

**MEASUREMENT REPORT**  
**FCC PART 15.247 802.11ax/be (OFDMA)****Applicant Name:**

Samsung Electronics Co., Ltd.  
129, Samsung-ro,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea

**Date of Testing:**

09/03/2024 - 10/25/2024

**Test Report Issue Date:**

10/28/2024

**Test Site/Location:**

Element lab., Columbia, MD, USA

**Test Report Serial No.:**

1M2408260070-10.A3L

**FCC ID:**

**A3LSMS938JPN**

**APPLICANT:**

**Samsung Electronics Co., Ltd.**

**Application Type:**

Certification

**Model:**

SC-52F

**Additional Model:**

SCG32

**EUT Type:**

Portable Handset

**Frequency Range:**

2412 – 2472MHz

**Modulation Type:**

OFDMA

**FCC Classification:**

Digital Transmission System (DTS)

**FCC Rule Part(s):**

Part 15 Subpart C (15.247)

**Test Procedure(s):**

ANSI C63.10-2013, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



**RJ Ortanez**  
**Executive Vice President**



|  |   |                                      |  |
|--|---|--------------------------------------|--|
| <b>FCC ID:</b> A3LSMS938JPN                    | <b>MEASUREMENT REPORT</b>                     |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2408260070-10.A3L | <b>Test Dates:</b><br>09/03/2024 - 10/25/2024 | <b>EUT Type:</b><br>Portable Handset | Page 1 of 86                             |

## TABLE OF CONTENTS

|       |   |    |
|-------|---|----|
| 1.0   | INTRODUCTION .....                                    | 4  |
| 1.1   | Scope .....   | 4  |
| 1.2   | Element Test Location .....                           | 4  |
| 1.3   | Test Facility / Accreditations .....                  | 4  |
| 2.0   | PRODUCT INFORMATION .....                             | 5  |
| 2.1   | Equipment Description .....                           | 5  |
| 2.2   | Device Capabilities .....                             | 5  |
| 2.3   | Test Configuration .....                              | 6  |
| 2.4   | Antenna Description .....                             | 6  |
| 2.5   | Software and Firmware .....                           | 7  |
| 2.6   | EMI Suppression Device(s)/Modifications .....         | 7  |
| 3.0   | DESCRIPTION OF TESTS .....                            | 8  |
| 3.1   | Evaluation Procedure .....                            | 8  |
| 3.2   | Radiated Emissions .....                              | 8  |
| 3.3   | Environmental Conditions .....                        | 8  |
| 4.0   | ANTENNA REQUIREMENTS .....                            | 9  |
| 5.0   | MEASUREMENT UNCERTAINTY .....                         | 10 |
| 6.0   | TEST EQUIPMENT CALIBRATION DATA .....                 | 11 |
| 7.0   | TEST RESULTS .....                                    | 13 |
| 7.1   | Summary .....   | 13 |
| 7.2   | 6dB Bandwidth Measurement .....                       | 17 |
| 7.2.1 | MIMO 6 dB Bandwidth Measurements .....                | 19 |
| 7.3   | Output Power Measurement .....                        | 25 |
| 7.4   | Power Spectral Density .....                          | 30 |
| 7.4.1 | MIMO Power Spectral Density Measurements .....        | 32 |
| 7.5   | Conducted Band Edge Emissions .....                   | 39 |
| 7.5.1 | MIMO Conducted Band Edge Emissions .....              | 40 |
| 7.6   | Conducted Spurious Emissions .....                    | 54 |
| 7.6.1 | MIMO Conducted Spurious Emissions .....               | 56 |
| 7.7   | Radiated Emission Measurements .....                  | 69 |
| 7.7.2 | MIMO Radiated Spurious Emission Measurements .....    | 73 |
| 7.7.3 | MIMO Radiated Restricted Band Edge Measurements ..... | 79 |
| 8.0   | CONCLUSION .....                                      | 86 |

|  |   |                                      |  |
|--|---|--------------------------------------|--|
| <b>FCC ID:</b> A3LSMS938JPN                    | <b>MEASUREMENT REPORT</b>                     |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2408260070-10.A3L | <b>Test Dates:</b><br>09/03/2024 - 10/25/2024 | <b>EUT Type:</b><br>Portable Handset | Page 2 of 86                             |

# MEASUREMENT REPORT

| Channel Bandwidth [MHz] | IEEE Mode         | Tones | Tx Frequency [MHz] | Antenna-1       |                  |                 |                  | Antenna-2       |                  |                 |                  | MIMO            |                  |                 |                  |
|-------------------------|-------------------|-------|--------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|
|                         |                   |       |                    | Avg. Conducted  |                  | Peak Conducted  |                  | Avg. Conducted  |                  | Peak Conducted  |                  | Avg. Conducted  |                  | Peak Conducted  |                  |
|                         |                   |       |                    | Max. Power [mW] | Max. Power [dBm] | Max. Power [mW] | Max. Power [dBm] | Max. Power [mW] | Max. Power [dBm] | Max. Power [mW] | Max. Power [dBm] | Max. Power [mW] | Max. Power [dBm] | Max. Power [mW] | Max. Power [dBm] |
| 20                      | 802.11ax/be OFDMA | 26T   | 2412 - 2472        | 24.66           | 13.92            | 152.41          | 21.83            | 24.43           | 13.88            | 78.16           | 18.93            | 48.39           | 16.85            | 224.77          | 23.52            |
|                         | 802.11ax/be OFDMA | 52T   | 2412 - 2472        | 31.55           | 14.99            | 157.76          | 21.98            | 30.69           | 14.87            | 95.06           | 19.78            | 60.27           | 17.80            | 258.48          | 24.12            |
|                         | 802.11ax/be OFDMA | 106T  | 2412 - 2472        | 49.77           | 16.97            | 250.03          | 23.98            | 48.75           | 16.88            | 154.88          | 21.90            | 94.73           | 19.76            | 451.66          | 26.55            |
|                         | 802.11ax/be OFDMA | 242T  | 2412 - 2472        | 58.34           | 17.66            | 302.69          | 24.81            | 60.95           | 17.85            | 174.18          | 22.41            | 115.62          | 20.63            | 566.95          | 27.54            |

## EUT Overview

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 3 of 86                      |

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 Element Test Location

These measurement tests were conducted at the Element laboratory facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

**Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.**

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

**Measurements were performed at Element located in Morgan Hill, CA 95037, U.S.A. ("CA")**

- Element is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element facility is a registered (22831) test laboratory with the site description on file with ISED.

|  |   |                                      |  |
|--|---|--------------------------------------|--|
| <b>FCC ID:</b> A3LSMS938JPN                    | <b>MEASUREMENT REPORT</b>                     |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2408260070-10.A3L | <b>Test Dates:</b><br>09/03/2024 - 10/25/2024 | <b>EUT Type:</b><br>Portable Handset | Page 4 of 86                             |

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMS938JPN**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

**Test Device Serial No.:** 0568M, 0304M, 0298M, 0073M, 0076M, 0111M, 0108M, 0131M, 0079M, 0066M, 0835M, 0823M, 0630R, 0635R

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, 850/1900 GSM/GPRS/EDGE, Multi-Band LTE, Multi-Band 5G NR (FR1), 802.11b/g/n/ac/ax/be WLAN, 802.11a/n/ac/ax/be UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer, UWB

| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
|-----|-----------------|-----|-----------------|
| 1   | 2412            | 8   | 2447            |
| 2   | 2417            | 9   | 2452            |
| 3   | 2422            | 10  | 2457            |
| 4   | 2427            | 11  | 2462            |
| 5   | 2432            | 12  | 2467            |
| 6   | 2437            | 13  | 2472            |
| 7   | 2442            |     |                 |

**Table 2-1. Frequency/ Channel Operations**

#### Notes:

1. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of ANSI C63.10-2013 and KDB 558074 D01 v05r02. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| Band   | Bandwidth | Tone Type | Tone Size | ANT1           |                    | ANT2           |                    | MIMO (1+2)     |                    |
|--------|-----------|-----------|-----------|----------------|--------------------|----------------|--------------------|----------------|--------------------|
|        |           |           |           | Duty Cycle [%] | Radiated DCCF [dB] | Duty Cycle [%] | Radiated DCCF [dB] | Duty Cycle [%] | Radiated DCCF [dB] |
| 2.4GHz | 20MHz     | RU        | 26T       | 99.46          | N/A                | 99.48          | N/A                | 98.95          | N/A                |
|        |           |           | 52T       | 99.43          | N/A                | 99.43          | N/A                | 98.94          | N/A                |
|        |           |           | 106T      | 98.97          | N/A                | 98.96          | N/A                | 98.11          | N/A                |
|        |           |           | 242T      | 97.82          | 0.10               | 99.33          | N/A                | 96.09          | 0.17               |
|        |           | MRU       | 52+26T    | 99.29          | N/A                | 99.18          | N/A                | 98.64          | N/A                |
|        |           |           | 106+26T   | 98.78          | N/A                | 98.78          | N/A                | 97.81          | 0.10               |
|        | 40MHz     | RU        | 26T       | 99.30          | N/A                | 99.30          | N/A                | 98.99          | N/A                |
|        |           |           | 52T       | 99.48          | N/A                | 99.48          | N/A                | 98.99          | N/A                |
|        |           |           | 106T      | 99.04          | N/A                | 99.04          | N/A                | 98.19          | N/A                |
|        |           |           | 242T      | 97.82          | 0.10               | 97.82          | 0.10               | 96.25          | 0.17               |
|        |           |           | 484T      | 98.82          | N/A                | 98.82          | N/A                | 96.21          | 0.17               |

**Table 2-2. Measured Duty Cycles**

|  |   |                                      |  |
|--|---|--------------------------------------|--|
| <b>FCC ID:</b> A3LSMS938JPN                    | <b>MEASUREMENT REPORT</b>                     |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2408260070-10.A3L | <b>Test Dates:</b><br>09/03/2024 - 10/25/2024 | <b>EUT Type:</b><br>Portable Handset | Page 5 of 86                             |

2. The device employs MIMO technology. Below are the possible configurations.

| WiFi Configurations |      | SISO |      | SDM  |      | CDD  |      |
|---------------------|------|------|------|------|------|------|------|
|                     |      | ANT1 | ANT2 | ANT1 | ANT2 | ANT1 | ANT2 |
| 2.4GHz              | 11ax | ✓    | ✓    | ✓    | ✓    | ✓    | ✓    |
| 2.4GHz              | 11be | ✓    | ✓    | ✓    | ✓    | ✓    | ✓    |

**Table 2-3. Antenna Configuration**

✓ = Support ; ✗ = NOT Support

**SISO** = Single Input Single Output

**SDM** = Spatial Diversity Multiplexing – MIMO function

**CDD** = Cyclic Delay Diversity - 2Tx Function

3. The device supports the following data rates (shown in Mbps):

| MCS Index | Spatial Stream | OFDMA (802.11ax) |          |          |          |          |          |          |          |          |          |          |          |
|-----------|----------------|------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
|           |                | 26T              |          |          | 52T      |          |          | 106T     |          |          | 242T     |          |          |
|           |                | 0.8µs GI         | 1.6µs GI | 3.2µs GI | 0.8µs GI | 1.6µs GI | 3.2µs GI | 0.8µs GI | 1.6µs GI | 3.2µs GI | 0.8µs GI | 1.6µs GI | 3.2µs GI |
| 0         | 1              | 0.9              | 0.8      | 0.8      | 1.8      | 1.7      | 1.5      | 3.8      | 3.5      | 3.2      | 8.6      | 8.1      | 7.3      |
| 1         | 1              | 1.8              | 1.7      | 1.5      | 3.5      | 3.3      | 3        | 7.5      | 7.1      | 6.4      | 17.2     | 16.3     | 14.6     |
| 2         | 1              | 2.6              | 2.5      | 2.3      | 5.3      | 5        | 4.5      | 11.3     | 10.6     | 9.6      | 25.8     | 24.4     | 21.9     |
| 3         | 1              | 3.5              | 3.3      | 3        | 7.1      | 6.7      | 6        | 15       | 14.2     | 12.8     | 34.4     | 32.5     | 29.3     |
| 4         | 1              | 5.3              | 5        | 4.5      | 10.6     | 10       | 9        | 22.5     | 21.3     | 19.1     | 51.6     | 48.8     | 43.9     |
| 5         | 1              | 7.1              | 6.7      | 6        | 14.1     | 13.3     | 12       | 30       | 28.3     | 25.5     | 68.8     | 65       | 58.5     |
| 6         | 1              | 7.9              | 7.5      | 6.8      | 15.9     | 15       | 13.5     | 33.8     | 31.9     | 28.7     | 77.4     | 73.1     | 65.8     |
| 7         | 1              | 8.8              | 8.3      | 7.5      | 17.6     | 16.7     | 15       | 37.5     | 35.4     | 31.9     | 86       | 81.3     | 73.1     |
| 8         | 1              | 10.6             | 10       | 9        | 21.2     | 20       | 18       | 45       | 42.5     | 38.3     | 103.2    | 97.5     | 87.8     |
| 9         | 1              | 11.8             | 11.1     | 10       | 23.5     | 22.2     | 20       | 50       | 47.2     | 42.5     | 114.7    | 108.3    | 97.5     |
| 10        | 1              | 13.2             | 12.5     | 11.3     | 26.5     | 25       | 22.5     | 56.3     | 53.1     | 47.8     | 129      | 121.9    | 109.7    |
| 11        | 1              | 14.7             | 13.9     | 12.5     | 29.4     | 27.8     | 25       | 62.5     | 59       | 53.1     | 143.4    | 135.4    | 121.9    |
| 0         | 2              | 1.8              | 1.7      | 1.5      | 3.5      | 3.3      | 3        | 7.5      | 7.1      | 6.4      | 17.2     | 16.3     | 14.6     |
| 1         | 2              | 3.5              | 3.3      | 3        | 7.1      | 6.7      | 6        | 15       | 14.2     | 12.8     | 34.4     | 32.5     | 29.3     |
| 2         | 2              | 5.3              | 5        | 4.5      | 10.6     | 10       | 9        | 22.5     | 21.3     | 19.1     | 51.6     | 48.8     | 43.9     |
| 3         | 2              | 7.1              | 6.7      | 6        | 14.1     | 13.3     | 12       | 30       | 28.3     | 25.5     | 68.8     | 65       | 58.5     |
| 4         | 2              | 10.6             | 10       | 9        | 21.2     | 20       | 18       | 45       | 42.5     | 38.3     | 103.2    | 97.5     | 87.8     |
| 5         | 2              | 14.1             | 13.3     | 12       | 28.2     | 26.7     | 24       | 60       | 56.7     | 51       | 137.6    | 130      | 117      |
| 6         | 2              | 15.9             | 15       | 13.5     | 31.8     | 30       | 27       | 67.5     | 63.8     | 57.4     | 154.9    | 146.3    | 131.6    |
| 7         | 2              | 17.6             | 16.7     | 15       | 35.3     | 33.3     | 30       | 75       | 70.8     | 63.8     | 172.1    | 162.5    | 146.3    |
| 8         | 2              | 21.2             | 20       | 18       | 42.4     | 40       | 36       | 90       | 85       | 76.5     | 206.5    | 195      | 175.5    |
| 9         | 2              | 23.5             | 22.2     | 20       | 47.1     | 44.4     | 40       | 100      | 94.4     | 85       | 229.4    | 216.7    | 195      |
| 10        | 2              | 26.5             | 25       | 22.5     | 52.9     | 50       | 45       | 112.5    | 106.3    | 95.6     | 258.1    | 243.8    | 219.4    |
| 11        | 2              | 29.4             | 27.8     | 25       | 58.8     | 55.6     | 50       | 125      | 118.1    | 106.3    | 286.8    | 270.8    | 243.8    |

**Table 2-4. Supported Data Rates**

## 2.3 Test Configuration

ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing. See Sections 0 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) EP-P2400 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

## 2.4 Antenna Description

The following antenna gains were used for the testing.

| Frequency [GHz] | Antenna-1 Gain [dBi] | Antenna-2 Gain [dBi] | Directional Gain [dBi] |
|-----------------|----------------------|----------------------|------------------------|
| 2.4             | -1.39                | -3.33                | 0.70                   |

**Table 2-5. Antenna Peak Gain**

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 6 of 86                      |



2.5 Software and Firmware

The test was conducted with software/firmware version S938USQUOAXJ3 installed on the EUT.

2.6 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 7 of 86                      |

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

### 3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

### 3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 8 of 86                      |

## 4.0 ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

### Conclusion:

The EUT unit complies with the requirement of §15.203.

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 9 of 86                      |

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution                     | Expanded Uncertainty ( $\pm$ dB) |
|----------------------------------|----------------------------------|
| Conducted Bench Top Measurements | 1.13                             |
| Line Conducted Disturbance       | 3.09                             |
| Radiated Disturbance (<1GHz)     | 4.98                             |
| Radiated Disturbance (>1GHz)     | 5.07                             |
| Radiated Disturbance (>18GHz)    | 5.09                             |

**Table 5-1. Measurement Uncertainty Budget – MD**

| Contribution                        | Expanded Uncertainty ( $\pm$ dB) |
|-------------------------------------|----------------------------------|
| Conducted Bench Top Measurements    | 1.65                             |
| Line Conducted Disturbance          | 2.71                             |
| Radiated Disturbance (<30MHz)       | 4.06                             |
| Radiated Disturbance (30MHz - 1GHz) | 4.30                             |
| Radiated Disturbance (1 - 18GHz)    | 4.78                             |
| Radiated Disturbance (>18GHz)       | 4.79                             |

**Table 5-2. Measurement Uncertainty Budget – CA**

|  |   |                                      |  |
|--|---|--------------------------------------|--|
| <b>FCC ID:</b> A3LSMS938JPN                    | <b>MEASUREMENT REPORT</b>                     |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2408260070-10.A3L | <b>Test Dates:</b><br>09/03/2024 - 10/25/2024 | <b>EUT Type:</b><br>Portable Handset | Page 10 of 86                            |

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer          | Model       | Description                            | Cal Date  | Cal Interval | Cal Due   | Serial Number |
|-----------------------|-------------|--|-----------|--------------|-----------|---------------|
| -                     | WL25-1      | Conducted Cable Set (25GHz)            | 4/2/2024  | Annual       | 4/2/2025  | WL25-1        |
| -                     | WL25-2      | Conducted Cable Set (25GHz)            | 4/2/2024  | Annual       | 4/2/2025  | WL25-2        |
| -                     | WL40-1      | Conducted Cable Set (40GHz)            | 4/2/2024  | Annual       | 4/2/2025  | WL40-1        |
| -                     | AP1-002     | EMC Cable and Switch System            | 4/2/2024  | Annual       | 4/2/2025  | AP1-002       |
| -                     | ETS-001     | EMC Cable and Switch System            | 4/2/2024  | Annual       | 4/2/2025  | ETS-001       |
| -                     | ETS-002     | EMC Cable and Switch System            | 4/2/2024  | Annual       | 4/2/2025  | ETS-002       |
| -                     | MD 1M 18-40 | EMC Cable and Switch System            | 4/2/2024  | Annual       | 4/2/2025  | MD 1M 18-40   |
| Anritsu               | MA24408A    | Microwave Peak Power Sensor            | 5/21/2024 | Annual       | 5/21/2025 | 11675         |
| Anritsu               | MA24408A    | Microwave Peak Power Sensor            | 4/10/2024 | Annual       | 4/10/2025 | 12798         |
| ETS-Lindgren          | 3116C       | Horn Antenna (18-40GHz)                | 2/27/2023 | Biennial     | 2/27/2025 | 218893        |
| Rohde & Schwarz       | TC-TA18     | Vivaldi Antenna                        | 2/23/2023 | Biennial     | 2/23/2025 | 26040036      |
| Rohde & Schwarz       | FSW26       | Signal and Spectrum Analyzer (26.5GHz) | 3/8/2024  | Annual       | 3/8/2025  | 103187        |
| Rohde & Schwarz       | ESU26       | EMI Test Receiver (26.5GHz)            | 9/25/2023 | Annual       | 9/25/2024 | 100342        |
| Rohde & Schwarz       | ESU40       | EMI Test Receiver (40GHz)              | 9/11/2023 | Annual       | 9/11/2024 | 100348        |
| Rohde & Schwarz       | ESW44       | EMI Test Receiver (44GHz)              | 4/5/2024  | Annual       | 4/5/2025  | 101716        |
| Pasternak             | NMLC-2      | EMI Test Receiver (2Hz to 44GHz)       | 4/2/2024  | Annual       | 4/2/2025  | NMLC-2        |
| Rohde & Schwarz       | ENV216      | Two-Line V-Network                     | 1/31/2023 | Biennial     | 1/31/2025 | 101379        |
| Keysight Technologies | N9030A      | PXA Signal Analyzer (44GHz)            | 4/9/2024  | Annual       | 4/9/2025  | MY52350166    |
| Keysight Technologies | N9020A      | MXA Signal Analyzer                    | 4/11/2024 | Annual       | 4/11/2025 | MY54500644    |
| Keysight Technologies | N9030A      | PXA Signal Analyzer                    | 2/29/2024 | Annual       | 3/1/2025  | MY55410501    |
| Keysight Technologies | N9030B      | PXA Signal Analyzer, Multi-touch       | 9/19/2024 | Annual       | 9/19/2025 | MY57141001    |
| Sunol                 | JB6         | JB6 Antenna                            | 3/2/2023  | Biennial     | 3/2/2025  | A082816       |
| Sunol                 | JB5         | Bi-Log Antenna (20M-5GHz)              | 9/11/2024 | Biennial     | 9/11/2026 | A051107       |
| Rohde & Schwarz       | SMW200A     | Vector Signal Generator                | 4/4/2024  | Annual       | 4/4/2025  | 109456        |

**Table 6-1. Test Equipment Calibration Table – MD**

| Manufacturer    | Model     | Description                              | Cal Date  | Cal Interval | Cal Due    | Serial Number |
|-----------------|-----------|--|-----------|--------------|------------|---------------|
| ETS-Lindgren    | 3117      | Double Ridged Guide Antenna (1-18 GHz)   | 4/9/2024  | Annual       | 4/9/2025   | 00218555      |
| Rohde & Schwarz | TS-PR18   | Pre-Amplifier (1GHz - 18GHz)             | 5/29/2024 | Annual       | 11/29/2024 | 102132        |
| Rohde & Schwarz | TS-PR18   | Pre-Amplifier (1GHz - 18GHz)             | 8/14/2024 | Annual       | 8/15/2025  | 101648        |
| Rohde & Schwarz | FSV40     | Signal Analyzer (10Hz-40GHz)             | 5/29/2024 | Annual       | 5/29/2025  | 101619        |
| Rohde & Schwarz | ESW44     | EMI Test Receiver                        | 5/1/2024  | Annual       | 5/1/2025   | 101867        |
| Rohde & Schwarz | FSW67     | Signal and Spectrum Analyzer (2Hz-67GHz) | 7/5/2024  | Annual       | 7/5/2025   | 101366        |
| Rohde & Schwarz | TS-PR8    | Pre-Amplifier (30MHz - 8GHz)             | 7/3/2024  | Annual       | 7/3/2025   | 102356        |
| Schwarzbeck     | VULB 9162 | Bilog Antenna (30MHz - 6GHz)             | 4/29/2024 | Annual       | 4/29/2025  | 00304         |

**Table 6-2. Test Equipment Calibration Table – CA**

|  |   |                                      |  |
|--|---|--------------------------------------|--|
| <b>FCC ID:</b> A3LSMS938JPN                    | <b>MEASUREMENT REPORT</b>                     |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2408260070-10.A3L | <b>Test Dates:</b><br>09/03/2024 - 10/25/2024 | <b>EUT Type:</b><br>Portable Handset | Page 11 of 86                            |



**Note:**

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 12 of 86                     |

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Samsung Electronics Co., Ltd.  
 FCC ID: A3LSMS938JPN  
 FCC Classification: Digital Transmission System (DTS)

| FCC Part Section(s) | RSS Section(s)   | Test Description  | Test Limit   | Test Condition | Test Result | Reference         | Test Lab Location |
|---------------------|------------------|---|--|----------------|-------------|-------------------|-------------------|
| 15.247(a)(2)        | RSS-247 [5.2(a)] | 6dB Bandwidth   | The minimum 6 dB bandwidth shall be at least 500 kHz.  | CONDUCTED      | PASS        | Section 7.2       | MD                |
| 15.247(b)(3)        | RSS-247 [5.4(b)] | Transmitter Output Power  | shall not exceed 1 W   |                | PASS        | Section 7.3       | MD                |
| N/A                 | RSS-247 [5.4(b)] | e.i.r.p   | Shall not exceed 4 W   |                | PASS        | Section 7.3       | MD                |
| 15.247(e)           | RSS-247 [5.2(b)] | Transmitter Power Spectral Density  | shall not be greater than 8 dBm in any 3 kHz band  |                | PASS        | Section 7.4       | MD                |
| 15.247(d)           | RSS-247 [5.5]    | Band Edge / Out-of-Band Emissions   | ≥ 20dBc  |                | PASS        | Sections 7.5, 7.6 | MD                |
| 15.205<br>15.209    | RSS-Gen [8.9]    | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9]) | RADIATED       | PASS        | Section 7.7       | CA                |

**Table 7-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst-case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "WLAN Automation," Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 1.3.1.
- 6) 802.11ax OFDMA testing was performed for all signal tone configurations as specified by the 802.11ax standard. Worst case results are determined and reported per the guidance provided at the October 2018 TCB Workshop.
- 7) Data was leveraged from model SM-S938U for the certification of SC-52F. See Table 7-2 for spot-check results.


|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 13 of 86                     |

| FCC Rules    | Test Item                    | Test Case  | Units | Limit | Reference Model:<br>SM-S938U | Variant Model:<br>SC-52F | Deviation<br>(dB) | Max<br>Deviation<br>(dB) | Pass/Fail |
|--------------|------------------------------|--|-------|-------|------------------------------|--------------------------|-------------------|--------------------------|-----------|
| 15.247(b)(3) | Conducted Output Power       | 802.11be MIMO 242 Tone Ch.10 - Average           | dBm   | N/A   | 20.63                        | 20.57                    | -0.06             | 1                        | PASS      |
| 15.207       | AC Line Conducted            | -  | dBm   | -     | -                            | -                        | -                 | -                        | PASS      |
| 15.209       | Radiated Spurious Emissions  | 802.11ax MIMO 242 Tone Ch.1 - 7236 MHz - Average | dBm   | 53.98 | 42.27                        | 43.01                    | 0.74              | 3                        | PASS      |
| 15.209       | Radiated Band Edge Emissions | 802.11ax MIMO 242 Tone Ch.1 - Average            | dBm   | 53.98 | 51.92                        | 52.17                    | 0.25              | 3                        | PASS      |

Table 7-2. Summary of Spot-Checks


| Freq [MHz] | Channel | Tones | RU Index | Conducted Power [dBm] |           |      | Conducted<br>Power Limit<br>[dBm] | Avg Conducted<br>Power Margin<br>[dB] | Peak Conducted<br>Power Margin<br>[dB] | Ant. Gain<br>[dBi] | Max e.i.r.p<br>[dBm] | e.i.r.p Limit<br>[dBm] | e.i.r.p Margin<br>[dB] |
|------------|---------|-------|----------|-----------------------|-----------|------|-----------------------------------|---------------------------------------|--|--------------------|----------------------|------------------------|------------------------|
|            |         |       |          | Antenna-1             | Antenna-2 | MIMO |                                   |                                       |  |                    |                      |                        |                        |
| 2457       | 10      | 242T  | 61       | AVG                   | AVG       | AVG  | 30.00                             | -9.43                                 | -2.46                                  | 0.70               | 21.27                | 36.02                  | -14.75                 |

Table 7-3. Conducted Output Power Measurements (Spot-check)

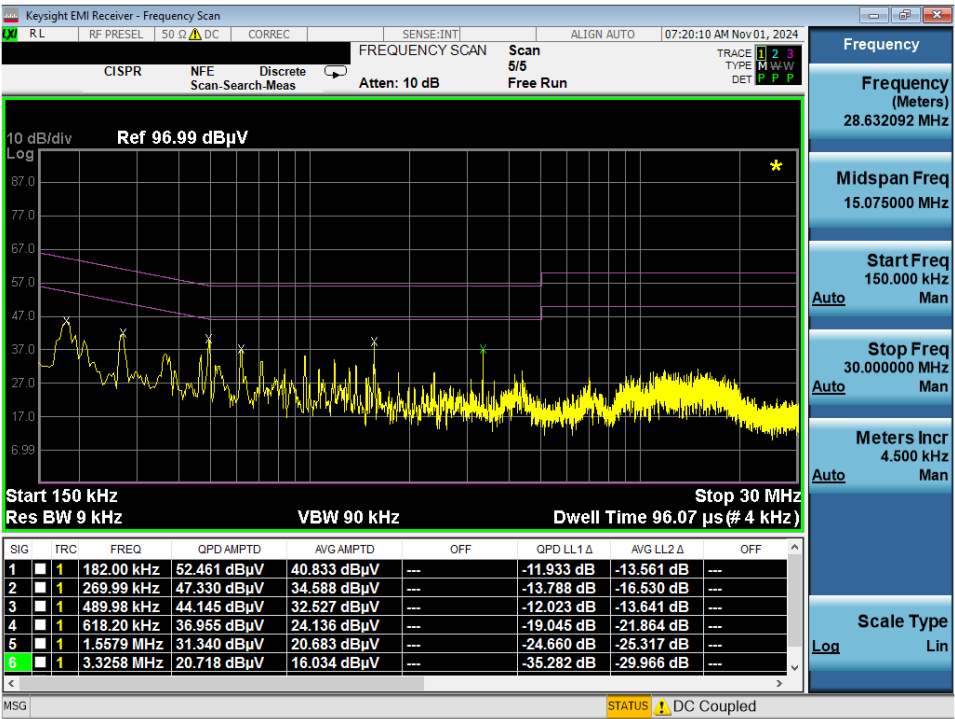

Plot 7-1. Line Conducted Plot with 802.11b (L1)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 14 of 86                     |

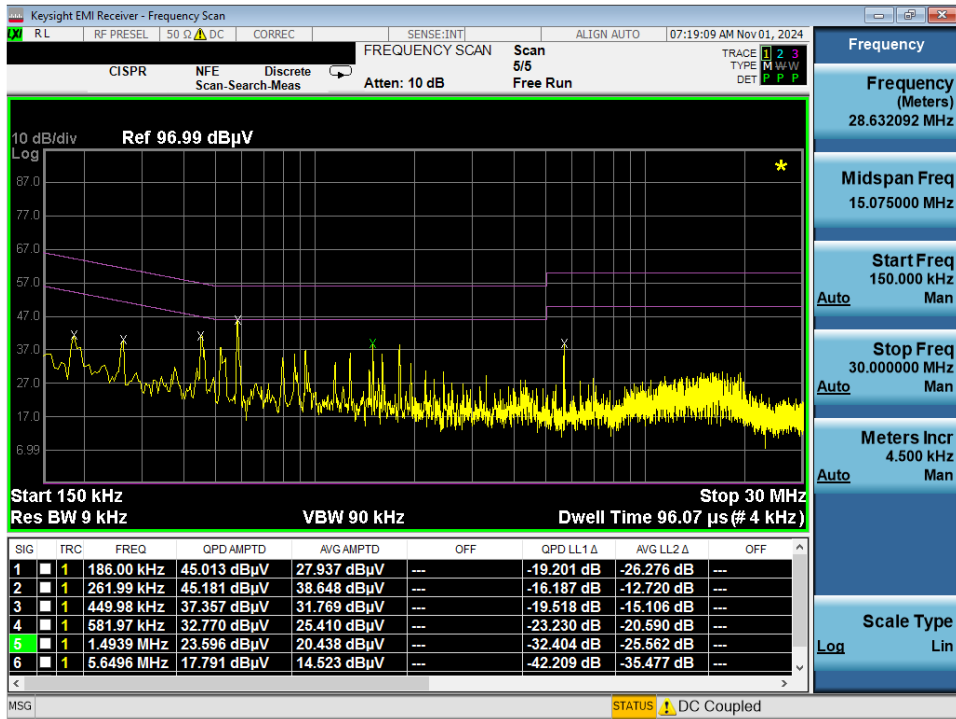


Plot 7-2. Line Conducted Plot with 802.11b (N)

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 7236.00         | Avg      | V               | 100                 | 312                        | -74.74               | 10.75       | 0.00                            | 43.01                   | 53.98          | -10.97      |

Table 7-4. Radiated Measurements MIMO (Spot-check)

|   |  |                               |  |  |                                   |
|---|--|-------------------------------|--|--|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               |  |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset |  |  | Page 15 of 86                     |

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz

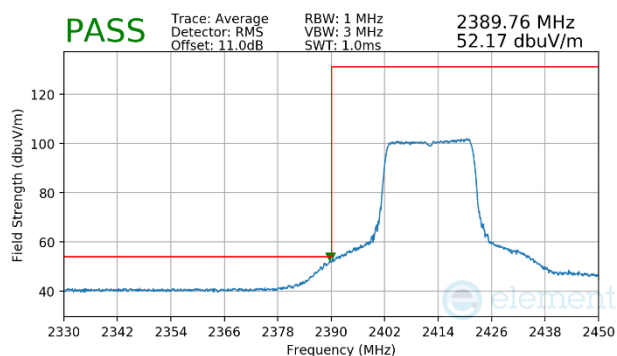

**Plot 7-3. Radiated Restricted Lower Band Edge Measurement (Average)**

1. Each spot check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device.
2. All test cases were performed to verify the variant EUT is still in compliance with the spot checked results to the reference device and was performed using the guidance of ANSI C63.10-2013.

|  |   |                                      |  |
|--|---|--------------------------------------|--|
| <b>FCC ID:</b> A3LSMS938JPN                    | <b>MEASUREMENT REPORT</b>                     |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2408260070-10.A3L | <b>Test Dates:</b><br>09/03/2024 - 10/25/2024 | <b>EUT Type:</b><br>Portable Handset | Page 16 of 86                            |

## 7.2 6dB Bandwidth Measurement

### Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst-case configuration results are reported in this section.

***The minimum 6 dB bandwidth shall be at least 500 kHz.***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes

1. Based on preliminary measurements, it was determined that, of all the tone configurations, the 26T configuration produced the worst case 6dB Bandwidth measurement. Only the worst-case data is included in this section.
2. The 6dB bandwidth for each channel was measured with the RU index showing the highest conducted power.

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 17 of 86                     |


## 6dB Bandwidth Measurements

| Frequency [MHz] | Channel No. | 802.11 Mode | Tones | Data Rate [Mbps] | ANT1 Measured Bandwidth [MHz] | ANT2 Measured Bandwidth [MHz] | Minimum Bandwidth [MHz] |
|-----------------|-------------|-------------|-------|------------------|-------------------------------|-------------------------------|-------------------------|
| 2412            | 1           | ax/be       | 26T   | MCS0             | 2.027                         | 2.118                         | 0.500                   |
| 2437            | 6           | ax/be       | 26T   | MCS0             | 2.757                         | 2.704                         | 0.500                   |
| 2462            | 11          | ax/be       | 26T   | MCS0             | 1.992                         | 2.121                         | 0.500                   |
| 2412            | 1           | ax/be       | 242T  | MCS0             | 19.02                         | 18.90                         | 0.500                   |
| 2437            | 6           | ax/be       | 242T  | MCS0             | 19.02                         | 18.93                         | 0.500                   |
| 2462            | 11          | ax/be       | 242T  | MCS0             | 19.00                         | 18.88                         | 0.500                   |


**Table 7-5. Conducted 6dB Bandwidth Measurements MIMO**

|  |   |                                      |  |
|--|---|--------------------------------------|--|
| <b>FCC ID:</b> A3LSMS938JPN                    | <b>MEASUREMENT REPORT</b>                     |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2408260070-10.A3L | <b>Test Dates:</b><br>09/03/2024 - 10/25/2024 | <b>EUT Type:</b><br>Portable Handset | Page 18 of 86                            |

## 7.2.1 MIMO 6 dB Bandwidth Measurements

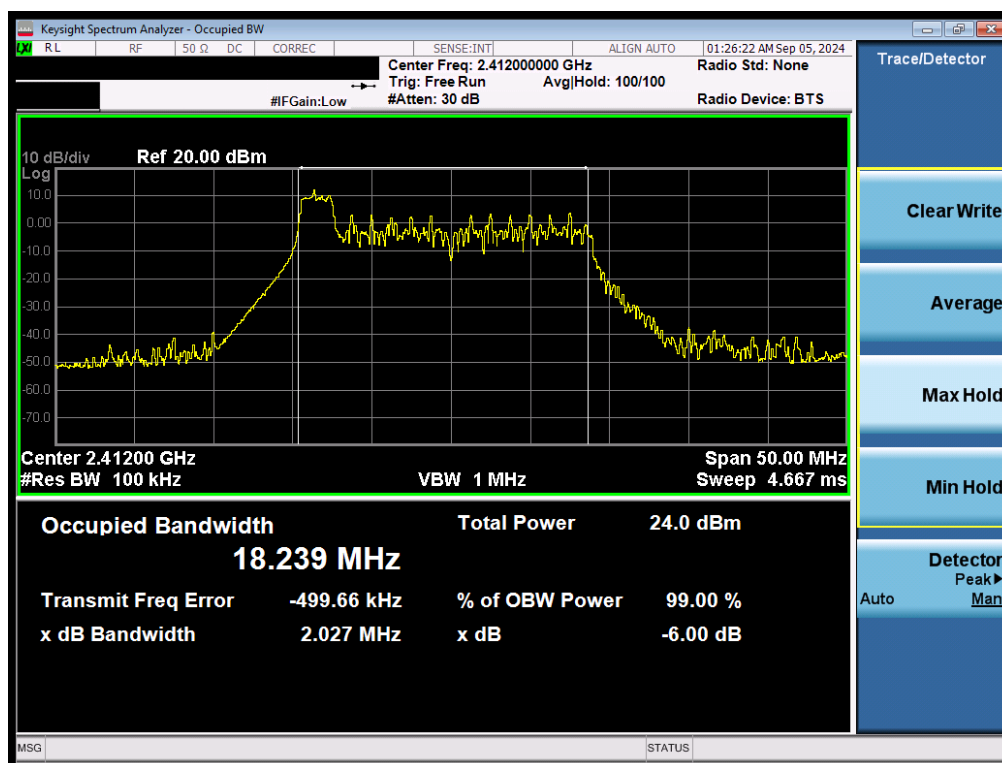


Plot 7-4. 6dB Bandwidth Plot MIMO ANT1 (802.11ax/be OFDMA – 26 Tones – Ch. 1)

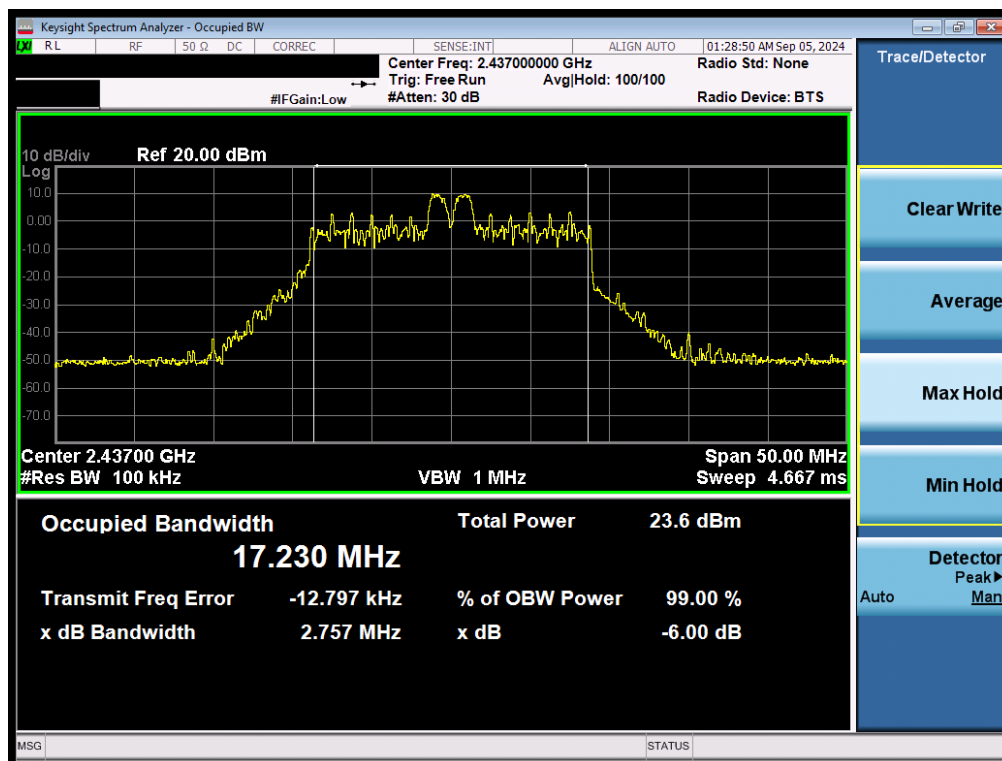


Plot 7-5. 6dB Bandwidth Plot MIMO ANT1 (802.11ax/be OFDMA – 26 Tones – Ch. 6)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 19 of 86                     |

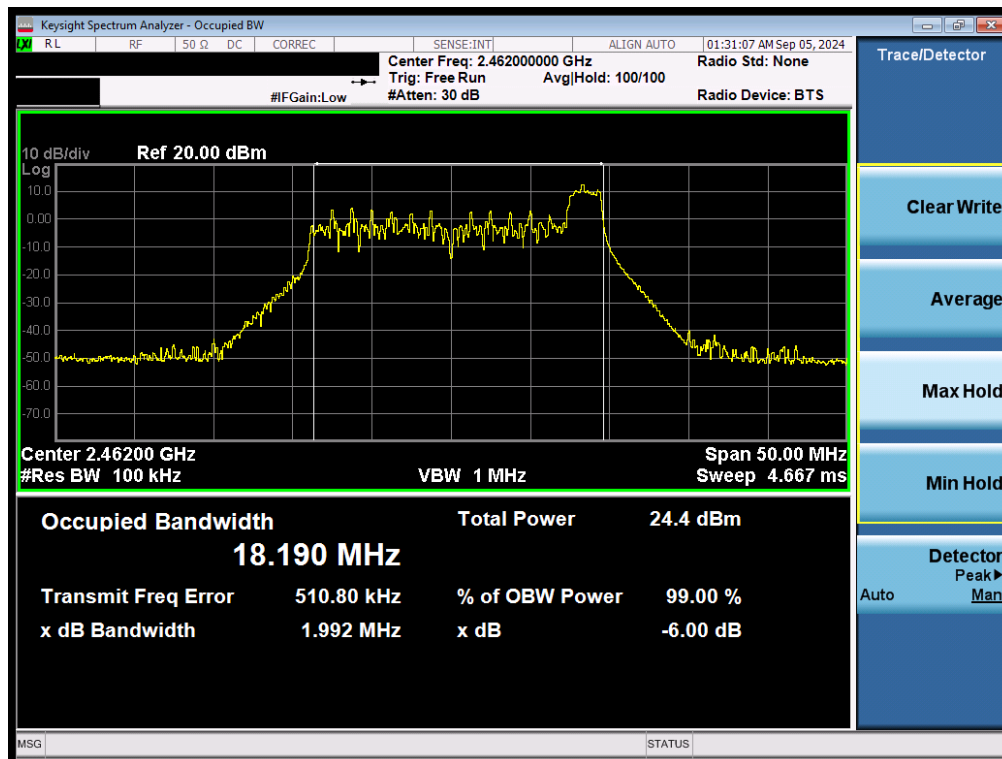


Plot 7-6. 6dB Bandwidth Plot MIMO ANT1 (802.11ax/be OFDMA – 26 Tones – Ch. 11)

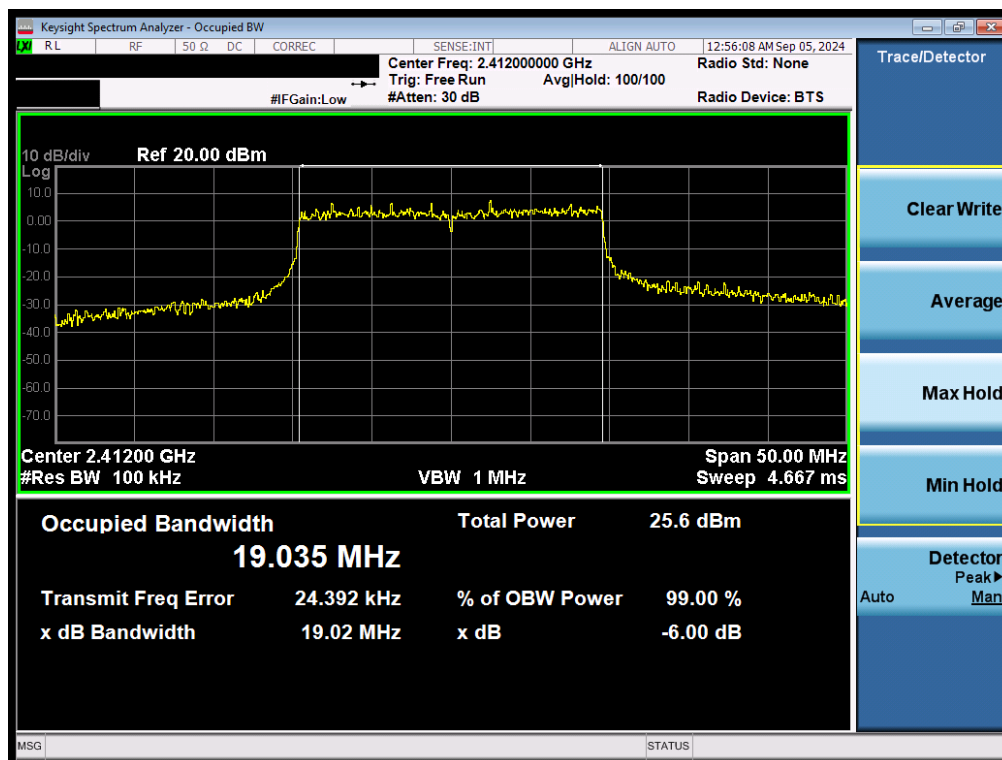


Plot 7-7. 6dB Bandwidth Plot MIMO ANT1 (802.11ax/be OFDMA – 242 Tones – Ch. 1)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 20 of 86                     |

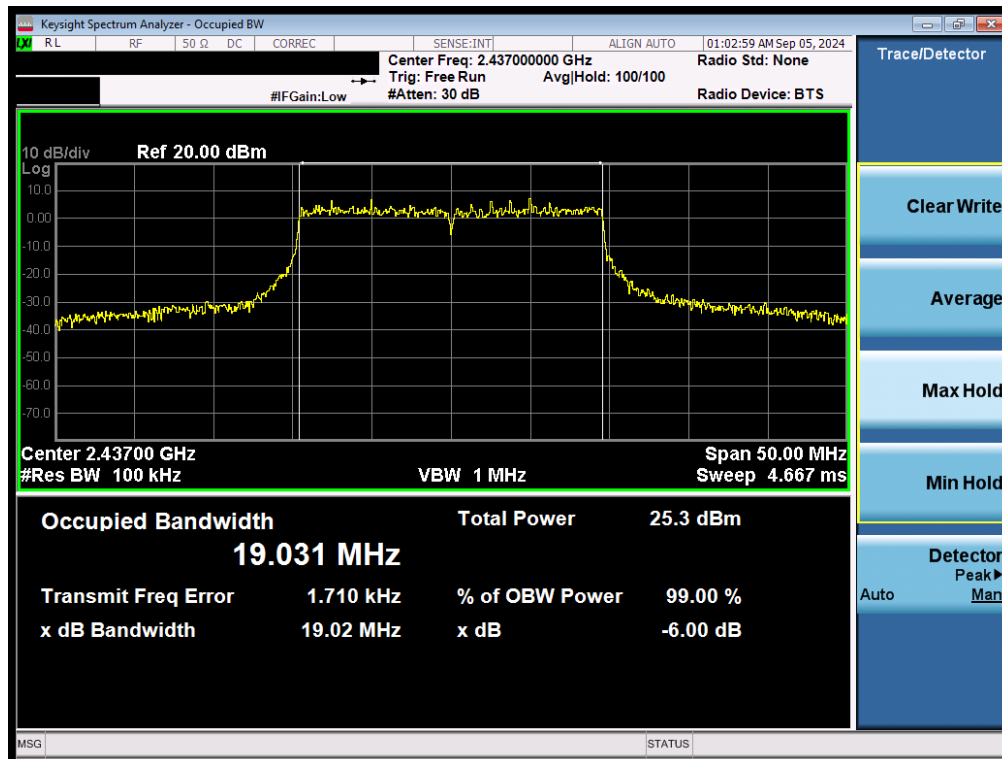


Plot 7-8. 6dB Bandwidth Plot MIMO ANT1 (802.11ax/be OFDMA – 242 Tones – Ch. 6)

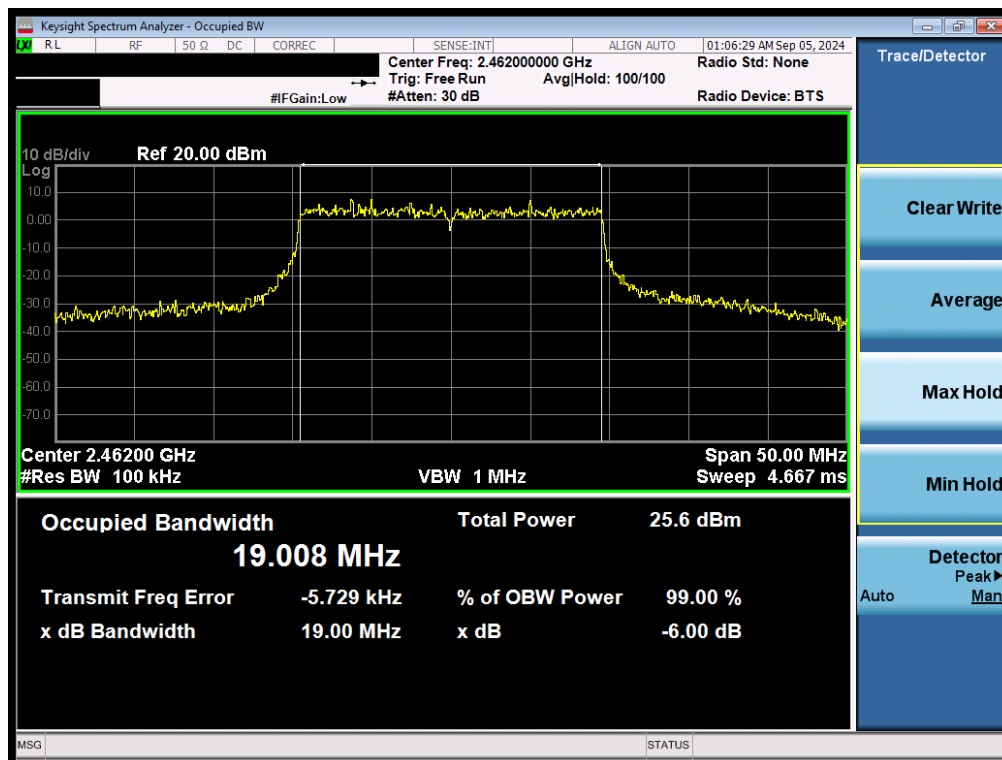


Plot 7-9. 6dB Bandwidth Plot MIMO ANT1 (802.11ax/be OFDMA – 242 Tones – Ch. 11)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 21 of 86                     |

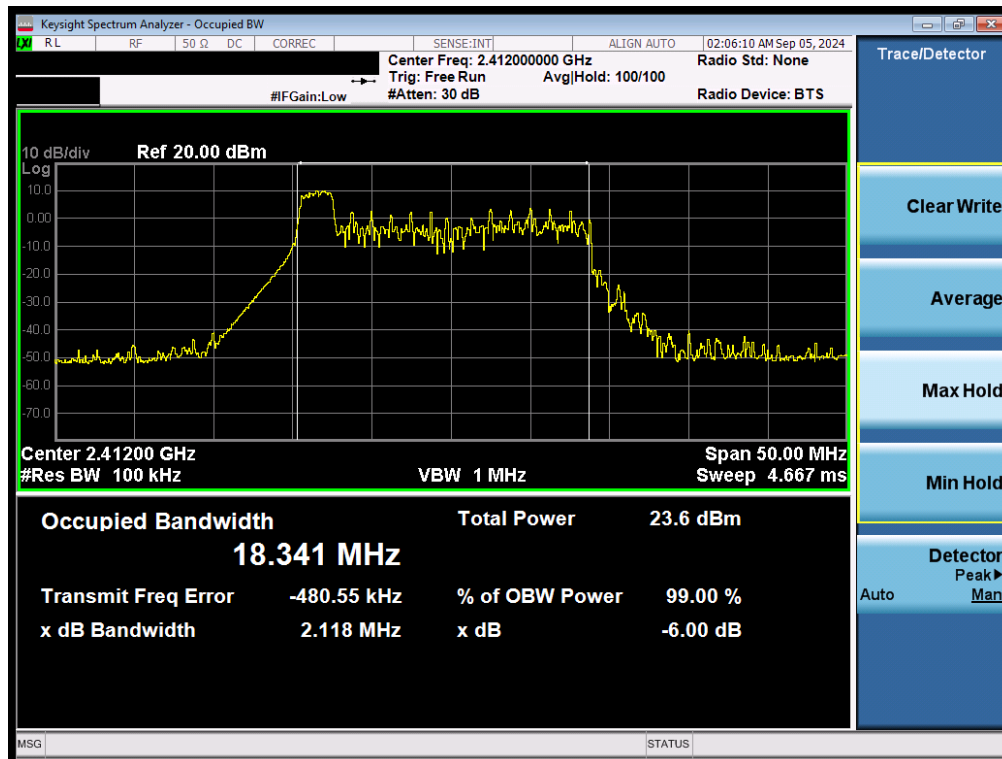


Plot 7-10. 6dB Bandwidth Plot MIMO ANT2 (802.11ax/be OFDMA – 26 Tones – Ch. 1)

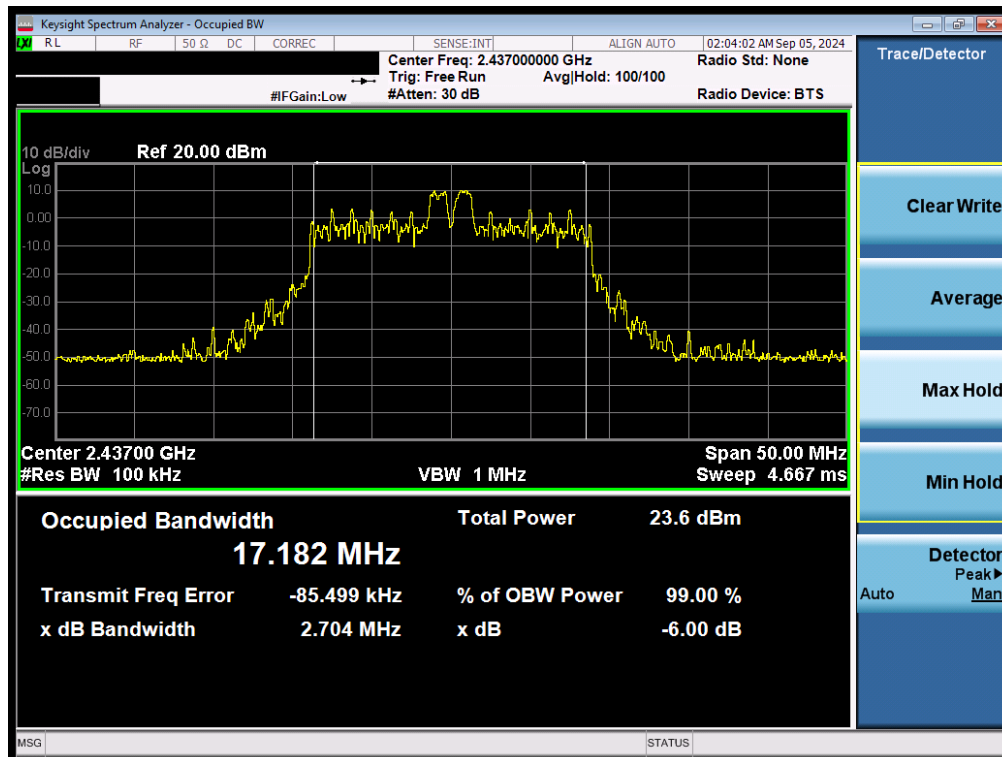


Plot 7-11. 6dB Bandwidth Plot MIMO ANT2 (802.11ax/be OFDMA – 26 Tones – Ch. 6)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 22 of 86                     |

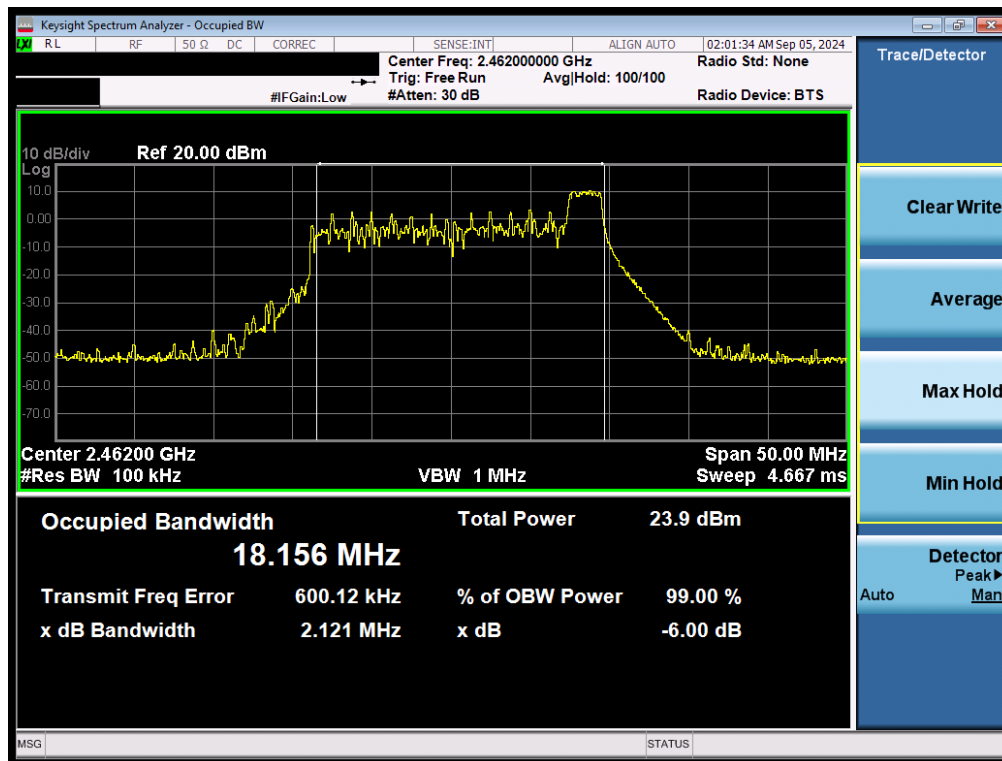


Plot 7-12. 6dB Bandwidth Plot MIMO ANT2 (802.11ax/be OFDMA – 26 Tones – Ch. 11)

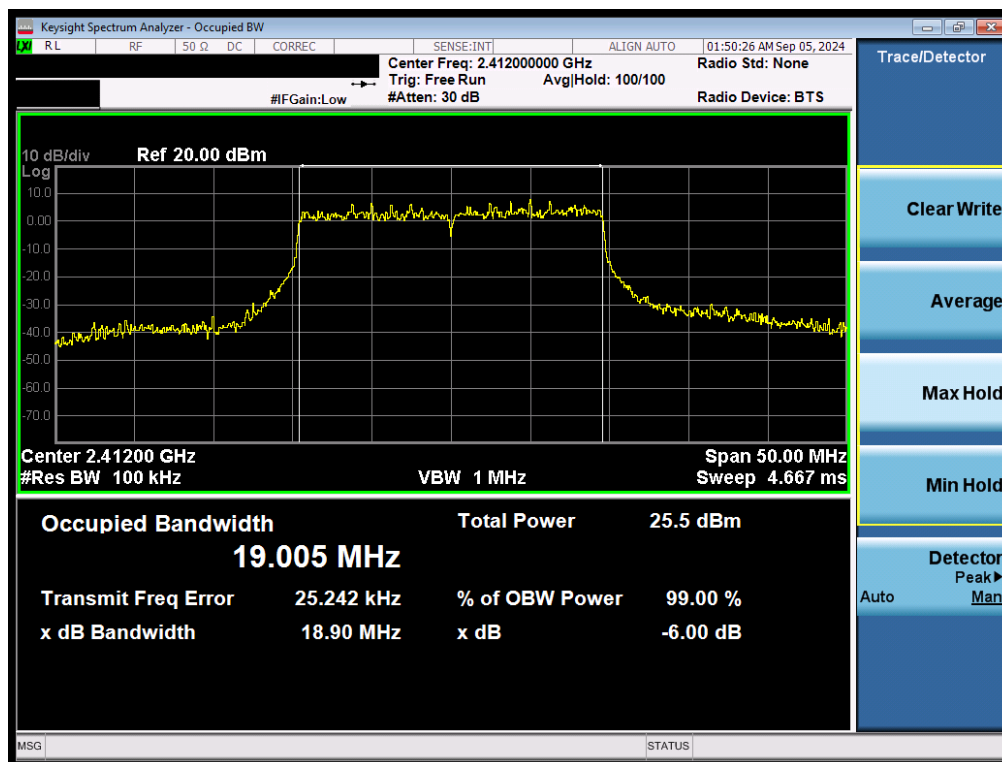


Plot 7-13. 6dB Bandwidth Plot MIMO ANT2 (802.11ax/be OFDMA – 242 Tones – Ch. 1)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 23 of 86                     |

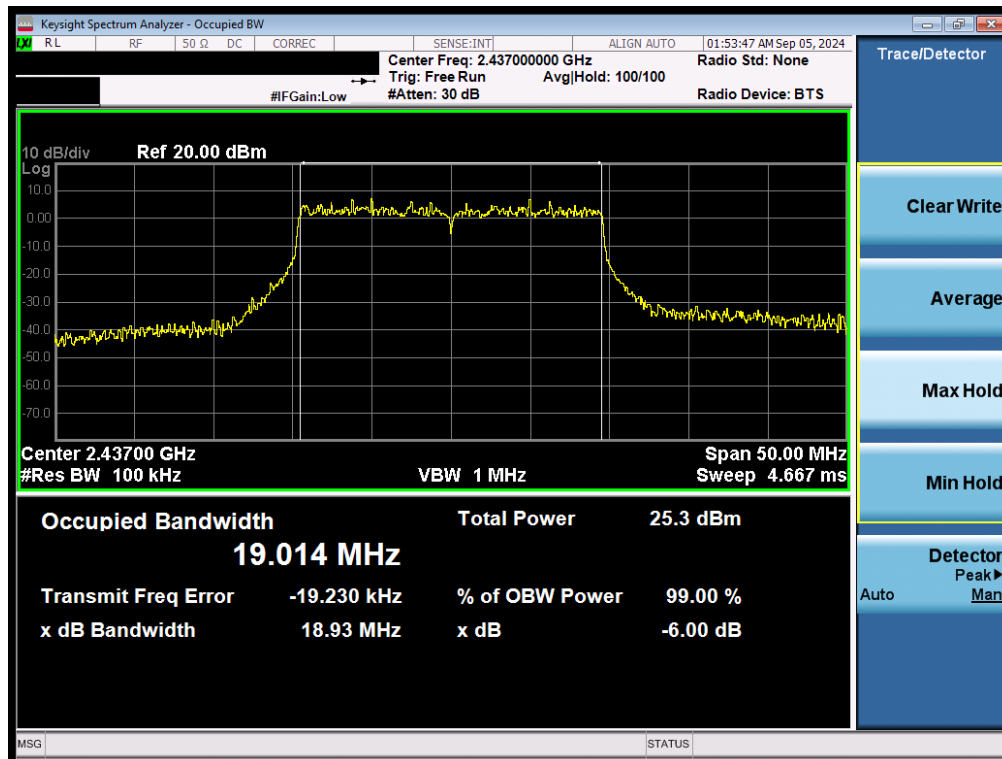

Plot 7-14. 6dB Bandwidth Plot MIMO ANT2 (802.11ax/be OFDMA – 242 Tones – Ch. 6)

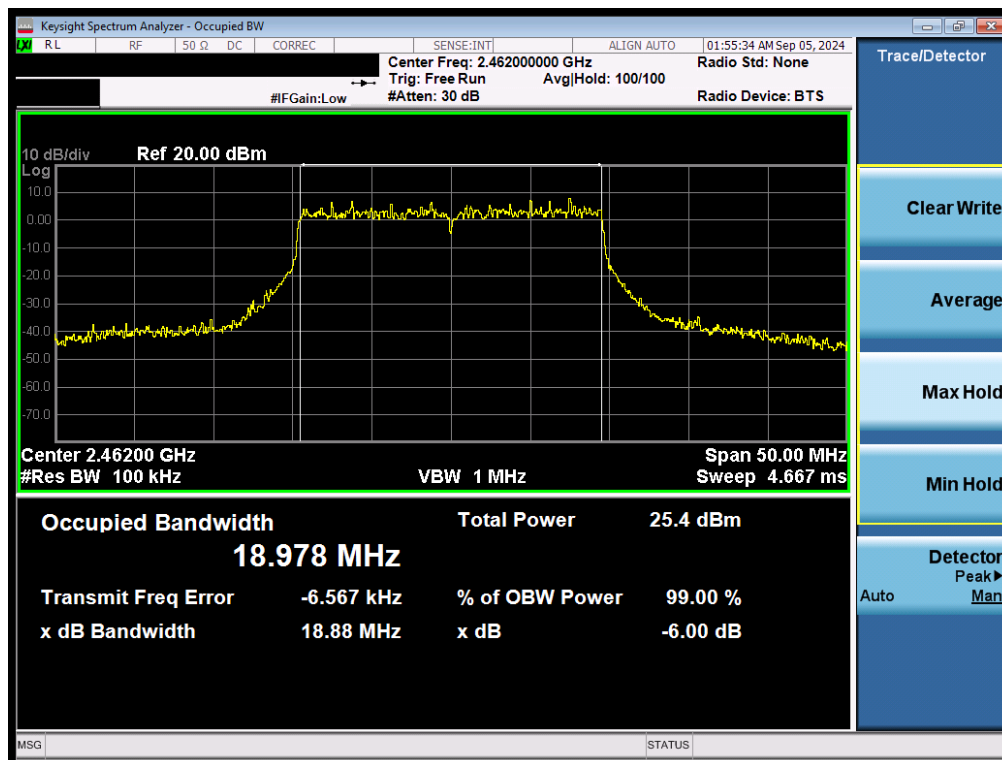

Plot 7-15. 6dB Bandwidth Plot MIMO ANT1 (802.11ax/be OFDMA – 242 Tones – Ch. 11)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 24 of 86                     |

## 7.3 Output Power Measurement

### Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

***The maximum permissible conducted output power is 1 Watt per 15.247 and RSS-247. The e.i.r.p. shall not exceed 4 W per RSS-247.***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3 PKPM1 Peak Power Method

ANSI C63.10-2013 – Section 11.9.2.3.2 Method AVGPM-G

ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

### Test Settings

#### Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

#### Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



**Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements**

### Test Notes

None.

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 25 of 86                     |

| Freq [MHz] | Channel | Tones | RU Index | Avg Conducted Powers [dBm] | Peak Conducted Powers [dBm] | Conducted Power Limit [dBm] | Avg Conducted Power Margin [dB] | Peak Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p [dBm] | e.i.r.p Limit [dBm] | e.i.r.p Margin [dB] |
|------------|---------|-------|----------|----------------------------|-----------------------------|-----------------------------|---------------------------------|----------------------------------|-----------------|-------------------|---------------------|---------------------|
| 2412       | 1       | 26T   | 0        | 13.85                      | 20.95                       | 30.00                       | -16.15                          | -9.05                            | -1.39           | 19.56             | 36.02               | -16.46              |
|            |         |       | 4        | 13.73                      | 20.58                       | 30.00                       | -16.27                          | -9.42                            | -1.39           | 19.19             | 36.02               | -16.83              |
|            |         |       | 8        | 13.92                      | 21.12                       | 30.00                       | -16.08                          | -8.88                            | -1.39           | 19.73             | 36.02               | -16.29              |
| 2437       | 6       | 26T   | 0        | 13.63                      | 20.42                       | 30.00                       | -16.37                          | -9.58                            | -1.39           | 19.03             | 36.02               | -16.99              |
|            |         |       | 4        | 13.84                      | 20.84                       | 30.00                       | -16.16                          | -9.16                            | -1.39           | 19.45             | 36.02               | -16.57              |
|            |         |       | 8        | 13.92                      | 20.45                       | 30.00                       | -16.08                          | -9.55                            | -1.39           | 19.06             | 36.02               | -16.96              |
| 2462       | 11      | 26T   | 0        | 13.85                      | 20.63                       | 30.00                       | -16.15                          | -9.36                            | -1.39           | 19.25             | 36.02               | -16.77              |
|            |         |       | 4        | 13.66                      | 20.63                       | 30.00                       | -16.34                          | -9.37                            | -1.39           | 19.24             | 36.02               | -16.78              |
|            |         |       | 8        | 13.54                      | 20.74                       | 30.00                       | -16.46                          | -9.26                            | -1.39           | 19.35             | 36.02               | -16.67              |

**Table 7-6. Conducted Output Power Measurements SISO ANT1 (26 Tones)**

| Freq [MHz] | Channel | Tones | RU Index | Avg Conducted Powers [dBm] | Peak Conducted Powers [dBm] | Conducted Power Limit [dBm] | Avg Conducted Power Margin [dB] | Peak Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p [dBm] | e.i.r.p Limit [dBm] | e.i.r.p Margin [dB] |
|------------|---------|-------|----------|----------------------------|-----------------------------|-----------------------------|---------------------------------|----------------------------------|-----------------|-------------------|---------------------|---------------------|
| 2412       | 1       | 52T   | 37       | 14.91                      | 21.95                       | 30.00                       | -15.09                          | -8.05                            | -1.39           | 20.56             | 36.02               | -15.46              |
|            |         |       | 38       | 14.59                      | 21.45                       | 30.00                       | -15.41                          | -8.55                            | -1.39           | 20.06             | 36.02               | -15.96              |
|            |         |       | 40       | 14.95                      | 21.84                       | 30.00                       | -15.05                          | -8.16                            | -1.39           | 20.45             | 36.02               | -15.57              |
| 2437       | 6       | 52T   | 37       | 14.60                      | 21.33                       | 30.00                       | -15.40                          | -8.67                            | -1.39           | 19.94             | 36.02               | -16.08              |
|            |         |       | 38       | 14.99                      | 21.97                       | 30.00                       | -15.01                          | -8.03                            | -1.39           | 20.58             | 36.02               | -15.44              |
|            |         |       | 40       | 14.89                      | 21.90                       | 30.00                       | -15.11                          | -8.10                            | -1.39           | 20.51             | 36.02               | -15.51              |
| 2462       | 11      | 52T   | 37       | 14.80                      | 21.98                       | 30.00                       | -15.20                          | -8.02                            | -1.39           | 20.59             | 36.02               | -15.43              |
|            |         |       | 38       | 14.52                      | 21.37                       | 30.00                       | -15.48                          | -8.63                            | -1.39           | 19.98             | 36.02               | -16.04              |
|            |         |       | 40       | 14.67                      | 21.60                       | 30.00                       | -15.33                          | -8.40                            | -1.39           | 20.21             | 36.02               | -15.81              |

**Table 7-7. Conducted Output Power Measurements SISO ANT1 (52 Tones)**

| Freq [MHz] | Channel | Tones | RU Index | Avg Conducted Powers [dBm] | Peak Conducted Powers [dBm] | Conducted Power Limit [dBm] | Avg Conducted Power Margin [dB] | Peak Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p [dBm] | e.i.r.p Limit [dBm] | e.i.r.p Margin [dB] |
|------------|---------|-------|----------|----------------------------|-----------------------------|-----------------------------|---------------------------------|----------------------------------|-----------------|-------------------|---------------------|---------------------|
| 2412       | 1       | 106T  | 53       | 16.61                      | 23.91                       | 30.00                       | -6.09                           | -6.09                            | -1.39           | 22.52             | 36.02               | -13.50              |
|            |         |       | 54       | 16.82                      | 23.84                       | 30.00                       | -6.16                           | -6.16                            | -1.39           | 22.45             | 36.02               | -13.57              |
|            |         |       | 55       | 16.62                      | 23.58                       | 30.00                       | -6.42                           | -6.42                            | -1.39           | 22.19             | 36.02               | -13.83              |
| 2437       | 6       | 106T  | 54       | 16.83                      | 23.82                       | 30.00                       | -6.18                           | -6.18                            | -1.39           | 22.43             | 36.02               | -13.59              |
|            |         |       | 53       | 16.97                      | 23.90                       | 30.00                       | -6.10                           | -6.10                            | -1.39           | 22.51             | 36.02               | -13.51              |
|            |         |       | 54       | 16.90                      | 23.98                       | 30.00                       | -6.02                           | -6.02                            | -1.39           | 22.59             | 36.02               | -13.43              |

**Table 7-8. Conducted Output Power Measurements SISO ANT1 (106 Tones)**

| Freq [MHz] | Channel | Tones | RU Index | Avg Conducted Powers [dBm] | Peak Conducted Powers [dBm] | Conducted Power Limit [dBm] | Avg Conducted Power Margin [dB] | Peak Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p [dBm] | e.i.r.p Limit [dBm] | e.i.r.p Margin [dB] |
|------------|---------|-------|----------|----------------------------|-----------------------------|-----------------------------|---------------------------------|----------------------------------|-----------------|-------------------|---------------------|---------------------|
| 2412       | 1       | 242T  | 61       | 16.43                      | 23.96                       | 30.00                       | -6.04                           | -6.04                            | -1.39           | 22.57             | 36.02               | -13.45              |
| 2417       | 2       | 242T  | 61       | 17.49                      | 24.11                       | 30.00                       | -5.89                           | -5.89                            | -1.39           | 22.72             | 36.02               | -13.30              |
| 2437       | 6       | 242T  | 61       | 17.66                      | 24.28                       | 30.00                       | -5.72                           | -5.72                            | -1.39           | 22.89             | 36.02               | -13.13              |
| 2457       | 10      | 242T  | 61       | 17.56                      | 24.31                       | 30.00                       | -5.69                           | -5.69                            | -1.39           | 22.92             | 36.02               | -13.10              |
| 2462       | 11      | 242T  | 61       | 15.85                      | 24.81                       | 30.00                       | -5.19                           | -5.19                            | -1.39           | 23.42             | 36.02               | -12.60              |

**Table 7-9. Conducted Output Power Measurements SISO ANT1 (242 Tones)**

|  |   |                                      |  |
|--|---|--------------------------------------|--|
| <b>FCC ID:</b> A3LSMS938JPN                    | <b>MEASUREMENT REPORT</b>                     |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2408260070-10.A3L | <b>Test Dates:</b><br>09/03/2024 - 10/25/2024 | <b>EUT Type:</b><br>Portable Handset | Page 26 of 86                            |

| Freq [MHz] | Channel | Tones | RU Index | Avg Conducted Powers [dBm] | Peak Conducted Powers [dBm] | Conducted Power Limit [dBm] | Avg Conducted Power Margin [dB] | Peak Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p [dBm] | e.i.r.p Limit [dBm] | e.i.r.p Margin [dB] |
|------------|---------|-------|----------|----------------------------|-----------------------------|-----------------------------|---------------------------------|----------------------------------|-----------------|-------------------|---------------------|---------------------|
| 2412       | 1       | 26T   | 0        | 13.06                      | 17.90                       | 30.00                       | -16.94                          | -12.10                           | -3.33           | 9.73              | 36.02               | -26.29              |
|            |         |       | 4        | 13.22                      | 18.03                       | 30.00                       | -16.78                          | -11.97                           | -3.33           | 9.89              | 36.02               | -26.13              |
|            |         |       | 8        | 13.39                      | 18.41                       | 30.00                       | -16.61                          | -11.59                           | -3.33           | 10.06             | 36.02               | -25.96              |
| 2437       | 6       | 26T   | 0        | 13.39                      | 18.34                       | 30.00                       | -16.61                          | -11.66                           | -3.33           | 10.06             | 36.02               | -25.96              |
|            |         |       | 4        | 13.41                      | 18.13                       | 30.00                       | -16.59                          | -11.87                           | -3.33           | 10.08             | 36.02               | -25.94              |
|            |         |       | 8        | 13.44                      | 18.70                       | 30.00                       | -16.56                          | -11.30                           | -3.33           | 10.11             | 36.02               | -25.91              |
| 2462       | 11      | 26T   | 0        | 13.51                      | 18.48                       | 30.00                       | -16.49                          | -11.52                           | -3.33           | 10.18             | 36.02               | -25.84              |
|            |         |       | 4        | 13.26                      | 18.09                       | 30.00                       | -16.74                          | -11.91                           | -3.33           | 9.93              | 36.02               | -26.09              |
|            |         |       | 8        | 13.88                      | 18.93                       | 30.00                       | -16.12                          | -11.07                           | -3.33           | 10.55             | 36.02               | -25.47              |

**Table 7-10. Conducted Output Power Measurements SISO ANT2 (26 Tones)**

| Freq [MHz] | Channel | Tones | RU Index | Avg Conducted Powers [dBm] | Peak Conducted Powers [dBm] | Conducted Power Limit [dBm] | Avg Conducted Power Margin [dB] | Peak Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p [dBm] | e.i.r.p Limit [dBm] | e.i.r.p Margin [dB] |
|------------|---------|-------|----------|----------------------------|-----------------------------|-----------------------------|---------------------------------|----------------------------------|-----------------|-------------------|---------------------|---------------------|
| 2412       | 1       | 52T   | 37       | 14.00                      | 18.85                       | 30.00                       | -16.00                          | -11.15                           | -3.33           | 10.67             | 36.02               | -25.35              |
|            |         |       | 38       | 14.07                      | 19.01                       | 30.00                       | -15.93                          | -10.99                           | -3.33           | 10.74             | 36.02               | -25.28              |
|            |         |       | 40       | 14.14                      | 18.85                       | 30.00                       | -15.86                          | -11.15                           | -3.33           | 10.81             | 36.02               | -25.21              |
| 2437       | 6       | 52T   | 37       | 14.35                      | 19.22                       | 30.00                       | -15.65                          | -10.78                           | -3.33           | 11.02             | 36.02               | -25.00              |
|            |         |       | 38       | 14.63                      | 19.63                       | 30.00                       | -15.37                          | -10.37                           | -3.33           | 11.30             | 36.02               | -24.72              |
|            |         |       | 40       | 14.48                      | 19.44                       | 30.00                       | -15.52                          | -10.56                           | -3.33           | 11.15             | 36.02               | -24.87              |
| 2462       | 11      | 52T   | 37       | 14.54                      | 19.39                       | 30.00                       | -15.46                          | -10.61                           | -3.33           | 11.21             | 36.02               | -24.81              |
|            |         |       | 38       | 14.34                      | 19.32                       | 30.00                       | -15.66                          | -10.68                           | -3.33           | 11.01             | 36.02               | -25.01              |
|            |         |       | 40       | 14.87                      | 19.78                       | 30.00                       | -15.13                          | -10.22                           | -3.33           | 11.54             | 36.02               | -24.48              |

**Table 7-11. Conducted Output Power Measurements SISO ANT2 (52 Tones)**

| Freq [MHz] | Channel | Tones | RU Index | Avg Conducted Powers [dBm] | Peak Conducted Powers [dBm] | Conducted Power Limit [dBm] | Avg Conducted Power Margin [dB] | Peak Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p [dBm] | e.i.r.p Limit [dBm] | e.i.r.p Margin [dB] |
|------------|---------|-------|----------|----------------------------|-----------------------------|-----------------------------|---------------------------------|----------------------------------|-----------------|-------------------|---------------------|---------------------|
| 2412       | 1       | 106T  | 53       | 16.28                      | 21.35                       | 30.00                       | -13.72                          | -8.65                            | -3.33           | 12.95             | 36.02               | -23.07              |
|            |         |       | 54       | 16.43                      | 21.40                       | 30.00                       | -13.57                          | -8.60                            | -3.33           | 13.10             | 36.02               | -22.92              |
|            |         |       | 55       | 16.88                      | 21.90                       | 30.00                       | -13.12                          | -8.10                            | -3.33           | 13.55             | 36.02               | -22.47              |
| 2437       | 6       | 106T  | 54       | 16.53                      | 21.65                       | 30.00                       | -13.47                          | -8.35                            | -3.33           | 13.20             | 36.02               | -22.82              |
|            |         |       | 53       | 16.49                      | 21.56                       | 30.00                       | -13.51                          | -8.44                            | -3.33           | 13.16             | 36.02               | -22.86              |
|            |         |       | 54       | 16.07                      | 21.23                       | 30.00                       | -13.93                          | -8.77                            | -3.33           | 12.74             | 36.02               | -23.28              |

**Table 7-12. Conducted Output Power Measurements SISO ANT2 (106 Tones)**

| Freq [MHz] | Channel | Tones | RU Index | Avg Conducted Powers [dBm] | Peak Conducted Powers [dBm] | Conducted Power Limit [dBm] | Avg Conducted Power Margin [dB] | Peak Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p [dBm] | e.i.r.p Limit [dBm] | e.i.r.p Margin [dB] |
|------------|---------|-------|----------|----------------------------|-----------------------------|-----------------------------|---------------------------------|----------------------------------|-----------------|-------------------|---------------------|---------------------|
|            | 1       | 242T  | 61       | 16.48                      | 21.19                       | 30.00                       | -13.52                          | -8.81                            | -3.33           | 13.15             | 36.02               | -22.87              |
|            | 2       | 242T  | 61       | 17.85                      | 22.41                       | 30.00                       | -12.15                          | -7.59                            | -3.33           | 14.52             | 36.02               | -21.50              |
|            | 6       | 242T  | 61       | 17.58                      | 22.19                       | 30.00                       | -12.42                          | -7.81                            | -3.33           | 14.25             | 36.02               | -21.77              |
|            | 10      | 242T  | 61       | 17.65                      | 22.31                       | 30.00                       | -12.35                          | -7.69                            | -3.33           | 14.32             | 36.02               | -21.70              |
|            | 11      | 242T  | 61       | 15.56                      | 20.27                       | 30.00                       | -14.44                          | -9.73                            | -3.33           | 12.23             | 36.02               | -23.79              |

**Table 7-13. Conducted Output Power Measurements SISO ANT2 (242 Tones)**

|  |   |                                      |  |
|--|---|--------------------------------------|--|
| <b>FCC ID:</b> A3LSMS938JPN                    | <b>MEASUREMENT REPORT</b>                     |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2408260070-10.A3L | <b>Test Dates:</b><br>09/03/2024 - 10/25/2024 | <b>EUT Type:</b><br>Portable Handset | Page 27 of 86                            |

| Freq [MHz] | Channel | Tones | RU Index | Conducted Power [dBm] |       |           |       |       |       | Conducted Power Limit [dBm] | Avg Conducted Power Margin [dB] | Peak Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p [dBm] | e.i.r.p Limit [dBm] | e.i.r.p Margin [dB] |
|------------|---------|-------|----------|-----------------------|-------|-----------|-------|-------|-------|-----------------------------|---------------------------------|----------------------------------|-----------------|-------------------|---------------------|---------------------|
|            |         |       |          | Antenna-1             |       | Antenna-2 |       | MIMO  |       |                             |                                 |                                  |                 |                   |                     |                     |
|            |         |       |          | AVG                   | PEAK  | AVG       | PEAK  | AVG   | PEAK  |                             |                                 |                                  |                 |                   |                     |                     |
| 2412       | 1       | 26T   | 0        | 13.81                 | 21.22 | 13.01     | 18.72 | 16.44 | 23.16 | 30.00                       | -13.56                          | -6.84                            | 0.70            | 17.14             | 36.02               | -18.88              |
|            |         |       | 4        | 13.60                 | 21.15 | 12.58     | 18.10 | 16.13 | 22.90 | 30.00                       | -13.87                          | -7.10                            | 0.70            | 16.83             | 36.02               | -19.19              |
|            |         |       | 8        | 13.69                 | 21.11 | 13.11     | 18.58 | 16.42 | 23.04 | 30.00                       | -13.58                          | -6.96                            | 0.70            | 17.12             | 36.02               | -18.90              |
|            |         |       | 0        | 13.51                 | 20.96 | 13.36     | 18.54 | 16.45 | 22.93 | 30.00                       | -13.55                          | -7.07                            | 0.70            | 17.15             | 36.02               | -18.87              |
| 2437       | 6       | 26T   | 4        | 13.72                 | 21.36 | 13.29     | 18.91 | 16.52 | 23.32 | 30.00                       | -13.48                          | -6.68                            | 0.70            | 17.22             | 36.02               | -18.80              |
|            |         |       | 8        | 13.99                 | 21.51 | 12.93     | 18.27 | 16.50 | 23.20 | 30.00                       | -13.50                          | -6.80                            | 0.70            | 17.21             | 36.02               | -18.81              |
|            |         |       | 0        | 13.86                 | 21.02 | 12.32     | 17.50 | 16.17 | 22.62 | 30.00                       | -13.83                          | -7.38                            | 0.70            | 16.87             | 36.02               | -19.15              |
|            |         |       | 4        | 13.53                 | 20.99 | 12.66     | 18.14 | 16.13 | 22.81 | 30.00                       | -13.87                          | -7.19                            | 0.70            | 16.83             | 36.02               | -19.19              |
| 2462       | 11      | 26T   | 8        | 13.98                 | 21.64 | 13.69     | 18.97 | 16.85 | 23.52 | 30.00                       | -13.15                          | -6.48                            | 0.70            | 17.55             | 36.02               | -18.47              |
|            |         |       | 0        | 5.76                  | 13.22 | 5.11      | 13.14 | 8.46  | 16.19 | 30.00                       | -21.54                          | -13.81                           | 0.70            | 9.16              | 36.02               | -26.86              |
|            |         |       | 4        | 5.65                  | 13.36 | 5.21      | 13.22 | 8.45  | 16.30 | 30.00                       | -21.55                          | -13.70                           | 0.70            | 9.15              | 36.02               | -26.87              |
|            |         |       | 8        | 5.52                  | 13.55 | 5.52      | 13.36 | 8.53  | 16.47 | 30.00                       | -21.47                          | -13.53                           | 0.70            | 9.23              | 36.02               | -26.79              |
| 2467       | 12      | 26T   | 0        | -9.77                 | -0.88 | -9.60     | -0.88 | -6.67 | 2.13  | 30.00                       | -36.67                          | -27.87                           | 0.70            | -5.97             | 36.02               | -41.99              |
|            |         |       | 4        | -9.36                 | -0.35 | -9.53     | -0.83 | -6.43 | 2.43  | 30.00                       | -36.43                          | -27.57                           | 0.70            | -5.73             | 36.02               | -41.75              |
|            |         |       | 8        | -9.77                 | -0.55 | -9.44     | -0.66 | -6.59 | 2.41  | 30.00                       | -36.59                          | -27.59                           | 0.70            | -5.89             | 36.02               | -41.91              |
|            |         |       |          |                       |       |           |       |       |       |                             |                                 |                                  |                 |                   |                     |                     |

Table 7-14. Conducted Output Power Measurements MIMO (26 Tones)

| Freq [MHz] | Channel | Tones | RU Index | Conducted Power [dBm] |       |           |       |       |       | Conducted Power Limit [dBm] | Avg Conducted Power Margin [dB] | Peak Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p [dBm] | e.i.r.p Limit [dBm] | e.i.r.p Margin [dB] |
|------------|---------|-------|----------|-----------------------|-------|-----------|-------|-------|-------|-----------------------------|---------------------------------|----------------------------------|-----------------|-------------------|---------------------|---------------------|
|            |         |       |          | Antenna-1             |       | Antenna-2 |       | MIMO  |       |                             |                                 |                                  |                 |                   |                     |                     |
|            |         |       |          | AVG                   | PEAK  | AVG       | PEAK  | AVG   | PEAK  |                             |                                 |                                  |                 |                   |                     |                     |
| 2412       | 1       | 52T   | 37       | 14.75                 | 22.25 | 14.00     | 19.46 | 17.40 | 24.09 | 30.00                       | -12.60                          | -5.91                            | 0.70            | 18.11             | 36.02               | -17.91              |
|            |         |       | 38       | 14.75                 | 22.36 | 14.00     | 19.36 | 17.40 | 24.12 | 30.00                       | -12.60                          | -5.88                            | 0.70            | 18.11             | 36.02               | -17.91              |
|            |         |       | 40       | 14.87                 | 22.24 | 14.05     | 19.31 | 17.49 | 24.03 | 30.00                       | -12.51                          | -5.97                            | 0.70            | 18.19             | 36.02               | -17.83              |
|            |         |       | 37       | 14.43                 | 21.94 | 14.29     | 19.62 | 17.37 | 23.94 | 30.00                       | -12.63                          | -6.06                            | 0.70            | 18.08             | 36.02               | -17.94              |
| 2437       | 6       | 52T   | 38       | 14.86                 | 22.05 | 14.72     | 19.76 | 17.80 | 24.06 | 30.00                       | -12.20                          | -5.94                            | 0.70            | 18.51             | 36.02               | -17.51              |
|            |         |       | 40       | 14.71                 | 22.13 | 13.93     | 19.27 | 17.35 | 23.94 | 30.00                       | -12.65                          | -6.06                            | 0.70            | 18.05             | 36.02               | -17.97              |
|            |         |       | 37       | 14.61                 | 21.88 | 13.27     | 18.78 | 17.00 | 23.61 | 30.00                       | -13.00                          | -6.39                            | 0.70            | 17.71             | 36.02               | -18.31              |
|            |         |       | 38       | 14.82                 | 22.24 | 13.75     | 18.99 | 17.33 | 23.92 | 30.00                       | -12.67                          | -6.08                            | 0.70            | 18.03             | 36.02               | -17.99              |
| 2462       | 11      | 52T   | 40       | 14.41                 | 22.03 | 14.17     | 19.71 | 17.30 | 24.03 | 30.00                       | -12.70                          | -5.97                            | 0.70            | 18.01             | 36.02               | -18.01              |
|            |         |       | 37       | 5.86                  | 13.51 | 5.51      | 10.61 | 8.70  | 15.31 | 30.00                       | -21.30                          | -14.69                           | 0.70            | 9.40              | 36.02               | -26.62              |
|            |         |       | 38       | 5.92                  | 13.71 | 5.50      | 11.03 | 8.73  | 15.58 | 30.00                       | -21.27                          | -14.42                           | 0.70            | 9.43              | 36.02               | -26.59              |
|            |         |       | 40       | 5.79                  | 13.66 | 5.39      | 9.89  | 8.60  | 15.18 | 30.00                       | -21.40                          | -14.82                           | 0.70            | 9.31              | 36.02               | -26.71              |
| 2467       | 12      | 52T   | 37       | -7.77                 | 0.89  | -7.66     | 0.96  | -4.70 | 3.94  | 30.00                       | -34.70                          | -26.06                           | 0.70            | -4.00             | 36.02               | -40.02              |
|            |         |       | 38       | -7.82                 | 0.90  | -7.85     | 0.85  | -4.82 | 3.93  | 30.00                       | -34.82                          | -26.07                           | 0.70            | -4.12             | 36.02               | -40.14              |
|            |         |       | 40       | -7.93                 | 0.93  | -7.57     | 0.75  | -4.74 | 3.85  | 30.00                       | -34.74                          | -26.15                           | 0.70            | -4.03             | 36.02               | -40.05              |
|            |         |       |          |                       |       |           |       |       |       |                             |                                 |                                  |                 |                   |                     |                     |

Table 7-15. Conducted Output Power Measurements MIMO (52 Tones)

| Freq [MHz] | Channel | Tones   | MRU Index | Conducted Power [dBm] |       |           |       |       |       | Conducted Power Limit [dBm] | Avg Conducted Power Margin [dB] | Peak Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p [dBm] | e.i.r.p Limit [dBm] | e.i.r.p Margin [dB] |
|------------|---------|---------|-----------|-----------------------|-------|-----------|-------|-------|-------|-----------------------------|---------------------------------|----------------------------------|-----------------|-------------------|---------------------|---------------------|
|            |         |         |           | Antenna-1             |       | Antenna-2 |       | MIMO  |       |                             |                                 |                                  |                 |                   |                     |                     |
|            |         |         |           | AVG                   | PEAK  | AVG       | PEAK  | AVG   | PEAK  |                             |                                 |                                  |                 |                   |                     |                     |
| 2412       | 1       | 106+26T | 82        | 16.60                 | 25.02 | 15.50     | 23.85 | 19.10 | 27.48 | 30.00                       | -10.90                          | -2.52                            | 0.70            | 19.80             | 36.02               | -16.22              |
|            |         |         | 83        | 16.60                 | 24.89 | 15.70     | 23.87 | 19.18 | 27.42 | 30.00                       | -10.82                          | -2.58                            | 0.70            | 19.89             | 36.02               | -16.13              |
| 2437       | 6       | 106+26T | 82        | 16.99                 | 25.22 | 16.36     | 24.54 | 19.70 | 27.90 | 30.00                       | -10.30                          | -2.10                            | 0.70            | 20.40             | 36.02               | -15.62              |
|            |         |         | 83        | 16.60                 | 24.84 | 15.30     | 23.40 | 19.01 | 27.19 | 30.00                       | -10.99                          | -2.81                            | 0.70            | 19.71             | 36.02               | -16.31              |
| 2462       | 11      | 106+26T | 82        | 16.99                 | 24.62 | 15.30     | 23.61 | 19.24 | 27.15 | 30.00                       | -10.76                          | -2.85                            | 0.70            | 19.94             | 36.02               | -16.08              |
| 2467       | 12      | 106+26T | 83        | 16.82                 | 24.90 | 15.65     | 23.82 | 19.28 | 27.40 | 30.00                       | -10.72                          | -2.60                            | 0.70            | 19.99             | 36.02               | -16.03              |
|            |         |         | 82        | 5.53                  | 14.83 | 5.46      | 14.88 | 8.51  | 17.87 | 30.00                       | -21.49                          | -12.13                           | 0.70            | 9.21              | 36.02               | -26.81              |
|            |         |         | 83        | 5.15                  | 14.69 | 5.27      | 14.66 | 8.22  | 17.69 | 30.00                       | -21.78                          | -12.31                           | 0.70            | 8.93              | 36.02               | -27.09              |
| 2472       | 13      | 106+26T | 82        | -4.67                 | 3.99  | -4.39     | 3.80  | -1.52 | 6.91  | 30.00                       | -31.52                          | -23.09                           | 0.70            | -0.81             | 36.02               | -36.83              |
|            |         |         | 83        | -4.35                 | 3.50  | -4.17     | 3.74  | -1.25 | 6.63  | 30.00                       | -31.25                          | -23.37                           | 0.70            | -0.54             | 36.02               | -36.56              |

Table 7-16. Conducted Output Power Measurements MIMO (52+26 Tones)

| Freq [MHz] | Channel | Tones | RU Index | Conducted Power [dBm] |       |           |       |       |       | Conducted Power Limit [dBm] | Avg Conducted Power Margin [dB] | Peak Conducted Power Margin | Ant. Gain [dBi] | Max e.i.r.p [dBm] | e.i.r.p Limit [dBm] | e.i.r.p Margin [dB] |
|------------|---------|-------|----------|-----------------------|-------|-----------|-------|-------|-------|-----------------------------|---------------------------------|-----------------------------|-----------------|-------------------|---------------------|---------------------|
|            |         |       |          | Antenna-1             |       | Antenna-2 |       | MIMO  |       |                             |                                 |                             |                 |                   |                     |                     |
|            |         |       |          | AVG                   | PEAK  | AVG       | PEAK  | AVG   | PEAK  |                             |                                 |                             |                 |                   |                     |                     |
| 2412       | 1       | 106T  | 53       | 16.24                 | 24.83 | 15.95     | 21.69 | 19.48 | 26.55 | 30.00                       | -10.52                          | -3.45                       | 0.70            | 20.19             | 36.02               | -15.83              |
|            |         |       | 54       | 16.55                 | 24.06 | 15.68     | 21.11 | 19.15 | 25.84 | 30.00                       | -10.85                          | -4.16                       | 0.70            | 19.85             | 36.02               | -16.17              |
|            |         |       | 53       | 16.95                 | 24.48 | 16.55     | 21.97 | 19.76 | 26.41 | 30.00                       | -10.24                          | -3.59                       | 0.70            | 20.47             | 36.02               | -15.55              |
|            |         |       | 54       | 16.56                 | 24.06 | 15.57     | 21.14 | 19.10 | 25.85 | 30.00                       | -10.90                          | -4.15                       | 0.70            | 19.81             | 36.02               | -16.21              |
| 2462       | 6       | 106T  | 53       | 16.63                 | 24.16 | 15.59     | 20.58 | 19.15 | 25.74 | 30.00                       | -10.85                          | -4.26                       | 0.70            | 19.86             | 36.02               | -16.16              |
|            |         |       | 54       | 16.62                 | 24.18 | 15.76     | 21.21 | 19.22 | 25.95 | 30.00                       | -10.78                          | -4.05                       | 0.70            | 19.93             | 36.02               | -16.09              |
|            |         |       | 53       | 5.59                  | 15.02 | 5.52      | 14.83 | 8.57  | 17.94 | 30.00                       | -21.43                          | -12.06                      | 0.70            | 9.27              | 36.02               | -26.75              |
|            |         |       | 54       | 5.33                  | 14.61 | 5.22      | 14.59 | 8.29  | 17.61 | 30.00                       | -21.71                          | -12.39                      | 0.70            | 8.99              | 36.02               | -27.03              |
| 2472       | 13      | 106T  | 53       | -4.75                 | 3.75  | -4.04     | 3.52  | -1.37 | 6.65  | 30.00                       | -31.37                          | -23.35                      | 0.70            | -0.67             | 36.02               | -36.69              |
|            |         |       | 54       | -4.22                 | 3.36  | -4.11     | 3.66  | -1.15 | 6.52  | 30.00                       | -31.15                          | -23.48                      | 0.70            | -0.45             | 36.02               | -36.47              |

Table 7-17. Conducted Output Power Measurements MIMO (106 Tones)

| Freq [MHz] | Channel | Tones  | MRU Index | Conducted Power [dBm] |       |           |       |       |       | Conducted Power Limit [dBm] | Avg Conducted Power Margin [dB] | Peak Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p [dBm] | e.i.r.p Limit [dBm] | e.i.r.p Margin [dB] |
|------------|---------|--------|-----------|-----------------------|-------|-----------|-------|-------|-------|-----------------------------|---------------------------------|----------------------------------|-----------------|-------------------|---------------------|---------------------|
|            |         |        |           | Antenna-1             |       | Antenna-2 |       | MIMO  |       |                             |                                 |                                  |                 |                   |                     |                     |
|            |         |        |           | AVG                   | PEAK  | AVG       | PEAK  | AVG   | PEAK  |                             |                                 |                                  |                 |                   |                     |                     |
| 2412       | 1       | 52+26T | 70        | 14.50                 | 22.61 | 13.40     | 21.51 | 17.00 | 25.11 | 30.00                       | -13.00                          | -4.89                            | 0.70            | 17.70             | 36.02               | -18.32              |
|            |         |        | 71        | 14.55                 | 22.55 | 13.45     | 21.58 | 17.05 | 25.10 | 30.00                       | -12.95                          | -4.90                            | 0.70            | 17.75             | 36.02               | -18.27              |
|            |         |        | 72        | 14.99                 | 22.60 | 14.10     | 21.80 | 17.58 | 25.20 | 30.00                       | -12.42                          | -4.77                            | 0.70            | 18.28             | 36.02               | -17.74              |
|            |         |        | 70        | 14.90                 | 22.85 | 14.33     | 21.98 | 17.63 | 25.45 | 30.00                       | -12.37                          | -4.55                            | 0.70            | 18.34             | 36.02               | -17.68              |
| 2437       | 6       | 52+26T | 71        | 14.86                 | 22.96 | 14.09     | 21.89 | 17.50 | 25.47 | 30.00                       | -12.50                          | -4.53                            | 0.70            | 18.21             | 36.02               | -17.81              |
|            |         |        | 72        | 14.99                 | 22.97 | 13.72     | 21.86 | 17.41 | 25.46 | 30.00                       | -12.59                          | -4.54                            | 0.70            | 18.12             | 36.02               | -17.90              |
| 2462       | 11      | 52+26T | 70        | 14.99                 | 22.85 | 13.46     | 21.49 | 17.30 | 25.23 | 30.00                       | -12.70                          | -4.71                            | 0.70            | 18.01             | 36.02               | -18.01              |
|            |         |        | 71        | 14.83                 | 22.72 | 13.47     | 21.42 | 17.21 | 25.13 | 30.00                       | -12.75                          | -4.67                            | 0.70            | 17.92             | 36.02               | -18.10              |
|            |         |        | 72        | 14.50                 | 22.69 | 13.90     | 21.59 | 17.22 | 25.19 | 30.00                       | -12.78                          | -4.81                            | 0.70            | 17.93             | 36.02               | -18.09              |
|            |         |        | 70        | 5.16                  | 12.91 | 5.10      | 10.07 | 8.14  | 14.73 | 30.00                       | -21.86                          | -15.27                           | 0.70            | 8.84              | 36.02               | -27.18              |
| 2467       | 12      | 52+26T | 71        | 5.58                  | 13.42 | 5.21      | 10.55 | 8.41  | 15.23 | 30.00                       | -21.59                          | -14.77                           | 0.70            | 9.11              | 36.02               | -26.91              |
|            |         |        | 72        | 5.59                  | 13.11 | 5.09      | 9.19  | 8.36  | 14.59 | 30.00                       | -21.64                          | -15.41                           | 0.70            | 9.06              | 36.02               | -26.96              |
| 2472       | 13      | 52+26T | 70        | -7.75                 | -0.86 | -7.99     | 0.81  | -4.66 | 3.85  | -0.70                       | -34.66                          | -26.15                           | 0.70            | -39.97            | 36.02               | -39.97              |
|            |         |        | 71        | -7.96                 | 1.11  | -7.81     | 1.12  | -4.87 | 4.13  | 30.00                       | -34.87                          | -25.87                           | 0.70            | -4.17             | 36.02               | -40.19              |
|            |         |        | 72        | -8.12                 | 0.93  | -7.65     | 0.68  | -4.87 | 3.82  | 30.00                       | -34.87                          | -26.18                           | 0.70            | -4.16             | 36.02               | -40.18              |

**Note:**

Per ANSI C63.10-2013 Section 14.2, the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

**Sample MIMO Calculation:**

At 2412MHz the average conducted output power was measured to be 13.81 dBm for Antenna 1 and 13.01 dBm for Antenna 2.

Antenna 1 + Antenna 2 = MIMO

$$(13.81 \text{ dBm} + 13.01 \text{ dBm}) = (24.044 \text{ mW} + 19.999 \text{ mW}) = 44.043 \text{ mW} = 16.44 \text{ dBm}$$

|  |   |                                      |  |
|--|---|--------------------------------------|--|
| <b>FCC ID:</b> A3LSMS938JPN                    | <b>MEASUREMENT REPORT</b>                     |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2408260070-10.A3L | <b>Test Dates:</b><br>09/03/2024 - 10/25/2024 | <b>EUT Type:</b><br>Portable Handset | Page 29 of 86                            |

## 7.4 Power Spectral Density

### Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates, tones configurations, and RU indices were investigated and the worst-case configuration results are reported in this section.

***The maximum permissible power spectral density shall not be greater than 8 dBm in any 3 kHz band.***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD

ANSI C63.10-2013 – Section 14.3.1 Measure-and-Sum Technique

### Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes

1. Based on preliminary measurements, it was determined that, of all of the tone configurations, the 26T configuration produced the worst case power spectral density measurement for partial loaded case. Therefore, only the 26 Tone configuration and 242 Tone data is included in this section.
2. The power spectral density for each channel was measured with the RU index showing the highest conducted power.

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 30 of 86                     |


## Power Spectral Density Measurements

| Frequency [MHz] | Channel No. | 802.11 Mode | Tones | Data Rate [Mbps] | ANT 1 Power Spectral Density [dBm] | ANT 2 Power Spectral Density [dBm] | Summed MIMO Power Spectral Density [dBm] | Maximum Permissible Power Density [dBm / 3kHz] | Margin [dB] | Pass / Fail |
|-----------------|-------------|-------------|-------|------------------|------------------------------------|------------------------------------|--|--|-------------|-------------|
| 2412            | 1           | ax/be       | 26T   | MCS0             | -3.89                              | -2.55                              | -0.16                                    | 8.00   | -8.16       | Pass        |
| 2437            | 6           | ax/be       | 26T   | MCS0             | -3.68                              | -3.41                              | -0.53                                    | 8.00   | -8.53       | Pass        |
| 2462            | 11          | ax/be       | 26T   | MCS0             | -3.24                              | -3.10                              | -0.16                                    | 8.00   | -8.16       | Pass        |
| 2412            | 1           | ax/be       | 242T  | MCS0             | -7.78                              | -8.22                              | -4.99                                    | 8.00   | -12.99      | Pass        |
| 2437            | 6           | ax/be       | 242T  | MCS0             | -7.97                              | -8.10                              | -5.02                                    | 8.00   | -13.02      | Pass        |
| 2462            | 11          | ax/be       | 242T  | MCS0             | -7.56                              | -8.55                              | -5.01                                    | 8.00   | -13.01      | Pass        |


**Table 7-20. Conducted Power Spectral Density Measurements MIMO**

|  |   |                                      |  |
|--|---|--------------------------------------|--|
| <b>FCC ID:</b> A3LSMS938JPN                    | <b>MEASUREMENT REPORT</b>                     |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2408260070-10.A3L | <b>Test Dates:</b><br>09/03/2024 - 10/25/2024 | <b>EUT Type:</b><br>Portable Handset | Page 31 of 86                            |

## 7.4.1 MIMO Power Spectral Density Measurements

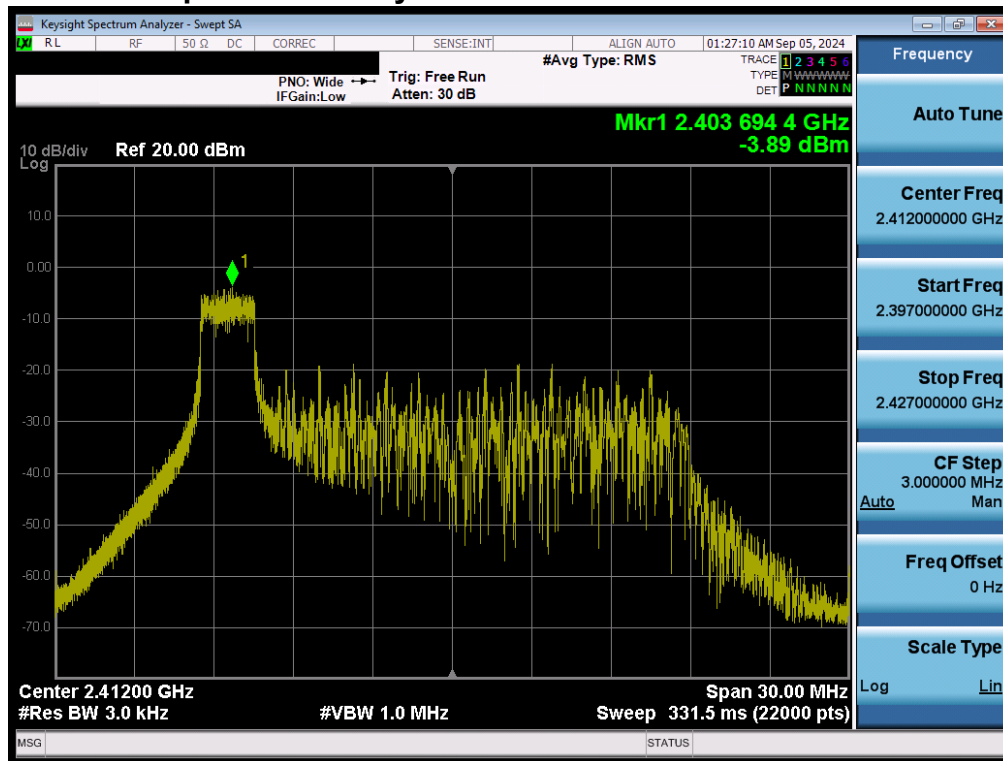


Plot 7-16. Power Spectral Density Plot MIMO ANT1 (802.11ax/be OFDMA – 26 Tones – Ch. 1)

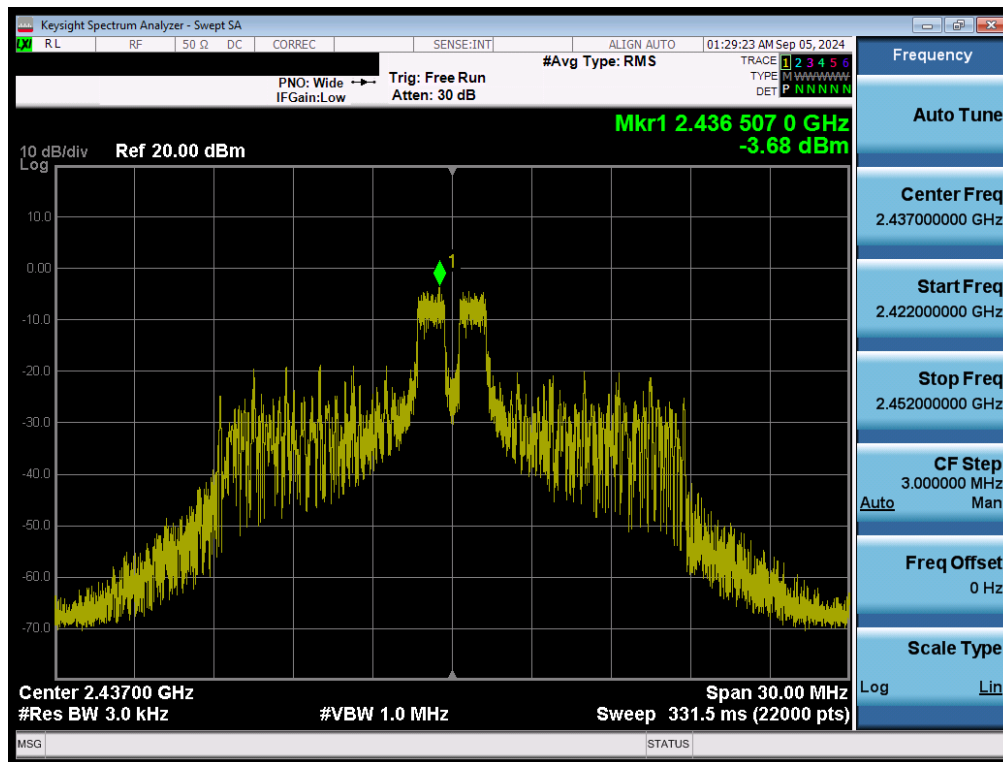


Plot 7-17. Power Spectral Density Plot MIMO ANT1 (802.11ax/be OFDMA – 26 Tones – Ch. 6)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 32 of 86                     |

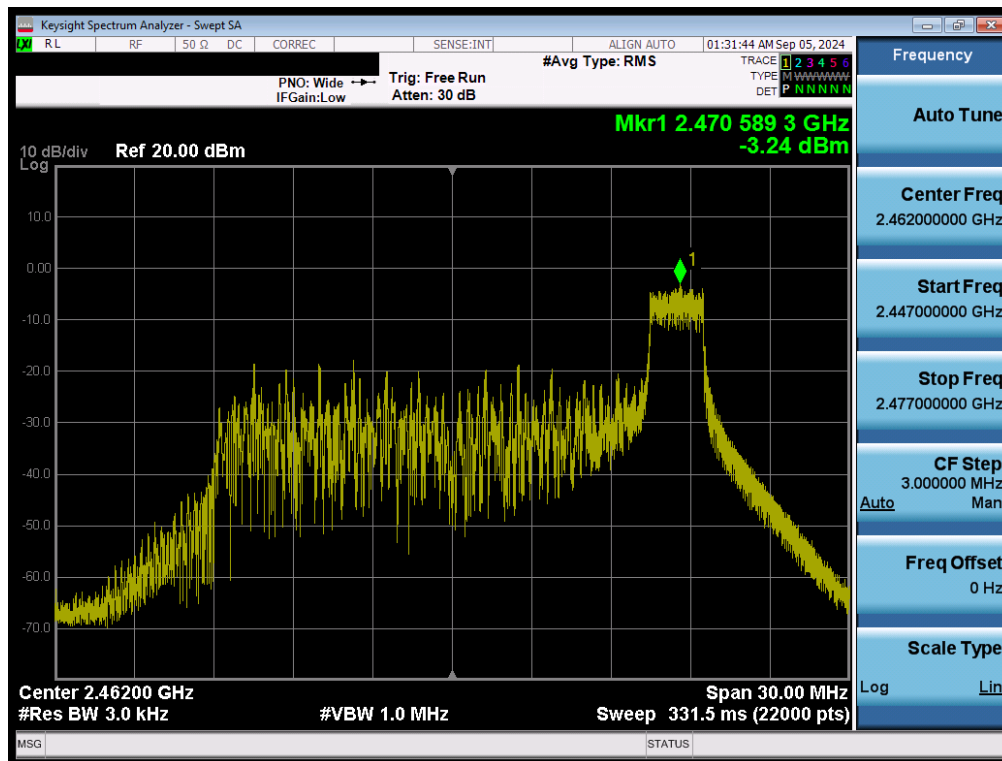


Plot 7-18. Power Spectral Density Plot MIMO ANT1 (802.11ax/be OFDMA – 26 Tones – Ch. 11)

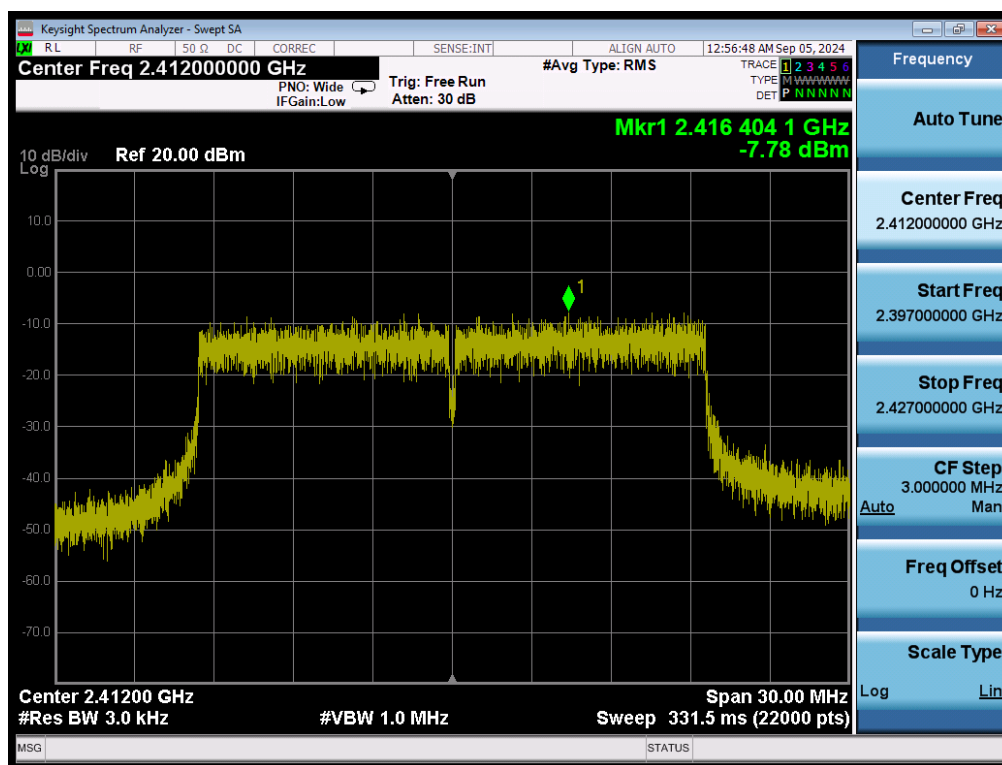


Plot 7-19. Power Spectral Density Plot MIMO ANT1 (802.11ax/be OFDMA – 242 Tones – Ch. 1)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 33 of 86                     |

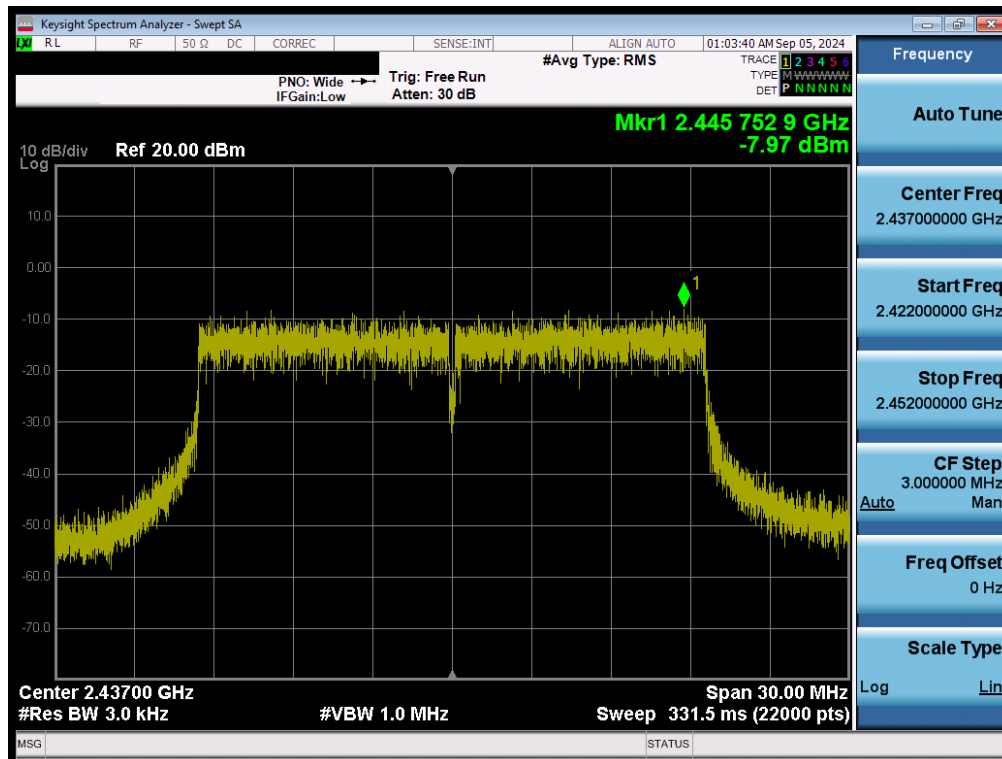


Plot 7-20. Power Spectral Density Plot MIMO ANT1 (802.11ax/be OFDMA – 242 Tones – Ch. 6)

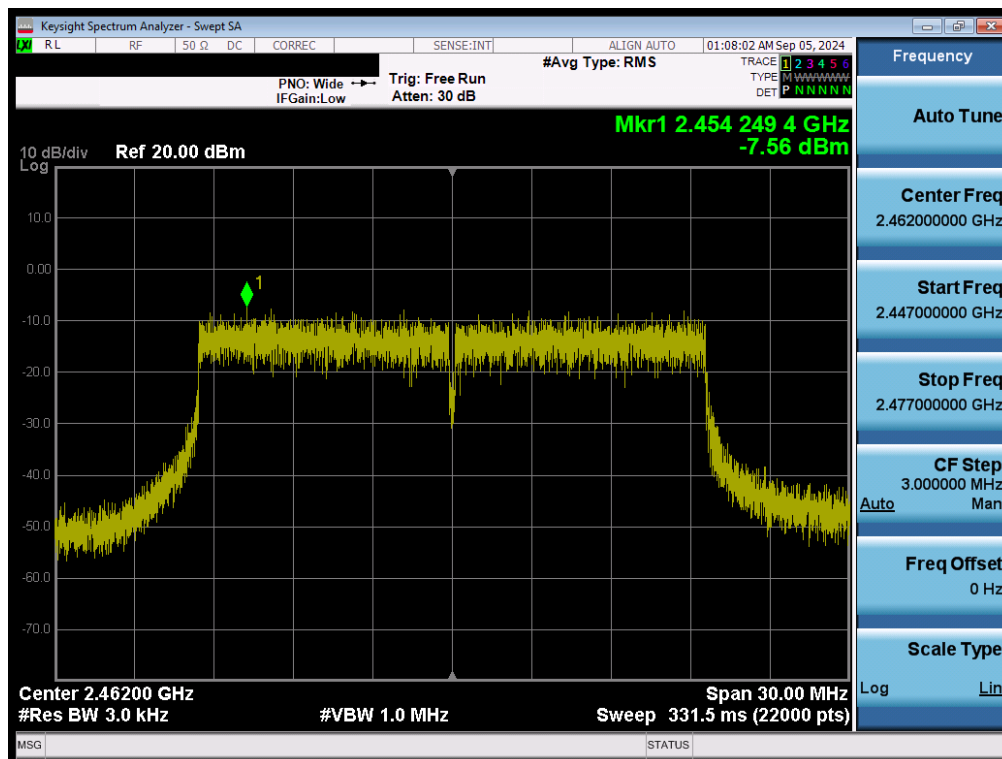


Plot 7-21. Power Spectral Density Plot MIMO ANT1 (802.11ax/be OFDMA – 242 Tones – Ch. 11)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 34 of 86                     |

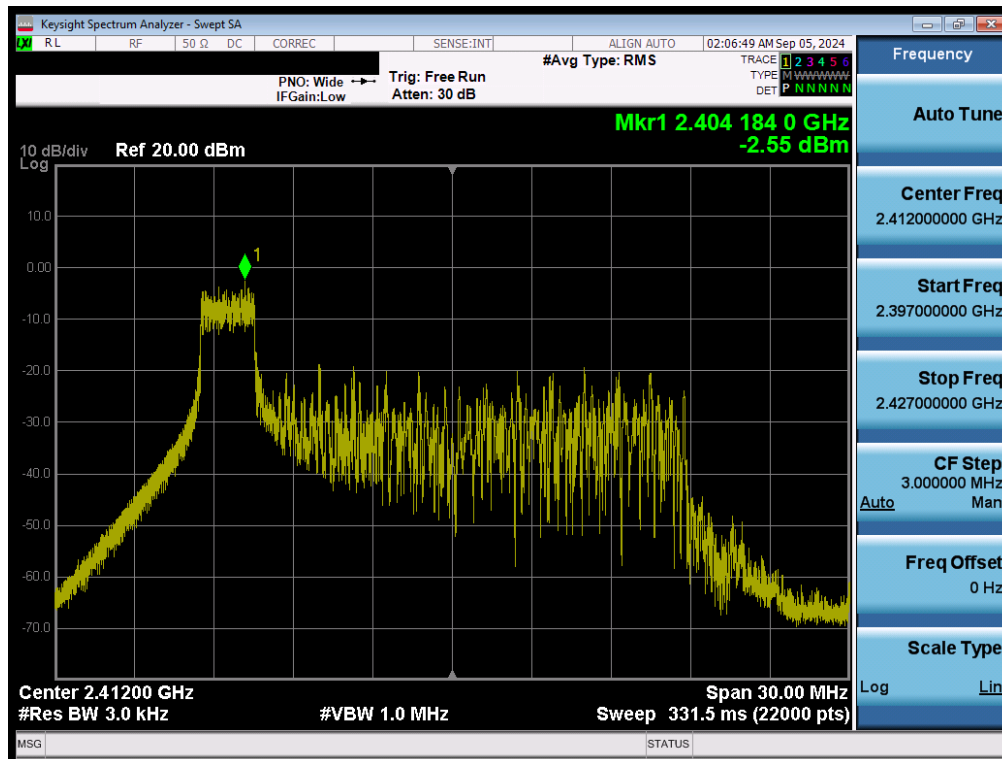


Plot 7-22. Power Spectral Density Plot MIMO ANT2 (802.11ax/be OFDMA – 26 Tones – Ch. 1)

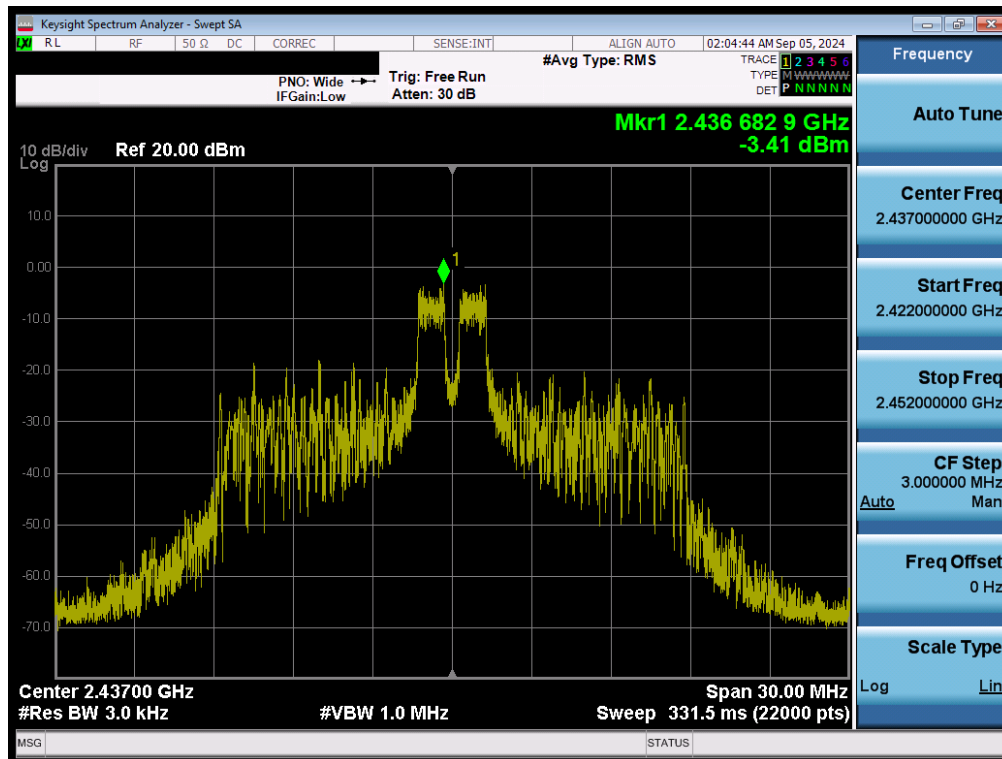


Plot 7-23. Power Spectral Density Plot MIMO ANT2 (802.11ax/be OFDMA – 26 Tones – Ch. 6)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 35 of 86                     |

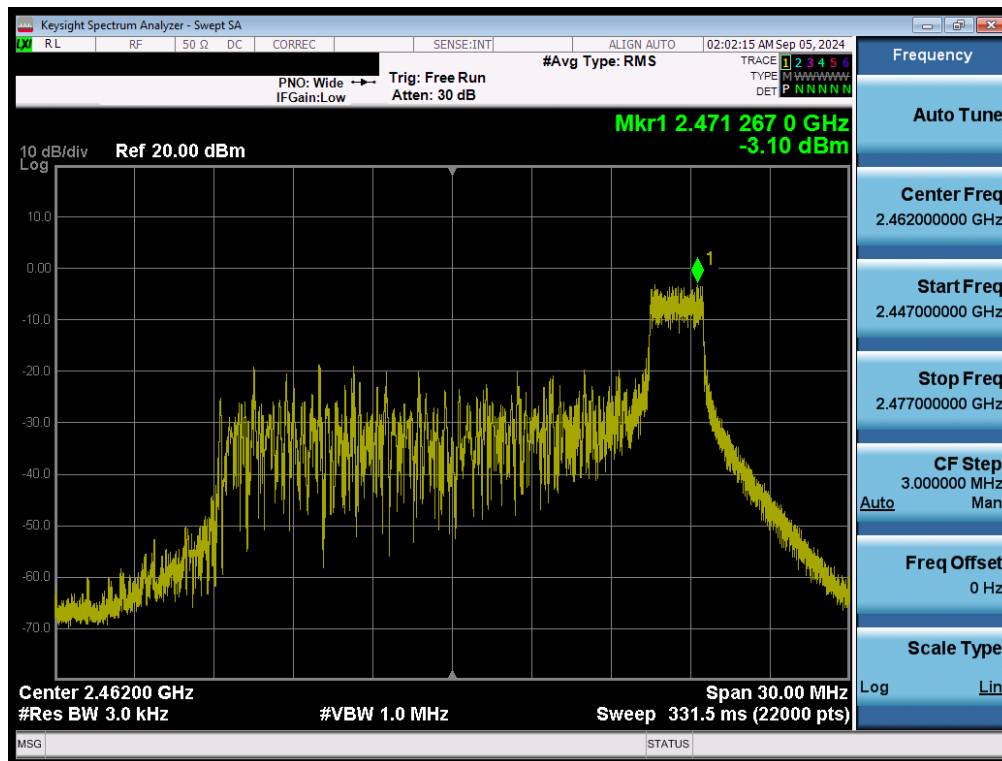


Plot 7-24. Power Spectral Density Plot MIMO ANT2 (802.11ax/be OFDMA – 26 Tones – Ch. 11)

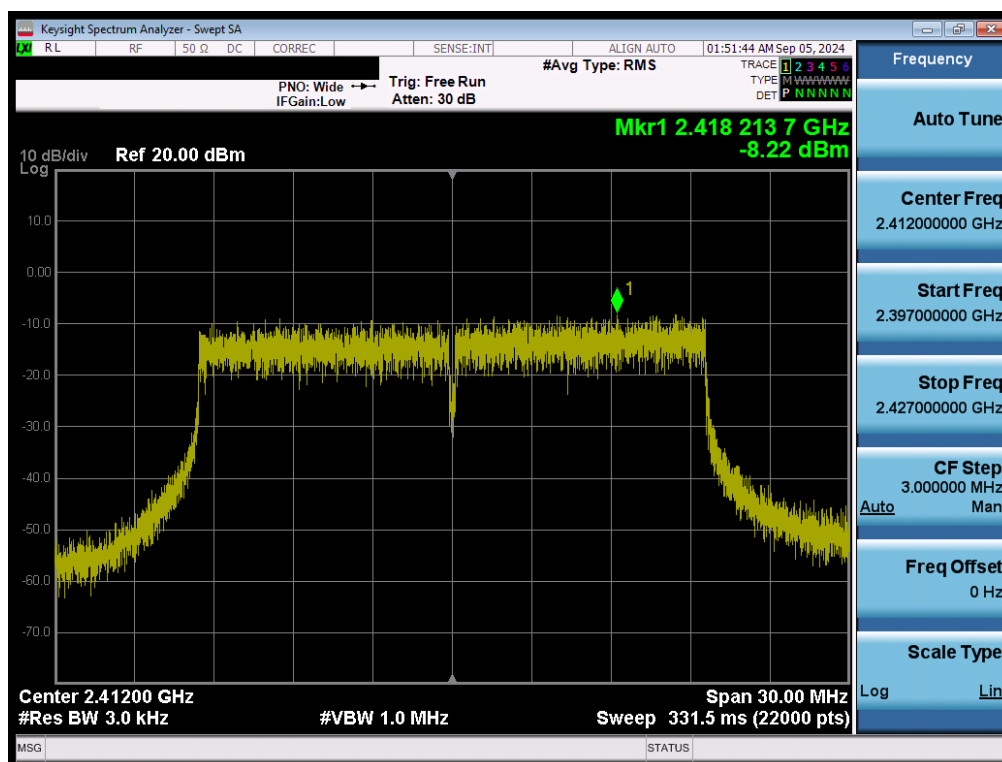

Plot 7-25. Power Spectral Density Plot MIMO ANT2 (802.11ax/be OFDMA – 242 Tones – Ch. 1)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 36 of 86                     |

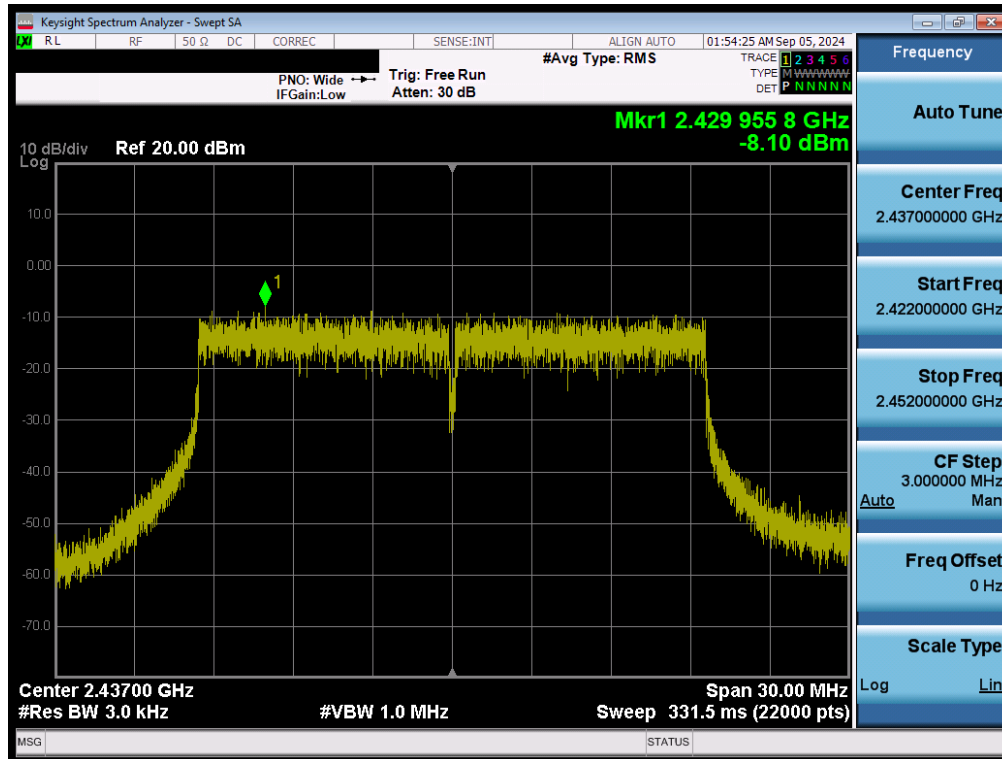

**Note:**

Per ANSI C63.10-2013 Section 14.3.1, the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

**Sample MIMO Calculation:**

At 2412MHz the average conducted power spectral density was measured to be -3.89 dBm for Antenna 1 and -2.55 dBm for Antenna 2.

Antenna 1 + Antenna 2 = MIMO

$$(-3.89 \text{ dBm} + -2.55 \text{ dBm}) = (0.408 \text{ mW} + 0.556 \text{ mW}) = 0.964 \text{ mW} = -0.16 \text{ dBm}$$

|  |   |                                      |  |
|--|---|--------------------------------------|--|
| <b>FCC ID:</b> A3LSMS938JPN                    | <b>MEASUREMENT REPORT</b>                     |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2408260070-10.A3L | <b>Test Dates:</b><br>09/03/2024 - 10/25/2024 | <b>EUT Type:</b><br>Portable Handset | Page 38 of 86                            |

## 7.5 Conducted Band Edge Emissions

### Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates, tone configurations, and RU indices were investigated to determine the worst-case configuration. For the following out of band conducted emissions plots at the band edge, the EUT was set to a data rate of MCS0 in 802.11ax mode as this setting produced the worst-case emissions.

***The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-4. Test Instrument & Measurement Setup**

### Test Notes


None.

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 39 of 86                     |

## 7.5.1 MIMO Conducted Band Edge Emissions

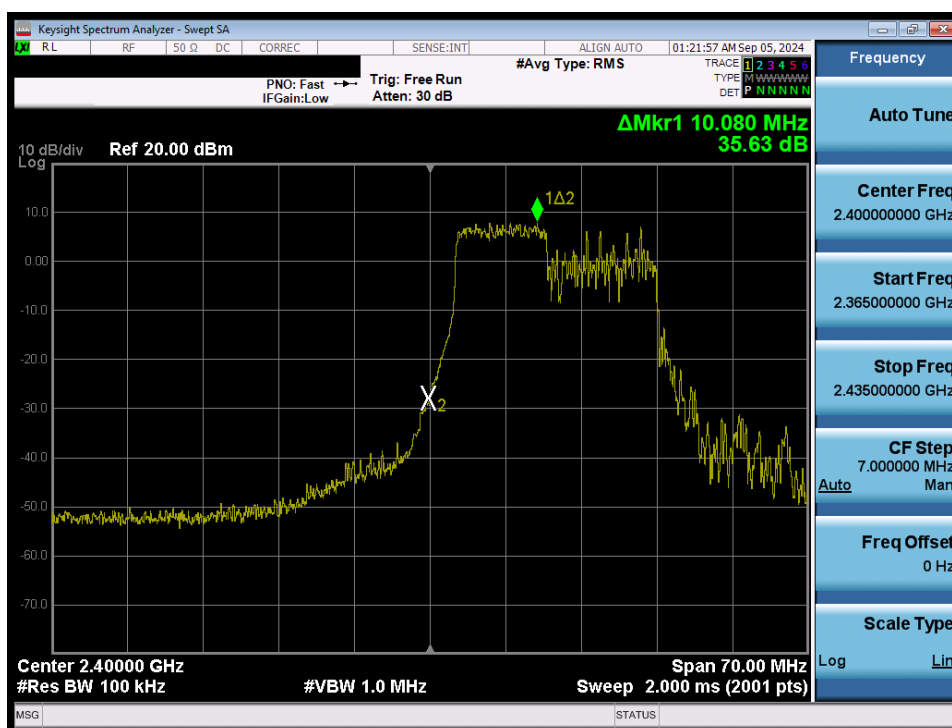


Plot 7-28. Band Edge Plot MIMO ANT1 (802.11ax/be OFDMA – 106 Tones – Ch. 1)

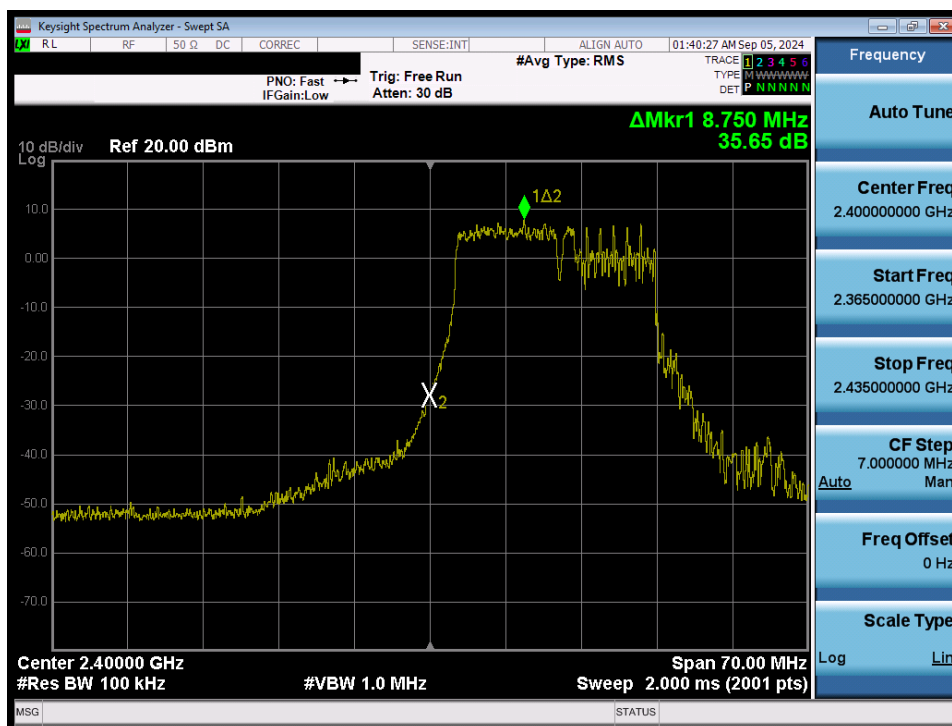


Plot 7-29. Band Edge Plot MIMO ANT1 (802.11be OFDMA – 106+26 Tones – Ch. 1)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 40 of 86                     |

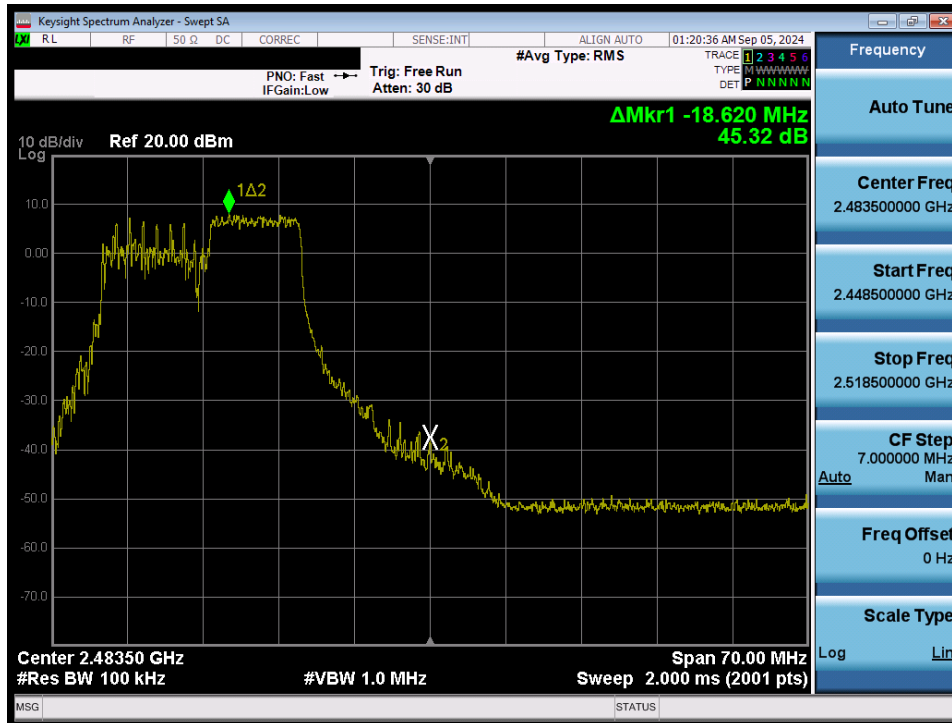


Plot 7-30. Band Edge Plot MIMO ANT1 (802.11ax/be OFDMA – 106 Tones – Ch. 11)

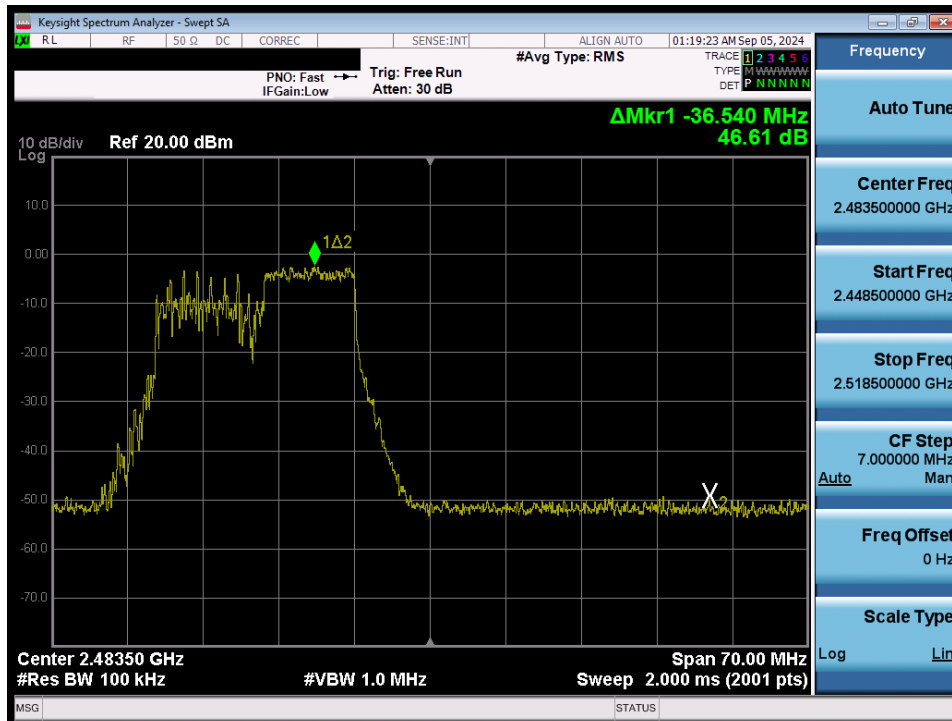


Plot 7-31. Band Edge Plot MIMO ANT1 (802.11ax/be OFDMA – 106 Tones – Ch. 12)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 41 of 86                     |

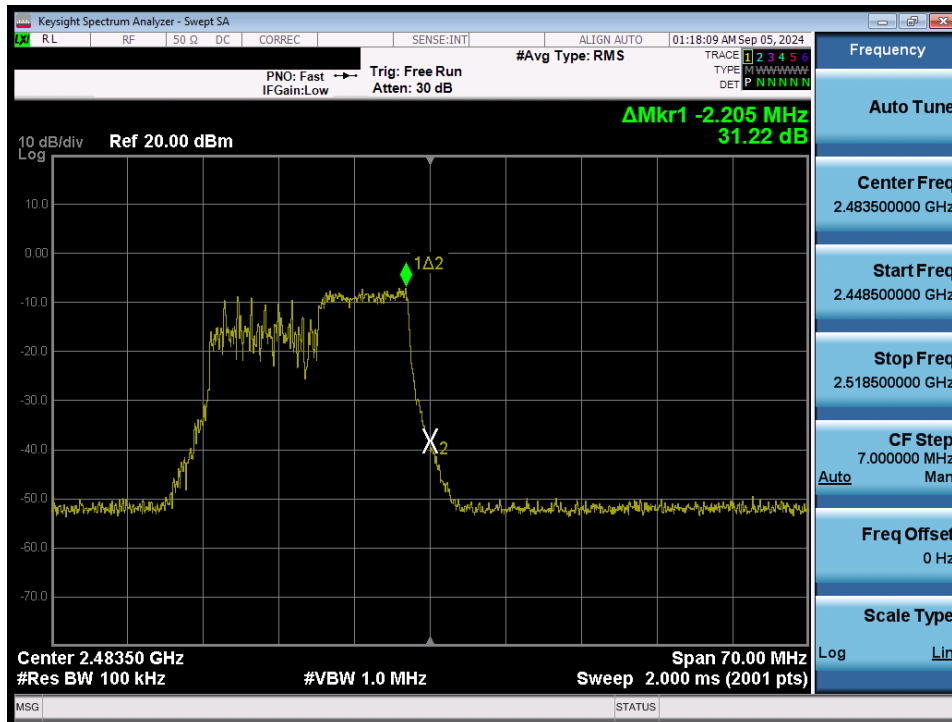


Plot 7-32. Band Edge Plot MIMO ANT1 (802.11ax/be OFDMA – 106 Tones – Ch. 13)

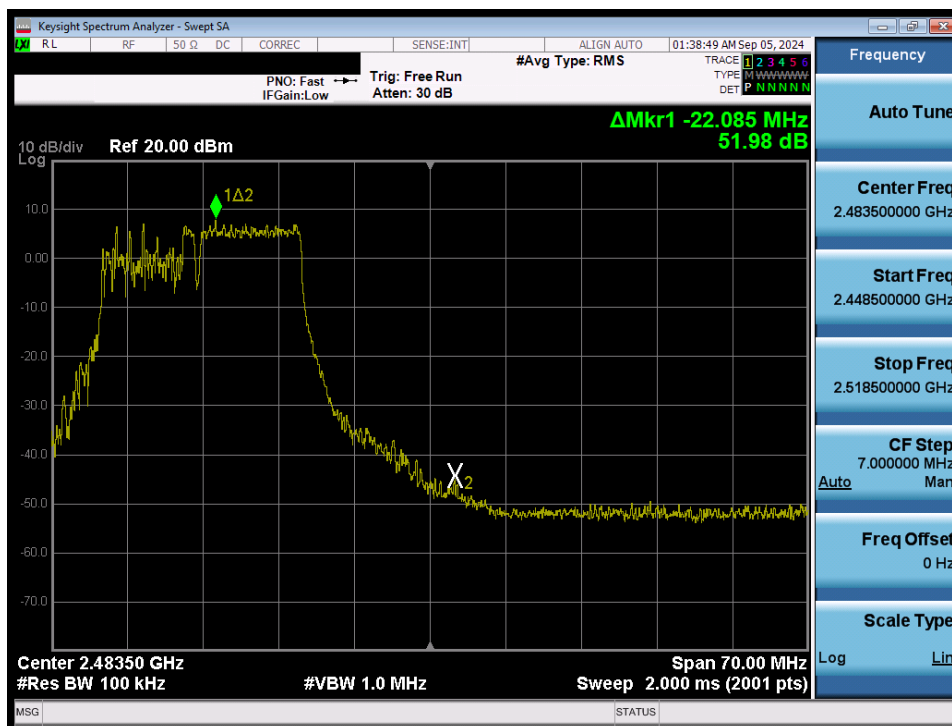


Plot 7-33. Band Edge Plot MIMO ANT1 (802.11be OFDMA – 106+26 Tones – Ch. 11)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 42 of 86                     |

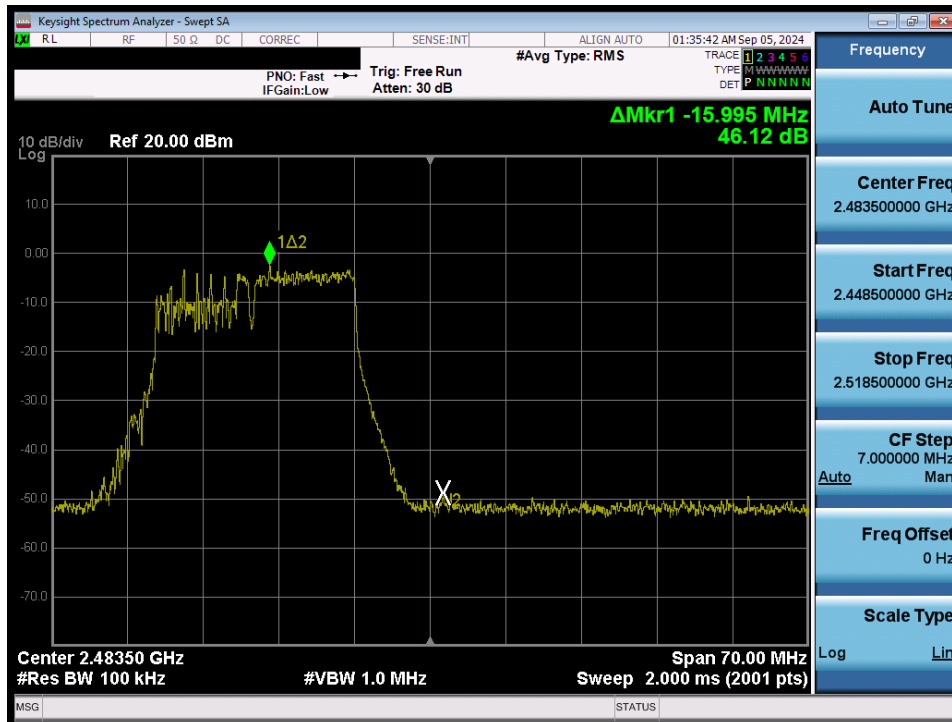


Plot 7-34. Band Edge Plot MIMO ANT1 (802.11be OFDMA – 106+26 Tones – Ch. 12)

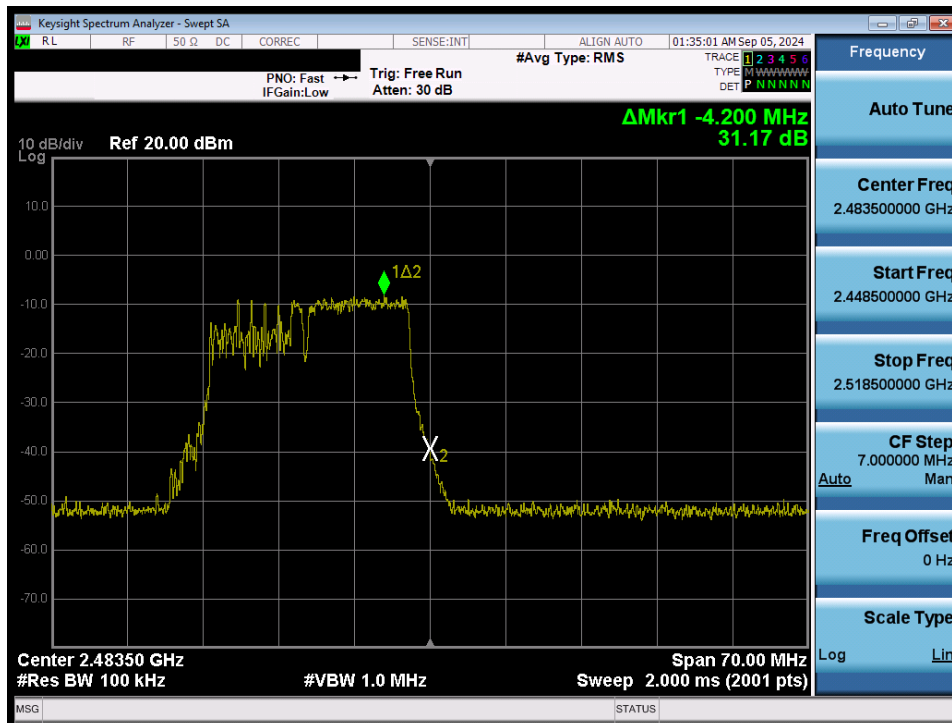


Plot 7-35. Band Edge Plot MIMO ANT1 (802.11be OFDMA – 106+26 Tones – Ch. 13)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 43 of 86                     |

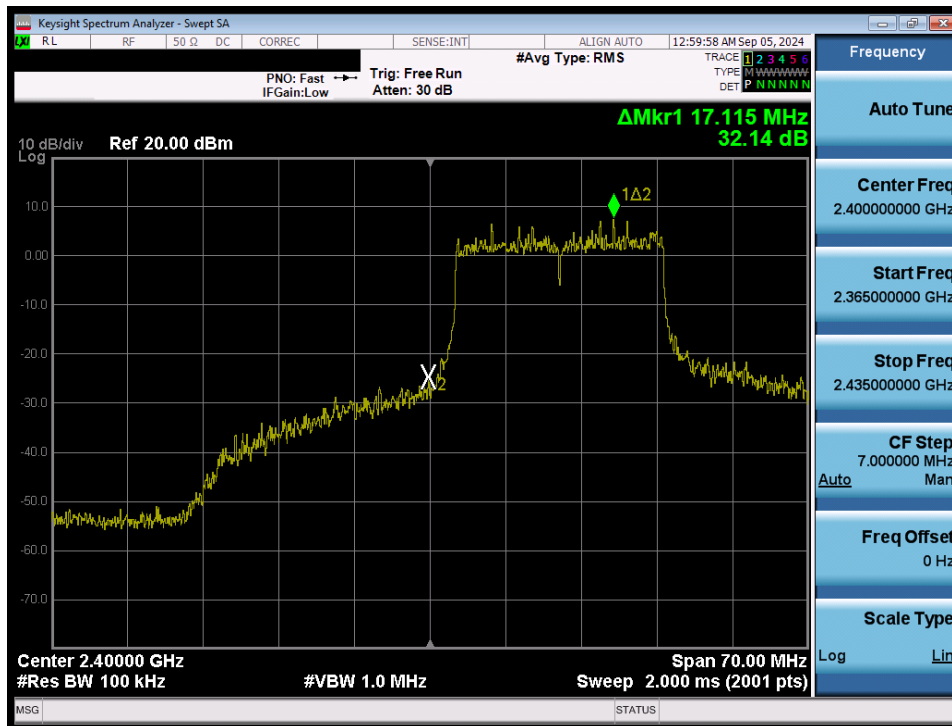


Plot 7-36. Band Edge Plot MIMO ANT1 (802.11ax/be OFDMA – 242 Tones – Ch. 1)

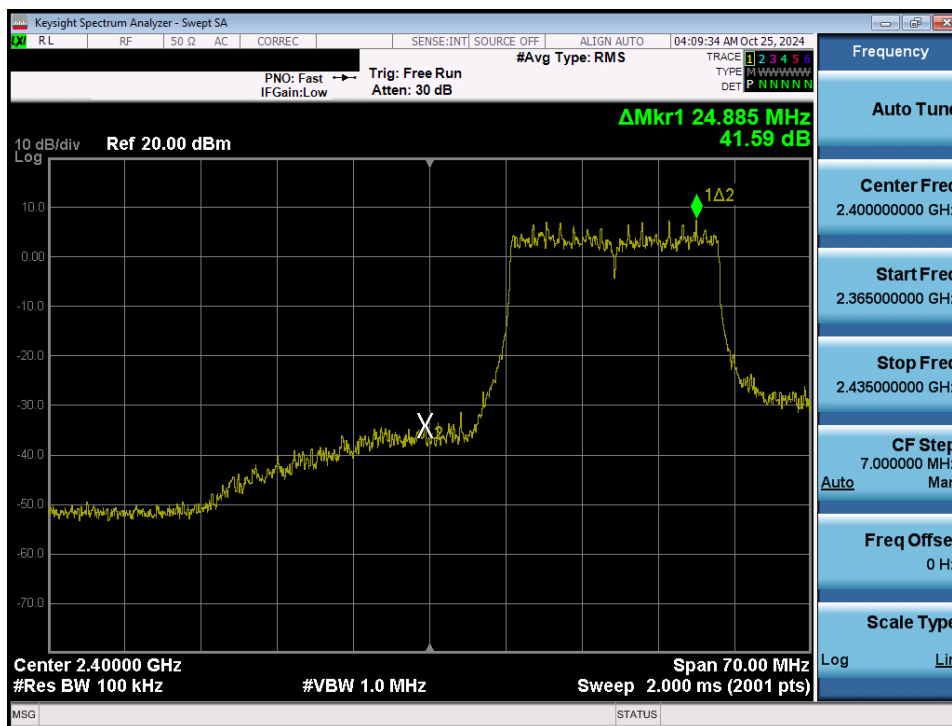


Plot 7-37. Band Edge Plot MIMO ANT1 (802.11ax/be OFDMA – 242 Tones – Ch. 2)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 44 of 86                     |

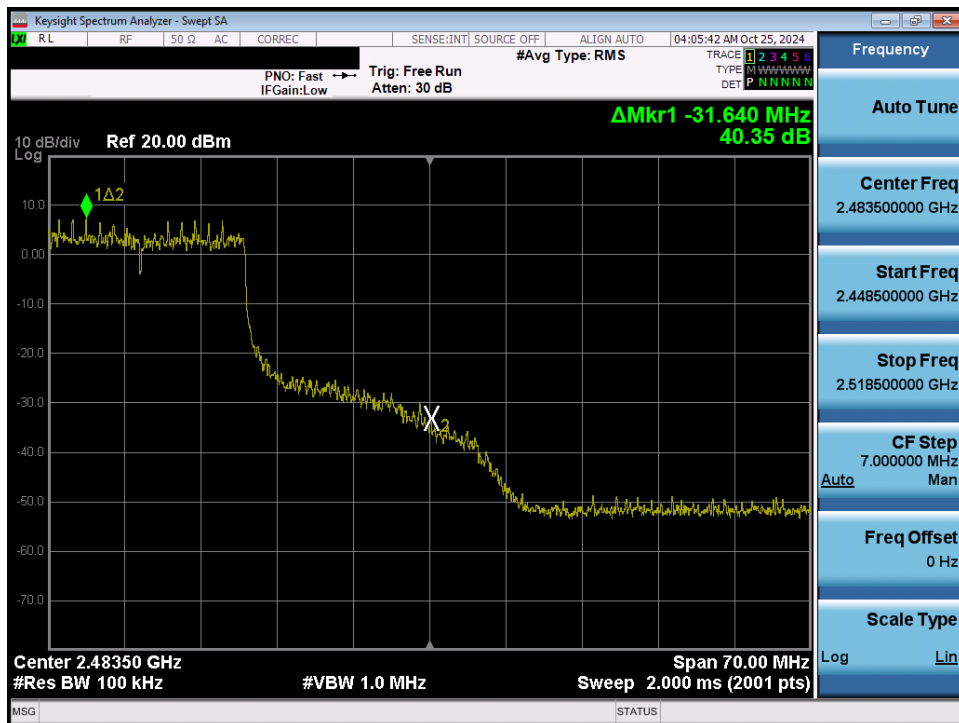


Plot 7-38. Band Edge Plot MIMO ANT1 (802.11ax/be OFDMA – 242 Tones – Ch. 10)

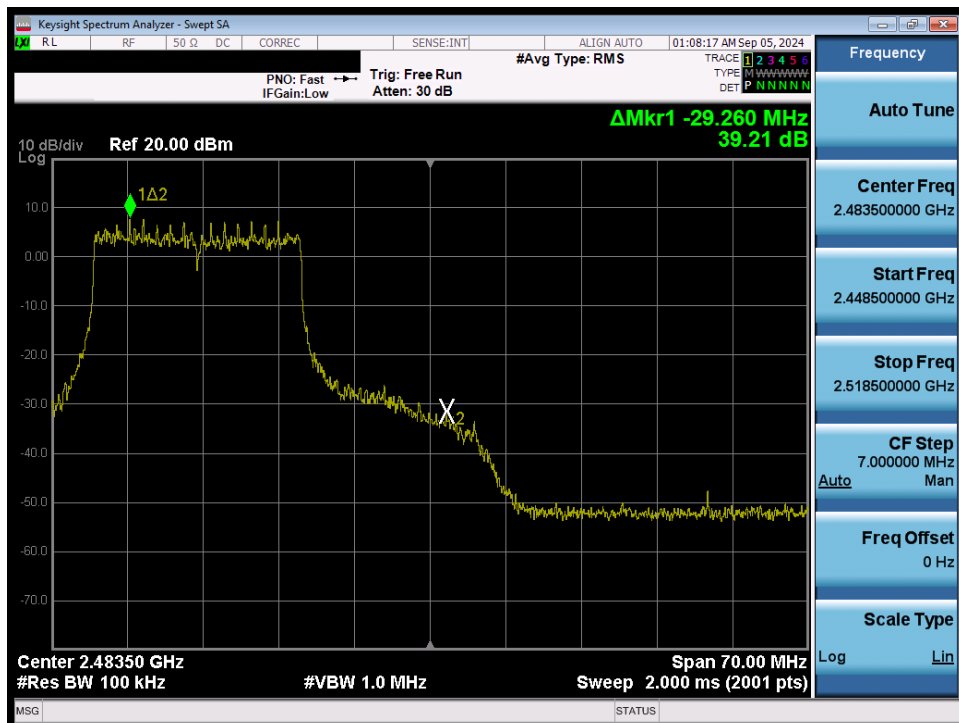


Plot 7-39. Band Edge Plot MIMO ANT1 (802.11ax/be OFDMA – 242 Tones – Ch. 11)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 45 of 86                     |

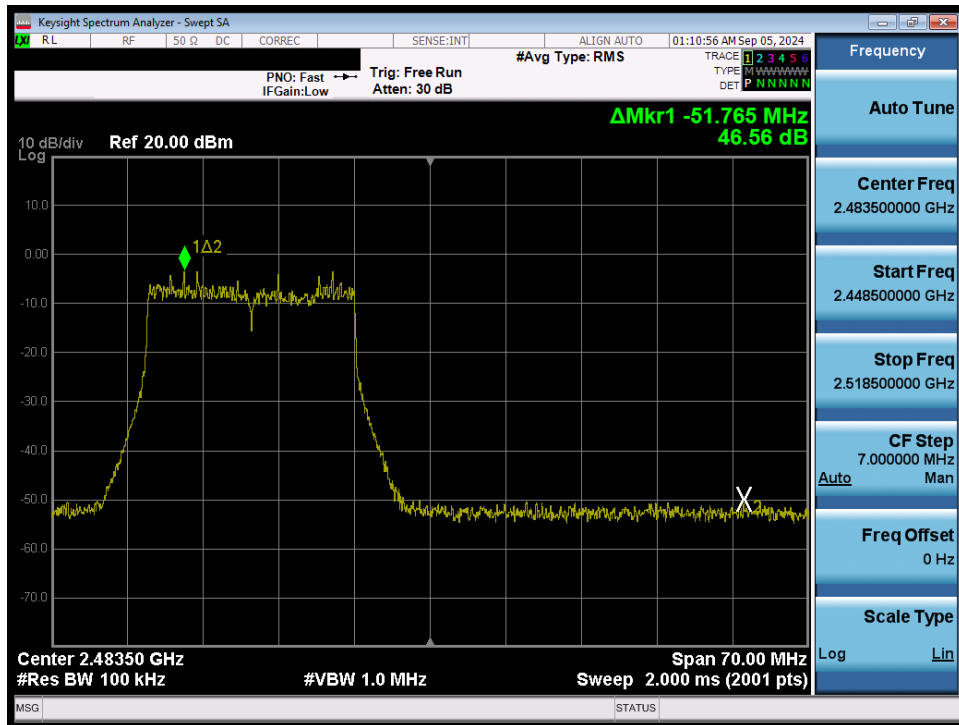


Plot 7-40. Band Edge Plot MIMO ANT1 (802.11ax/be OFDMA – 242 Tones – Ch. 12)

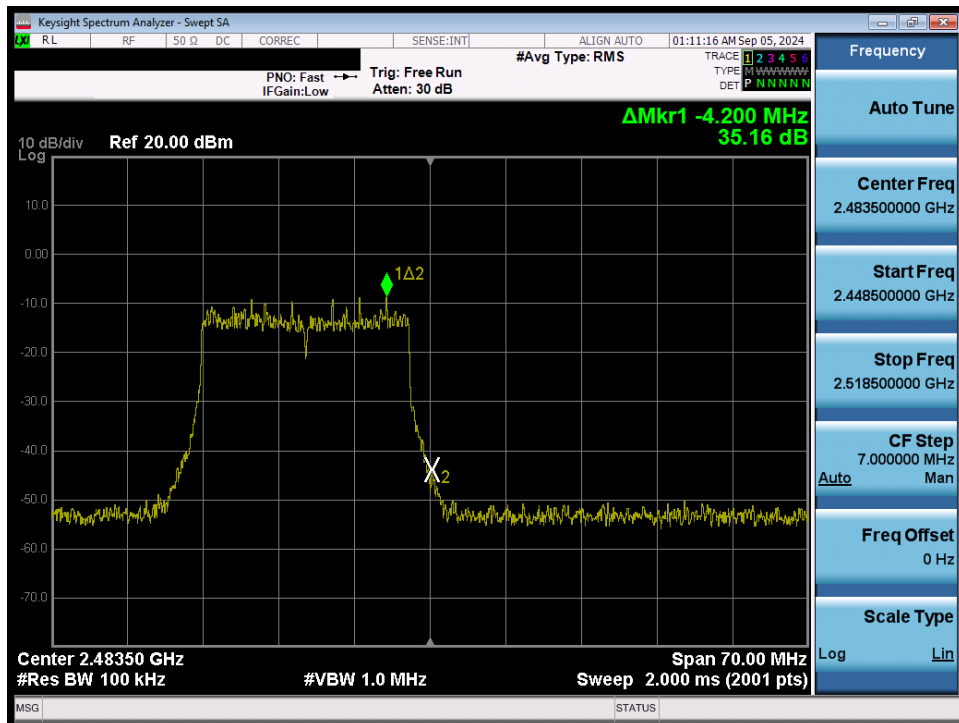


Plot 7-41. Band Edge Plot MIMO ANT1 (802.11ax/be OFDMA – 242 Tones – Ch. 13)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 46 of 86                     |

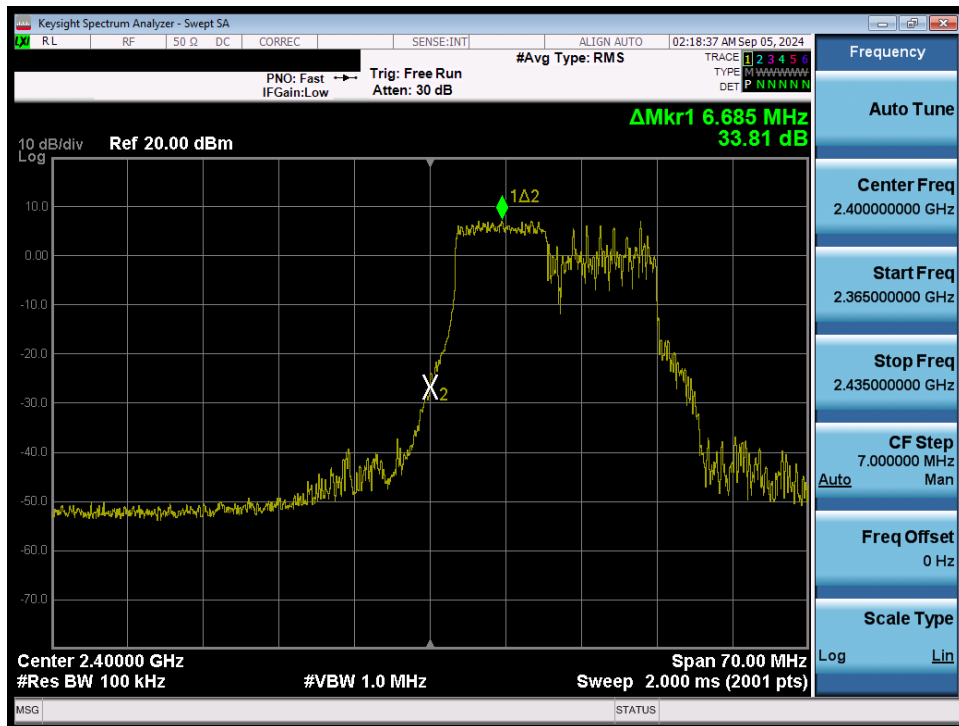

Plot 7-42. Band Edge Plot MIMO ANT2 (802.11ax/be OFDMA – 106 Tones – Ch. 1)

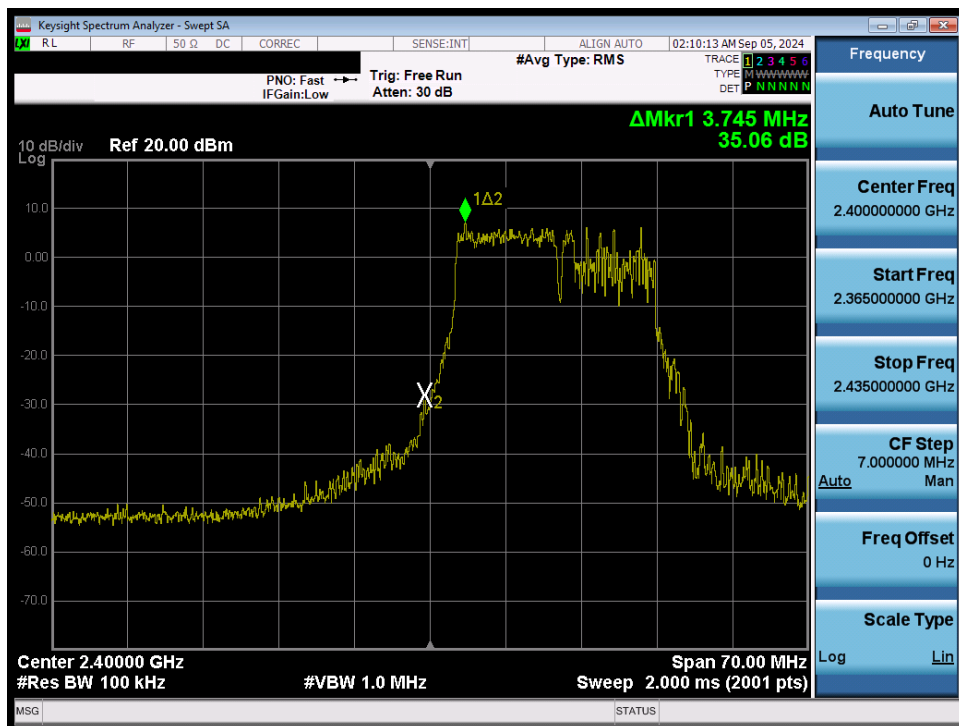


Plot 7-43. Band Edge Plot MIMO ANT2 (802.11be OFDMA – 106+26 Tones – Ch. 1)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 47 of 86                     |




© 2024 ELEMENT V11.1 08/28/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

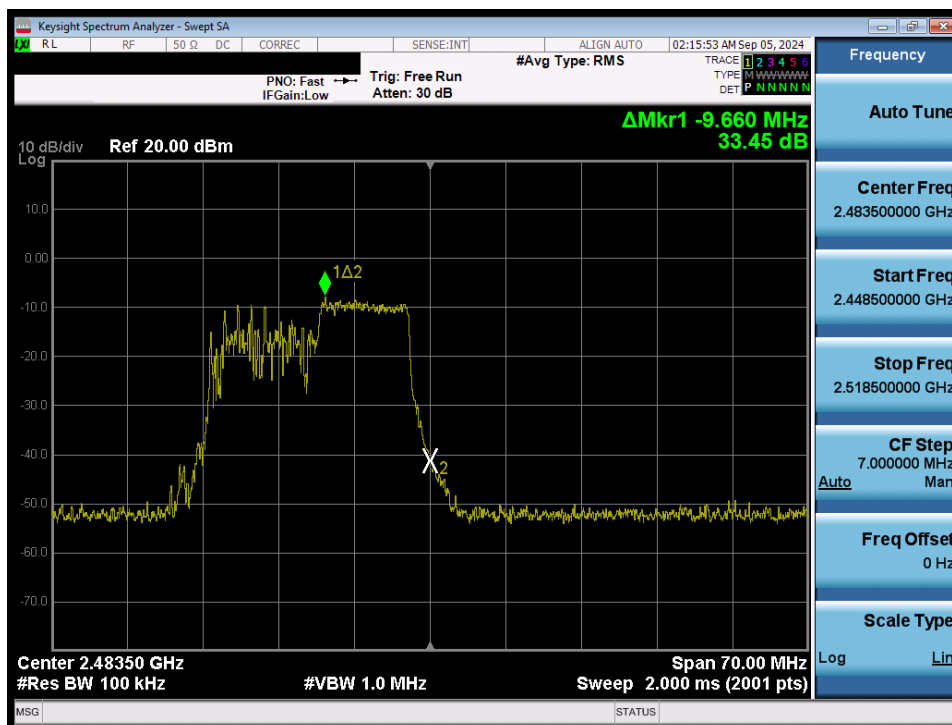


Plot 7-46. Band Edge Plot MIMO ANT2 (802.11ax/be OFDMA – 106 Tones – Ch. 13)

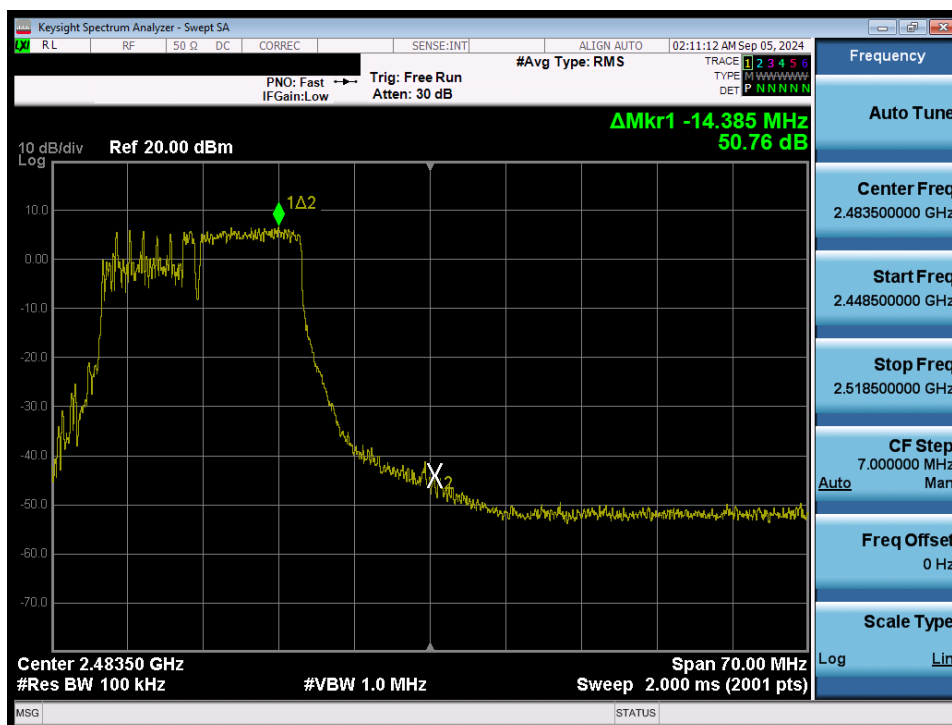


Plot 7-47. Band Edge Plot MIMO ANT2 (802.11be OFDMA – 106+26 Tones – Ch. 11)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 49 of 86                     |

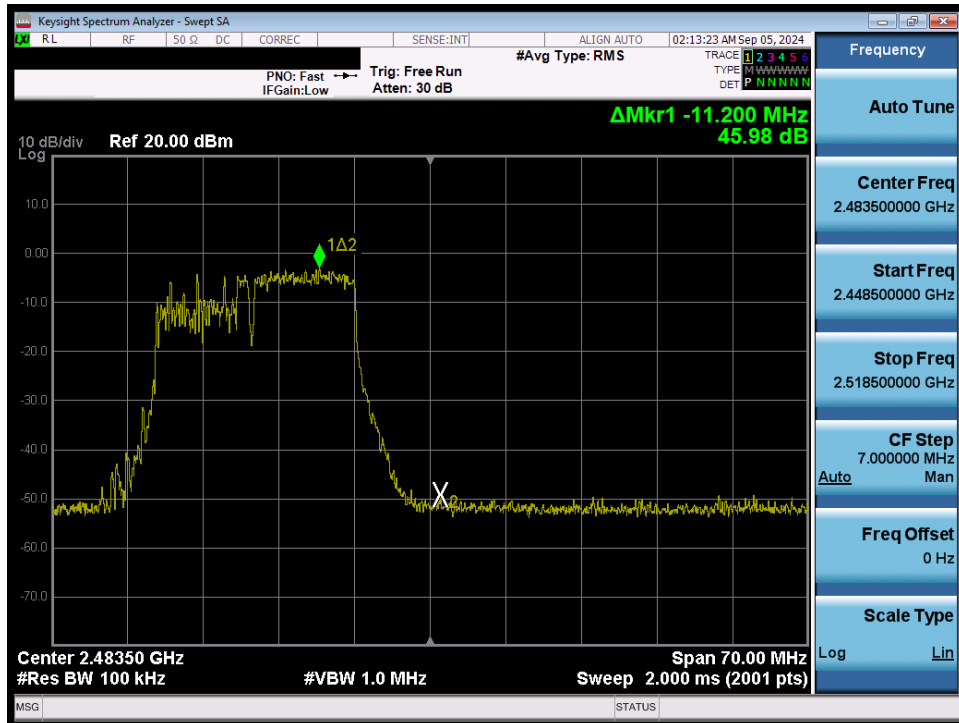


Plot 7-48. Band Edge Plot MIMO ANT2 (802.11be OFDMA – 106+26 Tones – Ch. 12)

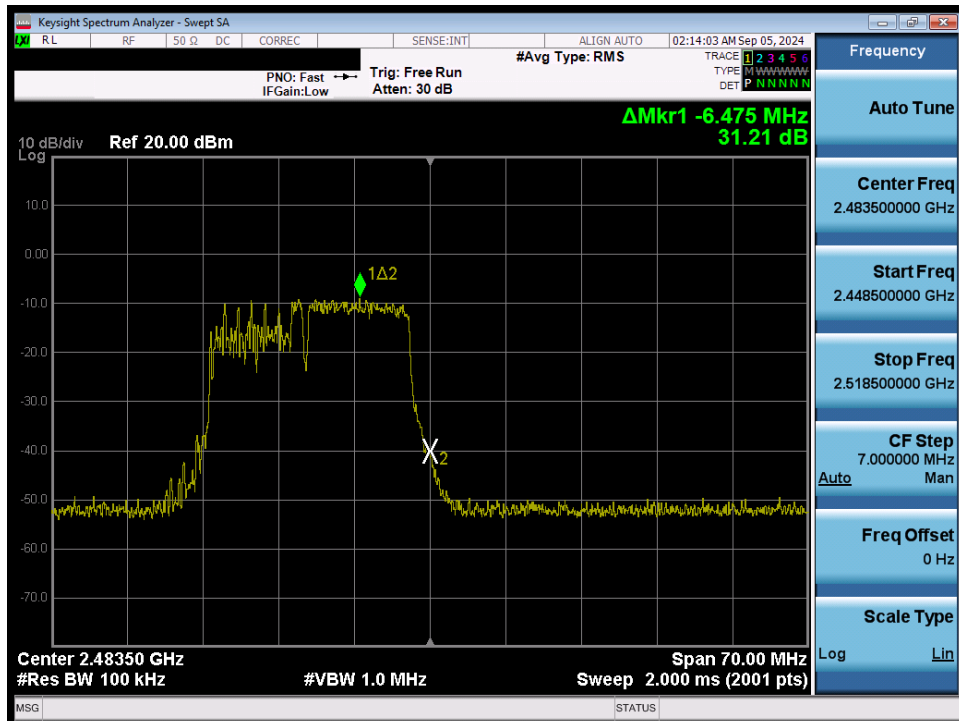


Plot 7-49. Band Edge Plot MIMO ANT2 (802.11be OFDMA – 106+26 Tones – Ch. 13)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 50 of 86                     |

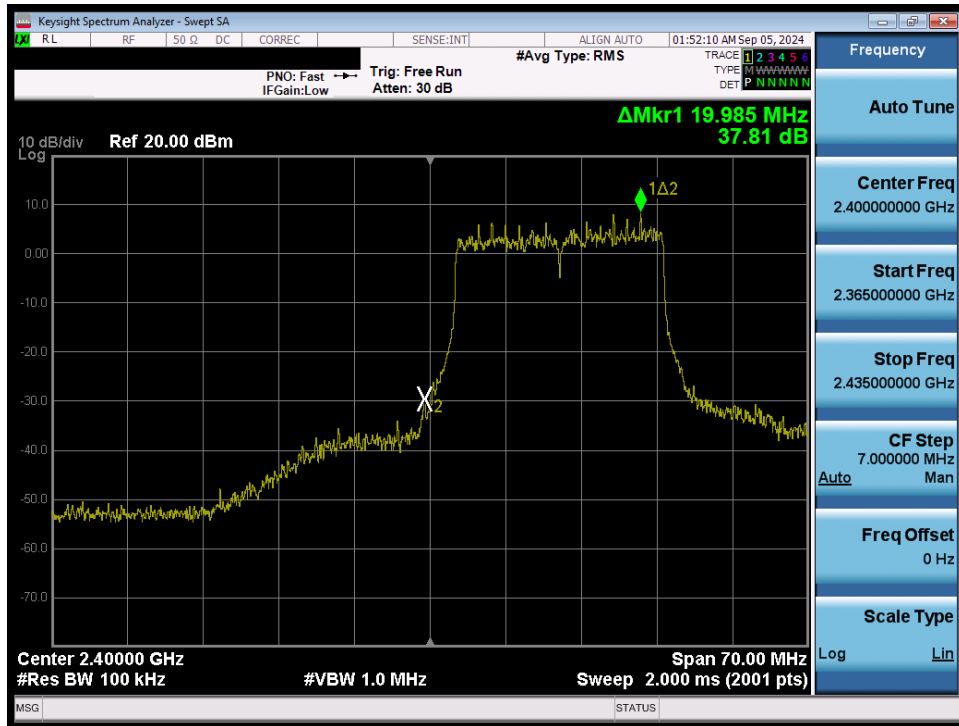


Plot 7-50. Band Edge Plot MIMO ANT2 (802.11ax/be OFDMA – 242 Tones – Ch. 1)

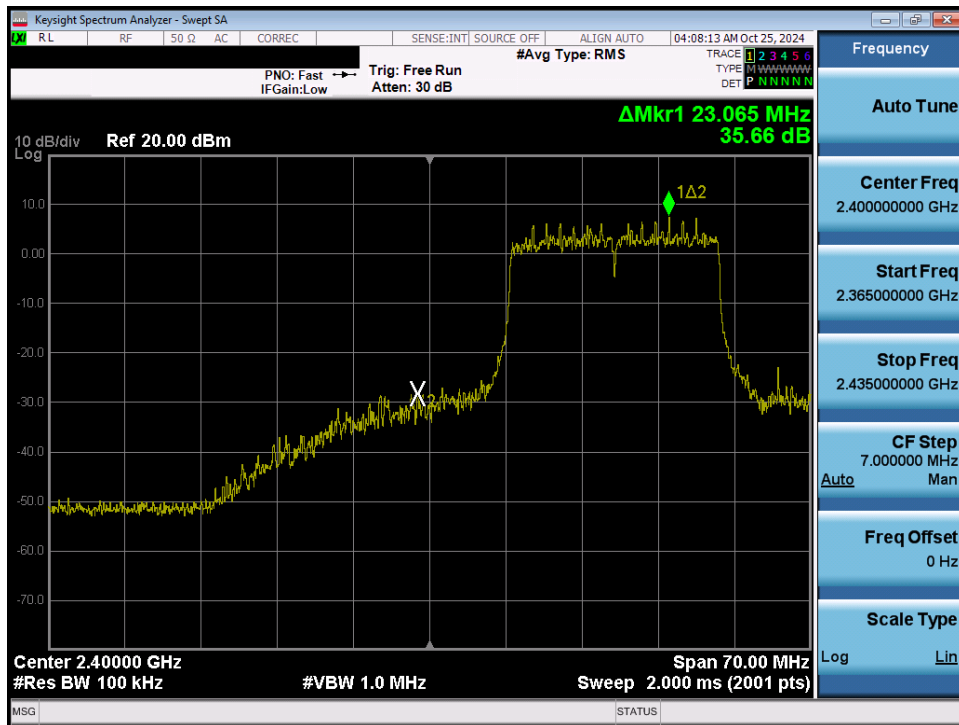


Plot 7-51. Band Edge Plot MIMO ANT2 (802.11ax/be OFDMA – 242 Tones – Ch. 2)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 51 of 86                     |

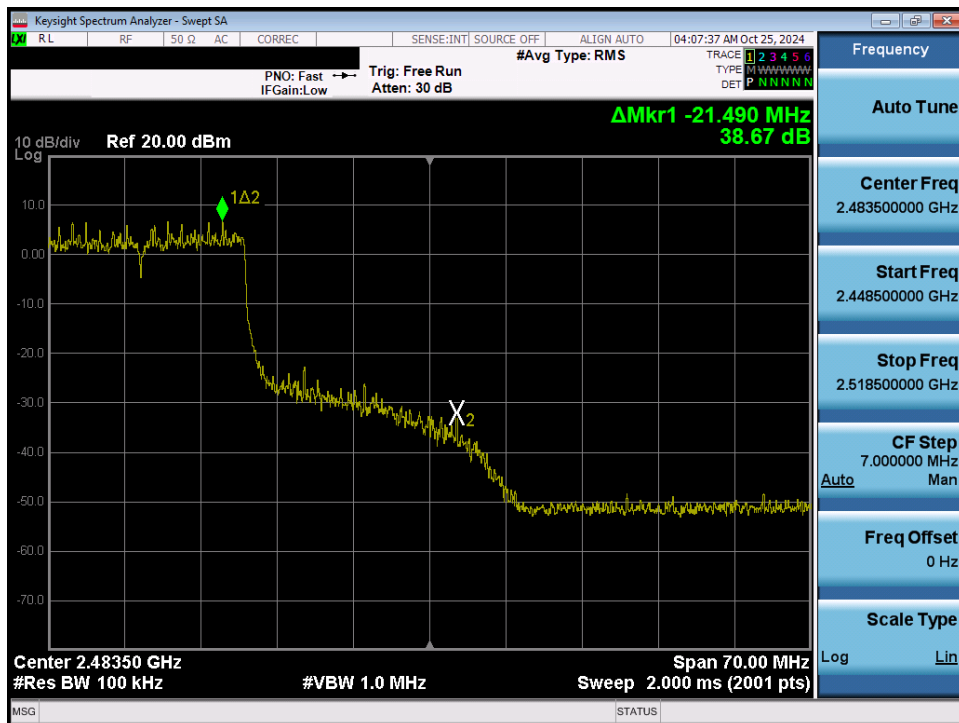


Plot 7-52. Band Edge Plot MIMO ANT2 (802.11ax/be OFDMA – 242 Tones – Ch. 10)

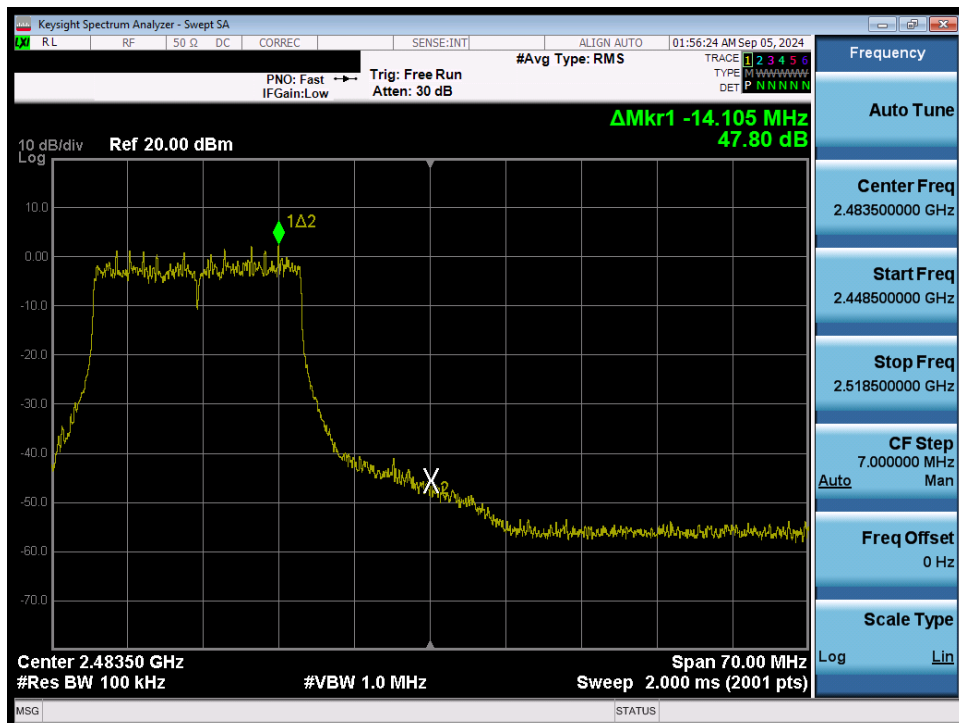


Plot 7-53. Band Edge Plot MIMO ANT2 (802.11ax/be OFDMA – 242 Tones – Ch. 11)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 52 of 86                     |

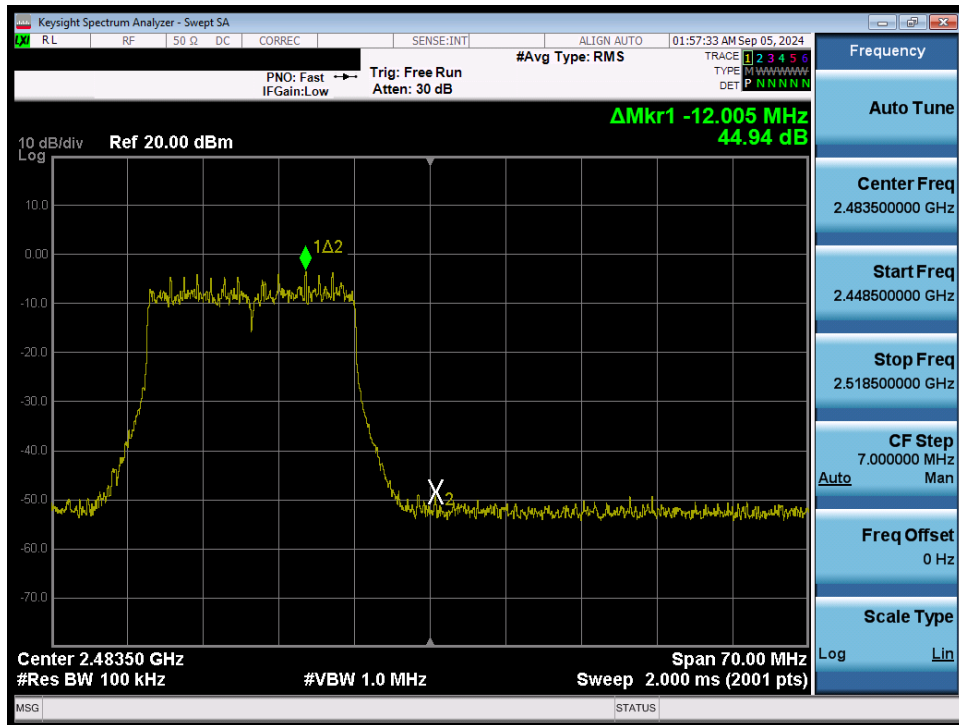

Plot 7-54. Band Edge Plot MIMO ANT2 (802.11ax/be OFDMA – 242 Tones – Ch. 12)

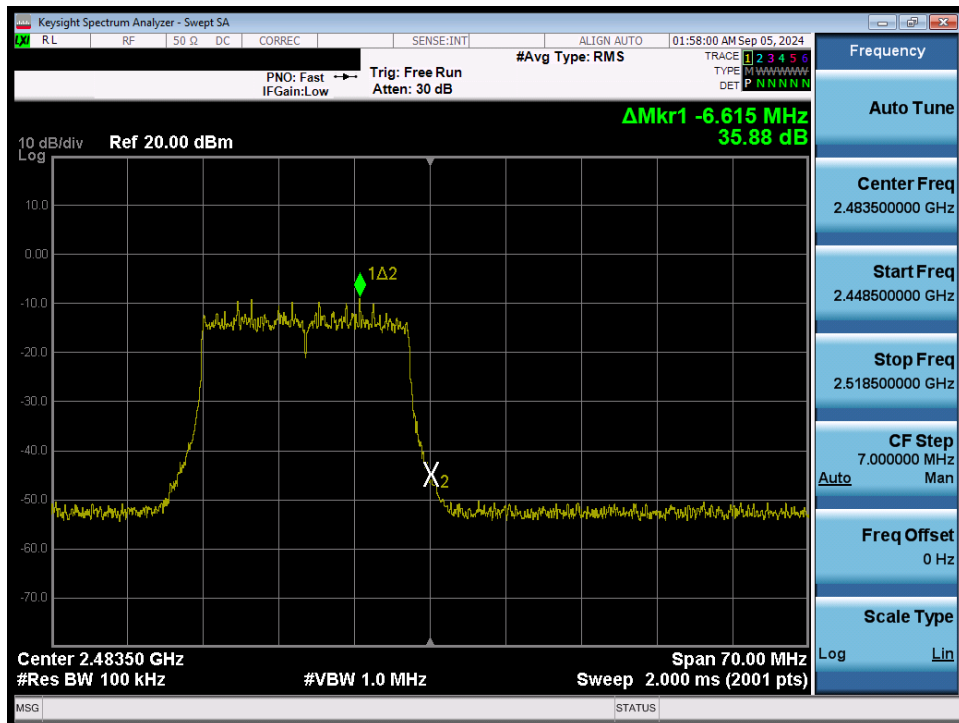

Plot 7-55. Band Edge Plot MIMO ANT2 (802.11ax/be OFDMA – 242 Tones – Ch. 13)

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 53 of 86                     |

## 7.6 Conducted Spurious Emissions

### Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates, tone configurations, and RU indices were investigated to determine the worst-case configuration. For the following out of band conducted emissions plots, the EUT was set to a data rate of MCS0 in 802.11ax mode as this setting produced the worst-case emissions.

***The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 11.11.3 of ANSI C63.10-2013.***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3  
ANSI C63.10-2013 – Section 14.3.3

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-5. Test Instrument & Measurement Setup**

|   |  |                               |                                   |
|---|--|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS938JPN                    | MEASUREMENT REPORT                     |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2408260070-10.A3L | Test Dates:<br>09/03/2024 - 10/25/2024 | EUT Type:<br>Portable Handset | Page 54 of 86                     |

## Test Notes

1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 30dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 30dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.
4. The conducted spurious emissions were measured to relative limits. Therefore, in accordance with ANSI C63.10-2013 Section 14.3.3, it was unnecessary to show compliance through the summation of test results of the individual outputs.

|  |   |                                      |  |
|--|---|--------------------------------------|--|
| <b>FCC ID:</b> A3LSMS938JPN                    | <b>MEASUREMENT REPORT</b>                     |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2408260070-10.A3L | <b>Test Dates:</b><br>09/03/2024 - 10/25/2024 | <b>EUT Type:</b><br>Portable Handset | Page 55 of 86                            |