

Report No.: ZR/2020/6001301

Page: 1 of 29

FCC TEST REPORT

Application No: ZR/2020/60013

Applicant: Fibocom Wireless Inc.

Address of Applicant 5/F, Tower A, Technology Building II, 1057 Nanhai Avenue, Shenzhen, China

Manufacturer: Fibocom Wireless Inc.

Address of Manufacturer: 5/F,Tower A,Technology Building II,1057 Nanhai Avenue,Shenzhen,China

EUT Description: LTE Cat1&GSM Module

Model No.: L610-LA

Trade Mark: Fibocom

FCC ID: ZMOL610LA

Standards: 47 CFR Part 2

47 CFR Part 22 subpart H 47 CFR Part 24 subpart E 47 CFR Part 27 subpart C

Test Method: FCC KDB 971168 D01 Power Meas License Digital Systems V03r01

C63.26 (2015)

Date of Receipt: 2020/7/15

Date of Test: 2020/7/15 to 2020/8/10

Date of Issue: 2020/8/14

Test Result: PASS *

Authorized Signature:

Derde yang

Derek Yang

Wireless Laboratory Manager

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email:

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn

Xi'an, Shaanxi, China

中国·西安沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com

^{*} In the configuration tested, the EUT detailed in this report complied with the standards specified above.



Report No.: ZR/2020/6001301

Page: 2 of 29

Version

	Revision Record					
Version Chapter Date Modifier Remark						
01		2020/8/14		Original		

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层



Report No.: ZR/2020/6001301

Page: 3 of 29

Test Summary

GSM850 & LTE Band 5

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913	FCC: ERP ≤ 7 W	Section 1 of Appendix B	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass
Band Edges Compliance	§2.1051, §22.917	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B	Pass
Frequency Stability	§2.1055, §22.355	≤ ±2.5ppm.	Section 8 of Appendix B	Pass
Remark: For the verd		□ es "not applicable", the "N/T" denotes "not te	• • •	

GSM 1900/LTE Band 2

COM 1000/ E	Som 1000/ E1E Bana E					
Test Item	FCC Rule No.	Requirements	Test Result	Verdict		
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232	EIRP ≤ 2 W	Section 1 of Appendix B	Pass		
Peak-Average Ratio	§2.1046, §24.232	Limit≤13 dB	Section 2 of Appendix B	Pass		
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass		
Band Edges Compliance	§2.1051, §24.238	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass		
Spurious Emission at Antenna Terminals	§2.1051, §24.238	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass		
Field Strength of	§2.1053,	≤ -13 dBm/1 MHz.	Section 7 of	Pass		

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层



Report No.: ZR/2020/6001301

Page: 4 of 29

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	
Spurious Radiation	§24.238		Appendix B		
Frequency Stability	§2.1055, §24.235	≤ ±2.5 ppm.	Section 8 of Appendix B	Pass	
Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".					

LTE Band 4 /66

Test Item	FCC Rule No.	Requirements	Test Result	Verdict					
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)	EIRP ≤ 1 W	Section 1 of Appendix B	Pass					
Peak-Average Ratio	§2.1046, §27.50(d)	Limit≤13 dB	Section 2 of Appendix B	Pass					
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass					
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass					
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass					
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass					
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass					
Frequency Stability	§2.1055, §27.54	≤ ±2.5 ppm.	Section 8 of Appendix B	Pass					
Remark: For the verd	lict, the "N/A" denote	es "not applicable", the "N/T" denotes "not	tested".	Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".					

LTE Band 7

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)	EIRP ≤ 2W	Section 1 of Appendix B	Pass
Peak-Average Ratio	§27.50(a)	≤13 dB	Section 2 of Appendix B	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than	Section 5 of	Pass

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层



Report No.: ZR/2020/6001301

Page: 5 of 29

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
TOST NOM	T GO Ruie No.	40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.	Appendix B	Volulot
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	Channel Edge -25dBm/ 1 MHz 1 MHz 1 MHz 9 kHz 95 MHz XMHz 10th harmonics X=Max {6MHz, EBW}	Section 6 of Appendix B	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	Channel Edge -25dBm/ 1 MHz 1 MHz 1 MHz 9 kHz 95 MHz XMHz 10 th harmonics X=Max {6MHz, EBW}	Section 7 of Appendix B	Pass
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B	Pass
Remark: For the verd	ict, the "N/A" denot	es "not applicable", the "N/T" denotes "not	tested".	

Checked By

David Chen

Reviewer

Test By

Daniel Wang

Project Engineer

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email:

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086

sgs.china@sgs.com



Report No.: ZR/2020/6001301

Page: 6 of 29

Content

1	GEN	8	
	1.1	CLIENT INFORMATION	8
	1.2	TEST LOCATION	8
	1.3	TEST FACILITY	8
	1.4	GENERAL DESCRIPTION OF EUT	9
	1.5	TEST MODE	g
	1.6	TEST ENVIRONMENT	10
	1.7	TECHNICAL SPECIFICATION	10
	1.8	TEST FREQUENCIES	12
2	DES	SCRIPTION OF TESTS	16
	2.1	CONDUCTED OUTPUT POWER	16
	2.2	EFFECTIVE (ISOTROPIC) RADIATED POWER OF TRANSMITTER	16
	2.3	EIRP Power Density	17
	2.4	Occupied Bandwidth	18
	2.5	BAND EDGE AT ANTENNA TERMINALS	19
	2.6	Spurious And Harmonic Emissions at Antenna Terminal	19
	2.7	PEAK-AVERAGE RATIO	20
	2.8	FIELD STRENGTH OF SPURIOUS RADIATION	20
	2.9	FREQUENCY STABILITY / TEMPERATURE VARIATION	22
	2.10	TEST SETUPS	23
	2.10	0.1 Test Setup 1	23
	2.10	0.2 Test Setup 2	23
	2.10	0.3 Test Setup 3	24
	2.10	0.4 Test Setup 4	24
	2.11	TEST CONDITIONS	26
3	MAI	N TEST INSTRUMENTS	28

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086

sgs.china@sgs.com



Report No.: ZR/2020/6001301

Page: 7 of 29

4	MEASUREMENT UNCERTAINTY	.29
5	APPENDIXES	.29

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email:

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn

Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元—层

Member of the SGS Group(SGS SA)

sgs.china@sgs.com

邮编 710086



Report No.: ZR/2020/6001301

Page: 8 of 29

1 General Information

1.1 Client Information

Applicant:	Fibocom Wireless Inc.	
Address of Applicant:	5/F,Tower A,Technology Building II,1057 Nanhai Avenue,Shenzhen,China	
Manufacturer:	Fibocom Wireless Inc.	
Address of Manufacturer:	5/F,Tower A,Technology Building II,1057 Nanhai Avenue,Shenzhen,China	

1.2 Test Location

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Xi'an Branch	
Address: Single floor D, building 1, Kanghong orange square science technology park, No.137 keyuan 3rd road, fengdong new too city, Shaanxi China		
Post code:	710000	
Telephone: +86 (0) 29 6282 7885		
Fax:	+86 (0) 29 6282 7885	
E-mail:	ee.xian@sgs.com	

1.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

A2LA (Certificate No. 4854.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES CO., LTD. XIAN BRANCH is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4854.01.

Test Site No.:	SGS Xian Site No.		FCC Designation No.
	CO01-XA	03CH01-XA	CN1271

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层



Report No.: ZR/2020/6001301

Page: 9 of 29

1.4 General Description of EUT

EUT Description::	LTE Cat1&GSM Module				
Model No.:	L610-LA				
Trade Mark:	Fibocom				
Hardware Version:	V1.1				
Software Version:	16000.1000.00.06.10.02				
Sample Type:	☐ Portable Device, ☐ Module				
Antenna Type:	⊠ External, ☐ Integrated				
	GSM850: 1.5dBi;				
	GSM1900: 0.9dBi;				
	LTE Band 2: 0.9dBi;				
Antenna Gain:	LTE Band 4: 1.3dBi;				
	LTE Band 5: 1.5dBi;				
	LTE Band 7: 2.3dBi;				
	LTE Band 66: 1.4dBi;				

1.5 Test Mode

Test Mode	Test Modes Description			
GSM/TM1	GSM system, GSM/GPRS, GMSK modulation			
LTE/TM1	LTE system, QPSK modulation			
LTE/TM2	LTE system, 16QAM modulation			

Remark: The test mode(s) are selected according to relevant radio technology specifications.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email:

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层



Report No.: ZR/2020/6001301

Page: 10 of 29

1.6 Test Environment

Environment Parameter	Selected Values During Tests		
Relative Humidity	52%		
Atmospheric Pressure:	101.32 KPa		
Temperature	NT	25 °C	
	LV	3.4	
Voltage:	NV	4.3	
	HV	3.8	

Remark: LV= lower extreme test voltage; NV= nominal voltage HV= upper extreme test voltage; NT= normal temperature

1.7 Technical Specification

Characteristics	Description					
Padio System Type	⊠ GSM					
Radio System Type						
	Band	TX	RX			
	GSM850	824 to 849 MHz	869 to 894 MHz			
	GSM1900	1850 to 1910 MHz	1930 to 1990 MHz			
Supported Frequency	LTE Band 2	1850 to 1910 MHz	1930 to 1990 MHz			
Range	LTE Band 4	1710 to 1755 MHz	2110 to 2155 MHz			
	LTE Band 5	824 to 849 MHz	869 to 894 MHz			
	LTE Band 7	2500 to 2570 MHz	2620 to 2690 MHz			
	LTE Band 66	1710 to 1780 MHz	2110 to 2180 MHz			
Target TX Output Power	GSM850:33.5dBm GSM1900: 30.5dBm LTE Band 2: 24.0dBm LTE Band 4: 24.0dBm LTE Band 5: 24.0dBm LTE Band 7: 24.0dBm LTE Band 66: 24.0dBm					
	GSM system:	⊠ 0.2 MHz				
Supported Channel Bandwidth	LTE Band 2	\boxtimes 1.4 MHz; \boxtimes 3 MHz; \boxtimes 5 MHz; \boxtimes 10 MHz; \boxtimes 15 MHz, \boxtimes 20 MHz				
Danuwiutii	LTE Band 4		5 MHz; ⊠ 10 MHz;			

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email:

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层



Report No.: ZR/2020/6001301

Page: 11 of 29

	LTE Band 5	
	LTE Band 7	
	LTE Band66	
Characteristics	Description	
	GSM850	240KGXW;
	GSM1900	240KGXW;
Designation of Emissions (Remark: the necessary bandwidth of which is the worst value from	LTE Band 2	1M09G7D;1M10W7D; 2M69G7D;2M69W7D; 4M46G7D;4M47W7D; 8M91G7D;5M81W7D; 13M5G7D;7M31W7D; 17M9G7D;8M15W7D;
	LTE Band 4	1M09G7D;1M10W7D; 2M69G7D;2M69W7D; 4M46G7D;4M45W7D; 8M91G7D;5M81W7D; 13M5G7D;6M98W7D; 17M9G7D;8M07W7D;
the measured occupied bandwidths for each type of channel	LTE Band 5	1M10G7D;1M10W7D; 2M69G7D;2M69W7D; 4M47G7D;4M46W7D; 8M91G7D;5M81W7D;
bandwidth configuration.)	LTE Band 7	4M46G7D;4M46W7D; 8M91G7D;5M79W7D; 13M5G7D;6M77W7D; 17M9G7D;7M15W7D;
	LTE Band 66	1M09G7D;1M10W7D; 2M69G7D;2M69W7D; 4M46G7D;4M46W7D; 8M89G7D;5M83W7D; 13M6G7D;6M89W7D; 18M0G7D;7M15W7D;

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层



Report No.: ZR/2020/6001301

Page: 12 of 29

1.8 Test Frequencies

Test Mode	Test Mode TX / RX RF Channel				
rest Mode	17/17	Low (L)	Middle (M)	High (H)	
	TX	Channel 128	Channel 190	Channel 251	
GSM850	17	824.2MHz	836.6 MHz	848.8 MHz	
GSIVIOSU	RX	Channel 128	Channel 190	Channel 251	
	KA	869.2 MHz	881.6 MHz	893.8 MHz	

Test Mode	st Mode TX / RX RF Channel			
i est ivioue	17/17	Low (L)	Middle (M)	High (H)
	TX	Channel 512	Channel 661	Channel 810
GSM1900	17	1850.2MHz	1880.0 MHz	1909.8 MHz
GSWII900	RX	Channel 512	Channel 661	Channel 810
	KΛ	1930.2 MHz	1960.0 MHz	1989.8 MHz

Test Mode	Bandwidth	TX / RX		RF Channel	
i est iviode	Dandwidth		Low (L)	Middle (M)	High (H)
		TV	Channel 18607	Channel 18900	Channel 19193
	1.4MHz	TX	1850.7 MHz	1880 MHz	1909.3 MHz
	1.4IVITZ	RX	Channel 607	Channel 900	Channel 1193
		NA.	1930.7 MHz	1960 MHz	1989.3 MHz
		TX	Channel 18615	Channel 18900	Channel 19185
	3MHz	1.	1851.5 MHz	1880 MHz	1908.5 MHz
	SIVITZ	RX	Channel 615	Channel 900	Channel 1185
		NA.	1931.5 MHz	1960 MHz	1988.5 MHz
		TX	Channel 18625	Channel 18900	Channel 19175
	5MHz		1852.5 MHz	1880 MHz	1907.5 MHz
	SIVITZ	RX	Channel 625	Channel 900	Channel1175
LTE Band 2		IXX	1932.5 MHz	1960 MHz	1987.5 MHz
LTE Dallu Z		TX	Channel 18650	Channel 18900	Channel 19150
	10MHz		1855 MHz	1880 MHz	1905 MHz
	TOIVIE	RX	Channel 650	Channel 900	Channel 1150
			100	1935 MHz	1960 MHz
		TX	Channel 18675	Channel 18900	Channel 19125
	15MHz	17	1857.5 MHz	1880 MHz	1902.5 MHz
	1 JIVII IZ	RX	Channel 675	Channel 900	Channel 1125
		IXX	1937.5 MHz	1960 MHz	1982.5 MHz
		TX	Channel 18700	Channel 18900	Channel 19100
	20MHz	1.	1860 MHz	1880 MHz	1900 MHz
	ZUIVITZ	RX	Channel 700	Channel 900	Channel 1100
		KX	1940 MHz	1960 MHz	1980 MHz

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email:

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层



Report No.: ZR/2020/6001301

Page: 13 of 29

		->/ / ->/		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
		TX	Channel 19957	Channel 20175	Channel 20393
	4 48411-		1710.7 MHz	1732.5 MHz	1754.3 MHz
	1.4MHz	RX	Channel 1975	Channel 2175	Channel 2375
		RA.	2112.5 MHz	2132.5MHz	2152.5 MHz
		TX	Channel 19965	Channel 20175	Channel 20385
	3MHz	1.	1711.5 MHz	1732.5 MHz	1753.5 MHz
	SIVITZ	RX	Channel 2000	Channel 2175	Channel 2350
		RA.	2115 MHz	2132.5MHz	2150 MHz
		TX	Channel 19975	Channel 20175	Channel 20375
	5MHz		1712.5 MHz	1732.5 MHz	1752.5 MHz
	SIVITZ	RX	Channel 1975	Channel 2175	Channel 2375
LTE Band 4			2112.5 MHz	2132.5MHz	2152.5 MHz
LIE Dallu 4		TX	Channel 20000	Channel 20175	Channel 20350
	10MHz		1715 MHz	1732.5 MHz	1750 MHz
	TOME	RX	Channel 2000	Channel 2175	Channel 2350
		KA	2115 MHz	2132.5MHz	2150 MHz
		TX	Channel 20025	Channel 20175	Channel 20325
	15MHz		1717.5 MHz	1732.5 MHz	1747.5 MHz
	TOMITZ	RX	Channel 2025	Channel 2175	Channel 2325
		r.x	2117.5 MHz	2132.5MHz	2147.5 MHz
		TX	Channel 20050	Channel 20175	Channel 20300
	20MHz	1.	1720 MHz	1732.5 MHz	1745 MHz
	ZUIVITZ	RX	Channel 2050	Channel 2175	Channel 2300
		Γ\Λ	2120 MHz	2132.5MHz	2145 MHz

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层



Report No.: ZR/2020/6001301

Page: 14 of 29

Test Mode	Bandwidth	TX / RX		RF Channel			
rest Mode	Bandwidth	IX/KX	Low (L)	Middle (M)	High (H)		
		TV	Channel 20407	Channel 20525	Channel 20643		
	4 48411-	TX	824.7 MHz	836.5 MHz	848.3 MHz		
	1.4MHz	RX	Channel 2407	Channel 2525	Channel 2643		
		KX	869.7 MHz	881.5 MHz	893.3 MHz		
		TV	Channel 20415	Channel 20525	Channel 20635		
	2041.1-	TX	825.5 MHz	836.5 MHz	847.5 MHz		
	3MHz	RX	Channel 2415	Channel 2525	Channel 2635		
LTE Dand E		KX	870.5 MHz	881.5 MHz	892.5 MHz		
LTE Band 5		TV	Channel 20425	Channel 20525	Channel 20625		
		TX	826.5 MHz	836.5 MHz	846.5 MHz		
	5MHz	RX	Channel 2425	Channel 2525	Channel 2625		
		KX	871.5 MHz	881.5 MHz	891.5 MHz		
		TV	Channel 20450	Channel 20525	Channel 20600		
	400411-	TX	829 MHz	836.5 MHz	844 MHz		
	10MHz	RX	Channel 2450	Channel 2525	Channel 2600		
			874 MHz	881.5 MHz	889 MHz		
Test Mode	Bandwidth	TV / DV	RF Channel				
i est iviode	Dandwidth	TX / RX	Low (L)	Middle (M)	High (H)		
		TX	Channel 20775	Channel 21100	Channel 21425		
	5MHz		2502.5 MHz	2535 MHz	2567.5 MHz		
	SIVITZ	RX	Channel 2775	Channel 3100	Channel 5825		
		KA.	2622.5 MHz	2655 MHz	2687.5 MHz		
		TV	Channel 20800	Channel 21100	Channel 21400		
	10144-	101411-	10MHz	TX	2505 MHz	2535 MHz	2565 MHz
	IUIVITZ	RX	Channel 2800	Channel 3100	Channel 3400		
LTE Band 7		I KA	2625 MHz	2655 MHz	2685 MHz		
LIE Dand /		TX	Channel 20825	Channel 21100	Channel 21375		
	15MU-	1^	2507.5 MHz	2535 MHz	2562.5 MHz		
	15MHz	RX	Channel 2825	Channel 3100	Channel 3375		
		ΓΛ.	2627.5 MHz	2655 MHz	2682.5 MHz		
		TX	Channel 20850	Channel 21100	Channel 21350		
	201411-		2510 MHz	2535 MHz	2560 MHz		
	ZUIVITIZ	20MHz	Channel 2850	Channel 3100	Channel 3350		
		RX	2630 MHz	2655 MHz	2680 MHz		

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层



Report No.: ZR/2020/6001301

Page: 15 of 29

	5	T) (/ D) (RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
		TV	Channel 131979	Channel 132322	Channel 132665
	1.4MHz	TX	1710.7 MHz	1745 MHz	1779.3 MHz
	1.4IVITZ	RX	Channel 66443	Channel 66786	Channel 67129
		RA.	2110.7 MHz	2145MHz	2179.3 MHz
		TX	Channel 131987	Channel 132322	Channel 132657
	3MHz	1.	1711.5 MHz	1745 MHz	1778.5MHz
	SIVITZ	RX	Channel 66451	Channel 66786	Channel 67121
		RA.	2111.5 MHz	2145MHz	2178.5MHz
		TX	Channel 131997	Channel 132322	Channel 132647
	5MHz	1.	1712.5 MHz	1745 MHz	1777.5 MHz
	SIVIFIZ	RX	Channel 66461	Channel 66786	Channel 67711
LTE Band 66			2112.5 MHz	2145MHz	2177.5 MHz
LIE Ballu 00		TX	Channel 132022	Channel 132322	Channel 132622
	10MHz	1.	1715 MHz	1745 MHz	1775 MHz
	TOME	-	Channel 66486	Channel 66786	Channel 67086
		RX	2115 MHz	2145MHz	2175 MHz
		TX	Channel 132047	Channel 132322	Channel 132597
	15MHz		1717.5 MHz	1745 MHz	1772.5 MHz
	ISIVITZ	RX	Channel 66511	Channel 66786	Channel 67061
		KA.	2117.5 MHz	2145MHz	2172.5 MHz
		TX	Channel 132072	Channel 132322	Channel 132572
	20MHz	1.	1720 MHz	1745 MHz	1770 MHz
	ZUIVITZ	RX	Channel 66536	Channel 66786	Channel 67036
		IVA	2120 MHz	2145MHz	2170 MHz

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层



Report No.: ZR/2020/6001301

Page: 16 of 29

2 Description of Tests

2.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1

2.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01; C63.26 (2015)

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB

Measurement Procedure: FCC KDB 971168 D01 V03r01; ANSI/C63.26 (2015)

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 0.8m high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6). The output power into the substitution antenna was then measured.
- 7). Steps 5) and 6) were repeated with both antennas polarized.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层



Report No.: ZR/2020/6001301

Page: 17 of 29

8). Calculate power in dBm by the following formula:

ERP (dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBd)

Where:

Pg is the generator output power into the substitution antenna.

Above 1GHz test procedure as below:

- 1). Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2). Calculate power in dBm by the following formula:

EIRP(dBm) = Pg(dBm) – cable loss (dB) + antenna gain (dBi)

EIRP=ERP+2.15dB

Where:

Pg is the generator output power into the substitution antenna.

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete.

Remark: Reference test setup 2

2.3 EIRP Power Density

For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

Test Settings

- 1. Set instrument center frequency to OBW center frequency.
- 2. Set span to at least 1.5 times the OBW.
- 3. Set the RBW to the specified reference bandwidth (often 1 MHz).
- 4. Set VBW ≥ 3 × RBW.
- 5. Detector = RMS (power averaging).
- 6. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- 7. Sweep time = auto couple.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 :

sgs.china@sgs.com



Report No.: ZR/2020/6001301

Page: 18 of 29

- 8. Employ trace averaging (RMS) mode over a minimum of 100 traces.
- 9. Use the peak marker function to determine the maximum amplitude level within the reference bandwidth (PSD).

2.4 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1

Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
 - 1 5% of the 99% occupied bandwidth observed in Step 7

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层



Report No.: ZR/2020/6001301

Page: 19 of 29

2.5 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold power.

Remark: Reference test setup 1

Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW ≥ 1% of the emission bandwidth
- VBW > 3 x RBW
- 5. Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- Trace mode = trace average for continuous emissions, max hold for pulse emissions
- Sweep time = auto couple
- 9. The trace was allowed to stabilize

2.6 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层



Report No.: ZR/2020/6001301

Page: 20 of 29

and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

- Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
- Detector = RMS
- 3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- Sweep time = auto couple
- The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings

2.7 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.1

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode

Remark: Reference test setup 1

Test Settings

- The signal analyzer's CCDF measurement profile is enabled
- Frequency = carrier center frequency
- Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

2.8 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01

Below 1GHz test procedure as below:

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层



Report No.: ZR/2020/6001301

Page: 21 of 29

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6). The output power into the substitution antenna was then measured.
- 7). Steps 5) and 6) were repeated with both antennas polarized.
- 8) Calculate power in dBm by the following formula:

ERP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBd)

Where

Pd is the dipole equivalent power, Pg is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to Pg [dBm] – cable loss [dB]. The calculated Pd levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of 43 + 10log10(Power [Watts]).

Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

EIRP(dBm) = Pg(dBm) – cable loss (dB) + antenna gain (dBi) EIRP=ERP+2.15dB

Where:

Pg is the generator output power into the substitution antenna.

- 3. Test the EUT in the lowest channel, the middle channel the Highest channel
- 4. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5. Repeat above procedures until all frequencies measured was complete

Remark: Reference test setup 3

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层



Report No.: ZR/2020/6001301

Page: 22 of 29

2.9 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; ANSI/C63.26 (2015)

- . The frequency stability of the transmitter is measured by:
- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 4

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com




Report No.: ZR/2020/6001301

Page: 23 of 29


2.10 Test Setups

2.10.1 Test Setup 1

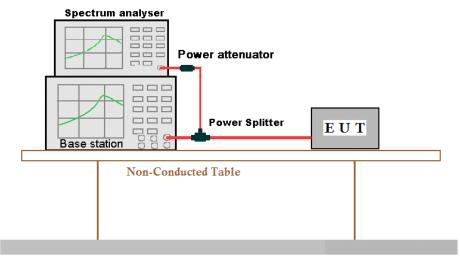

Ground Reference Plane

2.10.2 Test Setup 2

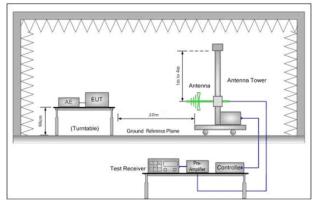

Antenna Tower

FUT

Turntable

Gound Reference Plane

Test Receiver

For Angelier

Controller

Figure 1. 30MHz to 1GHz

Figure 2. above 1GHz

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元—层

邮编 710086

sgs.china@sgs.com



Report No.: ZR/2020/6001301

Page: 24 of 29

2.10.3 Test Setup 3


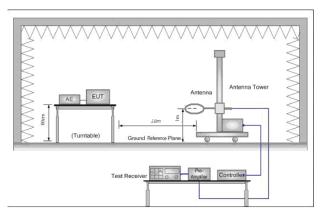


Figure 1. Below 30MHz

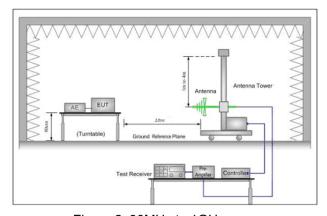

Antenna Tower

Hen Antenna

Turntable

Gound Reference Plane

Test Receiver

Test Receiver

Centralier

Figure 2. 30MHz to 1GHz

Figure 3. above 1GHz

2.10.4 Test Setup 4

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层


邮编 710086

sgs.china@sgs.com



Report No.: ZR/2020/6001301

Page: 25 of 29

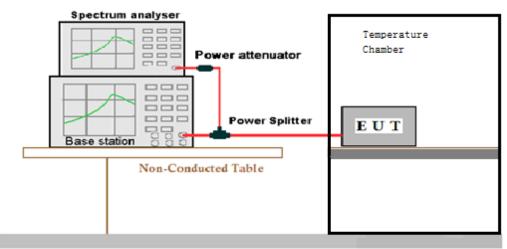

Ground Reference Plane

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层



Report No.: ZR/2020/6001301

Page: 26 of 29

2.11 Test Conditions

Test Case		Test Conditions		
		Test Environment	Ambient Climate & Rated Voltage	
	Average	Test Setup	Test Setup 1	
Transmit	Power, Total	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)	
Output		Test Mode	GSM/TM1;GSM/TM2; LTE/TM1;LTE/TM2	
Power	Average	Test Environment	Ambient Climate & Rated Voltage	
Data	Power,	Test Setup	Test Setup 1	
	Spectral Density (if	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)	
	required)	Test Mode	GSM/TM1;GSM/TM2; LTE/TM1;LTE/TM2	
		Test Environment	Ambient Climate & Rated Voltage	
Peak-to-Ave	erage Ratio	Test Setup	Test Setup 1	
(if required)	ū	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)	
		Test Mode	GSM/TM1;GSM/TM2; LTE/TM1;LTE/TM2	
		Test Environment	Ambient Climate & Rated Voltage	
Modulation		Test Setup	Test Setup 1	
Characteris	tics	RF Channels (TX)	M (M= middle channel)	
		Test Mode	GSM/TM1;GSM/TM2; LTE/TM1;LTE/TM2	
		Test Environment	Ambient Climate & Rated Voltage	
	Occupied	Test Setup	Test Setup 1	
	Bandwidth	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)	
Bandwidth		Test Mode	GSM/TM1;GSM/TM2; LTE/TM1;LTE/TM2	
Dandwidth		Test Environment	Ambient Climate & Rated Voltage	
	Emission Bandwidth	Test Setup	Test Setup 1	
	(if required)	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)	
	required)	Test Mode	GSM/TM1;GSM/TM2; LTE/TM1;LTE/TM2	

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层



Report No.: ZR/2020/6001301

Page: 27 of 29

	Test Environment	Ambient Climate & Rated Voltage	
Band Edges Compliance	Test Setup	Test Setup 1	
	RF Channels (TX)	L, H (L= low channel, H= high channel)	
	Test Mode	GSM/TM1;GSM/TM2; LTE/TM1;LTE/TM2	
	Test Environment	Ambient Climate & Rated Voltage	
Spurious Emission at Antenna Terminals	Test Setup	Test Setup 1	
	RF Channels (TX)	L,M, H (L= low channel, M= middle channel, H= high channel	
	Test Mode	GSM/TM1;GSM/TM2; LTE/TM1;LTE/TM2	
	Test Environment	Ambient Climate & Rated Voltage	
	Test Setup	Test Setup 2	
Field Strength of	Test Mode	GSM/TM1;GSM/TM2; LTE/TM1;LTE/TM2	
Field Strength of Spurious Radiation		Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.	
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)	
	Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage;	
		(2) VL, VN and VH of Rated Voltage at Ambient Climate.	
Frequency Stability	Test Setup	Test Setup 4	
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)	
	Test Mode	GSM/TM1;GSM/TM2; LTE/TM1;LTE/TM2	

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层



Report No.: ZR/2020/6001301

Page: 28 of 29

3 Main Test Instruments

GSM&WCDMA<E RF Test System					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Radio communication analyzer	ROHDE&SCHWARZ	CMW500	XAW01-03-07	2019-11-18	2020-11-18
Spectrum Analyzer	ROHDE&SCHWARZ	FSU	XAW01-13-02	2019-11-18	2020-11-18
Signal Generator	ROHDE&SCHWARZ	SMR20	XAW01-07-02	2020-04-02	2021-04-02
MXG Vector Signal Generator	Keysight	N5182A	XAW01-07-01	2020-06-28	2021-06-28
power supply	Angilent	66311B	XAW01-17-01	2020-06-20	2021-06-20
temperature chamber	Votsch	VT4002	XAW01-18-01	2020-06-28	2021-06-28
Band Reject Filter Group	Tonscend	JS0806-F	XAW03-05-03	NCR	NCR
RF Control Unit	Tonscend	JS0806-1	XAW03-37-02	NCR	NCR
Temperature and humidity meter	MingGao	TH101B	XAW01-01-02	2019-11-28	2020-11-28
Measurement Software	Tonscend	JS1120	XAW02-06-01	NCR	NCR

RE in Chamber					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Semi-Anechoic Chamber	Brilliant-emc	966	XAW03-35-01	NCR	NCR
MXA signal analyzer	Keysight	N9020A	XAW01-06-01	2020-04-02	2021-04-02
Radio communication analyzer	ROHDE&SCHWARZ	CMW 500	XAW01-03-02	2020-04-02	2021-04-02
Test receiver	ROHDE&SCHWARZ	ESR	XAW01-08-01	2019-09-07	2020-09-06
Receiving antenna	Rosenberger	VULB 9163	XAW01-09-01	2019-10-13	2021-10-12
Receiving antenna	Rosenberger	BBHA9120D	XAW01-09-02	2019-10-13	2021-10-12
Receiving antenna	Rosenberger	BBHA 9170	XAW01-09-03	2019-10-13	2021-10-12
Directional antenna rack controller	Max-Full	MF-7802BS	XAW03-03-01	NCR	NCR
High-speed antenna rack controller	Max-Full	MF-7802	XAW03-04-01	NCR	NCR
Filter bank	Tonscend	JS0806-F	XAW03-05-01	NCR	NCR
Filter bank	Tonscend	JS0806s	XAW03-05-02	NCR	NCR
Amplifier	Tonscend	TAP00903040	XAW01-41-01	2019-11-18	2020-11-18
Amplifier	Tonscend	TAP01018048	XAW01-41-02	2019-11-18	2020-11-18
Amplifier	Tonscend	TAP18040048	XAW01-41-03	2019-12-03	2020-12-03
Amplifier	Shanghai Steed	YX28980930	XAW01-41-06	2019-11-18	2020-11-18
5G UXM	Keysight	E7515B	XAW01-04-01	2019-09-04	2020-09-03
Temperature and humidity meter	MingGao	TH101B	XAW01-01-01	2019-11-28	2020-11-28
Measurement Software	Tonscend	TS+ RSE&RE	XAW02-05-01	NCR	NCR
Measurement Software	Tonscend	TS+ CE	XAW02-05-02	NCR	NCR

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元—层



Report No.: ZR/2020/6001301

Page: 29 of 29

4 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item	Extended Uncertainty	Data
Transmit Output Power Data	Power [dBm]	U =±0.21 dB
Bandwidth	Magnitude [%]	U =± 0.2%
Band Edge Compliance	Disturbance Power [dBm]	U = ±2.0 dB
Spurious Emissions, Conducted	Disturbance Power [dBm]	U = ±2.0 dB
		±4.8dB (30MHz-1GHz)
Field Strength of Spurious	ERP[dBm]/EIRP [dBm]	±5.2dB (1GHz-6GHz)
Radiation	EKF[dBiii]/EiKF [dBiii]	±5.5dB (6GHz-18GHz)
		±5.02dB (18GHz-40GHz)
Frequency Stability	Frequency Accuracy [ppm]	U = ±0.24 ppm
Modulation Characteristics	± 4 kHz	±4kHz

5 Appendixes

Appendix A	Photographs of EUT Constructional Details for ZR202060013
Appendix B.1	GSM850 & GSM1900
Appendix B.2	LTE Band 2
Appendix B.3	LTE Band 4
Appendix B.4	LTE Band 5
Appendix B.5	LTE Band 7
Appendix B.6	LTE Band 66

The End

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email:

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn Xi'an. Shaanxi. China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层