

# Nantong Tenchown Intelligent Technology Co., Ltd

## RF TEST REPORT

**Report Type:**

FCC Part 15C RF report

**Model:**

TC-C-W, TC-C-W (02)

**REPORT NUMBER:**

240500464SHA-001

**ISSUE DATE:**

August 13, 2024

**DOCUMENT CONTROL NUMBER:**

TTRFFCCPART15C\_V1 © 2018 Intertek



**TEST REPORT**

Telephone: 86 21 6127 8200

[www.intertek.com](http://www.intertek.com)

Report no.: 240500464SHA-001

**Applicant** : Nantong Tenchown Intelligent Technology Co., Ltd  
No.18 Xisu Road, High-tech District, Hai'an Country, NANTONG CITY  
Jiangsu 226600

**Manufacturer** : Nantong Tenchown Intelligent Technology Co., Ltd  
No.18 Xisu Road, High-tech District, Hai'an Country, NANTONG CITY  
Jiangsu 226600

**FCC ID** : 2A57E-TC-C-W2

**SUMMARY:**

The equipment complies with the requirements according to the following standard(s) or Specification:

**47CFR Part 15 (2023):** Radio Frequency Devices (Subpart C)

**ANSI C63.10 (2020):** American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

**PREPARED BY:**

**REVIEWED BY:**



Project Engineer  
Erick Liu

Reviewer  
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

## TEST REPORT

### Content

<b>REVISION HISTORY.....</b>	<b>4</b>
<b>MEASUREMENT RESULT SUMMARY .....</b>	<b>5</b>
<b>1 GENERAL INFORMATION .....</b>	<b>6</b>
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT) .....	6
1.2 TECHNICAL SPECIFICATION.....	6
1.3 DESCRIPTION OF TEST FACILITY .....	7
<b>2 TEST SPECIFICATIONS.....</b>	<b>8</b>
2.1 STANDARDS OR SPECIFICATION .....	8
2.2 MODE OF OPERATION DURING THE TEST .....	8
2.3 TEST SOFTWARE LIST .....	8
2.4 TEST PERIPHERALS LIST.....	8
2.5 TEST ENVIRONMENT CONDITION:.....	8
2.6 INSTRUMENT LIST .....	9
2.7 MEASUREMENT UNCERTAINTY.....	10
<b>3 RADIATED EMISSIONS .....</b>	<b>11</b>
3.1 LIMIT .....	11
3.2 MEASUREMENT PROCEDURE .....	11
3.3 TEST CONFIGURATION .....	12
3.4 TEST RESULTS OF RADIATED EMISSIONS .....	14
<b>4 CONDUCTED EMISSIONS .....</b>	<b>18</b>
4.1 LIMIT .....	18
4.2 TEST CONFIGURATION .....	18
4.3 MEASUREMENT PROCEDURE .....	19
4.4 TEST RESULTS OF CONDUCTED EMISSIONS.....	20

## Revision History

Report No.	Version	Description	Issued Date
240500464SHA-001	Rev. 01	Initial issue of report	August 13, 2024

## Measurement result summary

TEST ITEM	FCC REFERENCE	RESULT
Radiated emissions	15.209	Pass
Conducted emissions	15.207	Pass

Notes: 1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

## TEST REPORT

### 1 GENERAL INFORMATION

#### 1.1 Description of Equipment Under Test (EUT)

Product name:	Wireless charging
Type/Model:	TC-C-W, TC-C-W (02)
Description of EUT:	EUT is a wireless charger, all models are the same except USB port, secondary circuit for USB drive and model name. after evaluation, we choose TC-C-W for all tests.
Rating:	Input: 125VAC, 60Hz, 0.8A. DC output (single use only): 29VDC, 2A Wireless output: 15W MAX USB A+USB C output: 5VDC, 2A total (for model TC-C-W only)
Category of EUT:	Class B
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Software Version:	/
Hardware Version:	/
Sample received date:	July 24, 2024
Date of test:	July 27, 2024~ August 9, 2024

#### 1.2 Technical Specification

Frequency Range:	111kHz – 205kHz
Modulation:	ASK
Antenna:	Coil antenna, 0dBi

## TEST REPORT

### 1.3 Description of Test Facility

Name:	Intertek Testing Services (Shanghai FTZ) Co., Ltd.
Address:	Building 86, No. 1198 Qinzhou Road (North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L21189
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

## TEST REPORT

## 2 TEST SPECIFICATIONS

### 2.1 Standards or specification

47CFR Part 15 (2023)  
ANSI C63.10 (2020)

### 2.2 Mode of operation during the test

Within this test report, EUT was tested under its rating voltage and frequency (120V, 60Hz).  
The 0%/50%/100% battery capacity was tested and the 100% battery capacity was worst case.

### 2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

### 2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Mobile phone	Apple iPhone12	S/N: FFYFP8EV0DYL
2	Wireless charging	TC-C-W(03)	/

### 2.5 Test environment condition:

Test items	Temperature	Humidity
Radiated emission	25°C	54% RH
Power line conducted emission	24°C	54% RH



## TEST REPORT

### 2.6 Instrument list

Conducted Emission/Disturbance Power/Tri-loop Test/CDN method					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESR7	EC 6194	2025-02-27
<input checked="" type="checkbox"/>	Attenuator	Hua Xiang	Ts5-10db-6g	EC 6194-1	2024-12-07
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2024-11-19
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESR	EC6501	2024-09-24
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2024-09-12
<input checked="" type="checkbox"/>	Active loop antenna	Schwarzbeck	FMZB1519	EC 5345	2025-08-10
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2025-03-05
<input type="checkbox"/>	Vector Signal Generator	Agilent	N5182B	EC 5175	2025-03-05
<input type="checkbox"/>	Universal Radio Communication Tester	R&S	CMW500	EC5944	2025-03-05
<input type="checkbox"/>	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2025-03-07
<input type="checkbox"/>	Mobile Test System	Litepoint	lqxel	EC 5176	2025-01-11
<input type="checkbox"/>	Test Receiver	R&S	ESCI 7	EC 4501	2025-03-09
<input type="checkbox"/>	Climate chamber	GWS	MT3065	EC 6021	2025-03-07
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030B	EC 6078	2025-03-18
Test Site					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2025-01-11
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2026-07-11
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Thermo-Hygrograph	Testo	175h1	EC 6640	2025-08-29
<input checked="" type="checkbox"/>	Thermo-Hygrograph	Testo	175h1	EC6642	2025-08-29

## TEST REPORT

### 2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Frequency	Expanded Uncertainty ( $k=2$ )
Conducted emission at mains ports	9kHz ~ 150kHz	3.52 dB
	150kHz ~ 30MHz	3.19 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	4.90 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.02 dB
	6GHz ~ 18GHz	5.28 dB

## TEST REPORT

### 3 Radiated emissions

Test result: Pass

#### 3.1 Limit

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

#### 3.2 Measurement Procedure

##### For Radiated emission below 30MHz:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### For Radiated emission above 30MHz:

- The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meters chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

## TEST REPORT


- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

### Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. All modes of operation were evaluated and the worst-case emissions were reported

## 3.3 Test Configuration


**For Radiated emission below 30MHz:**

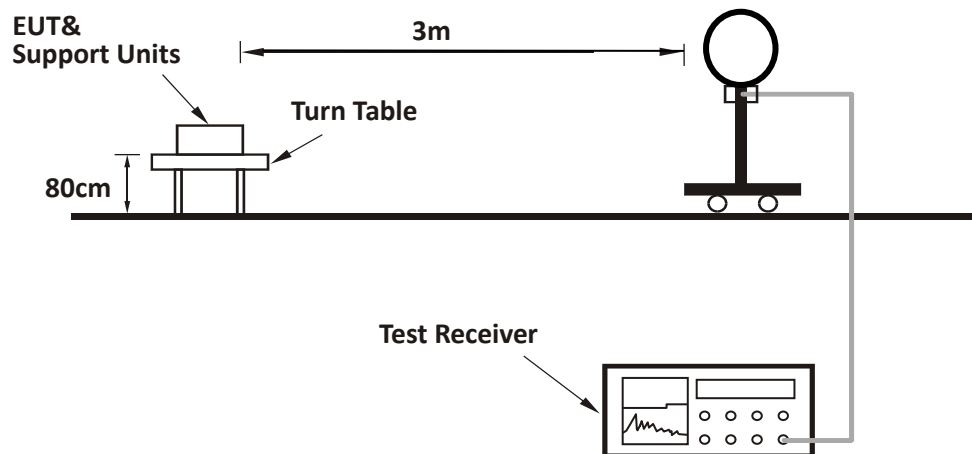

**For Radiated emission 30MHz to 1GHz:**

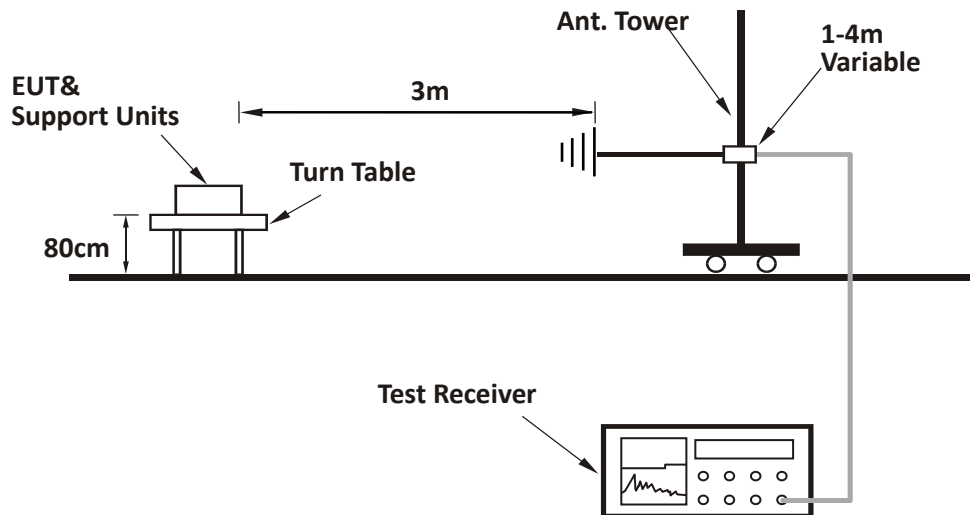

**For Radiated emission above 1GHz:**


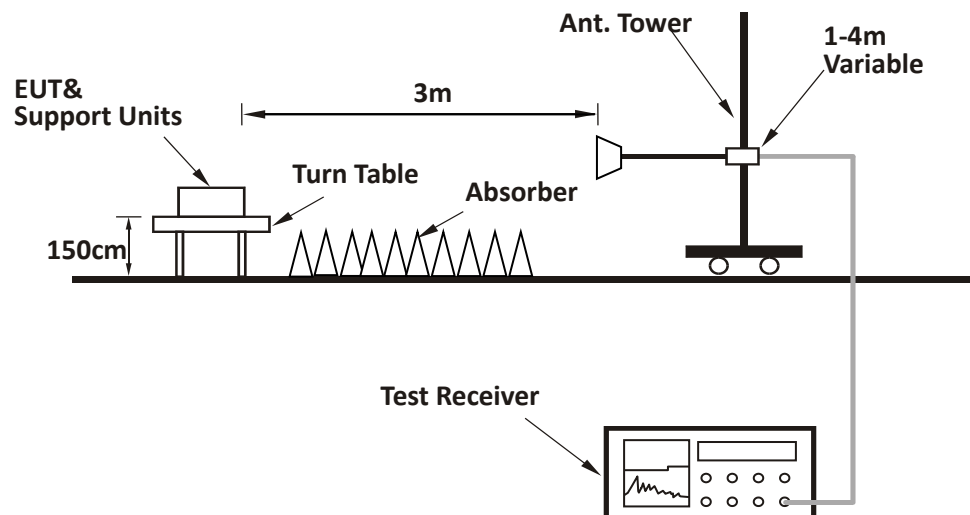


## TEST REPORT

### 3.4 Test Results of Radiated Emissions


EUT was tested with empty load, half load and full load, the full load is the worst case and we listed the results in the report.

Test data below 30MHz:

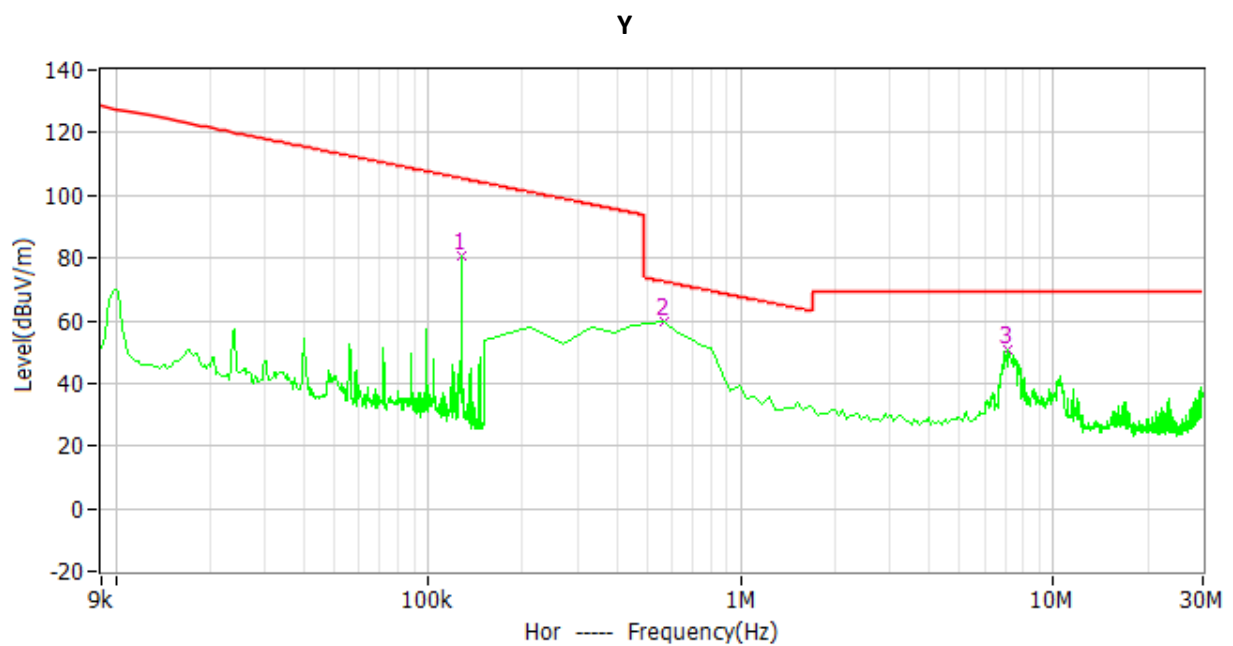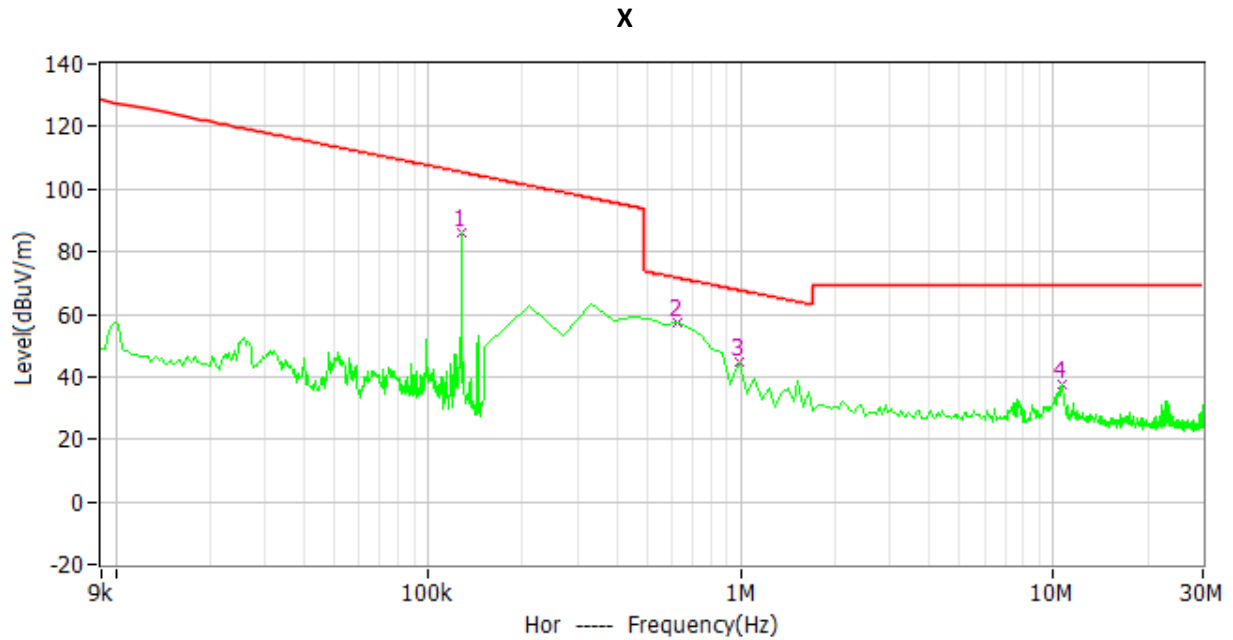

## TEST REPORT

Z

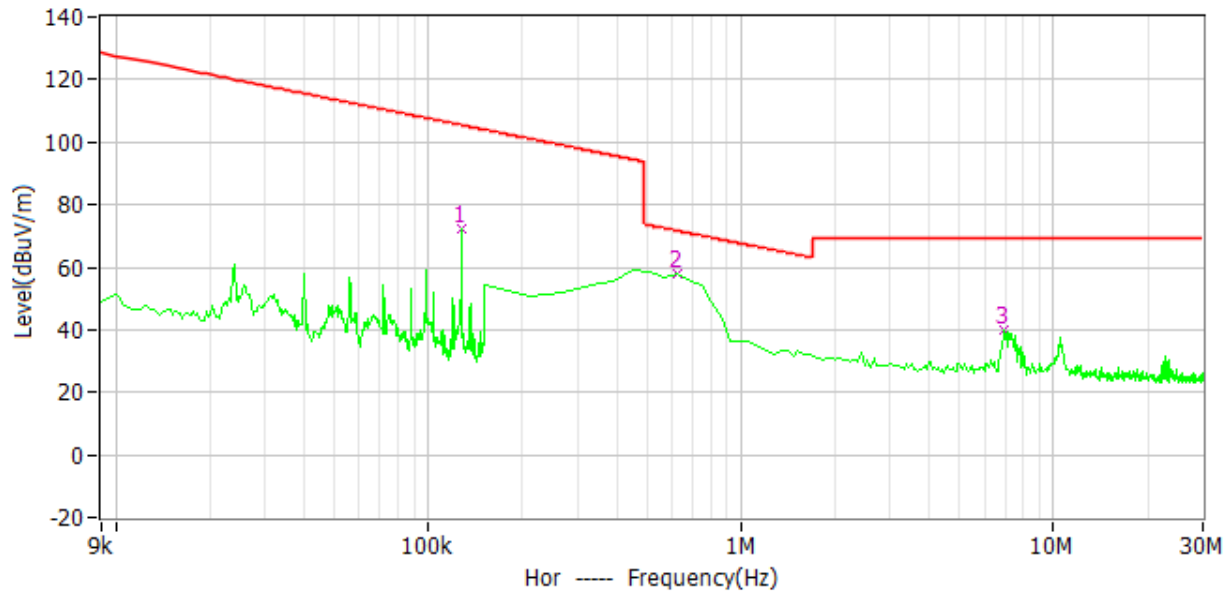

Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar
127.960kHz	105.5	86.1	-19.4	66.0	20.1	PK	X
628.557kHz	71.6	57.1	-14.5	36.9	20.2	PK	X
987.475kHz	67.7	44.5	-23.2	24.4	20.1	PK	X
10.618MHz	69.5	37.6	-31.9	17.2	20.4	PK	X
127.395kHz	105.5	80.6	-24.9	60.5	20.1	PK	Y
568.738kHz	72.5	59.6	-12.9	39.4	20.2	PK	Y
7.149MHz	69.5	50.7	-18.8	30.3	20.4	PK	Y
127.677kHz	105.5	72.1	-33.4	52.0	20.1	PK	Z
628.557kHz	71.6	58.2	-13.4	38.0	20.2	PK	Z
6.969MHz	69.5	40.2	-29.3	19.8	20.4	PK	Z

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.

2. Level = Original Receiver Reading + Correct Factor


3. Delta = Level - Limit

4. If the PK Level is lower than AV limit, the AV test can be elided.

## TEST REPORT

Test data from 30MHz to 1000MHz:

Horizontal

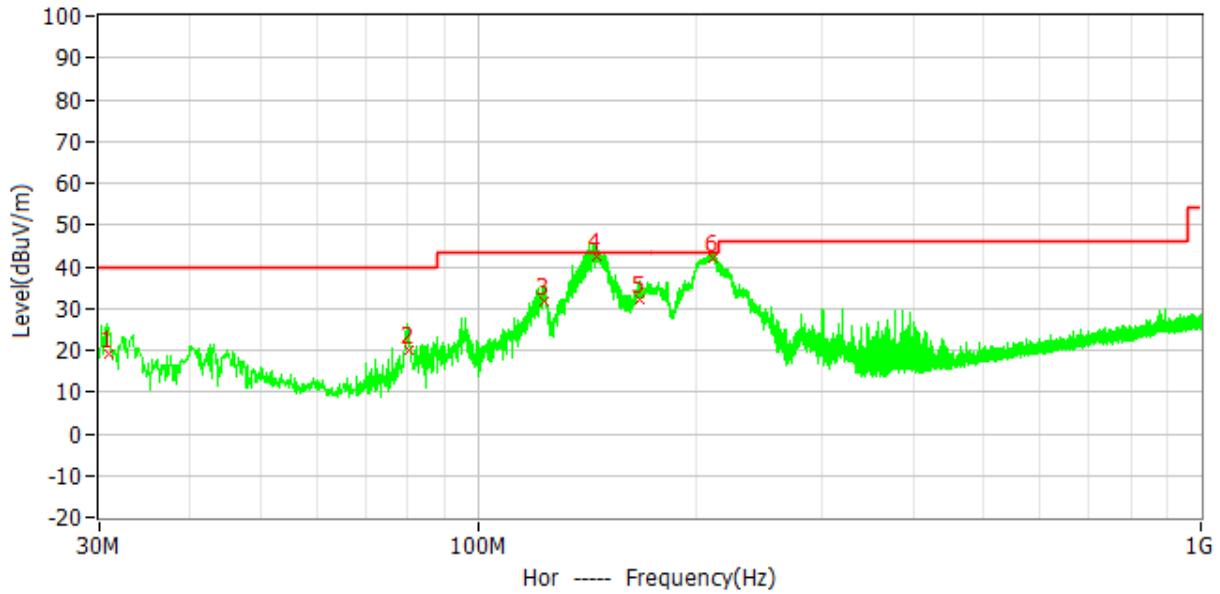

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar
1	30.999MHz	40.0	19.2	-20.8	6.8	12.4	QP	Hor
2	80.166MHz	40.0	20.1	-19.9	9.9	10.2	QP	Hor
3	123.804MHz	43.5	31.9	-11.6	19.2	12.7	QP	Hor
4	145.899MHz	43.5	42.6	-0.9	28.2	14.4	QP	Hor
5	167.643MHz	43.5	32.2	-11.3	18.0	14.2	QP	Hor
6	211.277MHz	43.5	42.0	-1.5	30.0	12.0	QP	Hor

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.

2. Level = Original Receiver Reading + Correct Factor


3. Delta = Level - Limit

4. If the PK Level is lower than AV limit, the AV test can be elided.



## TEST REPORT

### Vertical

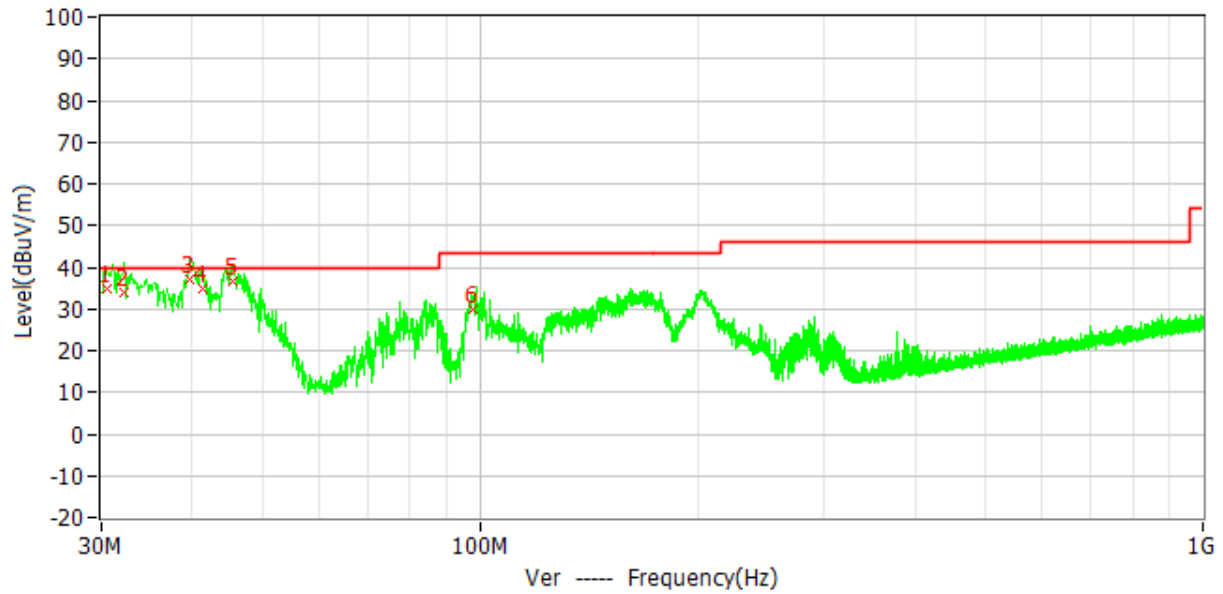

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar
1	30.517MHz	40.0	34.9	-5.1	22.6	12.3	QP	Ver
2	32.255MHz	40.0	34.1	-5.9	21.5	12.6	QP	Ver
3	39.730MHz	40.0	37.3	-2.7	23.4	13.9	QP	Ver
4	41.319MHz	40.0	35.0	-5.0	21.0	14.0	QP	Ver
5	45.517MHz	40.0	36.6	-3.4	22.3	14.3	QP	Ver
6	98.107MHz	43.5	30.0	-13.5	20.2	9.8	QP	Ver

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.  
 2. Level = Original Receiver Reading + Correct Factor  
 3. Delta = Level - Limit  
 4. If the PK Level is lower than AV limit, the AV test can be elided.

## TEST REPORT

### 4 Conducted emissions


Test result: Pass

#### 4.1 Limit

Frequency of Emission (MHz)	Conducted Emissions Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

#### 4.2 Test Configuration

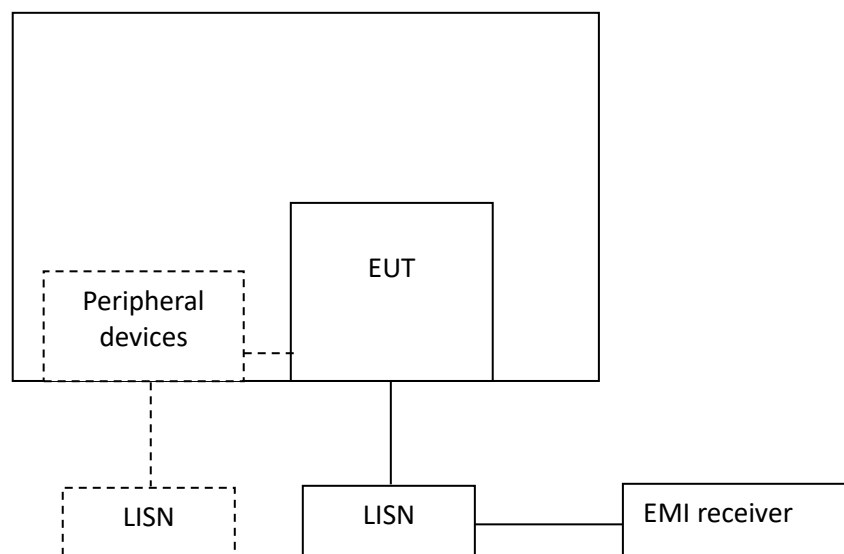

**TEST REPORT****4.3 Measurement Procedure**



Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50  $\Omega$  LISN port (to which the EUT is connected), where permitted, terminated into a 50  $\Omega$  measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50  $\Omega$  measuring port is terminated by a measuring instrument having 50  $\Omega$  input impedance. All other ports are terminated in 50  $\Omega$  loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

## TEST REPORT

### 4.4 Test Results of Conducted Emissions

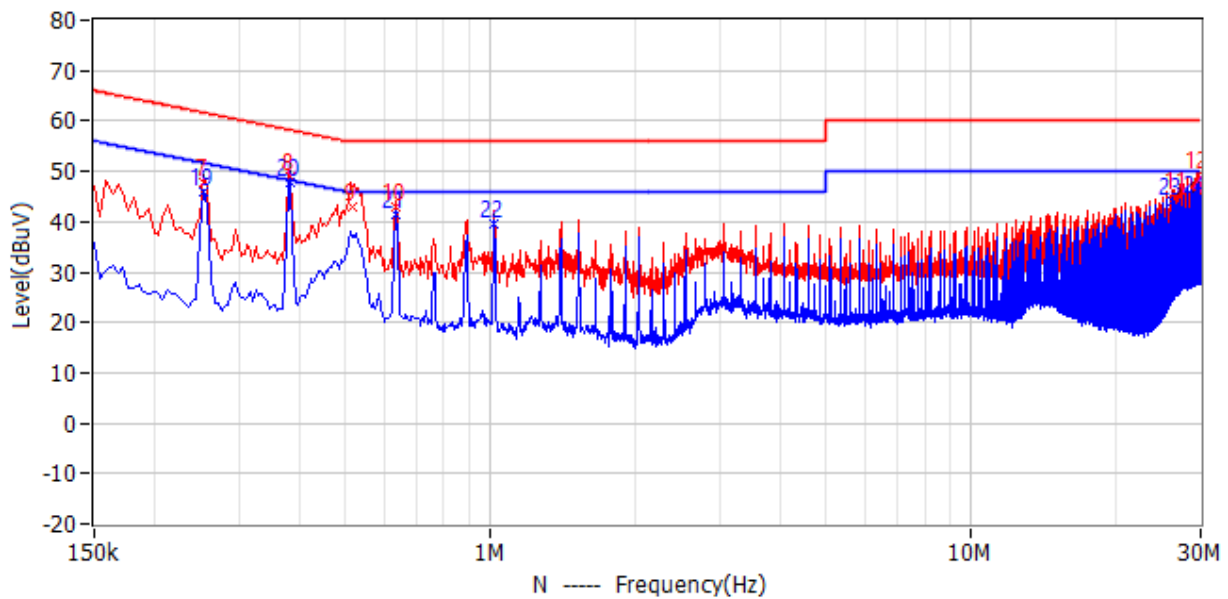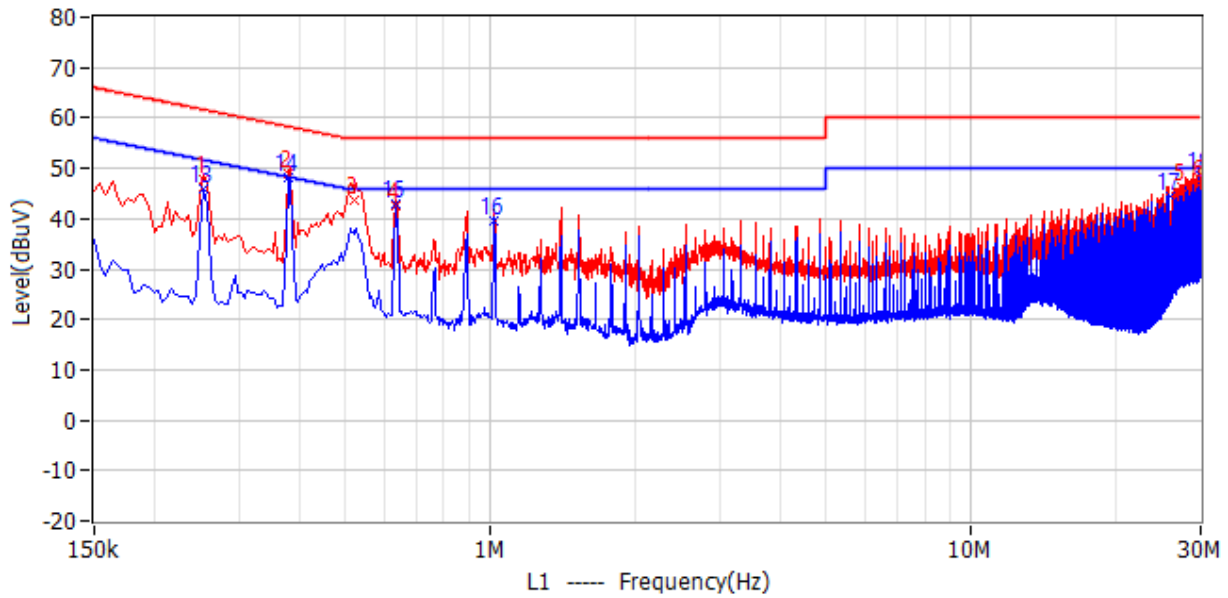

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
1	253.500kHz	61.6	47.7	-13.9	41.5	6.2	QP	L1
2	379.500kHz	58.3	49.0	-9.3	42.8	6.2	QP	L1
3	523.500kHz	56.0	43.6	-12.4	37.4	6.2	QP	L1
4	636.000kHz	56.0	42.6	-13.4	36.4	6.2	QP	L1
5	27.353MHz	60.0	46.2	-13.8	38.4	7.8	QP	L1
6	29.895MHz	60.0	47.0	-13.0	39.0	8.0	QP	L1
7	253.500kHz	61.6	47.7	-14.0	41.5	6.2	QP	N
8	384.000kHz	58.2	48.8	-9.4	42.6	6.2	QP	N
9	514.500kHz	56.0	42.9	-13.1	36.7	6.2	QP	N
10	636.000kHz	56.0	43.1	-12.9	36.9	6.2	QP	N

# TEST REPORT

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
11	26.849MHz	60.0	45.3	-14.7	37.7	7.6	QP	N
12	29.648MHz	60.0	49.2	-10.8	41.4	7.8	QP	N
13	253.500kHz	51.6	46.0	-5.6	39.8	6.2	CAV	L1
14	379.500kHz	48.3	47.5	-0.8	41.9	6.2	CAV	L1
15	636.000kHz	46.0	42.8	-3.2	36.6	6.2	CAV	L1
16	1.019MHz	46.0	39.6	-6.4	33.4	6.2	CAV	L1
17	26.079MHz	50.0	44.5	-5.5	36.9	7.6	CAV	L1
18	29.900MHz	50.0	48.6	-1.4	40.6	8.0	CAV	L1
19	253.500kHz	51.6	46.0	-5.6	39.8	6.2	CAV	N
20	384.000kHz	48.2	47.6	-0.6	41.7	6.2	CAV	N
21	636.000kHz	46.0	41.3	-4.7	35.1	6.2	CAV	N
22	1.019MHz	46.0	39.6	-6.4	33.4	6.2	CAV	N
23	26.088MHz	50.0	44.0	-6.0	36.5	7.5	CAV	N
24	29.400MHz	50.0	44.3	-5.7	36.5	7.8	CAV	N

Remark: 1. Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.  
2. Level = Original Receiver Reading + Factor  
3. Delta= Level - Limit  
4. If the PK Level is lower than AV limit, the AV test can be elided.

Example: Assuming LISN Factor = 10.00dB, Cable Loss = 2.00dB,  
Original Receiver Reading = 10.00dBuV, Limit = 66.00dBuV.  
Then Factor = 10.00 + 2.00 = 12.00dB;  
Level = 10dBuV + 12.00dB = 22.00dBuV;  
Delta = 22.00dBuV - 66.00dBuV = -44.00dB.

\*\*\*\*\* END \*\*\*\*\*