
FCC Test Report

Report No.: AGC01892150703FE03

FCC ID : 2AFDG-VASKXX
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : Bluetooth Speaker
BRAND NAME : VAVA
MODEL NAME : See Page 4
CLIENT : SUNVALLEYTEK INTERNATIONAL, INC.
DATE OF ISSUE : Oct.13,2015
STANDARD(S)
TEST PROCEDURE(S) : FCC Part 15 Rules
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Oct.13,2015	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCIES.....	5
3. MEASUREMENT UNCERTAINTY.....	7
4. DESCRIPTION OF TEST MODES.....	7
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM.....	8
5.2. EQUIPMENT USED IN EUT SYSTEM.....	8
5.3. SUMMARY OF TEST RESULTS.....	8
6. TEST FACILITY	9
7 ALL TEST EQUIPMENT LIST	9
8. RADIATED EMISSION	10
8.1TEST LIMIT.....	10
8.2. MEASUREMENT PROCEDURE.....	11
8.3. TEST SETUP	13
8.4. TEST RESULT	15
9. BAND EDGE EMISSION	41
9.1. MEASUREMENT PROCEDURE.....	41
9.2 TEST SETUP	41
9.3 RADIATED TEST RESULT	42
10. 20DB BANDWIDTH.....	50
10.1. MEASUREMENT PROCEDURE.....	50
10.2. TEST SET-UP	50
10.3. LIMITS AND MEASUREMENT RESULTS.....	50
11. FCC LINE CONDUCTED EMISSION TEST	60
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST	60
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	60
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	61
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	61
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	62
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	66
APPENDIX B: PHOTOGRAPHS OF EUT	68

1. VERIFICATION OF CONFORMITY

Applicant	SUNVALLEYTEK INTERNATIONAL, INC.
Address	2228 JUNCTION AVE, SAN JOSE, CA95131, USA
Manufacturer	Shenzhen NearbyExpress Technology Development Company Limited
Address	2F,Block D, Minle Industrial Park, Meiban Road,Longhua District,Shenzhen,China. 518131
Product Designation	Bluetooth Speaker
Brand Name	VAVA
Test Model	VA-SK001
Series Model	VA-SK002, VA-SK003, VA-SK004
Difference description	All the same except for the color
Date of test	Sep.28,2015 to Sep.29,2015
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Tested By Water Zuo
Water Zuo(Zuo Yingying) Oct.13,2015

Reviewed By Forrest Lei
Forrest Lei(Lei Yonggang) Oct.13,2015

Approved By Solger Zhang
Solger Zhang(Zhang Hongyi)
Authorized Officer Oct.13,2015

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	3.16dBm(Max)
Bluetooth Version	V4.0
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of channels	79 for BR/EDR 40 for BLE
Hardware Version	V1.0
Software Version	V1.0
Antenna Designation	Fixed Antenna (Met 15.203 Antenna requirement)
Antenna Gain	-6.1dBi
Power Supply	DC 7.4V by battery Adaptor: input:100-240V~50/60HZ 0.6A output:15V-1.6V
Note: One USB port used for charging and the other USB port used for discharging	

2.2. TABLE OF CARRIER FREQUENCIES

BR/EDR Bluetooth channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

BLE Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2404MHZ
	:	:
	38	2478 MHZ
	39	2480 MHZ

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	All emissions, radiated	$\pm 3.91\text{dB}$
3	Temperature	$\pm 0.5^\circ\text{C}$
4	Humidity	$\pm 2\%$

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT link with charging + power supply for mobile phone


Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. The EUT used fully-charged battery when tested.


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

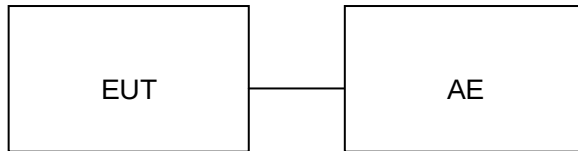

Configure 2: (Control continuous TX)

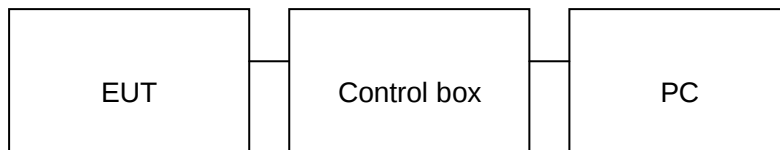

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Bluetooth Speaker	VAVA	VA-SK001	EUT
2	PC	Dell	INSPIRON	A.E
3	Control box	N/A	N/A	A.E
4	Audio Cable	N/A	1.2m, unshielded	A.E
5	Mobile phone	N/A	Huawei P7	A.E
6	AC ADAPTOR	Ktec	KSASB0241500160HU	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
N/A	BANDWIDTH	Compliant

6. TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.

7 ALL TEST EQUIPMENT LIST

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2015	July 6, 2016
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016
Power Probe	R&S	NRP-Z23	100323	July 25,2015	July 24,2016
RF attenuator	N/A	RFA20db	68	N/A	N/A
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9718			

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016
Shielded Room	CHENGYU	843			

8. RADIATED EMISSION

8.1 TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other: 74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Remark:

- (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.2. MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1.5MHz VBW and RBW for peak reading. Then 1.5MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1.5MHz/1.5MHz for Peak, 1.5MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

8.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

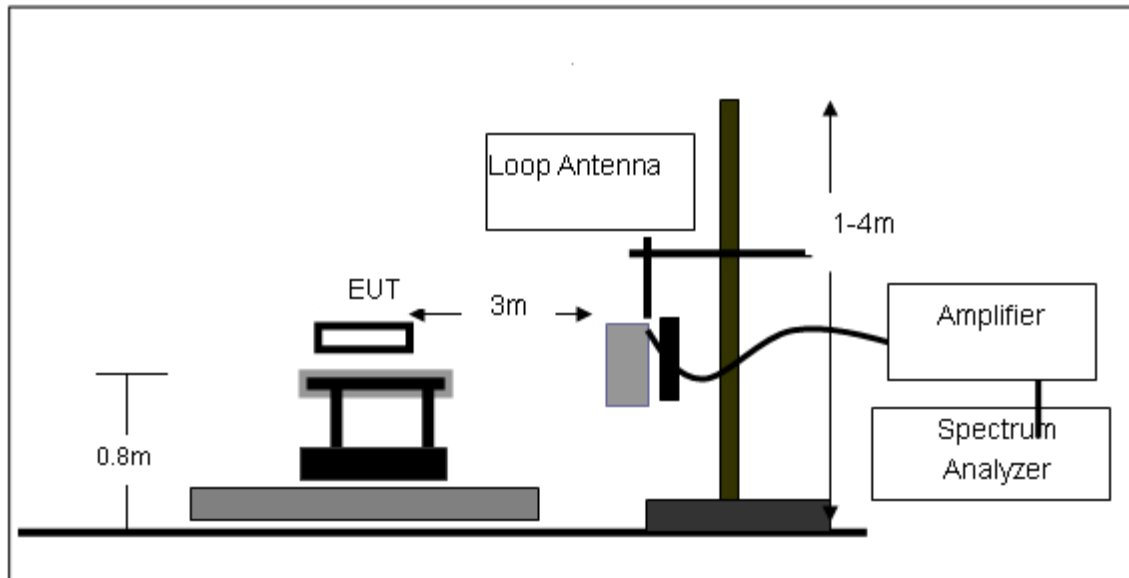

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

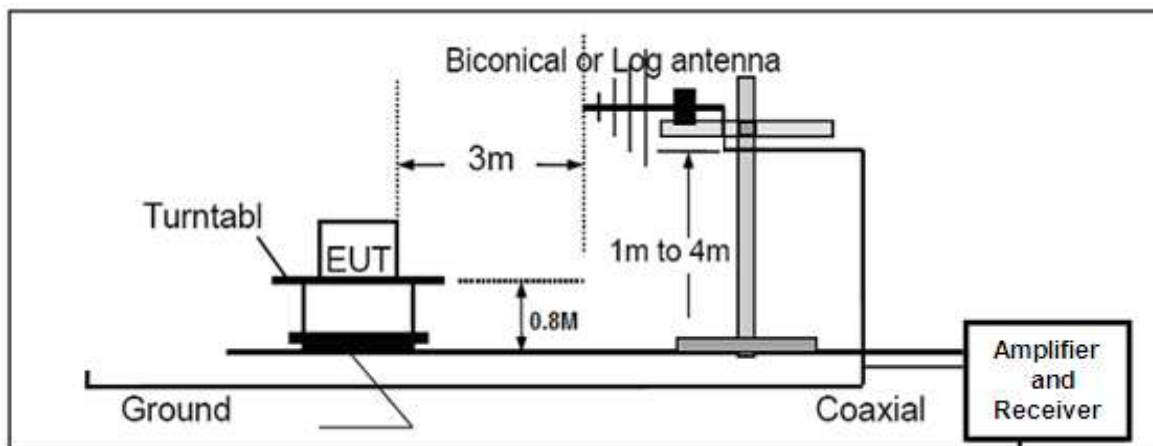

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

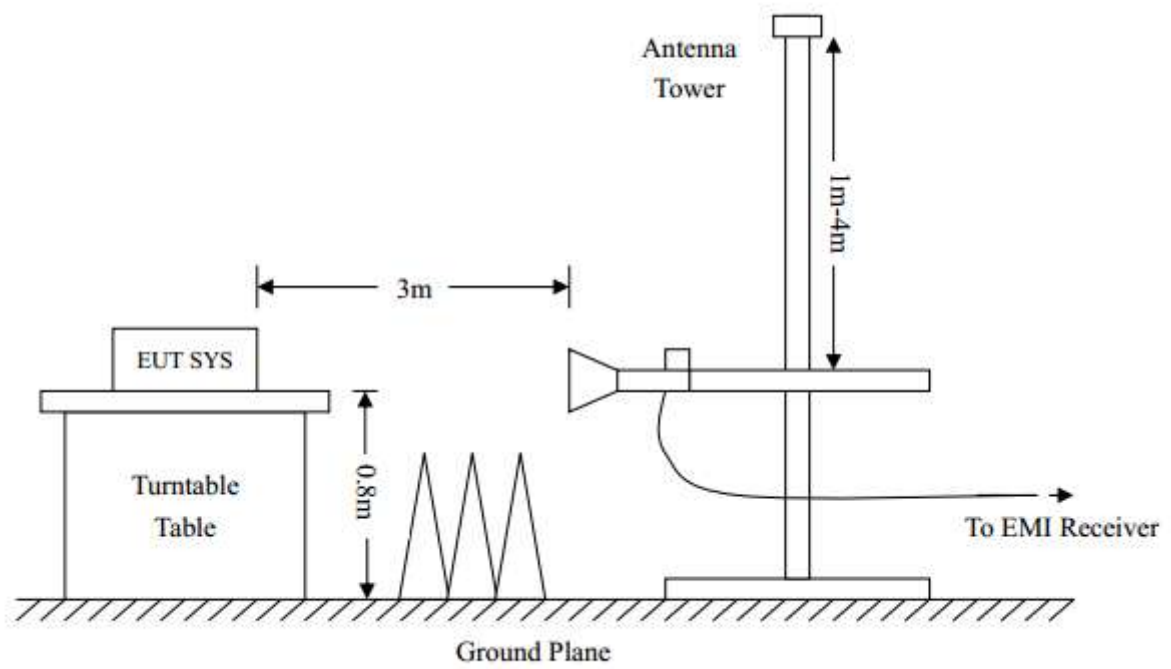


8.4. TEST RESULT
(Worst modulation: GFSK)
FOR BR/EDR BLUETOOTH

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

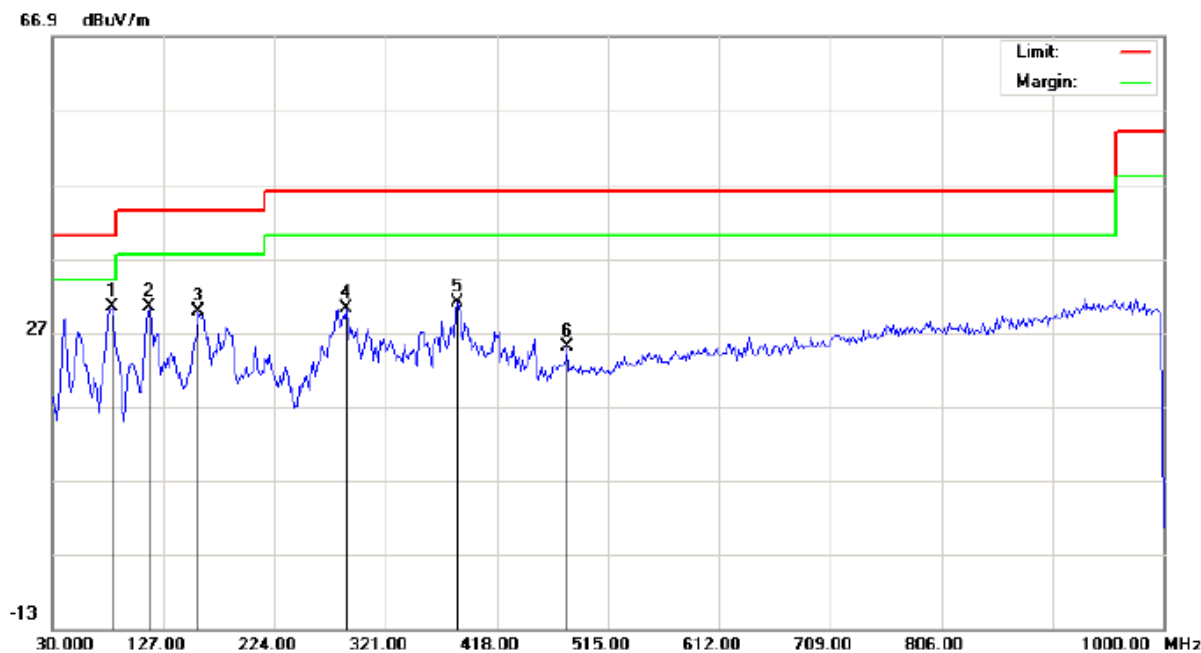

Site: site #1
Limit: FCC Class B 3M Radiation
EUT:Bluetooth Speaker
M/N:VA-SK001
Mode:Low Channel TX
Note:


Polarization: **Horizontal**
Power:
Distance: 3m

Temperature: 22.5
Humidity: 56.8 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	81.7333	20.69	9.73	30.42	40.00	-9.58	peak			
2		114.0667	18.93	11.45	30.38	43.50	-13.12	peak			
3		157.7167	14.46	15.32	29.78	43.50	-13.72	peak			
4		287.0500	15.15	15.02	30.17	46.00	-15.83	peak			
5		384.0500	12.12	18.96	31.08	46.00	-14.92	peak			
6		479.4333	4.10	20.91	25.01	46.00	-20.99	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

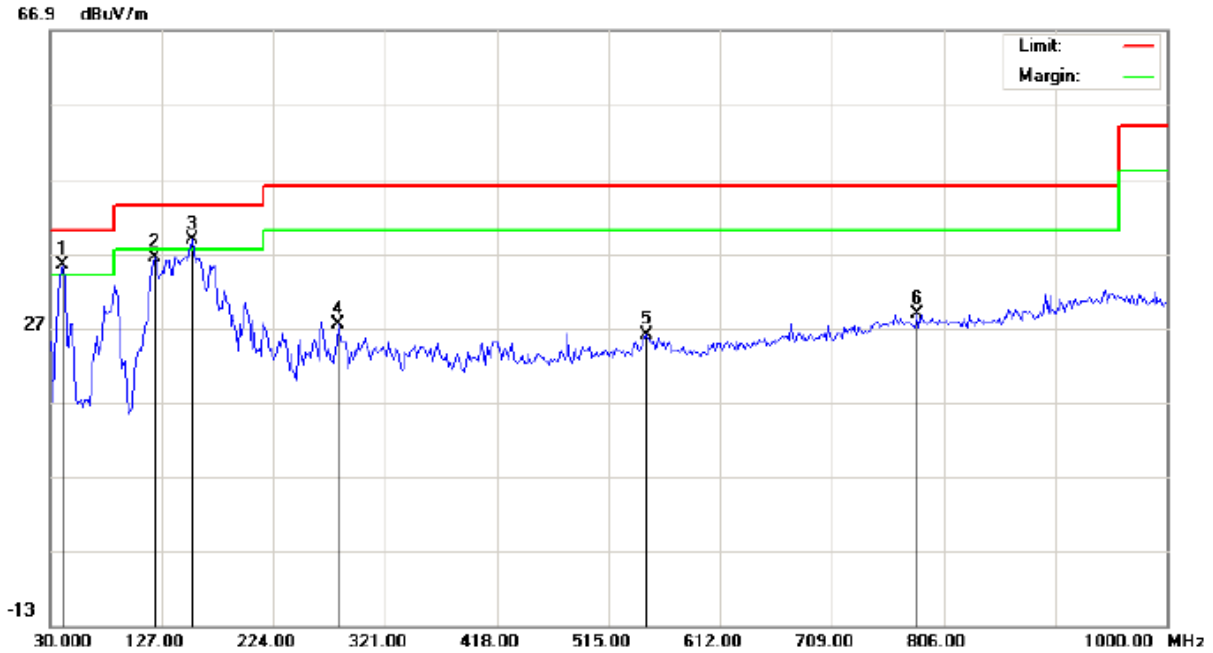

Site: site #1
Limit: FCC Class B 3M Radiation
EUT:Bluetooth Speaker
M/N:VA-SK001
Mode:Low Channel TX
Note:

Polarization: **Vertical**
Power:
Distance: 3m

Temperature: 22.5
Humidity: 56.8 %


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	41.3167	26.68	8.81	35.49	40.00	-4.51	peak			
2		120.5333	29.38	7.08	36.46	43.50	-7.04	peak			
3	!	152.8667	23.53	15.28	38.81	43.50	-4.69	peak			
4		280.5833	12.64	14.82	27.46	46.00	-18.54	peak			
5		547.3333	3.58	22.41	25.99	46.00	-20.01	peak			
6		783.3667	1.68	27.09	28.77	46.00	-17.23	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

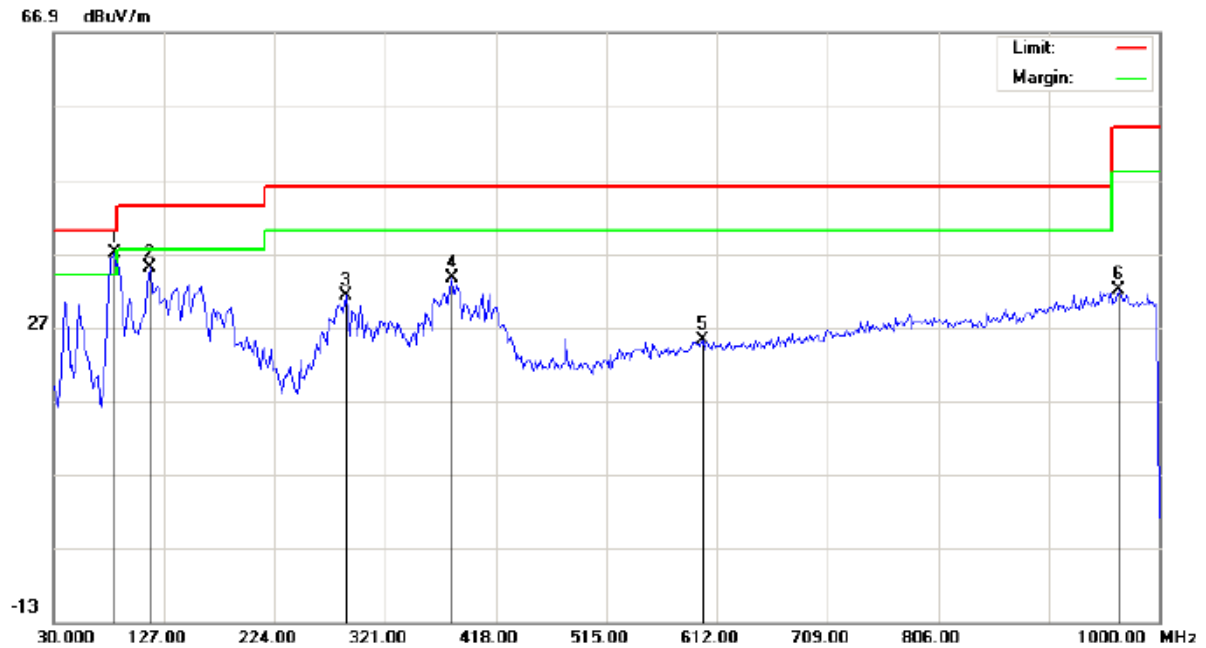

Site: site #1

Limit: FCC Class B 3M Radiation

EUT:Bluetooth Speaker

M/N:VA-SK001

Mode:Middle Channel TX

Note:

Polarization: *Horizontal*

Power:

Distance: 3m


Temperature: 22.5

Humidity: 56.8 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	83.3500	27.27	9.66	36.93	40.00	-3.07	peak			
2		114.0667	23.64	11.45	35.09	43.50	-8.41	peak			
3		287.0500	16.18	15.02	31.20	46.00	-14.80	peak			
4		379.2000	14.62	18.93	33.55	46.00	-12.45	peak			
5		599.0667	1.42	23.71	25.13	46.00	-20.87	peak			
6		964.4333	2.23	29.86	32.09	54.00	-21.91	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

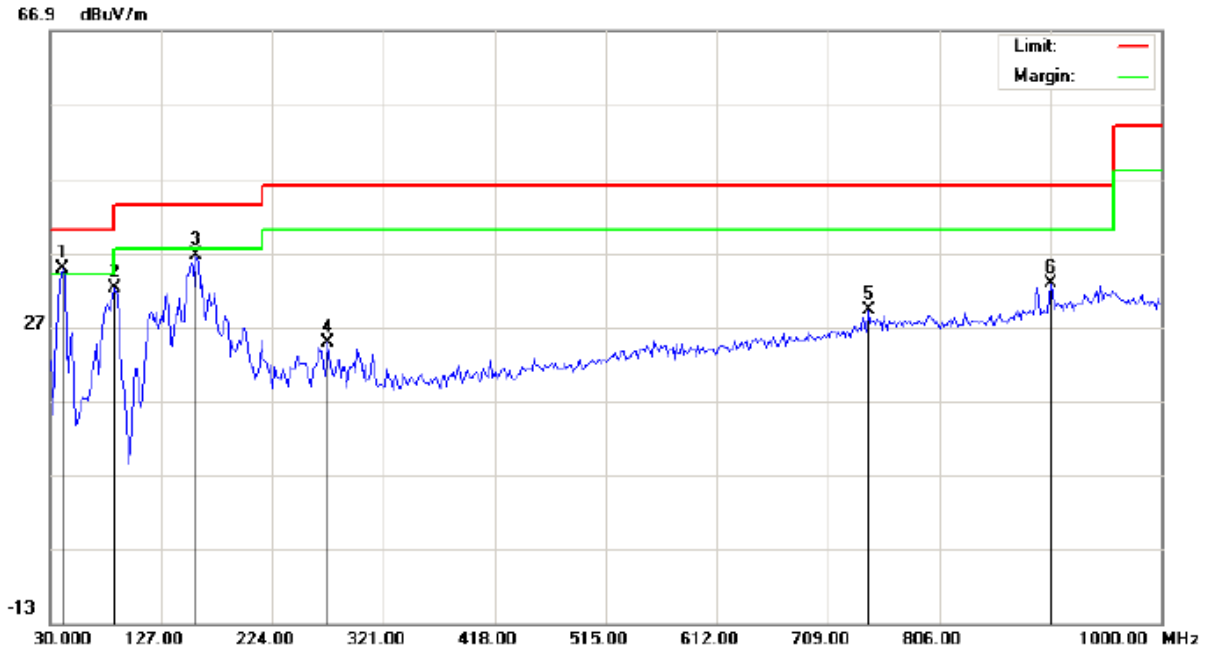

Site: site #1
Limit: FCC Class B 3M Radiation
EUT:Bluetooth Speaker
M/N:VA-SK001
Mode:Middle Channel TX
Note:

Polarization: **Vertical**
Power:
Distance: 3m

Temperature: 22.5
Humidity: 56.8 %


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	41.3167	26.02	8.81	34.83	40.00	-5.17	peak			
2		86.5832	28.09	4.16	32.25	40.00	-7.75	peak			
3		157.7167	21.20	15.32	36.52	43.50	-6.98	peak			
4		272.5000	10.31	14.58	24.89	46.00	-21.11	peak			
5		744.5667	2.79	26.47	29.26	46.00	-16.74	peak			
6		903.0000	4.17	28.69	32.86	46.00	-13.14	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

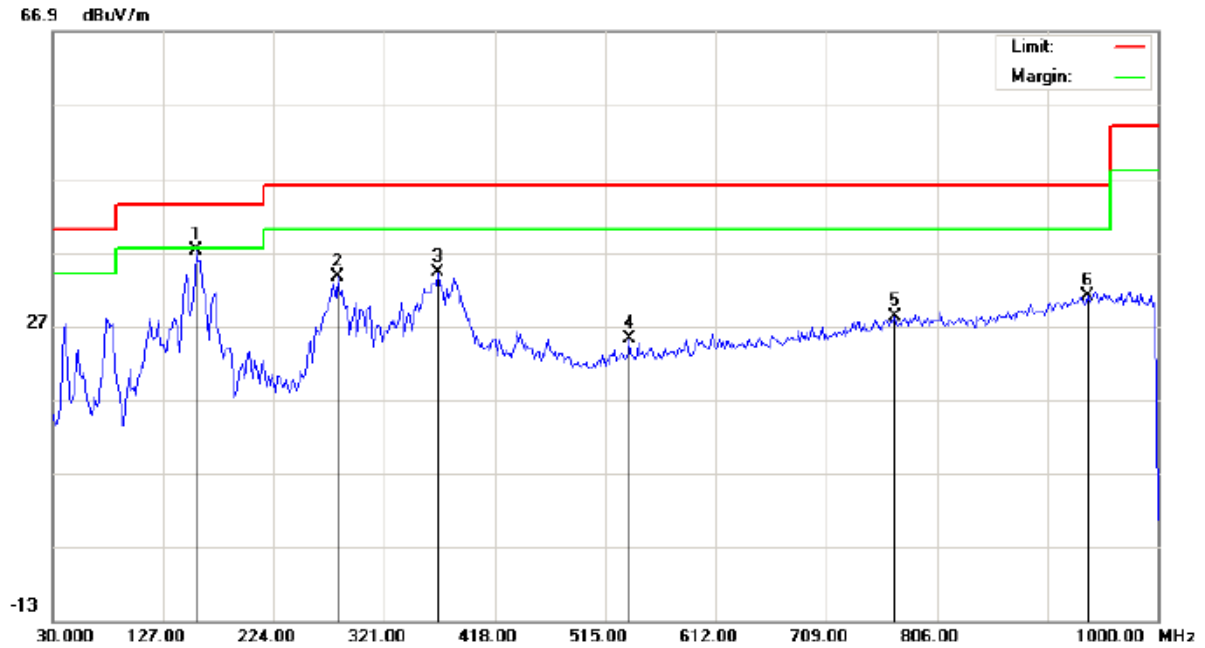

Site: site #1
Limit: FCC Class B 3M Radiation
EUT:Bluetooth Speaker
M/N:VA-SK001
Mode:High Channel TX
Note:


Polarization: *Horizontal*
Power:
Distance: 3m

Temperature: 22.5
Humidity: 56.8 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	156.1000	21.86	15.30	37.16	43.50	-6.34	peak			
2		280.5833	18.87	14.82	33.69	46.00	-12.31	peak			
3		367.8833	15.35	18.86	34.21	46.00	-11.79	peak			
4		536.0167	3.14	22.10	25.24	46.00	-20.76	peak			
5		768.8167	1.24	26.89	28.13	46.00	-17.87	peak			
6		938.5667	1.31	29.68	30.99	46.00	-15.01	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

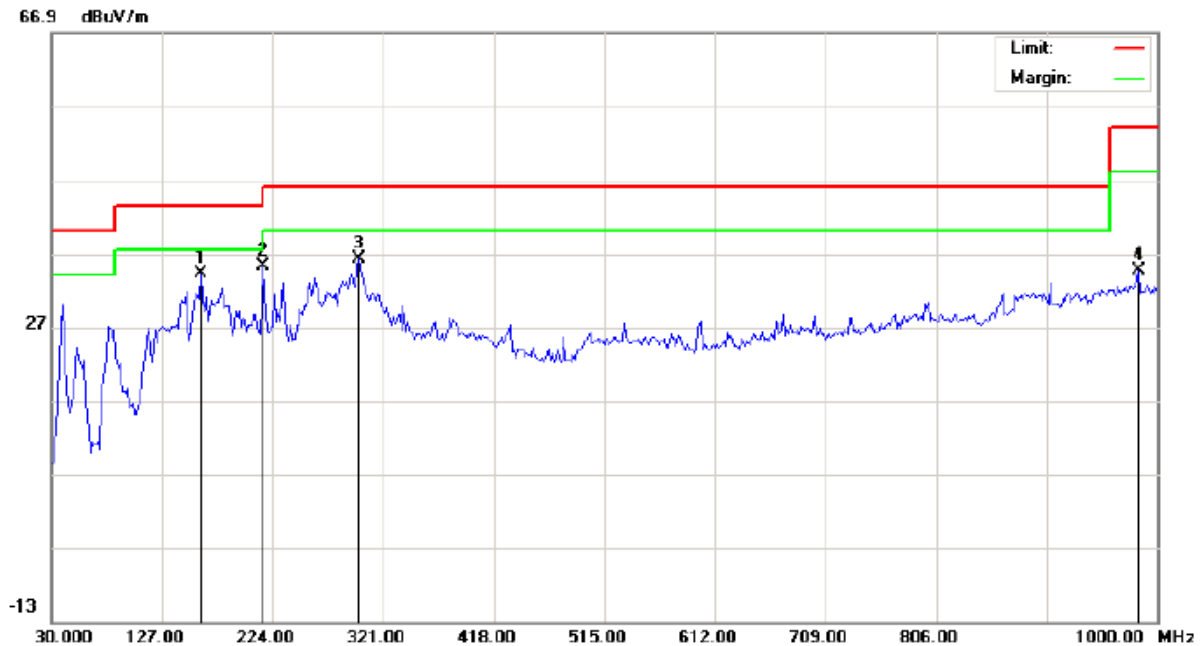

Site: site #1 Polarization: *Vertical* Temperature: 22.5
Limit: FCC Class B 3M Radiation Power: Humidity: 56.8 %
EUT:Bluetooth Speaker Distance: 3m
M/N:VA-SK001
Mode:High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		160.9500	19.01	15.27	34.28	43.50	-9.22	peak			
2	*	215.9167	24.71	10.56	35.27	43.50	-8.23	peak			
3		299.9833	20.72	15.41	36.13	46.00	-9.87	peak			
4		983.8333	4.99	29.68	34.67	54.00	-19.33	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.


FOR BLE

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

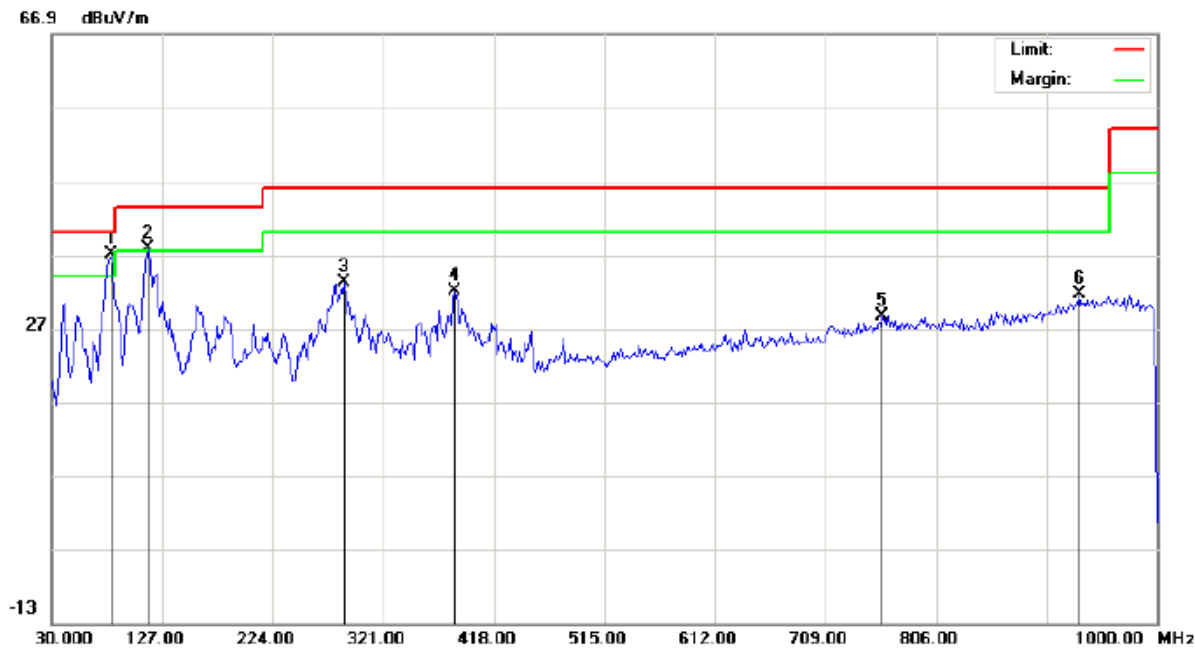

Site: site #1
Limit: FCC Class B 3M Radiation
EUT:Bluetooth Speaker
M/N:VA-SK001
Mode:Low Channel TX
Note:


Polarization: *Horizontal*
Power:
Distance: 3m

Temperature: 22.5
Humidity: 56.8 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	81.7333	27.19	9.73	36.92	40.00	-3.08	peak			
2	!	114.0667	26.43	11.45	37.88	43.50	-5.62	peak			
3		287.0500	18.15	15.02	33.17	46.00	-12.83	peak			
4		384.0500	13.12	18.96	32.08	46.00	-13.92	peak			
5		759.1167	1.82	26.76	28.58	46.00	-17.42	peak			
6		932.1000	2.04	29.50	31.54	46.00	-14.46	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

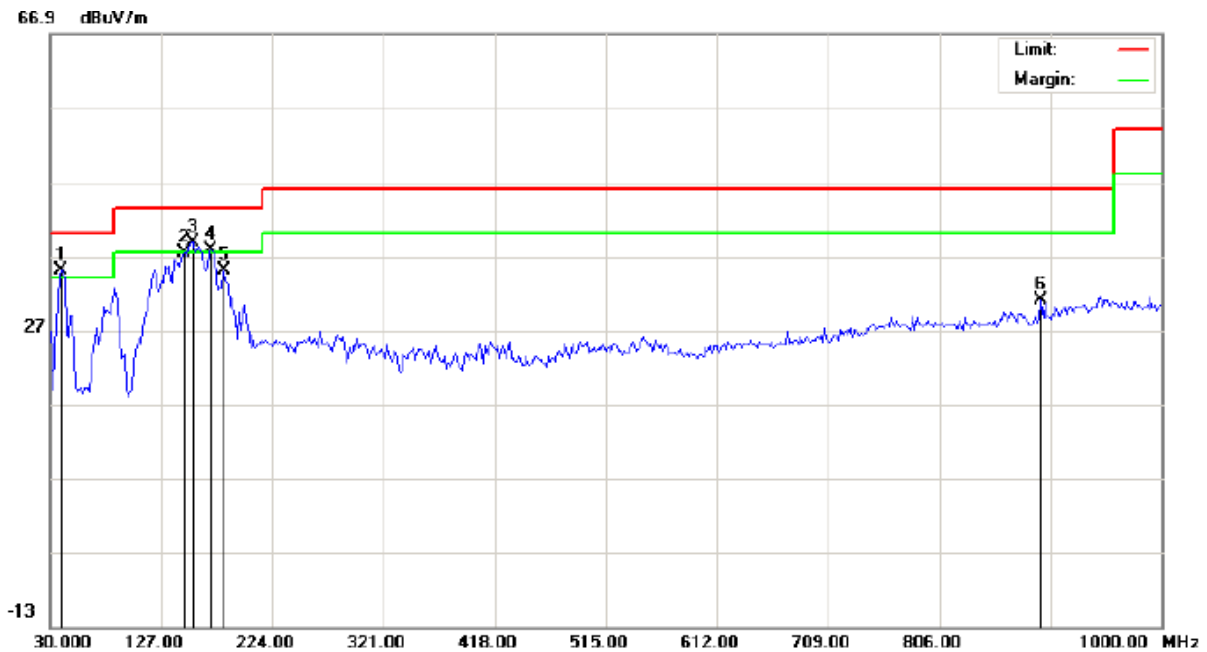

Site: site #1

Limit: FCC Class B 3M Radiation

EUT:Bluetooth Speaker

M/N:VA-SK001

Mode:Low Channel TX

Note:

Polarization: **Vertical**

Power:

Distance: 3m

Temperature: 22.5


Humidity: 56.8 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	!	39.7000	26.55	8.51	35.06	40.00	-4.94	peak			
2		146.4000	22.13	15.24	37.37	43.50	-6.13	peak			
3	*	154.4833	23.54	15.29	38.83	43.50	-4.67	peak			
4	!	170.6500	23.23	14.66	37.89	43.50	-5.61	peak			
5		181.9667	21.38	13.57	34.95	43.50	-8.55	peak			
6		894.9167	2.43	28.48	30.91	46.00	-15.09	peak			

RESULT: PASS**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

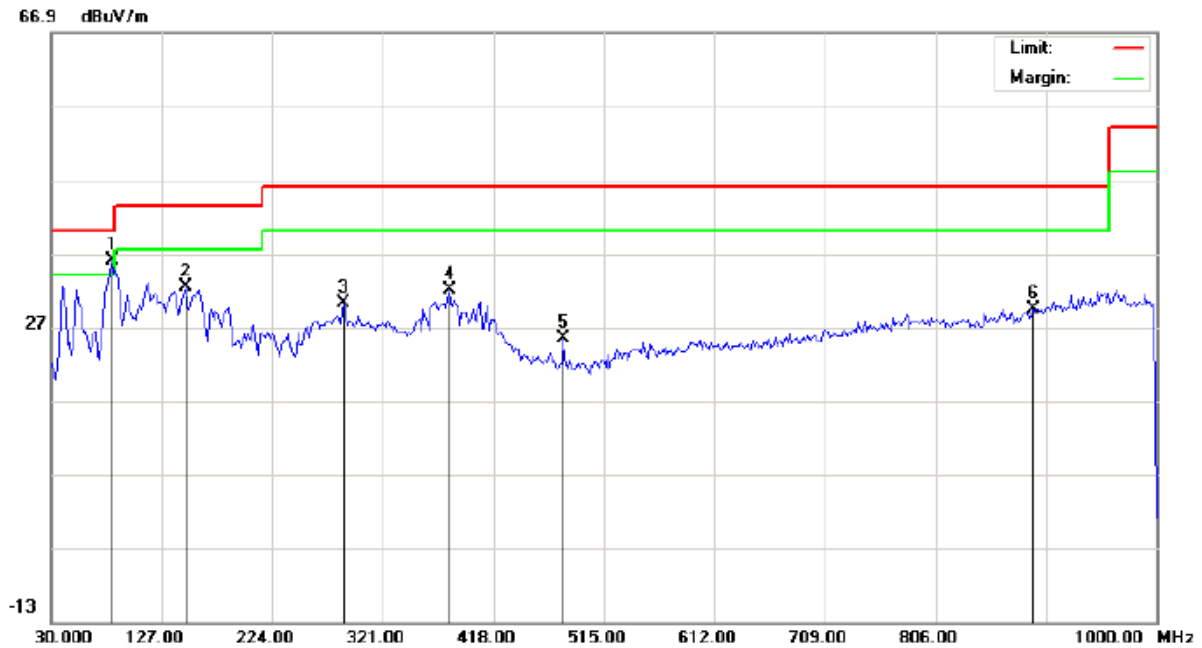

Site: site #1

Limit: FCC Class B 3M Radiation

EUT:Bluetooth Speaker

M/N:VA-SK001

Mode:Middle Channel TX

Note:

Polarization: *Horizontal*

Power:

Distance: 3m


Temperature: 22.5

Humidity: 56.8 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	83.3500	26.27	9.66	35.93	40.00	-4.07	peak			
2		148.0166	17.10	15.25	32.35	43.50	-11.15	peak			
3		287.0500	15.18	15.02	30.20	46.00	-15.80	peak			
4		379.2000	13.12	18.93	32.05	46.00	-13.95	peak			
5		479.4333	4.45	20.91	25.36	46.00	-20.64	peak			
6		891.6833	1.01	28.39	29.40	46.00	-16.60	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

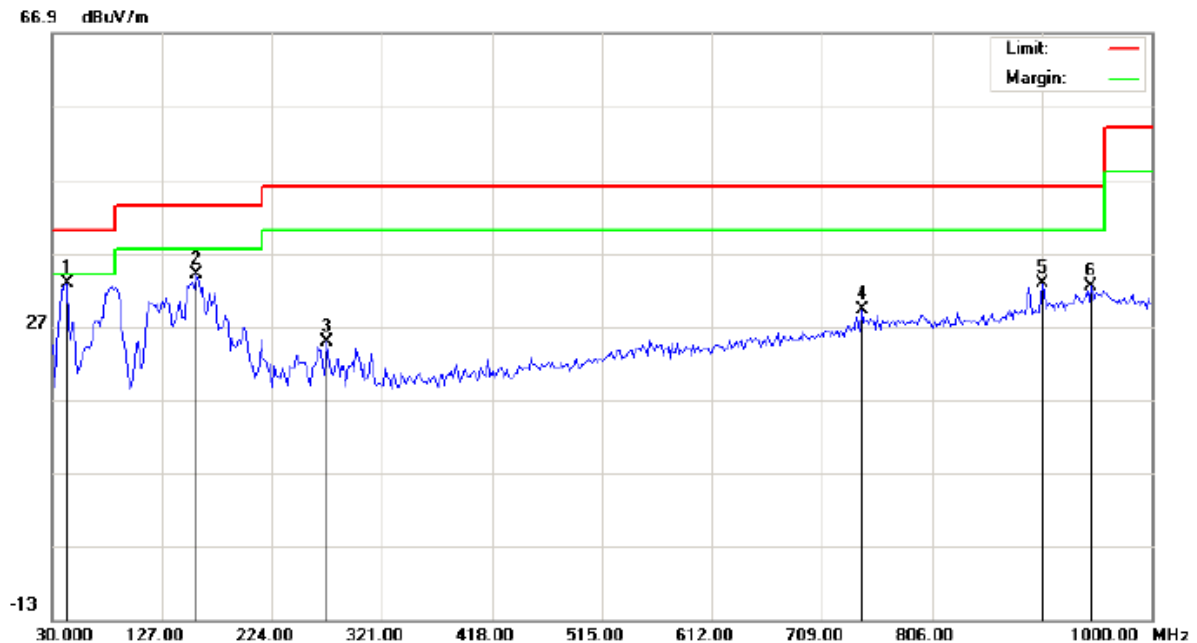

Site: site #1
Limit: FCC Class B 3M Radiation
EUT:Bluetooth Speaker
M/N:VA-SK001
Mode:Middle Channel TX
Note:

Polarization: **Vertical**
Power:
Distance: 3m

Temperature: 22.5
Humidity: 56.8 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	42.9333	24.14	8.71	32.85	40.00	-7.15	peak			
2		157.7167	18.70	15.32	34.02	43.50	-9.48	peak			
3		272.5000	10.31	14.58	24.89	46.00	-21.11	peak			
4		744.5667	2.79	26.47	29.26	46.00	-16.74	peak			
5		903.0000	4.17	28.69	32.86	46.00	-13.14	peak			
6		946.6500	2.45	29.91	32.36	46.00	-13.64	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL



Site: site #1

Limit: FCC Class B 3M Radiation

EUT:Bluetooth Speaker

M/N:VA-SK001

Mode:High Channel TX

Note:

Polarization: *Horizontal*

Power:

Distance: 3m


Temperature: 22.5

Humidity: 56.8 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		78.5000	21.93	9.87	31.80	40.00	-8.20	peak			
2	*	146.4000	23.06	15.24	38.30	43.50	-5.20	peak			
3		280.5833	21.37	14.82	36.19	46.00	-9.81	peak			
4		367.8833	17.35	18.86	36.21	46.00	-9.79	peak			
5		608.7667	2.51	23.75	26.26	46.00	-19.74	peak			
6		998.3833	5.55	29.54	35.09	54.00	-18.91	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

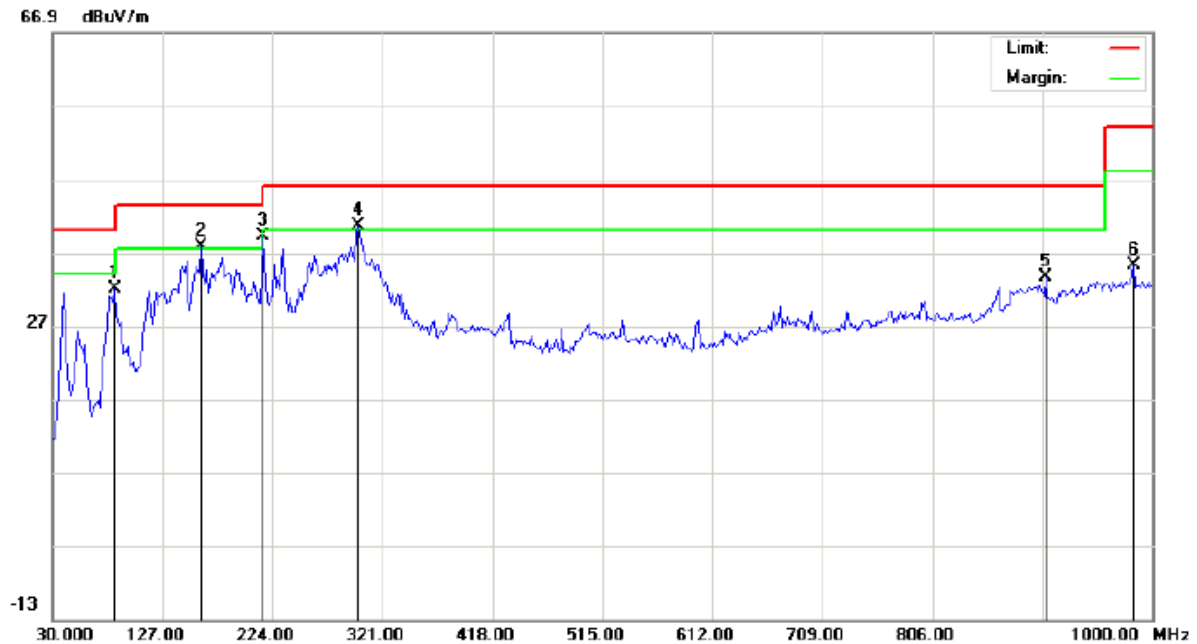

Site: site #1
Limit: FCC Class B 3M Radiation
EUT:Bluetooth Speaker
M/N:VA-SK001
Mode:High Channel TX
Note:

Polarization: *Vertical*
Power:
Distance: 3m

Temperature: 22.5
Humidity: 56.8 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		84.9667	28.47	3.58	32.05	40.00	-7.95	peak			
2	!	160.9500	22.51	15.27	37.78	43.50	-5.72	peak			
3	*	215.9167	28.71	10.56	39.27	43.50	-4.23	peak			
4	!	299.9833	25.22	15.41	40.63	46.00	-5.37	peak			
5		906.2333	4.73	28.78	33.51	46.00	-12.49	peak			
6		983.8333	5.49	29.68	35.17	54.00	-18.83	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION ABOVE 1GHZ FOR BR/EDR BLUETOOTH

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

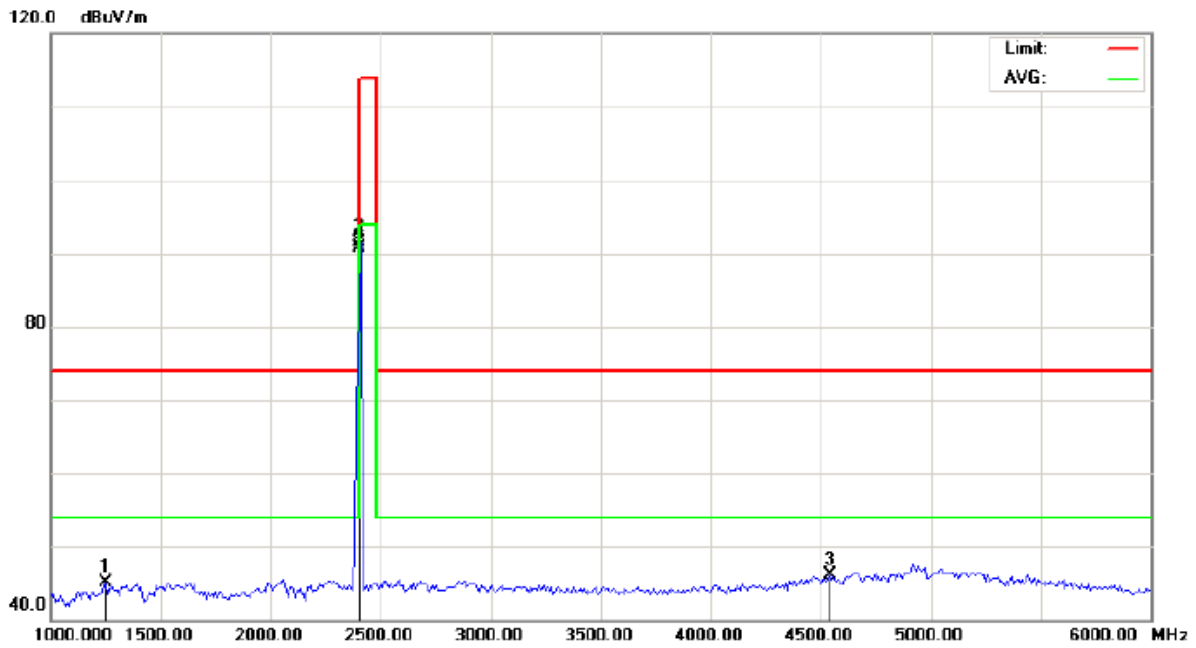


Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)-	Power:	Humidity: 60 %
EUT:Bluetooth Speaker	Distance: 3m	
M/N:VA-SK001		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1250.000	60.53	-15.48	45.05	74.00	-28.95	peak			
2		2402.000	101.23	-9.68	91.55	114.00	-22.45	peak			
3		4541.667	49.10	-3.00	46.10	74.00	-27.90	peak			
4	*	2402.000	100.33	-9.68	90.65	94.00	-3.35	AVG		360	

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

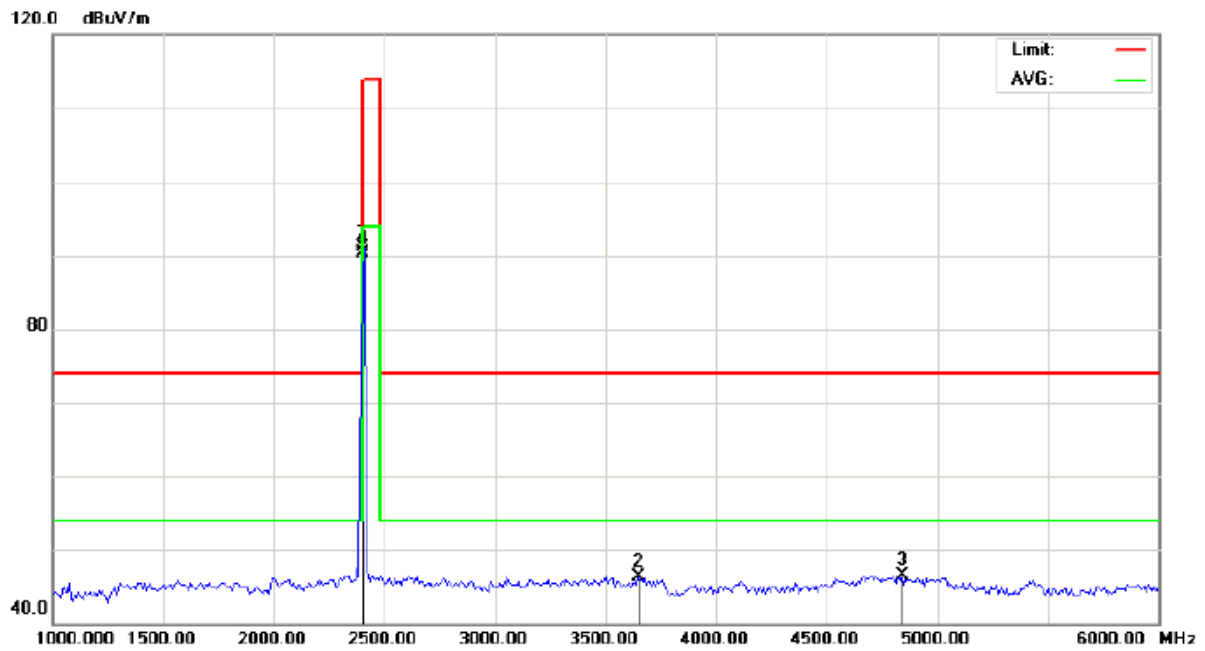

Site: site #1 Polarization: *Vertical* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Bluetooth Speaker Distance: 3m
M/N:VA-SK001
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	100.73	-9.68	91.05	114.00	-22.95	peak			
2		3650.000	53.28	-6.97	46.31	74.00	-27.69	peak			
3		4841.667	48.62	-2.21	46.41	74.00	-27.59	peak			
4	*	2402.000	99.91	-9.68	90.23	94.00	-3.77	AVG		360	


RESULT: PASS

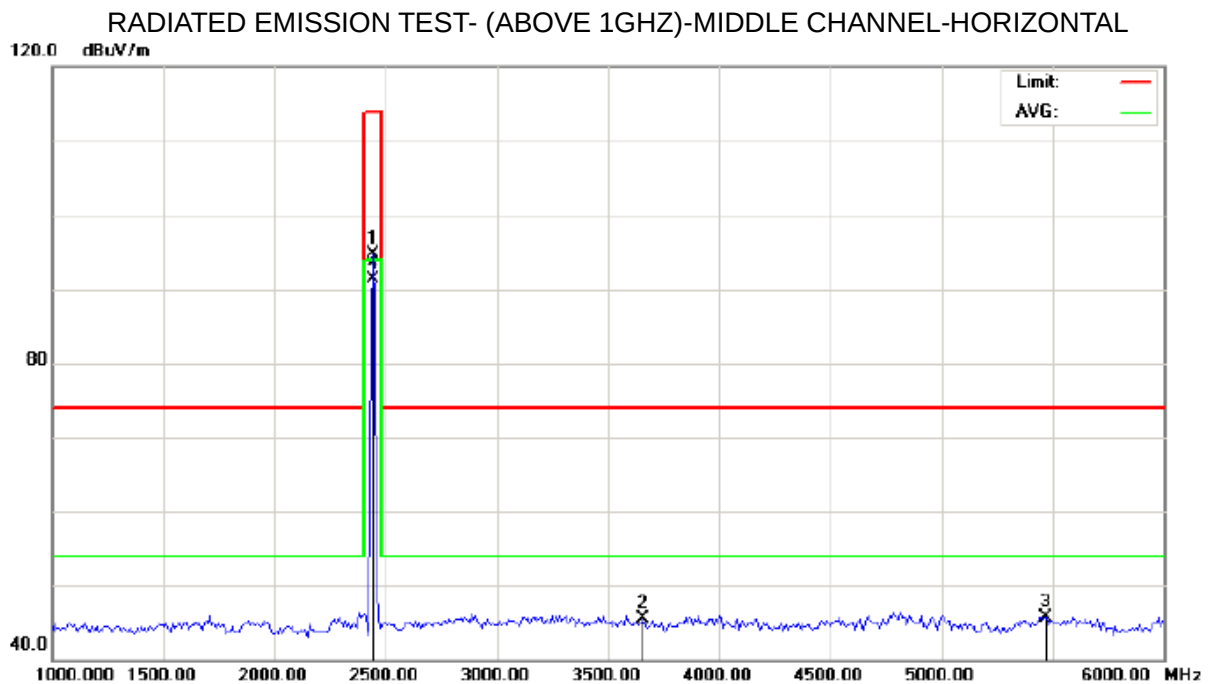

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)-	Power:	Humidity: 60 %
EUT:Bluetooth Speaker	Distance: 3m	
M/N:VA-SK001		
Mode: Middle Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	104.29	-9.63	94.66	114.00	-19.34	peak			
2		3658.333	52.40	-6.91	45.49	74.00	-28.51	peak			
3		5466.667	47.54	-1.81	45.73	74.00	-28.27	peak			
4	*	2441.000	100.97	-9.63	91.34	94.00	-2.66	AVG		189	

RESULT: PASS

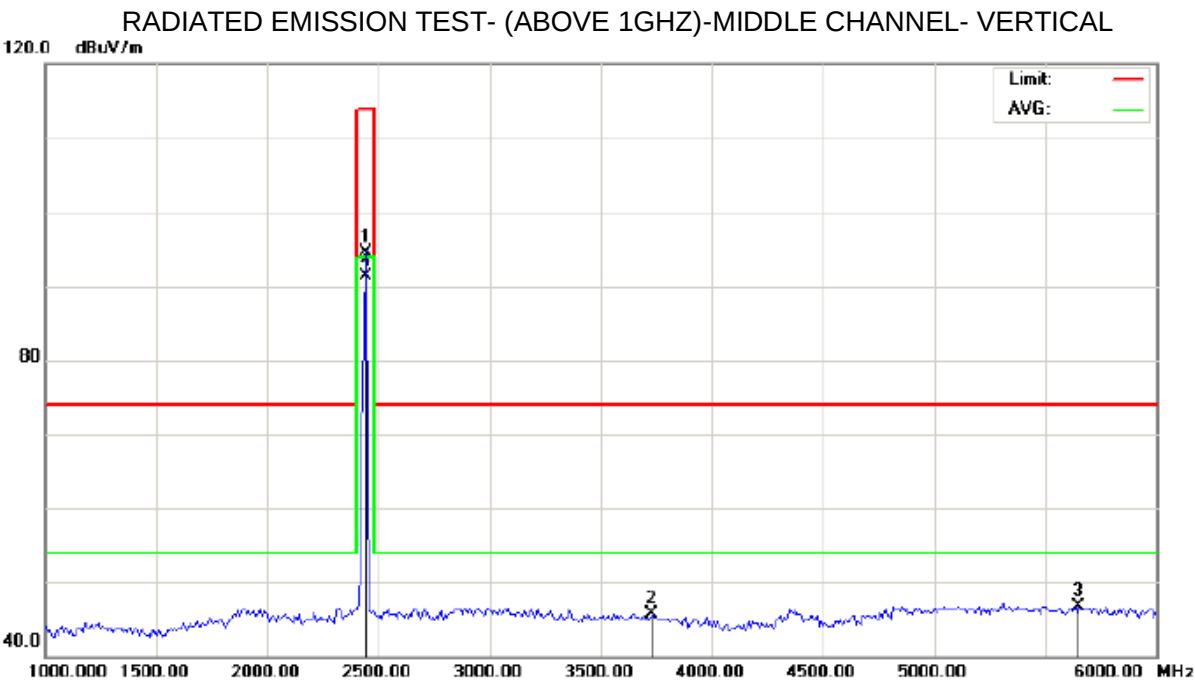


Site: site #1	Polarization: Vertical	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)-	Power:	Humidity: 60 %
EUT:Bluetooth Speaker	Distance: 3m	
M/N:VA-SK001		
Mode: Middle Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	104.23	-9.63	94.60	114.00	-19.40	peak			
2		3733.333	52.23	-6.45	45.78	74.00	-28.22	peak			
3		5650.000	48.40	-1.74	46.66	74.00	-27.34	peak			
4	*	2441.000	100.86	-9.63	91.23	94.00	-2.77	AVG		180	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

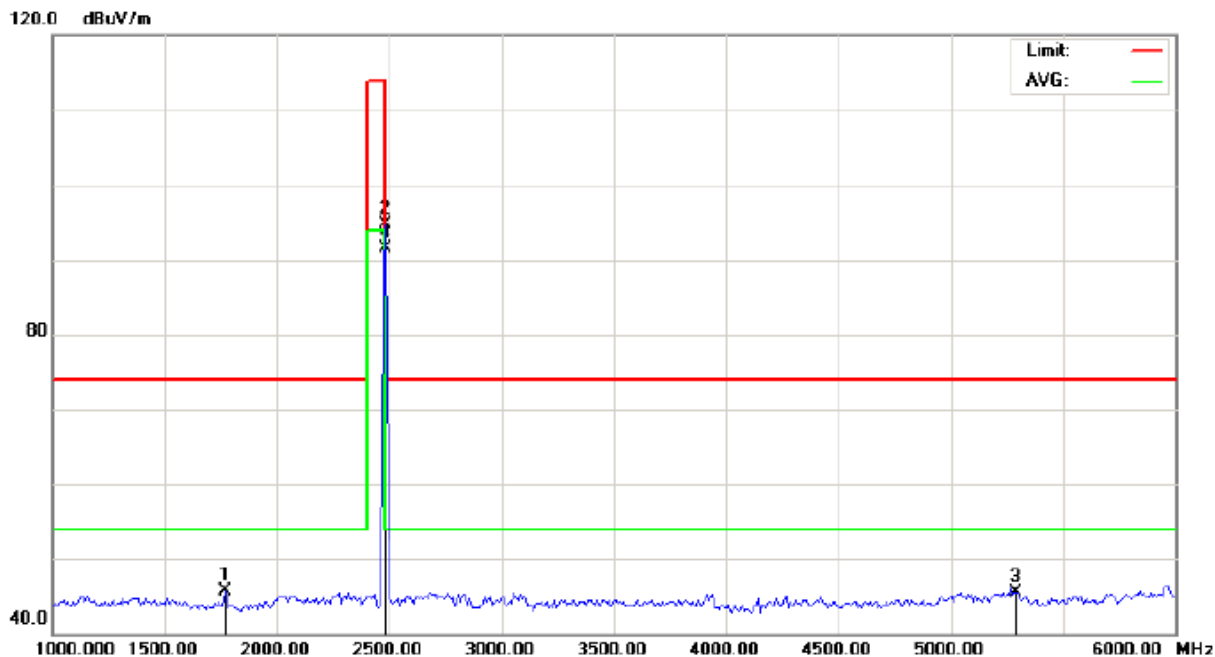


Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Bluetooth Speaker Distance: 3m
M/N:VA-SK001
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1766.667	58.20	-12.57	45.63	74.00	-28.37	peak			
2		2480.000	104.37	-9.59	94.78	114.00	-19.22	peak			
3		5291.667	47.40	-1.81	45.59	74.00	-28.41	peak			
4	*	2480.000	101.15	-9.59	91.56	94.00	-2.44	AVG		326	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

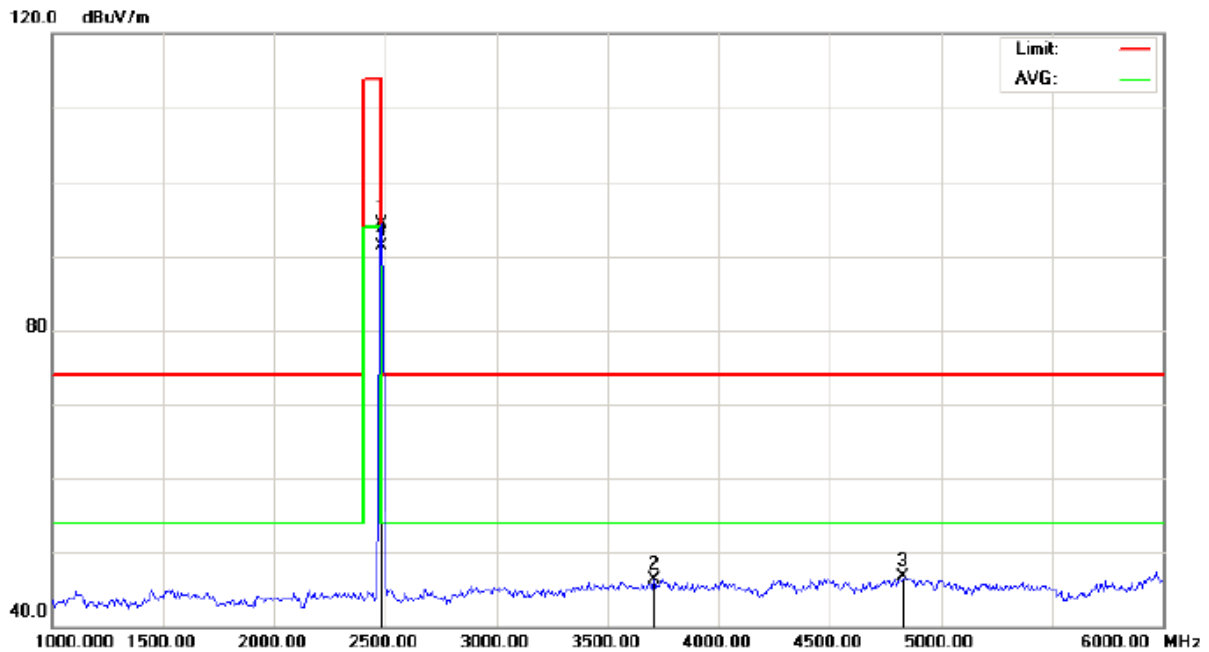

Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)-

Power:

Humidity: 60 %

EUT:Bluetooth Speaker

Distance: 3m

M/N:VA-SK001

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	103.87	-9.59	94.28	114.00	-19.72	peak			
2		3708.333	52.89	-6.61	46.28	74.00	-27.72	peak			
3		4833.333	48.94	-2.24	46.70	74.00	-27.30	peak			
4	*	2480.000	100.89	-9.59	91.30	94.00	-2.70	AVG		356	

RESULT: PASS**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

Peak value


Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	101.23	-9.68	91.55	114	-22.45	Horizontal
2402	100.73	-9.68	91.05	114	-22.95	Vertical
2441	104.29	-9.63	94.66	114	-19.34	Horizontal
2441	104.23	-9.63	94.60	114	-19.40	Vertical
2480	104.37	-9.59	94.78	114	-19.22	Horizontal
2480	103.87	-9.59	94.28	114	-19.72	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	100.33	-9.68	90.65	94	-3.35	Horizontal
2402	99.91	-9.68	90.23	94	-3.77	Vertical
2441	100.97	-9.63	91.34	94	-2.66	Horizontal
2441	100.86	-9.63	91.23	94	-2.77	Vertical
2480	101.15	-9.59	91.56	94	-2.44	Horizontal
2480	100.89	-9.59	91.30	94	-2.70	Vertical

FOR BLE

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

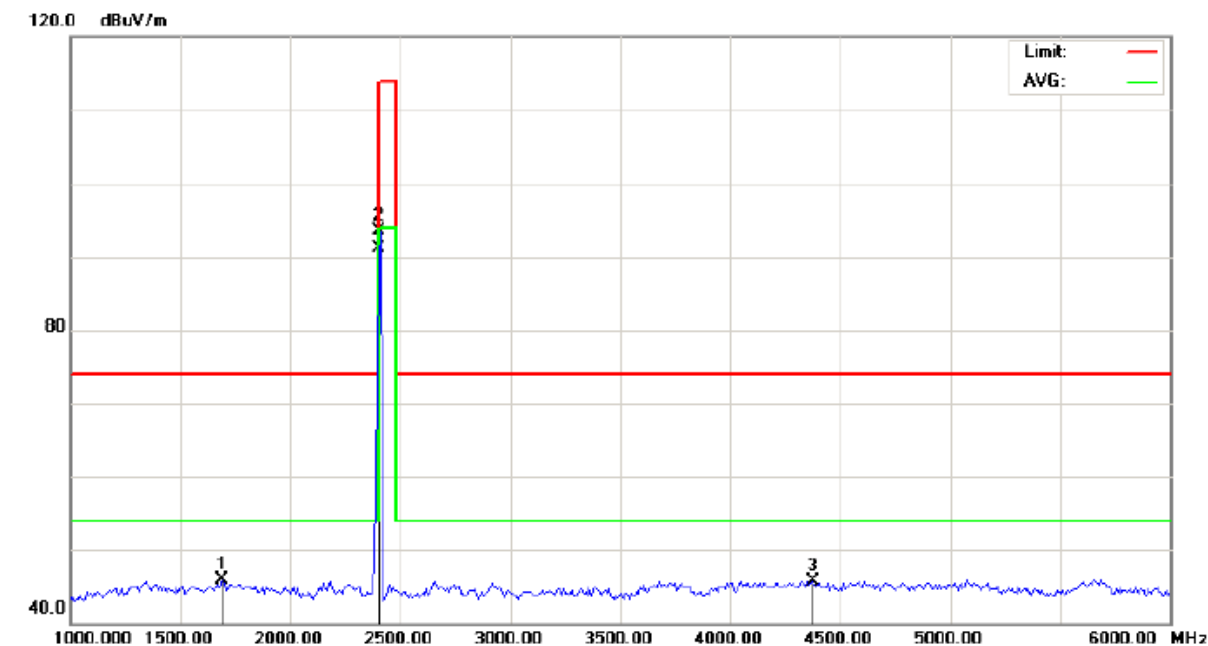


Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Bluetooth Speaker Distance: 3m
M/N:VA-SK001
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1691.667	59.20	-13.36	45.84	74.00	-28.16	peak			
2		2402.000	103.23	-9.68	93.55	114.00	-20.45	peak			
3		4375.000	49.27	-3.53	45.74	74.00	-28.26	peak			
4	*	2402.000	100.70	-9.68	91.02	94.00	-2.98	AVG		180	

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

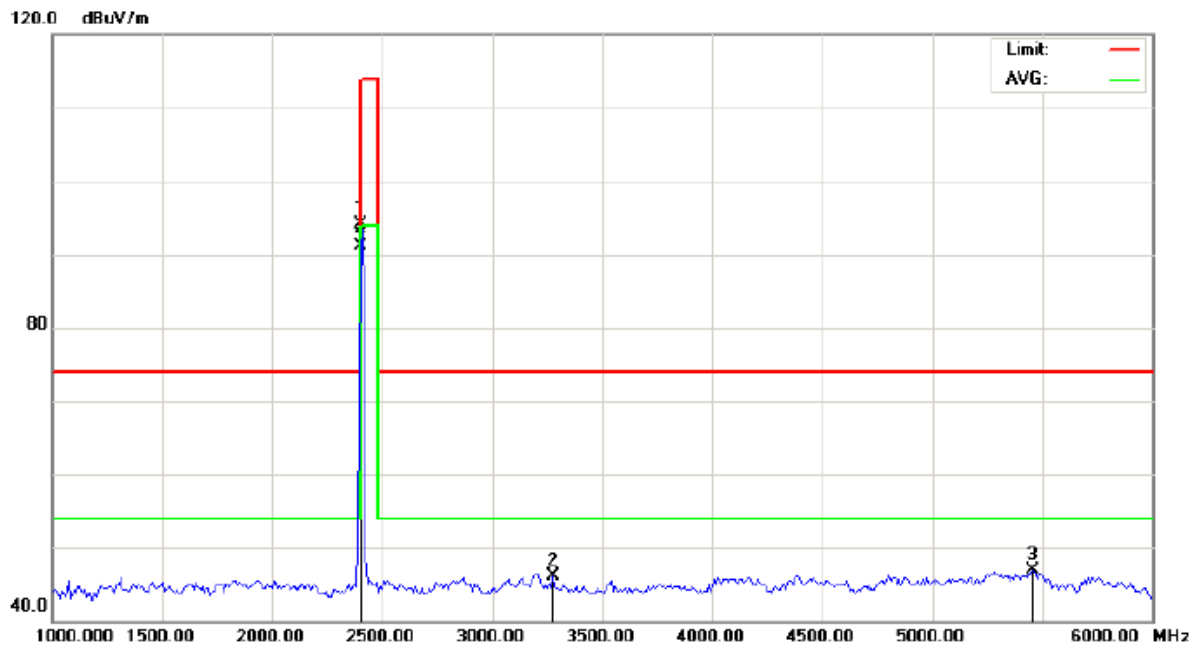

Site: site #1 Polarization: *Vertical* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Bluetooth Speaker Distance: 3m
M/N:VA-SK001
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	103.73	-9.68	94.05	114.00	-19.95	peak			
2		3275.000	54.15	-8.10	46.05	74.00	-27.95	peak			
3		5458.333	48.63	-1.81	46.82	74.00	-27.18	peak			
4	*	2402.000	100.81	-9.68	91.13	94.00	-2.87	AVG		176	

RESULT: PASS

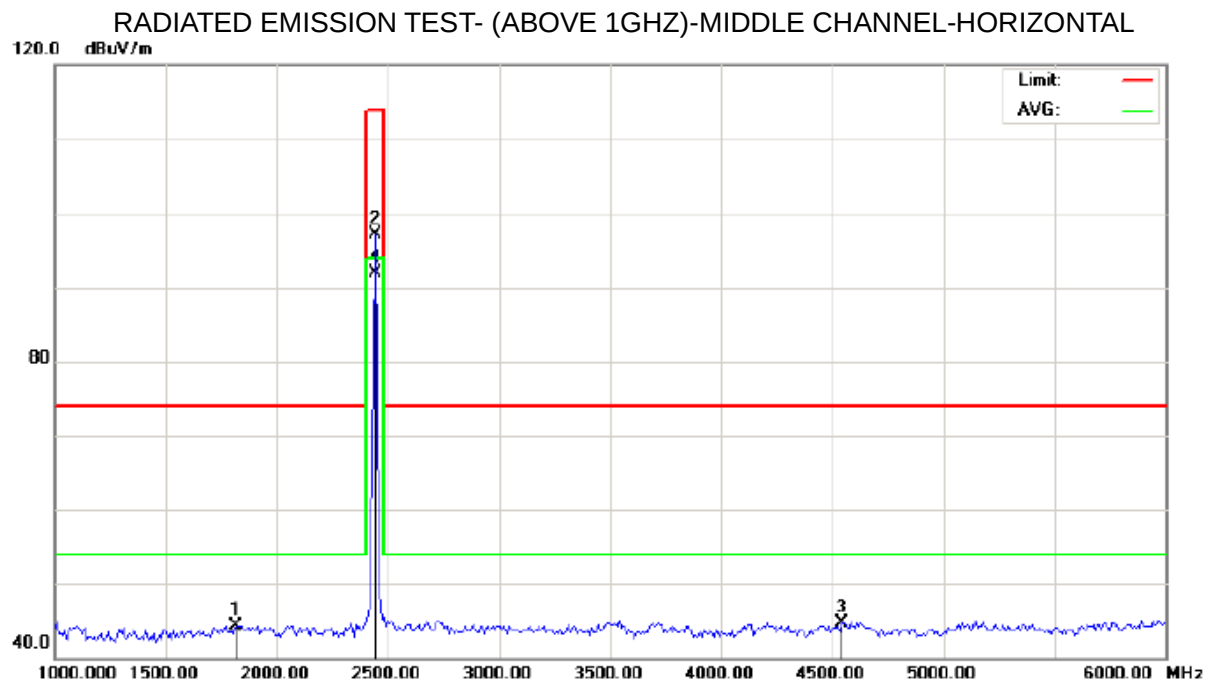


Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)-	Power:	Humidity: 60 %
EUT:Bluetooth Speaker	Distance: 3m	
M/N:VA-SK001		
Mode: Middle Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1816.667	56.34	-12.05	44.29	74.00	-29.71	peak			
2		2440.000	106.79	-9.63	97.16	114.00	-16.84	peak			
3		4541.667	47.74	-3.00	44.74	74.00	-29.26	peak			
4	*	2440.000	101.45	-9.63	91.82	94.00	-2.18	AVG		346	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

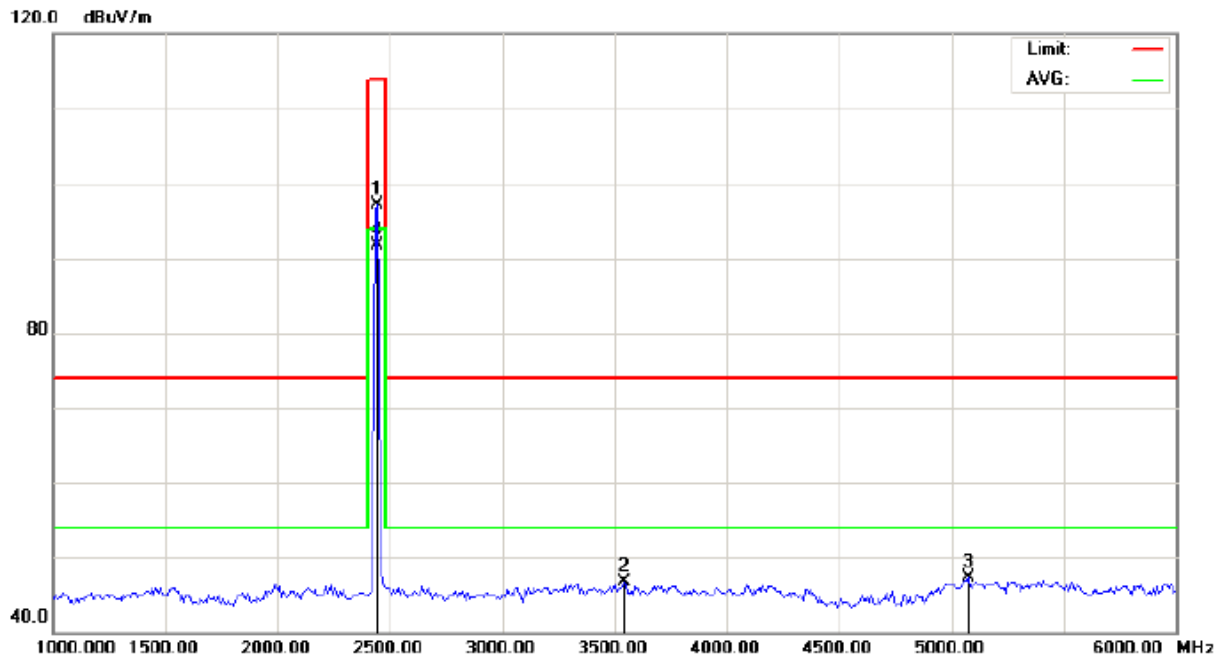


Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Bluetooth Speaker Distance: 3m
M/N:VA-SK001
Mode: Middle Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2440.000	106.73	-9.63	97.10	114.00	-16.90	peak			
2		3541.667	54.31	-7.63	46.68	74.00	-27.32	peak			
3		5075.000	49.04	-1.80	47.24	74.00	-26.76	peak			
4	*	2440.000	101.39	-9.63	91.76	94.00	-2.24	AVG		360	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

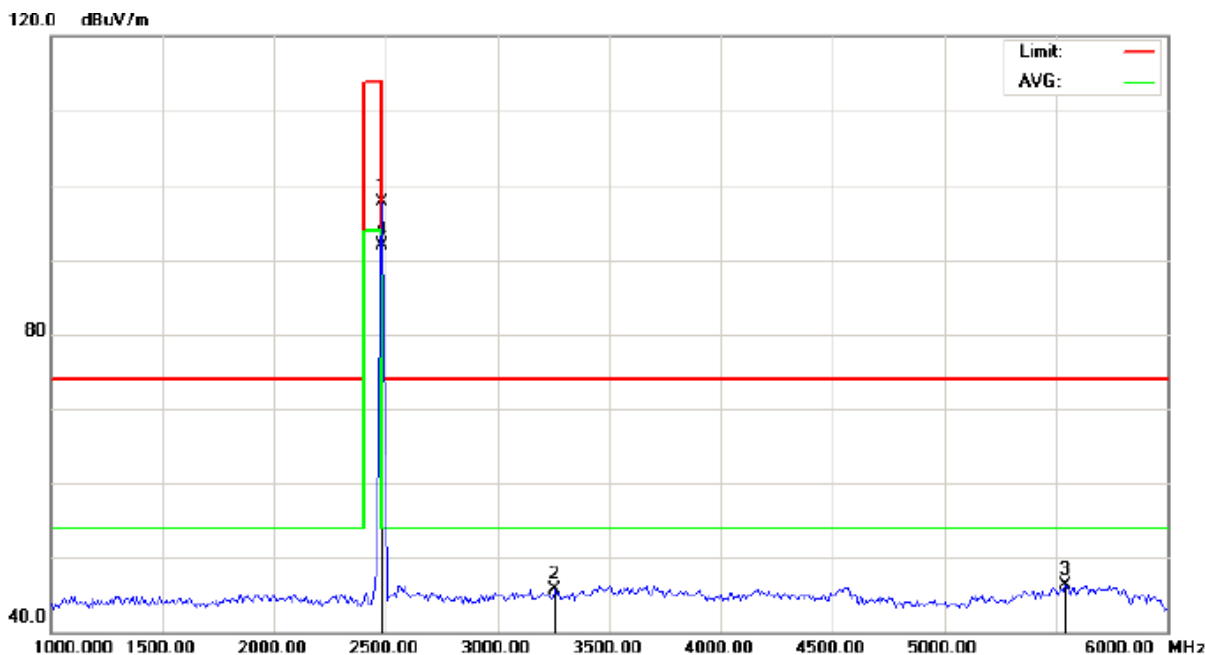

Site: site #1
Limit: FCC Class B 3M Radiation above 1GHZ(PK)-
EUT:Bluetooth Speaker
M/N:VA-SK001
Mode: High Channel TX
Note:


Polarization: *Horizontal*
Power:
Distance: 3m

Temperature: 26
Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	107.37	-9.59	97.78	114.00	-16.22	peak			
2		3258.333	53.90	-8.12	45.78	74.00	-28.22	peak			
3		5541.667	48.02	-1.79	46.23	74.00	-27.77	peak			
4	*	2480.000	101.47	-9.59	91.88	94.00	-2.12	AVG		156	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

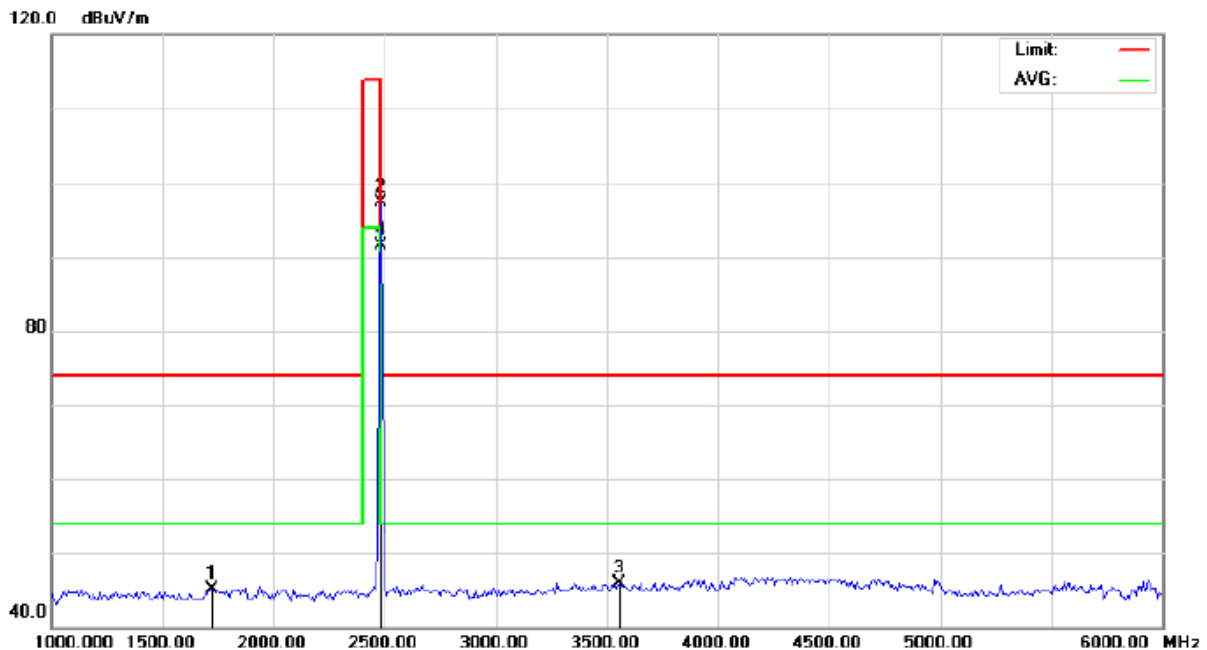

Site: site #1

Polarization: *Vertical*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)-

Power:

Humidity: 60 %

EUT:Bluetooth Speaker

Distance: 3m

M/N:VA-SK001

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1725.000	58.07	-13.01	45.06	74.00	-28.94	peak			
2		2480.000	106.87	-9.59	97.28	114.00	-16.72	peak			
3		3558.333	53.43	-7.53	45.90	74.00	-28.10	peak			
4	*	2480.000	101.01	-9.59	91.42	94.00	-2.58	AVG		180	

RESULT: PASS**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	103.23	-9.68	93.55	114	-20.45	Horizontal
2402	103.73	-9.68	94.05	114	-19.95	Vertical
2440	106.79	-9.63	97.16	114	-16.84	Horizontal
2440	106.73	-9.63	97.10	114	-16.90	Vertical
2480	107.37	-9.59	97.78	114	-16.22	Horizontal
2480	106.87	-9.59	97.28	114	-16.72	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	100.70	-9.68	91.02	94	-2.98	Horizontal
2402	-9.68	-9.68	91.13	94	-2.87	Vertical
2440	101.45	-9.63	91.82	94	-2.18	Horizontal
2440	101.39	-9.63	91.76	94	-2.24	Vertical
2480	101.47	-9.59	91.88	94	-2.12	Horizontal
2480	101.01	-9.59	91.42	94	-2.58	Vertical

9. BAND EDGE EMISSION

9.1. MEASUREMENT PROCEDURE

1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.


2Max hold the trace of the setp 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=VBW=1.5MHz / Sweep=AUTO


(b) AVERAGE: RBW=1.5MHz ; VBW=1/on time(1KHz) / Sweep=AUTO

9.2 TEST SETUP

RADIATED EMISSION TEST SETUP

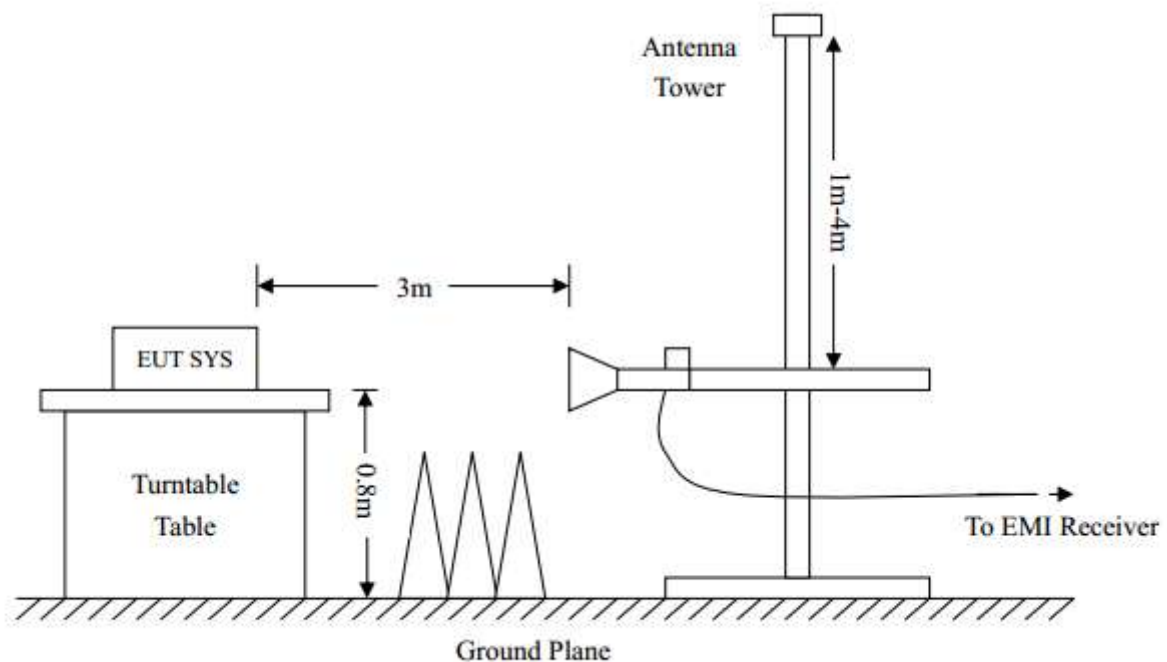


CONDUCTED TEST SETUP

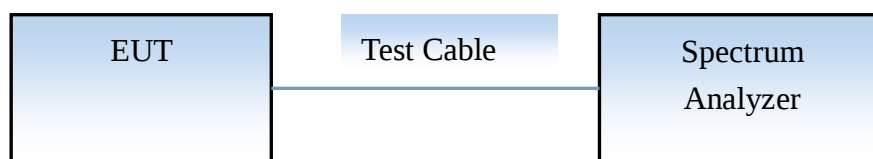

9.3 RADIATED TEST RESULT
(Worst modulation: GFSK)
FOR BR/EDR BLEUTOOTH


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

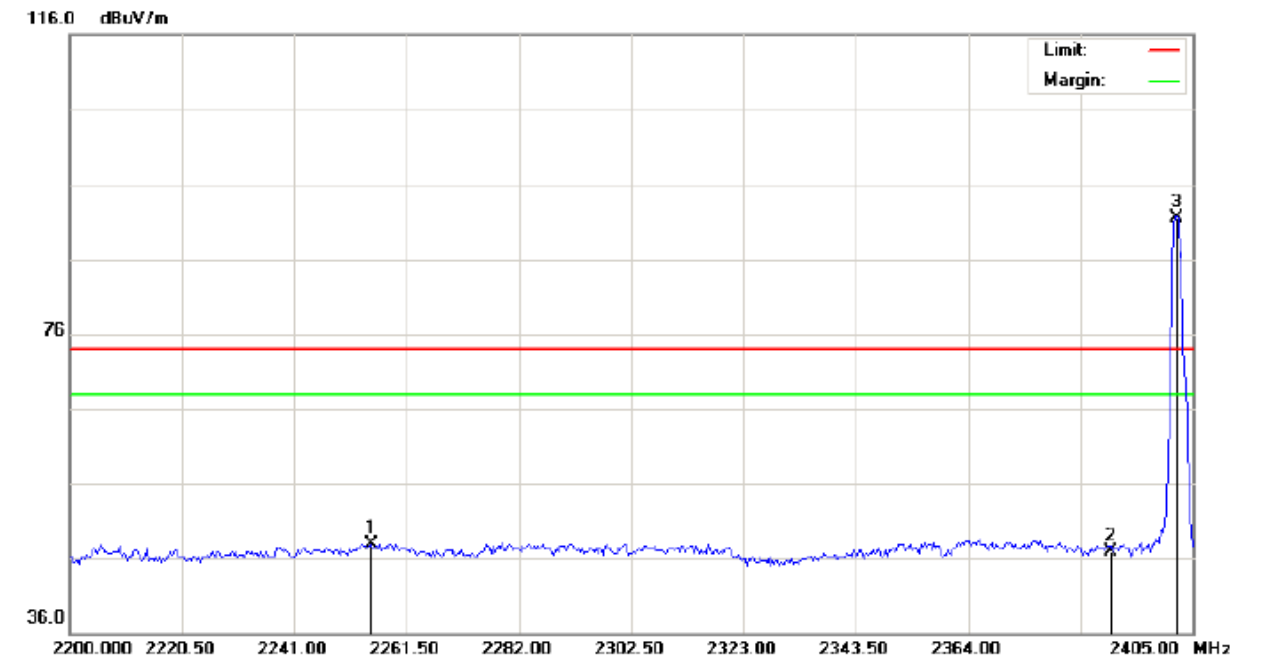

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)	Power:	Humidity: 60 %
EUT:Bluetooth Speaker	Distance:	
M/N:VA-SK001		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2255.008	37.79	10.16	47.95	74.00	-26.05	peak			
2		2390.000	36.50	10.31	46.81	74.00	-27.19	peak			
3	*	2402.000	81.22	10.32	91.54	74.00	17.54	peak			

TEST PLOT OF BAND EDGE FOR LOW CHANNEL –Vertical

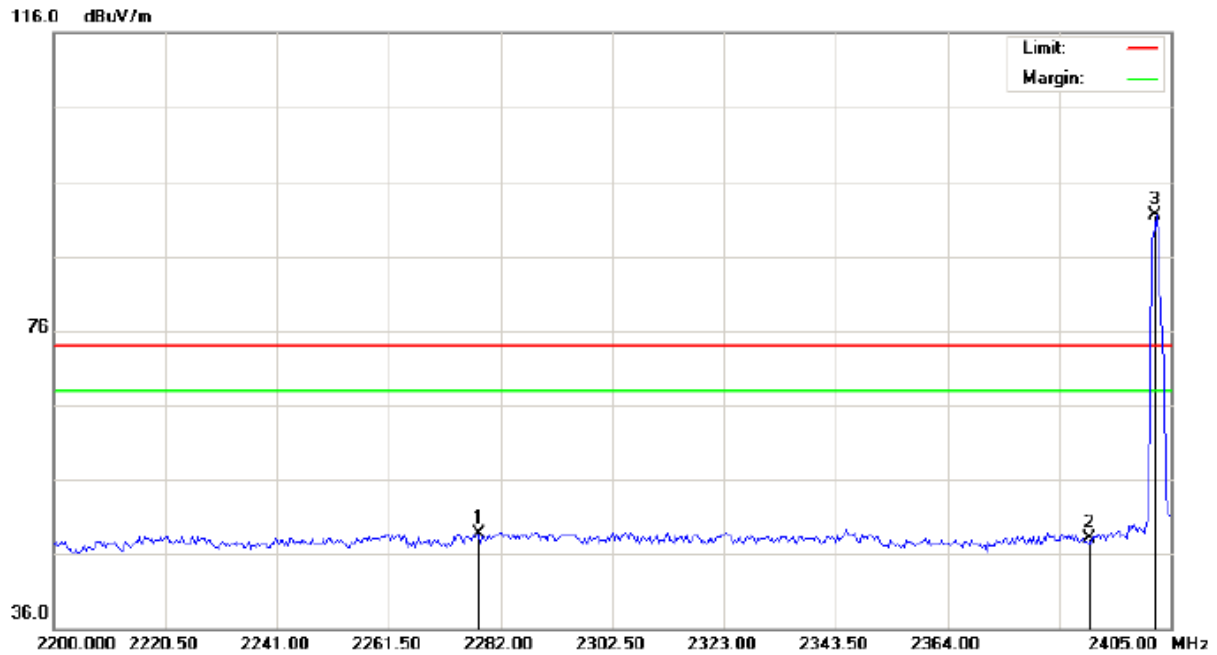

Site: site #1

Polarization: *Vertical*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT:Bluetooth Speaker

Distance:


M/N:VA-SK001

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2277.900	38.57	10.19	48.76	74.00	-25.24	peak			
2		2390.000	37.71	10.31	48.02	74.00	-25.98	peak			
3	*	2402.000	81.09	10.32	91.41	74.00	17.41	peak			


TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

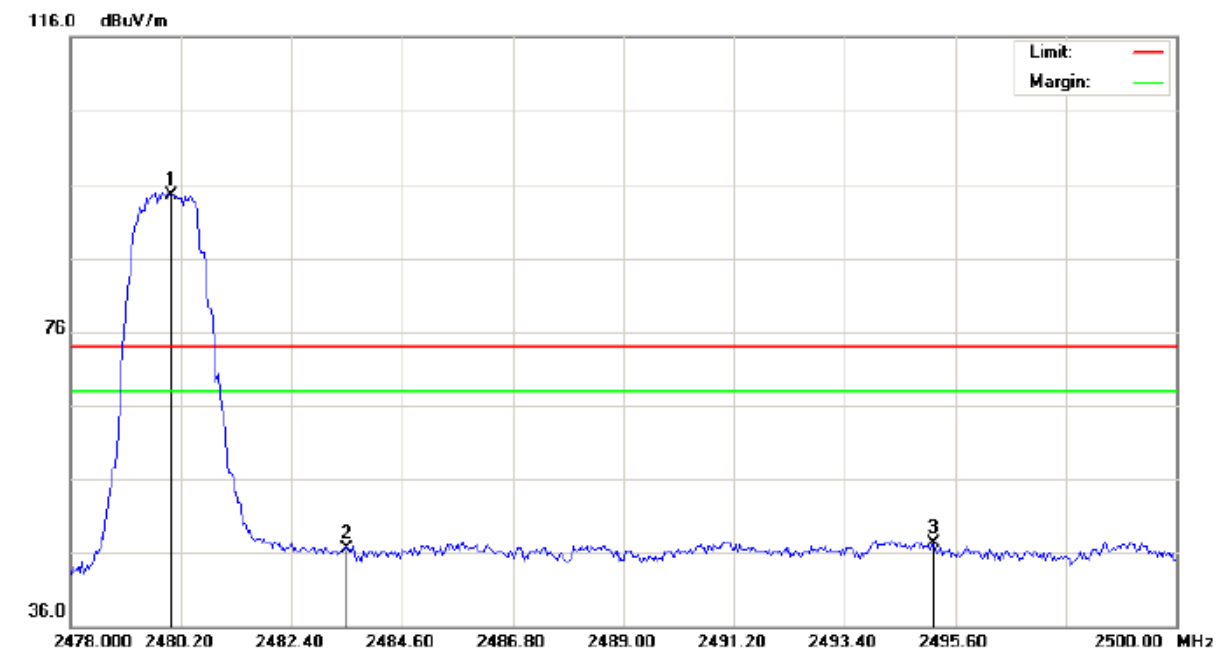

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)	Power:	Humidity: 60 %
EUT:Bluetooth Speaker	Distance:	
M/N:VA-SK001		
Mode: High Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	84.05	10.41	94.46	74.00	20.46	peak			
2		2483.500	36.19	10.41	46.60	74.00	-27.40	peak			
3		2495.160	36.96	10.42	47.38	74.00	-26.62	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

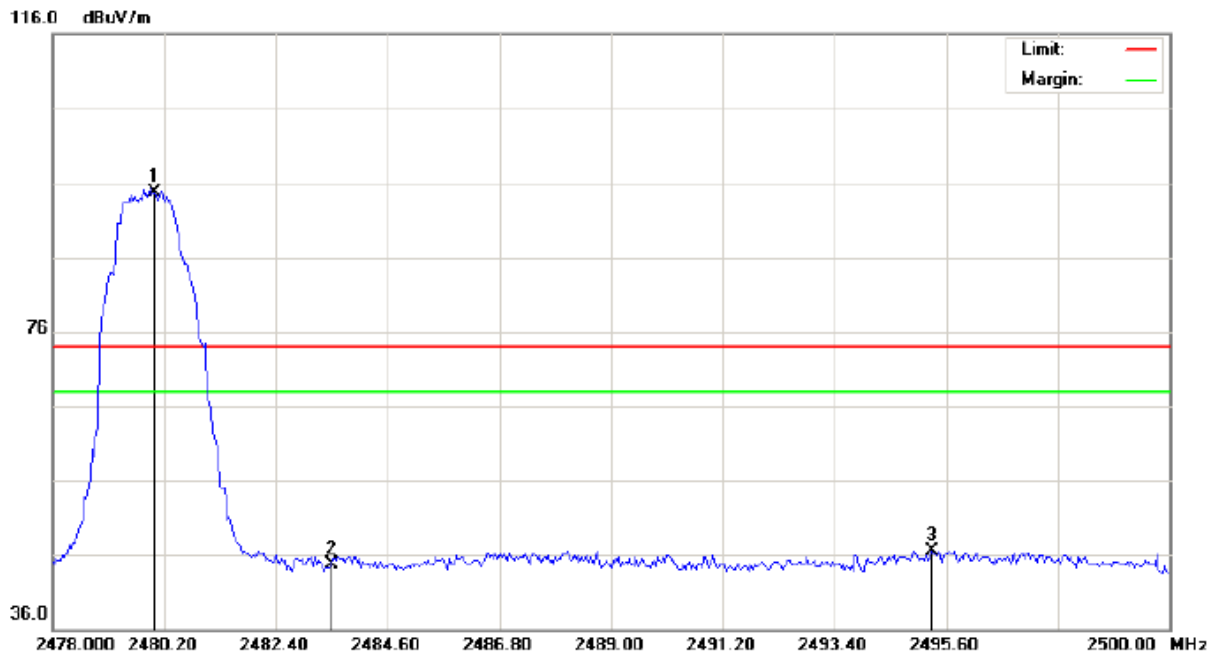

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT:Bluetooth Speaker Distance:
M/N:VA-SK001
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	84.32	10.41	94.73	74.00	20.73	peak			
2		2483.500	34.26	10.41	44.67	74.00	-29.33	peak			
3		2495.307	36.11	10.42	46.53	74.00	-27.47	peak			

RESULT: PASS


Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

FOR BLE


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

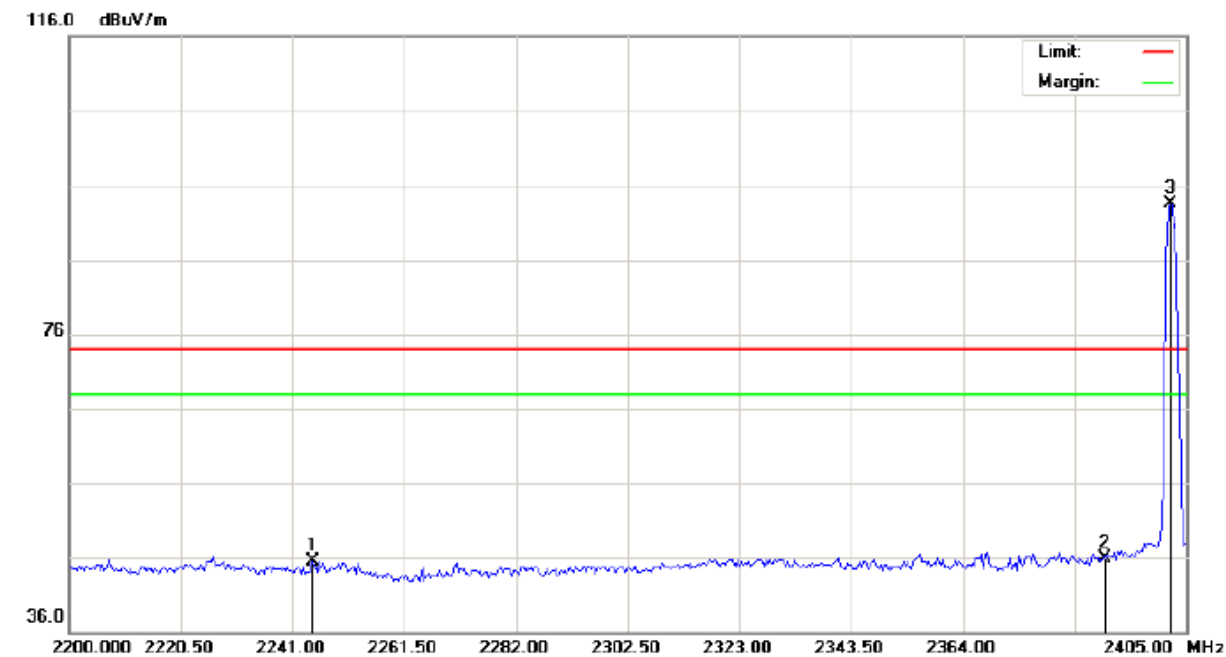

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)	Power:	Humidity: 60 %
EUT:Bluetooth Speaker	Distance:	
M/N:VA-SK001		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2244.758	35.38	10.15	45.53	74.00	-28.47	peak			
2		2390.000	35.50	10.31	45.81	74.00	-28.19	peak			
3	*	2402.000	83.22	10.32	93.54	74.00	19.54	peak			


TEST PLOT OF BAND EDGE FOR LOW CHANNEL –Vertical

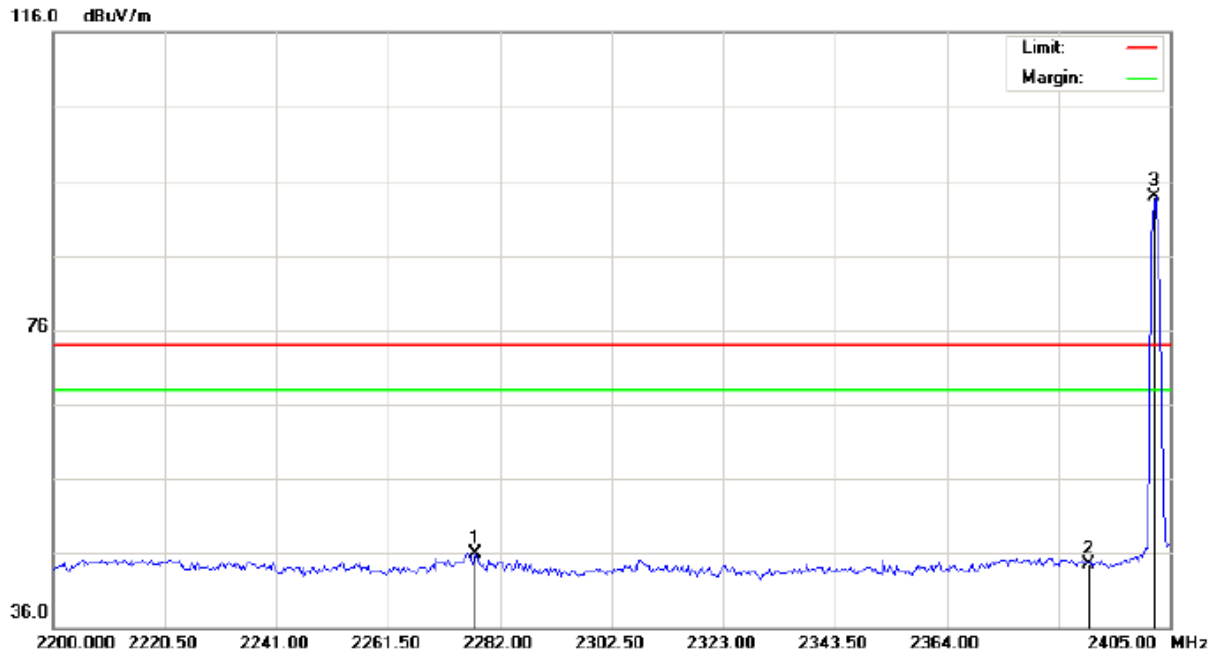

Site: site #1 Polarization: *Vertical* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT:Bluetooth Speaker Distance:
M/N:VA-SK001
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2277.558	35.68	10.19	45.87	74.00	-28.13	peak			
2		2390.000	34.21	10.31	44.52	74.00	-29.48	peak			
3	*	2402.000	83.59	10.32	93.91	74.00	19.91	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

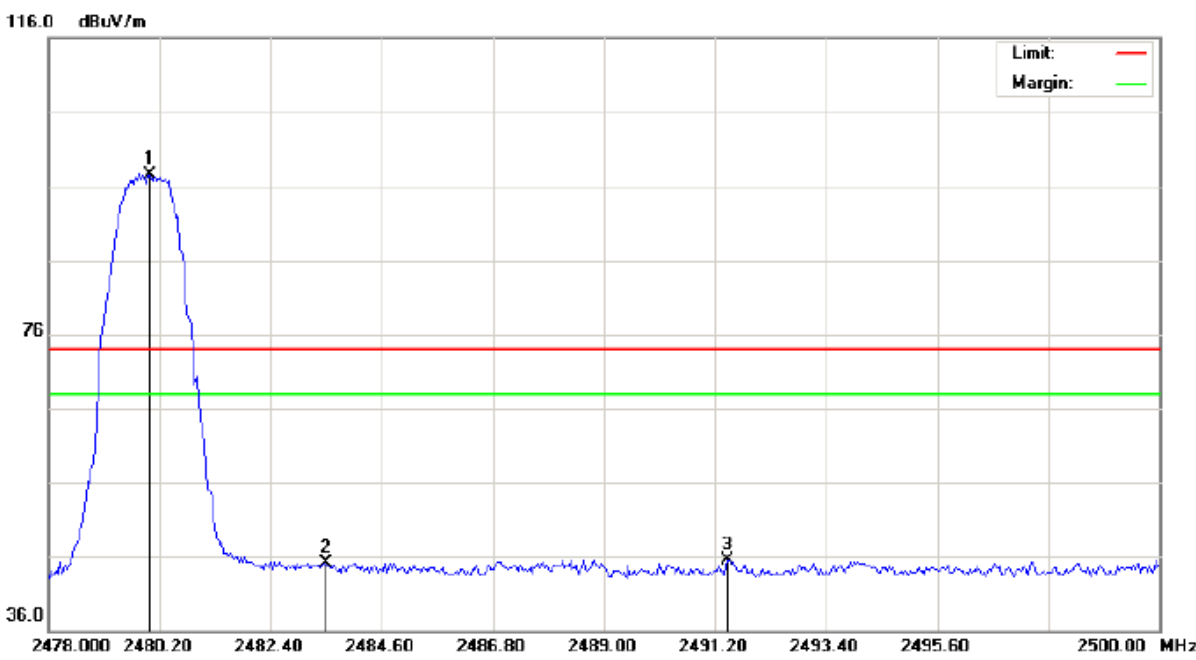

Site: site #1

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

EUT:Bluetooth Speaker

M/N:VA-SK001

Mode: High Channel TX

Note:

Polarization: *Horizontal*

Power:


Distance:

Temperature: 26

Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	87.05	10.41	97.46	74.00	23.46	peak			
2		2483.500	34.69	10.41	45.10	74.00	-28.90	peak			
3		2491.457	35.14	10.42	45.56	74.00	-28.44	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

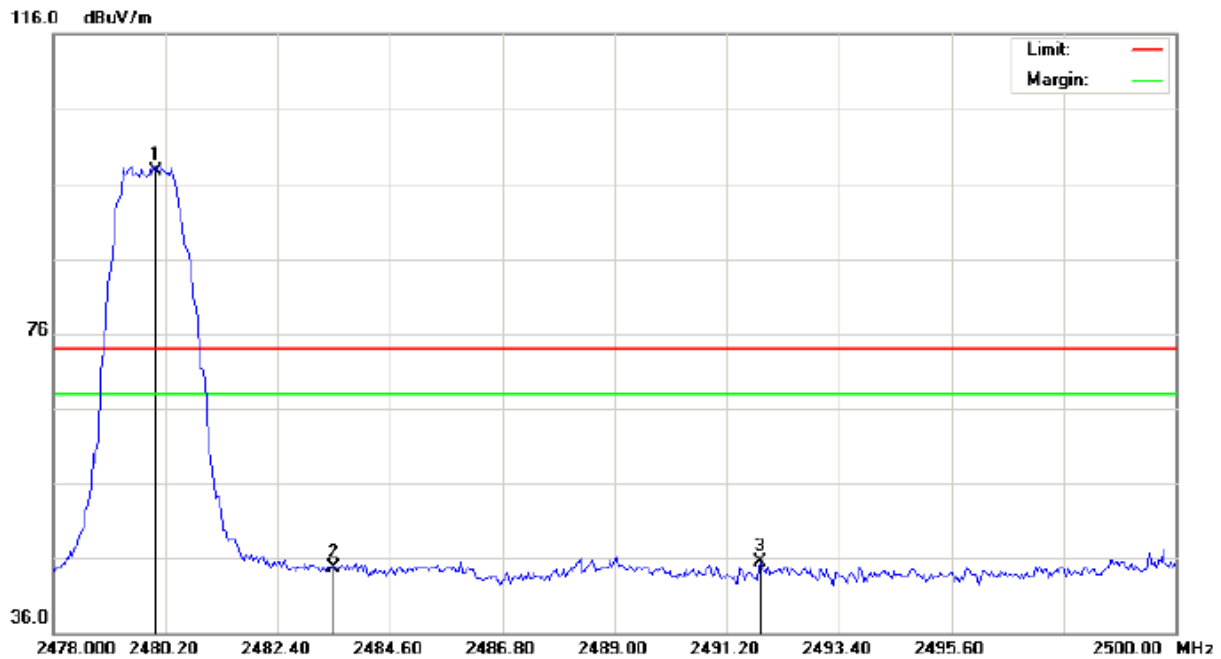

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT:Bluetooth Speaker Distance:
M/N:VA-SK001
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	87.32	10.41	97.73	74.00	23.73	peak			
2		2483.500	34.26	10.41	44.67	74.00	-29.33	peak			
3		2491.860	35.03	10.42	45.45	74.00	-28.55	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


10. 20DB BANDWIDTH

10.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW $\geq$ 1% of the 20 dB bandwidth, VBW $\geq$ RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

10.2. TEST SET-UP

(BLOCK DIAGRAM OF CONFIGURATION)

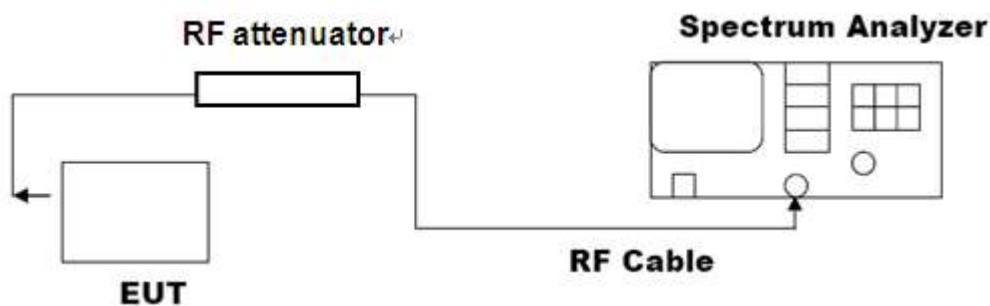

10.3. LIMITS AND MEASUREMENT RESULTS


FOR BR/EDR BLUETOOTH

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESUL			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	0.930	PASS
	Middle Channel	0.892	PASS
	High Channel	0.892	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

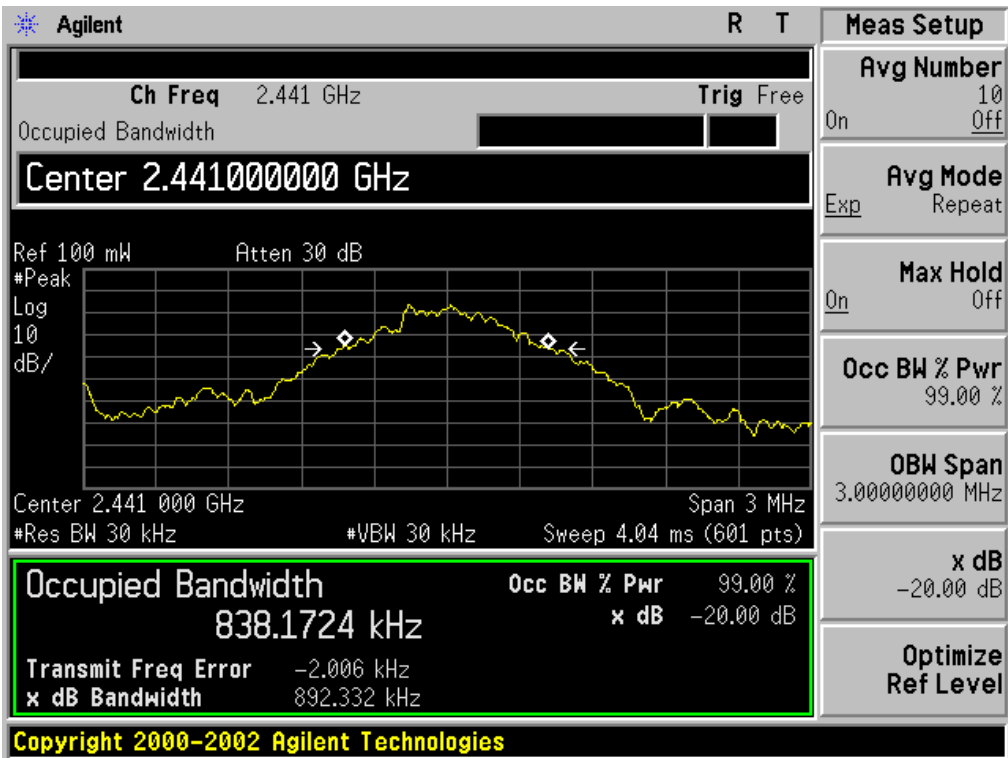


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

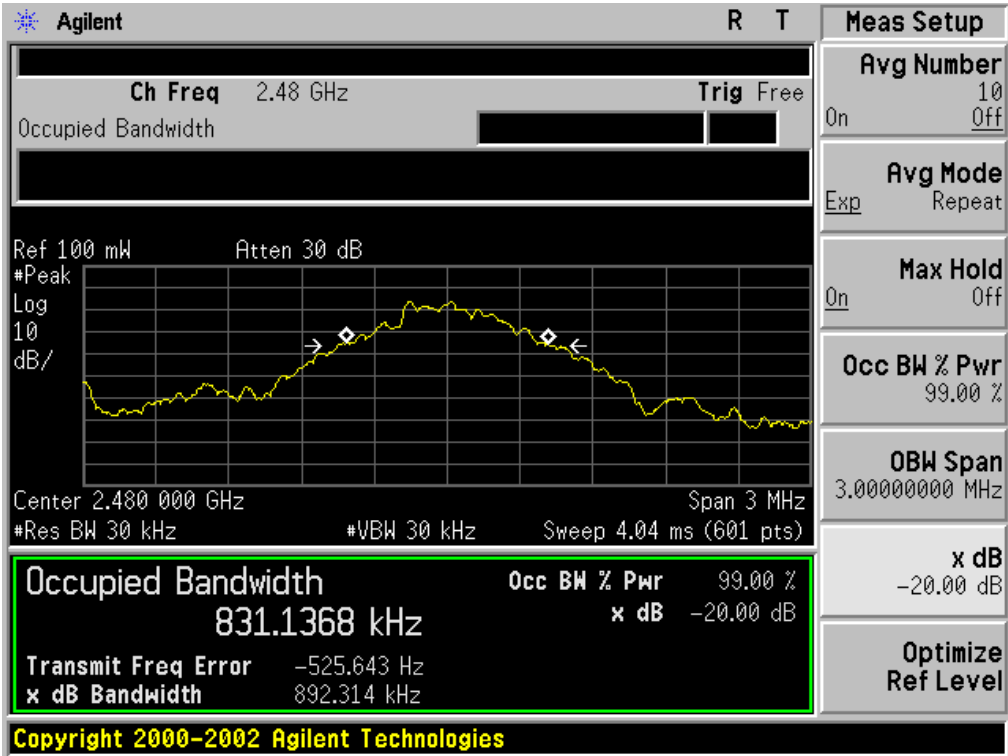


BLUETOOTH 2Mbps LIMITS AND MEASUREMENT RESUL			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.198	PASS
	Middle Channel	1.215	PASS
	High Channel	1.172	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

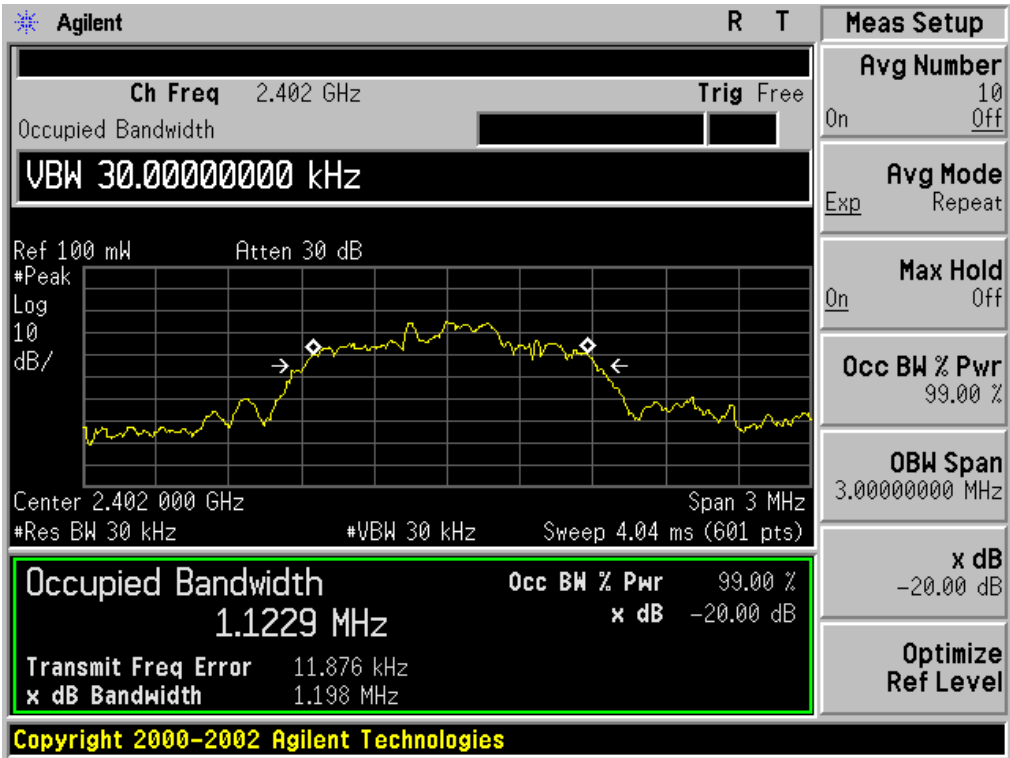

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

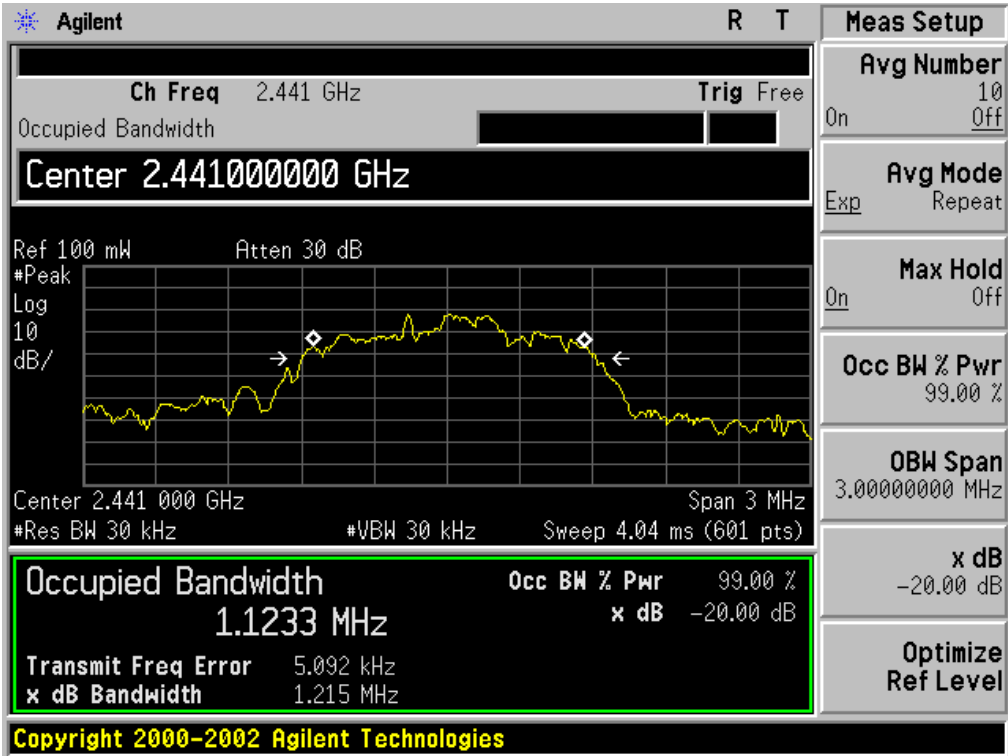

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

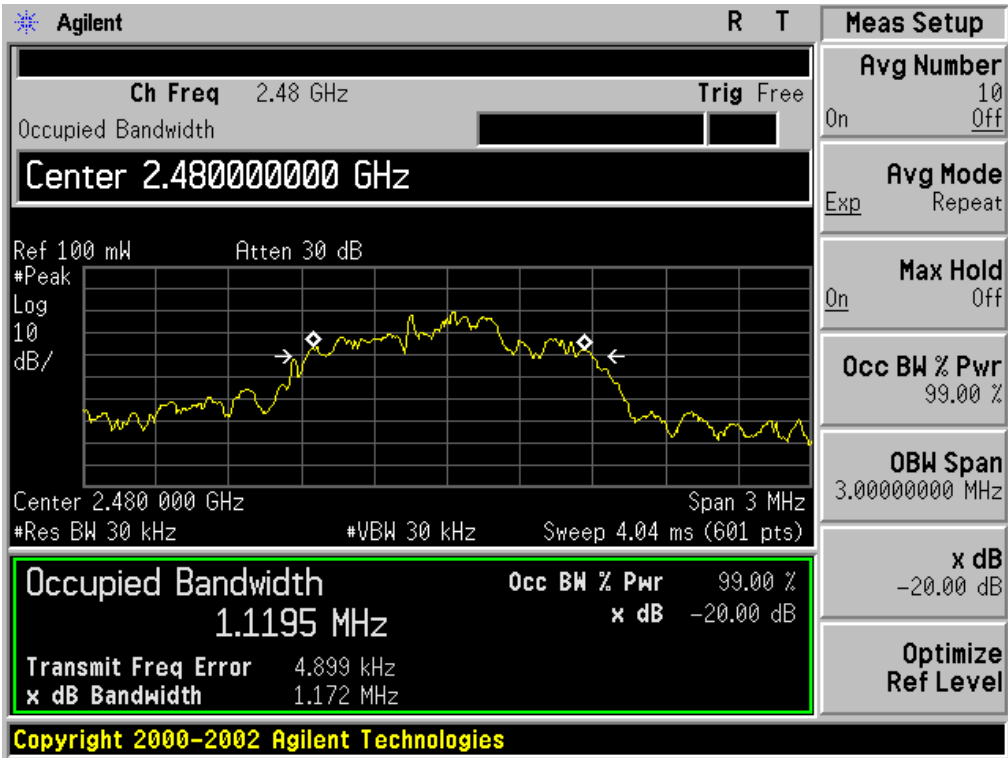


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESUL			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.132	PASS
	Middle Channel	1.168	PASS
	High Channel	1.111	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

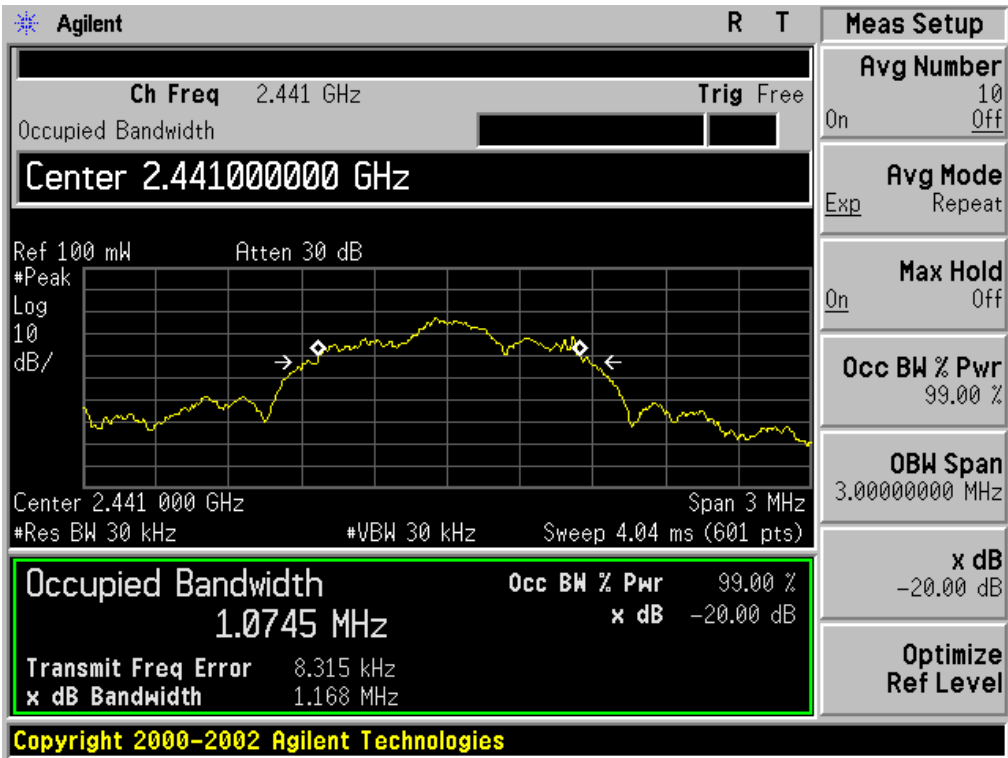


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

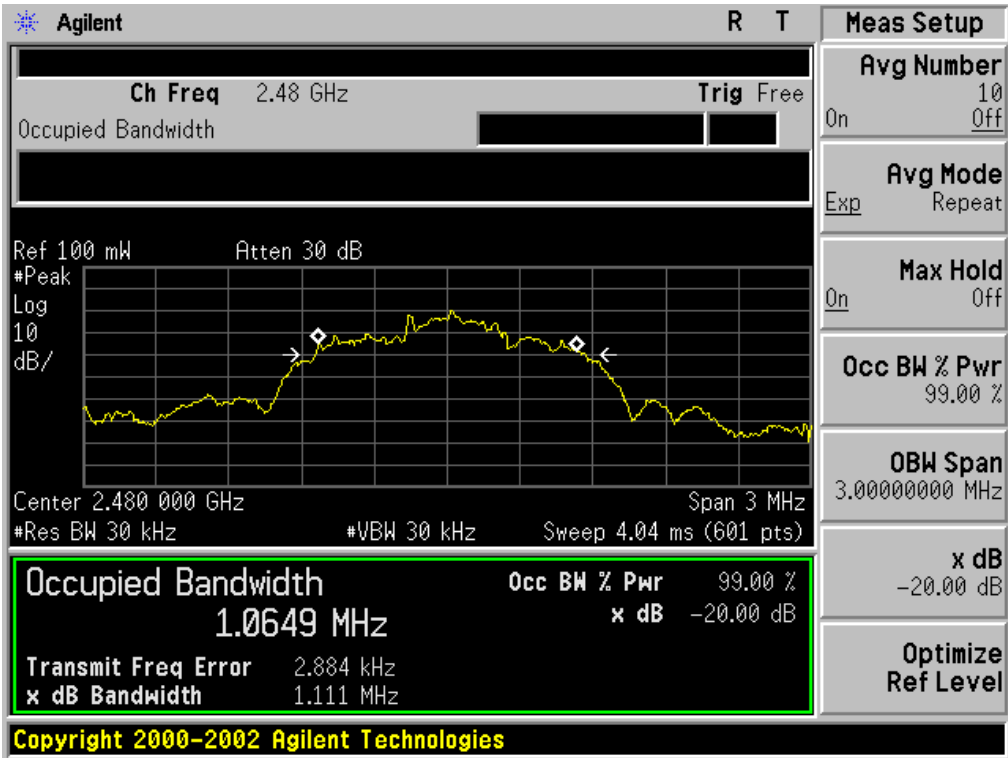


FOR BLE

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESUL			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.209	PASS
	Middle Channel	1.203	PASS
	High Channel	1.193	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

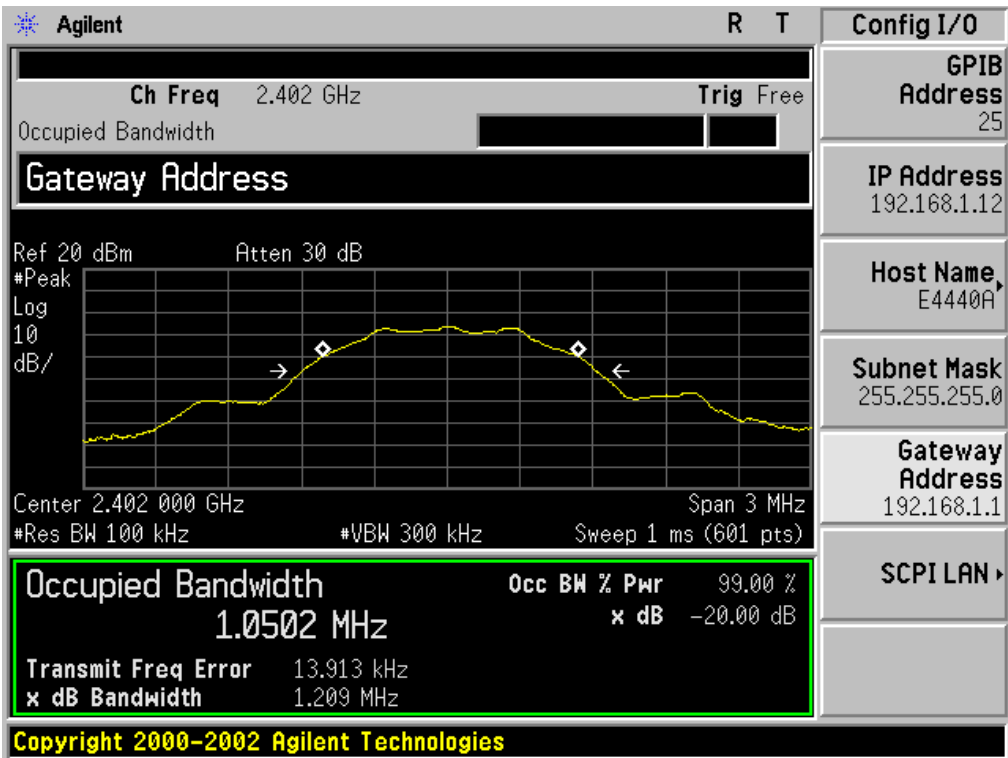

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

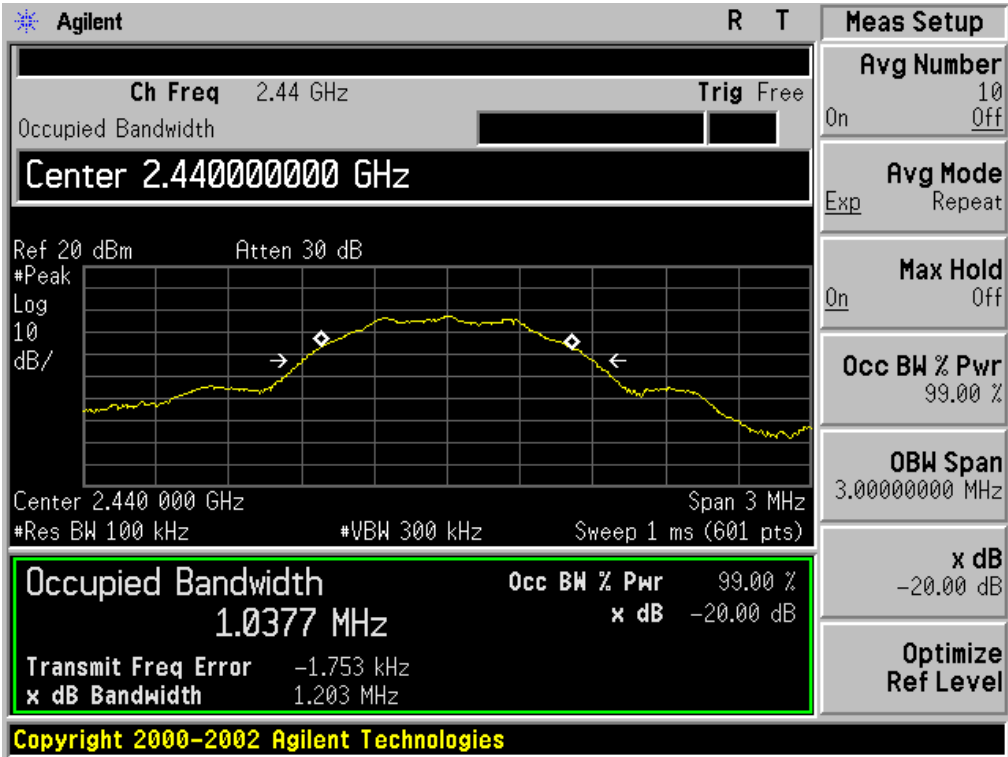

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

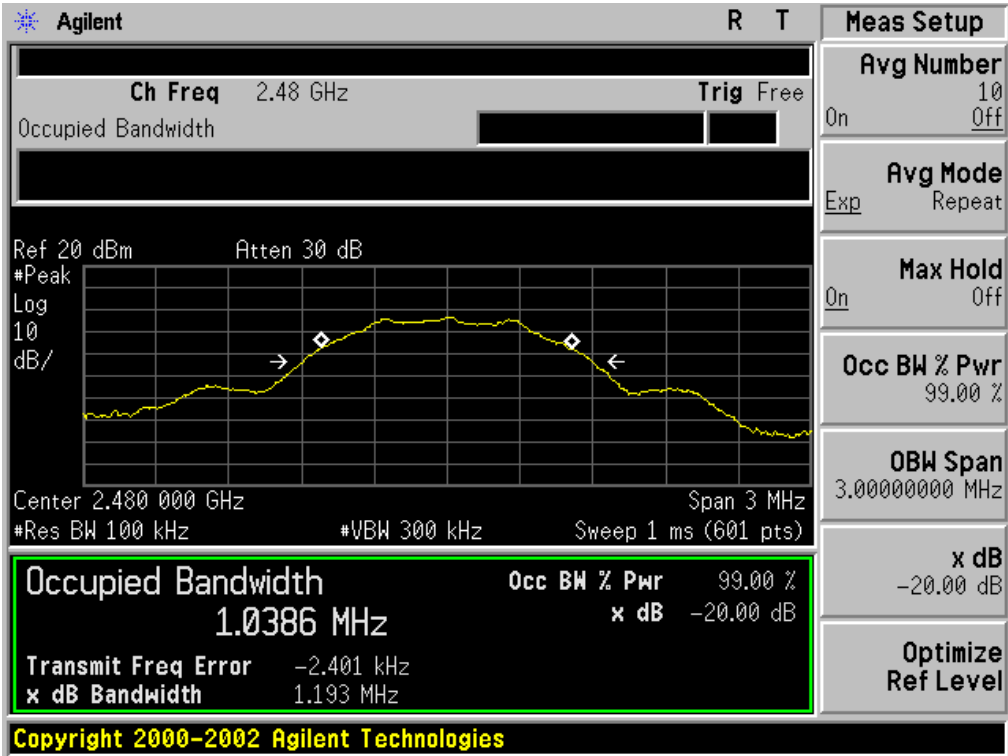

11. FCC LINE CONDUCTED EMISSION TEST


11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

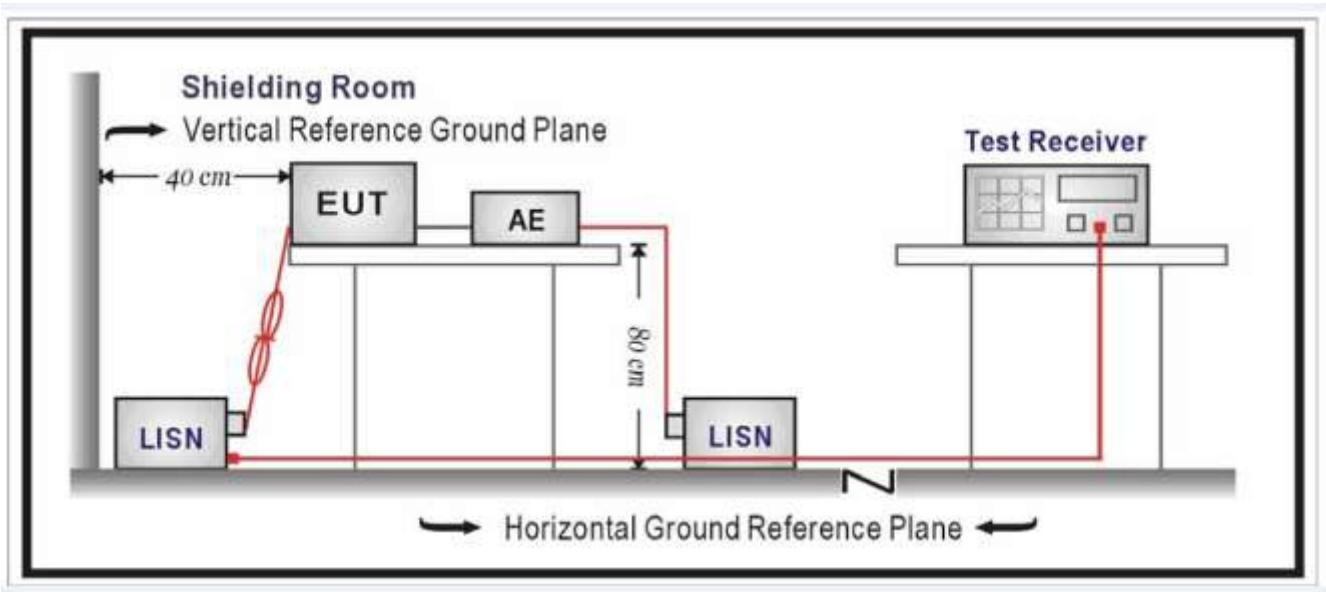

11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by PC which received 120V/60Hz power by a LISN..
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
 3. The test data of the worst case condition(s) was reported on the Summary Data page.

11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST
FOR BR/EDR BLUETOOTH


Line Conducted Emission Test Line 1-L

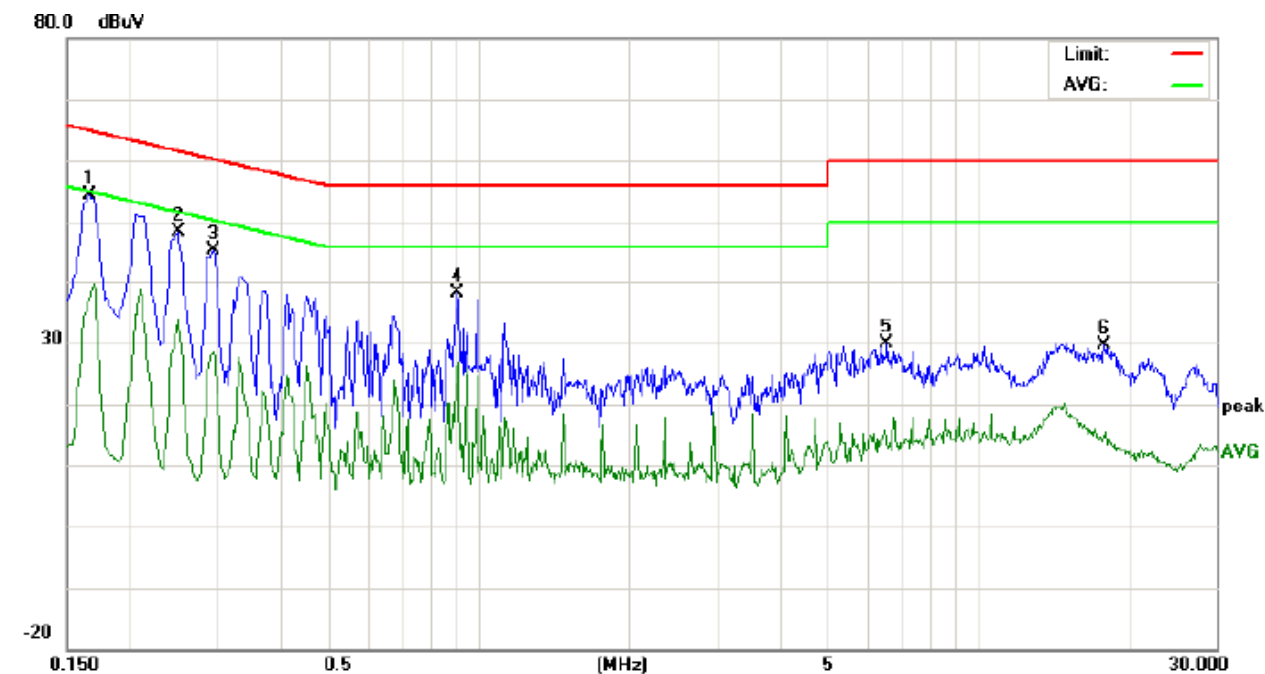

Site: Conduction Phase: **L1** Temperature: 23.9
Limit: FCC Class B Conduction(QP) Power: Humidity: 56.2 %
EUT:Bluetooth Speaker
M/N:VA-SK001
Mode:BT link with charging+power supply for mobile phone
Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1660	44.16		26.99	10.18	54.34		37.17	65.15	55.15	-10.81	-17.98	P	
2	0.2500	38.20		23.58	10.27	48.47		33.85	61.75	51.75	-13.28	-17.90	P	
3	0.2938	35.19		18.34	10.29	45.48		28.63	60.41	50.41	-14.93	-21.78	P	
4	0.9060	27.61		15.19	10.41	38.02		25.60	56.00	46.00	-17.98	-20.40	P	
5	6.5617	19.55		3.59	10.31	29.86		13.90	60.00	50.00	-30.14	-36.10	P	
6	17.9298	19.44		4.52	10.12	29.56		14.64	60.00	50.00	-30.44	-35.36	P	

Line Conducted Emission Test Line 2-N

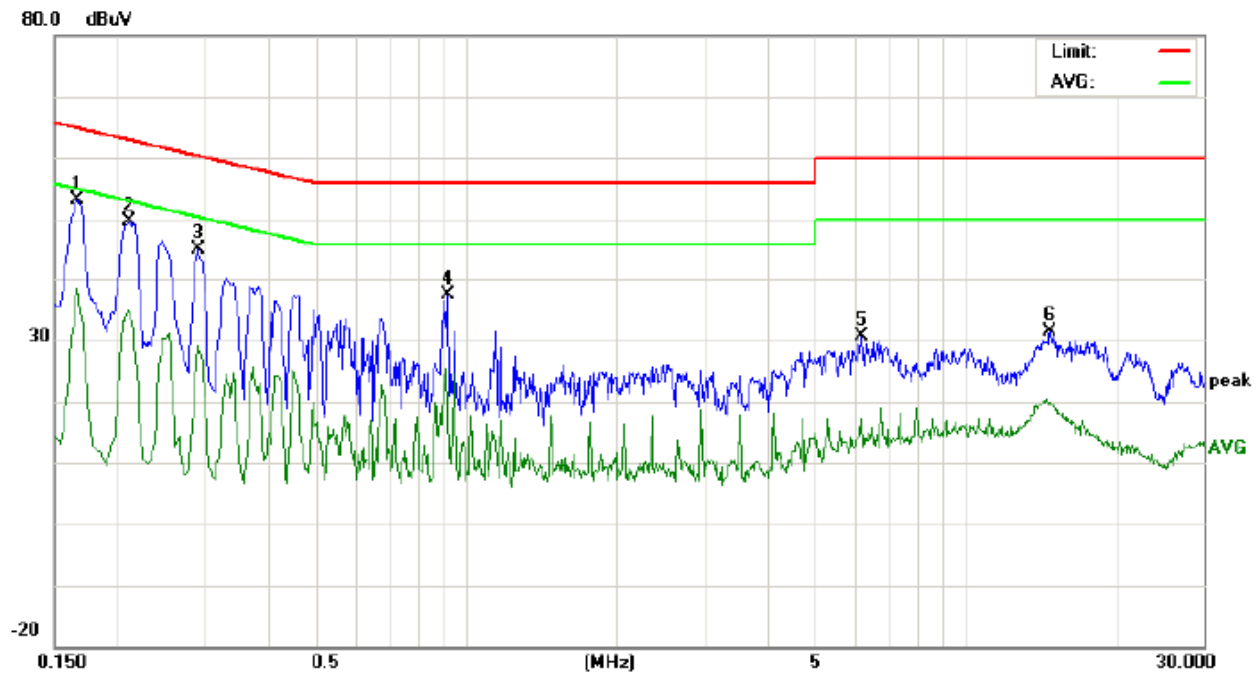


Site: Conduction Phase: **N** Temperature: 23.9
Limit: FCC Class B Conduction(QP) Power: Humidity: 56.2 %
EUT:Bluetooth Speaker
M/N:VA-SK001
Mode:BT link with charging+power supply for mobile phone
Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1660	42.91		28.07	10.18	53.09		38.25	65.15	55.15	-12.06	-16.90	P	
2	0.2106	39.38		24.32	10.23	49.61		34.55	63.18	53.18	-13.57	-18.63	P	
3	0.2899	34.79		18.91	10.29	45.08		29.20	60.52	50.52	-15.44	-21.32	P	
4	0.9220	26.88		8.43	10.40	37.28		18.83	56.00	46.00	-18.72	-27.17	P	
5	6.2058	20.37		6.90	10.29	30.66		17.19	60.00	50.00	-29.34	-32.81	P	
6	14.7619	21.16		9.77	10.12	31.28		19.89	60.00	50.00	-28.72	-30.11	P	

FOR BLE


Line Conducted Emission Test Line 1-L

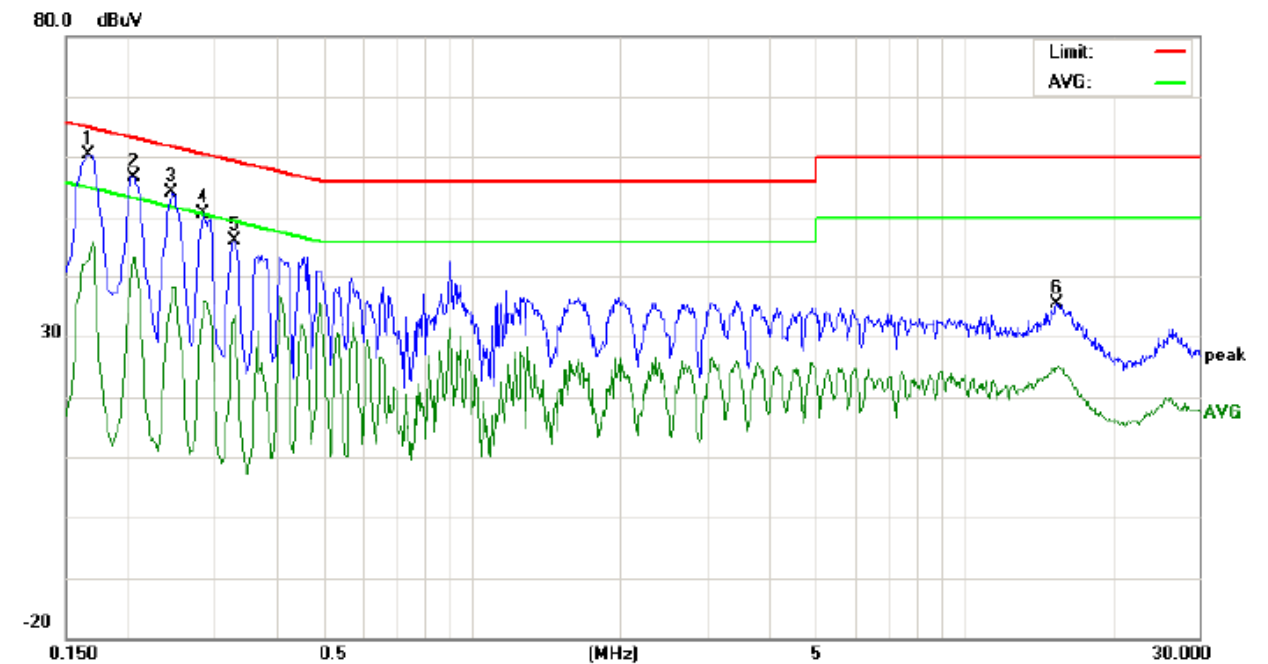

Site: Conduction Phase: **L1** Temperature: 23.9
Limit: FCC Class B Conduction(QP) Power: Humidity: 56.2 %
EUT:Bluetooth Speaker
M/N:VA-SK001
Mode:BT link with charging +power supply for mobile phone
Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1660	50.08		32.28	10.18	60.26		42.46	65.15	55.15	-4.89	-12.69	P	
2	0.2060	46.51		33.06	10.22	56.73		43.28	63.36	53.36	-6.63	-10.08	P	
3	0.2460	43.90		27.94	10.27	54.17		38.21	61.89	51.89	-7.72	-13.68	P	
4	0.2860	40.27		25.71	10.28	50.55		35.99	60.64	50.64	-10.09	-14.65	P	
5	0.3300	35.94		22.96	10.30	46.24		33.26	59.45	49.45	-13.21	-16.19	P	
6	15.4100	25.35		14.52	10.12	35.47		24.64	60.00	50.00	-24.53	-25.36	P	

Line Conducted Emission Test Line 2-N

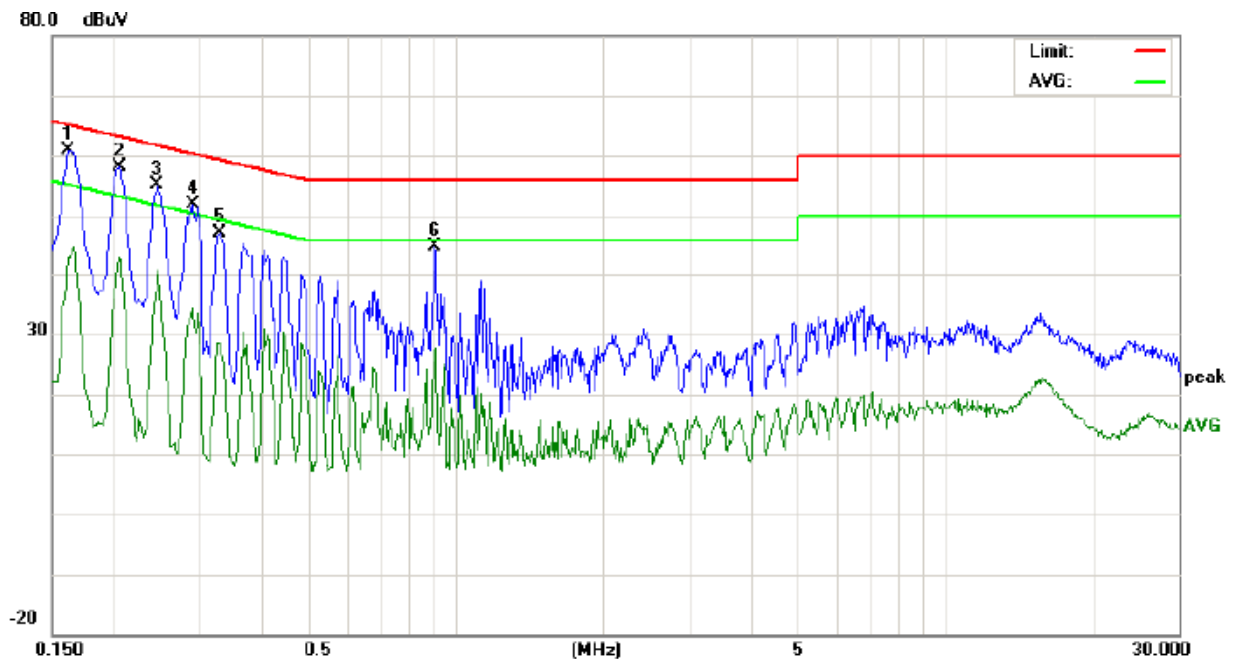

Site: Conduction Phase: **N** Temperature: 23.9
Limit: FCC Class B Conduction(QP) Power: Humidity: 56.2 %
EUT:Bluetooth Speaker
M/N:VA-SK001
Mode:BT link with charging +power supply for mobile phone
Note:


No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1620	50.69		32.63	10.17	60.86		42.80	65.36	55.36	-4.50	-12.56	P	
2	0.2060	48.01		32.67	10.22	58.23		42.89	63.36	53.36	-5.13	-10.47	P	
3	0.2460	44.76		30.29	10.27	55.03		40.56	61.89	51.89	-6.86	-11.33	P	
4	0.2900	41.52		24.13	10.29	51.81		34.42	60.52	50.52	-8.71	-16.10	P	
5	0.3300	36.83		18.42	10.30	47.13		28.72	59.45	49.45	-12.32	-20.73	P	
6	0.9060	34.43		16.97	10.41	44.84		27.38	56.00	46.00	-11.16	-18.62	P	


APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

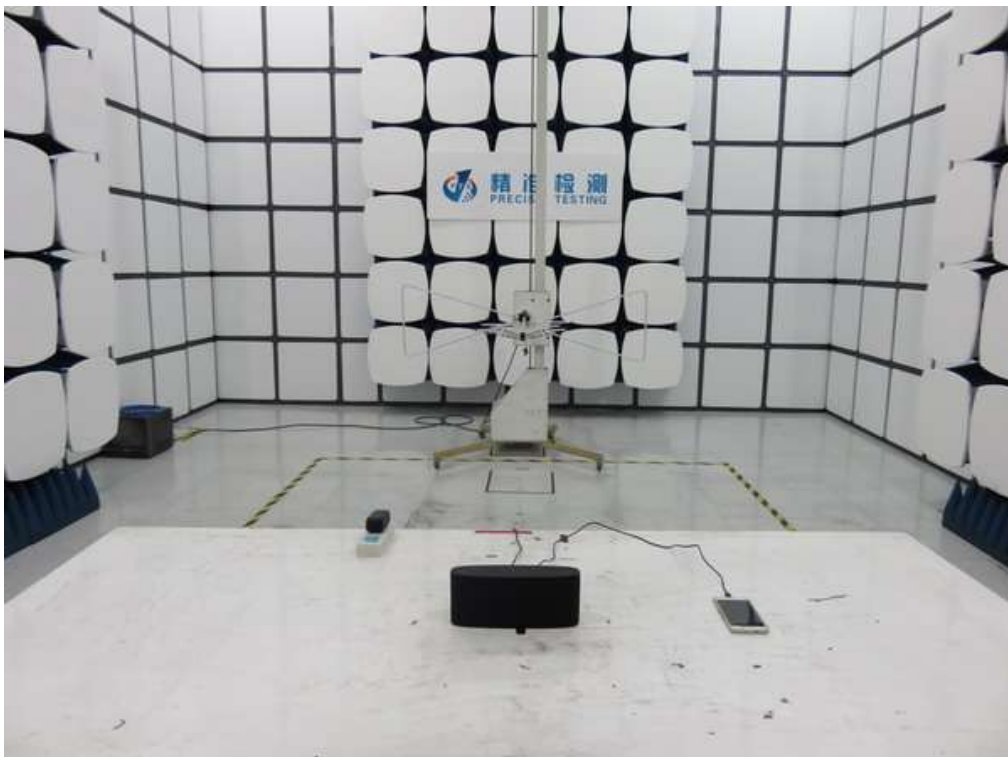

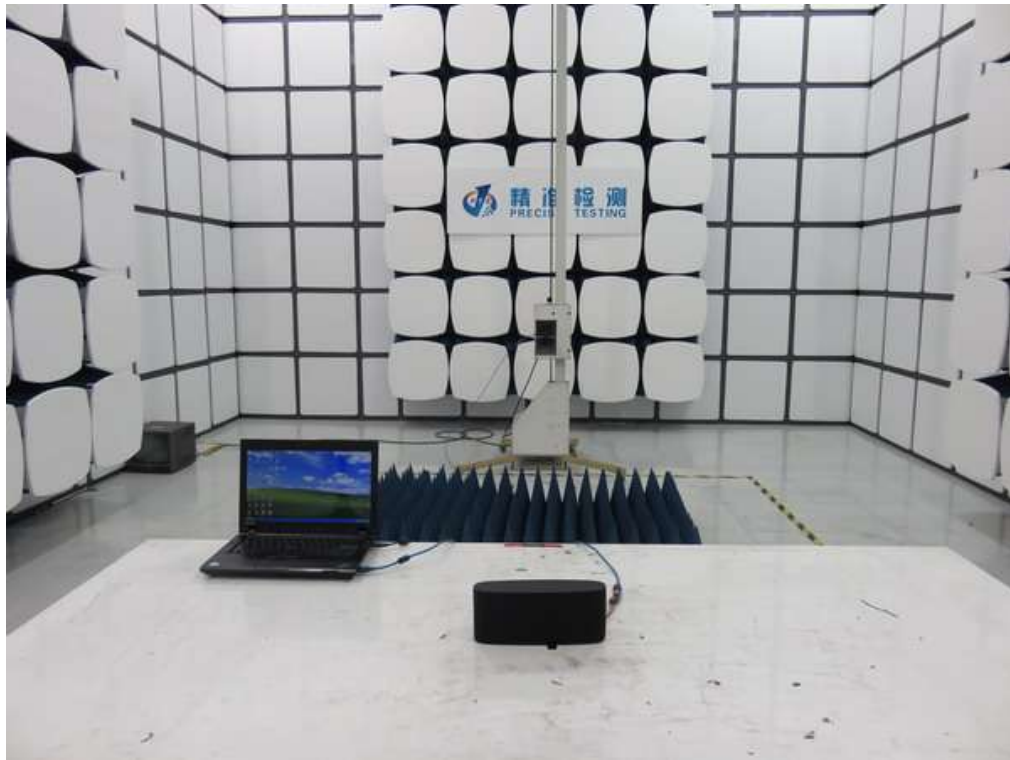


APPENDIX B: PHOTOGRAPHS OF EUT

All VIEW OF EUT



TOP VIEW OF EUT

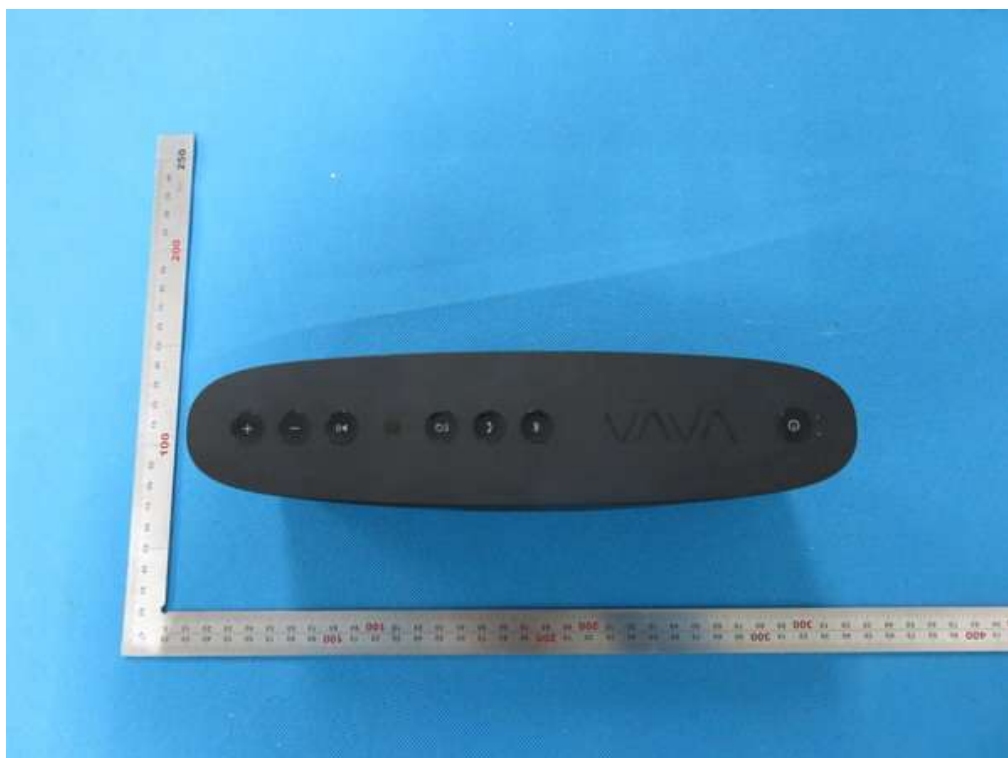

BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT



OPEN VIEW OF EUT



VIEW OF EUT (PORT)




THE PHOTO OF ADAPTER




INTERNAL VIEW OF EUT-1




INTERNAL VIEW OF EUT-2

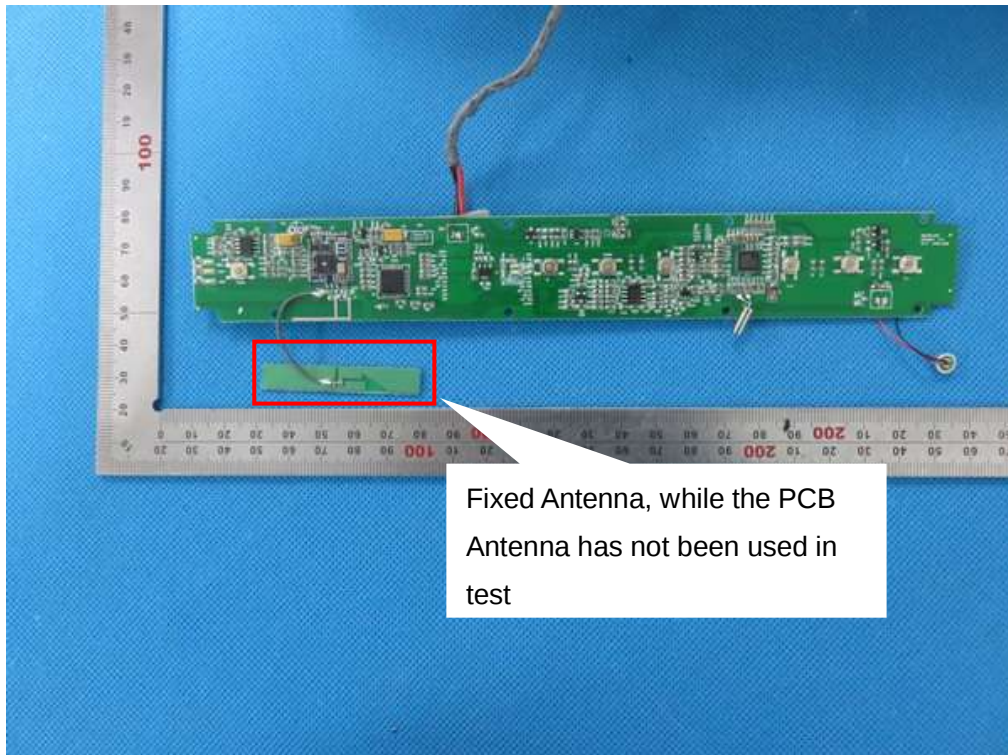


INTERNAL VIEW OF EUT-3

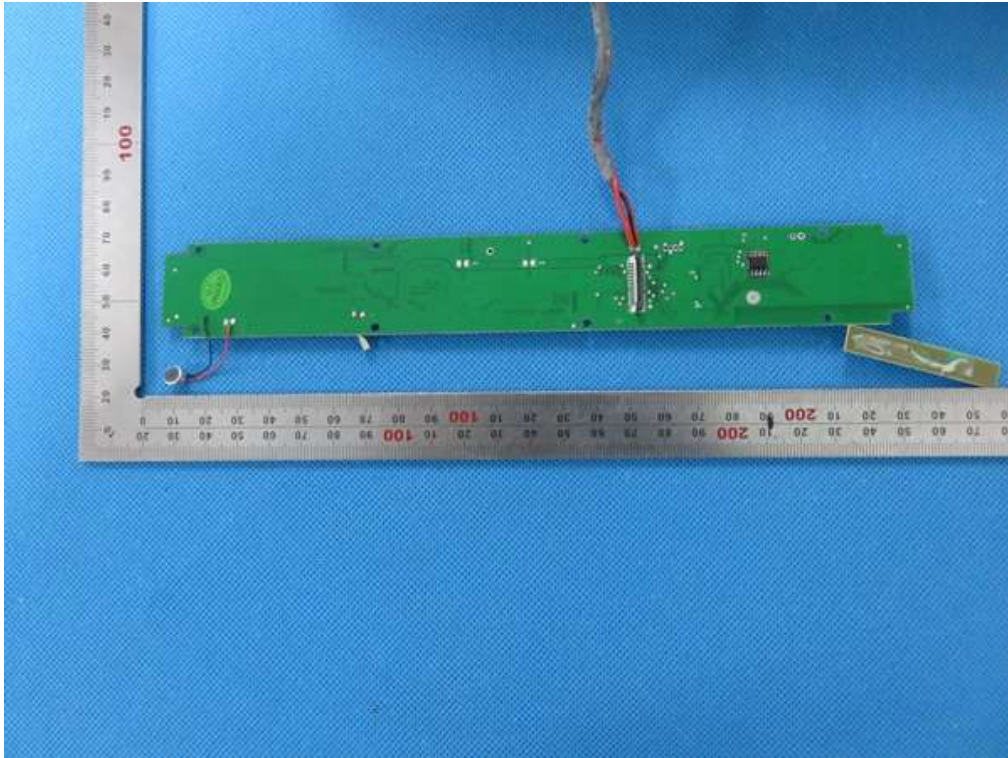


INTERNAL VIEW OF EUT-4

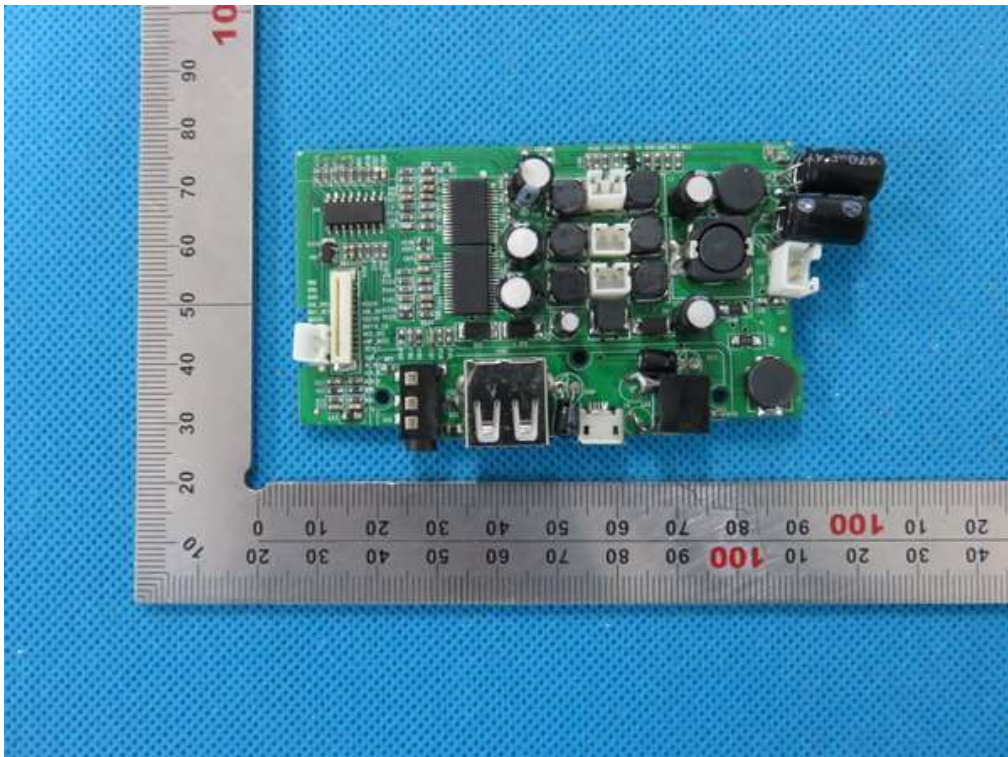


INTERNAL VIEW OF EUT-5

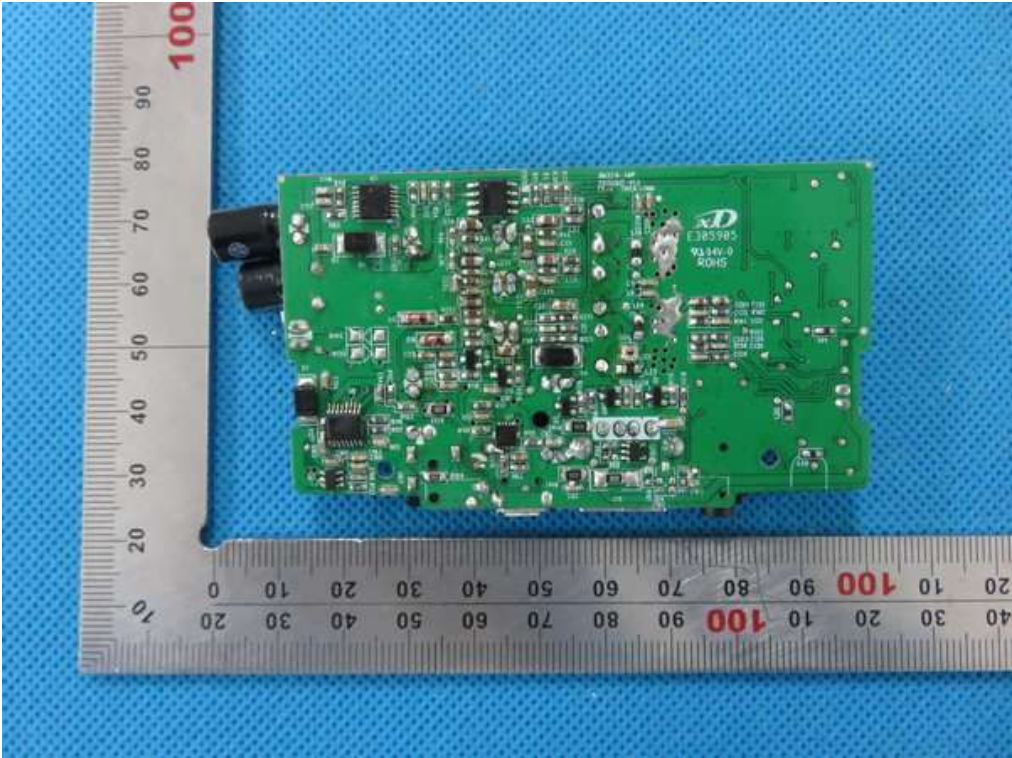


INTERNAL VIEW OF EUT-6

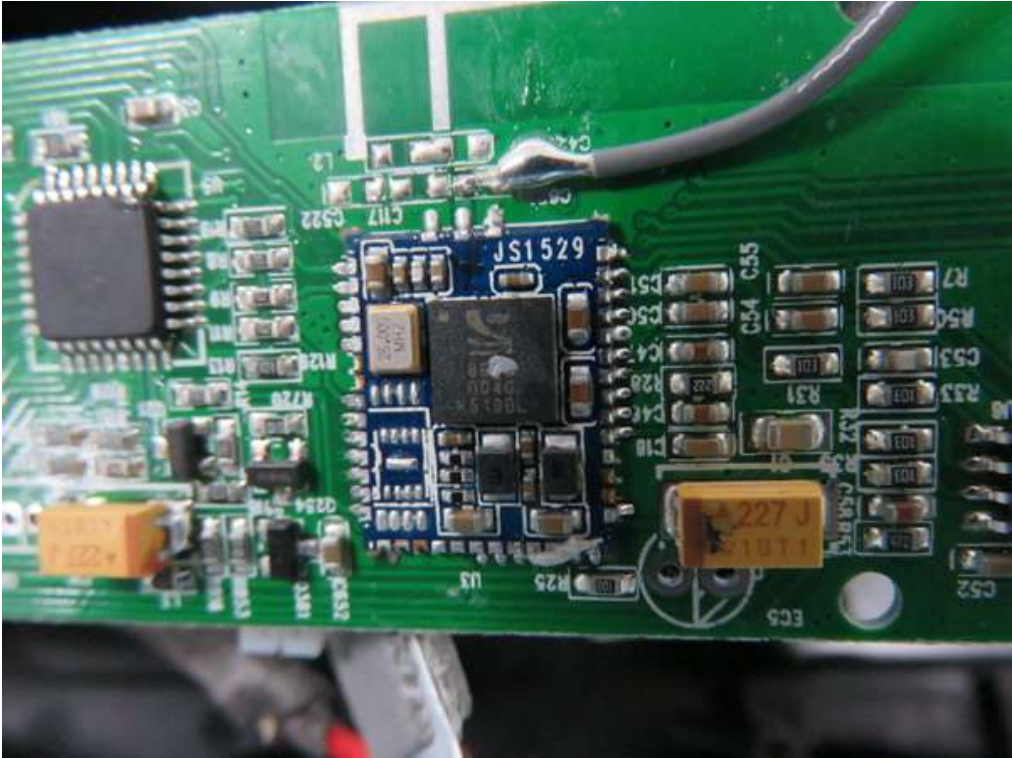

INTERNAL VIEW OF EUT-7

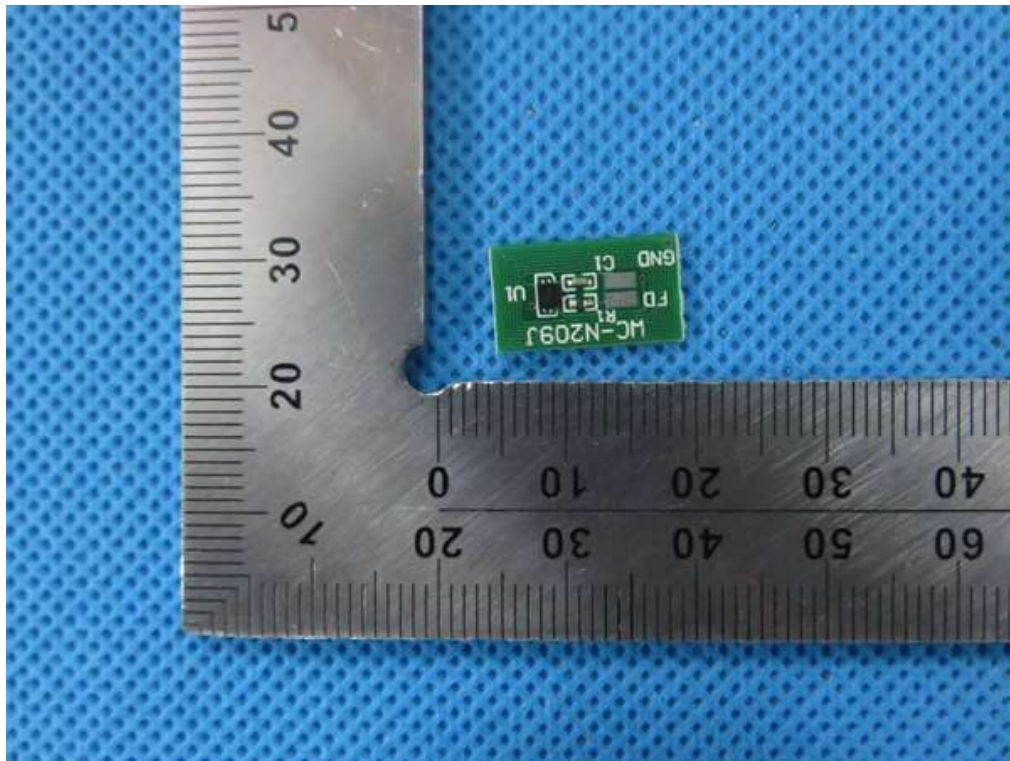

INTERNAL VIEW OF EUT-8

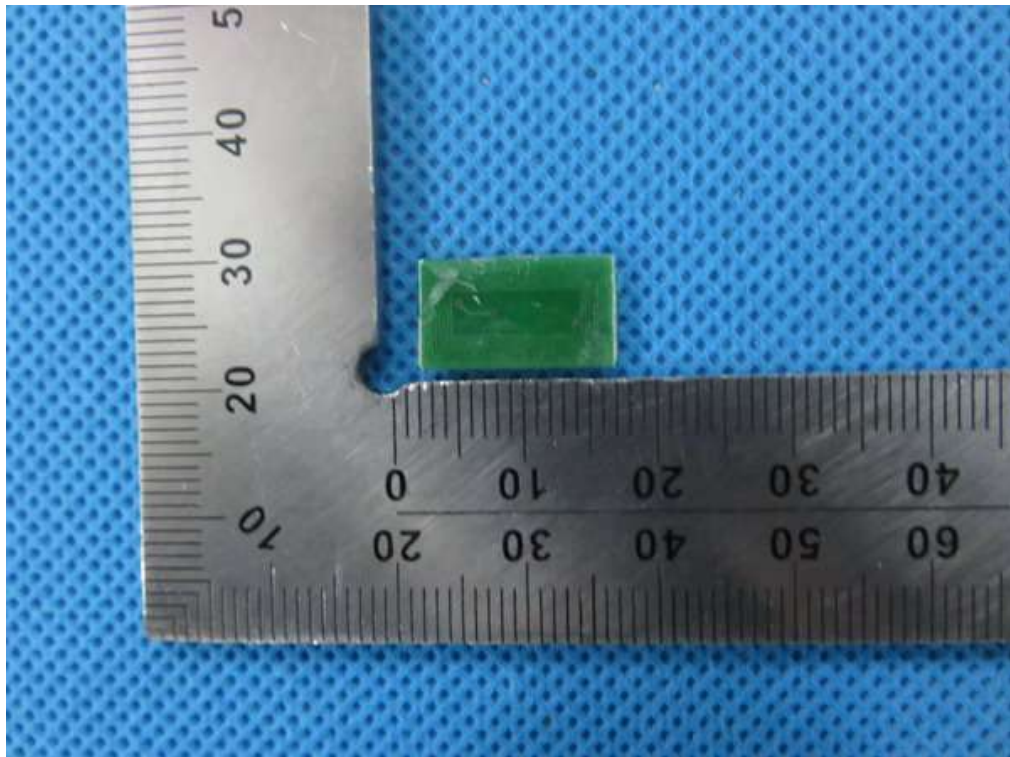

-----END OF REPORT-----