



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

FCC Rules and Regulations / Intentional Radiators

Operational in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz, Bands

Part 15, Subpart C, Section 15.247

THE FOLLOWING **"MEETS"** THE ABOVE TEST SPECIFICATION

Formal Name: R110XiIII Plus  
Kind of Equipment: Thermal Transfer on demand bar code printer  
Test Configuration: RFID - Matrics (Tested at 120 vac, 60 Hz)  
FCC ID Number: I28RFID-R100XI01  
Model Number(s): 110XiIII  
Model(s) Tested: 110XiIII  
Serial Number(s): 91C04220027  
Date of Tests: June 10, 2004  
Test Conducted For: Zebra Technologies Corporation  
333 Corporate Woods Parkway  
Vernon Hills, Illinois 60061

**NOTICE:** "This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government". Please see the "Additional Description of Equipment Under Test" page listed inside of this report. This report must not be reproduced (except in full), without the approval of D.L.S. Electronic Systems.



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

## SIGNATURE PAGE

Report By:

Arnom C. Rowe  
Test Engineer  
EMC-001375-NE

Reviewed By:

William Stumpf  
OATS Manager

Approved By:

Brian Mattson  
General Manager

Company Official:

Zebra Technologies Corporation



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 6009

United States Department of Commerce  
National Institute of Standards and Technology



ISO/IEC 17025:1999  
ISO 9002:1994

## Certificate of Accreditation

D.L.S. ELECTRONIC SYSTEMS, INC.  
WHEELING, IL

is recognized by the National Voluntary Laboratory Accreditation Program  
for satisfactory compliance with criteria set forth in NIST Handbook 150:2001,  
all requirements of ISO/IEC 17025:1999, and relevant requirements of ISO 9002:1994.  
Accreditation is awarded for specific services, listed on the Scope of Accreditation, for:

### ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

September 30, 2004

Effective through

For the National Institute of Standards and Technology  
NVLAP Lab Code: 100276-0

NVLAP-01C (06-01)



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 6009



ISO/IEC 17025:1999  
ISO 9002:1994

## Scope of Accreditation



### ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

NVLAP LAB CODE 100276-0

#### D.L.S. ELECTRONIC SYSTEMS, INC.

1250 Peterson Drive  
Wheeling, IL 60090-6454

Mr. Brian J. Mattson

Phone: 847-537-6400 Fax: 847-537-6488

E-Mail: [bmattson@dlsemc.com](mailto:bmattson@dlsemc.com)

URL: <http://www.dlsemc.com>

#### *NVLAP Code Designation / Description*

#### **Emissions Test Methods:**

12/160D21	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 21 - Emission of Radio Frequency Energy
12/300220a	EN 300 220-1 V1.3.1 (2000-09): Electromagnetic compatibility and Radio spectrum Matters; Short Range Devices; Radio equipment to be used in the 25 MHz to 1000 MHz frequency range with power levels ranging up to 500 mW; Part 1: Technical characteristics and test methods
12/300386a	EN 300 386 V.1.2.1: Electromagnetic compatibility and radio spectrum matter (ERM); Telecommunication network equipment; Electromagnetic compatibility (EMC) requirements
12/C63.17	ANSI C63.17-1998: American National Standard for Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices

September 30, 2004

Effective through

For the National Institute of Standards and Technology



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 6009



ISO/IEC 17025:1999  
ISO 9002:1994

## Scope of Accreditation



Page: 2 of 9

### ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

NVLAP LAB CODE 100276-0

#### D.L.S. ELECTRONIC SYSTEMS, INC.

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/C6317a	ANSI C63.17-1998: American National Standard for Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices
12/CIS11	IEC/CISPR 11 + A1 (1997), EN 55011 (1998), AS/NZS 2064 (1997), and CNS 137803 (1997): Limits and Methods of Measurement of Electromagnetic Disturbance Characteristics of Industrial, Scientific, and Medical Radio-Frequency Equipment
12/CIS13	IEC/CISPR 13 (2001-04), EN 55013 (2001), AS/NZS 1053 (2001), and CNS 13439 (2001): Sound and television broadcast receivers and associated equipment - Radio disturbance characteristics - Limits and methods of measurement
12/CIS14	CISPR 14-1 (March 30, 2000): Limits and methods of measurement of radio interference characteristics of household electrical appliances, portable tools and similar electrical apparatus - Part 1: Emissions
12/CIS14a	EN 55014-1 (1993) with Amendments A1 (1997) & A2 (1999)
12/CIS14d	IEC/CISPR 14-1 (2001) and A1 (2001): Electromagnetic Compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emissions
12/CIS14e	EN 55014-1 (2001) and A1 (2001): Electromagnetic Compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emission

September 30, 2004

Effective through

For the National Institute of Standards and Technology

NVLAP-01S (06-01)



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 6009



ISO/IEC 17025:1999  
ISO 9002:1994

## Scope of Accreditation



Page: 3 of 9

**ELECTROMAGNETIC COMPATIBILITY  
AND TELECOMMUNICATIONS**

**NVLAP LAB CODE 100276-0**

**D.L.S. ELECTRONIC SYSTEMS, INC.**

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/CIS14f	AS/NZS 1044 (2001) and A1 (2001): Electromagnetic Compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emission
12/CIS14g	CNS 13783-1 (2001) and A1 (2001): Electromagnetic Compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emission
12/CIS15	IEC/CISPR 15 (2000) + A1 (2001): Limits and methods of measurements of radio disturbance characteristics of electrical lighting and similar equipment
12/CIS15a	AS/NZS CISPR (2002): Limits and methods of measurements of radio disturbance characteristics of electrical lighting and similar equipment
12/CIS15b	CNS 13439 (2000) + A1 (2001): Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
12/CIS15c	EN 55015 (2000) + A1 (2001): Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
12/CIS22	IEC/CISPR 22 (1997) and EN 55022 (1998): Limits and methods of measurement of radio disturbance characteristics of information technology equipment
12/CIS22a	IEC/CISPR 22 (1993): Limits and methods of measurement of radio disturbance characteristics of information technology equipment, Amendment 1:1995, and Amendment 2:1996.

September 30, 2004

Effective through

For the National Institute of Standards and Technology

NVLAP-01S (06-01)



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 6009



ISO/IEC 17025:1999  
ISO 9002:1994

## Scope of Accreditation



Page: 4 of 9

**ELECTROMAGNETIC COMPATIBILITY  
AND TELECOMMUNICATIONS**

**NVLAP LAB CODE 100276-0**

**D.L.S. ELECTRONIC SYSTEMS, INC.**

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/CIS22b	CNS 13438 (1997): Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment
12/EM02a	IEC 61000-3-2, Edition 2.1 (2001-10), EN 61000-3-2 (2000), and AS/NZS 2279.1 (2000): Electromagnetic compatibility (EMC) Part 3-2: Limits - Limits for harmonic current emissions (equipment input current $\leq 16$ A)
12/EM03	EN 61000-3-3 (1995), IEC 61000-3-3 (1995), and AS/NZS 2279.3 (1995): EMC - Part 3: Limits - Section 3. Limitation of voltage fluctuations and flicker in low-voltage supply systems for equipment with rated current up to 16A
12/F18	FCC OST/MP-5 (1986): FCC Methods of Measurement of Radio Noise Emissions for ISM Equipment (cited in FCC Method 47 CFR Part 18 - Industrial, Scientific, and Medical Equipment)
12/FCC15b	ANSI C63.4 (2001) with FCC Method - 47 CFR Part 15, Subpart B: Unintentional Radiators
12/FCC15c	ANSI C63.4 (2001) with FCC Method - 47 CFR Part 15, Subpart C: Intentional Radiators
12/FCC15d	ANSI C63.4 (2001) with FCC Method - 47 CFR Part 15, Subpart D: Unlicensed Personal Communications Service Devices

September 30, 2004

Effective through

For the National Institute of Standards and Technology

NVLAP-01S (06-01)



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 6009



ISO/IEC 17025:1999  
ISO 9002:1994

## Scope of Accreditation



Page: 5 of 9

### ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

NVLAP LAB CODE 100276-0

#### D.L.S. ELECTRONIC SYSTEMS, INC.

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/FCC15e	ANSI C63.4 (2001) with FCC Method - CFR Part 15, Subpart E: Unlicensed National Information Infrastructure Service Devices
12/T51	AS/NZS CISPR 22 (2002) and AS/NZS 3548 (1997): Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment
12/VCCIa	Agreement of Voluntary Control Council for Interference by Information Technology Equipment - Technical Requirements: V-3/02.04

#### Immunity Test Methods:

12/1089a	GR-1089-CORE, Issue 3, October 2002: Electromagnetic Compatibility and Electrical Safety - Generic Criteria for Network Telecommunications Equipment (sections 2, 3.3, and 3.5)
12/160D16	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 16 - Power Input
12/160D17	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 17 - Voltage Spike
12/160D18	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 18 - Audio Frequency Conducted Susceptibility - Power Inputs

September 30, 2004

Effective through

For the National Institute of Standards and Technology





Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 6009



ISO/IEC 17025:1999  
ISO 9002:1994

## Scope of Accreditation



Page: 6 of 9

### ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

NVLAP LAB CODE 100276-0

#### D.L.S. ELECTRONIC SYSTEMS, INC.

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/160D19	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 19 - Induced Signal Susceptibility
12/160D20	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 20 - Radio Frequency Susceptibility (Radiated and Conducted)
12/160D22	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 22 - Lightning Induced Transient Susceptibility
12/160D25	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 25 - Electrostatic Discharge (ESD)
12/I01	IEC 61000-4-2 (1995) and Amendment 1 (1998) and EN 61000-4-2: Electrostatic Discharge Immunity Test
12/I02	IEC 61000-4-3 (1995) and Amendment 1 (1998) and EN 61000-4-3: Radiated, Radio-Frequency Electromagnetic Field Immunity Test
12/I03	IEC 61000-4-4 (1995) and EN 61000-4-4: Electrical Fast Transient/Burst Immunity Test
12/I04	IEC 61000-4-5 (1995) and EN 61000-4-5: Surge Immunity Test

September 30, 2004

Effective through

For the National Institute of Standards and Technology

NVLAP-01S (06-01)



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 6009



ISO/IEC 17025:1999  
ISO 9002:1994

## Scope of Accreditation



Page: 7 of 9

### ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

NVLAP LAB CODE 100276-0

D.L.S. ELECTRONIC SYSTEMS, INC.

#### NVLAP Code Designation / Description

12/I05	IEC 61000-4-6 (1996) and EN 61000-4-6: Immunity to Conducted Disturbances, Induced Radio-Frequency Fields
12/I06	IEC 61000-4-8 (1993): Power Frequency Magnetic Field Immunity Test
12/I07	IEC 61000-4-11 (1994): Voltage Dips, Short Interruptions and Voltage Variations Immunity Tests
12/J111324	SAE J1113/24: Immunity to radiated electromagnetic fields; 10 kHz to 200 MHz - Crawford TEM cell and 10 kHz to 5 GHz - Wideband TEM cell
12/J111341	SAE J1113/41 (1995-07): Limits and methods of measurement of radio disturbance characteristics of components and modules for the protection of receivers used on board vehicles

#### Radio Test Methods

12/RSS119	RSS-119, Issue 6 (March 25, 2000): Land Mobile and Fixed Radio Transmitters and Receivers, 27.41 to 960 MHz
12/RSS123	RSS-123, Issue 1, Rev. 2 (November 6, 1999): Low Power Licensed Radiocommunication Devices
12/RSS137	RSS-137, Issue 1, Rev. 1 (September 25, 1999): Location and Monitoring Service (902 - 928 MHz)

September 30, 2004

Effective through

For the National Institute of Standards and Technology

NVLAP-01S (06-01)



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 6009



ISO/IEC 17025:1999  
ISO 9002:1994

## Scope of Accreditation



Page: 8 of 9

### ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

NVLAP LAB CODE 100276-0

**D.L.S. ELECTRONIC SYSTEMS, INC.**

#### *NVLAP Code Designation / Description*

- |           |  |
|-----------|--|
| 12/RSS139 | RSS-139, Issue 1 (February 5, 2000): Licensed Radiocommunications Devices in the Band 2400 - 2483.5 MHz  |
| 12/CIS15c | EN 55015 (2000) + A1 (2001): Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment |

#### **MIL-STD-462 : Conducted Emissions:**

- |        |                                    |
|--------|------------------------------------|
| 12/A18 | MIL-STD-461 Version E Method CE106 |
|--------|------------------------------------|

#### **MIL-STD-462 : Conducted Susceptibility:**

- |        |                                    |
|--------|------------------------------------|
| 12/B12 | MIL-STD-462 Version D Method CS101 |
| 12/B13 | MIL-STD-462 Version D Method CS103 |
| 12/B25 | MIL-STD-461 Version E Method CS114 |
| 12/B26 | MIL-STD-461 Version E Method CS115 |
| 12/B27 | MIL-STD-461 Version E Method CS116 |

#### **MIL-STD-462 : Radiated Emissions:**

- |        |                                    |
|--------|------------------------------------|
| 12/D04 | MIL-STD-462 Version D Method RE101 |
|--------|------------------------------------|

September 30, 2004

Effective through

For the National Institute of Standards and Technology



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 6009



ISO/IEC 17025:1999  
ISO 9002:1994

## Scope of Accreditation



Page: 9 of 9

**ELECTROMAGNETIC COMPATIBILITY  
AND TELECOMMUNICATIONS**

**NVLAP LAB CODE 100276-0**

**D.L.S. ELECTRONIC SYSTEMS, INC.**

***NVLAP Code    Designation / Description***

12/D05            MIL-STD-462 Version D Method RE102

12/D06            MIL-STD-462 Version D Method RE103

**MIL-STD-462 : Radiated Susceptibility:**

12/E08            MIL-STD-462 Version D Method RS101

12/E09            MIL-STD-462 Version D Method RS103

September 30, 2004

Effective through

For the National Institute of Standards and Technology

NVLAP-01S (06-01)



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 6009

## TABLE OF CONTENTS

i.	Cover Page.....	1
ii.	Signature Page .....	2
iii.	NVLAP Certificate of Accreditation .....	3
iv.	NVLAP Scope of Accreditation .....	4
v.	Table of Contents .....	13
1.0	Summary of Test Report.....	14
2.0	Introduction.....	14
3.0	Object.....	14
4.0	Test Set-Up .....	15
5.0	Test Equipment .....	16
6.0	Ambient Measurements .....	17
7.0	Description of Test Sample.....	18
8.0	Additional Description of Test Sample.....	21
9.0	Photo Information and Test Set-Up .....	22
10.0	Radiated Photos Taken During Testing .....	23
10.0	Conducted Photos Taken During Testing.....	25
11.0	Results of Tests .....	26
12.0	Conclusion .....	26
	TABLE 1 – EQUIPMENT LIST .....	27
	Appendix A – Electric Field Radiated Emissions Test.....	29
1.0	Conducted Emission Measurements .....	30
1.0	Conducted Data and Graph(s) taken during testing.....	31
2.0	Spurious Emissions at the Antenna Terminals .....	36
2.0	Conducted Emission Data and Charts made at the Antenna Terminals .....	37
3.0	Conducted Emissions (Antenna Terminal) Photos Taken During Testing.....	54
4.0	Restricted Bands .....	55
5.0	Band Edge and Restrict Band Compliance .....	55
5.0	Data and Graph(s) taken showing the Band Edge and Restrict Band Compliance .....	56
6.0	Field Strength of Spurious Emission Measurements .....	61
6.0	Radiated Data and Graph(s) taken for Field Strength Spurious Emission Measurements .....	63
7.0	Radiated Emissions Photos Taken During Testing.....	88
8.0	20 dB Bandwidth Graphs taken during testing.....	89
8.0	Carrier Frequency Separation Graph(s) taken during testing .....	93
8.0	Number of Hopping Frequencies Graph(s) taken during testing.....	95
8.0	Time of Occupancy Graphs taken during testing .....	97
8.0	Conducted Peak Output Power Graphs Taken During testing.....	100



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 6009

## 1.0 SUMMARY OF TEST REPORT

It was found that the R110XiIII Plus, Model Number(s) 110XiIII, "**meets**" the radio interference conducted and radiated emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Section 15.247 for operational in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz, Bands. It should be noted that the amount of margin was only 3.2 dB at 6404 MHz, radiated. The normal tolerance of the test equipment is  $\pm 3$  dB. Due to this tolerance and the variation in normal production, a margin of at least 6 dB is recommended.

This test report relates only to the items tested and contains the following number of pages.

Text: 103

## 2.0 INTRODUCTION

On June 10, 2004, a series of radio frequency interference measurements was performed on R110XiIII Plus, Model Number(s) 110XiIII, Serial Number: 91C04220027. The tests were performed according to the procedures of the FCC as stated in the "Methods of Measurement of Radio-Noise Emissions for Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz" found in the American National Standards Institute, ANSI C63.4-2001. Tests were performed by personnel of D.L.S. Electronic Systems, Inc. who are responsible to Donald L. Sweeney, Senior EMC Engineer.

## 3.0 OBJECT

The purpose of this series of tests was to determine if the test sample could meet the radio frequency interference emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Sections 15.205, 15.209 & 15.247 for Intentional Radiators operating in the Bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 6009

#### 4.0 TEST SET-UP

All emission tests were performed at D.L.S. Electronic Systems, Inc. and set up according to the American National Standards Institute, ANSI C63.4-2001, Section 8, (Figures 11a and 11b).

All radiated emissions tests were performed with the test item placed on a 80 cm high rotating non-conductive table, located in the test room. Equipment normally operated on the floor was placed on a metal covered turntable which is flush with the surrounding conducting ground plane. The ground plane has an electrical isolation layer over its surface approximately 7 mm thick. The EUT is separated from the turntable ground plane by a non-conductive layer. The equipment under test was set up according to ANSI C63.4-2001, Sections 6 and 8.



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 6009

## 5.0 TEST EQUIPMENT (Bandwidths and Detector Function)

All preliminary data below 1000 MHz was automatically plotted using the HP Spectrum Analyzer or ESI 26/40 Fixed Tuned Receiver. The data was taken using Peak, Quasi-Peak or the Average Detector Functions as required. This information was then used to determine the frequencies of maximum emissions. Above 1000 MHz, final data was taken using the Average Detector.

Below 1000 MHz, final data was taken using the HP Spectrum Analyzer and/or ESI 26/40 Fixed Tuned Receiver. These plots were made using the Peak or Quasi-Peak Detector functions, with manual measurements performed on the questionable frequencies using the Quasi-Peak or the Average Detector Function of the Analyzer or ESI 26/40 Fixed Tuned Receiver as required. Above 1000 MHz, final data was taken using the Average Detector on the Spectrum Analyzer.

The bandwidths shown below are specified by ANSI C63.4-2001, Section 4.2.

Frequency Range	Bandwidth (-6 dB)
10 to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz
30 MHz to 1 GHz	120 kHz
Above 1 GHz	1 MHz

A list of the equipment used can be found in Table 1. All primary equipment was calibrated against known reference standards with a verified traceable path to NIST.





Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 6009

## 6.0 AMBIENT MEASUREMENTS

For emissions measurements, broadband antennas and an EMI Test Receiver with a panoramic spectrum display are used. First the frequency range is scanned and displayed on the test receiver display. Next the scanned frequency range is divided into smaller ranges, and then it is manually tuned through to determine the emissions from the EUT. A headset or loudspeaker is connected to the test receiver's AM/FM demodulated output as an aid in detecting ambient signals and finding frequencies of significant emission from the EUT. If there is any doubt as to the source of the emission, it is further investigated by rotating the EUT, or by disconnecting the power from the EUT.

The EUT is set up in its typical configuration and operated in its various modes. For tabletop systems, cables are manipulated within the range of likely configurations. For floor-standing equipment, the cables are located in the same manner as the user would install them and no further manipulation is made. If the manner of cable installation is not known, or if it changes with each installation, cables or wires for floor-standing equipment shall be manipulated to the extent possible to produce the maximum level of emissions. For each mode of operation, the frequency spectrum is monitored. Variations in antenna height, antenna polarization, EUT azimuth, and cable or wire placement (each variable within bounds specified elsewhere) are explored to produce the emissions that have the highest amplitude relative to the limit. These methods are performed to the specifications in ANSI C63.4: 2001.



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 6009

## 7.0 DESCRIPTION OF TEST SAMPLE: (See also Paragraph 8.0)

### 7.1 Description:

Zebra R110XiIII is a RFID Thermal Transfer on demand printer. Capable of printing RFID labels. Printer powered through an IEC 320 connector, from 90-264 VAC, 47-63 Hz. Printer uses ZPL programming language, capable of receiving data via Serial connector, Parallel connector ( covered when other communications options are installed). For this test the 10 base T print server option is installed and used for sending data packets of label data to the printer, from a Dell Laptop Computer.



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 6009

## 7.0 DESCRIPTION OF TEST SAMPLE: (CON'T)

### 7.2 PHYSICAL DIMENSIONS OF EQUIPMENT UNDER TEST

Long 49.5cm x Width: 26.3 cm x High: 39.5 cm

### 7.3 LINE FILTER USED:

Yunpen YL06T1, Corcom 6EGG  
High - Low 06SS3-SR-Q

### 7.4 INTERNAL CLOCK FREQUENCIES:

Switching Power Supply Frequencies:

46 KHz, 56 KHz, 100 kHz

Clock Frequencies:

Printer CPU: 3.6469 MHz, 8.0 MHz, 16.0 MHz, 32.0 MHz  
25 MHz, 33 MHz, 66 MHz, & 133 MHz



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

## 7.0 DESCRIPTION OF TEST SAMPLE: (CON'T)

### 7.5 DESCRIPTION OF ALL CIRCUIT BOARDS:

- |                                     |                      |
|-------------------------------------|----------------------|
| 1. CPU Board Assy                   | PN: 33008 Rev 4      |
| 2. Control Panel Board Assy         | PN: 49750, Rev 1     |
| 3. AC Power supply board Assy       | PN: 33050 rev 1      |
| 4. DC Power supply board Assy       | PN: 49795 Rev 3      |
| 5. Print server, 10 Base T Ethernet | PN: 46686A-001 Rev 1 |
| 6. RFID Reader (Rx PCB)             |                      |
| 7. RFID Reader (Tx PCB)             |                      |



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

8.0 ADDITIONAL DESCRIPTION OF TEST SAMPLE:  
(See also Paragraph 7.0)

1: There were no additional descriptions noted at the time of test.

I certify that the above, as described in paragraph 7.0, describes the equipment tested and will be manufactured as stated.

By: \_\_\_\_\_  
Signature Title

For: \_\_\_\_\_  
Company Date



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

## 9.0 PHOTO INFORMATION AND TEST SET-UP

Item 0 R110XiIII Plus

Model Number: 110XiIII Serial Number: 91C04220027

Item 1 Non-shielded AC Power Line Cord. 2m

Item 2 Shielded USB Cable with Metal Shells. 2m

Item 3 Shielded Serial Cable with Metal Shells. 2m


Item 4 Non-shielded Cat 5 Ethernet Cable with Plastic Shells going to external Computer. 18m



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781


1250 Peterson Dr., Wheeling, IL 60090

## RADIATED PHOTOS TAKEN DURING TESTING

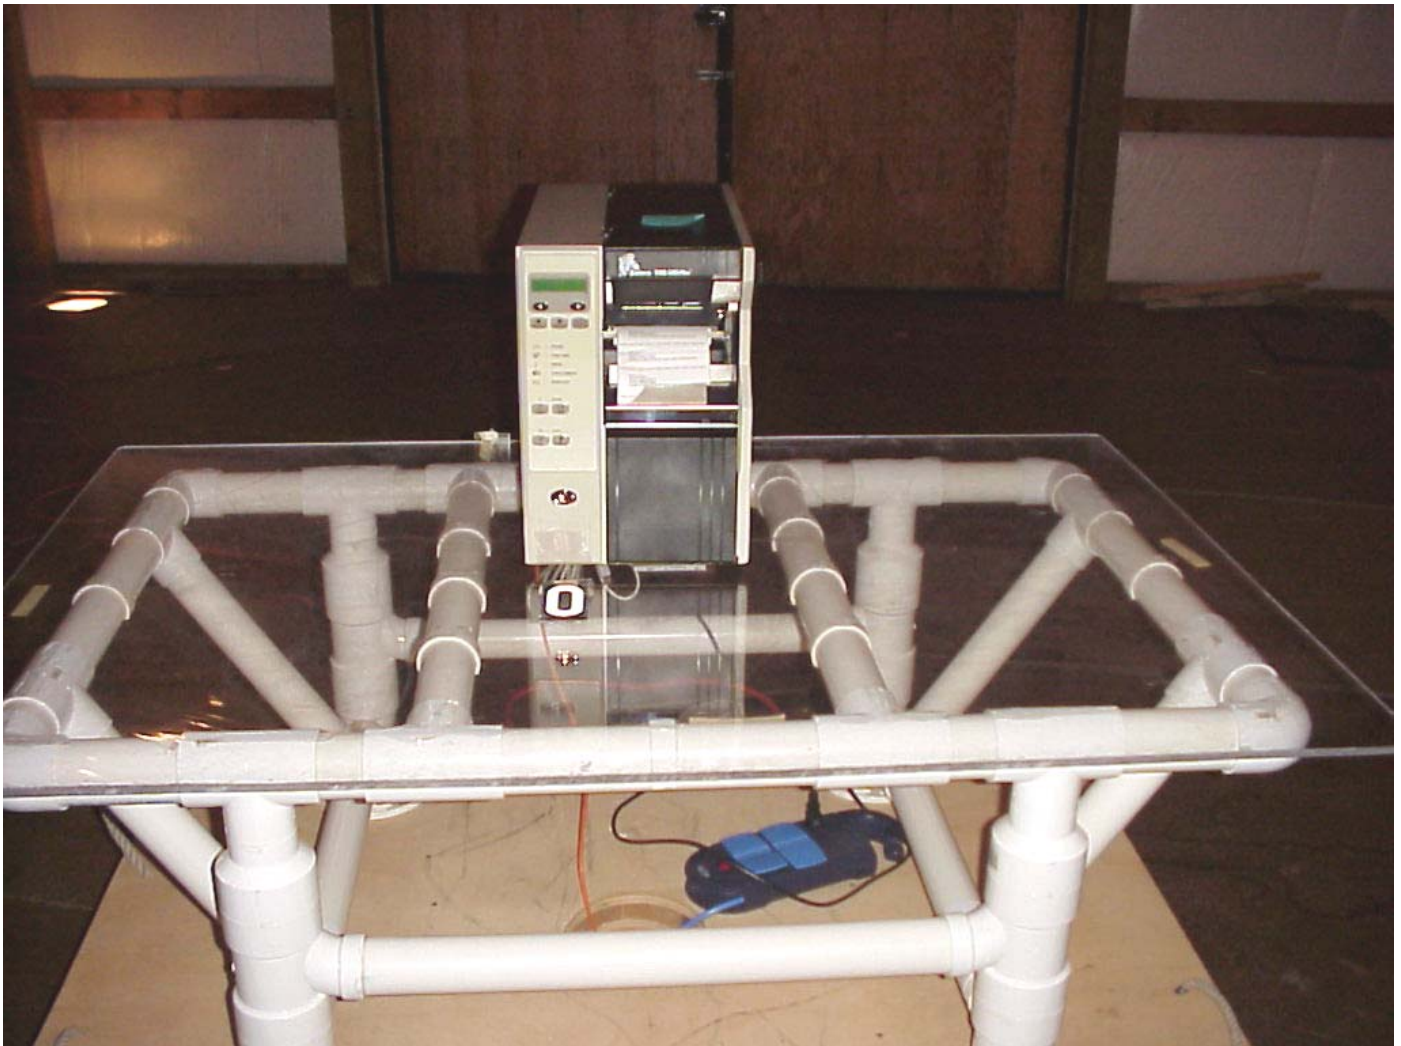

1250 Peterson Dr., Wheeling, IL 60090

## 10.0 RADIATED PHOTOS TAKEN DURING TESTING (CON'T):

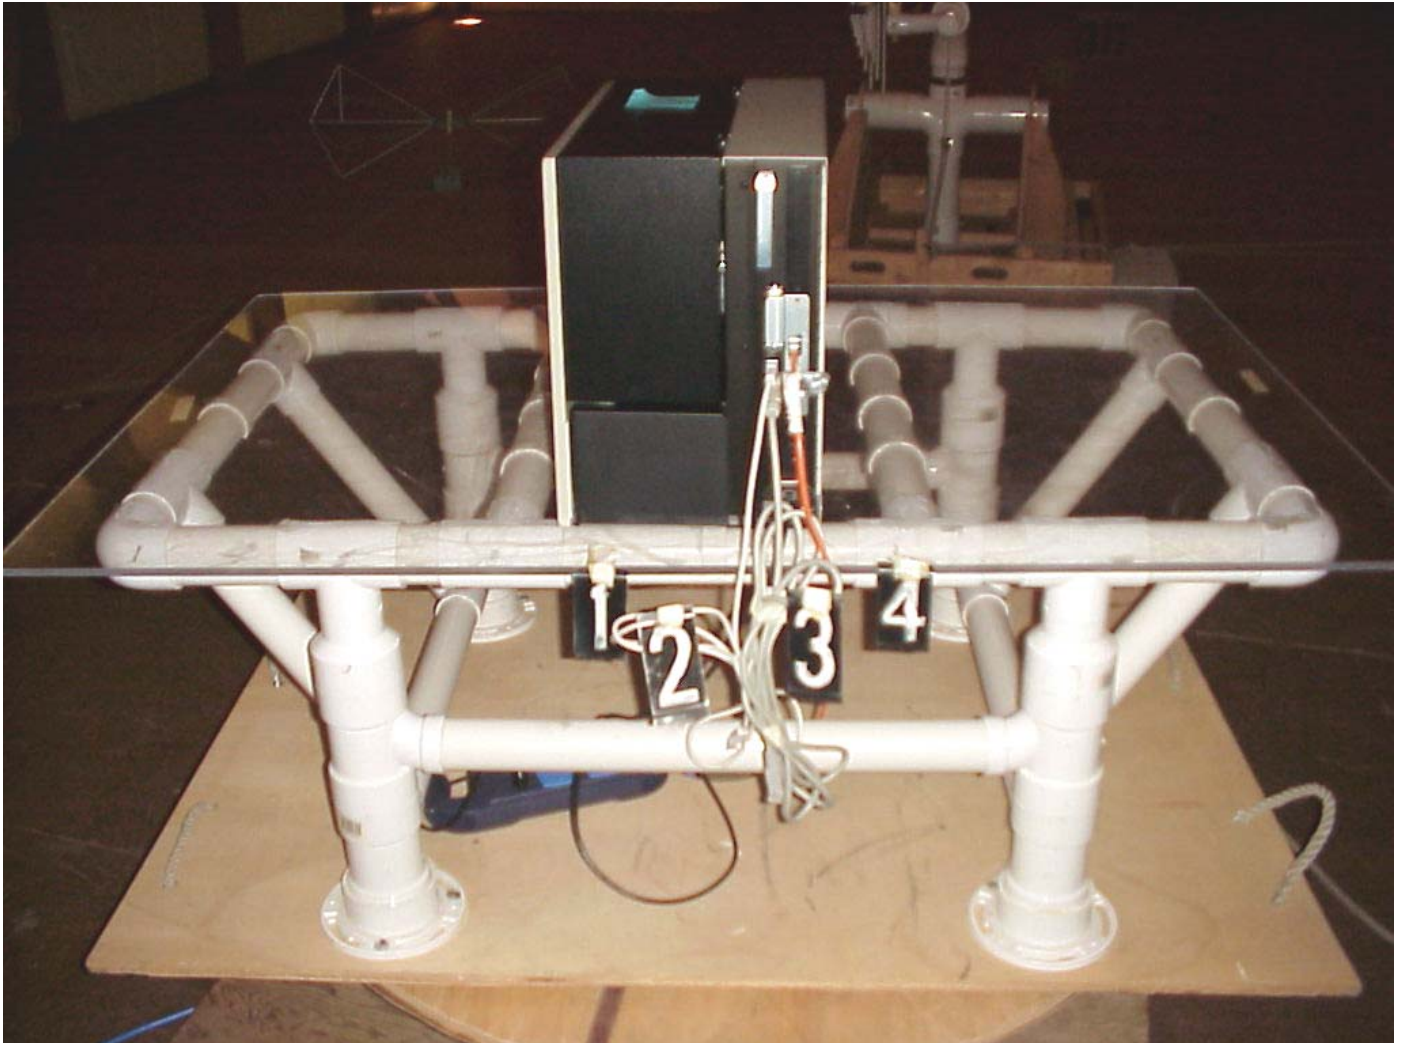





Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

## 10.0 CONDUCTED PHOTOS TAKEN DURING TESTING





Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

## 11.0 RESULTS OF TESTS

The radio interference emission charts results can be seen on the pages at the end of this report. Data sheets indicating the test measurements taken during testing can also be found at the end of this report. Points on the emission charts shown with a yellow mark are background frequencies that were verified during testing.

## 12.0 CONCLUSION

It was found that the R110XiIII Plus, Model Number(s) 110XiIII "**meets**" the radio interference conducted and radiated emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Section 15.247 for operational in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz, Bands.

It should be noted that the amount of margin was only 3.2 dB at 6404 MHz, radiated. The normal tolerance of the test equipment is  $\pm 3$  dB. Due to this tolerance and the variation in normal production, a margin of at least 6 dB is recommended.



Company: Zebra Technologies Corporation  
 Model Tested: 110XiIII  
 Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

TABLE 1 – EQUIPMENT LIST

Test Equipment	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Due Dates
Spectrum Analyzer	Hewlett/ Packard	8566B	2240A002041	100 Hz – 22 GHz	10/04
Quasi-Peak Adapter	Hewlett/ Packard	85650A	2043A00121	10 kHz – 1 GHz	10/04
Spectrum Analyzer	Hewlett/ Packard	8566B	2421A00452	100 Hz – 22 GHz	2/05
Quasi-Peak Adapter	Hewlett/ Packard	85650A	2043A00450	10 kHz – 1 GHz	2/05
Spectrum Analyzer	Hewlett/ Packard	8591A	3009A00700	9 kHz – 1.8 GHz	3/05
Receiver	Electrometrics	EMC-30	44168	10 kHz – 1 GHz	9/04
Receiver	Rohde & Schwarz	ESI 26	837491/010	20 Hz – 26 GHz	11/04
Receiver	Rohde & Schwarz	ESI 40	837808/006	20 Hz – 40 GHz	12/04
Receiver	Rohde & Schwarz	ESI 40	837808/005	20 Hz – 40 GHz	12/04
Antenna	EMCO	3104C	00054891	20 MHz – 200 MHz	2/05
Antenna	Electrometrics	LPA-25	1114	200 MHz – 1 GHz	3/05
Antenna	EMCO	3104C	00054892	20 MHz – 200 MHz	3/05

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

TABLE 1 – EQUIPMENT LIST

Test Equipment	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Due Dates
Antenna	Electrometrics	3146	1205	200 MHz – 1 GHz	3/05
Antenna	EMCO	3104C	97014785	20 MHz – 200 MHz	2/05
Antenna	EMCO	3146	97024895	200 MHz – 1 GHz	3/05
Antenna	EMCO	3115	2479	1 GHz – 18 GHz	8/04
Antenna	EMCO	3115	99035731	1 GHz – 18 GHz	4/05
Antenna	Rohde & Schwarz	HUF-Z1	829381001	20 MHz – 1 GHz	2/05
Antenna	Rohde & Schwarz	HUF-Z1	829381005	20 MHz – 1 GHz	8/04
LISN	Solar	8012-50-R-24-BNC	8305116	10 MHz – 30 MHz	8/04
LISN	Solar	8012-50-R-24-BNC	814548	10 MHz – 30 MHz	8/04
LISN	Solar	9252-50-R-24-BNC	961019	10 MHz – 30 MHz	12/04
LISN	Solar	9252-50-R-24-BNC	971612	10 MHz – 30 MHz	10/04
LISN	Solar	9252-50-R-24-BNC	92710620	10 MHz – 30 MHz	7/04

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

# TEST PROCEDURE

Part 15, Subpart C, Section 15.247 (a-h)

**OPERATION WITHIN THE BAND 902-928 MHz, 2400-2483.5 MHz  
AND 5725-5857 MHz**



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

## 1.0 CONDUCTED EMISSION MEASUREMENTS

If applicable, the conducted emissions were measured over the frequency range from 150 kHz to 30 MHz in accordance with the power line measurements as specified in the American National Standards Institute, ANSI C63.4-2001, Section 12. Since the device is operated from the public utility lines, the 115 Vac 60 Hz power leads, high and low sides, were to be measured by connecting the measuring equipment to the appropriate meter terminal of the LISN. All signals were then recorded. The allowed levels for Intentional Radiators cannot exceed 250 uV (47.96 dBuV) at any frequency between 150 kHz and 30 MHz, as stated in Section 15.207a.

**All conducted emissions measurements were made at a test room temperature of 70°F at 63% relative humidity.**



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

## CONDUCTED DATA AND GRAPH(S) TAKEN DURING TESTING

**PART 15.207**


## FCC Part 15 Class B

### Voltage Mains Test

EUT: R110XiIIIPlus  
Manufacturer: Zebra Technologies  
Operating Condition: 70 deg. F, 63% R.H.  
Test Site: DLS OF Screen Room  
Operator: Jason L  
Test Specification: 120 VAC, 60 Hz  
Comment: Line 1  
Date: 6/11/04

### SCAN TABLE: "FCC ClassB Voltage"

Short Description:			FCC Class B Voltage			
Start	Stop	Step	Detector	Meas.	IF	Transducer
Frequency	Frequency	Width		Time	Bandw.	
150.0 kHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	LISN DLS#128
			Average			

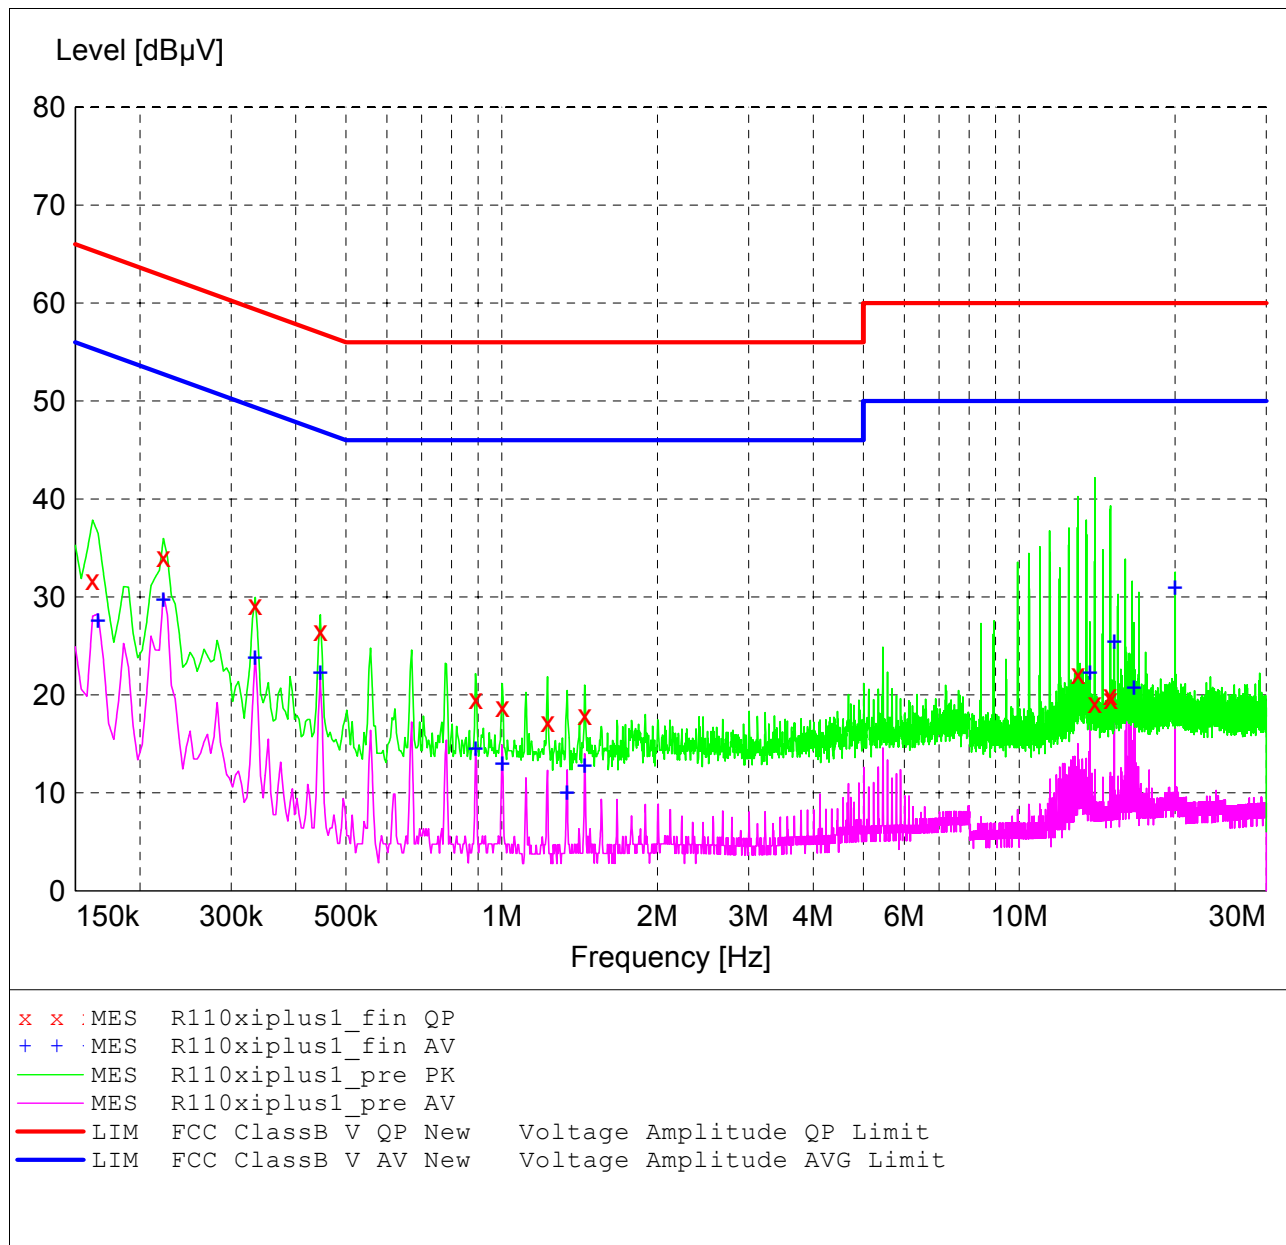



**MEASUREMENT RESULT: "R110xiplus1\_fin QP"**

6/11/2004 8:49AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.162000	31.70	11.4	65	33.6	1	---
0.222000	34.10	10.8	63	28.7	1	---
0.334000	29.20	10.5	59	30.2	1	---
0.446000	26.50	10.4	57	30.5	1	---
0.890000	19.60	10.3	56	36.4	1	---
1.002000	18.80	10.3	56	37.2	1	---
1.226000	17.20	10.3	56	38.8	1	---
1.446000	18.00	10.3	56	38.0	1	---
12.986000	22.10	11.0	60	37.9	1	---
13.998000	19.20	11.1	60	40.8	1	---
14.986000	20.00	11.2	60	40.0	1	---
15.014000	19.60	11.2	60	40.4	1	---

**MEASUREMENT RESULT: "R110xiplus1\_fin AV"**

6/11/2004 8:49AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.166000	27.50	11.4	55	27.6	1	---
0.222000	29.70	10.8	53	23.0	1	---
0.334000	23.80	10.5	49	25.5	1	---
0.446000	22.20	10.4	47	24.7	1	---
0.890000	14.50	10.3	46	31.5	1	---
1.002000	13.00	10.3	46	33.0	1	---
1.338000	10.00	10.3	46	36.0	1	---
1.446000	12.70	10.3	46	33.3	1	---
13.694000	22.30	11.1	50	27.7	1	---
15.262000	25.40	11.2	50	24.6	1	---
16.658000	20.70	11.4	50	29.3	1	---
20.002000	30.90	11.5	50	19.1	1	---


## FCC Part 15 Class B

### Voltage Mains Test

EUT: R110XiIIIPlus  
Manufacturer: Zebra Technologies  
Operating Condition: 70 deg. F, 63% R.H.  
Test Site: DLS OF Screen Room  
Operator: Jason L  
Test Specification: 120 VAC, 60 Hz  
Comment: Line 2  
Date: 6/11/04

### SCAN TABLE: "FCC ClassB Voltage"

Short Description:			FCC Class B Voltage			
Start	Stop	Step	Detector	Meas.	IF	Transducer
Frequency	Frequency	Width		Time	Bandw.	
150.0 kHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	LISN DLS#128
			Average			

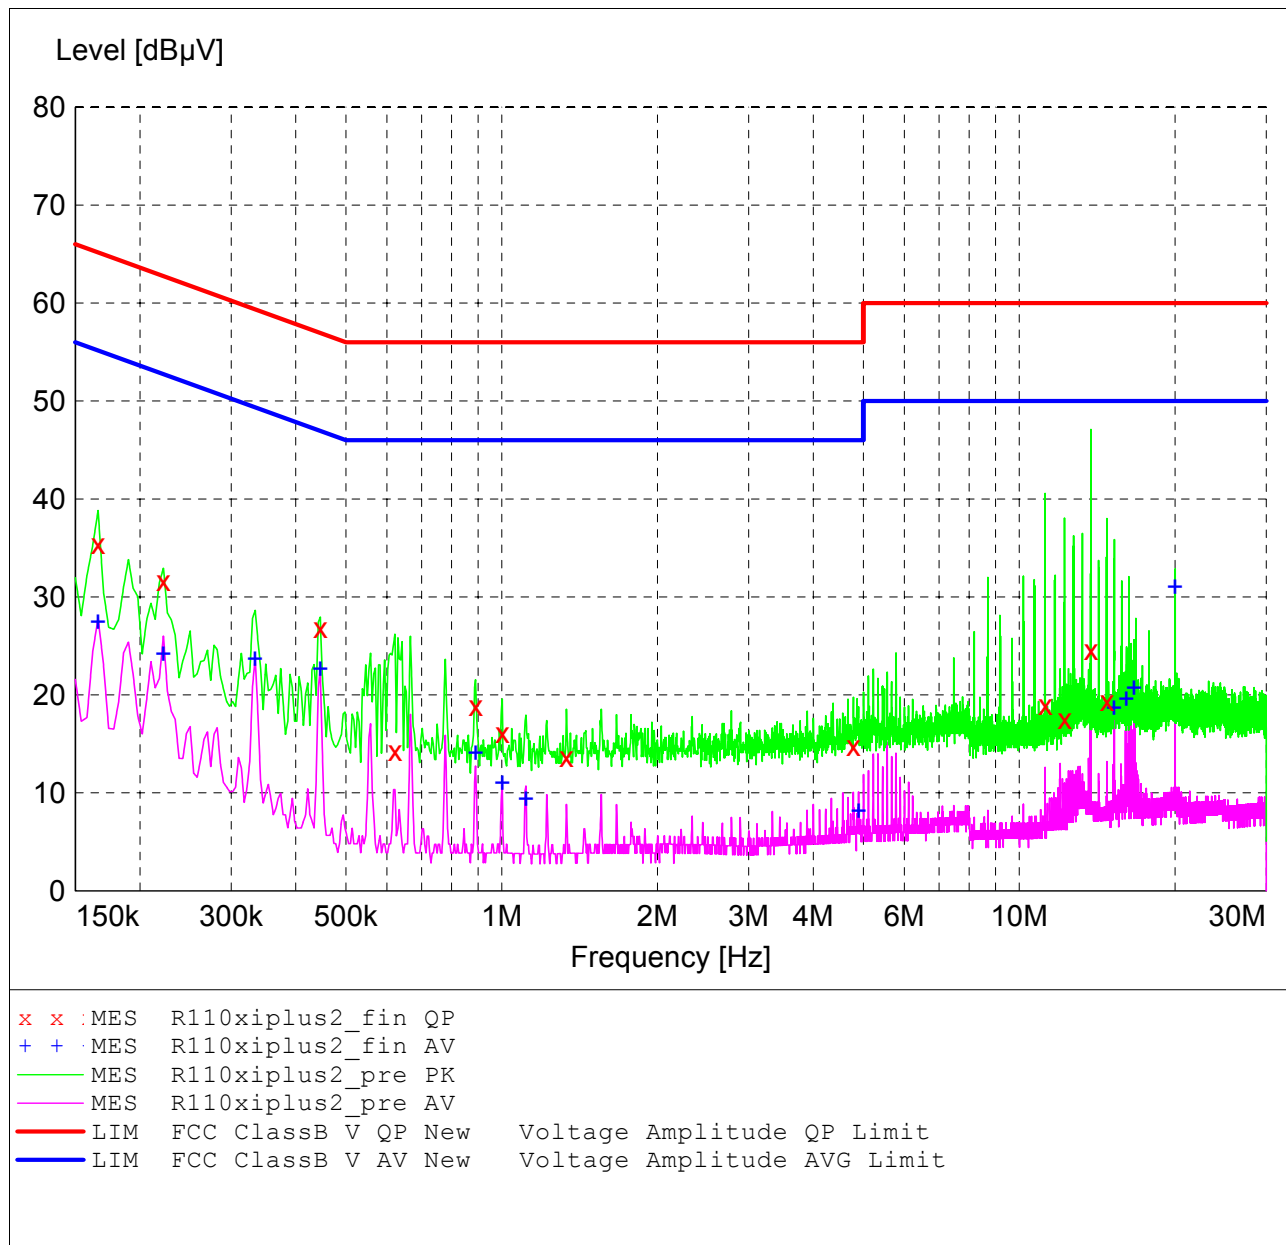

**MEASUREMENT RESULT: "R110xiplus2\_fin QP"**

6/11/2004 8:54AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.166000	35.40	11.4	65	29.8	1	---
0.222000	31.60	10.8	63	31.1	1	---
0.446000	26.80	10.4	57	30.1	1	---
0.622000	14.30	10.3	56	41.7	1	---
0.890000	18.90	10.3	56	37.1	1	---
1.002000	16.10	10.3	56	39.9	1	---
1.334000	13.70	10.3	56	42.3	1	---
4.782000	14.80	10.5	56	41.2	1	---
11.222000	19.00	11.0	60	41.0	1	---
12.238000	17.50	11.0	60	42.5	1	---
13.754000	24.60	11.1	60	35.4	1	---
14.770000	19.40	11.2	60	40.6	1	---

**MEASUREMENT RESULT: "R110xiplus2\_fin AV"**

6/11/2004 8:54AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.166000	27.40	11.4	55	27.8	1	---
0.222000	24.20	10.8	53	28.5	1	---
0.334000	23.70	10.5	49	25.7	1	---
0.446000	22.60	10.4	47	24.4	1	---
0.890000	14.10	10.3	46	31.9	1	---
1.002000	11.00	10.3	46	35.0	1	---
1.114000	9.40	10.3	46	36.6	1	---
4.894000	8.20	10.6	46	37.8	1	---
15.242000	18.70	11.2	50	31.3	1	---
16.110000	19.60	11.3	50	30.4	1	---
16.658000	20.70	11.4	50	29.3	1	---
20.002000	31.00	11.5	50	19.0	1	---



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

## 2.0 SPURIOUS EMISSIONS AT ANTENNA TERMINALS – PART 15.247(c)

Spurious conducted emissions were measured at the antenna terminals. Plots were made showing the amplitude of each harmonic emission with the equipment operated. As shown by the radiated charts there was no reason to believe that there were any spurious emissions other than the harmonics that were than individually investigated when doing the conducted test at the antenna terminals. Measurements were made up to the 10<sup>th</sup> harmonic of the fundamental.

The allowed emissions for transmitters operating in the 902 MHz to 928 MHz bands for R110XiIII Plus equipment are found under Part 15, Section 15.247(c). This paragraph states that in any 100 kHz bandwidth outside the frequency band which the spread spectrum intentional radiator is operating, the radio frequency power produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

**NOTE: See the following pages for the data ad graphs of the actual measurements made:**



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

CONDUCTED EMISSION DATA AND GRAPH(S) TAKEN FOR  
SPURIOUS EMISSION MEASUREMENTS MADE  
AT THE ANTENNA TERMINALS

PART 15.247(c)




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Spurious Emissions - Conducted  
Operator: Jason L.  
Comment: High Channel Transmit = 927.25 MHz  
Frequency Range: 30 to 1000 MHz  
Limit = 8.70 dBm

All Spurious Emissions at Least 20 dB below Peak Level of In Band Frequency

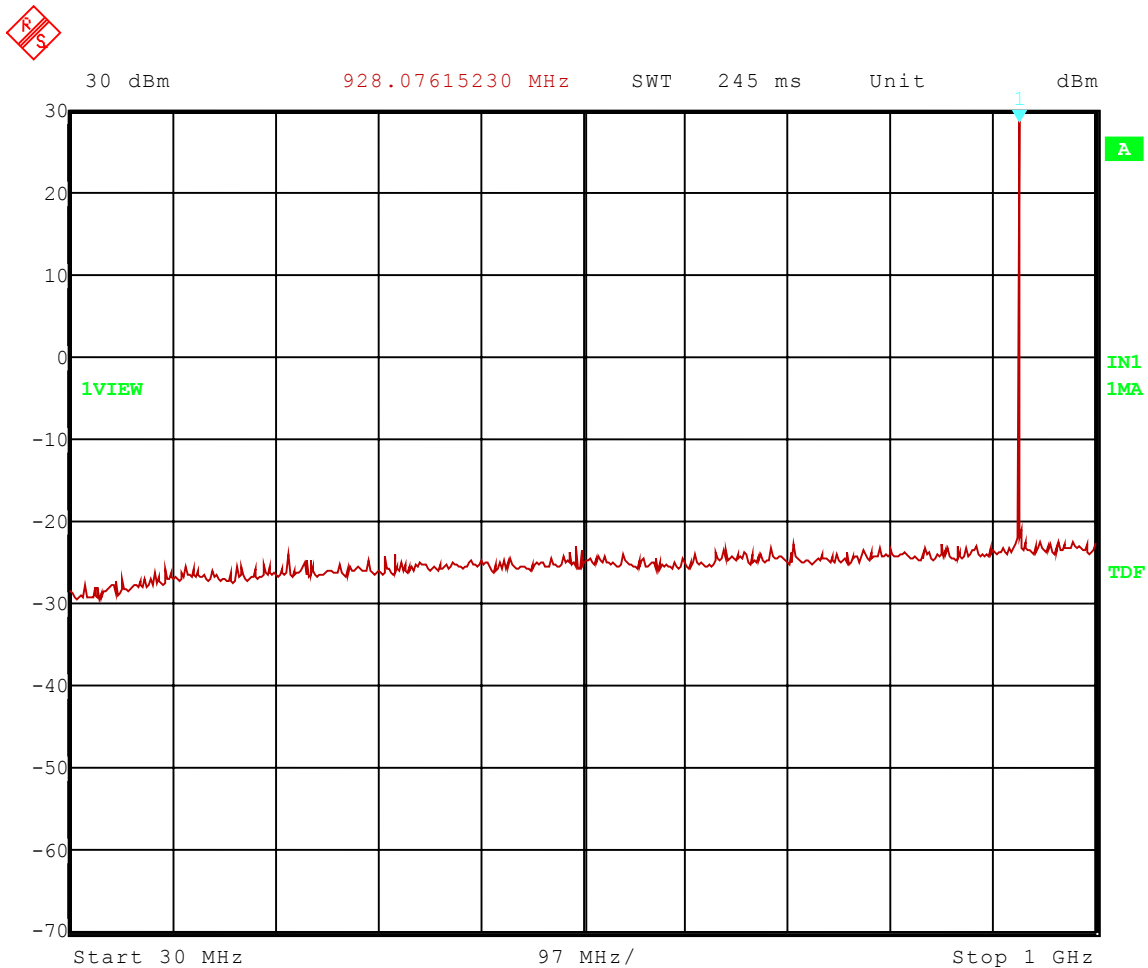

Date: 10.JUN.2004 11:35:07




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Spurious Emissions - Conducted  
Operator: Jason L.  
Comment: High Channel Transmit = 927.25 MHz  
Frequency Range: 900 to 1000 MHz  
Limit = 8.70 dBm

All Spurious Emissions at Least 20 dB below Peak Level of In Band Frequency

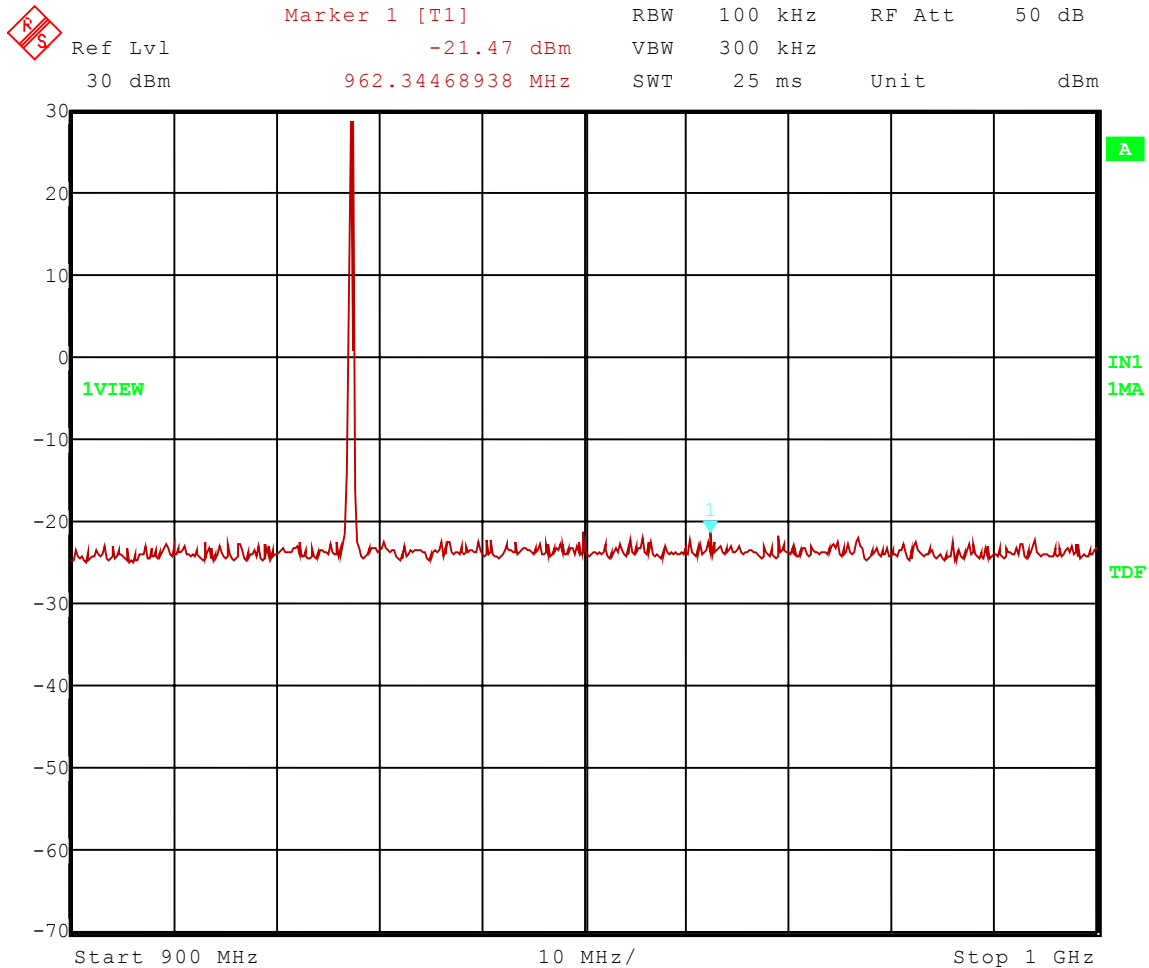

Date: 10.JUN.2004 11:36:04




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Spurious Emissions - Conducted  
Operator: Jason L.  
Comment: High Channel Transmit = 927.25 MHz  
Frequency Range: 1 to 3 GHz  
Limit = 8.70 dBm

All Spurious Emissions at Least 20 dB below Peak Level of In Band Frequency

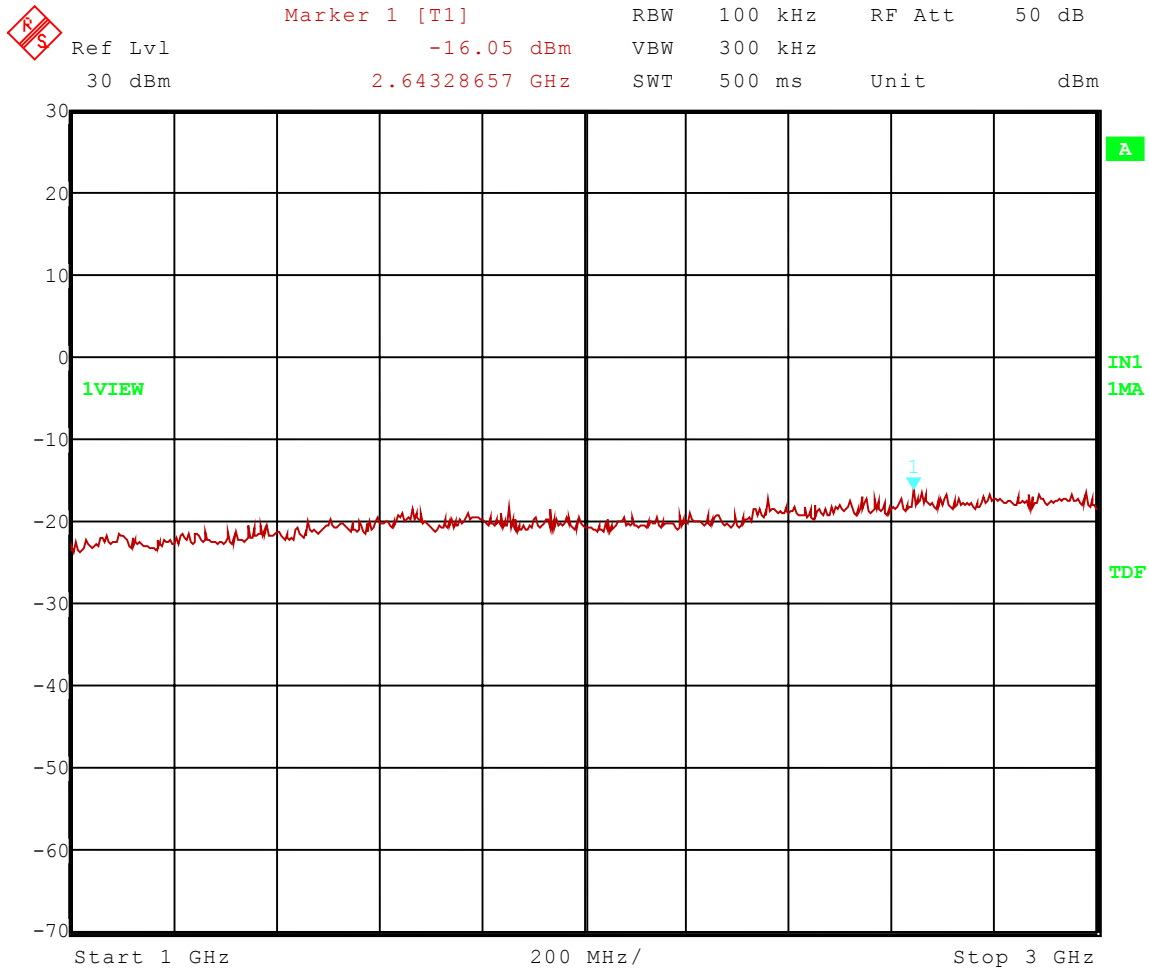

Date: 10.JUN.2004 11:37:07






Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Spurious Emissions - Conducted  
Operator: Jason L.  
Comment: High Channel Transmit = 927.25 MHz  
Frequency Range: 3 to 10 GHz  
Limit = 8.70 dBm

All Spurious Emissions at Least 20 dB below Peak Level of In Band Frequency

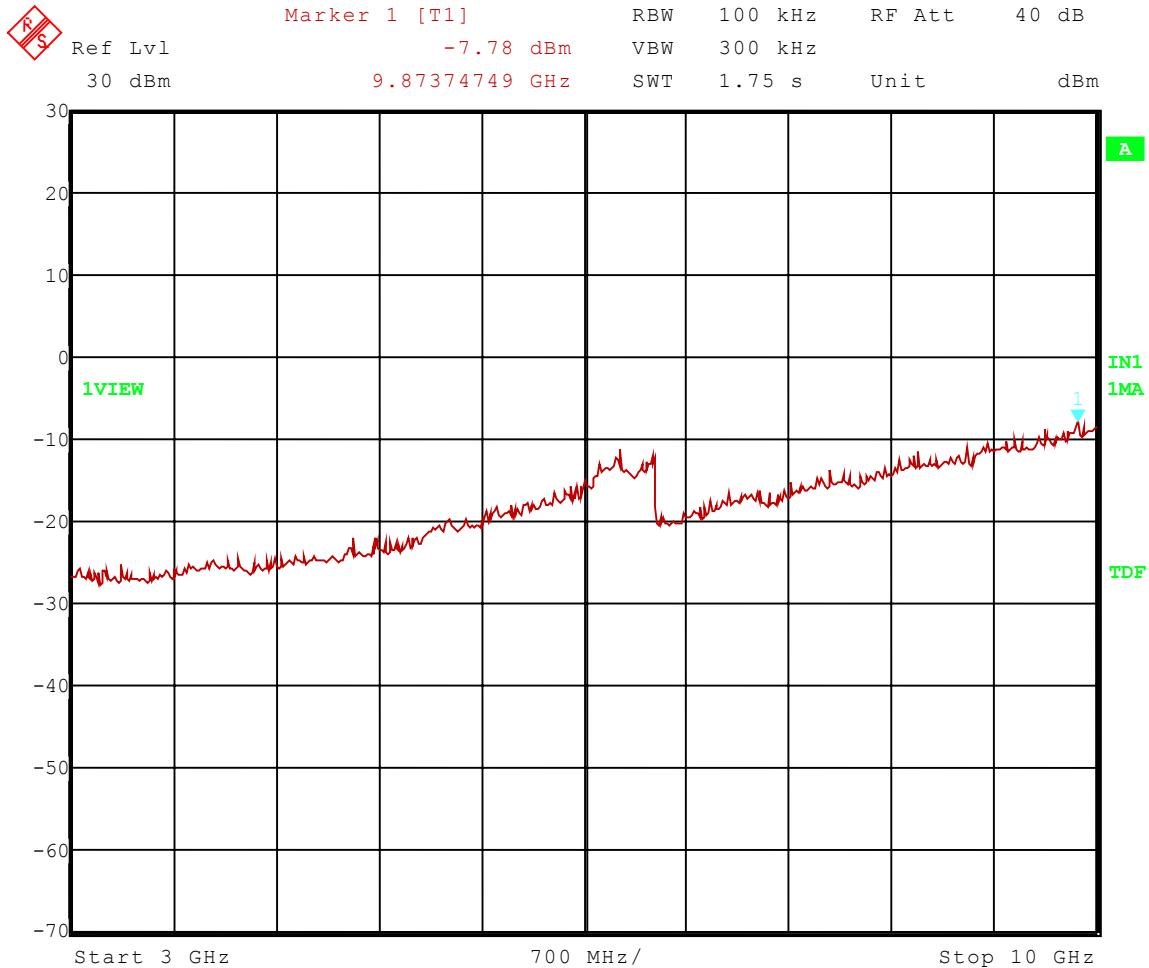

Date: 10.JUN.2004 11:38:49




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Spurious Emissions - Conducted  
Operator: Jason L.  
Comment: Middle Channel Transmit = 914.75 MHz  
Frequency Range: 30 to 1000 MHz  
Limit = 8.57 dBm

All Spurious Emissions at Least 20 dB below Peak Level of In Band Frequency

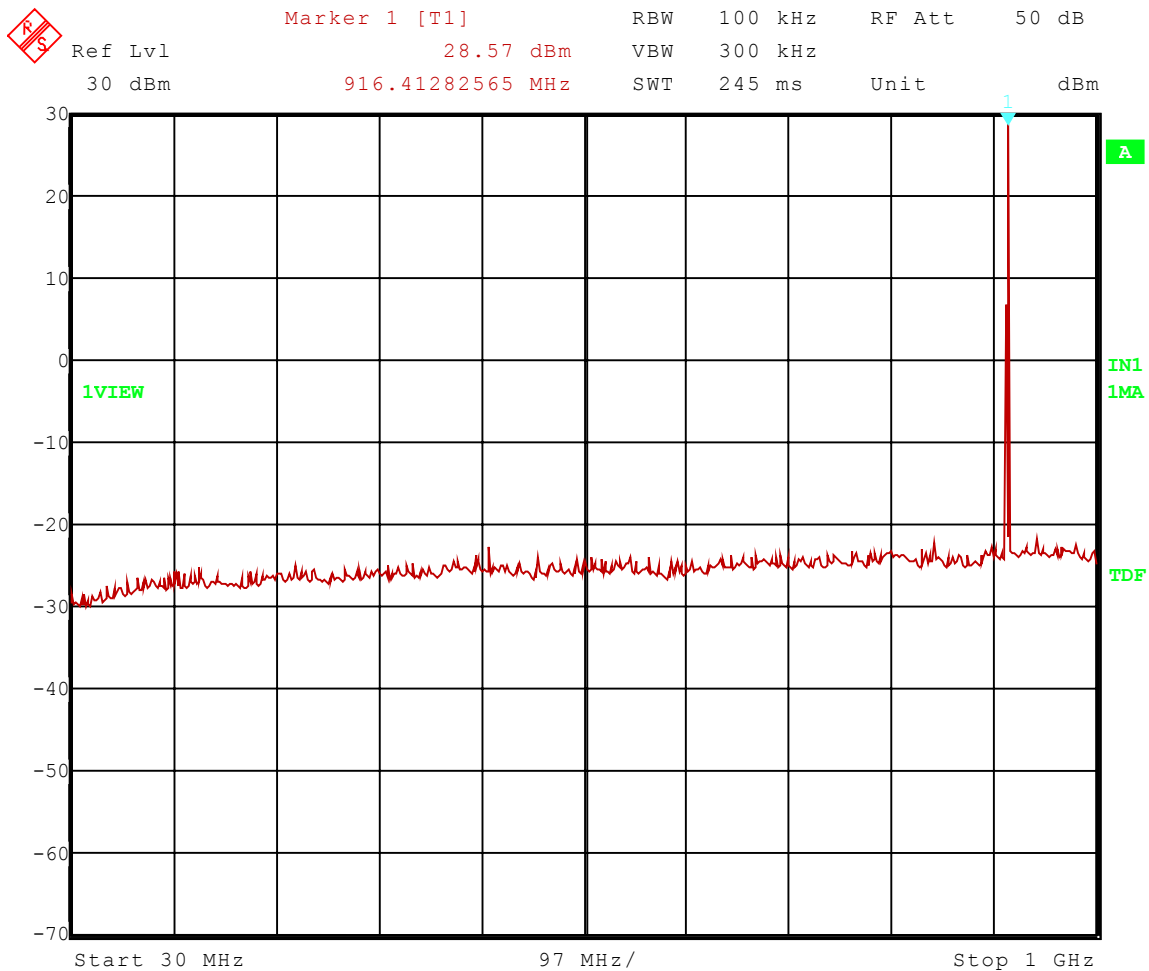

Date: 10.JUN.2004 11:30:05




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Spurious Emissions - Conducted  
Operator: Jason L.  
Comment: Middle Channel Transmit = 914.75 MHz  
Frequency Range: 900 to 1000 MHz  
Limit = 8.57 dBm

All Spurious Emissions at Least 20 dB below Peak Level of In Band Frequency

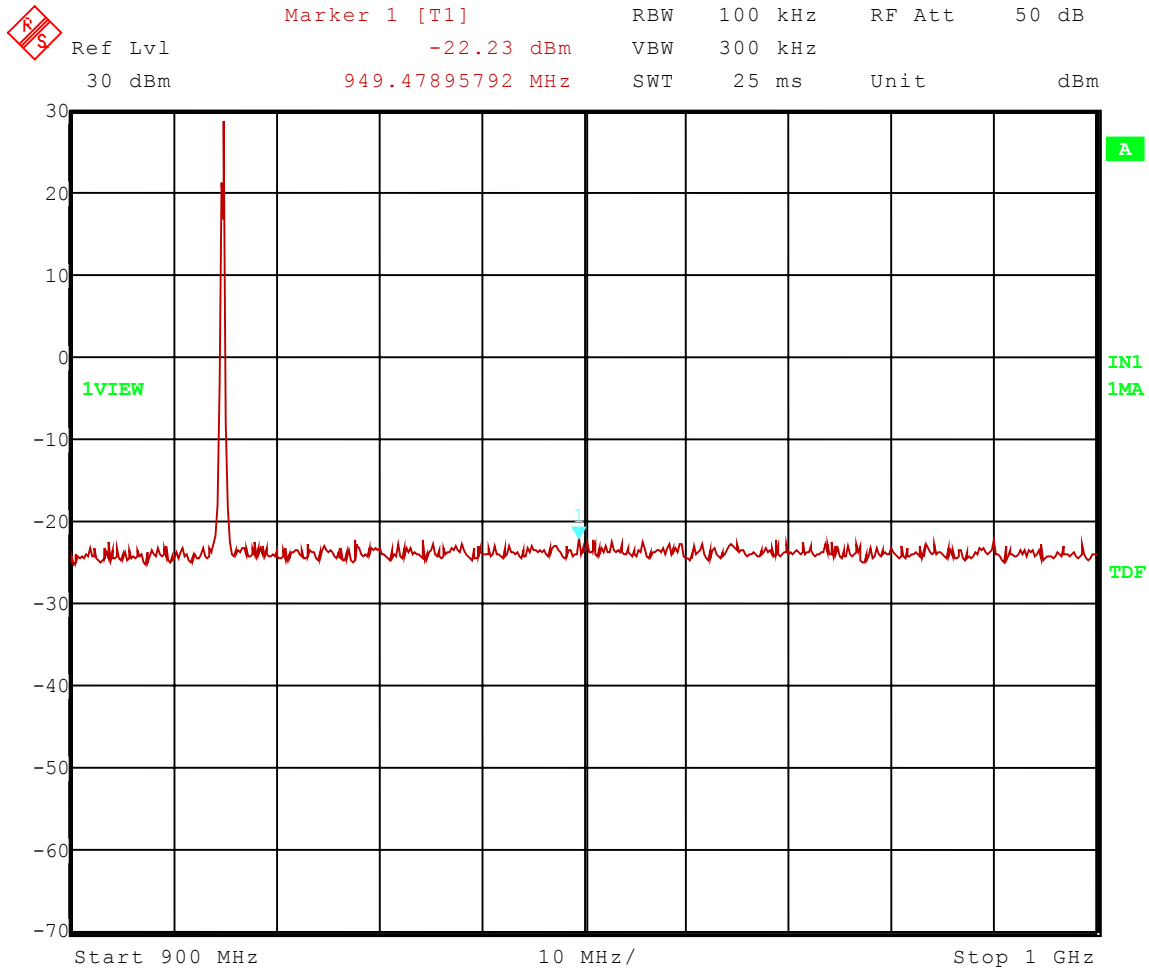

Date: 10.JUN.2004 11:30:55




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Spurious Emissions - Conducted  
Operator: Jason L.  
Comment: Middle Channel Transmit = 914.75 MHz  
Frequency Range: 1 to 3 GHz  
Limit = 8.57 dBm

All Spurious Emissions at Least 20 dB below Peak Level of In Band Frequency

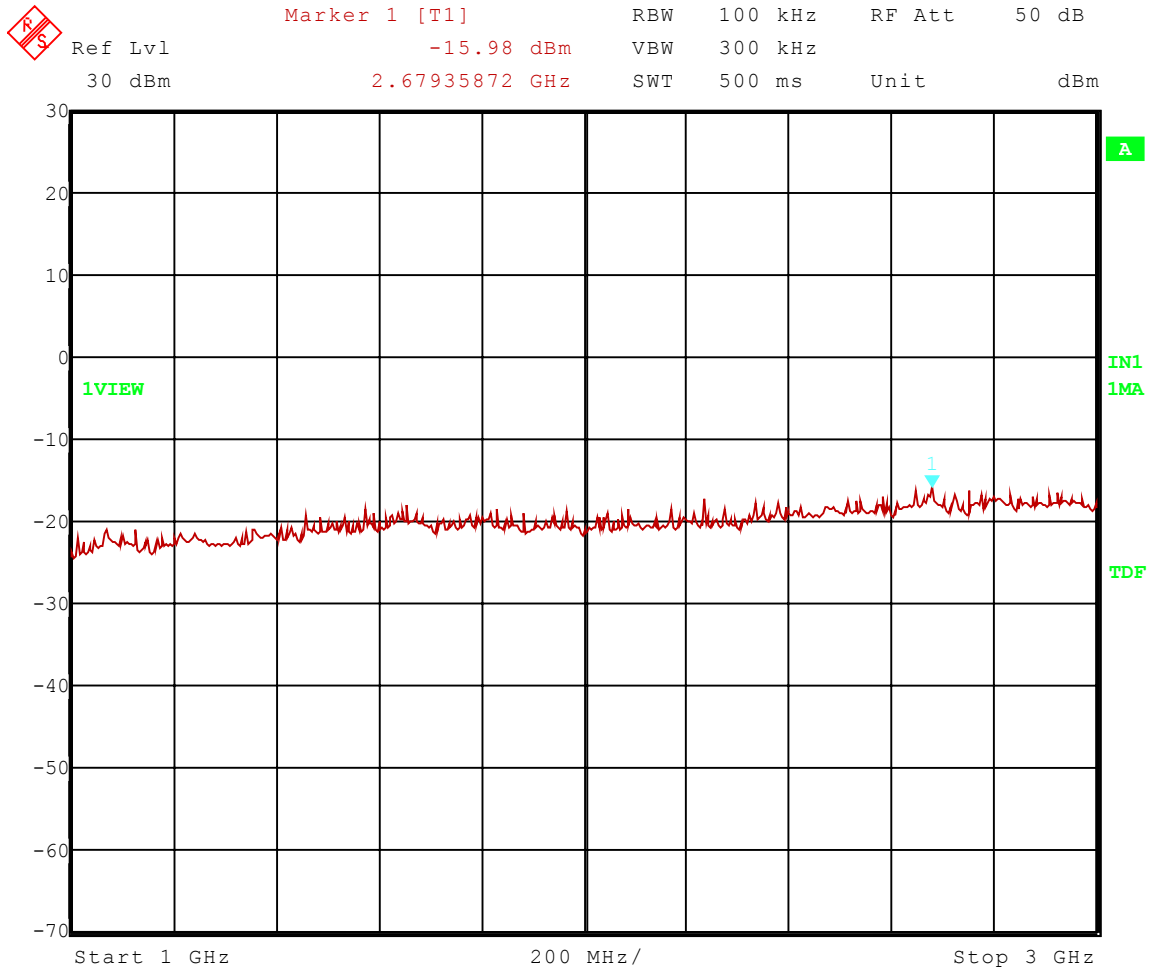

Date: 10.JUN.2004 11:31:50




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Spurious Emissions - Conducted  
Operator: Jason L.  
Comment: Middle Channel Transmit = 914.75 MHz  
Frequency Range: 3 to 10 GHz  
Limit = 8.57 dBm

All Spurious Emissions at Least 20 dB below Peak Level of In Band Frequency

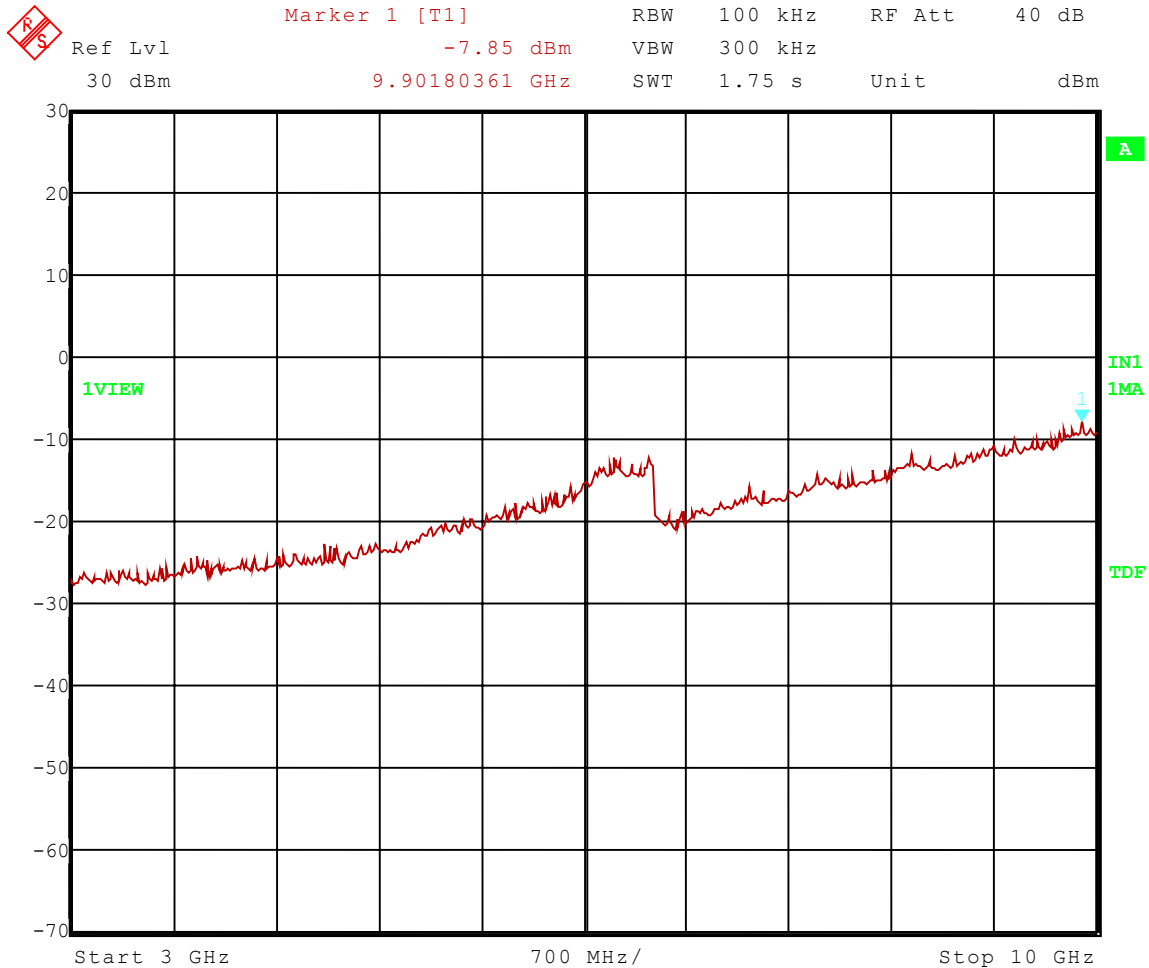

Date: 10.JUN.2004 11:32:55




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Spurious Emissions - Conducted  
Operator: Jason L.  
Comment: Low Channel Transmit = 902.75 MHz  
Frequency Range: 30 to 1000 MHz  
Limit = 8.57 dBm

All Spurious Emissions at Least 20 dB below Peak Level of In Band Frequency

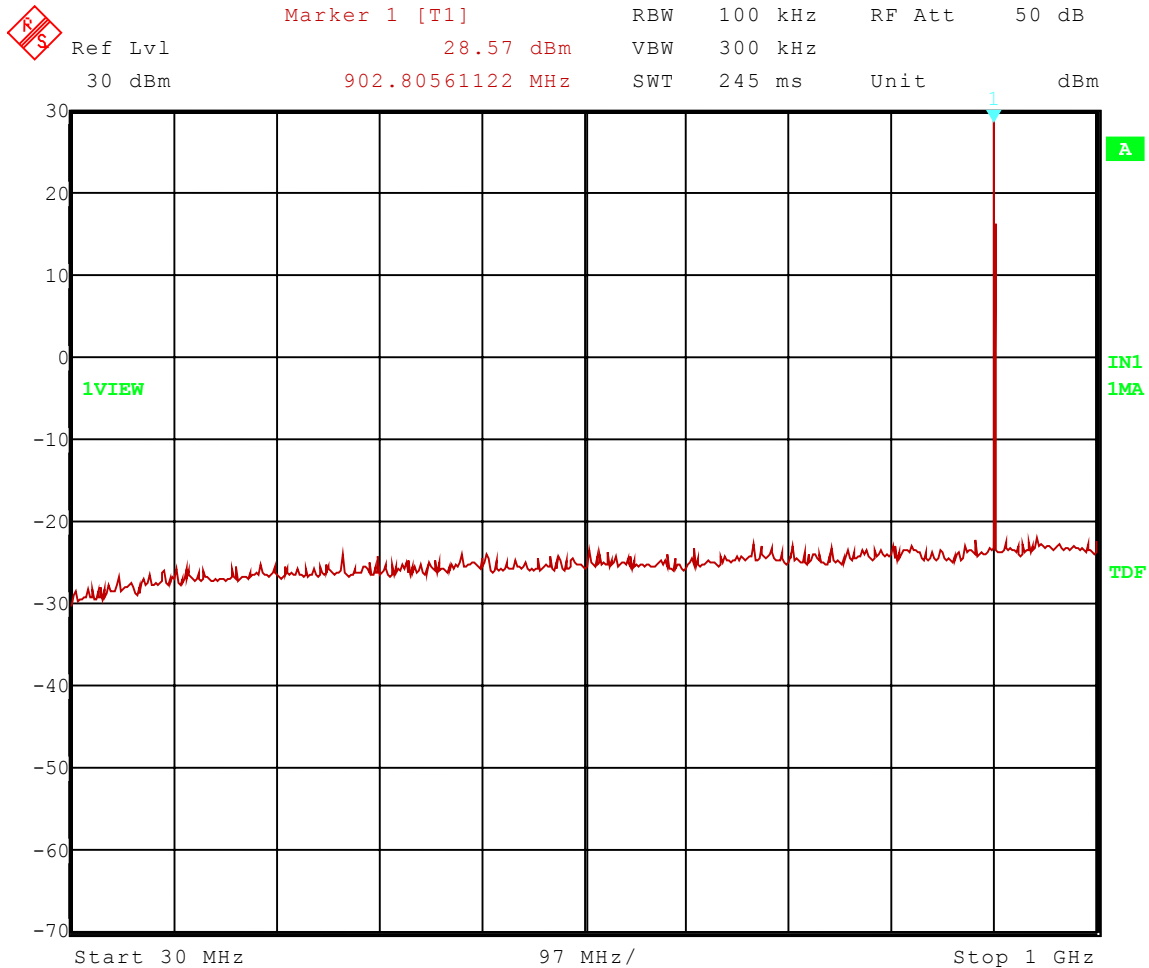

Date: 10.JUN.2004 11:22:02




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Spurious Emissions - Conducted  
Operator: Jason L.  
Comment: Low Channel Transmit = 902.75 MHz  
Frequency Range: 900 to 1000 MHz  
Limit = 8.57 dBm

All Spurious Emissions at Least 20 dB below Peak Level of In Band Frequency

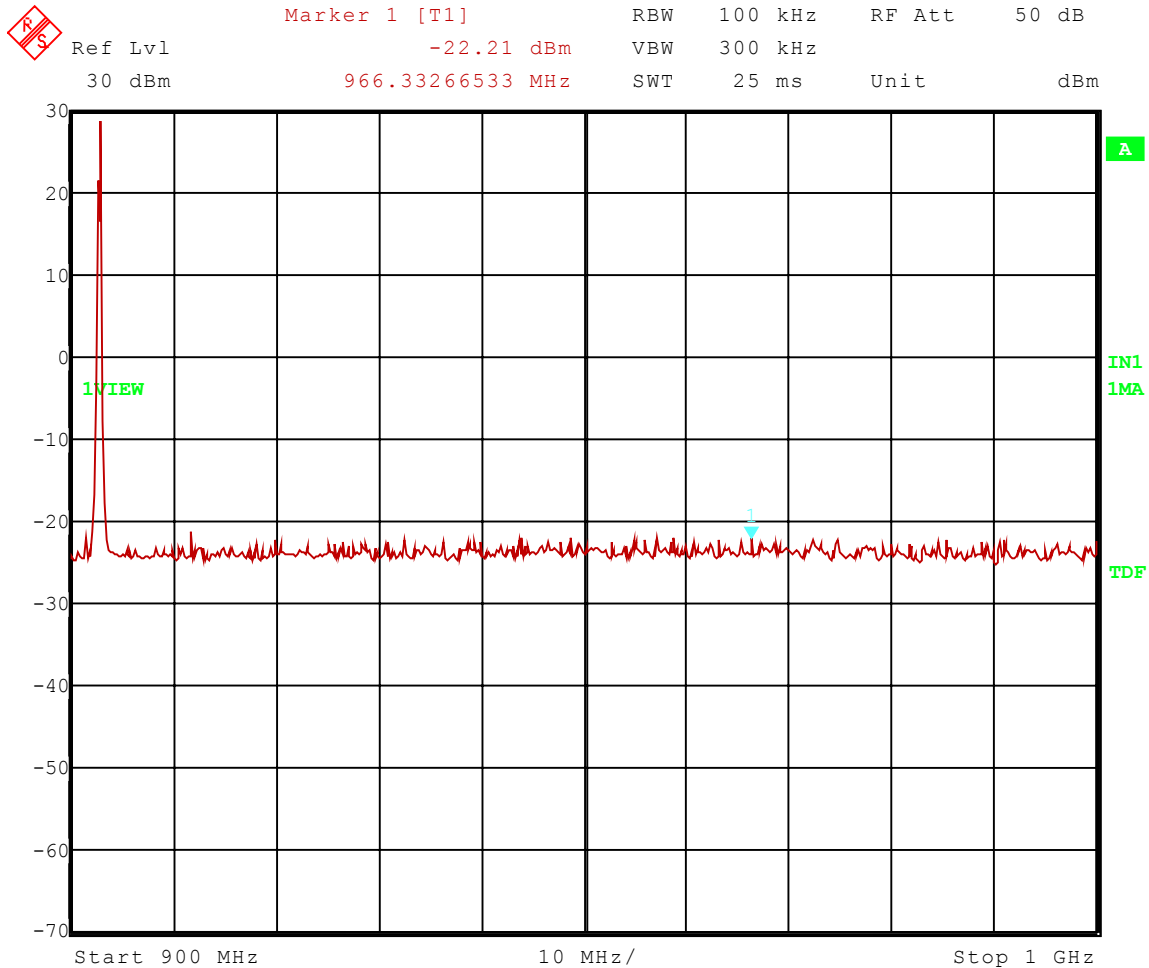

Date: 10.JUN.2004 11:23:07




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Spurious Emissions - Conducted  
Operator: Jason L.  
Comment: Low Channel Transmit = 902.75 MHz  
Frequency Range: 1 to 3 GHz  
Limit = 8.57 dBm

All Spurious Emissions at Least 20 dB below Peak Level of In Band Frequency

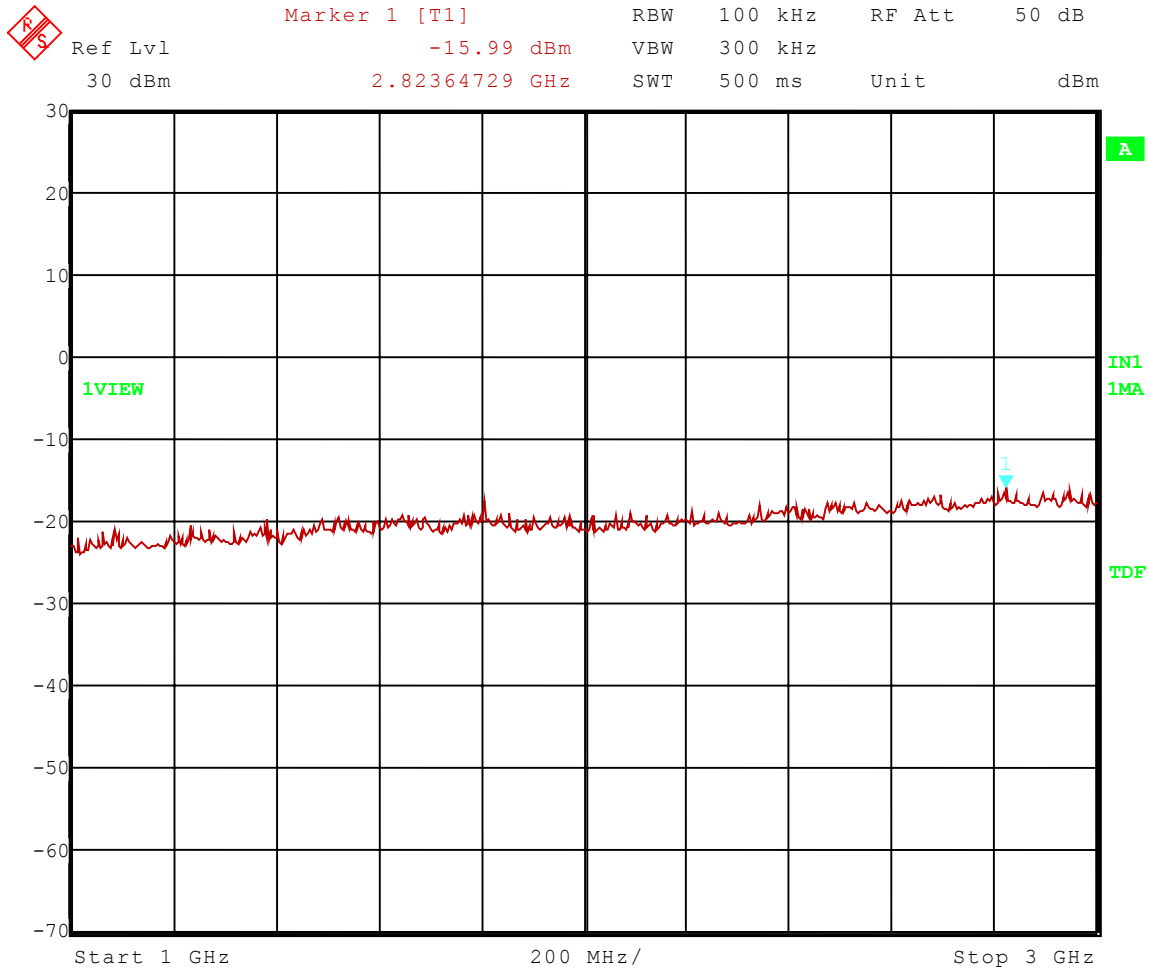

Date: 10.JUN.2004 11:24:23






Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Spurious Emissions - Conducted  
Operator: Jason L.  
Comment: Low Channel Transmit = 902.75 MHz  
Frequency Range: 3 to 10 GHz  
Limit = 8.57 dBm

All Spurious Emissions at Least 20 dB below Peak Level of In Band Frequency

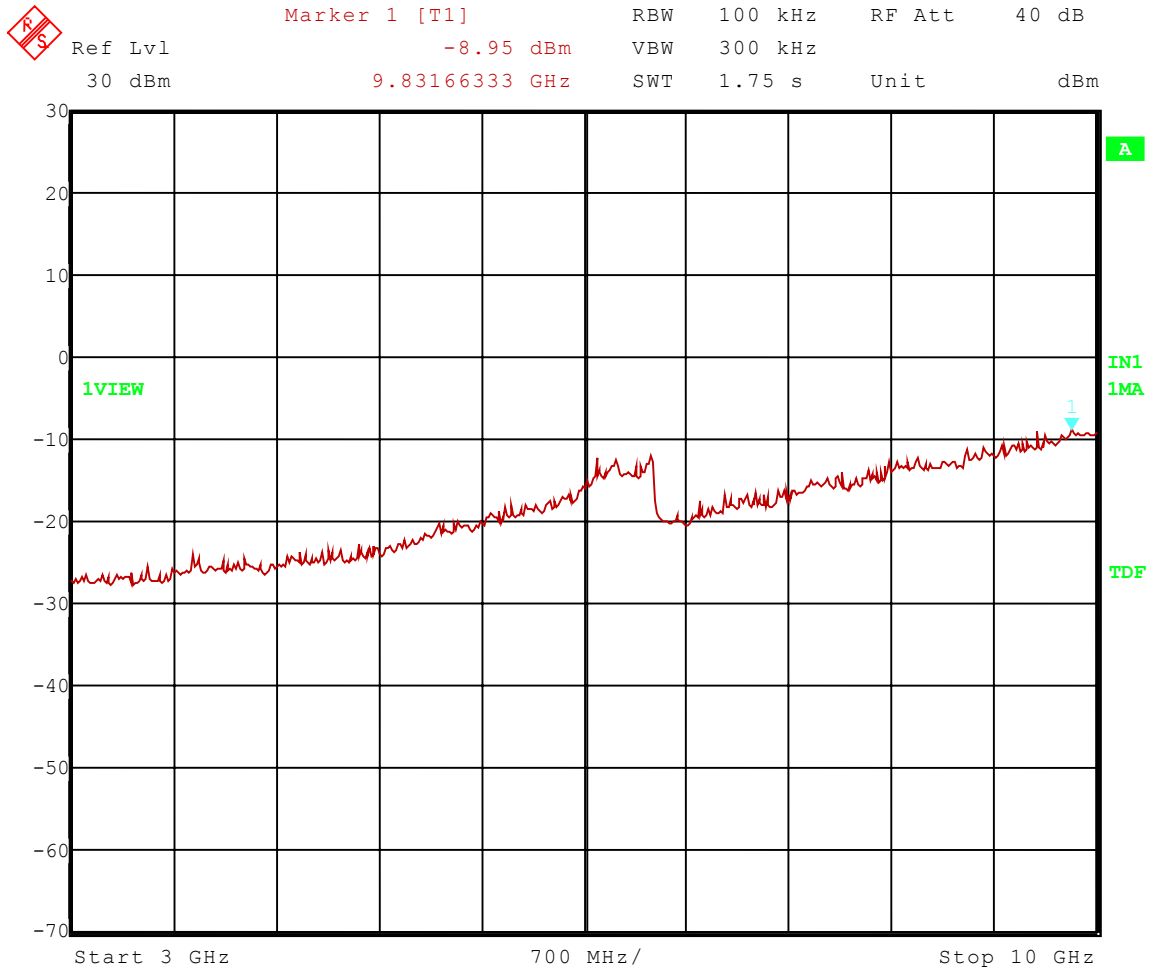

Date: 10.JUN.2004 11:25:55




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Spurious Emissions - Conducted  
Operator: Jason L.  
Comment: Spread Spectrum Hopping On  
Frequency Range: 30 to 1000 MHz  
Limit = 6.75 dBm

All Spurious Emissions at Least 20 dB below Peak Level of In Band Frequency

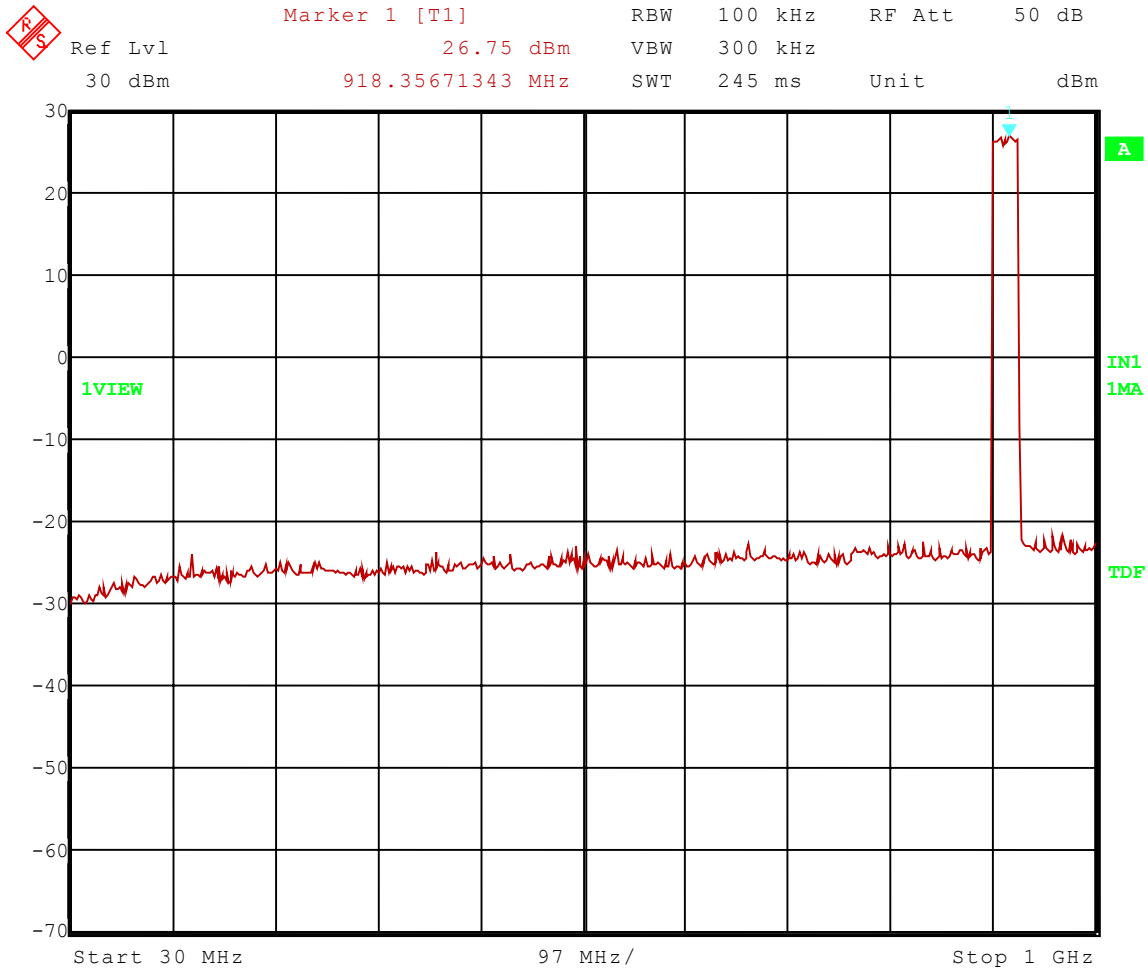

Date: 10.JUN.2004 11:40:19




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Spurious Emissions - Conducted  
Operator: Jason L.  
Comment: Spread Spectrum Hopping On  
Frequency Range: 900 to 1000 MHz  
Limit = 6.75 dBm

All Spurious Emissions at Least 20 dB below Peak Level of In Band Frequency

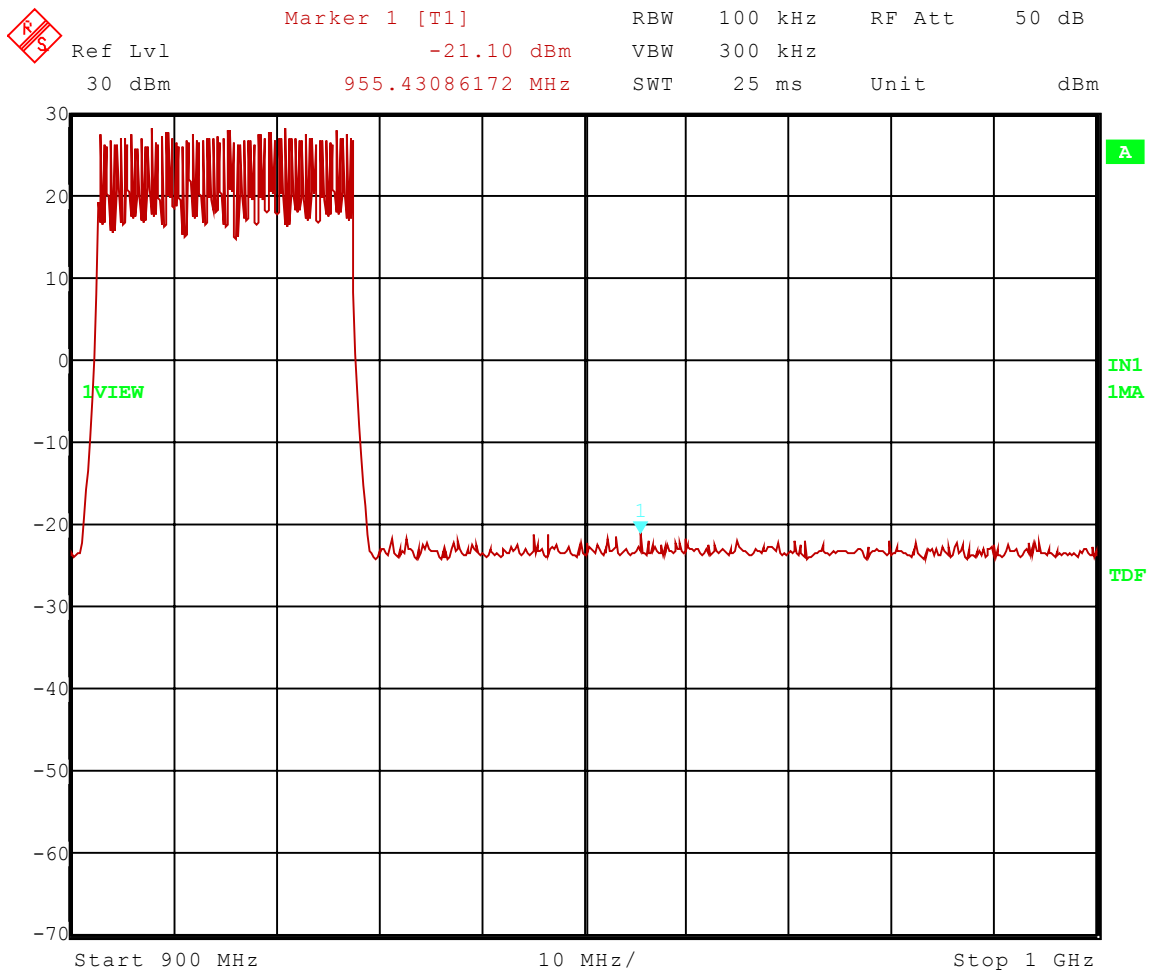

Date: 10.JUN.2004 11:41:49




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Spurious Emissions - Conducted  
Operator: Jason L.  
Comment: Spread Spectrum Hopping On  
Frequency Range: 1 to 3 GHz  
Limit = 6.75 dBm

All Spurious Emissions at Least 20 dB below Peak Level of In Band Frequency

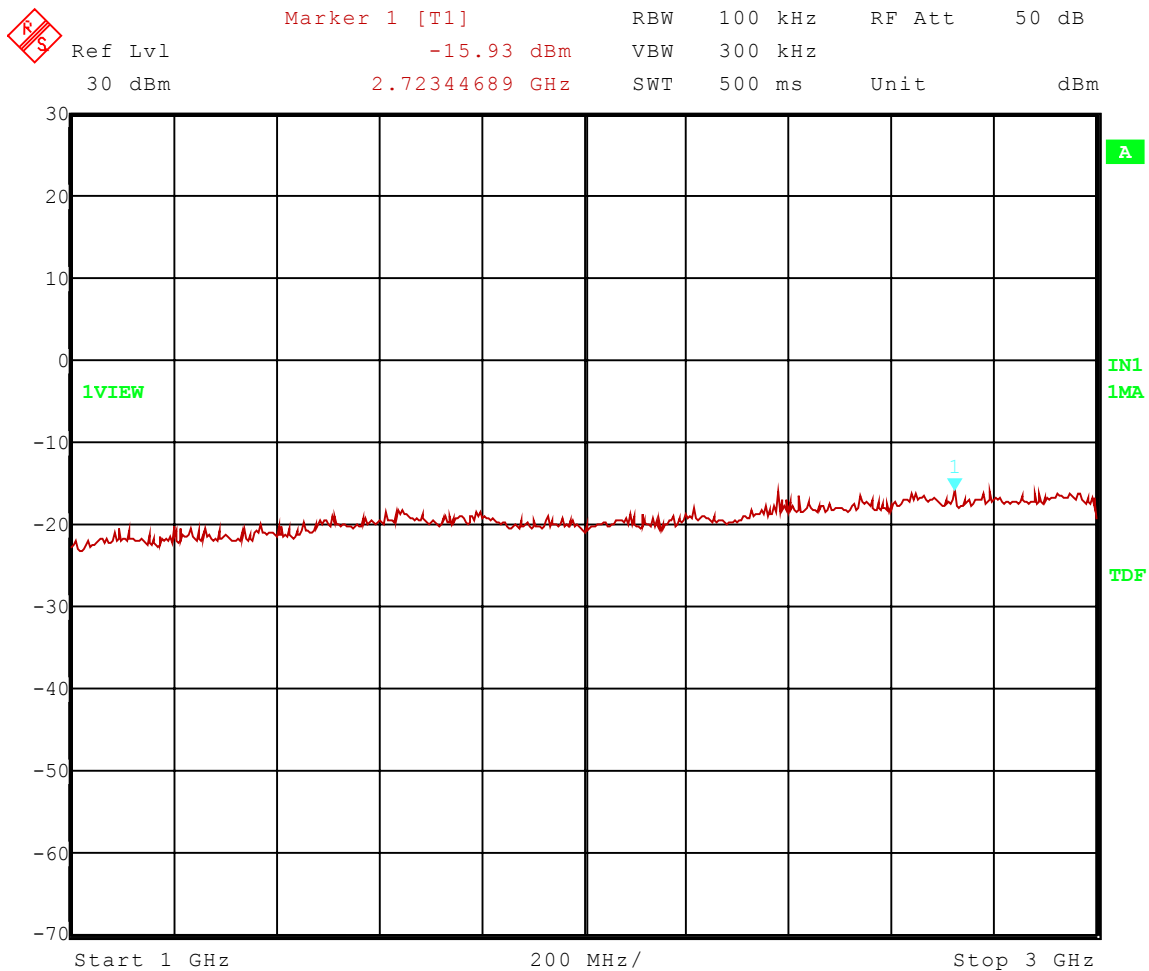

Date: 10.JUN.2004 11:44:28




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Spurious Emissions - Conducted  
Operator: Jason L.  
Comment: Spread Spectrum Hopping On  
Frequency Range: 3 to 10 GHz  
Limit = 6.75 dBm

All Spurious Emissions at Least 20 dB below Peak Level of In Band Frequency

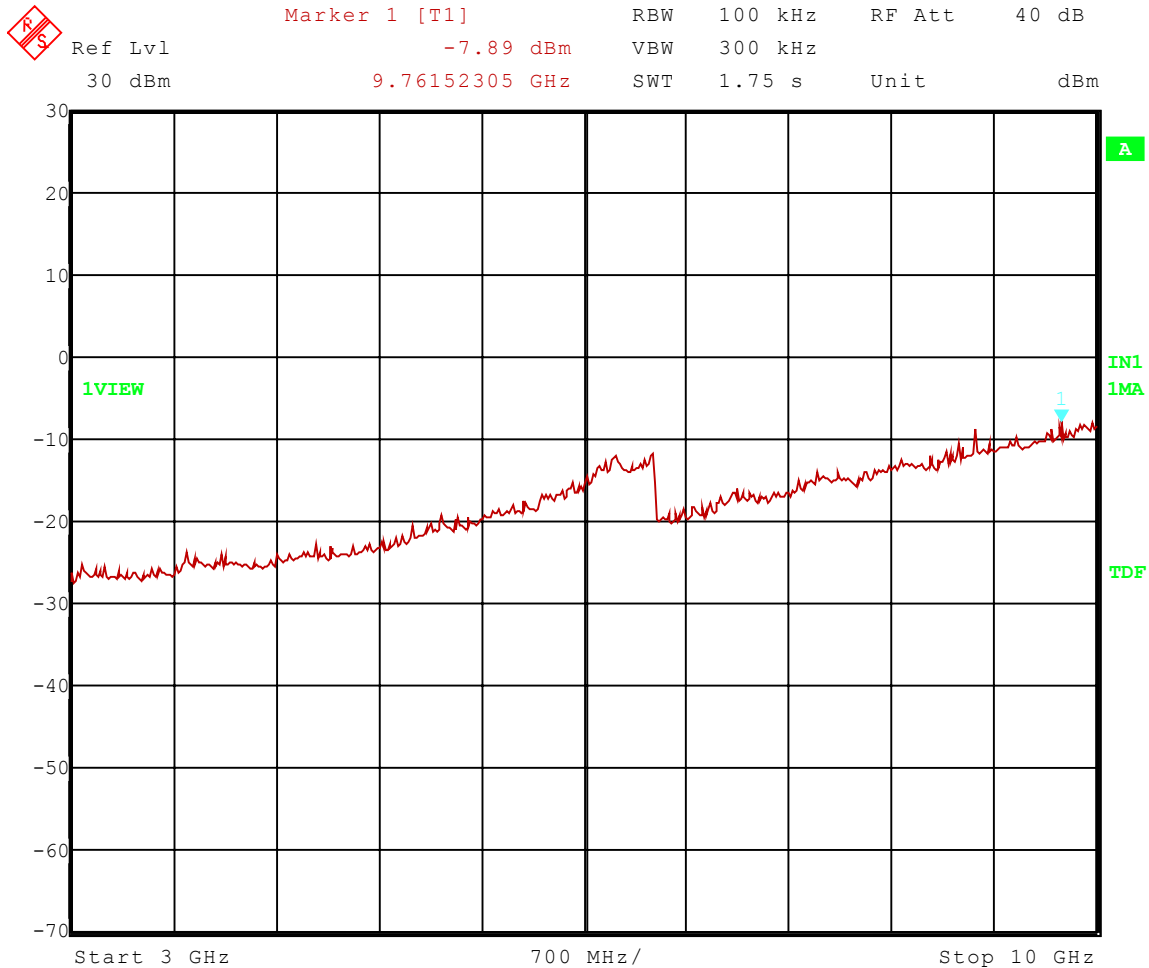

Date: 10.JUN.2004 11:46:29

1250 Peterson Dr., Wheeling, IL 60090

### 3.0 CONDUCTED EMISSIONS (ANTENNA TERMINAL) PHOTOS TAKEN DURING TESTING



TRANSMITTER (CONDUCTED TEST)



Company: Zebra Technologies Corporation  
 Model Tested: 110XiIII  
 Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

#### 4.0 RESTRICTED BANDS

As stated in Section 15.205a, the fundamental emission from the R110XiIII Plus shall not fall within any of the bands listed below:

Frequency in MHz	Frequency in MHz	Frequency in MHz	Frequency in GHz
.0900 to .1100	162.0125 to 167.17	2310.0 to 2390	9.30 to 9.50
.4900 to .5100	167.7200 to 173.20	2483.5 to 2500	10.60 to 12.70
2.1735 to 2.1905	240.000 to 285.00	2655.0 to 2900	13.25 to 13.40
8.362 to 8.3660	322.200 to 335.40	3260.0 to 3267	14.47 to 14.50
13.36 to 13.410	399.900 to 410.00	3332.0 to 3339	15.35 to 16.20
25.50 to 25.670	608.000 to 614.00	3345.8 to 3358	17.70 to 21.40
37.50 to 38.250	960.000 to 1240.00	3600.0 to 4400	22.01 to 23.13
73.00 to 75.500	1300.000 to 1427.00	4500.0 to 5250	23.60 to 24.00
108.00 to 121.94	1435.000 to 1626.50	5350.0 to 5450	31.20 to 31.80
123.00 to 138.00	1660.000 to 1710.00	7250.0 to 7750	36.43 to 36.50
149.90 to 150.00	1718.800 to 1722.20	8025.0 to 8500	ABOVE 38.60
156.70 to 156.90	2200.000 to 2300.00	9000.0 to 9200	

#### NOTE:

The noise floor within the Restricted Bands for the EMC Receiver and HP Spectrum Analyzer will typically lay 20 dB below the limit.

#### 5.0 BAND EDGE AND RESTRICT BAND COMPLIANCE

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the attenuation below the general limits specified in 15.209 is not required.

The field strength of any **radiated emissions** which fall within the restricted bands shall not exceed the general radiated emissions limits as stated Section 15.209.

**NOTE:** See the following page(s) for the graph(s) made showing compliance for Band Edge and Restrict Band:



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

## DATA AND GRAPH(S) TAKEN SHOWING THE BAND EDGE AND RESTRICT BAND COMPLIANCE

PART 15.247(c)






Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: High Band-Edge Compliance - Conducted  
Operator: Jason L.  
Comment: High Channel: Frequency – 927.25 MHz

Band-Edge Frequency = 928 MHz  
Band-Edge > 20 dB Below Peak In-Band Emission

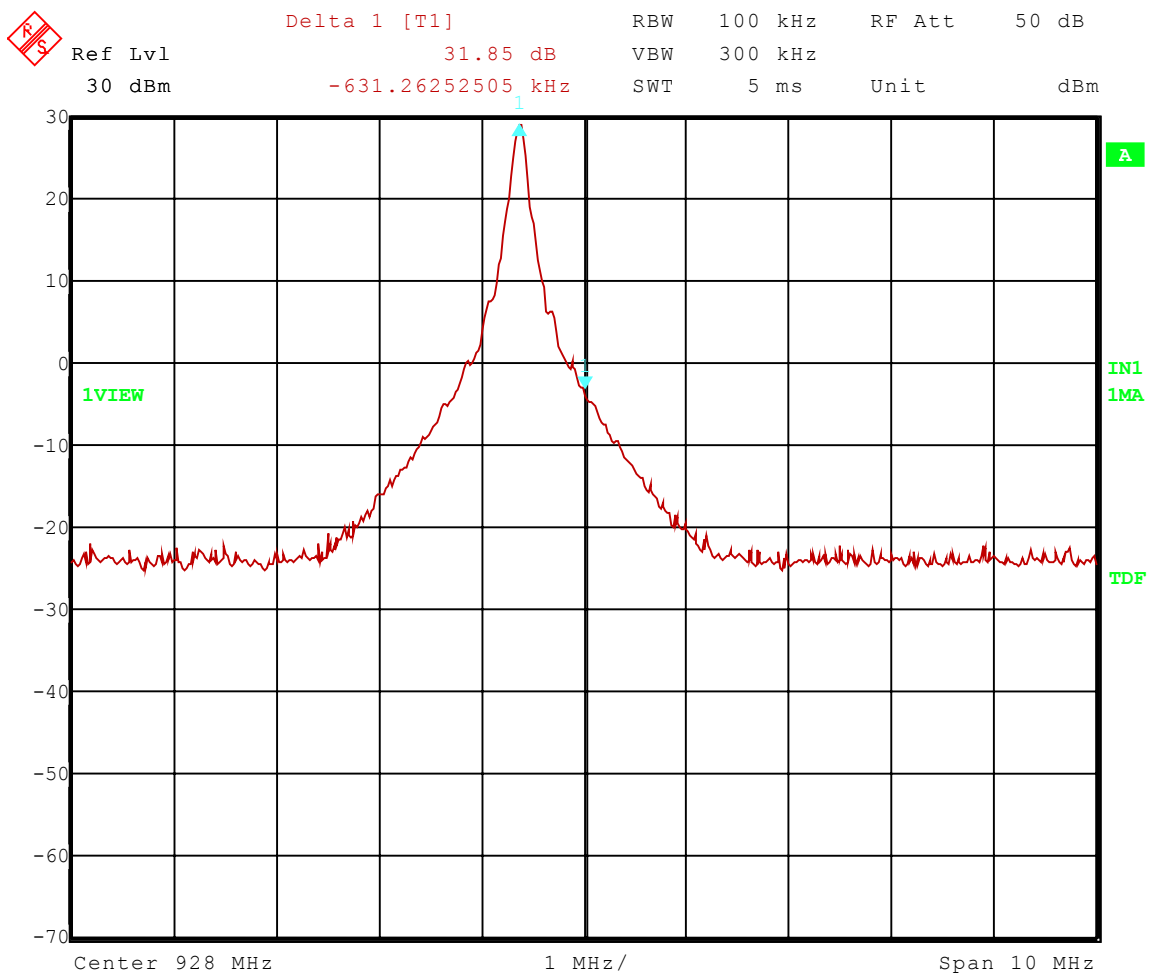


Date: 10.JUN.2004 09:43:38

**1250 Peterson Dr., Wheeling, IL 60090**

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Low Band-Edge Compliance - Conducted  
Operator: Jason L.  
Comment: Low Channel: Frequency – 902.75 MHz

Band-Edge Frequency = 902 MHz  
Band-Edge > 20 dB Below Peak In-Band Emission

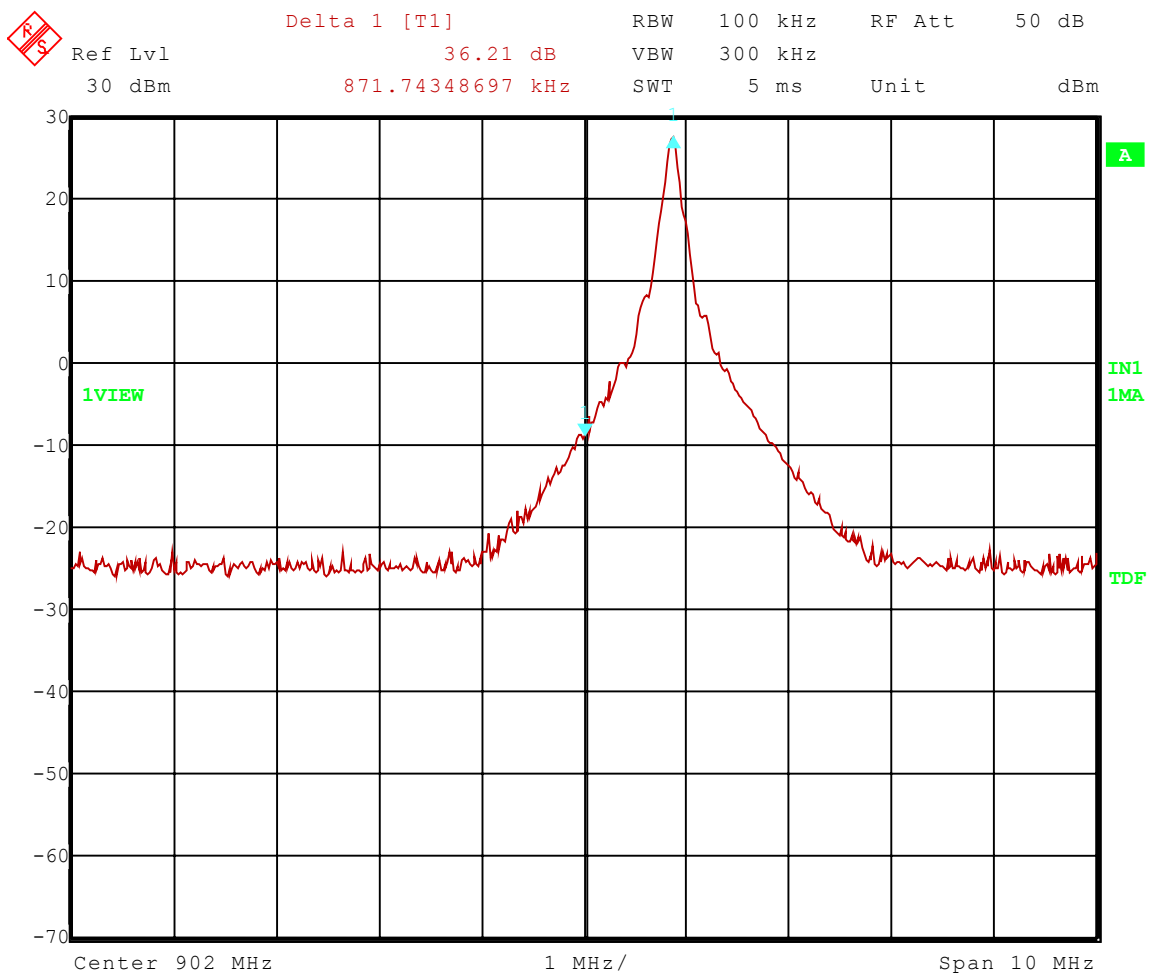

Date: 10.JUN.2004 09:56:36




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: High Band-Edge Compliance - Conducted  
Operator: Jason L.  
Comment: Spread Spectrum Frequency Hopping On

Band-Edge Frequency = 928 MHz  
Band-Edge > 20 dB Below Peak In-Band Emission

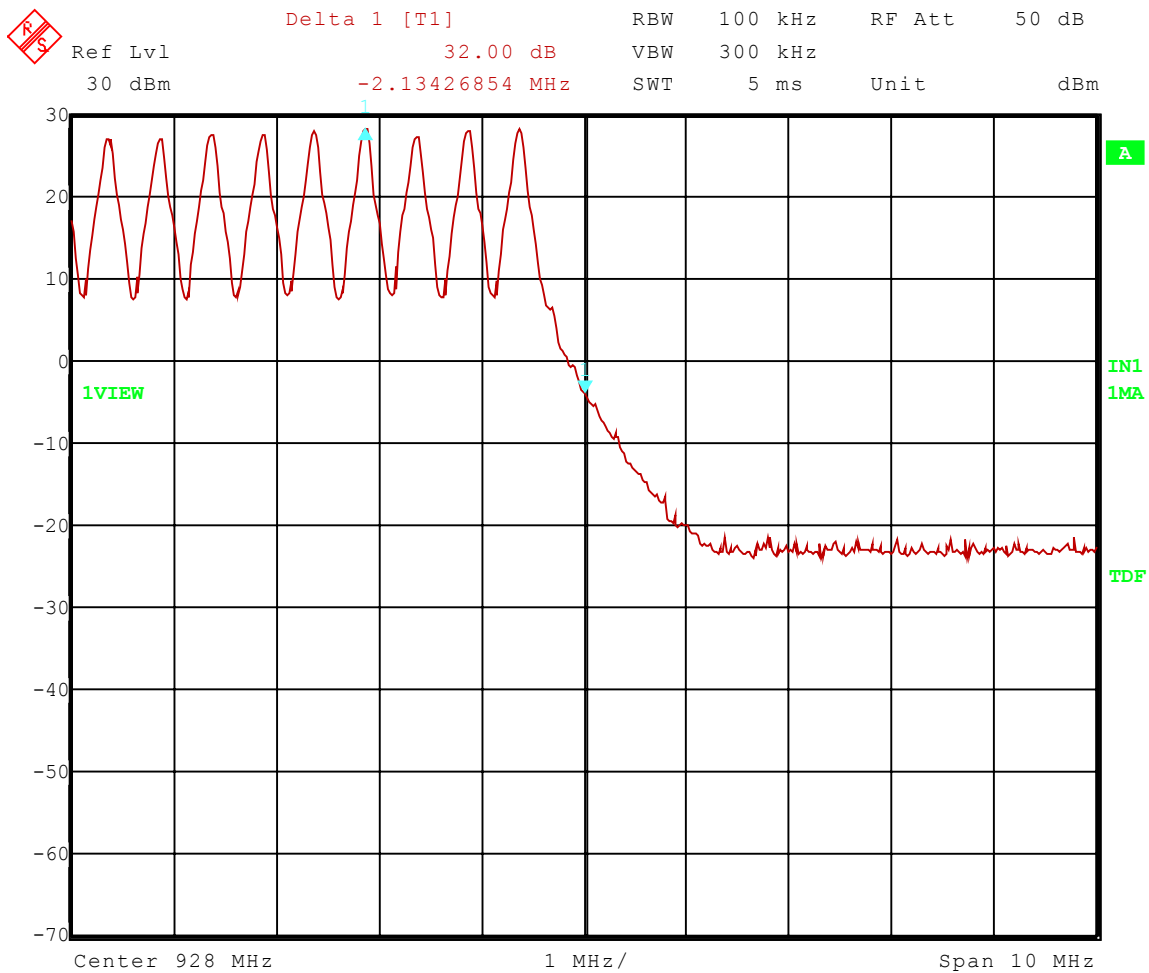

Date: 10.JUN.2004 09:51:35



Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Low Band-Edge Compliance - Conducted  
Operator: Jason L.  
Comment: Spread Spectrum Frequency Hopping On

Page - 60 -



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

## 6.0 FIELD STRENGTH OF SPURIOUS EMISSION MEASUREMENTS

The radiated measurements made at D.L.S. Electronic Systems, Inc., for the R110XiIII Plus, Model Number: 110XiIII, are shown in tabulated and graph form. Preliminary radiation measurements were performed at a 3 meter test distance with the limits adjusted linearly when required. The frequency range from 30 MHz to over 960 MHz, depending upon the fundamental frequency as stated in Part 15.33a, was automatically scanned and plotted at various angles.

Measurements for the R110XiIII Plus were made up to 10000 MHz, in accordance with Section 15.33a for Intentional Radiators with a fundamental frequency of MHz. For intentional radiators, the frequency range to be investigated is determined by the lowest radio frequency generated by the device without going below 30 MHz, up to at least the tenth harmonic of the highest fundamental frequency or 10 GHz, whichever is lower. At those frequencies where significant signals were detected, measurements were made over the entire frequency range specified in FCC Part 15, Subpart C, Section 15.247 at the open field test site, located at Genoa City, Wisconsin, FCC file number **31040/SIT**. When required, levels were extrapolated from 10 meters to 3 meters using a linear extrapolation.

All signals in the frequency range of 30 MHz to 2000 MHz were measured with a Biconical Antenna or tuned dipoles and from 200 MHz to 1000 MHz, a Log Periodic or Tuned Dipoles were used. From 1000 MHz to 25 GHz Horn Antennas were used. During the test the equipment was rotated and the antenna was raised and lowered from 1 meter to 4 meters to find the maximum level of emissions. In order to find maximum emissions, the cables were moved through all the positions the equipment would be expected to experience in the field. The EUT, peripheral equipment and cables were configured to meet the conditions in ANSI C63.4-2001, Clauses 6 & 8. Tests were made with the receive antenna(s) in both the horizontal and vertical planes of polarization. In each case, the table was rotated to find the maximum emissions.



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

## 6.0 FIELD STRENGTH OF SPURIOUS EMISSION MEASUREMENTS (CON'T)

As stated in Section 15.247(b) the allowed maximum peak output power of the transmitter shall not exceed 1 Watt. In any 100 kHz bandwidth outside these frequency bands (the power that is produced by the modulation products of the spreading sequence), the information sequence and the carrier frequency shall be either at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Attenuation below the general limits specified in 15.209 is not required.

Field strength limits are at a distance of 3 meters. The emission limits shown are based on measurement instrumentation employing an average detector.

Emissions radiated outside of the specified frequency bands, except for harmonics are attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Preliminary radiated emission measurements were performed at a 3 meter test distance. The frequency range from 30 MHz to 1000 MHz was automatically scanned and plotted at various angles.

### **NOTE:**

**All radiated emissions measurements were made at a test room temperature of 72°F at 63% relative humidity.**



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

RADIATED DATA AND GRAPH(S) TAKEN FOR

FIELD STRENGTH

SPURIOUS EMISSION MEASUREMENTS

PART 15.247

**FCC Part 15 Class B**


**Electric Field Strength**

EUT: R110XiIII Plus  
Manufacturer: Zebra Technologies  
Operating Condition: 72 degF; 63% R.H.  
Test Site: D.L.S. O.F. Site 2  
Operator: Jason L  
Test Specification: 120 Volts; 60 Hz  
Comment: All Modes of Operation  
Date: 6/10/2004

**TEXT: "Site 2 MidV 3M"**

Short Description: Test Set-up Vert30-1000MHz  
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 26 SN: 837491/010  
  
Antennas ---  
Biconical -- EMCO 3104C SN: 0005-4892  
Log Periodic -- Electro Metrics LPA-25 SN: 1205  
  
Pre-Amp --- Rohde&Schwarz TS-PR10 SN: 032001/004  
  
TEST SET-UP: EuT Measured at 3 Meters with VERTICAL Antenna Polarisation



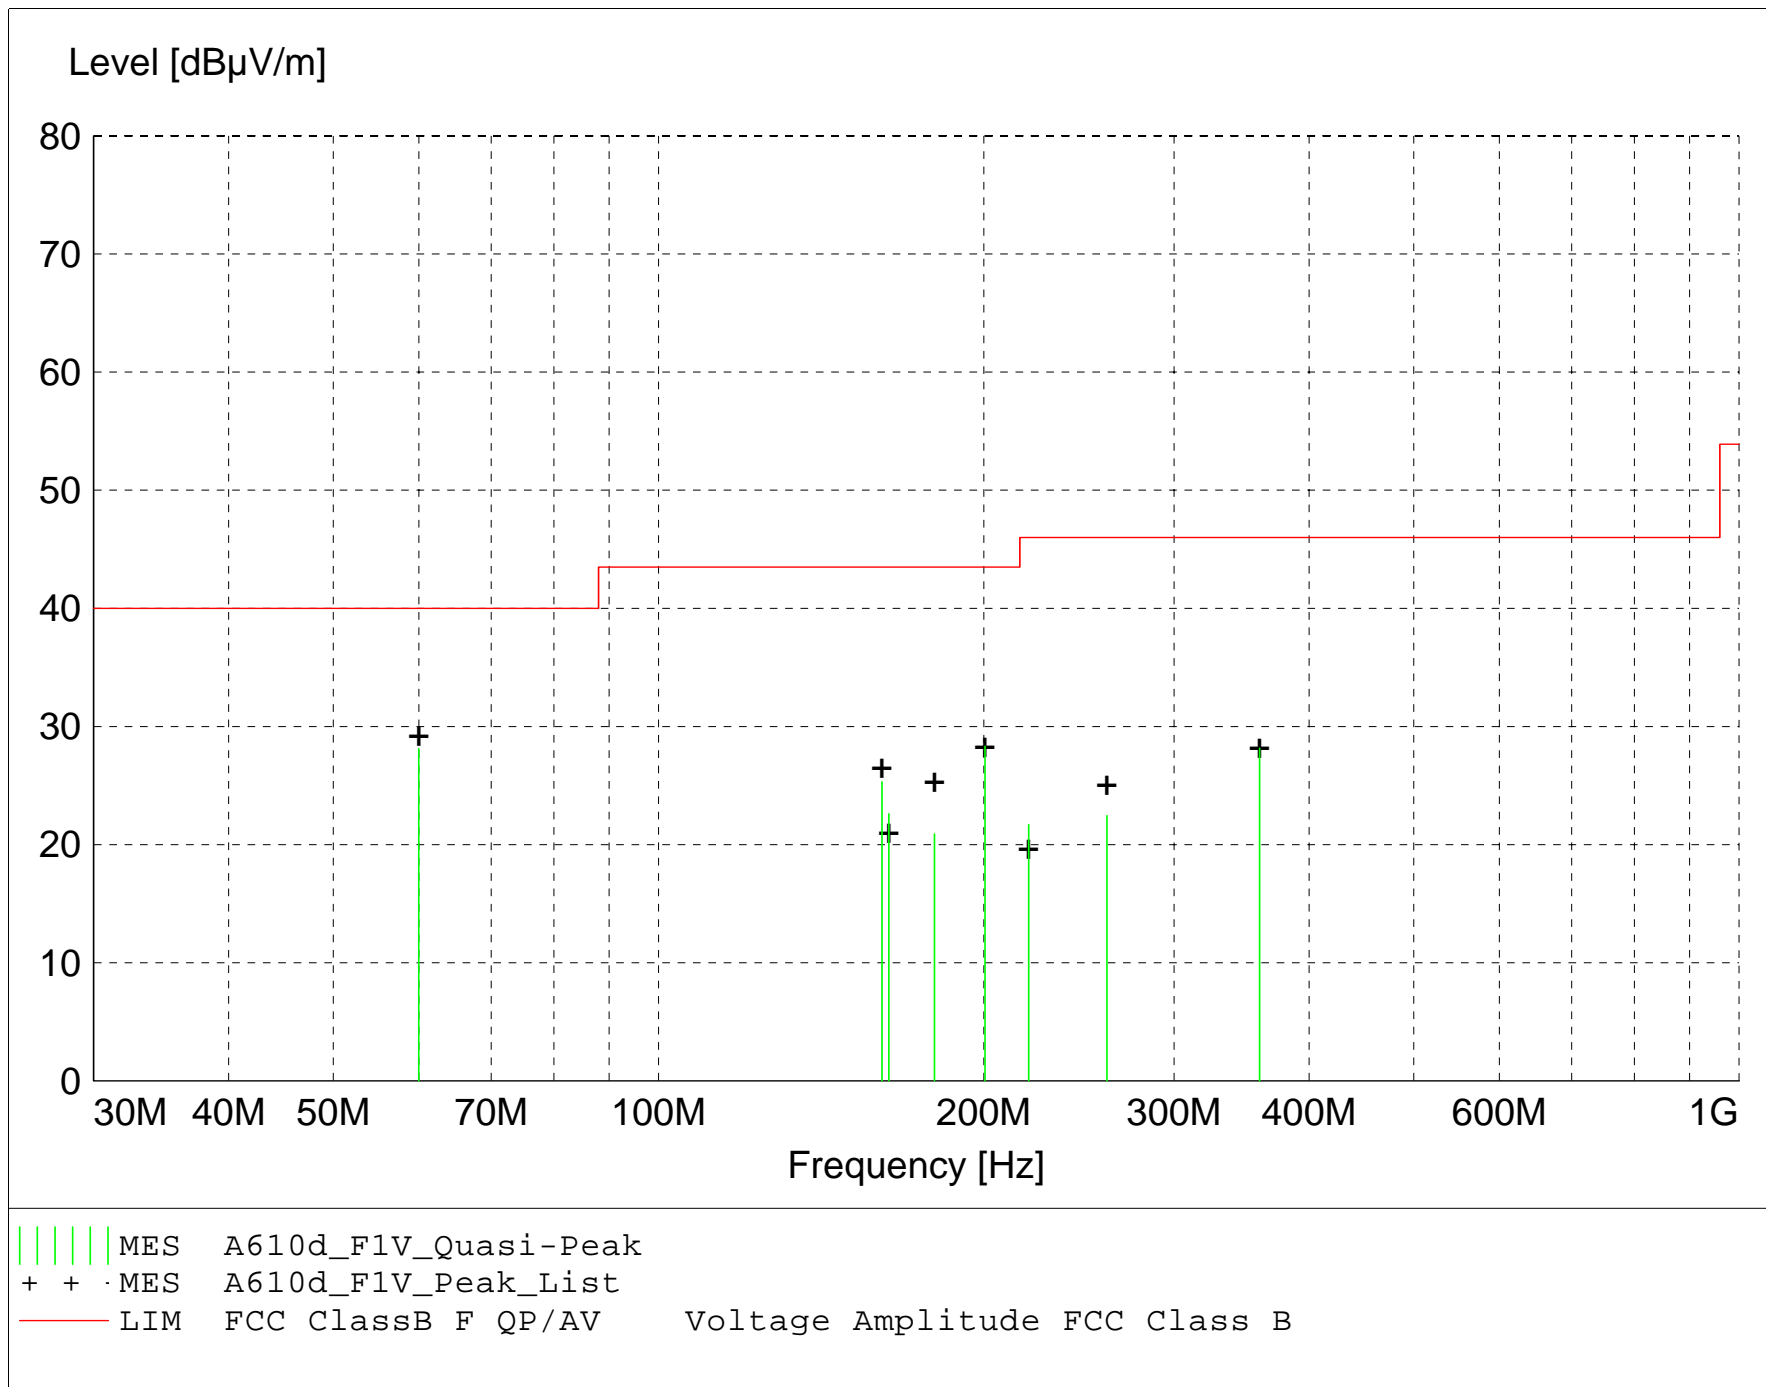

**MEASUREMENT RESULT: "A610d\_F1V\_Final"**

6/10/2004 4:49PM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dBμV	Factor	Loss	Level			Ant.	Angle	Detector	
		dBμV/m	dB	dBμV/m	dBμV/m	dB	m	deg		
59.990000	42.64	9.56	-24.1	28.1	40.0	11.9	1.00	180	QUASI-PEAK	None
200.470000	39.52	11.83	-23.0	28.3	43.5	15.2	1.00	0	QUASI-PEAK	None
359.980000	35.34	14.84	-22.0	28.2	46.0	17.8	1.00	225	QUASI-PEAK	None
160.940000	35.40	13.08	-23.1	25.3	43.5	18.2	1.00	30	QUASI-PEAK	None
163.330000	32.26	13.50	-23.1	22.6	43.5	20.9	1.00	45	QUASI-PEAK	None
180.020000	28.27	15.79	-23.1	20.9	43.5	22.6	1.00	30	QUASI-PEAK	None
260.000000	32.30	12.72	-22.6	22.5	46.0	23.5	1.00	270	QUASI-PEAK	None
220.010000	33.02	11.42	-22.7	21.7	46.0	24.3	1.00	20	QUASI-PEAK	None


**FCC Part 15 Class B**

**Electric Field Strength**

EUT: R110XiIII Plus  
Manufacturer: Zebra Technologies  
Operating Condition: 72 degF; 63% R.H.  
Test Site: D.L.S. O.F. Site 2  
Operator: Jason L  
Test Specification: 120 Volts; 60 Hz  
Comment: All Modes of Operation  
Date: 6/10/2004

**TEXT: "Site 2 MidH 3M"**

Short Description: Test Set-up Horz30-1000MHz  
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 26 SN: 837491/010  
  
Antennas ---  
Biconical -- EMCO 3104C SN: 0005-4892  
Log Periodic -- Electro Metrics LPA-25 SN: 1205  
  
Pre-Amp --- Rohde&Schwarz TS-PR10 SN: 032001/004  
  
TEST SET-UP: EuT Measured at 3 Meters with HORIZONTAL Antenna Polarisation

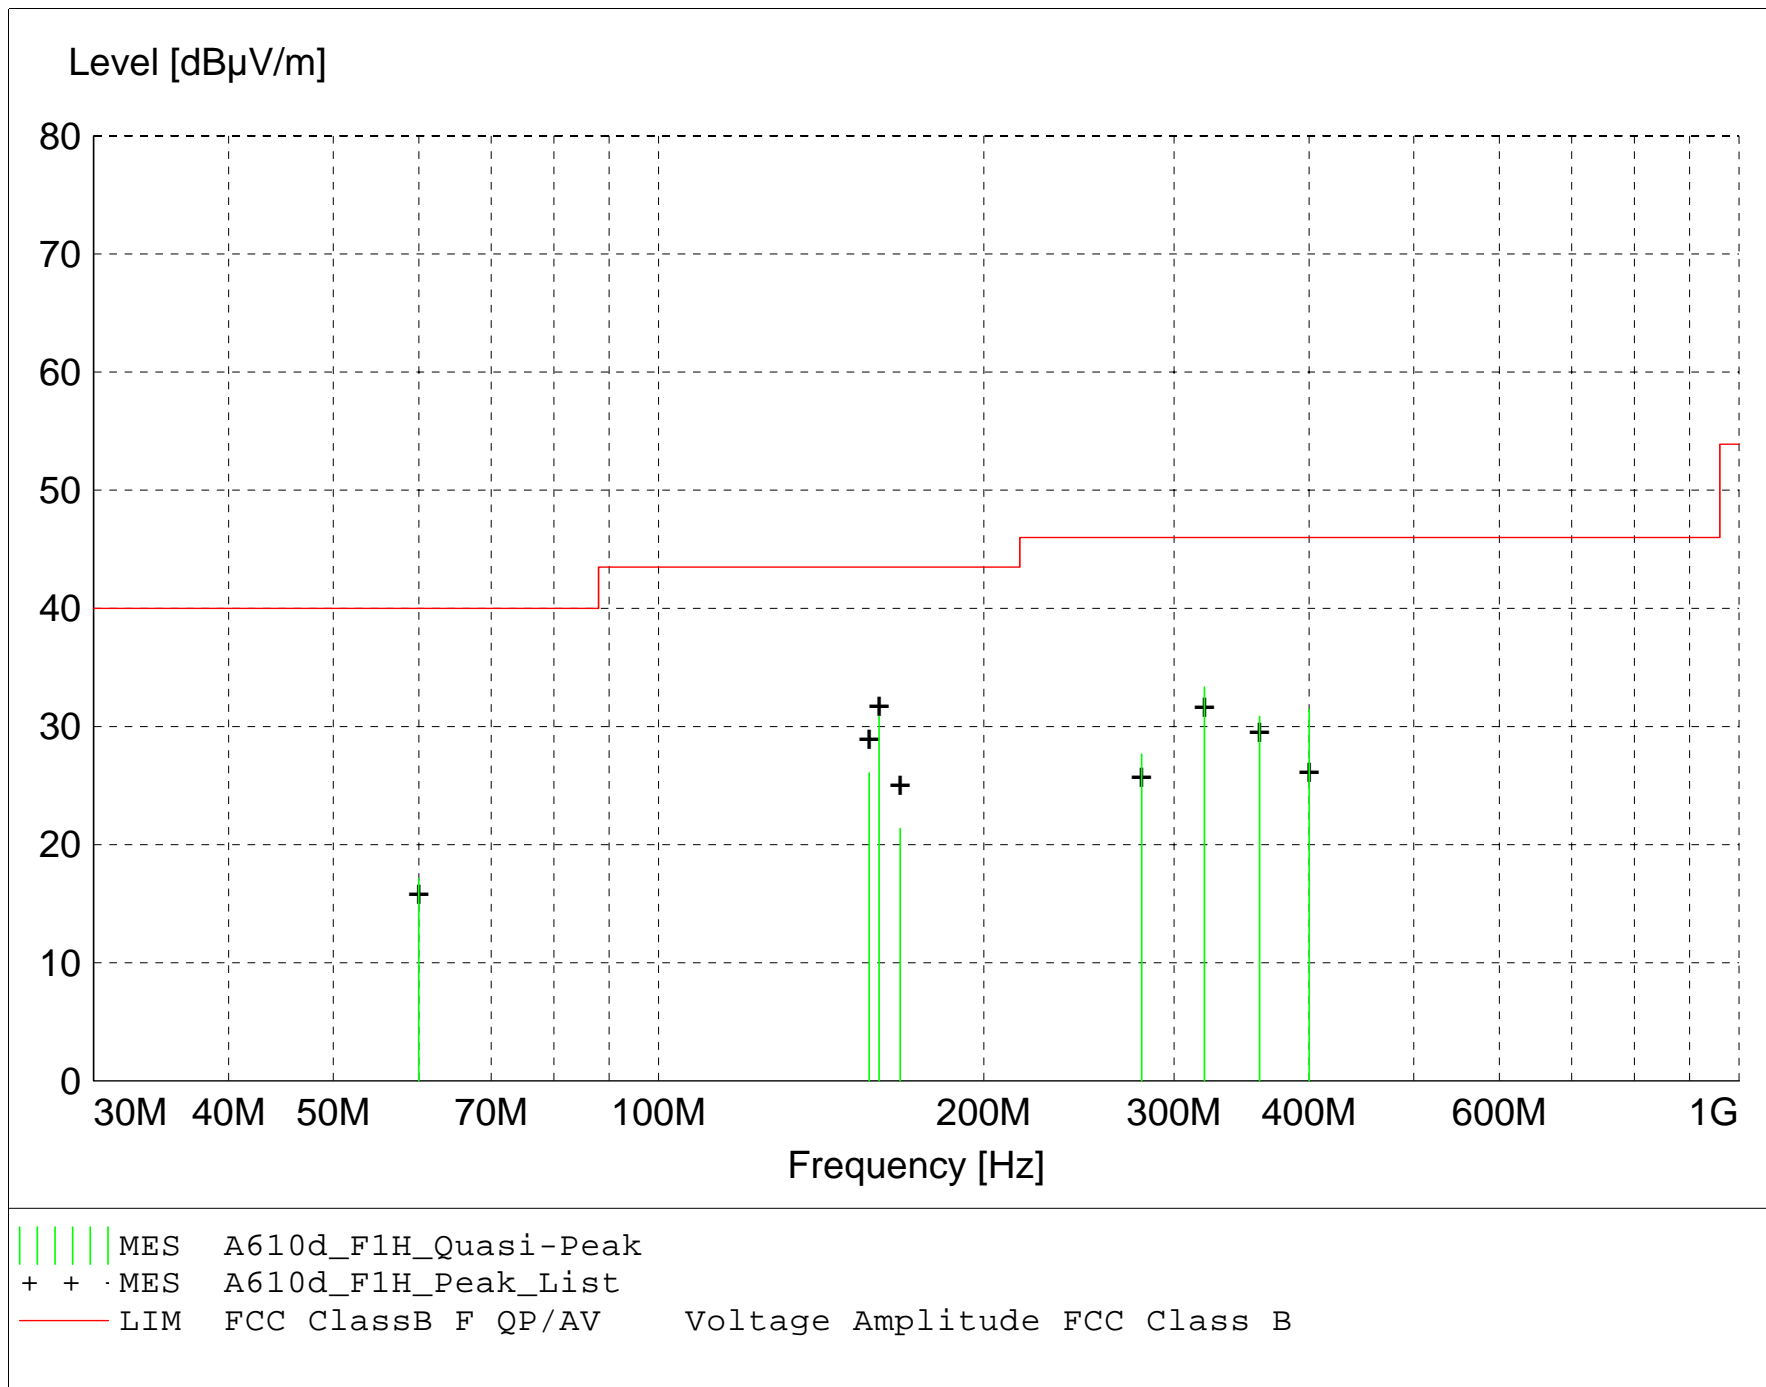

**MEASUREMENT RESULT: "A610d\_F1H\_Final"**

6/10/2004 4:41PM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dBμV	Factor	Loss	Level			Ant.	Angle	Detector	
		dBμV/m	dB	dBμV/m	dBμV/m	dB	m	deg		
160.000000	40.93	13.10	-23.2	30.9	43.5	12.6	1.00	90	QUASI-PEAK	None
319.990000	40.12	15.37	-22.1	33.3	46.0	12.7	1.20	90	QUASI-PEAK	None
400.000000	37.29	15.69	-21.5	31.5	46.0	14.5	1.00	0	QUASI-PEAK	None
359.990000	38.05	14.84	-22.0	30.9	46.0	15.1	1.00	60	QUASI-PEAK	None
156.630000	36.51	12.72	-23.2	26.1	43.5	17.4	1.00	90	QUASI-PEAK	None
279.980000	36.41	13.71	-22.4	27.7	46.0	18.3	1.00	270	QUASI-PEAK	None
167.350000	30.45	14.00	-23.1	21.4	43.5	22.1	1.00	70	QUASI-PEAK	None
59.990000	31.65	9.56	-24.1	17.1	40.0	22.9	1.00	270	QUASI-PEAK	None

**FCC Part 15 Class B**

**Electric Field Strength**

EUT: R110XiIII Plus  
Manufacturer: Zebra Technologies  
Operating Condition: 70 deg F; 65% R.H.  
Test Site: D.L.S. O.F. Site 2  
Operator: Jason L  
Test Specification: 120 Volts; 60 Hz  
Comment: Transmit Low Frequency = 902.853 MHz  
Date: 06/10/04

**TEXT: "Site 2 5731&106 V3M"**


Short Description: Test Set-up Vert1GHz-  
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/005

Horn Antenna --- EMCO 3115 SN: 9903-5731

Pre-Amps ---

1 - 18 GHz -- Miteq AMF-6B-100200-50 SN: 313936  
18 - 26 GHz -- Miteq AMF-6D-010100-50 SN: 213976

TEST SET-UP: EuT Measured at 3 Meters with VERTICAL Antenna Polarisation

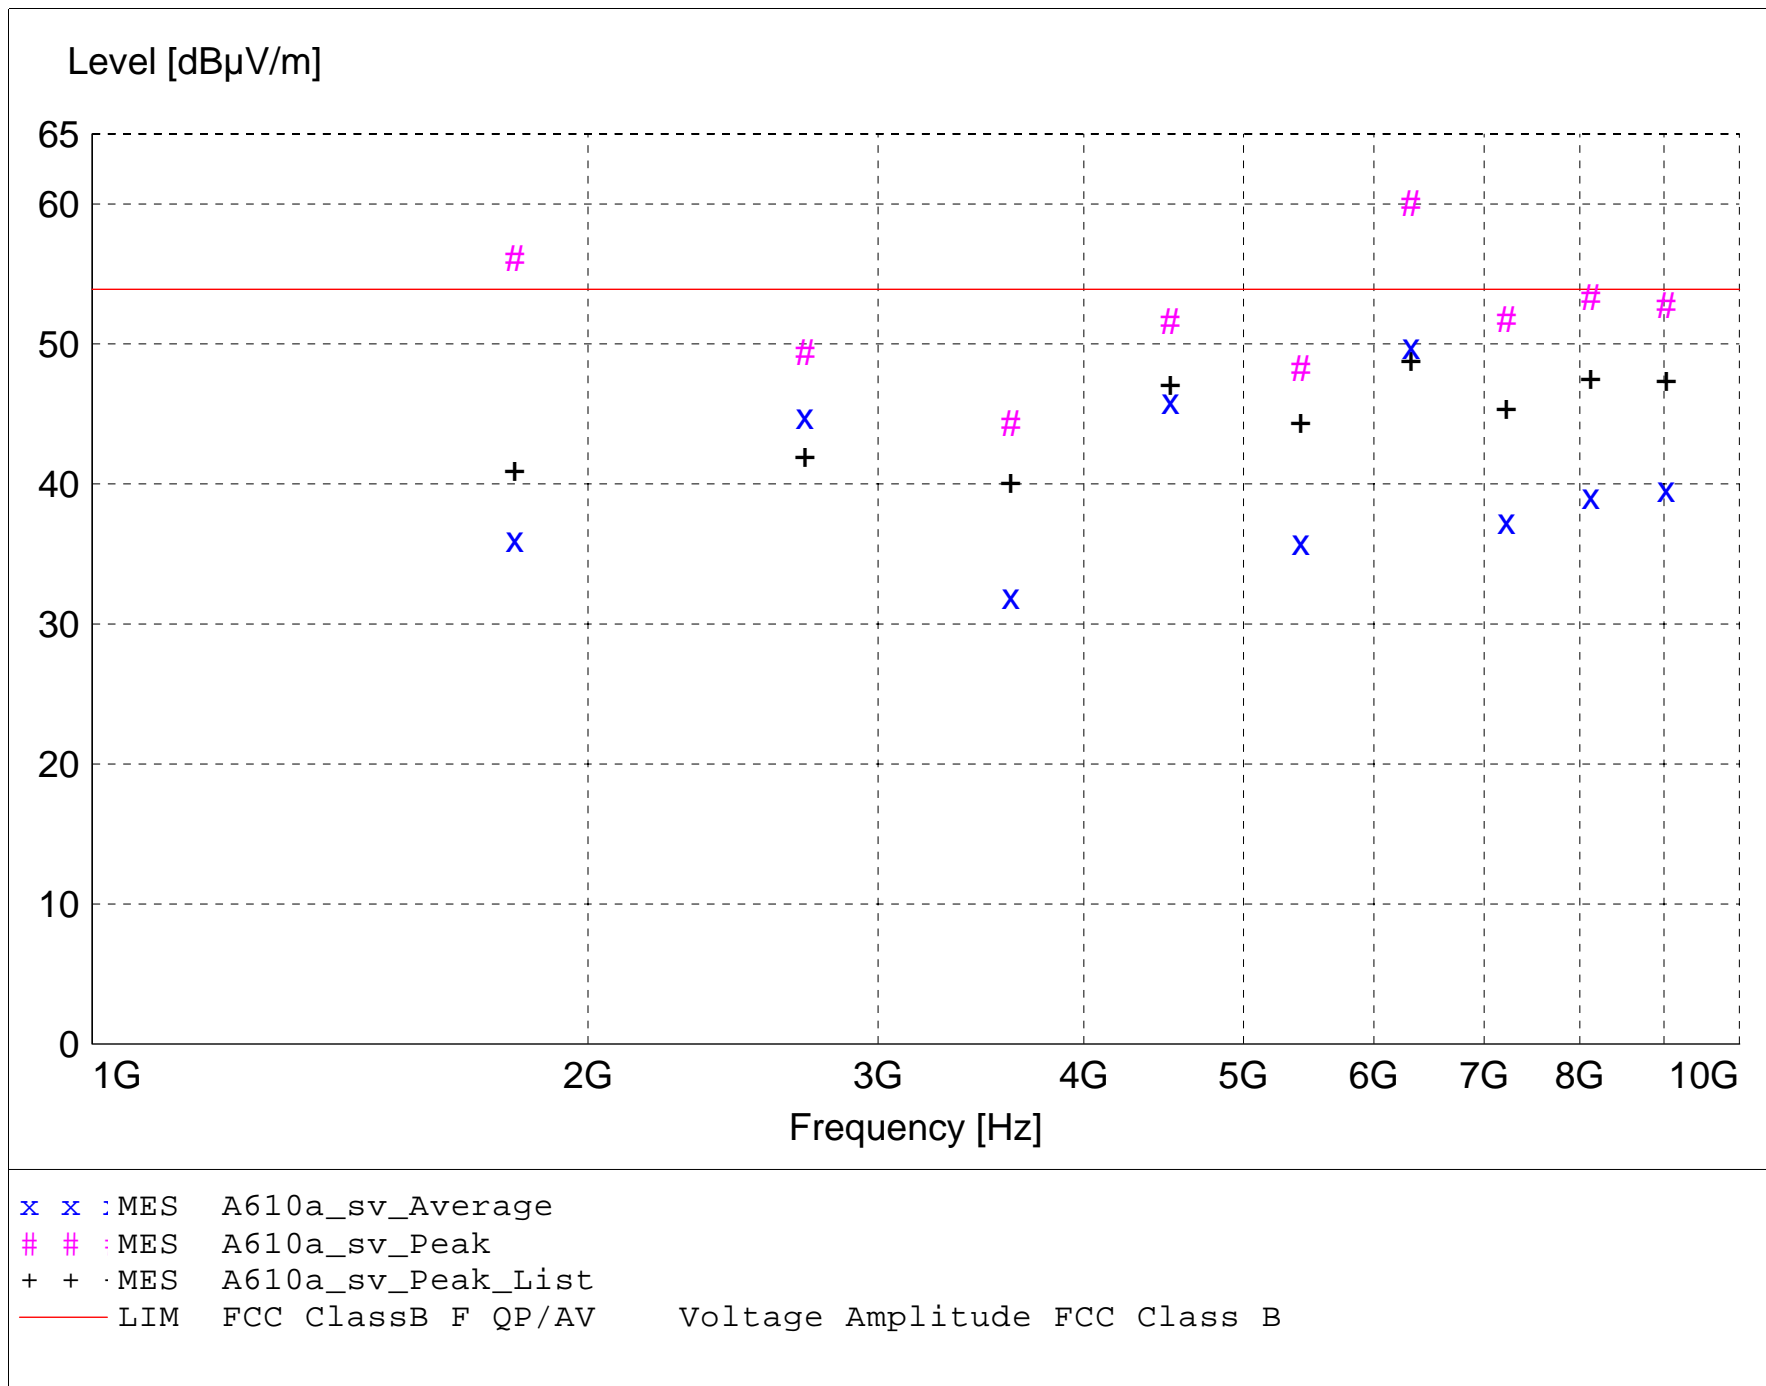

# MEASUREMENT RESULT: "A610a\_sv\_Final"

6/10/2004 1:13PM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dBμV	Factor	Loss	Level	dBμV/m	dB	Ant.	Angle	Detector	
		dBμV/m	dB	dBμV/m	dBμV/m		m	deg		
6320.000000	59.46	34.50	-33.9	60.1	53.9	-6.2	1.00	100	MAX PEAK	7th Harmonic
1805.700000	65.61	26.75	-36.2	56.1	53.9	-2.2	1.00	45	MAX PEAK	2nd Harmonic
8125.700000	49.55	36.85	-33.1	53.3	53.9	0.6	1.00	180	MAX PEAK	9th Harmonic
9028.600000	48.20	37.71	-33.2	52.7	53.9	1.2	1.00	0	MAX PEAK	10th Harmonic
7222.900000	49.68	35.73	-33.7	51.8	53.9	2.1	1.00	30	MAX PEAK	8th Harmonic
4514.300000	53.95	32.33	-34.6	51.7	53.9	2.2	1.00	0	MAX PEAK	5th Harmonic
6320.000000	49.23	34.50	-33.9	49.9	53.9	4.0	1.00	100	AVERAGE	7th Harmonic
2708.600000	56.00	29.23	-35.8	49.4	53.9	4.5	1.00	0	MAX PEAK	3rd Harmonic
5417.200000	47.57	34.07	-33.4	48.2	53.9	5.7	1.00	190	MAX PEAK	6th Harmonic
4514.300000	48.18	32.33	-34.6	45.9	53.9	8.0	1.00	0	AVERAGE	5th Harmonic
2708.600000	51.42	29.23	-35.8	44.9	53.9	9.0	1.00	0	AVERAGE	3rd Harmonic
3611.500000	48.20	31.51	-35.4	44.3	53.9	9.6	1.00	110	MAX PEAK	4th Harmonic
9028.600000	35.11	37.71	-33.2	39.6	53.9	14.3	1.00	0	AVERAGE	10th Harmonic
8125.700000	35.38	36.85	-33.1	39.2	53.9	14.7	1.00	180	AVERAGE	9th Harmonic
7222.900000	35.22	35.73	-33.7	37.3	53.9	16.6	1.00	30	AVERAGE	8th Harmonic
1805.700000	45.51	26.75	-36.2	36.0	53.9	17.9	1.00	45	AVERAGE	2nd Harmonic
5417.200000	35.20	34.07	-33.4	35.9	53.9	18.0	1.00	190	AVERAGE	6th Harmonic
3611.500000	35.86	31.51	-35.4	32.0	53.9	21.9	1.00	110	AVERAGE	4th Harmonic



**FCC Part 15 Class B**

**Electric Field Strength**

EUT: R110XiIII Plus  
Manufacturer: Zebra Technologies  
Operating Condition: 70 deg F; 65% R.H.  
Test Site: D.L.S. O.F. Site 2  
Operator: Jason L  
Test Specification: 120 Volts; 60 Hz  
Comment: Transmit Low Frequency = 902.853 MHz  
Date: 06/10/04

**TEXT: "Site 2 5731&106 H3M"**


Short Description: Test Set-up Horz1GHz-  
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/005

Horn Antenna --- EMCO 3115 SN: 9903-5731

Pre-Amps ---

1 - 18 GHz -- Miteq AMF-6D-010100-50 SN: 213976  
18 - 26 GHz -- Miteq AMF-6B-100200-50 SN: 313936

TEST SET-UP: EuT Measured at 3 Meters with HORIZONTAL Antenna Polarisation

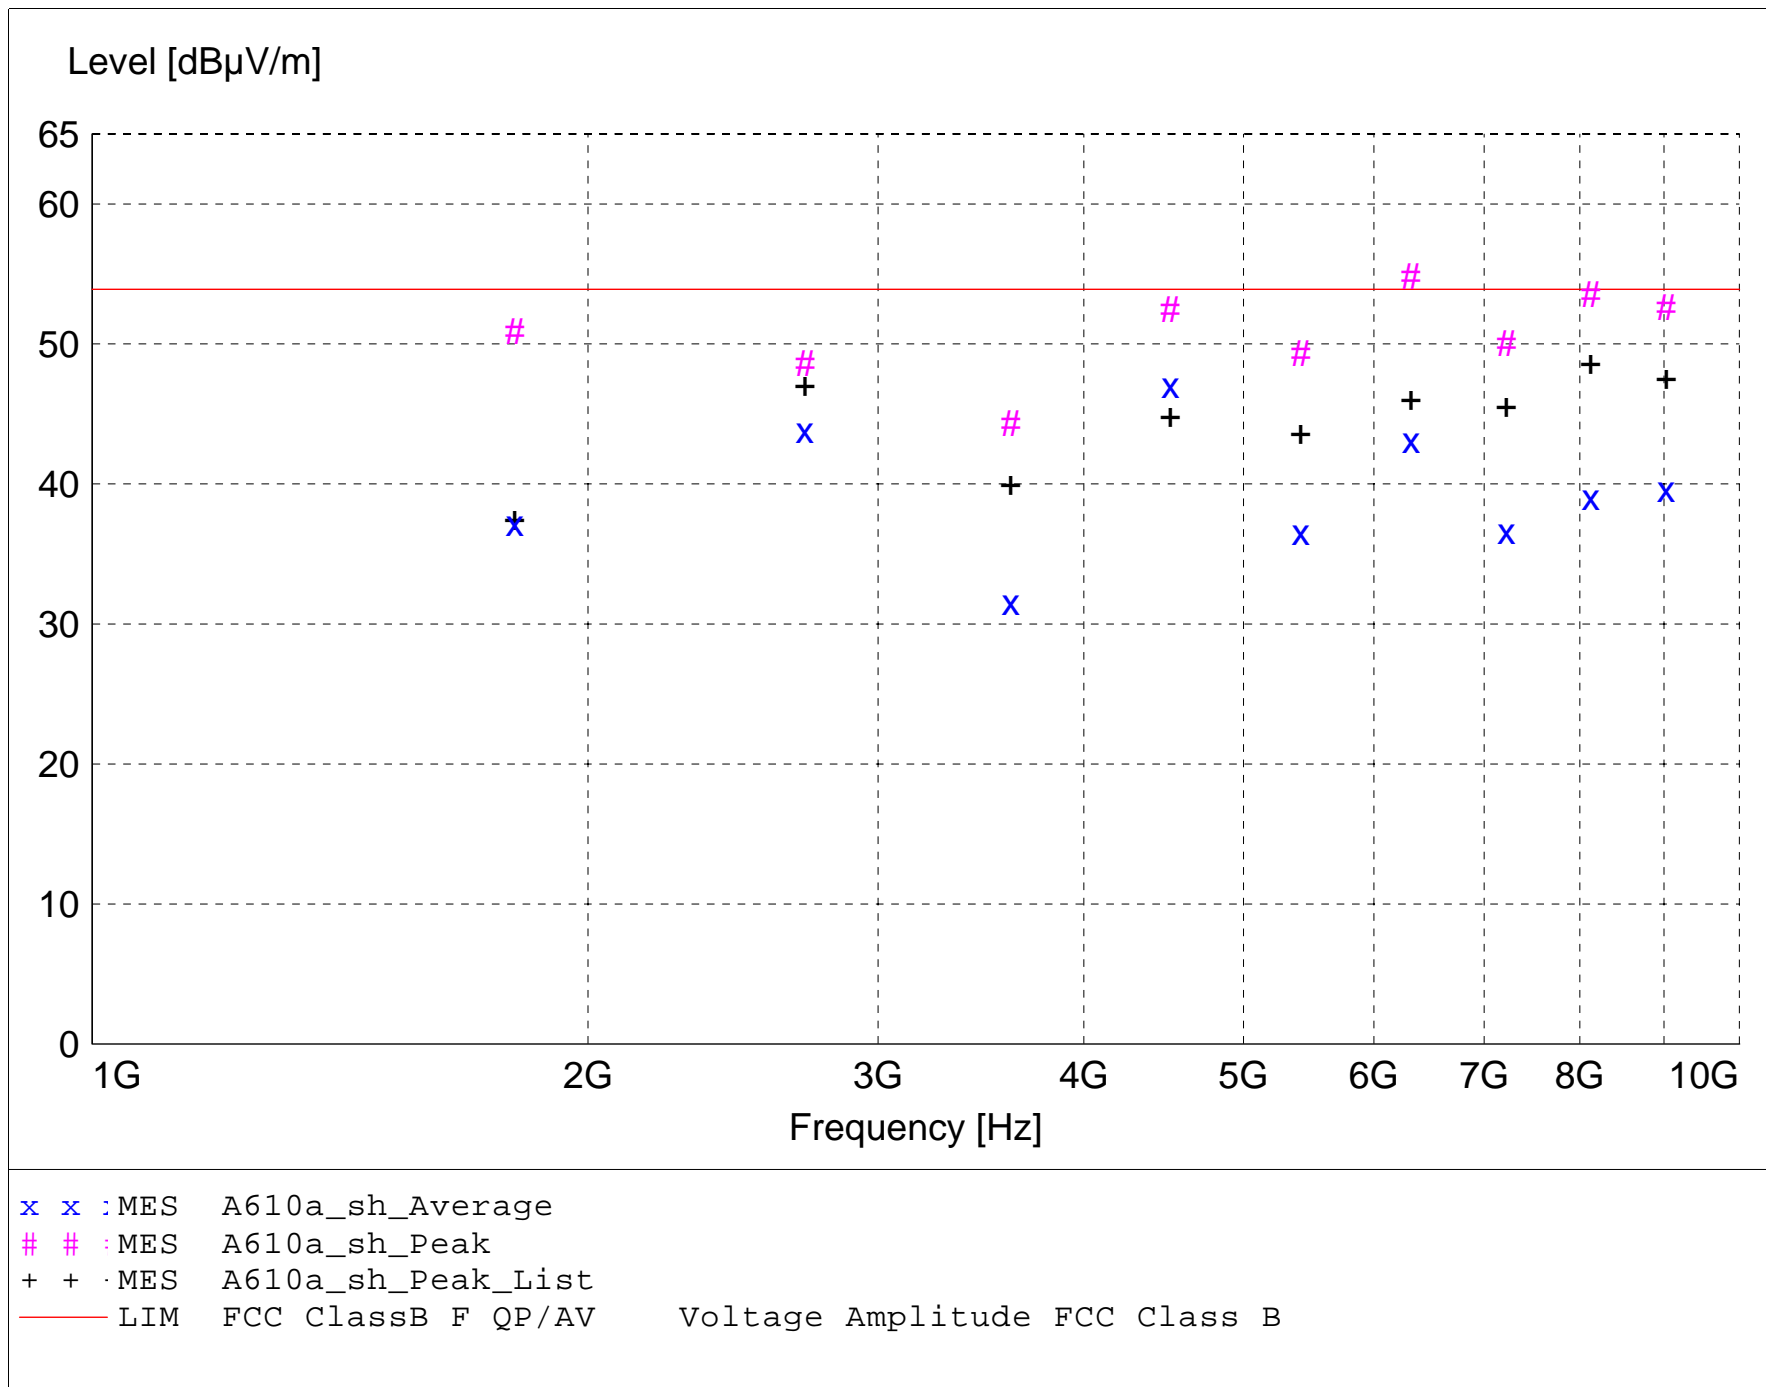

# MEASUREMENT RESULT: "A610a\_sh\_Final"

6/10/2004 1:34PM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dBμV	Factor	Loss	Level	dBμV/m	dB	Ant.	Angle	Detector	
		dBμV/m	dB	dBμV/m	dBμV/m		m	deg		
6320.000000	54.23	34.50	-33.9	54.8	53.9	-0.9	1.00	110	MAX PEAK	7th Harmonic
8125.700000	49.80	36.85	-33.1	53.6	53.9	0.3	1.00	0	MAX PEAK	9th Harmonic
9028.600000	48.08	37.71	-33.2	52.6	53.9	1.3	1.00	180	MAX PEAK	10th Harmonic
4514.300000	54.77	32.33	-34.6	52.5	53.9	1.4	1.20	145	MAX PEAK	5th Harmonic
1805.700000	60.41	26.75	-36.2	50.9	53.9	3.0	1.00	180	MAX PEAK	2nd Harmonic
7222.900000	47.95	35.73	-33.7	50.0	53.9	3.9	1.00	0	MAX PEAK	8th Harmonic
5417.200000	48.70	34.07	-33.4	49.4	53.9	4.5	1.20	180	MAX PEAK	6th Harmonic
2708.600000	55.18	29.23	-35.8	48.6	53.9	5.3	1.00	110	MAX PEAK	3rd Harmonic
4514.300000	49.34	32.33	-34.6	47.0	53.9	6.9	1.20	145	AVERAGE	5th Harmonic
3611.500000	48.20	31.51	-35.4	44.3	53.9	9.6	1.00	120	MAX PEAK	4th Harmonic
2708.600000	50.40	29.23	-35.8	43.8	53.9	10.1	1.00	110	AVERAGE	3rd Harmonic
6320.000000	42.48	34.50	-33.9	43.1	53.9	10.8	1.00	110	AVERAGE	7th Harmonic
9028.600000	35.12	37.71	-33.2	39.7	53.9	14.2	1.00	180	AVERAGE	10th Harmonic
8125.700000	35.29	36.85	-33.1	39.1	53.9	14.8	1.00	0	AVERAGE	9th Harmonic
1805.700000	46.69	26.75	-36.2	37.2	53.9	16.7	1.00	180	AVERAGE	2nd Harmonic
7222.900000	34.57	35.73	-33.7	36.6	53.9	17.3	1.00	0	AVERAGE	8th Harmonic
5417.200000	35.88	34.07	-33.4	36.6	53.9	17.3	1.20	180	AVERAGE	6th Harmonic
3611.500000	35.45	31.51	-35.4	31.6	53.9	22.3	1.00	120	AVERAGE	4th Harmonic

**FCC Part 15 Class B**

**Electric Field Strength**

EUT: R110XiIII Plus  
Manufacturer: Zebra Technologies  
Operating Condition: 70 deg F; 65% R.H.  
Test Site: D.L.S. O.F. Site 2  
Operator: Jason L  
Test Specification: 120 Volts; 60 Hz  
Comment: Transmit Middle Frequency = 914.854 MHz  
Date: 06/10/04

**TEXT: "Site 2 5731&106 V3M"**


Short Description: Test Set-up Vert1GHz-  
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/005

Horn Antenna --- EMCO 3115 SN: 9903-5731

Pre-Amps ---

1 - 18 GHz -- Miteq AMF-6B-100200-50 SN: 313936  
18 - 26 GHz -- Miteq AMF-6D-010100-50 SN: 213976

TEST SET-UP: EuT Measured at 3 Meters with VERTICAL Antenna Polarisation

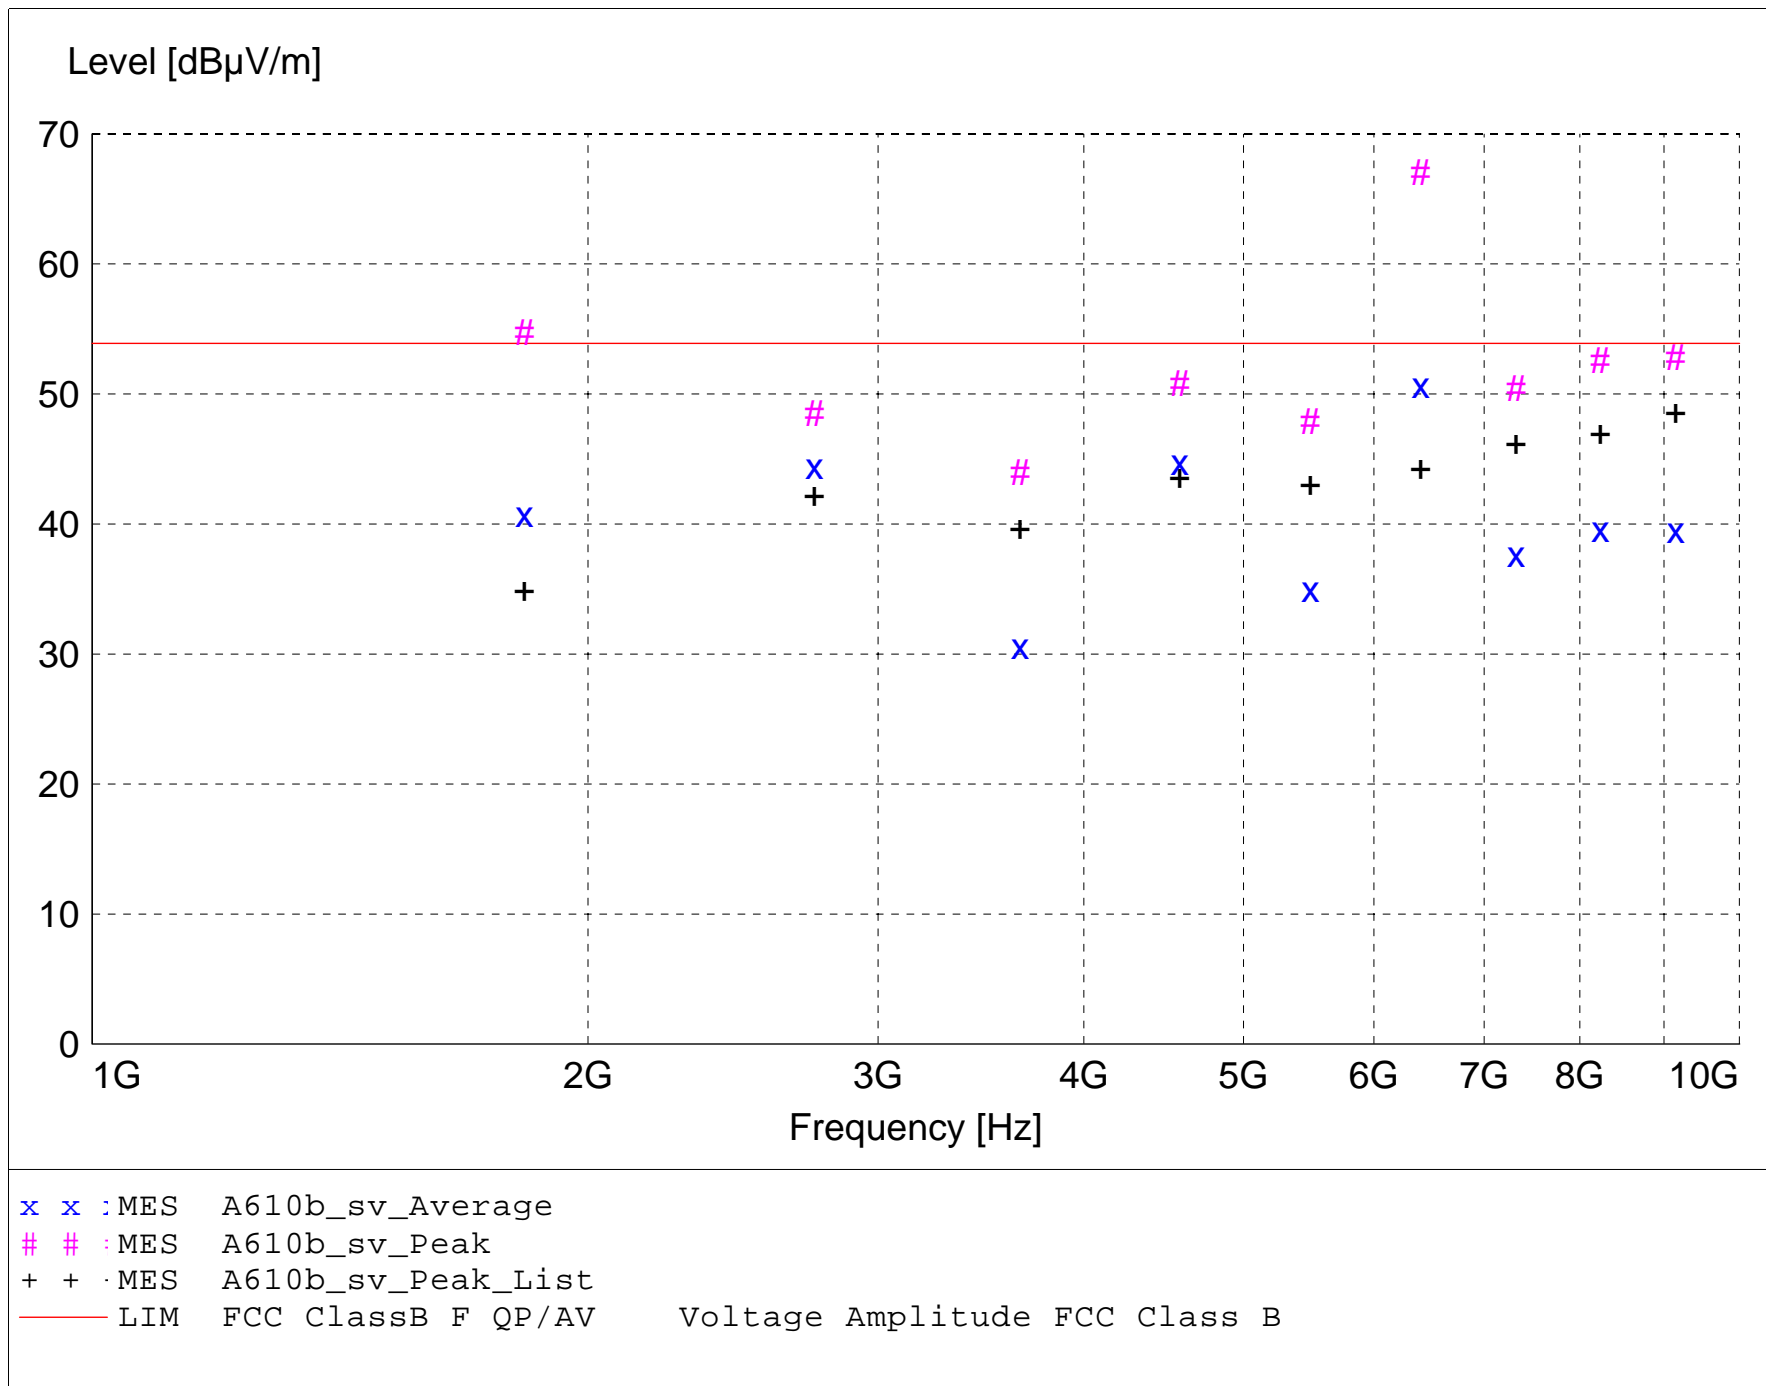

# MEASUREMENT RESULT: "A610b\_sv\_Final"

6/10/2004 1:56PM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dBμV	Factor	Loss	Level	dBμV/m	dB	Ant.	Angle	Detector	
		dBμV/m	dB	dBμV/m	dBμV/m		m	deg		
6404.000000	66.42	34.50	-33.9	67.0	53.9	-13.1	1.00	120	MAX PEAK	7th Harmonic
1829.700000	64.03	26.85	-36.2	54.7	53.9	-0.8	1.00	45	MAX PEAK	2nd Harmonic
9148.600000	48.20	37.73	-33.1	52.9	53.9	1.0	1.00	0	MAX PEAK	10th Harmonic
8233.700000	48.70	36.98	-33.1	52.6	53.9	1.3	1.00	125	MAX PEAK	9th Harmonic
4574.300000	52.97	32.46	-34.6	50.8	53.9	3.1	1.10	0	MAX PEAK	5th Harmonic
6404.000000	50.09	34.50	-33.9	50.7	53.9	3.2	1.00	120	AVERAGE	7th Harmonic
7318.900000	48.32	35.97	-33.9	50.4	53.9	3.5	1.00	180	MAX PEAK	8th Harmonic
2744.600000	54.77	29.33	-35.6	48.5	53.9	5.4	1.00	45	MAX PEAK	3rd Harmonic
5489.200000	47.20	34.18	-33.5	47.9	53.9	6.0	1.00	90	MAX PEAK	6th Harmonic
4574.300000	46.92	32.46	-34.6	44.8	53.9	9.1	1.10	0	AVERAGE	5th Harmonic
2744.600000	50.71	29.33	-35.6	44.4	53.9	9.5	1.00	45	AVERAGE	3rd Harmonic
3659.500000	47.82	31.65	-35.5	44.0	53.9	9.9	1.00	120	MAX PEAK	4th Harmonic
1829.700000	50.05	26.85	-36.2	40.7	53.9	13.2	1.00	45	AVERAGE	2nd Harmonic
8233.700000	35.69	36.98	-33.1	39.6	53.9	14.3	1.00	125	AVERAGE	9th Harmonic
9148.600000	34.87	37.73	-33.1	39.5	53.9	14.4	1.00	0	AVERAGE	10th Harmonic
7318.900000	35.53	35.97	-33.9	37.6	53.9	16.3	1.00	180	AVERAGE	8th Harmonic
5489.200000	34.22	34.18	-33.5	35.0	53.9	18.9	1.00	90	AVERAGE	6th Harmonic
3659.500000	34.45	31.65	-35.5	30.6	53.9	23.3	1.00	120	AVERAGE	4th Harmonic

**FCC Part 15 Class B**

**Electric Field Strength**

EUT: R110XiIII Plus  
Manufacturer: Zebra Technologies  
Operating Condition: 70 deg F; 65% R.H.  
Test Site: D.L.S. O.F. Site 2  
Operator: Jason L  
Test Specification: 120 Volts; 60 Hz  
Comment: Transmit Middle Frequency = 914.854 MHz  
Date: 06/10/04

**TEXT: "Site 2 5731&106 H3M"**


Short Description: Test Set-up Horz1GHz-  
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/005

Horn Antenna --- EMCO 3115 SN: 9903-5731

Pre-Amps ---

1 - 18 GHz -- Miteq AMF-6D-010100-50 SN: 213976  
18 - 26 GHz -- Miteq AMF-6B-100200-50 SN: 313936

TEST SET-UP: EuT Measured at 3 Meters with HORIZONTAL Antenna Polarisation

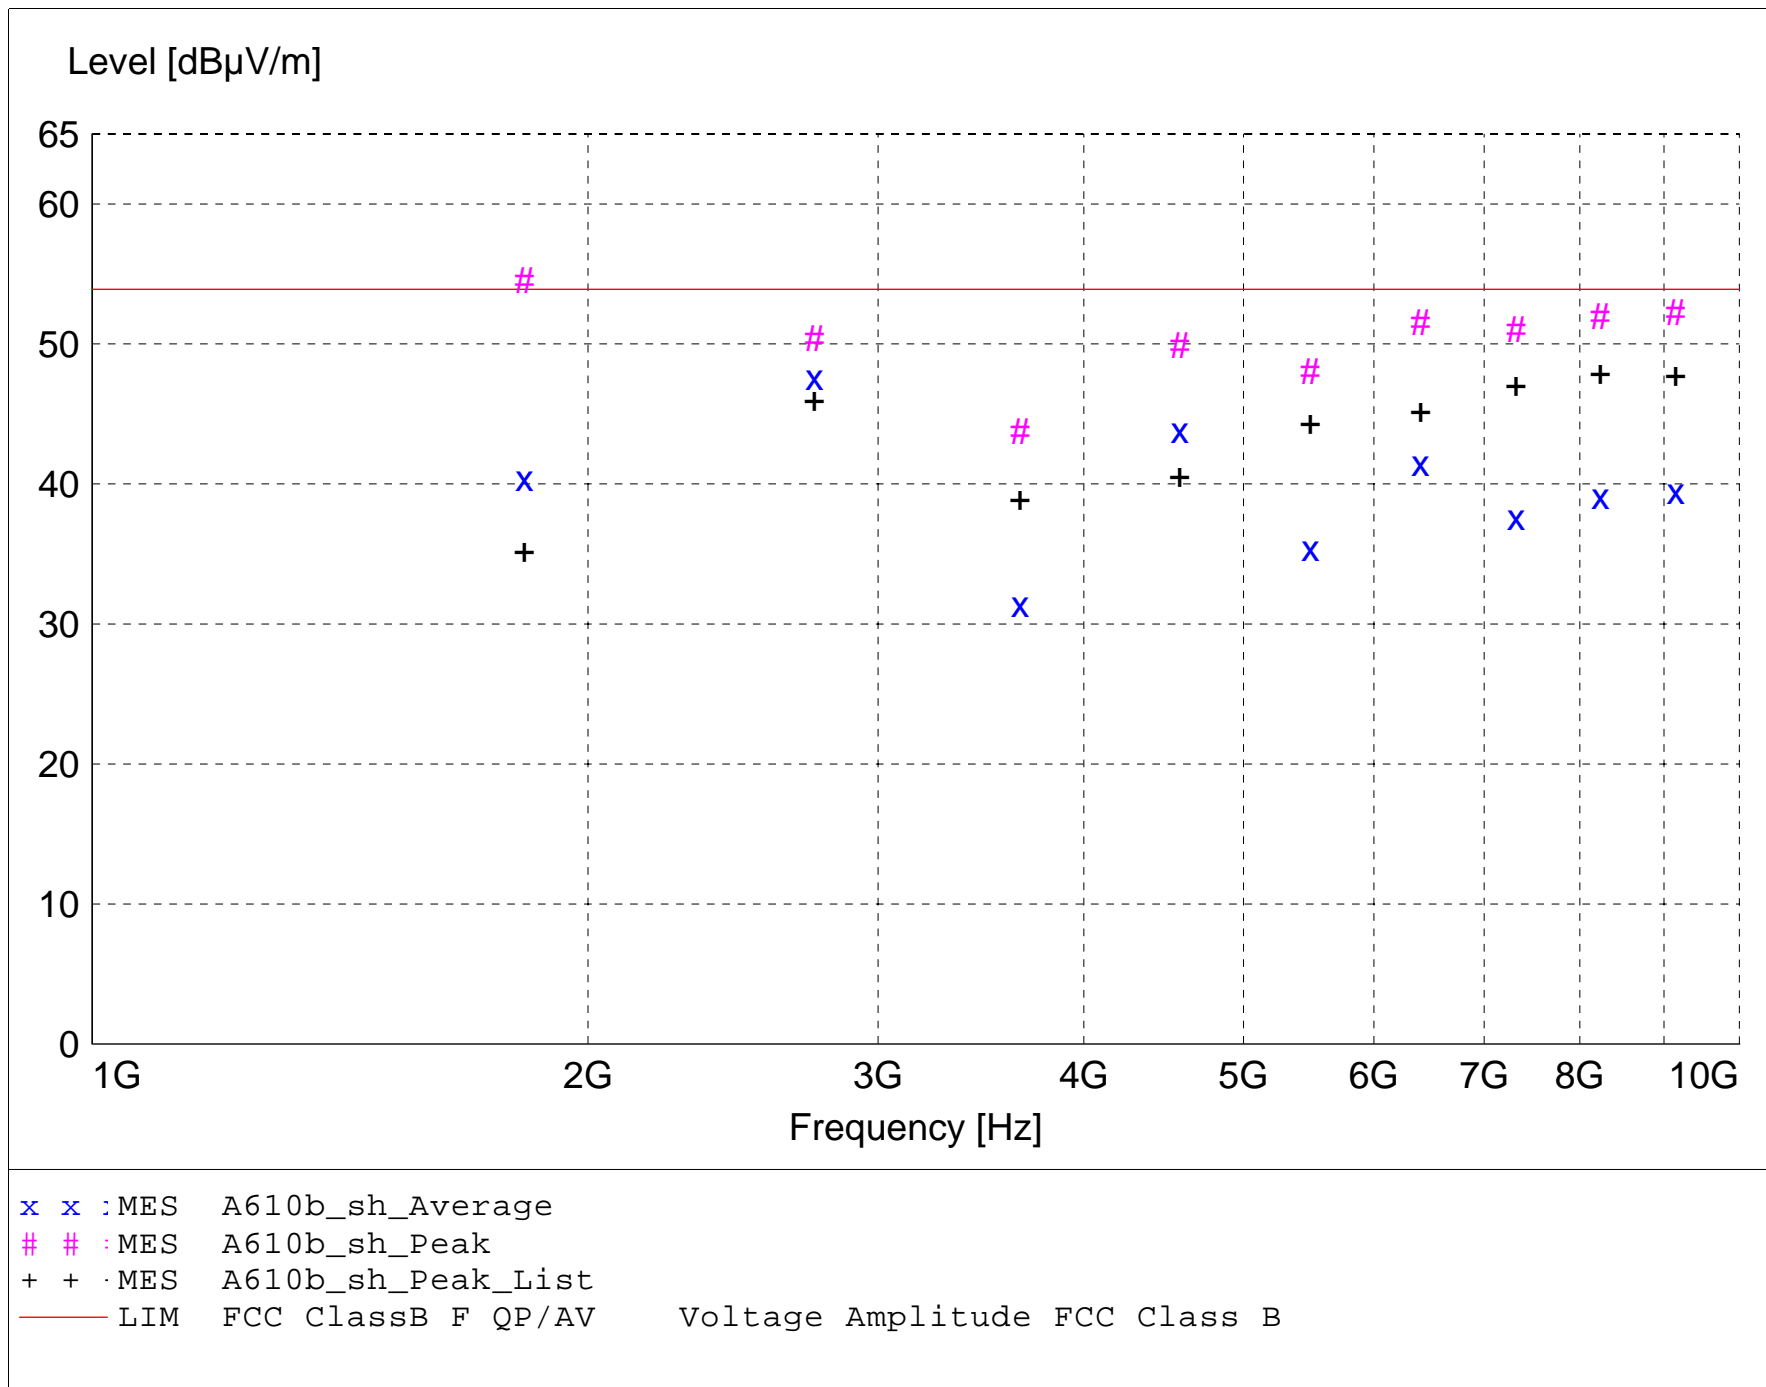



**MEASUREMENT RESULT: "A610b\_sh\_Final"**

6/10/2004 2:24PM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dBμV	Factor	Loss	Level			Ant.	Angle	Detector	
		dBμV/m	dB	dBμV/m	dBμV/m	dB	m	deg		
1829.700000	63.89	26.85	-36.2	54.6	53.9	-0.7	1.10	120	MAX PEAK	2nd Harmonic
9148.600000	47.58	37.73	-33.1	52.2	53.9	1.7	1.00	0	MAX PEAK	10th Harmonic
8233.700000	48.08	36.98	-33.1	52.0	53.9	1.9	1.00	120	MAX PEAK	9th Harmonic
6404.000000	50.95	34.50	-33.9	51.6	53.9	2.3	1.10	90	MAX PEAK	7th Harmonic
7318.900000	48.94	35.97	-33.9	51.1	53.9	2.8	1.00	0	MAX PEAK	8th Harmonic
2744.600000	56.67	29.33	-35.6	50.4	53.9	3.5	1.10	180	MAX PEAK	3rd Harmonic
4574.300000	52.06	32.46	-34.6	49.9	53.9	4.0	1.10	30	MAX PEAK	5th Harmonic
5489.200000	47.32	34.18	-33.5	48.1	53.9	5.8	1.00	125	MAX PEAK	6th Harmonic
2744.600000	53.88	29.33	-35.6	47.6	53.9	6.3	1.10	180	AVERAGE	3rd Harmonic
4574.300000	45.99	32.46	-34.6	43.9	53.9	10.0	1.10	30	AVERAGE	5th Harmonic
3659.500000	47.57	31.65	-35.5	43.7	53.9	10.2	1.10	90	MAX PEAK	4th Harmonic
6404.000000	40.88	34.50	-33.9	41.5	53.9	12.4	1.10	90	AVERAGE	7th Harmonic
1829.700000	49.72	26.85	-36.2	40.4	53.9	13.5	1.10	120	AVERAGE	2nd Harmonic
9148.600000	34.86	37.73	-33.1	39.5	53.9	14.4	1.00	0	AVERAGE	10th Harmonic
8233.700000	35.19	36.98	-33.1	39.1	53.9	14.8	1.00	120	AVERAGE	9th Harmonic
7318.900000	35.49	35.97	-33.9	37.6	53.9	16.3	1.00	0	AVERAGE	8th Harmonic
5489.200000	34.72	34.18	-33.5	35.5	53.9	18.4	1.00	125	AVERAGE	6th Harmonic
3659.500000	35.24	31.65	-35.5	31.4	53.9	22.5	1.10	90	AVERAGE	4th Harmonic

**FCC Part 15 Class B**

**Electric Field Strength**

EUT: R110XiIII Plus  
Manufacturer: Zebra Technologies  
Operating Condition: 70 deg F; 65% R.H.  
Test Site: D.L.S. O.F. Site 2  
Operator: Jason L  
Test Specification: 120 Volts; 60 Hz  
Comment: Transmit High Frequency = 927.353 MHz  
Date: 06/10/04

**TEXT: "Site 2 5731&106 V3M"**


Short Description: Test Set-up Vert1GHz-  
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/005

Horn Antenna --- EMCO 3115 SN: 9903-5731

Pre-Amps ---

1 - 18 GHz -- Miteq AMF-6B-100200-50 SN: 313936  
18 - 26 GHz -- Miteq AMF-6D-010100-50 SN: 213976

TEST SET-UP: EuT Measured at 3 Meters with VERTICAL Antenna Polarisation

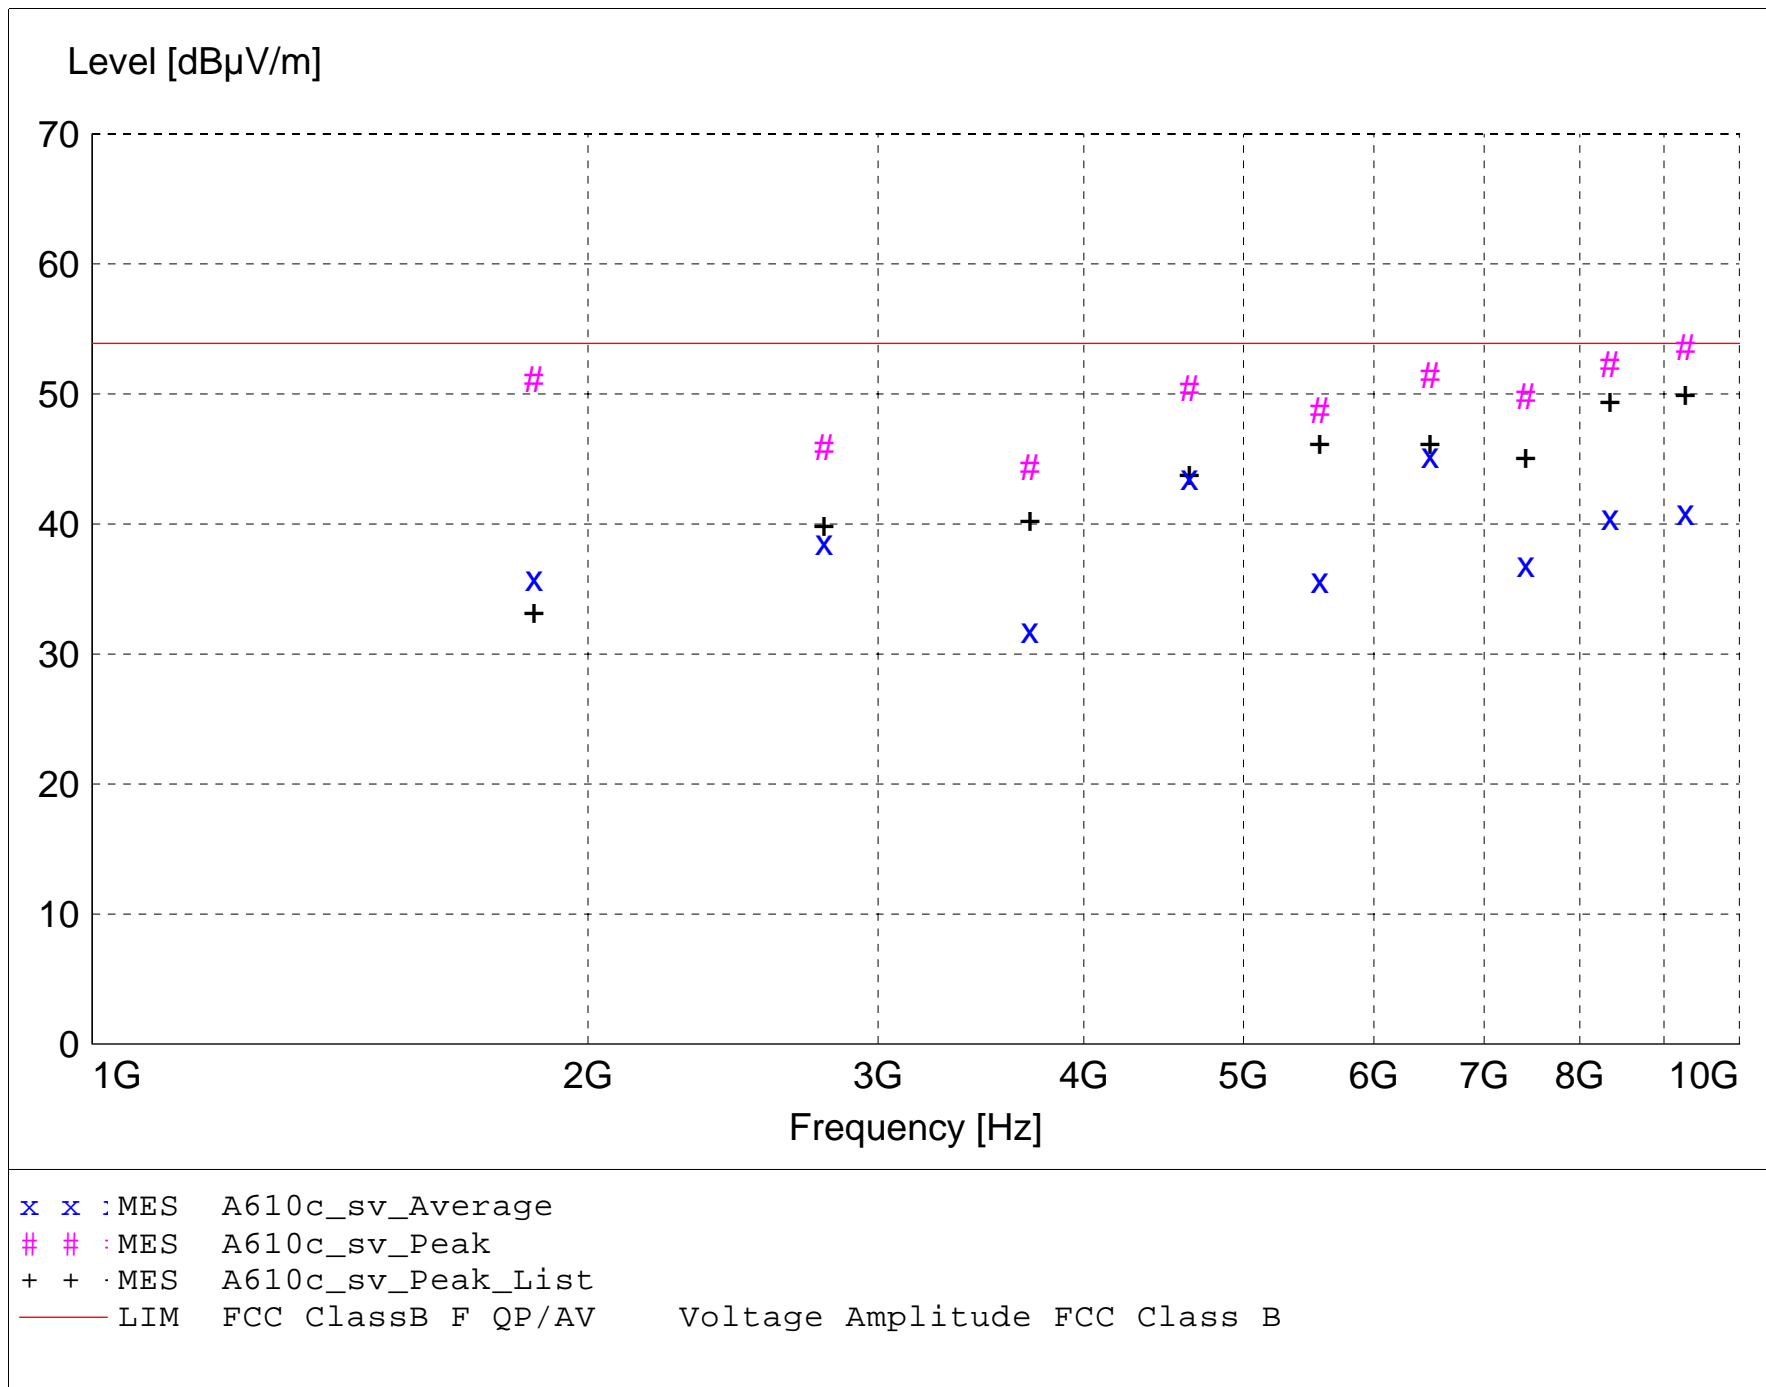

# MEASUREMENT RESULT: "A610c\_sv\_Final"

6/10/2004 2:47PM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dBμV	Factor	Loss	Level	dBμV/m	dB	Ant.	Angle	Detector	
		dBμV/m	dB	dBμV/m	dBμV/m		m	deg		
9273.600000	48.32	37.75	-32.5	53.6	53.9	0.3	1.00	180	MAX PEAK	10th Harmonic
8346.200000	48.07	37.12	-32.9	52.2	53.9	1.7	1.00	125	MAX PEAK	9th Harmonic
6491.500000	50.82	34.50	-33.9	51.4	53.9	2.5	1.00	45	MAX PEAK	7th Harmonic
1854.700000	60.41	26.96	-36.2	51.1	53.9	2.8	1.00	125	MAX PEAK	2nd Harmonic
4636.800000	52.19	32.60	-34.3	50.5	53.9	3.4	1.00	0	MAX PEAK	5th Harmonic
7418.900000	47.32	36.21	-33.7	49.8	53.9	4.1	1.00	145	MAX PEAK	8th Harmonic
5564.200000	47.70	34.24	-33.2	48.7	53.9	5.2	1.00	0	MAX PEAK	6th Harmonic
2782.100000	52.06	29.45	-35.6	45.9	53.9	8.0	1.00	140	MAX PEAK	3rd Harmonic
6491.500000	44.67	34.50	-33.9	45.3	53.9	8.6	1.00	45	AVERAGE	7th Harmonic
3709.500000	48.08	31.79	-35.5	44.3	53.9	9.6	1.00	125	MAX PEAK	4th Harmonic
4636.800000	45.27	32.60	-34.3	43.6	53.9	10.3	1.00	0	AVERAGE	5th Harmonic
9273.600000	35.61	37.75	-32.5	40.9	53.9	13.0	1.00	180	AVERAGE	10th Harmonic
8346.200000	36.31	37.12	-32.9	40.5	53.9	13.4	1.00	125	AVERAGE	9th Harmonic
2782.100000	44.75	29.45	-35.6	38.6	53.9	15.3	1.00	140	AVERAGE	3rd Harmonic
7418.900000	34.41	36.21	-33.7	36.9	53.9	17.0	1.00	145	AVERAGE	8th Harmonic
1854.700000	45.09	26.96	-36.2	35.8	53.9	18.1	1.00	125	AVERAGE	2nd Harmonic
5564.200000	34.60	34.24	-33.2	35.6	53.9	18.3	1.00	0	AVERAGE	6th Harmonic
3709.500000	35.58	31.79	-35.5	31.8	53.9	22.1	1.00	125	AVERAGE	4th Harmonic

**FCC Part 15 Class B**

**Electric Field Strength**

EUT: R110XiIII Plus  
Manufacturer: Zebra Technologies  
Operating Condition: 70 deg F; 65% R.H.  
Test Site: D.L.S. O.F. Site 2  
Operator: Jason L  
Test Specification: 120 Volts; 60 Hz  
Comment: Transmit High Frequency = 927.353 MHz  
Date: 06/10/04

**TEXT: "Site 2 5731&106 H3M"**


Short Description: Test Set-up Horz1GHz-  
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/005

Horn Antenna --- EMCO 3115 SN: 9903-5731

Pre-Amps ---

1 - 18 GHz -- Miteq AMF-6D-010100-50 SN: 213976  
18 - 26 GHz -- Miteq AMF-6B-100200-50 SN: 313936

TEST SET-UP: EuT Measured at 3 Meters with HORIZONTAL Antenna Polarisation

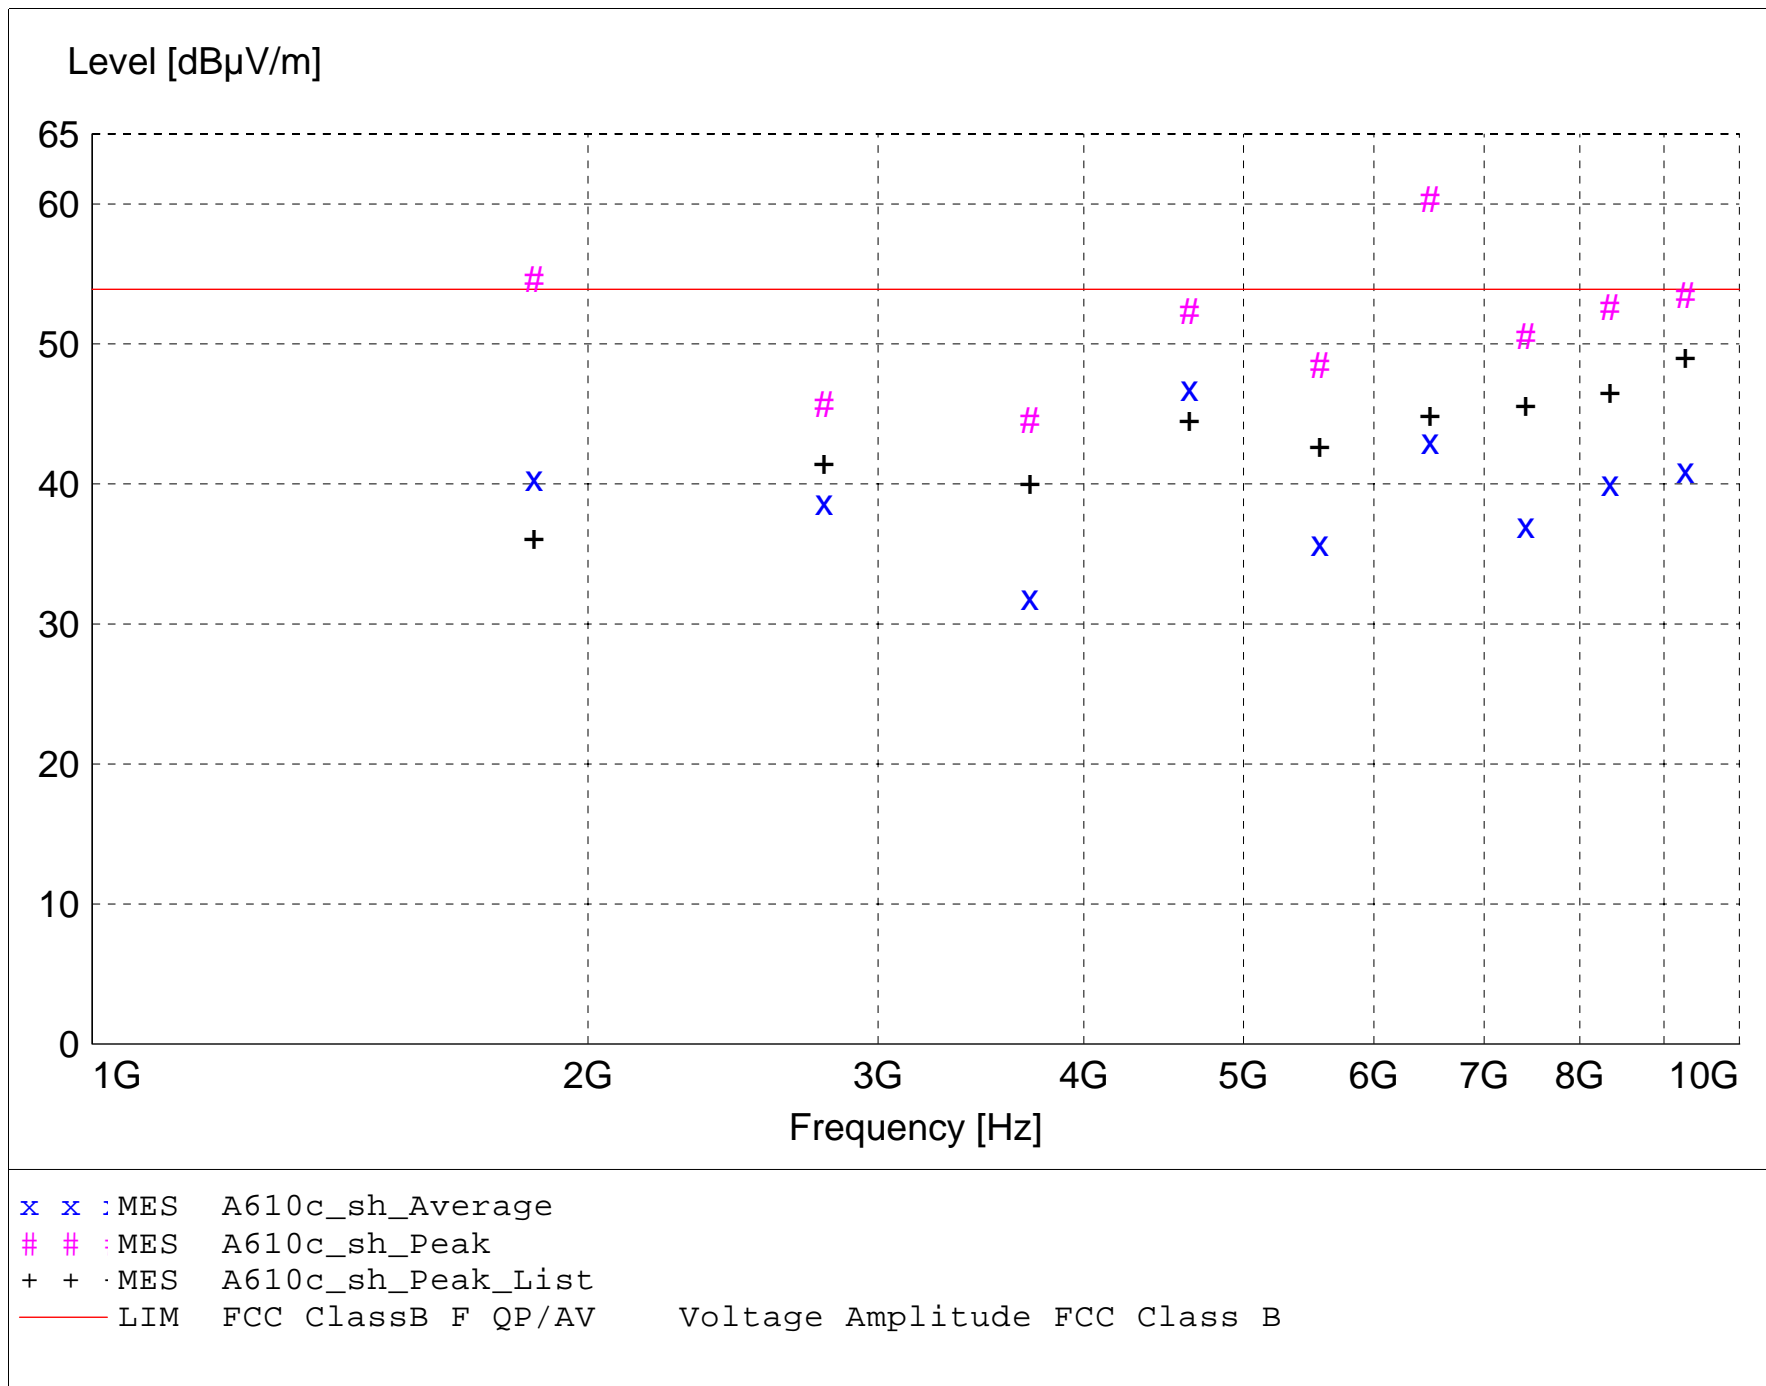


# MEASUREMENT RESULT: "A610c\_sh\_Final"

6/10/2004 3:10PM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dBμV	Factor	Loss	Level	dBμV/m	dB	Ant.	Angle	Detector	
		dBμV/m	dB	dBμV/m	dBμV/m		m	deg		
6491.500000	59.73	34.50	-33.9	60.4	53.9	-6.5	1.20	110	MAX PEAK	7th Harmonic
1854.700000	63.89	26.96	-36.2	54.6	53.9	-0.7	1.20	110	MAX PEAK	2nd Harmonic
9273.600000	48.20	37.75	-32.5	53.5	53.9	0.4	1.00	90	MAX PEAK	10th Harmonic
8346.200000	48.45	37.12	-32.9	52.6	53.9	1.3	1.00	110	MAX PEAK	9th Harmonic
4636.800000	54.09	32.60	-34.3	52.4	53.9	1.5	1.20	110	MAX PEAK	5th Harmonic
7418.900000	48.08	36.21	-33.7	50.6	53.9	3.3	1.00	90	MAX PEAK	8th Harmonic
5564.200000	47.45	34.24	-33.2	48.5	53.9	5.4	1.00	180	MAX PEAK	6th Harmonic
4636.800000	48.52	32.60	-34.3	46.8	53.9	7.1	1.20	110	AVERAGE	5th Harmonic
2782.100000	51.81	29.45	-35.6	45.7	53.9	8.2	1.20	45	MAX PEAK	3rd Harmonic
3709.500000	48.32	31.79	-35.5	44.6	53.9	9.3	1.20	60	MAX PEAK	4th Harmonic
6491.500000	42.46	34.50	-33.9	43.1	53.9	10.8	1.20	110	AVERAGE	7th Harmonic
9273.600000	35.66	37.75	-32.5	41.0	53.9	12.9	1.00	90	AVERAGE	10th Harmonic
1854.700000	49.73	26.96	-36.2	40.4	53.9	13.5	1.20	110	AVERAGE	2nd Harmonic
8346.200000	35.91	37.12	-32.9	40.1	53.9	13.8	1.00	110	AVERAGE	9th Harmonic
2782.100000	44.83	29.45	-35.6	38.7	53.9	15.2	1.20	45	AVERAGE	3rd Harmonic
7418.900000	34.57	36.21	-33.7	37.1	53.9	16.8	1.00	90	AVERAGE	8th Harmonic
5564.200000	34.75	34.24	-33.2	35.8	53.9	18.1	1.00	180	AVERAGE	6th Harmonic
3709.500000	35.68	31.79	-35.5	31.9	53.9	22.0	1.20	60	AVERAGE	4th Harmonic

1250 Peterson Dr., Wheeling, IL 60090

## 7.0 RADIATED EMISSIONS PHOTOS TAKEN DURING TESTING

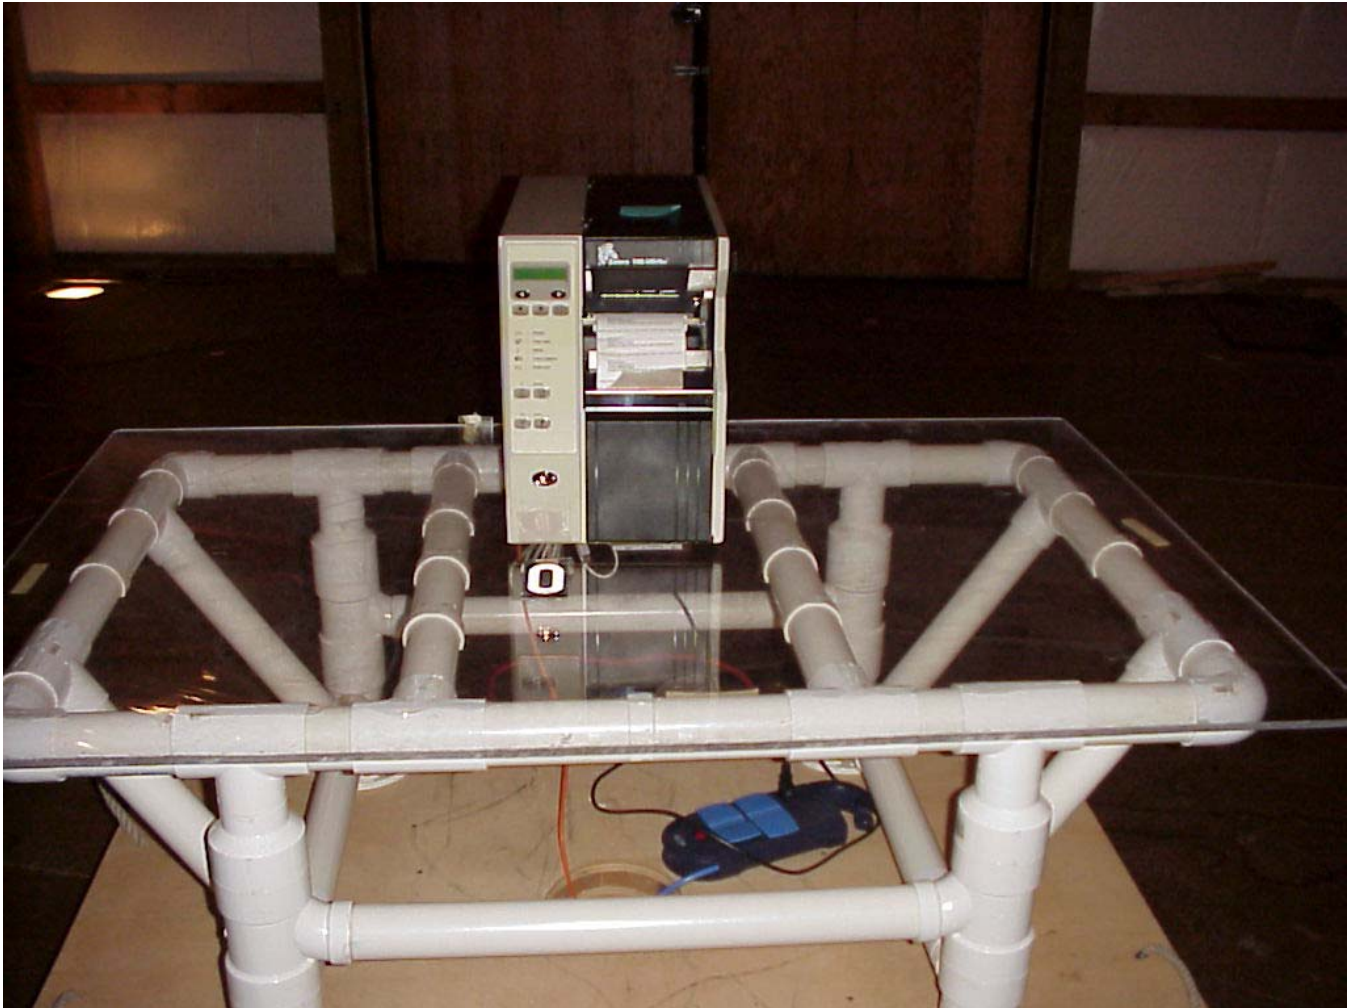





Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

## 20 dB BANDWIDTH GRAPHS

### PART 15.247




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: 20 dB Bandwidth - Conducted  
Operator: Jason L.  
Comment: High Channel: Frequency – 927.25 MHz

20 dB Bandwidth = 181.36 kHz

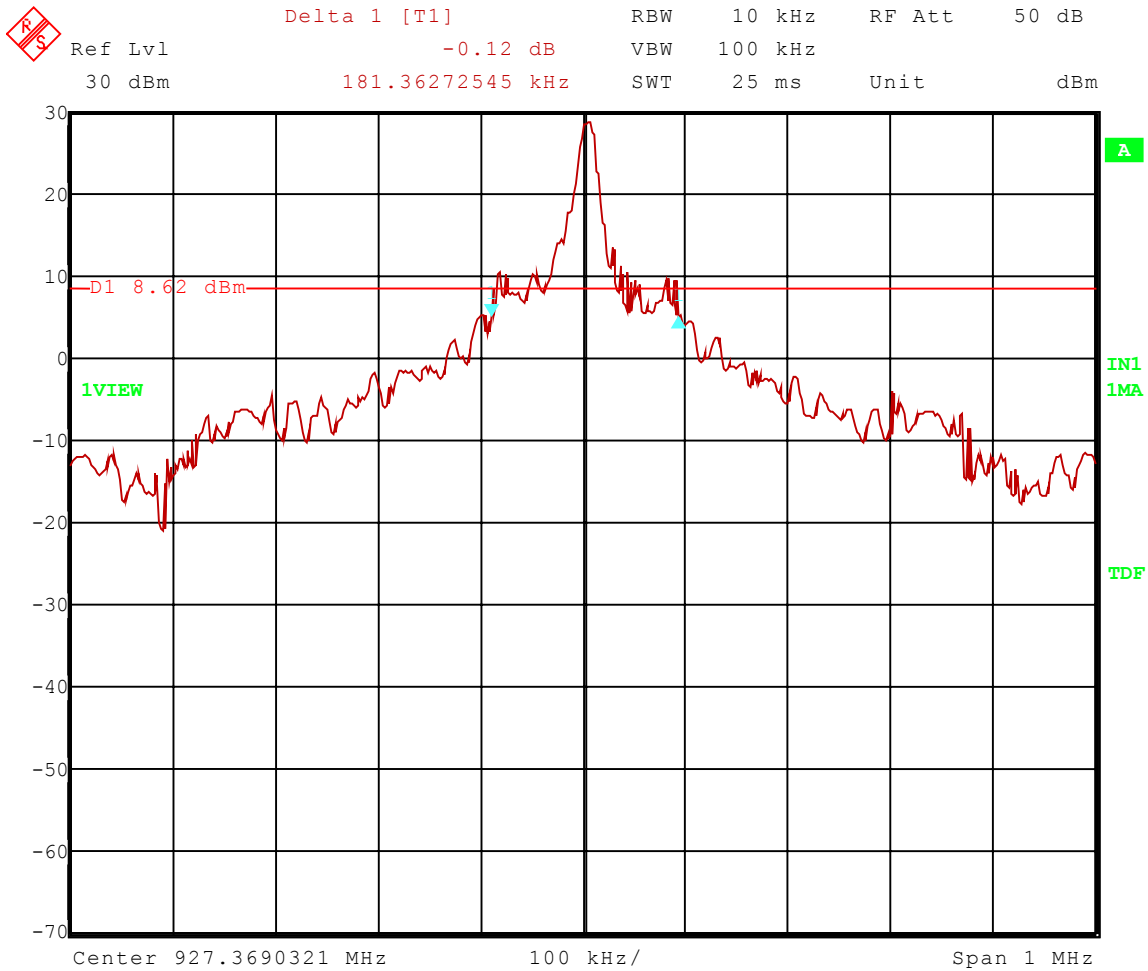

Date: 10.JUN.2004 09:41:02




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: 20 dB Bandwidth - Conducted  
Operator: Jason L.  
Comment: Middle Channel: Frequency – 914.75 MHz

20 dB Bandwidth = 184.37 kHz

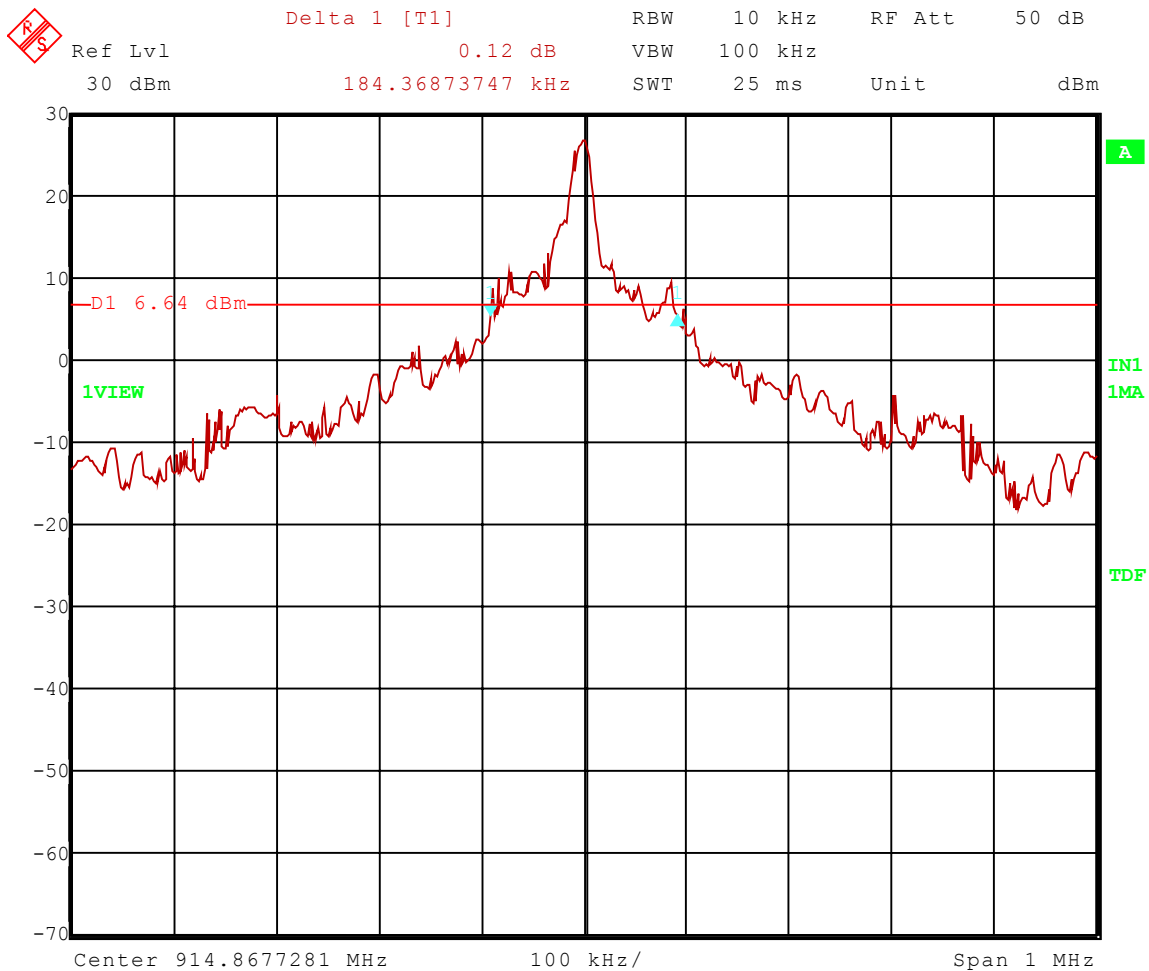

Date: 10.JUN.2004 09:37:48




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: 20 dB Bandwidth - Conducted  
Operator: Jason L.  
Comment: Low Channel: Frequency – 902.75 MHz

20 dB Bandwidth = 184.37 kHz

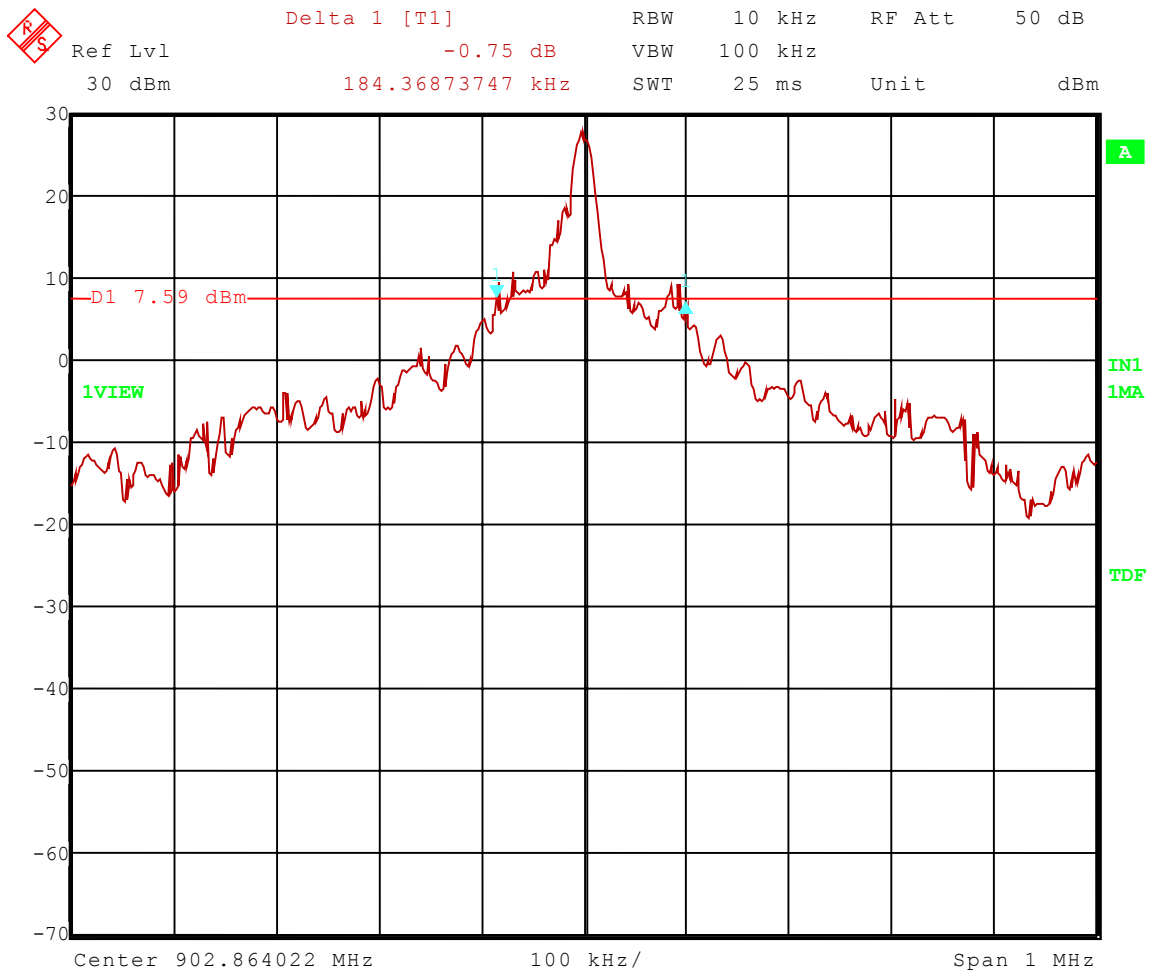

Date: 10.JUN.2004 09:33:22



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

## CARRIER FREQUENCY SEPARATION GRAPH(S)

PART 15.247




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Carrier Frequency Separation - Conducted  
Operator: Jason L.  
Comment: Frequency Hopping On

Carrier Freq Separation = 501 kHz

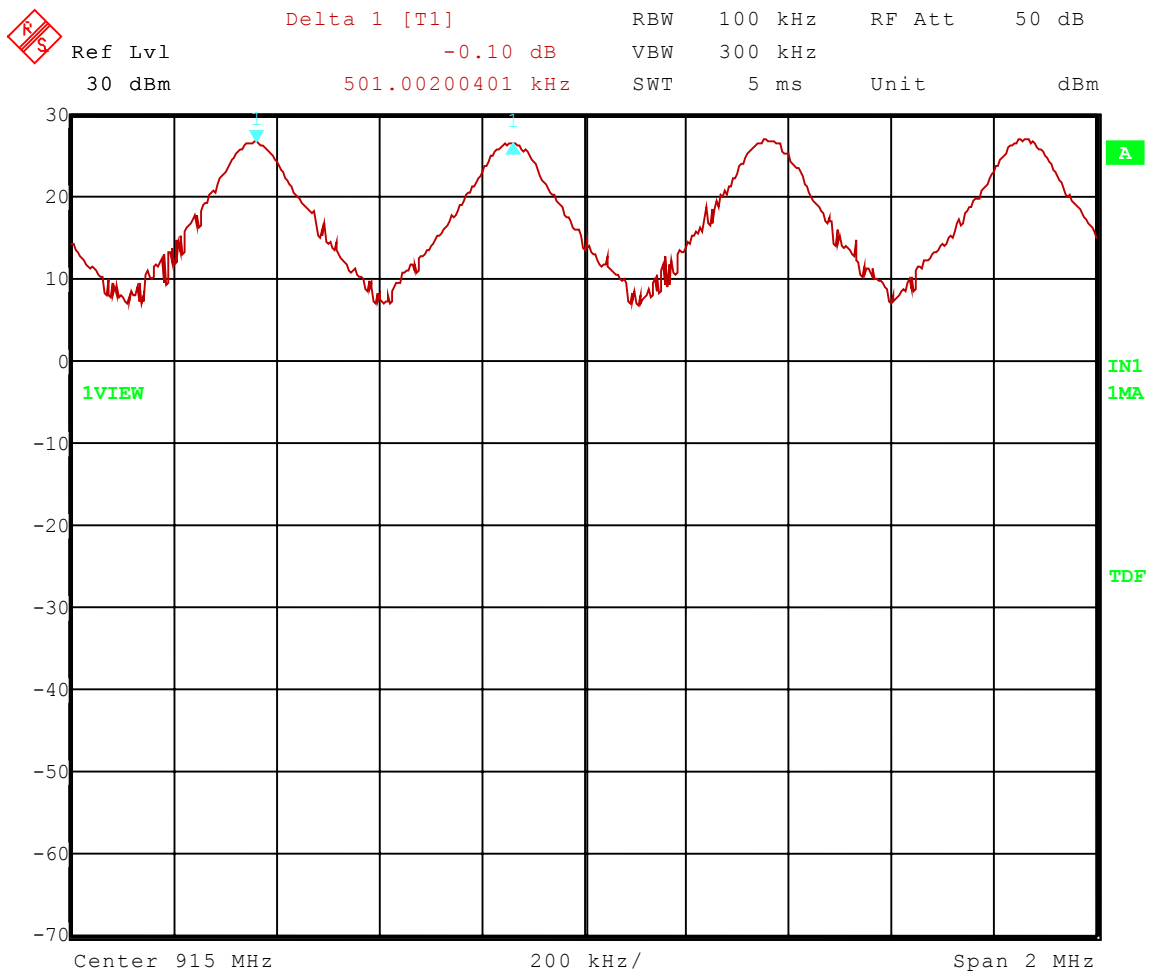

Date: 10.JUN.2004 10:09:40



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

## NUMBER OF HOPPING FREQUENCIES GRAPH(S)

PART 15.247




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Number of Hopping Frequencies - Conducted  
Operator: Jason L.  
Comment: Hopping Mode

Frequency Range = 902 MHz to 928 MHz  
Number of Frequencies in Range = 50

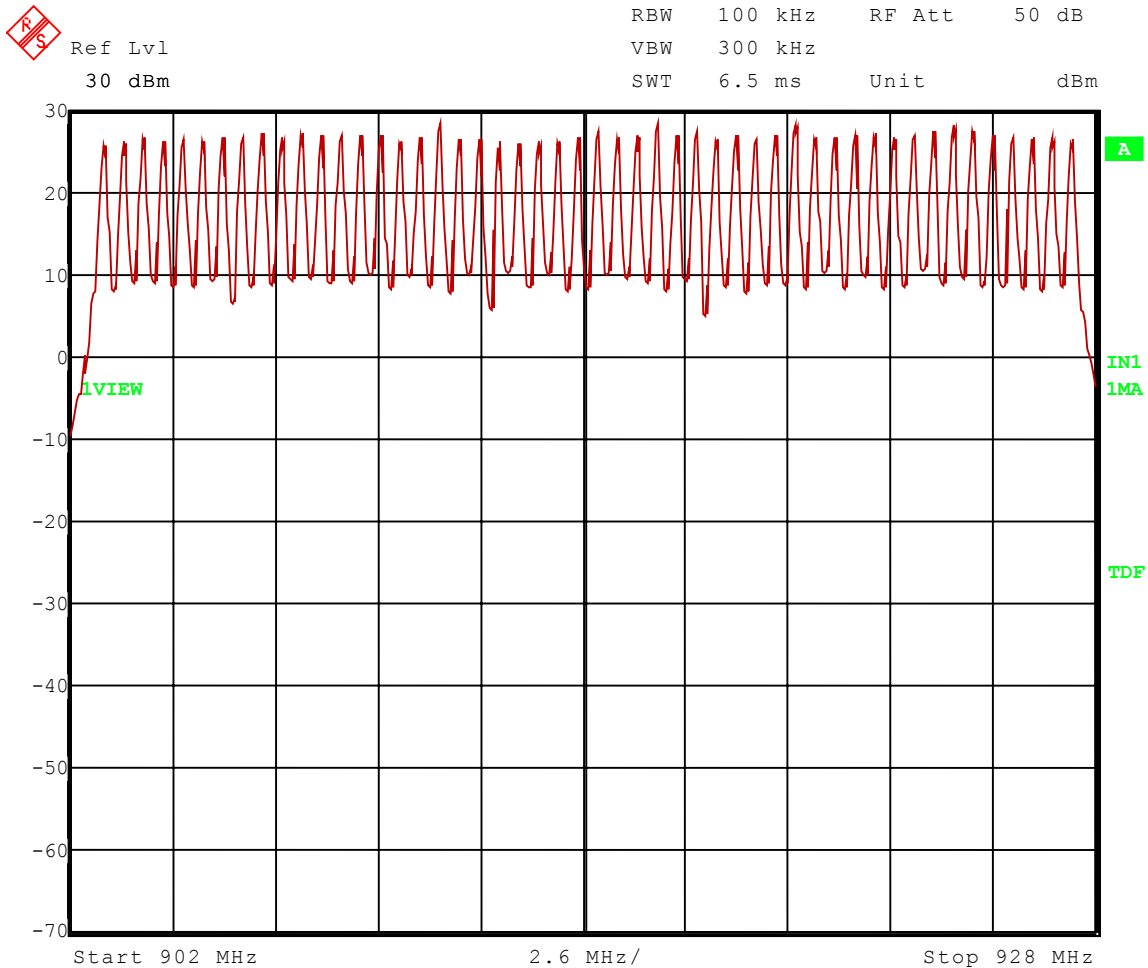

Date: 10.JUN.2004 10:06:49





Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

## TIME OF OCCUPANCY GRAPHS

PART 15.247




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Dwell Time - Conducted  
Operator: Jason L.  
Comment: Middle Channel - Hopping Mode On

Dwell Time = 134.48 mS

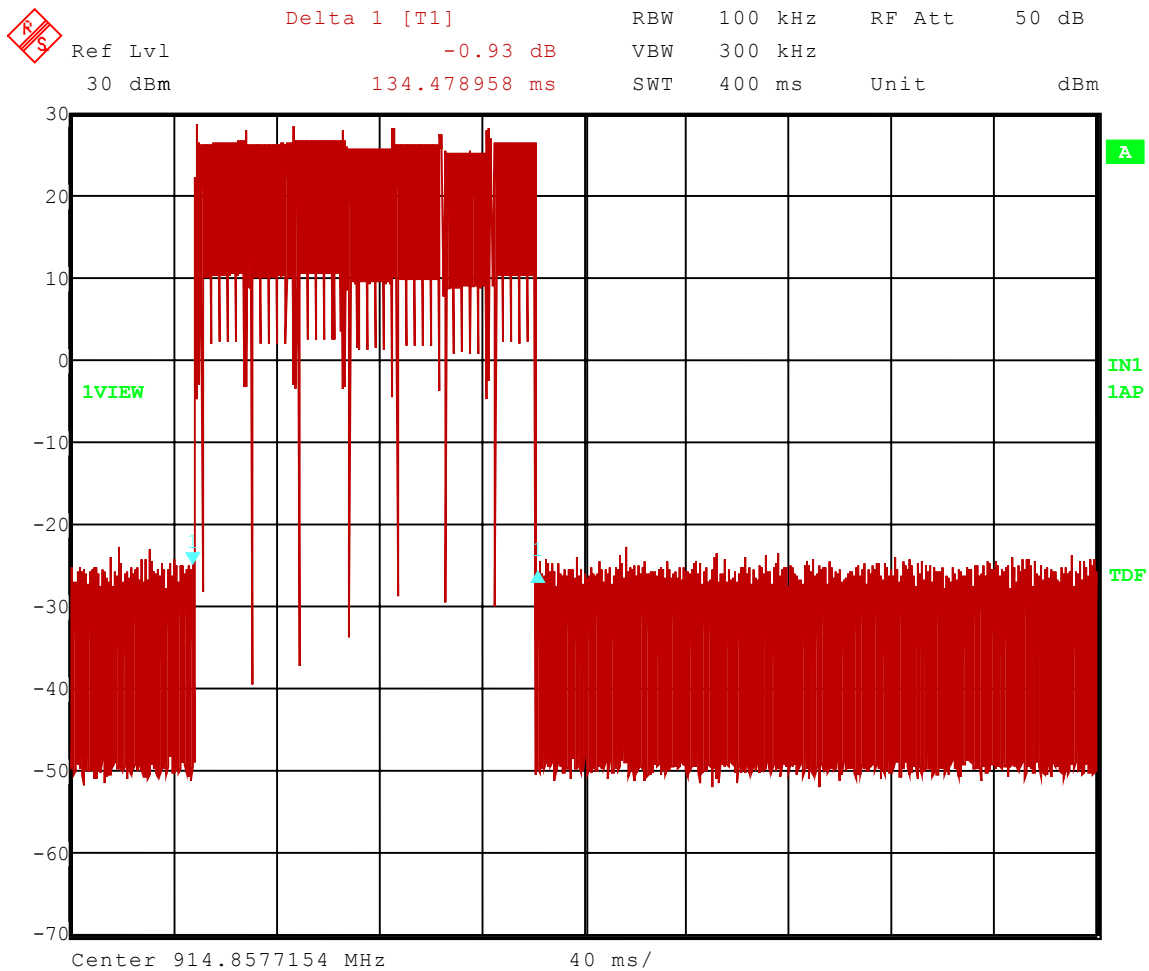

Date: 10.JUN.2004 10:19:04



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090


Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Dwell Time in 20 Seconds - Conducted  
Operator: Jason L.  
Comment: Middle Channel – Hopping Mode On

Dwell Time Limit = 0.4 Seconds in 20 Seconds

Times ON in 20 Sec = 2

Dwell Time in 20 Sec = Time Slot Length X Times On in 20 s

0.269 Seconds = 134.48 ms X 2

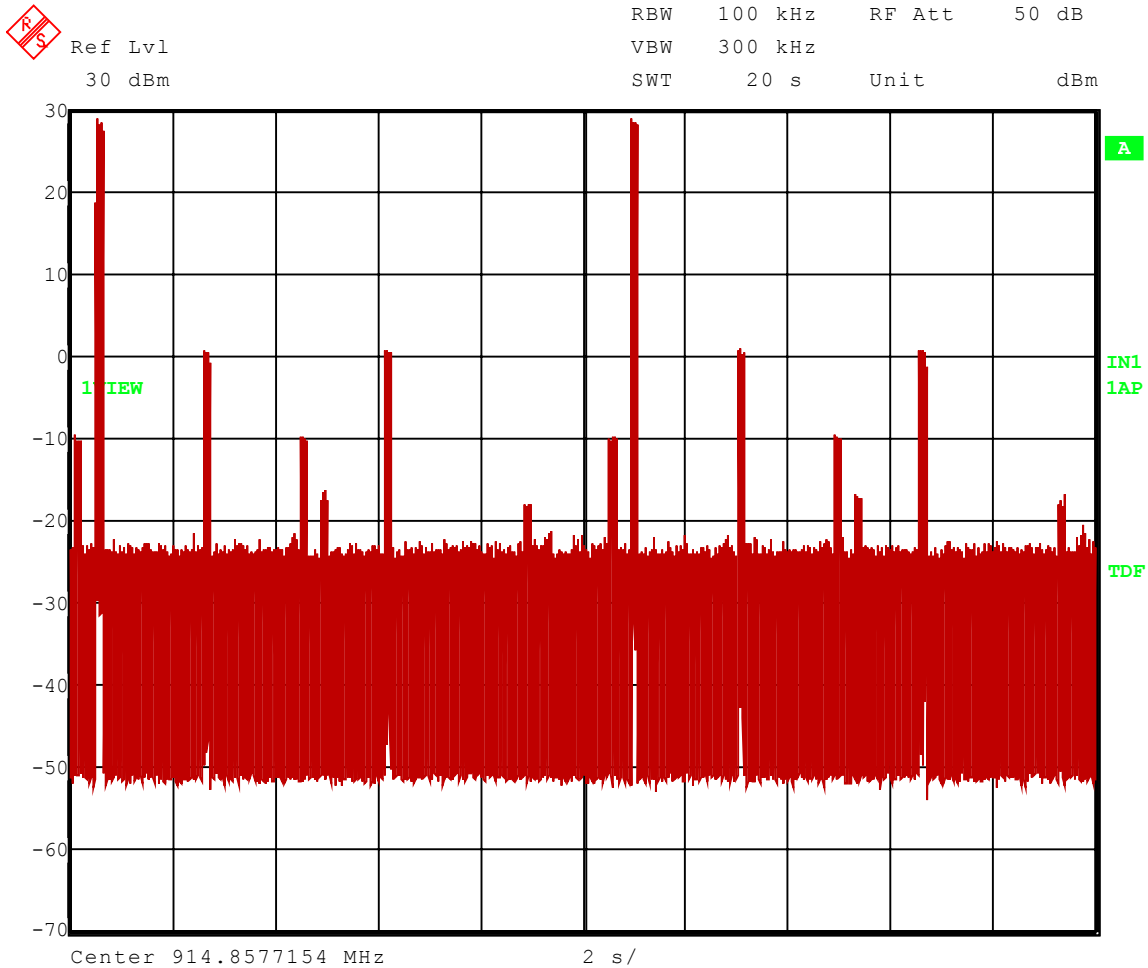

Date: 10.JUN.2004 11:11:55



Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

## CONDUCTED PEAK OUTPUT POWER GRAPHS

PART 15.247




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Peak Output Power - Conducted  
Operator: Jason L.  
Comment: High Channel: Frequency – 927.25 MHz

Peak Output Power = 28.79 dBm = 757 mW

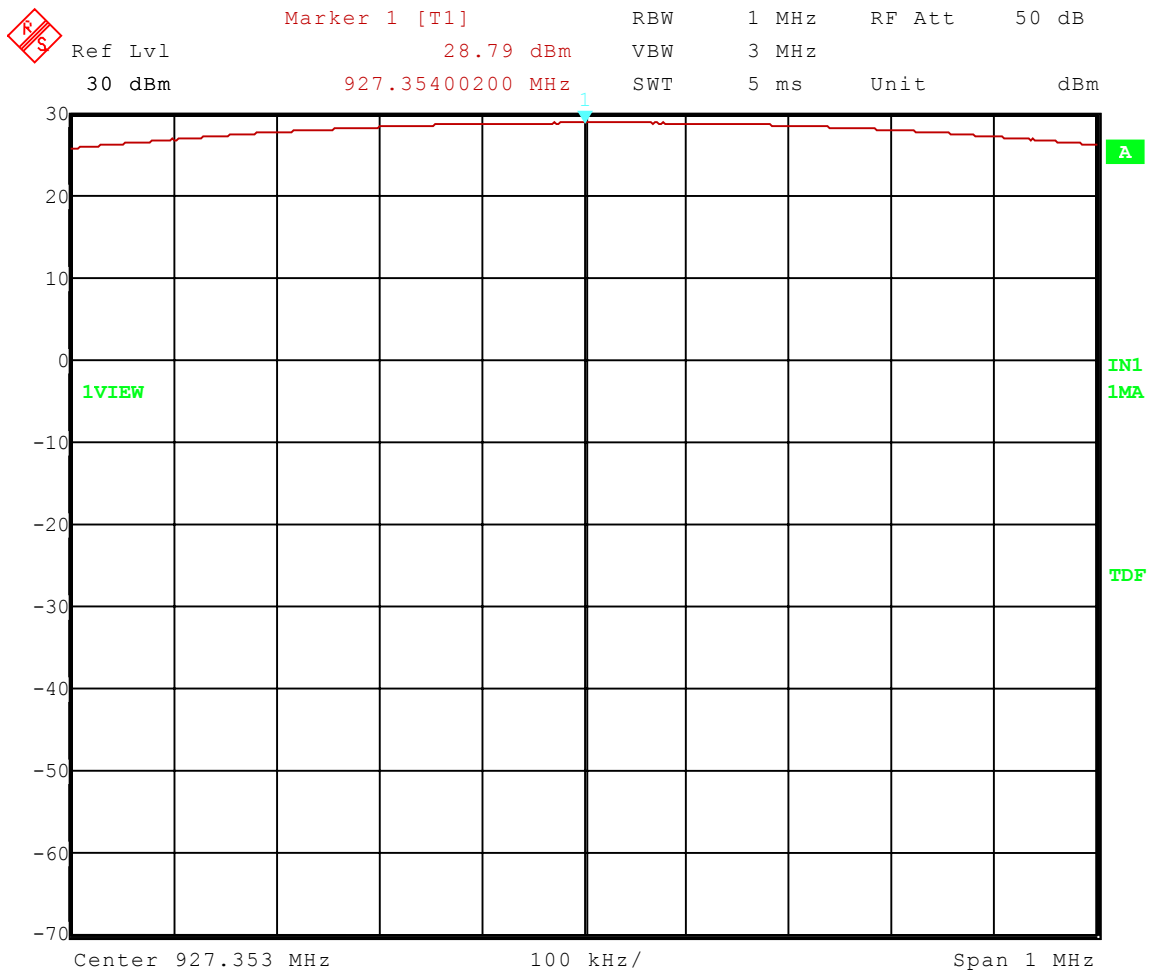

Date: 10.JUN.2004 09:24:56




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
EUT: R110XiIII Plus  
Test: Peak Output Power - Conducted  
Operator: Jason L.  
Comment: Middle Channel: Frequency – 914.75 MHz

Peak Output Power = 28.73 dBm = 746 mW

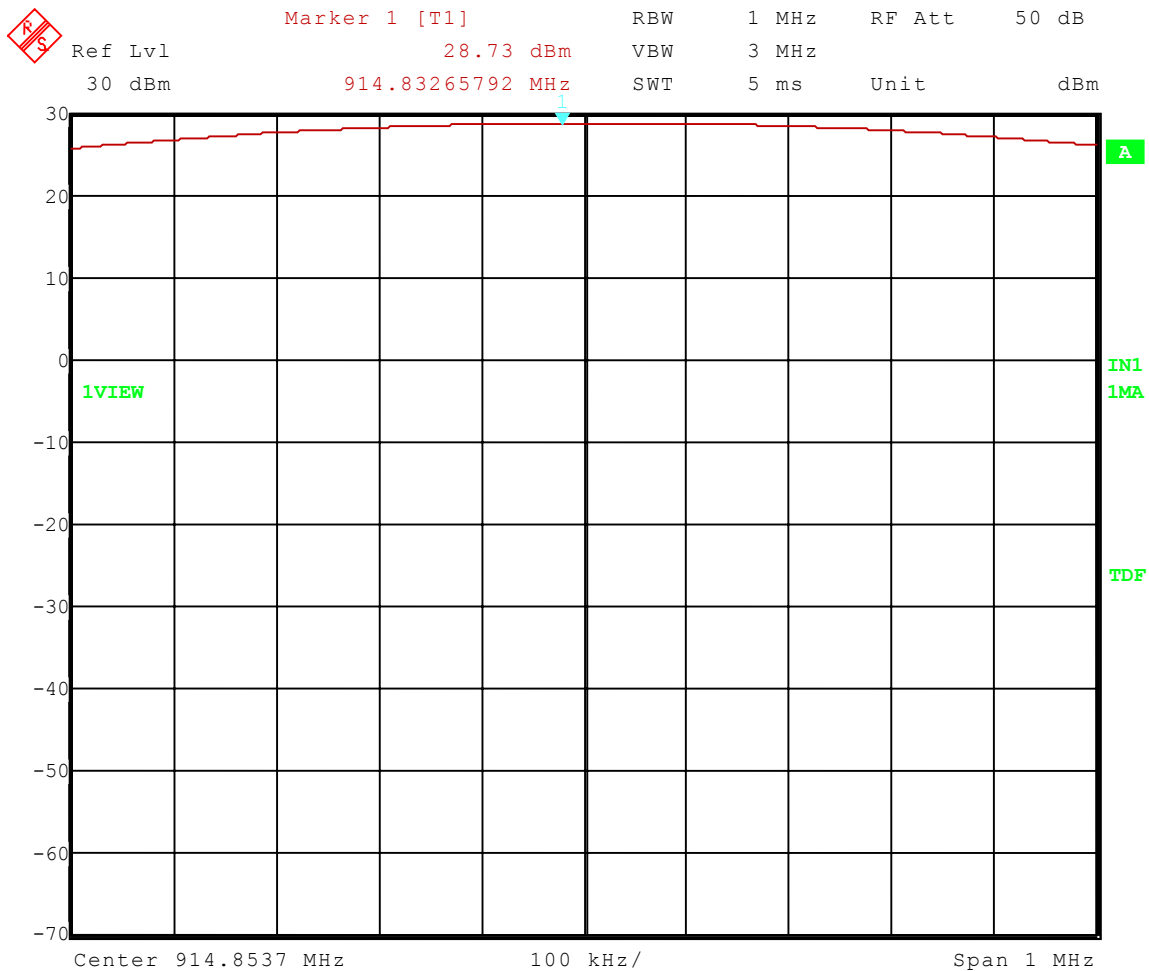

Date: 10.JUN.2004 09:21:54




Company: Zebra Technologies Corporation  
Model Tested: 110XiIII  
Report Number: 10781

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 6-10-04  
Company: Zebra Technologies  
EUT: R110XiIII Plus  
Test: Peak Output Power - Conducted  
Operator: Jason L.  
Comment: Low Channel: Frequency – 902.75 MHz

Peak Output Power = 28.68 dBm = 738 mW

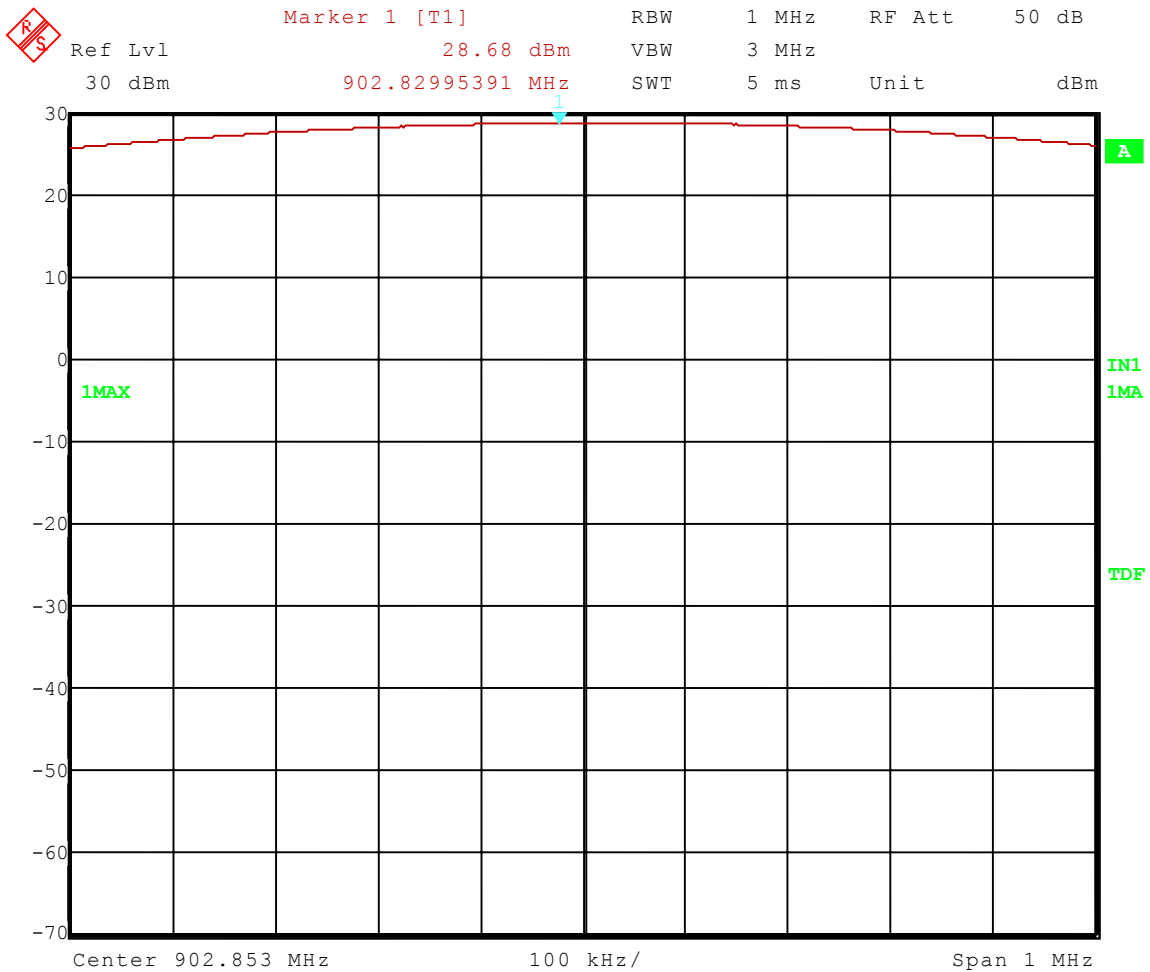

Date: 10.JUN.2004 09:27:22