



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

SAR TEST REPORT

Applicant Name:

SAMSUNG Electronics Co., Ltd.

129, Samsung-ro, Yeongtong-gu, Suwon-Si, Gyeonggi-do, 16677

Rep. of Korea

Date of Issue: Dec. 21, 2023

Test Report No.: HCT-SR-2312-FC001

Test Site: HCT CO., LTD.

FCC ID:

A3LSMM156B

Equipment Type:

Mobile Phone

Application Type

Certification

FCC Rule Part(s):

CFR §2.1093

Model Name:

SM-M156B/DSN

Date of Test:

Nov. 15, 2023 ~ Dec. 14, 2023

This device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in FCC KDB procedures and had been tested in accordance with the measurement procedures specified in FCC KDB procedures.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested By

Jin Wook, Ko
Test Engineer
SAR Team
Certification Division

Reviewed By

Yun Jeang, Heo
Technical Manager
SAR Team
Certification Division

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	Dec. 21, 2023	Initial Release

This test results were applied only to the test methods required by the standard.

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.

Table of Contents

1. Test Regulations	4
2. Test Location.....	5
3. Information of the EUT	5
4. Device Under Test Description.....	7
5. Introduction	25
6. Description of test equipment.....	26
7. SAR Measurement Procedure	27
8. Description of Test Position	29
9. RF Exposure Limits	34
10. FCC SAR General Measurement Procedures	35
11. Output Power Specifications.....	42
12. System Verification	153
13. SAR Test Data Summary.....	157
14. Simultaneous SAR Analysis.....	173
15. Measurement Uncertainty.....	178
16. SAR Test Equipment	179
17. Conclusion	181
18. References	182
Appendix A. DUT Ant. Information & SETUP PHOTO	184
Appendix B. SAR Test Plots	
Appendix C. Dipole Verification Plots	
Appendix D. SAR Tissue Characterization	
Appendix E. SAR System Validation	
Appendix F. Probe Calibration Data	
Appendix G. Dipole Calibration Data	
Appendix H. DLCA Power Measurement	

1. Test Regulations

The tests documented in this report were performed in accordance with FCC CFR § 2.1093, IEEE 1528-2013, ANSI C63.26-2015 the following FCC Published RF exposure KDB procedures:

- FCC KDB Publication 941225 D01 3G SAR Procedures v03r01
- FCC KDB Publication 941225 D06 Hot Spot SAR v02r01
- FCC KDB Publication 941225 D05 SAR for LTE Devices v02r05
- FCC KDB Publication 941225 D05A LTE Rel.10 KDB Inquiry sheet v01r02
- FCC KDB Publication 248227 D01 802.11 WLAN SAR v02r02
- FCC KDB Publication 447498 D01 General SAR Guidance v07
- FCC KDB Publication 648474 D04 Handset SAR v01r03
- FCC KDB Publication 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04.
- FCC KDB Publication 865664 D02 SAR Reporting v01r02
- FCC KDB Publication 690783 D01 SAR Listings on Grants v01r03
- FCC KDB Publication 971168 D01 Power Meas License Digital Systems v03r01

In Addition to the above, the following information was used.

- October 2013 TCB Workshop Notes (GPRS testing criteria)
- October 2014 TCB Workshop Notes (Overlapping LTE Bands)
- April 2015 TCB Workshop Notes (Simultaneous transmission summation clarified)
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)
- November 2017 TCBC Workshop Notes (LTE Carrier Aggregation)
- April 2018 TCBC Workshop Notes (LTE DL CA SAR Test Exclusion)

2. Test Location

2.1 Test Laboratory

Company Name	HCT Co., Ltd.
Address	74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Telephone	031-645-6300
Fax.	031-645-6401

2.2 Test Facilities

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

Korea	National Radio Research Agency (Designation No. KR0032)
	KOLAS (Testing No. KT197)

3. Information of the EUT

3.1 General Information of the EUT

Model Name	SM-M156B/DSN
Equipment Type	Mobile Phone
FCC ID	A3LSMM156B
Application Type	Certification
Applicant	SAMSUNG Electronics Co., Ltd.

3.2 Attestation of test result of device under test

Band	Tx. Frequency	Equipment Class	Reported SAR (W/kg)		
			1g Head	1g Body	10g Phablet
GSM/GPRS/EDGE 850	824.2 MHz ~ 848.8 MHz	PCE	0.32	0.76	N/A
GSM/GPRS/EDGE 1900	1 850.2 MHz ~ 1 909.8 MHz	PCE	0.20	0.54	N/A
UMTS Band 5	826.4 MHz ~ 846.6 MHz	PCE	0.26	0.67	N/A
UMTS Band 4	1 712.4 MHz ~ 1 752.6 MHz	PCE	0.22	0.34	N/A
UMTS Band 2	1 852.4 MHz ~ 1 907.6 MHz	PCE	0.32	0.66	N/A
LTE FDD Band 2 (PCS)	1 850.7 MHz ~ 1 909.3 MHz	PCE	0.72	0.28	N/A
LTE FDD Band 4 (AWS)	1 710.7 MHz ~ 1 754.3 MHz	PCE	0.58	0.29	N/A
LTE FDD Band 12	699.7 MHz ~ 715.3 MHz	PCE	0.23	0.63	N/A
LTE FDD Band 26 (Cell)	814.7 MHz ~ 848.3 MHz	PCE	0.25	0.86	N/A
LTE TDD Band 41	2 498.5 MHz ~ 2 687.5 MHz	PCE	0.29	0.52	N/A
LTE FDD Band 66 (AWS)	1 710.7 MHz ~ 1 779.3 MHz	PCE	0.38	0.32	N/A
NR FDD Band n5	826.5 MHz ~ 846.5 MHz	PCE	0.21	0.62	N/A
NR FDD Band n66	1 712.5 MHz ~ 1 777.5 MHz	PCE	0.17	0.18	N/A
802.11b	2 412 MHz ~ 2 472 MHz	DTS	0.14	0.14	N/A
U-NII-1	5 180 MHz ~ 5 240 MHz	NII	N/A	N/A	N/A
U-NII-2A	5 260 MHz ~ 5 320 MHz	NII	0.42	0.16	0.48
U-NII-2C	5 500 MHz ~ 5 720 MHz	NII	0.69	0.36	0.81
U-NII-3	5 745 MHz ~ 5 825 MHz	NII	0.77	0.73	N/A
Bluetooth	2 402 MHz ~ 2 480 MHz	DSS/DTS	<0.1	<0.1	N/A
NFC	13.56 MHz	DXX	N/A	N/A	<0.1
Simultaneous SAR per KDB 690783 D01v01r03			1.29	1.42	0.81
Date(s) of Tests:	Nov. 15, 2023 ~ Dec. 14, 2023				

4. Device Under Test Description

4.1 DUT specification

Device Wireless specification overview		
Band & Mode	Operating Mode	Tx Frequency
GSM850	Voice / Data	824.2 MHz ~ 848.8 MHz
GSM1900	Voice / Data	1 850.2 MHz ~ 1 909.8 MHz
UMTS Band 2	Voice / Data	1 852.4 MHz ~ 1 907.6 MHz
UMTS Band 4	Voice / Data	1 712.4 MHz ~ 1 752.6 MHz
UMTS Band 5	Voice / Data	826.4 MHz ~ 846.6 MHz
LTE FDD Band 2 (PCS)	Voice / Data	1 850.7 MHz ~ 1 909.3 MHz
LTE FDD Band 4 (AWS)	Voice / Data	1 710.7 MHz ~ 1 754.3 MHz
LTE FDD Band 5 (Cell)	Voice / Data	824.7 MHz ~ 848.3 MHz
LTE FDD Band 12	Voice / Data	699.7 MHz ~ 715.3 MHz
LTE FDD Band 17	Voice / Data	706.5 MHz ~ 713.5 MHz
LTE FDD Band 26	Voice / Data	814.7 MHz ~ 848.3 MHz
LTE TDD Band 41	Voice / Data	2 498.5 MHz ~ 2 687.5 MHz
LTE FDD Band 66 (AWS)	Voice / Data	1 710.7 MHz ~ 1 779.3 MHz
NR FDD Band n5	Voice / Data	826.5 MHz ~ 846.5 MHz
NR FDD Band n66	Voice / Data	1 712.5 MHz ~ 1 777.5 MHz
U-NII-1	Voice / Data	5 180 MHz ~ 5 240 MHz
U-NII-2A	Voice / Data	5 260 MHz ~ 5 320 MHz
U-NII-2C	Voice / Data	5 500 MHz ~ 5 720 MHz
U-NII-3	Voice / Data	5 745 MHz ~ 5 825 MHz
2.4 GHz WLAN	Voice / Data	2 412 MHz ~ 2 472 MHz
Bluetooth / LE 5.3	Data	2 402 MHz ~ 2 480 MHz
NFC	Data	13.56 MHz
Device Description		
S/W Version	M156B.001	
H/W Version	REV1.0	
Battery	EB-BM156ABY (ATL)	
Device Serial Numbers	Mode	Serial Number
	GSM850, UMTS 2, UMTS 4, UMTS 5, LTE 12, LTE 26, LTE 41, NR n5, NFC	WK14240M
	GSM1900, LTE 2, LTE 66	WK14262M
	LTE 2 Upper, LTE 4 Upper	WK14266M
	NR n66	WK14251M
	WLAN 2.4GHz, WLAN 5GHz, Bluetooth	WK14265M
	The manufacturer has confirmed that the devices tested have the same physical, mechanical and thermal characteristics are within operational tolerances expected for production units.	

4.2 Time-Averaging Algorithm for RF Exposure Compliance

This device is enabled with MediaTek Time-Averaged Specific Absorption Rate [TA-SAR] algorithm to control and manage transmitting power in real time and to ensure that the time-averaged RF exposure from 2G/3G/4G/5G NR WWAN, WLAN except BT is in compliance with FCC requirements.

This Part 0 report shows SAR characterization of WWAN radios for 2G/3G/4G and 5G Sub-6 NR and WLAN respectively. Characterization is achieved by determining Plimit for 2G/3G/4G and 5G Sub-6 NR, WLAN except BT correspond to the exposure design targets after accounting for all device design related uncertainties, i.e. SAR_design_target (< FCC SAR limit) for sub-6 radio. The SAR characterization is denoted as SAR Char in this report. Section 2.3 includes a nomenclature of the specific terms used in this report.

The compliance test under the static transmission scenario and simultaneous transmission analysis are reported in Part 1 report. The validation of the time-averaging algorithm and compliance under the dynamic (time-varying) transmission scenario for WWAN, WLAN technologies are reported in Part 2 report.

The Exposure Condition Index (ECI) conditions used in Table 4-1 and 4-2 represent different exposure scenarios.

Table 4-1 ECI and Corresponding Exposure Scenarios WWAN

Scenario	Description	SAR Test Cases
Head SAR (ECI = 1)	Device positioned next to head Receiver Active	Head SAR per KDB Publication 648474 D04
Body SAR /Hotspot Phablet (ECI =0,2,3)	Device being used with a body-worn accessory Device transmits in hotspot mode near body Hotspot Mode Active Device is held with hand	Body-worn SAR per KDB Publication 948474 D04 Hotspot SAR per KDB Publication 941225 D06 Phablet SAR per KDB Publication 648474 D04

Table 4-2 ECI and Corresponding Exposure Scenarios WLAN

Scenario	Description	SAR Test Cases
Head SAR (ECI = 1)	Device positioned next to head Receiver Active	Head SAR per KDB Publication 648474 D04
Body SAR /Hotspot Phablet (ECI =0)	Device being used with a body-worn accessory Device transmits in hotspot mode near body Hotspot Mode Active Device is held with hand	Body-worn SAR per KDB Publication 948474 D04 Hotspot SAR per KDB Publication 941225 D06 Phablet SAR per KDB Publication 648474 D04

SAR design Target

1g SAR		10g SAR	
Total uncertainty	1.0 dB	Total uncertainty	1.0 dB
SAR_regulatory_limit	1.6 W/kg	SAR_regulatory_limit	4.0 W/kg

To account for total uncertainty, SAR_Design_limit should be determined as:

$$\text{SAR_design_target} < \text{SAR_regulatory_limit} \times 10^{-(\text{total uncertainty}/10)}$$

Table 4-3 SAR Characterization

Plim values in green indicate Plimit < Pmax			Plimit values in grey indicate Plimit > Pmax			
Plimit corresponding to 1 W/kg (1g) 2.5W/kg(10g) SAR_Design_target					Pmax	
SAR Exposure Position			Head (RCV ON)	Body Phablet		Maximum Tune-up Output Power (Burst Average Power) [dBm]
Averaging volume			1g	1g	10g	
seperation Distance			0 mm	10 mm	0 mm	
Mode	Band	Antenna	ECI = 1	ECI =0,2,3		
GSM/GPRS/EDGE	850	MAIN 1	30.9	27.2		28.0
GSM/GPRS/EDGE	1900	MAIN 2	29.9	24.9		25.0
UMTS	2	MAIN 2	27.9	20.0		22.0
UMTS	4	MAIN 2	30.6	20.0		23.0
UMTS	5	MAIN 1	30.9	23.0		24.0
LTE FDD	2 Lower	MAIN 2	29.5	17.5		23.0
LTE FDD	2 Upper	MAIN 3	25.4	17.5		23.0
LTE FDD	66 Lower	MAIN 2	29.2	18.5		24.0
LTE FDD	4 Upper	MAIN 3	27.4	18.5		24.0
LTE FDD	12	MAIN 1	31.4	27.0		24.0
LTE FDD	26	MAIN 1	31.1	25.7		24.0
LTE TDD PC3	41	MAIN 2	27.5	20.0		23.0
NR FDD	5	MAIN 1	31.8	23.0		24.0
NR FDD	66	MAIN 2	22.0	17.5		24.0
Plim values in green indicate Plimit < Pmax			Plimit values in grey indicate Plimit > Pmax			
Plimit corresponding to 0.8 W/kg (1g) 2.0 W/kg(10g) SAR_Design_target						0
SAR Exposure Position			Head (RCV ON)	Body Phablet		Maximum Tune-up Output Power (Burst Average Power)
Averaging volume			1g	1g	10g	
seperation Distance			0 mm	10 mm	0 mm	
Mode	Band	Antenna	ECI = 1	ECI = 0,2,3		
WLAN 2.4 GHz	2.4 GHz	Sub 2	15.0	22.1		18.0
WLAN 5 GHz	5 GHz	Sub 2	14.0	14.0		17.0

Note:

1. Compared with the P_{limit} (Tune up Powers) declared in each ECI by the manufacturer and the P_{limit} (calculation) calculated by the SAR measurement of each ECI, the lower power were applied to the NV as the P_{limit} at each ECI configurations.
2. When $P_{max} < P_{limit}$, the DUT will operate at a power level up to P_{max} .
3. Maximum Tune up Power, P_{max} . Is configured in NV settings in EUT to limit maximum transmitting power. This power is converted into peak power in NV setting for TDD schemes.(GPRS, LTE TDD)
4. SAR_Design_Target is used in the same meaning as SAR_Design_Limit.
5. The above P_{max}/P_{limit} value for GSM850/GSM1900 GPRS is Frame Averaged Power for 4Tx Slots
6. The above P_{limit} value for 2.4 GHz 802.11b/5 GHz 802.11n40 is Frame Averaged Power

4.3 Power Reduction for SAR

In this model, except for BT, the output Power of the DUT in WWAN, WLAN mode is controlled by the application of MediaTek Time-Averaged Specific Absorption Rate [TA-SAR] algorithm, with the output Power depending on the ECI of the predefined DUT.

This device uses an independent fixed level power reduction mechanism for WLAN operations when during all voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013.

Detailed descriptions of the power reduction mechanism are included in the operational description.

The reduced powers for the power reduction mechanisms were conformed via conducted power measurements at the RF Port.

4.4 Nominal and Maximum Output Power Specifications

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB publication 447498 D01v06.

4.4.1 2G/3G/4G Nominal and Maximum Output Power

A. GSM Modes

Maximum Output Power (Pmax, ECI=0,1,2,3)

Mode / Band		Voice	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 Tx Slot	1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot	1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot
GSM/GPRS/EDGE 850	Maximum	34.0	34.0	32.0	30.0	29.0	26.5	25.5	23.5	22.5
	Nominal	33.0	33.0	31.0	29.0	28.0	25.5	24.5	22.5	21.5
GSM/GPRS/EDGE1900	Maximum	31.0	31.0	29.0	27.0	26.0	25.5	24.5	22.5	21.5
	Nominal	30.0	30.0	28.0	26.0	25.0	24.5	23.5	21.5	20.5

(Tolerance: Nominal +1 dB ~-1.5 dB)

B. UMTS Modes

Maximum Output Power (Pmax, ECI=1)

Mode/Band		Modulated Average(dBm)				
		3GPP RMC Rel 99	3GPP AMR Rel 99	3GPP Cat.5 HSDPA	3GPP Cat.6 HSUPA	3GPP Cat.8 DC-HSDPA
UMTS Band 2 (1 900 MHz)	Maximum	23.0	23.0	22.0	21.5	22.0
	Nominal	22.0	22.0	21.0	20.5	21.0
UMTS Band 4 (1 700 MHz)	Maximum	24.0	24.0	23.0	22.5	23.0
	Nominal	23.0	23.0	22.0	21.5	22.0
UMTS Band 5 (850 MHz)	Maximum	25.0	25.0	24.0	22.5	24.0
	Nominal	24.0	24.0	23.0	21.5	23.0

(Tolerance: Nominal +1 dB ~-1.5 dB)

Body Reduced Output Power (ECI=0,2,3)

Mode/Band		Modulated Average(dBm)				
		3GPP RMC Rel 99	3GPP AMR Rel 99	3GPP Cat.5 HSDPA	3GPP Cat.6 HSUPA	3GPP Cat.8 DC-HSDPA
UMTS Band 2 (1 900 MHz)	Maximum	21.0	21.0	20.0	19.5	20.0
	Nominal	20.0	20.0	19.0	18.5	19.0
UMTS Band 4 (1 700 MHz)	Maximum	21.0	21.0	20.0	19.0	20.0
	Nominal	20.0	20.0	19.0	18.0	19.0
UMTS Band 5 (835 MHz)	Maximum	24.0	24.0	23.0	21.5	23.0
	Nominal	23.0	23.0	22.0	20.5	22.0

C. LTE Modes

Maximum Output Power

Mode / Band		Modulated Average (dBm)		
		Pmax	Body (ECI =0,2,3)	Head (ECI =1)
LTE Band 2	Maximum	24.0	18.5	24.0
	Nominal	23.0	17.5	23.0
LTE Band 2 (Upper)	Maximum	24.0	18.5	24.0
	Nominal	23.0	17.5	23.0
LTE Band 4	Maximum	25.0	19.5	25.0
	Nominal	24.0	18.5	24.0
LTE Band 4 (Upper)	Maximum	25.0	19.5	25.0
	Nominal	24.0	18.5	24.0
LTE Band 5	Maximum	25.0	25.0	25.0
	Nominal	24.0	24.0	24.0
LTE Band 12	Maximum	25.0	25.0	25.0
	Nominal	24.0	24.0	24.0
LTE Band 17	Maximum	25.0	21.0	25.0
	Nominal	24.0	20.0	24.0
LTE Band 26	Maximum	25.0	25.0	25.0
	Nominal	24.0	24.0	24.0
LTE Band 41	Maximum	24.0	23.0	24.0
	Nominal	23.0	22.0	23.0
LTE Band 66	Maximum	25.0	19.5	25.0
	Nominal	24.0	18.5	24.0

(Tolerance: Nominal +1 dB ~-1.5 dB)

D. 5G NR Modes

Maximum Output Power

Mode / Band		Modulated Average (dBm)		
		Pmax	Body (ECI =0,2,3)	Head (ECI =1)
NR Band n5	Maximum	25.0	24.0	25.0
	Nominal	24.0	23.0	24.0
NR Band n66	Maximum	25.0	18.5	23.0
	Nominal	24.0	17.5	22.0

(Tolerance: Nominal +1 dB ~ Nominal -1.5 dB)

4.4.2 Maximum output power

2.4 GHz, 5 GHz WIFI

Mode	Band	SISO				
		(in dBm)				
		a	b	g	n	ac
2.4 GHz	2.45 GHz		18 Ch1,4,5 : 17 Ch2,3 : 16 Ch12 : 4 Ch13 : 0.5	16 Ch12 : 4 Ch13 : 0.5	16 Ch12 : 4 Ch13 : 0.5	
5 GHz (20 MHz)	5200 MHz	17			17	17
	5300 MHz	17			17	17
	5500 MHz	17 (ch100 : 16)			17 (ch100 : 16)	17 (ch100 : 16)
	5800 MHz	17			17	17
5 GHz (40 MHz)	5200 MHz				15	15
	5300 MHz				15	15
	5500 MHz				15 (ch102 : 14)	15 (ch102 : 14)
	5800 MHz				15	15
5 GHz (80 MHz)	5210 MHz					13
	5290 MHz					13
	5500 MHz					14 (Ch : 106 : 13)
	5800 MHz					14

(Tolerance: Target +1 dB)

4.4.3 Reduced output power

2.4 GHz, 5 GHz WIFI (RCV active, ECI=1)

Mode	Band	SISO				
		(in dBm)				
		a	b	g	n	ac
2.4 GHz	2.45 GHz		15 Ch12 : 4 Ch13 : 0.5	15 Ch12 : 4 Ch13 : 0.5	15 Ch12 : 4 Ch13 : 0.5	
5 GHz (20 MHz)	5200 MHz	14			14	14
	5300 MHz	14			14	14
	5500 MHz	14			14	14
	5800 MHz	14			14	14
5 GHz (40 MHz)	5200 MHz				14	14
	5300 MHz				14	14
	5500 MHz				14	14
	5800 MHz				14	14
5 GHz (80 MHz)	5200 MHz					13
	5300 MHz					13
	5500 MHz					13
	5800 MHz					13

(Tolerance: Target +1 dB)

4.4.4 Reduced output power

2.4 GHz, 5 GHz WIFI (Body TAS Active ECI =0,2,3)

Mode	Band	SISO				
		(in dBm)				
		a	b	g	n	ac
2.4 GHz	2.45 GHz		18 Ch1,4,5 : 17 Ch2,3 : 16 Ch12 : 4 Ch13 : 0.5	16 Ch12 : 4 Ch13 : 0.5	16 Ch12 : 4 Ch13 : 0.5	
5 GHz (20 MHz)	5200 MHz	14			14	14
	5300 MHz	14			14	14
	5500 MHz	14			14	14
	5800 MHz	14			14	14
5 GHz (40 MHz)	5200 MHz				14	14
	5300 MHz				14	14
	5500 MHz				14	14
	5800 MHz				14	14
5 GHz (80 MHz)	5200 MHz					13
	5300 MHz					13
	5500 MHz					13
	5800 MHz					13

(Tolerance: Target +1 dB)

4.4.5 Maximum Bluetooth Power

Mode	ANT1
	(in dBm)
Bluetooth(1Mbps)	10.5
Bluetooth (EDR)	7.5
Bluetooth LE 2Mbps	6.5
Bluetooth LE 1Mbps, 125/500Kbps	6.5

(Tolerance: Target +1 dB)

4.5 LTE Information

Item.	Description
Frequency Range	LTE FDD Band 2 (PCS)
	LTE FDD Band 4 (AWS)
	LTE FDD Band 5 (Cell)
	LTE FDD Band 12
	LTE FDD Band 17
	LTE FDD Band 26 (Cell)
	LTE TDD Band 41
	LTE FDD Band 66 (AWS)
Channel Bandwidths	LTE FDD Band 2 (PCS)
	LTE FDD Band 4 (AWS)
	LTE FDD Band 5 (Cell)
	LTE FDD Band 12
	LTE FDD Band 17
	LTE FDD Band 26 (Cell)
	LTE TDD Band 41
	LTE FDD Band 66 (AWS)

Ch. No.& Freq.(MHz)	Low	Mid	High
LTE Band 2 (PCS)	1.4 MHz	1 850.7 (18607)	1 880.0 (18900)
	3 MHz	1 851.5 (18615)	1 880.0 (18900)
	5 MHz	1 852.5 (18625)	1 880.0 (18900)
	10 MHz	1 855.0 (18650)	1 880.0 (18900)
	15 MHz	1 857.5 (18675)	1 880.0 (18900)
	20 MHz	1 860.0 (18700)	1 880.0 (18900)
LTE Band 4 (AWS)	1.4 MHz	1 710.7 (19957)	1 732.5 (20175)
	3 MHz	1 711.5 (19965)	1 732.5 (20175)
	5 MHz	1 712.5 (19975)	1 732.5 (20175)
	10 MHz	1 715.0 (20000)	1 732.5 (20175)
	15 MHz	1 717.5 (20025)	1 732.5 (20175)
	20 MHz		1 732.5 (20175)
LTE Band 5 (Cell)	1.4 MHz	824.7 (20407)	836.5 (20525)
	3 MHz	825.5 (20415)	836.5 (20525)
	5 MHz	826.5 (20425)	836.5 (20525)
	10 MHz		836.5 (20525)
LTE Band 12	1.4 MHz	699.7 (23017)	707.5 (23095)
	3 MHz	700.5 (23025)	707.5 (23095)
	5 MHz	701.5 (23035)	707.5 (23095)
	10 MHz		707.5 (23095)
LTE Band 17	5 MHz		710.0(23790)
	10 MHz		710.0(23790)
LTE Band 26 (Cell)	1.4 MHz	814.7 (26697)	831.5 (26865)
	3 MHz	815.5 (26705)	831.5 (26865)
	5 MHz	816.5 (26715)	831.5 (26865)
	10 MHz	819.0 (26740)	831.5 (26865)
	15 MHz		831.5 (26865)

Ch. No.& Freq.(MHz)		Low / Low-Mid		Mid	Mid-High / High	
LTE Band 66 (AWS)	1.4 MHz	1 710.7 (131979)		1 745 (132322)	1 779.3 (132665)	
	3 MHz	1 711.5 (131987)		1 745 (132322)	1 778.5 (132657)	
	5 MHz	1 712.5 (131997)		1 745 (132322)	1 777.5 (132647)	
	10 MHz	1 715.0 (132022)		1 745 (132322)	1 775.0 (132622)	
	15 MHz	1 717.5 (132047)		1 745 (132322)	1 772.5 (132597)	
	20 MHz	1 720.0 (132072)		1 745 (132322)	1 770.0 (132572)	
LTE TDD Band 41	5 MHz	2 506.0(39750)	2 549.5(40185)	2 593.0(40620)	2 636.5(41055)	2 680.0(41490)
	10 MHz	2 506.0(39750)	2 549.5(40185)	2 593.0(40620)	2 636.5(41055)	2 680.0(41490)
	15 MHz	2 506.0(39750)	2 549.5(40185)	2 593.0(40620)	2 636.5(41055)	2 680.0(41490)
	20 MHz	2 506.0(39750)	2 549.5(40185)	2 593.0(40620)	2 636.5(41055)	2 680.0(41490)
UE Category		LTE Rel. 15, DL: Category 13, UL: Category 18				
HPUE Power Class		LTE TDD 41 Power Class 3				
Modulations Supported in UL		QPSK, 16QAM, 64QAM, 256 QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3		Yes				
A-MPR disabled for SAR Testing.		Yes				
LTE Carrier Aggregation		This device supports Inter-Band & Intra-Band Down-Link Carrier aggregations. Detailed information of Down-Link CA are included in the Appendix.H and Technical Description document.				
LTE Release information		This device does not support full CA features on 3GPP Release 15. The following LTE Release 15 Features are not supported: Relay, Hetnet, Enhanced eICI, MDH, cross-carrier Scheduling, Enhanced SC-FDMA.				

4.6 5G NR SUB 6 Information

Item.		Description
Frequency Range	NR FDD Band n5	826.5 MHz ~ 846.5 MHz
	NR FDD Band n66	1 712.5 MHz ~ 1 777.5 MHz
Channel Bandwidth	NR FDD Band n5	5 MHz, 10 MHz, 15 MHz, 20 MHz
	NR FDD Band n66	5 MHz, 10 MHz, 15 MHz, 20 MHz, 25 MHz, 30 MHz, 40 MHz

Ch. No.& Freq.(MHz)		Low / Low-Mid	Mid	Mid-High / High
NR FDD Band n5 (Cell)	5 MHz	826.5 (165300)	836.5(167300)	846.5 (169300)
	10 MHz		836.5(167300)	
	15 MHz		836.5(167300)	
	20 MHz		836.5(167300)	
NR FDD Band n66	5 MHz	1712.5(342500)	1745(349000)	1777.5(355500)
	10 MHz	1715(343000)	1745(349000)	1775(355000)
	15 MHz	1717.5(343500)	1745(349000)	1772.5(354500)
	20 MHz	1720(344000)	1745(349000)	1770(354000)
	25 MHz	1722.5(344500)	1745(349000)	1767.5(353500)
	30 MHz		1745(349000)	
	40 MHz		1745(349000)	

Item.	Description
NR FDD Band n5/n66/ SCS	15 kHz
3GPP Rel.	Rel.16
A-MPR disabled for SAR Testing.	Yes
5G NR UL/DL FR1	CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM DFT-s-OFDM: $\pi/2$ -BPSK, QPSK, 16QAM, 64QAM, 256QAM
Non-Standalone & Standalone are supported. 5G NR FR1 Bands, except n5, n66 are supported to NSA and SA Connectivity. More detailed specifications of the 5G NR bands are contained in the Technical description document.	
EN-DC Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations
LTE Anchor Bands for NR Band n5 (Cell)	LTE Band 2/66
LTE Anchor Bands for NR Band n66 (AWS)	LTE Band 2/5/12

4.7 DUT Antenna Locations

The overall dimensions of this device are > 9 X 5 cm. A diagram showing device antenna can be found in SAR_setup_photos. Since the diagonal dimension of this device is > 160 mm and < 200 mm, it is considered a “phablet”.

This model allows users to exchange data or media files with other Bluetooth enabled devices using Bluetooth, which means they can connect to other Bluetooth enabled devices via Bluetooth tethering. Therefore, SAR test was performed for additional simultaneous transmissions.

Head and Bluetooth Tethering SAR were evaluated for BT BDR tethering applications.

Antenna	Mode	Rear	Front	Left	Right	Bottom	Top
MAIN1	GSM/GPRS/EDGE 850	Yes	Yes	Yes	Yes	Yes	No
MAIN2	GSM/GPRS/EDGE 1900	Yes	Yes	Yes	No	Yes	No
MAIN1	UMTS Band 5	Yes	Yes	Yes	Yes	Yes	No
MAIN1	LTE Band 12	Yes	Yes	Yes	Yes	Yes	No
MAIN1	LTE Band 26	Yes	Yes	Yes	Yes	Yes	No
MAIN2	UMTS Band 2	Yes	Yes	Yes	No	Yes	No
MAIN2	UMTS Band 4	Yes	Yes	Yes	No	Yes	No
MAIN2	LTE Band 2	Yes	Yes	Yes	No	Yes	No
MAIN3	LTE Band 2	Yes	Yes	Yes	No	No	Yes
MAIN3	LTE Band 4	Yes	Yes	Yes	No	No	Yes
MAIN2	LTE Band 66	Yes	Yes	Yes	No	Yes	No
MAIN2	LTE Band 41	Yes	Yes	Yes	No	Yes	No
MAIN1	NR Band n5	Yes	Yes	Yes	Yes	Yes	No
MAIN2	NR Band n66	Yes	Yes	Yes	No	Yes	No
SUB2	2.4 GHz, 5 GHz WLAN, Bluetooth	Yes	Yes	Yes	No	No	Yes
NFC	NFC	Yes	Yes	Yes	No	No	Yes

Particular EUT edges were not required to be evaluated for Bluetooth Tethering and Hotspot SAR if the edges were > 25 mm from the transmitting antenna according to FCC KDB 941225 D06v02r01 on page 2.

The distance between the transmit antennas and the edges of the device are included in the filing.

- Note: All test configurations are based on front view position.

4.8 Near Field Communications (NFC) Antenna

This EUT has NFC operations. The NFC antenna is integrated into the device for this model. Therefore, all SAR tests were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the NFC antenna can be found in SAR_Setup_photos.

4.9 SAR Summation Scenario

According to FCC KDB 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the EUT are shown below paths and are mode in same rectangle to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB 447498 D01v06.

Simultaneous Transmission Scenarios				
Applicable Combination	Head	BodyWorn	Hotspot	Extremity
GSM Voice + 2.4 GHz WI-FI	Yes	Yes	N/A	Yes
GSM Voice + 5 GHz WI-FI	Yes	Yes	N/A	Yes
GSM Voice + 2.4GHz Bluetooth	Yes^	Yes	N/A	Yes
GSM Voice + 5 GHz WI-FI + 2.4GHz Bluetooth	Yes	Yes	N/A	Yes
UMTS + 2.4 GHz WI-FI	Yes	Yes	Yes	Yes
UMTS + 5 GHz WI-FI	Yes	Yes	Yes	Yes
UMTS + 2.4GHz Bluetooth	Yes^	Yes	Yes^	Yes
UMTS + 5 GHz WI-FI + 2.4GHz Bluetooth	Yes^	Yes	Yes	Yes
LTE + 2.4 GHz WI-FI	Yes	Yes	Yes	Yes
LTE + 5 GHz WI-FI	Yes	Yes	Yes	Yes
LTE + 2.4GHz Bluetooth	Yes	Yes	Yes^	Yes
LTE + 5 GHz WI-FI + 2.4GHz Bluetooth	Yes^	Yes	Yes^	Yes
GPRS/EDGE + 2.4 GHz WI-FI	Yes	Yes	Yes	Yes
GPRS/EDGE + 5 GHz WI-FI	Yes	Yes	Yes	Yes
GPRS/EDGE + 2.4GHz Bluetooth	Yes^	Yes	Yes^	Yes
GPRS/EDGE + 5 GHz WI-FI + 2.4GHz Bluetooth	Yes^	Yes	Yes^	Yes
NR Band + 2.4 GHz WI-FI	Yes	Yes	Yes	Yes
NR Band + 5 GHz WI-FI	Yes	Yes	Yes	Yes
NR Band + 2.4GHz Bluetooth	Yes^	Yes	Yes^	Yes
NR Band + 5 GHz WI-FI + 2.4GHz Bluetooth	Yes^	Yes	Yes	Yes
NFC + 5 GHz WI-FI	N/A	N/A	N/A	Yes^

Note:

1. Bluetooth cannot transmit simultaneously with 2.4GHz WLAN.
2. 5GHz WLAN can transmit simultaneously with Bluetooth.
3. UMTS +WLAN scenario also represents the UMTS Voice/DATA + WLAN hotspot scenario.
4. VoIP is supported in GPRS/EDGE.
5. The highest reported SAR for each exposure condition is used for SAR summation purpose.
6. WLAN Hotspot is supported for 2.4 GHz/UNII-3 of 5 GHz WLAN.
7. Per the manufacture, WIFI Direct is not expected to be used in conjunction with a held to ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
8. This device supports Bluetooth tethering. ^ Bluetooth Tethering is considered.
9. Pre-installed VOIP applications are considered.
10. This device supports VoLTE/ VoWiFi.
11. NFC was evaluated for phablet based on expected usage conditions.

4.10 SAR Test Considerations

4.10.1 WiFi

Since wireless router operations are not allowed by the chipset firmware using U-NII-1, U-NII-2A & U-NII-2C WiFi, WiFi Hotspot SAR test and combinations are considered only 2.4 GHz and U-NII-3 for SAR with respected to wireless router configurations according to FCC KDB 941225 D06v02r01.

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg for 1g SAR and is less than 3.0 W/kg for 10g SAR, SAR is not required for U-NII-1 band according to FCC KDB 248227D01v02r02.

This device supports IEEE 802.11 ac with the following features:

- a) Up to 80MHz Bandwidth only for 5 GHz
- b) 1Tx Antenna output
- c) Up to 256 QAM is supported
- d) TDWR and Band gap channels are supported for 5 GHz
- e) Straddle channels are supported.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-1, U-NII-2A & U-NII-2C WLAN, phablet SAR tests were performed. Phablet SAR was not evaluated for 2.4 GHz WIFI, 2.4 GHz Bluetooth, and U-NII-3 WLAN operations since wireless router 1g SAR was < 1.2 W/kg.

4.10.2 Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US Bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

LTE SAR for the higher modulations and lower Bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest Bandwidth; and the reported LTE SAR for the highest Bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r05.

Per FCC KDB 648474 D04v01r03, this device is considered a "Phablet" since the diagonal dimension is greater than 160 mm and less than 200 mm. Therefore, extremity SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. When hotspot mode applies, 10g SAR required only for the surfaces and edges with hotspot mode scaled to the maximum output power (including tolerance) is 1g SAR > 1.2 W/kg.

This Device supports 64QAM and 256QAM on the uplink and 256QAM on the downlink for LTE Operations. Conducted powers for 64QAM and 256QAM uplink configurations were measured per section 5.1 of FCC KDB 941225 D05v02r05. SAR was not required for 64QAM or 256QAM since the highest maximum output power for 64QAM and 256QAM is ≤ 0.5dB higher than the same configuration in QPSK and the reported SAR for QPSK configuration is ≤ 1.45 W/Kg, per section 5.2.4 for FCC KDB941225 D05v02r05.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of LTE Band falls completely within an LTE Band with a larger transmission frequency range, both LTE bands have the same target power or the band with the larger transmission frequency range has a higher target power and both LTE bands share the same transmission path and signal characteristics, SAR was only tested for the band with the larger transmission frequency range.

LTE capabilities with overlapping transmission frequency ranges were applied to LTE Band 26 and LTE Band 5, LTE Band 4 and LTE Band 66, LTE Band 12 and LTE Band 17 of this model.

This device supports LTE Carrier Aggregation (CA) in the downlink. All uplink communications are identical to Release 8 specifications. Per FCC KDB publication 941225 D05A v01r02, SAR for LTE DL CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

Per FCC KDB 941225 D01v03r01, 12.2 kbps RMC is the primary mode and HSPA (HSUPA/HSDPA with RMC) is the secondary mode.

Per FCC KDB 941225 D01v03r01, The SAR test exclusion is applied to the secondary mode by the following equation.

$$\text{Adjusted SAR} = \text{Highest Reported SAR} \times \frac{\text{Secondary Max tune - up (mW)}}{\text{Primary Max tune tune - up (mW)}} \leq 1.2 \text{ W/kg.}$$

Based on the highest Reported SAR, the secondary mode is not required.

Per FCC KDB 690783 1 D01 SAR Listings on Grants v01r03 and KDB 447498 D01 General RF Exposure Guidance v06 The SAR numbers listed must be consistent with the highest reported test results required by the published RF exposure KDB procedures. When the measured SAR is not at the maximum tune-up tolerance limit or maximum output power allowed for production units, the measured results are scaled to the maximum conditions to determine compliance; the scaled results are referred to as the reported SAR.

$$\text{The Reported SAR} = \text{The Measured SAR} \times \frac{\text{Maximum tune - up (mW)}}{\text{Measured Conducted Power (mW)}}$$

The Reported SAR for WLAN and Bluetooth

$$\text{The Reported SAR} = \text{The Measured SAR} \times \frac{\text{Maximum tune - up (mW)}}{\text{Measured Conducted Power (mW)}} \times \text{Duty factor}$$

5. Introduction

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York 10017. The measurement procedure described in IEEE/ANSI C95.3-1992 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative of the incremental electromagnetic energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body.

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right)$$

Figure 1. SAR Mathematical Equation
SAR is expressed in units of Watts per Kilogram (W/kg)

Where:

- = conductivity of the tissue-simulant material (S/m)
- = mass density of the tissue-simulant material (kg/m³)
- = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

6. Description of test equipment

6.1 SAR MEASUREMENT SETUP

These measurements are performed using the DASY4 automated dosimetric assessment system. It is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland. It consists of high precision robotics system (Staubli), robot controller, Pentium III computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Figure.2).

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The PC with Windows XP or Windows 7 is working with SAR Measurement system DASY4 & DASY5, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

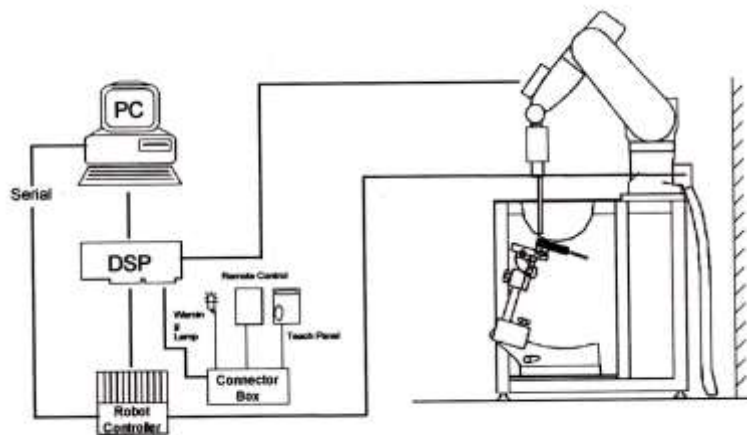


Figure 2. HCT SAR Lab. Test Measurement Set-up

The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in.

7. SAR Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013.

1. The SAR distribution at the exposed side of the head or body was measured at a distance no more than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the DUT's head and body area and the horizontal grid resolution was depending on the FCC KDB 865664 D01v01r04 table 4-1 & IEEE 1528-2013.
2. Based on step, the area of the maximum absorption was determined by sophisticated interpolations routines implemented in DASY software. When an Area Scan has measured all reachable point. DASY system computes the field maximal found in the scanned are, within a range of the maximum. SAR at this fixed point was measured and used as a reference value.
3. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB 865664 D01v01r04 table 4-1 and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (reference from the DASY manual.)
 - a. The data at the surface were extrapolated, since the center of the dipoles is no more than 2.7 mm away from the tip of the probe (it is different from the probe type) and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - b. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition in x, y, and z directions. The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan. If the value changed by more than 5 %, the SAR evaluation and drift measurements were repeated.

Area scan and zoom scan resolution setting follow KDB 865664 D01v01r04 quoted below.

			$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			$5\pm 1 \text{ mm}$	$\cdot \delta \cdot \ln(2)\pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^{\circ}\pm 1^{\circ}$	$20^{\circ}\pm 1^{\circ}$
Maximum areascan Spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$			$\leq 2 \text{ GHz: } \leq 15 \text{ mm}$ $2\text{-}3 \text{ GHz: } \leq 12 \text{ mm}$	$3\text{-}4 \text{ GHz: } \leq 12 \text{ mm}$ $4\text{-}6 \text{ GHz: } \leq 10 \text{ mm}$
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan Spatial resolution: $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$			$\leq 2 \text{ GHz: } \leq 8\text{mm}$ $2\text{-}3 \text{ GHz: } \leq 5\text{mm}^*$	$3\text{-}4 \text{ GHz: } \leq 5 \text{ mm}^*$ $4\text{-}6 \text{ GHz: } \leq 4 \text{ mm}^*$
Maximum zoom scan Spatial resolution normal to phantom surface	uniform grid: $\Delta z_{\text{zoom}}(n)$		$\leq 5 \text{ mm}$	$3\text{-}4 \text{ GHz: } \leq 4 \text{ mm}$ $4\text{-}5 \text{ GHz: } \leq 3 \text{ mm}$ $5\text{-}6 \text{ GHz: } \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{zoom}}(1)$: between 1 st two Points closest to phantom surface	$\leq 4 \text{ mm}$	$3\text{-}4 \text{ GHz: } \leq 3 \text{ mm}$ $4\text{-}5 \text{ GHz: } \leq 2.5 \text{ mm}$ $5\text{-}6 \text{ GHz: } \leq 2 \text{ mm}$
		$\Delta z_{\text{zoom}}(n>1)$: between subsequent Points	$\leq 1.5 \cdot \Delta z_{\text{zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3\text{-}4 \text{ GHz: } \geq 28 \text{ mm}$ $4\text{-}5 \text{ GHz: } \geq 25 \text{ mm}$ $5\text{-}6 \text{ GHz: } \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8. Description of Test Position

8.1 EAR REFERENCE POINT

Figure 8-2 shows the front, back and side views of the SAM phantom. The center-of-mouth reference point is labeled “M”, the left ear reference point (ERP) is marked “LE”, and the right ERP is marked “RE.” Each ERP is on the B-M (back-mouth) line located 15 mm behind the entrance-to-ear-canal (EEC) point, as shown in Figure 6-1. The Reference Plane is defined as passing through the two ears reference point and point M. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (See Figure 5-1), Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning.

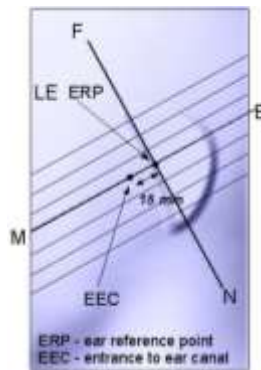


Figure 8-1
Close-up side view of ERP

8.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The device under test was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (see Figure 8-3). The acoustic output was then located at the same level as the center of the ear reference point. The device under test was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 8-2
Front, back and side views of SAM Twin Phantom

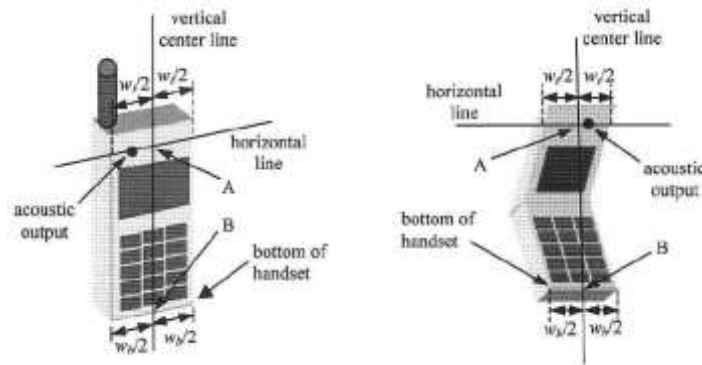


Figure 8-3. Handset vertical and horizontal reference lines

8.3 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameter; relative permittivity $\epsilon=3$ and loss tangent $\sigma=0.02$.

8.4 Position for cheek

Figure 8.4. shows cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

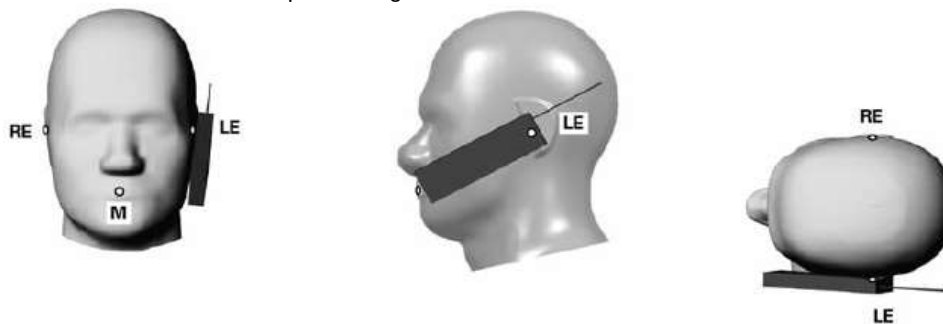


Figure 8.4 Cheek/ Touch position of the wireless device

8.5 Definition of the “tilted” position

Figure 8.5. shows tilted position. Place the device in the cheek position. Then while maintaining the orientation of the device, retract the device parallel to the reference plane far enough away from the phantom to enable a rotation of the device by 15°.



Figure 8.5. Tilt 15° position of the wireless device

8.6 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-dips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 8-6). Per FCC KDB Publication 648474 D04v01r03 Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in Body-worn accessories. The Body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for Body-worn accessory SAR compliance, without a headset connected to it. When the reported SAR for a body- worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency Band should be repeated for that body-worn accessory with a headset attached to the handset.



Figure 8-6
Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-dip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

8.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mix used conditions for this type of devices. Since the hotspot SAR results may overlap with the Body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some Body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The Portable Hotspot feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

8.8 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions: i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

For smart phones with a display diagonal dimension $> 15.0 \text{ cm}$ or an overall diagonal dimension $> 16.0 \text{ cm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear. the phablets procedures outlined in KDB Publication 648474 D04 v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worm accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with the phantom, for 10-g SAR. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g SAR is required only for the surfaces and edges with hotspot mode scaled to the maximum output power (including tolerance) is 1-g SAR $> 1.2 \text{ W/kg}$.

8.9 Bluetooth tethering Configurations

Per May 2017 TCBC Workshop documents, when Bluetooth tethering applies, simultaneous transmission SAR needs consideration.

This model allows users to exchange data or media files with other Bluetooth enabled devices using Bluetooth, which means they can connect to other Bluetooth enabled devices via Bluetooth tethering. Therefore, SAR test was performed for additional simultaneous transmissions. Head and Bluetooth tethering SAR were evaluated for BT BDR tethering applications.

9. RF Exposure Limits

HUMAN EXPOSURE	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT Occupational (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Partial Body)	1.6	8.0
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.4
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.0	20.0

NOTES:

* The Spatial Peak value of the SAR averaged over any 1 g of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

** The Spatial Average value of the SAR averaged over the whole-body.

*** The Spatial Peak value of the SAR averaged over any 10 g of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

10. FCC SAR General Measurement Procedures

Power Measurements for licensed transmitters are performed using a base simulator under digital average power.

10.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as Reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

10.2 3G SAR Test Reduction Procedure

10.2.1 GSM, GPRS AND EDGE

The following procedures may be considered for each frequency Band to determine SAR test reduction for devices operating in GSM/GPRS/EDGE modes to demonstrate RF exposure compliance. GSM voice mode transmits with 1 time-slot. GPRS and EDGE may transmit up to 4 time slots in the 8 time-slot frame according to the multi-slot class implemented in a device.

10.2.2 SAR Test Reduction

In FCC KDB 941225 D01v03r01, certain transmission modes within a frequency Band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested

10.2.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB 941225 D01v03r01-3G SAR Measurement Procedures. The handset was placed into a simulated call using a base station simulator in a shielded chamber. Such test signals offer a consistent means for testing SAR and are recommended for evaluation SAR measurements were taken with a fully charged battery. In order to verify that the device was tested and maintained at full power, this was configured with the base station simulator. The SAR measurement Software calculates a reference point at the start and end of the test to Check for power drifts. If conducted Power deviations of more than 5 % occurred, the tests were repeated.

10.3 SAR Measurement Conditions for UMTS

10.3.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in sec. 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

10.3.2 Body SAR measurements

SAR for body exposure configurations is measured using the 12.2kbps RMC with the TPC bits all “1s”. the 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using and applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported SAR configuration in 12.2kbps RMC.

10.3.3 SAR Measurements with Rel. 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using and FRC with H-SET 1 in Sub-test and a 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to release 6 HSPA test procedures. 8.4.5 SAR Measurement with Rel.6 HSUPA The 3G SAR test Reduction Procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, Using H-Set 1 and QPSK for FRC and a 12.2kbps RMC configured in Test Loop Mode 1 and Power Control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

10.3.4 SAR Measurements with Rel. 6 HSUPA


The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

10.3.5 DC-HSDPA

SAR is required for Rel.8 DC-HSDPA when SAR is required for Rel.5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in table C.8.1.12 of 3GPP TS34.121-1 to determine SAR test reduction. Primary and secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

DC-HSDPA Configurations

- ◆ 3GPP specification TS 34.121-1 Release 8. was used for used for DC-HSDPA guidance.
- ◆ H-set 12(QPSK)was conformed to be used during DC-HSDPA measurements.



10.4 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r05 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluation SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

10.4.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

10.4.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

10.4.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

10.4.4 Required RB Size and RB offsets for SAR testing

According to FCC KDB 941225 D05v02r05

- a. Per sec 4.2.1, SAR is required for QPSK 1 RB Allocation for the largest Bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/Kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Sec 4.2.2, SAR is required for 50% RB allocation using the largest Bandwidth following the same procedures outlined in Sec 4.2.1.
- c. Per Sec. 4.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Sec. 4.2.4 and 4.3, SAR test for higher order modulations and lower Band widths configurations are not required when the conducted power of the required test configurations determined by Sec. 4.2.1 through 4.2.3 is less than or equal to 1/2 dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/Kg.

10.4.5 Downlink Carrier Aggregation

Conducted power measurements with LTE Carrier aggregation (CA) downlink only active are made in accordance to KDB publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. For every supported combination of downlink only carrier aggregation, additional conducted output Powers are measured with downlink carrier aggregation active for the configuration with highest measured maximum conducted power with the downlink carrier aggregation inactive measured among the channel Bandwidth, modulation and RB combinations in each frequency Band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25dB higher than the average output power with downlink only carrier aggregation inactive.

10.4.6 LTE(TDD) Considerations

According to KDB 941225 D05v02r05, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33 %) using Uplink-downlink configuration 0 and Special subframe configuration 6. LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special sub frame configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Calculated Duty Cycle – Extended cyclic prefix in uplink $\times (T_s) \times$ no of S + no of U

Example for calculated Duty Cycle for Uplink-Downlink Configuration 0:

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle = $(5120 \times (1/(15000 \times 2048)) \times 2 + 0.006)/0.01 = 63.33 \%$

Where

$T_s = 1/(15000 \times 2048)$ seconds

10.4.7 The Call Box Setup for LTE(TDD)

When you Want to Test for LTE TDD, Please Change Frame Structure TDD and TDD Uplink Downlink Configuration 0 and Special Subframe Configuration 6.

2018/01/08 11:00		Idle(Regist)		Phone-2	Phone-1
<Fundamental Measurement> Output Main		Continuous		W-CDMA	LTE
Parameter	Fundamental	UE Report			
Reference Signal not found		UE Power : -21.5 dBm		Parameter	
Power Measurement		(Meas. Count : 11/ 20)		Common	
TX Power		Avg.	Max.	Min.	Limit
Channel Power		*****	*****	*****	20.3 to 25.7 dBm
Modulation Analysis		View		(Meas. Count : 1/ 1)	
Common Parameter		TX1 - Max. Power(QPSK/1 RB)		Physical Channel	
Test Parameter		On		Scenario Normal	
Frequency		TDD		Call Processing	
Channel Bandwidth		FDD Hz		TX Measurement Setup	
UL Channel & Frequency		TDD 20		RX Measurement Setup	
DL Channel & Frequency		40620		Fundamental Measurement	
Operation Band		41			
Frequency Separation		(0)MHz			
Level		30.0 dBm			
Input Level				1 2 3 4	

2018/01/08 11:01		Idle(Regist)		Phone-2	Phone-1
<Fundamental Measurement> Output Main		Continuous		W-CDMA	LTE
Parameter	Fundamental	UE Report			
Reference Signal not found		UE Power : -21.5 dBm		Parameter	
Power Measurement		(Meas. Count : 11/ 20)		Common	
TX Power		Avg.	Max.	Min.	Limit
Channel Power		*****	*****	*****	20.3 to 25.7 dBm
Modulation Analysis		View		(Meas. Count : 1/ 1)	
MCS Index (-)		5 (QPSK)	(5)	(2216)	-
MCS Index (5)		5 (QPSK)	(5)	(1864)	4
MCS Index (0)		5 (QPSK)	(5)	(2216)	2
MCS Index (1,6)		N/A	(---)	(---)	2
CFI		3			
TDD		subframe 0 1 2 3 4 5 6 7 8 9			
Uplink Downlink Configuration		0 : (5ms) D S U U U D S U U U			
Special Subframe Configuration		6			
Physical Channel Parameter					
PSS Power		0.0 dB			
SSS Power		0.0 dB			
PBCH Power		0.0 dB			
PCFICH Power		0.0 dB			
PHICH Power		0.0 dB			
		1 2 3 4			

10.5 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipsetbased test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

10.5.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR system to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92-96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

10.5.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII2A Bands, when the same maximum output power is specified for both Bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is $> 1.2 \text{ W/kg}$ for 1g SAR or $> 3.0 \text{ W/kg}$ for 10g SAR. When different maximum output powers are specified for the Bands, SAR measurement for the U-NII Band with the lower maximum output power is not required unless the highest reported SAR for the U-NII Band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two Bands, is $> 1.2 \text{ W/kg}$ for 1g SAR or $> 3.0 \text{ W/kg}$ for 10g SAR.

10.5.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 GHz – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 GHz – 5.65 GHz in U-NII-2C Band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless Band gap channels are permanently disabled, SAR must be considered for these channels.

10.5.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is $\leq 0.4 \text{ W/kg}$ for 1g SAR and $\leq 1.0 \text{ W/kg}$ for 10g SAR, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is $\leq 0.8 \text{ W/kg}$ for 1g SAR and $\leq 2.0 \text{ W/kg}$ for 10g SAR or all test positions are measured.

10.5.5 2.4 GHz SAR test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS is that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz Band, the Initial Test Configuration Procedures should be followed.

10.5.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz Bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency Band or aggregated Band, SAR is measured using the configuration with the largest channel Bandwidth, lowest order modulation and lowest data rate and lowest order 802.11 a/g/n/ac mode. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11 ac or 802.11g and 802.11n with the same channel Bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power is the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency Band or aggregated Band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

10.5.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 GHz and 5 GHz Bands, an initial test configuration is determined for each frequency Band and aggregated Band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency Band or aggregated Band, SAR is measured using the configuration(s) with the largest channel Bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output power is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements.

10.5.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency Band and aggregated Band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position on procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg for 1g SAR and ≤ 3.0 W/kg for 10g SAR, no additional SAR tests for the subsequent test configurations are required.

11. Output Power Specifications

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB publication 447498 D01v06.

Licensed Bands

Test Description	Test Procedure Used
Conducted Output Power	- KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2

Test Overview


According to ANSI C63.26-2015 Section 5.2.1 when measuring the maximum RF output power from such devices, control over the EUT must be provided either through special test software (provided by manufacturer specifically for compliance testing, but not accessible by an end user) or through use of a base station emulator, communications test set, call box, or similar instrumentation that is capable of establishing a communications link with the EUT to enable control over variable parameters (e.g., output power, OBW, etc.).

In some cases, these instruments also include basic digital spectrum analyzer and/or power meter capabilities that can be utilized to measure the RF output power if the specified detectors and requirements can be realized and the measurement functions have been calibrated.

Test Procedure

1. The RF port of the EUT was connected to the Communication Tester via an RF cable.
2. Conducted average power was measured using a calibrated Radio Communication Tester.

Test setup

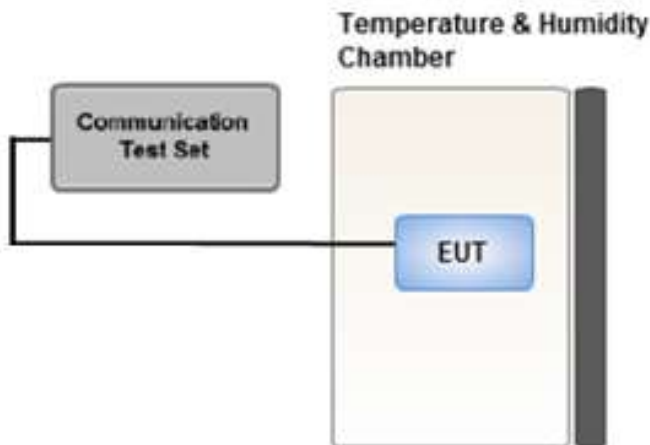

11.1 GSM

11.1.1 GSM Maximum Conducted Output Power (Pmax, ECI=0,1,2,3)

Mode / Band		Voice	GPRS(GMSK) Data (dBm)				EDGE Data (dBm)			
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Maximum		34.0	34.0	32.0	30.0	29.0	26.5	25.5	23.5	22.5
Nominal		33.0	33.0	31.0	29.0	28.0	25.5	24.5	22.5	21.5
GSM 850	128	33.25	33.24	31.00	29.01	28.01	25.95	24.94	22.82	21.52
	190	33.30	33.31	31.02	28.94	27.97	25.86	24.74	22.71	21.47
	251	33.17	33.20	30.94	28.84	27.86	25.77	24.73	22.70	21.38
Maximum		31.0	31.0	29.0	27.0	26.0	25.5	24.5	22.5	21.5
Nominal		30.0	30.0	28.0	26.0	25.0	24.5	23.5	21.5	20.5
GSM 1900	512	30.77	30.76	28.20	26.10	25.09	24.98	23.83	21.82	20.71
	661	30.62	30.56	27.99	25.90	24.89	24.73	23.61	21.60	20.41
	810	30.90	30.87	28.41	26.31	25.26	24.90	23.72	21.64	20.63

GSM Conducted output powers (Burst-Average)

Mode / Band		Voice	GPRS(GMSK) Data (dBm)				EDGE Data (dBm)			
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Maximum		24.97	24.97	25.98	25.74	25.99	17.47	19.48	19.24	19.49
Nominal		23.97	23.97	24.98	24.74	24.99	16.47	18.48	18.24	18.49
GSM 850	128	24.22	24.21	24.98	24.75	25.00	16.92	18.92	18.56	18.51
	190	24.27	24.28	25.00	24.68	24.96	16.83	18.72	18.45	18.46
	251	24.14	24.17	24.92	24.58	24.85	16.74	18.71	18.44	18.37
Maximum		21.97	21.97	22.98	22.74	22.99	16.47	18.48	18.24	18.49
Nominal		20.97	20.97	21.98	21.74	21.99	15.47	17.48	17.24	17.49
GSM 1900	21.74	21.74	21.73	22.18	21.84	22.08	15.95	17.81	17.56	17.70
	21.59	21.59	21.53	21.97	21.64	21.88	15.70	17.59	17.34	17.40
	21.87	21.87	21.84	22.39	22.05	22.25	15.87	17.70	17.38	17.62

GSM Conducted output powers (Frame-Average)

Note:


Time slot average factor is as follows:

1 Tx slot = 9.03 dB, Frame-Average output power = Burst-Average output power – 9.03 dB

2 Tx slot = 6.02 dB, Frame-Average output power = Burst-Average output power – 6.02 dB

3 Tx slot = 4.26 dB, Frame-Average output power = Burst-Average output power – 4.26 dB

4 Tx slot = 3.01 dB, Frame-Average output power = Burst-Average output power – 3.01 dB



11.2 UMTS Conducted Output Power

HSPA+

This DUT is capable of HSPA+ in downlink. Therefore, the RF conducted power is not measured according to 941225 D01v03r01 3G SAR.

11.2.1 UMTS Maximum Conducted Output Power

UMTS Band 5 Maximum Conducted Output Power (P_{max}, ECI=1)

3GPP Release Version	Mode	3GPP 34.121	UMTS Band 5 [dBm]			3GPP MPR
		Subtest	UL4132 DL4357	UL4183 DL4408	UL4233 DL4458	
99	UMTS	12.2 kbps RMC	24.27	24.15	24.11	-
99		12.2 kbps AMR	24.25	24.14	24.09	-
2	HSDPA	Subtest 1	23.27	23.24	23.15	0
5		Subtest 2	23.30	23.24	23.15	0
5		Subtest 3	22.83	22.80	22.69	0.5
5		Subtest 4	22.81	22.76	22.68	0.5
6	HSUPA	Subtest 1	21.28	21.22	21.15	0
6		Subtest 2	21.27	21.22	21.15	0
6		Subtest 3	22.31	22.26	22.16	0
6		Subtest 4	20.81	20.73	20.66	0
6		Subtest 5	22.26	22.26	22.14	0
8	DC-HSDPA	Subtest1	22.74	22.64	22.50	0
8		Subtest2	22.77	22.63	22.49	0
8		Subtest3	22.27	22.15	22.02	0.5
8		Subtest4	22.26	22.16	22.00	0.5

UMTS Average Conducted output powers

UMTS Band 4 Maximum Conducted Output Power (P_{max}, ECI=1)

3GPP Release Version	Mode	3GPP 34.121	UMTS Band 4 [dBm]			3GPP MPR
		Subtest	UL1312 DL1537	UL1412 DL1637	UL1513 DL1738	
99	UMTS	12.2 kbps RMC	22.96	23.10	23.34	-
99		12.2 kbps AMR	22.93	23.11	23.30	-
2	HSDPA	Subtest 1	21.99	22.12	22.34	0
5		Subtest 2	21.97	22.11	22.34	0
5		Subtest 3	21.54	21.69	21.85	0.5
5		Subtest 4	21.51	21.63	21.86	0.5
6	HSUPA	Subtest 1	21.07	21.20	21.41	0
6		Subtest 2	19.53	19.67	19.89	2
6		Subtest 3	20.51	20.63	20.89	1
6		Subtest 4	20.03	20.12	20.37	2
6		Subtest 5	21.49	21.63	21.86	0
8	DC-HSDPA	Subtest1	21.36	21.32	21.59	0
8		Subtest2	21.38	21.33	21.60	0
8		Subtest3	20.87	20.84	21.10	0.5
8		Subtest4	20.87	20.85	21.13	0.5

UMTS Band 2 Maximum Conducted Output Power (Pmax, ECI=1)

3GPP Release Version	Mode	3GPP 34.121	UMTS Band 2 [dBm]			3GPP MPR
		Subtest	UL9262 DL9662	UL9400 DL9800	UL9538 DL9938	
99	UMTS	12.2 kbps RMC	21.24	21.14	21.19	-
99		12.2 kbps AMR	21.24	21.16	21.19	-
2	HSDPA	Subtest 1	20.28	20.11	20.23	0
5		Subtest 2	20.24	20.10	20.20	0
5		Subtest 3	19.76	19.66	19.72	0.5
5		Subtest 4	19.77	19.65	19.69	0.5
6	HSUPA	Subtest 1	19.23	19.09	19.21	0
6		Subtest 2	19.25	19.14	19.23	2
6		Subtest 3	18.73	18.63	18.71	1
6		Subtest 4	19.26	19.15	19.15	2
6		Subtest 5	19.24	19.10	19.20	0
8	DC-HSDPA	Subtest1	19.79	19.65	19.72	0
8		Subtest2	19.80	19.66	19.74	0
8		Subtest3	19.30	19.17	19.22	0.5
8		Subtest4	19.32	19.16	19.23	0.5

11.2.2 UMTS Reduced Conducted Output Power

UMTS Band 5 Reduced Conducted Output Power (ECI=0,2,3)

3GPP Release Version	Mode	3GPP 34.121	UMTS Band 5 [dBm]			3GPP MPR
		Subtest	UL4132 DL4357	UL4183 DL4408	UL4233 DL4458	
99	UMTS	12.2 kbps RMC	23.26	23.16	23.10	-
99		12.2 kbps AMR	23.25	23.16	23.05	-
2	HSDPA	Subtest 1	22.28	22.22	22.16	0
5		Subtest 2	22.29	22.24	22.18	0
5		Subtest 3	21.85	21.77	21.73	0.5
5		Subtest 4	21.82	21.79	21.67	0.5
6	HSUPA	Subtest 1	20.28	20.23	20.15	0
6		Subtest 2	20.33	20.27	20.15	0
6		Subtest 3	21.30	21.24	21.17	0
6		Subtest 4	19.80	19.78	19.68	0
6		Subtest 5	21.28	21.23	21.14	0
8	DC-HSDPA	Subtest1	21.77	21.67	21.51	0
8		Subtest2	21.76	21.68	21.49	0
8		Subtest3	21.21	21.17	21.01	0.5
8		Subtest4	21.23	21.15	21.03	0.5

UMTS Average Conducted output powers

UMTS Band 4 Reduced Conducted Output Power (ECI=0,2,3)

3GPP Release Version	Mode	3GPP 34.121	UMTS Band 2 [dBm]			3GPP MPR
		Subtest	UL1312 DL1537	UL1412 DL1637	UL1531 DL1738	
99	UMTS	12.2 kbps RMC	19.84	19.99	20.14	-
99		12.2 kbps AMR	19.81	19.86	20.11	-
2	HSDPA	Subtest 1	18.87	19.01	19.20	0
5		Subtest 2	18.89	19.03	19.26	0
5		Subtest 3	18.42	18.55	18.79	0.5
5		Subtest 4	18.40	18.55	18.75	0.5
6	HSUPA	Subtest 1	17.85	18.02	18.23	0
6		Subtest 2	16.54	16.53	16.76	0
6		Subtest 3	17.36	17.54	17.71	0
6		Subtest 4	16.87	16.99	17.25	0
6		Subtest 5	18.38	18.51	18.71	0
8	DC-HSDPA	Subtest1	18.33	18.51	18.68	0
8		Subtest2	18.33	18.50	18.65	0
8		Subtest3	17.88	18.01	18.13	0.5
8		Subtest4	17.89	18.00	18.10	0.5

UMTS Band 2 Reduced Conducted Output Power (ECI=0,2,3)

3GPP Release Version	Mode	3GPP 34.121	UMTS Band 4 [dBm]			3GPP MPR
		Subtest	UL9262 DL9662	UL9400 DL9800	UL9538 DL9938	
99	UMTS	12.2 kbps RMC	19.21	19.10	19.24	-
99		12.2 kbps AMR	19.21	19.13	19.23	-
2	HSDPA	Subtest 1	18.29	18.13	18.26	0
5		Subtest 2	18.26	18.10	18.20	0
5		Subtest 3	17.80	17.66	17.75	0.5
5		Subtest 4	17.76	17.63	17.76	0.5
6	HSUPA	Subtest 1	17.28	17.12	17.18	0
6		Subtest 2	17.27	15.63	17.19	2
6		Subtest 3	16.78	16.66	16.73	1
6		Subtest 4	17.30	17.17	16.23	2
6		Subtest 5	17.26	17.14	17.18	0
8	DC-HSDPA	Subtest1	17.82	17.66	17.73	0
8		Subtest2	17.73	17.64	17.73	0
8		Subtest3	17.28	17.18	17.25	0.5
8		Subtest4	17.26	17.14	17.23	0.5

DC-HSDPA Configurations

- ◆ 3GPP specification TS 34.121-1 Release 8. was used for used for DC-HSDPA guidance.
- ◆ H-set 12(QPSK)was conformed to be used during DC-HSDPA measurements.



11.3 LTE Maximum Output Power

LTE B4/B5/B12/B13/B17/B26 does not support three non-overlapping channels at each supported max bandwidth. Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the mid channel of the group of overlapping channels should be selected for testing.

11.3.1 LTE Conducted Power

[LTE Band 2 Conducted Power Pmax, ECI=1]

LTE Band 2 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18607 Ch. 1850.7 MHz	18900 Ch. 1880 MHz	19193 Ch. 1909.3 MHz		
1.4 MHz	QPSK	1	0	22.07	22.49	22.90	0	0
		1	3	22.04	22.02	22.88	0	0
		1	5	22.07	22.12	23.05	0	0
		3	0	22.57	22.54	23.00	0	0
		3	1	22.52	22.52	23.03	0	0
		3	3	22.62	22.58	23.04	0	0
		6	0	21.58	21.55	22.03	0-1	1
	16QAM	1	0	21.39	21.43	21.79	0-1	1
		1	3	21.32	21.45	21.88	0-1	1
		1	5	21.35	21.28	21.92	0-1	1
		3	0	21.70	21.60	22.09	0-1	1
		3	1	21.55	21.66	22.20	0-1	1
		3	3	21.54	21.66	22.25	0-1	1
		6	0	20.65	20.64	21.13	0-2	2
	64QAM	1	0	20.30	20.25	20.75	0-2	2
		1	3	20.25	20.28	20.69	0-2	2
		1	5	20.31	20.79	20.75	0-2	2
		3	0	20.76	20.61	21.05	0-2	2
		3	1	20.66	20.66	21.07	0-2	2
		3	3	20.71	20.59	21.08	0-2	2
		6	0	19.62	19.57	20.09	0-3	3
	256QAM	1	0	17.86	17.82	18.23	0-5	5
		1	3	17.87	17.89	18.27	0-5	5
		1	5	17.88	17.84	18.32	0-5	5
		3	0	17.90	17.79	18.27	0-5	5
		3	1	17.86	17.80	18.30	0-5	5
		3	3	17.89	17.80	18.28	0-5	5
		6	0	17.75	17.69	18.11	0-5	5

LTE Band 2_ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18615 Ch. 1851.5 MHz	18900 Ch. 1880 MHz	19185 Ch. 1908.5 MHz		
3 MHz	QPSK	1	0	22.53	22.54	22.91	0	0
		1	7	22.61	22.62	22.91	0	0
		1	14	22.60	22.57	22.94	0	0
		8	0	21.63	21.55	22.02	0	0
		8	3	21.62	21.58	22.00	0	0
		8	7	21.62	21.63	22.06	0	0
		15	0	21.65	21.63	22.02	0-1	1
	16QAM	1	0	21.84	21.85	21.91	0-1	1
		1	7	22.00	21.85	21.94	0-1	1
		1	14	21.34	21.96	21.81	0-1	1
		8	0	20.80	20.68	21.10	0-1	1
		8	3	20.75	20.66	21.09	0-1	1
		8	7	20.73	20.67	21.09	0-1	1
		15	0	20.68	20.64	21.09	0-2	2
	64QAM	1	0	20.35	20.75	20.58	0-2	2
		1	7	20.86	20.84	20.80	0-2	2
		1	14	20.27	20.85	20.77	0-2	2
		8	0	19.68	19.59	20.08	0-2	2
		8	3	19.67	19.57	20.02	0-2	2
		8	7	19.68	19.65	20.05	0-2	2
		15	0	19.67	19.63	20.08	0-3	3
	256QAM	1	0	17.84	17.82	18.21	0-5	5
		1	7	17.82	17.85	18.22	0-5	5
		1	14	17.87	17.82	18.27	0-5	5
		8	0	17.80	17.75	18.17	0-5	5
		8	3	17.82	17.71	18.13	0-5	5
		8	7	17.81	17.76	18.19	0-5	5
		15	0	17.79	17.74	18.15	0-5	5

LTE Band 2 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18625 Ch. 1852.5 MHz	18900 Ch. 1880 MHz	19175 Ch. 1907.5 MHz		
5 MHz	QPSK	1	0	22.68	22.62	22.95	0	0
		1	12	22.59	22.62	23.00	0	0
		1	24	22.59	22.65	23.10	0	0
		12	0	21.72	21.63	22.05	0	0
		12	6	21.68	21.65	22.05	0	0
		12	11	21.75	21.68	22.09	0	0
		25	0	21.71	21.67	22.07	0-1	1
	16QAM	1	0	21.65	22.01	22.35	0-1	1
		1	12	21.48	21.91	21.92	0-1	1
		1	24	21.49	21.90	21.92	0-1	1
		12	0	20.75	20.68	21.06	0-1	1
		12	6	20.71	20.68	21.06	0-1	1
		12	11	20.73	20.68	21.16	0-1	1
		25	0	20.72	20.69	21.09	0-2	2
	64QAM	1	0	20.83	20.84	20.74	0-2	2
		1	12	20.87	20.80	20.82	0-2	2
		1	24	20.86	20.87	20.78	0-2	2
		12	0	19.75	19.63	20.09	0-2	2
		12	6	19.71	19.64	20.09	0-2	2
		12	11	19.71	19.67	20.10	0-2	2
		25	0	19.67	19.63	20.06	0-3	3
	256QAM	1	0	17.92	17.86	18.23	0-5	5
		1	12	17.93	17.87	18.29	0-5	5
		1	24	17.98	17.92	18.33	0-5	5
		12	0	17.78	17.73	18.15	0-5	5
		12	6	17.79	17.70	18.13	0-5	5
		12	11	17.85	17.76	18.21	0-5	5
		25	0	17.81	17.75	18.15	0-5	5

LTE Band 2 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18650 Ch. 1855 MHz	18900 Ch. 1880 MHz	19150 Ch. 1905 MHz		
10 MHz	QPSK	1	0	22.56	22.60	22.86	0	0
		1	24	22.72	22.66	22.99	0	0
		1	49	22.18	22.63	23.00	0	0
		25	0	21.65	21.60	21.97	0	0
		25	12	21.67	21.59	21.98	0	0
		25	24	21.69	21.63	22.06	0	0
		50	0	21.67	21.67	22.03	0-1	1
	16QAM	1	0	21.55	22.09	21.89	0-1	1
		1	24	21.50	21.98	21.81	0-1	1
		1	49	21.52	22.11	21.81	0-1	1
		25	0	20.66	20.58	20.96	0-1	1
		25	12	20.66	20.59	21.01	0-1	1
		25	24	20.70	20.65	21.05	0-1	1
		50	0	20.65	20.63	20.99	0-2	2
	64QAM	1	0	20.42	20.88	20.66	0-2	2
		1	24	20.39	20.89	20.65	0-2	2
		1	49	20.36	20.92	20.80	0-2	2
		25	0	19.66	19.56	19.91	0-2	2
		25	12	19.64	19.53	19.95	0-2	2
		25	24	19.65	19.62	20.03	0-2	2
		50	0	19.66	19.65	19.97	0-3	3
	256QAM	1	0	17.97	17.86	18.14	0-5	5
		1	24	17.94	17.84	18.20	0-5	5
		1	49	18.05	17.91	18.36	0-5	5
		25	0	17.80	17.69	18.00	0-5	5
		25	12	17.78	17.69	18.05	0-5	5
		25	24	17.84	17.74	18.13	0-5	5
		50	0	17.81	17.75	18.07	0-5	5

LTE Band 2 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18675 Ch. 1857.5 MHz	18900 Ch. 1880 MHz	19125 Ch. 1902.5 MHz		
15 MHz	QPSK	1	0	22.70	22.71	22.87	0	0
		1	36	22.73	22.73	22.92	0	0
		1	74	22.66	22.73	23.07	0	0
		36	0	21.69	21.68	22.00	0	0
		36	18	21.70	21.64	21.96	0	0
		36	39	21.71	21.72	22.10	0	0
		75	0	21.71	21.72	22.05	0-1	1
	16QAM	1	0	21.58	21.99	22.13	0-1	1
		1	36	21.62	22.00	21.70	0-1	1
		1	74	21.50	22.15	22.30	0-1	1
		36	0	20.70	20.68	21.00	0-1	1
		36	18	20.72	20.64	21.01	0-1	1
		36	39	20.69	20.73	21.07	0-1	1
		75	0	20.71	20.72	21.02	0-2	2
	64QAM	1	0	20.42	20.90	20.66	0-2	2
		1	36	20.38	20.92	20.71	0-2	2
		1	74	20.65	21.05	20.85	0-2	2
		36	0	19.76	19.70	20.02	0-2	2
		36	18	19.75	19.67	19.99	0-2	2
		36	39	19.79	19.76	20.12	0-2	2
		75	0	19.74	19.73	20.05	0-3	3
	256QAM	1	0	17.98	17.87	18.19	0-5	5
		1	36	17.97	17.92	18.18	0-5	5
		1	74	17.94	17.97	18.40	0-5	5
		36	0	17.82	17.78	18.09	0-5	5
		36	18	17.87	17.81	18.08	0-5	5
		36	39	17.91	17.84	18.16	0-5	5
		75	0	17.93	17.86	18.11	0-5	5

LTE Band 2 _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18700 Ch. 1860 MHz	18900 Ch. 1880 MHz	19100 Ch. 1900 MHz		
20 MHz	QPSK	1	0	22.69	22.67	22.87	0	0
		1	49	22.70	22.66	23.00	0	0
		1	99	22.70	22.74	22.85	0	0
		50	0	21.81	21.71	22.01	0	0
		50	25	21.80	21.74	22.03	0	0
		50	49	21.81	21.74	22.11	0	0
		100	0	21.79	21.70	22.03	0-1	1
	16QAM	1	0	21.59	22.08	21.70	0-1	1
		1	49	21.55	22.05	21.97	0-1	1
		1	99	21.60	22.31	22.15	0-1	1
		50	0	20.77	20.69	21.00	0-1	1
		50	25	20.75	20.73	20.99	0-1	1
		50	49	20.81	20.76	21.11	0-1	1
		100	0	20.81	20.75	21.08	0-2	2
	64QAM	1	0	20.97	20.93	20.66	0-2	2
		1	49	20.95	20.94	20.74	0-2	2
		1	99	20.56	21.04	20.92	0-2	2
		50	0	19.79	19.71	20.00	0-2	2
		50	25	19.78	19.74	20.01	0-2	2
		50	49	19.76	19.76	20.11	0-2	2
		100	0	19.78	19.74	20.07	0-3	3
	256QAM	1	0	17.95	18.00	18.14	0-5	5
		1	49	17.97	17.92	18.17	0-5	5
		1	99	17.99	18.01	18.43	0-5	5
		50	0	17.94	17.81	18.09	0-5	5
		50	25	17.89	17.84	18.12	0-5	5
		50	49	17.93	17.86	18.19	0-5	5
		100	0	17.95	17.82	18.14	0-5	5

[LTE Band 2 Upper Conducted Power Pmax, ECI=1]

LTE Band 2 Upper_ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18607 Ch. 1850.7 MHz	18900 Ch. 1880 MHz	19193 Ch. 1909.3 MHz		
1.4 MHz	QPSK	1	0	22.72	22.55	22.53	0	0
		1	3	22.75	22.63	22.47	0	0
		1	5	22.73	22.60	22.47	0	0
		3	0	22.68	22.61	22.43	0	1
		3	1	22.72	22.54	22.49	0	1
		3	3	22.74	22.60	22.52	0	1
	16QAM	6	0	21.79	21.65	21.51	0-1	1
		1	0	21.93	22.00	21.86	0-1	1
		1	3	22.04	21.96	21.87	0-1	1
		1	5	21.88	21.93	21.87	0-1	1
		3	0	21.74	21.71	21.55	0-1	2
		3	1	21.74	21.67	21.64	0-1	2
	64QAM	3	3	21.75	21.67	21.69	0-1	2
		6	0	20.88	20.67	20.62	0-2	2
		1	0	20.99	20.87	20.73	0-2	2
		1	3	20.91	20.76	20.67	0-2	2
		1	5	20.94	20.77	20.64	0-2	2
		3	0	20.82	20.62	20.57	0-2	3
	256QAM	3	1	20.81	20.60	20.57	0-2	3
		3	3	20.86	20.71	20.61	0-2	3
		6	0	19.71	19.60	19.52	0-3	3
		1	0	17.97	17.89	17.84	0-5	5
		1	3	17.96	17.79	17.87	0-5	5
		1	5	17.98	17.87	17.78	0-5	5
		3	0	17.96	17.82	17.79	0-5	5
		3	1	17.96	17.78	17.79	0-5	5
		3	3	17.96	17.79	17.78	0-5	5
		6	0	17.81	17.70	17.63	0-5	5

LTE Band 2 Upper _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18615 Ch. 1851.5 MHz	18900 Ch. 1880 MHz	19185 Ch. 1908.5 MHz		
3 MHz	QPSK	1	0	22.78	22.61	22.64	0	0
		1	7	22.84	22.59	22.54	0	0
		1	14	22.77	22.67	22.59	0	0
		8	0	21.82	21.66	21.60	0	1
		8	3	21.75	21.65	21.56	0	1
		8	7	21.76	21.63	21.56	0	1
		15	0	21.76	21.65	21.57	0-1	1
	16QAM	1	0	22.03	21.94	21.94	0-1	1
		1	7	22.09	22.02	21.88	0-1	1
		1	14	21.98	21.98	21.90	0-1	1
		8	0	20.91	20.72	20.66	0-1	2
		8	3	20.84	20.71	20.66	0-1	2
		8	7	20.89	20.73	20.69	0-1	2
		15	0	20.76	20.61	20.57	0-2	2
	64QAM	1	0	20.99	20.82	20.70	0-2	2
		1	7	21.09	20.99	20.68	0-2	2
		1	14	20.86	20.87	20.68	0-2	2
		8	0	19.78	19.65	19.63	0-2	3
		8	3	19.78	19.70	19.54	0-2	3
		8	7	19.77	19.62	19.63	0-2	3
		15	0	19.79	19.67	19.55	0-3	3
	256QAM	1	0	18.04	17.82	17.73	0-5	5
		1	7	17.91	17.81	17.80	0-5	5
		1	14	17.96	17.86	17.74	0-5	5
		8	0	17.91	17.75	17.68	0-5	5
		8	3	17.92	17.72	17.69	0-5	5
		8	7	17.92	17.75	17.72	0-5	5
		15	0	17.87	17.72	17.70	0-5	5

LTE Band 2 Upper _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18625 Ch. 1852.5 MHz	18900 Ch. 1880 MHz	19175 Ch. 1907.5 MHz		
5 MHz	QPSK	1	0	22.88	22.70	22.61	0	0
		1	12	22.82	22.74	22.54	0	0
		1	24	22.85	22.67	22.55	0	0
		12	0	21.86	21.73	21.64	0	1
		12	6	21.82	21.72	21.63	0	1
		12	11	21.83	21.68	21.63	0	1
		25	0	21.89	21.73	21.64	0-1	1
	16QAM	1	0	22.05	21.98	21.94	0-1	1
		1	12	22.23	22.05	21.90	0-1	1
		1	24	22.26	22.09	21.82	0-1	1
		12	0	20.89	20.81	20.69	0-1	2
		12	6	20.89	20.75	20.68	0-1	2
		12	11	20.92	20.71	20.68	0-1	2
		25	0	20.86	20.73	20.63	0-2	2
	64QAM	1	0	21.11	20.83	20.83	0-2	2
		1	12	21.09	20.85	20.85	0-2	2
		1	24	20.94	20.96	20.80	0-2	2
		12	0	19.89	19.73	19.64	0-2	3
		12	6	19.83	19.69	19.62	0-2	3
		12	11	19.86	19.67	19.62	0-2	3
		25	0	19.83	19.66	19.59	0-3	3
	256QAM	1	0	18.10	17.90	17.79	0-5	5
		1	12	18.02	17.96	17.83	0-5	5
		1	24	18.04	17.83	17.91	0-5	5
		12	0	17.91	17.82	17.69	0-5	5
		12	6	17.90	17.78	17.75	0-5	5
		12	11	17.90	17.80	17.70	0-5	5
		25	0	17.91	17.78	17.71	0-5	5

LTE Band 2 Upper _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18650 Ch. 1855 MHz	18900 Ch. 1880 MHz	19150 Ch. 1905 MHz		
10 MHz	QPSK	1	0	22.98	22.65	22.65	0	0
		1	24	22.85	22.67	22.57	0	0
		1	49	22.82	22.74	22.65	0	0
		25	0	21.89	21.74	21.68	0	1
		25	12	21.83	21.73	21.62	0	1
		25	24	21.85	21.72	21.66	0	1
		50	0	21.88	21.77	21.69	0-1	1
	16QAM	1	0	22.24	22.24	22.10	0-1	1
		1	24	22.21	22.07	21.91	0-1	1
		1	49	22.15	22.12	22.00	0-1	1
		25	0	20.86	20.72	20.66	0-1	2
		25	12	20.85	20.70	20.59	0-1	2
		25	24	20.86	20.71	20.65	0-1	2
		50	0	20.85	20.71	20.67	0-2	2
	64QAM	1	0	21.14	21.01	20.88	0-2	2
		1	24	20.97	20.85	20.74	0-2	2
		1	49	21.06	20.95	20.87	0-2	2
		25	0	19.84	19.68	19.66	0-2	3
		25	12	19.79	19.68	19.60	0-2	3
		25	24	19.84	19.70	19.63	0-2	3
		50	0	19.84	19.74	19.66	0-3	3
	256QAM	1	0	18.13	17.92	17.81	0-5	5
		1	24	18.03	17.80	17.76	0-5	5
		1	49	18.06	17.93	17.87	0-5	5
		25	0	17.93	17.81	17.70	0-5	5
		25	12	17.90	17.76	17.65	0-5	5
		25	24	17.93	17.80	17.70	0-5	5
		50	0	17.93	17.80	17.68	0-5	5

LTE Band 2 Upper _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18675 Ch. 1857.5 MHz	18900 Ch. 1880 MHz	19125 Ch. 1902.5 MHz		
15 MHz	QPSK	1	0	22.94	22.79	22.67	0	0
		1	36	22.83	22.78	22.58	0	0
		1	74	22.80	22.74	22.59	0	0
		36	0	21.86	21.73	21.65	0	1
		36	18	21.78	21.69	21.62	0	1
		36	39	21.80	21.71	21.61	0	1
		75	0	21.83	21.75	21.66	0-1	1
	16QAM	1	0	22.32	22.15	22.17	0-1	1
		1	36	22.16	22.13	22.07	0-1	1
		1	74	22.12	22.14	22.00	0-1	1
		36	0	20.84	20.74	20.67	0-1	2
		36	18	20.79	20.69	20.60	0-1	2
		36	39	20.79	20.70	20.61	0-1	2
		75	0	20.83	20.70	20.67	0-2	2
	64QAM	1	0	21.15	20.95	20.87	0-2	2
		1	36	20.96	20.90	20.87	0-2	2
		1	74	20.99	20.90	20.90	0-2	2
		36	0	19.86	19.76	19.69	0-2	3
		36	18	19.81	19.72	19.60	0-2	3
		36	39	19.79	19.71	19.65	0-2	3
		75	0	19.83	19.71	19.64	0-3	3
	256QAM	1	0	18.18	18.00	17.77	0-5	5
		1	36	18.01	17.88	17.76	0-5	5
		1	74	17.92	17.96	17.91	0-5	5
		36	0	17.89	17.78	17.69	0-5	5
		36	18	17.87	17.78	17.65	0-5	5
		36	39	17.86	17.78	17.68	0-5	5
		75	0	17.88	17.81	17.70	0-5	5

LTE Band 2 Upper _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18700 Ch. 1860 MHz	18900 Ch. 1880 MHz	19100 Ch. 1900 MHz		
20 MHz	QPSK	1	0	22.99	22.68	22.59	0	0
		1	49	22.88	22.72	22.66	0	0
		1	99	22.83	22.79	22.68	0	0
		50	0	21.88	21.78	21.75	0	1
		50	25	21.84	21.78	21.66	0	1
		50	49	21.84	21.77	21.69	0	1
		100	0	21.87	21.78	21.69	0-1	1
	16QAM	1	0	22.12	22.09	22.09	0-1	1
		1	49	22.22	22.22	21.99	0-1	1
		1	99	22.11	22.04	22.14	0-1	1
		50	0	20.88	20.82	20.73	0-1	2
		50	25	20.83	20.74	20.69	0-1	2
		50	49	20.88	20.76	20.67	0-1	2
		100	0	20.85	20.77	20.69	0-2	2
	64QAM	1	0	21.15	20.95	20.99	0-2	2
		1	49	21.02	20.93	20.92	0-2	2
		1	99	21.01	20.91	20.85	0-2	2
		50	0	19.86	19.78	19.74	0-2	3
		50	25	19.82	19.75	19.66	0-2	3
		50	49	19.83	19.75	19.68	0-2	3
		100	0	19.83	19.77	19.69	0-3	3
	256QAM	1	0	18.15	18.01	18.02	0-5	5
		1	49	17.92	17.91	17.85	0-5	5
		1	99	17.96	17.84	17.87	0-5	5
		50	0	17.93	17.87	17.77	0-5	5
		50	25	17.88	17.82	17.70	0-5	5
		50	49	17.87	17.78	17.68	0-5	5
		100	0	17.93	17.84	17.77	0-5	5

[LTE Band 4 Conducted Power Pmax, ECI=1]

LTE Band 4 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19957 Ch. 1710.7 MHz	20175 Ch. 1732.5 MHz	20393 Ch. 1754.3 MHz		
1.4 MHz	QPSK	1	0	23.37	23.57	23.59	0	0
		1	3	23.28	23.46	23.65	0	0
		1	5	23.33	23.52	23.49	0	0
		3	0	23.89	23.96	24.10	0	0
		3	1	23.87	23.97	24.17	0	0
		3	3	23.80	24.05	24.08	0	0
		6	0	22.40	22.53	22.66	0-1	1
	16QAM	1	0	22.09	22.37	22.50	0-1	1
		1	3	22.20	22.35	22.47	0-1	1
		1	5	22.17	22.30	22.38	0-1	1
		3	0	22.56	22.57	22.82	0-1	1
		3	1	22.57	22.67	22.71	0-1	1
		3	3	22.58	22.67	22.73	0-1	1
		6	0	21.48	21.61	21.68	0-2	2
	64QAM	1	0	20.99	21.25	21.31	0-2	2
		1	3	21.03	21.11	21.29	0-2	2
		1	5	21.02	21.24	21.27	0-2	2
		3	0	21.45	21.55	21.71	0-2	2
		3	1	21.41	21.59	21.69	0-2	2
		3	3	21.46	21.58	21.66	0-2	2
		6	0	20.37	20.60	20.73	0-3	3
	256QAM	1	0	19.01	19.22	19.29	0-5	5
		1	3	19.05	19.24	19.25	0-5	5
		1	5	18.92	19.06	19.23	0-5	5
		3	0	18.98	19.17	19.22	0-5	5
		3	1	19.03	19.17	19.20	0-5	5
		3	3	18.97	19.13	19.22	0-5	5
		6	0	18.86	19.05	19.21	0-5	5

LTE Band 4 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19965 Ch. 1711.5 MHz	20175 Ch. 1732.5 MHz	20385 Ch. 1753.5 MHz		
3 MHz	QPSK	1	0	23.65	23.95	24.08	0	0
		1	7	23.79	24.11	24.11	0	0
		1	14	23.37	23.96	24.04	0	0
		8	0	22.37	22.52	22.70	0	0
		8	3	22.34	22.52	22.64	0	0
		8	7	22.36	22.59	22.63	0	0
		15	0	22.36	22.58	22.66	0-1	1
	16QAM	1	0	22.20	22.81	22.55	0-1	1
		1	7	22.17	22.29	22.28	0-1	1
		1	14	22.19	22.89	22.42	0-1	1
		8	0	21.50	21.61	21.75	0-1	1
		8	3	21.47	21.64	21.79	0-1	1
		8	7	21.54	21.71	21.81	0-1	1
		15	0	21.42	21.59	21.70	0-2	2
	64QAM	1	0	21.06	21.67	21.83	0-2	2
		1	7	21.08	21.53	21.92	0-2	2
		1	14	21.05	21.26	21.85	0-2	2
		8	0	20.35	20.56	20.80	0-2	2
		8	3	20.42	20.60	20.65	0-2	2
		8	7	20.43	20.66	20.69	0-2	2
		15	0	20.39	20.57	20.68	0-3	3
	256QAM	1	0	19.00	19.11	19.32	0-5	5
		1	7	18.94	19.24	19.36	0-5	5
		1	14	18.99	19.24	19.21	0-5	5
		8	0	18.92	19.06	19.15	0-5	5
		8	3	18.87	19.08	19.15	0-5	5
		8	7	18.88	19.09	19.17	0-5	5
		15	0	18.87	19.08	19.17	0-5	5

LTE Band 4 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19975 Ch. 1712.5 MHz	20175 Ch. 1732.5 MHz	20375 Ch. 1752.5 MHz		
5 MHz	QPSK	1	0	23.90	23.95	24.08	0	0
		1	12	23.90	24.04	24.12	0	0
		1	24	23.33	23.98	23.67	0	0
		12	0	22.47	22.58	22.78	0	0
		12	6	22.47	22.55	22.72	0	0
		12	11	22.43	22.65	22.71	0	0
		25	0	22.45	22.61	22.75	0-1	1
	16QAM	1	0	22.23	22.48	22.79	0-1	1
		1	12	22.31	22.45	22.62	0-1	1
		1	24	22.11	22.90	22.54	0-1	1
		12	0	21.51	21.64	21.77	0-1	1
		12	6	21.51	21.63	21.80	0-1	1
		12	11	21.50	21.72	21.80	0-1	1
		25	0	21.48	21.64	21.75	0-2	2
	64QAM	1	0	21.14	21.71	21.86	0-2	2
		1	12	21.11	21.33	21.92	0-2	2
		1	24	21.10	21.39	21.89	0-2	2
		12	0	20.49	20.58	20.78	0-2	2
		12	6	20.47	20.56	20.75	0-2	2
		12	11	20.39	20.66	20.69	0-2	2
		25	0	20.44	20.59	20.68	0-3	3
	256QAM	1	0	19.06	19.16	19.34	0-5	5
		1	12	18.97	19.27	19.36	0-5	5
		1	24	19.02	19.18	19.29	0-5	5
		12	0	18.94	19.03	19.28	0-5	5
		12	6	18.90	19.05	19.21	0-5	5
		12	11	18.93	19.15	19.21	0-5	5
		25	0	18.92	19.09	19.21	0-5	5

LTE Band 4 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20000 Ch. 1715 MHz	20175 Ch. 1732.5 MHz	20350 Ch. 1750 MHz		
10 MHz	QPSK	1	0	23.85	23.99	24.12	0	0
		1	24	23.73	24.06	24.01	0	0
		1	49	23.41	24.05	24.10	0	0
		25	0	22.40	22.51	22.71	0	0
		25	12	22.36	22.58	22.71	0	0
		25	24	22.42	22.63	22.69	0	0
		50	0	22.45	22.58	22.69	0-1	1
	16QAM	1	0	22.19	22.85	22.59	0-1	1
		1	24	22.15	22.34	22.49	0-1	1
		1	49	22.32	22.51	22.52	0-1	1
		25	0	21.41	21.52	21.71	0-1	1
		25	12	21.37	21.55	21.72	0-1	1
		25	24	21.41	21.63	21.71	0-1	1
		50	0	21.38	21.56	21.68	0-2	2
	64QAM	1	0	21.12	21.33	21.38	0-2	2
		1	24	21.05	21.42	21.79	0-2	2
		1	49	21.08	21.85	21.89	0-2	2
		25	0	20.41	20.50	20.68	0-2	2
		25	12	20.36	20.52	20.69	0-2	2
		25	24	20.39	20.58	20.70	0-2	2
		50	0	20.40	20.58	20.67	0-3	3
	256QAM	1	0	19.15	19.16	19.37	0-5	5
		1	24	18.95	19.20	19.32	0-5	5
		1	49	19.17	19.27	19.37	0-5	5
		25	0	18.87	19.00	19.21	0-5	5
		25	12	18.83	19.03	19.19	0-5	5
		25	24	18.92	19.11	19.18	0-5	5
		50	0	18.92	19.07	19.19	0-5	5

LTE Band 4 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20025 Ch. 1717.5 MHz	20175 Ch. 1732.5 MHz	20325 Ch. 1747.5 MHz		
15 MHz	QPSK	1	0	23.84	23.56	24.10	0	0
		1	36	23.94	24.04	24.15	0	0
		1	74	24.03	23.64	24.12	0	0
		36	0	22.40	22.53	22.74	0	0
		36	18	22.43	22.59	22.72	0	0
		36	39	22.48	22.67	22.75	0	0
		75	0	22.47	22.60	22.75	0-1	1
	16QAM	1	0	22.38	22.26	22.51	0-1	1
		1	36	22.27	22.48	23.04	0-1	1
		1	74	22.42	22.62	22.52	0-1	1
		36	0	21.42	21.51	21.73	0-1	1
		36	18	21.39	21.56	21.69	0-1	1
		36	39	21.47	21.63	21.72	0-1	1
		75	0	21.47	21.59	21.75	0-2	2
	64QAM	1	0	21.22	21.20	21.89	0-2	2
		1	36	21.22	21.31	21.91	0-2	2
		1	74	21.22	21.38	21.91	0-2	2
		36	0	20.44	20.55	20.75	0-2	2
		36	18	20.41	20.59	20.74	0-2	2
		36	39	20.51	20.68	20.74	0-2	2
		75	0	20.45	20.61	20.76	0-3	3
	256QAM	1	0	19.10	19.16	19.36	0-5	5
		1	36	19.08	19.28	19.42	0-5	5
		1	74	19.28	19.31	19.35	0-5	5
		36	0	18.91	19.02	19.22	0-5	5
		36	18	18.87	19.05	19.20	0-5	5
		36	39	18.97	19.17	19.25	0-5	5
		75	0	18.96	19.07	19.26	0-5	5

LTE Band 4 _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]	MPR Allowed Per 3GPP [dB]	MPR [dB]
				20175 Ch. 1732.5 MHz		
20 MHz	QPSK	1	0	23.94	0	0
		1	49	24.03	0	0
		1	99	24.15	0	0
		50	0	22.54	0	0
		50	25	22.62	0	0
		50	49	22.67	0	0
		100	0	22.60	0-1	1
	16QAM	1	0	22.80	0-1	1
		1	49	23.07	0-1	1
		1	99	23.06	0-1	1
		50	0	21.53	0-1	1
		50	25	21.61	0-1	1
		50	49	21.67	0-1	1
		100	0	21.63	0-2	2
	64QAM	1	0	21.71	0-2	2
		1	49	21.75	0-2	2
		1	99	21.39	0-2	2
		50	0	20.54	0-2	2
		50	25	20.64	0-2	2
		50	49	20.68	0-2	2
		100	0	20.61	0-3	3
	256QAM	1	0	19.09	0-5	5
		1	49	19.28	0-5	5
		1	99	19.41	0-5	5
		50	0	19.02	0-5	5
		50	25	19.12	0-5	5
		50	49	19.19	0-5	5
		100	0	19.12	0-5	5

[LTE Band 4 Upper Conducted Power Pmax, ECI=1]

LTE Band 4 Upper _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19957 Ch. 1710.7 MHz	20175 Ch. 1732.5 MHz	20393 Ch. 1754.3 MHz		
1.4 MHz	QPSK	1	0	23.44	23.55	23.44	0	0
		1	3	23.44	23.59	23.33	0	0
		1	5	23.40	23.51	23.39	0	0
		3	0	23.47	23.56	23.43	0	0
		3	1	23.47	23.54	23.40	0	0
		3	3	23.45	23.48	23.38	0	0
		6	0	22.00	22.07	21.96	0-1	1
	16QAM	1	0	22.23	22.45	22.26	0-1	1
		1	3	22.30	22.50	22.20	0-1	1
		1	5	22.23	22.41	22.19	0-1	1
		3	0	22.11	22.17	22.11	0-1	1
		3	1	22.07	22.12	21.99	0-1	1
		3	3	22.14	22.13	22.00	0-1	1
		6	0	21.08	21.11	21.07	0-2	2
	64QAM	1	0	21.15	21.27	21.09	0-2	2
		1	3	21.17	21.22	21.19	0-2	2
		1	5	21.17	21.16	21.06	0-2	2
		3	0	21.12	21.11	20.97	0-2	2
		3	1	21.03	21.06	20.90	0-2	2
		3	3	21.07	21.11	21.02	0-2	2
		6	0	19.98	20.02	19.96	0-3	3
	256QAM	1	0	18.80	18.74	18.65	0-5	5
		1	3	18.74	18.78	18.67	0-5	5
		1	5	18.74	18.76	18.67	0-5	5
		3	0	18.77	18.77	18.65	0-5	5
		3	1	18.76	18.75	18.65	0-5	5
		3	3	18.74	18.75	18.68	0-5	5
		6	0	18.64	18.62	18.55	0-5	5

LTE Band 4 Upper _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19965 Ch. 1711.5 MHz	20175 Ch. 1732.5 MHz	20385 Ch. 1753.5 MHz		
3 MHz	QPSK	1	0	23.43	23.51	23.49	0	0
		1	7	23.40	23.55	23.51	0	0
		1	14	23.39	23.61	23.34	0	0
		8	0	21.99	22.02	22.00	0	0
		8	3	22.01	22.11	21.94	0	0
		8	7	21.99	22.07	21.98	0	0
		15	0	22.01	22.12	22.01	0-1	1
	16QAM	1	0	22.38	22.41	22.28	0-1	1
		1	7	22.39	22.52	22.28	0-1	1
		1	14	22.25	22.43	22.21	0-1	1
		8	0	21.14	21.13	21.10	0-1	1
		8	3	21.08	21.12	21.09	0-1	1
		8	7	21.15	21.15	21.05	0-1	1
		15	0	20.99	21.09	21.00	0-2	2
	64QAM	1	0	21.20	21.17	21.11	0-2	2
		1	7	21.19	21.33	21.20	0-2	2
		1	14	21.20	21.31	21.11	0-2	2
		8	0	20.02	20.09	20.06	0-2	2
		8	3	19.94	20.04	19.99	0-2	2
		8	7	20.00	20.06	19.99	0-2	2
		15	0	20.00	20.07	20.00	0-3	3
	256QAM	1	0	18.74	18.73	18.67	0-5	5
		1	7	18.66	18.79	18.65	0-5	5
		1	14	18.74	18.75	18.66	0-5	5
		8	0	18.65	18.68	18.64	0-5	5
		8	3	18.65	18.66	18.64	0-5	5
		8	7	18.67	18.65	18.61	0-5	5
		15	0	18.63	18.65	18.62	0-5	5

LTE Band 4 Upper _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19975 Ch. 1712.5 MHz	20175 Ch. 1732.5 MHz	20375 Ch. 1752.5 MHz		
5 MHz	QPSK	1	0	23.51	23.54	23.45	0	0
		1	12	23.51	23.63	23.48	0	0
		1	24	23.42	23.55	23.41	0	0
		12	0	22.06	22.11	22.12	0	0
		12	6	22.06	22.10	22.05	0	0
		12	11	22.05	22.13	22.02	0	0
		25	0	22.09	22.16	22.08	0-1	1
	16QAM	1	0	22.41	22.36	22.35	0-1	1
		1	12	22.28	22.51	22.29	0-1	1
		1	24	22.31	22.40	22.32	0-1	1
		12	0	21.12	21.20	21.16	0-1	1
		12	6	21.12	21.16	21.10	0-1	1
		12	11	21.04	21.19	21.08	0-1	1
		25	0	21.11	21.15	21.05	0-2	2
	64QAM	1	0	21.26	21.30	21.22	0-2	2
		1	12	21.24	21.28	21.14	0-2	2
		1	24	21.17	21.31	21.12	0-2	2
		12	0	20.08	20.13	20.13	0-2	2
		12	6	20.08	20.10	20.05	0-2	2
		12	11	20.01	20.11	20.04	0-2	2
		25	0	20.06	20.10	20.02	0-3	3
	256QAM	1	0	18.78	18.82	18.76	0-5	5
		1	12	18.73	18.87	18.78	0-5	5
		1	24	18.70	18.76	18.67	0-5	5
		12	0	18.70	18.69	18.72	0-5	5
		12	6	18.69	18.72	18.66	0-5	5
		12	11	18.65	18.71	18.65	0-5	5
		25	0	18.71	18.72	18.65	0-5	5

LTE Band 4 Upper _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20000 Ch. 1715 MHz	20175 Ch. 1732.5 MHz	20350 Ch. 1750 MHz		
10 MHz	QPSK	1	0	23.58	23.61	23.62	0	0
		1	24	23.48	23.64	23.58	0	0
		1	49	23.57	23.69	23.56	0	0
		25	0	22.08	22.15	22.14	0	0
		25	12	22.03	22.10	22.11	0	0
		25	24	22.07	22.18	22.08	0	0
		50	0	22.08	22.15	22.13	0-1	1
	16QAM	1	0	22.54	22.52	22.45	0-1	1
		1	24	22.27	22.50	22.49	0-1	1
		1	49	22.35	22.48	22.31	0-1	1
		25	0	21.09	21.13	21.17	0-1	1
		25	12	20.97	21.10	21.13	0-1	1
		25	24	21.05	21.14	21.07	0-1	1
		50	0	21.04	21.14	21.13	0-2	2
	64QAM	1	0	21.38	21.41	21.35	0-2	2
		1	24	21.09	21.27	21.26	0-2	2
		1	49	21.26	21.31	21.24	0-2	2
		25	0	20.04	20.09	20.13	0-2	2
		25	12	20.00	20.08	20.10	0-2	2
		25	24	20.05	20.16	20.06	0-2	2
		50	0	20.07	20.15	20.13	0-3	3
	256QAM	1	0	18.80	18.80	18.82	0-5	5
		1	24	18.68	18.85	18.76	0-5	5
		1	49	18.78	18.75	18.73	0-5	5
		25	0	18.67	18.68	18.72	0-5	5
		25	12	18.60	18.65	18.72	0-5	5
		25	24	18.63	18.71	18.67	0-5	5
		50	0	18.68	18.71	18.73	0-5	5

LTE Band 4 Upper _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20025 Ch. 1717.5 MHz	20175 Ch. 1732.5 MHz	20325 Ch. 1747.5 MHz		
15 MHz	QPSK	1	0	23.62	23.55	23.51	0	0
		1	36	23.61	23.60	23.59	0	0
		1	74	23.65	23.68	23.51	0	0
		36	0	22.08	22.12	22.15	0	0
		36	18	22.03	22.13	22.10	0	0
		36	39	22.08	22.16	22.08	0	0
		75	0	22.10	22.19	22.13	0-1	1
	16QAM	1	0	22.43	22.45	22.55	0-1	1
		1	36	22.44	22.50	22.43	0-1	1
		1	74	22.49	22.54	22.31	0-1	1
		36	0	21.07	21.13	21.15	0-1	1
		36	18	21.04	21.12	21.10	0-1	1
		36	39	21.06	21.20	21.10	0-1	1
		75	0	21.07	21.17	21.12	0-2	2
	64QAM	1	0	21.33	21.32	21.34	0-2	2
		1	36	21.21	21.40	21.32	0-2	2
		1	74	21.31	21.39	21.20	0-2	2
		36	0	20.10	20.14	20.18	0-2	2
		36	18	20.05	20.13	20.13	0-2	2
		36	39	20.12	20.19	20.10	0-2	2
		75	0	20.11	20.17	20.12	0-3	3
	256QAM	1	0	18.82	18.84	18.85	0-5	5
		1	36	18.72	18.86	18.83	0-5	5
		1	74	18.78	18.86	18.68	0-5	5
		36	0	18.65	18.66	18.72	0-5	5
		36	18	18.64	18.72	18.70	0-5	5
		36	39	18.66	18.68	18.69	0-5	5
		75	0	18.65	18.73	18.73	0-5	5

LTE Band 4 Upper _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]	MPR Allowed Per 3GPP [dB]	MPR [dB]
				20175 Ch. 1732.5 MHz		
20 MHz	QPSK	1	0	23.69	0	0
		1	49	23.63	0	0
		1	99	23.65	0	0
		50	0	22.16	0	0
		50	25	22.19	0	0
		50	49	22.21	0	0
		100	0	22.14	0-1	1
	16QAM	1	0	22.38	0-1	1
		1	49	22.50	0-1	1
		1	99	22.55	0-1	1
		50	0	21.14	0-1	1
		50	25	21.18	0-1	1
		50	49	21.21	0-1	1
		100	0	21.14	0-2	2
	64QAM	1	0	21.34	0-2	2
		1	49	21.36	0-2	2
		1	99	21.41	0-2	2
		50	0	20.12	0-2	2
		50	25	20.16	0-2	2
		50	49	20.20	0-2	2
		100	0	20.15	0-3	3
	256QAM	1	0	18.84	0-5	5
		1	49	18.88	0-5	5
		1	99	18.85	0-5	5
		50	0	18.69	0-5	5
		50	25	18.73	0-5	5
		50	49	18.75	0-5	5
		100	0	18.68	0-5	5

[LTE Band 5 Conducted Power Pmax, ECI=0, 1, 2, 3]

LTE Band 5 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20407 Ch. 824.7 MHz	20525 Ch. 836.5 MHz	20643 Ch. 848.3 MHz		
1.4 MHz	QPSK	1	0	24.01	23.90	23.73	0	0
		1	3	24.00	23.86	23.73	0	0
		1	5	23.89	23.87	23.75	0	0
		3	0	23.96	23.92	23.87	0	0
		3	1	23.93	23.89	23.75	0	0
		3	3	23.99	23.91	23.79	0	0
		6	0	22.96	22.93	22.77	0-1	1
	16QAM	1	0	23.25	23.19	23.07	0-1	1
		1	3	23.13	23.29	23.08	0-1	1
		1	5	23.25	23.27	23.07	0-1	1
		3	0	22.90	23.05	22.95	0-1	1
		3	1	22.84	23.02	22.87	0-1	1
		3	3	22.91	22.92	22.89	0-1	1
		6	0	22.17	22.11	22.05	0-2	2
	64QAM	1	0	22.32	22.18	22.04	0-2	2
		1	3	22.20	22.29	22.15	0-2	2
		1	5	22.30	22.23	22.19	0-2	2
		3	0	22.25	22.12	22.03	0-2	2
		3	1	22.11	22.11	22.05	0-2	2
		3	3	22.20	22.13	22.00	0-2	2
		6	0	21.10	21.04	21.03	0-3	3
	256QAM	1	0	19.23	19.21	19.06	0-5	5
		1	3	19.21	19.21	18.96	0-5	5
		1	5	19.14	19.17	19.01	0-5	5
		3	0	19.14	19.13	19.04	0-5	5
		3	1	19.22	19.16	19.04	0-5	5
		3	3	19.18	19.12	19.04	0-5	5
		6	0	19.08	19.12	18.95	0-5	5

LTE Band 5 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20415 Ch. 825.5 MHz	20525 Ch. 836.5 MHz	20635 Ch. 847.5 MHz		
3 MHz	QPSK	1	0	23.90	23.88	23.76	0	0
		1	7	23.98	24.01	23.85	0	0
		1	14	23.85	23.84	23.71	0	0
		8	0	22.98	22.93	22.81	0	0
		8	3	22.96	22.89	22.78	0	0
		8	7	23.02	22.90	22.78	0	0
		15	0	22.95	22.94	22.84	0-1	1
	16QAM	1	0	23.31	23.21	23.07	0-1	1
		1	7	23.41	23.36	23.18	0-1	1
		1	14	23.32	23.18	23.05	0-1	1
		8	0	22.20	22.19	22.11	0-1	1
		8	3	22.16	22.17	22.06	0-1	1
		8	7	22.25	22.16	22.08	0-1	1
		15	0	22.10	22.11	22.01	0-2	2
	64QAM	1	0	22.28	22.25	22.08	0-2	2
		1	7	22.25	22.30	22.28	0-2	2
		1	14	22.22	22.31	22.12	0-2	2
		8	0	21.12	21.07	21.03	0-2	2
		8	3	21.08	21.11	20.92	0-2	2
		8	7	21.13	21.00	21.01	0-2	2
		15	0	21.10	21.10	21.00	0-3	3
	256QAM	1	0	19.20	19.19	19.07	0-5	5
		1	7	19.20	18.97	19.03	0-5	5
		1	14	19.17	19.10	19.01	0-5	5
		8	0	19.07	19.12	18.99	0-5	5
		8	3	19.06	19.05	18.95	0-5	5
		8	7	19.10	19.02	18.95	0-5	5
		15	0	19.04	19.04	18.94	0-5	5

LTE Band 5 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20425 Ch. 826.5 MHz	20525 Ch. 836.5 MHz	20625 Ch. 846.5 MHz		
5 MHz	QPSK	1	0	23.97	23.87	23.88	0	0
		1	12	24.05	24.08	23.88	0	0
		1	24	23.89	23.90	23.77	0	0
		12	0	23.02	23.00	22.92	0	0
		12	6	23.02	22.93	22.88	0	0
		12	11	22.98	22.91	22.87	0	0
		25	0	23.02	22.97	22.90	0-1	1
	16QAM	1	0	23.31	23.24	23.21	0-1	1
		1	12	23.41	23.37	23.12	0-1	1
		1	24	23.24	23.25	23.22	0-1	1
		12	0	22.22	22.11	22.10	0-1	1
		12	6	22.20	22.15	22.07	0-1	1
		12	11	22.20	22.13	22.06	0-1	1
		25	0	22.16	22.12	22.04	0-2	2
	64QAM	1	0	22.35	22.29	22.18	0-2	2
		1	12	22.25	22.24	22.26	0-2	2
		1	24	22.28	22.30	22.15	0-2	2
		12	0	21.16	21.11	21.05	0-2	2
		12	6	21.14	21.11	21.08	0-2	2
		12	11	21.15	21.10	21.03	0-2	2
		25	0	21.15	21.08	20.99	0-3	3
	256QAM	1	0	19.14	19.17	19.22	0-5	5
		1	12	19.20	19.21	19.05	0-5	5
		1	24	19.19	19.24	19.10	0-5	5
		12	0	19.11	19.04	18.98	0-5	5
		12	6	19.08	19.07	19.02	0-5	5
		12	11	19.09	19.03	18.97	0-5	5
		25	0	19.08	19.06	19.02	0-5	5

LTE Band 5 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]	MPR Allowed Per 3GPP [dB]	MPR [dB]
				20525 Ch. 836.5 MHz		
10 MHz	QPSK	1	0	23.96	0	0
		1	24	23.90	0	0
		1	49	23.92	0	0
		25	0	23.02	0	0
		25	12	22.93	0	0
		25	24	22.92	0	0
		50	0	22.95	0-1	1
	16QAM	1	0	23.38	0-1	1
		1	24	23.21	0-1	1
		1	49	23.32	0-1	1
		25	0	22.08	0-1	1
		25	12	22.03	0-1	1
		25	24	22.05	0-1	1
		50	0	22.04	0-2	2
	64QAM	1	0	22.28	0-2	2
		1	24	22.26	0-2	2
		1	49	22.26	0-2	2
		25	0	21.06	0-2	2
		25	12	21.01	0-2	2
		25	24	20.99	0-2	2
		50	0	21.02	0-3	3
	256QAM	1	0	19.33	0-5	5
		1	24	19.18	0-5	5
		1	49	19.20	0-5	5
		25	0	19.10	0-5	5
		25	12	18.99	0-5	5
		25	24	19.01	0-5	5
		50	0	19.03	0-5	5

[LTE Band 12 Conducted Power Pmax, ECI=0, 1, 2, 3]

LTE Band 12 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				23017 Ch. 699.7 MHz	23095 Ch. 707.5 MHz	23173 Ch. 715.3 MHz		
1.4 MHz	QPSK	1	0	23.49	23.64	23.76	0	0
		1	3	23.53	23.64	23.76	0	0
		1	5	23.53	23.66	23.77	0	0
		3	0	23.45	23.62	23.74	0	0
		3	1	23.50	23.63	23.69	0	0
		3	3	23.49	23.64	23.72	0	0
		6	0	22.52	22.65	22.72	0-1	1
	16QAM	1	0	22.85	23.12	22.96	0-1	1
		1	3	22.92	22.99	23.06	0-1	1
		1	5	22.92	23.01	23.10	0-1	1
		3	0	22.57	22.85	22.86	0-1	1
		3	1	22.66	22.75	22.76	0-1	1
		3	3	22.69	22.73	22.92	0-1	1
		6	0	21.60	21.67	21.85	0-2	2
	64QAM	1	0	21.75	21.84	21.95	0-2	2
		1	3	21.71	21.77	21.92	0-2	2
		1	5	21.71	21.72	21.90	0-2	2
		3	0	21.58	21.70	21.79	0-2	2
		3	1	21.57	21.70	21.82	0-2	2
		3	3	21.61	21.70	21.87	0-2	2
		6	0	20.58	20.67	20.70	0-3	3
	256QAM	1	0	18.62	18.85	18.74	0-5	5
		1	3	18.60	18.70	18.80	0-5	5
		1	5	18.63	18.82	18.78	0-5	5
		3	0	18.60	18.73	18.76	0-5	5
		3	1	18.65	18.76	18.78	0-5	5
		3	3	18.60	18.70	18.84	0-5	5
		6	0	18.55	18.73	18.67	0-5	5

LTE Band 12_ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				23025 Ch. 700.5 MHz	23095 Ch. 707.5 MHz	23165 Ch. 714.5 MHz		
3 MHz	QPSK	1	0	23.49	23.62	23.61	0	0
		1	7	23.57	23.63	23.64	0	0
		1	14	23.60	23.57	23.74	0	0
		8	0	22.57	22.64	22.72	0	0
		8	3	22.60	22.68	22.69	0	0
		8	7	22.58	22.64	22.76	0	0
		15	0	22.56	22.67	22.75	0-1	1
	16QAM	1	0	22.89	23.12	22.99	0-1	1
		1	7	22.86	23.06	23.14	0-1	1
		1	14	22.88	22.91	23.20	0-1	1
		8	0	21.68	21.73	21.81	0-1	1
		8	3	21.68	21.71	21.81	0-1	1
		8	7	21.69	21.73	21.88	0-1	1
		15	0	21.59	21.71	21.79	0-2	2
	64QAM	1	0	21.68	21.80	21.86	0-2	2
		1	7	21.74	21.88	21.81	0-2	2
		1	14	21.74	21.78	21.92	0-2	2
		8	0	20.59	20.65	20.74	0-2	2
		8	3	20.59	20.68	20.70	0-2	2
		8	7	20.55	20.68	20.76	0-2	2
		15	0	20.58	20.67	20.74	0-3	3
	256QAM	1	0	18.66	18.73	18.71	0-5	5
		1	7	18.67	18.78	18.80	0-5	5
		1	14	18.64	18.80	18.83	0-5	5
		8	0	18.60	18.67	18.70	0-5	5
		8	3	18.57	18.66	18.68	0-5	5
		8	7	18.56	18.67	18.67	0-5	5
		15	0	18.54	18.66	18.74	0-5	5

LTE Band 12_ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				23035 Ch. 701.5 MHz	23095 Ch. 707.5 MHz	23155 Ch. 713.5 MHz		
5 MHz	QPSK	1	0	23.52	23.67	23.60	0	0
		1	12	23.54	23.66	23.73	0	0
		1	24	23.66	23.58	23.80	0	0
		12	0	22.59	22.66	22.78	0	0
		12	6	22.62	22.64	22.71	0	0
		12	11	22.63	22.65	22.73	0	0
		25	0	22.63	22.67	22.78	0-1	1
	16QAM	1	0	22.88	22.91	22.97	0-1	1
		1	12	22.97	22.98	23.06	0-1	1
		1	24	22.99	22.95	23.08	0-1	1
		12	0	21.65	21.71	21.80	0-1	1
		12	6	21.63	21.65	21.77	0-1	1
		12	11	21.68	21.69	21.79	0-1	1
		25	0	21.62	21.65	21.79	0-2	2
	64QAM	1	0	21.79	21.85	21.76	0-2	2
		1	12	21.82	21.92	21.91	0-2	2
		1	24	21.83	21.85	21.91	0-2	2
		12	0	20.63	20.69	20.71	0-2	2
		12	6	20.68	20.62	20.72	0-2	2
		12	11	20.63	20.63	20.71	0-2	2
		25	0	20.61	20.63	20.71	0-3	3
	256QAM	1	0	18.68	18.70	18.71	0-5	5
		1	12	18.67	18.84	18.78	0-5	5
		1	24	18.73	18.70	18.79	0-5	5
		12	0	18.55	18.63	18.70	0-5	5
		12	6	18.60	18.61	18.66	0-5	5
		12	11	18.57	18.61	18.69	0-5	5
		25	0	18.59	18.58	18.70	0-5	5

LTE Band 12 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]	MPR Allowed Per 3GPP [dB]	MPR [dB]
				23095 Ch. 707.5 MHz		
10 MHz	QPSK	1	0	23.60	0	0
		1	24	23.59	0	0
		1	49	23.55	0	0
		25	0	22.58	0	0
		25	12	22.57	0	0
		25	24	22.52	0	0
		50	0	22.56	0-1	1
	16QAM	1	0	23.03	0-1	1
		1	24	22.93	0-1	1
		1	49	22.85	0-1	1
		25	0	21.61	0-1	1
		25	12	21.58	0-1	1
		25	24	21.54	0-1	1
		50	0	21.54	0-2	2
	64QAM	1	0	21.89	0-2	2
		1	24	21.85	0-2	2
		1	49	21.81	0-2	2
		25	0	20.57	0-2	2
		25	12	20.56	0-2	2
		25	24	20.53	0-2	2
		50	0	20.56	0-3	3
	256QAM	1	0	18.82	0-5	5
		1	24	18.69	0-5	5
		1	49	18.68	0-5	5
		25	0	18.57	0-5	5
		25	12	18.53	0-5	5
		25	24	18.49	0-5	5
		50	0	18.51	0-5	5

[LTE Band 17 Conducted Power Pmax, ECI=1]

LTE Band 17 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				23755 Ch. 706.5 MHz	23790 Ch. 710 MHz	23825 Ch. 713.5 MHz		
5 MHz	QPSK	1	0	23.59	23.64	23.71	0	0
		1	12	23.65	23.71	23.75	0	0
		1	24	23.74	23.71	23.75	0	0
		12	0	22.64	22.71	22.77	0	0
		12	6	22.67	22.69	22.73	0	0
		12	11	22.69	22.68	22.76	0	0
		25	0	22.66	22.72	22.80	0-1	1
	16QAM	1	0	22.97	23.05	23.07	0-1	1
		1	12	22.82	23.03	23.16	0-1	1
		1	24	23.01	23.04	23.17	0-1	1
		12	0	21.65	21.78	21.84	0-1	1
		12	6	21.65	21.75	21.78	0-1	1
		12	11	21.67	21.76	21.83	0-1	1
		25	0	21.65	21.71	21.81	0-2	2
	64QAM	1	0	21.84	21.80	21.79	0-2	2
		1	12	21.82	21.85	21.85	0-2	2
		1	24	21.96	21.86	22.02	0-2	2
		12	0	20.65	20.75	20.75	0-2	2
		12	6	20.69	20.70	20.77	0-2	2
		12	11	20.71	20.69	20.70	0-2	2
		25	0	20.65	20.67	20.75	0-3	3
	256QAM	1	0	18.75	18.70	18.85	0-5	5
		1	12	18.73	18.88	18.88	0-5	5
		1	24	18.82	18.87	18.89	0-5	5
		12	0	18.56	18.69	18.72	0-5	5
		12	6	18.60	18.69	18.70	0-5	5
		12	11	18.64	18.63	18.72	0-5	5
		25	0	18.63	18.64	18.75	0-5	5

LTE Band 17 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]	MPR Allowed Per 3GPP [dB]	MPR [dB]
				23790 Ch. 710 MHz		
10 MHz	QPSK	1	0	23.66	0	0
		1	24	23.58	0	0
		1	49	23.76	0	0
		25	0	22.67	0	0
		25	12	22.66	0	0
		25	24	22.64	0	0
		50	0	22.70	0-1	1
	16QAM	1	0	23.02	0-1	1
		1	24	22.98	0-1	1
		1	49	23.13	0-1	1
		25	0	21.67	0-1	1
		25	12	21.68	0-1	1
		25	24	21.64	0-1	1
		50	0	21.68	0-2	2
	64QAM	1	0	21.97	0-2	2
		1	24	21.85	0-2	2
		1	49	22.00	0-2	2
		25	0	20.65	0-2	2
		25	12	20.64	0-2	2
		25	24	20.61	0-2	2
		50	0	20.67	0-3	3
	256QAM	1	0	18.85	0-5	5
		1	24	18.71	0-5	5
		1	49	18.86	0-5	5
		25	0	18.61	0-5	5
		25	12	18.67	0-5	5
		25	24	18.60	0-5	5
		50	0	18.62	0-5	5

[LTE Band 26 Conducted Power Pmax, ECI=0,1, 2, 3]

LTE Band 26 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				26697 Ch. 814.7 MHz	26865 Ch. 831.5 MHz	27033 Ch. 848.3 MHz		
1.4 MHz	QPSK	1	0	23.92	23.83	23.77	0	0
		1	3	23.98	23.77	23.73	0	0
		1	5	23.94	23.78	23.82	0	0
		3	0	24.01	23.85	23.80	0	0
		3	1	24.02	23.84	23.78	0	0
		3	3	24.06	23.85	23.82	0	0
		6	0	23.12	23.00	22.94	0-1	1
	16QAM	1	0	23.36	23.31	23.31	0-1	1
		1	3	23.39	23.16	23.19	0-1	1
		1	5	23.46	23.35	23.26	0-1	1
		3	0	23.30	23.09	23.09	0-1	1
		3	1	23.25	23.18	23.07	0-1	1
		3	3	23.42	23.15	23.04	0-1	1
		6	0	22.24	22.10	22.10	0-2	2
	64QAM	1	0	22.31	22.24	22.12	0-2	2
		1	3	22.32	22.26	22.06	0-2	2
		1	5	22.29	22.17	22.10	0-2	2
		3	0	22.22	22.04	22.00	0-2	2
		3	1	22.21	22.10	21.93	0-2	2
		3	3	22.21	22.08	21.98	0-2	2
		6	0	21.18	21.09	21.02	0-3	3
	256QAM	1	0	19.19	19.13	18.99	0-5	5
		1	3	19.24	19.19	19.02	0-5	5
		1	5	19.22	19.18	18.99	0-5	5
		3	0	19.17	19.09	19.07	0-5	5
		3	1	19.20	19.16	19.08	0-5	5
		3	3	19.24	19.08	19.03	0-5	5
		6	0	19.15	19.03	19.03	0-5	5

LTE Band 26 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				26705 Ch. 815.5 MHz	26865 Ch. 831.5 MHz	27025 Ch. 847.5 MHz		
3 MHz	QPSK	1	0	24.00	23.80	23.80	0	0
		1	7	23.99	23.99	23.80	0	0
		1	14	24.02	23.80	23.85	0	0
		8	0	23.11	23.01	22.98	0	0
		8	3	23.13	23.01	23.00	0	0
		8	7	23.16	23.03	22.95	0	0
		15	0	23.10	23.04	22.96	0-1	1
	16QAM	1	0	23.47	23.41	23.31	0-1	1
		1	7	23.36	23.33	23.15	0-1	1
		1	14	23.48	23.31	23.24	0-1	1
		8	0	22.24	22.20	22.16	0-1	1
		8	3	22.21	22.15	22.10	0-1	1
		8	7	22.26	22.20	22.11	0-1	1
		15	0	22.14	22.06	22.01	0-2	2
	64QAM	1	0	22.33	22.26	22.10	0-2	2
		1	7	22.34	22.22	22.20	0-2	2
		1	14	22.33	22.24	22.11	0-2	2
		8	0	21.18	21.07	21.07	0-2	2
		8	3	21.12	21.11	20.98	0-2	2
		8	7	21.20	21.08	21.05	0-2	2
		15	0	21.13	21.07	21.00	0-3	3
	256QAM	1	0	19.23	19.24	19.09	0-5	5
		1	7	19.28	19.14	19.07	0-5	5
		1	14	19.12	19.12	19.07	0-5	5
		8	0	19.12	19.09	19.00	0-5	5
		8	3	19.12	19.04	18.99	0-5	5
		8	7	19.17	19.03	18.99	0-5	5
		15	0	19.14	19.01	18.97	0-5	5

LTE Band 26 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				26715 Ch. 816.5 MHz	26865 Ch. 831.5 MHz	27015 Ch. 846.5 MHz		
5 MHz	QPSK	1	0	24.03	23.95	23.95	0	0
		1	12	23.98	23.92	23.85	0	0
		1	24	24.08	23.89	23.81	0	0
		12	0	23.16	23.11	23.06	0	0
		12	6	23.25	23.08	23.01	0	0
		12	11	23.18	23.09	23.02	0	0
		25	0	23.20	23.09	23.03	0-1	1
	16QAM	1	0	23.37	23.45	23.34	0-1	1
		1	12	23.48	23.35	23.26	0-1	1
		1	24	23.41	23.30	23.34	0-1	1
		12	0	22.22	22.14	22.17	0-1	1
		12	6	22.23	22.17	22.10	0-1	1
		12	11	22.23	22.10	22.11	0-1	1
		25	0	22.19	22.11	22.05	0-2	2
	64QAM	1	0	22.41	22.33	22.13	0-2	2
		1	12	22.31	22.30	22.20	0-2	2
		1	24	22.35	22.29	22.21	0-2	2
		12	0	21.20	21.17	21.11	0-2	2
		12	6	21.21	21.10	21.06	0-2	2
		12	11	21.18	21.13	21.06	0-2	2
		25	0	21.16	21.09	21.04	0-3	3
	256QAM	1	0	19.32	19.28	19.16	0-5	5
		1	12	19.28	19.25	19.09	0-5	5
		1	24	19.28	19.20	19.16	0-5	5
		12	0	19.11	19.11	19.05	0-5	5
		12	6	19.15	19.12	18.97	0-5	5
		12	11	19.16	19.05	18.98	0-5	5
		25	0	19.15	19.10	19.00	0-5	5

LTE Band 26 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				26740 Ch. 819 MHz	26865 Ch. 831.5 MHz	26990 Ch. 844 MHz		
10 MHz	QPSK	1	0	24.07	24.04	24.00	0	0
		1	24	24.10	23.87	23.94	0	0
		1	49	24.03	23.91	23.96	0	0
		25	0	23.19	23.07	23.08	0	0
		25	12	23.17	23.07	23.04	0	0
		25	24	23.15	23.06	23.01	0	0
		50	0	23.20	23.06	23.03	0-1	1
	16QAM	1	0	23.61	23.35	23.34	0-1	1
		1	24	23.46	23.30	23.32	0-1	1
		1	49	23.59	23.25	23.50	0-1	1
		25	0	22.21	22.04	22.09	0-1	1
		25	12	22.15	22.08	22.06	0-1	1
		25	24	22.16	22.08	22.00	0-1	1
		50	0	22.17	22.05	22.01	0-2	2
	64QAM	1	0	22.43	22.32	22.29	0-2	2
		1	24	22.32	22.25	22.22	0-2	2
		1	49	22.29	22.17	22.20	0-2	2
		25	0	21.16	21.04	21.04	0-2	2
		25	12	21.17	21.02	21.02	0-2	2
		25	24	21.13	21.05	21.00	0-2	2
		50	0	21.17	21.05	21.02	0-3	3
	256QAM	1	0	19.36	19.23	19.20	0-5	5
		1	24	19.32	19.12	19.11	0-5	5
		1	49	19.25	19.22	19.20	0-5	5
		25	0	19.19	19.03	19.03	0-5	5
		25	12	19.16	19.03	19.00	0-5	5
		25	24	19.12	19.05	18.97	0-5	5
		50	0	19.16	19.05	19.00	0-5	5

LTE Band 26 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]	MPR Allowed Per 3GPP [dB]	MPR [dB]
				26865 Ch. 831.5 MHz		
15 MHz	QPSK	1	0	24.07	0	0
		1	36	24.08	0	0
		1	74	23.93	0	0
		36	0	23.11	0	0
		36	18	23.08	0	0
		36	39	23.08	0	0
		75	0	23.10	0-1	1
	16QAM	1	0	23.51	0-1	1
		1	36	23.41	0-1	1
		1	74	23.37	0-1	1
		36	0	22.13	0-1	1
		36	18	22.11	0-1	1
		36	39	22.08	0-1	1
		75	0	22.11	0-2	2
	64QAM	1	0	22.40	0-2	2
		1	36	22.32	0-2	2
		1	74	22.20	0-2	2
		36	0	21.14	0-2	2
		36	18	21.10	0-2	2
		36	39	21.10	0-2	2
		75	0	21.13	0-3	3
	256QAM	1	0	19.33	0-5	5
		1	36	19.24	0-5	5
		1	74	19.18	0-5	5
		36	0	19.10	0-5	5
		36	18	19.07	0-5	5
		36	39	19.06	0-5	5
		75	0	19.10	0-5	5

[LTE Band 41 Conducted Power Pmax, ECI=1]

LTE Band 41 _ 5 MHz Bandwidth

Band width	Modulation	RB Size	RB Offset	Max. Average Power [dBm]					MPR Allowed Per GPP [dB]	MPR [dB]
				39750 Ch. 2506.0 MHz	40185 Ch. 2549.5 MHz	40620 Ch. 2593.0 MHz	41055 Ch. 2636.5 MHz	41490 Ch. 2680.0 MHz		
5 MHz	QPSK	1	0	22.86	22.95	22.40	22.39	22.59	0	0
		1	12	22.84	22.92	22.42	22.41	22.62	0	0
		1	24	22.75	22.85	22.37	22.42	22.59	0	0
		12	0	21.97	21.97	21.43	21.50	21.69	0-1	1
		12	6	21.97	21.92	21.45	21.48	21.68	0-1	1
		12	11	21.97	21.95	21.42	21.47	21.68	0-1	1
		25	0	21.97	21.94	21.45	21.51	21.69	0-1	1
	16QAM	1	0	21.94	22.00	21.44	21.47	21.67	0-1	1
		1	12	21.96	21.99	21.47	21.49	21.67	0-1	1
		1	24	22.04	21.94	21.46	21.49	21.70	0-1	1
		12	0	20.93	20.92	20.36	20.42	20.61	0-2	2
		12	6	20.91	20.87	20.36	20.41	20.62	0-2	2
		12	11	20.93	20.90	20.35	20.41	20.60	0-2	2
		25	0	21.05	21.02	20.52	20.54	20.73	0-2	2
	64QAM	1	0	20.72	20.70	20.14	20.19	20.38	0-2	2
		1	12	20.72	20.69	20.20	20.20	20.41	0-2	2
		1	24	20.77	20.64	20.14	20.20	20.12	0-2	2
		12	0	19.95	19.96	19.41	19.31	19.62	0-3	3
		12	6	19.94	19.91	19.41	19.43	19.61	0-3	3
		12	11	19.93	19.92	19.41	19.44	19.62	0-3	3
		25	0	20.00	19.97	19.47	19.49	19.67	0-3	3
	256QAM	1	0	17.84	17.85	17.30	17.32	17.51	0-5	5
		1	12	17.82	17.82	17.32	17.34	17.51	0-5	5
		1	24	17.90	17.77	17.31	17.32	17.50	0-5	5
		12	0	18.11	18.12	17.59	17.60	17.77	0-5	5
		12	6	18.09	18.09	17.58	17.60	17.78	0-5	5
		12	11	18.10	18.12	17.58	17.58	17.77	0-5	5
		25	0	18.04	18.06	17.55	17.57	17.73	0-5	5

LTE Band 41 _ 10 MHz Bandwidth

Band width	Modulation	RB Size	RB Offset	Max. Average Power [dBm]					MPR Allowed Per GPP [dB]	MPR [dB]
				39750 Ch. 2506.0 MHz	40185 Ch. 2549.5 MHz	40620 Ch. 2593.0 MHz	41055 Ch. 2636.5 MHz	41490 Ch. 2680.0 MHz		
10 MHz	QPSK	1	0	22.82	23.01	22.44	22.44	22.64	0	0
		1	24	22.83	22.86	22.36	22.36	22.59	0	0
		1	49	22.98	22.85	22.36	22.46	22.71	0	0
		25	0	21.90	21.97	21.42	21.46	21.72	0-1	1
		25	12	21.92	21.91	21.37	21.45	21.64	0-1	1
		25	24	21.96	21.91	21.40	21.46	21.71	0-1	1
		50	0	21.97	21.95	21.43	21.49	21.72	0-1	1
	16QAM	1	0	22.01	22.08	21.54	21.58	21.74	0-1	1
		1	24	22.01	21.96	21.49	21.52	21.68	0-1	1
		1	49	22.19	21.98	21.51	21.59	21.75	0-1	1
		25	0	20.96	21.01	20.48	20.52	20.70	0-2	2
		25	12	20.98	20.95	20.42	20.48	20.68	0-2	2
		25	24	21.04	20.96	20.45	20.48	20.70	0-2	2
		50	0	21.02	20.98	20.46	20.54	20.71	0-2	2
	64QAM	1	0	20.70	20.79	20.25	20.22	20.43	0-2	2
		1	24	20.63	20.66	20.13	20.15	20.34	0-2	2
		1	49	20.81	20.66	20.19	20.23	20.46	0-2	2
		25	0	19.91	20.01	19.44	19.54	19.65	0-3	3
		25	12	19.95	19.91	19.38	19.51	19.62	0-3	3
		25	24	19.97	19.92	19.39	19.53	19.64	0-3	3
		50	0	20.05	20.01	19.48	19.51	19.72	0-3	3
	256QAM	1	0	17.83	17.97	17.39	17.40	17.57	0-5	5
		1	24	17.85	17.84	17.33	17.34	17.53	0-5	5
		1	49	17.98	17.84	17.36	17.43	17.60	0-5	5
		25	0	17.99	18.09	17.54	17.56	17.72	0-5	5
		25	12	18.01	17.98	17.47	17.51	17.67	0-5	5
		25	24	18.06	18.02	17.50	17.55	17.71	0-5	5
		50	0	18.07	18.08	17.55	17.59	17.76	0-5	5

LTE Band 41 _ 15 MHz Bandwidth

Band width	Modulation	RB Size	RB Offset	Max. Average Power [dBm]					MPR Allowed Per GPP [dB]	MPR [dB]
				39750 Ch. 2506.0 MHz	40185 Ch. 2549.5 MHz	40620 Ch. 2593.0 MHz	41055 Ch. 2636.5 MHz	41490 Ch. 2680.0 MHz		
15 MHz	QPSK	1	0	22.82	23.03	22.45	22.55	22.79	0	0
		1	36	22.93	22.96	22.43	22.51	22.74	0	0
		1	74	23.01	22.79	22.34	22.61	22.84	0	0
		36	0	21.96	22.04	21.48	21.56	21.86	0-1	1
		36	18	22.01	21.96	21.43	21.61	21.76	0-1	1
		36	39	22.05	21.91	21.40	21.59	21.85	0-1	1
		75	0	22.00	21.97	21.46	21.63	21.88	0-1	1
	16QAM	1	0	21.89	22.15	21.56	21.73	21.88	0-1	1
		1	36	21.98	22.04	21.56	21.66	21.80	0-1	1
		1	74	22.18	21.94	21.47	21.70	21.86	0-1	1
		36	0	20.88	20.99	20.42	20.62	20.84	0-2	2
		36	18	20.94	20.90	20.38	20.64	20.78	0-2	2
		36	39	20.99	20.86	20.36	20.58	20.85	0-2	2
		75	0	21.03	21.00	20.50	20.67	20.87	0-2	2
	64QAM	1	0	20.64	20.81	20.24	20.37	20.53	0-2	2
		1	36	20.69	20.68	20.21	20.28	20.47	0-2	2
		1	74	20.84	20.59	20.14	20.37	20.62	0-2	2
		36	0	19.95	20.07	19.49	19.69	19.76	0-3	3
		36	18	20.00	19.97	19.44	19.67	19.74	0-3	3
		36	39	20.07	19.93	19.42	19.65	19.77	0-3	3
		75	0	20.05	20.03	19.52	19.61	19.82	0-3	3
	256QAM	1	0	17.84	18.01	17.36	17.54	17.67	0-5	5
		1	36	17.88	17.87	17.33	17.44	17.69	0-5	5
		1	74	18.03	17.78	17.24	17.55	17.72	0-5	5
		36	0	17.98	18.12	17.50	17.66	17.85	0-5	5
		36	18	18.03	18.05	17.46	17.65	17.82	0-5	5
		36	39	18.11	17.99	17.49	17.66	17.87	0-5	5
		75	0	18.08	18.08	17.54	17.72	17.87	0-5	5

LTE Band 41 _ 20 MHz Bandwidth

Band width	Modulation	RB Size	RB Offset	Max. Average Power [dBm]					MPR Allowed Per GPP [dB]	MPR [dB]
				39750 Ch. 2506.0 MHz	40185 Ch. 2549.5 MHz	40620 Ch. 2593.0 MHz	41055 Ch. 2636.5 MHz	41490 Ch. 2680.0 MHz		
20 MHz	QPSK	1	0	22.87	23.08	22.52	22.56	22.79	0	0
		1	49	22.90	22.96	22.43	22.46	22.75	0	0
		1	99	23.05	22.80	22.32	22.58	22.85	0	0
		50	0	22.00	22.07	21.55	21.61	21.87	0-1	1
		50	25	22.03	22.00	21.47	21.59	21.74	0-1	1
		50	49	22.06	21.98	21.43	21.62	21.81	0-1	1
		100	0	22.01	21.99	21.46	21.61	21.86	0-1	1
	16QAM	1	0	22.00	22.19	21.62	21.74	21.89	0-1	1
		1	49	22.13	22.06	21.54	21.67	21.80	0-1	1
		1	99	22.26	21.92	21.46	21.75	21.89	0-1	1
		50	0	21.04	21.10	20.56	20.67	20.80	0-2	2
		50	25	21.07	21.03	20.49	20.64	20.80	0-2	2
		50	49	21.12	20.99	20.47	20.60	20.84	0-2	2
		100	0	21.08	21.05	20.54	20.70	20.84	0-2	2
	64QAM	1	0	20.70	20.86	20.29	20.38	20.57	0-2	2
		1	49	20.71	20.74	20.24	20.25	20.49	0-2	2
		1	99	20.88	20.58	20.14	20.37	20.59	0-2	2
		50	0	20.07	20.13	19.61	19.68	19.76	0-3	3
		50	25	20.09	20.07	19.53	19.65	19.72	0-3	3
		50	49	20.14	20.03	19.52	19.66	19.77	0-3	3
		100	0	20.06	20.06	19.53	19.64	19.84	0-3	3
	256QAM	1	0	17.88	18.03	17.47	17.51	17.68	0-5	5
		1	49	17.89	17.88	17.43	17.49	17.63	0-5	5
		1	99	18.04	17.77	17.32	17.54	17.72	0-5	5
		50	0	18.09	18.20	17.67	17.67	17.87	0-5	5
		50	25	18.13	18.11	17.59	17.67	17.78	0-5	5
		50	49	18.19	18.10	17.57	17.66	17.81	0-5	5
		100	0	18.09	18.10	17.56	17.70	17.86	0-5	5

Note; LTE Band 41 has 5 required test channels per FCC KDB 447498 D01v06.
The EUT enables maximum power reduction in accordance with 3GPP 36.101. The MPR settings are configured during the manufacture process and are not configurable by the network, carrier, or end user.

[LTE Band 66 Conducted Power Pmax, ECI=1]

LTE Band 66 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				131979 Ch. 1710.7 MHz	132322 Ch. 1745 MHz	132665 Ch. 1779.3 MHz		
1.4 MHz	QPSK	1	0	23.69	23.43	23.53	0	0
		1	3	23.76	23.45	23.53	0	0
		1	5	23.74	23.41	23.66	0	0
		3	0	23.83	24.05	24.13	0	0
		3	1	23.80	24.04	24.13	0	0
		3	3	23.84	24.03	24.14	0	0
		6	0	22.34	22.49	22.65	0-1	1
	16QAM	1	0	22.04	22.23	22.39	0-1	1
		1	3	21.98	22.86	22.36	0-1	1
		1	5	22.08	22.22	22.34	0-1	1
		3	0	22.48	22.72	22.77	0-1	1
		3	1	22.43	22.65	22.78	0-1	1
		3	3	22.36	22.71	22.85	0-1	1
		6	0	21.47	21.61	21.80	0-2	2
	64QAM	1	0	20.93	21.23	21.34	0-2	2
		1	3	21.43	21.74	21.20	0-2	2
		1	5	21.45	21.76	21.29	0-2	2
		3	0	21.32	21.53	21.71	0-2	2
		3	1	21.39	21.52	21.68	0-2	2
		3	3	21.43	21.60	21.78	0-2	2
		6	0	20.39	20.64	20.72	0-3	3
	256QAM	1	0	19.02	19.25	19.27	0-5	5
		1	3	19.01	19.28	19.29	0-5	5
		1	5	19.08	19.17	19.42	0-5	5
		3	0	19.01	19.24	19.32	0-5	5
		3	1	19.02	19.16	19.30	0-5	5
		3	3	18.98	19.15	19.33	0-5	5
		6	0	18.88	19.12	19.28	0-5	5

LTE Band 66 _ 3 Mhz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				131987 Ch. 1711.5 Mhz	132322 Ch. 1745 Mhz	132657 Ch. 1778.5 Mhz		
3 Mhz	QPSK	1	0	23.76	23.93	23.57	0	0
		1	7	23.30	23.51	23.64	0	0
		1	14	23.17	23.47	23.54	0	0
		8	0	22.27	22.48	22.63	0	0
		8	3	22.27	22.50	22.64	0	0
		8	7	22.29	22.52	22.63	0	0
		15	0	22.28	22.53	22.69	0-1	1
	16QAM	1	0	22.16	22.69	22.99	0-1	1
		1	7	22.14	22.83	22.83	0-1	1
		1	14	22.16	22.76	22.58	0-1	1
		8	0	21.44	21.64	21.75	0-1	1
		8	3	21.40	21.59	21.75	0-1	1
		8	7	21.45	21.64	21.77	0-1	1
		15	0	21.33	21.59	21.73	0-2	2
	64QAM	1	0	20.99	21.58	21.84	0-2	2
		1	7	21.02	21.77	21.79	0-2	2
		1	14	21.02	21.73	21.95	0-2	2
		8	0	20.36	20.58	20.77	0-2	2
		8	3	20.39	20.59	20.69	0-2	2
		8	7	20.36	20.55	20.65	0-2	2
		15	0	20.37	20.57	20.70	0-3	3
	256QAM	1	0	19.07	19.09	19.21	0-5	5
		1	7	18.98	19.26	19.29	0-5	5
		1	14	19.03	19.20	19.25	0-5	5
		8	0	18.90	19.10	19.25	0-5	5
		8	3	18.82	19.14	19.20	0-5	5
		8	7	18.84	19.13	19.25	0-5	5
		15	0	18.84	19.06	19.19	0-5	5

LTE Band 66 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				131997 Ch. 1712.5 MHz	132322 Ch. 1745 MHz	132647 Ch. 1777.5 MHz		
5 MHz	QPSK	1	0	23.75	23.94	23.60	0	0
		1	12	23.77	23.59	23.61	0	0
		1	24	23.30	23.48	23.58	0	0
		12	0	22.38	22.62	22.69	0	0
		12	6	22.38	22.60	22.71	0	0
		12	11	22.36	22.59	22.73	0	0
		25	0	22.39	22.60	22.70	0-1	1
	16QAM	1	0	22.18	22.84	22.42	0-1	1
		1	12	22.10	22.33	22.37	0-1	1
		1	24	22.09	22.66	22.62	0-1	1
		12	0	21.46	21.67	21.71	0-1	1
		12	6	21.42	21.66	21.72	0-1	1
		12	11	21.40	21.63	21.79	0-1	1
		25	0	21.42	21.62	21.70	0-2	2
	64QAM	1	0	20.99	21.78	21.80	0-2	2
		1	12	21.09	21.82	21.30	0-2	2
		1	24	21.55	21.76	21.47	0-2	2
		12	0	20.42	20.61	20.71	0-2	2
		12	6	20.39	20.62	20.69	0-2	2
		12	11	20.38	20.59	20.73	0-2	2
		25	0	20.37	20.61	20.67	0-3	3
	256QAM	1	0	19.09	19.24	19.25	0-5	5
		1	12	19.01	19.30	19.28	0-5	5
		1	24	18.97	19.19	19.44	0-5	5
		12	0	18.87	19.08	19.17	0-5	5
		12	6	18.89	19.08	19.14	0-5	5
		12	11	18.89	19.11	19.22	0-5	5
		25	0	18.92	19.13	19.20	0-5	5

LTE Band 66 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				132022 Ch. 1715 MHz	132322 Ch. 1745 MHz	132622 Ch. 1775 MHz		
10 MHz	QPSK	1	0	23.84	23.93	23.55	0	0
		1	24	23.33	23.60	23.58	0	0
		1	49	23.40	23.59	23.73	0	0
		25	0	22.34	22.58	22.55	0	0
		25	12	22.29	22.52	22.60	0	0
		25	24	22.35	22.58	22.66	0	0
		50	0	22.34	22.58	22.60	0-1	1
	16QAM	1	0	22.30	22.87	22.45	0-1	1
		1	24	22.09	22.98	22.30	0-1	1
		1	49	22.25	22.81	22.67	0-1	1
		25	0	21.33	21.58	21.55	0-1	1
		25	12	21.30	21.55	21.58	0-1	1
		25	24	21.34	21.62	21.66	0-1	1
		50	0	21.33	21.56	21.58	0-2	2
	64QAM	1	0	21.10	21.76	21.26	0-2	2
		1	24	20.99	21.78	21.35	0-2	2
		1	49	21.15	21.31	21.42	0-2	2
		25	0	20.33	20.54	20.52	0-2	2
		25	12	20.29	20.50	20.56	0-2	2
		25	24	20.33	20.54	20.64	0-2	2
		50	0	20.33	20.58	20.60	0-3	3
	256QAM	1	0	19.11	19.19	19.18	0-5	5
		1	24	18.94	19.29	19.17	0-5	5
		1	49	19.12	19.30	19.40	0-5	5
		25	0	18.81	19.06	19.00	0-5	5
		25	12	18.82	19.03	19.07	0-5	5
		25	24	18.85	19.09	19.15	0-5	5
		50	0	18.86	19.07	19.10	0-5	5

LTE Band 66 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				132047 Ch. 1717.5 MHz	132322 Ch. 1745 MHz	132597 Ch. 1772.5 MHz		
15 MHz	QPSK	1	0	23.80	23.57	23.53	0	0
		1	36	23.32	23.58	23.64	0	0
		1	74	23.44	23.60	23.73	0	0
		36	0	22.39	22.56	22.62	0	0
		36	18	22.37	22.62	22.63	0	0
		36	39	22.44	22.62	22.69	0	0
		75	0	22.44	22.61	22.65	0-1	1
	16QAM	1	0	22.16	22.88	22.46	0-1	1
		1	36	22.24	22.84	22.44	0-1	1
		1	74	22.39	22.42	22.78	0-1	1
		36	0	21.39	21.57	21.60	0-1	1
		36	18	21.37	21.58	21.65	0-1	1
		36	39	21.43	21.64	21.70	0-1	1
		75	0	21.43	21.61	21.65	0-2	2
	64QAM	1	0	21.13	21.76	21.33	0-2	2
		1	36	21.07	21.78	21.37	0-2	2
		1	74	21.20	21.80	21.49	0-2	2
		36	0	20.39	20.60	20.63	0-2	2
		36	18	20.37	20.64	20.65	0-2	2
		36	39	20.45	20.64	20.71	0-2	2
		75	0	20.44	20.64	20.64	0-3	3
	256QAM	1	0	19.07	19.17	19.25	0-5	5
		1	36	19.05	19.30	19.20	0-5	5
		1	74	19.22	19.31	19.47	0-5	5
		36	0	18.90	19.12	19.09	0-5	5
		36	18	18.87	19.09	19.10	0-5	5
		36	39	18.95	19.14	19.22	0-5	5
		75	0	18.93	19.15	19.12	0-5	5

LTE Band 66 _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				132072 Ch. 1720 MHz	132322 Ch. 1745 MHz	132572 Ch. 1770 MHz		
20 MHz	QPSK	1	0	23.72	23.52	23.60	0	0
		1	49	23.85	23.54	23.63	0	0
		1	99	23.53	23.52	23.87	0	0
		50	0	22.41	22.61	22.65	0	0
		50	25	22.47	22.65	22.67	0	0
		50	49	22.56	22.64	22.75	0	0
		100	0	22.49	22.60	22.70	0-1	1
	16QAM	1	0	22.34	22.42	22.35	0-1	1
		1	49	22.11	23.09	22.53	0-1	1
		1	99	22.43	22.40	22.55	0-1	1
		50	0	21.37	21.60	21.63	0-1	1
		50	25	21.44	21.62	21.65	0-1	1
		50	49	21.57	21.63	21.71	0-1	1
		100	0	21.51	21.62	21.72	0-2	2
	64QAM	1	0	21.57	21.77	21.35	0-2	2
		1	49	21.37	21.82	21.25	0-2	2
		1	99	21.32	21.78	21.59	0-2	2
		50	0	20.40	20.63	20.65	0-2	2
		50	25	20.43	20.64	20.66	0-2	2
		50	49	20.54	20.63	20.74	0-2	2
		100	0	20.50	20.62	20.73	0-3	3
	256QAM	1	0	19.08	19.02	19.29	0-5	5
		1	49	19.01	19.30	19.31	0-5	5
		1	99	19.22	19.36	19.51	0-5	5
		50	0	18.90	19.11	19.14	0-5	5
		50	25	18.93	19.14	19.12	0-5	5
		50	49	19.04	19.14	19.26	0-5	5
		100	0	19.02	19.14	19.25	0-5	5

11.3.2 LTE Reduced Conducted Power

[LTE Band 2 Conducted Power ECI=0,2,3]

LTE Band 2 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18607 Ch. 1850.7 MHz	18900 Ch. 1880 MHz	19193 Ch. 1909.3 MHz		
1.4 MHz	QPSK	1	0	16.70	16.71	17.10	0	0
		1	3	16.72	16.69	17.13	0	0
		1	5	16.69	16.72	17.11	0	0
		3	0	16.67	16.66	17.10	0	0
		3	1	16.70	16.66	17.09	0	0
		3	3	16.70	16.61	17.15	0	0
		6	0	16.73	16.67	17.13	0-1	0
	16QAM	1	0	16.93	17.04	17.38	0-1	0
		1	3	16.92	17.13	17.57	0-1	0
		1	5	16.99	17.02	17.46	0-1	0
		3	0	16.72	16.72	17.29	0-1	0
		3	1	16.73	16.76	17.27	0-1	0
		3	3	16.66	16.74	17.36	0-1	0
		6	0	16.84	16.72	17.17	0-2	0
	64QAM	1	0	16.92	16.91	17.30	0-2	0
		1	3	16.89	16.91	17.32	0-2	0
		1	5	16.91	16.91	17.33	0-2	0
		3	0	16.79	16.70	17.16	0-2	0
		3	1	16.81	16.72	17.18	0-2	0
		3	3	16.83	16.72	17.17	0-2	0
		6	0	16.72	16.69	17.11	0-3	0
	256QAM	1	0	16.87	16.71	17.14	0-5	0
		1	3	16.84	16.81	17.25	0-5	0
		1	5	16.82	16.83	17.28	0-5	0
		3	0	16.81	16.76	17.21	0-5	0
		3	1	16.83	16.76	17.23	0-5	0
		3	3	16.83	16.75	17.30	0-5	0
		6	0	16.71	16.70	17.14	0-5	0

LTE Band 2 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18615 Ch. 1851.5 MHz	18900 Ch. 1880 MHz	19185 Ch. 1908.5 MHz		
3 MHz	QPSK	1	0	16.67	16.68	17.05	0	0
		1	7	16.73	16.65	17.11	0	0
		1	14	16.67	16.67	17.11	0	0
		8	0	16.74	16.64	17.10	0	0
		8	3	16.75	16.69	17.11	0	0
		8	7	16.73	16.70	17.11	0	0
		15	0	16.71	16.73	17.15	0-1	0
	16QAM	1	0	16.98	16.90	17.35	0-1	0
		1	7	17.05	17.11	17.31	0-1	0
		1	14	17.07	17.13	17.42	0-1	0
		8	0	16.81	16.74	17.20	0-1	0
		8	3	16.85	16.78	17.18	0-1	0
		8	7	16.86	16.84	17.20	0-1	0
		15	0	16.77	16.74	17.15	0-2	0
	64QAM	1	0	16.84	16.86	17.28	0-2	0
		1	7	16.94	16.89	17.34	0-2	0
		1	14	17.01	16.86	17.30	0-2	0
		8	0	16.79	16.68	17.12	0-2	0
		8	3	16.76	16.72	17.13	0-2	0
		8	7	16.78	16.71	17.17	0-2	0
		15	0	16.77	16.75	17.13	0-3	0
	256QAM	1	0	16.80	16.82	17.11	0-5	0
		1	7	16.89	16.87	17.24	0-5	0
		1	14	16.85	16.83	17.26	0-5	0
		8	0	16.76	16.69	17.14	0-5	0
		8	3	16.76	16.69	17.11	0-5	0
		8	7	16.77	16.72	17.17	0-5	0
		15	0	16.74	16.71	17.14	0-5	0

LTE Band 2 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18625 Ch. 1852.5 MHz	18900 Ch. 1880 MHz	19175 Ch. 1907.5 MHz		
5 MHz	QPSK	1	0	16.70	16.76	17.09	0	0
		1	12	16.79	16.74	17.11	0	0
		1	24	16.79	16.76	17.19	0	0
		12	0	16.76	16.72	17.11	0	0
		12	6	16.74	16.70	17.13	0	0
		12	11	16.80	16.75	17.14	0	0
		25	0	16.80	16.77	17.15	0-1	0
	16QAM	1	0	17.05	17.08	17.43	0-1	0
		1	12	17.09	17.08	17.54	0-1	0
		1	24	17.08	17.06	17.47	0-1	0
		12	0	16.83	16.74	17.21	0-1	0
		12	6	16.81	16.76	17.18	0-1	0
		12	11	16.84	16.79	17.20	0-1	0
		25	0	16.78	16.77	17.11	0-2	0
	64QAM	1	0	17.00	16.94	17.30	0-2	0
		1	12	17.01	16.83	17.37	0-2	0
		1	24	17.04	16.87	17.37	0-2	0
		12	0	16.75	16.70	17.17	0-2	0
		12	6	16.79	16.72	17.15	0-2	0
		12	11	16.79	16.77	17.13	0-2	0
		25	0	16.77	16.77	17.11	0-3	0
	256QAM	1	0	16.89	16.88	17.26	0-5	0
		1	12	16.86	16.88	17.18	0-5	0
		1	24	16.95	16.81	17.31	0-5	0
		12	0	16.74	16.72	17.07	0-5	0
		12	6	16.75	16.68	17.11	0-5	0
		12	11	16.80	16.74	17.14	0-5	0
		25	0	16.78	16.75	17.13	0-5	0

LTE Band 2 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18650 Ch. 1855 MHz	18900 Ch. 1880 MHz	19150 Ch. 1905 MHz		
10 MHz	QPSK	1	0	16.73	16.70	17.00	0	0
		1	24	16.73	16.67	16.98	0	0
		1	49	16.79	16.76	17.16	0	0
		25	0	16.77	16.70	17.00	0	0
		25	12	16.77	16.66	17.03	0	0
		25	24	16.81	16.73	17.09	0	0
		50	0	16.80	16.72	17.07	0-1	0
	16QAM	1	0	17.06	17.20	17.30	0-1	0
		1	24	17.12	17.04	17.20	0-1	0
		1	49	17.08	17.20	17.48	0-1	0
		25	0	16.72	16.69	17.01	0-1	0
		25	12	16.79	16.64	17.05	0-1	0
		25	24	16.82	16.74	17.09	0-1	0
		50	0	16.77	16.72	17.02	0-2	0
	64QAM	1	0	16.96	16.90	17.21	0-2	0
		1	24	16.98	16.92	17.20	0-2	0
		1	49	17.00	16.95	17.38	0-2	0
		25	0	16.73	16.67	16.97	0-2	0
		25	12	16.74	16.65	16.99	0-2	0
		25	24	16.77	16.71	17.08	0-2	0
		50	0	16.78	16.71	17.06	0-3	0
	256QAM	1	0	16.79	16.89	17.20	0-5	0
		1	24	16.91	16.87	17.08	0-5	0
		1	49	16.98	16.95	17.27	0-5	0
		25	0	16.75	16.70	16.98	0-5	0
		25	12	16.76	16.68	17.00	0-5	0
		25	24	16.80	16.72	17.09	0-5	0
		50	0	16.77	16.69	17.04	0-5	0

LTE Band 2 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18675 Ch. 1857.5 MHz	18900 Ch. 1880 MHz	19125 Ch. 1902.5 MHz		
15 MHz	QPSK	1	0	16.72	16.77	16.95	0	0
		1	36	16.80	16.76	17.03	0	0
		1	74	16.83	16.82	17.22	0	0
		36	0	16.81	16.72	17.04	0	0
		36	18	16.83	16.73	17.02	0	0
		36	39	16.84	16.77	17.11	0	0
		75	0	16.85	16.75	17.06	0-1	0
	16QAM	1	0	17.12	17.03	17.30	0-1	0
		1	36	17.19	17.19	17.30	0-1	0
		1	74	17.21	17.19	17.40	0-1	0
		36	0	16.81	16.71	16.99	0-1	0
		36	18	16.82	16.72	17.00	0-1	0
		36	39	16.82	16.76	17.08	0-1	0
		75	0	16.82	16.74	17.03	0-2	0
	64QAM	1	0	16.96	16.95	17.19	0-2	0
		1	36	17.04	16.95	17.22	0-2	0
		1	74	16.99	17.01	17.39	0-2	0
		36	0	16.81	16.73	17.03	0-2	0
		36	18	16.82	16.73	17.03	0-2	0
		36	39	16.84	16.79	17.12	0-2	0
		75	0	16.84	16.74	17.05	0-3	0
	256QAM	1	0	16.85	16.83	17.06	0-5	0
		1	36	16.92	16.89	17.12	0-5	0
		1	74	17.01	16.95	17.28	0-5	0
		36	0	16.79	16.72	17.00	0-5	0
		36	18	16.82	16.72	17.00	0-5	0
		36	39	16.79	16.76	17.12	0-5	0
		75	0	16.82	16.74	17.06	0-5	0

LTE Band 2 _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18700 Ch. 1860 MHz	18900 Ch. 1880 MHz	19100 Ch. 1900 MHz		
20 MHz	QPSK	1	0	16.74	16.72	16.91	0	0
		1	49	16.80	16.73	16.99	0	0
		1	99	16.81	16.85	17.20	0	0
		50	0	16.87	16.74	17.00	0	0
		50	25	16.83	16.79	17.04	0	0
		50	49	16.85	16.78	17.10	0	0
		100	0	16.84	16.73	17.04	0-1	0
	16QAM	1	0	17.21	17.07	17.34	0-1	0
		1	49	17.18	17.14	17.40	0-1	0
		1	99	17.20	17.17	17.43	0-1	0
		50	0	16.83	16.73	17.00	0-1	0
		50	25	16.80	16.76	17.01	0-1	0
		50	49	16.83	16.78	17.08	0-1	0
		100	0	16.83	16.77	17.04	0-2	0
	64QAM	1	0	16.99	16.93	17.12	0-2	0
		1	49	16.92	16.97	17.24	0-2	0
		1	99	16.97	16.94	17.42	0-2	0
		50	0	16.86	16.74	17.00	0-2	0
		50	25	16.81	16.74	17.01	0-2	0
		50	49	16.82	16.80	17.09	0-2	0
		100	0	16.85	16.76	17.05	0-3	0
	256QAM	1	0	16.97	16.83	17.08	0-5	0
		1	49	16.85	16.85	17.13	0-5	0
		1	99	16.92	17.02	17.37	0-5	0
		50	0	16.84	16.69	17.00	0-5	0
		50	25	16.81	16.76	17.01	0-5	0
		50	49	16.85	16.79	17.08	0-5	0
		100	0	16.84	16.78	17.04	0-5	0

[LTE Band 2 Upper Conducted Power ECI=0,2,3]

LTE Band 2 Upper_ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18607 Ch. 1850.7 MHz	18900 Ch. 1880 MHz	19193 Ch. 1909.3 MHz		
1.4 MHz	QPSK	1	0	16.94	16.70	16.67	0	0
		1	3	16.92	16.79	16.69	0	0
		1	5	16.94	16.76	16.76	0	0
		3	0	16.88	16.73	16.70	0	0
		3	1	16.89	16.69	16.70	0	0
		3	3	16.90	16.72	16.72	0	0
		6	0	16.91	16.76	16.73	0-1	0
	16QAM	1	0	17.09	17.21	17.11	0-1	0
		1	3	17.22	17.08	17.03	0-1	0
		1	5	17.24	17.09	17.07	0-1	0
		3	0	16.94	16.77	16.88	0-1	0
		3	1	16.87	16.84	16.86	0-1	0
		3	3	16.98	16.83	16.75	0-1	0
		6	0	16.95	16.82	16.76	0-2	0
	64QAM	1	0	17.14	16.99	16.84	0-2	0
		1	3	16.99	16.99	16.90	0-2	0
		1	5	17.13	16.96	16.98	0-2	0
		3	0	16.96	16.78	16.82	0-2	0
		3	1	17.02	16.84	16.78	0-2	0
		3	3	17.02	16.76	16.75	0-2	0
		6	0	16.87	16.77	16.67	0-3	0
	256QAM	1	0	17.01	16.95	16.90	0-5	0
		1	3	17.09	16.91	16.85	0-5	0
		1	5	17.06	16.91	16.94	0-5	0
		3	0	17.06	16.89	16.85	0-5	0
		3	1	17.02	16.86	16.80	0-5	0
		3	3	17.02	16.82	16.85	0-5	0
		6	0	16.89	16.75	16.77	0-5	0

LTE Band 2 Upper _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18615 Ch. 1851.5 MHz	18900 Ch. 1880 MHz	19185 Ch. 1908.5 MHz		
3 MHz	QPSK	1	0	16.88	16.77	16.65	0	0
		1	7	16.91	16.76	16.70	0	0
		1	14	16.90	16.76	16.70	0	0
		8	0	16.89	16.79	16.74	0	0
		8	3	16.87	16.76	16.70	0	0
		8	7	16.89	16.77	16.73	0	0
		15	0	16.90	16.78	16.75	0-1	0
	16QAM	1	0	17.31	17.09	16.93	0-1	0
		1	7	17.19	17.11	17.08	0-1	0
		1	14	17.19	17.10	17.08	0-1	0
		8	0	16.98	16.84	16.82	0-1	0
		8	3	16.95	16.82	16.80	0-1	0
		8	7	17.00	16.85	16.83	0-1	0
		15	0	16.90	16.76	16.76	0-2	0
	64QAM	1	0	17.05	16.91	16.84	0-2	0
		1	7	17.11	17.02	16.94	0-2	0
		1	14	17.13	16.95	16.89	0-2	0
		8	0	16.93	16.76	16.73	0-2	0
		8	3	16.87	16.77	16.71	0-2	0
		8	7	16.95	16.81	16.76	0-2	0
		15	0	16.92	16.81	16.77	0-3	0
	256QAM	1	0	16.99	16.86	16.78	0-5	0
		1	7	16.97	16.89	16.76	0-5	0
		1	14	17.02	16.85	16.84	0-5	0
		8	0	16.94	16.80	16.78	0-5	0
		8	3	16.91	16.77	16.75	0-5	0
		8	7	16.91	16.82	16.75	0-5	0
		15	0	16.89	16.76	16.74	0-5	0

LTE Band 2 Upper _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18625 Ch. 1852.5 MHz	18900 Ch. 1880 MHz	19175 Ch. 1907.5 MHz		
5 MHz	QPSK	1	0	16.94	16.86	16.53	0	0
		1	12	16.96	16.86	16.74	0	0
		1	24	16.92	16.85	16.77	0	0
		12	0	16.95	16.82	16.73	0	0
		12	6	16.96	16.79	16.73	0	0
		12	11	16.93	16.82	16.78	0	0
		25	0	16.97	16.84	16.77	0-1	0
	16QAM	1	0	17.29	17.03	17.04	0-1	0
		1	12	17.29	16.98	17.02	0-1	0
		1	24	17.28	17.17	17.04	0-1	0
		12	0	16.99	16.89	16.79	0-1	0
		12	6	17.00	16.91	16.79	0-1	0
		12	11	17.00	16.84	16.81	0-1	0
		25	0	16.95	16.84	16.74	0-2	0
	64QAM	1	0	17.23	16.99	16.86	0-2	0
		1	12	17.08	17.03	16.93	0-2	0
		1	24	17.17	17.04	16.93	0-2	0
		12	0	17.02	16.81	16.79	0-2	0
		12	6	17.00	16.82	16.78	0-2	0
		12	11	16.94	16.85	16.81	0-2	0
		25	0	16.93	16.81	16.74	0-3	0
	256QAM	1	0	17.06	16.97	16.81	0-5	0
		1	12	17.06	16.96	16.83	0-5	0
		1	24	17.00	16.91	16.94	0-5	0
		12	0	16.92	16.85	16.74	0-5	0
		12	6	16.95	16.79	16.75	0-5	0
		12	11	16.93	16.82	16.76	0-5	0
		25	0	16.96	16.81	16.75	0-5	0

LTE Band 2 Upper _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18650 Ch. 1855 MHz	18900 Ch. 1880 MHz	19150 Ch. 1905 MHz		
10 MHz	QPSK	1	0	17.04	16.46	16.65	0	0
		1	24	16.93	16.81	16.65	0	0
		1	49	16.96	16.83	16.79	0	0
		25	0	16.94	16.84	16.73	0	0
		25	12	16.93	16.80	16.71	0	0
		25	24	16.95	16.82	16.74	0	0
		50	0	16.96	16.83	16.72	0-1	0
	16QAM	1	0	17.29	17.14	17.04	0-1	0
		1	24	17.24	17.14	16.96	0-1	0
		1	49	17.29	17.14	17.05	0-1	0
		25	0	16.96	16.80	16.70	0-1	0
		25	12	16.90	16.80	16.68	0-1	0
		25	24	16.94	16.78	16.74	0-1	0
		50	0	16.91	16.80	16.70	0-2	0
	64QAM	1	0	17.17	17.10	16.98	0-2	0
		1	24	17.10	16.93	16.76	0-2	0
		1	49	17.04	17.07	16.98	0-2	0
		25	0	16.93	16.77	16.67	0-2	0
		25	12	16.90	16.80	16.67	0-2	0
		25	24	16.88	16.78	16.71	0-2	0
		50	0	16.94	16.81	16.72	0-3	0
	256QAM	1	0	17.18	17.01	16.90	0-5	0
		1	24	17.05	16.86	16.79	0-5	0
		1	49	17.10	16.98	16.97	0-5	0
		25	0	16.94	16.80	16.71	0-5	0
		25	12	16.88	16.77	16.68	0-5	0
		25	24	16.91	16.79	16.73	0-5	0
		50	0	16.93	16.83	16.72	0-5	0

LTE Band 2 Upper _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18675 Ch. 1857.5 MHz	18900 Ch. 1880 MHz	19125 Ch. 1902.5 MHz		
15 MHz	QPSK	1	0	16.97	16.77	16.69	0	0
		1	36	16.89	16.77	16.67	0	0
		1	74	16.90	16.81	16.82	0	0
		36	0	16.88	16.79	16.70	0	0
		36	18	16.85	16.78	16.62	0	0
		36	39	16.85	16.76	16.64	0	0
		75	0	16.89	16.79	16.71	0-1	0
	16QAM	1	0	17.18	17.30	17.12	0-1	0
		1	36	17.24	17.15	17.09	0-1	0
		1	74	17.11	17.09	17.08	0-1	0
		36	0	16.89	16.81	16.68	0-1	0
		36	18	16.87	16.78	16.64	0-1	0
		36	39	16.85	16.78	16.68	0-1	0
		75	0	16.88	16.78	16.68	0-2	0
	64QAM	1	0	17.10	17.04	16.93	0-2	0
		1	36	17.02	17.02	16.91	0-2	0
		1	74	17.09	17.05	17.00	0-2	0
		36	0	16.91	16.83	16.70	0-2	0
		36	18	16.89	16.76	16.67	0-2	0
		36	39	16.87	16.81	16.71	0-2	0
		75	0	16.89	16.79	16.69	0-3	0
	256QAM	1	0	17.08	16.98	16.80	0-5	0
		1	36	17.01	16.98	16.80	0-5	0
		1	74	17.02	16.89	16.98	0-5	0
		36	0	16.88	16.78	16.69	0-5	0
		36	18	16.87	16.75	16.65	0-5	0
		36	39	16.86	16.78	16.72	0-5	0
		75	0	16.90	16.80	16.72	0-5	0

LTE Band 2 Upper _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18700 Ch. 1860 MHz	18900 Ch. 1880 MHz	19100 Ch. 1900 MHz		
20 MHz	QPSK	1	0	17.02	16.85	16.85	0	0
		1	49	16.91	16.82	16.71	0	0
		1	99	16.91	16.84	16.81	0	0
		50	0	16.93	16.85	16.77	0	0
		50	25	16.94	16.81	16.70	0	0
		50	49	16.91	16.83	16.71	0	0
		100	0	16.89	16.83	16.77	0-1	0
	16QAM	1	0	17.32	17.11	17.20	0-1	0
		1	49	17.22	17.22	17.12	0-1	0
		1	99	17.31	17.11	17.17	0-1	0
		50	0	16.92	16.83	16.77	0-1	0
		50	25	16.88	16.79	16.67	0-1	0
		50	49	16.88	16.81	16.71	0-1	0
		100	0	16.89	16.82	16.78	0-2	0
	64QAM	1	0	17.21	17.03	17.01	0-2	0
		1	49	17.11	17.07	16.85	0-2	0
		1	99	17.04	16.97	17.01	0-2	0
		50	0	16.92	16.85	16.78	0-2	0
		50	25	16.89	16.82	16.74	0-2	0
		50	49	16.87	16.84	16.70	0-2	0
		100	0	16.90	16.81	16.74	0-3	0
	256QAM	1	0	17.12	17.03	16.82	0-5	0
		1	49	17.04	16.91	16.88	0-5	0
		1	99	17.02	16.93	16.94	0-5	0
		50	0	16.91	16.84	16.77	0-5	0
		50	25	16.93	16.83	16.72	0-5	0
		50	49	16.92	16.80	16.71	0-5	0
		100	0	16.90	16.83	16.75	0-5	0

[LTE Band 4 Conducted Power ECI=0,2,3]

LTE Band 4 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19957 Ch. 1710.7 MHz	20175 Ch. 1732.5 MHz	20393 Ch. 1754.3 MHz		
1.4 MHz	QPSK	1	0	17.74	18.02	18.12	0	0
		1	3	17.78	17.97	18.03	0	0
		1	5	17.72	17.97	18.03	0	0
		3	0	17.79	17.94	18.09	0	0
		3	1	17.80	17.94	18.08	0	0
		3	3	17.78	17.92	18.09	0	0
		6	0	17.81	17.99	18.13	0-1	0
	16QAM	1	0	18.13	18.48	18.48	0-1	0
		1	3	18.11	18.31	18.44	0-1	0
		1	5	18.09	18.33	18.43	0-1	0
		3	0	17.83	18.09	18.32	0-1	0
		3	1	17.89	18.13	18.21	0-1	0
		3	3	17.91	18.08	18.34	0-1	0
		6	0	17.93	18.07	18.17	0-2	0
	64QAM	1	0	18.06	18.16	18.35	0-2	0
		1	3	17.98	18.11	18.30	0-2	0
		1	5	18.02	18.19	18.26	0-2	0
		3	0	17.91	17.99	18.19	0-2	0
		3	1	17.88	18.03	18.20	0-2	0
		3	3	17.83	18.04	18.15	0-2	0
		6	0	17.88	18.00	18.15	0-3	0
	256QAM	1	0	17.90	18.13	18.22	0-5	0
		1	3	17.89	18.13	18.23	0-5	0
		1	5	17.88	18.15	18.21	0-5	0
		3	0	17.92	18.10	18.20	0-5	0
		3	1	17.89	18.11	18.19	0-5	0
		3	3	17.93	18.08	18.23	0-5	0
		6	0	17.84	18.03	18.15	0-5	0

LTE Band 4 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19965 Ch. 1711.5 MHz	20175 Ch. 1732.5 MHz	20385 Ch. 1753.5 MHz		
3 MHz	QPSK	1	0	17.80	17.95	18.09	0	0
		1	7	17.71	17.94	18.02	0	0
		1	14	17.76	17.93	18.03	0	0
		8	0	17.83	17.98	18.18	0	0
		8	3	17.77	17.99	18.16	0	0
		8	7	17.76	18.03	18.16	0	0
		15	0	17.82	18.01	18.14	0-1	0
	16QAM	1	0	18.12	18.24	18.43	0-1	0
		1	7	18.04	18.22	18.55	0-1	0
		1	14	18.03	18.45	18.58	0-1	0
		8	0	17.86	18.04	18.24	0-1	0
		8	3	17.88	18.10	18.25	0-1	0
		8	7	17.87	18.13	18.24	0-1	0
		15	0	17.85	18.05	18.17	0-2	0
	64QAM	1	0	18.01	18.14	18.32	0-2	0
		1	7	18.06	18.17	18.32	0-2	0
		1	14	17.99	18.22	18.37	0-2	0
		8	0	17.88	18.01	18.22	0-2	0
		8	3	17.84	18.04	18.15	0-2	0
		8	7	17.81	18.06	18.16	0-2	0
		15	0	17.84	18.02	18.18	0-3	0
	256QAM	1	0	17.92	18.10	18.13	0-5	0
		1	7	17.85	18.09	18.27	0-5	0
		1	14	17.89	18.15	18.27	0-5	0
		8	0	17.86	17.99	18.20	0-5	0
		8	3	17.78	18.01	18.15	0-5	0
		8	7	17.81	18.04	18.17	0-5	0
		15	0	17.82	17.99	18.16	0-5	0

LTE Band 4 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19975 Ch. 1712.5 MHz	20175 Ch. 1732.5 MHz	20375 Ch. 1752.5 MHz		
5 MHz	QPSK	1	0	17.80	17.98	18.10	0	0
		1	12	17.76	18.06	18.14	0	0
		1	24	17.72	18.02	18.15	0	0
		12	0	17.86	18.03	18.25	0	0
		12	6	17.82	18.03	18.19	0	0
		12	11	17.80	18.10	18.22	0	0
		25	0	17.83	18.08	18.22	0-1	0
	16QAM	1	0	18.19	18.29	18.63	0-1	0
		1	12	18.22	18.40	18.55	0-1	0
		1	24	18.14	18.35	18.40	0-1	0
		12	0	17.93	18.08	18.27	0-1	0
		12	6	17.93	18.07	18.29	0-1	0
		12	11	17.89	18.12	18.27	0-1	0
		25	0	17.86	18.04	18.23	0-2	0
	64QAM	1	0	18.08	18.23	18.39	0-2	0
		1	12	18.04	18.27	18.35	0-2	0
		1	24	18.01	18.28	18.37	0-2	0
		12	0	17.91	18.05	18.24	0-2	0
		12	6	17.86	18.02	18.24	0-2	0
		12	11	17.86	18.13	18.24	0-2	0
		25	0	17.86	18.04	18.23	0-3	0
	256QAM	1	0	17.95	18.18	18.34	0-5	0
		1	12	17.97	18.16	18.27	0-5	0
		1	24	17.89	18.21	18.31	0-5	0
		12	0	17.87	18.00	18.26	0-5	0
		12	6	17.83	18.01	18.21	0-5	0
		12	11	17.79	18.05	18.18	0-5	0
		25	0	17.85	18.06	18.23	0-5	0

LTE Band 4 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20000 Ch. 1715 MHz	20175 Ch. 1732.5 MHz	20350 Ch. 1750 MHz		
10 MHz	QPSK	1	0	17.78	17.97	18.07	0	0
		1	24	17.65	17.94	18.09	0	0
		1	49	17.76	18.06	18.18	0	0
		25	0	17.79	17.94	18.18	0	0
		25	12	17.74	18.01	18.16	0	0
		25	24	17.77	18.07	18.15	0	0
		50	0	17.82	18.01	18.17	0-1	0
	16QAM	1	0	18.16	18.30	18.62	0-1	0
		1	24	18.00	18.39	18.48	0-1	0
		1	49	18.20	18.40	18.61	0-1	0
		25	0	17.80	17.93	18.18	0-1	0
		25	12	17.76	18.02	18.18	0-1	0
		25	24	17.79	18.07	18.16	0-1	0
		50	0	17.80	17.99	18.18	0-2	0
	64QAM	1	0	17.97	18.12	18.39	0-2	0
		1	24	17.83	18.22	18.28	0-2	0
		1	49	18.04	18.33	18.45	0-2	0
		25	0	17.79	17.91	18.16	0-2	0
		25	12	17.73	17.96	18.18	0-2	0
		25	24	17.76	18.04	18.14	0-2	0
		50	0	17.81	17.97	18.18	0-3	0
	256QAM	1	0	17.99	18.11	18.30	0-5	0
		1	24	17.79	18.19	18.26	0-5	0
		1	49	17.97	18.22	18.30	0-5	0
		25	0	17.79	17.91	18.18	0-5	0
		25	12	17.74	17.98	18.18	0-5	0
		25	24	17.76	18.04	18.15	0-5	0
		50	0	17.80	17.98	18.15	0-5	0

LTE Band 4 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20025 Ch. 1717.5 MHz	20175 Ch. 1732.5 MHz	20325 Ch. 1747.5 MHz		
15 MHz	QPSK	1	0	17.81	17.88	18.10	0	0
		1	36	17.81	18.05	18.15	0	0
		1	74	17.90	18.11	18.14	0	0
		36	0	17.81	17.98	18.20	0	0
		36	18	17.79	18.07	18.20	0	0
		36	39	17.86	18.15	18.20	0	0
		75	0	17.85	18.04	18.21	0-1	0
	16QAM	1	0	18.25	18.26	18.46	0-1	0
		1	36	18.15	18.57	18.42	0-1	0
		1	74	18.18	18.52	18.70	0-1	0
		36	0	17.77	17.98	18.16	0-1	0
		36	18	17.79	18.06	18.19	0-1	0
		36	39	17.88	18.10	18.21	0-1	0
		75	0	17.84	18.04	18.21	0-2	0
	64QAM	1	0	18.04	18.13	18.29	0-2	0
		1	36	17.89	18.31	18.35	0-2	0
		1	74	18.16	18.29	18.42	0-2	0
		36	0	17.82	17.98	18.21	0-2	0
		36	18	17.81	18.07	18.21	0-2	0
		36	39	17.88	18.10	18.21	0-2	0
		75	0	17.85	18.03	18.23	0-3	0
	256QAM	1	0	18.05	17.99	18.22	0-5	0
		1	36	17.96	18.14	18.43	0-5	0
		1	74	17.99	18.26	18.40	0-5	0
		36	0	17.78	17.95	18.17	0-5	0
		36	18	17.78	18.01	18.18	0-5	0
		36	39	17.87	18.08	18.21	0-5	0
		75	0	17.85	18.05	18.23	0-5	0

LTE Band 4 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]	MPR Allowed Per 3GPP [dB]	MPR [dB]
				20175 Ch. 1732.5 MHz		
20 MHz	QPSK	1	0	17.85	0	0
		1	49	18.03	0	0
		1	99	18.17	0	0
		50	0	17.93	0	0
		50	25	18.06	0	0
		50	49	18.15	0	0
		100	0	18.03	0-1	0
	16QAM	1	0	18.41	0-1	0
		1	49	18.34	0-1	0
		1	99	18.50	0-1	0
		50	0	17.92	0-1	0
		50	25	18.03	0-1	0
		50	49	18.14	0-1	0
		100	0	18.04	0-2	0
	64QAM	1	0	18.18	0-2	0
		1	49	18.31	0-2	0
		1	99	18.30	0-2	0
		50	0	17.93	0-2	0
		50	25	18.03	0-2	0
		50	49	18.14	0-2	0
		100	0	18.04	0-3	0
	256QAM	1	0	18.09	0-5	0
		1	49	18.23	0-5	0
		1	99	18.31	0-5	0
		50	0	17.94	0-5	0
		50	25	18.04	0-5	0
		50	49	18.12	0-5	0
		100	0	18.03	0-5	0

[LTE Band 4 Upper Conducted Power ECI=0,2,3]

LTE Band 4 Upper_ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19957 Ch. 1710.7 MHz	20175 Ch. 1732.5 MHz	20393 Ch. 1754.3 MHz		
1.4 MHz	QPSK	1	0	17.63	17.55	17.50	0	0
		1	3	17.64	17.59	17.48	0	0
		1	5	17.59	17.65	17.52	0	0
		3	0	17.63	17.62	17.55	0	0
		3	1	17.60	17.59	17.52	0	0
		3	3	17.58	17.60	17.53	0	0
		6	0	17.64	17.63	17.57	0-1	0
	16QAM	1	0	17.98	17.92	17.98	0-1	0
		1	3	18.02	17.98	17.83	0-1	0
		1	5	17.86	18.15	17.85	0-1	0
		3	0	17.82	17.71	17.63	0-1	0
		3	1	17.79	17.74	17.67	0-1	0
		3	3	17.71	17.70	17.62	0-1	0
		6	0	17.65	17.67	17.69	0-2	0
	64QAM	1	0	17.85	17.78	17.80	0-2	0
		1	3	17.76	17.83	17.75	0-2	0
		1	5	17.79	17.88	17.80	0-2	0
		3	0	17.69	17.69	17.61	0-2	0
		3	1	17.70	17.69	17.61	0-2	0
		3	3	17.64	17.66	17.59	0-2	0
		6	0	17.63	17.61	17.58	0-3	0
	256QAM	1	0	17.71	17.74	17.70	0-5	0
		1	3	17.76	17.74	17.68	0-5	0
		1	5	17.64	17.71	17.58	0-5	0
		3	0	17.77	17.77	17.69	0-5	0
		3	1	17.76	17.71	17.61	0-5	0
		3	3	17.75	17.78	17.64	0-5	0
		6	0	17.68	17.62	17.56	0-5	0

LTE Band 4 Upper_ 3 Mhz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19965 Ch. 1711.5 Mhz	20175 Ch. 1732.5 Mhz	20385 Ch. 1753.5 Mhz		
3 Mhz	QPSK	1	0	17.63	17.61	17.58	0	0
		1	7	17.60	17.63	17.56	0	0
		1	14	17.56	17.62	17.55	0	0
		8	0	17.66	17.64	17.60	0	0
		8	3	17.63	17.63	17.62	0	0
		8	7	17.62	17.66	17.61	0	0
		15	0	17.64	17.67	17.62	0-1	0
	16QAM	1	0	17.97	17.99	17.90	0-1	0
		1	7	17.92	17.94	17.95	0-1	0
		1	14	17.95	18.07	17.78	0-1	0
		8	0	17.71	17.72	17.68	0-1	0
		8	3	17.70	17.71	17.67	0-1	0
		8	7	17.72	17.72	17.68	0-1	0
		15	0	17.66	17.62	17.58	0-2	0
	64QAM	1	0	17.87	17.83	17.80	0-2	0
		1	7	17.83	17.85	17.82	0-2	0
		1	14	17.81	17.73	17.61	0-2	0
		8	0	17.70	17.67	17.61	0-2	0
		8	3	17.60	17.69	17.62	0-2	0
		8	7	17.69	17.68	17.58	0-2	0
		15	0	17.66	17.67	17.63	0-3	0
	256QAM	1	0	17.71	17.82	17.74	0-5	0
		1	7	17.70	17.75	17.68	0-5	0
		1	14	17.73	17.66	17.63	0-5	0
		8	0	17.68	17.66	17.63	0-5	0
		8	3	17.65	17.66	17.63	0-5	0
		8	7	17.68	17.66	17.61	0-5	0
		15	0	17.61	17.67	17.59	0-5	0

LTE Band 4 Upper _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19975 Ch. 1712.5 MHz	20175 Ch. 1732.5 MHz	20375 Ch. 1752.5 MHz		
5 MHz	QPSK	1	0	17.69	17.74	17.61	0	0
		1	12	17.61	17.69	17.60	0	0
		1	24	17.57	17.67	17.57	0	0
		12	0	17.67	17.67	17.71	0	0
		12	6	17.64	17.67	17.65	0	0
		12	11	17.63	17.69	17.62	0	0
		25	0	17.68	17.71	17.68	0-1	0
	16QAM	1	0	18.01	18.06	18.08	0-1	0
		1	12	17.91	17.97	17.99	0-1	0
		1	24	17.90	17.99	17.83	0-1	0
		12	0	17.74	17.74	17.76	0-1	0
		12	6	17.77	17.78	17.68	0-1	0
		12	11	17.73	17.76	17.74	0-1	0
		25	0	17.69	17.70	17.65	0-2	0
	64QAM	1	0	17.91	17.87	17.86	0-2	0
		1	12	17.89	17.93	17.84	0-2	0
		1	24	17.82	17.87	17.73	0-2	0
		12	0	17.72	17.70	17.75	0-2	0
		12	6	17.67	17.71	17.68	0-2	0
		12	11	17.63	17.68	17.63	0-2	0
		25	0	17.68	17.66	17.60	0-3	0
	256QAM	1	0	17.84	17.73	17.76	0-5	0
		1	12	17.79	17.78	17.70	0-5	0
		1	24	17.70	17.69	17.76	0-5	0
		12	0	17.64	17.65	17.66	0-5	0
		12	6	17.67	17.69	17.67	0-5	0
		12	11	17.65	17.67	17.60	0-5	0
		25	0	17.67	17.65	17.66	0-5	0

LTE Band 4 Upper_ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20000 Ch. 1715 MHz	20175 Ch. 1732.5 MHz	20350 Ch. 1750 MHz		
10 MHz	QPSK	1	0	17.71	17.75	17.63	0	0
		1	24	17.55	17.67	17.63	0	0
		1	49	17.65	17.74	17.62	0	0
		25	0	17.66	17.67	17.76	0	0
		25	12	17.62	17.66	17.70	0	0
		25	24	17.63	17.73	17.66	0	0
		50	0	17.68	17.71	17.72	0-1	0
	16QAM	1	0	18.12	18.02	18.03	0-1	0
		1	24	17.88	18.07	18.01	0-1	0
		1	49	17.91	18.09	17.94	0-1	0
		25	0	17.65	17.65	17.74	0-1	0
		25	12	17.60	17.62	17.70	0-1	0
		25	24	17.62	17.71	17.65	0-1	0
		50	0	17.65	17.67	17.72	0-2	0
	64QAM	1	0	17.84	17.92	17.87	0-2	0
		1	24	17.77	17.95	17.78	0-2	0
		1	49	17.89	17.96	17.79	0-2	0
		25	0	17.63	17.64	17.70	0-2	0
		25	12	17.61	17.62	17.65	0-2	0
		25	24	17.60	17.67	17.65	0-2	0
		50	0	17.68	17.69	17.71	0-3	0
	256QAM	1	0	17.80	17.73	17.76	0-5	0
		1	24	17.68	17.80	17.86	0-5	0
		1	49	17.82	17.85	17.68	0-5	0
		25	0	17.65	17.67	17.69	0-5	0
		25	12	17.59	17.61	17.70	0-5	0
		25	24	17.59	17.68	17.62	0-5	0
		50	0	17.66	17.68	17.69	0-5	0

LTE Band 4 Upper_ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20025 Ch. 1717.5 MHz	20175 Ch. 1732.5 MHz	20325 Ch. 1747.5 MHz		
15 MHz	QPSK	1	0	17.68	17.69	17.62	0	0
		1	36	17.58	17.73	17.66	0	0
		1	74	17.68	17.71	17.64	0	0
		36	0	17.64	17.66	17.69	0	0
		36	18	17.59	17.66	17.70	0	0
		36	39	17.64	17.69	17.63	0	0
		75	0	17.65	17.69	17.69	0-1	0
	16QAM	1	0	18.05	17.94	18.04	0-1	0
		1	36	17.93	18.05	18.02	0-1	0
		1	74	17.91	18.11	17.99	0-1	0
		36	0	17.63	17.65	17.70	0-1	0
		36	18	17.62	17.69	17.69	0-1	0
		36	39	17.66	17.69	17.64	0-1	0
		75	0	17.63	17.68	17.68	0-2	0
	64QAM	1	0	17.87	17.89	17.87	0-2	0
		1	36	17.83	17.75	17.77	0-2	0
		1	74	17.93	17.90	17.77	0-2	0
		36	0	17.68	17.67	17.69	0-2	0
		36	18	17.63	17.68	17.72	0-2	0
		36	39	17.65	17.70	17.69	0-2	0
		75	0	17.63	17.69	17.68	0-3	0
	256QAM	1	0	17.83	17.82	17.81	0-5	0
		1	36	17.83	17.86	17.78	0-5	0
		1	74	17.78	17.80	17.71	0-5	0
		36	0	17.65	17.66	17.70	0-5	0
		36	18	17.62	17.68	17.68	0-5	0
		36	39	17.64	17.68	17.61	0-5	0
		75	0	17.63	17.68	17.69	0-5	0

LTE Band 4 Upper_ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]	MPR Allowed Per 3GPP [dB]	MPR [dB]
				20175 Ch. 1732.5 MHz		
20 MHz	QPSK	1	0	17.71	0	0
		1	49	17.68	0	0
		1	99	17.73	0	0
		50	0	17.66	0	0
		50	25	17.71	0	0
		50	49	17.74	0	0
		100	0	17.69	0-1	0
	16QAM	1	0	18.02	0-1	0
		1	49	18.10	0-1	0
		1	99	18.03	0-1	0
		50	0	17.63	0-1	0
		50	25	17.68	0-1	0
		50	49	17.71	0-1	0
		100	0	17.67	0-2	0
	64QAM	1	0	17.81	0-2	0
		1	49	17.92	0-2	0
		1	99	17.95	0-2	0
		50	0	17.65	0-2	0
		50	25	17.71	0-2	0
		50	49	17.70	0-2	0
		100	0	17.67	0-3	0
	256QAM	1	0	17.82	0-5	0
		1	49	17.83	0-5	0
		1	99	17.84	0-5	0
		50	0	17.62	0-5	0
		50	25	17.68	0-5	0
		50	49	17.73	0-5	0
		100	0	17.67	0-5	0

[LTE Band 17 Conducted Power ECI=0,2,3]

LTE Band 17 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				23755 Ch. 706.5 MHz	23790 Ch. 710 MHz	23825 Ch. 713.5 MHz		
5 MHz	QPSK	1	0	19.45	19.45	19.49	0	0
		1	12	19.45	19.47	19.53	0	0
		1	24	19.52	19.44	19.57	0	0
		12	0	19.44	19.48	19.53	0	0
		12	6	19.49	19.42	19.50	0	0
		12	11	19.49	19.44	19.53	0	0
		25	0	19.49	19.47	19.56	0-1	0
	16QAM	1	0	19.77	19.87	19.82	0-1	0
		1	12	19.69	19.95	19.76	0-1	0
		1	24	19.90	19.81	19.78	0-1	0
		12	0	19.46	19.52	19.61	0-1	0
		12	6	19.50	19.52	19.57	0-1	0
		12	11	19.54	19.48	19.60	0-1	0
		25	0	19.48	19.47	19.55	0-2	0
	64QAM	1	0	19.66	19.62	19.71	0-2	0
		1	12	19.61	19.59	19.64	0-2	0
		1	24	19.72	19.64	19.70	0-2	0
		12	0	19.41	19.49	19.55	0-2	0
		12	6	19.50	19.46	19.54	0-2	0
		12	11	19.48	19.45	19.54	0-2	0
		25	0	19.41	19.43	19.55	0-3	0
	256QAM	1	0	18.53	18.56	18.52	0-5	1
		1	12	18.52	18.57	18.49	0-5	1
		1	24	18.58	18.57	18.58	0-5	1
		12	0	18.42	18.44	18.53	0-5	1
		12	6	18.44	18.43	18.45	0-5	1
		12	11	18.42	18.40	18.50	0-5	1
		25	0	18.43	18.42	18.51	0-5	1

LTE Band 17 _10 Mhz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				23780 Ch. 709 Mhz	23790 Ch. 710 Mhz	23800 Ch. 711 Mhz		
10 Mhz	QPSK	1	0	19.44	19.42	19.45	0	0
		1	24	19.43	19.41	19.36	0	0
		1	49	19.44	19.48	19.51	0	0
		25	0	19.39	19.39	19.46	0	0
		25	12	19.40	19.38	19.41	0	0
		25	24	19.35	19.36	19.41	0	0
		50	0	19.39	19.39	19.46	0-1	0
	16QAM	1	0	19.74	19.75	19.94	0-1	0
		1	24	19.72	19.64	19.85	0-1	0
		1	49	19.83	19.85	19.78	0-1	0
		25	0	19.37	19.38	19.42	0-1	0
		25	12	19.38	19.35	19.43	0-1	0
		25	24	19.34	19.36	19.42	0-1	0
		50	0	19.38	19.39	19.43	0-2	0
	64QAM	1	0	19.51	19.62	19.61	0-2	0
		1	24	19.68	19.58	19.54	0-2	0
		1	49	19.63	19.69	19.63	0-2	0
		25	0	19.35	19.35	19.38	0-2	0
		25	12	19.35	19.34	19.39	0-2	0
		25	24	19.33	19.34	19.35	0-2	0
		50	0	19.36	19.40	19.44	0-3	0
	256QAM	1	0	18.50	18.58	18.49	0-5	1
		1	24	18.55	18.55	18.52	0-5	1
		1	49	18.60	18.54	18.71	0-5	1
		25	0	18.38	18.35	18.40	0-5	1
		25	12	18.32	18.39	18.37	0-5	1
		25	24	18.33	18.35	18.37	0-5	1
		50	0	18.37	18.33	18.39	0-5	1

[LTE Band 41 Conducted Power ECI=0, 2, 3]

LTE Band 41 _ 5 MHz Bandwidth

Band width	Modulation	RB Size	RB Offset	Max. Average Power [dBm]					MPR Allowed Per GPP [dB]	MPR [dB]
				39750 Ch. 2506.0 MHz	40185 Ch. 2549.5 MHz	40620 Ch. 2593.0 MHz	41055 Ch. 2636.5 MHz	41490 Ch. 2680.0 MHz		
5 MHz	QPSK	1	0	21.62	21.78	21.43	21.42	21.65	0	0
		1	12	21.68	21.77	21.47	21.44	21.63	0	0
		1	24	21.72	21.69	21.42	21.43	21.60	0	0
		12	0	21.74	21.77	21.43	21.46	21.63	0-1	0
		12	6	21.73	21.75	21.44	21.45	21.62	0-1	0
		12	11	21.74	21.75	21.42	21.45	21.62	0-1	0
		25	0	21.74	21.76	21.45	21.47	21.66	0-1	0
	16QAM	1	0	21.65	21.79	21.42	21.44	21.63	0-1	0
		1	12	21.67	21.79	21.45	21.48	21.64	0-1	0
		1	24	21.79	21.73	21.44	21.45	21.70	0-1	0
		12	0	20.69	20.71	20.36	20.40	20.60	0-2	2
		12	6	20.68	20.67	20.37	20.38	20.58	0-2	2
		12	11	20.68	20.69	20.37	20.38	20.59	0-2	2
		25	0	20.81	20.83	20.50	20.52	20.69	0-2	2
	64QAM	1	0	20.43	20.50	20.15	20.17	20.34	0-2	2
		1	12	20.48	20.51	20.18	20.18	20.31	0-2	2
		1	24	20.52	20.41	20.13	20.18	20.34	0-2	2
		12	0	19.72	19.74	19.40	19.43	19.59	0-3	3
		12	6	19.70	19.71	19.41	19.42	19.59	0-3	3
		12	11	19.72	19.73	19.41	19.41	19.58	0-3	3
		25	0	19.77	19.77	19.47	19.48	19.63	0-3	3
	256QAM	1	0	17.60	17.66	17.32	17.33	17.46	0-5	5
		1	12	17.64	17.63	17.36	17.28	17.44	0-5	5
		1	24	17.66	17.59	17.29	17.28	17.44	0-5	5
		12	0	17.86	17.92	17.57	17.61	17.76	0-5	5
		12	6	17.86	17.88	17.57	17.58	17.75	0-5	5
		12	11	17.85	17.90	17.55	17.59	17.74	0-5	5
		25	0	17.82	17.84	17.54	17.54	17.70	0-5	5

LTE Band 41 _ 10 MHz Bandwidth

Band width	Modulation	RB Size	RB Offset	Max. Average Power [dBm]					MPR Allowed Per GPP [dB]	MPR [dB]
				39750 Ch. 2506.0 MHz	40185 Ch. 2549.5 MHz	40620 Ch. 2593.0 MHz	41055 Ch. 2636.5 MHz	41490 Ch. 2680.0 MHz		
10 MHz	QPSK	1	0	21.64	21.48	21.43	21.47	21.13	0	0
		1	24	21.63	21.72	21.41	21.37	21.56	0	0
		1	49	21.80	21.70	21.44	21.47	21.64	0	0
		25	0	21.68	21.78	21.44	21.45	21.65	0-1	0
		25	12	21.72	21.71	21.37	21.42	21.62	0-1	0
		25	24	21.74	21.71	21.39	21.44	21.63	0-1	0
		50	0	21.76	21.74	21.41	21.46	21.65	0-1	0
	16QAM	1	0	21.67	21.87	21.53	21.53	21.69	0-1	0
		1	24	21.66	21.72	21.42	21.44	21.63	0-1	0
		1	49	21.83	21.75	21.47	21.55	21.69	0-1	0
		25	0	20.76	20.79	20.48	20.49	20.69	0-2	2
		25	12	20.78	20.73	20.42	20.46	20.66	0-2	2
		25	24	20.81	20.76	20.42	20.49	20.67	0-2	2
		50	0	20.81	20.77	20.45	20.48	20.68	0-2	2
	64QAM	1	0	20.43	20.56	20.22	20.23	20.42	0-2	2
		1	24	20.45	20.44	20.14	20.13	20.34	0-2	2
		1	49	20.60	20.46	20.16	20.24	20.40	0-2	2
		25	0	19.70	19.78	19.44	19.45	19.63	0-3	3
		25	12	19.73	19.70	19.37	19.42	19.59	0-3	3
		25	24	19.75	19.73	19.39	19.42	19.60	0-3	3
		50	0	19.82	19.80	19.49	19.52	19.70	0-3	3
	256QAM	1	0	17.62	17.76	17.40	17.37	17.59	0-5	5
		1	24	17.63	17.64	17.31	17.27	17.52	0-5	5
		1	49	17.78	17.64	17.36	17.39	17.60	0-5	5
		25	0	17.75	17.84	17.51	17.53	17.68	0-5	5
		25	12	17.76	17.79	17.44	17.48	17.65	0-5	5
		25	24	17.81	17.82	17.48	17.51	17.69	0-5	5
		50	0	17.85	17.85	17.52	17.57	17.72	0-5	5

LTE Band 41 _ 15 MHz Bandwidth

Band width	Modulation	RB Size	RB Offset	Max. Average Power [dBm]					MPR Allowed Per GPP [dB]	MPR [dB]
				39750 Ch. 2506.0 MHz	40185 Ch. 2549.5 MHz	40620 Ch. 2593.0 MHz	41055 Ch. 2636.5 MHz	41490 Ch. 2680.0 MHz		
15 MHz	QPSK	1	0	21.60	21.46	21.38	21.52	21.67	0	0
		1	36	21.71	21.76	21.49	21.45	21.66	0	0
		1	74	21.81	21.77	21.37	21.46	21.62	0	0
		36	0	21.70	21.83	21.48	21.49	21.68	0-1	0
		36	18	21.76	21.76	21.42	21.48	21.68	0-1	0
		36	39	21.84	21.70	21.40	21.49	21.68	0-1	0
		75	0	21.77	21.76	21.46	21.50	21.68	0-1	0
	16QAM	1	0	21.60	21.91	21.50	21.48	21.70	0-1	0
		1	36	21.70	21.80	21.48	21.49	21.67	0-1	0
		1	74	21.87	21.67	21.44	21.52	21.67	0-1	0
		36	0	20.66	20.76	20.40	20.43	20.65	0-2	2
		36	18	20.71	20.71	20.34	20.43	20.59	0-2	2
		36	39	20.76	20.64	20.34	20.43	20.57	0-2	2
		75	0	20.79	20.77	20.47	20.51	20.69	0-2	2
	64QAM	1	0	20.40	20.59	20.20	20.21	20.37	0-2	2
		1	36	20.47	20.48	20.16	20.21	20.40	0-2	2
		1	74	20.60	20.35	20.12	20.23	20.37	0-2	2
		36	0	19.73	19.84	19.48	19.49	19.68	0-3	3
		36	18	19.77	19.77	19.44	19.48	19.67	0-3	3
		36	39	19.83	19.73	19.41	19.47	19.67	0-3	3
		75	0	19.82	19.81	19.52	19.55	19.69	0-3	3
	256QAM	1	0	17.59	17.75	17.40	17.36	17.56	0-5	5
		1	36	17.68	17.68	17.33	17.32	17.53	0-5	5
		1	74	17.81	17.55	17.31	17.37	17.54	0-5	5
		36	0	17.75	17.89	17.53	17.54	17.68	0-5	5
		36	18	17.80	17.79	17.49	17.52	17.70	0-5	5
		36	39	17.86	17.76	17.47	17.54	17.70	0-5	5
		75	0	17.83	17.84	17.54	17.56	17.75	0-5	5

LTE Band 41 _ 20 MHz Bandwidth

Band width	Modulation	RB Size	RB Offset	Max. Average Power [dBm]					MPR Allowed Per GPP [dB]	MPR [dB]
				39750 Ch. 2506.0 MHz	40185 Ch. 2549.5 MHz	40620 Ch. 2593.0 MHz	41055 Ch. 2636.5 MHz	41490 Ch. 2680.0 MHz		
20 MHz	QPSK	1	0	21.71	21.23	21.50	21.45	21.14	0	0
		1	49	21.70	21.78	21.45	21.47	21.66	0	0
		1	99	21.85	21.63	21.38	21.48	21.55	0	0
		50	0	21.77	21.86	21.52	21.52	21.71	0-1	0
		50	25	21.80	21.79	21.45	21.53	21.72	0-1	0
		50	49	21.87	21.77	21.42	21.53	21.69	0-1	0
		100	0	21.78	21.79	21.44	21.52	21.69	0-1	0
	16QAM	1	0	21.78	21.92	21.60	21.52	21.78	0-1	0
		1	49	21.85	21.82	21.56	21.52	21.72	0-1	0
		1	99	21.94	21.71	21.48	21.54	21.64	0-1	0
		50	0	20.80	20.88	20.55	20.53	20.75	0-2	2
		50	25	20.84	20.81	20.46	20.54	20.73	0-2	2
		50	49	20.88	20.78	20.45	20.53	20.75	0-2	2
		100	0	20.86	20.84	20.54	20.58	20.79	0-2	2
	64QAM	1	0	20.48	20.64	20.27	20.24	20.43	0-2	2
		1	49	20.50	20.49	20.20	20.23	20.44	0-2	2
		1	99	20.66	20.36	20.13	20.25	20.38	0-2	2
		50	0	19.83	19.92	19.61	19.59	19.76	0-3	3
		50	25	19.87	19.84	19.53	19.57	19.77	0-3	3
		50	49	19.91	19.84	19.50	19.56	19.75	0-3	3
		100	0	19.84	19.85	19.51	19.55	19.74	0-3	3
	256QAM	1	0	17.66	17.79	17.46	17.41	17.57	0-5	5
		1	49	17.71	17.73	17.38	17.37	17.57	0-5	5
		1	99	17.83	17.54	17.31	17.42	17.53	0-5	5
		50	0	17.84	17.96	17.65	17.65	17.80	0-5	5
		50	25	17.90	17.92	17.59	17.62	17.79	0-5	5
		50	49	17.95	17.89	17.56	17.63	17.78	0-5	5
		100	0	17.85	17.87	17.54	17.59	17.74	0-5	5

Note; LTE Band 41 has 5 required test channels per FCC KDB 447498 D01v06.
The EUT enables maximum power reduction in accordance with 3GPP 36.101. The MPR settings are configured during the manufacture process and are not configurable by the network, carrier, or end user.

[LTE Band 66 Conducted Power ECI=0, 2, 3]

LTE Band 66 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				131979 Ch. 1710.7 MHz	132322 Ch. 1745 MHz	132665 Ch. 1779.3 MHz		
1.4 MHz	QPSK	1	0	17.78	18.09	18.17	0	0
		1	3	17.77	18.14	18.15	0	0
		1	5	17.76	18.11	18.25	0	0
		3	0	17.78	18.05	18.12	0	0
		3	1	17.82	18.00	18.14	0	0
		3	3	17.80	18.05	18.17	0	0
		6	0	17.84	18.08	18.22	0-1	0
	16QAM	1	0	18.11	18.48	18.47	0-1	0
		1	3	18.22	18.50	18.53	0-1	0
		1	5	18.13	18.43	18.43	0-1	0
		3	0	17.98	18.18	18.23	0-1	0
		3	1	17.95	18.19	18.29	0-1	0
		3	3	17.93	18.19	18.35	0-1	0
		6	0	17.91	18.19	18.31	0-2	0
	64QAM	1	0	18.06	18.29	18.36	0-2	0
		1	3	18.03	18.24	18.42	0-2	0
		1	5	18.02	18.30	18.35	0-2	0
		3	0	17.88	18.07	18.28	0-2	0
		3	1	17.91	18.10	18.25	0-2	0
		3	3	17.85	18.12	18.22	0-2	0
		6	0	17.90	18.12	18.26	0-3	0
	256QAM	1	0	17.95	18.27	18.22	0-5	0
		1	3	17.91	18.22	18.38	0-5	0
		1	5	17.93	18.23	18.35	0-5	0
		3	0	17.93	18.22	18.29	0-5	0
		3	1	17.90	18.12	18.28	0-5	0
		3	3	17.94	18.19	18.30	0-5	0
		6	0	17.85	18.14	18.24	0-5	0

LTE Band 66 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				131987 Ch. 1711.5 MHz	132322 Ch. 1745 MHz	132657 Ch. 1778.5 MHz		
3 MHz	QPSK	1	0	17.78	17.52	18.08	0	0
		1	7	17.79	18.01	18.18	0	0
		1	14	17.83	18.05	18.22	0	0
		8	0	17.85	18.09	18.18	0	0
		8	3	17.82	18.09	18.19	0	0
		8	7	17.80	18.09	18.24	0	0
		15	0	17.81	18.10	18.21	0-1	0
	16QAM	1	0	18.16	18.38	18.58	0-1	0
		1	7	18.17	18.50	18.44	0-1	0
		1	14	18.13	18.33	18.56	0-1	0
		8	0	17.95	18.15	18.30	0-1	0
		8	3	17.92	18.18	18.25	0-1	0
		8	7	17.92	18.20	18.32	0-1	0
		15	0	17.85	18.11	18.22	0-2	0
	64QAM	1	0	18.02	18.28	18.35	0-2	0
		1	7	17.98	18.40	18.37	0-2	0
		1	14	17.99	18.26	18.37	0-2	0
		8	0	17.87	18.14	18.24	0-2	0
		8	3	17.89	18.11	18.23	0-2	0
		8	7	17.88	18.09	18.25	0-2	0
		15	0	17.86	18.16	18.27	0-3	0
	256QAM	1	0	17.92	18.18	18.21	0-5	0
		1	7	17.97	18.14	18.32	0-5	0
		1	14	17.90	18.21	18.33	0-5	0
		8	0	17.86	18.09	18.27	0-5	0
		8	3	17.88	18.11	18.23	0-5	0
		8	7	17.87	18.11	18.25	0-5	0
		15	0	17.82	18.12	18.16	0-5	0

LTE Band 66 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				131997 Ch. 1712.5 MHz	132322 Ch. 1745 MHz	132647 Ch. 1777.5 MHz		
5 MHz	QPSK	1	0	17.90	17.49	17.49	0	0
		1	12	17.89	18.11	18.20	0	0
		1	24	17.79	18.07	18.23	0	0
		12	0	17.88	18.11	18.20	0	0
		12	6	17.88	18.15	18.24	0	0
		12	11	17.86	18.15	18.24	0	0
		25	0	17.88	18.17	18.25	0-1	0
	16QAM	1	0	18.20	18.44	18.47	0-1	0
		1	12	18.24	18.44	18.61	0-1	0
		1	24	18.24	18.52	18.63	0-1	0
		12	0	17.97	18.20	18.26	0-1	0
		12	6	17.92	18.18	18.24	0-1	0
		12	11	17.89	18.19	18.30	0-1	0
		25	0	17.91	18.16	18.24	0-2	0
	64QAM	1	0	18.19	18.24	18.31	0-2	0
		1	12	18.13	18.42	18.36	0-2	0
		1	24	18.04	18.39	18.36	0-2	0
		12	0	17.92	18.16	18.19	0-2	0
		12	6	17.92	18.15	18.28	0-2	0
		12	11	17.88	18.14	18.24	0-2	0
		25	0	17.89	18.16	18.22	0-3	0
	256QAM	1	0	18.04	18.21	18.28	0-5	0
		1	12	18.03	18.16	18.40	0-5	0
		1	24	17.96	18.31	18.42	0-5	0
		12	0	17.92	18.17	18.19	0-5	0
		12	6	17.88	18.15	18.25	0-5	0
		12	11	17.86	18.11	18.23	0-5	0
		25	0	17.90	18.15	18.22	0-5	0

LTE Band 66 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				132022 Ch. 1715 MHz	132322 Ch. 1745 MHz	132622 Ch. 1775 MHz		
10 MHz	QPSK	1	0	17.86	17.67	18.09	0	0
		1	24	17.73	18.03	18.08	0	0
		1	49	17.89	18.09	18.21	0	0
		25	0	17.83	18.09	18.13	0	0
		25	12	17.82	18.08	18.12	0	0
		25	24	17.85	18.11	18.20	0	0
		50	0	17.87	18.12	18.17	0-1	0
	16QAM	1	0	18.22	18.42	18.58	0-1	0
		1	24	18.19	18.43	18.50	0-1	0
		1	49	18.29	18.49	18.64	0-1	0
		25	0	17.87	18.10	18.13	0-1	0
		25	12	17.80	18.08	18.11	0-1	0
		25	24	17.84	18.11	18.17	0-1	0
		50	0	17.84	18.11	18.15	0-2	0
	64QAM	1	0	18.13	18.28	18.34	0-2	0
		1	24	18.02	18.31	18.30	0-2	0
		1	49	18.12	18.35	18.46	0-2	0
		25	0	17.81	18.07	18.12	0-2	0
		25	12	17.80	18.07	18.11	0-2	0
		25	24	17.82	18.12	18.18	0-2	0
		50	0	17.84	18.10	18.16	0-3	0
	256QAM	1	0	18.02	18.24	18.34	0-5	0
		1	24	17.96	18.25	18.28	0-5	0
		1	49	18.05	18.26	18.36	0-5	0
		25	0	17.83	18.06	18.11	0-5	0
		25	12	17.80	18.06	18.09	0-5	0
		25	24	17.85	18.10	18.19	0-5	0
		50	0	17.87	18.11	18.14	0-5	0

LTE Band 66 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				132047 Ch. 1717.5 MHz	132322 Ch. 1745 MHz	132597 Ch. 1772.5 MHz		
15 MHz	QPSK	1	0	17.84	17.43	17.45	0	0
		1	36	17.89	18.20	18.14	0	0
		1	74	17.95	18.09	18.20	0	0
		36	0	17.90	18.12	18.16	0	0
		36	18	17.89	18.14	18.19	0	0
		36	39	17.94	18.14	18.21	0	0
		75	0	17.92	18.15	18.20	0-1	0
	16QAM	1	0	18.26	18.53	18.48	0-1	0
		1	36	18.12	18.48	18.41	0-1	0
		1	74	18.23	18.52	18.70	0-1	0
		36	0	17.89	18.08	18.17	0-1	0
		36	18	17.84	18.14	18.19	0-1	0
		36	39	17.91	18.15	18.21	0-1	0
		75	0	17.91	18.14	18.20	0-2	0
	64QAM	1	0	18.17	18.29	18.45	0-2	0
		1	36	18.11	18.27	18.32	0-2	0
		1	74	18.15	18.36	18.48	0-2	0
		36	0	17.88	18.12	18.16	0-2	0
		36	18	17.92	18.14	18.21	0-2	0
		36	39	17.94	18.19	18.24	0-2	0
		75	0	17.93	18.14	18.19	0-3	0
	256QAM	1	0	18.02	18.13	18.31	0-5	0
		1	36	18.01	18.36	18.22	0-5	0
		1	74	18.06	18.27	18.36	0-5	0
		36	0	17.88	18.11	18.14	0-5	0
		36	18	17.84	18.14	18.16	0-5	0
		36	39	17.92	18.13	18.22	0-5	0
		75	0	17.91	18.14	18.18	0-5	0

LTE Band 66 _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				132072 Ch. 1720 MHz	132322 Ch. 1745 MHz	132572 Ch. 1770 MHz		
20 MHz	QPSK	1	0	17.87	17.59	17.61	0	0
		1	49	17.84	18.16	18.13	0	0
		1	99	18.03	18.14	18.32	0	0
		50	0	17.88	18.13	18.19	0	0
		50	25	17.92	18.17	18.21	0	0
		50	49	18.05	18.14	18.28	0	0
		100	0	17.98	18.13	18.25	0-1	0
	16QAM	1	0	18.38	18.55	18.55	0-1	0
		1	49	18.31	18.49	18.56	0-1	0
		1	99	18.40	18.51	18.61	0-1	0
		50	0	17.87	18.09	18.20	0-1	0
		50	25	17.92	18.17	18.20	0-1	0
		50	49	18.05	18.17	18.30	0-1	0
		100	0	18.01	18.14	18.27	0-2	0
	64QAM	1	0	18.14	18.31	18.41	0-2	0
		1	49	18.14	18.36	18.45	0-2	0
		1	99	18.33	18.44	18.52	0-2	0
		50	0	17.88	18.12	18.18	0-2	0
		50	25	17.96	18.16	18.19	0-2	0
		50	49	18.05	18.17	18.30	0-2	0
		100	0	18.01	18.13	18.29	0-3	0
	256QAM	1	0	18.01	18.14	18.34	0-5	0
		1	49	18.13	18.40	18.31	0-5	0
		1	99	18.24	18.36	18.40	0-5	0
		50	0	17.88	18.11	18.18	0-5	0
		50	25	17.94	18.16	18.18	0-5	0
		50	49	18.05	18.15	18.29	0-5	0
		100	0	18.01	18.12	18.29	0-5	0

11.3.3 NR Band Maximum Conducted Power

[NR Band n5 Conducted Power Pmax, ECI=1]

NR Band n5_ 5 MHz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
						165300	167300	169300	
						826.5 MHz	836.5 MHz	846.5 MHz	
5 MHz	15	DFT-s OFDM	pi/2 BPSK	1	1	24.14	24.04	24.01	0
				1	13	24.06	24.03	23.93	0
				1	23	24.06	24.02	23.94	0
				12	0	23.76	23.67	23.60	0.5
				12	7	24.20	24.16	24.05	0
				12	13	23.73	23.62	23.56	0.5
				25	0	23.75	23.69	23.59	0.5
			QPSK	1	1	24.09	23.93	23.94	0
				1	13	23.97	23.97	23.84	0
				1	23	23.93	24.00	23.89	0
				12	0	23.28	23.21	23.17	1
				12	7	24.25	24.16	24.12	0
				12	13	23.25	23.13	23.09	1
				25	0	23.23	23.21	23.09	1
			16QAM	1	1	23.27	23.30	23.22	1
			64QAM	1	1	21.98	22.01	21.84	2.5
			256QAM	1	1	19.61	19.62	19.44	4.5
		CP	QPSK	1	1	22.64	22.56	22.49	1.5

NR Band n5_ 10 MHz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
							167300		
							836.5 MHz		
10 MHz	15	DFT-s OFDM	pi/2 BPSK	1	1		24.06		0
				1	26		24.14		0
				1	50		24.02		0
				25	0		23.75		0.5
				25	14		24.18		0
				25	27		23.63		0.5
				50	0		23.66		0.5
			QPSK	1	1		23.92		0
				1	26		23.98		0
				1	50		23.98		0
				25	0		23.22		1
				25	14		24.18		0
				25	27		23.11		1
				50	0		23.16		1
			16QAM	1	1		23.42		1
			64QAM	1	1		22.08		2.5
			256QAM	1	1		19.67		4.5
		CP	QPSK	1	1		22.55		1.5

NR Band n5_ 15 MHz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]		MPR [dB]
							167300	
15 MHz	15	DFT-s OFDM	pi/2 BPSK	1	1		836.5 MHz	
				1	40		24.09	0
				1	77		24.15	0
				36	0		24.02	0
				36	22		23.71	0.5
				36	43		24.14	0
				75	0		23.62	0.5
			QPSK	1	1		23.62	0.5
				1	40		23.94	0
				1	77		24.04	0
				36	0		23.97	0
				36	22		23.20	1
				36	43		24.12	0
				75	0		23.10	1
							23.17	1
			16QAM	1	1		23.36	1
			64QAM	1	1		22.08	2.5
			256QAM	1	1		19.67	4.5
		CP	QPSK	1	1		22.55	1.5

NR Band n5_ 20 MHz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]		MPR [dB]
							167300	
20 MHz	15	DFT-s OFDM	pi/2 BPSK	1	1		836.5 MHz	
				1	53		24.15	0
				1	104		24.18	0
				50	0		23.96	0
				50	28		23.73	0.5
				50	56		24.17	0
				100	0		23.59	0.5
			QPSK	1	1		23.66	0.5
				1	53		24.01	0
				1	104		24.06	0
				50	0		23.91	0
				50	28		23.23	1
				50	56		24.14	0
				100	0		23.10	1
							23.18	1
			16QAM	1	1		23.34	1
			64QAM	1	1		22.07	2.5
			256QAM	1	1		19.64	4.5
		CP	QPSK	1	1		22.59	1.5

[NR Band n66 Conducted Power_ Pmax]

NR Band n66 _5 MHz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
						342500	349000	355500	
						1712.5 MHz	1745 MHz	1777.5 MHz	
5 MHz	15	DFT-s OFDM	pi/2 BPSK	1	1	23.51	24.08	23.98	0
				1	13	23.45	24.08	23.98	0
				1	23	23.52	24.12	24.05	0
				12	0	23.66	23.69	23.61	0.5
				12	7	24.11	24.18	24.14	0
				12	13	23.63	23.68	23.64	0.5
				25	0	23.63	23.73	23.65	0.5
			QPSK	1	1	23.48	24.00	23.97	0
				1	13	23.42	24.01	23.90	0
				1	23	23.44	23.97	23.91	0
				12	0	23.24	23.26	23.20	1
				12	7	24.18	24.24	24.20	0
				12	13	23.16	23.24	23.20	1
				25	0	23.15	23.24	23.18	1
			16QAM	1	1	22.76	23.31	22.63	1
			64QAM	1	1	21.32	21.89	21.25	2.5
			256QAM	1	1	19.49	19.54	19.42	4.5
		CP	QPSK	1	1	22.51	22.56	22.46	1.5

NR Band n66 _10 MHz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
						343000	349000	355000	
						1715 MHz	1745 MHz	1775 MHz	
10 MHz	15	DFT-s OFDM	pi/2 BPSK	1	1	24.09	24.10	23.97	0
				1	26	24.01	24.09	24.04	0
				1	50	24.01	24.09	24.09	0
				25	0	23.63	23.68	23.51	0.5
				25	14	24.13	24.14	24.07	0
				25	27	23.61	23.63	23.63	0.5
			QPSK	50	0	23.63	23.64	23.58	0.5
				1	1	24.05	24.03	23.44	0
				1	26	23.96	23.99	23.46	0
				1	50	23.96	24.01	23.51	0
				25	0	23.17	23.19	23.02	1
				25	14	24.13	24.18	24.10	0
				25	27	23.12	23.17	23.17	1
				50	0	23.17	23.14	23.10	1
			16QAM	1	1	22.84	23.31	22.60	1
			64QAM	1	1	21.46	21.88	21.18	2.5
			256QAM	1	1	19.62	19.59	19.35	4.5
		CP	QPSK	1	1	22.58	22.57	22.41	1.5

NR Band n66 _ 15 Mhz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
						343500	349000	354500	
						1717.5 Mhz	1745 Mhz	1772.5 Mhz	
15 Mhz	15	DFT-s OFDM	pi/2 BPSK	1	1	24.07	24.10	23.87	0
				1	40	24.03	24.18	23.98	0
				1	77	23.99	24.03	24.04	0
				36	0	23.65	23.74	23.47	0.5
				36	22	24.12	24.26	24.05	0
				36	43	23.63	23.72	23.60	0.5
			QPSK	75	0	23.67	23.71	23.57	0.5
				1	1	24.01	24.05	23.36	0
				1	40	23.98	24.12	23.42	0
				1	77	23.96	23.97	23.45	0
				36	0	23.20	23.23	23.00	1
				36	22	24.16	24.25	24.09	0
				36	43	23.14	23.21	23.12	1
				75	0	23.21	23.23	23.07	1
			16QAM	1	1	22.79	23.30	22.52	1
			64QAM	1	1	21.39	21.90	21.13	2.5
			256QAM	1	1	19.57	19.56	19.31	4.5
		CP	QPSK	1	1	22.53	22.56	22.32	1.5

NR Band n66 _ 20 Mhz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
						344000	349000	354000	
						1720 Mhz	1745 Mhz	1770 Mhz	
20 Mhz	15	DFT-s OFDM	pi/2 BPSK	1	1	24.02	24.07	23.89	0
				1	53	24.03	24.19	23.94	0
				1	104	23.99	24.03	24.05	0
				50	0	23.62	23.71	23.53	0.5
				50	28	24.15	24.23	24.06	0
				50	56	23.66	23.66	23.62	0.5
			QPSK	100	0	23.63	23.69	23.60	0.5
				1	1	23.95	24.03	23.38	0
				1	53	23.95	24.10	23.44	0
				1	104	23.93	23.91	23.48	0
				50	0	23.11	23.19	23.05	1
				50	28	24.14	24.22	24.08	0
				50	56	23.14	23.19	23.15	1
				100	0	23.14	23.22	23.07	1
			16QAM	1	1	22.77	23.25	22.54	1
			64QAM	1	1	21.88	21.87	21.13	2.5
			256QAM	1	1	19.54	19.55	19.36	4.5
		CP	QPSK	1	1	22.47	22.55	22.34	1.5

NR Band n66 _ 25 MHz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
						344500	349000	353500	
						1722.5 MHz	1745 MHz	1767.5 MHz	
25 MHz	15	DFT-s OFDM	pi/2 BPSK	1	1	24.00	24.09	24.00	0
				1	66	24.02	24.27	24.02	0
				1	131	24.02	24.01	24.10	0
				64	0	23.65	23.77	23.71	0.5
				64	35	24.14	24.26	24.17	0
				64	69	23.75	23.71	23.76	0.5
			QPSK	128	0	23.65	23.71	23.71	0.5
				1	1	23.97	24.03	23.43	0
				1	66	24.00	24.20	23.49	0
				1	131	23.98	23.92	23.50	0
				64	0	23.14	23.28	23.22	1
				64	35	24.15	24.31	24.17	0
				64	69	23.23	23.23	23.23	1
				128	0	23.16	23.23	23.23	1
			16QAM	1	1	23.27	23.19	22.69	1
			64QAM	1	1	21.87	21.82	21.36	2.5
			256QAM	1	1	19.53	19.49	19.45	4.5
		CP	QPSK	1	1	22.44	22.52	22.43	1.5

NR Band n66 _ 30 MHz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]		MPR [dB]
							349000	
							1745 MHz	
30 MHz	15	DFT-s OFDM	pi/2 BPSK	1	1		24.11	0
				1	80		24.21	0
				1	158		24.01	0
				80	0		23.73	0.5
				80	40		24.25	0
				80	80		23.70	0.5
			QPSK	160	0		23.69	0.5
				1	1		24.07	0
				1	80		24.15	0
				1	158		23.92	0
				80	0		23.24	1
				80	40		24.28	0
				80	80		23.23	1
				160	0		23.21	1
			16QAM	1	1		23.23	1
			64QAM	1	1		21.82	2.5
			256QAM	1	1		19.53	4.5
		CP	QPSK	1	1		22.55	1.5

NR Band n66 _ 40 MHz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
							349000		
40 MHz	15	DFT-s OFDM	pi/2 BPSK	1	1		1745 MHz		
				1	108		24.06		0
				1	214		24.25		0
				1	214		23.96		0
				108	0		23.69		0.5
				108	54		24.24		0
				108	108		23.59		0.5
				216	0		23.60		0.5
			QPSK	1	1		24.00		0
				1	108		24.14		0
				1	214		23.90		0
				108	0		23.20		1
				108	54		24.27		0
				108	108		23.13		1
				216	0		23.14		1
			16QAM	1	1		23.21		1
			64QAM	1	1		21.77		2.5
			256QAM	1	1		19.45		4.5
		CP	QPSK	1	1		22.50		1.5

11.3.4 NR Band Reduced Conducted Power

[NR Band n5 Conducted Power ECI=0,2,3]

NR Band n5_ 5 MHz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
						165300	167300	169300	
						826.5 MHz	836.5 MHz	846.5 MHz	
5 MHz	15	DFT-s OFDM	pi/2 BPSK	1	1	23.23	23.11	23.04	0
				1	13	23.17	23.06	22.96	0
				1	23	23.17	23.07	23.00	0
				12	0	23.30	23.22	23.14	0
				12	7	23.30	23.18	23.09	0
				12	13	23.28	23.16	23.09	0
			QPSK	25	0	23.28	23.23	23.17	0
				1	1	23.22	23.06	23.02	0
				1	13	23.09	23.05	22.94	0
				1	23	23.07	23.10	23.01	0
				12	0	23.33	23.24	23.18	0
				12	7	23.29	23.21	23.13	0
				12	13	23.29	23.17	23.12	0
				25	0	23.27	23.21	23.13	0
			16QAM	1	1	23.36	23.34	23.23	0
			64QAM	1	1	22.02	22.00	21.88	1.5
			256QAM	1	1	19.62	19.66	19.47	3.5
		CP	QPSK	1	1	22.67	22.58	22.49	0.5

NR Band n5_ 10 MHz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
							167300		
							836.5 MHz		
10 MHz	15	DFT-s OFDM	pi/2 BPSK	1	1		23.16		0
				1	26		23.20		0
				1	50		23.08		0
				25	0		23.26		0
				25	14		23.22		0
				25	27		23.12		0
			QPSK	50	0		23.19		0
				1	1		23.08		0
				1	26		23.09		0
				1	50		23.08		0
				25	0		23.27		0
				25	14		23.19		0
				25	27		23.16		0
				50	0		23.18		0
			16QAM	1	1		23.45		0
			64QAM	1	1		22.12		1.5
			256QAM	1	1		19.70		3.5
		CP	QPSK	1	1		22.60		0.5

NR Band n5_ 15 MHz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]		MPR [dB]
							167300	
15 MHz	15	DFT-s OFDM	pi/2 BPSK	1	1		836.5 MHz	
				1	40		23.16	0
				1	77		23.17	0
				36	0		23.06	0
				36	22		23.25	0
				36	43		23.21	0
				75	0		23.1	0
			QPSK	1	1		23.21	0
				1	40		23.08	0
				1	77		23.13	0
				36	0		23.06	0
				36	22		23.24	0
				36	43		23.15	0
				75	0		23.12	0
				75	0		23.19	0
			16QAM	1	1		23.43	0
			64QAM	1	1		22.08	1.5
			256QAM	1	1		19.70	3.5
		CP	QPSK	1	1		22.58	0.5

NR Band n5_ 20 MHz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]		MPR [dB]
							167300	
20 MHz	15	DFT-s OFDM	pi/2 BPSK	1	1		836.5 MHz	
				1	53		23.21	0
				1	104		23.27	0
				50	0		23.04	0
				50	28		23.29	0
				50	56		23.21	0
				100	0		23.12	0
			QPSK	1	1		23.21	0
				1	53		23.10	0
				1	104		23.19	0
				50	0		23.03	0
				50	28		23.25	0
				50	56		23.18	0
				100	0		23.12	0
				100	0		23.20	0
			16QAM	1	1		23.36	0
			64QAM	1	1		22.00	1.5
			256QAM	1	1		19.67	3.5
		CP	QPSK	1	1		22.60	0.5

[NR Band n66 Conducted Power_ ECI=0,2,3]

NR Band n66 _5 MHz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
						342500	349000	355500	
						1712.5 MHz	1745 MHz	1777.5 MHz	
5 MHz	15	DFT-s OFDM	pi/2 BPSK	1	1	18.07	18.11	18.10	0
				1	13	18.02	18.17	18.14	0
				1	23	18.05	18.17	18.19	0
				12	0	18.22	18.24	18.24	0
				12	7	18.15	18.24	18.25	0
				12	13	18.14	18.25	18.31	0
			QPSK	25	0	18.16	18.24	18.26	0
				1	1	18.06	18.14	18.16	0
				1	13	18.01	18.16	18.16	0
				1	23	18.00	18.10	18.18	0
				12	0	18.19	18.22	18.23	0
				12	7	18.19	18.26	18.27	0
				12	13	18.14	18.22	18.27	0
				25	0	18.17	18.27	18.25	0
			16QAM	1	1	18.14	18.15	18.18	0
			64QAM	1	1	18.20	18.20	18.21	0
			256QAM	1	1	17.99	18.00	18.00	0
		CP	QPSK	1	1	18.06	18.14	18.14	0

NR Band n66 _10 MHz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
						343000	349000	355000	
						1715 MHz	1745 MHz	1775 MHz	
10 MHz	15	DFT-s OFDM	pi/2 BPSK	1	1	18.15	18.13	18.07	0
				1	26	18.07	18.11	18.10	0
				1	50	18.06	18.10	18.25	0
				25	0	18.19	18.20	18.12	0
				25	14	18.17	18.19	18.17	0
				25	27	18.13	18.20	18.26	0
				50	0	18.17	18.20	18.21	0
			QPSK	1	1	18.14	18.12	18.09	0
				1	26	18.02	18.09	18.08	0
				1	50	18.08	18.08	18.23	0
				25	0	18.20	18.21	18.12	0
				25	14	18.17	18.20	18.15	0
				25	27	18.13	18.19	18.24	0
				50	0	18.18	18.22	18.20	0
			16QAM	1	1	18.30	18.15	18.08	0
			64QAM	1	1	18.26	18.24	18.22	0
			256QAM	1	1	18.12	18.04	17.95	0
		CP	QPSK	1	1	18.19	18.13	18.09	0

NR Band n66 _ 15 Mhz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
						343500	349000	354500	
						1717.5 MHz	1745 MHz	1772.5 MHz	
15 Mhz	15	DFT-s OFDM	pi/2 BPSK	1	1	18.13	18.12	17.94	0
				1	40	18.10	18.22	18.09	0
				1	77	18.07	18.10	18.18	0
				36	0	18.21	18.23	18.08	0
				36	22	18.15	18.24	18.16	0
				36	43	18.17	18.22	18.23	0
				75	0	18.20	18.21	18.17	0
			QPSK	1	1	18.12	18.08	17.93	0
				1	40	18.06	18.22	18.04	0
				1	77	18.03	18.05	18.09	0
				36	0	18.18	18.20	18.08	0
				36	22	18.19	18.26	18.16	0
				36	43	18.15	18.19	18.22	0
				75	0	18.16	18.21	18.14	0
			16QAM	1	1	18.22	18.13	17.96	0
			64QAM	1	1	18.26	18.20	18.08	0
			256QAM	1	1	18.06	18.01	17.80	0
		CP	QPSK	1	1	18.13	18.13	17.96	0

NR Band n66 _ 20 Mhz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
						344000	349000	354000	
						1720 MHz	1745 MHz	1770 MHz	
20 Mhz	15	DFT-s OFDM	pi/2 BPSK	1	1	18.08	18.10	18.01	0
				1	53	18.06	18.24	18.07	0
				1	104	18.03	18.08	18.15	0
				50	0	18.15	18.21	18.08	0
				50	28	18.18	18.29	18.18	0
				50	56	18.14	18.18	18.24	0
				100	0	18.14	18.21	18.21	0
			QPSK	1	1	18.07	18.09	17.95	0
				1	53	18.01	18.20	18.03	0
				1	104	18.04	18.02	18.12	0
				50	0	18.15	18.21	18.09	0
				50	28	18.17	18.30	18.15	0
				50	56	18.15	18.17	18.25	0
				100	0	18.13	18.19	18.12	0
			16QAM	1	1	18.13	18.09	18.01	0
			64QAM	1	1	18.20	18.19	18.10	0
			256QAM	1	1	18.00	17.97	17.88	0
		CP	QPSK	1	1	18.09	18.09	18.02	0

NR Band n66 _ 25 Mhz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
						344500	349000	353500	
						1722.5 Mhz	1745 Mhz	1767.5 Mhz	
25 Mhz	15	DFT-s OFDM	pi/2 BPSK	1	1	18.06	18.06	18.08	0
				1	66	18.05	18.22	18.12	0
				1	131	18.02	18.09	18.18	0
				64	0	18.15	18.21	18.31	0
				64	35	18.15	18.29	18.28	0
				64	69	18.23	18.20	18.37	0
				128	0	18.20	18.21	18.34	0
			QPSK	1	1	18.03	18.09	18.08	0
				1	66	18.04	18.25	18.14	0
				1	131	18.01	18.08	18.17	0
				64	0	18.13	18.19	18.27	0
				64	35	18.15	18.32	18.25	0
				64	69	18.24	18.21	18.32	0
				128	0	18.16	18.22	18.30	0
			16QAM	1	1	18.14	18.11	18.17	0
			64QAM	1	1	18.22	18.18	18.16	0
			256QAM	1	1	17.97	17.96	17.98	0
		CP	QPSK	1	1	18.07	18.09	18.07	0

NR Band n66 _ 30 Mhz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]		MPR [dB]
							349000	
							1745 Mhz	
30 Mhz	15	DFT-s OFDM	pi/2 BPSK	1	1		18.11	0
				1	80		18.25	0
				1	158		18.14	0
				80	0		18.24	0
				80	40		18.26	0
				80	80		18.22	0
				160	0		18.22	0
			QPSK	1	1		18.10	0
				1	80		18.22	0
				1	158		18.08	0
				80	0		18.24	0
				80	40		18.27	0
				80	80		18.22	0
				160	0		18.23	0
			16QAM	1	1		18.13	0
			64QAM	1	1		18.22	0
			256QAM	1	1		17.99	0
		CP	QPSK	1	1		18.13	0

NR Band n66 _ 40 MHz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
							349000		
40 MHz	15	DFT-s OFDM	pi/2 BPSK	1	1		1745 MHz		0
				108	0		18.06		0
				108	54		18.28		0
				108	108		18.09		0
				216	0		18.20		0
				108	54		18.25		0
				108	108		18.15		0
			QPSK	216	0		18.14		0
				1	1		18.03		0
				1	108		18.20		0
				1	214		18.08		0
				108	0		18.18		0
				108	54		18.28		0
				108	108		18.13		0
				216	0		18.19		0
			16QAM	1	1		18.11		0
			64QAM	1	1		18.16		0
			256QAM	1	1		17.96		0
		CP	QPSK	1	1		18.05		0

[NR Band n66 Conducted Power_ ECI=1]

NR Band n66 _5 MHz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
						342500	349000	355500	
						1712.5 MHz	1745 MHz	1777.5 MHz	
5 MHz	15	DFT-s OFDM	pi/2 BPSK	1	1	22.03	22.10	22.05	0
				1	13	21.96	22.11	22.00	0
				1	23	22.01	22.14	22.09	0
				12	0	22.15	22.23	22.14	0
				12	7	22.12	22.24	22.17	0
				12	13	22.11	22.21	22.20	0
			QPSK	25	0	22.11	22.26	22.15	0
				1	1	22.04	22.13	22.02	0
				1	13	21.96	22.14	22.02	0
				1	23	22.00	22.13	22.08	0
				12	0	22.18	22.25	22.14	0
				12	7	22.12	22.23	22.19	0
				12	13	22.11	22.23	22.22	0
				25	0	22.14	22.22	22.19	0
			16QAM	1	1	22.21	22.24	22.14	0
			64QAM	1	1	21.83	21.87	21.76	0.5
			256QAM	1	1	19.48	19.52	19.42	2.5
		CP	QPSK	1	1	21.94	22.07	21.98	0

NR Band n66 _10 MHz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
						343000	349000	355000	
						1715 MHz	1745 MHz	1775 MHz	
10 MHz	15	DFT-s OFDM	pi/2 BPSK	1	1	22.11	22.14	22.00	0
				1	26	22.13	22.16	22.06	0
				1	50	22.03	22.11	22.15	0
				25	0	22.15	22.21	22.02	0
				25	14	22.14	22.18	22.08	0
				25	27	22.12	22.16	22.17	0
			QPSK	50	0	22.13	22.15	22.12	0
				1	1	22.16	22.13	22.00	0
				1	26	22.07	22.15	22.00	0
				1	50	22.02	22.14	22.12	0
				25	0	22.18	22.20	22.03	0
				25	14	22.13	22.16	22.07	0
				25	27	22.11	22.15	22.16	0
				50	0	22.16	22.18	22.13	0
			16QAM	1	1	22.28	22.20	22.07	0
			64QAM	1	1	21.94	21.84	21.68	0.5
			256QAM	1	1	19.58	19.57	19.37	2.5
		CP	QPSK	1	1	22.09	22.05	21.90	0

NR Band n66 _ 15 MHz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
						343500	349000	354500	
						1717.5 MHz	1745 MHz	1772.5 MHz	
15 MHz	15	DFT-s OFDM	pi/2 BPSK	1	1	22.10	22.14	21.93	0
				1	40	22.05	22.20	22.00	0
				1	77	22.04	22.11	22.07	0
				36	0	22.17	22.24	21.99	0
				36	22	22.17	22.27	22.10	0
				36	43	22.14	22.23	22.13	0
				75	0	22.18	22.23	22.08	0
			QPSK	1	1	22.12	22.14	21.90	0
				1	40	22.07	22.23	21.99	0
				1	77	22.04	22.09	22.04	0
				36	0	22.19	22.23	21.99	0
				36	22	22.13	22.25	22.11	0
				36	43	22.15	22.19	22.12	0
				75	0	22.17	22.23	22.09	0
			16QAM	1	1	22.27	22.24	22.02	0
			64QAM	1	1	21.90	21.84	21.63	0.5
			256QAM	1	1	19.54	19.52	19.32	2.5
		CP	QPSK	1	1	22.03	22.07	21.80	0

NR Band n66 _ 20 MHz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
						344000	349000	354000	
						1720 MHz	1745 MHz	1770 MHz	
20 MHz	15	DFT-s OFDM	pi/2 BPSK	1	1	22.03	22.11	21.92	0
				1	53	22.04	22.20	22.06	0
				1	104	22.00	22.03	22.07	0
				50	0	22.11	22.21	22.04	0
				50	28	22.17	22.25	22.10	0
				50	56	22.14	22.18	22.18	0
				100	0	22.14	22.20	22.13	0
			QPSK	1	1	22.08	22.12	21.94	0
				1	53	22.03	22.19	21.96	0
				1	104	22.00	21.99	22.05	0
				50	0	22.14	22.21	22.04	0
				50	28	22.16	22.24	22.09	0
				50	56	22.14	22.20	22.15	0
				100	0	22.11	22.22	22.08	0
			16QAM	1	1	22.21	22.19	22.05	0
			64QAM	1	1	21.84	21.80	21.72	0.5
			256QAM	1	1	19.53	19.56	19.35	2.5
		CP	QPSK	1	1	21.96	22.05	21.84	0

NR Band n66 _ 25 Mhz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
						344500	349000	353500	
						1722.5 Mhz	1745 Mhz	1767.5 Mhz	
25 Mhz	15	DFT-s OFDM	pi/2 BPSK	1	1	22.04	22.11	22.03	0
				1	66	22.06	22.31	22.09	0
				1	131	22.05	22.04	22.14	0
				64	0	22.14	22.27	22.23	0
				64	35	22.13	22.29	22.17	0
				64	69	22.25	22.22	22.25	0
			QPSK	128	0	22.15	22.22	22.27	0
				1	1	22.05	22.09	22.04	0
				1	66	22.04	22.27	22.04	0
				1	131	22.03	22.02	22.10	0
				64	0	22.16	22.25	22.23	0
				64	35	22.15	22.30	22.15	0
				64	69	22.23	22.22	22.25	0
				128	0	22.16	22.26	22.22	0
			16QAM	1	1	22.23	22.19	22.18	0
			64QAM	1	1	21.83	21.77	21.83	0.5
			256QAM	1	1	19.52	19.53	19.48	2.5
		CP	QPSK	1	1	21.96	22.05	21.92	0

NR Band n66 _ 30 Mhz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]		MPR [dB]
							349000	
							1745 Mhz	
30 Mhz	15	DFT-s OFDM	pi/2 BPSK	1	1		22.11	0
				1	80		22.32	0
				1	158		22.07	0
				80	0		22.24	0
				80	40		22.28	0
				80	80		22.21	0
			QPSK	160	0		22.21	0
				1	1		22.13	0
				1	80		22.25	0
				1	158		22.05	0
				80	0		22.25	0
				80	40		22.27	0
				80	80		22.21	0
			16QAM	160	0		22.22	0
				1	1		22.22	0
				1	1		21.81	0.5
			256QAM	1	1		19.51	2.5
		CP	QPSK	1	1		22.05	0

NR Band n66 _ 40 MHz Bandwidth

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR [dB]
							349000		
40 MHz	15	DFT-s OFDM	pi/2 BPSK	1	1		1745 MHz		0
				1	108		22.06		0
				1	214		22.33		0
				108	0		21.99		0
				108	54		22.20		0
				108	108		22.26		0
				216	0		22.13		0
			QPSK	1	1		22.13		0
				1	108		22.07		0
				1	214		22.26		0
				108	0		22.01		0
				108	54		22.21		0
				108	108		22.31		0
				216	0		22.14		0
							22.18		0
			16QAM	1	1		22.22		0
			64QAM	1	1		21.78		0.5
			256QAM	1	1		19.49		2.5
		CP	QPSK	1	1		21.98		0

11.4 WIFI Conducted Power measurement method


Un-Licensed Bands (DTS Band)

Test Description	Test Procedure Used
Conducted Output Power	- KDB 558074 v05 - Section 8.3.2.3 - ANSI 63.10-2013 - Section 11.9.2.3

Test Procedure

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Test setup




Un-Licensed Bands (NII Band)

Test Description	Test Procedure Used
Conducted Output Power	- KDB 789033 D02 v02r01 - Section E.3.a

Test Procedure

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Test setup



11.4.1 IEEE 802.11 (2.4 GHz) Maximum Conducted Power

Mode	Frequency [MHz]	Channel	IEEE 802.11 (2.4 GHz) Average RF Conducted Power [dBm]
			SISO
			WIFI 1
802.11b	2 412	1	17.77
	2 437	6	18.54
	2 462	11	18.29
	2 467	12	4.59
	2 472	13	0.77
802.11g	2 412	1	16.68
	2 437	6	16.28
	2 462	11	16.05
	2 467	12	4.09
	2 472	13	0.36
802.11n (HT20)	2 412	1	16.58
	2 437	6	16.17
	2 462	11	15.94
	2 467	12	3.98
	2 472	13	0.25

11.4.2 IEEE 802.11 (2.4 GHz) Reduced Conducted Power

Mode	Frequency [MHz]	Channel	IEEE 802.11 (2.4 GHz) Average RF Conducted Power [dBm]
			SISO
			WIFI 1
802.11b	2 412	1	15.72
	2 437	6	15.27
	2 462	11	15.05


11.4.3 IEEE 802.11 (5 GHz) Reduced Conducted Power

Mode	Frequency [MHz]	Channel	IEEE 802.11 (5 GHz) Average RF Conducted Power [dBm]
			SISO
			WIFI 1
802.11n (40 MHz BW)	5 190	38	14.16
	5 230	46	14.17
	5 270	54	14.13
	5 310	62	14.01
	5 510	102	14.65
	5 590	118	14.37
	5 630	126	14.42
	5 710	142	14.66
	5 755	151	14.05
	5 795	159	13.82

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission mode with the same maximum output power specification, powers were measured for the largest channel Bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel Bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-Band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-Band channels, due to an even number of channels, both channels were measured.

Test Configuration



11.5 Bluetooth

Maximum Conducted Power

The Burst averaged-conducted power


Mode	Frequency [MHz]	Channel	Bluetooth Power [dBm]
DH5	2 402	0	9.93
	2 441	39	10.05
	2 480	78	10.27
2-DH5	2 402	0	6.78
	2 441	39	6.27
	2 480	78	6.60
3-DH5	2 402	0	6.61
	2 441	39	6.11
	2 480	78	6.44

Per October 2016 TCB Workshop Notes:

When call box and Bluetooth protocol are used for Bluetooth SAR measurement, time-domain plot is required to identify duty factor for supporting the test setup and result.

Bluetooth duty cycle was measured using Bluetooth tester equipment (CBT / R&S) with Bluetooth DH5 mode.

Bluetooth DH 5 Mode

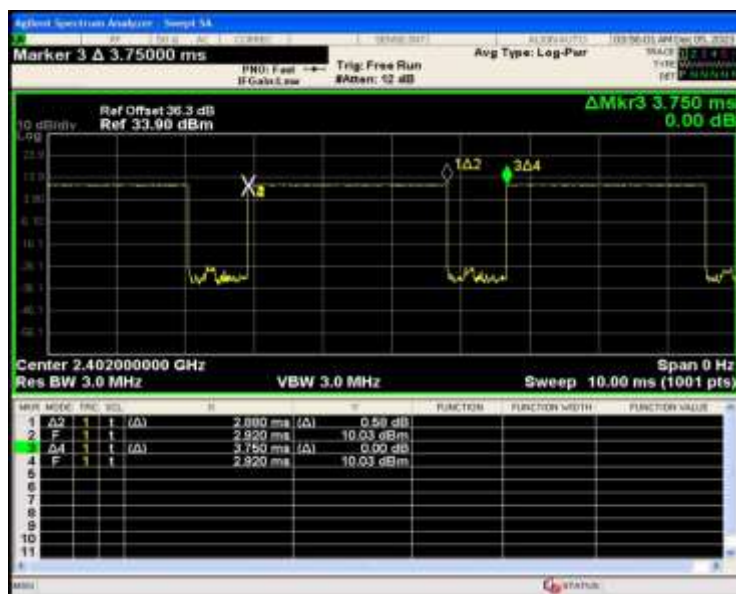

Bluetooth Duty Cycle [BDR]

Duty Cycle = (BT-On time / BT-Full time) = (2.880/3.750) = 0.768 (DH5)

BT DH5 Maximum Duty Factor:

The theoretical maximum duty cycle defined by chipset manufacturer is 76.56 % In the ideal theory Duty Cycle, the test error tolerance [1%] of the test equipment was considered and applied to the measurement results. The duty cycle of DH5 measured by DUT was 76.80 %, and the duty cycle was compensated by applying test error tolerance 1 %.

12. System Verification

12.1 Tissue Verification

The body simulating material is calibrated by HCT using the DAKS 3.5 to determine the conductivity and permittivity.

Table for Head Tissue Verification									
Date of Tests	Tissue Temp.	Tissue Type	Freq.	Measured Conductivity	Measured Dielectric Constant, ϵ	Target Conductivity	Target Dielectric Constant, ϵ	dev σ	dev ϵ
	(°C)		(MHz)	σ (S/m)		σ (S/m)		(%)	(%)
12/06/2023	20.6	13H	12	0.744	54.382	0.750	55.000	- 0.80	- 1.12
			13	0.724	54.465	0.750	55.000	- 3.47	- 0.97
			14	0.756	54.356	0.750	55.000	0.80	- 1.17
11/15/2023	20.4	750H	705	0.871	42.588	0.889	42.174	- 2.02	0.98
			710	0.876	42.511	0.890	42.148	- 1.57	0.86
			750	0.920	41.899	0.893	41.940	3.02	- 0.10
12/14/2023	21.9	835H	820	0.905	41.474	0.899	41.577	0.67	- 0.25
			835	0.922	41.235	0.900	41.500	2.44	- 0.64
			850	0.938	41.005	0.916	41.500	2.40	- 1.19
11/16/2023	20.8	835H	820	0.908	41.952	0.899	41.577	1.00	0.90
			835	0.926	41.723	0.900	41.500	2.89	0.54
			850	0.941	41.501	0.916	41.500	2.73	0.00
12/01/2023	21.7	835H	820	0.905	40.570	0.899	41.577	0.67	- 2.42
			835	0.923	40.350	0.900	41.500	2.56	- 2.77
			850	0.938	40.117	0.916	41.500	2.40	- 3.33
11/17/2023	20.5	835H	820	0.906	41.492	0.899	41.577	0.78	- 0.20
			835	0.923	41.257	0.900	41.500	2.56	- 0.59
			850	0.939	41.028	0.916	41.500	2.51	- 1.14
12/01/2023	21.1	1800H	1710	1.293	40.771	1.348	40.144	- 4.08	1.56
			1750	1.327	40.659	1.371	40.080	- 3.21	1.44
			1800	1.382	40.555	1.400	40.000	- 1.29	1.39
11/20/2023	21.7	1800H	1710	1.316	39.866	1.348	40.144	- 2.37	- 0.69
			1750	1.360	39.719	1.371	40.080	- 0.80	- 0.90
			1800	1.359	39.485	1.400	40.000	- 2.93	- 1.29
11/29/2023	22.0	1800H	1710	1.300	39.705	1.348	40.144	- 3.56	- 1.09
			1750	1.344	39.553	1.371	40.080	- 1.97	- 1.31
			1800	1.343	39.323	1.400	40.000	- 4.07	- 1.69
11/23/2023	21.6	1800H	1710	1.286	41.423	1.348	40.144	- 4.60	3.19
			1750	1.322	41.383	1.371	40.080	- 3.57	3.25
			1800	1.369	41.231	1.400	40.000	- 2.21	3.08
12/13/2023	22.8	1900H	1850	1.341	39.240	1.400	40.000	- 4.21	- 1.90
			1900	1.386	39.015	1.400	40.000	- 1.00	- 2.46
			1910	1.393	38.961	1.400	40.000	- 0.50	- 2.60
11/17/2023	22.0	1900H	1850	1.360	39.056	1.400	40.000	- 2.86	- 2.36
			1900	1.405	38.828	1.400	40.000	0.36	- 2.93
			1910	1.412	38.771	1.400	40.000	0.86	- 3.07

11/30/2023	21.0	1900H	1850	1.344	41.737	1.400	40.000	- 4.00	4.34
			1900	1.392	41.532	1.400	40.000	- 0.57	3.83
			1910	1.396	41.511	1.400	40.000	- 0.29	3.78
11/22/2023	20.8	1900H	1850	1.364	39.806	1.400	40.000	- 2.57	- 0.48
			1900	1.417	39.572	1.400	40.000	1.21	- 1.07
			1910	1.425	39.520	1.400	40.000	1.79	- 1.20
11/28/2023	21.7	2450H	2400	1.739	39.071	1.756	39.290	- 0.97	- 0.56
			2450	1.802	38.872	1.800	39.200	0.11	- 0.84
			2500	1.852	38.696	1.855	39.140	- 0.16	- 1.13
11/29/2023	21.0	2450H	2400	1.760	38.589	1.756	39.290	0.23	- 1.78
			2450	1.823	38.357	1.800	39.200	1.28	- 2.15
			2500	1.877	38.151	1.855	39.140	1.19	- 2.53
11/20/2023	20.7	2600H	2500	1.918	38.453	1.855	39.140	3.40	- 1.76
			2550	1.973	38.261	1.909	39.070	3.35	- 2.07
			2600	2.034	38.053	1.964	39.010	3.56	- 2.45
11/28/2023	21.8	5250H	5180	4.566	36.989	4.635	36.010	- 1.49	2.72
			5250	4.679	36.825	4.706	35.930	- 0.57	2.49
			5280	4.721	36.723	4.737	35.894	- 0.34	2.31
			5320	4.800	36.744	4.778	35.846	0.46	2.51
11/29/2023	21.1	5600H	5500	4.913	36.610	4.963	35.640	- 1.01	2.72
			5600	4.963	36.212	5.065	35.530	- 2.01	1.92
11/30/2023	20.8	5750H	5750	5.245	36.036	5.219	35.360	0.50	1.91
			5800	5.215	36.047	5.270	35.300	- 1.04	2.12
			5825	5.202	36.045	5.296	35.270	- 1.77	2.20

12.2 System Verification

Input Power: 50 mW

Freq.	Date	Probe (S/N)	Dipole (S/N)	Liquid	Amb. Temp.	Liquid Temp.	1 W Target SAR _{1g} (SPEAG)	50 mW Measured SAR _{1g}	1 W Normalized SAR _{1g}	Deviation	Limit
[MHz]					[°C]	[°C]	[W/kg]	[W/kg]	[W/kg]	[%]	[%]
750	11/15/2023	7702	1014	Head	20.5	20.4	8.59	0.405	8.10	- 5.70	± 10
835	12/14/2023	7702	4d165	Head	22.0	21.9	9.74	0.485	9.70	- 0.41	± 10
835	11/17/2023	7702		Head	20.6	20.5	9.74	0.487	9.74	0.00	± 10
835	11/16/2023	7702		Head	20.9	20.8	9.74	0.487	9.74	0.00	± 10
835	12/01/2023	7702		Head	21.8	21.7	9.74	0.484	9.68	- 0.62	± 10
1800	11/23/2023	7702	2d015	Head	21.7	21.6	37.8	1.770	35.4	- 6.35	± 10
1800	12/01/2023	7680		Head	21.2	21.1	37.8	1.880	37.6	- 0.53	± 10
1800	11/20/2023	7680		Head	21.8	21.7	37.8	1.870	37.4	- 1.06	± 10
1800	11/29/2023	7680		Head	22.1	22.0	37.8	1.810	36.2	- 4.23	± 10
1900	12/13/2023	7680	5d061	Head	22.9	22.8	38.9	1.960	39.2	0.77	± 10
1900	11/22/2023	7702		Head	20.9	20.8	38.9	1.940	38.8	- 0.26	± 10
1900	11/17/2023	7680		Head	22.1	22.0	38.9	1.990	39.8	2.31	± 10
1900	11/30/2023	7680		Head	21.1	21.0	38.9	1.900	38.0	- 2.31	± 10
2 450	11/28/2023	7654	1049	Head	21.8	21.7	52.7	2.440	48.8	- 7.40	± 10
2 450	11/29/2023	7654		Head	21.1	21.0	52.7	2.470	49.4	- 6.26	± 10
2 600	11/20/2023	7702	1106	Head	20.8	20.7	55.6	2.590	51.8	- 6.83	± 10
5 250	11/28/2023	7702	1317	Head	21.9	21.8	78.8	3.830	76.6	- 2.79	± 10
5 600	11/29/2023	7702		Head	21.2	21.1	81.2	4.040	80.8	- 0.49	± 10
5 750	11/30/2023	7702		Head	20.9	20.8	77.4	3.830	76.6	- 1.03	± 10

System Verification Results – Phablet SAR

Input Power: 50 mW

Freq.	Date	Probe (S/N)	Dipole (S/N)	Liquid	Amb. Temp.	Liquid Temp.	1 W Target SAR _{10g} (SPEAG)	50 mW Measured SAR _{10g}	1 W Normalized SAR _{10g}	Deviation	Limit
[MHz]					[°C]	[°C]	[W/kg]	[W/kg]	[W/kg]	[%]	[%]
13	12/06/2023	3076	1016	Head	20.7	20.6	0.353	0.018	0.360	1.98	± 10
5 250	11/28/2023	7702	1317	Head	21.9	21.8	22.6	1.090	21.8	- 3.54	± 10
5 600	11/29/2023	7702		Head	21.2	21.1	23.0	1.150	23.0	0.00	± 10

12.3 System Verification Procedure

SAR measurement was prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at each frequency Band by using the system verification kit. (Graphic Plots Attached)

- Cabling the system, using the verification kit equipment.
- Generate about 50 mW Input level from the signal generator to the Dipole Antenna.
- Dipole antenna was placed below the flat phantom.
- The measured one-gram SAR at the surface of the phantom above the dipole feed-point should be within 10 % of the target reference value.
- The results are normalized to 1 W input power.

Note;

SAR Verification was performed according to the FCC KDB 865664 D01v01r04.

13. SAR Test Data Summary

13.1 SAR Measurement Results

GSM 850 Head SAR

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(dB)	(dB)	(dB)			(W/kg)		(W/kg)	
836.6	190	Voice	34.0	33.30	0.11	Left Cheek	1:8.3	0.203	1.175	0.239	-
836.6	190	Voice	34.0	33.30	0.06	Left Tilt	1:8.3	0.125	1.175	0.147	-
836.6	190	Voice	34.0	33.30	0.09	Right Cheek	1:8.3	0.216	1.175	0.254	-
836.6	190	Voice	34.0	33.30	-0.17	Right Tilt	1:8.3	0.113	1.175	0.133	-
836.6	190	GPRS 4TX	29.0	28.01	0.05	Left Cheek	1:2.07	0.210	1.256	0.264	-
836.6	190	GPRS 4TX	29.0	28.01	-0.11	Left Tilt	1:2.07	0.133	1.256	0.167	-
836.6	190	GPRS 4TX	29.0	28.01	-0.03	Right Cheek	1:2.07	0.255	1.256	0.320	A1
836.6	190	GPRS 4TX	29.0	28.01	0.12	Right Tilt	1:2.07	0.144	1.256	0.181	-
ANSI/ IEEE C95.1 - 2005- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg Averaged over 1 gram					

GSM 1900 Head SAR

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(dB)	(dB)	(dB)			(W/kg)		(W/kg)	
1 880	661	Voice	31.0	30.62	0.12	Left Cheek	1:8.3	0.146	1.091	0.159	-
1 880	661	Voice	31.0	30.62	0.19	Left Tilt	1:8.3	0.084	1.091	0.092	-
1 880	661	Voice	31.0	30.62	0.18	Right Cheek	1:8.3	0.087	1.091	0.095	-
1 880	661	Voice	31.0	30.62	0.03	Right Tilt	1:8.3	0.076	1.091	0.083	-
1 880	661	GPRS 4TX	26.0	24.89	-0.16	Left Cheek	1:2.07	0.156	1.291	0.201	A2
1 880	661	GPRS 4TX	26.0	24.89	-0.02	Left Tilt	1:2.07	0.096	1.291	0.124	-
1 880	661	GPRS 4TX	26.0	24.89	-0.14	Right Cheek	1:2.07	0.089	1.291	0.115	-
1 880	661	GPRS 4TX	26.0	24.89	-0.16	Right Tilt	1:2.07	0.083	1.291	0.107	-
ANSI/ IEEE C95.1 - 2005- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg Averaged over 1 gram					

UMTS Band 2 Head SAR

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(dB)	(dB)	(dB)			(W/kg)		(W/kg)	
1880	9400	RMC	23.0	21.14	0.10	Left Cheek	1:1	0.211	1.535	0.324	A3
1880	9400	RMC	23.0	21.14	-0.16	Left Tilt	1:1	0.174	1.535	0.267	-
1880	9400	RMC	23.0	21.14	-0.07	Right Cheek	1:1	0.171	1.535	0.262	-
1880	9400	RMC	23.0	21.14	0.09	Right Tilt	1:1	0.121	1.535	0.186	-
ANSI/ IEEE C95.1 - 2005- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg Averaged over 1 gram					

UMTS Band 4 Head SAR

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(dB)	(dB)	(dB)			(W/kg)		(W/kg)	
1732.4	1412	RMC	24.0	23.10	0.10	Left Cheek	1:1	0.179	1.230	0.220	A4
1732.4	1412	RMC	24.0	23.10	0.12	Left Tilt	1:1	0.124	1.230	0.153	-
1732.4	1412	RMC	24.0	23.10	0.05	Right Cheek	1:1	0.138	1.230	0.170	-
1732.4	1412	RMC	24.0	23.10	-0.13	Right Tilt	1:1	0.113	1.230	0.139	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg Averaged over 1 gram					

UMTS Band 5 Head SAR

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(dB)	(dB)	(dB)			(W/kg)		(W/kg)	
836.6	4183	RMC	25.0	24.15	0.16	Left Cheek	1:1	0.181	1.216	0.220	-
836.6	4183	RMC	25.0	24.15	-0.02	Left Tilt	1:1	0.096	1.216	0.117	-
836.6	4183	RMC	25.0	24.15	-0.14	Right Cheek	1:1	0.211	1.216	0.257	A5
836.6	4183	RMC	25.0	24.15	0.01	Right Tilt	1:1	0.094	1.216	0.114	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg Averaged over 1 gram					

LTE Band 2 Head SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(dBm)	(dBm)	(dB)		(dB)				(W/kg)		(W/kg)	
1900	19100	QPSK	20	24.0	23.00	-0.18	Left Cheek	0	1	49	1:1	0.222	1.259	0.279	A6
1900	19100	QPSK	20	23.0	22.11	0.06	Left Cheek	1	50	49	1:1	0.181	1.227	0.222	-
1900	19100	QPSK	20	24.0	23.00	0.05	Left Tilt	0	1	49	1:1	0.171	1.259	0.215	-
1900	19100	QPSK	20	23.0	22.11	-0.11	Left Tilt	1	50	49	1:1	0.119	1.227	0.146	-
1900	19100	QPSK	20	24.0	23.00	-0.09	Right Cheek	0	1	49	1:1	0.188	1.259	0.237	-
1900	19100	QPSK	20	23.0	22.11	-0.07	Right Cheek	1	50	49	1:1	0.139	1.227	0.171	-
1900	19100	QPSK	20	24.0	23.00	0.03	Right Tilt	0	1	49	1:1	0.110	1.259	0.138	-
1900	19100	QPSK	20	23.0	22.11	0.19	Right Tilt	1	50	49	1:1	0.085	1.227	0.104	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg Averaged over 1 gram									

LTE Band 2 Upper Ant. Head SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(dBm)	(dBm)	(dB)		(dB)				(W/kg)		(W/kg)	
1860	18700	QPSK	20	24.0	22.99	0.08	Left Cheek	0	1	0	1:1	0.313	1.262	0.395	-
1860	18700	QPSK	20	23.0	21.88	0.05	Left Cheek	1	50	0	1:1	0.254	1.294	0.329	-
1860	18700	QPSK	20	24.0	22.99	-0.13	Left Tilt	0	1	0	1:1	0.177	1.262	0.223	-
1860	18700	QPSK	20	23.0	21.88	0.15	Left Tilt	1	50	0	1:1	0.140	1.294	0.181	-
1860	18700	QPSK	20	24.0	22.99	-0.17	Right Cheek	0	1	0	1:1	0.568	1.262	0.717	A7
1860	18700	QPSK	20	23.0	21.88	-0.03	Right Cheek	1	50	0	1:1	0.461	1.294	0.597	-
1860	18700	QPSK	20	24.0	22.99	0.12	Right Tilt	0	1	0	1:1	0.209	1.262	0.264	-
1860	18700	QPSK	20	23.0	21.88	-0.06	Right Tilt	1	50	0	1:1	0.158	1.294	0.204	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population								Head 1.6 W/kg Averaged over 1 gram							

LTE Band 4 Upper Ant. Head SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(dBm)	(dBm)	(dB)		(dB)				(W/kg)		(W/kg)	
1732.5	20175	QPSK	20	25.0	23.69	-0.11	Left Cheek	0	1	0	1:1	0.184	1.352	0.249	-
1732.5	20175	QPSK	20	24.0	22.21	-0.03	Left Cheek	1	50	49	1:1	0.161	1.510	0.243	-
1732.5	20175	QPSK	20	25.0	23.69	0.09	Left Tilt	0	1	0	1:1	0.095	1.352	0.128	-
1732.5	20175	QPSK	20	24.0	22.21	0.11	Left Tilt	1	50	49	1:1	0.080	1.510	0.121	-
1732.5	20175	QPSK	20	25.0	23.69	0.13	Right Cheek	0	1	0	1:1	0.426	1.352	0.576	A8
1732.5	20175	QPSK	20	24.0	22.21	0.01	Right Cheek	1	50	49	1:1	0.351	1.510	0.530	-
1732.5	20175	QPSK	20	25.0	23.69	-0.19	Right Tilt	0	1	0	1:1	0.155	1.352	0.210	-
1732.5	20175	QPSK	20	24.0	22.21	0.08	Right Tilt	1	50	49	1:1	0.119	1.510	0.180	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population								Head 1.6 W/kg Averaged over 1 gram							

LTE Band 12 Head SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(dBm)	(dBm)	(dB)		(dB)				(W/kg)		(W/kg)	
707.5	23095	QPSK	10	25.0	23.60	0.09	Left Cheek	0	1	0	1:1	0.147	1.380	0.203	-
707.5	23095	QPSK	10	24.0	22.58	0.02	Left Cheek	1	25	0	1:1	0.111	1.387	0.154	-
707.5	23095	QPSK	10	25.0	23.60	0.18	Left Tilt	0	1	0	1:1	0.074	1.380	0.102	-
707.5	23095	QPSK	10	24.0	22.58	-0.13	Left Tilt	1	25	0	1:1	0.060	1.387	0.083	-
707.5	23095	QPSK	10	25.0	23.60	-0.10	Right Cheek	0	1	0	1:1	0.167	1.380	0.230	A9
707.5	23095	QPSK	10	24.0	22.58	-0.09	Right Cheek	1	25	0	1:1	0.138	1.387	0.191	-
707.5	23095	QPSK	10	25.0	23.60	0.14	Right Tilt	0	1	0	1:1	0.083	1.380	0.115	-
707.5	23095	QPSK	10	24.0	22.58	0.08	Right Tilt	1	25	0	1:1	0.069	1.387	0.096	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population								Head 1.6 W/kg Averaged over 1 gram							

LTE Band 26 Head SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(dBm)	(dBm)	(dB)		(dB)				(W/kg)		(W/kg)	
831.5	26865	QPSK	15	25.0	24.08	0.09	Left Cheek	0	1	36	1:1	0.159	1.236	0.197	-
831.5	26865	QPSK	15	24.0	23.11	0.11	Left Cheek	1	36	0	1:1	0.124	1.227	0.152	-
831.5	26865	QPSK	15	25.0	24.08	-0.05	Left Tilt	0	1	36	1:1	0.089	1.236	0.110	-
831.5	26865	QPSK	15	24.0	23.11	-0.06	Left Tilt	1	36	0	1:1	0.072	1.227	0.088	-
831.5	26865	QPSK	15	25.0	24.08	0.13	Right Cheek	0	1	36	1:1	0.200	1.236	0.247	A10
831.5	26865	QPSK	15	24.0	23.11	0.08	Right Cheek	1	36	0	1:1	0.153	1.227	0.188	-
831.5	26865	QPSK	15	25.0	24.08	-0.09	Right Tilt	0	1	36	1:1	0.100	1.236	0.124	-
831.5	26865	QPSK	15	24.0	23.11	0.17	Right Tilt	1	36	0	1:1	0.078	1.227	0.096	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population								Head 1.6 W/kg Averaged over 1 gram							

LTE TDD Band 41 Head SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(dBm)	(dBm)	(dB)		(dB)				(W/kg)		(W/kg)	
2549.5	40185	QPSK	20	24.0	23.08	-0.18	Left Cheek	0	1	0	1:1.58	0.231	1.236	0.286	A11
2549.5	40185	QPSK	20	23.0	22.07	-0.03	Left Cheek	1	50	0	1:1.58	0.181	1.239	0.224	-
2549.5	40185	QPSK	20	24.0	23.08	-0.19	Left Tilt	0	1	0	1:1.58	0.089	1.236	0.110	-
2549.5	40185	QPSK	20	23.0	22.07	-0.05	Left Tilt	1	50	0	1:1.58	0.071	1.239	0.088	-
2549.5	40185	QPSK	20	24.0	23.08	0.02	Right Cheek	0	1	0	1:1.58	0.149	1.236	0.184	-
2549.5	40185	QPSK	20	23.0	22.07	0.09	Right Cheek	1	50	0	1:1.58	0.066	1.239	0.082	-
2549.5	40185	QPSK	20	24.0	23.08	0.12	Right Tilt	0	1	0	1:1.58	0.162	1.236	0.200	-
2549.5	40185	QPSK	20	23.0	22.07	0.10	Right Tilt	1	50	0	1:1.58	0.128	1.239	0.159	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population								Head 1.6 W/kg Averaged over 1 gram							

LTE Band 66 Head SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(dBm)	(dBm)	(dB)		(dB)				(W/kg)		(W/kg)	
1770	132572	QPSK	20	25.0	23.87	-0.10	Left Cheek	0	1	99	1:1	0.295	1.297	0.383	A12
1770	132572	QPSK	20	24.0	22.75	-0.09	Left Cheek	1	50	49	1:1	0.208	1.334	0.277	-
1770	132572	QPSK	20	25.0	23.87	0.14	Left Tilt	0	1	99	1:1	0.259	1.297	0.336	-
1770	132572	QPSK	20	24.0	22.75	0.19	Left Tilt	1	50	49	1:1	0.185	1.334	0.247	-
1770	132572	QPSK	20	25.0	23.87	0.09	Right Cheek	0	1	99	1:1	0.217	1.297	0.281	-
1770	132572	QPSK	20	24.0	22.75	0.02	Right Cheek	1	50	49	1:1	0.165	1.334	0.220	-
1770	132572	QPSK	20	25.0	23.87	-0.08	Right Tilt	0	1	99	1:1	0.150	1.297	0.195	-
1770	132572	QPSK	20	24.0	22.75	0.18	Right Tilt	1	50	49	1:1	0.135	1.334	0.180	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population								Head 1.6 W/kg Averaged over 1 gram							

NR Band n5 Head SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(dBm)	(dBm)	(dB)		(dB)				(W/kg)		(W/kg)	
836.5	167300	DFT-s OFDM QPSK	20	25.0	24.06	-0.05	Left Cheek	0	1	53	1:1	0.157	1.242	0.195	-
836.5	167300	DFT-s OFDM QPSK	20	25.0	24.14	0.13	Left Cheek	0	50	28	1:1	0.151	1.219	0.184	-
836.5	167300	DFT-s OFDM QPSK	20	25.0	24.06	0.19	Left Tilt	0	1	53	1:1	0.082	1.242	0.102	-
836.5	167300	DFT-s OFDM QPSK	20	25.0	24.14	0.02	Left Tilt	0	50	28	1:1	0.083	1.219	0.101	-
836.5	167300	DFT-s OFDM QPSK	20	25.0	24.06	-0.13	Right Cheek	0	1	53	1:1	0.168	1.242	0.209	-
836.5	167300	DFT-s OFDM QPSK	20	25.0	24.14	0.06	Right Cheek	0	50	28	1:1	0.172	1.219	0.210	A13
836.5	167300	DFT-s OFDM QPSK	20	25.0	24.06	0.11	Right Tilt	0	1	53	1:1	0.082	1.242	0.102	-
836.5	167300	DFT-s OFDM QPSK	20	25.0	24.14	-0.19	Right Tilt	0	50	28	1:1	0.084	1.219	0.102	-
836.5	167300	CP OFDM QPSK	20	23.5	22.59	-0.08	Right Cheek	1.5	1	1	1:1	0.159	1.233	0.196	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Head 1.6 W/kg Averaged over 1 gram								

NR Band n66 Head SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(dBm)	(dBm)	(dB)		(dB)				(W/kg)		(W/kg)	
1745	349000	DFT-s OFDM QPSK	40	23.0	22.26	-0.09	Left Cheek	0	1	108	1:1	0.133	1.186	0.158	-
1745	349000	DFT-s OFDM QPSK	40	23.0	22.31	0.16	Left Cheek	0	108	54	1:1	0.139	1.172	0.163	-
1745	349000	DFT-s OFDM QPSK	40	23.0	22.26	0.19	Left Tilt	0	1	108	1:1	0.101	1.186	0.120	-
1745	349000	DFT-s OFDM QPSK	40	23.0	22.31	0.02	Left Tilt	0	108	54	1:1	0.100	1.172	0.117	-
1745	349000	DFT-s OFDM QPSK	40	23.0	22.26	0.03	Right Cheek	0	1	108	1:1	0.140	1.186	0.166	-
1745	349000	DFT-s OFDM QPSK	40	23.0	22.31	-0.05	Right Cheek	0	108	54	1:1	0.139	1.172	0.163	-
1745	349000	DFT-s OFDM QPSK	40	23.0	22.26	-0.11	Right Tilt	0	1	108	1:1	0.086	1.186	0.102	-
1745	349000	DFT-s OFDM QPSK	40	23.0	22.31	0.07	Right Tilt	0	108	54	1:1	0.090	1.172	0.105	-
1745	349000	CP OFDM QPSK	40	23.0	21.98	0.14	Right Cheek	0	1	1	1:1	0.132	1.265	0.167	A14
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Head 1.6 W/kg Averaged over 1 gram								

DTS Head SAR - RCV-ON

Frequency		Mode	Band width	Data Rate	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Ant Config.	Duty Cycle	Area Scan Peak SAR	Meas. SAR	Scaling Factor	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(Mbps)	(dBm)	(dBm)	(dB)				(W/kg)	(W/kg)		(Duty)	(W/kg)	
2 412	1	802.11b	20	1	16.0	15.72	0.01	Left Cheek	Ant.1	99.5	0.162	0.101	1.067	1.005	0.108	-
2 412	1	802.11b	20	1	16.0	15.72	-0.16	Left Tilt	Ant.1	99.5	0.190	0.119	1.067	1.005	0.128	-
2 412	1	802.11b	20	1	16.0	15.72	0.17	Right Cheek	Ant.1	99.5	0.234	0.132	1.067	1.005	0.142	A16
2 412	1	802.11b	20	1	16.0	15.72	0.09	Right Tilt	Ant.1	99.5	0.262	0.129	1.067	1.005	0.138	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population										Head 1.6 W/kg Averaged over 1 gram						

NII Head SAR – RCV-ON

Frequency		Mode	Band width	Data Rate	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Ant Config.	Duty Cycle	Area Scan Peak SAR	Meas. SAR	Scaling Factor	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(Mbps)	(dBm)	(dBm)	(dB)				(W/kg)	(W/kg)		(Duty)	(W/kg)	
5270	54	802.11n	40	MCS0	15.0	14.13	-0.11	Left Cheek	Ant.1	93.5	0.771	0.266	1.222	1.069	0.347	-
5270	54	802.11n	40	MCS0	15.0	14.13	0.06	Left Tilt	Ant.1	93.5	0.884	0.320	1.222	1.069	0.418	-
5270	54	802.11n	40	MCS0	15.0	14.13	0.09	Right Cheek	Ant.1	93.5	0.641	0.235	1.222	1.069	0.307	-
5270	54	802.11n	40	MCS0	15.0	14.13	-0.16	Right Tilt	Ant.1	93.5	0.671	0.317	1.222	1.069	0.414	-
5710	142	802.11n	40	MCS0	15.0	14.66	-0.08	Left Cheek	Ant.1	93.5	1.26	0.471	1.081	1.069	0.544	-
5710	142	802.11n	40	MCS0	15.0	14.66	0.02	Left Tilt	Ant.1	93.5	1.58	0.580	1.081	1.069	0.670	-
5710	142	802.11n	40	MCS0	15.0	14.66	0.17	Right Cheek	Ant.1	93.5	1.07	0.422	1.081	1.069	0.488	-
5710	142	802.11n	40	MCS0	15.0	14.66	-0.13	Right Tilt	Ant.1	93.5	1.23	0.600	1.081	1.069	0.693	-
5755	151	802.11n	40	MCS0	15.0	14.05	-0.18	Left Cheek	Ant.1	93.5	1.12	0.489	1.245	1.069	0.651	-
5755	151	802.11n	40	MCS0	15.0	14.05	-0.05	Left Tilt	Ant.1	93.5	1.44	0.499	1.245	1.069	0.664	-
5755	151	802.11n	40	MCS0	15.0	14.05	0.18	Right Cheek	Ant.1	93.5	1.04	0.404	1.245	1.069	0.538	-
5755	151	802.11n	40	MCS0	15.0	14.05	0.12	Right Tilt	Ant.1	93.5	1.12	0.576	1.245	1.069	0.767	A17
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population										Head 1.6 W/kg Averaged over 1 gram						

DSS / DTS Head SAR

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Ant Config.	Meas. SAR	Scaling Factor	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(dBm)	(dBm)	(dB)			(W/kg)		(Duty)	(W/kg)	
2 480	78	Bluetooth DH5	11.5	10.27	-0.09	Left Cheek	Ant.1	0.029	1.327	1.010	0.039	-
2 480	78	Bluetooth DH5	11.5	10.27	-0.12	Left Tilt	Ant.1	0.036	1.327	1.010	0.048	A18
2 480	78	Bluetooth DH5	11.5	10.27	0.11	Right Cheek	Ant.1	0.029	1.327	1.010	0.039	-
2 480	78	Bluetooth DH5	11.5	10.27	0.05	Right Tilt	Ant.1	0.031	1.327	1.010	0.042	-
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population								Head 1.6 W/kg Averaged over 1 gram				

13.2 Hotspot/Body SAR Measurement Results

GSM 850 Hotspot/Body SAR

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Distance (mm)	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
Mhz	Ch.		(dB)	(dB)	(dB)				(W/kg)		(W/kg)	
836.6	190	GPRS 4TX	29.0	28.01	-0.05	Rear	1:2.07	10	0.608	1.256	0.764	B1
836.6	190	GPRS 4TX	29.0	28.01	-0.01	Front	1:2.07	10	0.216	1.256	0.271	-
836.6	190	GPRS 4TX	29.0	28.01	0.09	Left	1:2.07	10	0.181	1.256	0.227	-
836.6	190	GPRS 4TX	29.0	28.01	0.11	Right	1:2.07	10	0.235	1.256	0.295	-
836.6	190	GPRS 4TX	29.0	28.01	0.16	Bottom	1:2.07	10	0.282	1.256	0.354	-
836.6	190	Voice	34.0	33.30	-0.05	Rear	1:8.3	10	0.643	1.175	0.756	-
836.6	190	Voice	34.0	33.30	0.19	Front	1:8.3	10	0.15	1.175	0.176	-
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg Averaged over 1 gram						

GSM 1900 Hotspot/Body SAR

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Distance (mm)	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
Mhz	Ch.		(dB)	(dB)	(dB)				(W/kg)		(W/kg)	
1880	661	GPRS 4TX	26.0	24.89	-0.16	Rear	1:2.07	10	0.365	1.291	0.471	-
1880	661	GPRS 4TX	26.0	24.89	-0.11	Front	1:2.07	10	0.282	1.291	0.364	-
1880	661	GPRS 4TX	26.0	24.89	0.08	Left	1:2.07	10	0.178	1.291	0.230	-
1880	661	GPRS 4TX	26.0	24.89	-0.06	Bottom	1:2.07	10	0.414	1.291	0.535	B2
1880	661	Voice	31.0	30.62	0.07	Rear	1:8.3	10	0.348	1.091	0.380	-
1880	661	Voice	31.0	30.62	0.14	Front	1:8.3	10	0.268	1.091	0.293	-
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg Averaged over 1 gram						

UMTS Band 2 Hotspot/Body SAR

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
Mhz	Ch.		(dB)	(dB)	(dB)			(mm)	(W/kg)		(W/kg)	
1880	9400	RMC	21.0	19.10	-0.15	Rear	1:1	10	0.332	1.549	0.514	-
1880	9400	RMC	21.0	19.10	-0.13	Front	1:1	10	0.314	1.549	0.486	-
1880	9400	RMC	21.0	19.10	0.09	Left	1:1	10	0.210	1.549	0.325	-
1880	9400	RMC	21.0	19.10	0.04	Bottom	1:1	10	0.428	1.549	0.663	B3
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg Averaged over 1 gram						

UMTS Band 4 Hotspot/Body SAR

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.											
1732.4	1412	RMC	21.0	19.99	-0.19	Rear	1:1	10	0.178	1.262	0.225	-
1732.4	1412	RMC	21.0	19.99	-0.13	Front	1:1	10	0.154	1.262	0.194	-
1732.4	1412	RMC	21.0	19.99	0.05	Left	1:1	10	0.120	1.262	0.151	-
1732.4	1412	RMC	21.0	19.99	-0.07	Bottom	1:1	10	0.270	1.262	0.341	B4
ANSI/ IEEE C95.1 - 2005-- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg Averaged over 1 gram						

UMTS Band 5 Hotspot/Body SAR

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.											
836.6	4183	RMC	24.0	23.16	-0.17	Rear	1:1	10	0.555	1.213	0.673	B5
836.6	4183	RMC	24.0	23.16	-0.11	Front	1:1	10	0.127	1.213	0.154	-
836.6	4183	RMC	24.0	23.16	0.03	Left	1:1	10	0.100	1.213	0.121	-
836.6	4183	RMC	24.0	23.16	0.15	Right	1:1	10	0.170	1.213	0.206	-
836.6	4183	RMC	24.0	23.16	0.16	Bottom	1:1	10	0.253	1.213	0.307	-
ANSI/ IEEE C95.1 - 2005-- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg Averaged over 1 gram						

LTE Band 2 Hotspot/Body SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.															
1900	19100	QPSK	20	18.0	17.20	0.02	Rear	0	1	99	1:1	10	0.057	1.202	0.069	-
1900	19100	QPSK	20	18.0	17.10	0.18	Rear	0	50	49	1:1	10	0.053	1.230	0.065	-
1900	19100	QPSK	20	18.0	17.20	-0.16	Front	0	1	99	1:1	10	0.098	1.202	0.118	-
1900	19100	QPSK	20	18.0	17.10	-0.10	Front	0	50	49	1:1	10	0.101	1.230	0.124	-
1900	19100	QPSK	20	18.0	17.20	0.08	Left	0	1	99	1:1	10	0.078	1.202	0.094	-
1900	19100	QPSK	20	18.0	17.10	-0.08	Left	0	50	49	1:1	10	0.064	1.230	0.079	-
1900	19100	QPSK	20	18.0	17.20	0.18	Bottom	0	1	99	1:1	10	0.159	1.202	0.191	-
1900	19100	QPSK	20	18.0	17.10	0.00	Bottom	0	50	49	1:1	10	0.162	1.230	0.199	B6
ANSI/ IEEE C95.1 - 2005 -- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population								Body 1.6 W/kg Averaged over 1 gram								

LTE Band 2 Upper Ant. Hotspot/Body SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB	RB	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(dBm)	(dBm)	(dB)		(dB)	Size	Offset		(mm)	(W/kg)		(W/kg)	
1860	18700	QPSK	20	18.5	17.02	0.05	Rear	0	1	0	1:1	10	0.183	1.406	0.257	-
1860	18700	QPSK	20	18.5	16.94	0.10	Rear	0	50	25	1:1	10	0.197	1.432	0.282	B7
1860	18700	QPSK	20	18.5	17.02	0.19	Front	0	1	0	1:1	10	0.068	1.406	0.096	-
1860	18700	QPSK	20	18.5	16.94	-0.11	Front	0	50	25	1:1	10	0.065	1.432	0.093	-
1860	18700	QPSK	20	18.5	17.02	-0.02	Left	0	1	0	1:1	10	0.133	1.406	0.187	-
1860	18700	QPSK	20	18.5	16.94	0.07	Left	0	50	25	1:1	10	0.140	1.432	0.201	-
1860	18700	QPSK	20	18.5	17.02	-0.08	Top	0	1	0	1:1	10	0.017	1.406	0.024	-
1860	18700	QPSK	20	18.5	16.94	0.16	Top	0	50	25	1:1	10	0.015	1.432	0.021	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population								Body 1.6 W/kg Averaged over 1 gram								

LTE Band 4 Upper Ant. Hotspot/Body SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB	RB	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(dBm)	(dBm)	(dB)		(dB)	Size	Offset		(mm)	(W/kg)		(W/kg)	
1732.5	20175	QPSK	20	19.5	17.73	0.02	Rear	0	1	99	1:1	10	0.188	1.503	0.283	-
1732.5	20175	QPSK	20	19.5	17.74	0.18	Rear	0	50	49	1:1	10	0.190	1.500	0.285	B8
1732.5	20175	QPSK	20	19.5	17.73	-0.16	Front	0	1	99	1:1	10	0.037	1.503	0.056	-
1732.5	20175	QPSK	20	19.5	17.74	0.08	Front	0	50	49	1:1	10	0.038	1.500	0.057	-
1732.5	20175	QPSK	20	19.5	17.73	0.13	Left	0	1	99	1:1	10	0.093	1.503	0.140	-
1732.5	20175	QPSK	20	19.5	17.74	-0.17	Left	0	50	49	1:1	10	0.091	1.500	0.136	-
1732.5	20175	QPSK	20	19.5	17.73	0.05	Top	0	1	99	1:1	10	0.011	1.503	0.017	-
1732.5	20175	QPSK	20	19.5	17.74	0.08	Top	0	50	49	1:1	10	0.009 06	1.500	0.014	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population								Body 1.6 W/kg Averaged over 1 gram								

LTE Band 12 Hotspot/Body SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB	RB	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(dBm)	(dBm)	(dB)		(dB)	Size	Offset		(mm)	(W/kg)		(W/kg)	
707.5	23095	QPSK	10	25.0	23.60	0.03	Rear	0	1	0	1:1	10	0.456	1.380	0.629	B9
707.5	23095	QPSK	10	24.0	22.58	0.03	Rear	1	25	0	1:1	10	0.366	1.387	0.508	-
707.5	23095	QPSK	10	25.0	23.60	0.09	Front	0	1	0	1:1	10	0.158	1.380	0.218	-
707.5	23095	QPSK	10	24.0	22.58	-0.14	Front	1	25	0	1:1	10	0.124	1.387	0.172	-
707.5	23095	QPSK	10	25.0	23.60	0.11	Left	0	1	0	1:1	10	0.127	1.380	0.175	-
707.5	23095	QPSK	10	24.0	22.58	0.08	Left	1	25	0	1:1	10	0.100	1.387	0.139	-
707.5	23095	QPSK	10	25.0	23.60	-0.19	Right	0	1	0	1:1	10	0.241	1.380	0.333	-
707.5	23095	QPSK	10	24.0	22.58	-0.05	Right	1	25	0	1:1	10	0.186	1.387	0.258	-
707.5	23095	QPSK	10	25.0	23.60	0.02	Bottom	0	1	0	1:1	10	0.192	1.380	0.265	-
707.5	23095	QPSK	10	24.0	22.58	0.01	Bottom	1	25	0	1:1	10	0.150	1.387	0.208	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population								Body 1.6 W/kg Averaged over 1 gram								

LTE Band 26 Hotspot/Body SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB	RB	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(dBm)	(dBm)	(dB)		(dB)	Size	Offset		(mm)	(W/kg)		(W/kg)	
831.5	26865	QPSK	15	25.0	24.08	-0.01	Rear	0	1	36	1:1	10	0.692	1.236	0.855	B10
831.5	26865	QPSK	15	24.0	23.11	-0.09	Rear	1	36	0	1:1	10	0.534	1.227	0.655	-
831.5	26865	QPSK	15	25.0	24.08	0.13	Front	0	1	36	1:1	10	0.168	1.236	0.208	-
831.5	26865	QPSK	15	24.0	23.11	0.11	Front	1	36	0	1:1	10	0.133	1.227	0.163	-
831.5	26865	QPSK	15	25.0	24.08	0.05	Left	0	1	36	1:1	10	0.131	1.236	0.162	-
831.5	26865	QPSK	15	24.0	23.11	-0.16	Left	1	36	0	1:1	10	0.140	1.227	0.172	-
831.5	26865	QPSK	15	25.0	24.08	0.08	Right	0	1	36	1:1	10	0.272	1.236	0.336	-
831.5	26865	QPSK	15	24.0	23.11	-0.11	Right	1	36	0	1:1	10	0.222	1.227	0.272	-
831.5	26865	QPSK	15	25.0	24.08	-0.18	Bottom	0	1	36	1:1	10	0.436	1.236	0.539	-
831.5	26865	QPSK	15	24.0	23.11	0.07	Bottom	1	36	0	1:1	10	0.336	1.227	0.412	-

ANSI/ IEEE C95.1 - 2005 – Safety Limit
Spatial Peak
Uncontrolled Exposure/ General Population

Body
1.6 W/kg
Averaged over 1 gram

LTE TDD Band 41 Hotspot/Body SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB	RB	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(dBm)	(dBm)	(dB)		(dB)	Size	Offset		(mm)	(W/kg)		(W/kg)	
2506	39750	QPSK	20	23.0	21.85	-0.08	Rear	0	1	99	1:1.58	10	0.337	1.303	0.439	-
2506	39750	QPSK	20	23.0	21.87	-0.17	Rear	0	50	49	1:1.58	10	0.359	1.297	0.466	-
2506	39750	QPSK	20	23.0	21.85	-0.11	Front	0	1	99	1:1.58	10	0.115	1.303	0.150	-
2506	39750	QPSK	20	23.0	21.87	-0.15	Front	0	50	49	1:1.58	10	0.230	1.297	0.298	-
2506	39750	QPSK	20	23.0	21.85	-0.13	Left	0	1	99	1:1.58	10	0.149	1.303	0.194	-
2506	39750	QPSK	20	23.0	21.87	0.11	Left	0	50	49	1:1.58	10	0.148	1.297	0.192	-
2506	39750	QPSK	20	23.0	21.85	0.01	Bottom	0	1	99	1:1.58	10	0.397	1.303	0.517	B11
2506	39750	QPSK	20	23.0	21.87	0.06	Bottom	0	50	49	1:1.58	10	0.395	1.297	0.512	-

ANSI/ IEEE C95.1 - 2005 – Safety Limit
Spatial Peak
Uncontrolled Exposure/ General Population

Body
1.6 W/kg
Averaged over 1 gram

LTE Band 66 Hotspot/Body SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB	RB	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(dBm)	(dBm)	(dB)		(dB)	Size	Offset		(mm)	(W/kg)		(W/kg)	
1770	132572	QPSK	20	19.5	18.32	-0.15	Rear	0	1	99	1:1	10	0.116	1.312	0.152	-
1770	132572	QPSK	20	19.5	18.28	-0.13	Rear	0	50	49	1:1	10	0.114	1.324	0.151	-
1770	132572	QPSK	20	19.5	18.32	0.19	Front	0	1	99	1:1	10	0.130	1.312	0.171	-
1770	132572	QPSK	20	19.5	18.28	0.08	Front	0	50	49	1:1	10	0.130	1.324	0.172	-
1770	132572	QPSK	20	19.5	18.32	0.12	Left	0	1	99	1:1	10	0.080	1.312	0.105	-
1770	132572	QPSK	20	19.5	18.28	-0.08	Left	0	50	49	1:1	10	0.090	1.324	0.119	-
1770	132572	QPSK	20	19.5	18.32	0.04	Bottom	0	1	99	1:1	10	0.234	1.312	0.307	-
1770	132572	QPSK	20	19.5	18.28	-0.00	Bottom	0	50	49	1:1	10	0.239	1.324	0.317	B12

ANSI/ IEEE C95.1 - 2005 – Safety Limit
Spatial Peak
Uncontrolled Exposure/ General Population

Body
1.6 W/kg
Averaged over 1 gram

NR Band n5 Hotspot/Body SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
Mhz	Ch.		(Mhz)	(dBm)	(dBm)	(dB)		(dB)				(mm)	(W/kg)		(W/kg)	
836.5	167300	DFT-s OFDM QPSK	20	24.0	23.19	0.01	Rear	0	1	53	1:1	10	0.511	1.205	0.616	B13
836.5	167300	DFT-s OFDM QPSK	20	24.0	23.25	0.19	Rear	0	50	0	1:1	10	0.485	1.189	0.577	-
836.5	167300	DFT-s OFDM QPSK	20	24.0	23.19	-0.04	Front	0	1	53	1:1	10	0.145	1.205	0.175	-
836.5	167300	DFT-s OFDM QPSK	20	24.0	23.25	-0.13	Front	0	50	0	1:1	10	0.149	1.189	0.177	-
836.5	167300	DFT-s OFDM QPSK	20	24.0	23.19	0.03	Left	0	1	53	1:1	10	0.118	1.205	0.142	-
836.5	167300	DFT-s OFDM QPSK	20	24.0	23.25	0.05	Left	0	50	0	1:1	10	0.124	1.189	0.147	-
836.5	167300	DFT-s OFDM QPSK	20	24.0	23.19	-0.11	Right	0	1	53	1:1	10	0.218	1.205	0.263	-
836.5	167300	DFT-s OFDM QPSK	20	24.0	23.25	0.08	Right	0	50	0	1:1	10	0.23	1.189	0.273	-
836.5	167300	DFT-s OFDM QPSK	20	24.0	23.19	0.08	Bottom	0	1	53	1:1	10	0.288	1.205	0.347	-
836.5	167300	DFT-s OFDM QPSK	20	24.0	23.25	0.02	Bottom	0	50	0	1:1	10	0.281	1.189	0.334	-
836.5	167300	CP OFDM QPSK	20	23.5	22.6	0.17	Rear	0.5	1	1	1:1	10	0.385	1.230	0.474	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Body 1.6 W/kg Averaged over 1 gram									

NR Band n66 Hotspot/Body SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
Mhz	Ch.		(Mhz)	(dBm)	(dBm)	(dB)		(dB)				(mm)	(W/kg)		(W/kg)	
1745	349000	DFT-s OFDM QPSK	40	18.5	18.20	-0.17	Rear	0	1	108	1:1	10	0.133	1.072	0.143	-
1745	349000	DFT-s OFDM QPSK	40	18.5	18.28	0.06	Rear	0	108	54	1:1	10	0.142	1.052	0.149	-
1745	349000	DFT-s OFDM QPSK	40	18.5	18.20	0.02	Front	0	1	108	1:1	10	0.129	1.072	0.138	-
1745	349000	DFT-s OFDM QPSK	40	18.5	18.28	0.11	Front	0	108	54	1:1	10	0.131	1.052	0.138	-
1745	349000	DFT-s OFDM QPSK	40	18.5	18.20	0.08	Left	0	1	108	1:1	10	0.100	1.072	0.107	-
1745	349000	DFT-s OFDM QPSK	40	18.5	18.28	-0.13	Left	0	108	54	1:1	10	0.102	1.052	0.107	-
1745	349000	DFT-s OFDM QPSK	40	18.5	18.20	0.05	Bottom	0	1	108	1:1	10	0.154	1.072	0.165	-
1745	349000	DFT-s OFDM QPSK	40	18.5	18.28	0.03	Bottom	0	108	54	1:1	10	0.168	1.052	0.177	B14
1745	349000	CP OFDM QPSK	40	18.5	18.05	0.05	Bottom	0	1	1	1:1	10	0.157	1.109	0.174	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Body 1.6 W/kg Averaged over 1 gram									

DTS Hotspot/Body SAR

Frequency		Mode	Band width	Data Rate	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Ant Config.	Duty Cycle	Distance	Area Scan Peak SAR	Meas. SAR	Scaling Factor	Scaling Factor	Reported SAR	Plot No.
MHz	Ch.		(MHz)	(Mbps)	(dBm)	(dBm)	(dB)				(mm)	(W/kg)	(W/kg)		(Duty)	(W/kg)	
2 437	6	802.11b	20	1	19.0	18.54	0.11	Rear	Ant.1	99.5	10	0.180	0.109	1.112	1.005	0.122	-
2 437	6	802.11b	20	1	19.0	18.54	-0.17	Front	Ant.1	99.5	10	0.0784	0.045	1.112	1.005	0.050	-
2 437	6	802.11b	20	1	19.0	18.54	0.16	Left	Ant.1	99.5	10	0.042	0.013	1.112	1.005	0.015	-
2 437	6	802.11b	20	1	19.0	18.54	0.19	Top	Ant.1	99.5	10	0.204	0.128	1.112	1.005	0.143	B16
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population												Body 1.6 W/kg Averaged over 1 gram					

5 GHz WLAN Hotspot/Body SAR

Frequency		Mode	Band width	Data Rate	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Ant Config.	Duty Cycle	Distance	Area Scan Peak SAR	Meas. SAR	Scaling Factor	Scaling Factor	Reported SAR	Plot No.
MHz	Ch.		(MHz)	(Mbps)	(dBm)	(dBm)	(dB)				(mm)	(W/kg)	(W/kg)		(Duty)	(W/kg)	
5270	54	802.11n	40	MCS0	15.0	14.13	0.08	Rear	Ant.1	93.5	10	0.280	0.119	1.222	1.069	0.155	-
5270	54	802.11n	40	MCS0	15.0	14.13	-0.16	Front	Ant.1	93.5	10	0.122	0.029	1.222	1.069	0.038	-
5710	142	802.11n	40	MCS0	15.0	14.66	-0.17	Rear	Ant.1	93.5	10	0.686	0.309	1.081	1.069	0.357	-
5710	142	802.11n	40	MCS0	15.0	14.66	0.05	Front	Ant.1	93.5	10	0.344	0.134	1.081	1.069	0.155	-
5755	151	802.11n	40	MCS0	15.0	14.05	-0.18	Rear	Ant.1	93.5	10	0.924	0.396	1.245	1.069	0.527	-
5755	151	802.11n	40	MCS0	15.0	14.05	0.19	Front	Ant.1	93.5	10	0.256	0.098	1.245	1.069	0.130	-
5755	151	802.11n	40	MCS0	15.0	14.05	0.08	Left	Ant.1	93.5	10	0.198	0.084	1.245	1.069	0.112	-
5755	151	802.11n	40	MCS0	15.0	14.05	0.12	Top	Ant.1	93.5	10	1.29	0.548	1.245	1.069	0.729	B17
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population												Body 1.6 W/kg Averaged over 1 gram					

DSS / DTS Tethering SAR

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Ant Config.	Distance	Meas. SAR	Scaling Factor	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(dBm)	(dBm)	(dB)			(mm)	(W/kg)		(Duty)	(W/kg)	
2480	78	Bluetooth DH5	11.5	10.27	0.00	Rear	Ant.1	10	0.030	1.327	1.010	0.040	B18
2480	78	Bluetooth DH5	11.5	10.27	0.13	Front	Ant.1	10	0.005 98	1.327	1.010	0.008	-
2480	78	Bluetooth DH5	11.5	10.27	-0.18	Left	Ant.1	10	0	1.327	1.010	0.000	-
2480	78	Bluetooth DH5	11.5	10.27	-0.02	Top	Ant.1	10	0.017	1.327	1.010	0.023	-
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Body 1.6 W/kg Averaged over 1 gram						

13.3 Phablet SAR Measurement Considerations

Per FCC KDB 648474 D04v01r03, this device is considered a “Phablet” since the diagonal dimension is greater than 160 mm and less than 200 mm. Therefore, extremity SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR >1.2 W/kg. When hotspot mode applies, 10g SAR required only for the surfaces and edges with hotspot mode scaled to the maximum output power (including tolerance) is 1g SAR > 1.2 W/kg.

13.4 Phablet SAR Measurement Results

5 GHz WLAN Phablet SAR _10g																	
Frequency		Mode	Band width	Data Rate	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Ant. Config.	Duty Cycle	Distance	Area Scan Peak SAR	Meas. SAR	Scaling Factor	Scaling Factor	Scaled SAR	Plot No.
Mhz	Ch.		(MHz)	(Mbps)	(dBm)	(dBm)	(dB)				(mm)	(W/kg)	(W/kg)		(Duty)	(W/kg)	
5270	54	802.11n	40	MCS0	15.0	14.13	0.18	Rear	Ant.1	93.5	0	3.36	0.28	1.222	1.069	0.366	-
5270	54	802.11n	40	MCS0	15.0	14.13	0.05	Front	Ant.1	93.5	0	1.10	0.104	1.222	1.069	0.136	-
5270	54	802.11n	40	MCS0	15.0	14.13	-0.07	Left	Ant.1	93.5	0	0.751	0.077	1.222	1.069	0.101	-
5270	54	802.11n	40	MCS0	15.0	14.13	-0.13	Top	Ant.1	93.5	0	13.9	0.369	1.222	1.069	0.482	-
5710	142	802.11n	40	MCS0	15.0	14.66	0.06	Rear	Ant.1	93.5	0	6.51	0.548	1.081	1.069	0.633	-
5710	142	802.11n	40	MCS0	15.0	14.66	-0.11	Front	Ant.1	93.5	0	1.86	0.197	1.081	1.069	0.228	-
5710	142	802.11n	40	MCS0	15.0	14.66	0.08	Left	Ant.1	93.5	0	2.21	0.189	1.081	1.069	0.218	-
5710	142	802.11n	40	MCS0	15.0	14.66	0.10	Top	Ant.1	93.5	0	13.9	0.698	1.081	1.069	0.807	C1
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population											Hand 4.0 W/kg Averaged over 10 gram						

NFC Phablet SAR _10g							
Frequency		Mode	Data Rate	Power Drift	Test Position	Distance	Meas. SAR
Mhz			(Kbps)	(dB)		(mm)	(W/kg)
13.56		NFC (Type A)	106	0.00	Rear	0	0.000 197
13.56		NFC (Type B)	106	0.00	Rear	0	0.000 128
13.56		NFC (Type F)	106	0.00	Rear	0	0.000 128
13.56		NFC (Type A)	106	0.00	Front	0	0
13.56		NFC (Type A)	106	0.00	Left	0	0
13.56		NFC (Type A)	106	0.00	Top	0	0
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population				Hand 4.0 W/kg Averaged over 10 gram			

13.5 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, FCC KDB Procedure.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB 648474 D04v01r03, SAR was evaluated without a headset connected to the device. Since the standalone reported SAR was 1.2 W/kg, no additional SAR evaluation using a headset cable were required.
8. Per KDB 648474 D04v01r03, this device is considered a "Phablet" since the diagonal dimension is > 160 mm and < 200 mm. When hotspot mode applies, extremity SAR is required only for the surfaces and edges with hotspot mode scaled to the maximum output power (with tolerance) is 1 g SAR > 1.2 W/kg.
9. Per FCC KDB 865664 D01v01r04, variability SAR measurement were performed when the measured SAR results for a frequency Band were greater than or equal to 0.8 W/kg for 1g SAR and >2 for 10g SAR Please see Section 15 for variability analysis.
10. This device utilizes power reduction for some wireless mode and technologies, as outlined in sec. 4 The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous scenarios.
11. During SAR testing for the Hotspot conditions per KDB 941225 D06v02r01, the actual portable hotspotoperation (with actual simultaneous transmission of a transmitter with WiFi) was not activated.

GSM/GPRS Test Notes:

1. This EUT'S GSM and GPRS device class is B.
2. This device supports GPRS VOIP in the head and the body-worn configurations therefore GPRS was additionally evaluated for head and body-worn compliance.
3. Justification for reduced test configurations per KDB 941225 D01v03r01: The source-based time-averaged output power was evaluated for all multi-slot operations. The multi-slot configuration with the highest frame averaged output power including tolerance was evaluated for SAR.
4. Per FCC KDB 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is 1/2 dB, instead of the middle channel, the highest output power channel must be used.

UMTS Notes:

1. The 12.2 kbps RMC mode is the primary mode per KDB 941225 D01v03r01.
2. UMTS SAR was tested under RMC 12.2 kbps with HSPA inactive per KDB publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
3. Per FCC KDB 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the channel highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Consideration for LTE Devices in FCC KDB 941225 D05v02r05.
2. According to FCC KDB 941225 D05v02r05:
When the reported SAR is 0.8 W/kg, testing of the 100% RB allocation and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the 1RB, 50%RB and 100%RB allocation with highest output power for that channel.
Only one channel, and as reported SAR values for 1RB allocation and 50%RB allocation were less than 1.45W/Kg only the highest power RB offset for each allocation was required.
3. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to target MPR is indicated alongside the SAR results.
4. When Power reduction is applied, MPR is 0 for some modes.
5. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator.
6. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) LTE TDD Band 41 SAR measured at the highest output power channel for each test configuration is 0.6 W/kg then testing at the other channels is not required for such test configurations.
7. TDD LTE (Power Class 3) was tested using UL-DL configuration 0 with 6 UL sub frames and 2S subframes using extended cyclic prefix only and special sub frame configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Sec. 4, the duty factor using extended cyclic prefix is 0.633(cf=1.58).
8. Per KDB 941225 D05Av01r02, SAR for LTE Carrier Aggregation operations was not needed because the maximum average output power in LTE CA mode was not > 0.25 dB higher than the maximum output power when downlink CA was not activated.
9. SAR test reduction is applied using the following criteria:
Start with the largest channel Bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is >0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel. Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are >0.8 W/kg, testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation <1.45 W/kg. Testing for 16-QAM modulation is not required because the reported SAR for QPSK is <1.45 W/kg and its output power is not more than 0.5 dB higher than that a QPSK. Testing for the other channel Bandwidths is not required because the reported SAR for the highest channel Bandwidth is <1.45 W/kg and its output power is not more than 0.5 dB higher than that of the highest channel Bandwidth.

NR Notes:

1. This device supports SA and NSA mode for NR implementation. In EN-DC Mode, NR operate with the LTE Bands shown in the NR FR1 checklist acting as anchor Bands.
2. More detailed specifications of the NR Bands are contained in the Technical description document.
3. This device additionally supports some EN-DC conditions where additional LTE carriers are added on the downlink only.
4. For NR modulations and RB Sizes/Offsets were selected for testing such that configurations with the highest output power was evaluated for SAR tests.

WLAN Notes:

1. For held-to-ear and hotspot operations, the initial test position procedures were applied. For initial test position, the highest extrapolated peak SAR will be used. When reported SAR for the initial test position is ≤ 0.4 W/kg for 1g SAR and ≤ 1.0 W/kg for 10g SAR, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR results is ≤ 0.8 W/kg for 1g SAR and ≤ 2.0 W/kg for 10g SAR or all test position are measured.
2. Per KDB 248227 D01v02r02 justification for test configurations of 2.4 GHz WiFi Single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11 g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR
3. Per KDB 248227 D01v02r02 justification for test configurations of 5 GHz WiFi Single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission mode was not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g SAR and less than 3.0 W/kg for 10 g SAR.
4. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel Bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated WLAN test reports.

Bluetooth Notes:

1. Bluetooth SAR was measured with the device connected to a call box with hopping disabled with DH5 operation and Tx Tests mode type. BT's DH5 operates at the maximum duty factor declared by the manufacturer and the measurement results are adjusted for a 1% test equipment error tolerance. For more information, please refer to the manufacturer's technical documentation.
2. Head and Bluetooth tethering SAR were evaluated for tethering applications.

14. Simultaneous SAR Analysis

This device is containing transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of 1g SAR and 10g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is $\leq 1.6\text{W/kg}$ for 1g SAR and $\leq 4\text{ W/kg}$ for 10g SAR. The different test positions in an exposure condition may be considered collectively to determine SAR exclusion according to the sum of 1g or 10g SAR.

In 5G NR + LTE + WLAN + BT simultaneous transmission, 5G NR, LTE transmission are managed and controlled by MediaTek WWAN TA-SAR and WLAN, BT transmission managed and controlled by MediaTek CONNSYS TA-SAR

$$x \cdot \text{LTE} + y \cdot 5\text{G NR} + \text{WLAN} + \text{BT} \leq 1.6$$

Where, for a total of 100% exposure margin, LTE uses x, then the exposure margin left for 5G NR is capped to y.

$$x \cdot \text{LTE} + y \cdot 5\text{G NR} \leq x \cdot \text{Max}(\text{LTE}, 5\text{G NR}) + y \cdot \text{Max}(\text{LTE}, 5\text{G NR}) \leq \text{Max}(\text{LTE}, 5\text{G NR})$$

$$x \cdot \text{LTE} + y \cdot 5\text{G NR} + \text{WLAN} + \text{BT} \leq \text{Max}(\text{LTE}, 5\text{G NR}) + \text{WLAN} + \text{BT} \leq 1.6$$

If $\text{LTE} + \text{WLAN} + \text{BT} \leq 1.6$ and $5\text{G NR} + \text{WLAN} + \text{BT} \leq 1.6$ can be proven, then $x \cdot \text{LTE} + y \cdot 5\text{G NR} + \text{WLAN} + \text{BT} \leq 1.6$.

Therefore, simultaneous transmission analysis for 5G NR + LTE + WLAN + BT can be performed in two steps

Step 1: Prove SAR Limit of $\text{LTE} + \text{WLAN} + \text{BT} < 1.6$

Step 2: Prove SAR Limit of $5\text{G NR} + \text{WLAN} + \text{BT} < 1.6$

$x \cdot \text{LTE} + y \cdot 5\text{G NR} \leq 1.6$ analysis is covered in Part 2 report. and analysis is also applied to LTE/NR inter inter-band uplink, $\text{LTE}(\text{NR})1 + \text{LTE}(\text{NR})2 + \text{WLAN} + \text{BT}$ simultaneous transmission, so inter-band uplink CA no need to do additional simultaneously analysis again.

14.1 Head SAR Simultaneous Transmission Analysis.

Simultaneous Transmission Summation Scenario (Head SAR)										
Band		Main SAR	2.4 GHz WLAN SAR	5 GHz WLAN SAR	Bluetooth	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	SPLSR
		(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(Yes/ No)
		1	2	3	4	1+2	1+3	1+4	1+3+4	
GSM 850	Left Touch	0.264	0.108	0.651	0.039	0.372	0.915	0.303	0.954	No
	Left Tilt	0.167	0.128	0.670	0.048	0.295	0.837	0.215	0.885	No
	Right Touch	0.320	0.142	0.538	0.039	0.462	0.858	0.359	0.897	No
	Right Tilt	0.181	0.138	0.767	0.042	0.319	0.948	0.223	0.990	No
GSM 1900	Left Touch	0.201	0.108	0.651	0.039	0.309	0.852	0.240	0.891	No
	Left Tilt	0.124	0.128	0.670	0.048	0.252	0.794	0.172	0.842	No
	Right Touch	0.116	0.142	0.538	0.039	0.258	0.654	0.155	0.693	No
	Right Tilt	0.107	0.138	0.767	0.042	0.245	0.874	0.149	0.916	No
UMTS Band 2	Left Touch	0.324	0.108	0.651	0.039	0.432	0.975	0.363	1.014	No
	Left Tilt	0.267	0.128	0.670	0.048	0.395	0.937	0.315	0.985	No
	Right Touch	0.262	0.142	0.538	0.039	0.404	0.800	0.301	0.839	No
	Right Tilt	0.186	0.138	0.767	0.042	0.324	0.953	0.228	0.995	No
UMTS Band 4	Left Touch	0.220	0.108	0.651	0.039	0.328	0.871	0.259	0.910	No
	Left Tilt	0.153	0.128	0.670	0.048	0.281	0.823	0.201	0.871	No
	Right Touch	0.170	0.142	0.538	0.039	0.312	0.708	0.209	0.747	No
	Right Tilt	0.139	0.138	0.767	0.042	0.277	0.906	0.181	0.948	No

Simultaneous Transmission Summation Scenario (Head SAR)										
Band		Main SAR	2.4 GHz WLAN SAR	5 GHz WLAN SAR	Bluetooth	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	SPLSR
		(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(Yes/No)
		1	2	3	4	1+2	1+3	1+4	1+3+4	
UMTS Band 5	Left Touch	0.22	0.108	0.651	0.039	0.328	0.871	0.259	0.910	No
	Left Tilt	0.117	0.128	0.670	0.048	0.245	0.787	0.165	0.835	No
	Right Touch	0.257	0.142	0.538	0.039	0.399	0.795	0.296	0.834	No
	Right Tilt	0.114	0.138	0.767	0.042	0.252	0.881	0.156	0.923	No
LTE Band 2 Lower	Left Touch	0.279	0.108	0.651	0.039	0.387	0.930	0.318	0.969	No
	Left Tilt	0.215	0.128	0.670	0.048	0.343	0.885	0.263	0.933	No
	Right Touch	0.237	0.142	0.538	0.039	0.379	0.775	0.276	0.814	No
	Right Tilt	0.138	0.138	0.767	0.042	0.276	0.905	0.180	0.947	No
LTE Band 2 Upper	Left Touch	0.395	0.108	0.651	0.039	0.503	1.046	0.434	1.085	No
	Left Tilt	0.223	0.128	0.670	0.048	0.351	0.893	0.271	0.941	No
	Right Touch	0.717	0.142	0.538	0.039	0.859	1.255	0.756	1.294	No
	Right Tilt	0.264	0.138	0.767	0.042	0.402	1.031	0.306	1.073	No
LTE Band 4 Upper	Left Touch	0.249	0.108	0.651	0.039	0.357	0.900	0.288	0.939	No
	Left Tilt	0.128	0.128	0.670	0.048	0.256	0.798	0.176	0.846	No
	Right Touch	0.576	0.142	0.538	0.039	0.718	1.114	0.615	1.153	No
	Right Tilt	0.210	0.138	0.767	0.042	0.348	0.977	0.252	1.019	No
LTE Band 12	Left Touch	0.203	0.108	0.651	0.039	0.311	0.854	0.242	0.893	No
	Left Tilt	0.102	0.128	0.670	0.048	0.230	0.772	0.150	0.820	No
	Right Touch	0.230	0.142	0.538	0.039	0.372	0.768	0.269	0.807	No
	Right Tilt	0.115	0.138	0.767	0.042	0.253	0.882	0.157	0.924	No
LTE Band 26	Left Touch	0.197	0.108	0.651	0.039	0.305	0.848	0.236	0.887	No
	Left Tilt	0.110	0.128	0.670	0.048	0.238	0.780	0.158	0.828	No
	Right Touch	0.247	0.142	0.538	0.039	0.389	0.785	0.286	0.824	No
	Right Tilt	0.124	0.138	0.767	0.042	0.262	0.891	0.166	0.933	No
LTE Band 41	Left Touch	0.286	0.108	0.651	0.039	0.394	0.937	0.325	0.976	No
	Left Tilt	0.110	0.128	0.670	0.048	0.238	0.780	0.158	0.828	No
	Right Touch	0.184	0.142	0.538	0.039	0.326	0.722	0.223	0.761	No
	Right Tilt	0.200	0.138	0.767	0.042	0.338	0.967	0.242	1.009	No
LTE Band 66 Lower	Left Touch	0.383	0.108	0.651	0.039	0.491	1.034	0.422	1.073	No
	Left Tilt	0.336	0.128	0.670	0.048	0.464	1.006	0.384	1.054	No
	Right Touch	0.281	0.142	0.538	0.039	0.423	0.819	0.320	0.858	No
	Right Tilt	0.195	0.138	0.767	0.042	0.333	0.962	0.237	1.004	No
NR Band n5	Left Touch	0.195	0.108	0.651	0.039	0.303	0.846	0.234	0.885	No
	Left Tilt	0.102	0.128	0.670	0.048	0.230	0.772	0.150	0.820	No
	Right Touch	0.210	0.142	0.538	0.039	0.352	0.748	0.249	0.787	No
	Right Tilt	0.102	0.138	0.767	0.042	0.240	0.869	0.144	0.911	No
NR Band n66	Left Touch	0.163	0.108	0.651	0.039	0.271	0.814	0.202	0.853	No
	Left Tilt	0.120	0.128	0.670	0.048	0.248	0.790	0.168	0.838	No
	Right Touch	0.166	0.142	0.538	0.039	0.308	0.704	0.205	0.743	No
	Right Tilt	0.105	0.138	0.767	0.042	0.243	0.872	0.147	0.914	No

14.2 Hotspot/Body SAR Simultaneous Transmission Analysis.

Simultaneous Transmission Summation Scenario (Hotspot SAR)										
Band		Main SAR	2.4 GHz WLAN SAR	5 GHz WLAN SAR	Bluetooth	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	SPLSR
		(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(Yes/No)
		1	2	3	4	1+2	1+3	1+4	1+3+4	
GSM 850	Rear	0.764	0.122	0.527	0.040	0.886	1.291	0.804	1.331	No
	Front	0.271	0.050	0.155	0.008	0.321	0.426	0.279	0.434	No
	Left	0.227	0.015	0.112	0.000	0.242	0.339	0.227	0.339	No
	Right	0.295				0.295	0.295	0.295	0.295	No
	Top		0.143	0.729	0.023	0.143	0.729	0.023	0.752	No
	Bottom	0.354				0.354	0.354	0.354	0.354	No
GSM 1900	Rear	0.471	0.122	0.527	0.040	0.593	0.998	0.511	1.038	No
	Front	0.364	0.050	0.155	0.008	0.414	0.519	0.372	0.527	No
	Left	0.230	0.015	0.112	0.000	0.245	0.342	0.230	0.342	No
	Right					0.000	0.000	0.000	0.000	No
	Top		0.143	0.729	0.023	0.143	0.729	0.023	0.752	No
	Bottom	0.535				0.535	0.535	0.535	0.535	No
UMTS Band 2	Rear	0.514	0.122	0.527	0.040	0.636	1.041	0.554	1.081	No
	Front	0.486	0.050	0.155	0.008	0.536	0.641	0.494	0.649	No
	Left	0.325	0.015	0.112	0.000	0.340	0.437	0.325	0.437	No
	Right					0.000	0.000	0.000	0.000	No
	Top		0.143	0.729	0.023	0.143	0.729	0.023	0.752	No
	Bottom	0.663				0.663	0.663	0.663	0.663	No
UMTS Band 4	Rear	0.225	0.122	0.527	0.040	0.347	0.752	0.265	0.792	No
	Front	0.194	0.050	0.155	0.008	0.244	0.349	0.202	0.357	No
	Left	0.151	0.015	0.112	0.000	0.166	0.263	0.151	0.263	No
	Right					0.000	0.000	0.000	0.000	No
	Top		0.143	0.729	0.023	0.143	0.729	0.023	0.752	No
	Bottom	0.341				0.341	0.341	0.341	0.341	No
UMTS Band 5	Rear	0.673	0.122	0.527	0.040	0.795	1.200	0.713	1.240	No
	Front	0.154	0.050	0.155	0.008	0.204	0.309	0.162	0.317	No
	Left	0.121	0.015	0.112	0.000	0.136	0.233	0.121	0.233	No
	Right	0.206				0.206	0.206	0.206	0.206	No
	Top		0.143	0.729	0.023	0.143	0.729	0.023	0.752	No
	Bottom	0.307				0.307	0.307	0.307	0.307	No
LTE Band 2 Lower	Rear	0.069	0.122	0.527	0.040	0.191	0.596	0.109	0.636	No
	Front	0.124	0.050	0.155	0.008	0.174	0.279	0.132	0.287	No
	Left	0.094	0.015	0.112	0.000	0.109	0.206	0.094	0.206	No
	Right					0.000	0.000	0.000	0.000	No
	Top		0.143	0.729	0.023	0.143	0.729	0.023	0.752	No
	Bottom	0.199				0.199	0.199	0.199	0.199	No
LTE Band 2 Upper	Rear	0.282	0.122	0.527	0.040	0.404	0.809	0.322	0.849	No
	Front	0.096	0.050	0.155	0.008	0.146	0.251	0.104	0.259	No
	Left	0.201	0.015	0.112	0.000	0.216	0.313	0.201	0.313	No
	Right					0.000	0.000	0.000	0.000	No
	Top	0.024	0.143	0.729	0.023	0.167	0.753	0.047	0.776	No
	Bottom					0.000	0.000	0.000	0.000	No

Simultaneous Transmission Summation Scenario (Hotspot SAR)										
Band		Main SAR	2.4 GHz WLAN SAR	5 GHz WLAN SAR	Bluetooth	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	SPLSR
		(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(Yes/No)
		1	2	3	4	1+2	1+3	1+4	1+3+4	
LTE Band 4 Upper	Rear	0.285	0.122	0.527	0.040	0.407	0.812	0.325	0.852	No
	Front	0.057	0.050	0.155	0.008	0.107	0.212	0.065	0.220	No
	Left	0.140	0.015	0.112	0.000	0.155	0.252	0.140	0.252	No
	Right					0.000	0.000	0.000	0.000	No
	Top	0.017	0.143	0.729	0.023	0.160	0.746	0.040	0.769	No
	Bottom					0.000	0.000	0.000	0.000	No
LTE Band 12	Rear	0.629	0.122	0.527	0.040	0.751	1.156	0.669	1.196	No
	Front	0.218	0.050	0.155	0.008	0.268	0.373	0.226	0.381	No
	Left	0.175	0.015	0.112	0.000	0.190	0.287	0.175	0.287	No
	Right	0.333				0.333	0.333	0.333	0.333	No
	Top		0.143	0.729	0.023	0.143	0.729	0.023	0.752	No
	Bottom	0.265				0.265	0.265	0.265	0.265	No
LTE Band 26	Rear	0.855	0.122	0.527	0.040	0.977	1.382	0.895	1.422	No
	Front	0.208	0.050	0.155	0.008	0.258	0.363	0.216	0.371	No
	Left	0.172	0.015	0.112	0.000	0.187	0.284	0.172	0.284	No
	Right	0.336				0.336	0.336	0.336	0.336	No
	Top		0.143	0.729	0.023	0.143	0.729	0.023	0.752	No
	Bottom	0.539				0.539	0.539	0.539	0.539	No
LTE Band 41	Rear	0.466	0.122	0.527	0.040	0.588	0.993	0.506	1.033	No
	Front	0.298	0.050	0.155	0.008	0.348	0.453	0.306	0.461	No
	Left	0.194	0.015	0.112	0.000	0.209	0.306	0.194	0.306	No
	Right					0.000	0.000	0.000	0.000	No
	Top		0.143	0.729	0.023	0.143	0.729	0.023	0.752	No
	Bottom	0.517				0.517	0.517	0.517	0.517	No
LTE Band 66	Rear	0.152	0.122	0.527	0.040	0.274	0.679	0.192	0.719	No
	Front	0.172	0.050	0.155	0.008	0.222	0.327	0.180	0.335	No
	Left	0.119	0.015	0.112	0.000	0.134	0.231	0.119	0.231	No
	Right					0.000	0.000	0.000	0.000	No
	Top		0.143	0.729	0.023	0.143	0.729	0.023	0.752	No
	Bottom	0.317				0.317	0.317	0.317	0.317	No
NR Band n5	Rear	0.616	0.122	0.527	0.040	0.738	1.143	0.656	1.183	No
	Front	0.177	0.050	0.155	0.008	0.227	0.332	0.185	0.340	No
	Left	0.147	0.015	0.112	0.000	0.162	0.259	0.147	0.259	No
	Right	0.273				0.273	0.273	0.273	0.273	No
	Top		0.143	0.729	0.023	0.143	0.729	0.023	0.752	No
	Bottom	0.347				0.347	0.347	0.347	0.347	No
NR Band n66	Rear	0.149	0.122	0.527	0.040	0.271	0.676	0.189	0.716	No
	Front	0.138	0.050	0.155	0.008	0.188	0.293	0.146	0.301	No
	Left	0.107	0.015	0.112	0.000	0.122	0.219	0.107	0.219	No
	Right					0.000	0.000	0.000	0.000	No
	Top		0.143	0.729	0.023	0.143	0.729	0.023	0.752	No
	Bottom	0.177				0.177	0.177	0.177	0.177	No

14.3 Phablet SAR Simultaneous Transmission Analysis.

Simultaneous Transmission Summation Scenario (Phablet SAR)					
Band		NFC SAR	5 GHz WLAN	Σ 10-g SAR	SPLSR
		(W/kg)	(W/kg)	(W/kg)	(Yes/No)
		1	2	1+2	
NFC	Rear	0.000197	0.633	0.633	No
	Front	0	0.228	0.228	No
	Left	0	0.218	0.218	No
	Right				No
	Top	0	0.807	0.807	No
	Bottom				No

14.4 Simultaneous Transmission Conclusion

The above numerical summed SAR Results are sufficient to determine that simultaneous transmission cases will not exceed the SAR Limit and therefore measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE1528-2013.

15. Measurement Uncertainty

The measured SAR was <1.5 W/Kg for 1g SAR and <3.75 W/Kg For 10g SAR for all frequency Bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE1528-2013 was not required.

16. SAR Test Equipment

Manufacturer	Type / Model	S/N	Calib. Date	Calib.Interval	Calib.Due
SPEAG	SAM Phantom	-	N/A	N/A	N/A
Staubli #3	CS8Cspeag-TX90	F12/ 5K9GA1/ C/ 01	N/A	N/A	N/A
Staubli #7	CS8Cspeag-TX90	F08/5AJ0A1/C/01	N/A	N/A	N/A
Staubli #11	CS8Cspeag-TX60L	F10/5FN3A1/C/01	N/A	N/A	N/A
Staubli #14	CS8Cspeag-TX90	F07/55B8A1/C/01	N/A	N/A	N/A
Staubli #3	TX90 XLspeag	F12/ 5K9GA1/ A/ 01	N/A	N/A	N/A
Staubli #7	CS8Cspeag-TX90	F08/5AJ0A1/C/01	N/A	N/A	N/A
Staubli #11	TX-60 L speag	F10/5FN3A1/A/01	N/A	N/A	N/A
Staubli #14	TX90 XL speag	F07/55B8A1/A/01	N/A	N/A	N/A
Staubli #3	Teach Pendant (Joystick)	S-1206 0513	N/A	N/A	N/A
Staubli #7	Teach Pendant (Joystick)	S-0008	N/A	N/A	N/A
Staubli #11	Teach Pendant (Joystick)	D21142602	N/A	N/A	N/A
Staubli #14	Teach Pendant (Joystick)	S-0306	N/A	N/A	N/A
TESTO	175-H1/Thermometer	40331939309	12/29/2022	Annual	12/29/2023
TESTO	175-H1/Thermometer	40331949309	12/29/2022	Annual	12/29/2023
TESTO	608-H1/Thermometer	2183499992	11/29/2022	Annual	11/29/2023
TESTO	608-H1/Thermometer	2183499992	11/29/2023	Annual	11/29/2024
TESTO	608-H1/Thermometer	83348021	03/27/2023	Annual	03/27/2024
SPEAG	DAE4	652	01/20/2023	Annual	01/20/2024
SPEAG	DAE4	1254	06/02/2023	Annual	06/02/2024
SPEAG	DAE4	869	03/23/2023	Annual	03/23/2024
SPEAG	DAE4	1686	05/23/2023	Annual	05/23/2024
SPEAG	E-Field Probe ES3DV3	3076	07/18/2023	Annual	07/18/2024
SPEAG	E-Field Probe EX3DV4	7654	05/24/2023	Annual	05/24/2024
SPEAG	E-Field Probe EX3DV4	7702	01/26/2023	Annual	01/26/2024
SPEAG	E-Field Probe EX3DV4	7680	05/24/2023	Annual	05/24/2024
SPEAG	Dipole CLA13	1016	09/21/2023	Annual	09/21/2024
SPEAG	Dipole D750V3	1014	05/23/2023	Annual	05/23/2024
SPEAG	Dipole D835V2	4d165	05/23/2023	Annual	05/23/2024
SPEAG	Dipole D1800V2	2d015	05/17/2023	Annual	05/17/2024
SPEAG	Dipole D1900V2	5d061	01/23/2023	Annual	01/23/2024
SPEAG	Dipole D2450V2	1049	04/25/2023	Annual	04/25/2024
SPEAG	Dipole D2600V2	1106	05/24/2023	Annual	05/24/2024
SPEAG	Dipole D5 GHz V2	1317	05/17/2023	Annual	05/17/2024
Agilent	Power Meter E4419B	MY41291386	09/21/2023	Annual	09/21/2024
Agilent	Power Meter N1911A	MY45101406	05/26/2023	Annual	05/26/2024
Agilent	Power Sensor 8481A	SG1091286	09/21/2023	Annual	09/21/2024
H.P	Power Sensor 8481A	MY41090675	09/21/2023	Annual	09/21/2024
Agilent	Wideband Power Sensor N1921A	MY55220026	07/28/2023	Annual	07/28/2024
Agilent	11636B/Power Divider	58698	01/26/2023	Annual	01/26/2024
SPEAG	DAKS 3.5	1038	01/25/2023	Annual	01/25/2024
SPEAG	Vector Reflectometer	00141013	02/13/2023	Annual	02/13/2024
SPEAG	MXA Signal Analyzer	MY49100108	01/13/2023	Annual	01/13/2024
H.P	Network Analyzer /8753ES	JP39240221	01/02/2023	Annual	01/02/2024
Agilent	WIRELESS COMMUNICATION E5515C	MY48361100	09/21/2023	Annual	09/21/2024
Agilent	WIRELESS COMMUNICATION E5515C	MY48360252	07/27/2023	Annual	07/27/2024
R&S	Wireless Communication Test Set CMW500	115733	03/23/2023	Annual	03/23/2024
Agilent	SIGNAL GENERATOR N5182A	MY47070230	03/23/2023	Annual	03/23/2024
EMPOWER	RF Power Amplifier	1084	05/26/2023	Annual	05/26/2024
EMPOWER	RF Power Amplifier	1011	09/21/2023	Annual	09/21/2024
MICRO LAB	LP Filter / LA-15N	10453	09/21/2023	Annual	09/21/2024
MICRO LAB	LP Filter / LA-30N	-	09/21/2023	Annual	09/21/2024
MICRO LAB	LP Filter / LA-60N	32011	09/21/2023	Annual	09/21/2024
Agilent	Attenuator (3dB) 8693B	MY39260298	08/22/2023	Annual	08/22/2024
HP	Attenuator (3dB) 33340A	02427	08/22/2023	Annual	08/22/2024
HP	Attenuator (20dB) 8493C	09271	08/22/2023	Annual	08/22/2024

Manufacturer	Type / Model	S/N	Calib. Date	Calib.Interval	Calib.Due
Agilent	Directional Bridge 86205A	3140A04581	04/25/2023	Annual	04/25/2024
OSI	Power Divider	#3	05/26/2023	Annual	05/26/2024
Agilent	MXA Signal Analyzer N9020A	MY50510407	06/07/2023	Annual	06/07/2024
HP	Dual Directional Coupler	16072	09/21/2023	Annual	09/21/2024
Anritsu	Radio Communication Test Station MT8000A	6262036812	12/07/2022	Annual	12/07/2023
Anritsu	Radio Communication Tester MT8820C	6201074225	01/25/2023	Annual	01/25/2024
Anritsu	Radio Communication Tester MT8820C	6200695605	03/23/2023	Annual	03/23/2024
Anritsu	Radio Communication Tester MT8821C	6201502997	05/26/2023	Annual	05/26/2024
Anritsu	Radio Communication Tester MT8821C	6201664725	01/25/2023	Annual	01/25/2024
Agilent	WIRELESS COMMUNICATION E5515C	MY50260992	05/26/2023	Annual	05/26/2024
ROHDE&SCHWARZ	BLUETOOTH TESTER CBT	100272	01/25/2023	Annual	01/25/2024
MITUTOYO	Vernier Calipers	B17351637	08/23/2023	Annual	08/23/2024

* The E-field probe was calibrated by SPEAG, by the waveguide technique procedure. Dipole Verification measurement is performed by HCT Lab. before each test. The brain/body simulating material is calibrated by HCT using the DAKS 3.5 to determine the conductivity and permittivity (dielectric constant) of the brain/body-equivalent material.

17. Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the ANSI/ IEEE C95.1 - 2005.

These measurements were taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

18. References

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio frequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1 - 2005 , American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300 kHz to 300 GHz, New York: IEEE, Sept. 1992
- [3] ANSI/IEEE C 95.1 - 2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3 kHz to 300 GHz, New York: IEEE, 2006
- [4] ANSI/IEEE C95.3 - 2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: December 2002.
- [5] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice or Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body from Wireless Communications Devices
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300 MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectro magnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10 kHz-300 GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation and procedures – Part 1: Procedure to determine the

specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), July. 2016..

[21] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz) Mar. 2010.

[22] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio Communication Apparatus (All Frequency Band) Issue 5, March 2015.

[23] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009

[24] FCC SAR Test procedures for 2G-3G Devices, Mobile Hotspot and UMPC Device KDB 941225 D01.

[25] SAR Measurement Guidance for IEEE 802.11 transmitters, KDB 248227 D01v02r02

[26] SAR Evaluation of Handsets with Multiple Transmitters and Antennas KDB 648474 D03, D04.

[27] SAR Evaluation for Laptop, Notebook, Netbook and Tablet computers KDB 616217 D04.

[28] SAR Measurement and Reporting Requirements for 100 MHz – 6 GHz, KDB 865664 D01, D02.

[29] FCC General RF Exposure Guidance and SAR procedures for Dongles, KDB 447498 D01,D02.

Appendix A. DUT Ant. Information & SETUP PHOTO

Please refer to test DUT Ant. Information & setup photo file no. as follows:

Report No.
HCT-SR-2312-FC001-P