



TEST REPORT

APPLICANT : BLU Products, Inc.

PRODUCT NAME : Mobile phone

MODEL NAME : G5 PLUS, STUDIO MEGA 2019

BRAND NAME : BLU

FCC ID : YHLBLUG5PLUS

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2019-04-18

TEST DATE : 2019-04-29 to 2019-05-28

ISSUE DATE : 2019-05-28

Edited by: Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by: Peng Huarui
Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

1. Technical Information	4
1.1. Applicant and Manufacturer Information	4
1.2. Equipment Under Test (EUT) Description	4
1.3. Test Standards and Results	6
1.4. Environmental Conditions	6
2. 47 CFR Part 15C Requirements	7
2.1. Antenna requirement	7
2.2. Duty Cycle Of Test Signal	7
2.3. Maximum Peak and Average Conducted Output Power	11
2.4. Bandwidth	14
2.5. Conducted Spurious Emissions and Band Edge	21
2.6. Power spectral density (PSD)	37
2.7. Conducted Emission	47
2.8. Restricted Frequency Bands	51
2.9. Radiated Emission	67
Annex A Test Uncertainty	86
Annex B Testing Laboratory Information	87



REPORT No.: SZ19040180W03

Change History		
Version	Date	Reason for change
1.0	2019-05-28	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	BLU Products, Inc.
Applicant Address:	10814 NW 33rd St # 100 Doral, FL 33172, Doral, Florida, United States
Manufacturer:	BLU Products, Inc.
Manufacturer Address:	10814 NW 33rd St # 100 Doral, FL 33172, Doral, Florida, United States

1.2. Equipment Under Test (EUT) Description

Product Name:	Mobile phone	
Serial No:	(N/A, marked #1 by test site)	
Hardware Version:	FS171-MB-V0.1	
Software Version:	BLU_G5_Plus_V9.0.01.00_GENERIC	
Equipment type:	WLAN2.4G	
Modulation Type:	DSSS, OFDM	
Operating Frequency Range:	802.11b/g/ n(HT20): 2.412GHz - 2.472GHz	
Channel Number:	802.11b/g/ n(HT20): 13	
Antenna Type:	PIFA Antenna	
Antenna Gain:	-1.9 dBi	
Accessory Information:	Battery	
	Brand Name:	BLU
	Model No.:	C956439300L
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	3000mAh
	Rated Voltage:	3.8V
	Charge Limit:	4.35 V



Accessory Information:	AC Adapter	
	Brand Name:	BLU
	Model No.:	US-NB-1504
	Serial No.:	(N/A, marked #1 by test site)
	Rated Output:	5V $\overline{=}$ 1.5A
	Rated Input:	100-240V $\sim$ 50/60Hz 0.3A

Note 1: According to the certificate holder, they declared that the models: G5 PLUS and STUDIO MEGA 2019 are accordant in both hardware and software. The two models only differ in the models name. The main measuring model is G5 PLUS, only the results for G5 PLUS were recorded in this report.

Note 2: The EUT is operating at 2.4GHz ISM; it supports 802.11b, 802.11g, 802.11n and they are all tested in this report. For 802.11b/g/n(HT20) (2.4GHz band), the frequencies allocated is F (MHz) =2412+5*(n-1) ($1 \leq n \leq 13$). The channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz), 11 (2462MHz), 12(2467MHz) and 13(2472MHz).

Note 3: The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT continuous transmission.

Note 4: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	PASS
2	N/A	Duty Cycle Of Test Signal	Apr 29, 2019	Wang Meng	PASS
3	15.247(b)	Maximum Peak and Average Conducted Output Power	Apr 29, 2019 May 24, 2019	Wang Meng	PASS
4	15.247(a)	Bandwidth	Apr 29, 2019	Wang Meng	PASS
5	15.247(d)	Conducted Spurious Emission and Band Edge	Apr 29, 2019 May 24, 2019	Wang Meng	PASS
6	15.247(e)	Power spectral density (PSD)	Apr 29, 2019 May 24, 2019	Wang Meng	PASS
7	15.207	Conducted Emission	May 10, 2019	Peng Xuewei	PASS
8	15.247(d)	Restricted Frequency Bands	May 10, 2019 May 28, 2019	Peng Xuewei	PASS
9	15.209, 15.247(d)	Radiated Emission	May 07, 2019 May 28, 2019	Peng Xuewei	PASS

Note1: The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013, KDB558074 D01 v05r02 and KDB594280 D01 v02r01.

Note2: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 11.5dB contains two parts that cable loss 1.5dB and Attenuator 10dB.

1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Duty Cycle Of Test Signal


2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this subclause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

2.2.2. Test Description

A. Test Set:

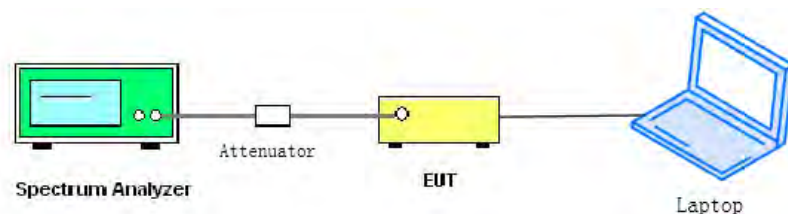

ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.

B. Equipments List:

Please refer ANNEX B(4).

2.2.3. Test Result

A. Test Verdict:


Test Mode	Duty Cycle (%) (D)	Duty Factor ($10 \cdot \lg[1/D]$)
802.11b	100.00	0.00
802.11g	97.54	0.11
802.11n(HT20)	96.64	0.15




B. Test Plots



(Channel 1, 2412MHz, 802.11b)

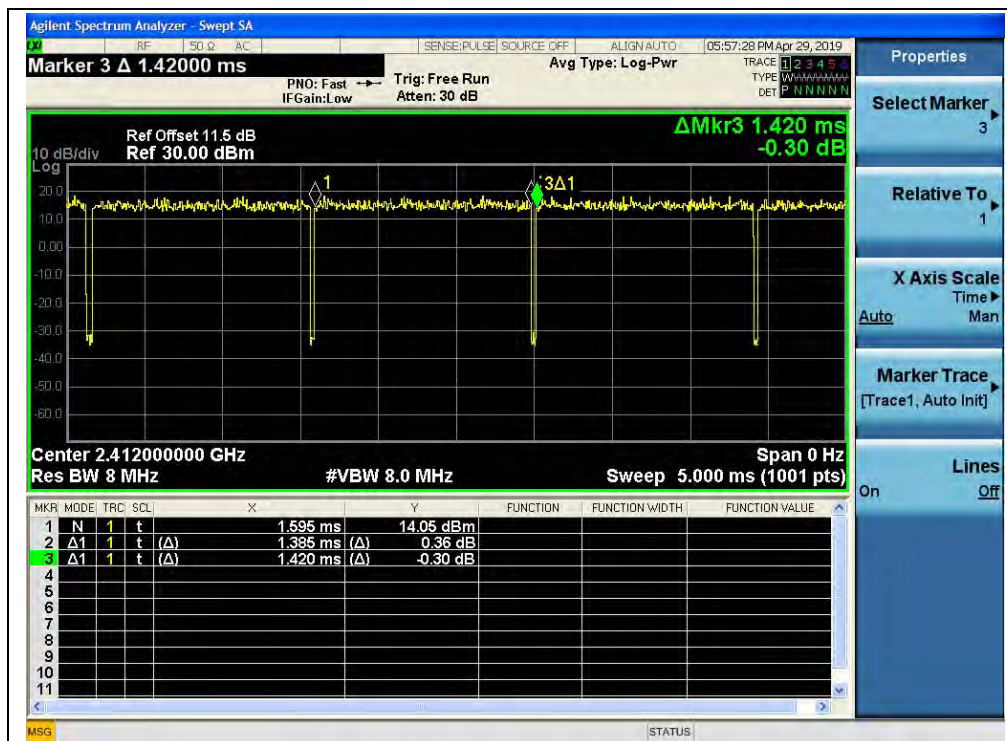

(Channel 1, 2412MHz, 802.11g)

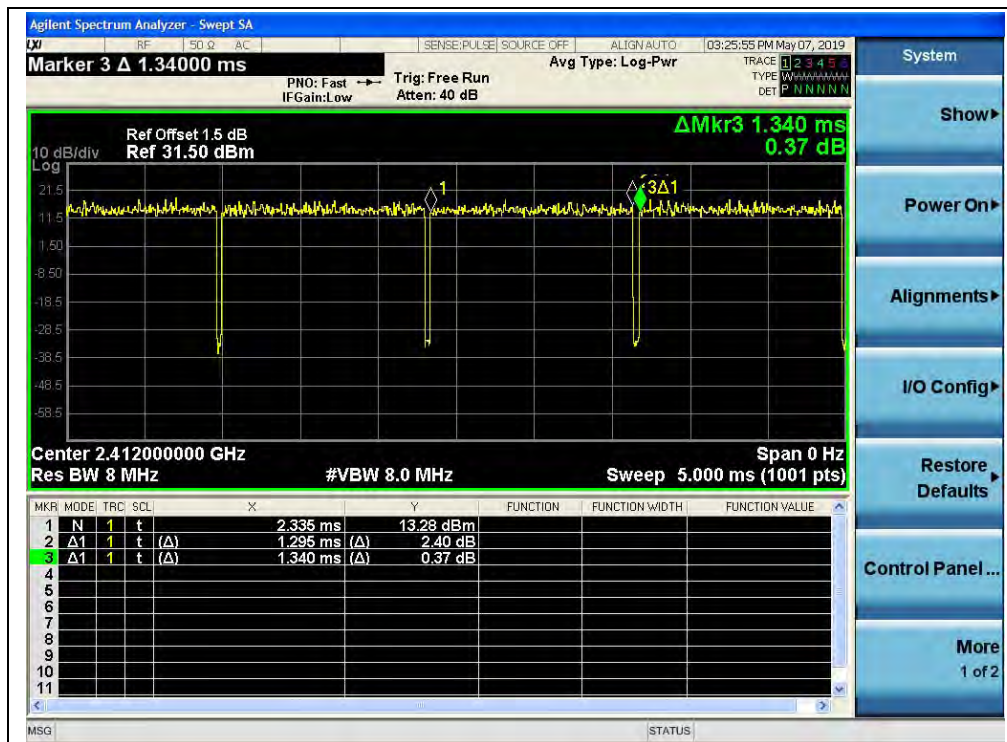

(Channel 1, 2412MHz, 802.11 n(HT20))

2.3. Maximum Peak and Average Conducted Output Power


2.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.3.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

A. Test Setup:

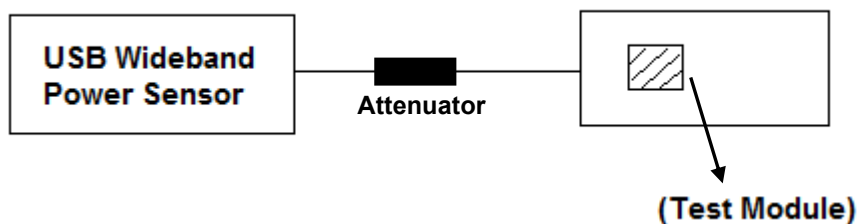

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

Please refer ANNEX B(4).



2.3.3. Test Result

Maximum Peak Conducted Output Power

802.11b Test Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	17.79	0.060	30	1	PASS
6	2437	19.49	0.089			PASS
11	2462	17.32	0.054			PASS
12	2467	17.42	0.055			PASS
13	2472	17.79	0.060			PASS

802.11g Test mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	21.22	0.132	30	1	PASS
6	2437	21.84	0.153			PASS
11	2462	20.60	0.115			PASS
12	2467	20.75	0.119			PASS
13	2472	20.91	0.123			PASS

802.11n(HT20) Test mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	20.42	0.110	30	1	PASS
6	2437	21.33	0.136			PASS
11	2462	20.00	0.100			PASS
12	2467	20.39	0.109			PASS
13	2472	20.74	0.119			PASS

**Maximum Average Conducted Output Power****802.11b Test Mode**

Channel	Frequency (MHz)	Average Power			Limit		Verdict
		Measured	Duty factor Calculated				
		dBm	dBm	W	dBm	W	
1	2412	14.75	14.75	0.030	30	1	PASS
6	2437	16.63	16.63	0.046			PASS
11	2462	14.35	14.35	0.027			PASS
12	2467	14.45	14.45	0.028			PASS
13	2472	14.80	14.80	0.030			PASS

802.11g Test mode

Channel	Frequency (MHz)	Average Power			Limit		Verdict
		Measured	Duty factor Calculated				
		dBm	dBm	W	dBm	W	
1	2412	12.70	12.81	0.019	30	1	PASS
6	2437	14.55	14.66	0.029			PASS
11	2462	12.32	12.43	0.017			PASS
12	2467	12.66	12.77	0.019			PASS
13	2472	13.06	13.17	0.021			PASS

802.11n (HT20) Test mode

Channel	Frequency (MHz)	Average Power			Limit		Verdict
		Measured	Duty factor Calculated				
		dBm	dBm	W	dBm	W	
1	2412	11.21	11.36	0.014	30	1	PASS
6	2437	13.30	13.45	0.022			PASS
11	2462	10.94	11.09	0.013			PASS
12	2467	11.41	11.56	0.014			PASS
13	2472	11.86	12.01	0.016			PASS


2.4. Bandwidth

2.4.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.4.2. Test Description

A. Test Set:

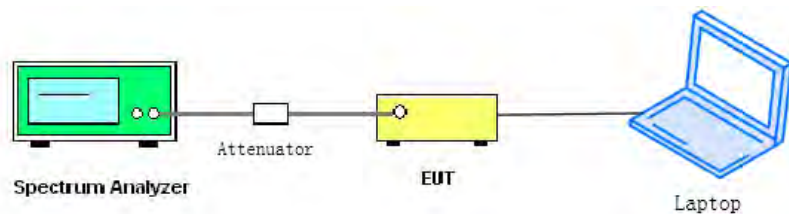

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 8.2 was used in order to prove compliance.

B. Equipments List:

Please refer ANNEX B(4).



2.4.3. Test Result

802.11b Test mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	9.313	≥500	PASS
6	2437	9.298	≥500	PASS
11	2462	9.515	≥500	PASS

B. Test Plots



(Channel 1, 2412MHz, 802.11b)



(Channel 6, 2437 MHz, 802.11b)



(Channel 11, 2462MHz, 802.11b)



802.11g Test mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	16.40	≥500	PASS
6	2437	16.33	≥500	PASS
11	2462	16.38	≥500	PASS

B. Test Plots:



(Channel 1, 2412MHz, 802.11g)



(Channel 6, 2437MHz, 802.11g)



(Channel 11, 2462MHz, 802.11g)



802.11n(HT20) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	17.64	≥500	PASS
6	2437	17.62	≥500	PASS
11	2462	17.60	≥500	PASS

B. Test Plots:



(Channel 1, 2412MHz, 802.11n(HT20))

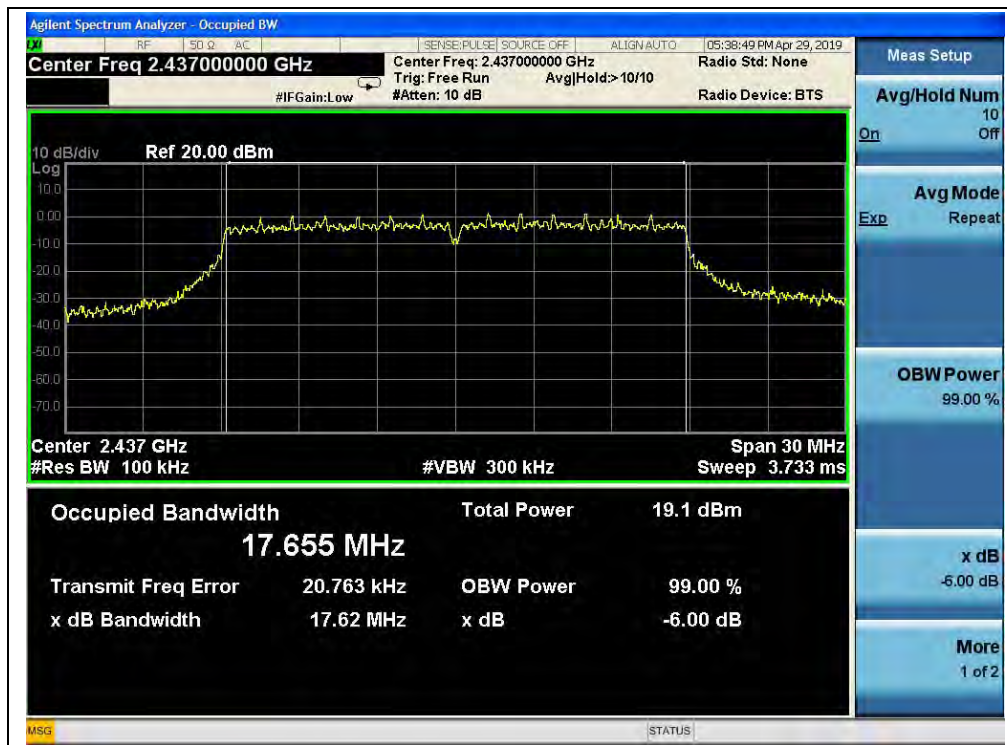

(Channel 6, 2437MHz, 802.11n(HT20))



(Channel 11, 2462MHz, 802.11n(HT20))


2.5. Conducted Spurious Emissions and Band Edge

2.5.1. Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.5.2. Test Description

A. Test Set:

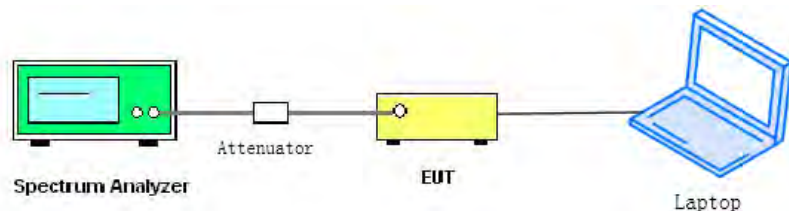

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

B. Equipments List:

Please refer ANNEX B(4).



2.5.3. Test Result


802.11b Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-43.07	4.09	-15.91	PASS
6	2437	-43.10	6.33	-13.67	PASS
11	2462	-43.23	4.05	-15.95	PASS
12	2467	-38.33	4.21	-15.79	PASS
13	2472	-38.70	4.54	-15.46	PASS

B. Test Plots:

Note: The power of the Module transmitting frequency should be ignored.

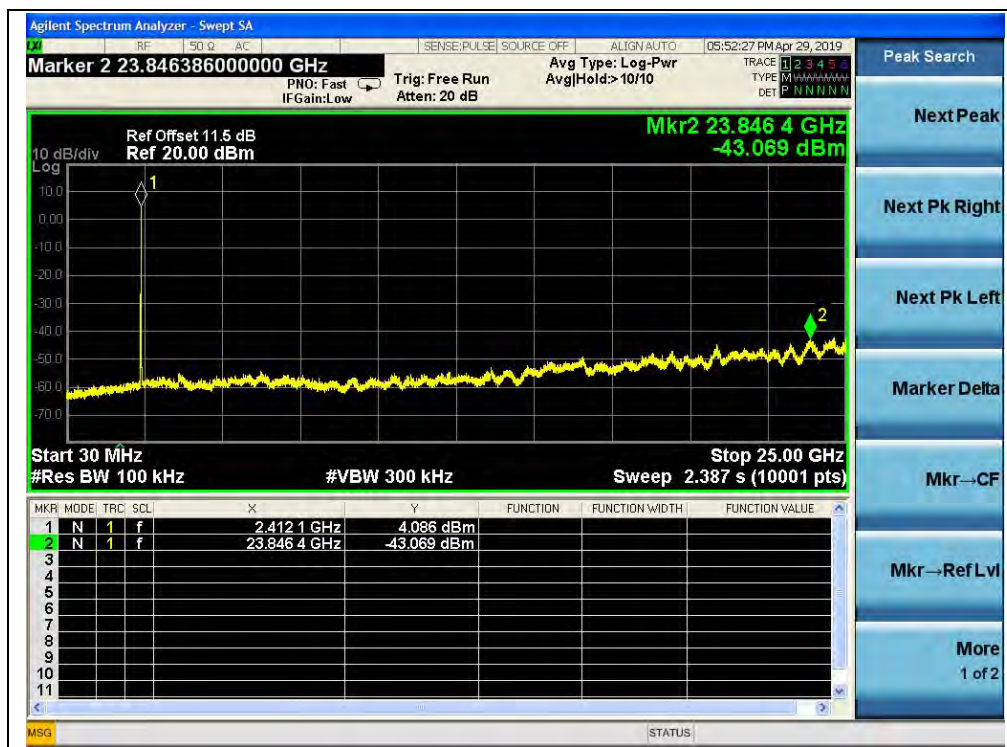

(Channel = 1, 30MHz to 25GHz)



(Band Edge, Channel = 1)




(Channel = 6, 30MHz to 25GHz)



(Channel = 11, 30MHz to 25GHz)



(Band Edge, Channel = 11)

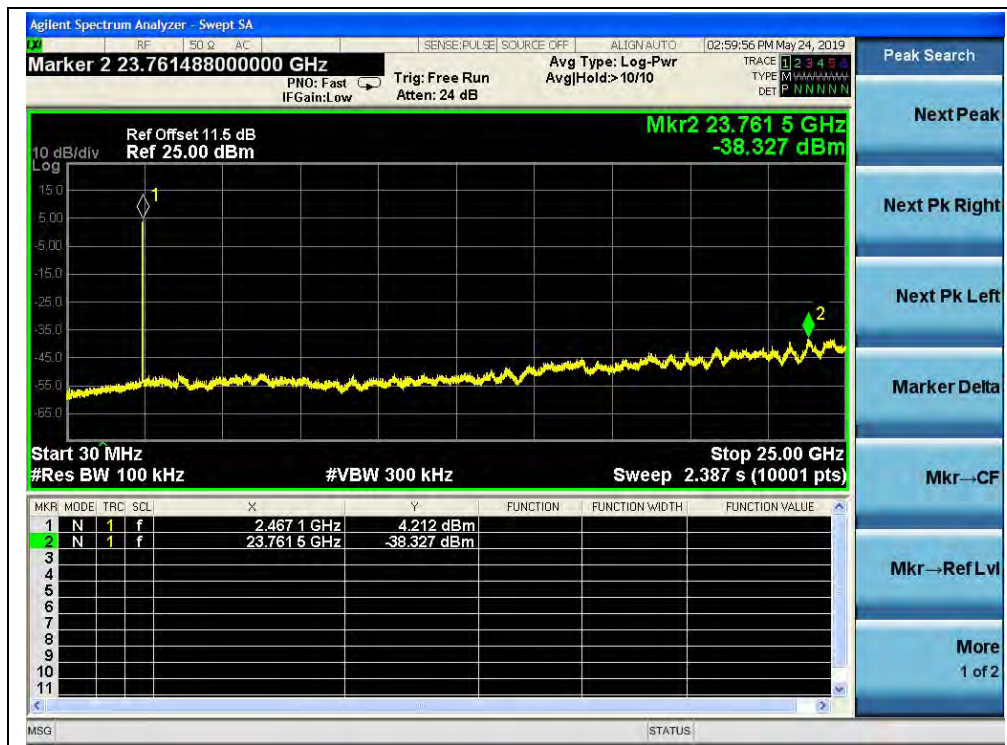


(Channel = 12, 30MHz to 25GHz)



(Band Edge, Channel = 12)



(Channel = 13, 30MHz to 25GHz)

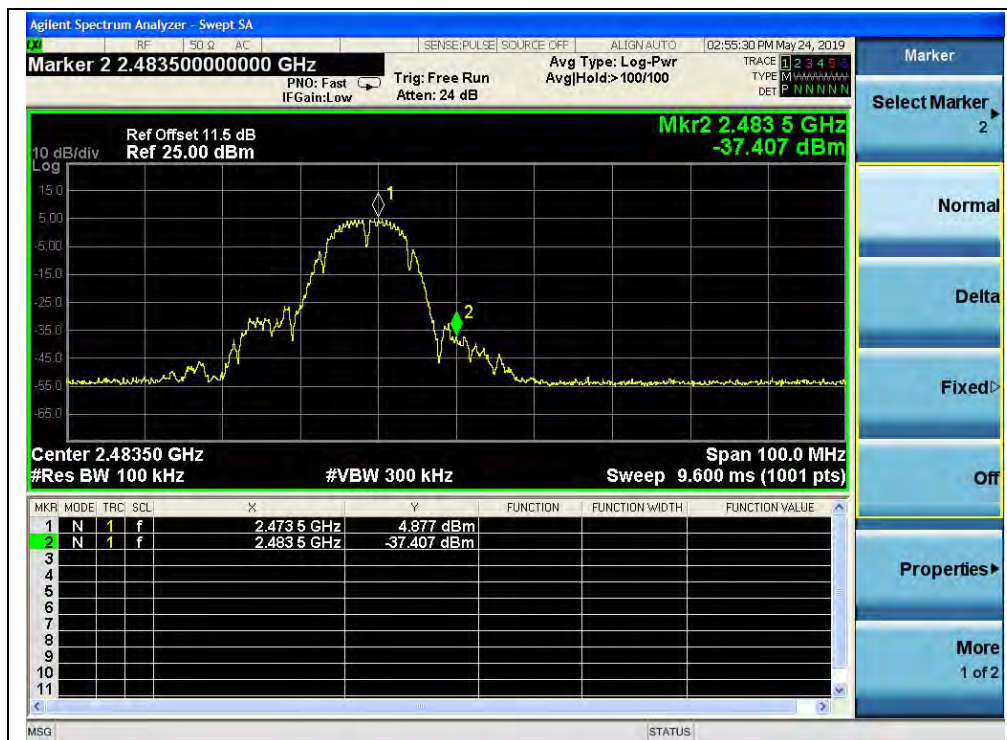

(Band Edge, Channel = 13)




802.11g Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-41.50	-0.96	-20.96	PASS
6	2437	-45.25	0.07	-19.93	PASS
11	2462	-41.96	-0.19	-20.19	PASS
12	2467	-39.65	1.64	-18.36	PASS
13	2472	-38.83	1.95	-18.05	PASS

B. Test Plots:

Note: The power of the Module transmitting frequency should be ignored.

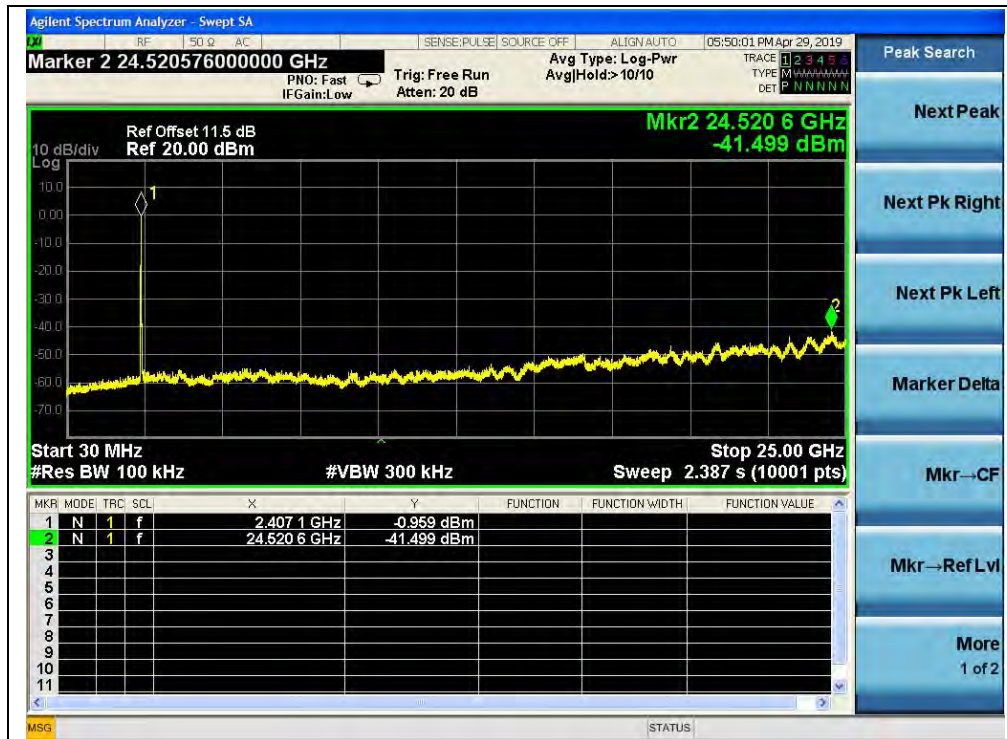


(Channel = 1, 30MHz to 25GHz)



(Band Edge, Channel = 1)



(Channel = 6, 30MHz to 25GHz)

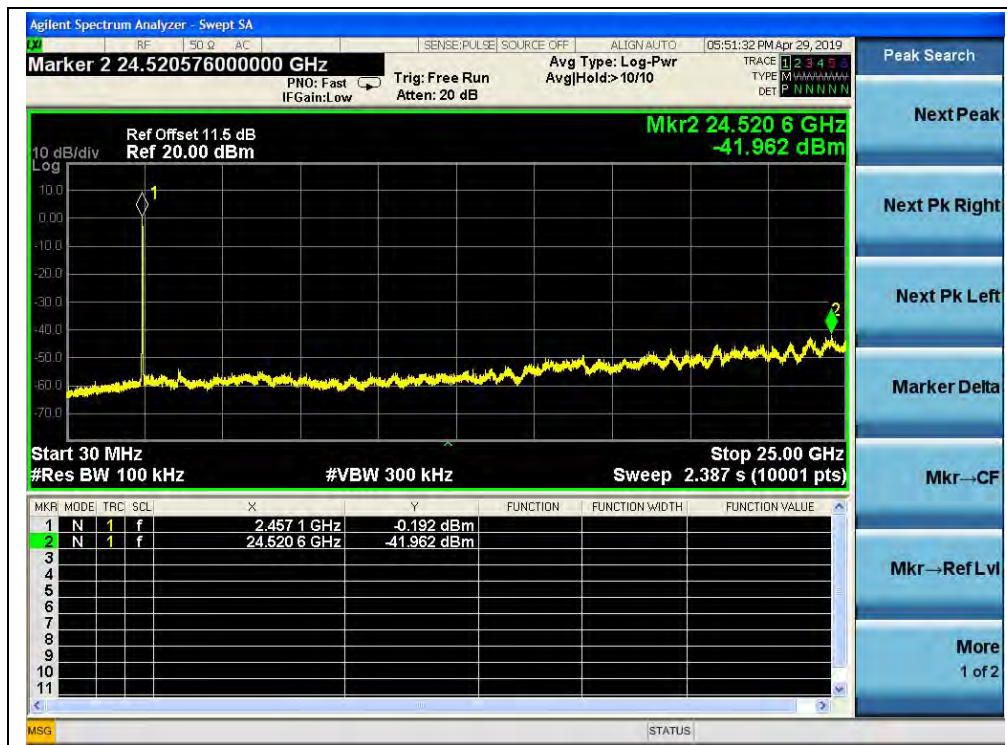

(Channel = 11, 30MHz to 25GHz)



(Band Edge, Channel = 11)



(Channel = 12, 30MHz to 25GHz)



(Band Edge, Channel = 12)



(Channel = 13, 30MHz to 25GHz)



(Band Edge, Channel = 13)



802.11n(HT20) Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-43.01	-1.32	-21.32	PASS
6	2437	-42.83	-0.59	-20.59	PASS
11	2462	-42.54	-0.50	-20.50	PASS
12	2467	-37.37	0.22	-19.78	PASS
13	2472	-38.44	1.21	-18.79	PASS

B. Test Plots:

Note: The power of the Module transmitting frequency should be ignored.



(Channel = 1, 30MHz to 25GHz)

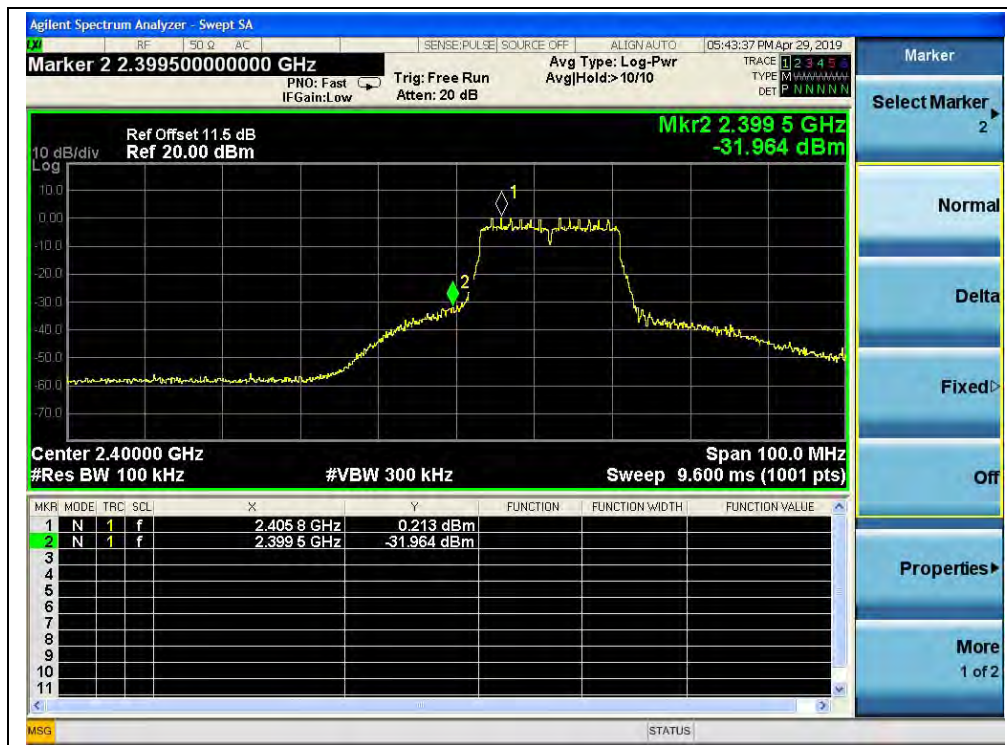

(Band Edge, Channel = 1)




(Channel = 6, 30MHz to 25GHz)



(Channel = 11, 30MHz to 25GHz)



(Band Edge, Channel = 11)

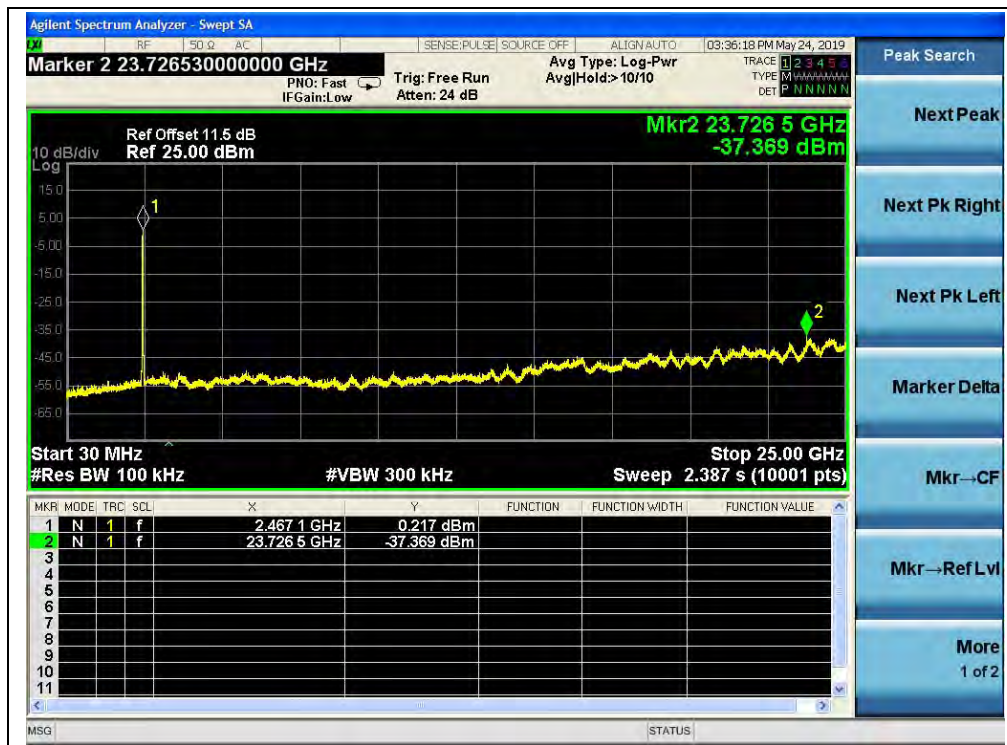


(Channel = 12, 30MHz to 25GHz)



(Band Edge, Channel = 12)



(Channel = 13, 30MHz to 25GHz)

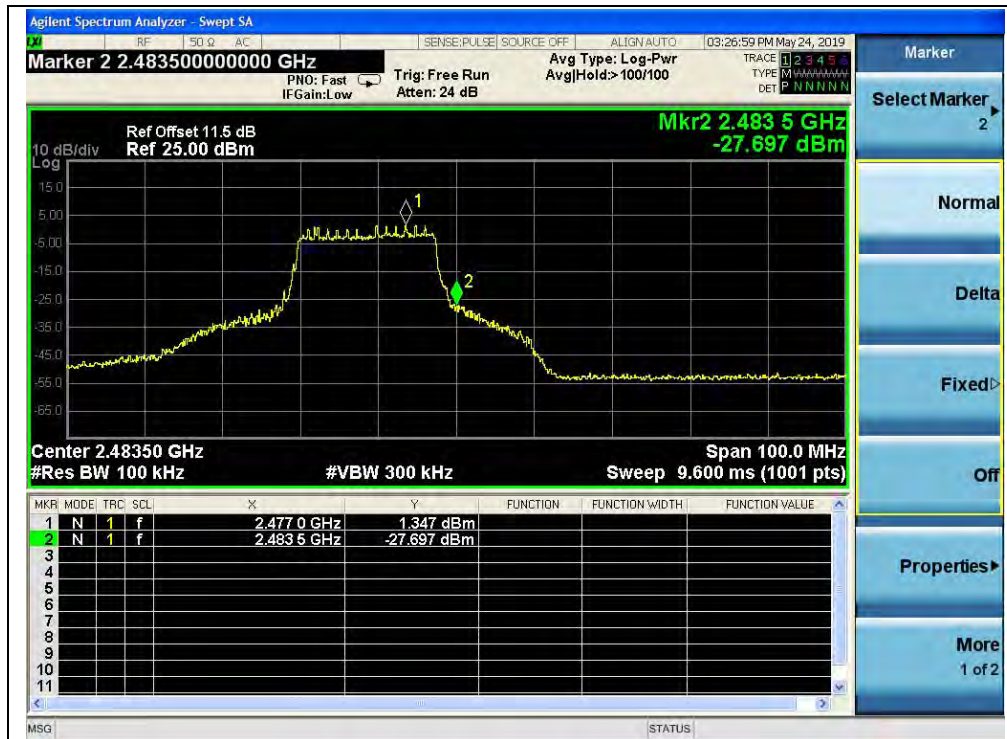

(Band Edge, Channel = 13)

2.6. Power spectral density (PSD)

2.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


2.6.2. Test Description

A. Test procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- Set analyzer center frequency to channel center frequency.
- Set the span to 1.5 times DTS
- Set the RBW to 3 kHz
- Set the VBW to 10 kHz
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

B. Test Set:

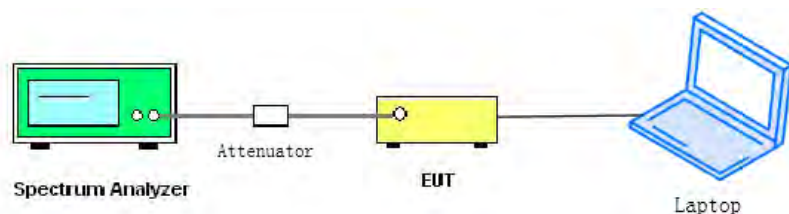

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

KDB 558074 Section 8.4 was used in order to prove compliance.

C. Equipments List:

Please refer ANNEX B(4).



2.6.3. Test Result

802.11b Test mode

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	3.23	8	PASS
6	2437	5.10	8	PASS
11	2462	2.87	8	PASS
12	2467	3.67	8	PASS
13	2472	3.88	8	PASS

B. Test Plots:



(Channel = 1, 802.11b)



(Channel = 6, 802.11b)



(Channel = 11, 802.11b)



(Channel = 12, 802.11b)



(Channel = 13, 802.11b)

**802.11g Test mode****A. Test Verdict:**

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-13.26	8	PASS
6	2437	-11.53	8	PASS
11	2462	-14.46	8	PASS
12	2467	-13.35	8	PASS
13	2472	-13.09	8	PASS

B. Test Plots:

(Channel = 1, 802.11g)



(Channel = 6, 802.11g)



(Channel = 11, 802.11g)



(Channel = 12, 802.11g)



(Channel = 13, 802.11g)

**802.11n(HT20) Test mode****A. Test Verdict:**

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-14.47	8	PASS
6	2437	-12.35	8	PASS
11	2462	-13.85	8	PASS
12	2467	-15.06	8	PASS
13	2472	-11.29	8	PASS

B. Test Plots:

(Channel = 1, 802.11n(HT20))



(Channel = 6, 802.11n(HT20))



(Channel = 11, 802.11n(HT20))



(Channel = 11, 802.11n(HT20))



(Channel = 11, 802.11n(HT20))

2.7. Conducted Emission

2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2. Test Description

A. Test Setup:

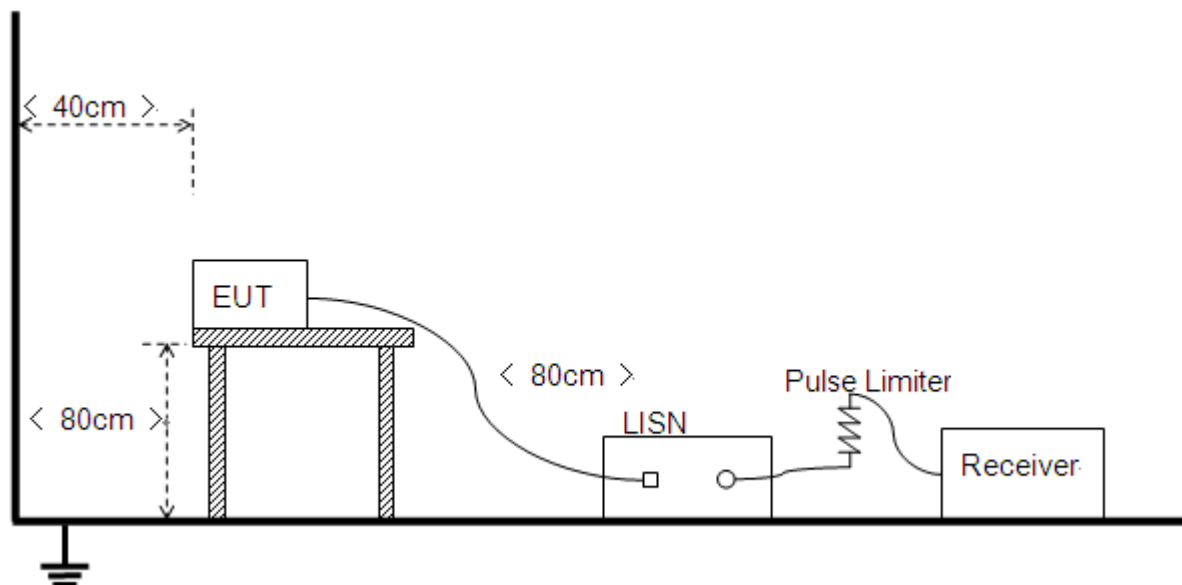

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10 2013.



B. Equipments List:

Please refer ANNEX B(4).

2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test setup:

Test Mode: EUT+ADAPTER+EARPHONE+ WIFI TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plots:

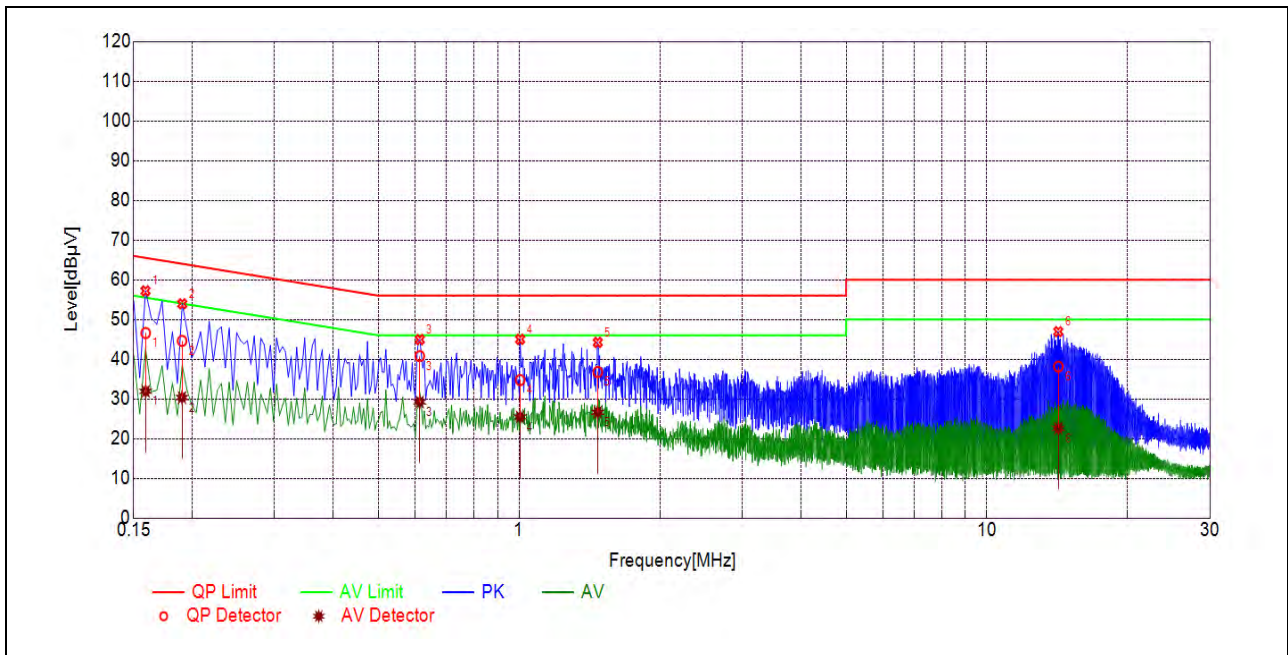

(L Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1591	46.60	31.92	65.51	55.51	Line	PASS
2	0.1903	44.61	30.35	64.02	54.02		PASS
3	0.6131	40.78	29.25	56.00	46.00		PASS
4	1.0048	34.75	25.46	56.00	46.00		PASS
5	1.4723	36.78	26.64	56.00	46.00		PASS
6	14.2139	38.14	22.58	60.00	50.00		PASS

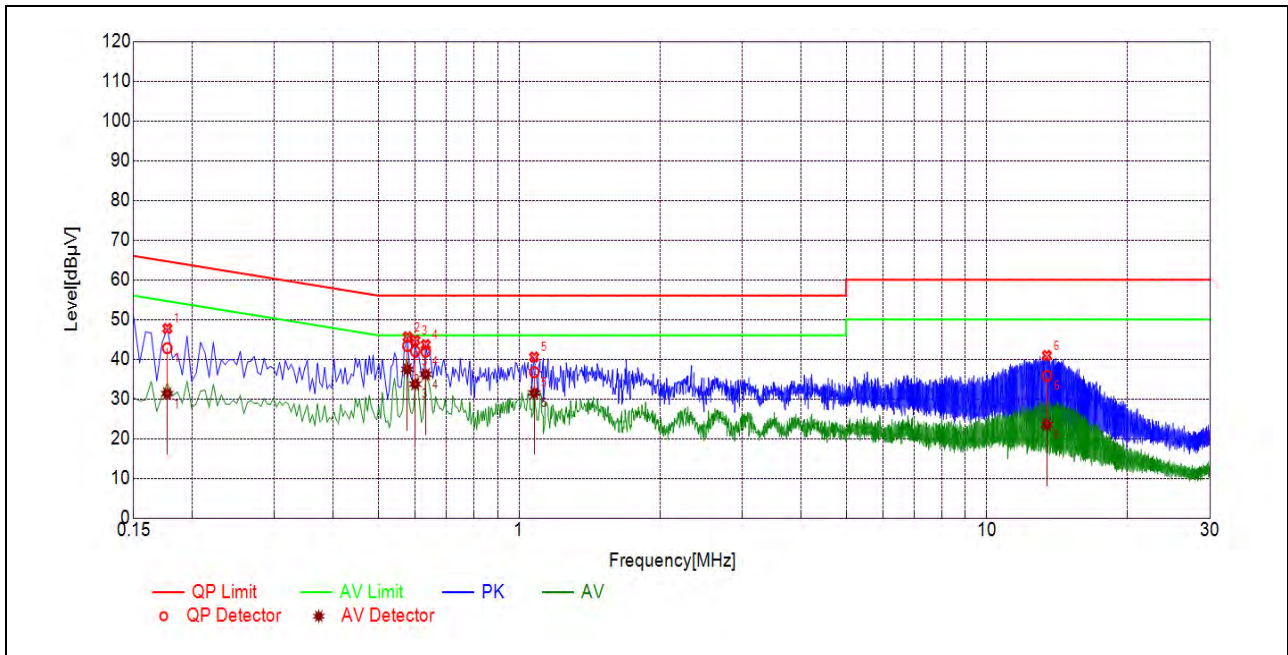

(N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1769	42.79	31.35	64.63	54.63	Neutral	PASS
2	0.5771	43.34	37.42	56.00	46.00		PASS
3	0.5996	42.02	33.71	56.00	46.00		PASS
4	0.6316	41.93	36.20	56.00	46.00		PASS
5	1.0775	36.72	31.50	56.00	46.00		PASS
6	13.4349	35.78	23.51	60.00	50.00		PASS


2.8. Restricted Frequency Bands

2.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2. Test Description

A. Test Setup

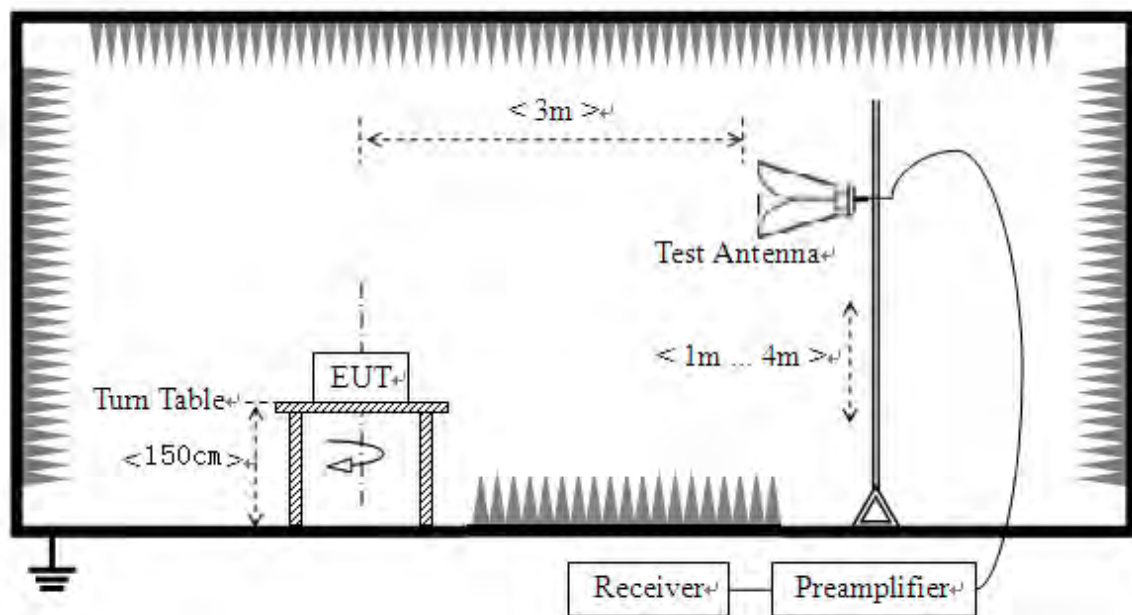

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

KDB 558074 Section 12.1 was used in order to prove compliance.

**B. Equipments List:**

Please refer ANNEX B(4).

2.8.3. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

802.11b Test mode**A. Test Verdict:**


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2380.00	PK	48.00	-29.67	32.56	50.89	74	PASS
1	2376.75	AV	45.59	-29.67	32.56	48.48	54	PASS
11	2486.34	PK	48.52	-29.67	32.56	51.41	74	PASS
11	2484.44	AV	46.16	-29.67	32.56	49.05	54	PASS
12	2483.89	PK	49.29	-29.67	32.56	52.18	74	PASS
12	2484.08	AV	48.04	-29.67	32.56	50.93	54	PASS
13	2484.53	PK	48.09	-29.67	32.56	50.98	74	PASS
13	2483.50	AV	46.97	-29.67	32.56	49.86	54	PASS




B. Test Plots:

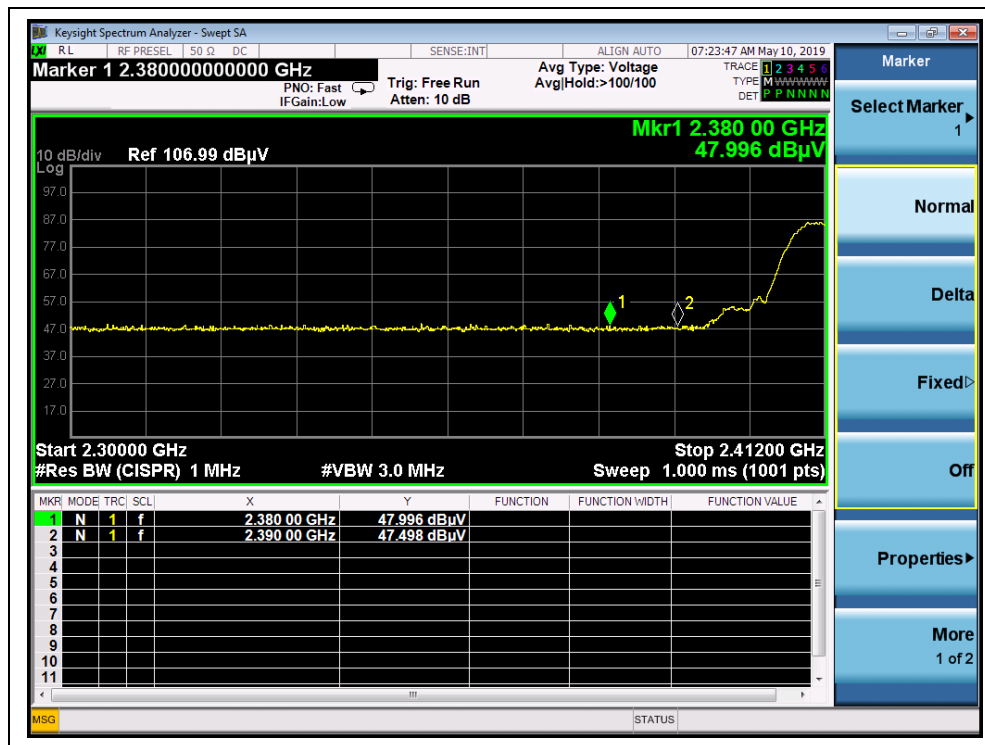


(Channel = 1 PEAK, 802.11b)

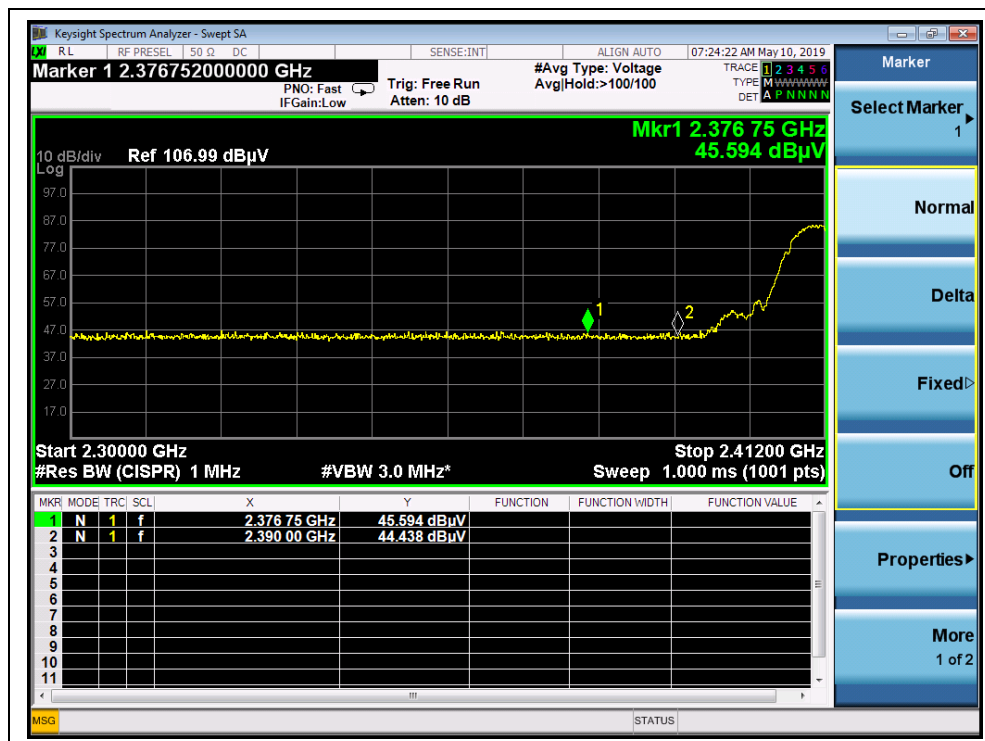


(Channel = 1 AVG, 802.11b)

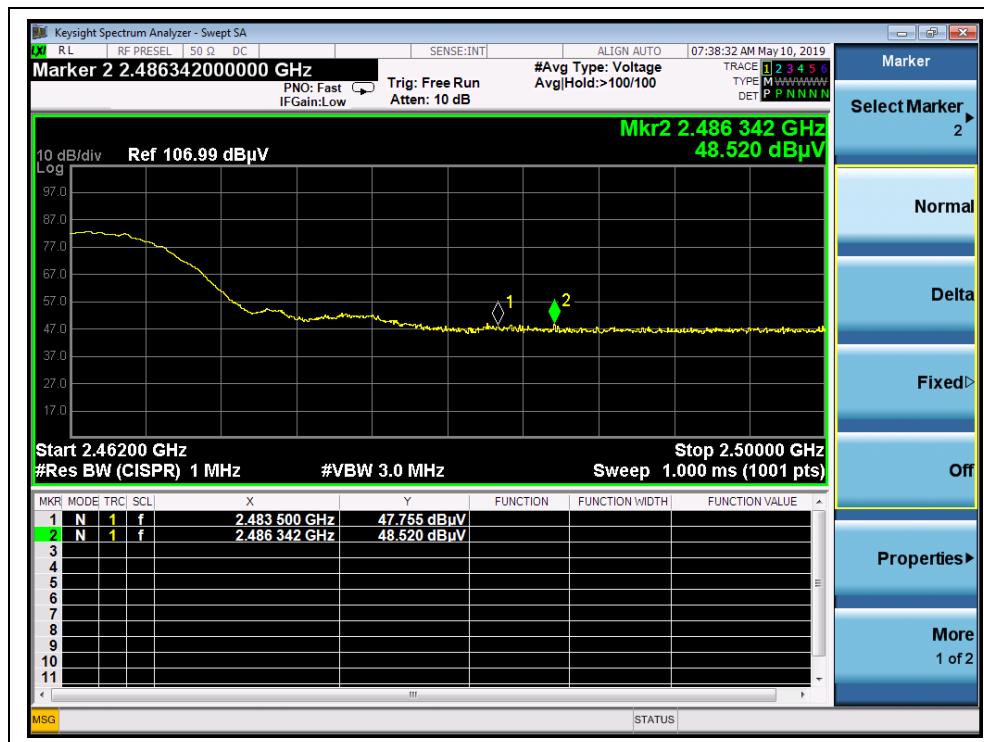

(Channel = 11 PEAK, 802.11b)

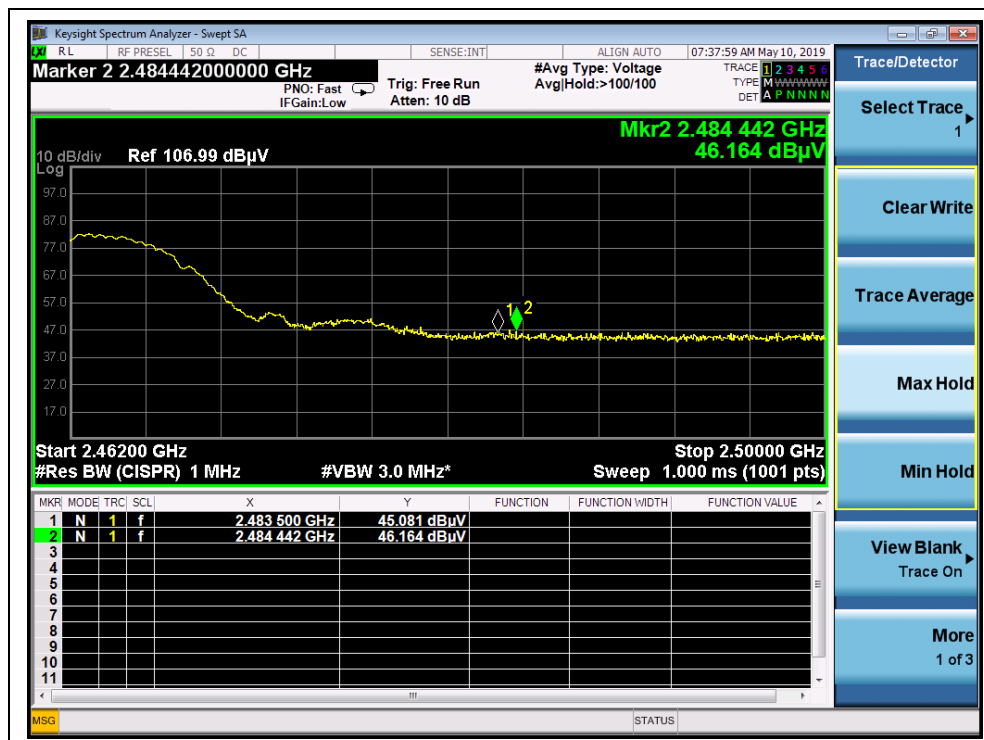


(Channel = 11 AVG, 802.11b)

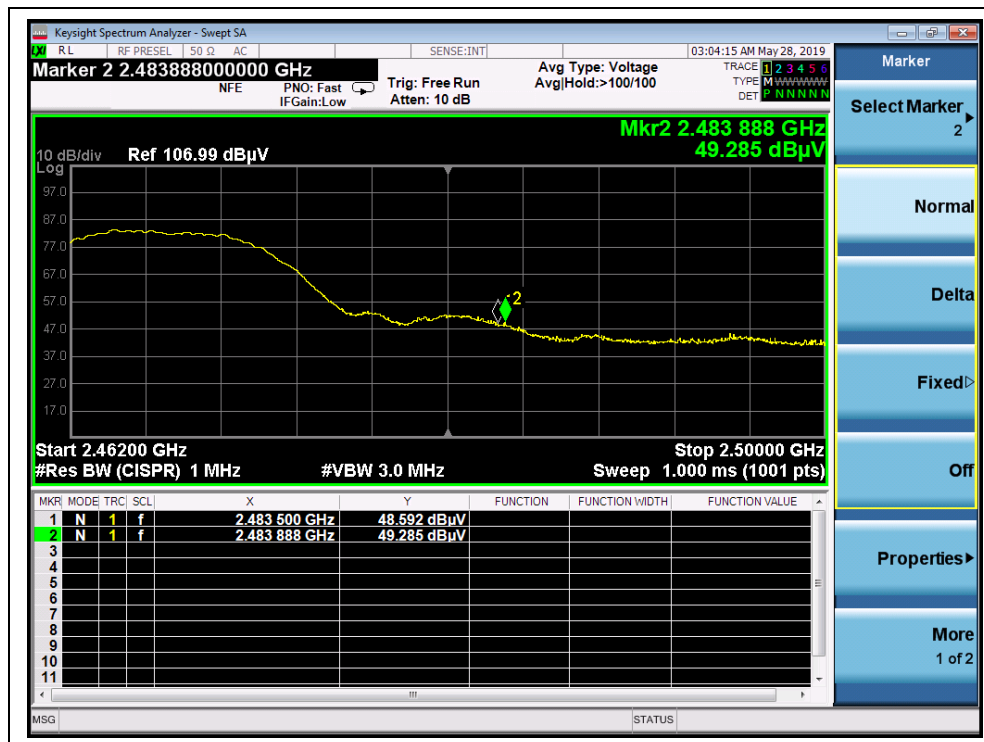


(Channel = 12 PEAK, 802.11b)



(Channel = 12 AVG, 802.11b)

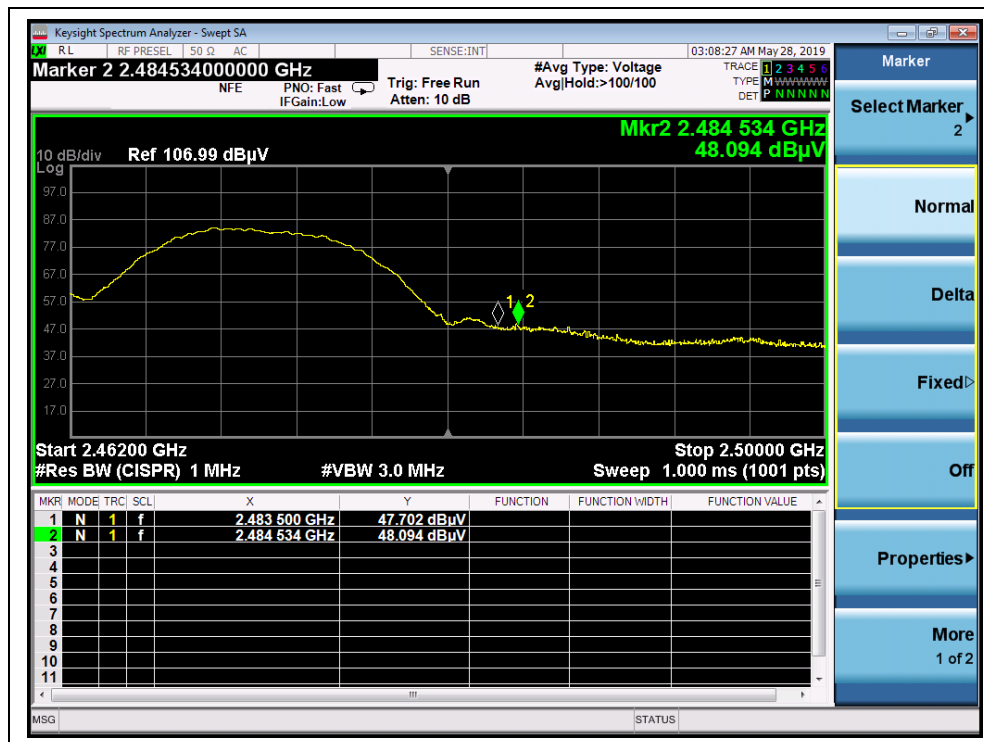

(Channel = 13 PEAK, 802.11b)

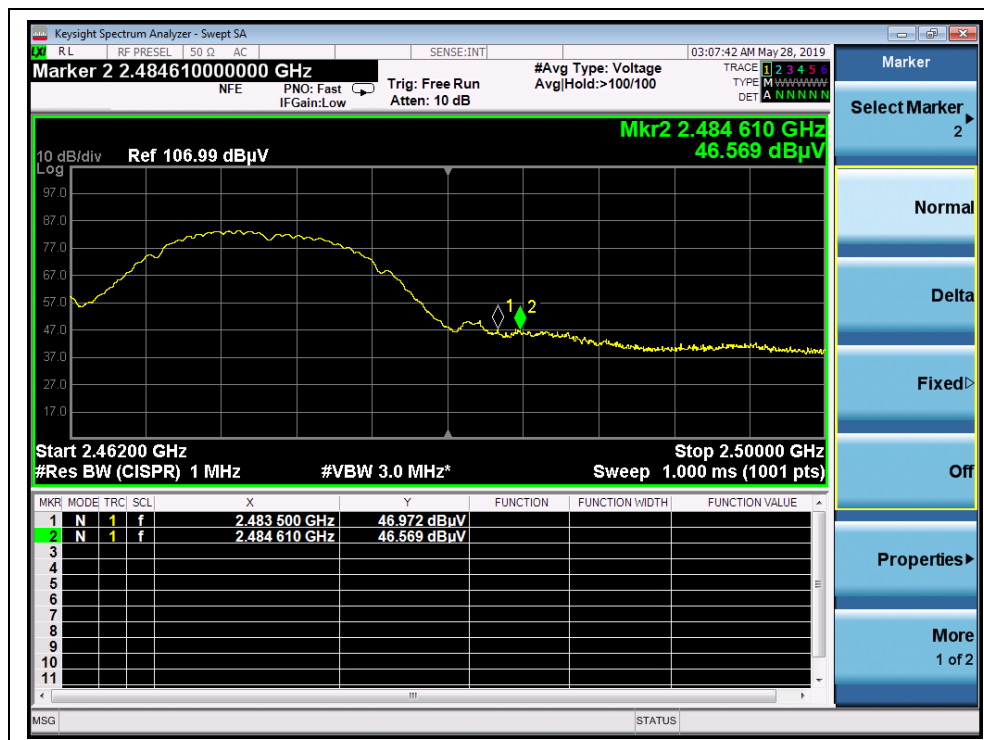


(Channel = 13 AVG, 802.11b)

**802.11g Test mode****A. Test Verdict:**


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
1	2390.00	PK	50.54	-29.67	32.56	53.43	74	PASS
1	2390.00	AV	47.09	-29.67	32.56	49.98	54	PASS
11	2483.50	PK	50.80	-29.67	32.56	53.69	74	PASS
11	2484.18	AV	47.34	-29.67	32.56	50.23	54	PASS
12	2483.77	PK	57.29	-29.67	32.56	60.18	74	PASS
12	2483.50	AV	43.12	-29.67	32.56	46.01	54	PASS
13	2483.50	PK	57.78	-29.67	32.56	60.67	74	PASS
13	2484.04	AV	42.41	-29.67	32.56	45.30	54	PASS




B. Test Plots:

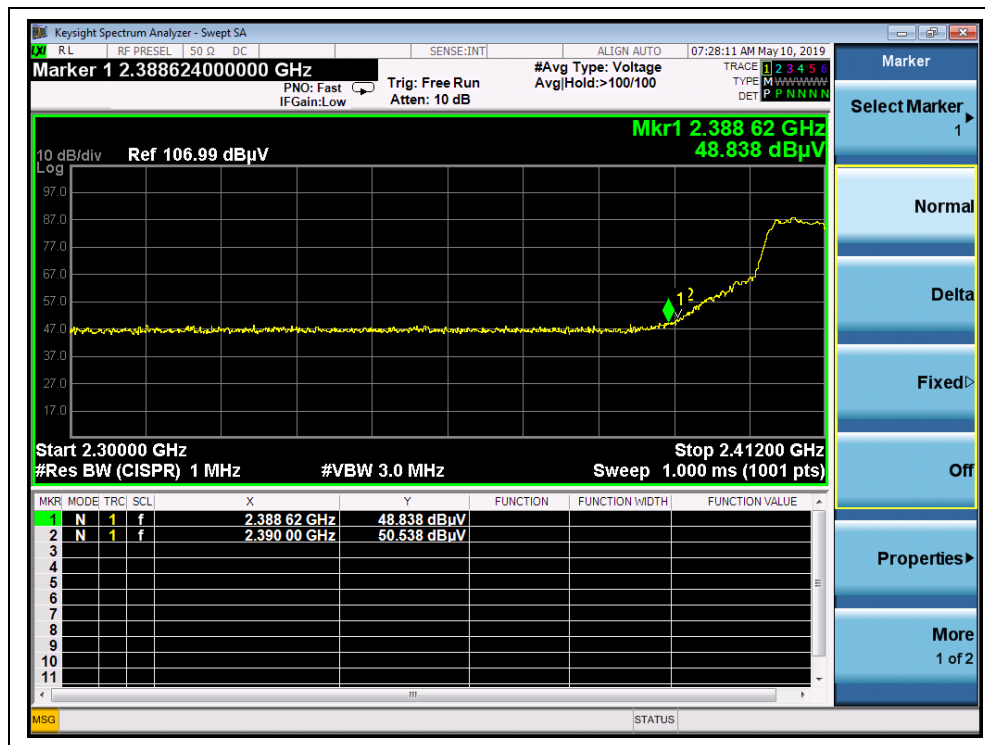


(Channel = 1 PEAK, 802.11g)

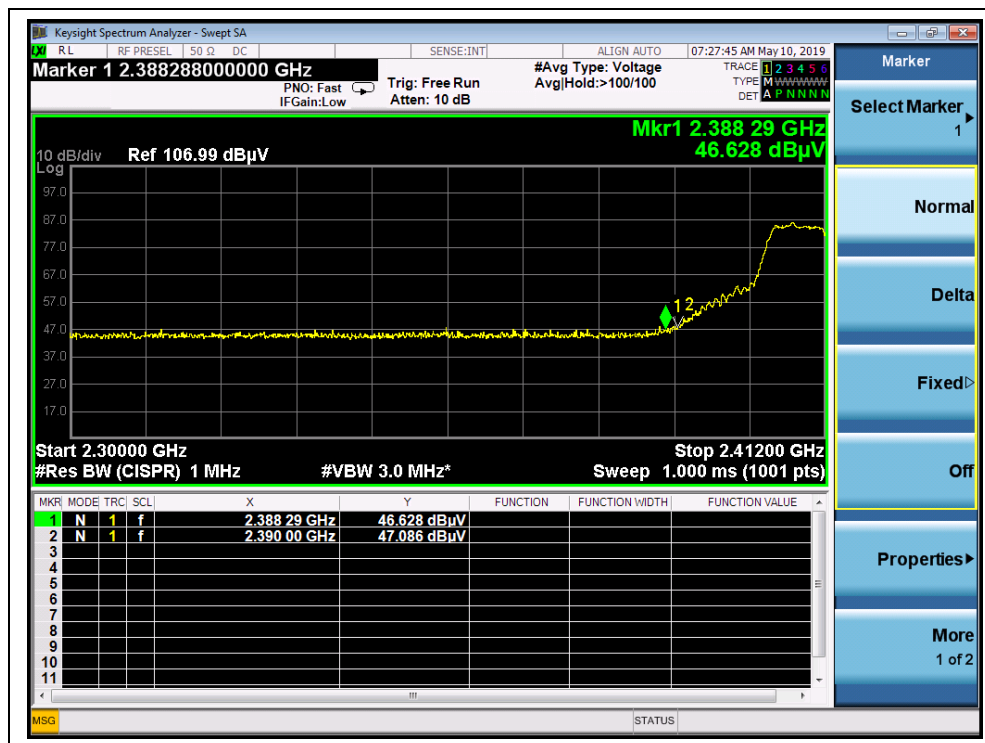


(Channel = 1 AVG, 802.11g)

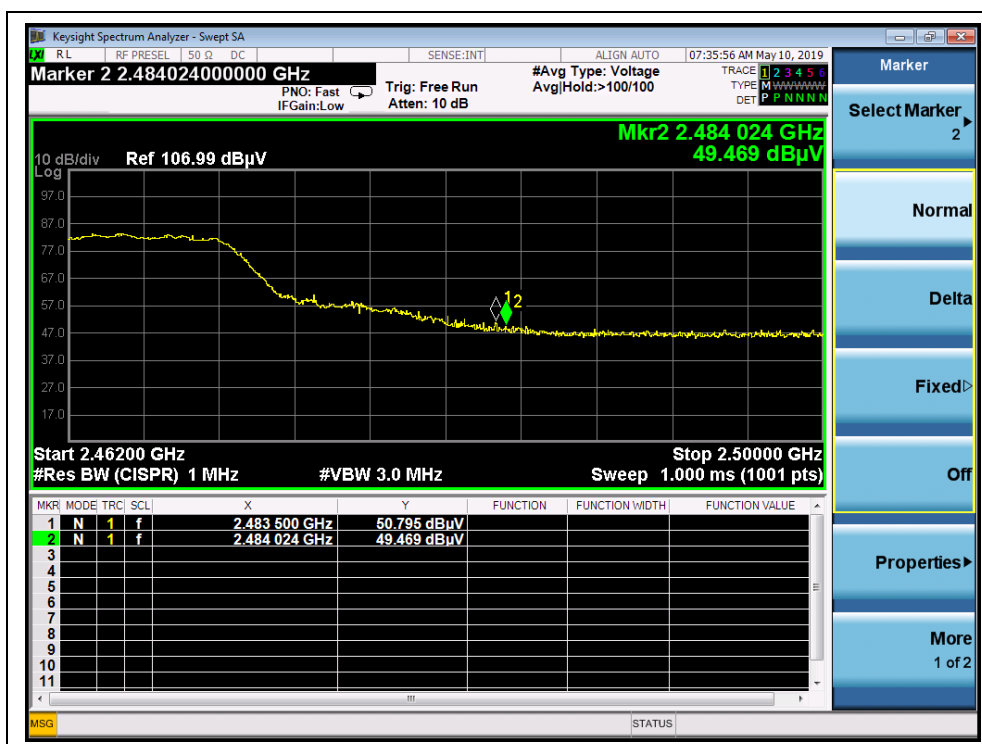


(Channel = 11 PEAK, 802.11g)

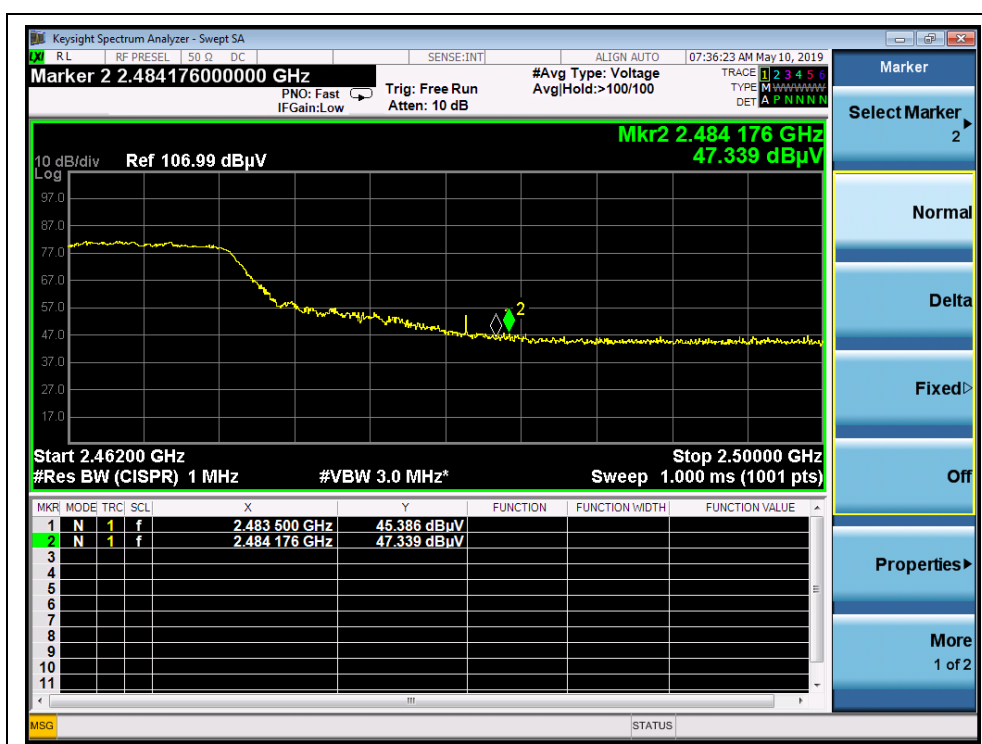


(Channel = 11 AVG, 802.11g)

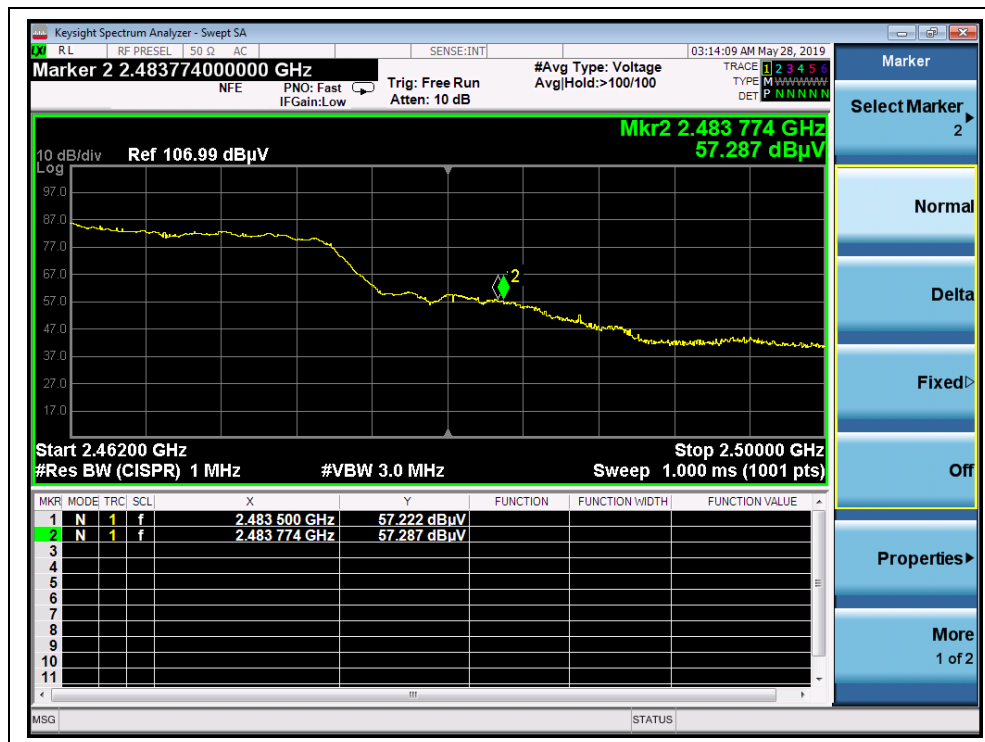


(Channel = 12 PEAK, 802.11g)

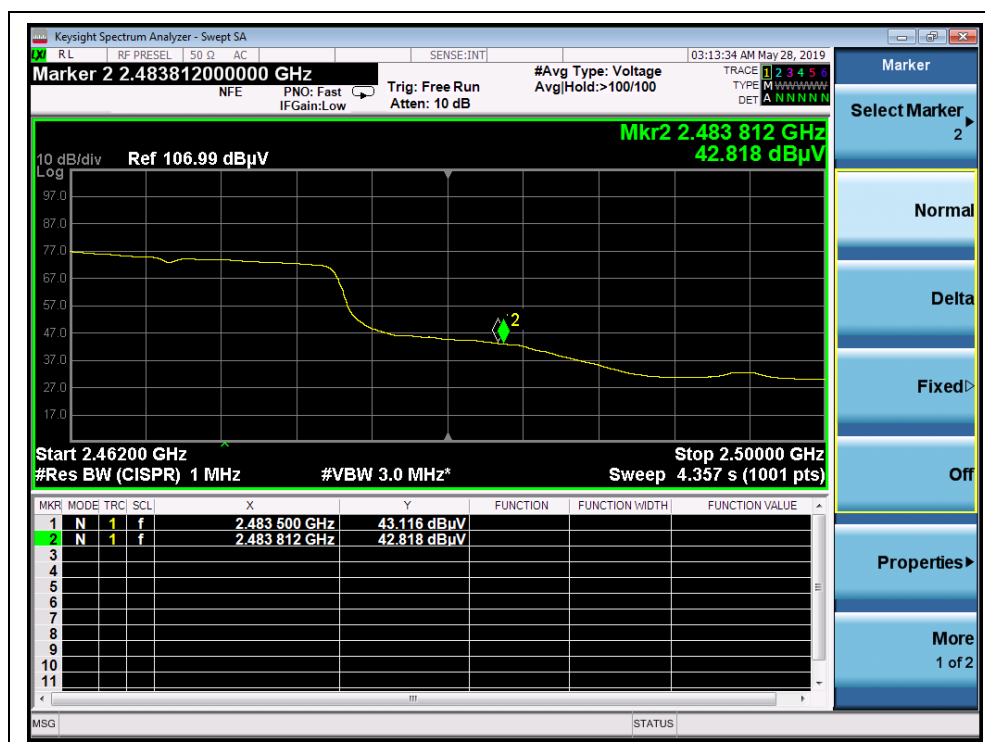

(Channel = 12 AVG, 802.11g)

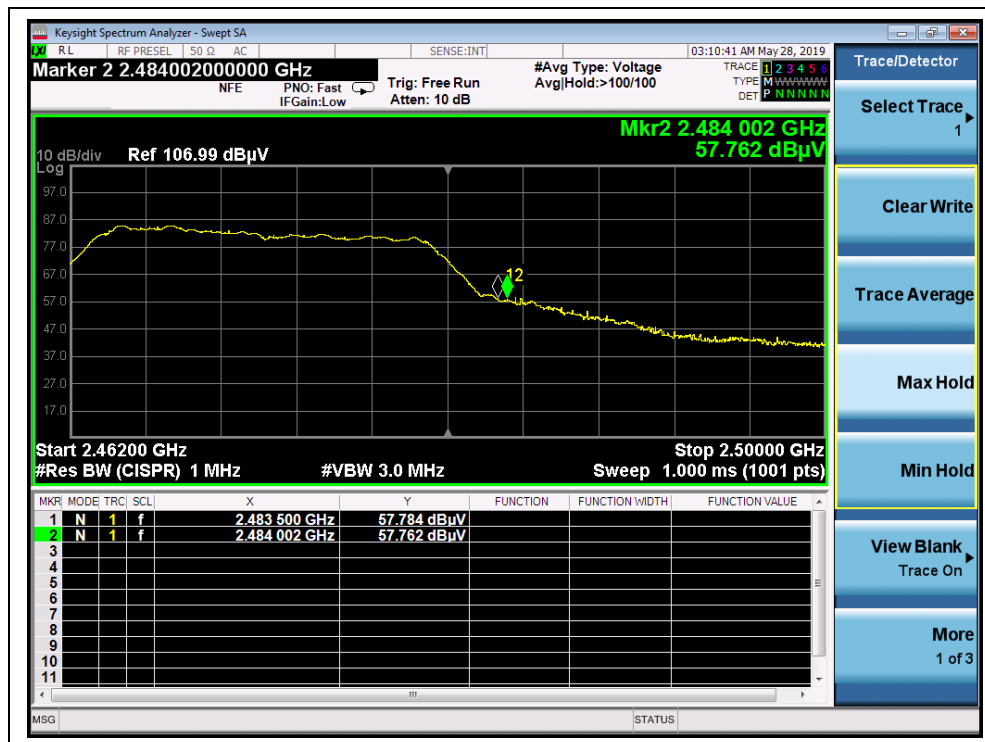

(Channel = 13 PEAK, 802.11g)

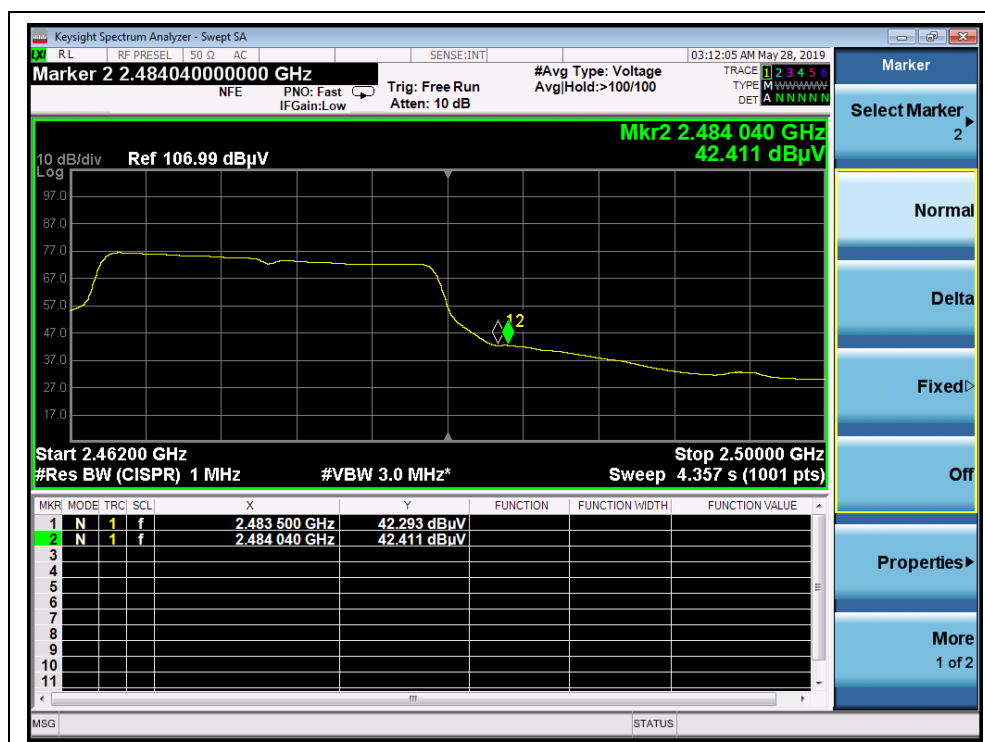


(Channel = 13 AVG, 802.11g)


**802.11 n(HT20) Test mode****A. Test Verdict:**

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
1	2387.84	PK	50.76	-29.67	32.56	53.65	74	PASS
1	2388.51	AV	47.72	-29.67	32.56	50.61	54	PASS
11	2485.35	PK	49.93	-29.67	32.56	52.82	74	PASS
11	2484.71	AV	47.46	-29.67	32.56	50.35	54	PASS
12	2483.81	PK	57.98	-29.67	32.56	60.87	74	PASS
12	2483.50	AV	41.07	-29.67	32.56	43.96	54	PASS
13	2484.27	PK	55.54	-29.67	32.56	58.43	74	PASS
13	2483.50	AV	41.78	-29.67	32.56	44.67	54	PASS


B. Test Plots:

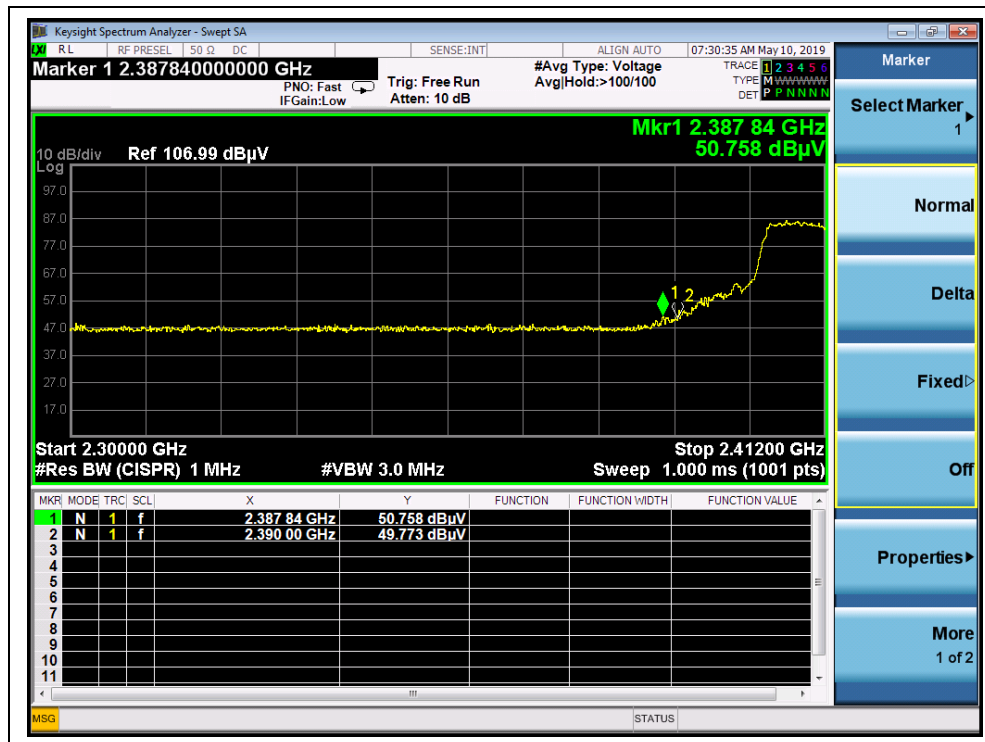


(Channel = 1 PEAK, 802.11n(HT20))

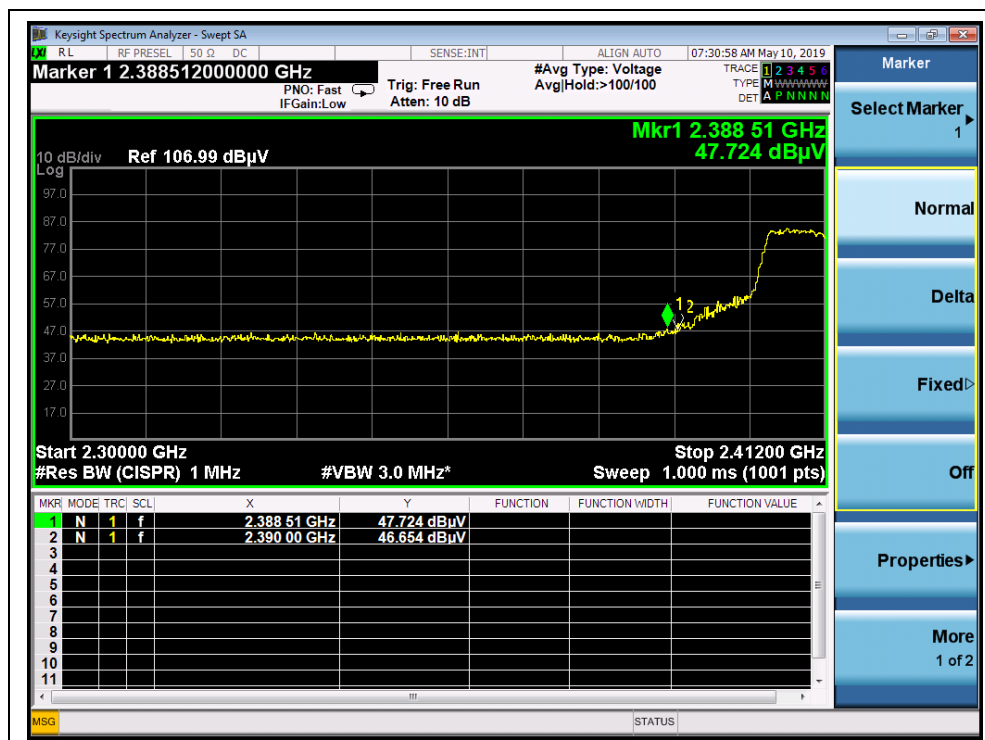


(Channel = 1 AVG, 802.11n(HT20))

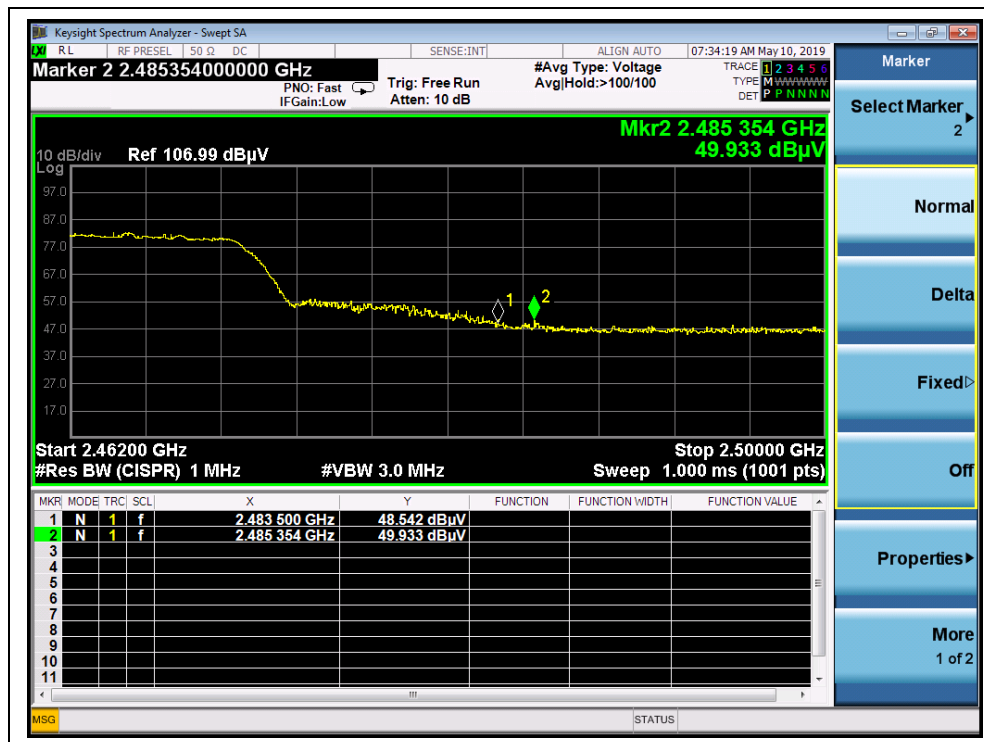


(Channel = 11 PEAK, 802.11n(HT20))

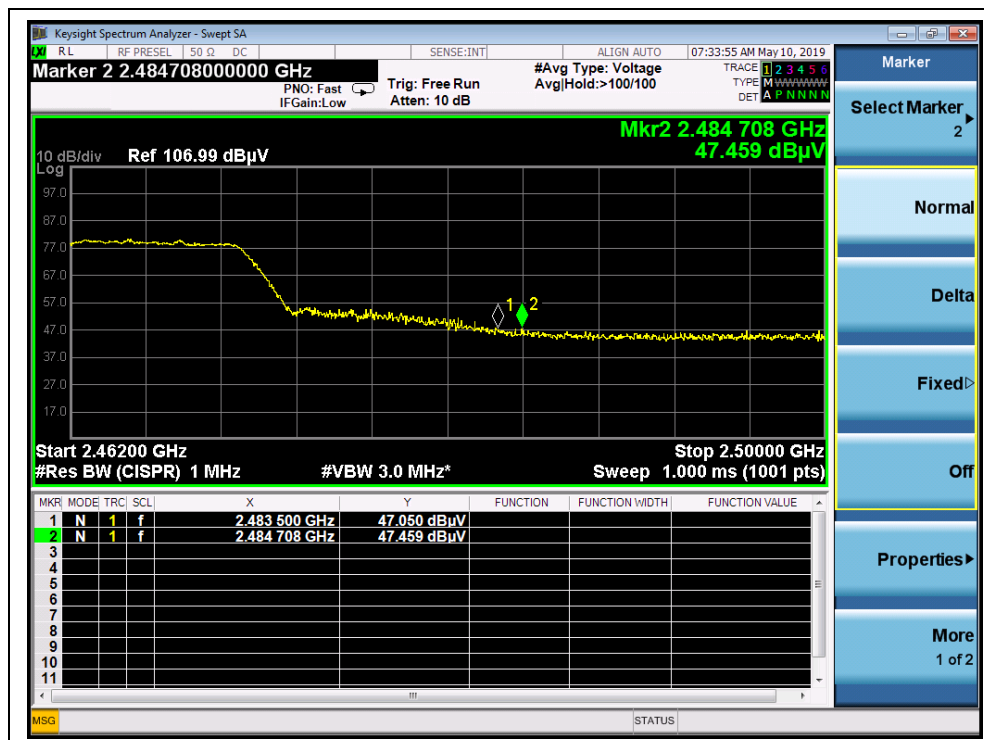


(Channel = 11 AVG, 802.11n(HT20))

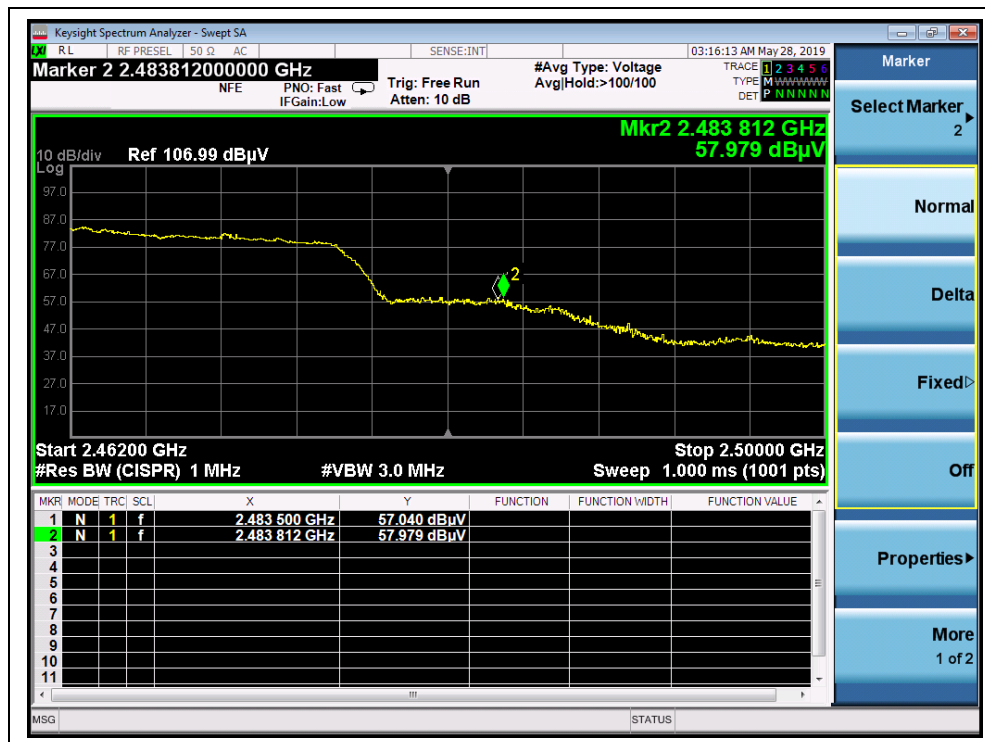


(Channel = 12 PEAK, 802.11n(HT20))

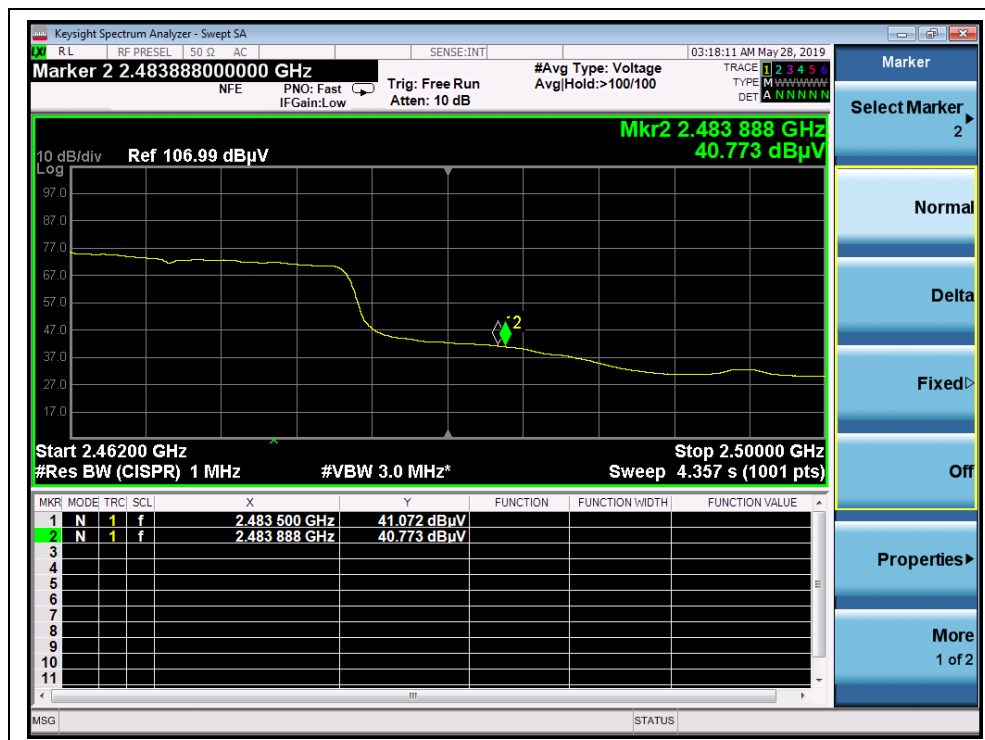

(Channel = 12 AVG, 802.11n(HT20))

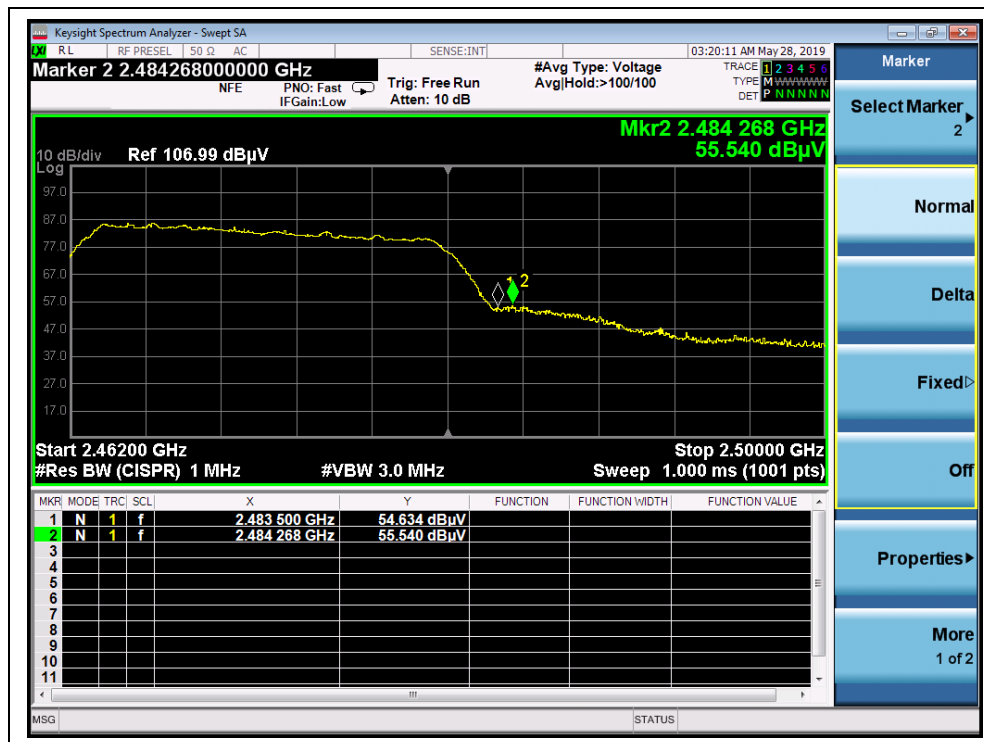

(Channel = 13 PEAK, 802.11n(HT20))

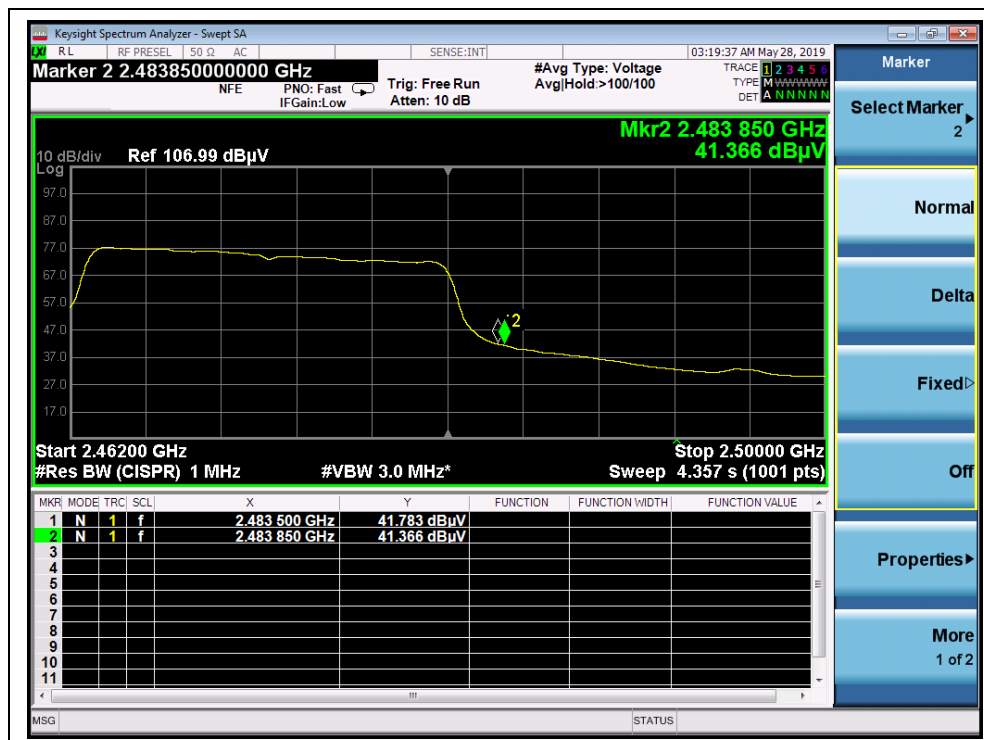

(Channel = 13 AVG, 802.11n(HT20))



2.9. Radiated Emission

2.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.


For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.9.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

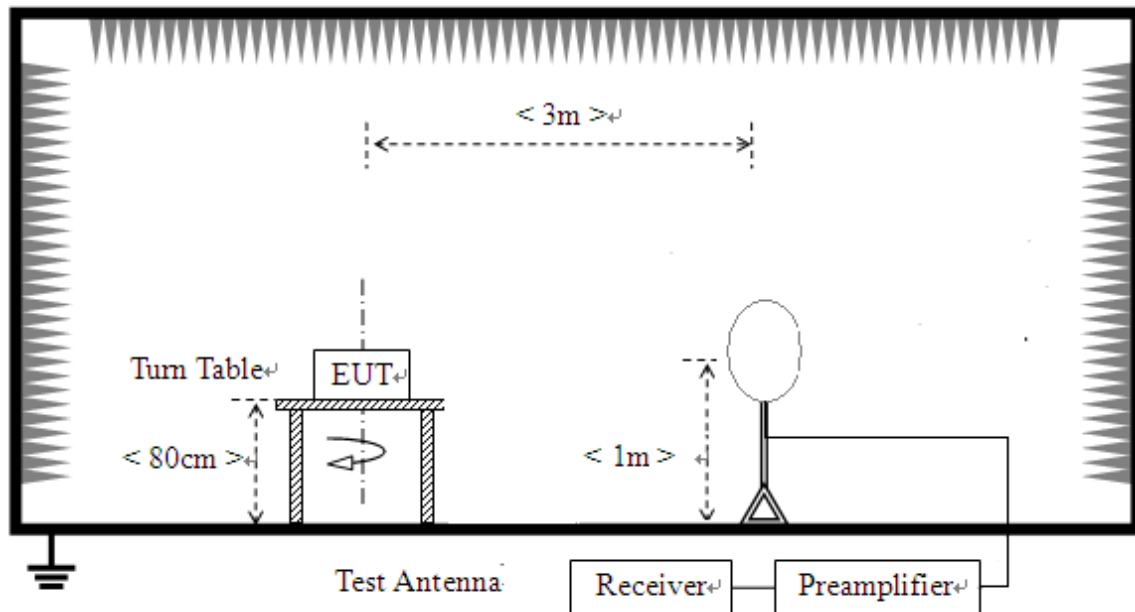

- 2) For radiated emissions from 30MHz to 1GHz

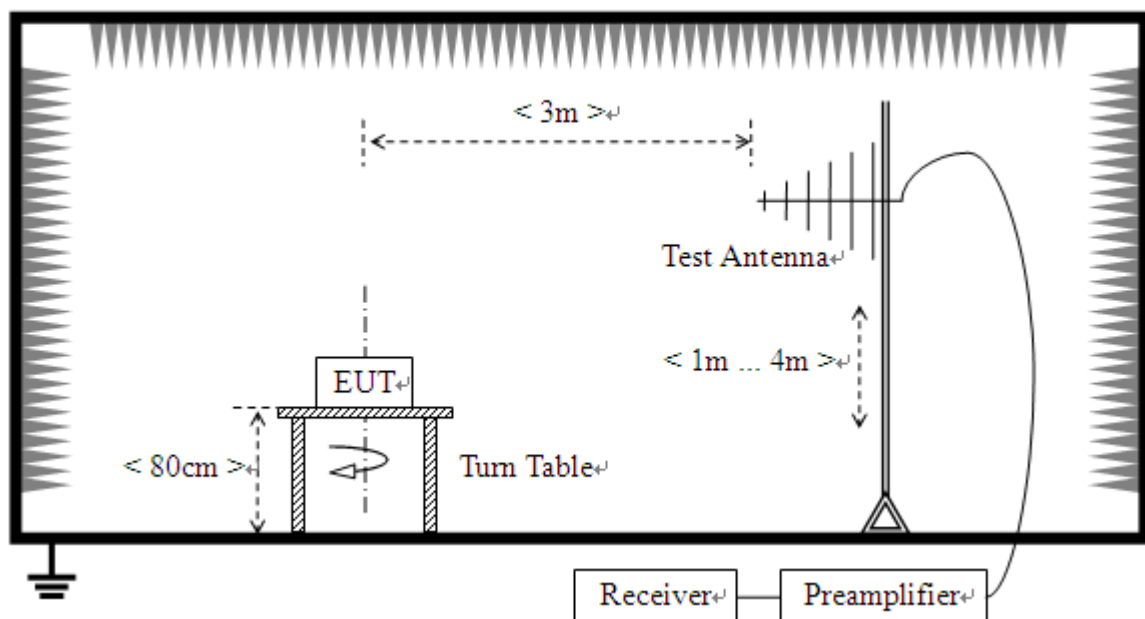

3) For radiated emissions above 1GHz

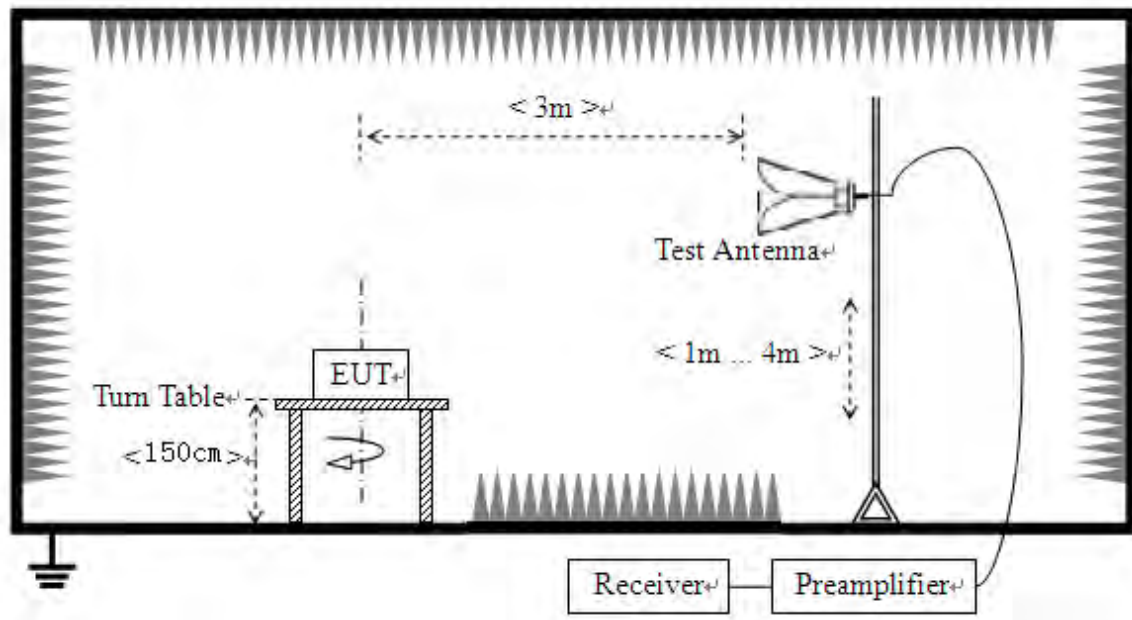

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading



For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

A. Equipments List:

Please refer ANNEX B(4).

2.9.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 25GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**802.11b Test mode**

Plots for Channel = 1

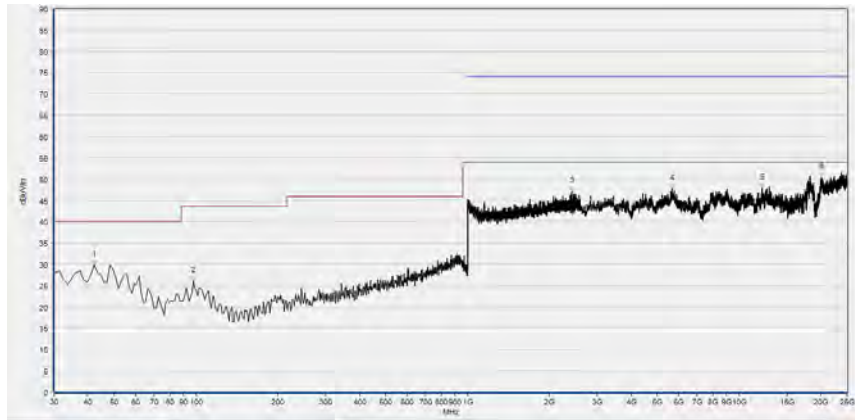


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
42.140	29.76	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
97.985	26.16	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2418.808	47.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5663.248	47.69	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12148.209	47.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
20119.985	50.37	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

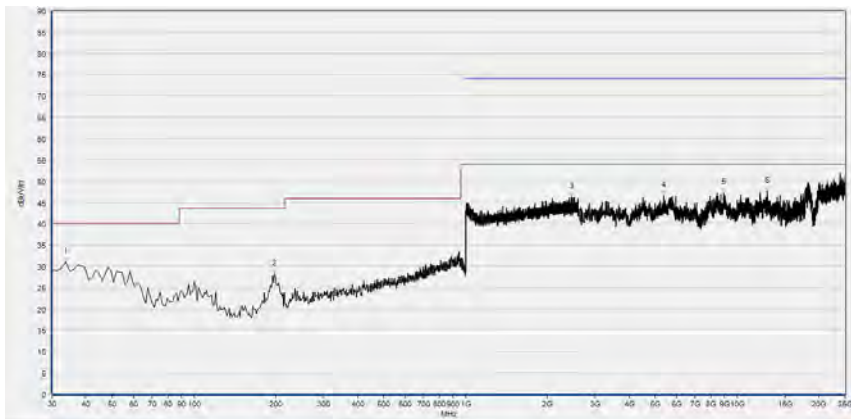


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
33.642	31.07	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
197.534	28.12	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2461.064	46.27	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5357.738	46.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8946.463	47.25	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12918.094	47.54	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)

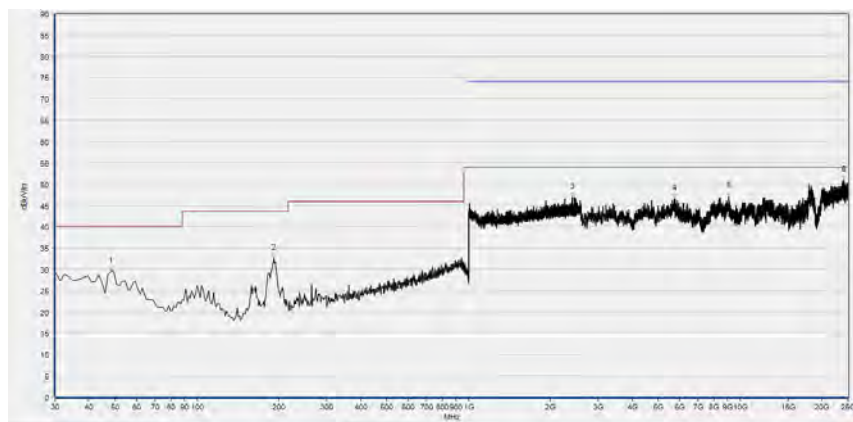Plot for Channel = 6

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	29.56	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
191.464	32.45	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2407.923	46.94	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5736.570	46.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9076.814	47.17	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
24107.911	51.00	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

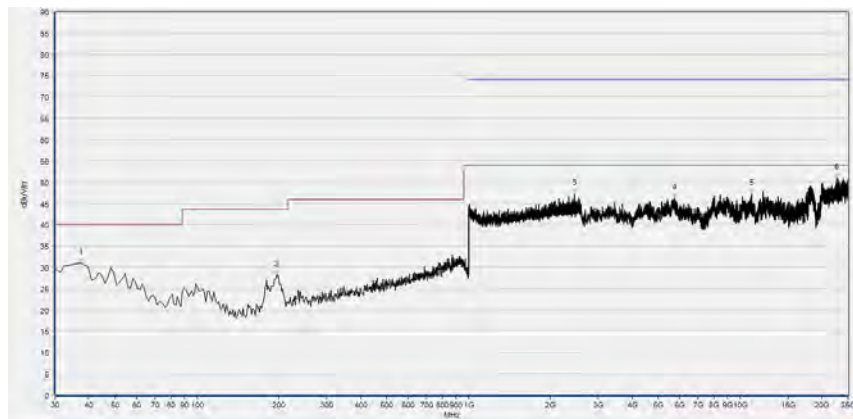


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
37.284	31.06	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
196.320	28.08	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2452.741	47.34	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5720.276	46.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11011.711	47.28	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
22710.711	50.89	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




Plot for Channel = 11

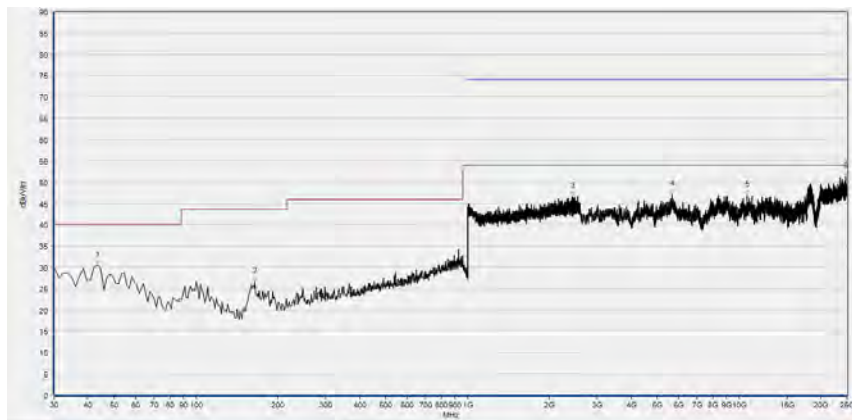

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.354	30.52	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
164.756	26.59	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2445.698	46.62	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5655.101	47.03	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10730.642	46.86	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
24727.078	51.25	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

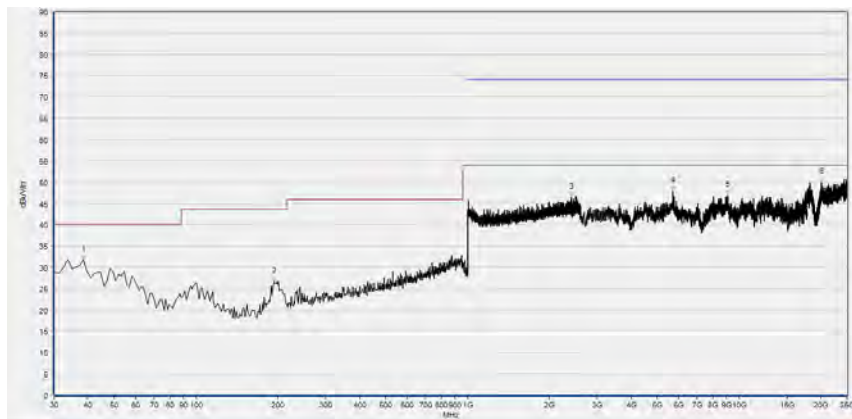


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
38.498	31.60	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
193.892	26.63	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2411.765	46.42	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5708.056	47.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9068.667	46.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
20067.030	49.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




Plot for Channel = 12

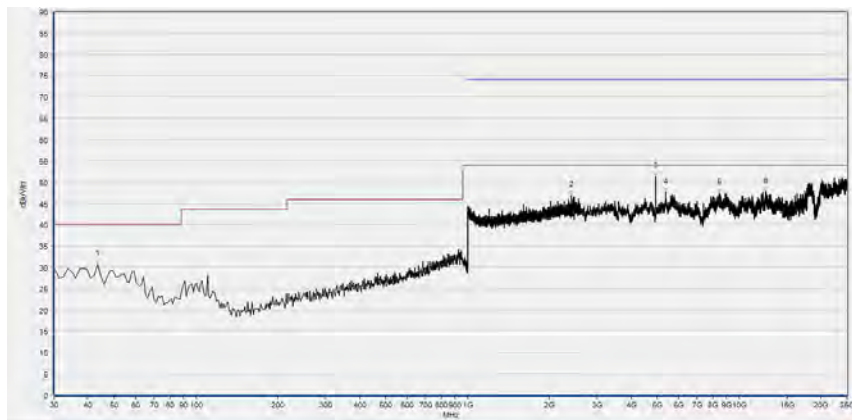

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.354	30.72	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
2409.844	46.98	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4934.097	51.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5365.885	47.54	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8433.206	47.48	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12498.527	47.74	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

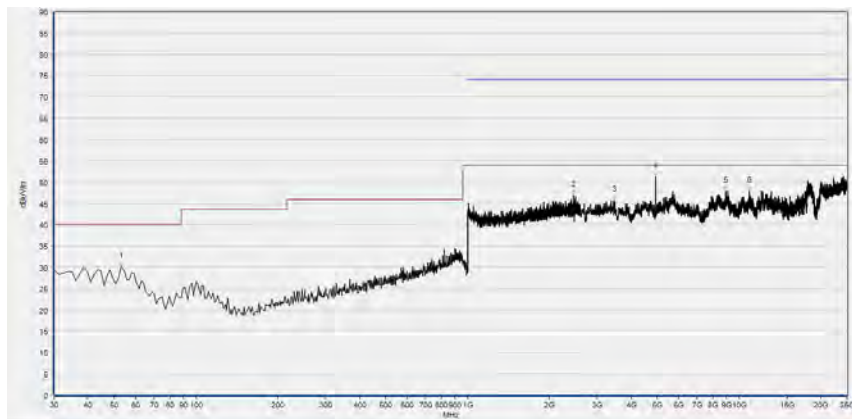


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
53.066	30.19	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
2452.101	46.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3467.649	45.83	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4934.097	51.27	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8926.096	47.91	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10885.434	47.90	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




Plot for Channel = 13

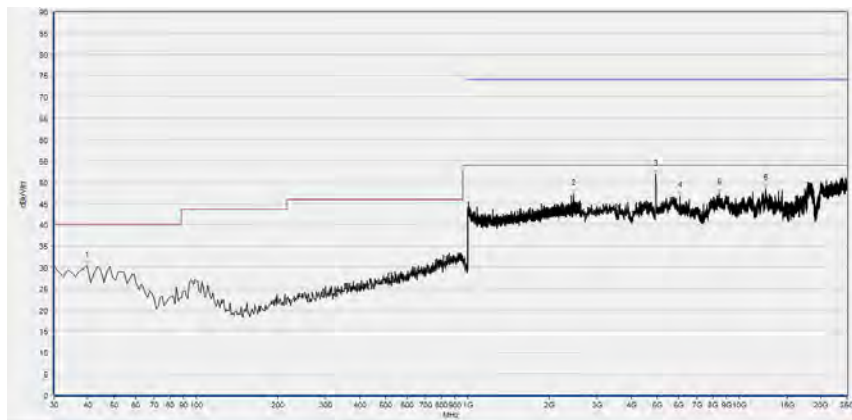

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
39.712	30.31	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
2458.503	47.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4942.244	51.75	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6054.301	46.81	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8453.573	47.42	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12527.041	48.44	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

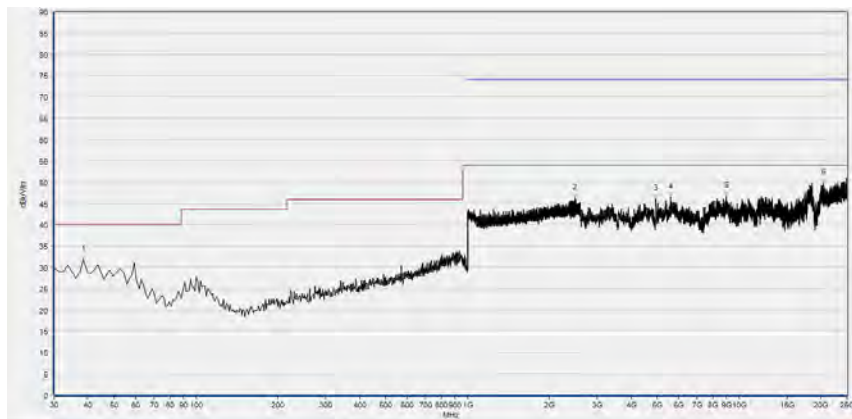


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
38.498	31.85	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
2491.156	46.21	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4942.244	46.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5581.779	46.40	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8970.904	46.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
20486.598	49.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)


**802.11g Test mode**

Plots for Channel = 1

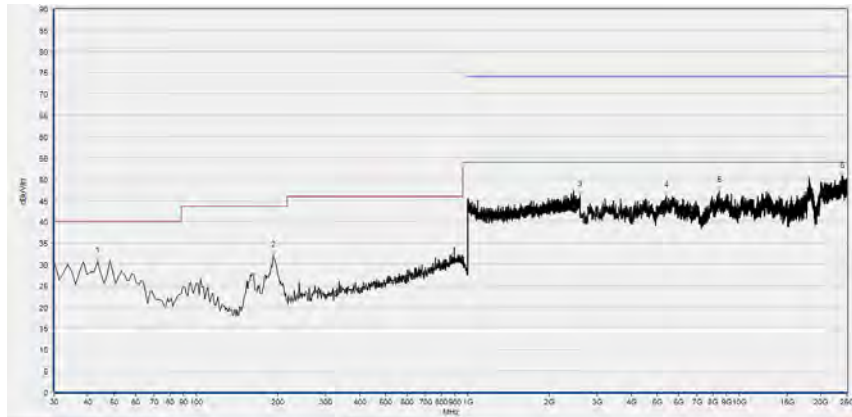

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.354	30.67	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
192.678	31.99	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2587.195	46.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5394.399	46.16	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8453.573	47.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
23936.825	50.69	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

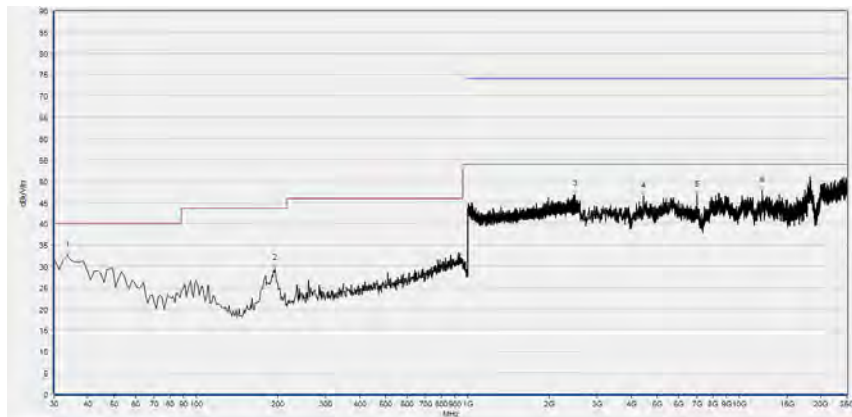

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
33.642	32.44	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
195.106	29.49	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2492.437	46.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4433.061	46.43	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6995.272	46.84	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12193.017	47.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 6

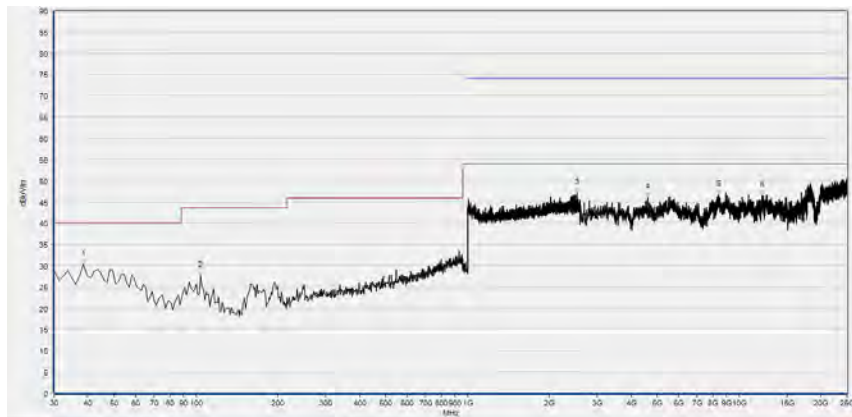

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
38.498	30.27	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.055	27.73	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2533.413	47.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4624.514	46.08	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8412.839	46.83	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12152.282	46.63	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

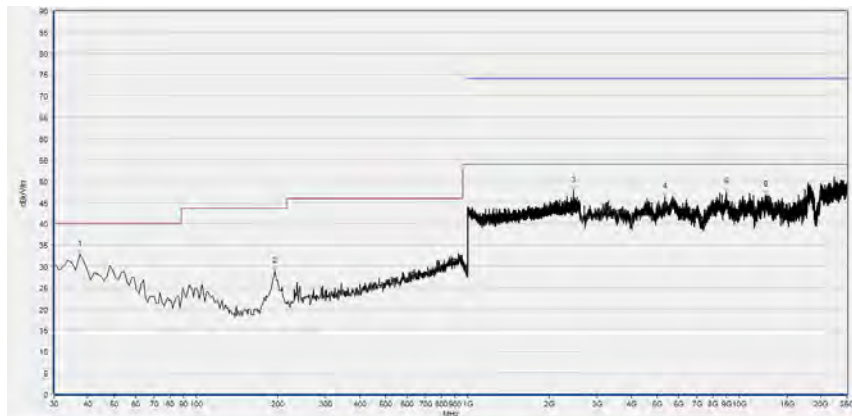

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
37.284	32.65	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
195.106	28.81	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2452.101	47.71	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5329.223	46.27	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8991.271	47.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12567.776	46.70	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 11

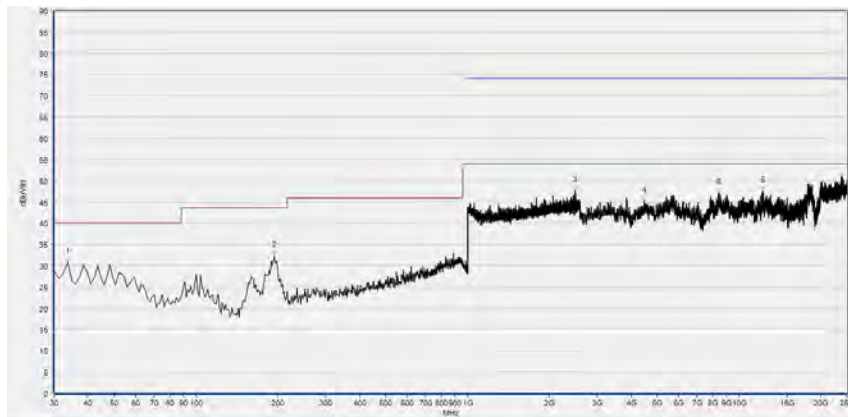

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
33.642	30.82	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
193.892	32.27	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2491.797	47.72	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4473.795	45.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8392.471	47.07	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12201.164	47.67	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

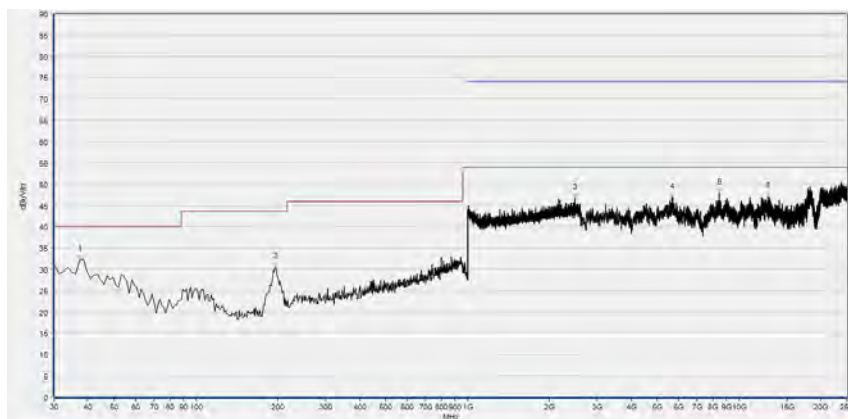

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
37.284	32.19	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
196.320	30.46	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2485.394	46.80	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5663.248	46.88	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8445.426	48.00	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12755.155	47.10	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 12

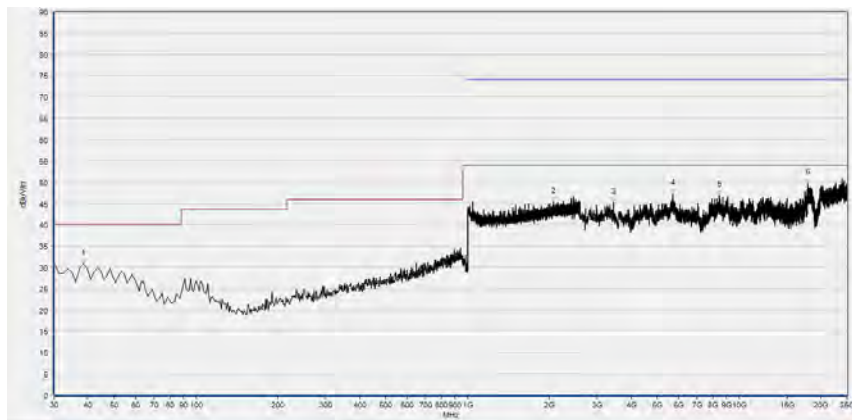

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
38.498	30.79	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
2068.587	45.41	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3451.355	45.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5691.762	47.26	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8457.647	46.91	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
17928.460	49.75	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

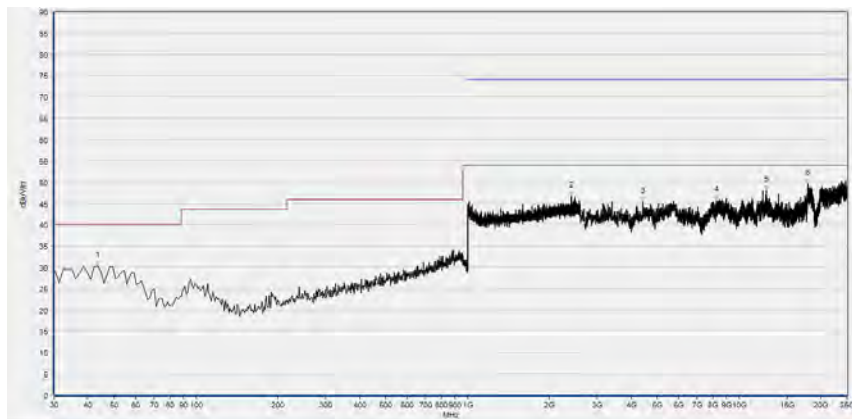


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.354	30.38	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
2417.527	46.84	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4420.840	45.37	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8241.753	45.67	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12596.290	48.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
17961.047	49.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




Plot for Channel = 13

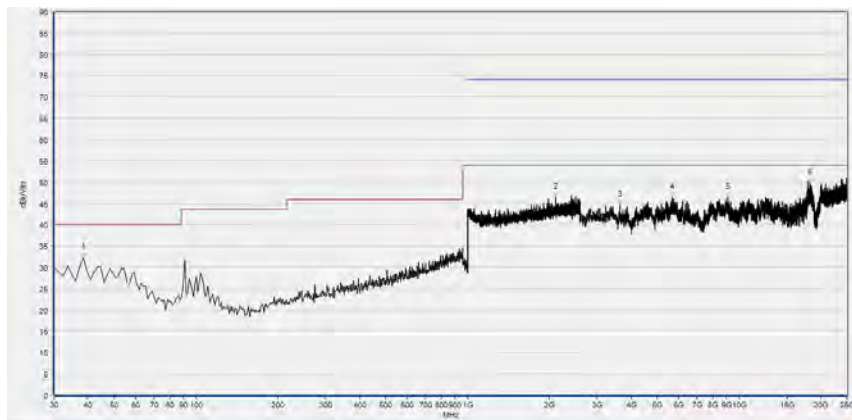

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
38.498	32.24	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
2105.722	46.48	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3642.808	44.57	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5679.542	46.46	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9089.034	46.42	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
18189.162	49.74	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

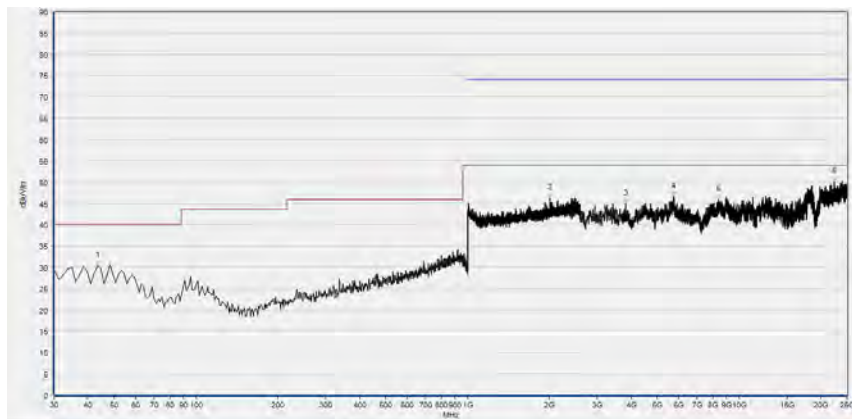


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.354	30.34	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
2010.324	46.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3809.820	44.92	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5740.644	46.54	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8380.251	45.91	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
22397.054	50.14	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)


**802.11n(HT20) Test mode**

Plots for Channel = 1

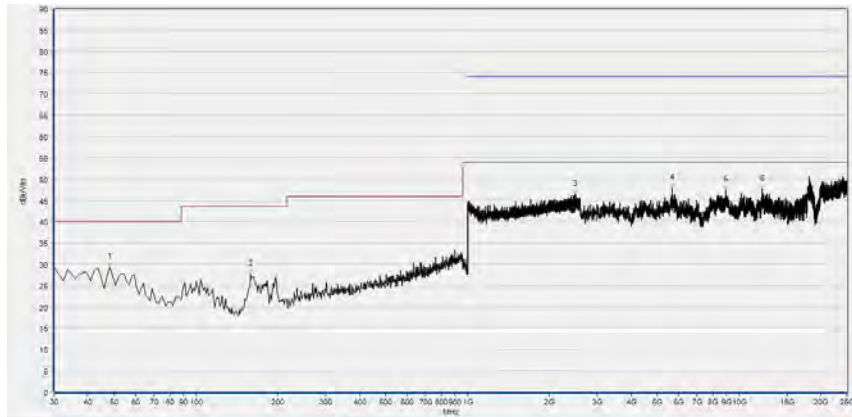

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	29.36	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
158.686	27.57	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2489.876	46.49	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5679.542	47.85	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8930.169	47.35	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12148.209	47.62	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

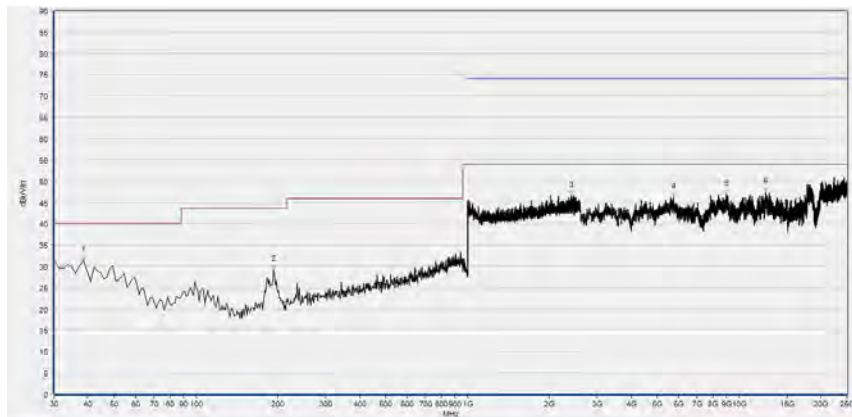

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
38.498	31.36	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
192.678	29.22	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2415.606	46.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5728.423	46.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8991.271	46.99	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12510.747	47.50	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 6

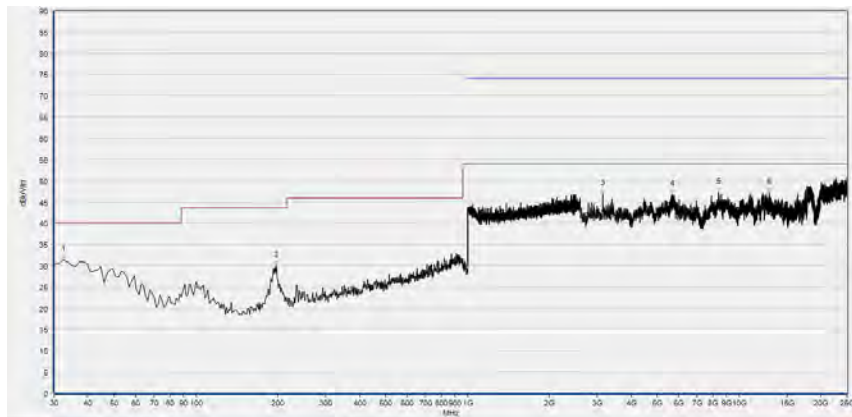

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
32.428	31.36	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
197.534	30.03	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
3149.918	46.94	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5663.248	46.75	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8412.839	47.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12905.874	47.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

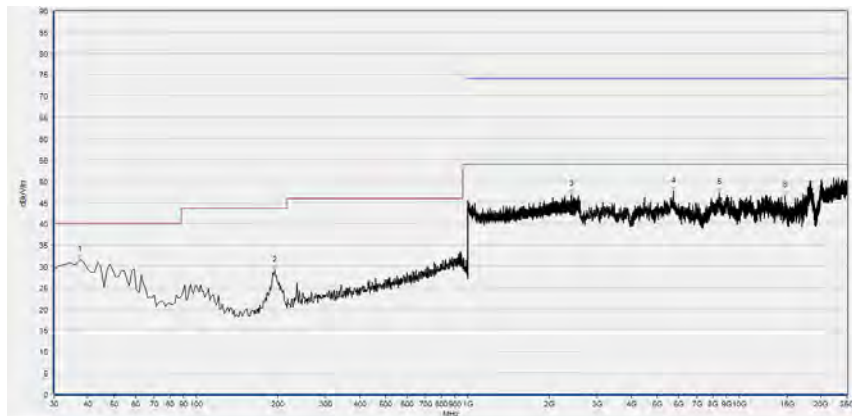

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
37.284	31.57	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
195.106	29.05	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2410.484	46.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5720.276	47.57	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8433.206	47.34	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14795.963	46.62	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 11

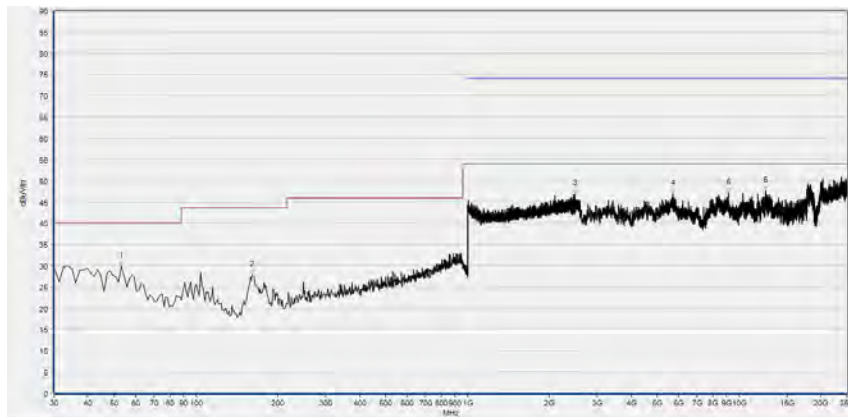

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
53.066	29.91	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
161.114	27.82	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2491.797	46.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5695.836	46.89	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9137.916	47.06	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12514.821	47.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

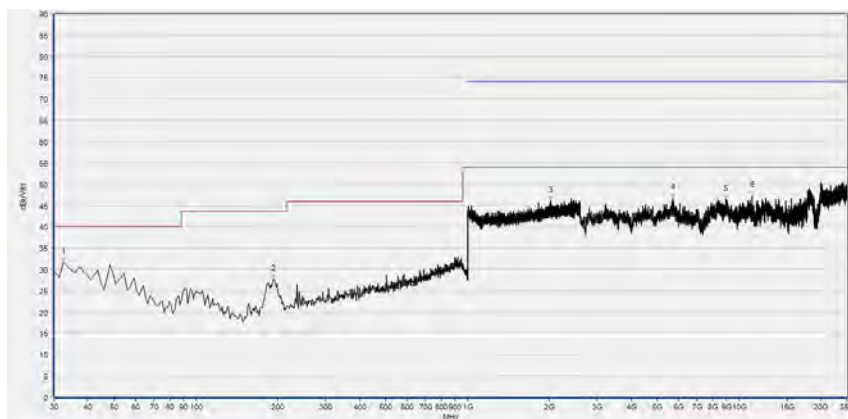


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
32.428	31.63	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
192.678	27.71	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2017.367	46.02	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5699.909	46.81	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8934.243	46.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11186.870	47.34	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




Plot for Channel = 12

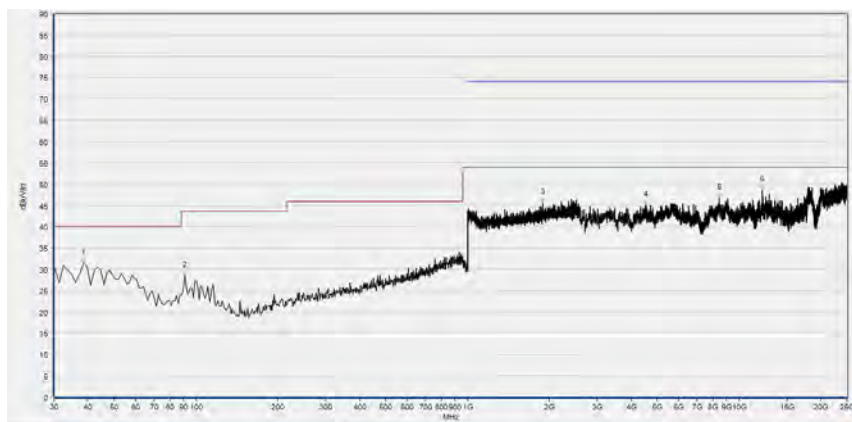

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
38.498	31.41	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
90.701	28.45	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1895.078	45.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4530.824	45.07	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8453.573	46.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12193.017	48.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

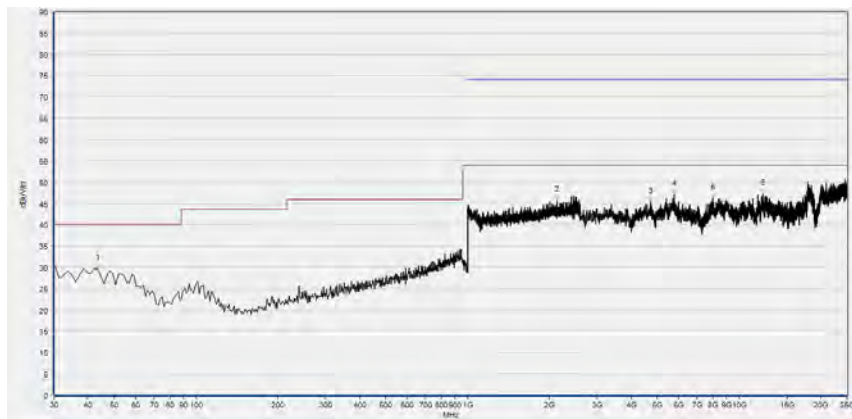


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.354	29.69	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
2135.174	45.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4722.277	45.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5756.938	47.02	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7989.198	46.32	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12258.192	47.32	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




Plot for Channel = 13

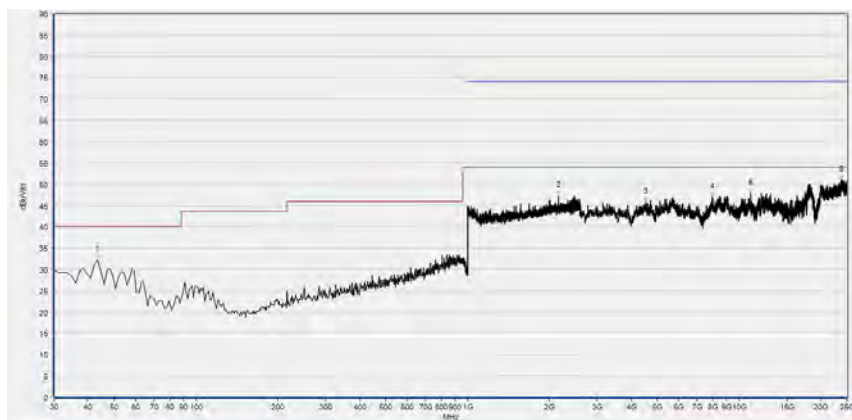

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.354	32.16	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
2160.784	47.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4522.677	45.73	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7968.831	46.85	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11036.152	47.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
23847.209	50.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

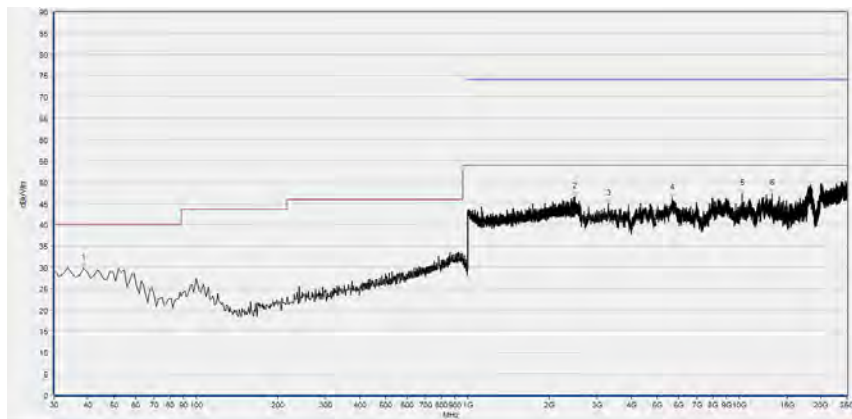

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
38.498	29.86	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
2490.516	46.61	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3296.563	44.98	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5671.395	46.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10274.414	47.27	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13223.604	47.33	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	$\pm 2.22\text{dB}$
Power spectral density (PSD)	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77\text{ dB}$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Attenuator 1	(N/A.)	10dB	Resnet	2019.04.09	2020.04.08
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2019.04.09	2020.04.08
USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2019.04.16	2020.04.15
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2019.05.08	2020.05.09
LISN	812744	NSLK 8127	Schwarzbeck	2019.05.08	2020.05.09
Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2019.05.08	2020.05.09
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

4.3 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V 1.0

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2018.08.04	2019.08.03
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.08	2020.05.09
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2019.02.15	2020.02.14
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2018.08.06	2019.08.05
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2018.08.02	2019.08.01
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2019.05.08	2020.05.09
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2019.05.08	2020.05.09
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2018.12.01	2019.11.30
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

————— END OF REPORT —————