



FCC 47 CFR PART 15 SUBPART C

CERTIFICATION TEST REPORT

For

NA Zigbee Smart Plug

MODEL NUMBER: 6B-PL-Z-A0

FCC ID: 2AB2Q6BPLZA0

REPORT NUMBER: 4788672483-1

ISSUE DATE: September 26, 2018

Prepared for

LEEDARSON LIGHTING CO., LTD.

**XINGDA RD, XINGTAI INDUSTRIAL ZONE, CHANGTAI COUNTY, ZHANGZHOU,
FUJIAN, 363900, CHINA**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Building 10, Innovation Technology Park, No. 1, Li Bin Road,
Song Shan Lake Hi-Tech Development Zone, Dongguan, People's Republic of China
Tel: +86 769-22038881
Fax: +86 769 33244054
Website: www.ul.com**



Revision History

Rev.	Issue Date	Revisions	Revised By
--	9/26/2018	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	6db DTS Bandwidth	FCC 15.247 (a) (2)	PASS
2	Peak Conducted Power	FCC 15.247 (b) (3)	PASS
3	Power Spectral Density	FCC 15.247 (e)	PASS
4	Conducted Band edge And Spurious emission	FCC 15.247 (d)	PASS
5	Radiated Band edges and Spurious emission	FCC 15.247 (d) FCC 15.209 FCC 15.205	PASS
6	Conducted Emission Test For AC Power Port	FCC 15.207	PASS
7	Antenna Requirement	FCC 15.203	PASS



TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. MEASUREMENT UNCERTAINTY	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. MAXIMUM OUTPUT POWER	9
5.3. CHANNEL LIST	9
5.4. TEST CHANNEL CONFIGURATION	10
5.5. THE WORSE CASE POWER SETTING PARAMETER	10
5.6. DESCRIPTION OF AVAILABLE ANTENNAS	10
5.7. TEST ENVIRONMENT	10
5.8. DESCRIPTION OF TEST SETUP	11
5.9. MEASURING INSTRUMENT AND SOFTWARE USED	12
6. MEASUREMENT METHODS	13
7. ANTENNA PORT TEST RESULTS	14
7.1. ON TIME AND DUTY CYCLE	14
7.2. 6 dB DTS BANDWIDTH	15
7.3. PEAK CONDUCTED OUTPUT POWER	19
7.4. POWER SPECTRAL DENSITY	20
7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS	24
8. RADIATED TEST RESULTS	29
8.1. RESTRICTED BANDEDGE	35
8.2. SPURIOUS EMISSIONS (1~3GHz)	41
8.3. SPURIOUS EMISSIONS (3~18GHz)	49
8.4. SPURIOUS EMISSIONS 18G ~ 26GHz	57
8.5. SPURIOUS EMISSIONS 30M ~ 1 GHz	59
8.5.1. Main Relay	59
8.5.2. Alternative Relay	61
8.6. SPURIOUS EMISSIONS BELOW 30M	63



9.	AC POWER LINE CONDUCTED EMISSIONS.....	66
9.1.1.	Main Relay	67
9.1.2.	Alternative Relay	69
10.	ANTENNA REQUIREMENTS	71



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: LEEDARSON LIGHTING CO., LTD.
Address: XINGDA RD, XINGTAI INDUSTRIAL ZONE, CHANGTAI
COUNTY, ZHANGZHOU, FUJIAN, 363900, CHINA

Manufacturer Information

Company Name: LEEDARSON LIGHTING CO., LTD.
Address: XINGDA RD, XINGTAI INDUSTRIAL ZONE, CHANGTAI
COUNTY, ZHANGZHOU, FUJIAN, 363900, CHINA

EUT Description

EUT Name: NA Zigbee Smart Plug
Model: 6B-PL-Z-A0
Brand: LEEDARSON
Sample Received Date: September 13
Date Tested: September 14~25, 2018

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	PASS

Tested By:

Checked By:

Kebo Zhang
Engineer

Shawn Wen
Laboratory Leader

Approved By:

Stephen Guo
Laboratory Manager



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 DTS Meas Guidance v05r02, KDB414788 D01 Radiated Test Site v01r01, FCC CFR 47 Part 2, FCC CFR 47 Part 15 and ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules IC(Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320. VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OFS.



4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.90dB
Uncertainty for Radiation Emission test(include Fundamental emission) (9KHz-30MHz)	2.2dB
Uncertainty for Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	4.52dB
Uncertainty for Radiation Emission test (1GHz to 26GHz)(include Fundamental emission)	5.04dB(1-6GHz)
	5.30dB (6GHz-18Gz)
	5.23dB (18GHz-26Gz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Equipment	NA Zigbee Smart Plug		
Model Name	6B-PL-Z-A0		
Product Description	Operation Frequency	2405 MHz ~ 2480 MHz	
	Modulation Type		Data Rate
	O-QPSK		250kbps
Power supply	AC 120V		
Main test Relay	RTD34012_076140120141105		
Alternative test Relay	HF115F(JQX-115F)_cn		
Note: The equipment has two relays, one of them will be used in the end product and the others are exactly the same.			

5.2. MAXIMUM OUTPUT POWER

Mode	Frequency (MHz)	Channel Number	Max Output Power (dBm)
ZigBee	2405-2480	11-26 [16]	13.841

5.3. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
11	2405	15	2425	19	2445	23	2465
12	2410	16	2430	20	2450	24	2470
13	2415	17	2435	21	2455	25	2475
14	2420	18	2440	22	2460	26	2480



5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
ZigBee	CH 11, CH 19, CH 25, CH 26	2405MHz, 2445MHz, 2475MHz, 2480MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band					
Test Software		UartAssis			
Modulation Type	Transmit Antenna Number	Test Channel			
		CH 11	CH 19	CH 25	CH 26
O-QPSK	1	13	13	13	4

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
1	2405-2480	Internal Antenna	1.73

Test Mode	Transmit and Receive Mode	Description
ZigBee	☒ 1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.

5.7. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	55 ~ 65%	
Atmospheric Pressure:	1025Pa	
Temperature	TN	23 ~ 28°C
Voltage :	VL	N/A
	VN	AC 120V
	VH	N/A

Note: VL= Lower Extreme Test Voltage
VN= Nominal Voltage
VH= Upper Extreme Test Voltage
TN= Normal Temperature



5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	Laptop	ThinkPad	T460S	SL10K24796 JS
2	USB TO RS232	N/A	N/A	N/A

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	N/A	N/A	1	N/A


ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
1	NA	NA	NA	NA

TEST SETUP

The EUT can work in an engineer mode with a software through a Laptop.

SETUP DIAGRAM FOR TEST

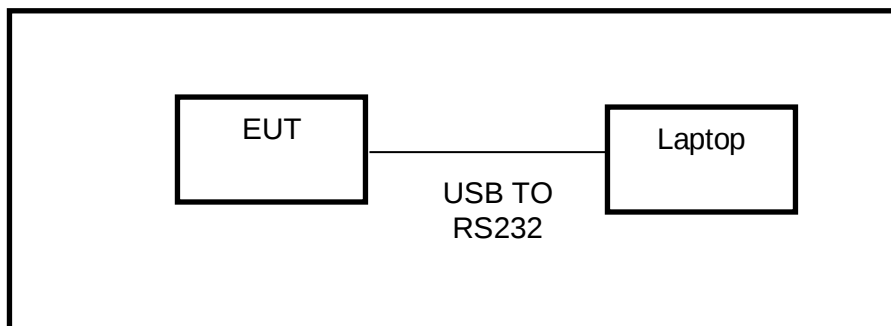



5.9. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	EMI Test Receiver	R&S	ESR3	101961	Dec.12,2017	Dec.11,2018
☒	Two-Line V-Network	R&S	ENV216	101983	Dec.12,2017	Dec.11,2018
☒	Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Dec.12,2017	Dec.11,2018
Software						
Used	Description		Manufacturer	Name		Version
☒	Test Software for Conducted disturbance		Farad	EZ-EMC		Ver. UL-3A1
Radiated Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Dec.12,2017	Dec.11,2018
☒	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Jan.09, 2016	Jan.09, 2019
☒	Preamplifier	HP	8447D	2944A09099	Dec.12,2017	Dec.11,2018
☒	EMI Measurement Receiver	R&S	ESR26	101377	Dec.12,2017	Dec.11,2018
☒	Horn Antenna	TDK	HRN-0118	130939	Jan. 09, 2016	Jan. 09, 2019
☒	High Gain Horn Antenna	Schwarzbeck	BBHA-9170	691	Jan.06, 2016	Jan.06, 2019
☒	Preamplifier	TDK	PA-02-0118	TRS-305-00066	Dec.12,2017	Dec.11,2018
☒	Preamplifier	TDK	PA-02-2	TRS-307-00003	Dec.12,2017	Dec.11,2018
☒	Loop antenna	Schwarzbeck	1519B	00008	Mar. 26, 2016	Mar. 25, 2019
Software						
Used	Description		Manufacturer	Name		Version
☒	Test Software for Radiated disturbance		Farad	EZ-EMC		Ver. UL-3A1
Other instruments						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	Spectrum Analyzer	Keysight	N9030A	MY55410512	Dec.12,2017	Dec.11,2018
☒	Power Meter	Keysight	N1911A	MY55416024	Dec.12,2017	Dec.11,2018
☒	Power Sensor	Keysight	N1921A	MY51100041	Dec.12,2017	Dec.11,2018



6. MEASUREMENT METHODS

No.	Test Item	KDB Name	Section
1	6 dB Bandwidth	KDB 558074 D01 DTS Meas Guidance v05r02	8.2
2	Peak Output Power	KDB 558074 D01 DTS Meas Guidance v05r02	8.3.1.3
3	Power Spectral Density	KDB 558074 D01 DTS Meas Guidance v05r02	8.4
4	Out-of-band emissions in non-restricted bands	KDB 558074 D01 DTS Meas Guidance v05r02	8.5
5	Out-of-band emissions in restricted bands	KDB 558074 D01 DTS Meas Guidance v05r02	8.6
6	Band-edge	KDB 558074 D01 DTS Meas Guidance v05r02	8.7
7	Conducted Emission Test For AC Power Port	ANSI C63.10-2013	6.2
8	99% Bandwidth	ANSI C63.10-2013	6.9.3



7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method

TEST SETUP



RESULTS

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)	1/T Minimum VBW (KHz)
ZigBee	2.839	21.18	0.134	13.4	8.73	0.352

Note: Duty Cycle Correction Factor= $10\log(1/x)$.
Where: x is Duty Cycle(Linear)
Where: T is On Time (transmit duration)

ON TIME AND DUTY CYCLE MID CH



7.2. 6 dB DTS BANDWIDTH

LIMITS

FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247(a)(2)	6dB Bandwidth	$\geq 500\text{KHz}$	2400-2483.5

TEST PROCEDURE


KDB 558074D01 Section 8.1 test method.

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100K
VBW	$\geq 3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


TEST SETUP


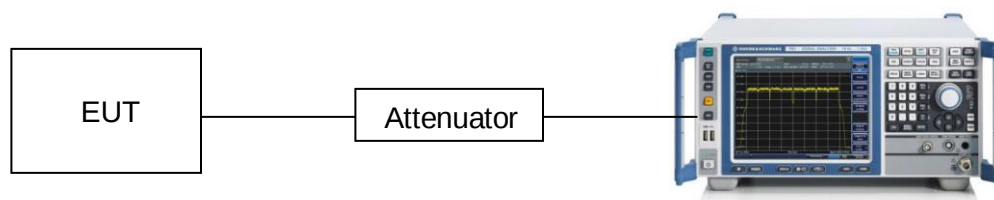





RESULTS

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2405	1.590	500	Pass
Middle	2445	1.595	500	Pass
High	2475	1.560	500	Pass
CH26	2480	1.435	500	Pass

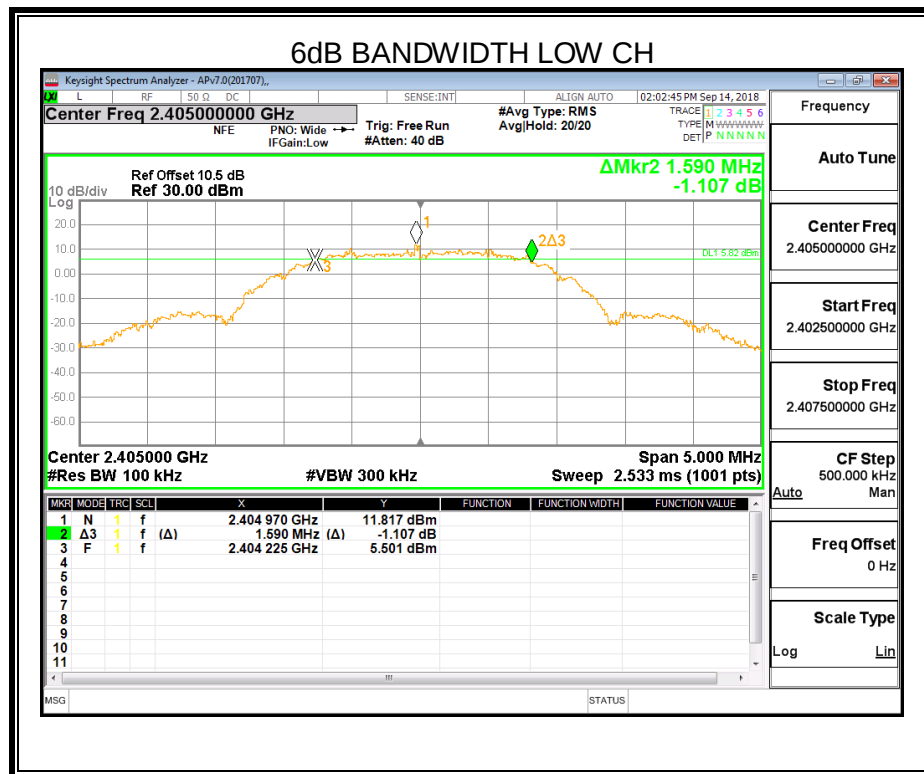

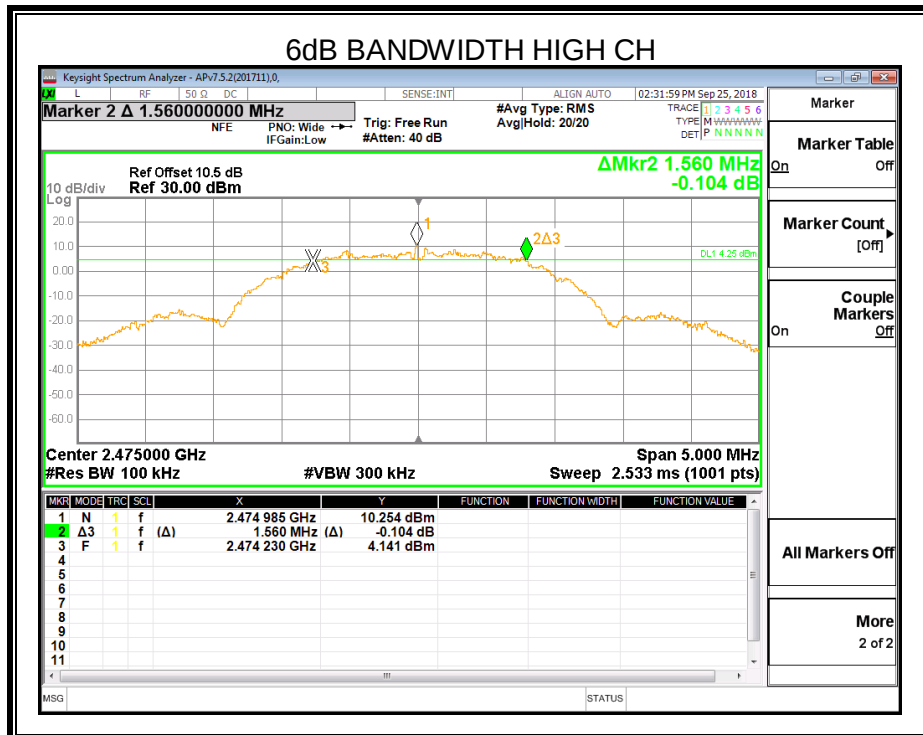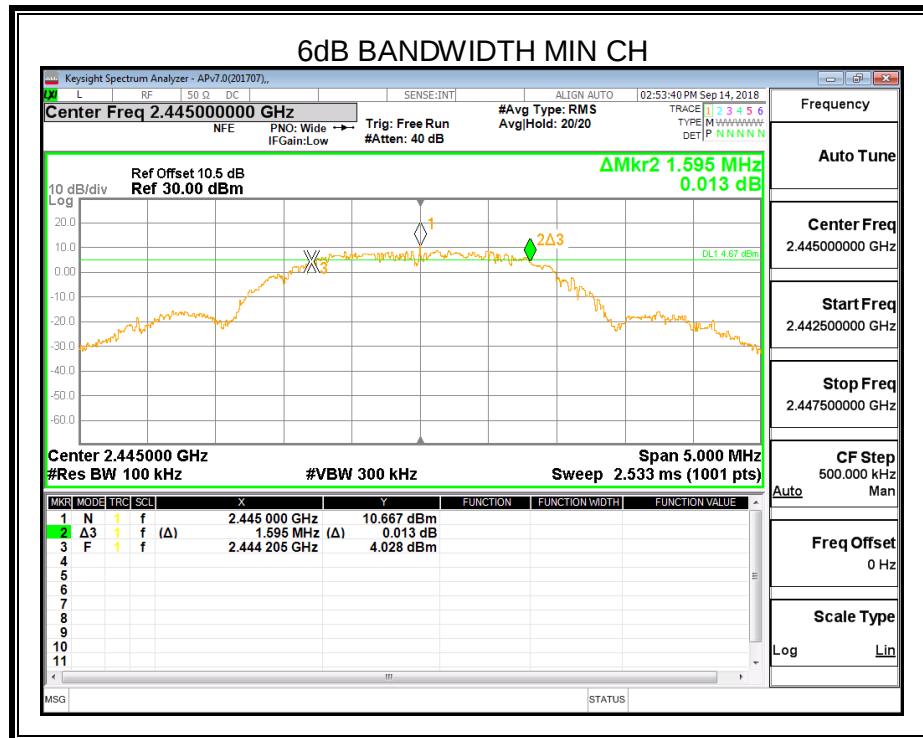

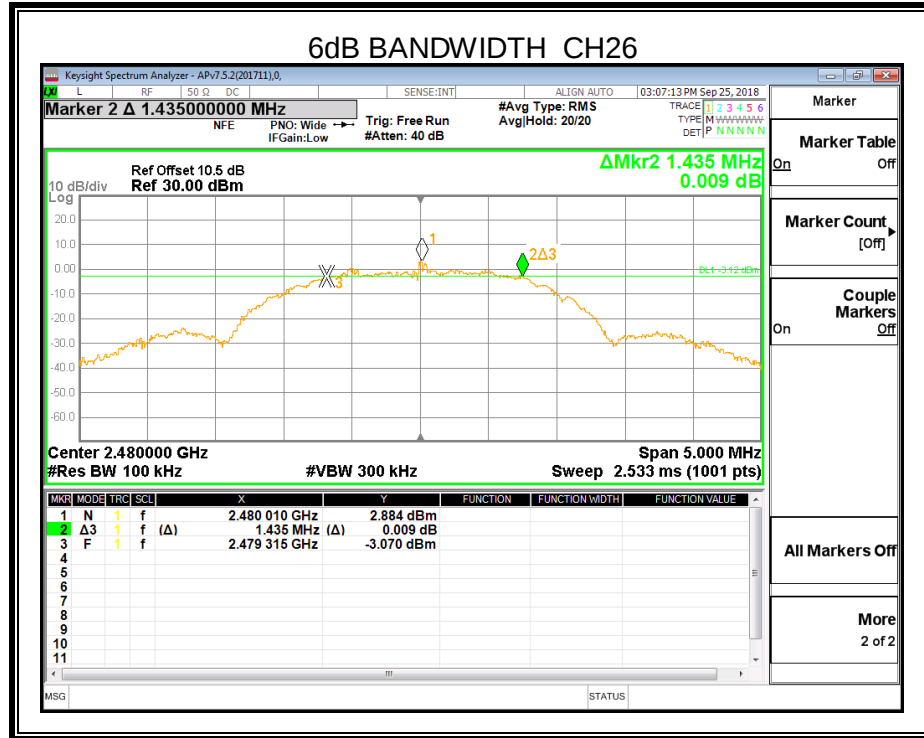



7.3. PEAK CONDUCTED OUTPUT POWER


LIMITS

FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5

TEST PROCEDURE

KDB558074D01 section 9.1.3 for peak measurement and 9.2.3 for average measurement. Connect the EUT to the a broadband peak RF power meter, the power meter shall have a video bandwidth that is greater than or equal to the bandwidth and shall utilize a fast-responding diode detector.

TEST SETUP



RESULTS

Test Channel	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
Low	2405	13.841	30
Middle	2445	13.063	30
High	2475	12.581	30
CH 26	2480	4.343	30

7.4. POWER SPECTRAL DENSITY

LIMITS

FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC §15.247 (e)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE

KDB 558074D01 section 10.2 test method.


Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


TEST SETUP


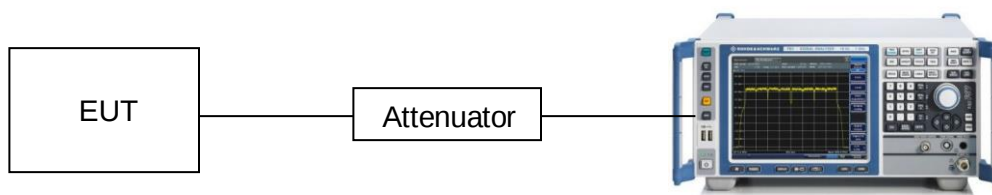






RESULTS

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2405 MHz	1.149	8	PASS
2445 MHz	0.701	8	PASS
2475 MHz	-2.080	8	PASS
2480 MHz	-9.603	8	PASS

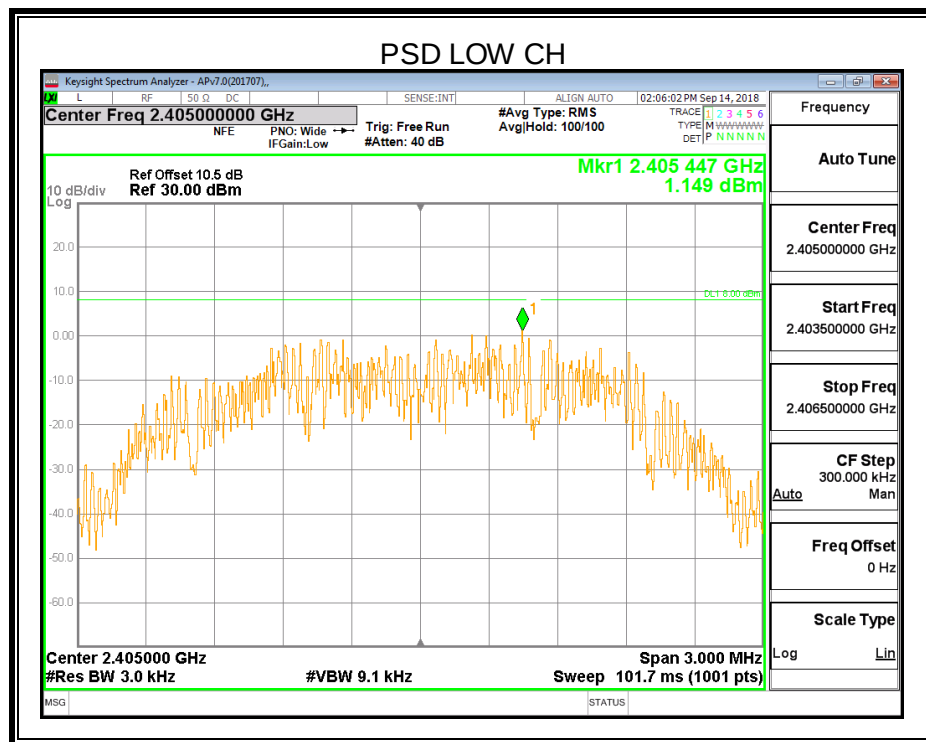

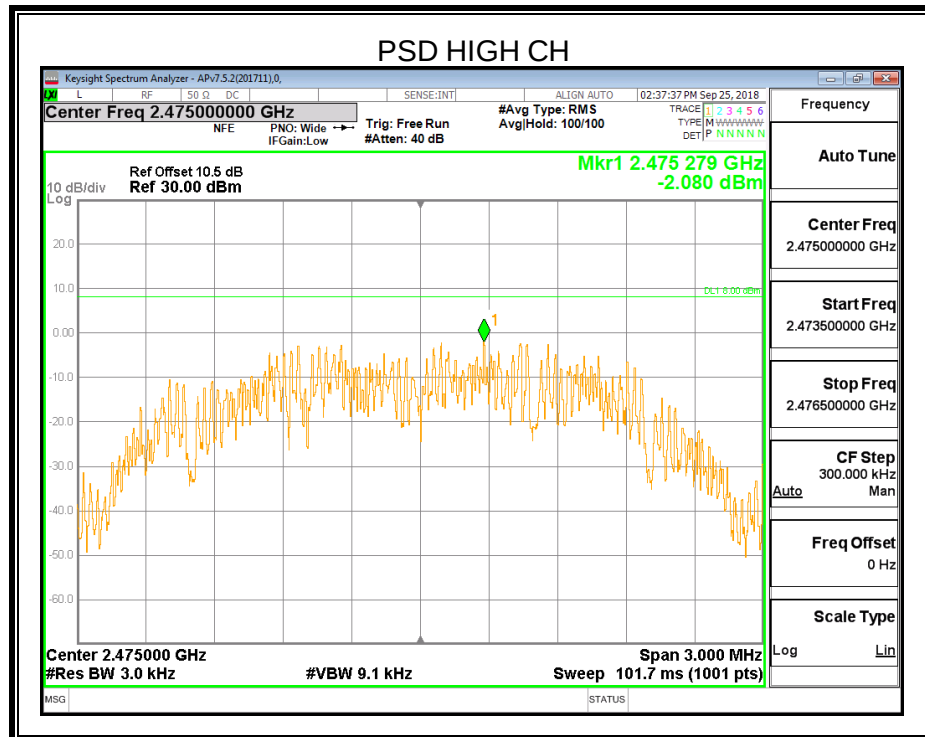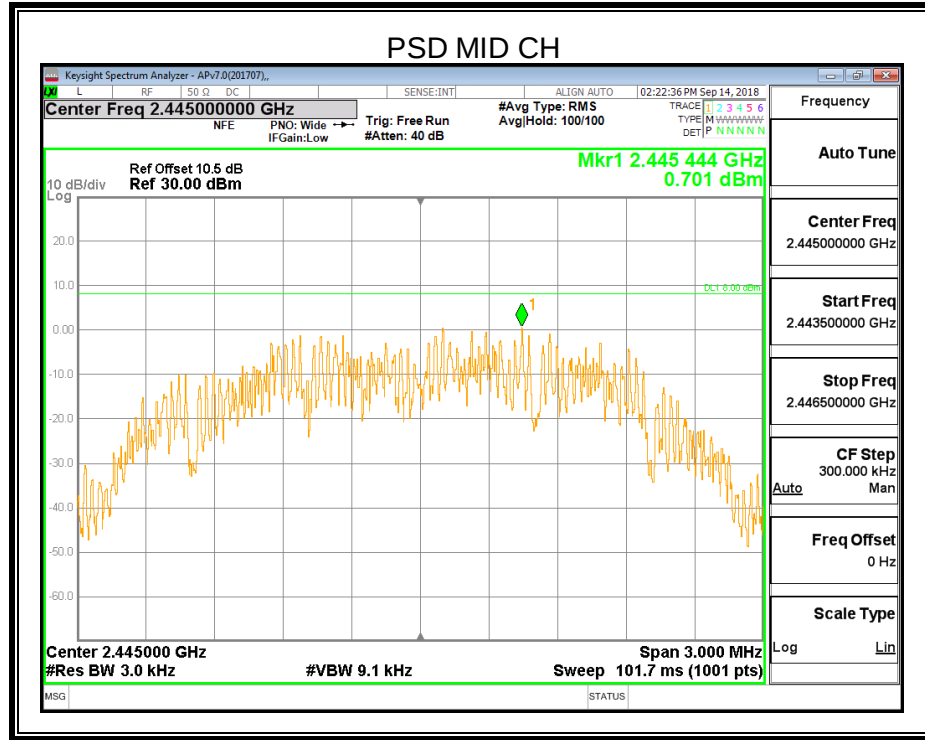

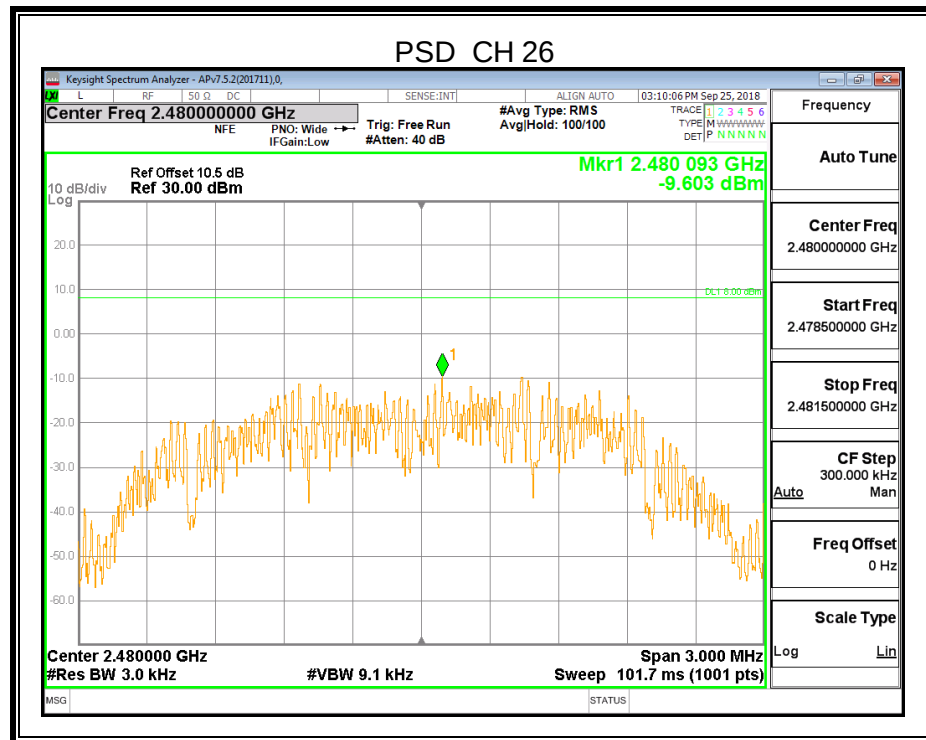

7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

LIMITS

FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

KDB 558074D01 section 11 test method.

Connect the UUT to the spectrum analyser and use the following settings:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100K
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.



Use the peak marker function to determine the maximum PSD level.



Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100K
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.



Use the peak marker function to determine the maximum amplitude level.



TEST SETUP

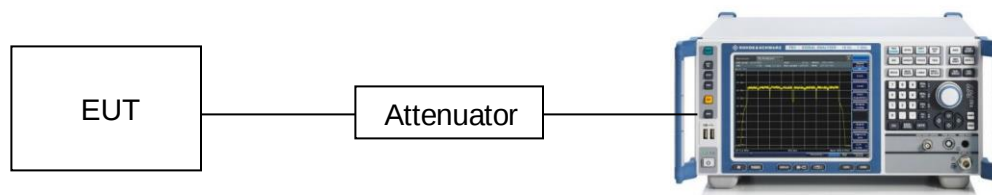

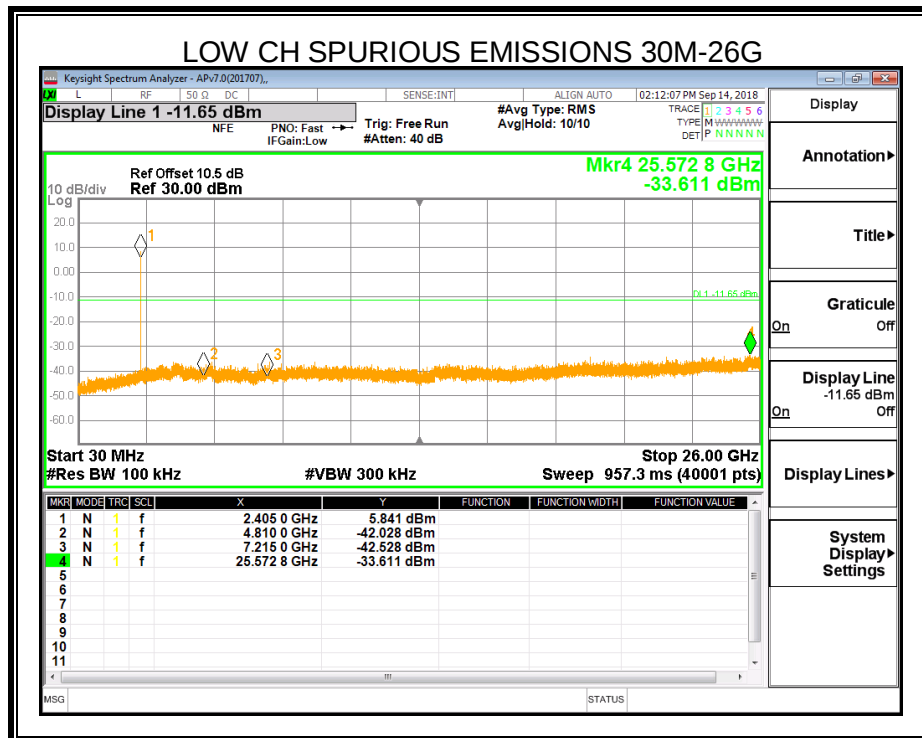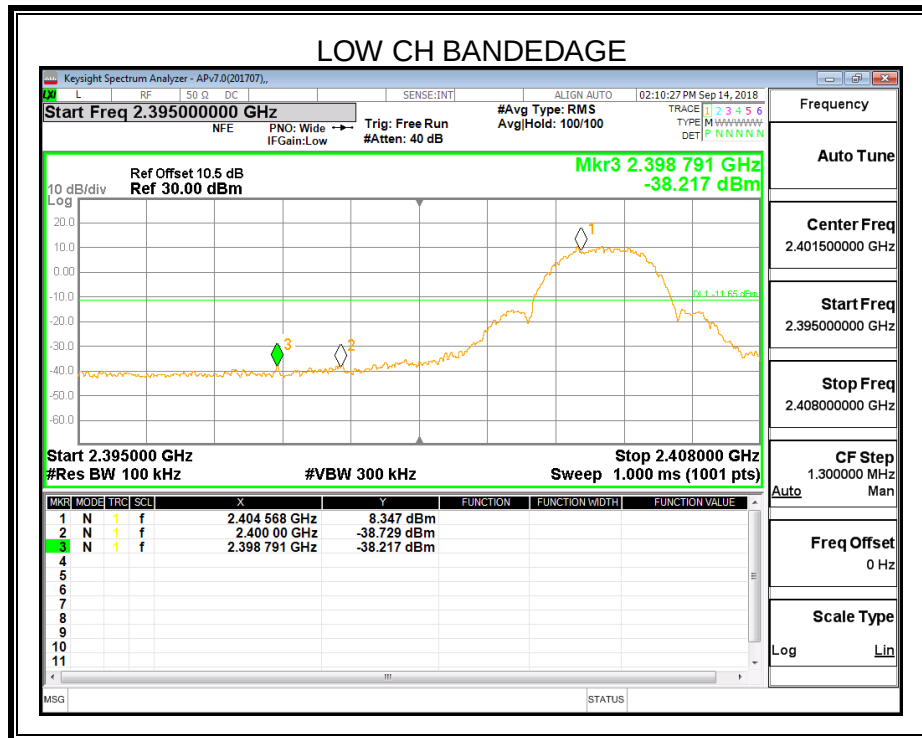

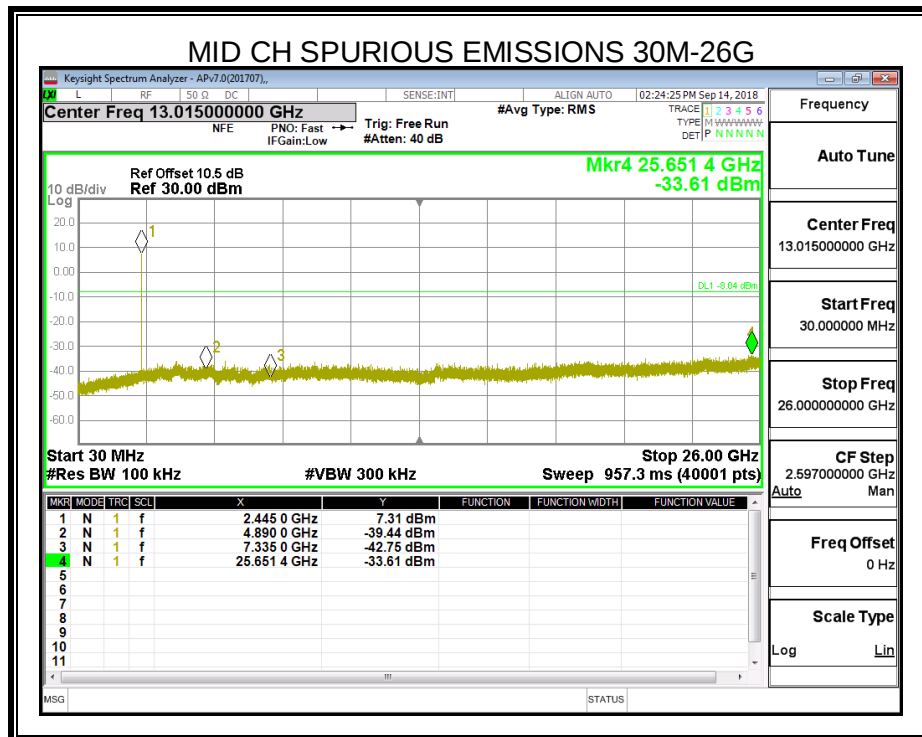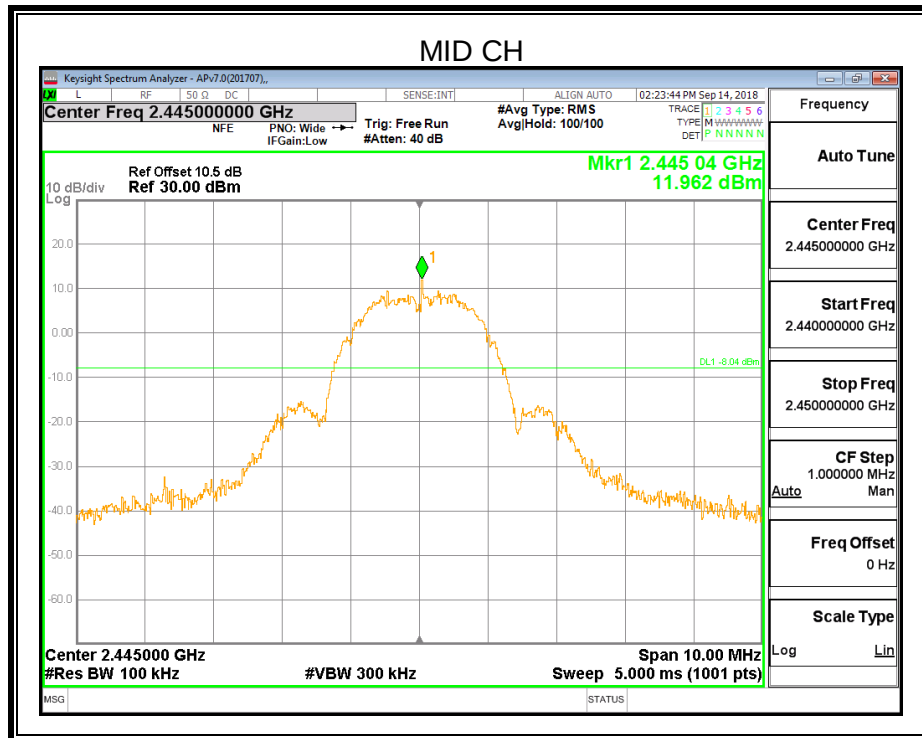

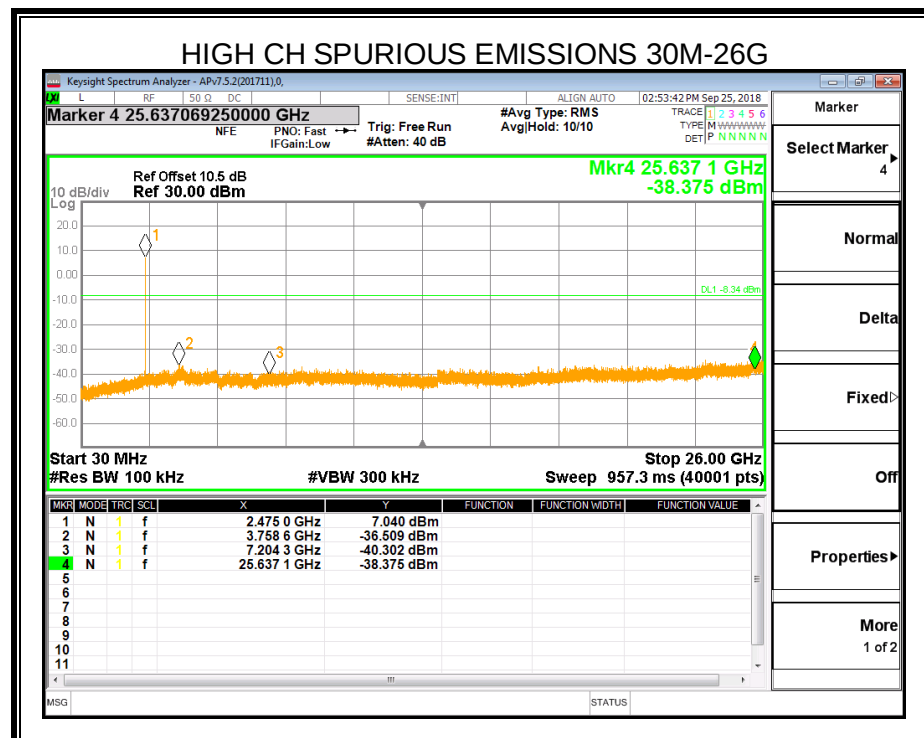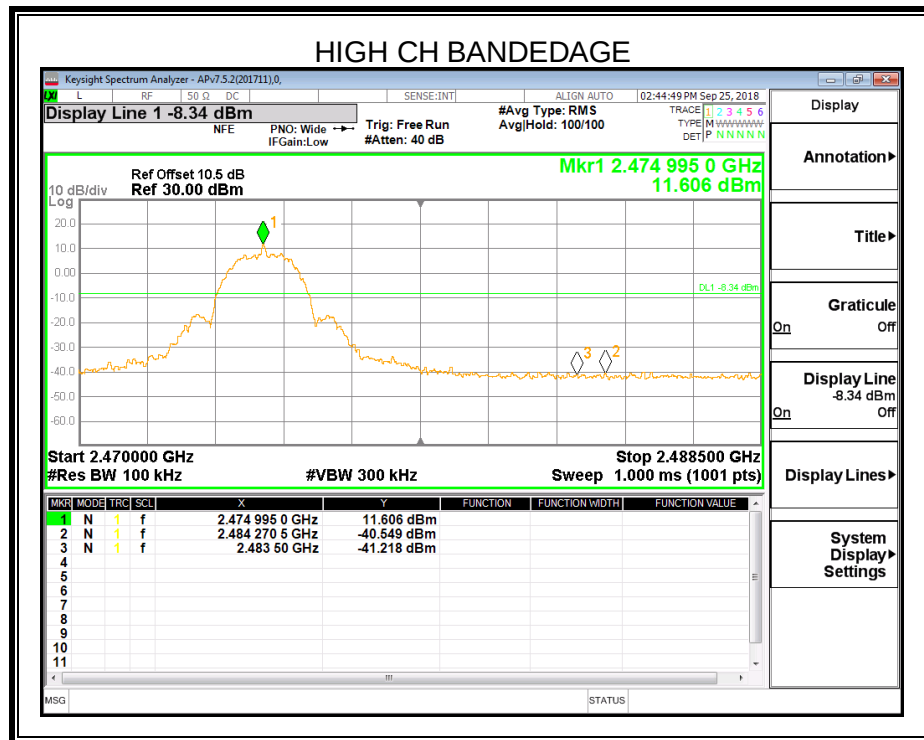

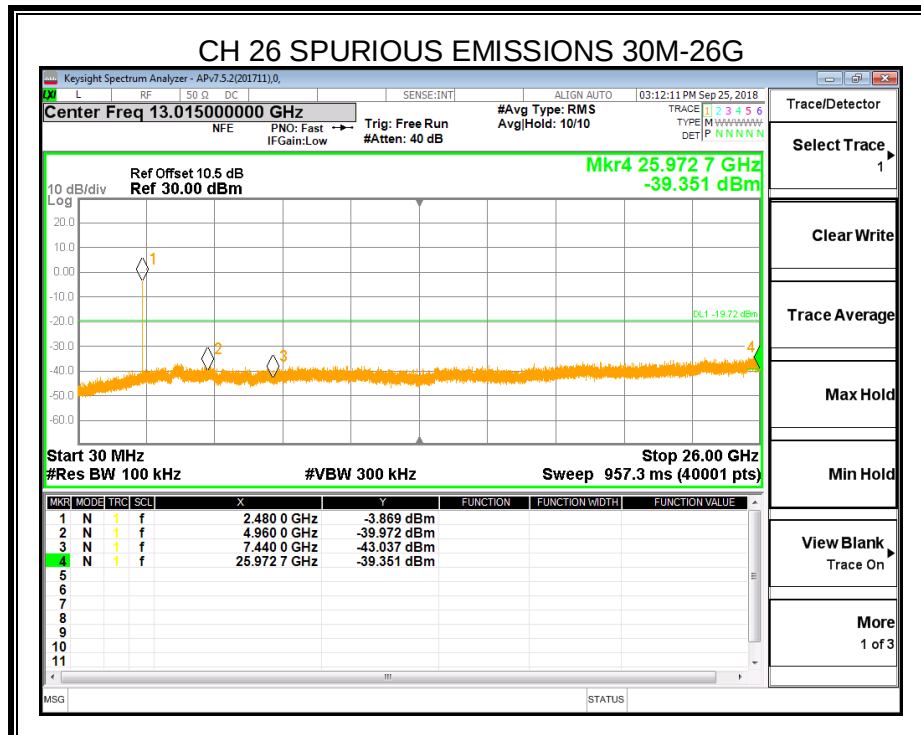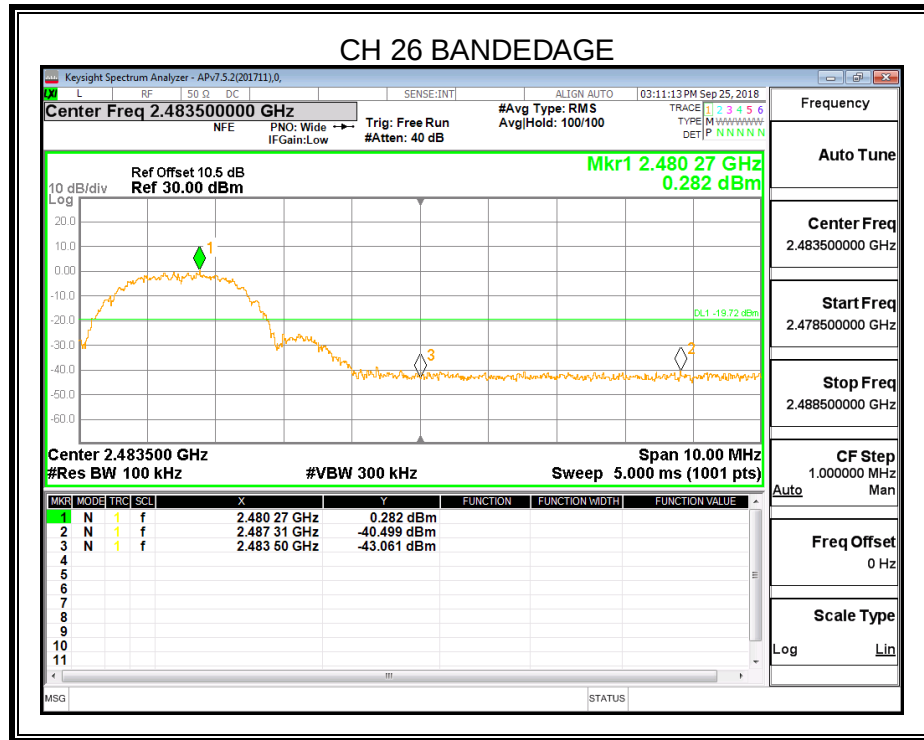



8. RADIATED TEST RESULTS

LIMITS

Please refer to FCC §15.205 and §15.209

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

Note: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites.



Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

Restricted bands of operation


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30MHz

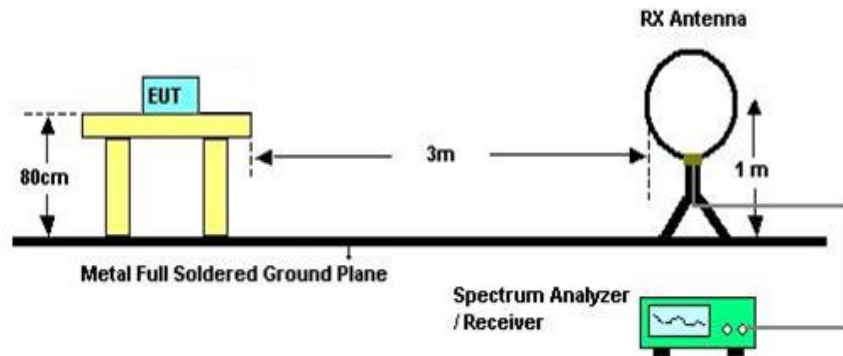


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)
8. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Below 1G and above 30MHz

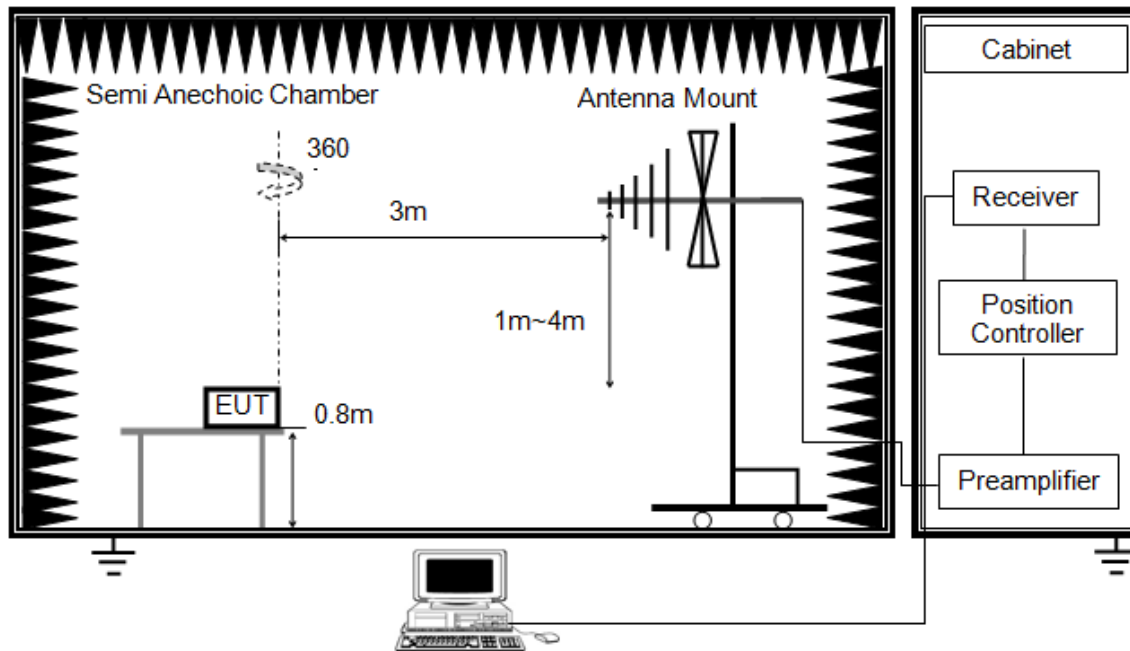


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Above 1G

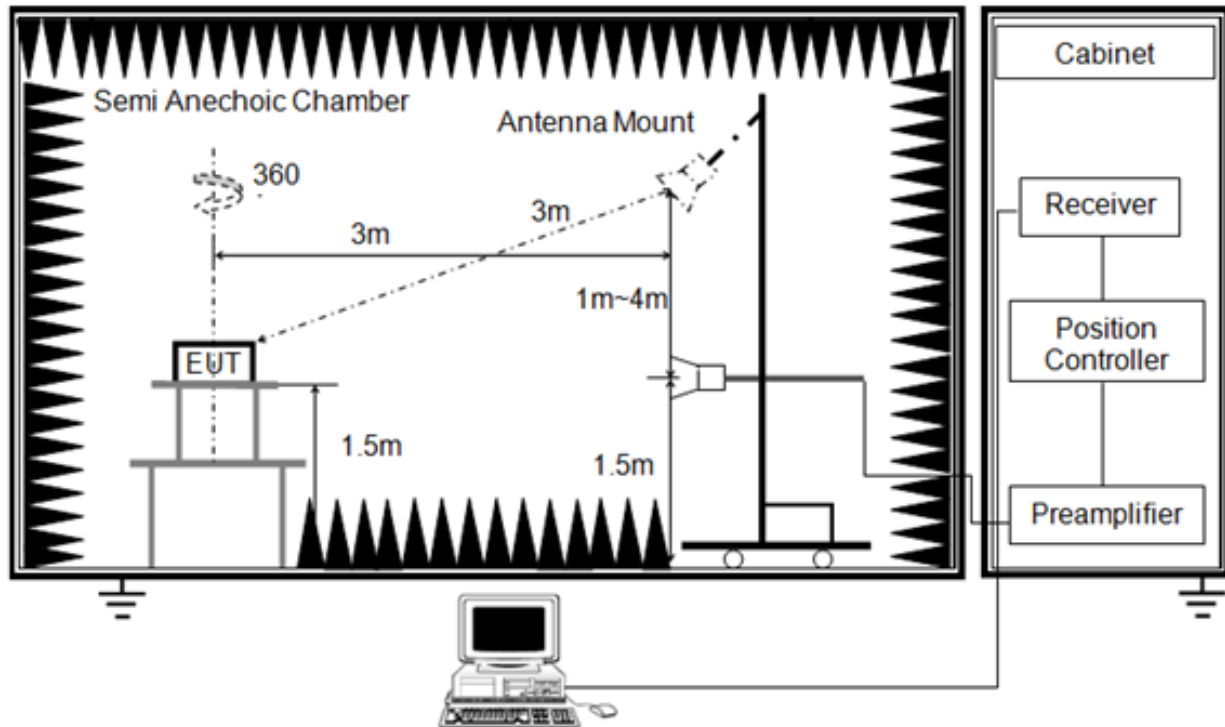

The setting of the spectrum analyser

RBW	1M
VBW	PEAK: 3M AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (1.5 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.


6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with $1/T \leq$ video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

If that calculated VBW is not available on the analyzer then the next higher value should be used.

In this case 500Hz should be used.

7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

X axis, Y axis, Z axis positions:

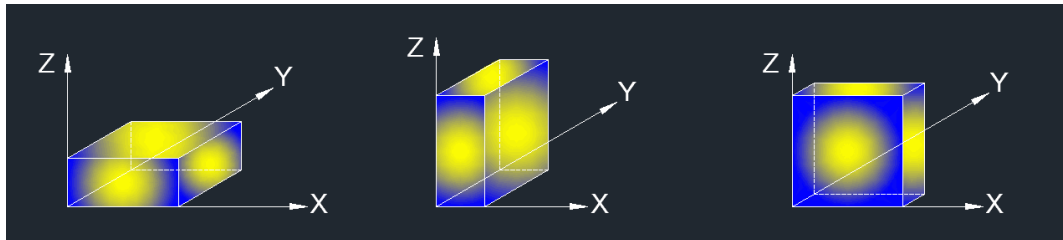


Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.



8.1. RESTRICTED BANDEDGE

Main Relay

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

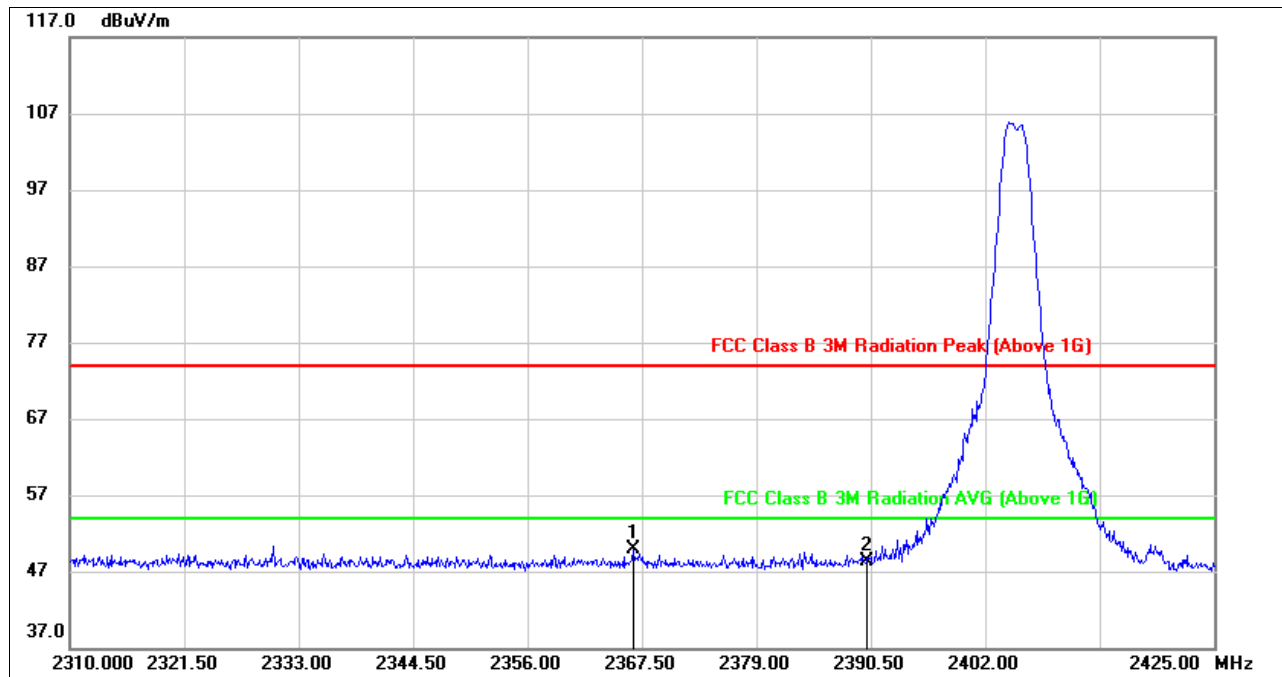


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2366.580	16.65	33.31	49.96	74.00	-24.04	peak
2	2390.000	15.20	33.14	48.34	74.00	-25.66	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission will be recorder, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

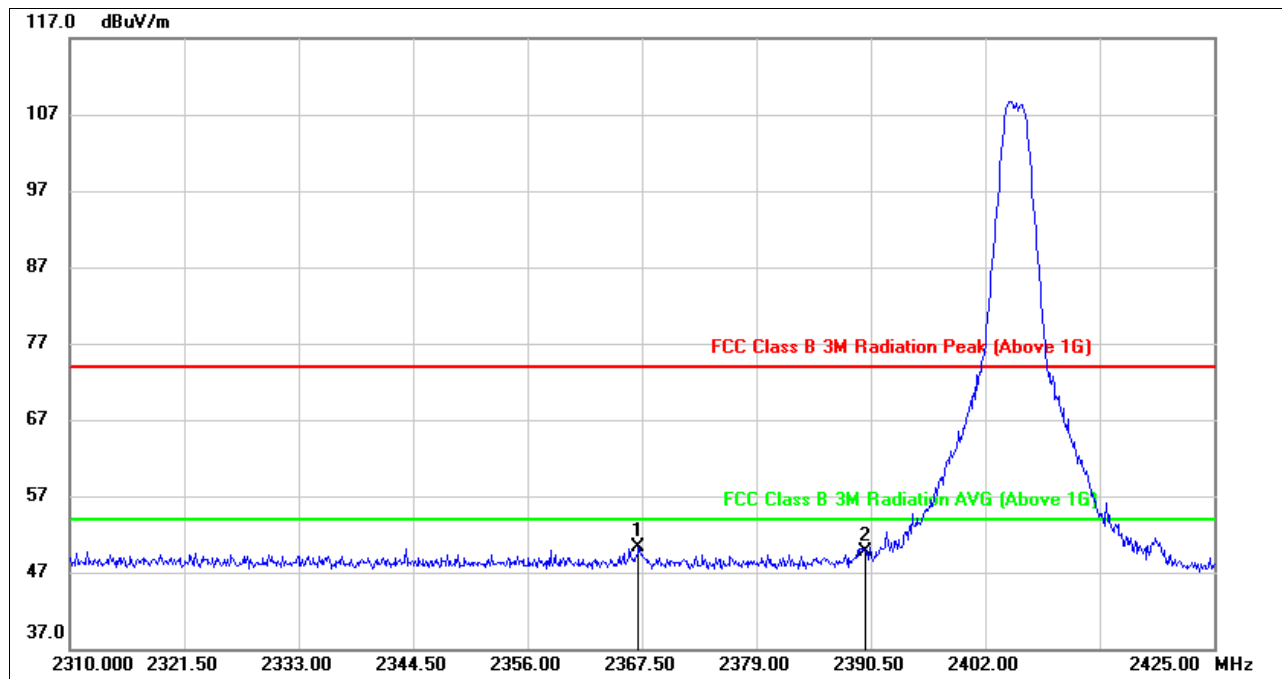


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2367.155	16.89	33.40	50.29	74.00	-23.71	peak
2	2390.000	16.36	33.24	49.60	74.00	-24.40	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission will be recorder, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

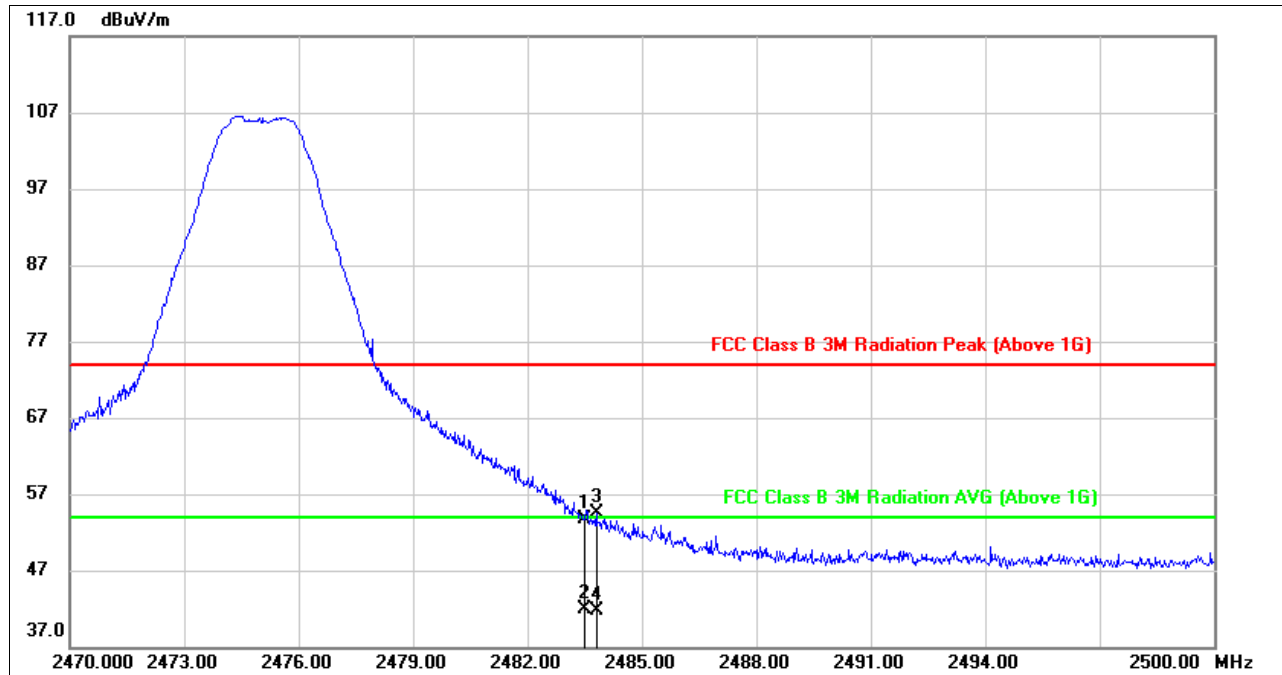


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	20.91	32.78	53.69	74.00	-20.31	peak
2	2483.500	9.08	32.78	41.86	54.00	-12.14	AVG
3	2483.800	21.63	32.78	54.41	74.00	-19.59	peak
4	2483.800	8.86	32.78	41.64	54.00	-12.36	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton where: ton is transmit duration.
5. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.
6. Only the worst case emission will be recorder, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

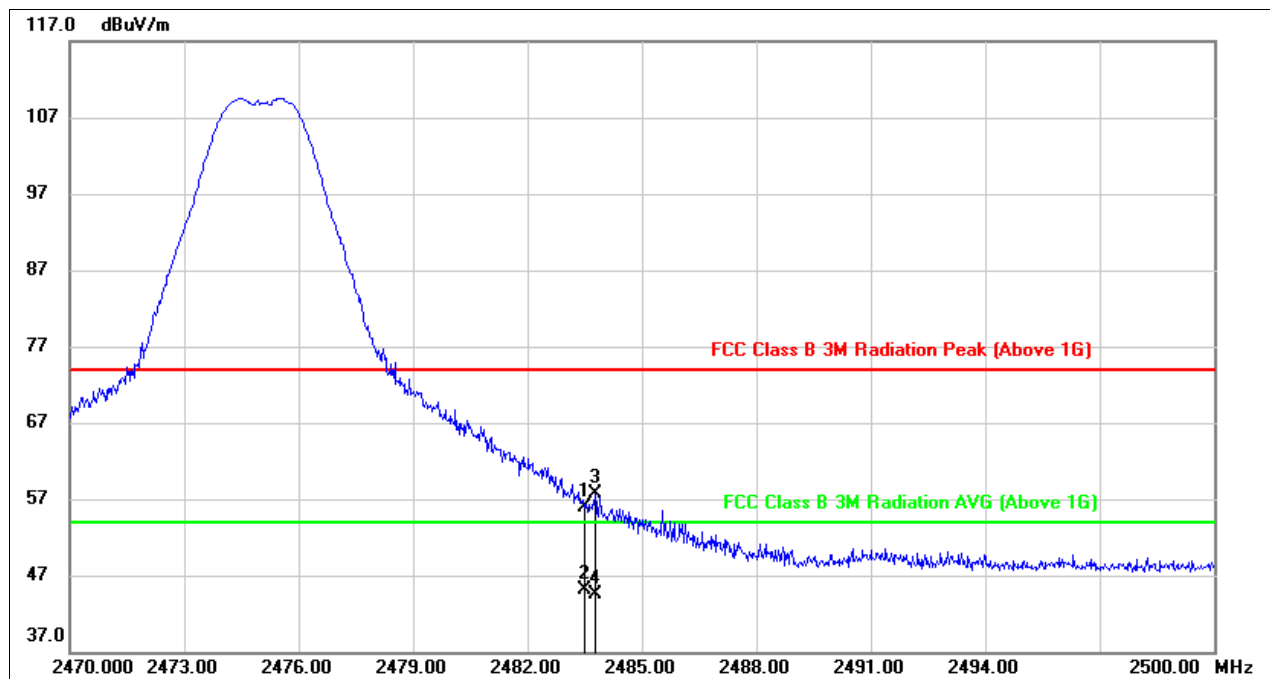


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	22.98	32.88	55.86	74.00	-18.14	peak
2	2483.500	12.26	32.88	45.14	54.00	-8.86	AVG
3	2483.770	24.80	32.88	57.68	74.00	-16.32	peak
4	2483.770	11.60	32.88	44.48	54.00	-9.52	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$ where: ton is transmit duration.
5. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.
6. Only the worst case emission will be recorder, if it complies with the limit, the other emissions deemed to comply with the limit.




RESTRICTED BANDEDGE (CHANNEL26, HORIZONTAL)

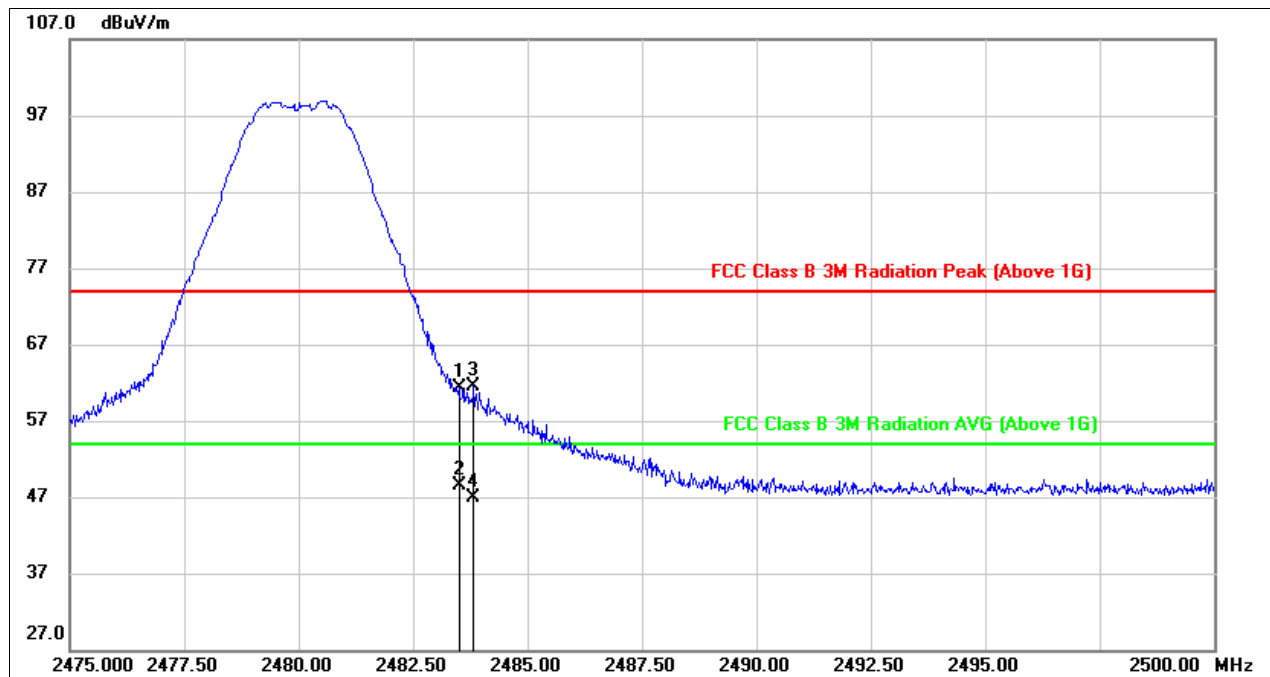

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	28.61	32.78	61.39	74.00	-12.61	peak
2	2483.500	15.82	32.78	48.60	54.00	-5.40	AVG
3	2483.825	28.75	32.78	61.53	74.00	-12.47	peak
4	2483.825	14.10	32.78	46.88	54.00	-7.12	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton where: ton is transmit duration.
5. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.
6. Only the worst case emission will be recorder, if it complies with the limit, the other emissions deemed to comply with the limit.

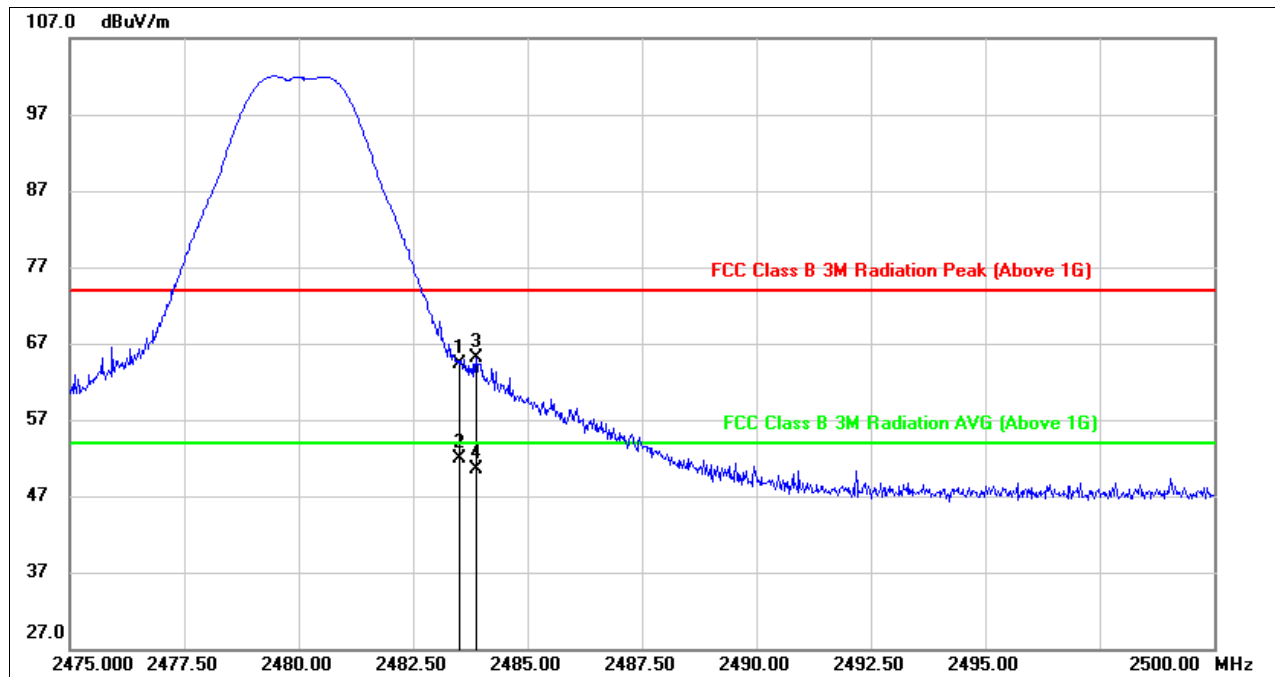**RESTRICTED BANDEDGE (CHANNEL26, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	31.43	32.88	64.31	74.00	-9.69	peak
2	2483.500	19.10	32.88	51.98	54.00	-2.02	AVG
3	2483.875	32.22	32.88	65.10	74.00	-8.90	peak
4	2483.875	17.67	32.88	50.55	54.00	-3.45	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$ where: ton is transmit duration.
5. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.
6. Only the worst case emission will be recorder, if it complies with the limit, the other emissions deemed to comply with the limit.


Note: All the modes had been tested, but only the worst data were recorded in the report.



8.2. SPURIOUS EMISSIONS (1~3GHz)


Main Relay

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

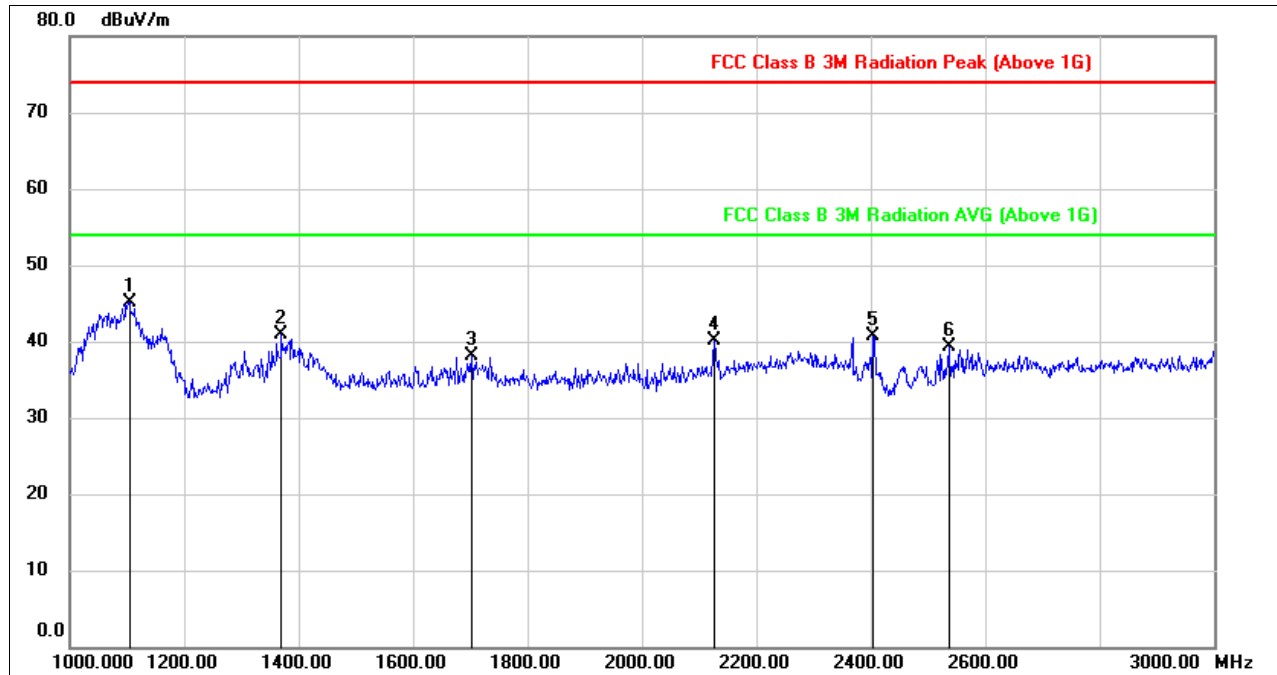

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1104.000	58.64	-13.54	45.10	74.00	-28.90	peak
2	1370.000	53.23	-12.25	40.98	74.00	-33.02	peak
3	1702.000	49.54	-11.51	38.03	74.00	-35.97	peak
4	2126.000	49.33	-9.24	40.09	74.00	-33.91	peak
5	2404.000	48.86	-8.12	40.74	74.00	-33.26	peak
6	2536.000	47.62	-8.37	39.25	74.00	-34.75	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

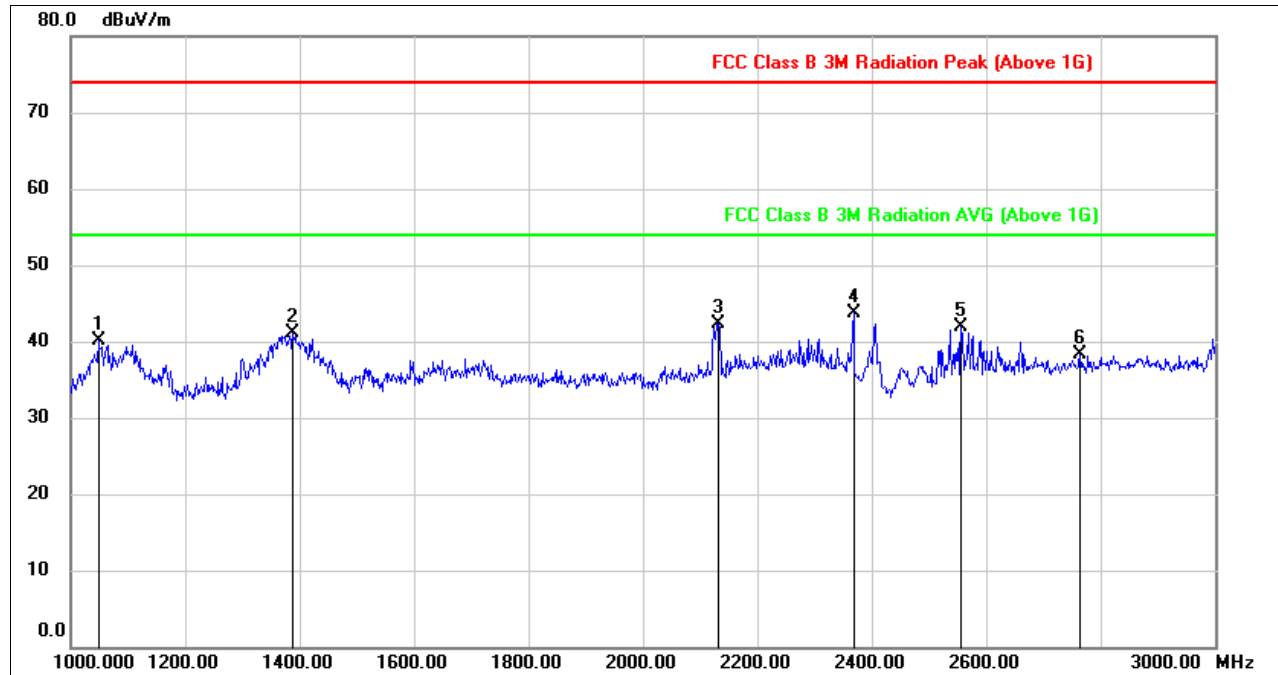**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1048.000	54.05	-13.93	40.12	74.00	-33.88	peak
2	1388.000	53.48	-12.44	41.04	74.00	-32.96	peak
3	2132.000	51.65	-9.26	42.39	74.00	-31.61	peak
4	2368.000	51.54	-7.78	43.76	74.00	-30.24	peak
5	2556.000	50.09	-8.24	41.85	74.00	-32.15	peak
6	2764.000	45.48	-7.23	38.25	74.00	-35.75	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

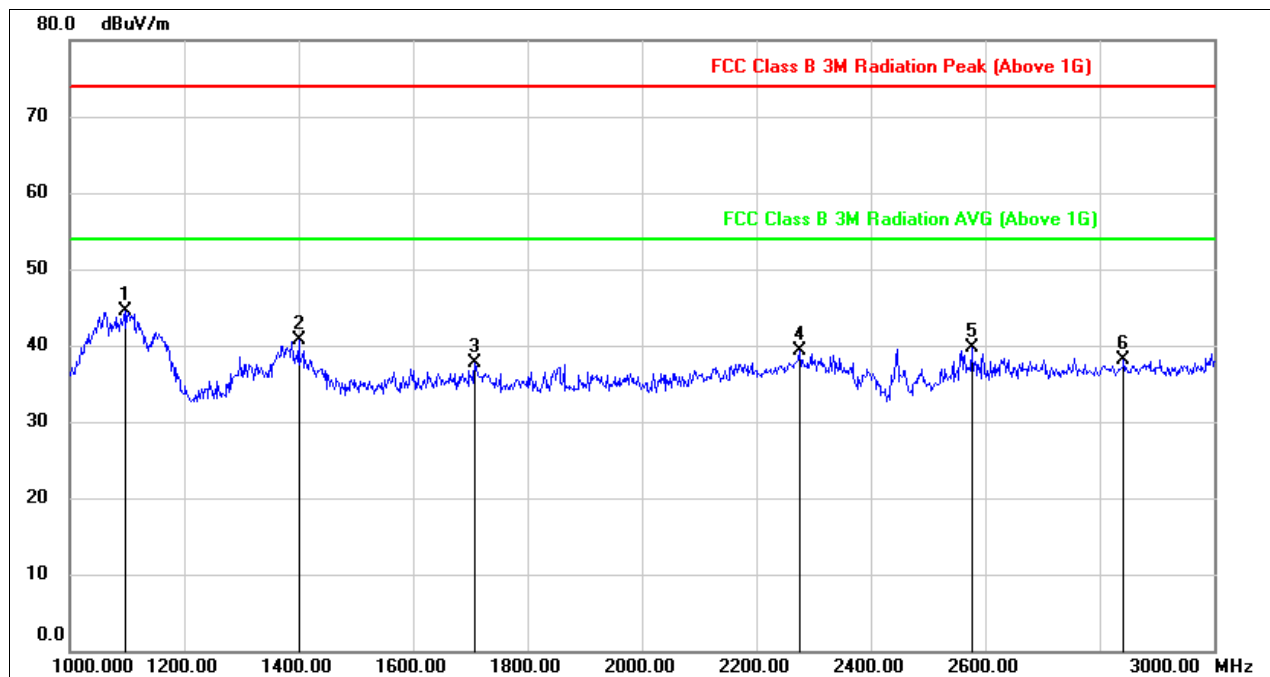

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1096.000	58.10	-13.57	44.53	74.00	-29.47	peak
2	1400.000	52.83	-12.06	40.77	74.00	-33.23	peak
3	1708.000	49.18	-11.48	37.70	74.00	-36.30	peak
4	2276.000	46.83	-7.49	39.34	74.00	-34.66	peak
5	2576.000	47.95	-8.23	39.72	74.00	-34.28	peak
6	2842.000	44.79	-6.74	38.05	74.00	-35.95	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

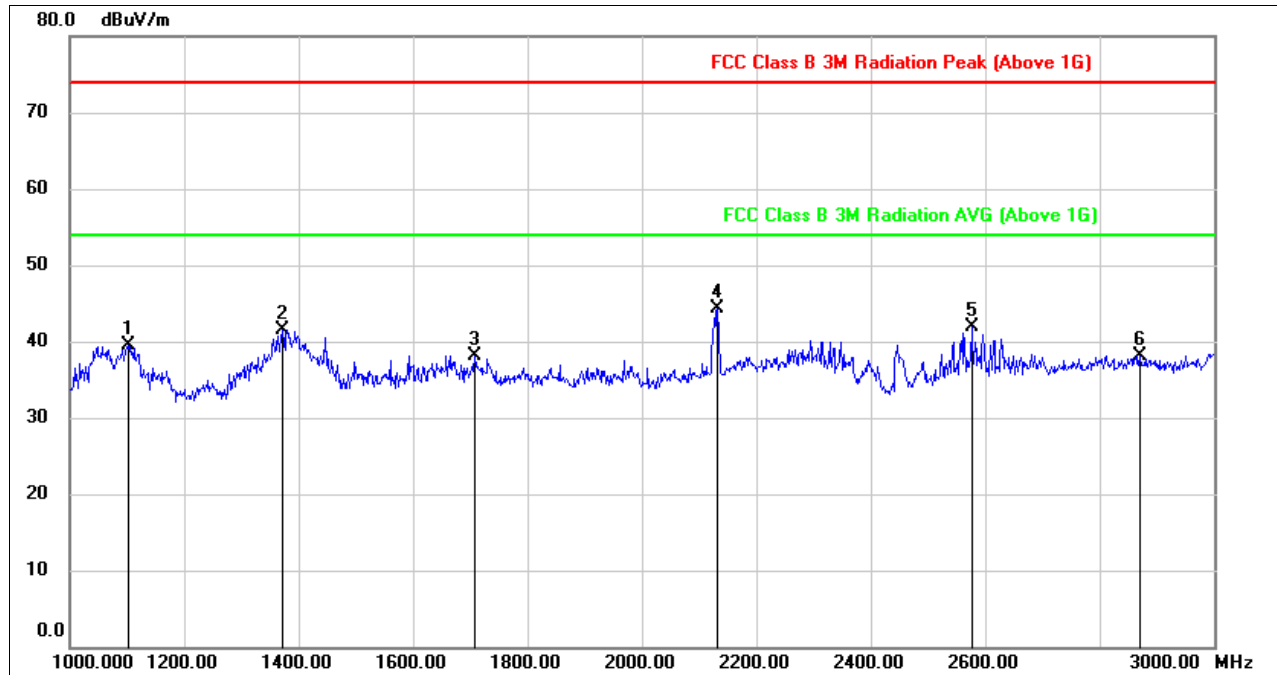**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1102.000	53.41	-13.85	39.56	74.00	-34.44	peak
2	1372.000	53.89	-12.42	41.47	74.00	-32.53	peak
3	1708.000	49.62	-11.48	38.14	74.00	-35.86	peak
4	2132.000	53.53	-9.26	44.27	74.00	-29.73	peak
5	2576.000	50.08	-8.18	41.90	74.00	-32.10	peak
6	2870.000	44.79	-6.62	38.17	74.00	-35.83	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

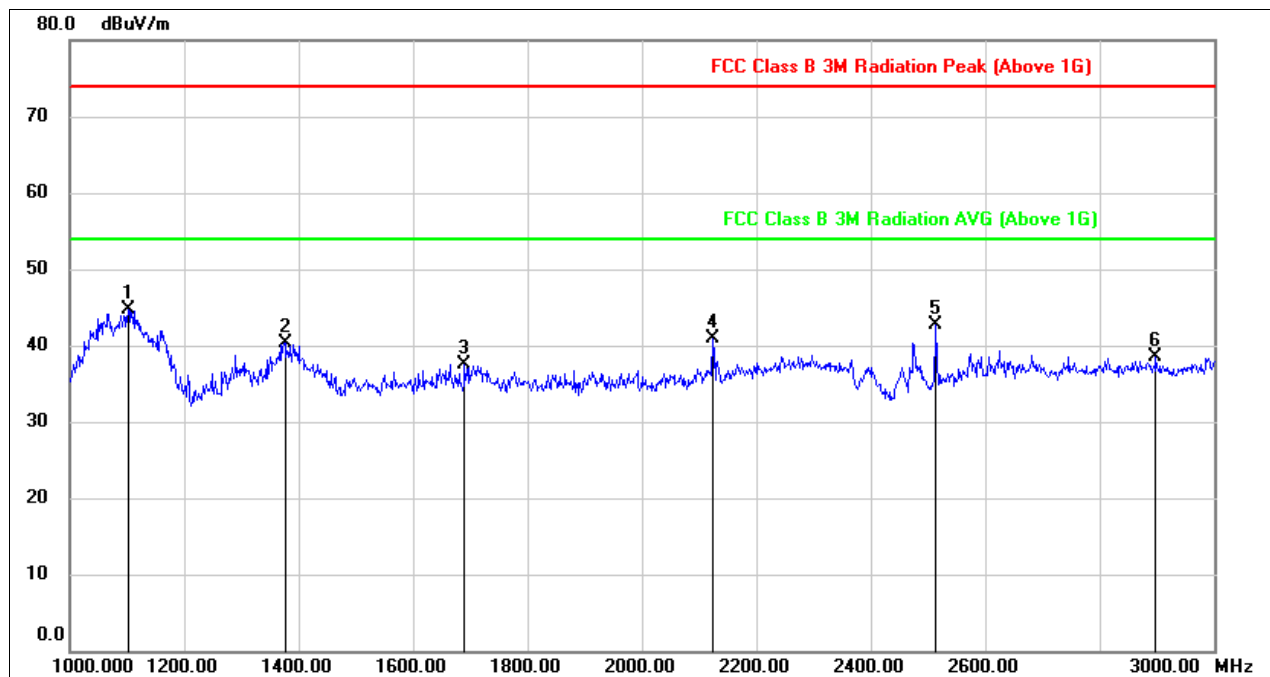


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1102.000	58.26	-13.56	44.70	74.00	-29.30	peak
2	1376.000	52.46	-12.22	40.24	74.00	-33.76	peak
3	1690.000	49.03	-11.57	37.46	74.00	-36.54	peak
4	2124.000	50.07	-9.26	40.81	74.00	-33.19	peak
5	2514.000	51.16	-8.38	42.78	74.00	-31.22	peak
6	2898.000	45.08	-6.54	38.54	74.00	-35.46	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

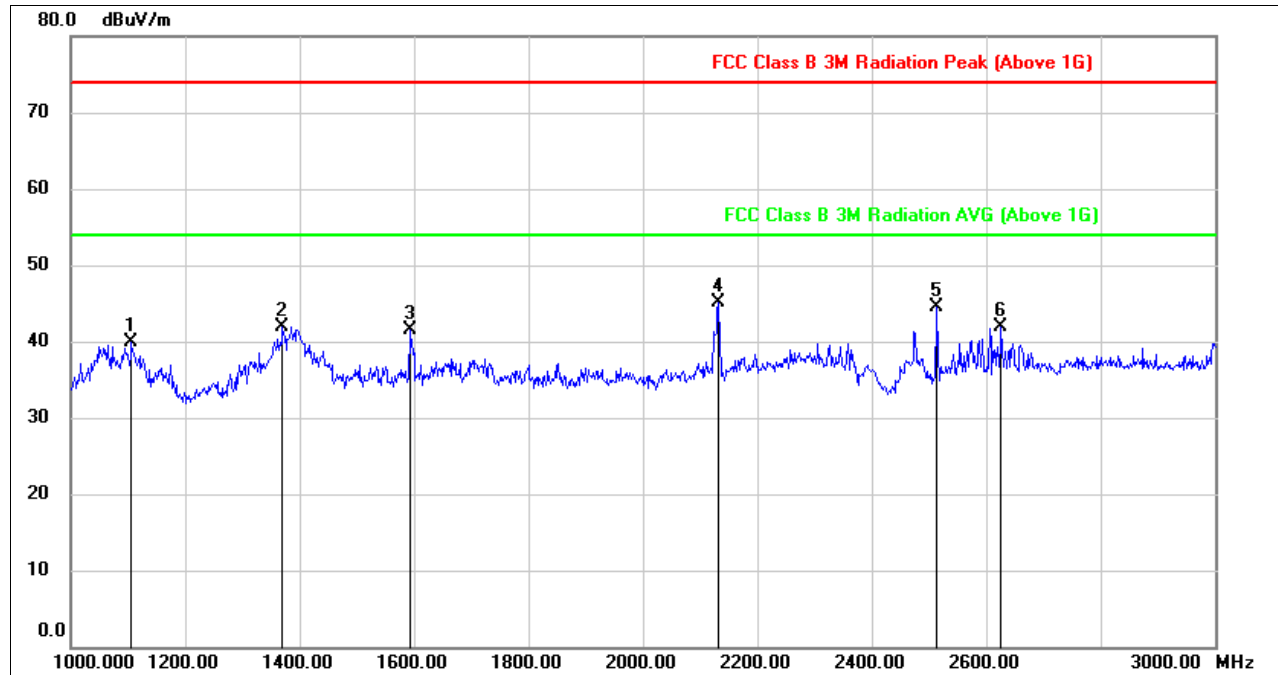

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1106.000	53.69	-13.83	39.86	74.00	-34.14	peak
2	1370.000	54.35	-12.41	41.94	74.00	-32.06	peak
3	1592.000	53.57	-12.10	41.47	74.00	-32.53	peak
4	2132.000	54.42	-9.26	45.16	74.00	-28.84	peak
5	2514.000	52.77	-8.28	44.49	74.00	-29.51	peak
6	2626.000	49.89	-8.03	41.86	74.00	-32.14	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

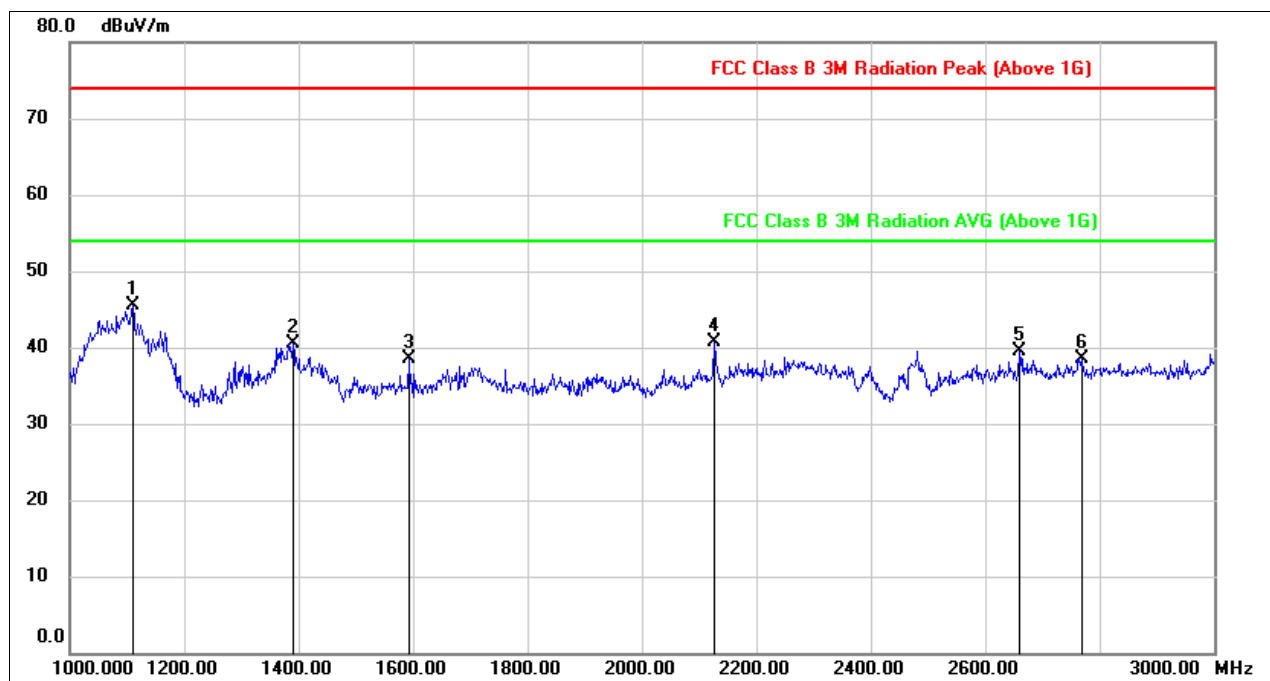**HARMONICS AND SPURIOUS EMISSIONS (CHANNEL26, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1110.000	59.05	-13.52	45.53	74.00	-28.47	peak
2	1390.000	52.72	-12.12	40.60	74.00	-33.40	peak
3	1592.000	50.61	-12.11	38.50	74.00	-35.50	peak
4	2126.000	49.92	-9.24	40.68	74.00	-33.32	peak
5	2660.000	47.32	-7.80	39.52	74.00	-34.48	peak
6	2768.000	45.63	-7.14	38.49	74.00	-35.51	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (CHANNEL26, VERTICAL)

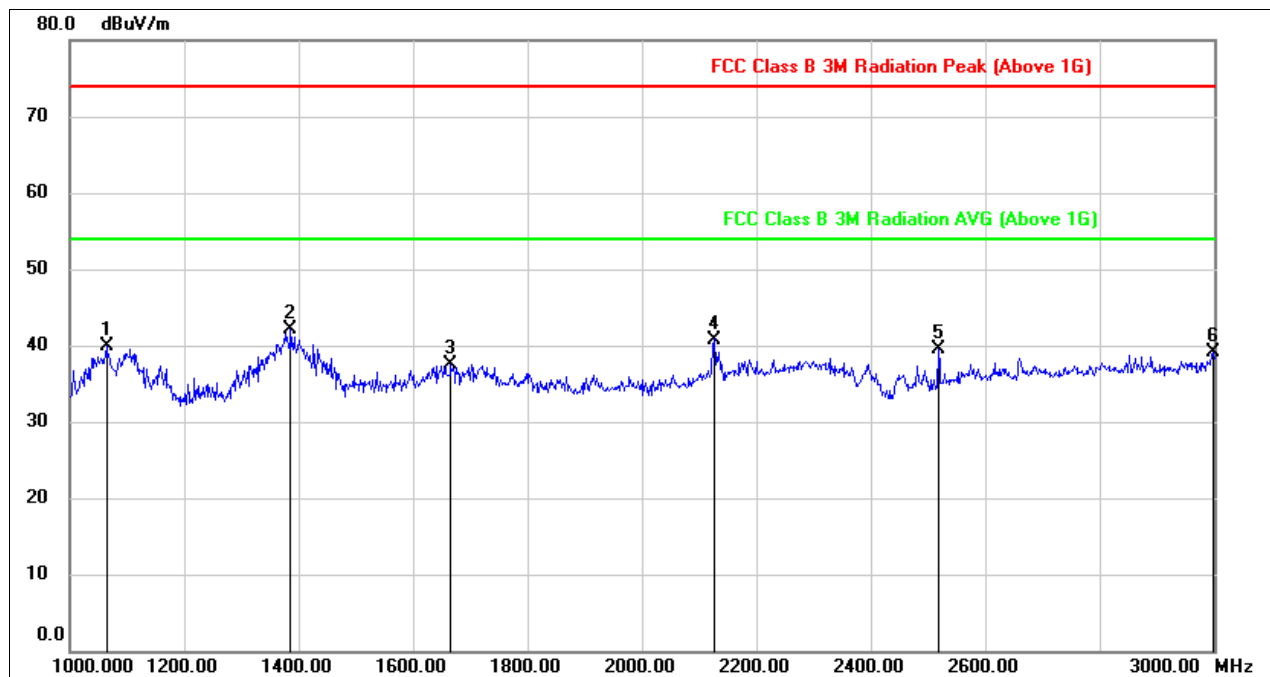

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1064.000	53.74	-13.92	39.82	74.00	-34.18	peak
2	1386.000	54.50	-12.43	42.07	74.00	-31.93	peak
3	1666.000	49.11	-11.67	37.44	74.00	-36.56	peak
4	2126.000	50.14	-9.34	40.80	74.00	-33.20	peak
5	2518.000	47.81	-8.28	39.53	74.00	-34.47	peak
6	2998.000	45.62	-6.60	39.02	74.00	-34.98	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


Note: All the modes had been tested, but only the worst data were recorded in the report.



8.3. SPURIOUS EMISSIONS (3~18GHz)

Main Relay

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

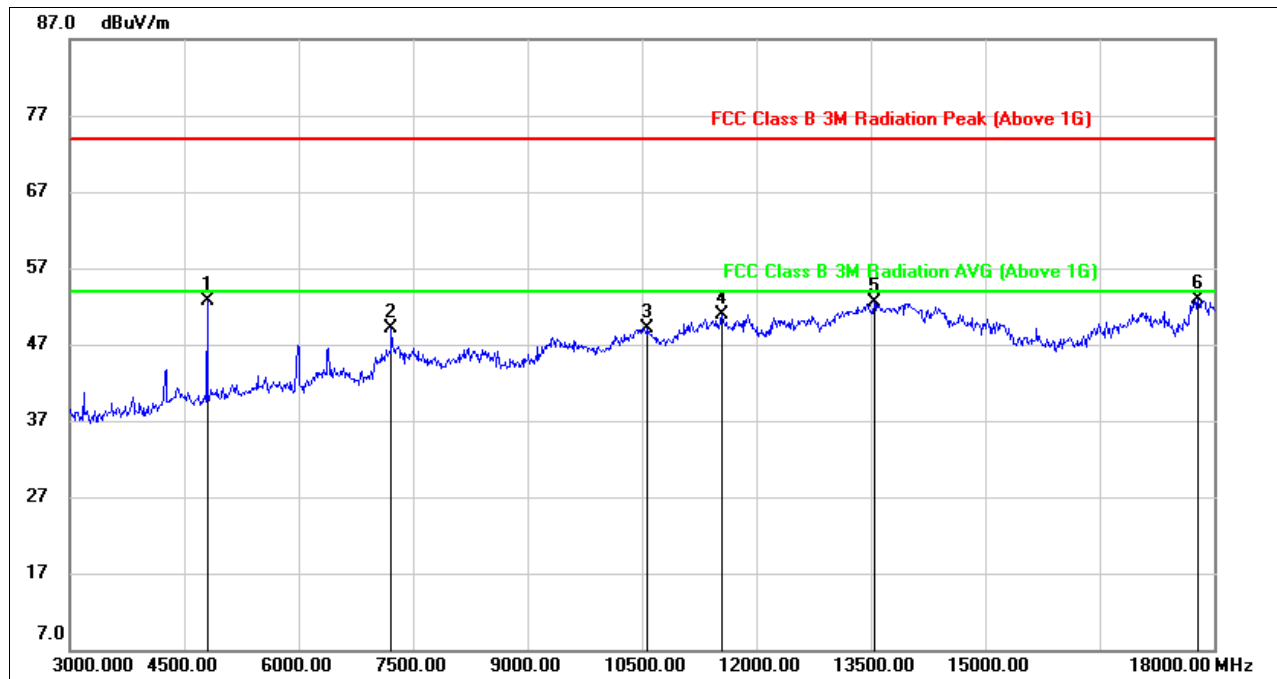


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	53.32	-0.56	52.76	74.00	-21.24	peak
2	7215.000	41.27	7.78	49.05	74.00	-24.95	peak
3	10575.000	35.49	13.70	49.19	74.00	-24.81	peak
4	11550.000	35.02	15.82	50.84	74.00	-23.16	peak
5	13545.000	32.12	20.29	52.41	74.00	-21.59	peak
6	17790.000	26.47	26.36	52.83	74.00	-21.17	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

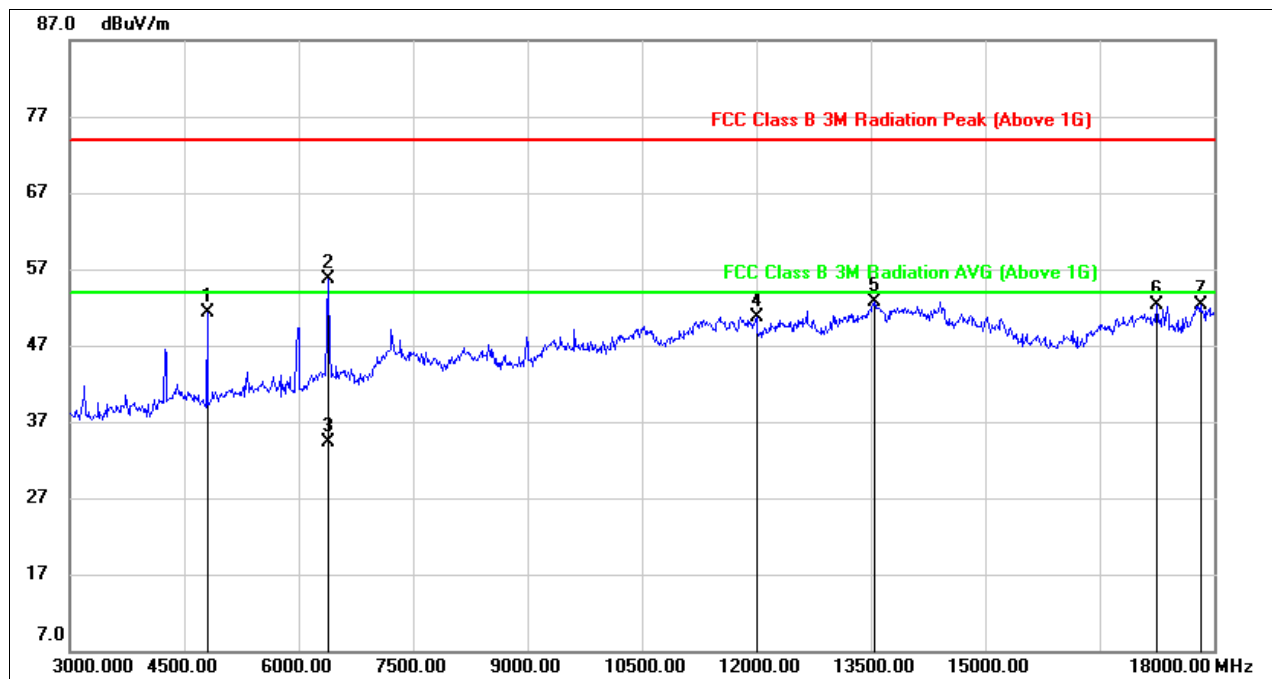


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	51.77	-0.46	51.31	74.00	-22.69	peak
2	6390.000	51.00	4.73	55.73	74.00	-18.27	peak
3	6390.000	29.49	4.73	34.22	54.00	-19.78	AVG
4	12000.000	34.19	16.56	50.75	74.00	-23.25	peak
5	13545.000	31.87	20.88	52.75	74.00	-21.25	peak
6	17250.000	29.04	23.19	52.23	74.00	-21.77	peak
7	17820.000	25.70	26.56	52.26	74.00	-21.74	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$ where: ton is transmit duration.
5. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.
6. The High Pass filter loss factor already add into the correct factor.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

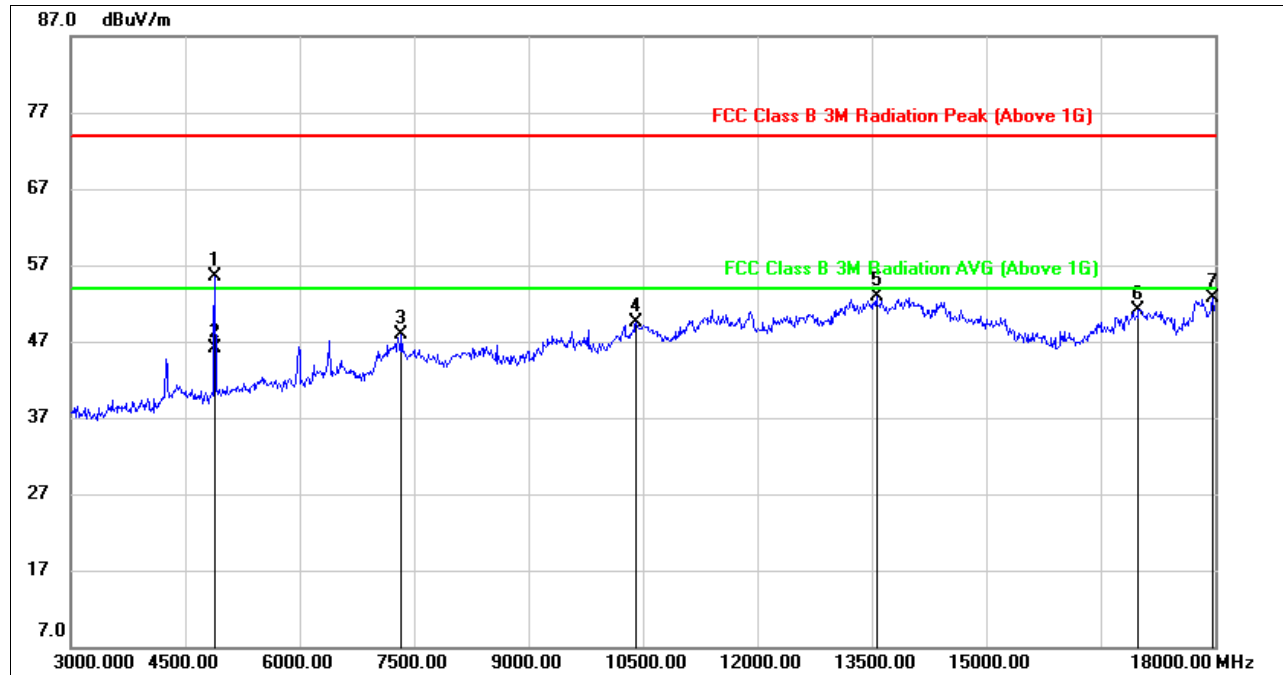


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4890.000	54.88	0.57	55.45	74.00	-18.55	peak
2	4890.000	45.47	0.57	46.04	54.00	-7.96	AVG
3	7335.000	40.46	7.45	47.91	74.00	-26.09	peak
4	10410.000	36.39	13.16	49.55	74.00	-24.45	peak
5	13560.000	32.63	20.37	53.00	74.00	-21.00	peak
6	16995.000	29.34	21.85	51.19	74.00	-22.81	peak
7	17970.000	25.57	27.04	52.61	74.00	-21.39	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$ where: ton is transmit duration.
5. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.
6. The High Pass filter loss factor already add into the correct factor.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

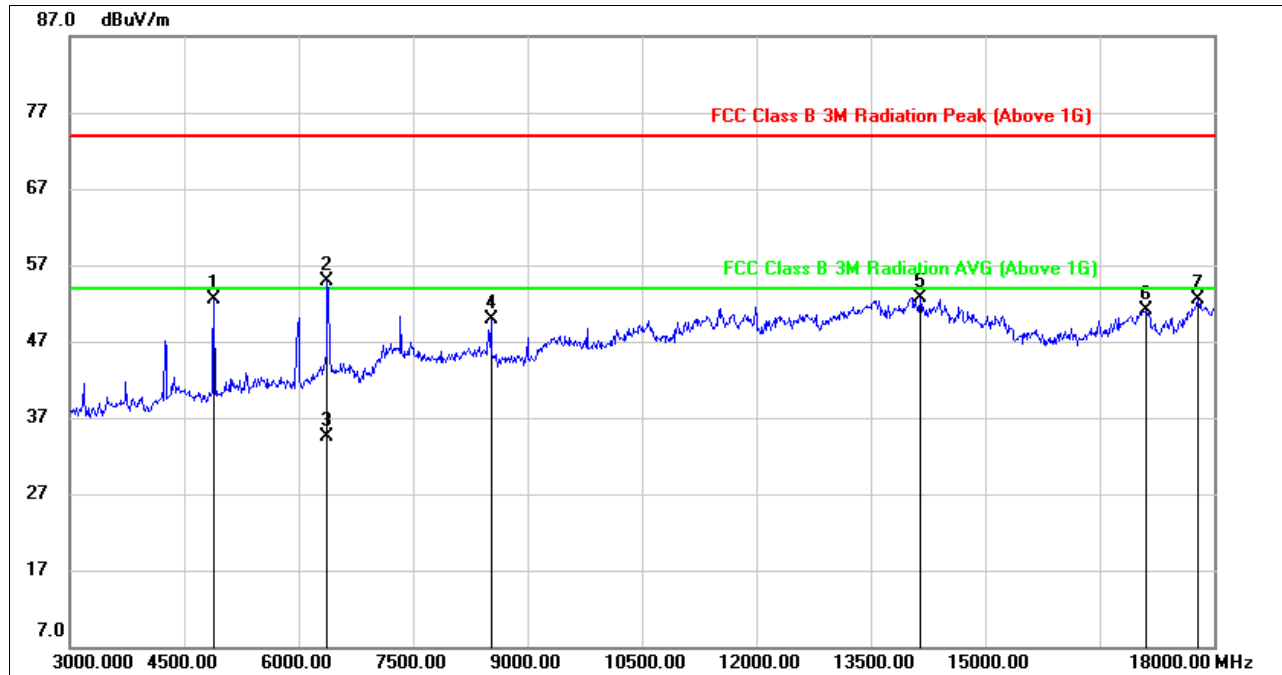


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4890.000	52.10	0.49	52.59	74.00	-21.41	peak
2	6375.000	50.28	4.70	54.98	74.00	-19.02	peak
3	6375.000	29.79	4.70	34.49	54.00	-19.51	AVG
4	8520.000	41.29	8.52	49.81	74.00	-24.19	peak
5	14145.000	32.28	20.44	52.72	74.00	-21.28	peak
6	17115.000	28.22	22.85	51.07	74.00	-22.93	peak
7	17790.000	25.80	26.76	52.56	74.00	-21.44	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$ where: ton is transmit duration.
5. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.
6. The High Pass filter loss factor already add into the correct factor.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

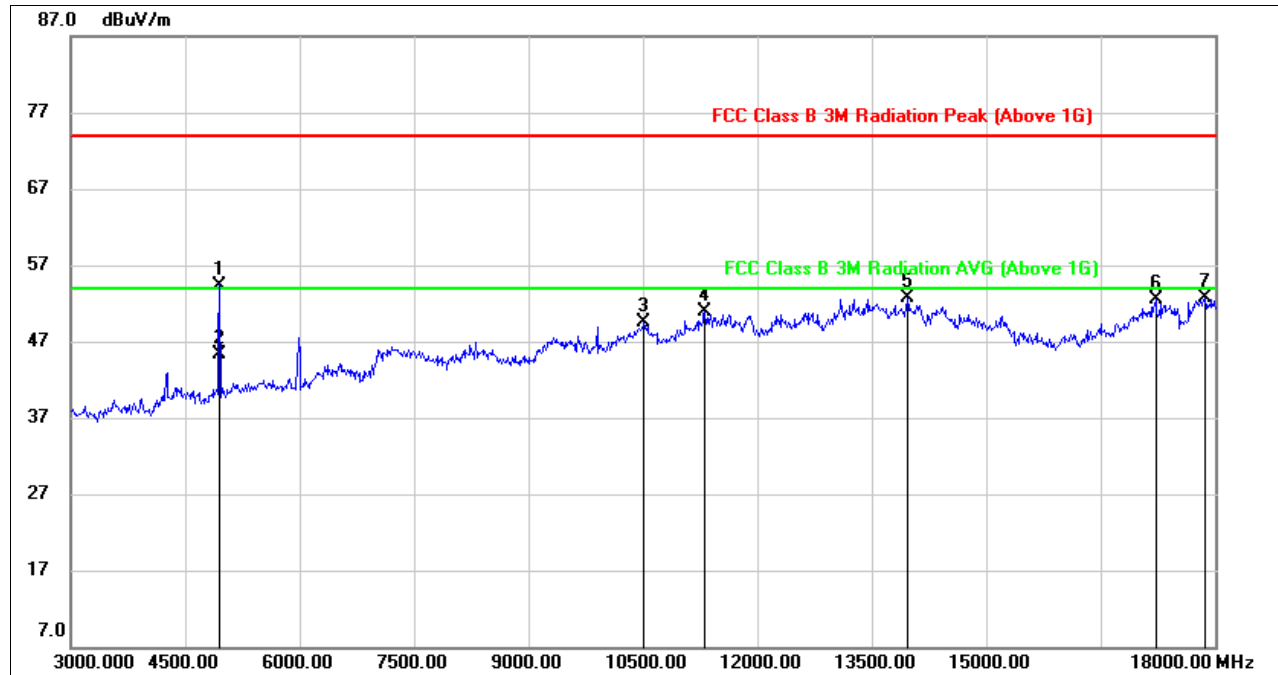


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	53.81	0.59	54.40	74.00	-19.60	peak
2	4950.000	44.62	0.59	45.21	54.00	-8.79	AVG
3	10515.000	35.67	13.74	49.41	74.00	-24.59	peak
4	11310.000	35.38	15.44	50.82	74.00	-23.18	peak
5	13965.000	31.99	20.66	52.65	74.00	-21.35	peak
6	17220.000	29.73	22.75	52.48	74.00	-21.52	peak
7	17865.000	26.22	26.40	52.62	74.00	-21.38	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$ where: ton is transmit duration.
 5. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.
 6. The High Pass filter loss factor already add into the correct factor.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

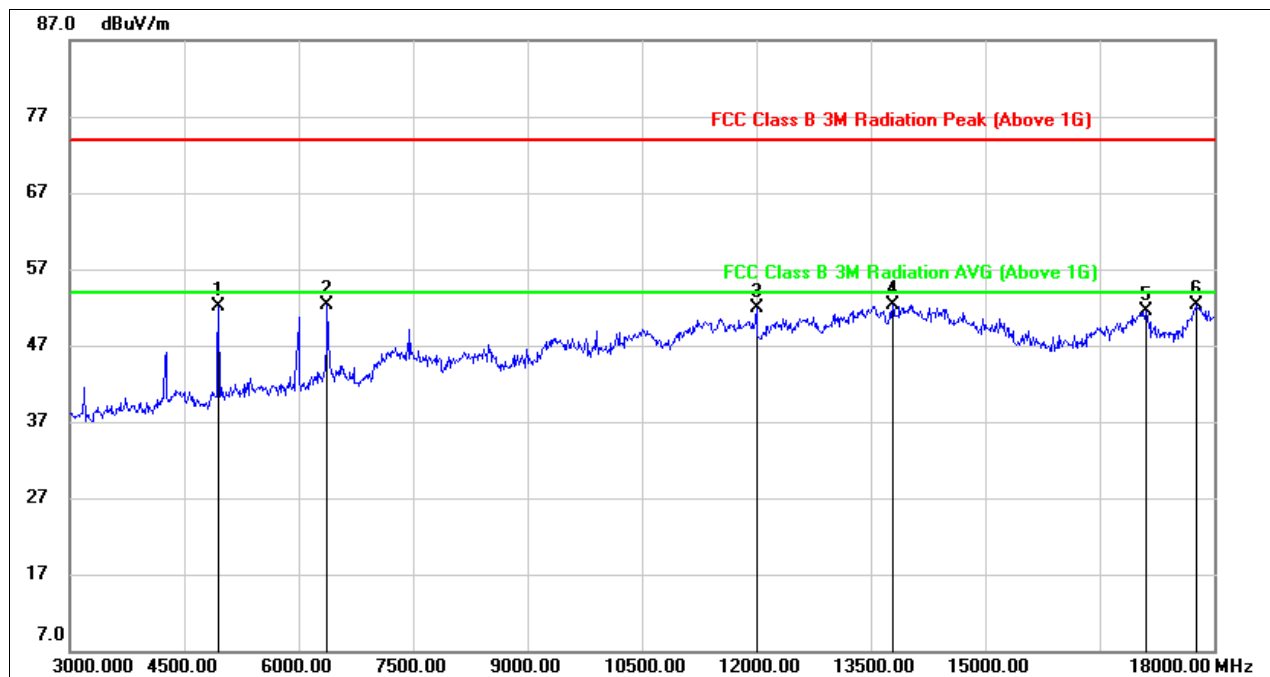


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	51.45	0.59	52.04	74.00	-21.96	peak
2	6375.000	47.55	4.70	52.25	74.00	-21.75	peak
3	12000.000	35.32	16.56	51.88	74.00	-22.12	peak
4	13785.000	31.28	21.05	52.33	74.00	-21.67	peak
5	17100.000	28.64	22.84	51.48	74.00	-22.52	peak
6	17775.000	25.76	26.57	52.33	74.00	-21.67	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (CHANNEL26, HORIZONTAL)

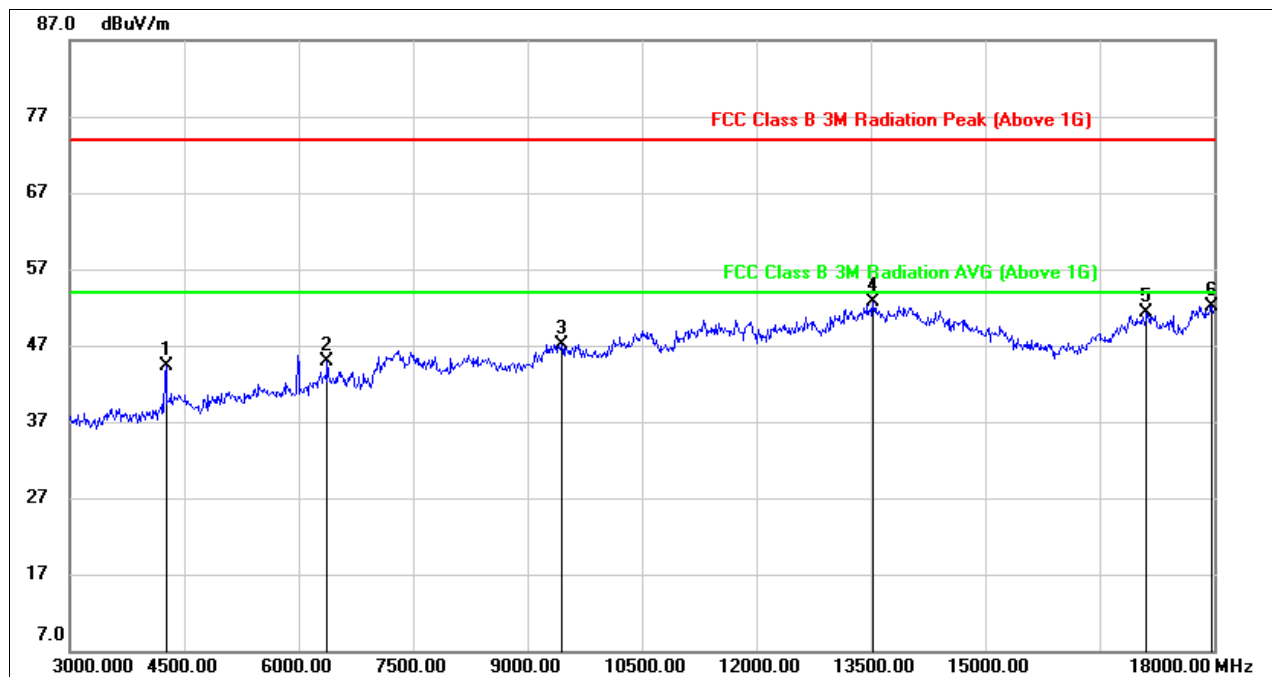


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4260.000	46.15	-1.90	44.25	74.00	-29.75	peak
2	6375.000	40.25	4.65	44.90	74.00	-29.10	peak
3	9450.000	36.19	10.90	47.09	74.00	-26.91	peak
4	13530.000	32.57	20.22	52.79	74.00	-21.21	peak
5	17115.000	28.88	22.37	51.25	74.00	-22.75	peak
6	17970.000	25.06	27.04	52.10	74.00	-21.90	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (CHANNEL26, VERTICAL)

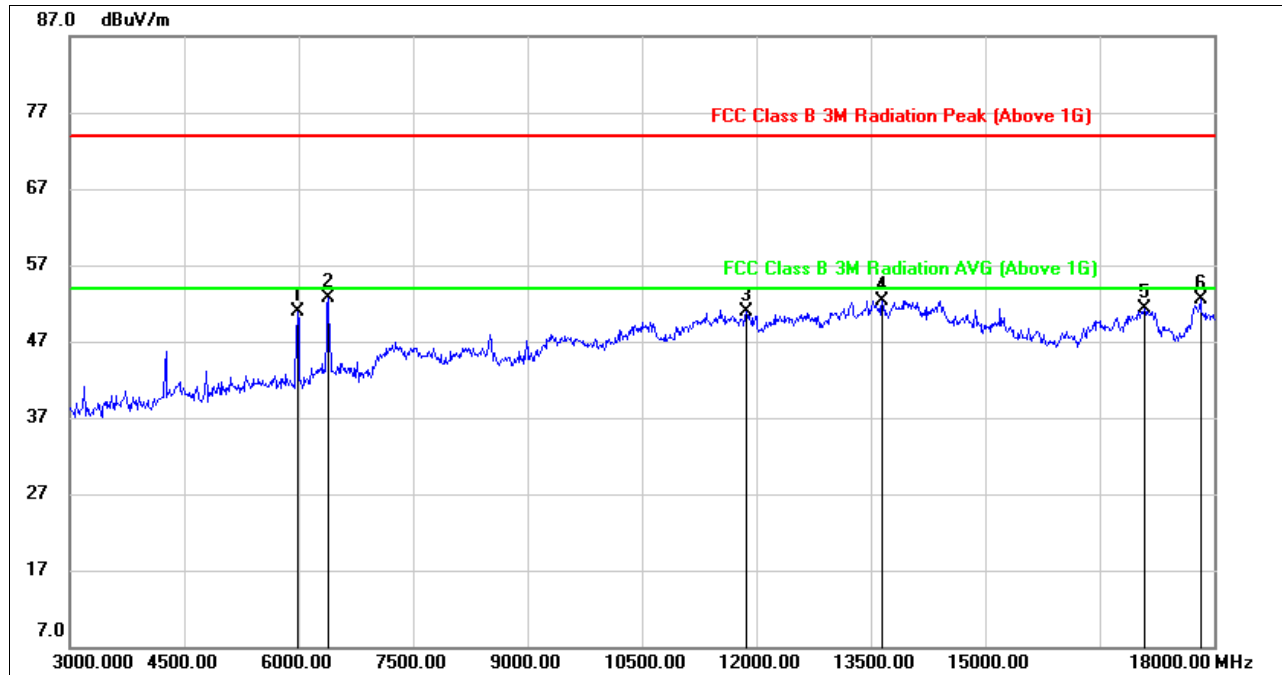

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5985.000	47.60	3.28	50.88	74.00	-23.12	peak
2	6390.000	48.01	4.73	52.74	74.00	-21.26	peak
3	11865.000	34.33	16.64	50.97	74.00	-23.03	peak
4	13650.000	31.60	20.73	52.33	74.00	-21.67	peak
5	17085.000	28.48	22.79	51.27	74.00	-22.73	peak
6	17820.000	25.96	26.56	52.52	74.00	-21.48	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


Note: All the modes had been tested, but only the worst data were recorded in the report.



8.4. SPURIOUS EMISSIONS 18G ~ 26GHz

Main Relay

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

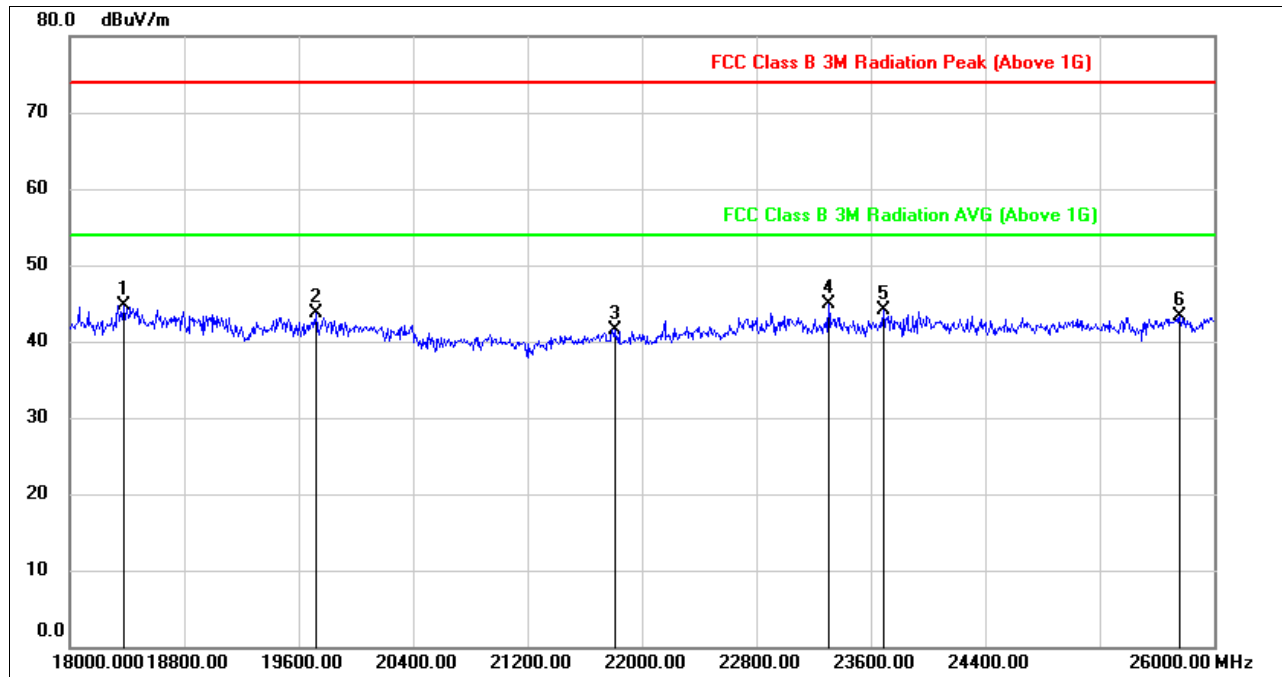


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18376.000	49.03	-4.35	44.68	74.00	-29.32	peak
2	19720.000	47.75	-4.12	43.63	74.00	-30.37	peak
3	21808.000	46.88	-5.44	41.44	74.00	-32.56	peak
4	23304.000	48.50	-3.64	44.86	74.00	-29.14	peak
5	23688.000	47.73	-3.66	44.07	74.00	-29.93	peak
6	25760.000	45.65	-2.42	43.23	74.00	-30.77	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Proper operation of the transmitter prior to adding the filter to the measurement chain.



SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

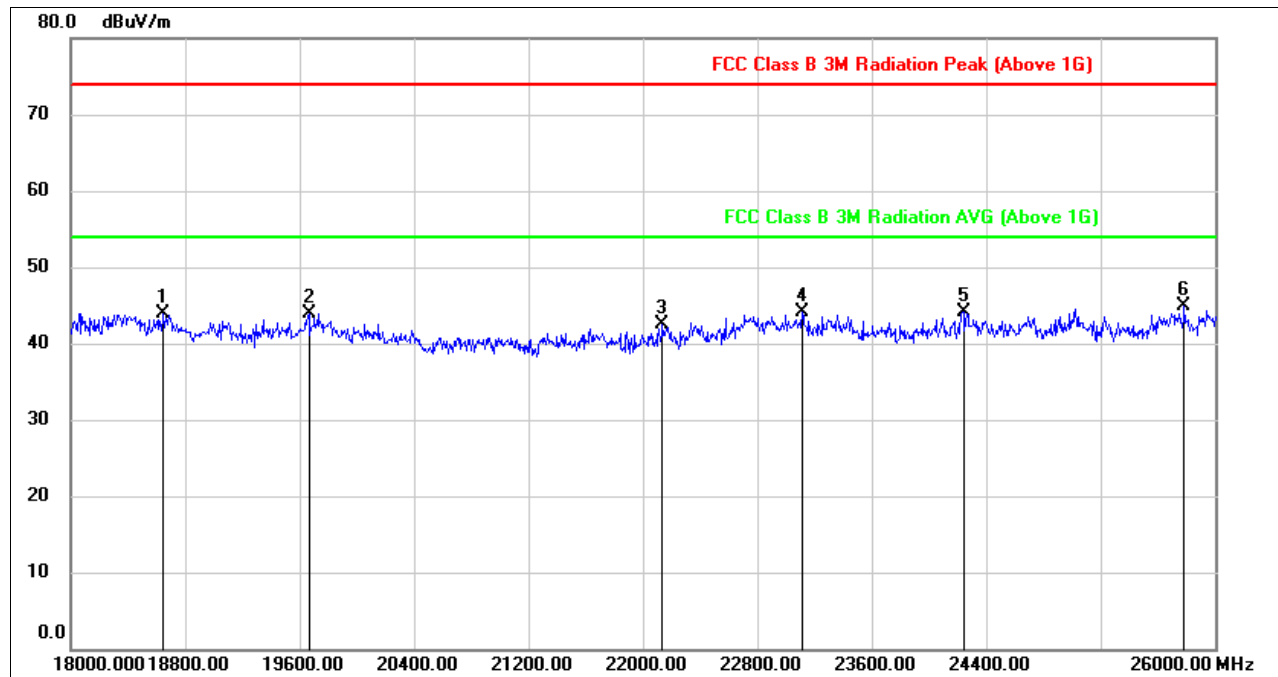

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18648.000	48.47	-4.63	43.84	74.00	-30.16	peak
2	19664.000	48.25	-4.26	43.99	74.00	-30.01	peak
3	22136.000	47.76	-5.32	42.44	74.00	-31.56	peak
4	23112.000	47.75	-3.65	44.10	74.00	-29.90	peak
5	24240.000	47.59	-3.48	44.11	74.00	-29.89	peak
6	25784.000	47.40	-2.49	44.91	74.00	-29.09	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Proper operation of the transmitter prior to adding the filter to the measurement chain.


Note: All the modes had been tested, but only the worst data were recorded in the report.



8.5. SPURIOUS EMISSIONS 30M ~ 1 GHz


8.5.1. Main Relay

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

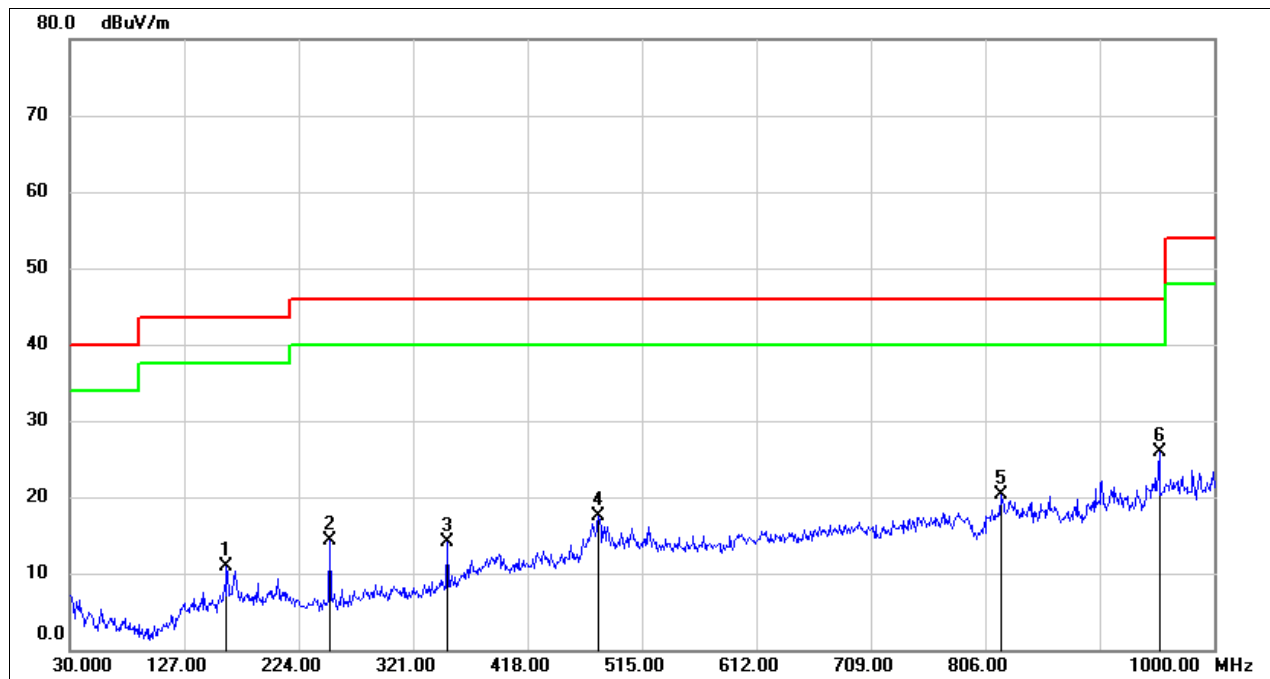

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	162.8900	28.21	-17.39	10.82	43.50	-32.68	QP
2	250.1900	31.63	-17.26	14.37	46.00	-31.63	QP
3	350.1000	28.71	-14.63	14.08	46.00	-31.92	QP
4	478.1400	29.17	-11.63	17.54	46.00	-28.46	QP
5	819.5800	26.30	-5.98	20.32	46.00	-25.68	QP
6	953.4400	30.18	-4.27	25.91	46.00	-20.09	QP

Note: 1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

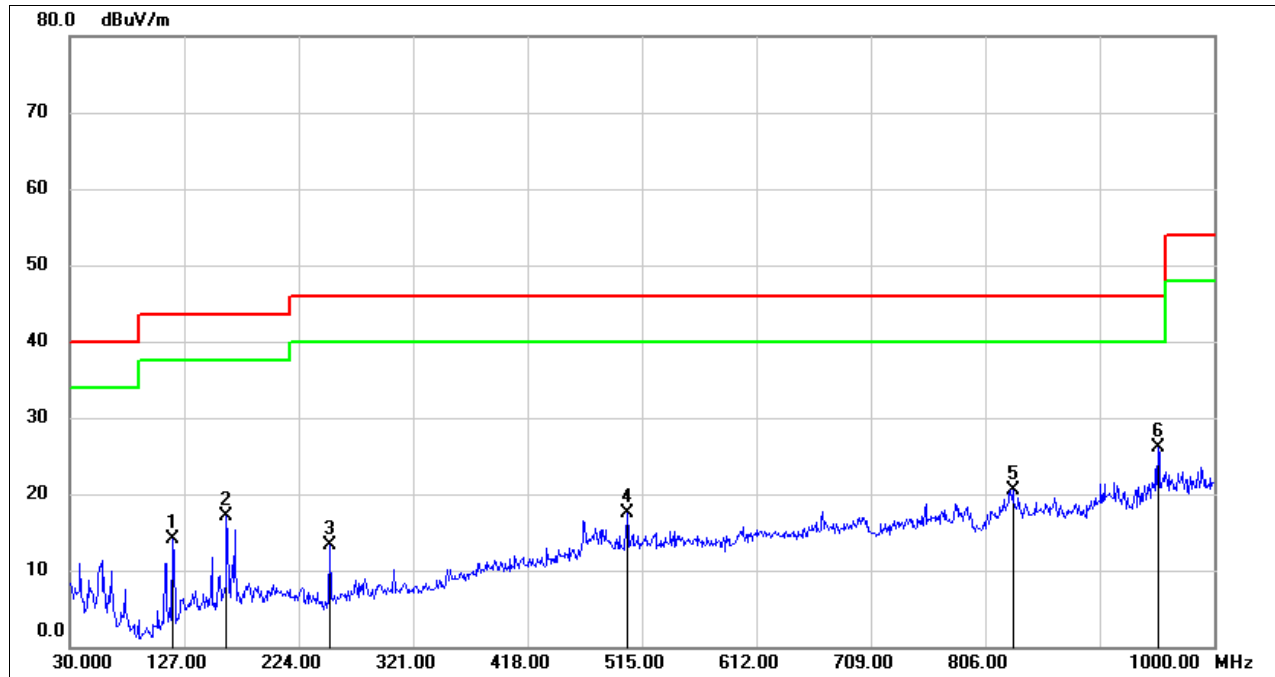**SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	117.3000	33.90	-19.88	14.02	43.50	-29.48	QP
2	162.8900	34.43	-17.39	17.04	43.50	-26.46	QP
3	250.1900	30.50	-17.26	13.24	46.00	-32.76	QP
4	502.3900	28.39	-10.86	17.53	46.00	-28.47	QP
5	829.2800	26.28	-5.75	20.53	46.00	-25.47	QP
6	952.4700	30.32	-4.29	26.03	46.00	-19.97	QP

Note: 1. Result Level = Read Level + Correct Factor.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.


3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

Note: All the modes had been tested, but only the worst data were recorded in the report.




8.5.2. Alternative Relay

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

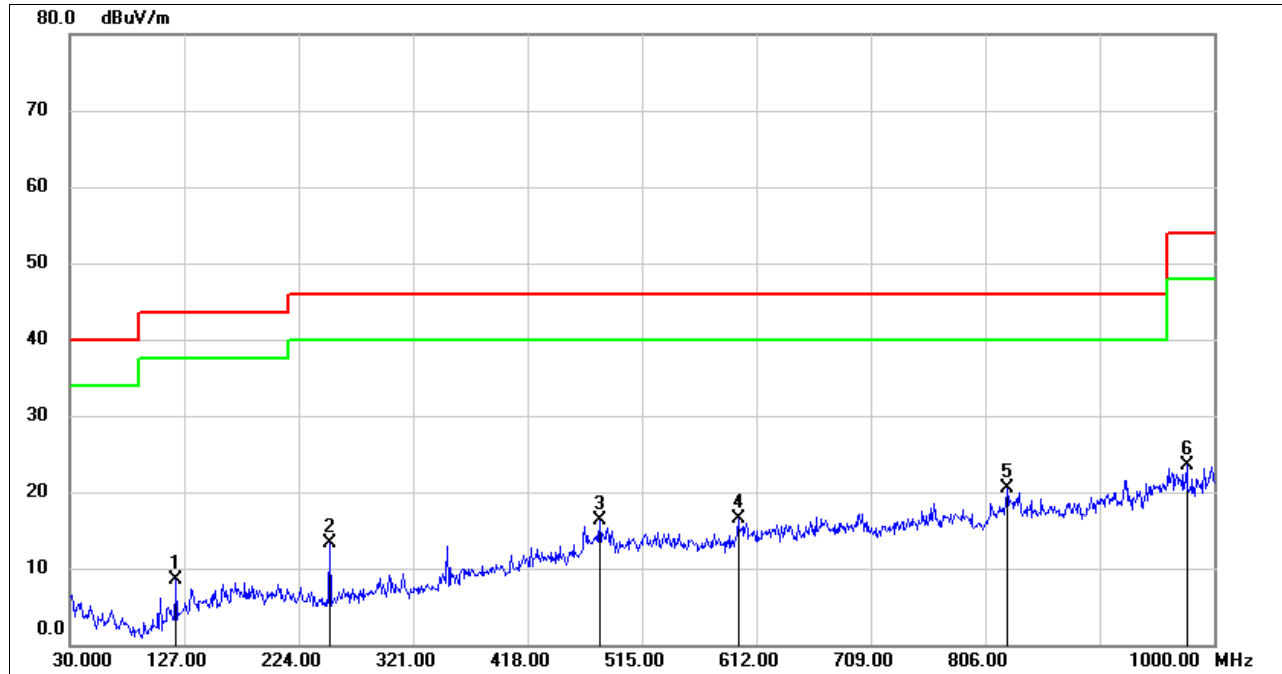

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	120.2100	28.14	-19.56	8.58	43.50	-34.92	QP
2	250.1900	30.60	-17.26	13.34	46.00	-32.66	QP
3	479.1100	27.79	-11.54	16.25	46.00	-29.75	QP
4	596.4800	26.05	-9.45	16.60	46.00	-29.40	QP
5	824.4300	26.32	-5.85	20.47	46.00	-25.53	QP
6	976.7200	27.72	-4.20	23.52	54.00	-30.48	QP

Note: 1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

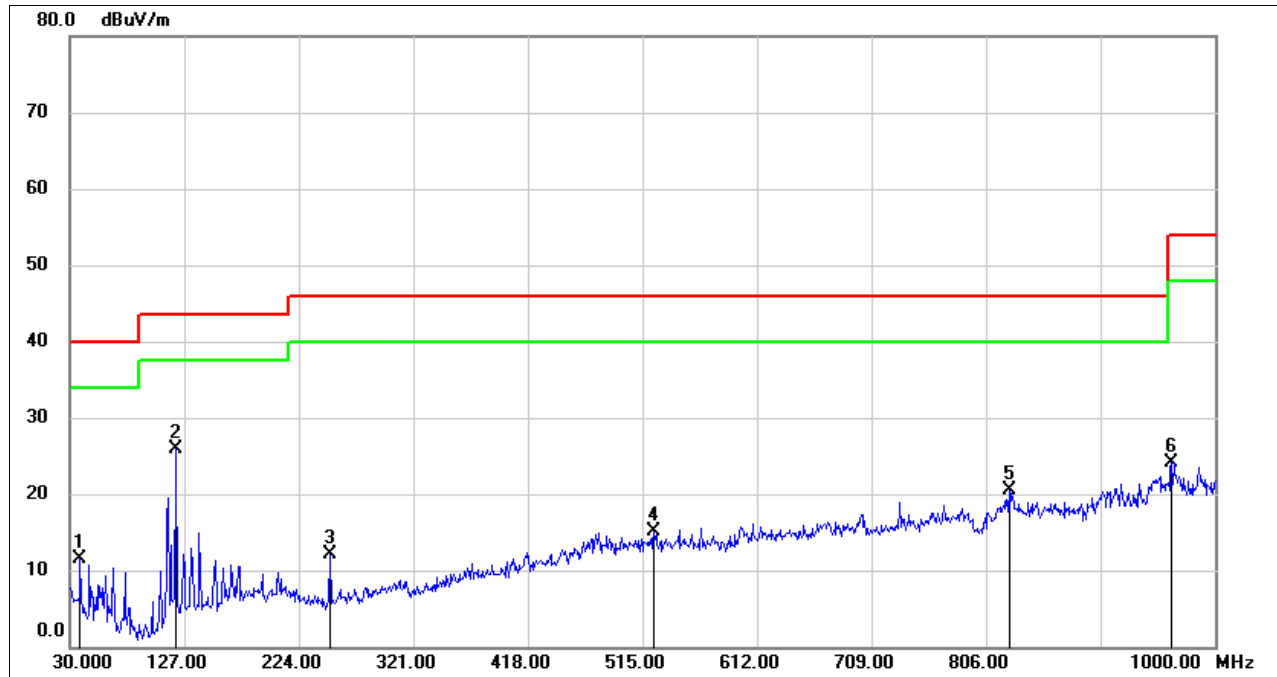**SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	38.7300	30.54	-19.01	11.53	40.00	-28.47	QP
2	120.2100	45.44	-19.56	25.88	43.50	-17.62	QP
3	250.1900	29.35	-17.26	12.09	46.00	-33.91	QP
4	524.7000	25.48	-10.47	15.01	46.00	-30.99	QP
5	825.4000	26.31	-5.82	20.49	46.00	-25.51	QP
6	963.1400	28.30	-4.13	24.17	54.00	-29.83	QP

Note: 1. Result Level = Read Level + Correct Factor.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

Note: All the modes had been tested, but only the worst data were recorded in the report.




8.6. SPURIOUS EMISSIONS BELOW 30M

Main Relay

SPURIOUS EMISSIONS (LOW CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9kHz~ 150kHz

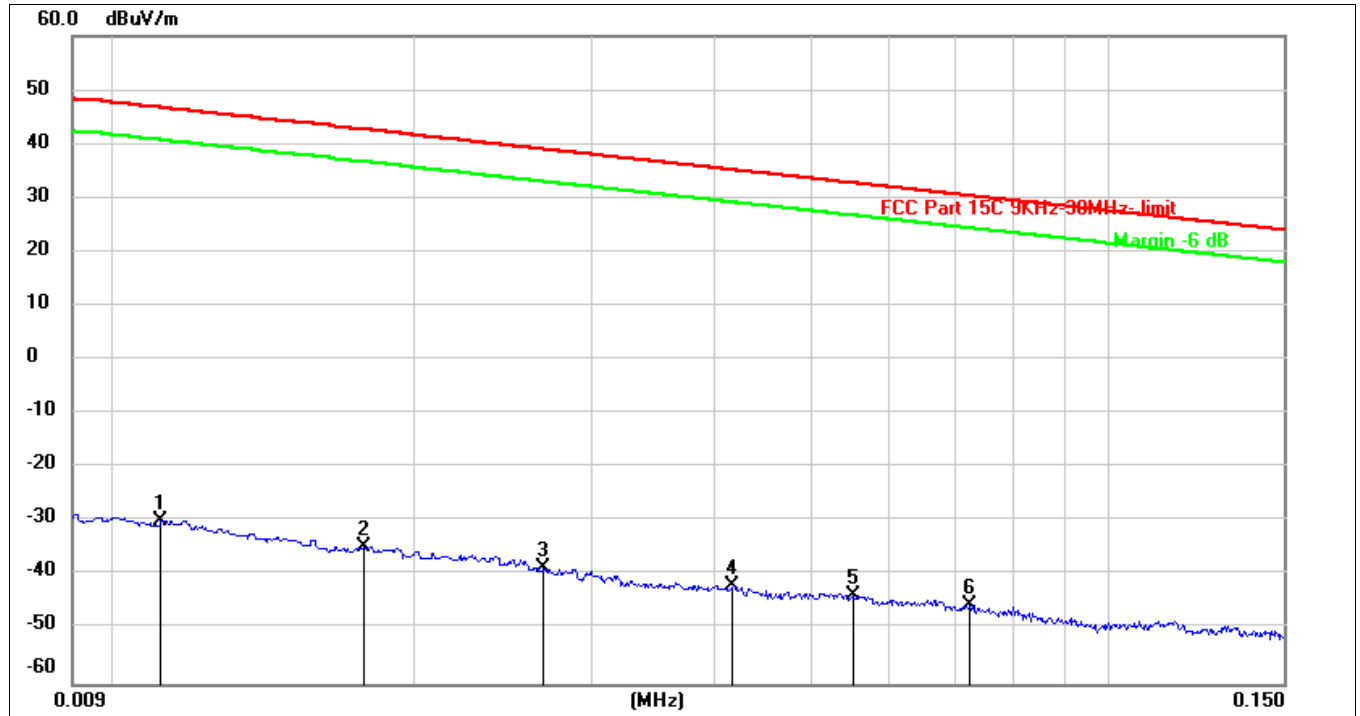


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0111	71.45	-101.39	-29.94	46.69	-76.63	peak
2	0.0177	66.62	-101.35	-34.73	42.64	-77.37	peak
3	0.0269	62.85	-101.38	-38.53	39.01	-77.54	peak
4	0.0417	59.58	-101.44	-41.86	35.20	-77.06	peak
5	0.0551	57.95	-101.50	-43.55	32.78	-76.33	peak
6	0.0724	56.06	-101.58	-45.52	30.41	-75.93	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

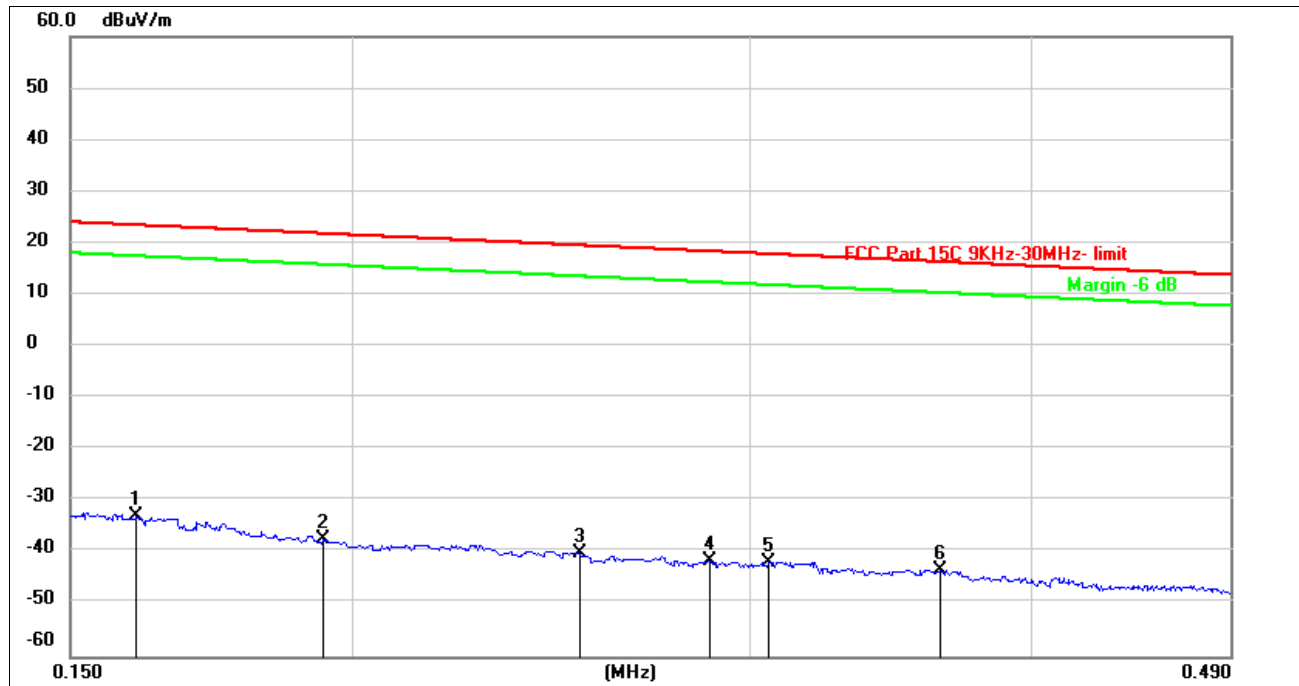150kHz ~ 490kHz

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1604	68.68	-101.65	-32.97	23.50	-56.47	peak
2	0.1942	64.31	-101.70	-37.39	21.84	-59.23	peak
3	0.2522	61.89	-101.80	-39.91	19.57	-59.48	peak
4	0.2878	60.22	-101.85	-41.63	18.42	-60.05	peak
5	0.3059	60.15	-101.86	-41.71	17.89	-59.60	peak
6	0.3644	58.44	-101.93	-43.49	16.37	-59.86	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



490kHz ~ 30MHz

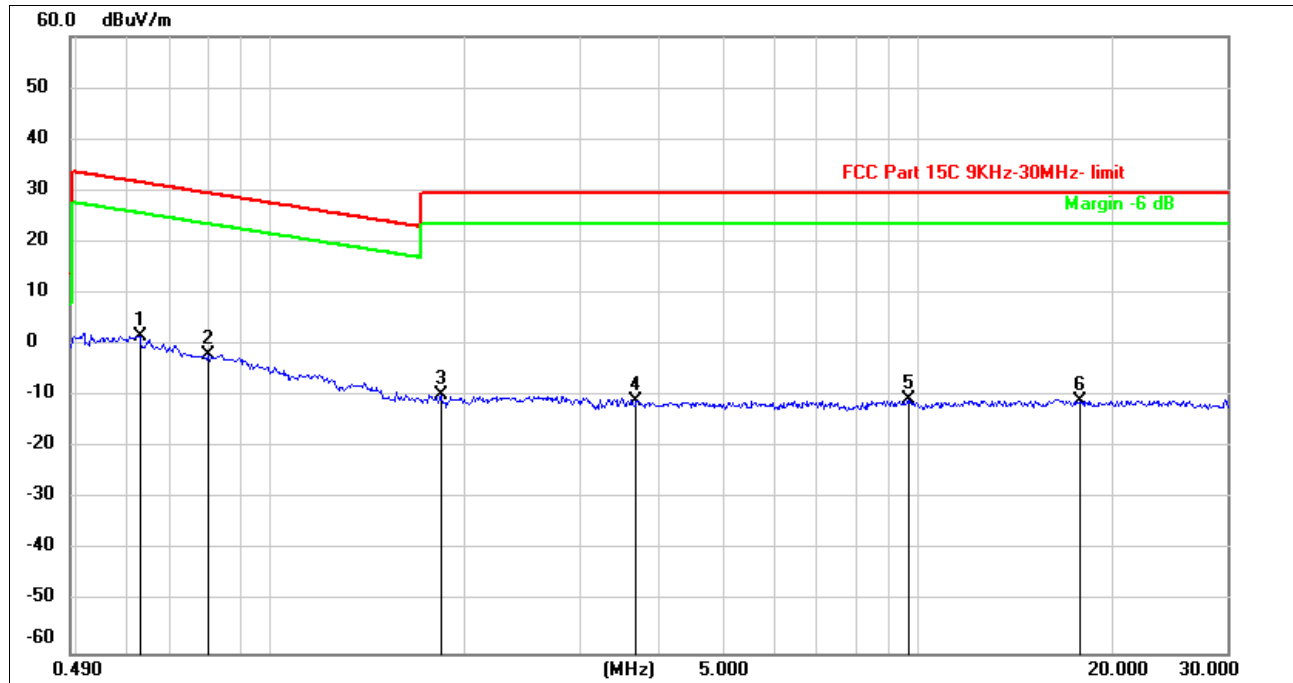

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.6270	63.65	-62.09	1.56	31.66	-30.10	peak
2	0.7993	60.22	-62.15	-1.93	29.55	-31.48	peak
3	1.8282	52.19	-61.90	-9.71	29.54	-39.25	peak
4	3.6770	50.54	-61.41	-10.87	29.54	-40.41	peak
5	9.6676	50.18	-60.85	-10.67	29.54	-40.21	peak
6	17.8124	50.12	-60.92	-10.80	29.54	-40.34	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the modes had been tested, but only the worst data were recorded in the report.


9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to FCC §15.207 (a)

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

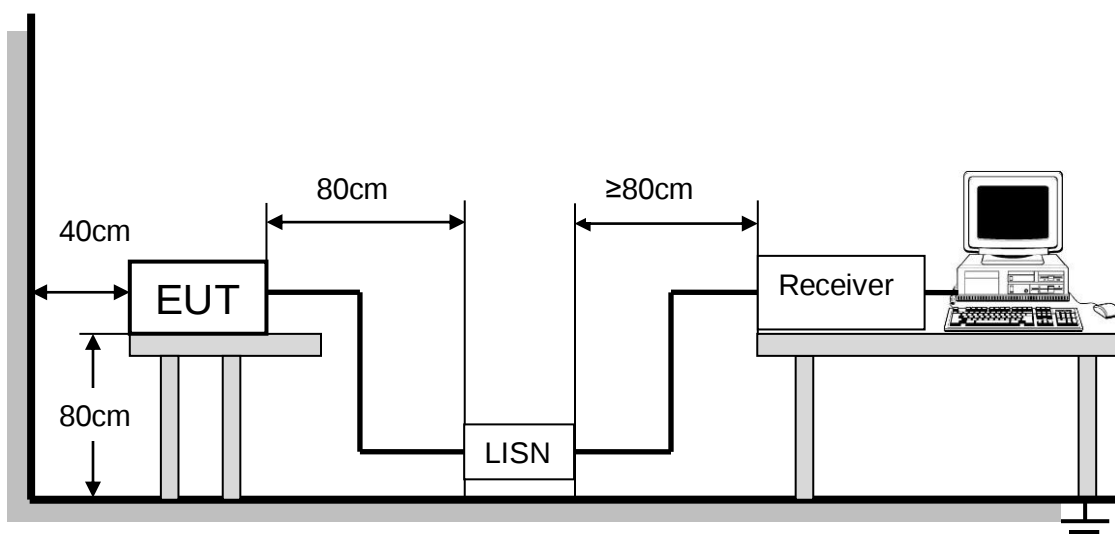

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10 -2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.


The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.



TEST RESULTS

9.1.1. Main Relay

LINE N RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)

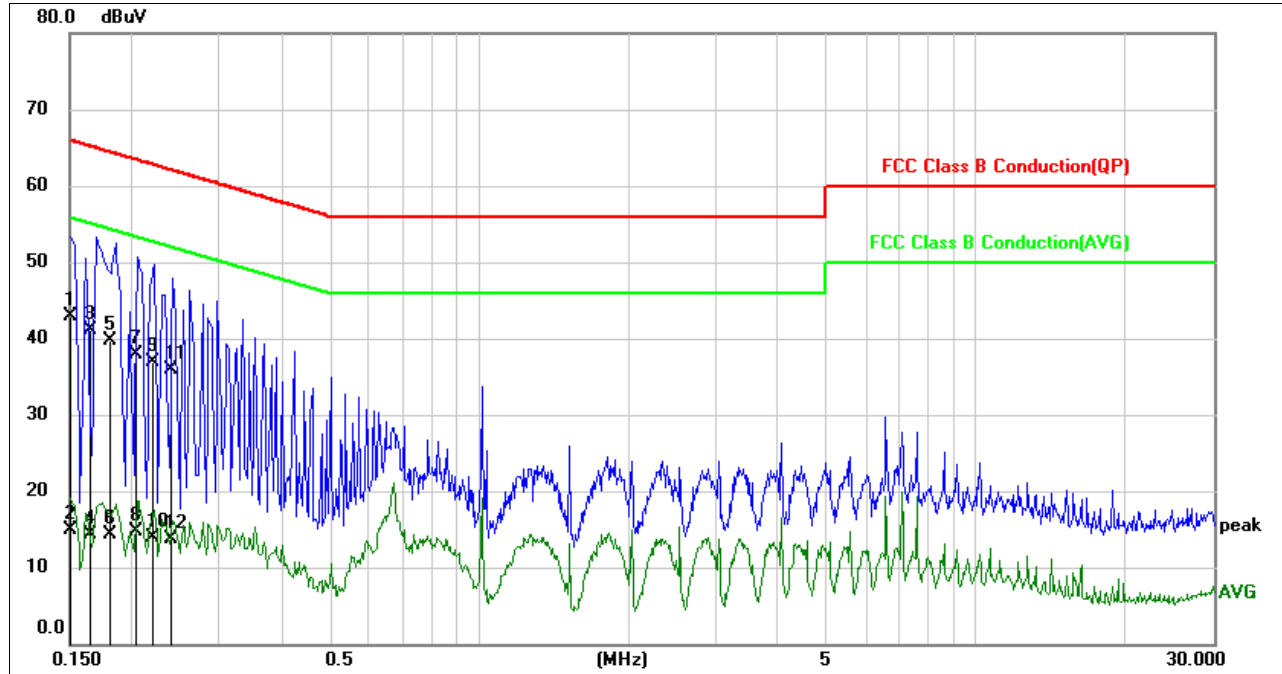

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1515	33.28	9.62	42.90	65.92	-23.02	QP
2	0.1515	5.20	9.62	14.82	55.92	-41.10	AVG
3	0.1654	31.55	9.62	41.17	65.19	-24.02	QP
4	0.1654	4.77	9.62	14.39	55.19	-40.80	AVG
5	0.1817	30.16	9.62	39.78	64.41	-24.63	QP
6	0.1817	4.66	9.62	14.28	54.41	-40.13	AVG
7	0.2031	28.25	9.62	37.87	63.48	-25.61	QP
8	0.2031	5.08	9.62	14.70	53.48	-38.78	AVG
9	0.2194	27.34	9.62	36.96	62.84	-25.88	QP
10	0.2194	4.19	9.62	13.81	52.84	-39.03	AVG
11	0.2382	26.23	9.63	35.86	62.16	-26.30	QP
12	0.2382	4.14	9.63	13.77	52.16	-38.39	AVG

Note: 1. Result = Reading +Correct Factor.


2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.



LINE L RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)

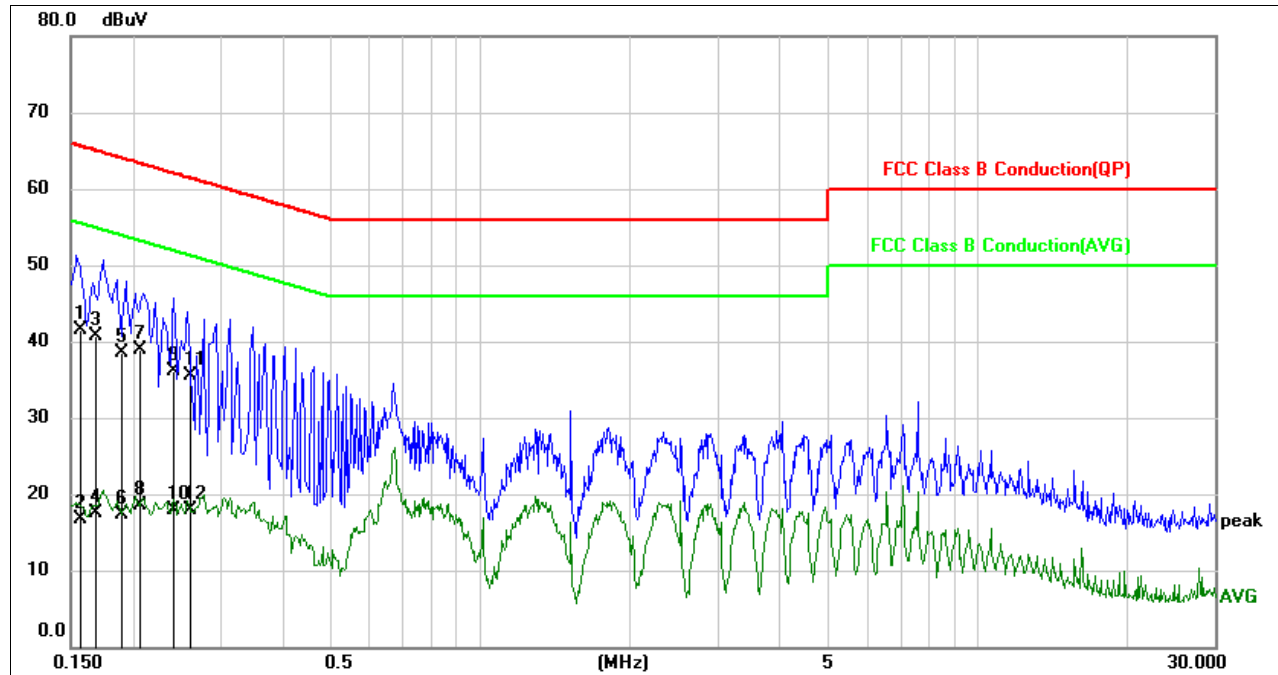


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1567	31.93	9.64	41.57	65.64	-24.07	QP
2	0.1567	7.11	9.64	16.75	55.64	-38.89	AVG
3	0.1692	31.16	9.63	40.79	65.00	-24.21	QP
4	0.1692	7.80	9.63	17.43	55.00	-37.57	AVG
5	0.1904	28.78	9.63	38.41	64.02	-25.61	QP
6	0.1904	7.60	9.63	17.23	54.02	-36.79	AVG
7	0.2064	29.25	9.63	38.88	63.35	-24.47	QP
8	0.2064	8.95	9.63	18.58	53.35	-34.77	AVG
9	0.2405	26.46	9.63	36.09	62.08	-25.99	QP
10	0.2405	8.32	9.63	17.95	52.08	-34.13	AVG
11	0.2608	25.93	9.63	35.56	61.41	-25.85	QP
12	0.2608	8.35	9.63	17.98	51.41	-33.43	AVG

- Note: 1. Result = Reading +Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Note: All the modes had been tested, but only the worst data were recorded in the report.

9.1.2. Alternative Relay

LINE N RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)

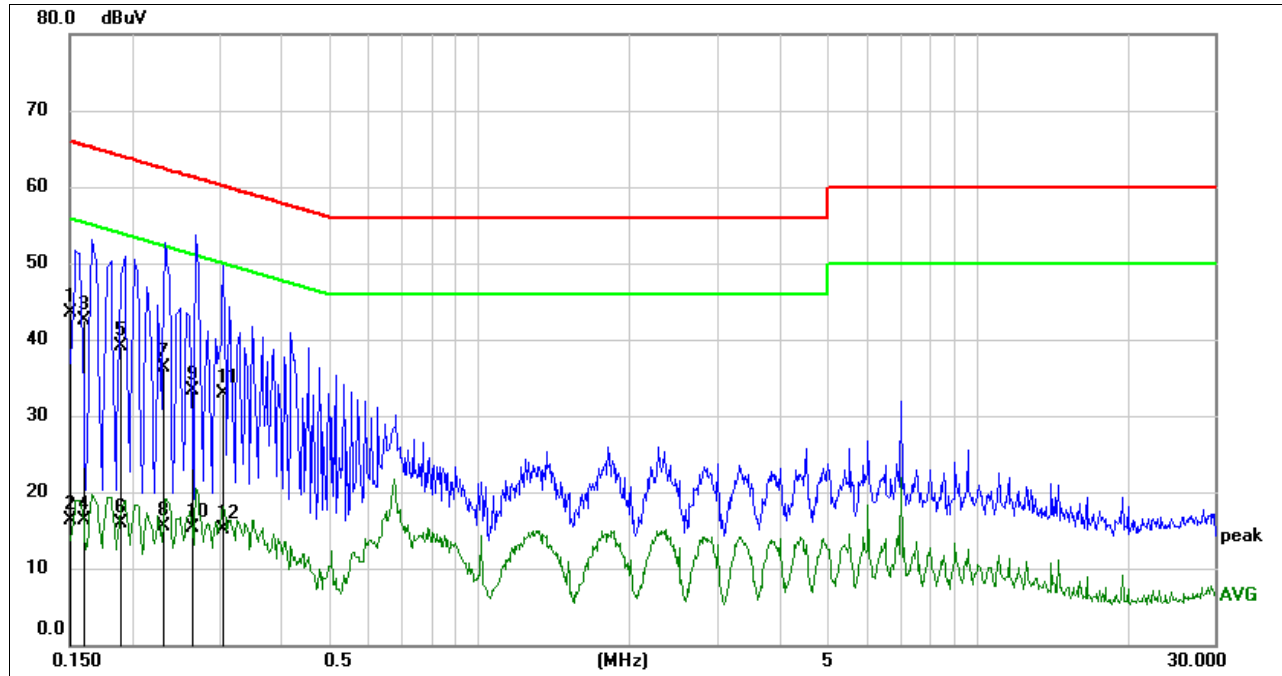

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1505	33.95	9.62	43.57	65.97	-22.40	QP
2	0.1505	6.65	9.62	16.27	55.97	-39.70	AVG
3	0.1618	32.87	9.62	42.49	65.37	-22.88	QP
4	0.1618	6.63	9.62	16.25	55.37	-39.12	AVG
5	0.1898	29.52	9.62	39.14	64.05	-24.91	QP
6	0.1898	6.22	9.62	15.84	54.05	-38.21	AVG
7	0.2314	26.65	9.63	36.28	62.40	-26.12	QP
8	0.2314	5.96	9.63	15.59	52.40	-36.81	AVG
9	0.2649	23.68	9.63	33.31	61.28	-27.97	QP
10	0.2649	5.76	9.63	15.39	51.28	-35.89	AVG
11	0.3038	23.30	9.62	32.92	60.14	-27.22	QP
12	0.3038	5.47	9.62	15.09	50.14	-35.05	AVG

Note: 1. Result = Reading +Correct Factor.


2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.



LINE L RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)

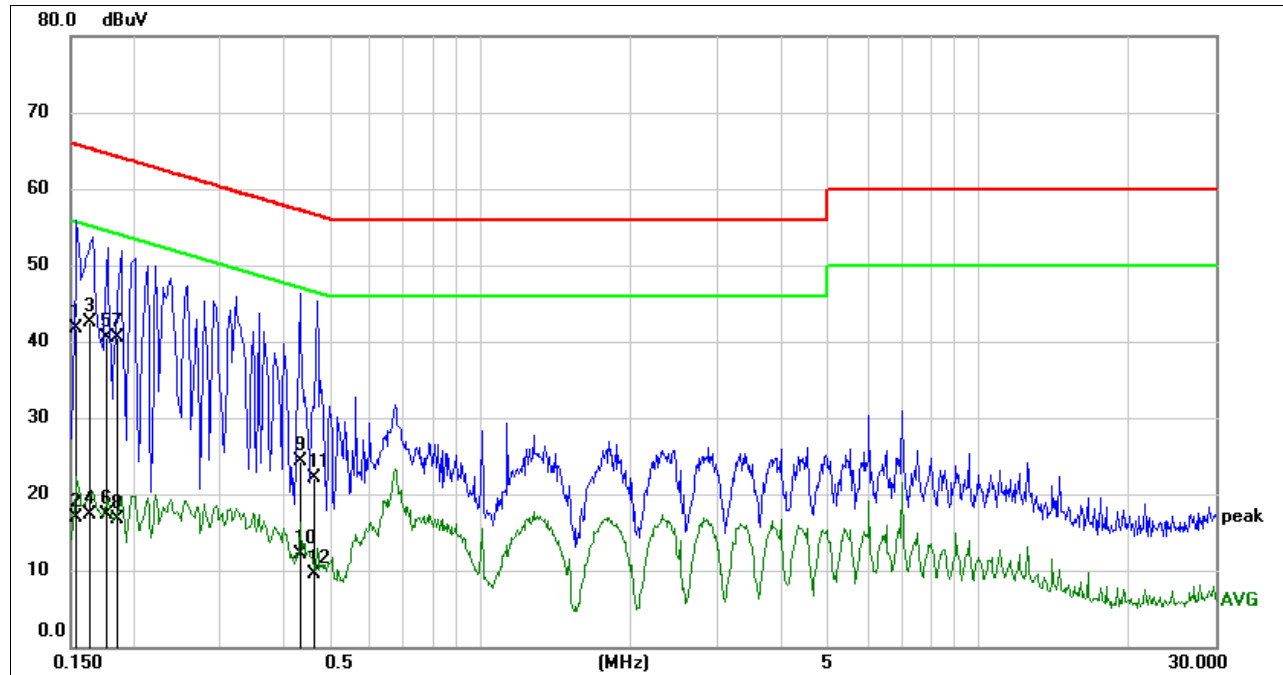

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1544	32.01	9.64	41.65	65.76	-24.11	QP
2	0.1544	7.22	9.64	16.86	55.76	-38.90	AVG
3	0.1640	32.79	9.63	42.42	65.26	-22.84	QP
4	0.1640	7.74	9.63	17.37	55.26	-37.89	AVG
5	0.1764	30.87	9.63	40.50	64.65	-24.15	QP
6	0.1764	7.77	9.63	17.40	54.65	-37.25	AVG
7	0.1853	30.97	9.63	40.60	64.24	-23.64	QP
8	0.1853	7.10	9.63	16.73	54.24	-37.51	AVG
9	0.4322	14.71	9.63	24.34	57.21	-32.87	QP
10	0.4322	2.51	9.63	12.14	47.21	-35.07	AVG
11	0.4655	12.55	9.63	22.18	56.59	-34.41	QP
12	0.4655	-0.17	9.63	9.46	46.59	-37.13	AVG

- Note: 1. Result = Reading +Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Note: All the modes had been tested, but only the worst data were recorded in the report.



10. ANTENNA REQUIREMENTS

Applicable requirements

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector

EUT has an internal antenna without antenna connector.

Antenna Gain

The antenna gain of EUT is less than 6 dBi.

END OF REPORT