

FCC Part 15B Compliance Test Report

Test Report no.:	FCC15B_RM-1071_04.docx	Date of Report:	27-Nov-2014
Number of pages:	11	Customer's Contact person:	Zhang David
Testing laboratory:	TCC Microsoft Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	Customer:	Microsoft Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
FCC listing no.:	975940		
IC recognition no.:	661AH-1		
Tested devices/ accessories:	Phone RM-1068 / Battery BV-5J / Charger AC-18E / Headset WH-108		
FCC ID:	PYA-VDB	IC:	
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), CISPR 22 and IC standards, RSS-GEN (Issue 3, December 2010), RSS-132 (Issue 3, January 2013), RSS-133 (Issue 6, January 2013). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Microsoft.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Gao Sherina, Engineer, EMC

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	31-Oct-2014
Testing completed	14-Nov-2014
The customer's contact person	Zhang David
Test Plan referred to	T:\Projects\RM-1068\TestPlan\RS_testplan_RM-1068.xlsm
Notes	-
Document name	FCC15B_RM-1068_07.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:
GSM/WCDMA/WLAN/Bluetooth
The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-1068	SIM1:004402740457407; SIM2:004402740457415	0100	-	02048.00000.14431.35000	54618
Battery	BV-5J	4955404426020108485;0670731	LG PWB Ver.1.0.	-	-	54627
Charger	AC-18E	4868674142320513785;0675695	-	-	-	54630
Headset	WH-108	3455r3R	-	-	-	54632

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in RSS-GEN	Name of the test	Result
15.107, a	7.2.4	AC powerline conducted emissions	NP
15.109, a	6.1	Radiated emissions	PASSED

GSM 1900:

Section in CFR 47	Section in RSS-GEN	Name of the test	Result
15.107, a	7.2.4	AC powerline conducted emissions	NP
15.109, a	6.1	Radiated emissions	PASSED

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Microsoft Laboratory.

The test results of PYARM-1068 are re-used for certification of the PYARM-1071. The table above indicates the results, which will be re-used.


CONTENTS

1. Summary for FCC Part 15B Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Radiated emissions (FCC 15.109, a, RSS-132 6.1, RSS-133 6.1).....	4
2.2. Test method and limit	4
2.3. GSM 850 test results; FM Radio on	6
2.4. GSM 1900 test results; GPS on	7
3. Test Equipment	9
3.1. Conducted measurements	9
3.2. Radiated measurements	9

2. Radiated emissions (FCC 15.109, a, RSS-132 6.1, RSS-133 6.1)

EUT with DUT number	RM-1068, DUT 54618
Accessories with DUT numbers	BV-5J, DUT 54627 ; AC-18E, DUT 54630 ; WH-108, DUT 54632
Operation Voltage [V] / [Hz]	115/60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20/42/102.5
Date of measurements	14-Nov-2014
Measured by	Dou Rubo

2.1.1 Test setup

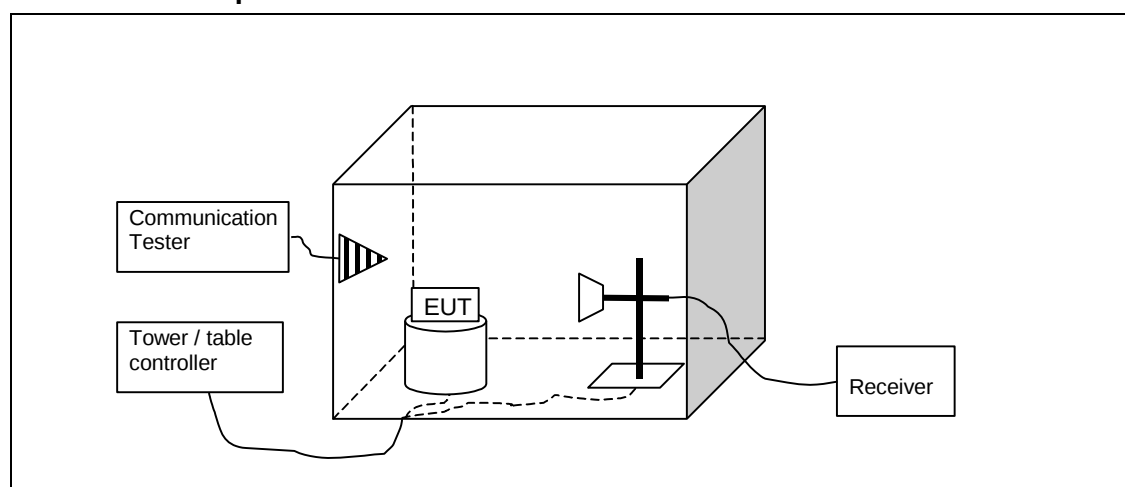

2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 - 230	40	-	-
230 – 1000	47	-	-
1000 - 3000	-	50	70
Above 3000	-	54	74

2.3. GSM 850 test results; FM Radio on

RX mode, channel 128 / 869.2 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
3475.2	40.82	109.901	42.12	-1.3	74	33.18	PASSED
6955.2	56.15	641.948	47.95	8.2	74	17.85	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
3475.2	27.87	24.746	29.17	-1.3	54	26.13	PASSED
6955.2	42.85	138.835	34.65	8.2	54	11.15	PASSED

RX mode, channel 190 / 881.6 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
30.63	17.03	7.104	30.93	-13.9	40	22.97	PASSED
36.24	12.71	4.32	30.21	-17.5	40	27.29	PASSED
38.188	15.88	6.223	34.68	-18.8	40	24.12	PASSED
38.284	14.31	5.194	33.21	-18.9	40	25.69	PASSED
39.065	23.29	14.605	42.69	-19.4	40	16.71	PASSED
43.826	6.21	2.044	28.81	-22.6	40	33.79	PASSED
51.17	10.36	3.296	37.96	-27.6	40	29.64	PASSED
53.831	5.35	1.851	34.45	-29.1	40	34.65	PASSED
54.302	5.72	1.932	35.12	-29.4	40	34.28	PASSED
97.986	30.95	35.278	57.45	-26.5	40	9.05	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
3527.9	40.91	111.045	41.71	-0.8	74	33.09	PASSED
7051.3	48.91	278.933	39.21	9.7	74	25.09	PASSED
7832.263	49.56	300.608	39.16	10.4	74	24.44	PASSED
7842.683	49.48	297.852	39.08	10.4	74	24.52	PASSED
7857.115	50.27	326.212	39.77	10.5	74	23.73	PASSED
7860.323	50.47	333.811	39.87	10.6	74	23.53	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
3527.9	28.11	25.439	28.91	-0.8	54	25.89	PASSED
7051.3	35.72	61.094	26.02	9.7	54	18.28	PASSED
7832.263	36.56	67.298	26.16	10.4	54	17.44	PASSED
7842.683	36.63	67.842	26.23	10.4	54	17.37	PASSED
7857.115	36.84	69.502	26.34	10.5	54	17.16	PASSED
7860.323	36.87	69.743	26.27	10.6	54	17.13	PASSED

RX mode, channel 251 / 893.8 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
3574.3	40.83	110.027	41.83	-1	74	33.17	PASSED
7150.5	49.42	295.801	39.52	9.9	74	24.58	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
3574.3	27.84	24.66	28.84	-1	54	26.16	PASSED
7150.5	35.77	61.447	25.87	9.9	54	18.23	PASSED

2.4. GSM 1900 test results; GPS on

RX mode, channel 512 / 1930.2 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
3861.1	41.04	112.72	41.54	-0.5	74	32.96	PASSED
7719.2	48.67	271.331	38.67	10	74	25.33	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
3861.1	28.15	25.556	28.65	-0.5	54	25.85	PASSED
7719.2	35.93	62.589	25.93	10	54	18.07	PASSED

RX mode, channel 661 / 1960.0 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
30.3	17.72	7.691	31.42	-13.7	40	22.28	PASSED
30.81	16.74	6.871	30.74	-14	40	23.26	PASSED
33.339	13.56	4.764	29.16	-15.6	40	26.44	PASSED
33.75	15.92	6.252	31.82	-15.9	40	24.08	PASSED
42.306	11.18	3.622	32.78	-21.6	40	28.82	PASSED
49.31	9.07	2.841	35.47	-26.4	40	30.93	PASSED
51.223	10.39	3.308	37.99	-27.6	40	29.61	PASSED
52.092	12.11	4.032	40.21	-28.1	40	27.89	PASSED
53.079	10.08	3.192	38.78	-28.7	40	29.92	PASSED
83.153	0.15	1.017	27.75	-27.6	40	39.85	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
3921.4	41.15	114.156	41.65	-0.5	74	32.85	PASSED
7830.66	49.45	296.825	39.05	10.4	74	24.55	PASSED
7838.8	50.34	328.852	39.94	10.4	74	23.66	PASSED
7847.996	49.9	312.608	39.5	10.4	74	24.1	PASSED
7856.61	50.49	334.58	39.99	10.5	74	23.51	PASSED
7862.529	50.87	349.543	40.27	10.6	74	23.13	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
3921.4	27.77	24.462	28.27	-0.5	54	26.23	PASSED
7830.66	36.56	67.298	26.16	10.4	54	17.44	PASSED
7838.8	36.6	67.608	26.2	10.4	54	17.4	PASSED
7847.996	36.65	67.999	26.25	10.4	54	17.35	PASSED
7856.61	36.84	69.502	26.34	10.5	54	17.16	PASSED
7862.529	36.94	70.307	26.34	10.6	54	17.06	PASSED

RX mode, channel 810 / 1989.8 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
3980.2	40.72	108.643	41.12	-0.4	74	33.28	PASSED
7958	50.82	347.536	39.72	11.1	74	23.18	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
3980.2	27.51	23.741	27.91	-0.4	54	26.49	PASSED
7958	37.07	71.367	25.97	11.1	54	16.93	PASSED

3. Test Equipment

3.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCHW0020	DC Power supply	HP6632B	HP	22/24/27, 15C
BJPCPT0040	Receiver	ESCS30	R&S	15C, 15B
BJPCPT0069	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
BJPCTC0323	Signal Generator	SMR 27	R&S	22/24/27, 15C, 15B
BJPCPT0073	Signal Generator	SMR 20	R&S	22/24/27, 15C, 15B
BJPCPT0191	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
BJPCPT0208	UPS	PULSAR RX10	Merlin gerin	15C, 15B
BJPCTC0001	DIGITAL CAMERA	PC1015	CANON	15C, 15R
BJPCTC0017	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0062	AC Power source	6812B	HP	15C, 15B
BJPCTC0067	Bluetooth Tester	CBT	R&S	22/24/27, 15C
BJPCTC0082	Humidity and Temperature Sensor	175-H2	Testo	15B, 15C
BJPCTC0088	Absolut pressure meter	testo 511	Testo	22/24/27, 15B, 15C
BJPCTC0089	Temperature Test chamber	VT4002	Votsch industrietechnik	22/24/27, 15C
BJPCTC0090	FSP spectrum analyzer	FSP30	R&S	22/24/27, 15C
BJPCTC0094	GPIO-RS232 convertor	GPIO-RS232	NI	22/24/27, 15C
BJPCTC0112	Power Splitter	11667B	Agilent	22/24/27, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C
BJPCTC0127	AC Power source	SOYI-500VA	SOYI	15B, 15C
BJPCTC0128	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27, 15B, 15C
BJPCTC0129	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27, 15B, 15C
BJPCTC0131	Communication tester	CMW500	R&S	22/24/27, 15B, 15C
BJPCTC0136	Communication antenna	JXTXLB-880-NF	A-INFOMW	15B, 15C
BJPCTC0306	Power Splitter	11667B	Agilent	22/24/27, 15C
BJPCTC0305	GPIO converter	GPIO-RS232	NI	22/24/27, 15C
BJPCTC0304	Spectrum Analyser	FSV30	R&S	22/24/27, 15C
BJPCTC0309	GPIO-RS232 convertor	RS232	NI	22/24/27, 15C
BJPCTC0307	Dual channel battery/charger simulator	2306	KEITHLEY	22/24/27, 15C
BJPCTC0308	Dual channel battery/charger simulator	2306	KEITHLEY	22/24/27, 15C
BJPCTC0352	Signal Generator 20GHz	MG3692B	Anritsu	22/24/27, 15C
BJBDATC0169	Temperature Test chamber	VT4002	Votsch	22/24/27, 15C
BJPCTC0334	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0342	Communication Tester	CMU200	R&S	15B, 15C
BJPCTC0343	Power Splitter	1167A	Agilent	EN300328
BJPCTC0344	Power Splitter	1167A	Agilent	EN300328
BJPCTC0345	Power Splitter	1167A	Agilent	EN300328
BJPCTC0346	Attenuator	8496A	Agilent	EN300328
BJPCTC0347	Directional Coupler	4226-20	Narda	EN300328
BJPCTC0348	Signal generator	E4438C	Agilent	EN300328
BJPCTC0336	Signal Generator	SMP22	R&S	22/24/27, 15C

3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCPT0072	Receiver	ESI B26	R&S	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
BJPCPT0150	High Pass Filter	WHKS1200-10SS	Wainwright	22/24/27, 15C, 15B
BJPCPT0151	Band Reject Filter	WRCD1880/2000-0.2/40-5SSK	Wainwright	24, 15B
BJPCPT0154	Band Reject Filter	WRCT2402/2480-2400/2483.5-30-20SS	Wainwright	15C, 15B
BJPCPT0166	Antenna	VUBA 9117	Swarzbeck	22/24/27
BJPCPT0208	UPS	PULSAR RX10	Merlin gerin	15C, 15B
BJPCTC0001	DIGITAL CAMERA	PC1015	CANON	15C, 15R
BJPCTC0007	Antenna	HL562	R&S	22/24/27, 15C, 15B
BJPCTC0029	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0034	Band Reject Filter	WRCT 800/880-0.2/40-5SSK	Wainwright	22, 15B
BJPCTC0049	Preamplifier	Blma 0118-1A-Bt	Bonn	22/24/27, 15C, 15B
BJPCTC0055	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0058	Bluetooth Tester	CBT	R&S	15C, 15B
BJPCTC0062	AC Power source	6812B	Hp	15C, 15B
BJPCTC0064	Band Reject Filter	WRCG1877/1883-1870/1890-40/6SS	Wainwright	24, 15B
BJPCTC0071	Multi-Device Controller	2090	EMCO	22/24/27, 15C, 15B
BJPCTC0072	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	ETS	22/24/27, 15C, 15B
BJPCTC0073	MAST	Model-TR/POL	ETS	22/24/27, 15C, 15B
BJPCTC0074	MAST	Model 2070-2	ETS	22/24/27, 15C, 15B
BJPCTC0075	Turntable	Model 2188	ETS-EMCO	22/24/27, 15C, 15B
BJPCTC0081	Humidity and Temperature Sensor	175-H2	Testo	15B, 15C
BJPCTC0088	Absolut pressure meter	testo 511	Testo	22/24/27, 15B, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C
BJPCTC0124	Attenuator	SA18N200W-40	Fairview Microwave	-
BJPCTC0125	Loop Antenna	HFH2-Z2	R&S	15C
BJPCTC0126	Tripod	FHU-Z	R&S	15C
BJPCTC0128	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0129	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0131	Communication tester	CMW500	R&S	22/24/27 15B 15C
BJPCTC0133	Open Swith and contril unit	OSP 150	R&S	15B, 15C
BJPCTC0134	Open Swith and contril unit	OSP 150	R&S	15B, 15C
BJPCTC0135	Open Swith and contril unit	OSP 130	R&S	15B, 15C
BJPCTC0136	Communication antenna	JXTXLB-880-NF	A-INFOMW	15B 15C
BJPCTC0171	Broad-band Horn Antenna	BBHA9120 D	SCHWARZBECK MESS - ELEKTRONIK	22/24/27, 15C, 15B
BJPCTC0310	Horn Antenna	QSH20SMA	Q-par	22/24/27, 15C, 15B
BJPCTC0311	Horn Antenna	QSH18SMA	Q-par	22/24/27, 15C, 15B
BJPCTC0312	Relay Switch Unit	-	-	22/24/27, 15C, 15B
BJPCTC0313	High Pass Filter	WHKX1.0/15G-12SS	Wainwright	22/24/27, 15C, 15B
BJPCTC0314	High Pass Filter	WHKX8.0/18G-88SS	Wainwright	22/24/27, 15C, 15B
BJPCTC0315	High Pass Filter	WHKX3.0/18G-12SS	Wainwright	22/24/27, 15C, 15B
BJPCTC0316	Preamplifier	AMT-5F-18002550-25-108	-	22/24/27, 15C, 15B
BJPCTC0317	Preamplifier	AMF-6D-02001800-29-20P	-	22/24/27, 15C, 15B
BJPCTC0350	Preamplifier	AMF-4D-01000800-30-29P	Miteq	22/24/27, 15C, 15B
BJPCTC0324	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B
BJPCTC0329	Relay Switch Unit	-	-	22/24/27, 15C, 15B
BJPCTC0334	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0342	Communication Tester	CMU200	R&S	15B, 15C
BJPCTC0349	Preamplifier	AMF-4D-01000800-30-79P	Miteq	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
BJPCTC0350	Preamplifier	AMF-4D-01000800-30-29P	Miteg	22/24/27, 15C, 15B
BJPCTC0351	Preamplifier	AFS4-00101800	-	22/24/27, 15C, 15B