

Test Plot1#: GSM 850_Head Left Cheek_Middle**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 42.448$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(9.88, 9.88, 9.88) @836.6 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.228 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.324 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.267 W/kg

SAR(1 g) = 0.197 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.238 W/kg

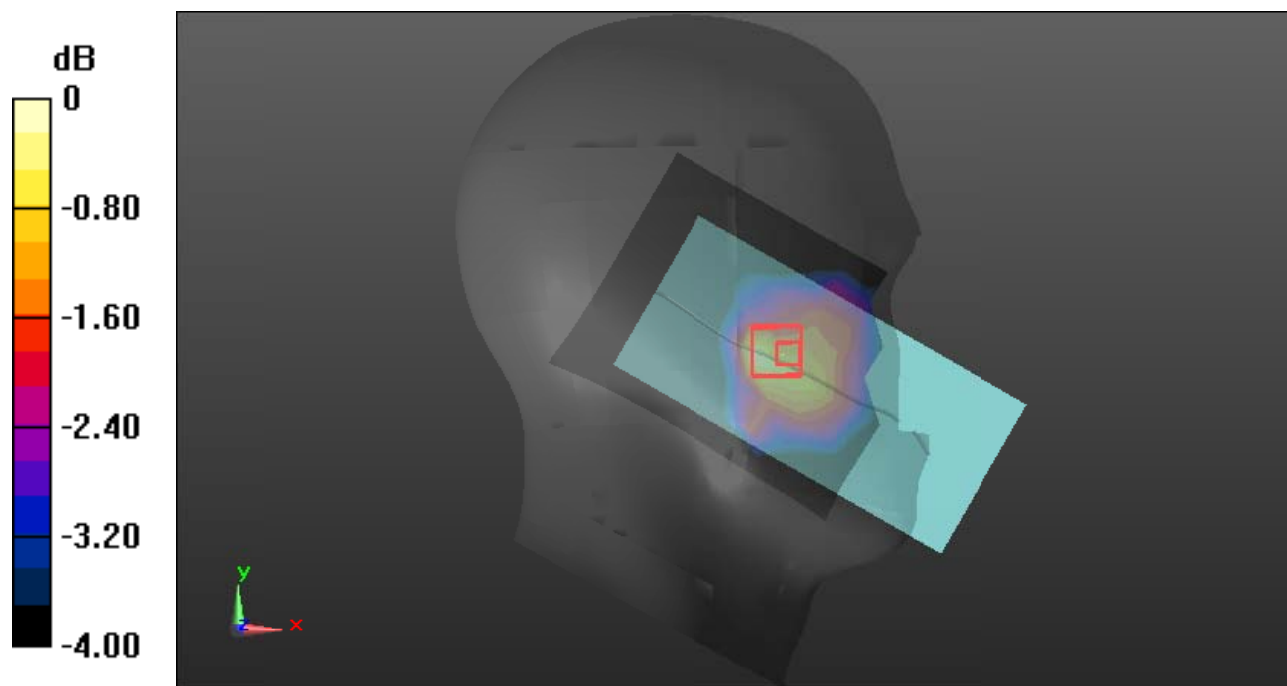

0 dB = 0.238 W/kg = -6.23 dB dBW/kg

Test Plot2#: GSM 850_Body Worn Back_High**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic GSM (0); Frequency: 848.8 MHz; Duty Cycle: 1:8
 Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 42.313$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(9.88, 9.88, 9.88) @848.8 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (8x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.660 W/kg


Zoom Scan (6x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.79 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.890 W/kg

SAR(1 g) = 0.508 W/kg; SAR(10 g) = 0.288 W/kg

Maximum value of SAR (measured) = 0.743 W/kg

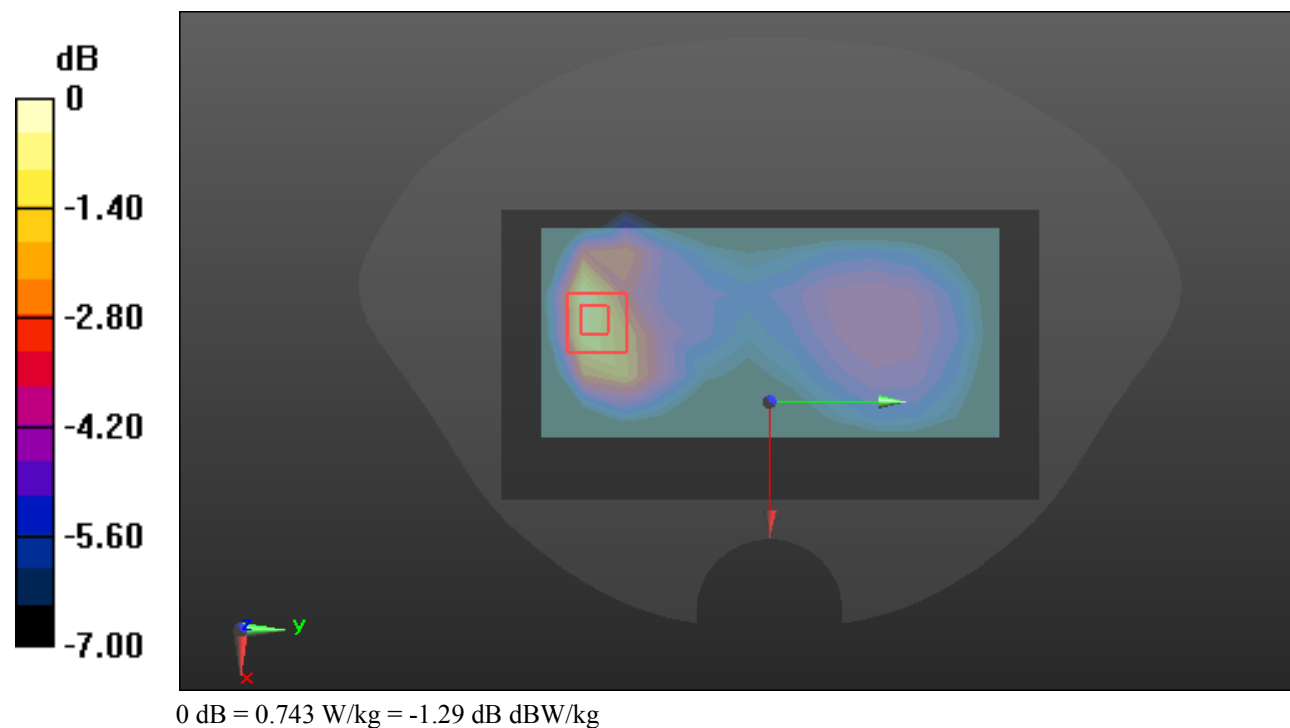

Test Plot3#: PCS 1900_Head Right Cheek_Low**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic GPRS-3 slots; Frequency: 1850.2 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f=1850.2$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 40.132$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.92, 7.92, 7.92) @1850.2 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.507 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.187 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.340 W/kg; SAR(10 g) = 0.199 W/kg

Maximum value of SAR (measured) = 0.637 W/kg

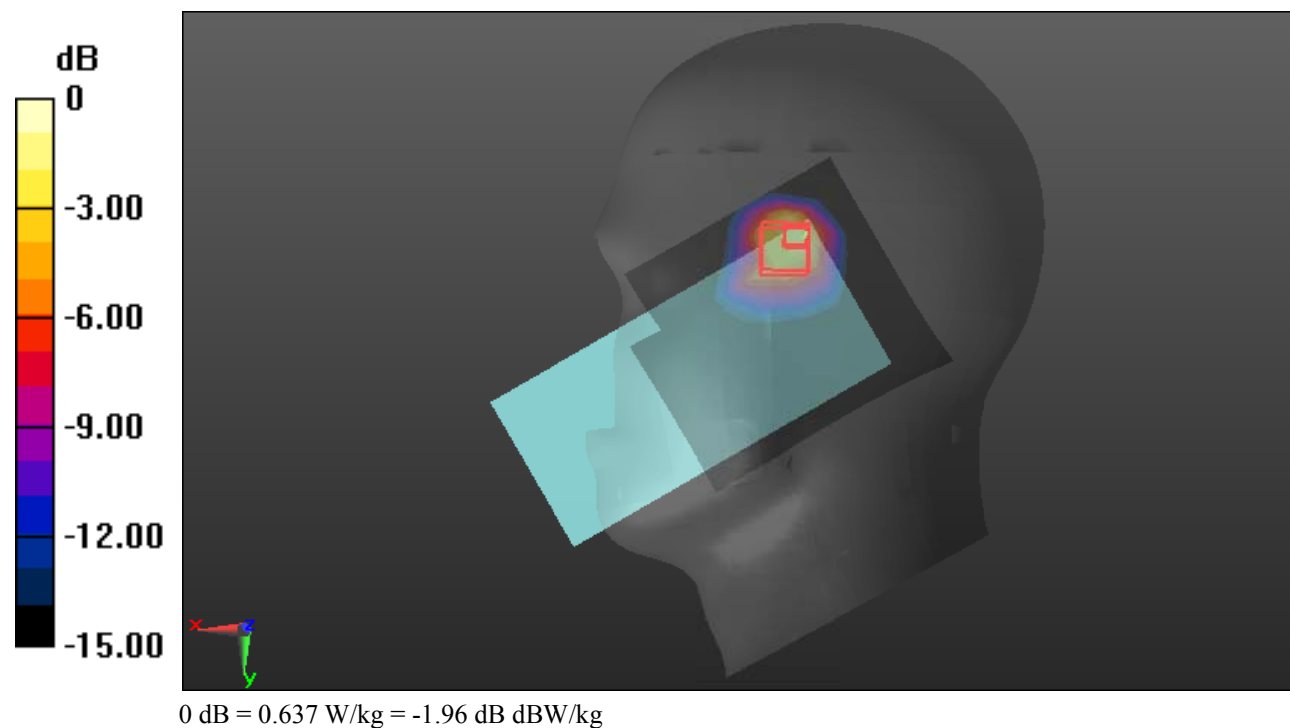

Test Plot4#: PCS 1900_Body Worn Back_Low**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1:8
 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 40.132$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.92, 7.92, 7.92) @1850.2 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.254 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.102 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.267 W/kg

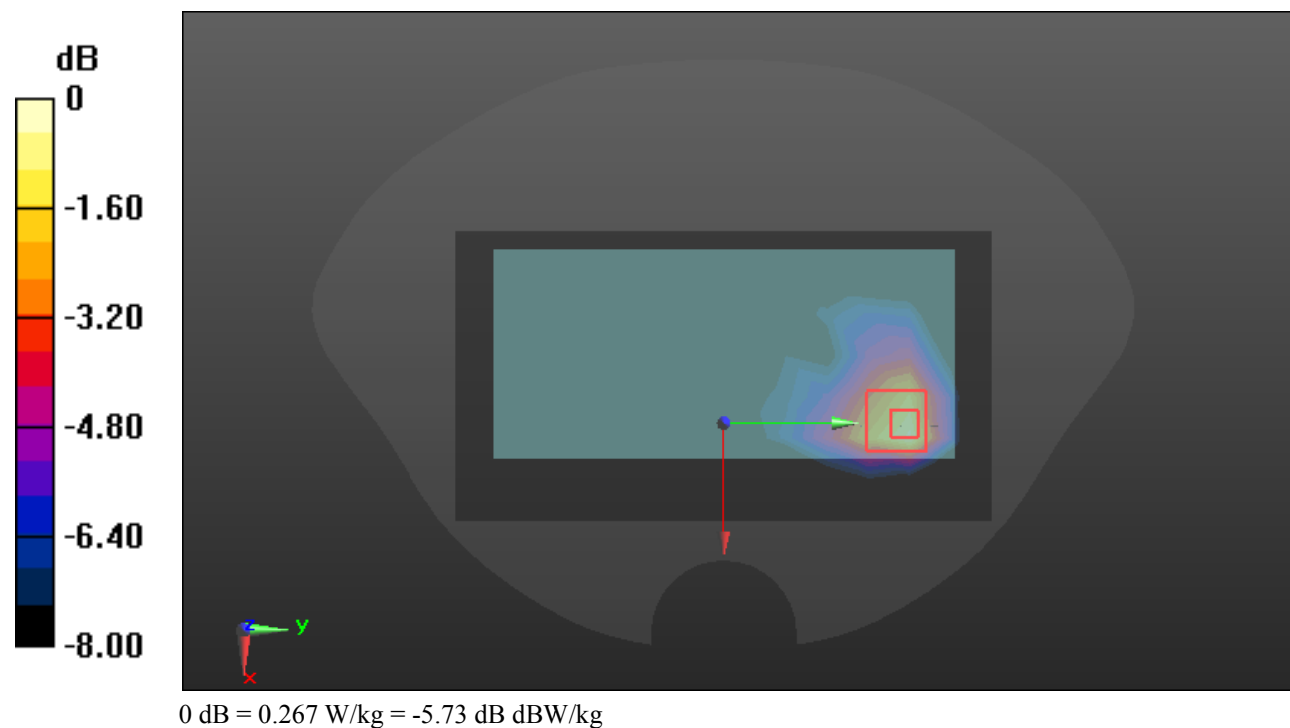

Test Plot5#: WCDMA Band 2_Head Right Cheek_Middle**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f=1880$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 39.868$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.92, 7.92, 7.92) @1880 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.709 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.27 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.269 W/kg

Maximum value of SAR (measured) = 0.909 W/kg

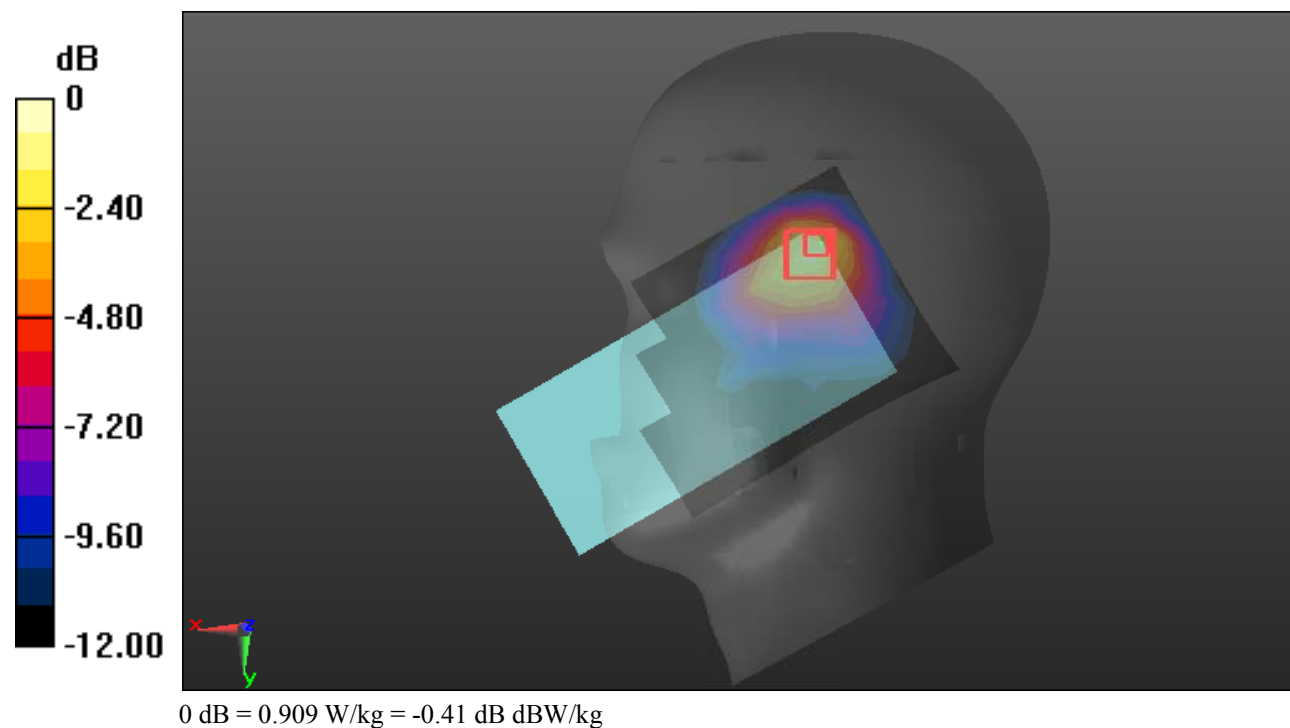

Test Plot6#: WCDMA Band 2_Body Back_Low**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 40.424$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.92, 7.92, 7.92) @1852.4 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.273 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.311 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.482 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.126 W/kg

Maximum value of SAR (measured) = 0.392 W/kg

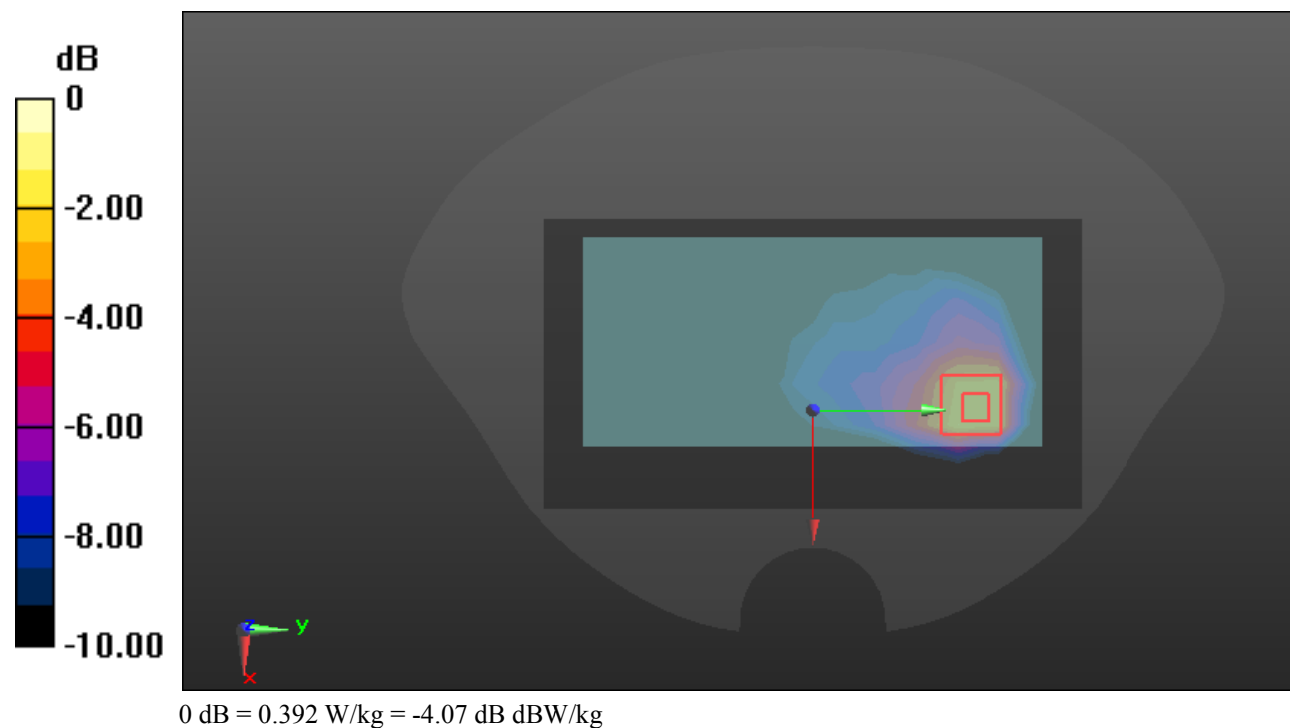

Test Plot7#: WCDMA Band 4_Head Right Cheek_Middle**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.362$ S/m; $\epsilon_r = 41.461$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(8.28, 8.28, 8.28) @1732.6 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.600 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.17 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.248 W/kg

Maximum value of SAR (measured) = 0.664 W/kg

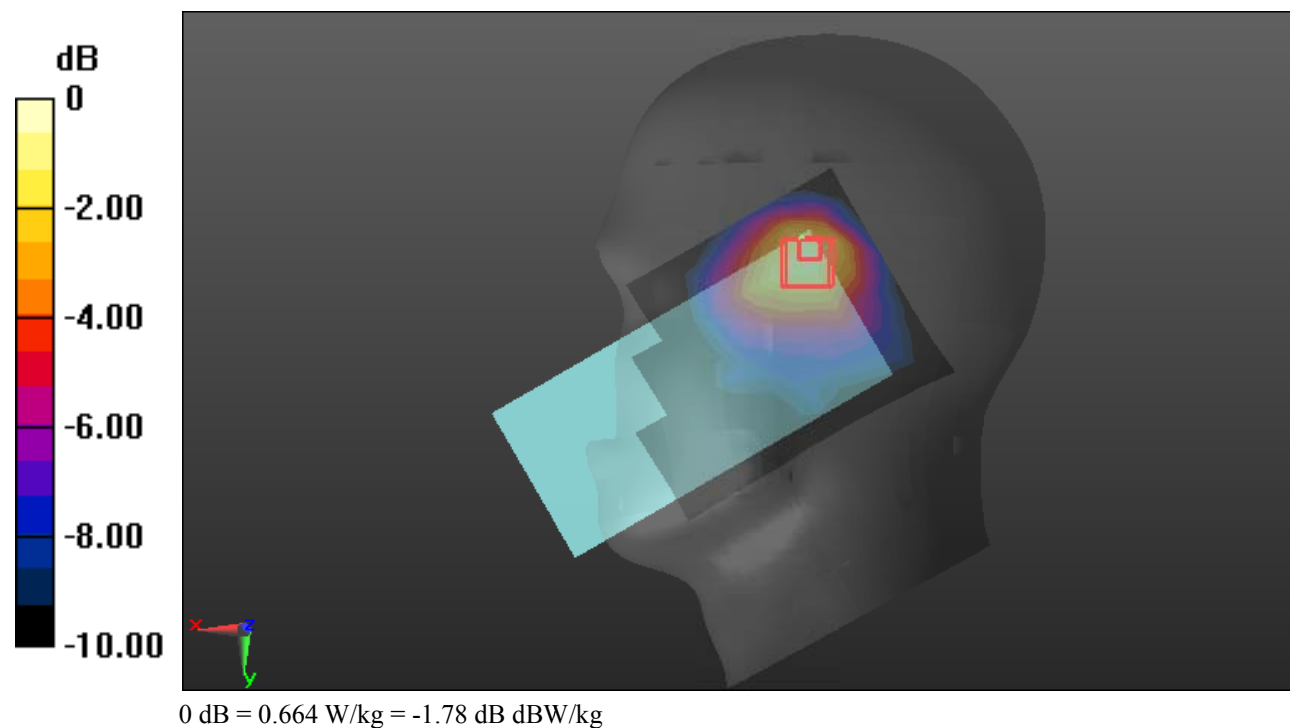

Test Plot8#: WCDMA Band 4_Body Back_High**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.381$ S/m; $\epsilon_r = 41.092$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(8.28, 8.28, 8.28) @1752.6 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.249 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.765 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.432 W/kg

SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.344 W/kg

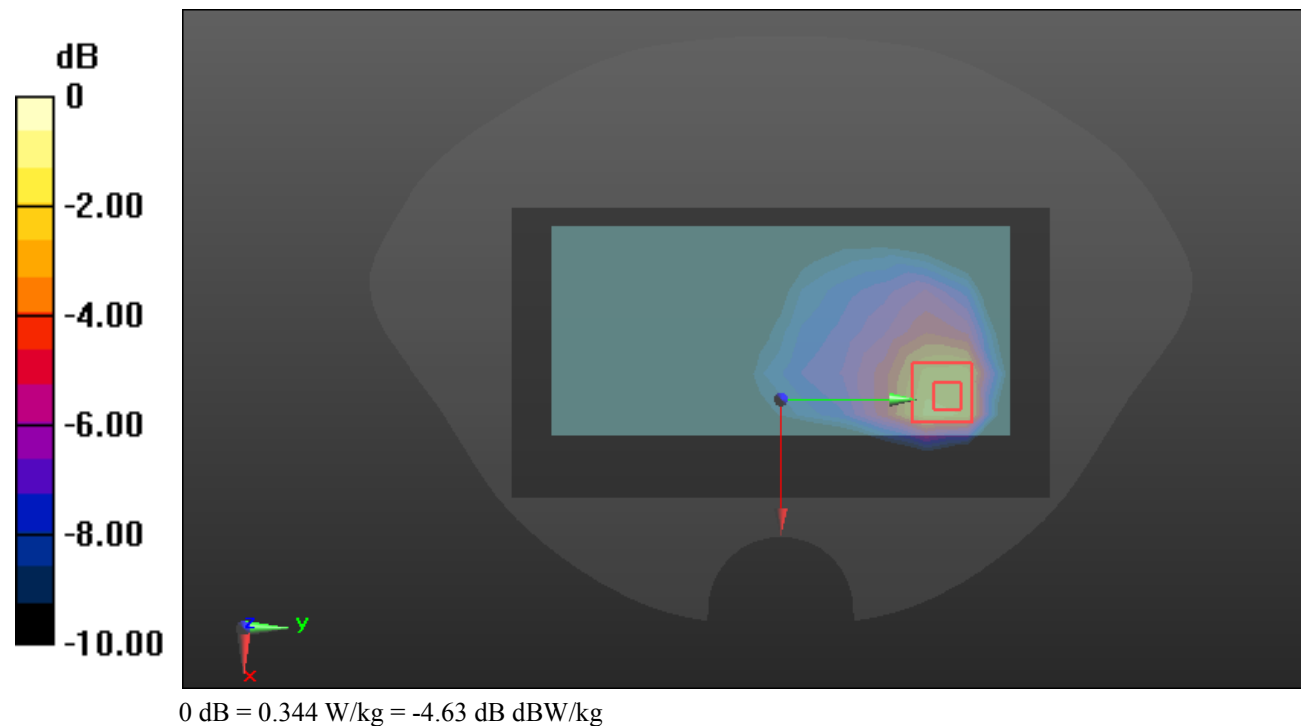

Test Plot9#: WCDMA Band 5_Head Left Cheek_Middle**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 42.448$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(9.88, 9.88, 9.88) @836.6 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.242 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.344 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.271 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.247 W/kg

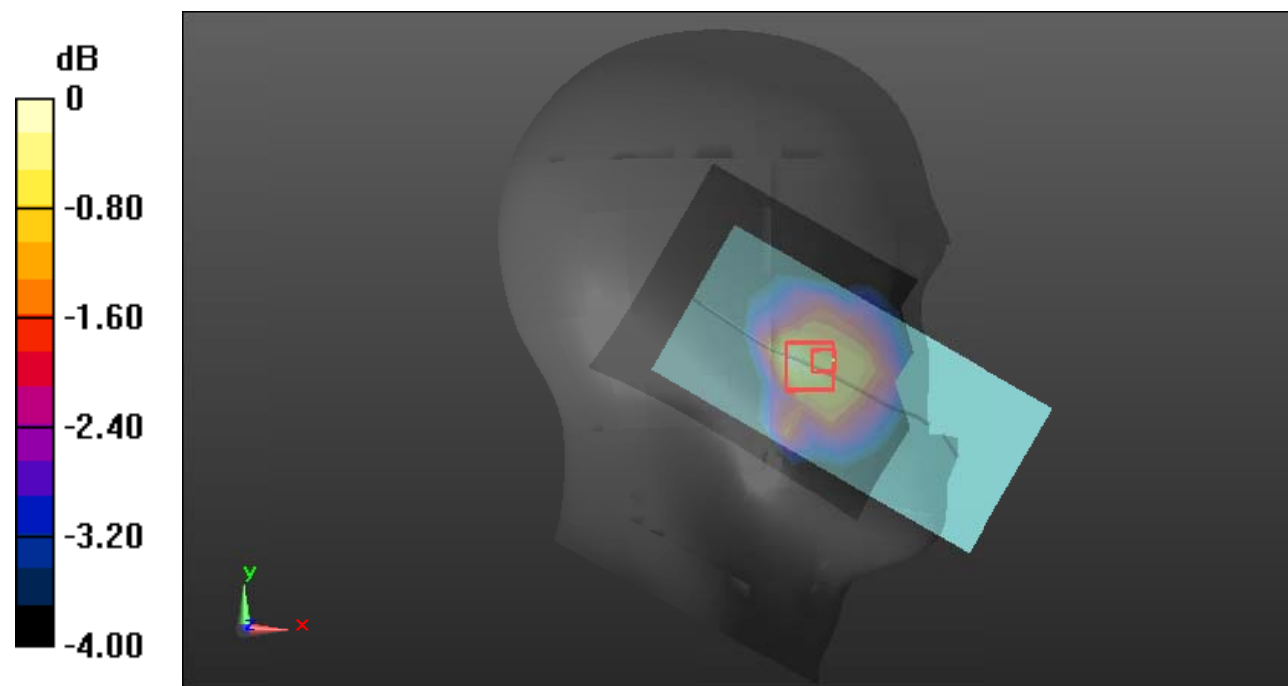

0 dB = 0.247 W/kg = -6.07 dB dBW/kg

Test Plot10#: WCDMA Band 5_Body Back_High**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.397$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(9.88, 9.88, 9.88) @846.6 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.467 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.50 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.623 W/kg

SAR(1 g) = 0.356 W/kg; SAR(10 g) = 0.201 W/kg

Maximum value of SAR (measured) = 0.525 W/kg

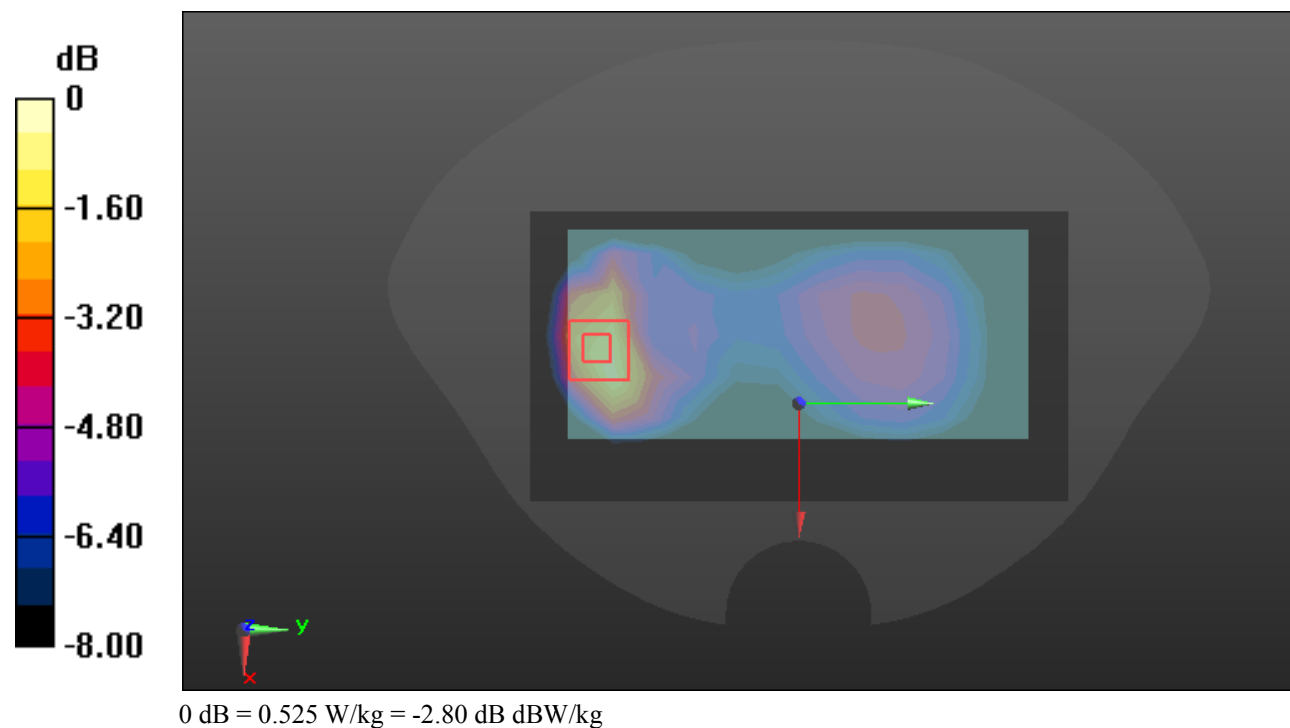

Test Plot11#: LTE Band 2_Head Right Cheek_1RB_Low**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic FDD-LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1415$ S/m; $\epsilon_r = 39.968$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.92, 7.92, 7.92) @1860 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.954 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.55 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.666 W/kg; SAR(10 g) = 0.366 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

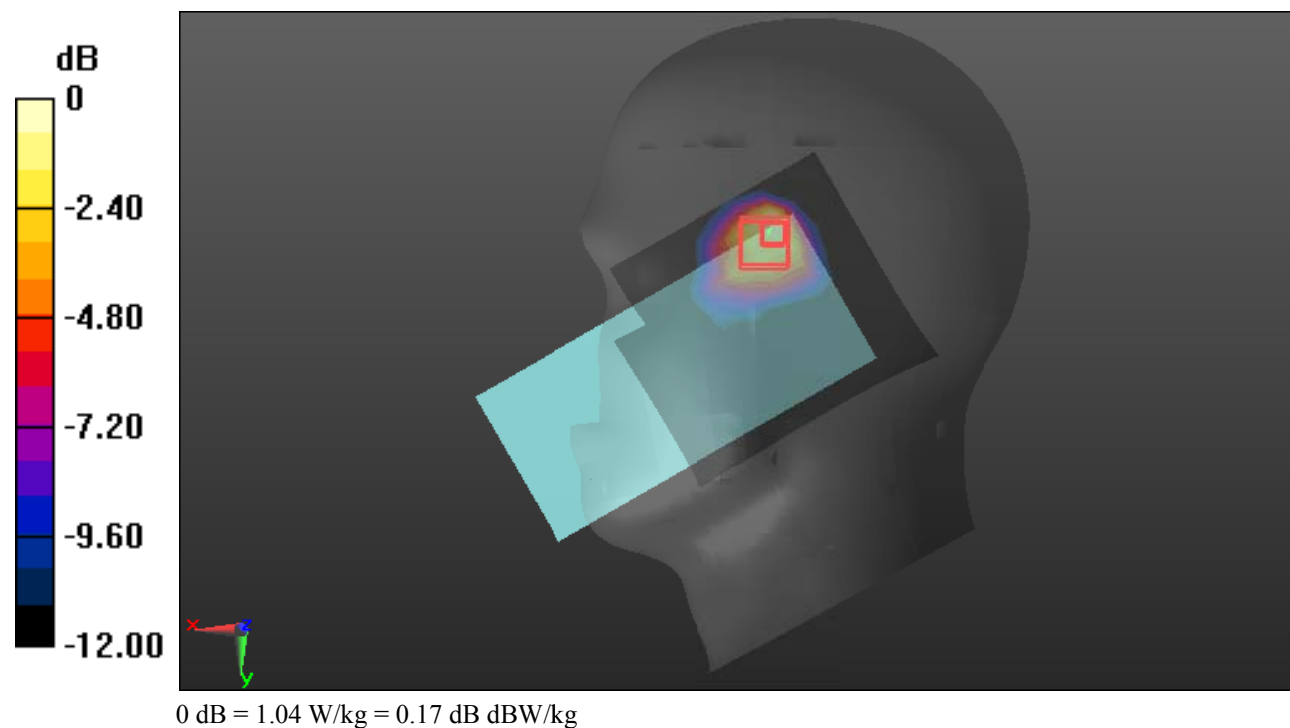

Test Plot12#: LTE Band 2_Body Back_1RB_Middle**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.421$ S/m; $\epsilon_r = 39.736$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.92, 7.92, 7.92) @1880 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.430 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.097 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.619 W/kg

SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.181 W/kg

Maximum value of SAR (measured) = 0.500 W/kg

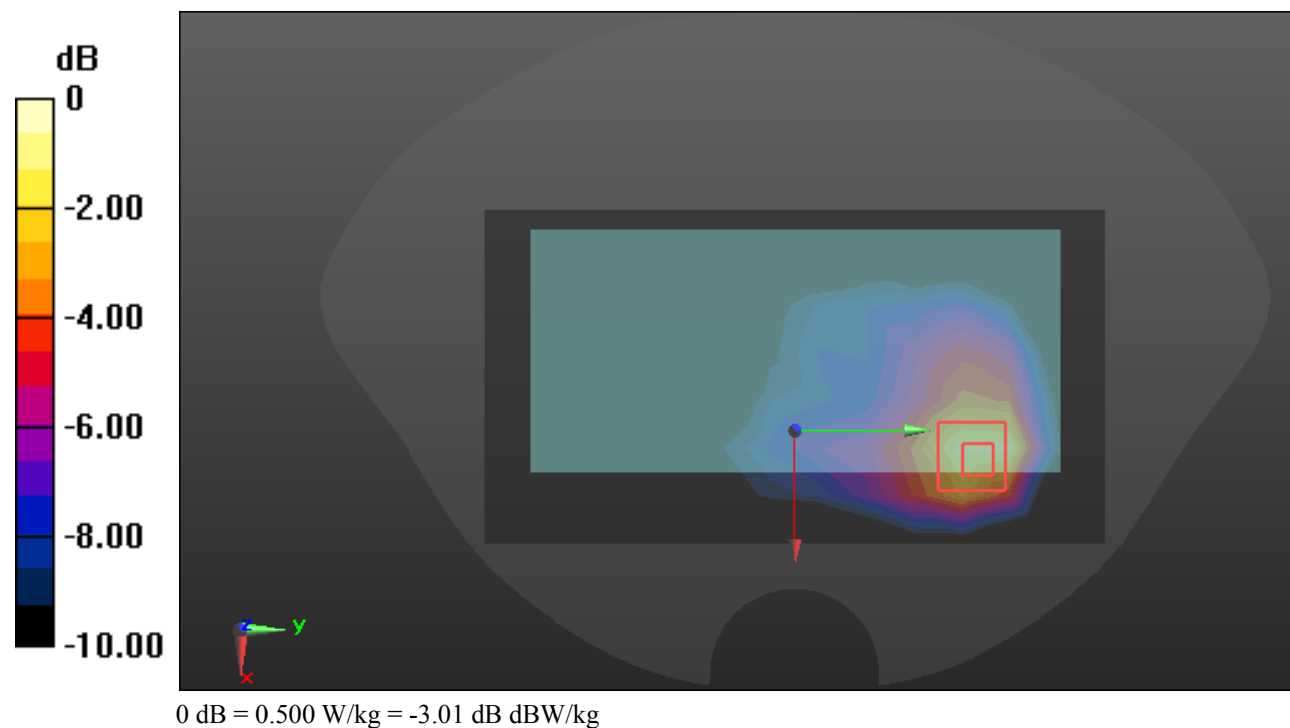

Test Plot13#: LTE Band 5_Head Left Cheek_1RB_High**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic FDD-LTE (0); Frequency: 844 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 844$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 42.286$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(9.88, 9.88, 9.88) @844 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.148 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.975 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.189 W/kg

SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.175 W/kg

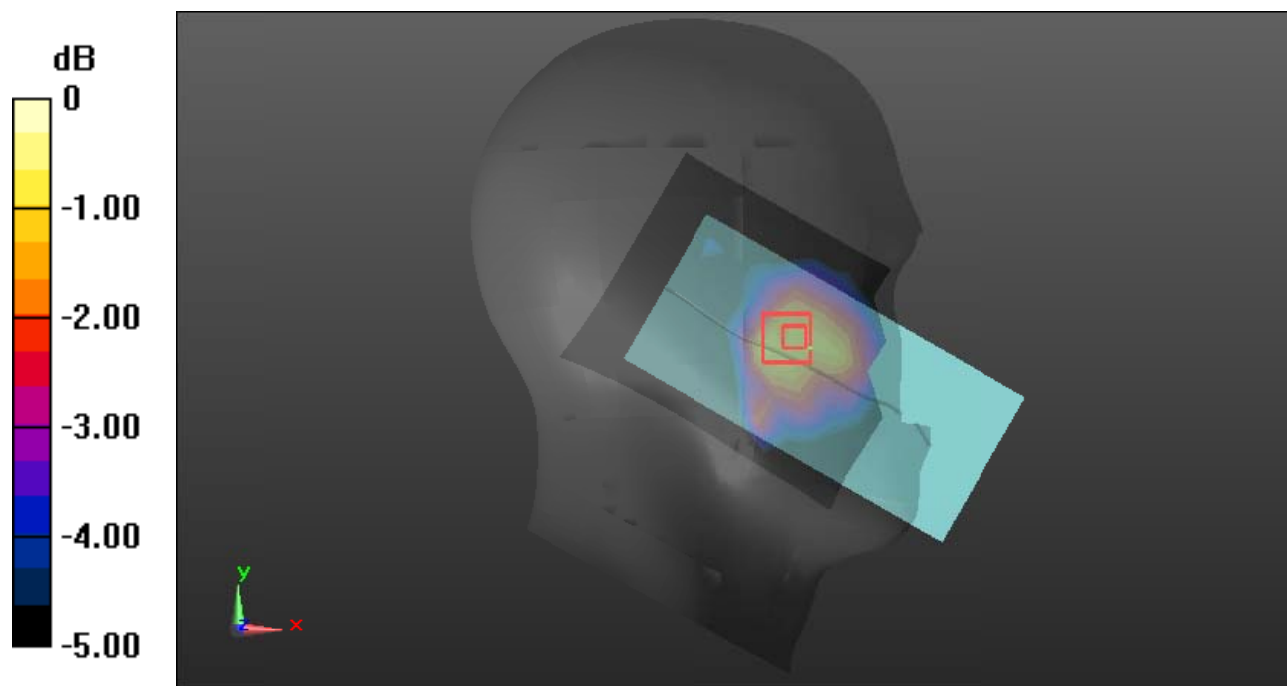

0 dB = 0.175 W/kg = -7.57 dB dBW/kg

Test Plot14#: LTE Band 5_Body Back_1RB_Low**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic FDD-LTE (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 42.478$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(9.88, 9.88, 9.88) @829 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.556 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.22 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.840 W/kg

SAR(1 g) = 0.480 W/kg; SAR(10 g) = 0.270 W/kg

Maximum value of SAR (measured) = 0.696 W/kg

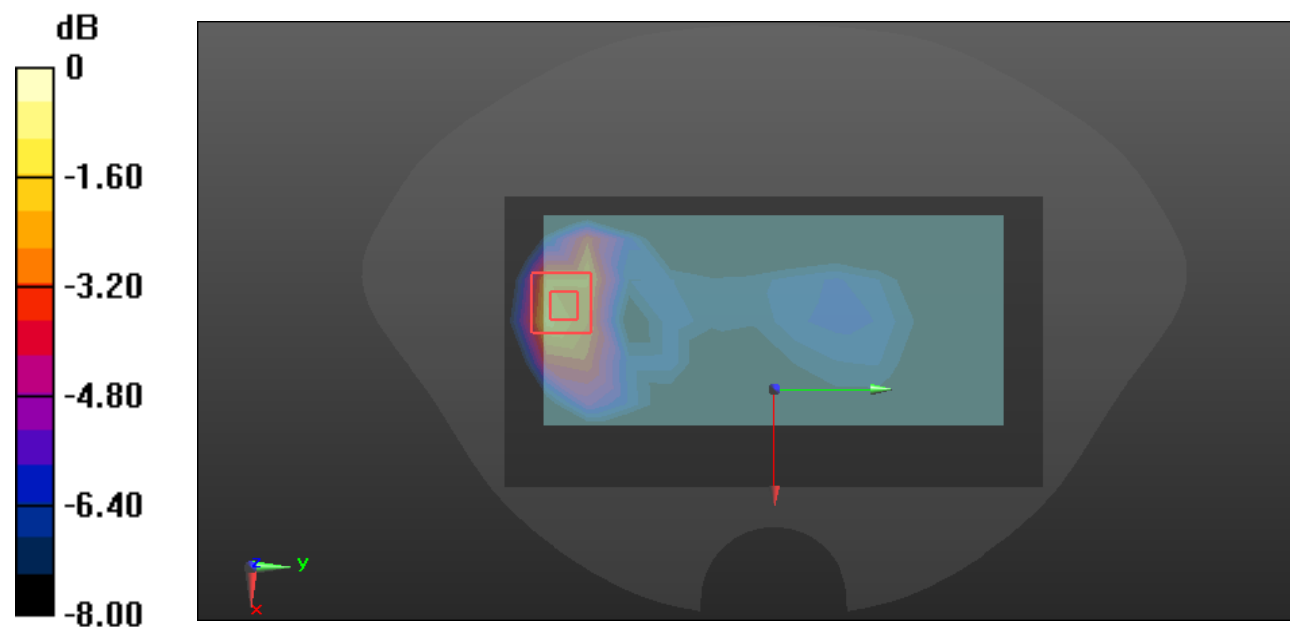

0 dB = 0.696 W/kg = -1.57 dB dBW/kg

Test Plot15#: LTE Band 7_Head Right Cheek_1RB_High**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic FDD-LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.869$ S/m; $\epsilon_r = 40.042$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.02, 7.02, 7.02) @2560 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.17 W/kg


Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.33 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.733 W/kg; SAR(10 g) = 0.390 W/kg

Maximum value of SAR (measured) = 1.22 W/kg

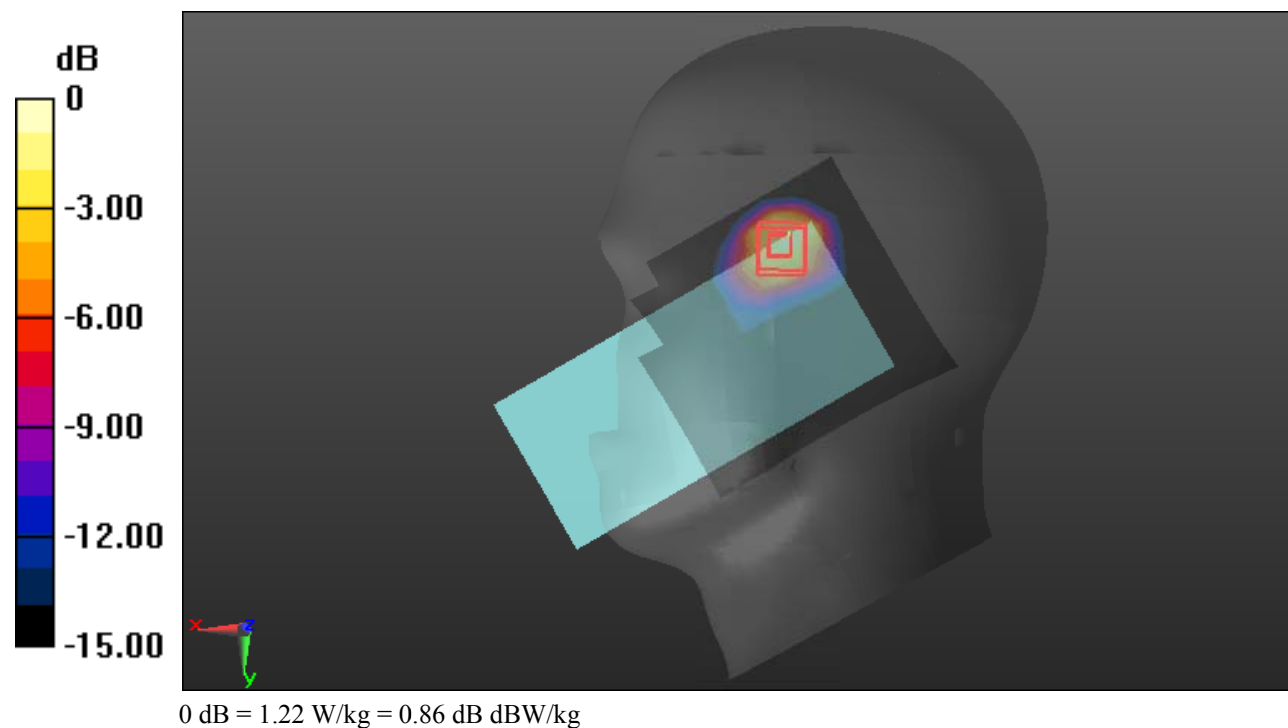

Test Plot16#: LTE Band 7_Body Back_1RB_High**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic FDD-LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.869$ S/m; $\epsilon_r = 40.042$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.02, 7.02, 7.02) @2560 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.381 W/kg


Zoom Scan (7x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.983 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.591 W/kg

SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.466 W/kg

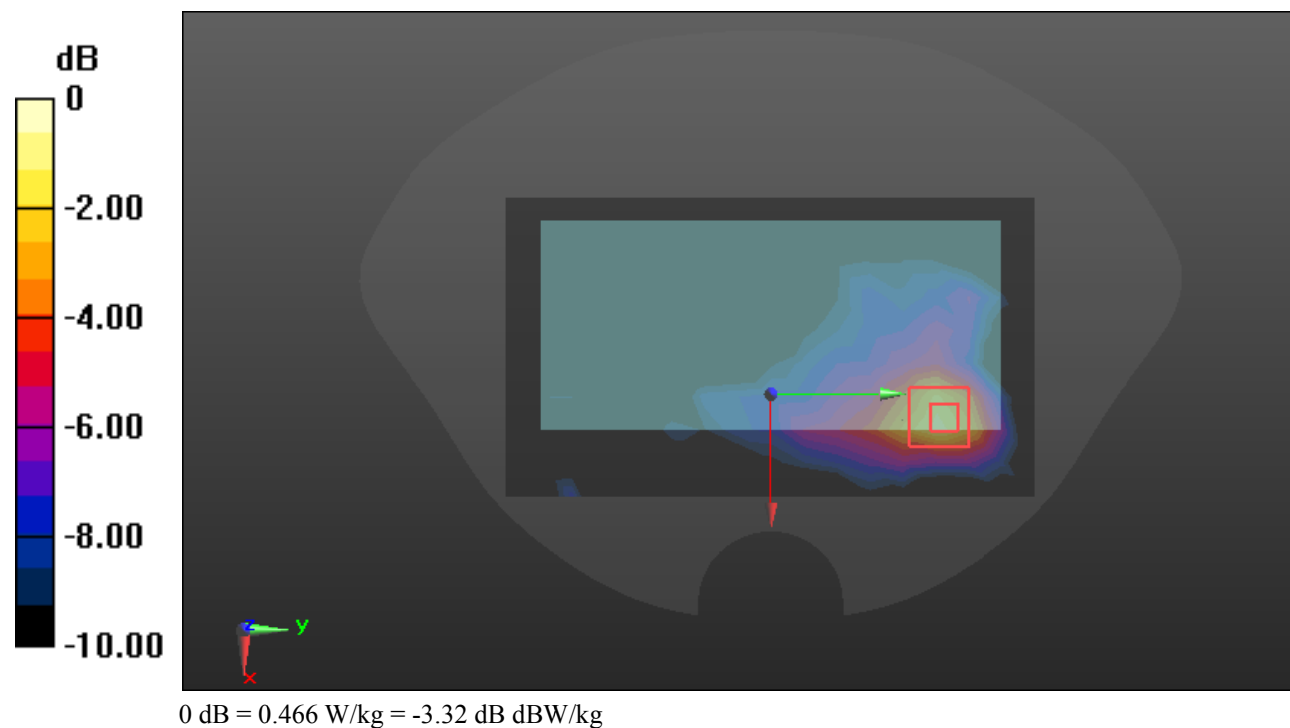

Test Plot17#: LTE Band 12_Head Right Cheek_1RB_Middle**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.868$ S/m; $\epsilon_r = 43.043$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(10.27, 10.27, 10.27) @707.5 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.108 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.706 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.116 W/kg

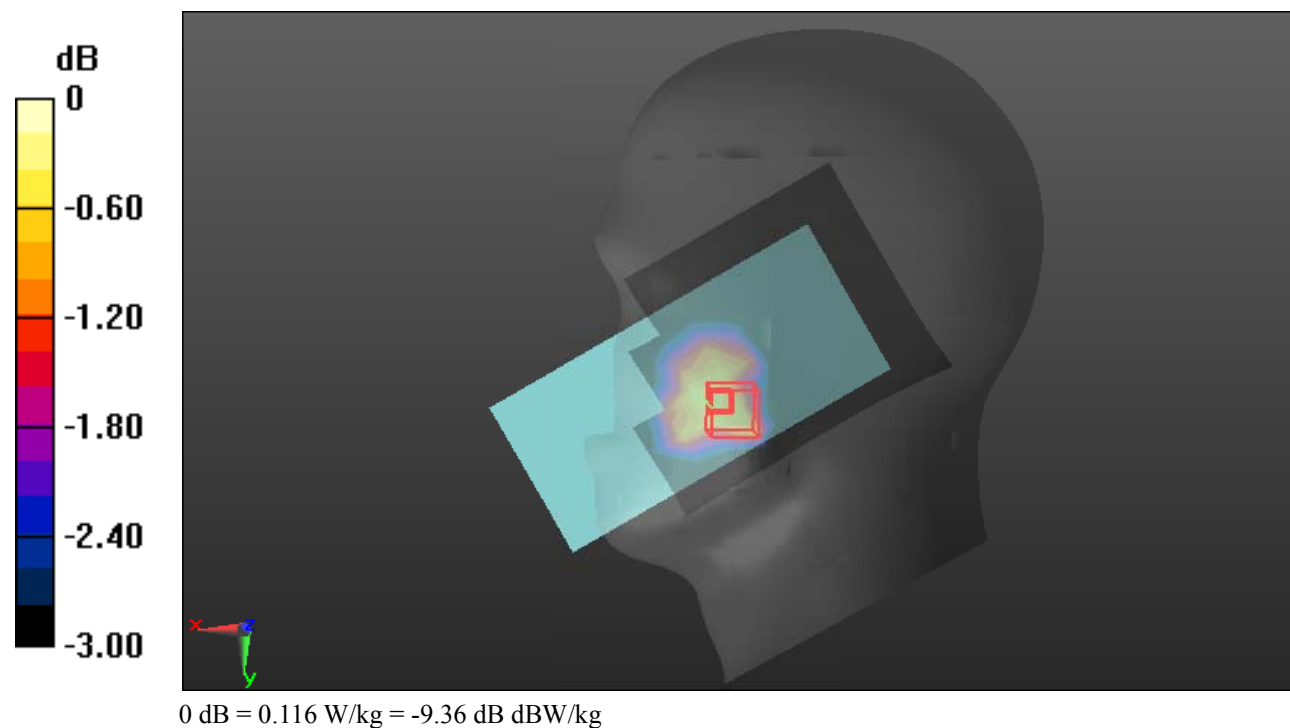

Test Plot18#: LTE Band 12_Body Back_1RB_High**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic FDD-LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.871$ S/m; $\epsilon_r = 42.963$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(10.27, 10.27, 10.27) @711 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.359 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.27 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.531 W/kg

SAR(1 g) = 0.308 W/kg; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 0.442 W/kg

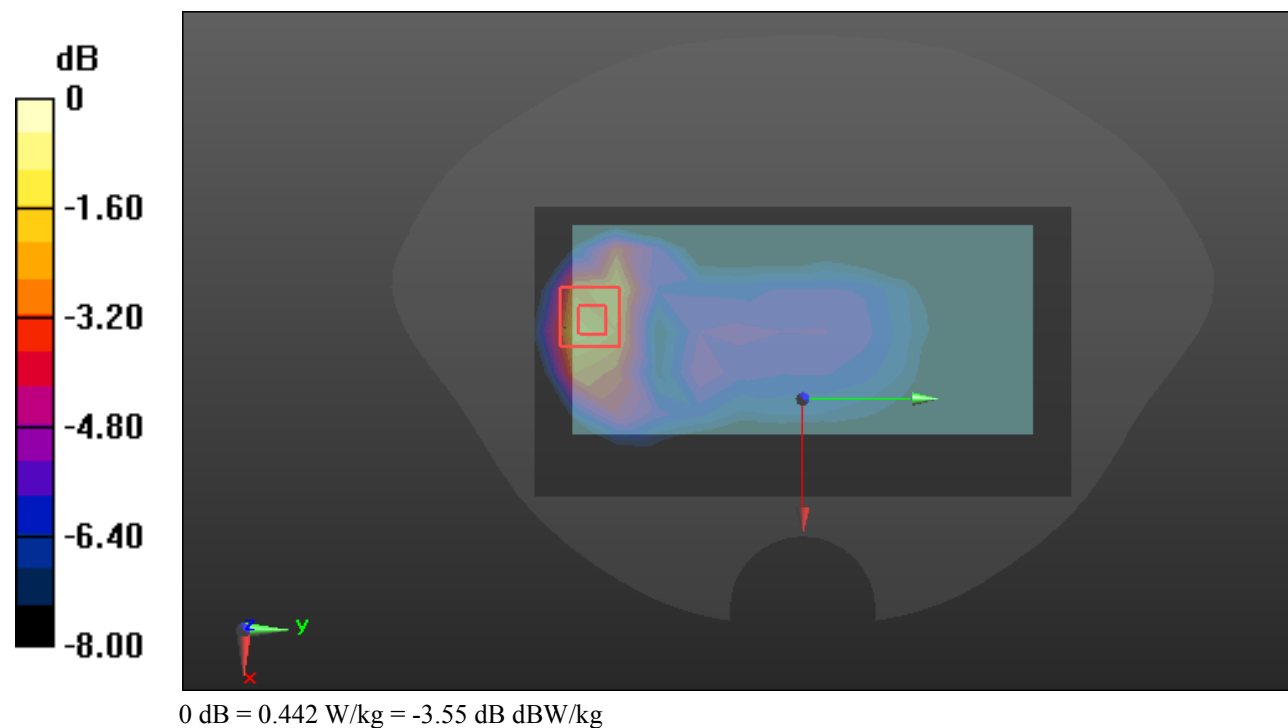

Test Plot19#: LTE Band 41_Head Right Cheek_1RB_2570 MHz**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic TDD-LTE (0); Frequency: 2570 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2570$ MHz; $\sigma = 1.878$ S/m; $\epsilon_r = 39.899$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.02, 7.02, 7.02) @2570 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (10x11x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.21 W/kg


Zoom Scan (8x8x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.32 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.29 W/kg

SAR(1 g) = 0.741 W/kg; SAR(10 g) = 0.437 W/kg

Maximum value of SAR (measured) = 1.43 W/kg

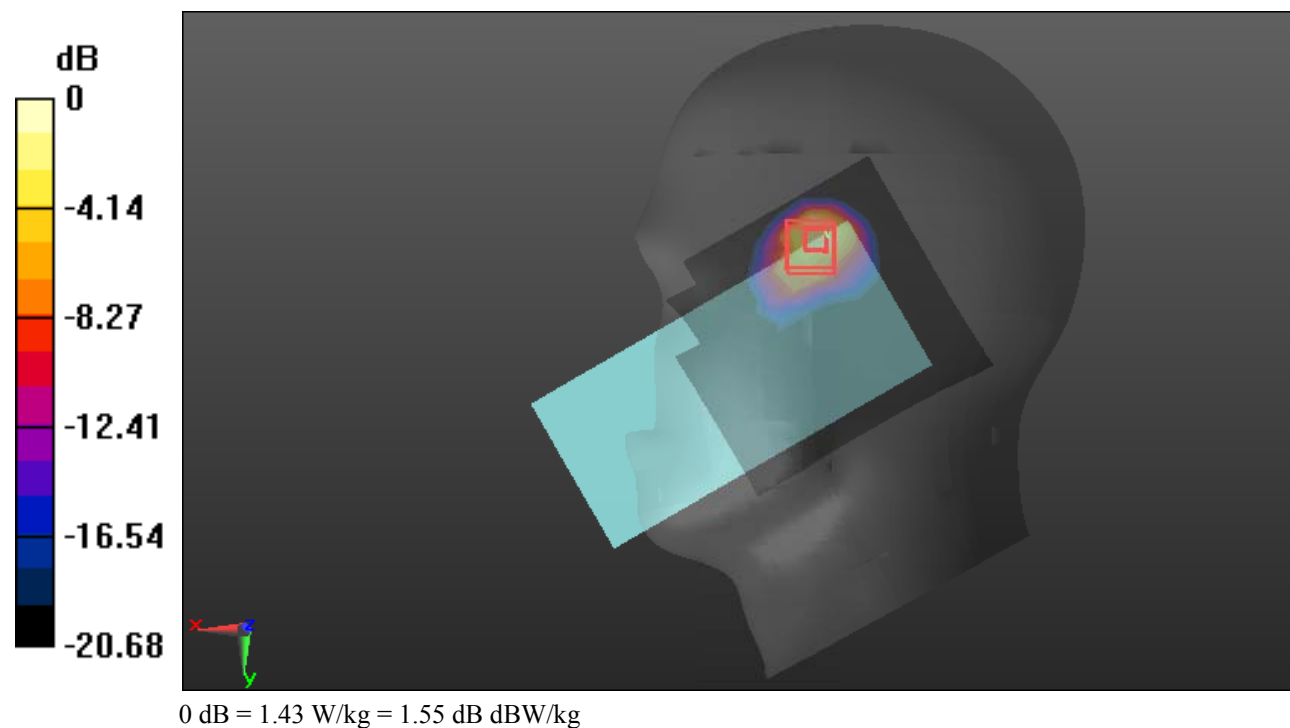

Test Plot20#: LTE Band 41_Body Back_1RB_2570 MHz**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic TDD-LTE (0); Frequency: 2570 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2570$ MHz; $\sigma = 1.878$ S/m; $\epsilon_r = 39.899$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.02, 7.02, 7.02) @2570 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.550 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.828 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.769 W/kg

SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.604 W/kg

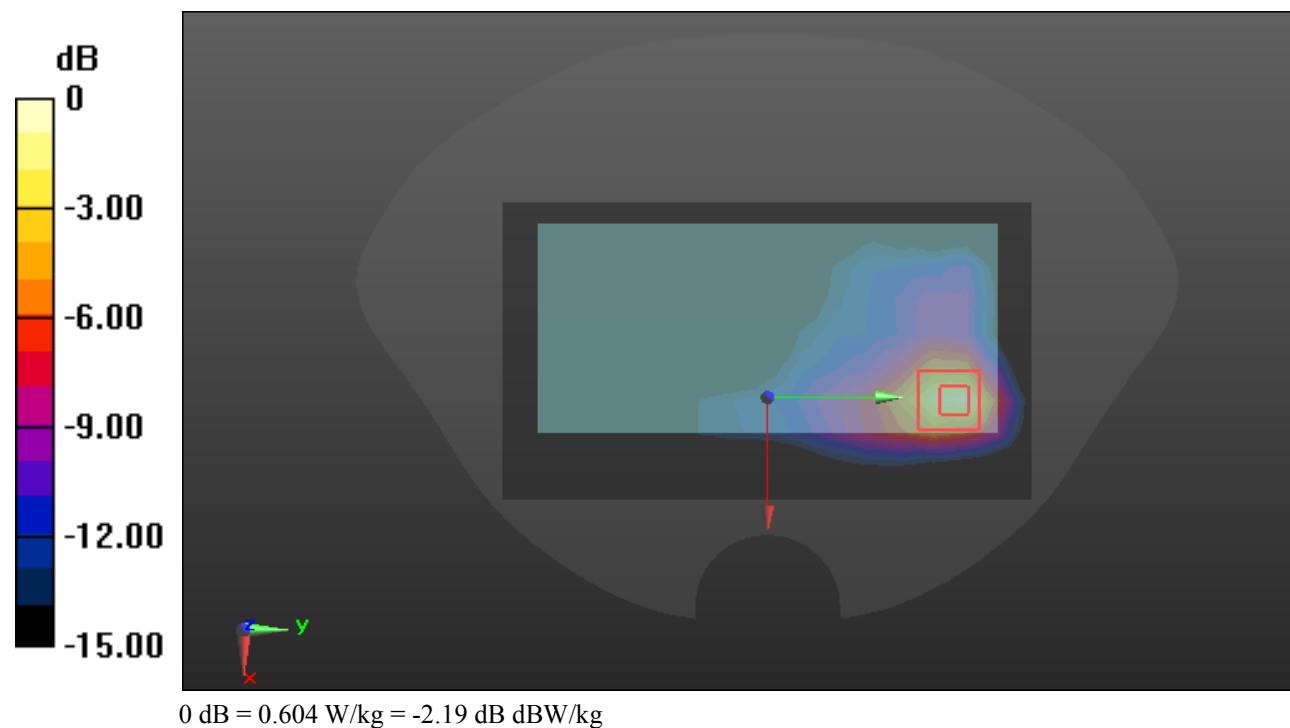

Test Plot21#: LTE Band 66_Head Right Cheek_1RB_Low**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.356$ S/m; $\epsilon_r = 41.506$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(8.28, 8.28, 8.28) @1720 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.872 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.91 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.538 W/kg; SAR(10 g) = 0.292 W/kg

Maximum value of SAR (measured) = 0.911 W/kg

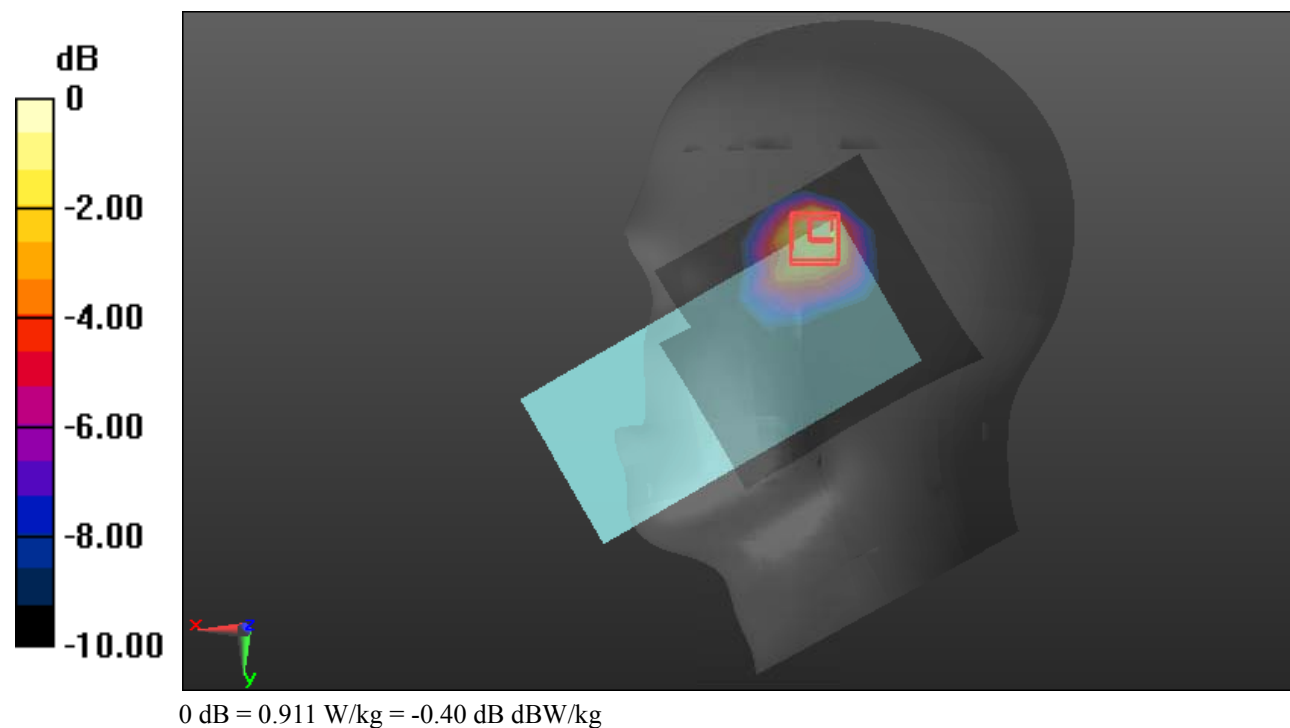

Test Plot22#: LTE Band 66_Body Back_1RB_Middle**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 41.279$ $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(8.28, 8.28, 8.28) @1745 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.399 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.222 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.569 W/kg

SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.167 W/kg

Maximum value of SAR (measured) = 0.452 W/kg

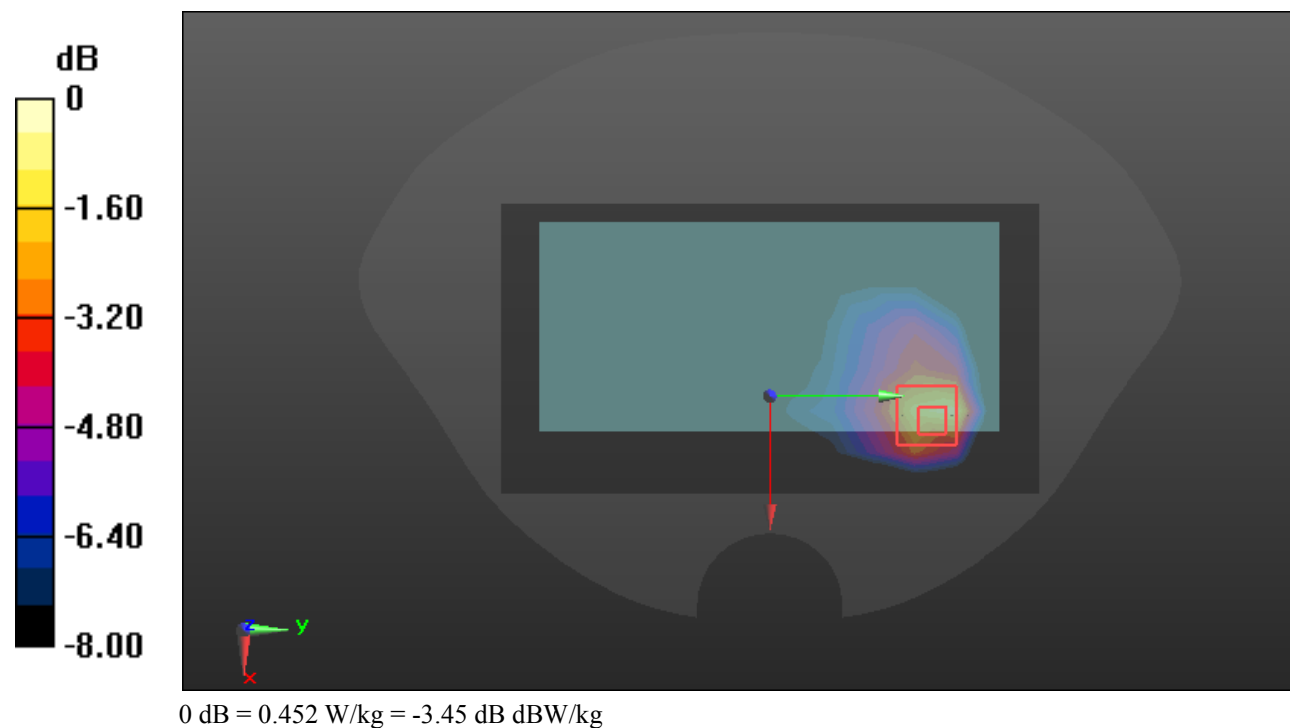

Test Plot23#: LTE Band 71_Head Right Cheek_1RB_Middle**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 43.348$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(10.27, 10.27, 10.27) @680.5 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0754 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.989 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0840 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.0757 W/kg

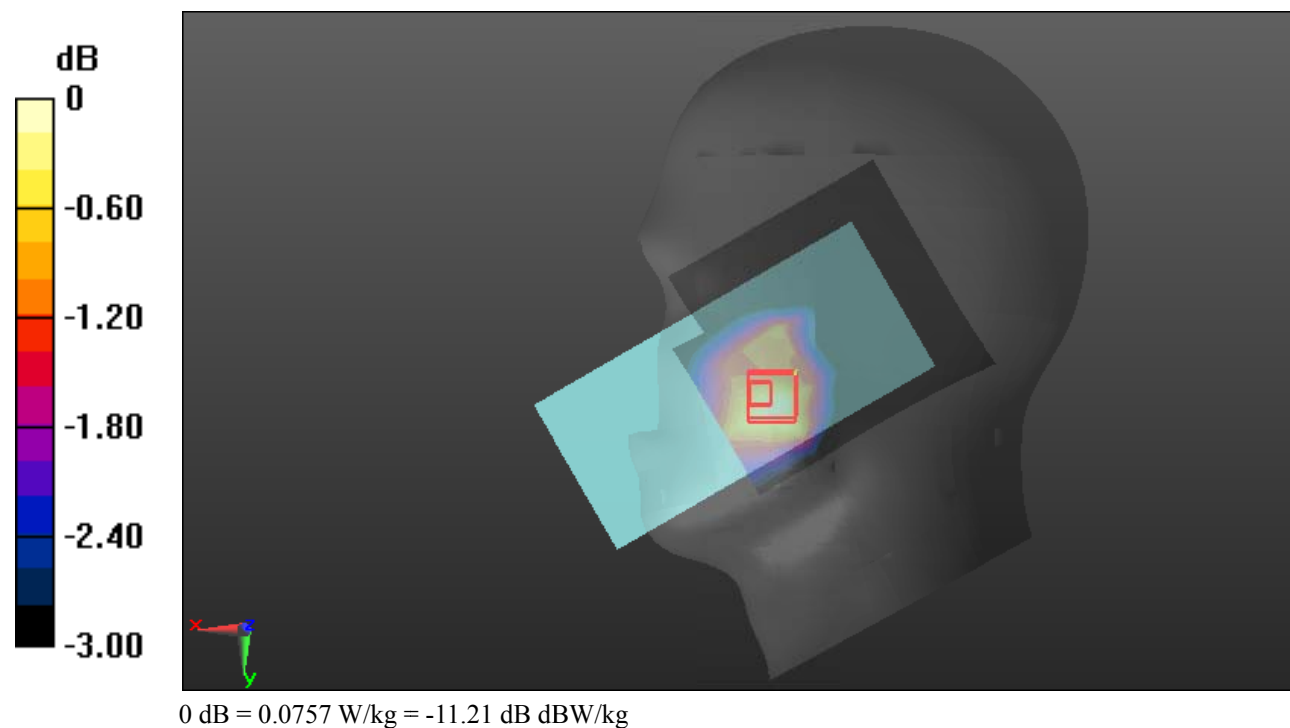

Test Plot24#: LTE Band 71_Body Back_1RB_Middle**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 43.348$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(10.27, 10.27, 10.27) @680.5 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.205 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.36 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.255 W/kg

SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.217 W/kg

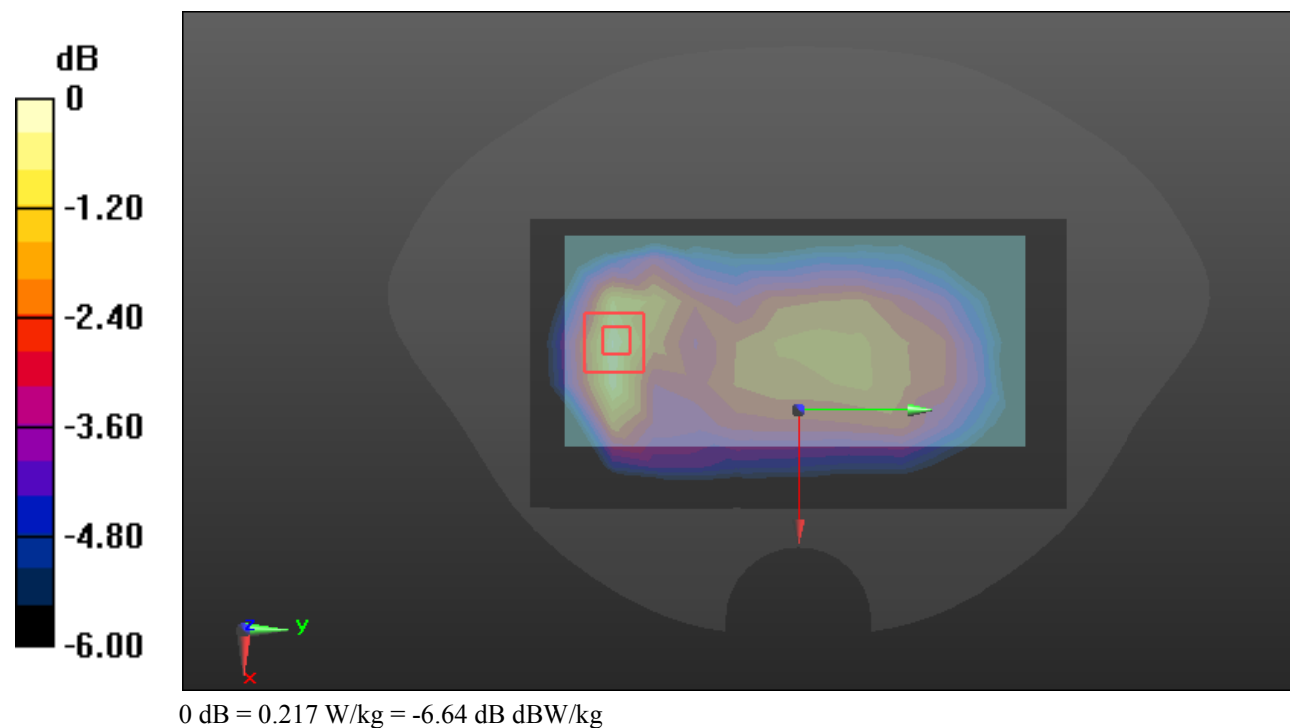

Test Plot 25#: 2.4G WIFI Low_Head Left Cheek**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: UID 0, 802.11 b (0); Frequency: 2412 MHz; Duty Cycle: 1:1.023

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.804$ S/m; $\epsilon_r = 40.536$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27) @ 2412 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.891 W/kg


Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.54 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.685 W/kg; SAR(10 g) = 0.391 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

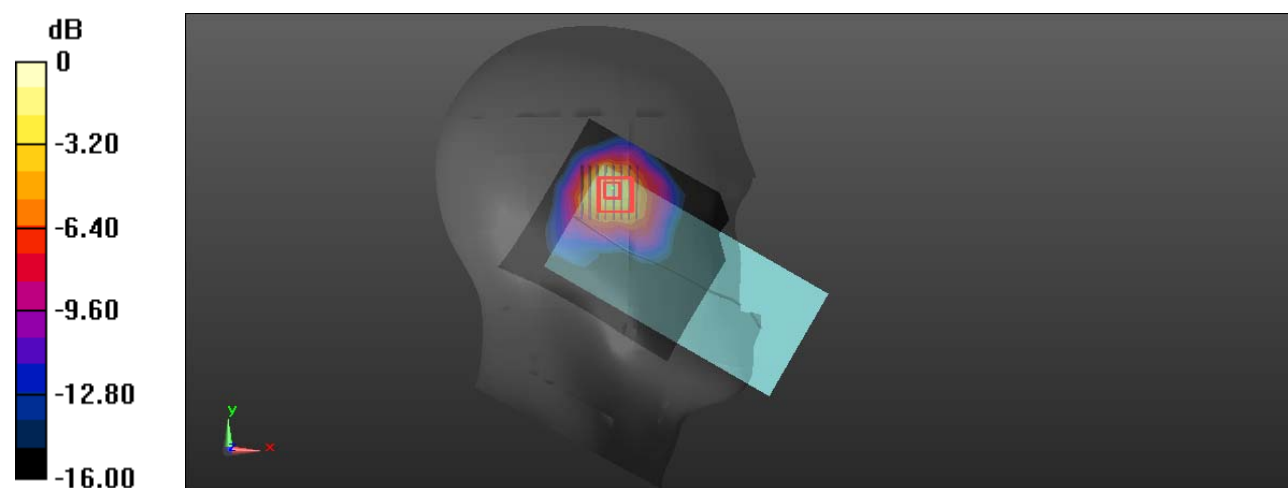

0 dB = 1.08 W/kg = 0.33 dBW/kg

Test Plot 26#: 2.4G WIFI Low _ Body Back**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: UID 0, 802.11 b (0); Frequency: 2412 MHz; Duty Cycle: 1:1.023

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.804$ S/m; $\epsilon_r = 40.536$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27) @ 2412 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.504 W/kg


Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.640 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.672 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 0.515 W/kg

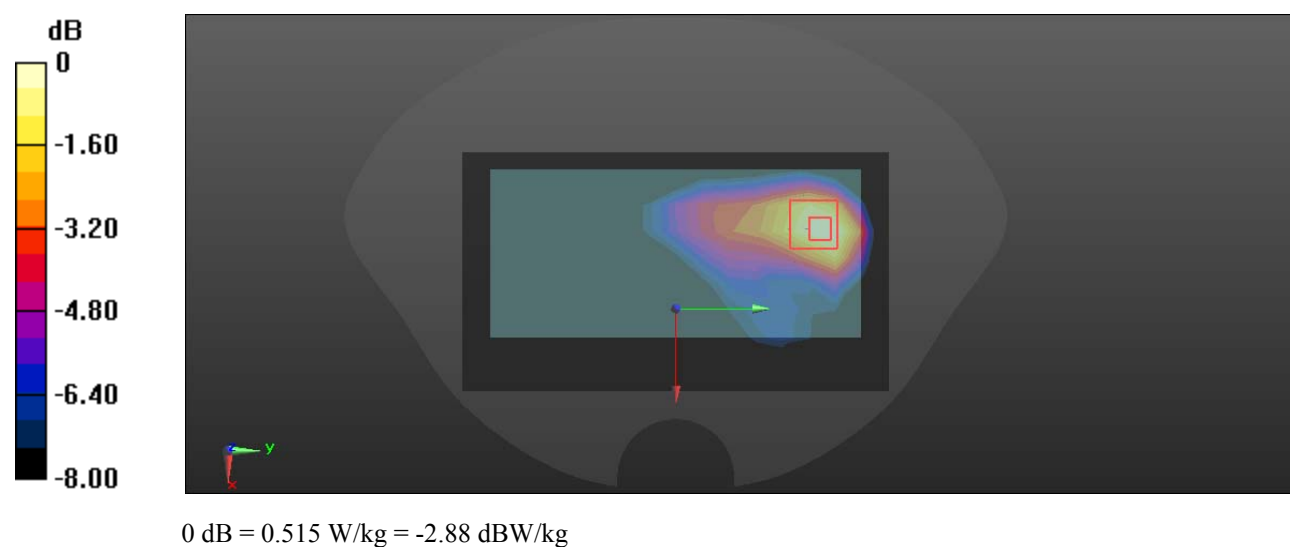

Test Plot 27#: 5.2G WIFI Low _ Head Left Tilt**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: UID 0, 802.11 a (0); Frequency: 5180 MHz; Duty Cycle: 1:1.122

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.514 \text{ S/m}$; $\epsilon_r = 37.174$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(5.25, 5.25, 5.25) @ 5180 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (12x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.03 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 11.09 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 2.72 W/kg

SAR(1 g) = 0.644 W/kg; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 1.48 W/kg

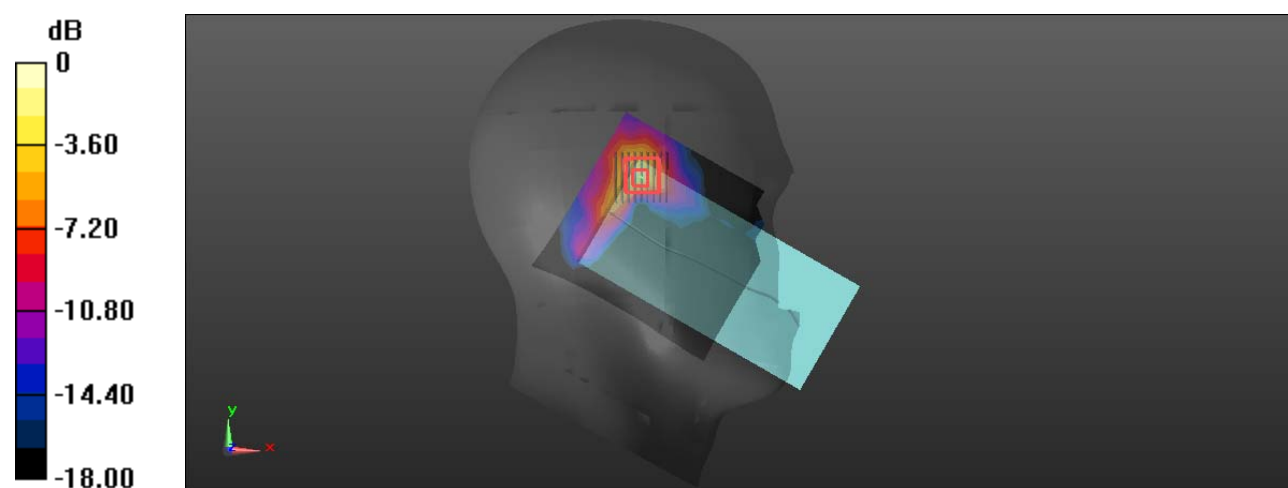

0 dB = 1.48 W/kg = 1.70 dBW/kg

Test Plot 28#: 5.2G WIFI Low _ Body Back**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: UID 0, 802.11 a (0); Frequency: 5180 MHz; Duty Cycle: 1:1.122

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.514$ S/m; $\epsilon_r = 37.174$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(5.25, 5.25, 5.25) @ 5180 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (12x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.868 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.832 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.935 W/kg

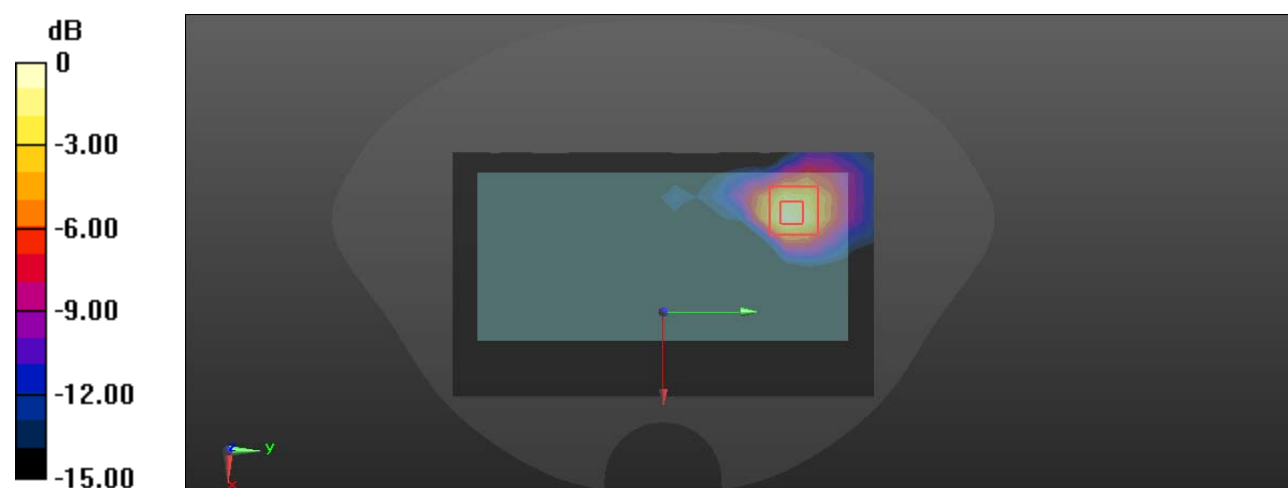

0 dB = 0.935 W/kg = -0.29 dBW/kg

Test Plot 29#: 5.8G WIFI High _ Head Left Tilt**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: UID 0, 802.11 a (0); Frequency: 5825 MHz; Duty Cycle: 1:1.122

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.439$ S/m; $\epsilon_r = 35.625$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(4.78, 4.78, 4.78) @ 5825 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.629 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.993 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.132 W/kg

Maximum value of SAR (measured) = 0.944 W/kg

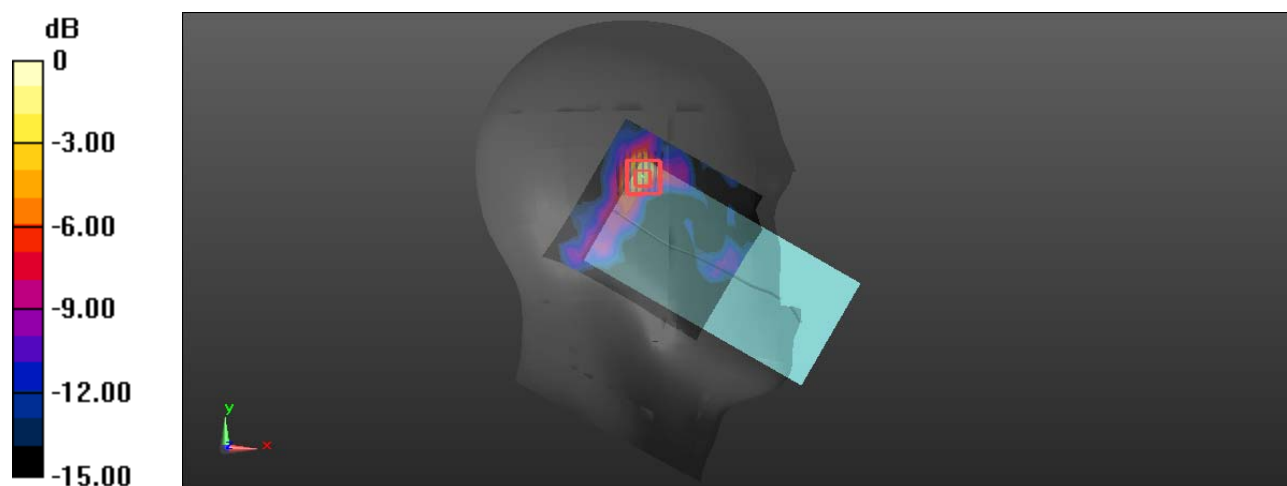

0 dB = 0.944 W/kg = -0.25 dBW/kg

Test Plot 30#: 5.8G WIFI High_Body Back**DUT: Phone; Type: GRAVITY G68 ; Serial: RDG241203001-1**

Communication System: UID 0, 802.11 a (0); Frequency: 5825 MHz; Duty Cycle: 1:1.122

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.439$ S/m; $\epsilon_r = 35.625$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(4.78, 4.78, 4.78) @ 5825 MHz; Calibrated: 3/26/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.11 (7437)

Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.557 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.251 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.346 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.797 W/kg

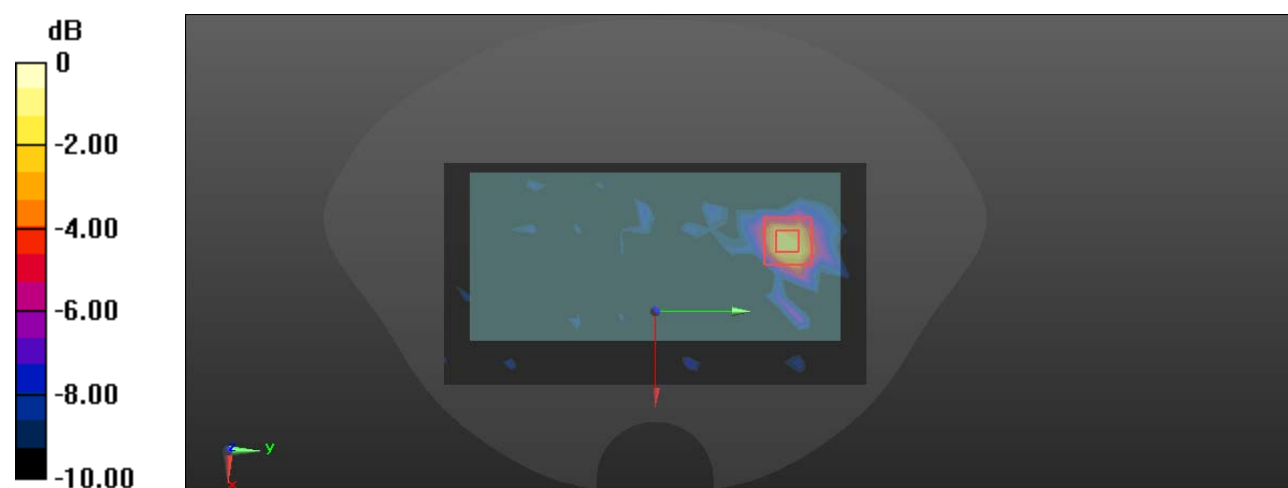

0 dB = 0.797 W/kg = -0.99 dBW/kg