

# Submittal Application Report

FOR  
Grant of Certification


Model: VuLink2  
2412-2462 MHz  
Broadband Digital Transmission System  
FCC ID: WPZ-VULINK2  
IC: 7945A-VULINK2

FOR

**Digital Ally**  
9705 Loiret Blvd  
Lenexa, KS 66219

Test Report Number: 161121  
FCC Site Registration: 90910  
IC Test Site Registration: 3041A-1

Authorized Signatory: *Scot D. Rogers*  
Scot D. Rogers



## **ROGERS LABS, INC.**

4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone / Fax (913) 837-3214

Engineering Test Report for  
Grant of Certification Application  
FOR  
Broadband Digital Transmission System  
CFR 47, PART 15C - Paragraph 15.247  
Industry Canada RSS-247 Issue1  
License Exempt Intentional Radiator  
For

### **Digital Ally**

9705 Loiret Blvd  
Lenexa, KS 66219

Broadband Digital Transmission System

Model: VuLink2  
Frequency Range 2412-2462 MHz  
FCC: WPZ-VULINK2  
IC: 7945A-VULINK2

Test Date: November 21, 2016

Certifying Engineer: *Scot D. Rogers*

Scot D. Rogers  
Rogers Labs, Inc.  
4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Telephone/Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory.  
This report must not be used by the client to claim product certification, approval, or endorsement by  
NVLAP, NIST, or any agency of the Federal Government.

Rogers Labs, Inc.  
4405 W. 259th Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 2

Digital Ally  
Model: VuLink2  
Test #: 161121  
Test to: 47CFR 15.247, RSS-247  
File: Digital Ally Vulink2 DTS TstRpt 161121 r2

S/N: 09502057  
FCC ID: WPZ-VULINK2  
IC: 7945A-VULINK2  
Date: January 13, 2017  
Page 2 of 28

## Table Of Contents

<b>TABLE OF CONTENTS.....</b>	<b>3</b>
<b>REVISIONS.....</b>	<b>4</b>
<b>FORWARD .....</b>	<b>5</b>
<b>OPINION / INTERPRETATION OF RESULTS .....</b>	<b>5</b>
<b>EQUIPMENT TESTED.....</b>	<b>5</b>
<b>EQUIPMENT FUNCTION AND CONFIGURATION.....</b>	<b>6</b>
Equipment Configuration.....	6
<b>APPLICATION FOR CERTIFICATION.....</b>	<b>7</b>
<b>APPLICABLE STANDARDS &amp; TEST PROCEDURES .....</b>	<b>8</b>
<b>EQUIPMENT TESTING PROCEDURES .....</b>	<b>8</b>
AC Line Conducted Emission Test Procedure .....	8
Radiated Emission Test Procedure.....	8
Diagram 1 Test arrangement for Conducted emissions .....	9
Diagram 2 Test arrangement for radiated emissions of tabletop equipment.....	10
Diagram 3 Test arrangement for radiated emissions tested on Open Area Test Site (OATS).....	11
<b>TEST SITE LOCATIONS .....</b>	<b>11</b>
<b>LIST OF TEST EQUIPMENT .....</b>	<b>12</b>
<b>UNITS OF MEASUREMENTS .....</b>	<b>13</b>
<b>ENVIRONMENTAL CONDITIONS.....</b>	<b>13</b>
<b>INTENTIONAL RADIATORS.....</b>	<b>13</b>
Antenna Requirements .....	13
Restricted Bands of Operation.....	13
Table 1 General Radiated Emissions in Restricted Bands Data (worst-case, all modes) .....	14

<b>Summary of Results for Radiated Emissions in Restricted Bands .....</b>	<b>14</b>
<b>General Radiated Emissions Procedure.....</b>	<b>15</b>
Table 2 General Radiated Emissions from EUT Data (Highest Emissions).....	16
<b>Summary of Results for General Radiated Emissions .....</b>	<b>16</b>
<b>Operation in the 2400-2483.5 MHz Frequency Band.....</b>	<b>17</b>
Figure 1 Plot of Transmitter Emissions Across Operational Band).....	18
Figure 2 Plot of Transmitter Low Band Edge.....	18
Figure 3 Plot of Transmitter High Band Edge (802.11b chain 0).....	19
Figure 4 Plot of Transmitter 6-dB Occupied Band Width.....	19
Figure 5 Plot of Transmitter 99% Occupied Band Width.....	20
<b>Transmitter Emissions Data.....</b>	<b>20</b>
Table 3 Transmitter Power and Emissions chain 1 .....	20
Table 4 Transmitter Radiated Emissions (Worst-case all modes) .....	21
<b>Summary of Results for Transmitter Radiated Emissions of Intentional Radiator.....</b>	<b>22</b>
<b>STATEMENT OF MODIFICATIONS AND DEVIATIONS .....</b>	<b>22</b>
<b>ANNEX.....</b>	<b>23</b>
Annex A Measurement Uncertainty Calculations.....	24
Annex B Rogers Labs Test Equipment List.....	25
Annex C Rogers Qualifications .....	26
Annex D FCC Site Registration Letter.....	27
Annex E Industry Canada Site Registration Letter .....	28

## Revisions

Revision 2 Issued January 13, 2017 – corrected type error page 5/28  
Revision 1 Issued January 12, 2017

## Forward

The following information is submitted for consideration in obtaining Grant of Certification for License Exempt Digital Transmission System Intentional Radiator operating under 47CFR Paragraph 15.247 and RSS-247 Issue 1 Digital Modulation transmitter operation in the 2412-2462 MHz band.

Name of Applicant: Digital Ally                      FRN: 0018031203  
9705 Loiret Blvd  
Lenexa, KS 66219

Model: VuLink2

FCC ID: WPZ-VULINK2                      IC: 7945A-VULINK2

Frequency Range: 2412-2462 MHz (802.11g mode operation)

Total Operating Power: average power 0.040 watts, 99% OBW 18,630 kHz

## Opinion / Interpretation of Results

Tests Performed	Margin (dB)	Results
Restricted Frequency Bands 15.205, RSS-GEN 8.10	-17.3	Complies
AC Line Conducted 15.207, RSS-GEN 7.2.4	N/A	Complies
Radiated Emissions 15.209, RSS-GEN 7.2.5	-15.3	Complies
Harmonic Emissions per 15.247, RSS-247	-12.4	Complies
Peak Power Spectral Density per 15.247, RSS-247	-22.3	Complies

## Equipment Tested


<u>Equipment</u>	<u>Model</u>	<u>FCC I.D.</u>
EUT	VuLink2	WPZ-VULINK2
AC Adapter	MN-SA1244C-12	N/A
Test box	Digital Ally	N/A

Test results in this report relate only to the items tested.

## Equipment Function and Configuration

The EUT is a vehicle mounted 2412-2462 MHz SISO Digital Transmission System used to interface with compliant equipment. The design utilizes single permanently attached PCB mounted antenna. For testing purposes, the VuLink2 transceiver was connected to the manufacturer supplied interface cable and DC power supply. This configuration provided power and operational control of the EUT. The VuLink2 offers two ports for connection with compliant USB equipment and power. No other interfacing options are provided. For testing purposes, the VuLink2 received power from the DC power supply and was configured to transmit in available modes. The antenna system complies with requirements for unique antenna connection port.

### Equipment Configuration

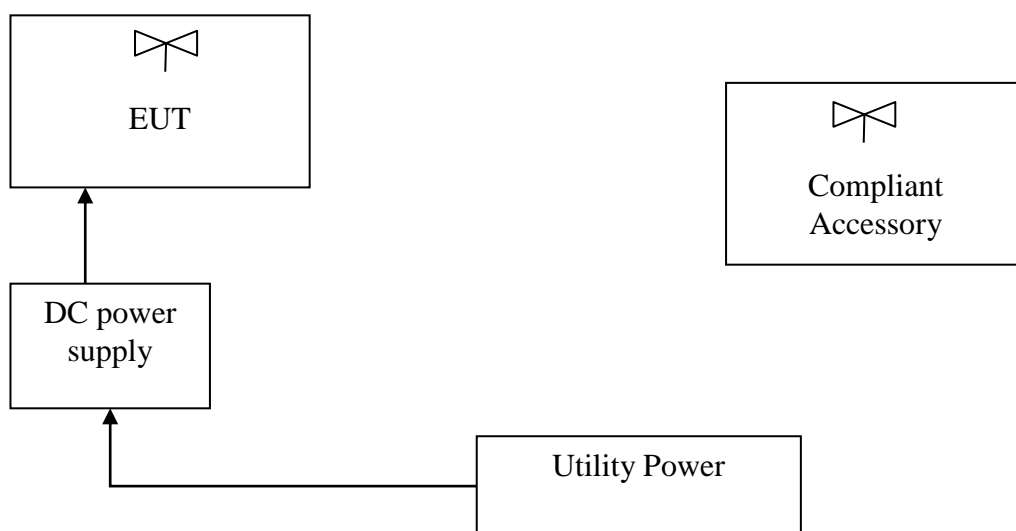

## Application for Certification

- (1) Manufacturer: Digital Ally  
9705 Loiret Blvd  
Lenexa, KS 66219
- (2) Identification: Model: VuLink2  
FCC I.D.: WPZ-VULINK2 IC: 7945A-VULINK2
- (3) Instruction Book:  
Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:  
Refer to Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:  
Refer to Exhibit of Operational Description.
- (6) Report of Measurements:  
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:  
Refer to Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from direct current power received from installation vehicle. The EUT provides USB ports for programming and communications and proprietary interface for connection with compliant equipment and power. During testing, the EUT was connected to the AC/DC power supply.
- (9) Transition Provisions of 47CFR 15.37 are not requested
- (10) Not Applicable. The unit is not a scanning receiver.
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.
- (13) Applications for certification of U-NII devices in the 5.15-5.35 GHz and the 5.47-5.85 GHz bands must include a high-level operational description of the security procedures that control the radio frequency operating parameters and ensure that unauthorized modifications cannot be made. Not applicable to this filing.
- (14) Contain at least one drawing or photograph showing the test set-up for each of the required types of tests applicable to the device for which certification is requested. These drawings or photographs must show enough detail to confirm other information contained in the test report. Any photographs used must be focused originals without glare or dark spots and must clearly show the test configuration used. This information is provide in this report and Test Setup Exhibits provided with the application filing.

## Applicable Standards & Test Procedures

The following information is submitted in accordance e-CFR Title 47 dated October 31, 2016, Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, and applicable parts of paragraph 15, Part 15C Paragraph 15.247 and Industry Canada RSS-247 Issue 1 and RSS-Gen Issue 4. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.10-2013, KDB 558074 D01 v03r05, RSS-247 Issue 1, and RSS-GEN Issue 4, the following information is submitted for processing application for Certification.

## Equipment Testing Procedures


### ***AC Line Conducted Emission Test Procedure***

The EUT operates solely from direct current power and offers no provision for connection to utility AC power systems. Therefore, no AC power line conducted emissions test was required or performed.

### ***Radiated Emission Test Procedure***


Radiated emission testing was performed as required and specified in ANSI C63.10-2013 and referenced KDB documents. The EUT was placed on a rotating 0.9 x 1.2-meter platform, elevated as required above the ground plane at a distance of 3 meters from the FSM antenna. The table permitted orientation of the EUT in each of three orthogonal axis positions during testing. EMI energy was maximized by equipment placement, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken using a spectrum analyzer. The frequency spectrum from 9 kHz to 25,000 MHz was searched for during preliminary investigation. Refer to diagrams two and three showing typical test arrangement and photographs in the test setup exhibits for specific EUT placement during testing.



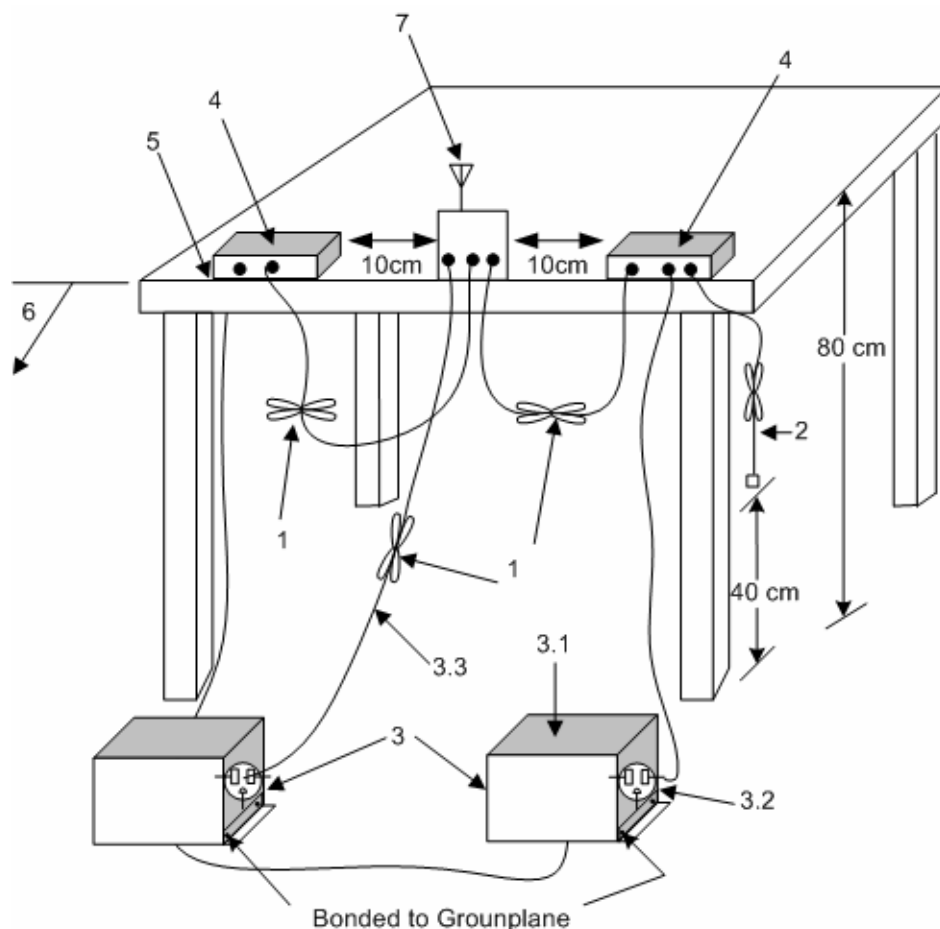


1. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long see (see 6.2.3.2).
2. The I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m (see 6.2.2).
3. EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$  loads. LISN may be placed on top of, or immediately beneath, reference ground plane (see 6.2.2 and 6.2.3).
  - 3.1 All other equipment powered from additional LISN(s).
  - 3.2 Multiple-outlet strip can be used for multiple power cords of non-EUT equipment.
  - 3.3 LISN at least 80 cm from nearest part of EUT chassis
4. Non-EUT components of EUT system being tested
5. Rear of EUT, including peripherals, shall all be aligned and flush with edge of tabletop (see 6.2.3.2).
6. Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane (see 6.2.2 for options).
7. Antenna may be integral or detachable. If detachable, the antenna shall be attached for this test.

**Diagram 1 Test arrangement for Conducted emissions**

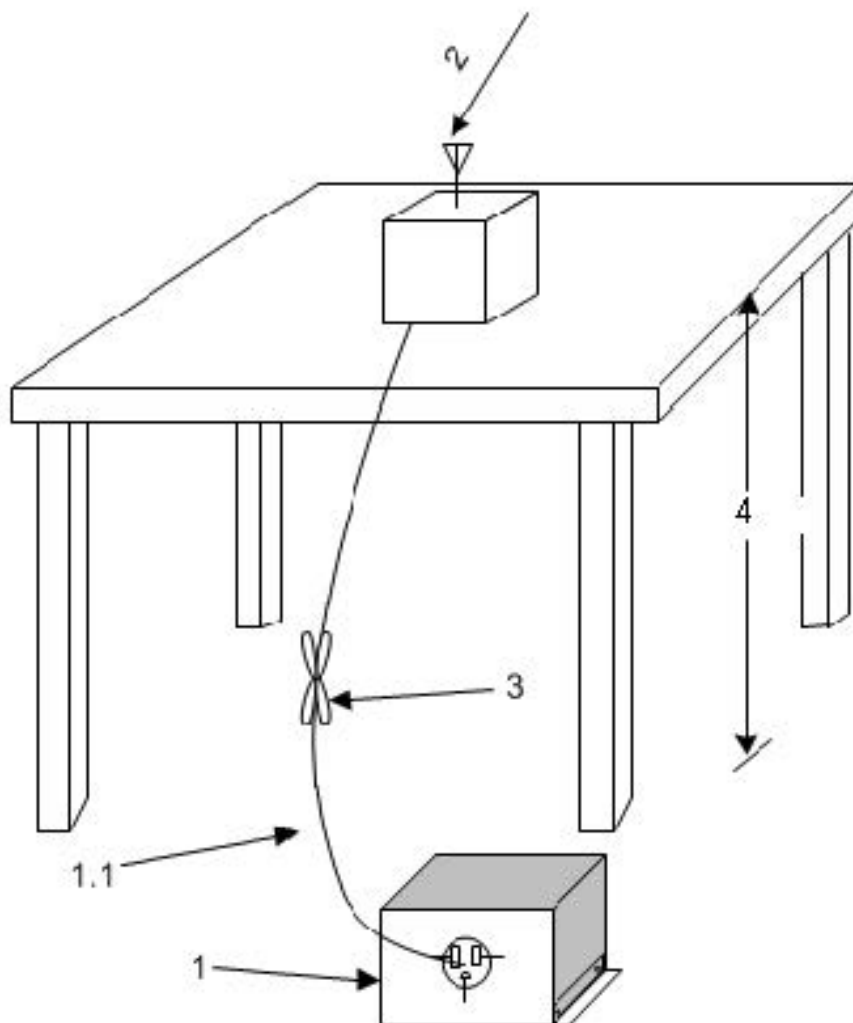

1. A LISN is optional for radiated measurements between 30 MHz and 1000 MHz but not allowed for measurements below 30 MHz and above 1000 MHz (see 6.3.1). If used, then connect EUT to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$  loads. The LISN may be placed on top of, or immediately beneath, the reference ground plane (see 6.2.2 and 6.2.3.2).
  - 1.1 LISN spaced at least 80 cm from nearest part of EUT chassis.
2. Antenna can be integral or detachable, depending on the EUT (see 6.3.1).
3. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long (see 6.3.1).
4. For emission measurements at or below 1 GHz, the table height shall be 80 cm. For emission measurements above 1 GHz, the table height shall be 1.5 m for measurements, except as otherwise specified (see 6.3.1 and 6.6.3.1).

**Diagram 2 Test arrangement for radiated emissions of tabletop equipment**

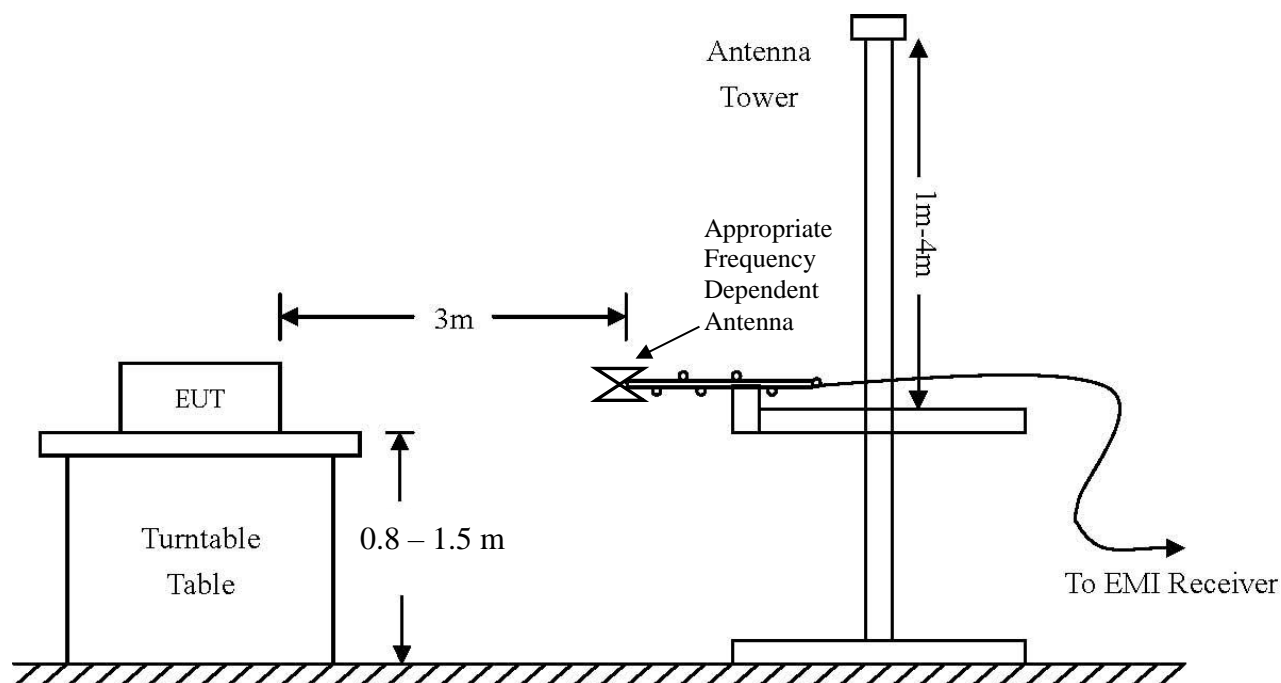

Frequency: 9 kHz-30 MHz	Frequency: 30 MHz- 1 GHZ	Frequency: Above 1 GHz
Loop Antenna	Broadband Biconilog	Horn
RBW = 9 kHz	RBW = 120 kHz	RBW = 1 MHz
VBW = 30 kHz	VBW = 120 kHz	VBW = 1 MHz
Sweep time = Auto	Sweep time = Auto	Sweep time = Auto
Detector = PK, QP	Detector = PK, QP	Detector = PK, AV
Antenna Height 1m	Antenna Height 1-4m	Antenna Height 1-4m

**Diagram 3 Test arrangement for radiated emissions tested on Open Area Test Site (OATS)**

## Test Site Locations

**Conducted EMI** The AC power line conducted emissions testing performed in a shielded screen room located at Rogers Labs, Inc., 4405 W. 259<sup>th</sup> Terrace, Louisburg, KS

**Radiated EMI** The radiated emissions tests were performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 W. 259<sup>th</sup> Terrace, Louisburg, KS

**Site Registration** Refer to Annex for Site Registration Letters

**NVLAP Accreditation** Lab code 200087-0

## List of Test Equipment

A Rohde and Schwarz ESU40 and/or Hewlett Packard 8591EM was used as the measuring device for the emissions testing of frequencies below 1 GHz. A Rohde and Schwarz ESU40 and/or Hewlett Packard 8562A Spectrum Analyzer was used as the measuring device for testing the emissions at frequencies above 1 GHz. The analyzer settings used are described in the following table. Refer to the appendix for a complete list of test equipment.

AC Line Conducted Emissions (0.150 -30 MHz)		
RBW	AVG. BW	Detector Function
9 kHz	30 kHz	Peak / Quasi Peak
Emissions (30-1000 MHz)		
RBW	AVG. BW	Detector Function
120 kHz	300 kHz	Peak / Quasi Peak
Emissions (Above 1000 MHz)		
RBW	Video BW	Detector Function
100 kHz	100 kHz	Peak
1 MHz	1 MHz	Peak / Average

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model (SN)</u>	<u>Band</u>	<u>Cal Date</u>	<u>Due</u>
<input type="checkbox"/> LISN	FCC	FCC-LISN-50-2-10(1PA) (160611)	.15-30MHz	5/16	5/17
<input checked="" type="checkbox"/> Cable	Time Microwave	750HF290-750 (L10M)	9kHz-40 GHz	10/15	10/16
<input type="checkbox"/> Cable	Belden	RG-58 (L1-CAT3-11509)	9kHz-30 MHz	10/15	10/16
<input type="checkbox"/> Cable	Belden	RG-58 (L2-CAT3-11509)	9kHz-30 MHz	10/15	10/16
<input type="checkbox"/> Antenna	ARA	BCD-235-B (169)	20-350MHz	10/15	10/16
<input type="checkbox"/> Antenna	EMCO	3147 (40582)	200-1000MHz	10/15	10/16
<input checked="" type="checkbox"/> Antenna	ETS-Lindgren	3117 (200389)	1-18 GHz	5/16	5/18
<input type="checkbox"/> Antenna	Com Power	AH-118 (10110)	1-18 GHz	10/15	10/16
<input checked="" type="checkbox"/> Antenna	Com Power	AH-840 (101046)	18-40 GHz	5/16	5/18
<input checked="" type="checkbox"/> Antenna	EMCO	6509 (9502-1374)	.001-30 MHz	10/15	10/16
<input checked="" type="checkbox"/> Antenna	Sunol	JB-6 (A100709)	30-1000 MHz	10/15	10/16
<input checked="" type="checkbox"/> Antenna	EMCO	3143 (9607-1277)	20-1200 MHz	5/16	5/17
<input type="checkbox"/> Analyzer	HP	8591EM (3628A00871)	9kHz-1.8GHz	5/16	5/17
<input type="checkbox"/> Analyzer	HP	8562A (3051A05950)	9kHz-110GHz	5/16	5/17
<input type="checkbox"/> Analyzer	HP External Mixers	11571, 11970	40GHz-110GHz	5/16	5/17
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESU40 (100108)	20Hz-40GHz	5/16	5/17
<input checked="" type="checkbox"/> Amplifier	Com-Power	PA-010 (171003)	100Hz-30MHz	10/15	10/16
<input checked="" type="checkbox"/> Amplifier	Com-Power	CPPA-102 (01254)	1-1000 MHz	10/15	10/16
<input checked="" type="checkbox"/> Amplifier	Com-Power	PAM-118A (551014)	0.5-18 GHz	10/15	10/16

## Units of Measurements

Conducted EMI              Data is in dB $\mu$ V; dB referenced to one microvolt

Radiated EMI              Data is in dB $\mu$ V/m; dB/m referenced to one microvolt per meter

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured

A.F. = Receive antenna factor, Gain = amplification gains and/or cable losses

RFS (dB $\mu$ V/m @ 3m) = FSM (dB $\mu$ V) + A.F. (dB) - Gain (dB)

## Environmental Conditions

Ambient Temperature              19.4° C

Relative Humidity                  29%

Atmospheric Pressure              1022.2 mb

## Intentional Radiators

As per 47CFR part 15 subpart C, and Industry Canada RSS-247, Issue 1, the following information is submitted for consideration and demonstration of compliance with regulation and standards.

### **Antenna Requirements**

The EUT incorporates integral antenna system and offers no provision for connection to alternate system. The EUT utilizes permanently attached metal stamped Planar Inverted F antenna (PIFA) mounted inside the enclosure. The antenna connection point complies with the unique antenna connection requirements. The requirements of 15.203 are fulfilled there are no deviations or exceptions to the specification.

### **Restricted Bands of Operation**

Spurious emissions falling in the restricted frequency bands of operation were measured at the on the OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in restricted bands. Emissions were investigated at the antenna port and OATS, using appropriate antennas or pyramidal horns, amplification stages, and spectrum analyzer. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Test procedures of ANSI C63.10-2013 were used during testing. No other significant emission was observed which fell into the restricted bands of operation. Computed radiated emission values take into account the measured radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

**Table 1 General Radiated Emissions in Restricted Bands Data (worst-case, all modes)**

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Quasi-Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Quasi-Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)
2390.0	51.0	N/A	30.7	45.4	N/A	30.5	54.0
2483.5	44.8	N/A	31.6	44.1	N/A	30.4	54.0
4824.0	45.0	N/A	32.0	44.9	N/A	32.1	54.0
4874.0	43.6	N/A	30.3	44.4	N/A	31.4	54.0
4924.0	44.2	N/A	32.2	45.4	N/A	32.3	54.0
7236.0	46.8	N/A	33.7	46.0	N/A	33.5	54.0
7311.0	45.5	N/A	33.4	46.2	N/A	33.7	54.0
7386.0	46.0	N/A	33.8	47.4	N/A	33.8	54.0
12060.0	49.4	N/A	36.2	49.4	N/A	36.7	54.0
12185.0	49.2	N/A	36.3	48.7	N/A	36.2	54.0
12310.0	48.8	N/A	36.2	49.2	N/A	36.1	54.0
14472.0	49.6	N/A	36.5	50.0	N/A	36.5	46.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

### ***Summary of Results for Radiated Emissions in Restricted Bands***

The EUT demonstrated compliance with the emissions requirements of 47CFR 15.205, RSS-GEN and RSS-247, Issue 1 Intentional Radiators. The EUT provided a worst-case minimum margin of -17.3 dB below the emissions requirements in restricted frequency bands. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.

## ***General Radiated Emissions Procedure***

The EUT was arranged in a typical equipment configuration and operated through all available modes with worst-case data recorded. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Each radiated emission was then maximized at the OATS location before final radiated emissions measurements were performed. Final data was taken with the EUT located at the OATS at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 9 kHz to 25,000 MHz was searched for general radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Loop from 9 kHz to 30 MHz, Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 1 GHz and or Double Ridge or pyramidal horns and mixers from 1 GHz to 25 GHz, notch filters, and appropriate amplifiers and external mixers were utilized.

**Table 2 General Radiated Emissions from EUT Data (Highest Emissions)**

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Quasi-Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Quasi-Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)
179.9	30.1	24.5	N/A	29.3	24.3	N/A	43.5
180.1	28.7	22.2	N/A	28.6	23.9	N/A	43.5
215.8	26.7	20.9	N/A	32.1	26.9	N/A	43.5
216.0	26.7	21.3	N/A	31.2	25.8	N/A	43.5
240.0	32.2	27.6	N/A	5.3	29.7	N/A	46.0
276.0	32.1	27.7	N/A	35.2	30.7	N/A	46.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.


### ***Summary of Results for General Radiated Emissions***

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR part 15 and Industry Canada RSS-247 Issue 1 Intentional Radiators. The EUT demonstrated a minimum margin of -15.3 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.




## ***Operation in the 2400-2483.5 MHz Frequency Band***


Radiated emissions were measured on the Open Area Test Site (OATS) at a three-meter distance. The EUT utilizes metal stamped PIFA permanently attached to the printed circuit board. A second test sample was provided with antenna port connection points replacing the internal antenna. Antenna conducted measurements were taken on the second test sample. Radiated emissions measurements were performed on the test sample with integral antenna. The EUT was placed on a turntable elevated as required above the ground plane at a distance of 3 meters from the FSM antenna located on the OATS. The peak and quasi-peak amplitude of the frequencies below 1000 MHz were measured using a spectrum analyzer. The peak and average amplitude of emissions above 1000 MHz were measured using a spectrum analyzer. Emissions data was recorded from the measurement results. Data presented reflects measurement result corrected to account for measurement system gains and losses. Plots were made of transmitter performance for reference purposes.

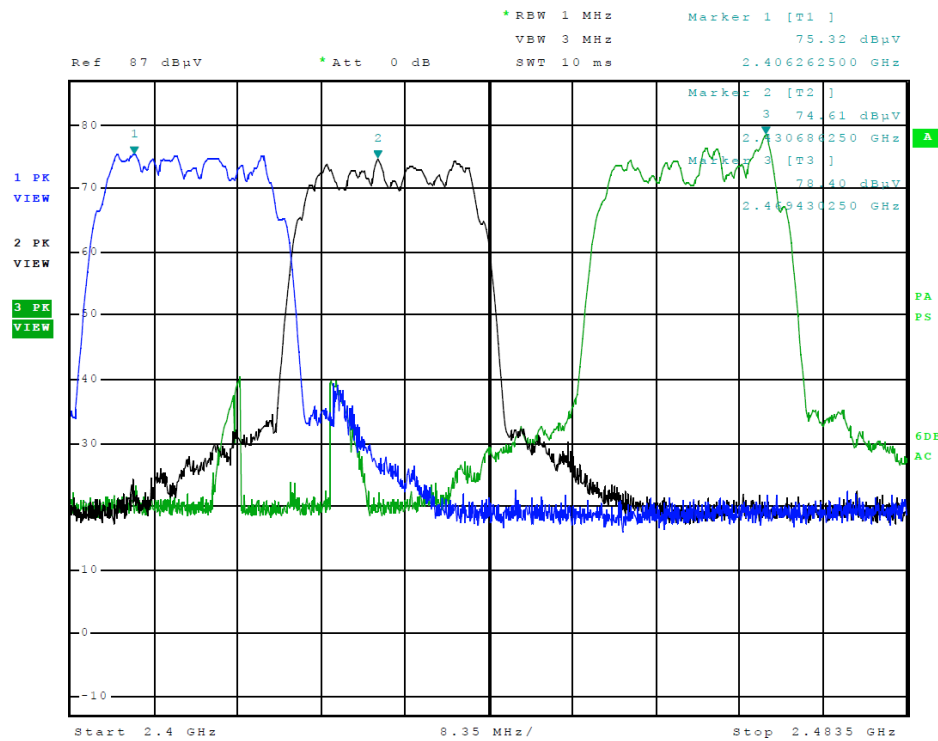


**Figure 1 Plot of Transmitter Emissions Across Operational Band)**

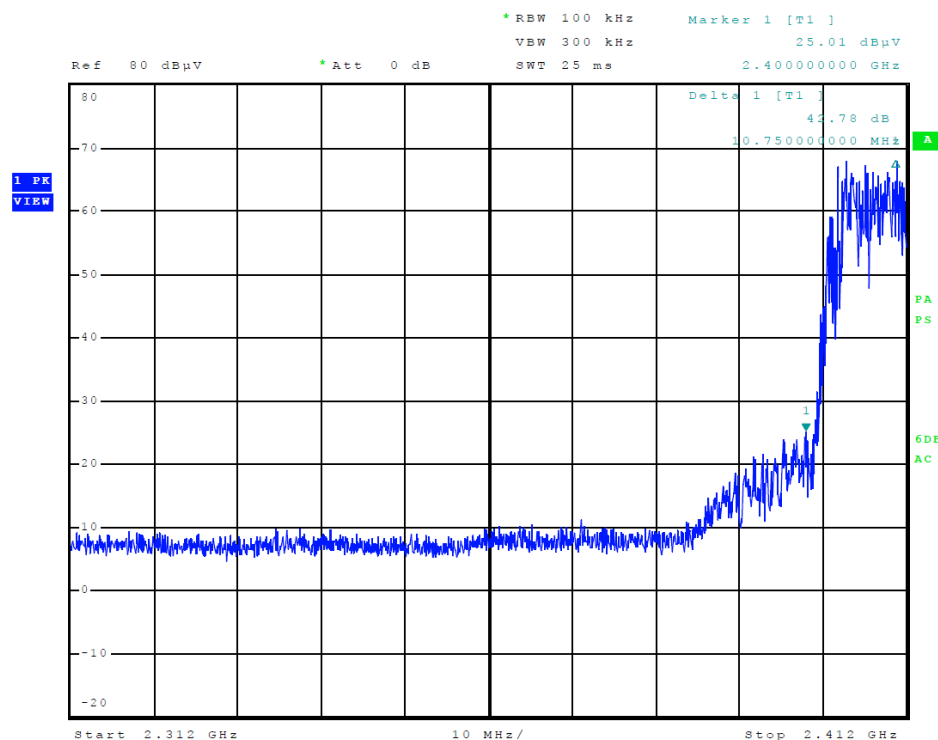


**Figure 2 Plot of Transmitter Low Band Edge**

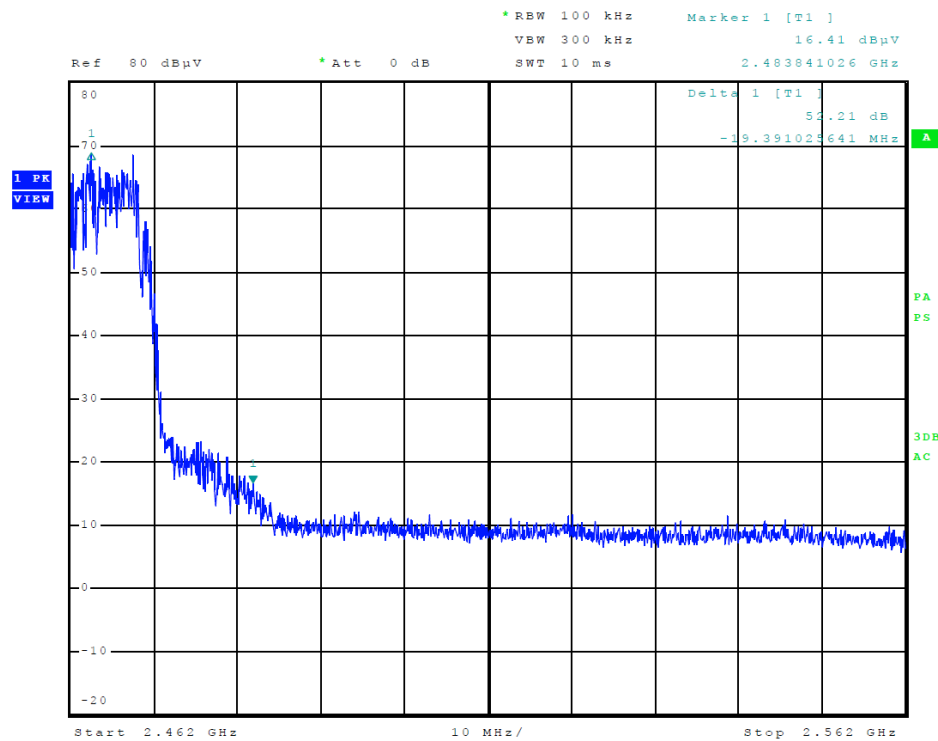

**Figure 3 Plot of Transmitter High Band Edge (802.11b chain 0)**

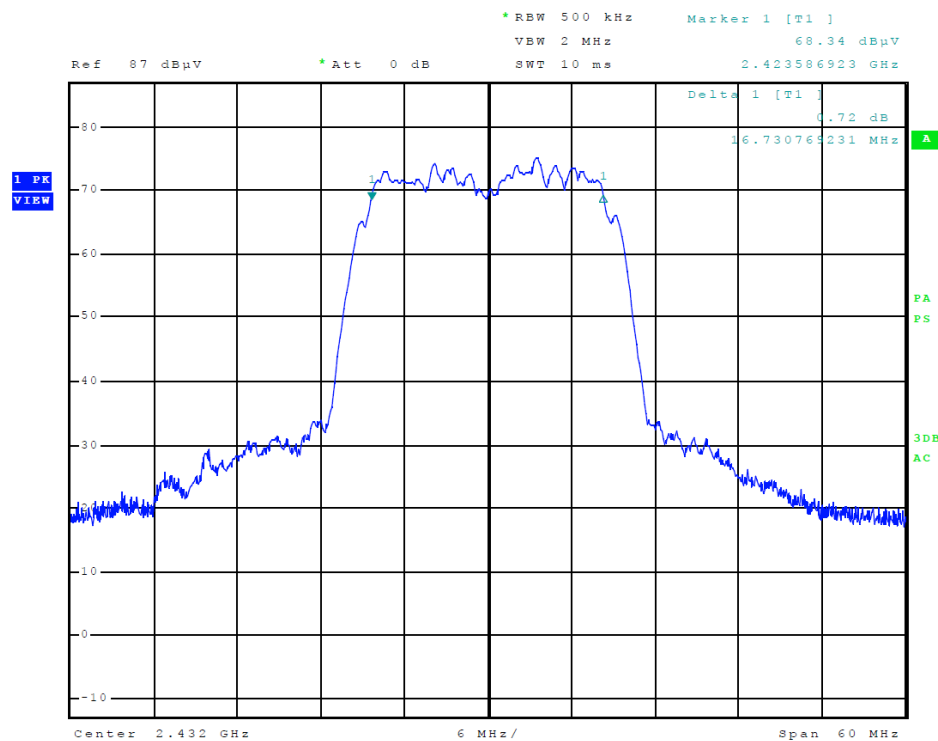

**Figure 4 Plot of Transmitter 6-dB Occupied Band Width**

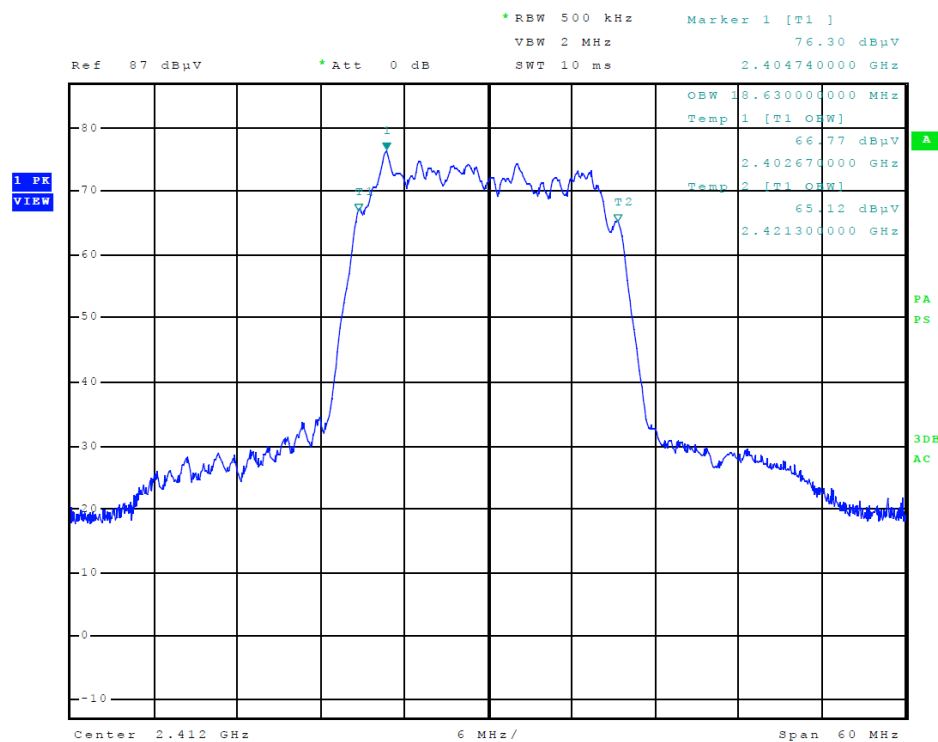

**Figure 5 Plot of Transmitter 99% Occupied Band Width**

### Transmitter Emissions Data

**Table 3 Transmitter Power and Emissions chain 1**

Frequency MHz	Conducted Antenna Port Output Power (Watts)	6-dB Occupied Bandwidth kHz	99% Occupied Bandwidth h kHz	Power Spectral Density dBm
2412.0	0.028	16730.0	18630.0	-15.2
2437.0	0.040	16731.0	18510.0	-14.3
2462.0	0.027	16728.0	18480.0	-17.0

**Table 4 Transmitter Radiated Emissions (Worst-case all modes)**

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)
2412.0	96.6	93.8	86.6	82.4	-
4824.0	45.0	32.0	44.9	32.1	54.0
7236.0	46.8	33.7	46.0	33.5	54.0
9648.0	45.8	32.3	44.9	32.2	54.0
12060.0	49.4	36.2	49.4	36.7	54.0
14472.0	49.6	36.5	50.0	36.5	54.0
16884.0	52.3	39.2	52.2	39.3	54.0
2437.0	98.2	91.2	88.4	85.6	-
4874.0	43.6	30.3	44.4	31.4	54.0
7311.0	45.5	33.4	46.2	33.7	54.0
9748.0	46.8	34.0	47.5	34.2	54.0
12185.0	49.2	36.3	48.7	36.2	54.0
14622.0	49.8	37.1	50.2	37.3	54.0
17059.0	52.2	39.8	52.9	40.0	54.0
2462.0	95.8	88.9	89.7	81.9	-
4924.0	44.2	32.2	45.4	32.3	54.0
7386.0	46.0	33.8	47.4	33.8	54.0
9848.0	45.9	33.4	45.8	33.5	54.0
12310.0	48.8	36.2	49.2	36.1	54.0
14772.0	50.3	38.0	50.3	37.9	54.0
17234.0	54.5	41.6	54.7	41.6	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

## ***Summary of Results for Transmitter Radiated Emissions of Intentional Radiator***

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Part 15.247 and Industry Canada RSS-247. The highest conducted power was 0.040-Watts. The worst-case total peak power spectral density provided a minimum margin of -22.3 dB below the requirements. The minimum radiated harmonic emission provided -12.4 dB margin below requirements. There were no other significantly measurable emissions in the restricted bands other than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the requirements. There were no other deviations or exceptions to the requirements.

## **Statement of Modifications and Deviations**

No modifications to the EUT were required for the unit to demonstrate compliance with the 47CFR Part 15C and Industry Canada RSS-247 emissions requirements. There were no deviations or modifications to the specifications.

## Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Rogers Labs Test Equipment List
- Annex C Rogers Qualifications
- Annex D FCC Site Registration Letter
- Annex E Industry Canada Site Registration Letter

## Annex A Measurement Uncertainty Calculations

Measurement uncertainty calculations were made for the laboratory. Result of measurement uncertainty calculations are recorded below for AC line conducted and radiated emission measurements.

Measurement Uncertainty	U <sub>(E)</sub>	U <sub>(lab)</sub>
3 Meter Horizontal 30-200 MHz Measurements	2.08	4.16
3 Meter Vertical 30-200 MHz Measurements	2.16	4.33
3 Meter Vertical Measurements 200-1000 MHz	2.99	5.97
10 Meter Horizontal Measurements 30-200 MHz	2.07	4.15
10 Meter Vertical Measurements 30-200 MHz	2.06	4.13
10 Meter Horizontal Measurements 200-1000 MHz	2.32	4.64
10 Meter Vertical Measurements 200-1000 MHz	2.33	4.66
3 Meter Measurements 1-6 GHz	2.57	5.14
3 Meter Measurements 6-18 GHz	2.58	5.16
AC Line Conducted	1.72	3.43



## Annex B Rogers Labs Test Equipment List

List of Test Equipment	Calibration	<u>Date</u>	<u>Due</u>
Spectrum Analyzer: Rohde & Schwarz ESU40		5/16	5/17
Spectrum Analyzer: HP 8562A, HP Adapters: 11518, 11519, and 11520		5/16	5/17
Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W			
Spectrum Analyzer: HP 8591EM		5/16	5/17
Antenna: EMCO Biconilog Model: 3143		5/16	5/17
Antenna: Sunol Biconilog Model: JB6		10/16	10/17
Antenna: EMCO Log Periodic Model: 3147		10/16	10/17
Antenna: Com Power Model: AH-118		10/16	10/17
Antenna: Com Power Model: AH-840		5/16	5/18
Antenna: Antenna Research Biconical Model: BCD 235		10/16	10/17
Antenna: Com Power Model: AL-130		10/16	10/17
Antenna: EMCO 6509		10/16	10/17
LISN: Compliance Design Model: FCC-LISN-2.Mod.cd, 50 $\mu$ Hy/50 ohm/0.1 $\mu$ f		10/16	10/17
R.F. Preamp CPPA-102		10/16	10/17
Attenuator: HP Model: HP11509A		10/16	10/17
Attenuator: Mini Circuits Model: CAT-3		10/16	10/17
Attenuator: Mini Circuits Model: CAT-3		10/16	10/17
Cable: Belden RG-58 (L1)		10/16	10/17
Cable: Belden RG-58 (L2)		10/16	10/17
Cable: Belden 8268 (L3)		10/16	10/17
Cable: Time Microwave: 4M-750HF290-750		10/16	10/17
Cable: Time Microwave: 10M-750HF290-750		10/16	10/17
Frequency Counter: Leader LDC825		2/16	2/17
Oscilloscope Scope: Tektronix 2230		2/16	2/17
Wattmeter: Bird 43 with Load Bird 8085		2/16	2/17
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140		2/16	2/17
R.F. Generators: HP 606A, HP 8614A, HP 8640B		2/16	2/17
R.F. Power Amp 65W Model: 470-A-1010		2/16	2/17
R.F. Power Amp 50W M185- 10-501		2/16	2/17
R.F. Power Amp A.R. Model: 10W 1010M7		2/16	2/17
R.F. Power Amp EIN Model: A301		2/16	2/17
LISN: Compliance Eng. Model 240/20		2/16	2/17
LISN: Fischer Custom Communications Model: FCC-LISN-50-16-2-08		2/16	2/17
Antenna: EMCO Dipole Set 3121C		2/16	2/17
Antenna: C.D. B-101		2/16	2/17
Antenna: Solar 9229-1 & 9230-1		2/16	2/17
Audio Oscillator: H.P. 201CD		2/16	2/17
ESD Test Set 2010i		2/16	2/17
Fast Transient Burst Generator Model: EFT/B-101		2/16	2/17
Field Intensity Meter: EFM-018		2/16	2/17
KEYTEK Ecat Surge Generator		2/16	2/17
Shielded Room 5 M x 3 M x 3.0 M			

## ***Annex C Rogers Qualifications***

***Scot D. Rogers, Engineer***

### **Rogers Labs, Inc.**

Mr. Rogers has approximately 17 years' experience in the field of electronics. Engineering experience includes six years in the automated controls industry and remaining years working with the design, development and testing of radio communications and electronic equipment.

#### **Positions Held**


Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

#### **Educational Background**

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.



Scot D. Rogers

**Annex D FCC Site Registration Letter**

**FEDERAL COMMUNICATIONS COMMISSION**

**Laboratory Division  
7435 Oakland Mills Road  
Columbia, MD 21046**

April 16, 2015

Registration Number: 90910

Rogers Labs, Inc.  
4405 West 259th Terrace  
Louisburg, KS 66053

Attention: Scot Rogers,


Re: Measurement facility located at Louisburg  
3 & 10 meter site  
Date of Renewal: April 16, 2015

Dear Sir or Madam:


Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website [www.fcc.gov](http://www.fcc.gov) under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

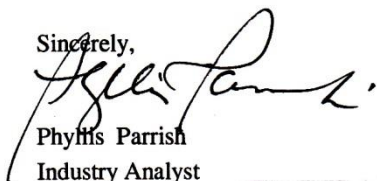  
Phyllis Parrish  
Industry Analyst

## Annex E Industry Canada Site Registration Letter



June 08, 2015

OUR FILE: 46405-3041  
Authorization No: 010277847-001

Rogers Labs Inc.  
4405 West 259th Terrace  
Louisburg, KS  
USA  
66053

**Attention:** Mr. Scot D. Rogers

Dear Sir:

The Bureau has received your application for the renewal of 3m OATS. Be advised that the information received was satisfactory to Industry Canada. The following number(s) is now associated to the site(s) for which registration / renewal was sought ( **Site# 3041A-1** ). Please reference the appropriate site number in the body of test reports containing measurements performed on the site. In addition, please keep for your records the following information;

- The company address code associated to the site(s) located at the above address is: **3041A**

Furthermore, to obtain or renew a unique site number, the applicant shall demonstrate that the site has been accredited to ANSI C63.4-2009 or later. A scope of accreditation indicating the accreditation by a recognized accreditation body to ANSI C63.4-2009 or later shall be accepted. Please indicate in a letter the previous assigned site number if applicable and the type of site (example: 3 metre OATS or 3 metre chamber). If the test facility is not accredited to ANSI C63.4-2009 or later, the test facility shall submit test data demonstrating full compliance with the ANSI standard. The Bureau will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to exceed **three years**. There is no fee or form associated with an OATS filing. OATS submissions are encouraged to be submitted electronically to the Bureau using the following URL; [http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h\\_tt00052e.html](http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h_tt00052e.html).

If you have any questions, you may contact the Bureau by e-mail at [certification.bureau@ic.gc.ca](mailto:certification.bureau@ic.gc.ca) Please reference our file and submission number above for all correspondence.

Yours sincerely,

Bill Payn  
For: Wireless Laboratory Manager  
Certification and Engineering Bureau  
3701 Carling Ave., Building 94  
P.O. Box 11490, Station AH@  
Ottawa, Ontario K2H 8S2  
Email: [certification.bureau@ic.gc.ca](mailto:certification.bureau@ic.gc.ca)

Rogers Labs, Inc.  
4405 W. 259th Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 2

Digital Ally  
Model: VuLink2  
Test #: 161121  
Test to: 47CFR 15.247, RSS-247  
File: Digital Ally Vulink2 DTS TstRpt 161121 r2

S/N: 09502057  
FCC ID: WPZ-VULINK2  
IC: 7945A-VULINK2  
Date: January 13, 2017  
Page 28 of 28