

Prüfbericht-Nr.: <i>Test report no.:</i>	NN20R8UN 001	Auftrags-Nr.: <i>Order no.:</i>	168281436	Seite 1 von 29 Page 1 of 29
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2020-08-15	
Auftraggeber: <i>Client:</i>	Ring LLC 1523 26th St, Santa Monica, CA 90404, USA			
Prüfgegenstand: <i>Test item:</i>	Battery Flood Light			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	5B21S8			
Auftrags-Inhalt: <i>Order content:</i>	FCC and IC approval			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.209 RSS-247 Issue 2 February 2017 RSS-Gen Issue 5 March 2019			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2020-08-15	Please refer to photo documents		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A000876441 001-002			
Prüfzeitraum: <i>Testing period:</i>	2020-09-19 – 2020-09-21			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd. Testing Center			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2020-08-15			
geprüft von: <i>tested by:</i>	X Bell Hu		genehmigt von: <i>authorized by:</i>	X Wine Hon
Datum: <i>Date:</i>	2020-11-13		Ausstellungsdatum: <i>Issue date:</i>	2020-11-13
Stellung / Position:	Project Manager		Stellung / Position:	Technical Certifier
Sonstiges / Other:	FCC ID: 2AEUPRBFBA001, IC: 20271-RBFBA001, HVIN: 5B21S8-A, PMN: Floodlight Battery. Note: The Radiated Spurious Emission above 1GHz and Radiated band edge of BLE function are evaluated in this report. All other tests refer to test report 60411760 001.			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable
5 = mangelhaft N/T = nicht getestet 5 = poor N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht - Nr.: NN20R8UN 001
Test Report No.

Seite 2 von 29
Page 2 of 29

Test Summary

5.1.1 Radiated Spurious Emission

RESULT: *Pass*

Contents

1	General Remarks	4
1.1	Complementary Materials	4
2	Test Sites	4
2.1	Test Facilities	4
2.2	List of Test and Measurement Instruments	5
2.3	Traceability	6
2.4	Calibration	6
2.5	Measurement Uncertainty	6
2.6	Location of Original Data	6
2.7	Status of Facility Used for Testing	6
3	General Product Information	7
3.1	Product Function and Intended Use	7
3.2	Ratings and System Details	7
3.3	Independent Operation Modes	9
3.4	Noise Generating and Noise Suppressing Parts	9
3.5	Submitted Documents	9
4	Test Set-up and Operation Modes	10
4.1	Principle of Configuration Selection	10
4.2	Test Operation and Test Software	10
4.3	Special Accessories and Auxiliary Equipment	10
4.4	Countermeasures to Achieve EMC Compliance	10
4.5	Test Setup Diagram	11
5	Test Results	12
5.1.1	<i>Radiated Spurious Emission.....</i>	12
6	List of Tables	29

1 General Remarks

1.1 Complementary Materials

N/A

2 Test Sites

2.1 Test Facilities

Error! Reference source not found.

362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China

FCC Registration No.: 694916

ISED wireless device testing laboratory: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
Signal Generator	Rohde & Schwarz	SMB100A	180840	2020-08-30
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	165339	2020-08-30
Signal Analyzer	Rohde & Schwarz	FSV 40	101440	2020-08-30
System Controller Interface	Rohde & Schwarz	SCI-100	S10010036	N/A
Filterbank	Rohde & Schwarz	CDMA	100751	2020-08-30
Filterbank	Rohde & Schwarz	GSM	100811	2020-08-30
OSP	Rohde & Schwarz	OSP 120	102041	N/A
OSP	Rohde & Schwarz	OSP 150	101385	N/A
Pre-amplifier	Rohde & Schwarz	SCU08F1	08320030	2020-08-30
Amplifier	Rohde & Schwarz	SCU-18F	180079	2020-08-30
Amplifier	Rohde & Schwarz	SCU40A	100450	2020-09-03
Trilog Broadband Antenna (30 MHz - 1 GHz)	Schwarzbeck	VULB9162	192	2020-09-02
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218719	2020-09-02
Wideband Ridged Horn Antenna (12-18 GHz)	Steatite	QMS-00208	18312	2020-09-02
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19066	2020-09-02
Biconical Broadband Antenna (30 MHz - 1 GHz)	Schwarzbeck	VUBA 9117	357	2020-09-02
Double Ridged Broadband Horn Antenna (1 – 18 GHz)	Schwarzbeck	BBHA 9120 D	01760	2020-09-02
Broadband Horn Antenna (15 – 40 GHz)	Schwarzbeck	BBHA 9170	00862	2020-09-02
Test software	Rohde & Schwarz	EMC32 (V10.40.00)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NW9P2	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table

Item		Extended Uncertainty
Radiated Emission (30-1000MHz)	Field strength (dBμV/m)	4.27dB
Radiated Emission (above 1000MHz)	Field strength (dBμV/m)	4.46dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached in this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No. 362 Huanguan Road Middle, Longhua District, Shenzhen 518110, People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT (equipment under test) is a Battery Flood Light which supports LoRa DTS, LoRa FHSS, FSK FHSS and BLE functions operated at 902-928MHz and 2400-2483.5MHz respectively. For the further information, refer to the user's manual.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

Technical Specification	Value
Kind of Equipment	Battery Flood Light
Type Designation	5B21S8
FCC ID	2AEUPRBFBA001
IC	20271-RBFBA001
HVIN	5B21S8-A
FVIN	1.7.16-56
PMN	Battery Flood Light
Operating Voltage	DC 6V 4D Cells
Testing Voltage	DC 6V

Technical Specification BLE	
Operating Frequency band	2402 – 2480 MHz
Bluetooth Core Version	Bluetooth Low Energy 4.2
Channel separation	2MHz
Extreme Temperature Range	-20°C ~ 55°C
Modulation	GFSK
Antenna Type	Internal Antenna
Antenna Gain(dBi)	0
Channel	0~39

Technical Specification LoRa DTS 500kHz 902.5-926.5MHz	
Operating Frequency band	902 – 928 MHz
Extreme Temperature Range	-20°C ~ 55°C
Bandwidth(kHz)	500
Modulation	LoRa DTS
Antenna Type	Internal Antenna
Antenna Gain(dBi)	-1.88
Channel Separation (kHz)	800
Channel Number	31
Channel (MHz)	902.5, 903.3, 904.1, 904.9, 905.7, 906.5, 907.3, 908.1, 908.9, 909.7, 910.5, 911.3, 912.1, 912.9, 913.7, 914.5, 915.3, 916.1, 916.9, 917.7, 918.5, 919.3, 920.1, 920.9, 921.7, 922.5, 923.3, 924.1, 924.9, 925.7, 926.5

Technical Specification LoRa 125kHz FHSS 902.2-927.8MHz	
Operating Frequency band	902 – 928 MHz
Extreme Temperature Range	-20°C ~ 55°C
Modulation	LoRa FHSS
Antenna Type	Internal Antenna
Antenna Gain(dBi)	-1.88
Channel Separation (kHz)	200
Channel Number	129
Bandwidth (kHz)	125
Hopping channel(MHz)	902.2-927.8

Technical Specification	FSK150Kbps FHSS	FSK 50Kbps FHSS	FSK 250Kbps FHSS
Operating Frequency band	902 – 928 MHz		
Extreme Temperature Range	-20°C ~ 55°C		
Modulation	FSK FHSS		
Antenna Type	Internal Antenna		
Antenna Gain(dBi)	-1.88		
Channel Separation (kHz)	400	200	500
Channel Number	64	129	51
Data Rate (Kbps)	150	50	250
Hopping Channel(MHz)	902.4~927.6	902.2~927.8	902.5~927.5

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, BLE transmitting mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- B. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- | | |
|-------------------------|----------------------------------|
| - Application Form | - FCC/IC Label and Location Info |
| - Block Diagram | - Photo Document |
| - Schematics | - User Manual |
| - Technical Description | |

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10: 2013.

4.3 Special Accessories and Auxiliary Equipment

Table 3: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N
notebook	Lenovo	T420	N/A


4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

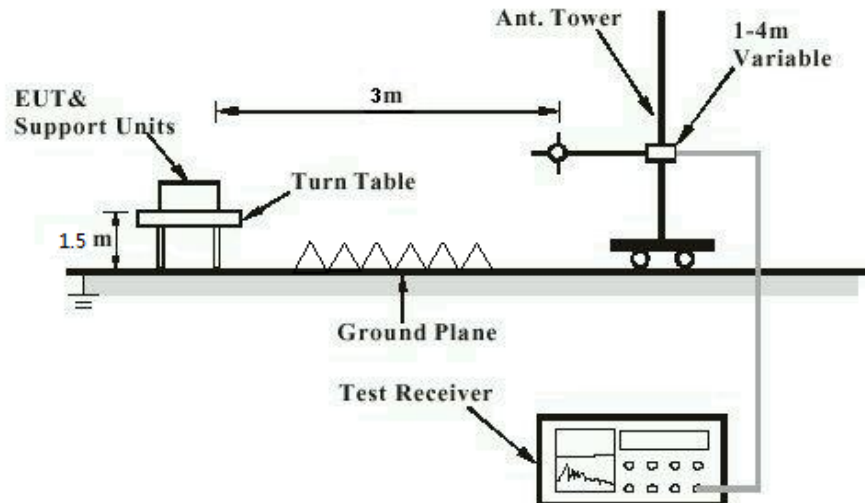

5 Test Results

5.1.1 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d) & FCC Part 15.205 RSS-247 Clause 3.3
Basic standard	: ANSI C63.10: 2013
Limits	: Refer to 15.209(a) of FCC part 15.247(d) RSS-Gen Table 6 & Table 7
Kind of test site	: 3m Semi-anechoic Chamber


Test Setup

Date of testing	: 21.09.2020
Input voltage	: DC 6V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24 °C
Relative humidity	: 45 %
Atmospheric pressure	: 101 kPa

Remark:

During the pretest the EUT was rotated through three orthogonal axes to determine the attitude that maximizes the emissions. After that the EUT was manually handled to find the orientation that has the maximum emission, which is the orientation shown in the test set-up photos.


Mode A.1
Horizontal

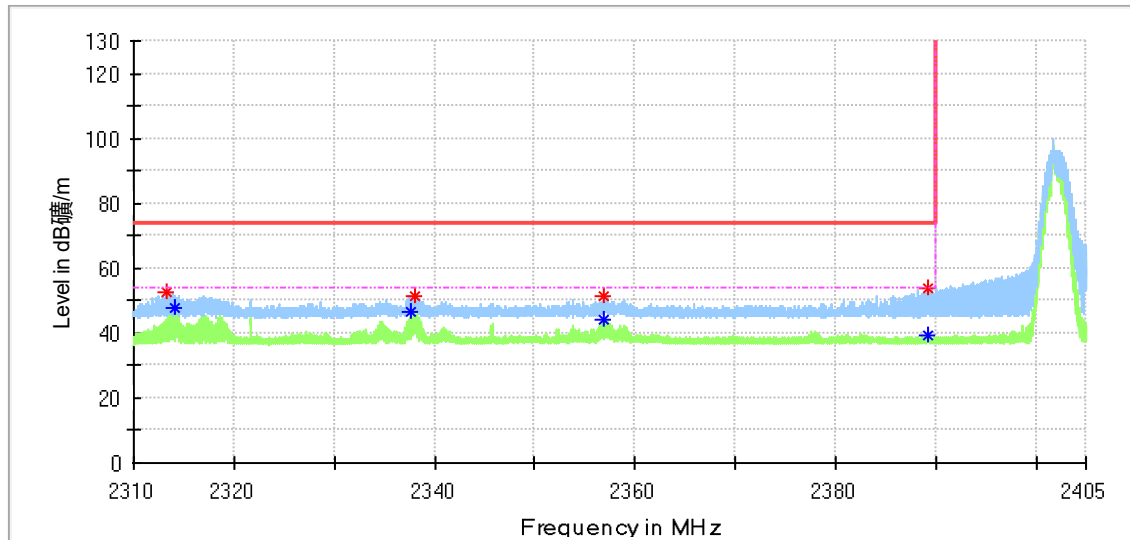

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2313.215625	52.36	---	74.00	21.64	100.0	H	329.0	6.5
2314.035938	---	47.64	54.00	6.36	100.0	H	329.0	6.5
2337.739688	---	46.30	54.00	7.70	100.0	H	329.0	6.8
2337.956250	51.47	---	74.00	22.53	100.0	H	329.0	6.8
2356.889063	51.27	---	74.00	22.73	100.0	H	104.0	6.9
2356.895625	---	44.12	54.00	9.88	100.0	H	104.0	6.9
2389.222500	---	39.33	54.00	14.67	100.0	H	216.0	7.0
2389.229063	53.52	---	74.00	20.48	100.0	H	104.0	7.0


Vertical

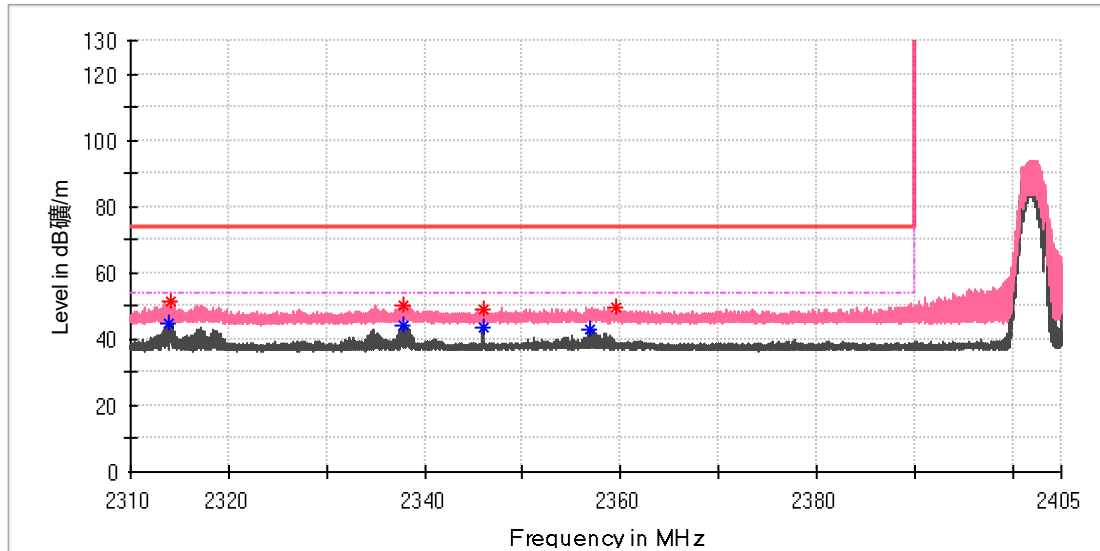

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2313.878438	---	44.66	54.00	9.34	100.0	V	59.0	6.5
2314.068750	51.38	---	74.00	22.62	100.0	V	163.0	6.5
2337.785625	---	44.26	54.00	9.74	100.0	V	0.0	6.8
2337.811875	49.95	---	74.00	24.05	100.0	V	139.0	6.8
2345.982188	49.19	---	74.00	24.81	100.0	V	0.0	6.9
2345.982188	---	43.64	54.00	10.36	100.0	V	0.0	6.9
2356.895625	---	42.71	54.00	11.29	100.0	V	163.0	6.9
2359.461563	49.79	---	74.00	24.21	100.0	V	163.0	6.9


Mode A.1
Horizontal

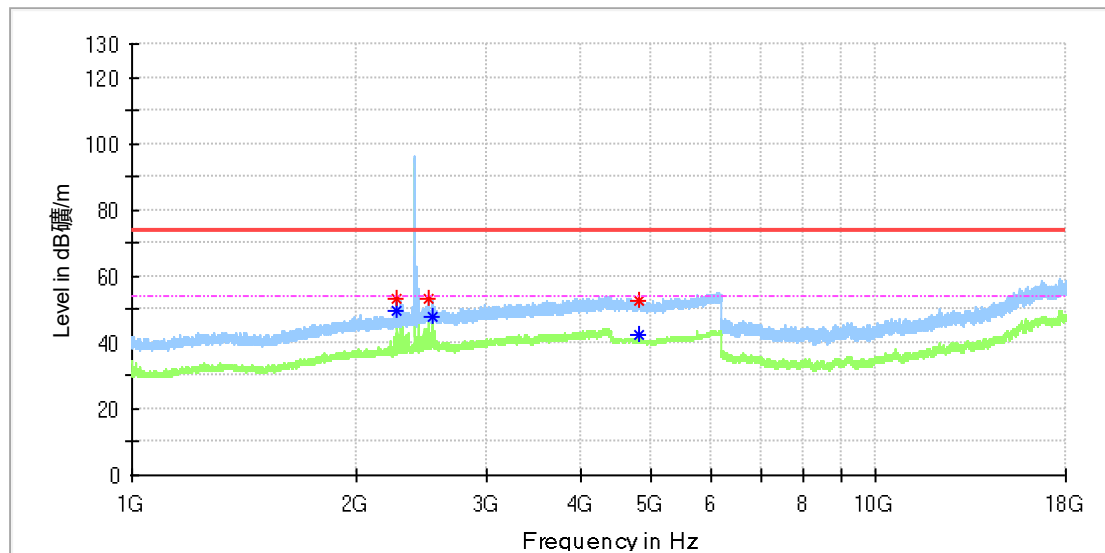

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2273.937500	53.47	---	74.00	20.53	100.0	H	203.0	6.4
2274.150000	---	49.35	54.00	4.65	100.0	H	203.0	6.4
2510.875000	53.02	---	74.00	20.98	100.0	H	92.0	7.4
2530.000000	---	47.89	54.00	6.11	100.0	H	121.0	7.5
4803.500000	52.68	---	74.00	21.32	100.0	H	351.0	13.6
4803.500000	---	42.09	54.00	11.91	100.0	H	351.0	13.6


Vertical

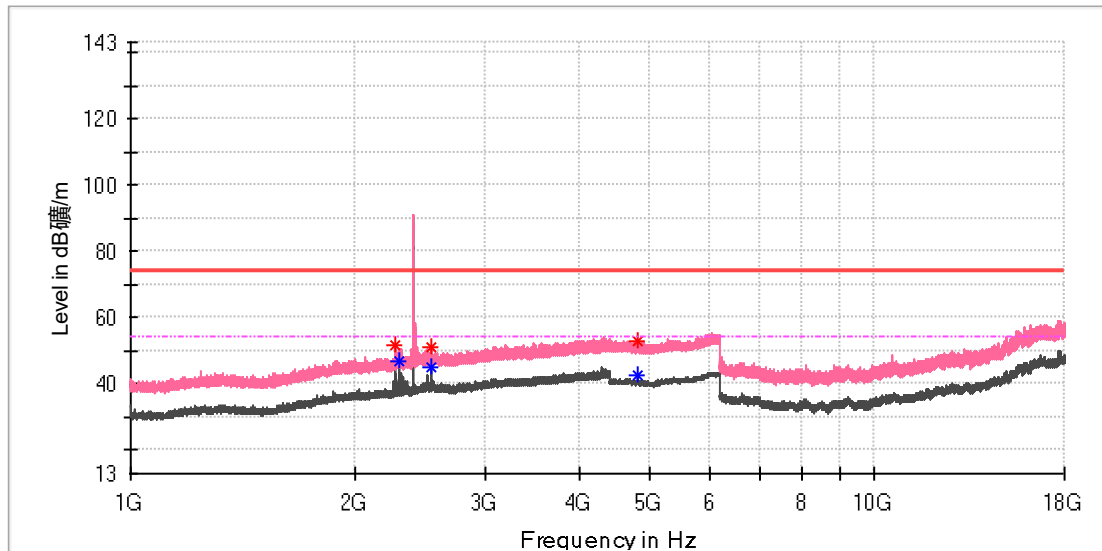

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2273.300000	51.65	---	74.00	22.35	100.0	V	169.0	6.4
2293.062500	---	46.69	54.00	7.31	100.0	V	169.0	6.4
2529.575000	51.30	---	74.00	22.70	100.0	V	0.0	7.5
2530.000000	---	45.13	54.00	8.87	100.0	V	47.0	7.5
4799.000000	52.85	---	74.00	21.15	100.0	V	210.0	13.6
4804.000000	---	42.63	54.00	11.37	100.0	V	88.0	13.6


Mode A.1
Horizontal

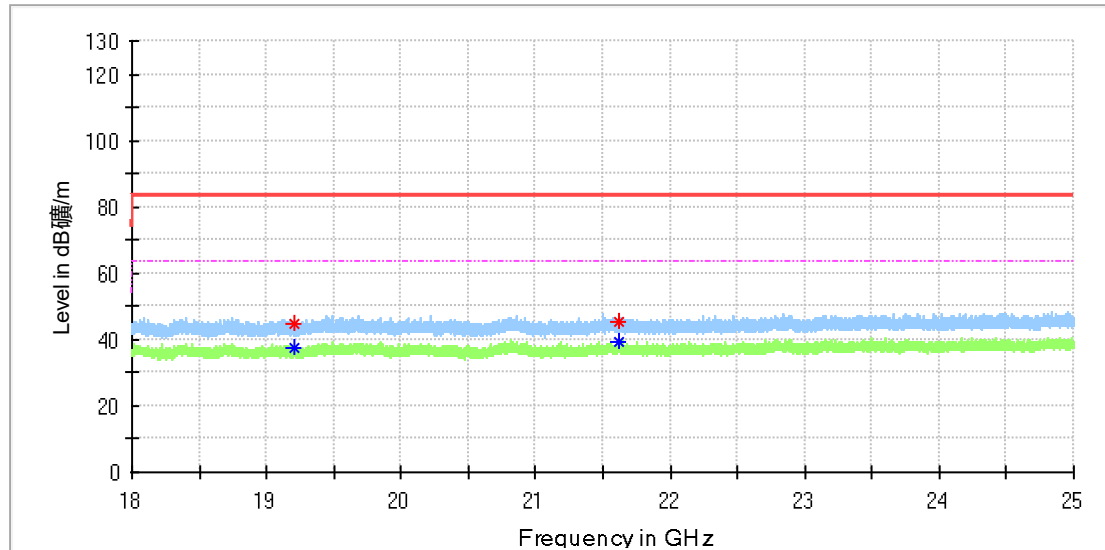

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
19207.062500	44.89	---	83.50	38.61	100.0	H	43.0	-13.2
19210.125000	---	37.55	63.50	25.95	100.0	H	136.0	-13.2
21616.812500	45.25	---	83.50	38.25	100.0	H	117.0	-11.7
21620.312500	---	39.08	63.50	24.42	100.0	H	323.0	-11.7


Vertical

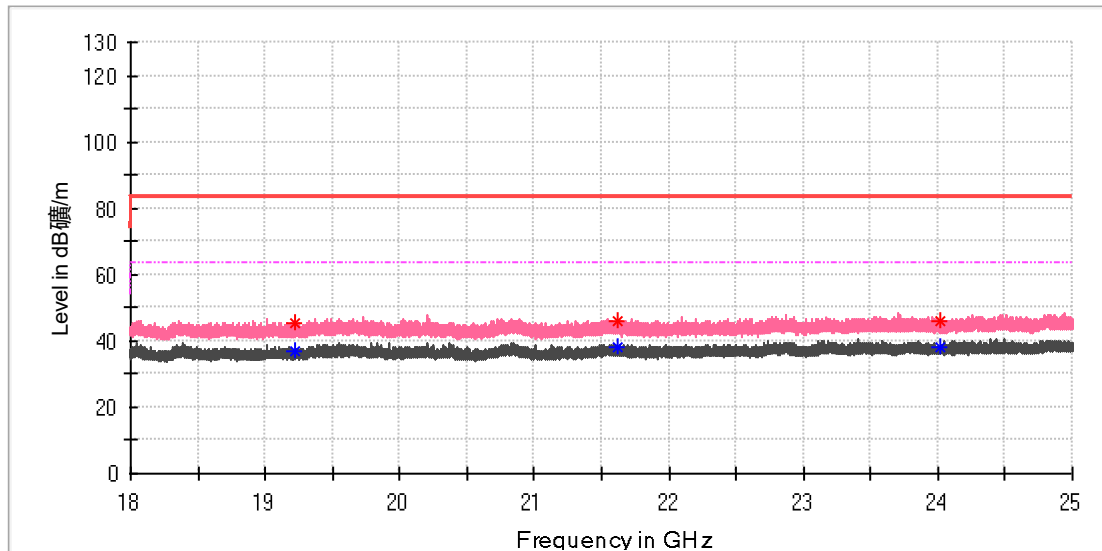

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
19214.062500	45.46	---	83.50	38.04	100.0	V	315.0	-13.2
19214.062500	---	37.12	63.50	26.38	100.0	V	315.0	-13.2
21620.968750	46.06	---	83.50	37.44	100.0	V	291.0	-11.7
21622.718750	---	38.33	63.50	25.17	100.0	V	255.0	-11.7
24018.906250	46.17	---	83.50	37.33	100.0	V	184.0	-10.1
24019.343750	---	38.07	63.50	25.43	100.0	V	0.0	-10.1


Mode A.2
Horizontal

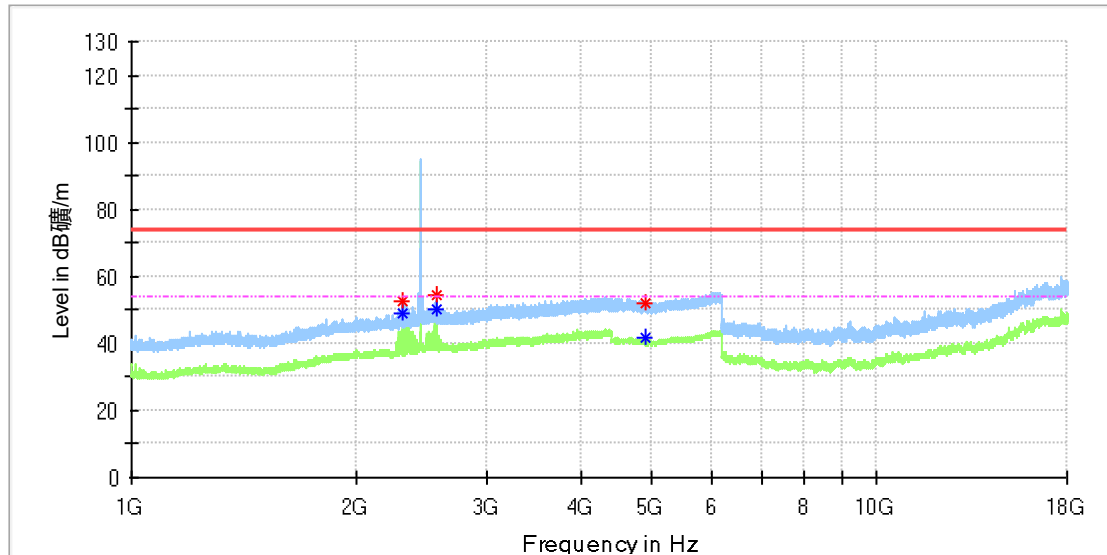

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2311.762500	---	49.19	54.00	4.81	100.0	H	214.0	6.5
2312.612500	52.82	---	74.00	21.18	100.0	H	325.0	6.5
2567.612500	---	50.38	54.00	3.62	100.0	H	77.0	7.5
2567.612500	54.38	---	74.00	19.62	100.0	H	77.0	7.5
4879.000000	52.17	---	74.00	21.83	100.0	H	22.0	13.4
4880.000000	---	41.99	54.00	12.01	100.0	H	8.0	13.4


Vertical

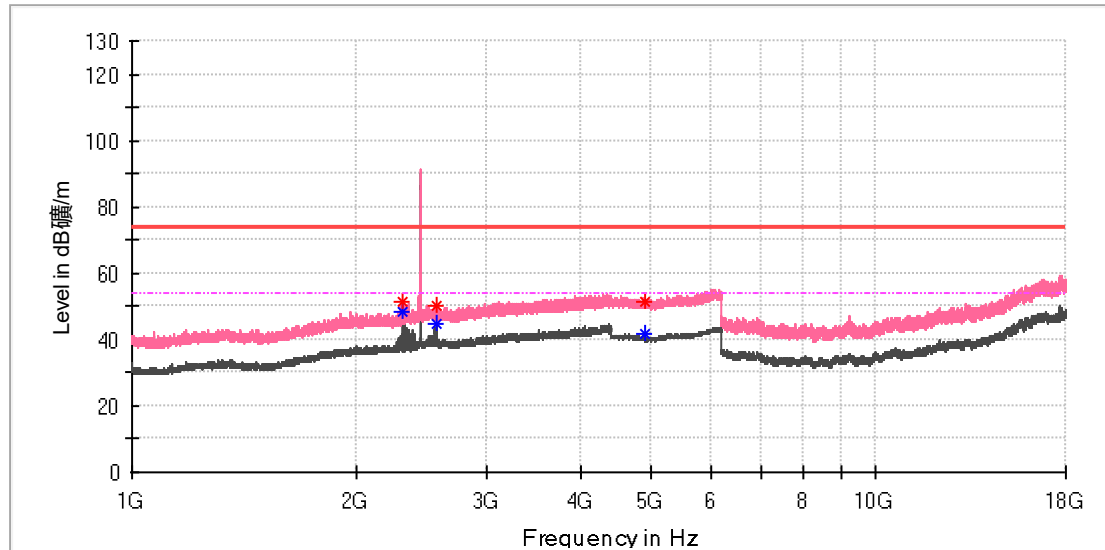

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2311.762500	51.60	---	74.00	22.40	100.0	V	1.0	6.5
2311.762500	---	48.35	54.00	5.66	100.0	V	1.0	6.5
2567.825000	---	44.64	54.00	9.36	100.0	V	79.0	7.5
2568.037500	50.42	---	74.00	23.58	100.0	V	79.0	7.5
4879.000000	51.36	---	74.00	22.64	100.0	V	95.0	13.4
4879.500000	---	41.64	54.00	12.36	100.0	V	51.0	13.4


Horizontal

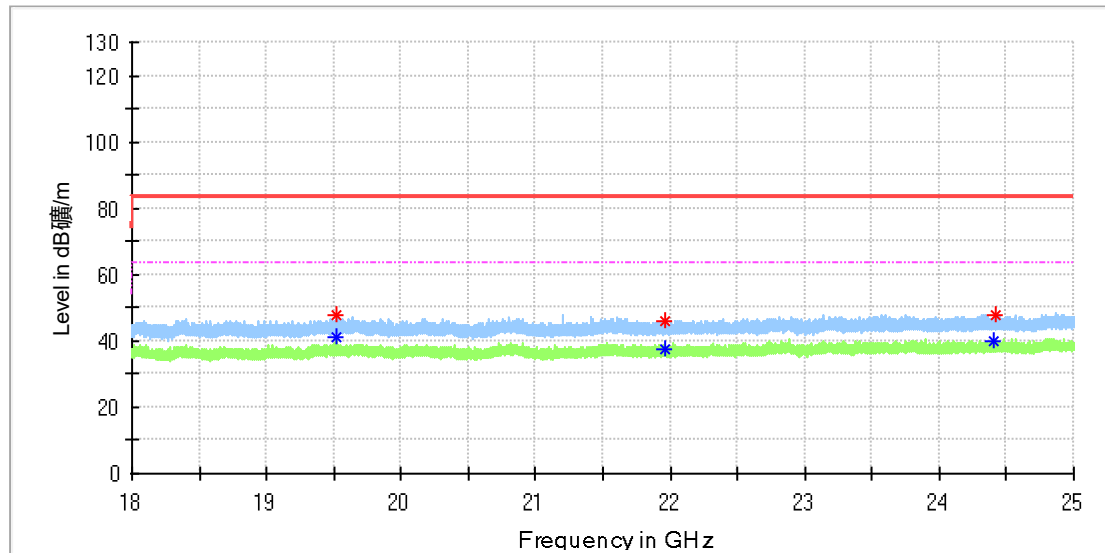

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
19517.906250	---	41.13	63.50	22.37	100.0	H	312.0	-13.1
19517.906250	47.91	---	83.50	35.59	100.0	H	312.0	-13.1
21962.656250	---	37.65	63.50	25.85	100.0	H	0.0	-11.4
21962.656250	45.89	---	83.50	37.61	100.0	H	0.0	-11.4
24409.812500	---	40.12	63.50	23.38	100.0	H	303.0	-10.1
24413.312500	47.47	---	83.50	36.03	100.0	H	93.0	-10.1


Vertical

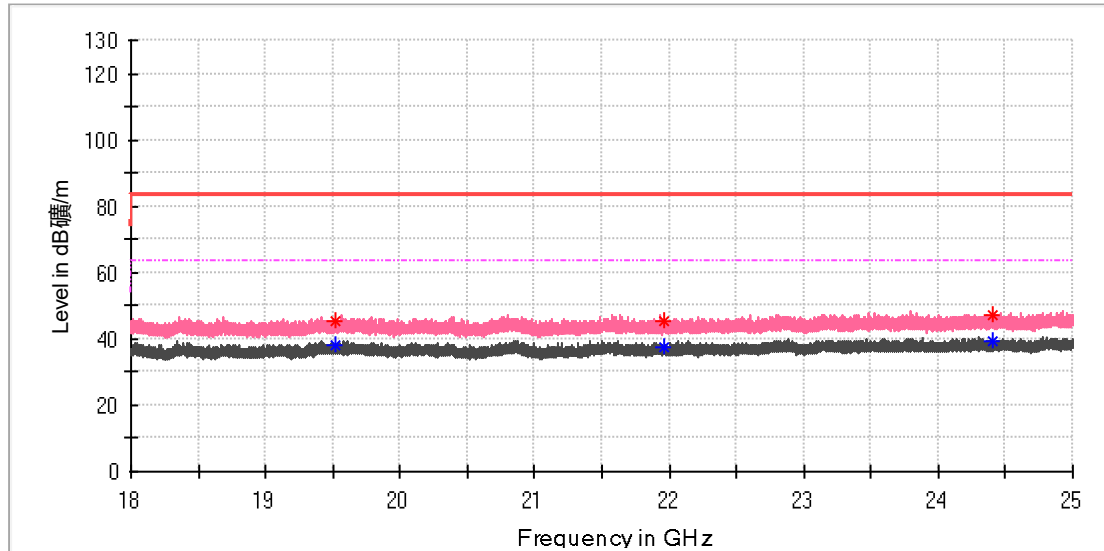

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
19518.781250	---	38.08	63.50	25.42	100.0	V	291.0	-13.1
19519.218750	45.23	---	83.50	38.27	100.0	V	53.0	-13.1
21965.718750	45.10	---	83.50	38.40	100.0	V	172.0	-11.4
21966.593750	---	37.70	63.50	25.80	100.0	V	231.0	-11.4
24401.500000	---	39.03	63.50	24.47	100.0	V	356.0	-10.1
24405.000000	47.09	---	83.50	36.41	100.0	V	0.0	-10.1


Mode: A3
Horizontal

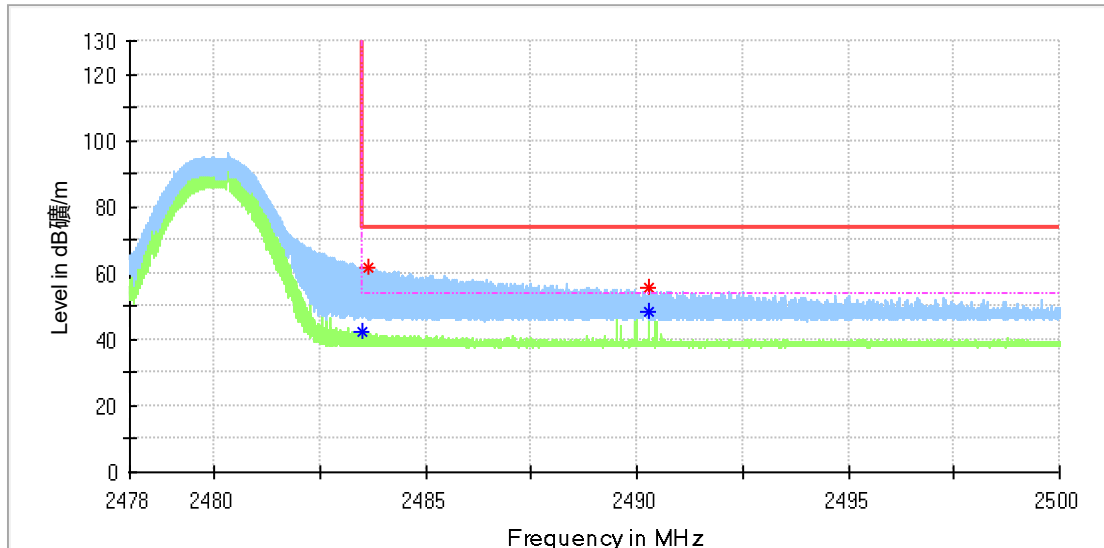

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.522000	---	42.17	54.00	11.83	100.0	H	83.0	7.4
2483.626500	61.85	---	74.00	12.15	100.0	H	94.0	7.4
2490.296625	55.37	---	74.00	18.63	100.0	H	247.0	7.4
2490.296625	---	48.24	54.00	5.76	100.0	H	247.0	7.4


Vertical

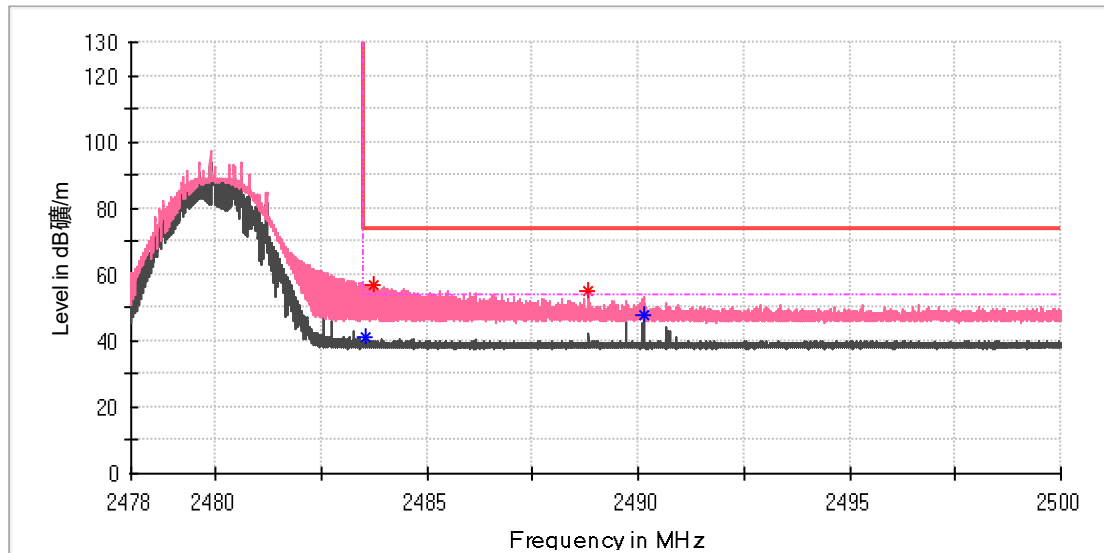

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.553625	---	40.89	54.00	13.11	100.0	V	254.0	7.4
2483.739250	56.86	---	74.00	17.14	100.0	V	44.0	7.4
2488.833625	54.87	---	74.00	19.13	100.0	V	145.0	7.4
2490.119250	---	47.60	54.00	6.40	100.0	V	306.0	7.4


Horizontal

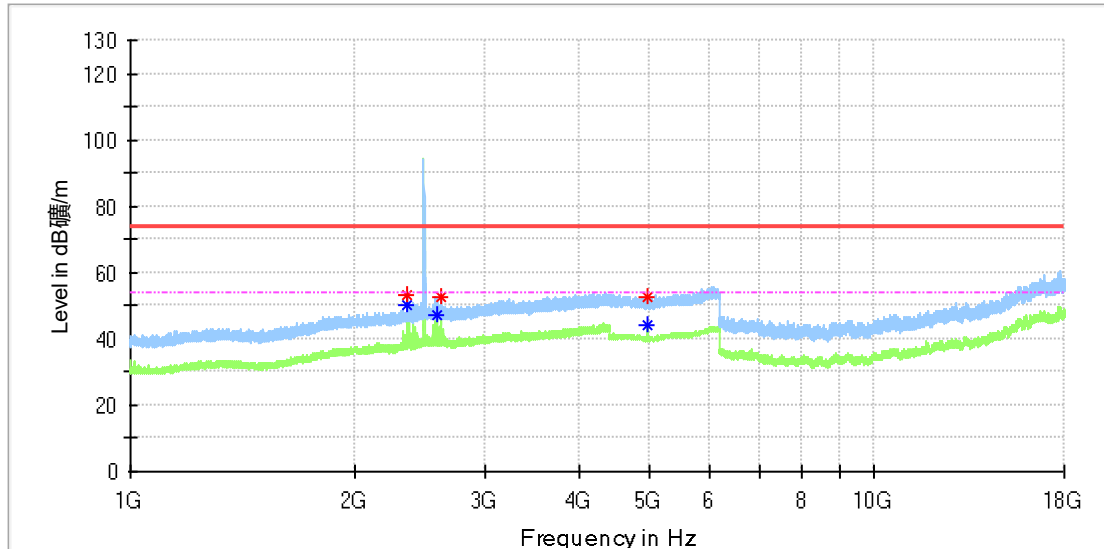

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2351.925000	---	50.24	54.00	3.76	100.0	H	225.0	6.9
2352.350000	53.15	---	74.00	20.85	100.0	H	225.0	6.9
2588.650000	---	47.25	54.00	6.75	100.0	H	87.0	7.4
2607.562500	52.46	---	74.00	21.54	100.0	H	115.0	7.4
4959.500000	---	43.89	54.00	10.11	100.0	H	127.0	13.2
4960.500000	52.73	---	74.00	21.27	100.0	H	6.0	13.2


Vertical

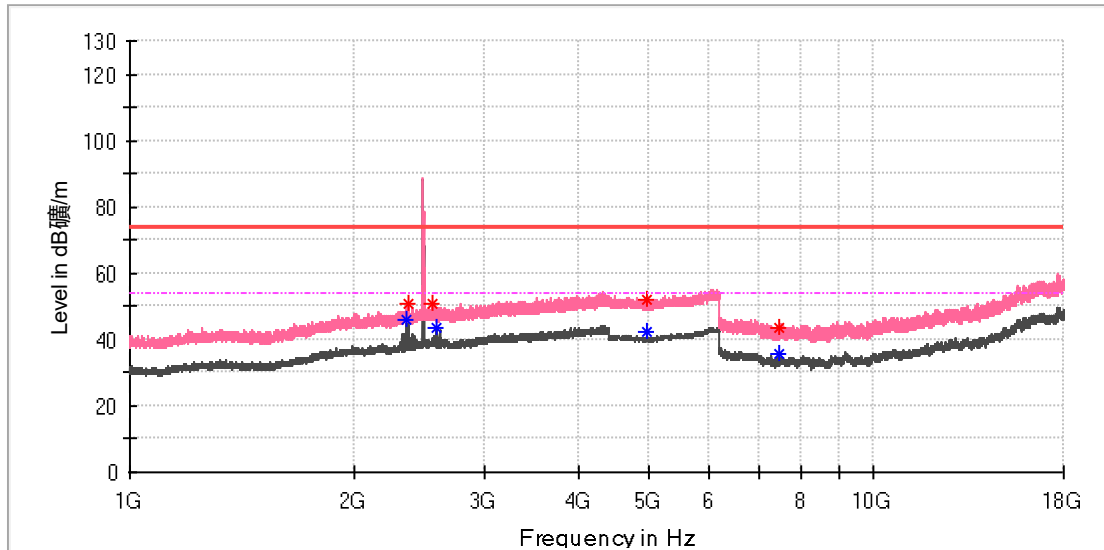

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2351.925000	---	45.75	54.00	8.25	100.0	V	0.0	6.9
2371.262500	50.68	---	74.00	23.32	100.0	V	5.0	6.9
2551.037500	50.62	---	74.00	23.38	100.0	V	339.0	7.6
2586.950000	---	43.25	54.00	10.75	100.0	V	65.0	7.4
4960.000000	---	42.59	54.00	11.41	100.0	V	42.0	13.2
4960.500000	51.90	---	74.00	22.10	100.0	V	42.0	13.2
7440.475000	---	35.54	54.00	18.46	100.0	V	98.0	8.4
7440.966667	43.35	---	74.00	30.65	100.0	V	355.0	8.4


Horizontal

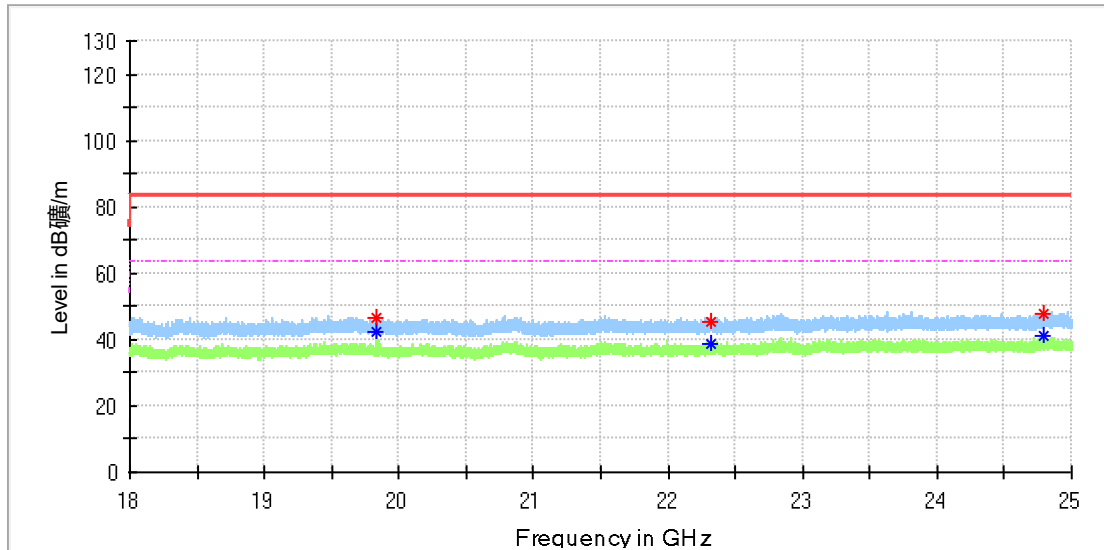

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
19837.718750	46.39	---	83.50	37.11	100.0	H	293.0	-13.0
19837.718750	---	42.07	63.50	21.43	100.0	H	293.0	-13.0
22317.031250	45.61	---	83.50	37.89	100.0	H	69.0	-11.2
22317.687500	---	38.97	63.50	24.53	100.0	H	345.0	-11.2
24795.687500	48.04	---	83.50	35.46	100.0	H	59.0	-10.2
24798.312500	---	40.98	63.50	22.52	100.0	H	179.0	-10.2

Horizontal

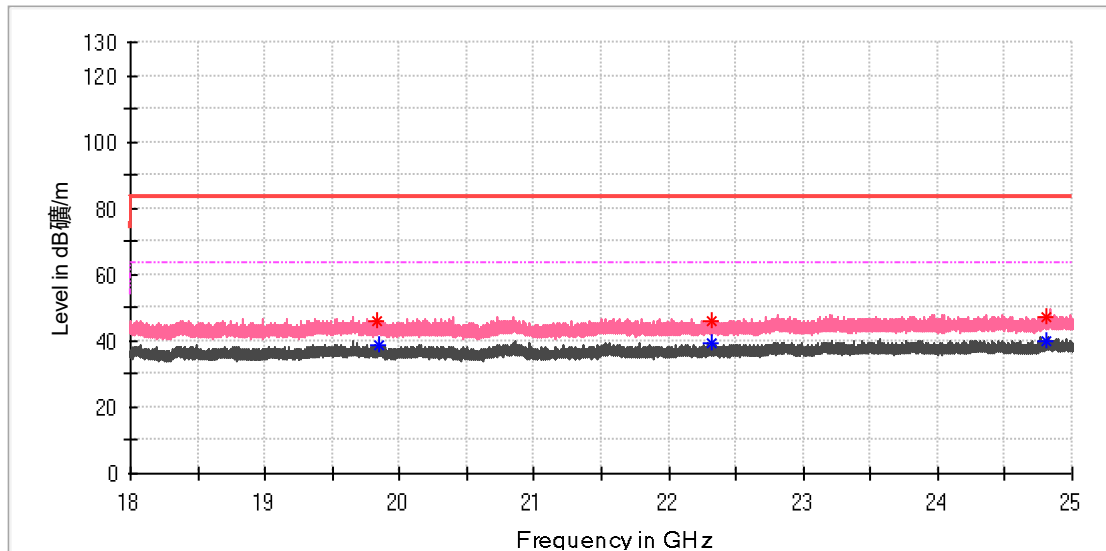

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
19835.093750	45.75	---	83.50	37.75	100.0	V	212.0	-13.0
19839.468750	---	38.46	63.50	25.04	100.0	V	224.0	-13.0
22315.718750	45.78	---	83.50	37.72	100.0	V	105.0	-11.2
22316.812500	---	39.26	63.50	24.24	100.0	V	0.0	-11.2
24801.812500	47.23	---	83.50	36.27	100.0	V	212.0	-10.2
24802.468750	---	40.04	63.50	23.46	100.0	V	359.0	-10.2

6 List of Tables

Table 1: List of Test and Measurement Equipment	5
Table 2: Technical Specification of EUT	7
Table 3: List of Accessories and Auxiliary Equipment	10