



802.11n-HT40 AVGPSPD - Ant 1 / Ant 0 + 1 (Beam-Forming Mode)


Channel 03 (2422MHz)

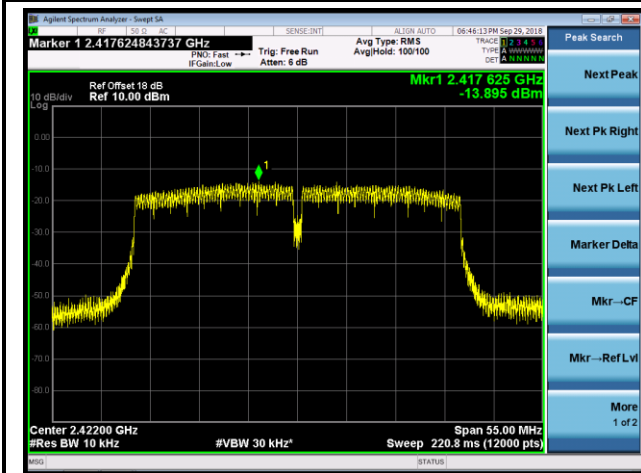

Channel 06 (2437MHz)

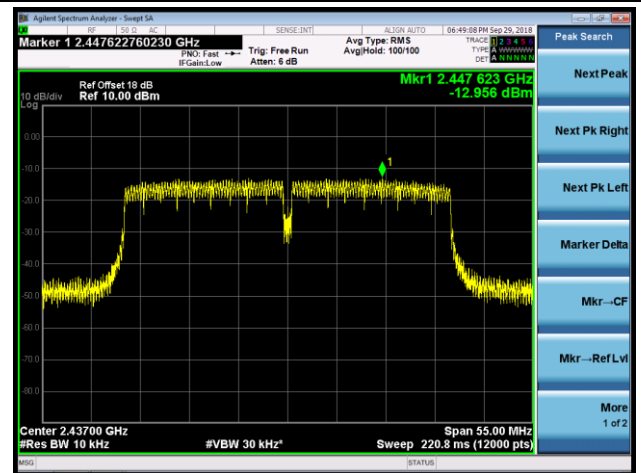

Channel 09 (2452MHz)

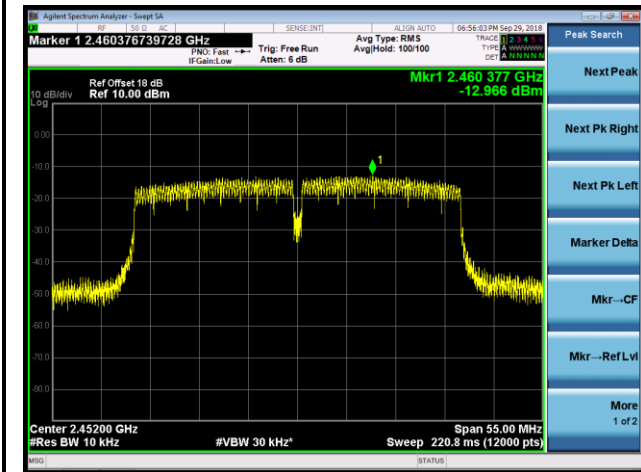

7.5. Conducted Band Edge and Out-of-Band Emissions

7.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

7.5.2. Test Procedure Used

ANSI C63.10 Section 11.11

7.5.3. Test Setting

Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize


Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Notes

1. RBW was set to 1.3MHz rather than 100KHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 20dB below the fundamental emission level measured in a 100KHz bandwidth. However, since the traces in the following plots are measured with a 1.3MHz RBW, the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1.3MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.

7.5.4.Test Setup

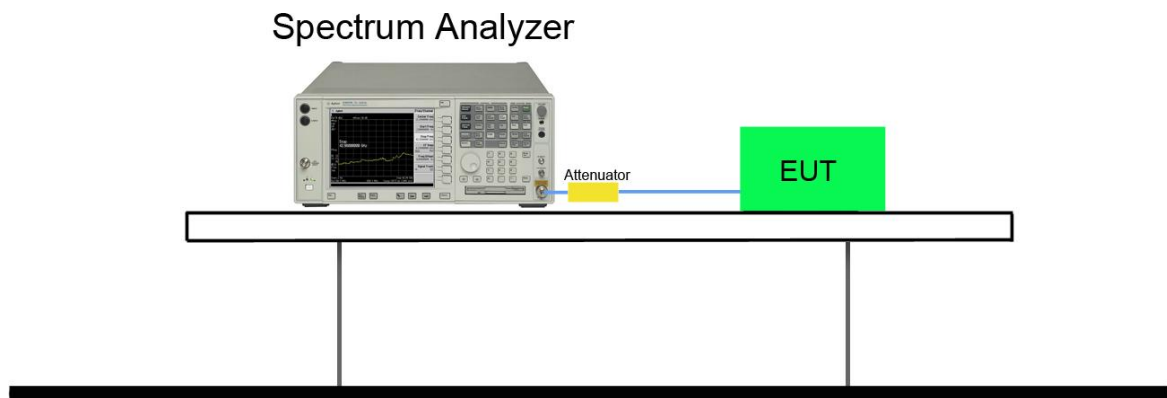

7.5.5. Test Result


Product	OmniAccess Stellar	Temperature	23°C
Test Engineer	Flag Yang	Relative Humidity	54%
Test Site	TR3	Test Date	2018/09/16

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Limit	Result
Ant 0					
11b	1Mbps	01	2412	30dBc	Pass
11b	1Mbps	06	2437	30dBc	Pass
11b	1Mbps	11	2462	30dBc	Pass
Ant 0 / Ant 0 + 1					
11g	6Mbps	01	2412	30dBc	Pass
11g	6Mbps	06	2437	30dBc	Pass
11g	6Mbps	11	2462	30dBc	Pass
11n-HT20	MCS0	01	2412	30dBc	Pass
11n-HT20	MCS0	06	2437	30dBc	Pass
11n-HT20	MCS0	11	2462	30dBc	Pass
11n-HT40	MCS0	03	2422	30dBc	Pass
11n-HT40	MCS0	06	2437	30dBc	Pass
11n-HT40	MCS0	09	2452	30dBc	Pass

802.11b Out-of-Band Emissions - Ant 0

Channel 01 (2412MHz)

100kHz PSD reference Level

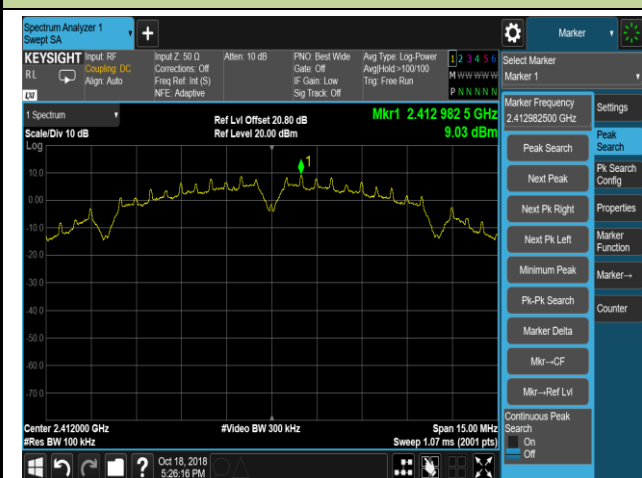

Low Band Edge



Spurious Emission



Channel 06 (2437MHz)

100kHz PSD reference Level




Spurious Emission




Channel 11 (2462MHz)

100kHz PSD reference Level

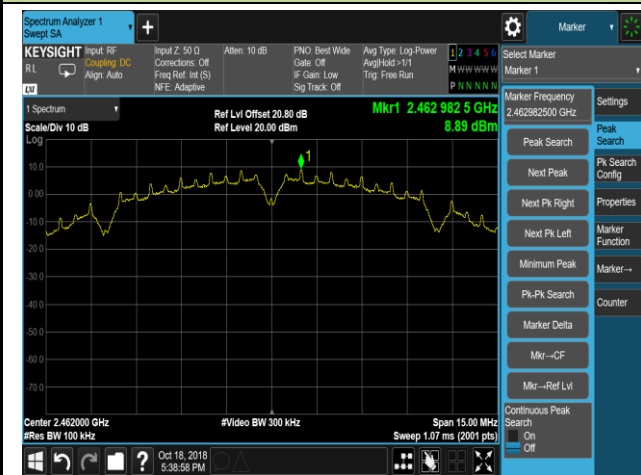

High Band Edge

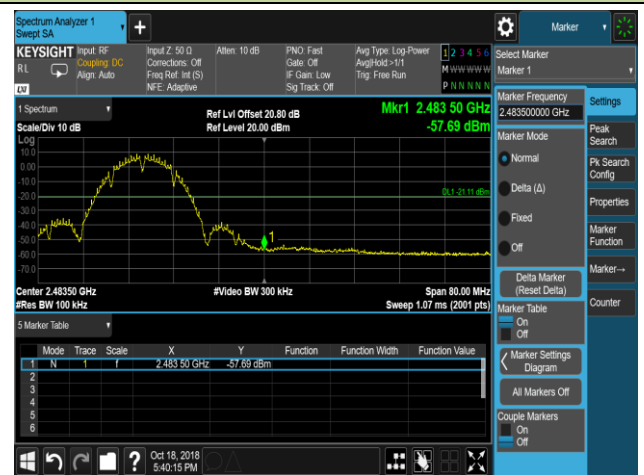


Spurious Emission




802.11g Out-of-Band Emissions- Ant 0 / Ant 0 + 1

Channel 01 (2412MHz)


100kHz PSD reference Level

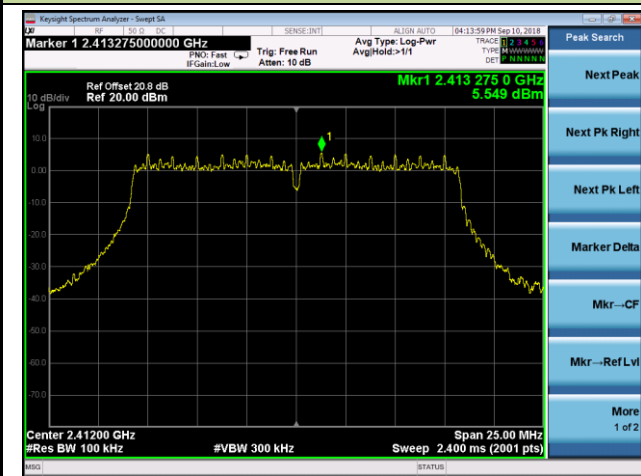

Low Band Edge

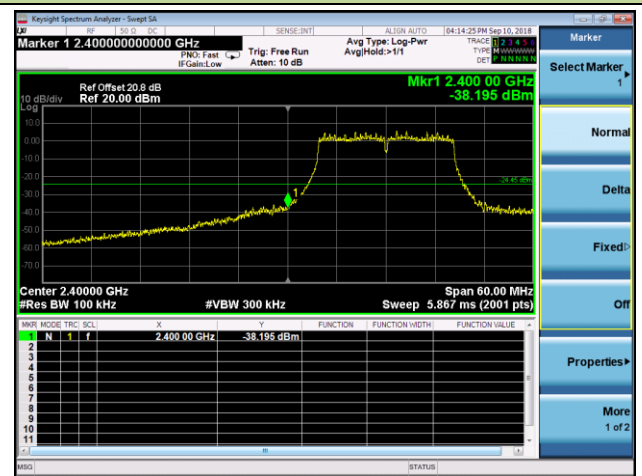


Spurious Emission

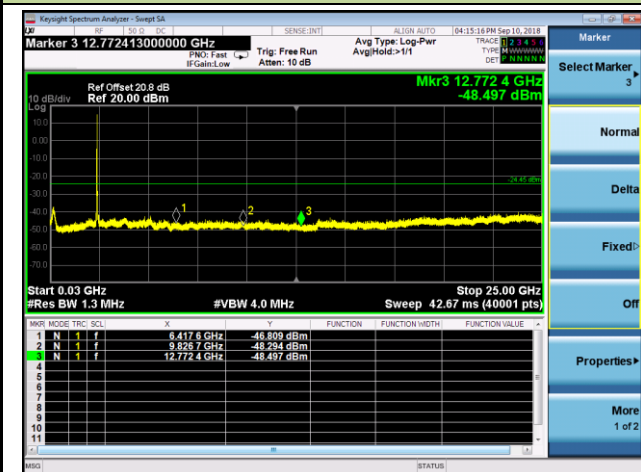


Channel 06 (2437MHz)

100kHz PSD reference Level

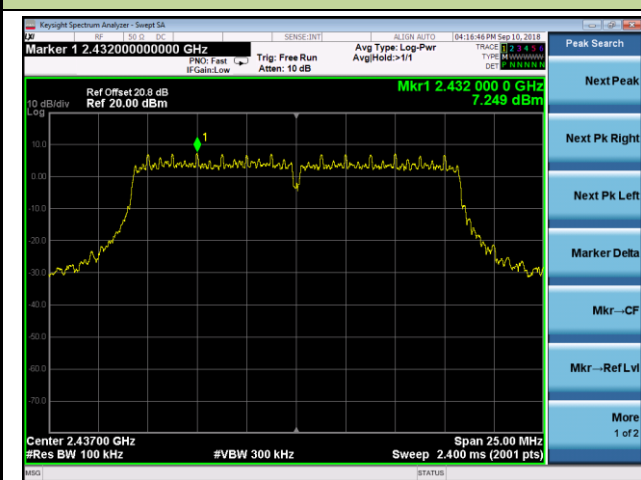


Spurious Emission

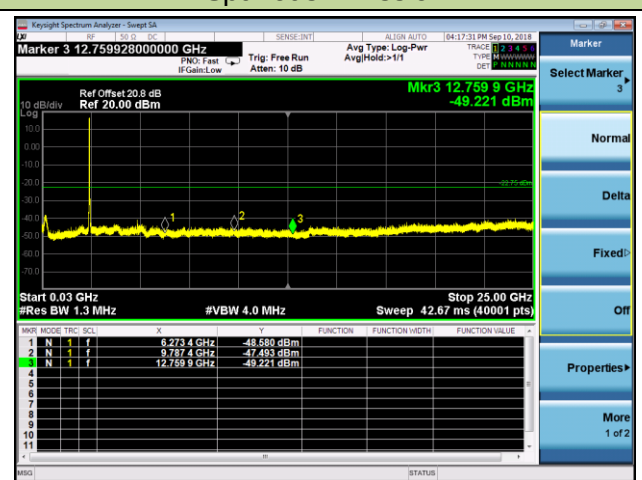


Channel 11 (2462MHz)


100kHz PSD reference Level

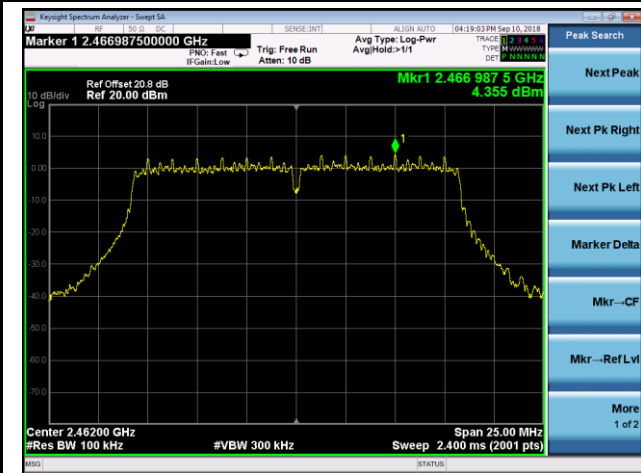

High Band Edge

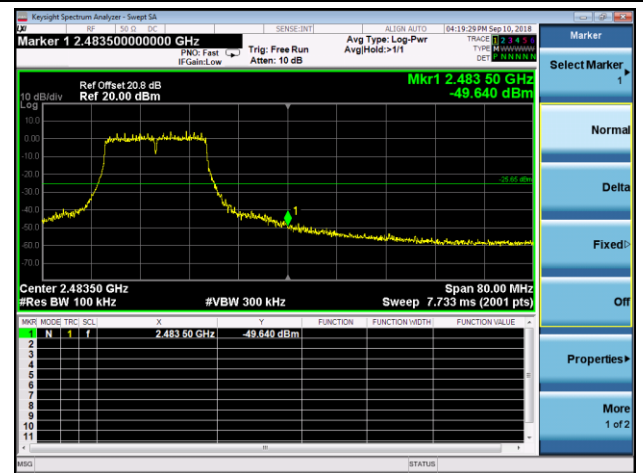


Spurious Emission

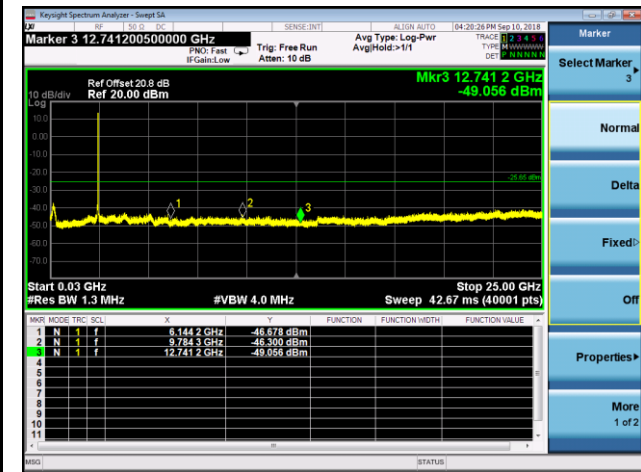


802.11n-HT20 Out-of-Band Emissions- Ant 0 / Ant 0 + 1

Channel 01 (2412MHz)


100kHz PSD reference Level

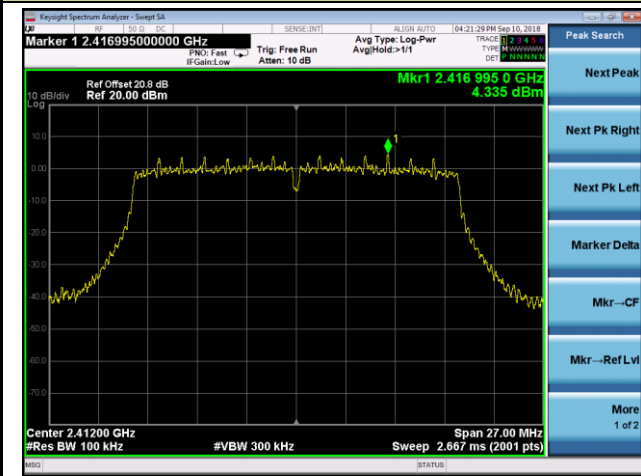

Low Band Edge

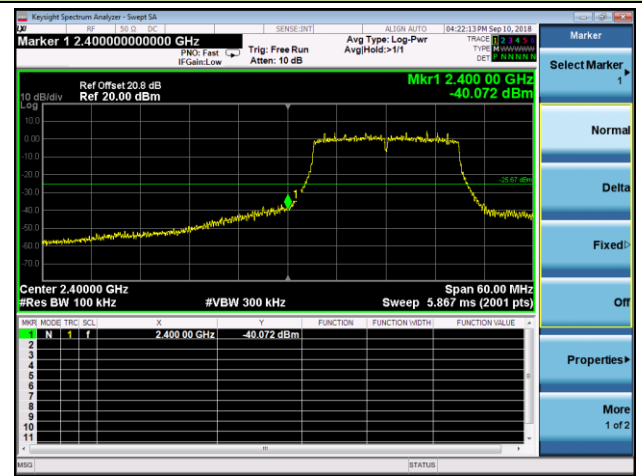


Spurious Emission

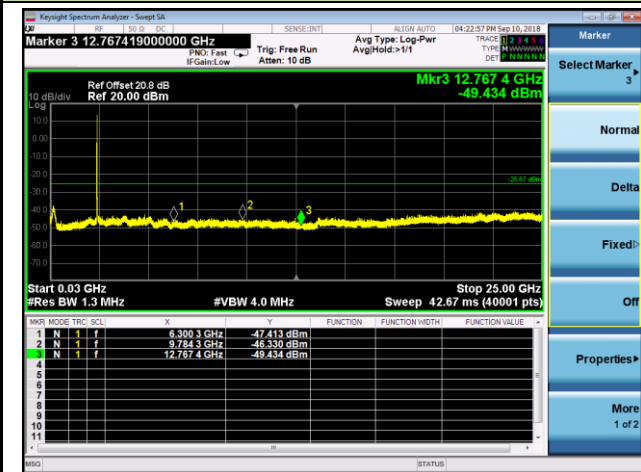


Channel 06 (2437MHz)

100kHz PSD reference Level

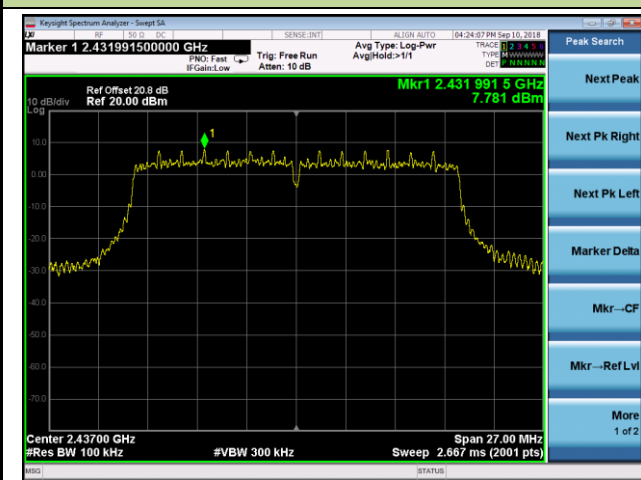


Spurious Emission

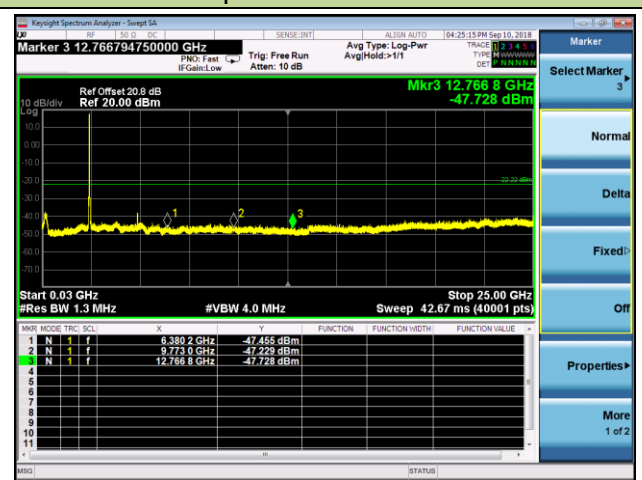


Channel 11 (2462MHz)


100kHz PSD reference Level

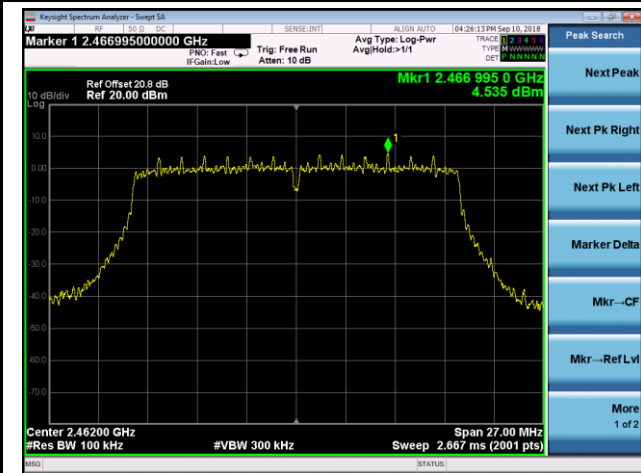

High Band Edge

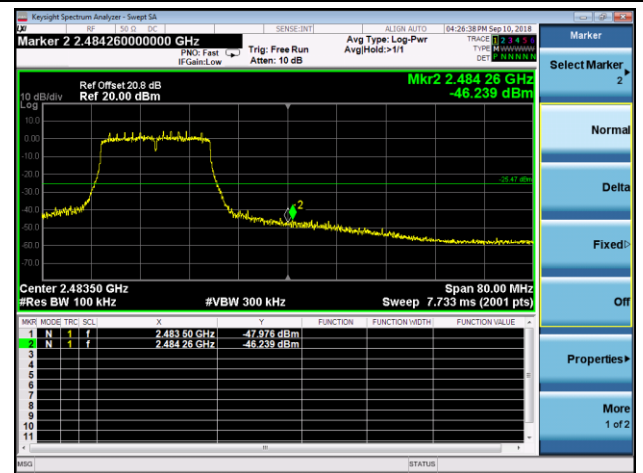


Spurious Emission

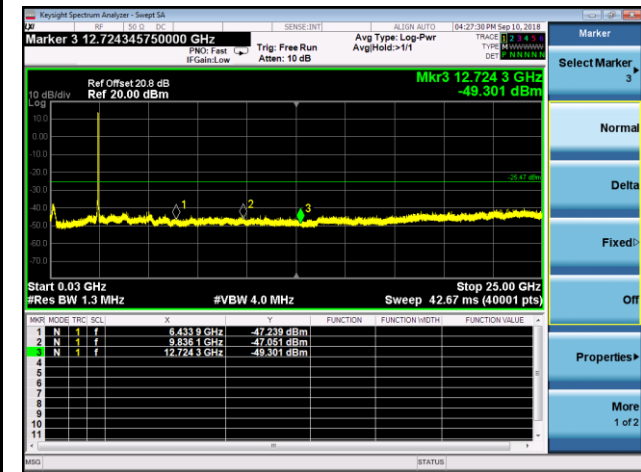


802.11n-HT40 Out-of-Band Emissions- Ant 0 / Ant 0 + 1

Channel 03 (2422MHz)


100kHz PSD reference Level

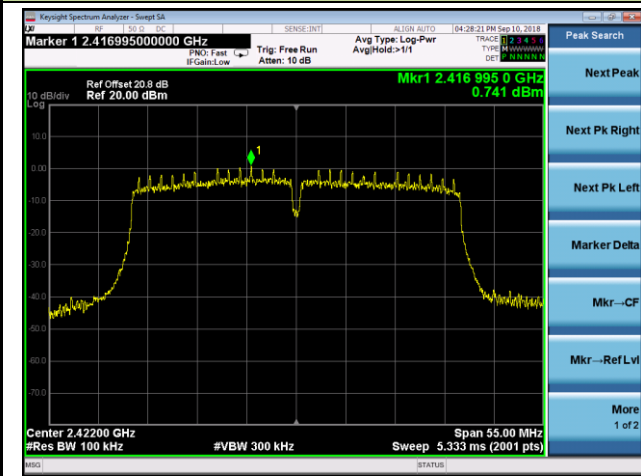

Low Band Edge

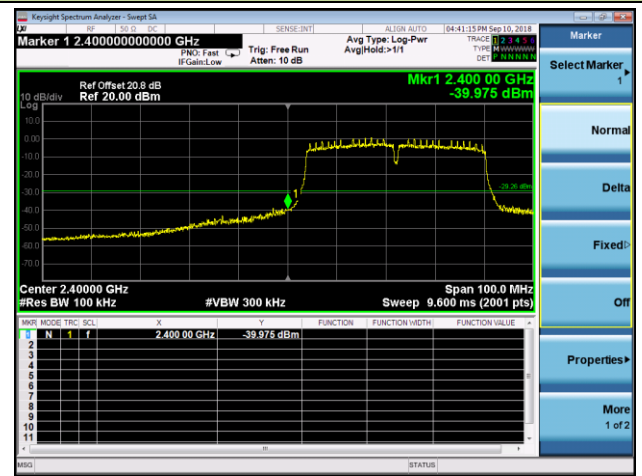


Spurious Emission

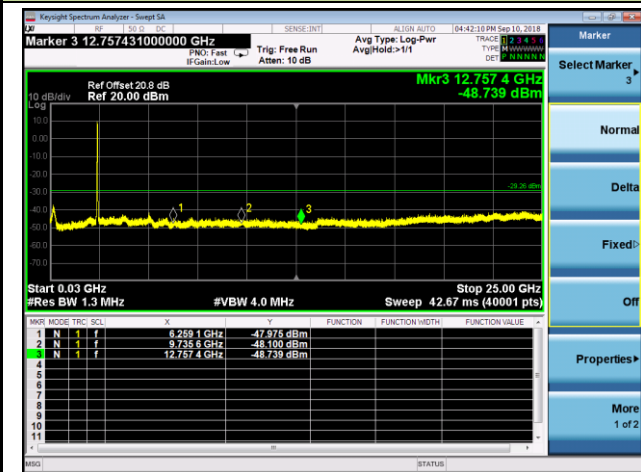


Channel 06 (2437MHz)

100kHz PSD reference Level

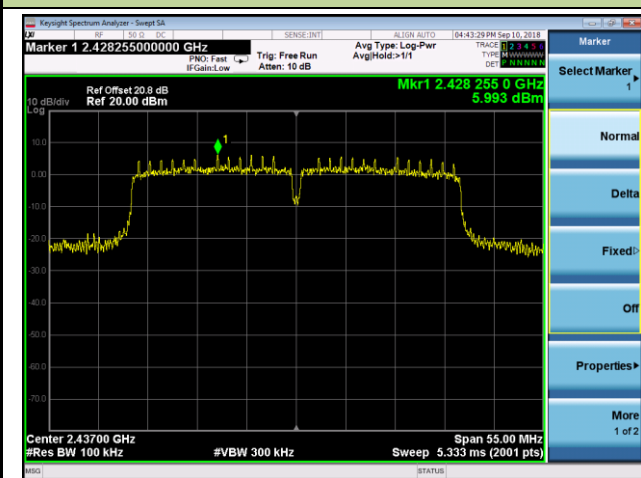


Spurious Emission

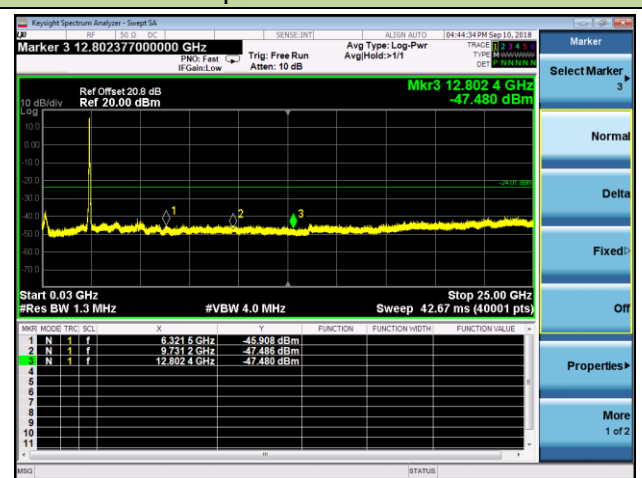


Channel 09 (2452MHz)


100kHz PSD reference Level

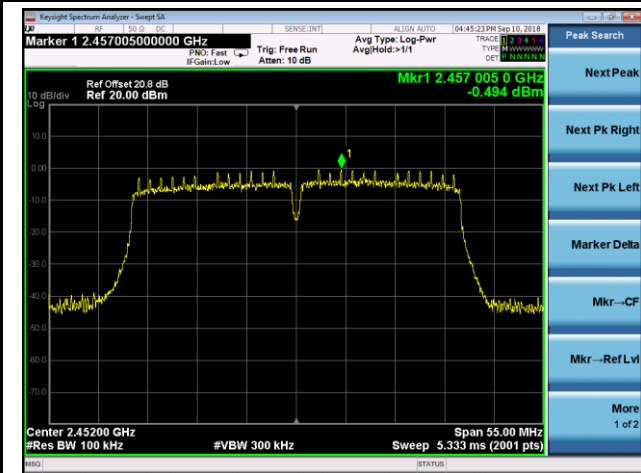

High Band Edge

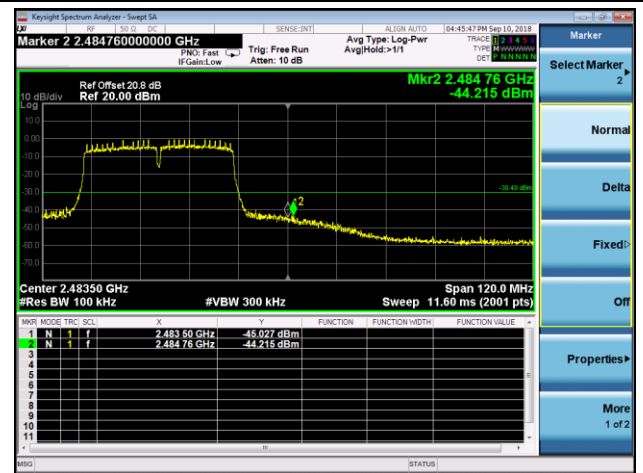

Spurious Emission

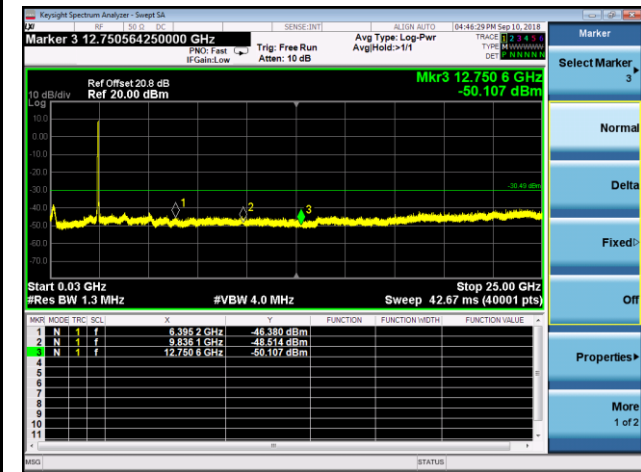

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Peak Field Strength Measurements

Analyzer center frequency was set to the frequency of the radiated spurious emission of interest

RBW = as specified in Table 1

VBW = 3MHz

Detector = peak

Sweep time = auto couple

Trace mode = max hold

Trace was allowed to stabilize

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements

Analyzer center frequency was set to the frequency of the radiated spurious emission of interest

RBW = 1MHz

VBW $\geq$ 1/T

De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to “Voltage” regardless of the display mode

Detector = Peak


Sweep time = auto

Trace mode = max hold


Allow max hold to run for at least 50 times (1/duty cycle) traces

7.6.4. Test Setup


9kHz ~ 30MHz Test Setup:

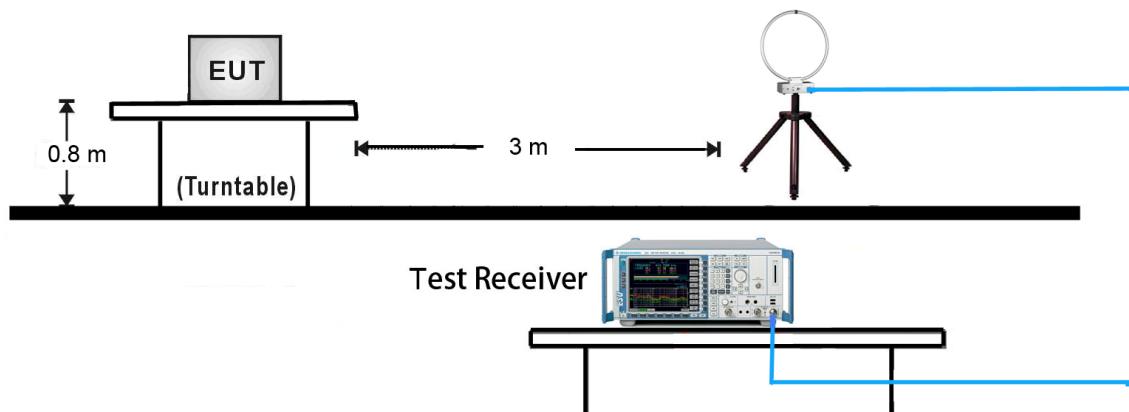


30MHz ~ 1GHz Test Setup:

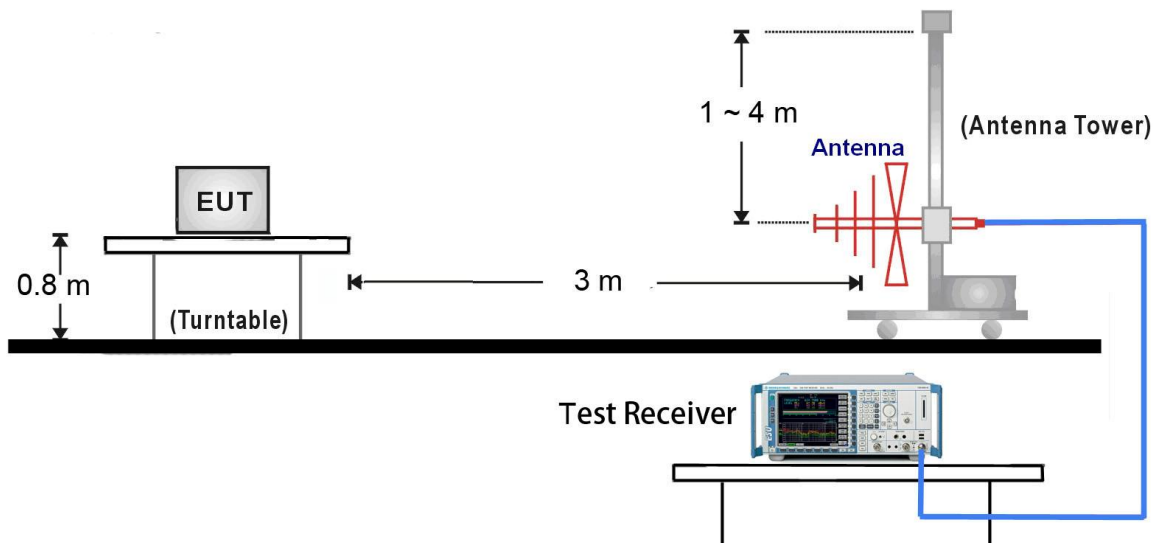

1GHz ~ 18GHz Test Setup:

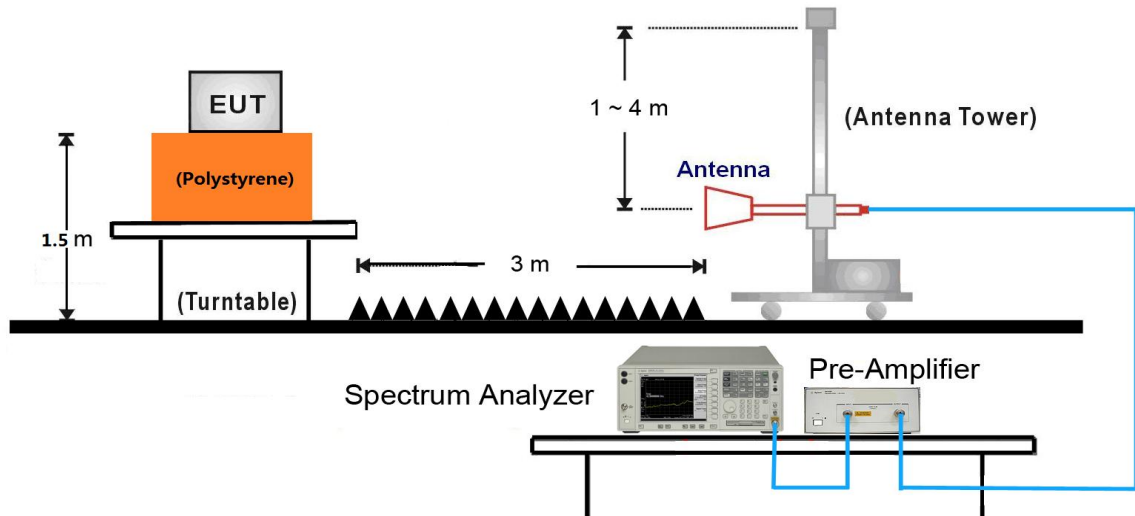


18GHz ~25GHz Test Setup:

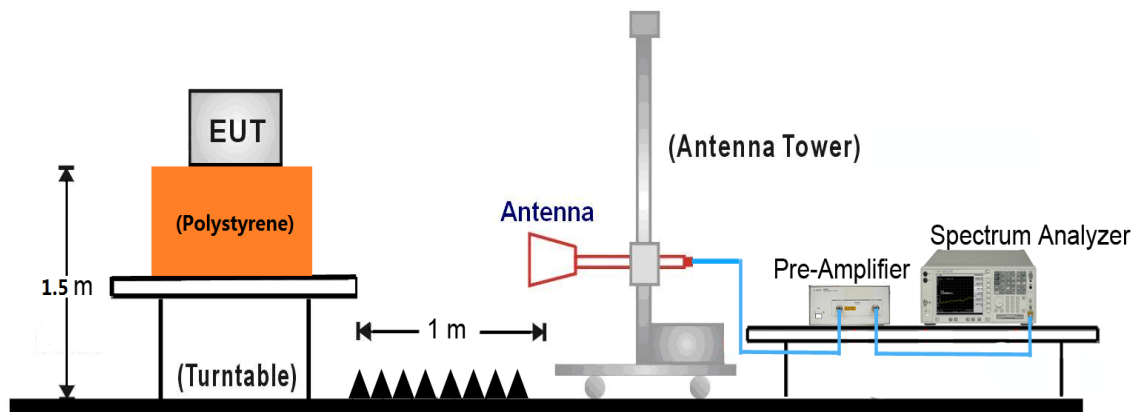

Note: This item was performed with the WIFI antenna connected.

Additional Beam-Forming Mode Test Setup (Apply to all BF radiated emission test frequency range)

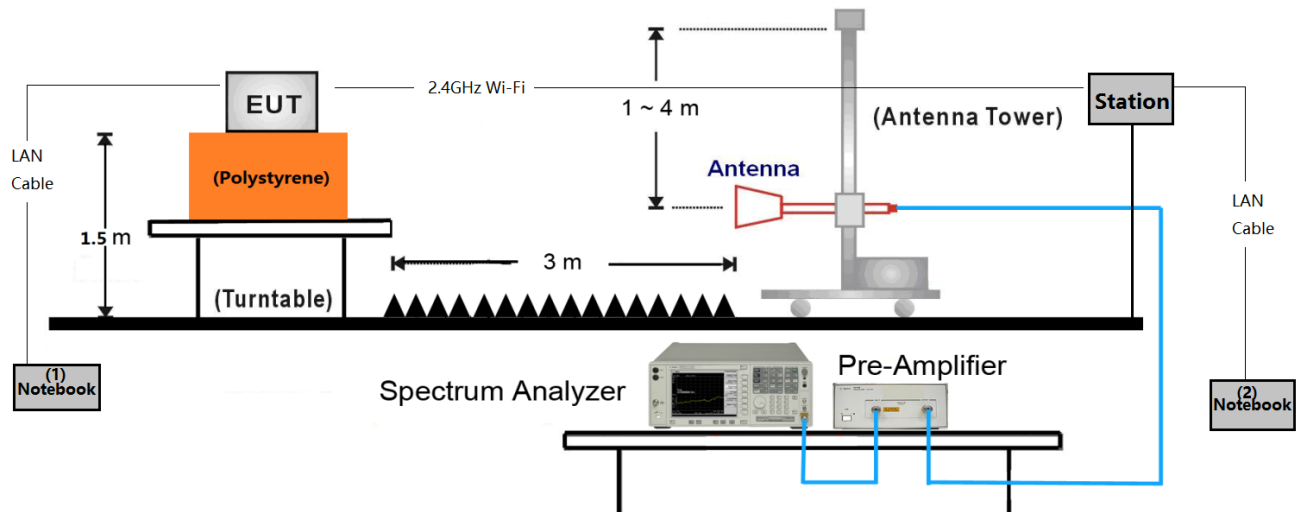

Make the EUT connect with the station by 2.4GHz wireless.

Input some commands in the notebook (1) to open the EUT Beam Forming function, and setup the related test channel & data rate & power setting.

Make the notebook (1) ping with notebook (2) using the “Iperf” software that can produce one bigger duty cycle waveform.

7.6.5. Test Result

Product	OmniAccess Stellar	Temperature	26°C
Test Engineer	Bruce Wang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/10/19
Test Mode:	802.11b - Ant 0	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4825.0	42.3	5.9	48.2	74.0	-25.8	Peak	Horizontal
*	6253.0	39.2	8.7	47.9	79.4	-31.5	Peak	Horizontal
	8174.0	35.1	13.2	48.3	74.0	-25.7	Peak	Horizontal
*	9891.0	32.8	16.6	49.4	79.4	-30.0	Peak	Horizontal
	4825.0	40.6	5.9	46.5	74.0	-27.5	Peak	Vertical
*	7162.5	35.5	12.5	48.0	79.4	-31.4	Peak	Vertical
	8216.5	35.9	13.0	48.9	74.0	-25.1	Peak	Vertical
*	10010.0	33.3	16.6	49.9	79.4	-29.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (109.4dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	OmniAccess Stellar	Temperature	26°C
Test Engineer	Bruce Wang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/10/19
Test Mode:	802.11b - Ant 0	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	47.0	6.0	53.0	74.0	-21.0	Peak	Horizontal
*	6253.0	39.5	8.7	48.2	78.7	-30.5	Peak	Horizontal
	11761.0	34.7	17.3	52.0	74.0	-22.0	Peak	Horizontal
*	13129.5	32.3	18.7	51.0	78.7	-27.7	Peak	Horizontal
	4876.0	41.7	6.0	47.7	74.0	-26.3	Peak	Vertical
*	6253.0	36.5	8.7	45.2	78.7	-33.5	Peak	Vertical
	8182.5	36.1	13.2	49.3	74.0	-24.7	Peak	Vertical
*	9899.5	33.8	16.6	50.4	78.7	-28.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 30dBc of the fundamental emission level (108.7dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	OmniAccess Stellar	Temperature	26°C
Test Engineer	Bruce Wang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/10/19
Test Mode:	802.11b - Ant 0	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4927.0	45.9	6.1	52.0	74.0	-22.0	Peak	Horizontal
*	6253.0	40.1	8.7	48.8	78.4	-29.6	Peak	Horizontal
	8140.0	36.1	13.4	49.5	74.0	-24.5	Peak	Horizontal
*	10146.0	34.4	17.0	51.4	78.4	-27.0	Peak	Horizontal
	4927.0	41.0	6.1	47.1	74.0	-26.9	Peak	Vertical
*	6363.5	36.7	9.1	45.8	78.4	-32.6	Peak	Vertical
	8216.5	36.1	13.0	49.1	74.0	-24.9	Peak	Vertical
*	10188.5	34.0	17.1	51.1	78.4	-27.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (108.4dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	OmniAccess Stellar	Temperature	26°C
Test Engineer	Bruce Wang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/10/19
Test Mode:	802.11b - Ant 1	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4825.0	42.5	5.9	48.4	74.0	-25.6	Peak	Horizontal
*	7239.0	37.4	12.7	50.1	74.0	-23.9	Peak	Horizontal
	8310.0	34.8	12.6	47.4	74.0	-26.6	Peak	Horizontal
*	10188.5	34.9	17.1	52.0	74.0	-22.0	Peak	Horizontal
	4825.0	41.7	5.9	47.6	74.0	-26.4	Peak	Vertical
*	6338.0	37.0	9.0	46.0	74.0	-28.0	Peak	Vertical
	8174.0	36.1	13.2	49.3	74.0	-24.7	Peak	Vertical
*	9950.5	35.3	16.7	52.0	74.0	-22.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (102.0dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	OmniAccess Stellar	Temperature	26°C
Test Engineer	Bruce Wang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/10/19
Test Mode:	802.11b - Ant 1	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	39.1	6.0	45.1	74.0	-28.9	Peak	Horizontal
*	6253.0	37.9	8.7	46.6	74.3	-27.7	Peak	Horizontal
	7307.0	40.4	12.5	52.9	74.0	-21.1	Peak	Horizontal
	7310.1	33.6	12.5	46.1	54.0	-7.9	Average	Horizontal
*	10120.5	32.8	16.9	49.7	74.3	-24.6	Peak	Horizontal
	4876.0	41.4	6.0	47.4	74.0	-26.6	Peak	Vertical
*	6550.5	36.3	10.2	46.5	74.3	-27.8	Peak	Vertical
	8225.0	36.4	13.1	49.5	74.0	-24.5	Peak	Vertical
*	10307.5	34.8	17.3	52.1	74.3	-22.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 30dBc of the fundamental emission level (104.3dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	OmniAccess Stellar	Temperature	26°C
Test Engineer	Bruce Wang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/10/19
Test Mode:	802.11b - Ant 1	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4924.1	46.9	6.1	53.0	54.0	-1.0	Average	Horizontal
	4927.0	49.5	6.1	55.6	74.0	-18.4	Peak	Horizontal
*	6253.0	38.6	8.7	47.3	74.0	-26.7	Peak	Horizontal
	7383.5	42.8	12.6	55.4	74.0	-18.6	Peak	Horizontal
	7385.1	38.6	12.6	51.2	54.0	-2.8	Average	Horizontal
*	9916.5	33.1	16.6	49.7	74.0	-24.3	Peak	Horizontal
	4927.0	44.0	6.1	50.1	74.0	-23.9	Peak	Vertical
*	6253.0	36.3	8.7	45.0	74.0	-29.0	Peak	Vertical
	7383.5	39.7	12.6	52.3	74.0	-21.7	Peak	Vertical
	7385.2	34.8	12.6	47.4	54.0	-6.6	Average	Vertical
*	9721.0	33.9	15.7	49.6	74.0	-24.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (103.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	OmniAccess Stellar	Temperature	26°C
Test Engineer	Bruce Wang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/09/19
Test Mode:	802.11g - Ant 0 + 1 (CDD Mode)	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4825.0	5.9	51.4	57.3	74.0	-16.7	Peak	Horizontal
	4826.1	5.9	40.9	46.8	54.0	-7.2	Average	Horizontal
*	7230.5	12.7	45.1	57.8	82.1	-24.3	Peak	Horizontal
	8216.5	13.0	35.6	48.6	74.0	-25.4	Peak	Horizontal
*	9933.5	16.7	34.4	51.1	82.1	-31.0	Peak	Horizontal
	4825.0	5.9	55.6	61.5	74.0	-12.5	Peak	Vertical
	4826.3	5.9	44.1	50.0	54.0	-4.0	Average	Vertical
*	7247.5	12.7	41.7	54.4	82.1	-27.7	Peak	Vertical
	8395.0	12.5	35.7	48.2	74.0	-25.8	Peak	Vertical
*	9874.0	16.8	34.6	51.4	82.1	-30.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (112.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	OmniAccess Stellar	Temperature	26°C
Test Engineer	Bruce Wang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/09/19
Test Mode:	802.11g - Ant 0 + 1 (CDD Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4867.5	6.0	52.1	58.1	74.0	-15.9	Peak	Horizontal
	4870.3	6.0	42.2	48.2	54.0	-5.8	Average	Horizontal
*	6253.0	8.7	38.2	46.9	85.2	-38.3	Peak	Horizontal
	7311.7	12.5	41.3	53.8	54.0	-0.2	Average	Horizontal
	7315.5	12.6	53.2	65.8	74.0	-8.2	Peak	Horizontal
*	10027.0	16.6	35.3	51.9	85.2	-33.3	Peak	Horizontal
	4875.3	6.0	45.9	51.9	54.0	-2.1	Average	Vertical
	4876.0	6.0	55.7	61.7	74.0	-12.3	Peak	Vertical
*	6057.5	7.9	36.1	44.0	85.2	-41.2	Peak	Vertical
	7311.6	12.5	38.2	50.7	54.0	-3.3	Average	Vertical
	7315.5	12.6	49.4	62.0	74.0	-12.0	Peak	Vertical
*	10197.0	17.2	34.8	52.0	85.2	-33.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (115.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	OmniAccess Stellar	Temperature	26°C
Test Engineer	Bruce Wang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/09/19
Test Mode:	802.11g - Ant 0 + 1 (CDD Mode)	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4927.0	6.1	41.2	47.3	74.0	-26.7	Peak	Horizontal
*	6253.0	8.7	37.6	46.3	80.7	-34.4	Peak	Horizontal
	7375.0	12.6	45.6	58.2	74.0	-15.8	Peak	Horizontal
	7391.9	12.6	33.2	45.8	54.0	-8.2	Average	Horizontal
*	9976.0	16.7	35.2	51.9	80.7	-28.8	Peak	Horizontal
	4925.5	6.1	36.6	42.7	54.0	-11.3	Average	Vertical
	4935.5	6.1	48.1	54.2	74.0	-19.8	Peak	Vertical
*	6363.5	9.1	36.1	45.2	80.7	-35.5	Peak	Vertical
	7386.6	12.6	30.6	43.2	54.0	-10.8	Average	Vertical
	7392.0	12.6	43.0	55.6	74.0	-18.4	Peak	Vertical
*	10299.0	17.3	34.4	51.7	80.7	-29.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (110.7dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	OmniAccess Stellar	Temperature	26°C
Test Engineer	Bruce Wang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/09/19
Test Mode:	802.11n-HT20 - Ant 0 + 1 (CDD Mode)	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4829.6	5.9	37.5	43.4	54.0	-10.6	Average	Horizontal
	4833.5	5.9	50.2	56.1	74.0	-17.9	Peak	Horizontal
*	7222.0	12.7	43.1	55.8	84.0	-28.2	Peak	Horizontal
	8199.5	13.1	35.9	49.0	74.0	-25.0	Peak	Horizontal
*	9950.5	16.7	34.7	51.4	84.0	-32.6	Peak	Horizontal
	4816.5	5.9	50.7	56.6	74.0	-17.4	Peak	Vertical
	4829.2	5.9	39.8	45.7	54.0	-8.3	Average	Vertical
*	7239.0	12.7	40.7	53.4	84.0	-30.6	Peak	Vertical
	8293.0	12.7	36.6	49.3	74.0	-24.7	Peak	Vertical
*	10222.5	17.1	34.6	51.7	84.0	-32.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (114.0dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	OmniAccess Stellar	Temperature	26°C
Test Engineer	Bruce Wang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/09/19
Test Mode:	802.11n-HT20 - Ant 0 + 1 (CDD Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4859.0	5.9	52.5	58.4	74.0	-15.6	Peak	Horizontal
	4875.9	6.0	38.3	44.3	54.0	-9.7	Average	Horizontal
*	6253.0	8.7	37.2	45.9	84.6	-38.7	Peak	Horizontal
	7313.4	12.5	40.1	52.6	54.0	-1.4	Average	Horizontal
	7315.5	12.6	54.3	66.9	74.0	-7.1	Peak	Horizontal
*	9857.0	16.7	35.3	52.0	84.6	-32.6	Peak	Horizontal
	4859.0	5.9	55.0	60.9	74.0	-13.1	Peak	Vertical
	4876.6	6.0	43.3	49.3	54.0	-4.7	Average	Vertical
*	6253.0	8.7	36.8	45.5	84.6	-39.1	Peak	Vertical
	7312.9	12.5	38.7	51.2	54.0	-2.8	Average	Vertical
	7315.5	12.6	48.8	61.4	74.0	-12.6	Peak	Vertical
*	10171.5	17.0	33.8	50.8	84.6	-33.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 30dBc of the fundamental emission level (114.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	OmniAccess Stellar	Temperature	26°C
Test Engineer	Bruce Wang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/09/19
Test Mode:	802.11n-HT20 - Ant 0 + 1 (CDD Mode)	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4918.5	6.1	41.6	47.7	74.0	-26.3	Peak	Horizontal
*	6253.0	8.7	36.9	45.6	81.1	-35.5	Peak	Horizontal
	7383.5	12.6	45.7	58.3	74.0	-15.7	Peak	Horizontal
	7386.7	12.6	35.7	48.3	54.0	-5.7	Average	Horizontal
*	10197.0	17.2	34.4	51.6	81.1	-29.5	Peak	Horizontal
	4918.5	6.1	45.4	51.5	74.0	-22.5	Peak	Vertical
*	6533.5	10.0	35.5	45.5	81.1	-35.6	Peak	Vertical
	7383.5	12.6	42.2	54.8	74.0	-19.2	Peak	Vertical
	7386.6	12.6	31.9	44.5	54.0	-9.5	Average	Vertical
*	9967.5	16.7	33.8	50.5	81.1	-30.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (111.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	OmniAccess Stellar	Temperature	26°C
Test Engineer	Bruce Wang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/09/19
Test Mode:	802.11n-HT40 - Ant 0 + 1 (CDD Mode)	Test Channel:	03
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4833.5	5.9	43.6	49.5	74.0	-24.5	Peak	Horizontal
*	6457.0	9.8	36.7	46.5	78.1	-31.6	Peak	Horizontal
	7434.5	12.8	35.3	48.1	74.0	-25.9	Peak	Horizontal
*	9984.5	16.7	34.2	50.9	78.1	-27.2	Peak	Horizontal
	4833.5	5.9	45.8	51.7	74.0	-22.3	Peak	Vertical
*	6508.0	9.9	35.2	45.1	78.1	-33.0	Peak	Vertical
	7443.0	12.9	35.1	48.0	74.0	-26.0	Peak	Vertical
*	10027.0	16.6	34.9	51.5	78.1	-26.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (108.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	OmniAccess Stellar	Temperature	26°C
Test Engineer	Bruce Wang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/09/19
Test Mode:	802.11n-HT40 - Ant 0 + 1 (CDD Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	6.0	51.6	57.6	74.0	-16.4	Peak	Horizontal
	4880.5	6.0	41.4	47.4	54.0	-6.6	Average	Horizontal
*	6253.0	8.7	36.5	45.2	78.7	-33.5	Peak	Horizontal
	7298.5	12.5	51.4	63.9	74.0	-10.1	Peak	Horizontal
	7304.4	12.5	40.9	53.4	54.0	-0.6	Average	Horizontal
*	9993.0	16.7	34.4	51.1	78.7	-27.6	Peak	Horizontal
	4859.0	5.9	53.4	59.3	74.0	-14.7	Peak	Vertical
	4878.7	6.0	43.8	49.8	54.0	-4.2	Average	Vertical
*	6253.0	8.7	35.7	44.4	78.7	-34.3	Peak	Vertical
	7306.2	12.5	36.9	49.4	54.0	-4.6	Average	Vertical
	7307.0	12.5	47.4	59.9	74.0	-14.1	Peak	Vertical
*	9967.5	16.7	35.0	51.7	78.7	-27.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 30dBc of the fundamental emission level (108.7dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	OmniAccess Stellar	Temperature	26°C
Test Engineer	Bruce Wang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/09/19
Test Mode:	802.11n-HT40 - Ant 0 + 1 (CDD Mode)	Test Channel:	09
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4910.0	6.1	38.8	44.9	74.0	-29.1	Peak	Horizontal
*	6253.0	8.7	37.2	45.9	75.9	-30.0	Peak	Horizontal
	7358.0	12.7	36.9	49.6	74.0	-24.4	Peak	Horizontal
*	10239.5	17.2	34.4	51.6	75.9	-24.3	Peak	Horizontal
	4910.0	6.1	40.8	46.9	74.0	-27.1	Peak	Vertical
*	6542.0	10.1	36.0	46.1	75.9	-29.8	Peak	Vertical
	8165.5	13.3	36.0	49.3	74.0	-24.7	Peak	Vertical
*	10273.5	17.2	35.2	52.4	75.9	-23.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (105.9dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	OmniAccess Stellar	Temperature	26°C
Test Engineer	Bruce Wang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/09/19
Test Mode:	802.11n-HT20 - Ant 0 + 1 (Beam-Forming Mode)	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4825.0	44.6	5.9	50.5	74.0	-23.5	Peak	Horizontal
*	6253.0	36.8	8.7	45.5	78.4	-32.9	Peak	Horizontal
	7460.0	36.0	12.9	48.9	74.0	-25.1	Peak	Horizontal
*	10103.5	35.0	16.9	51.9	78.4	-26.5	Peak	Horizontal
	4824.0	47.1	5.9	53.0	54.0	-1.0	Average	Vertical
	4825.0	48.1	5.9	54.0	74.0	-20.0	Peak	Vertical
*	6567.5	36.4	10.2	46.6	78.4	-31.8	Peak	Vertical
	7477.0	36.3	12.9	49.2	74.0	-24.8	Peak	Vertical
*	10214.0	36.3	17.1	53.4	78.4	-25.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (108.4dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	OmniAccess Stellar	Temperature	26°C
Test Engineer	Bruce Wang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/09/19
Test Mode:	802.11n-HT20 - Ant 0 + 1 (Beam-Forming Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	39.9	6.0	45.9	74.0	-28.1	Peak	Horizontal
*	6499.5	35.7	9.9	45.6	81.3	-35.7	Peak	Horizontal
	7315.5	39.0	12.6	51.6	74.0	-22.4	Peak	Horizontal
*	7987.0	35.2	13.7	48.9	81.3	-32.4	Peak	Horizontal
	4874.0	46.5	6.0	52.5	54.0	-1.5	Average	Vertical
	4876.0	47.4	6.0	53.4	74.0	-20.6	Peak	Vertical
*	6440.0	35.8	9.6	45.4	81.3	-35.9	Peak	Vertical
	7460.0	36.0	12.9	48.9	74.0	-25.1	Peak	Vertical
*	9755.0	34.0	16.2	50.2	81.3	-31.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (111.3dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	OmniAccess Stellar	Temperature	26°C
Test Engineer	Bruce Wang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/09/19
Test Mode:	802.11n-HT20 - Ant 0 + 1 (Beam-Forming Mode)	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4927.0	41.2	6.1	47.3	74.0	-26.7	Peak	Horizontal
*	6567.5	35.9	10.2	46.1	80.6	-34.5	Peak	Horizontal
	7392.0	38.3	12.6	50.9	74.0	-23.1	Peak	Horizontal
*	10137.5	34.3	17.0	51.3	80.6	-29.3	Peak	Horizontal
	4924.0	47.3	6.1	53.4	54.0	-0.6	Average	Vertical
	4927.0	47.5	6.1	53.6	74.0	-20.4	Peak	Vertical
*	6550.5	35.0	10.2	45.2	80.6	-35.4	Peak	Vertical
	7409.0	35.1	12.6	47.7	74.0	-26.3	Peak	Vertical
*	9976.0	34.1	16.7	50.8	80.6	-29.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 30dBc of the fundamental emission level (110.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	OmniAccess Stellar	Temperature	26°C
Test Engineer	Bruce Wang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/09/19
Test Mode:	802.11n-HT40 - Ant 0 + 1 (Beam-Forming Mode)	Test Channel:	03
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4842.0	41.6	5.9	47.5	74.0	-26.5	Peak	Horizontal
*	6516.5	35.9	9.9	45.8	79.0	-33.2	Peak	Horizontal
	7298.5	37.4	12.5	49.9	74.0	-24.1	Peak	Horizontal
*	10392.5	35.3	17.4	52.7	79.0	-26.3	Peak	Horizontal
	4842.0	47.3	5.9	53.2	74.0	-20.8	Peak	Vertical
*	6567.5	35.6	10.2	45.8	79.0	-33.2	Peak	Vertical
	7451.5	36.6	12.9	49.5	74.0	-24.5	Peak	Vertical
*	9797.5	34.7	16.2	50.9	79.0	-28.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (109.0dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	OmniAccess Stellar	Temperature	26°C
Test Engineer	Bruce Wang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/09/19
Test Mode:	802.11n-HT40 - Ant 0 + 1 (Beam-Forming Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	39.3	6.0	45.3	74.0	-28.7	Peak	Horizontal
*	6533.5	36.1	10.0	46.1	81.0	-34.9	Peak	Horizontal
	7311.8	37.0	12.5	49.5	54.0	-4.5	Average	Horizontal
	7315.5	42.9	12.6	55.5	74.0	-18.5	Peak	Horizontal
*	10392.5	34.6	17.4	52.0	81.0	-29.0	Peak	Horizontal
	4876.0	44.6	6.0	50.6	74.0	-23.4	Peak	Vertical
*	6533.5	35.7	10.0	45.7	81.0	-35.3	Peak	Vertical
	7417.5	36.3	12.7	49.0	74.0	-25.0	Peak	Vertical
*	9933.5	35.0	16.7	51.7	81.0	-29.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (111.0dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	OmniAccess Stellar	Temperature	26°C
Test Engineer	Bruce Wang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/09/19
Test Mode:	802.11n-HT40 - Ant 0 + 1 (Beam-Forming Mode)	Test Channel:	09
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4901.5	42.6	6.0	48.6	74.0	-25.4	Peak	Horizontal
*	6542.0	36.1	10.1	46.2	80.8	-34.6	Peak	Horizontal
	7356.6	39.8	12.7	52.5	54.0	-1.5	Average	Horizontal
	7358.0	41.7	12.7	54.4	74.0	-19.6	Peak	Horizontal
*	10324.5	34.8	17.3	52.1	80.8	-28.7	Peak	Horizontal
	4901.5	47.6	6.0	53.6	74.0	-20.4	Peak	Vertical
*	6610.0	35.8	10.2	46.0	80.8	-34.8	Peak	Vertical
	7434.5	35.8	12.8	48.6	74.0	-25.4	Peak	Vertical
*	10188.5	34.4	17.1	51.5	80.8	-29.3	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (110.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The worst case of Radiated Emission below 1GHz:

Site: AC1	Time: 2018/09/11 - 10:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: VULB 9168 _20-2000MHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Note: Transmit by 802.11g at Channel 2412MHz Ant 0 + 1	

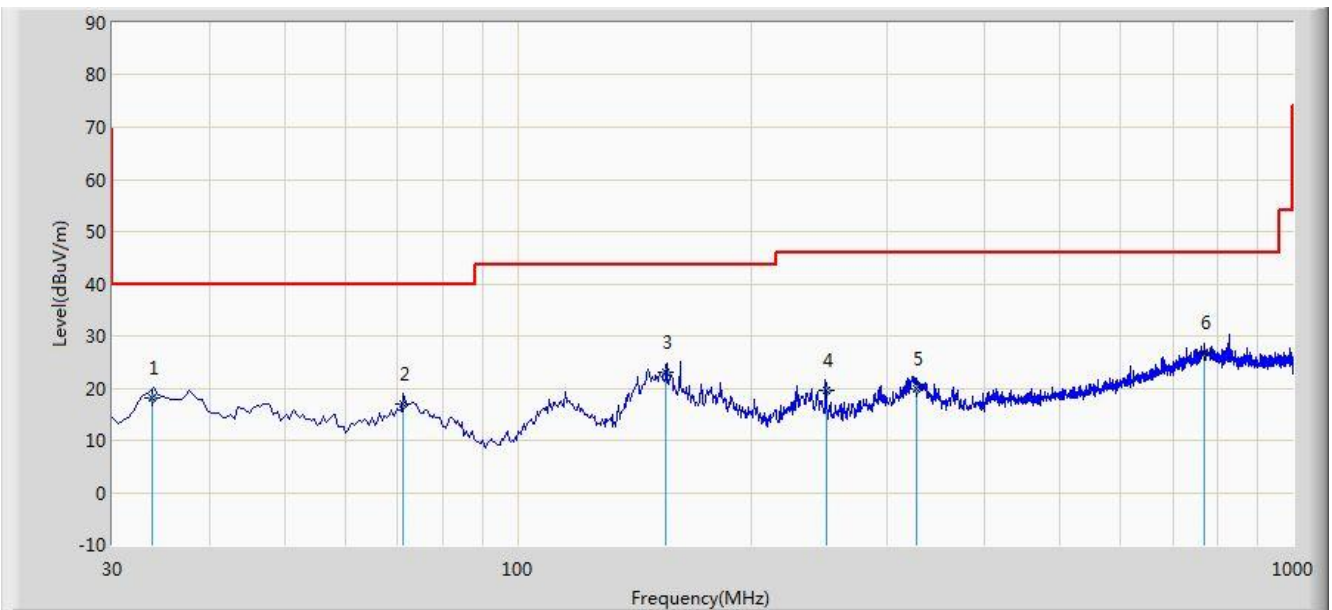


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			33.754	18.100	4.215	-21.900	40.000	13.885	QP
2			71.214	16.971	5.558	-23.029	40.000	11.413	QP
3			155.548	23.152	7.854	-20.348	43.500	15.297	QP
4			249.854	19.574	6.554	-26.426	46.000	13.020	QP
5			327.585	19.985	4.854	-26.015	46.000	15.131	QP
6		*	768.660	26.695	3.658	-19.305	46.000	23.036	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: AC1	Time: 2018/09/11 - 10:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: VULB 9168 _20-2000MHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Note: Transmit by 802.11g at Channel 2412MHz Ant 0 + 1	

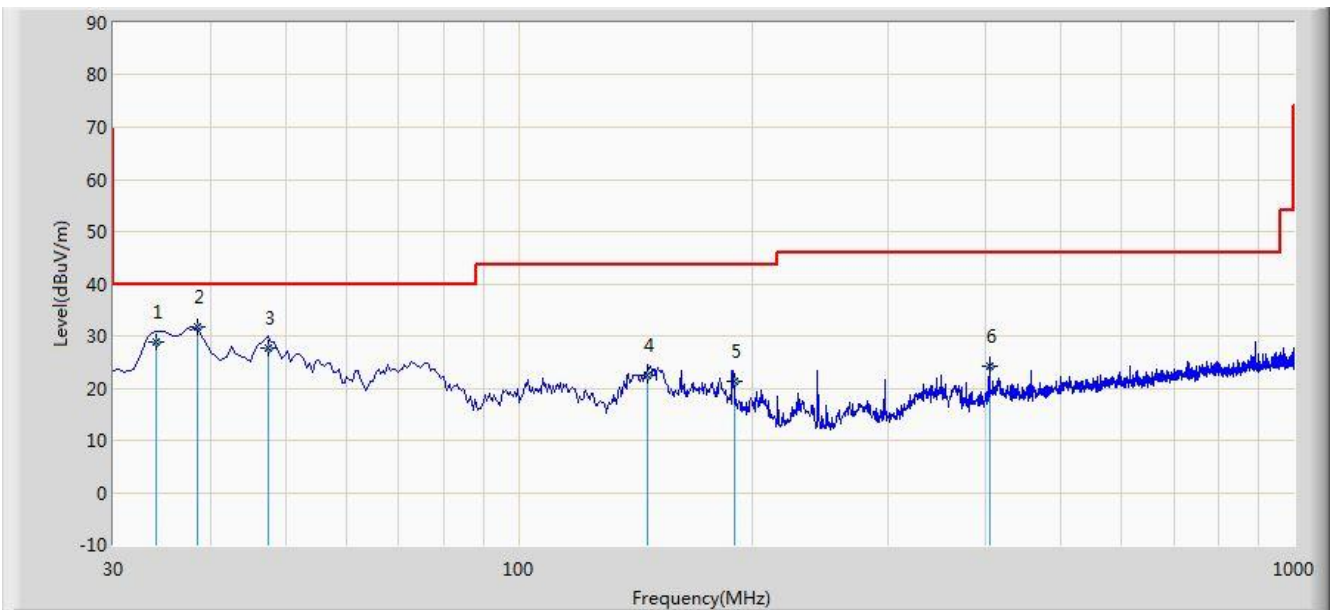

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			34.115	28.757	14.847	-11.243	40.000	13.911	QP
2		*	38.550	31.667	17.214	-8.333	40.000	14.453	QP
3			47.545	27.781	13.548	-12.219	40.000	14.233	QP
4			146.584	22.561	7.514	-20.939	43.500	15.047	QP
5			189.550	21.310	9.514	-22.190	43.500	11.796	QP
6			404.625	24.298	7.584	-21.702	46.000	16.714	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For RSS-Gen Section 8.10 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.009 - 0.110	240 - 285	9.0 - 9.2
2.1735 - 2.1905	322 - 335.4	9.3 - 9.5
3.020 - 3.026	399.9 - 410	10.6 - 12.7
4.125 - 4.128	608 - 614	13.25 - 13.4
4.17725 - 4.17775	960 - 1427	14.47 - 14.5
4.20725 - 4.20775	1435 - 1626.5	15.35 - 16.2
5.677 - 5.683	1645.5 - 1646.5	17.7 - 21.4
6.215 - 6.218	1660 - 1710	22.01 - 23.12
6.26775 - 6.26825	1718.8 -1722.2	23.6 - 24.0
6.31175 - 6.31225	2200 - 2300	31.2 - 31.8
8.291 - 8.294	2310 -2390	36.43 - 36.5
8.362 - 8.366	2655 - 2900	Above 38.6
8.37625 - 8.38675	3260 - 3267	--
8.41425 - 8.41475	3332 -3339	
12.29 - 12.293	334.5 - 3358	
12.51975 - 12.52025	3500 - 4400	
12.57675 - 12.57725	4500 - 5150	
13.36 -13.41	5350 - 5460	
16.42 - 16.423	7250 - 7750	
16.69475 - 16.69525	8025 - 8500	
16.80425 - 16.80475	--	
25.5 - 25.67		
37.5 - 38.25		
73 - 74.6		
74.8 - 75.2		
108 - 138		
156.52475 - 156.525225		
156.7 - 156.9		

All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen must not exceed the limits shown in Table per Section 8.9.

RSS-Gen Section 8.9		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.7.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.7.4.Test Setup

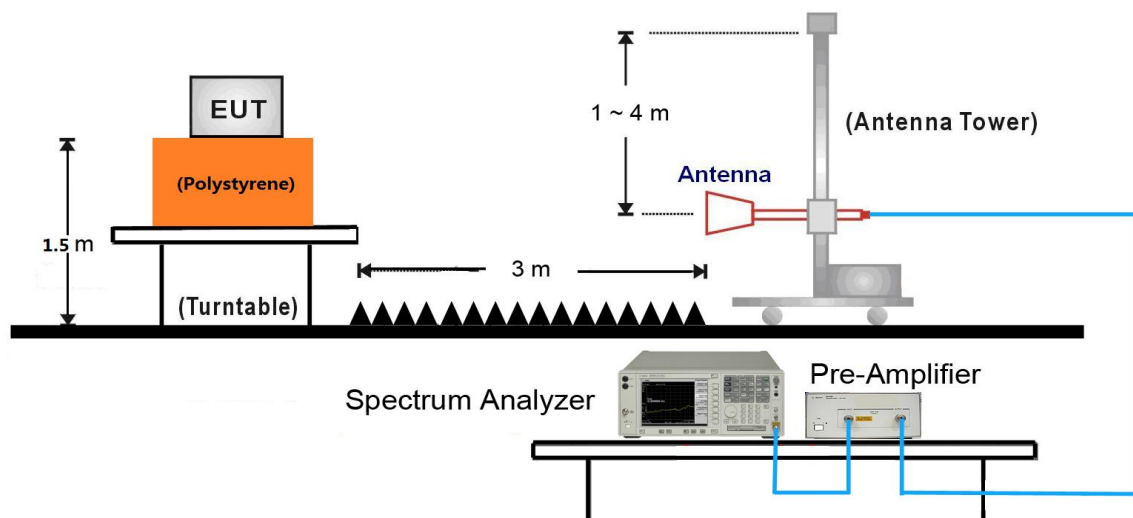

Note: This item was performed with the WIFI antenna connected.

Additional Beam-Forming Mode Test Setup

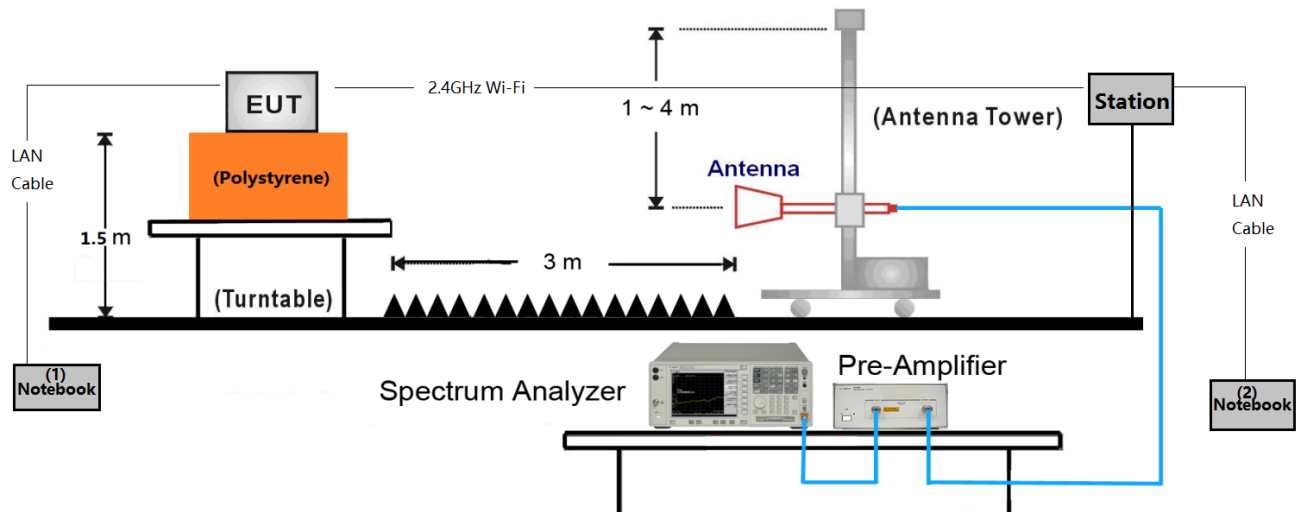


Make the EUT connect with the station by 2.4GHz wireless.

Input some commands in the notebook (1) to open the EUT Beam Forming function, and setup the related test channel & data rate & power setting.

Make the notebook (1) ping with notebook (2) using the “Iperf” software that can produce one bigger duty cycle waveform.

7.7.5.Test Result

Site: AC1	Time: 2018/10/19 - 05:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2412MHz Ant 0	

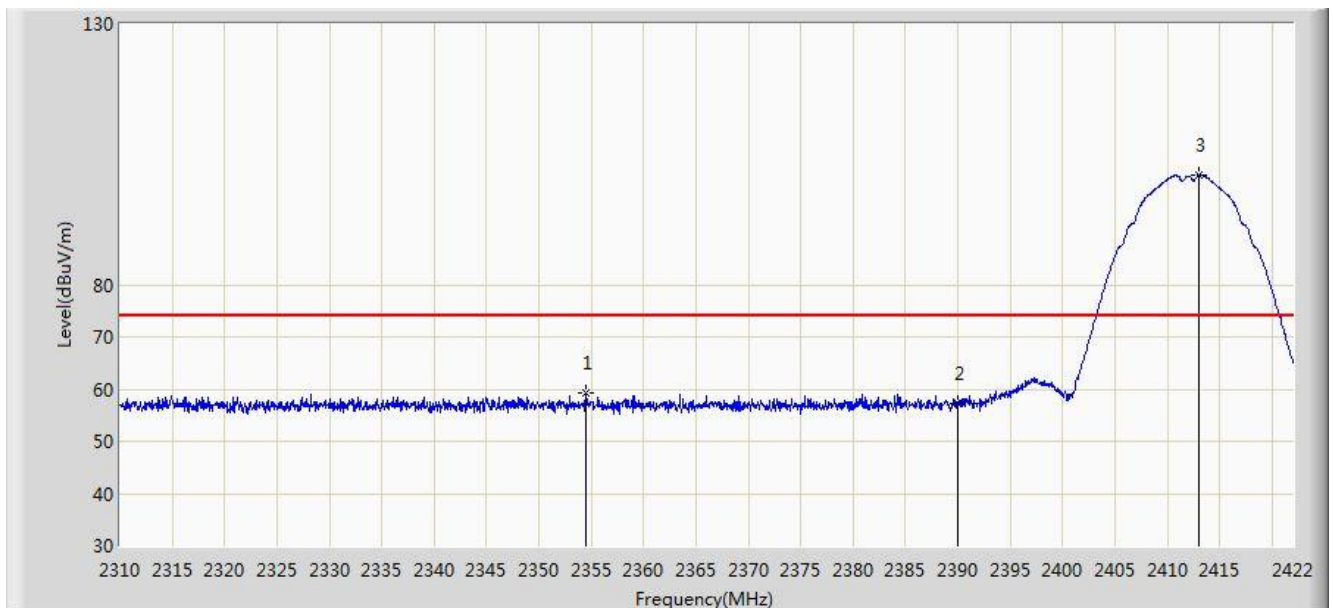


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2354.520	59.281	26.893	-14.719	74.000	32.388	PK
2			2390.000	57.251	24.924	-16.749	74.000	32.327	PK
3		*	2413.040	100.996	68.712	N/A	N/A	32.284	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/10/19 - 05:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2412MHz Ant 0	

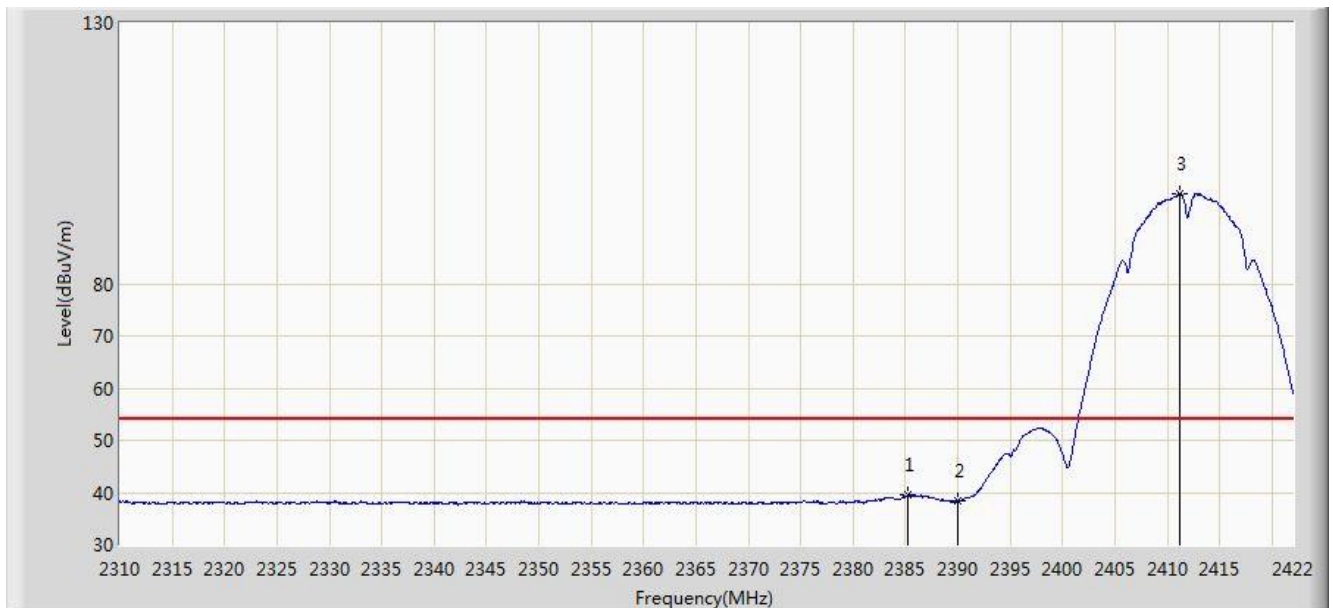


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.264	39.486	7.153	-14.514	54.000	32.333	AV
2			2390.000	38.370	6.043	-15.630	54.000	32.327	AV
3		*	2411.136	97.269	64.984	N/A	N/A	32.285	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/10/19 - 05:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2412MHz Ant 0	

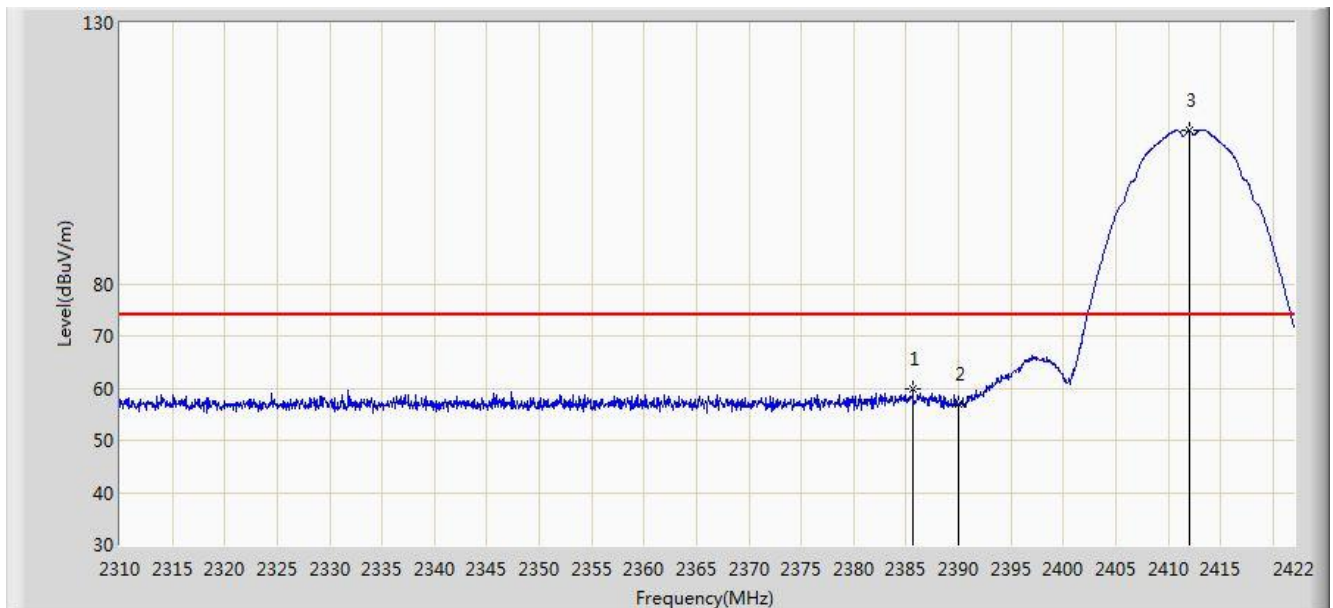


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.656	59.735	27.402	-14.265	74.000	32.333	PK
2			2390.000	56.880	24.553	-17.120	74.000	32.327	PK
3		*	2412.032	109.356	77.071	N/A	N/A	32.285	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/10/19 - 05:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2412MHz Ant 0	

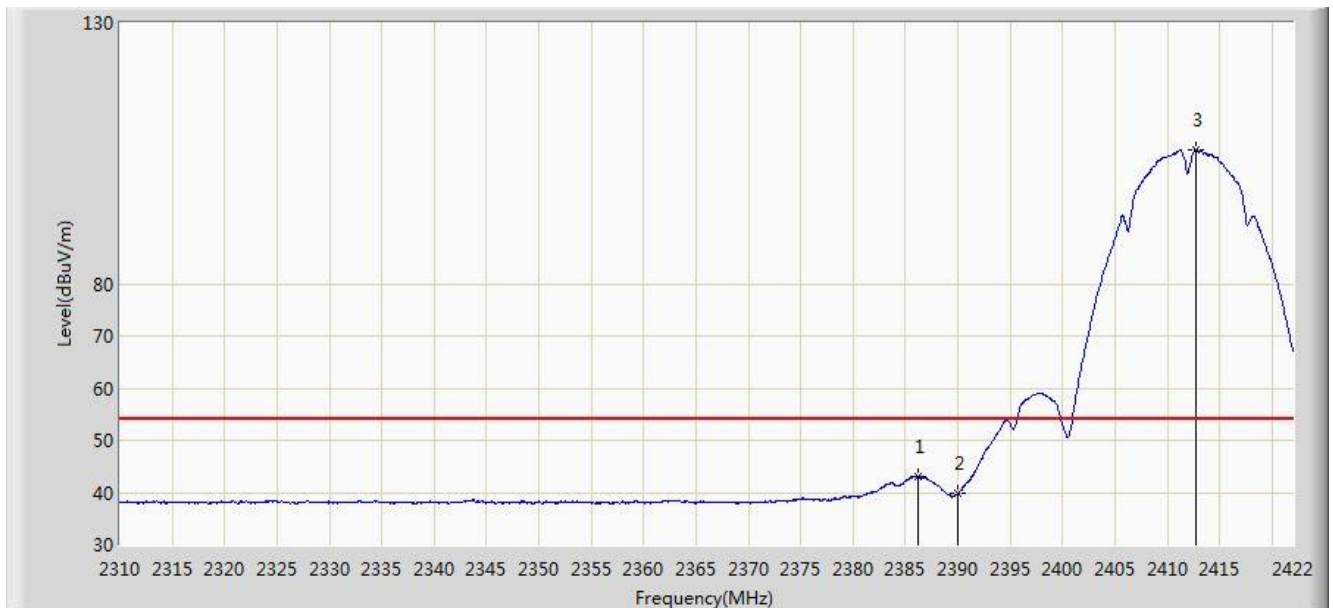


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.216	43.063	10.731	-10.937	54.000	32.332	AV
2			2390.000	39.781	7.454	-14.219	54.000	32.327	AV
3		*	2412.760	105.675	73.390	N/A	N/A	32.284	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/10/19 - 05:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz Ant 0	

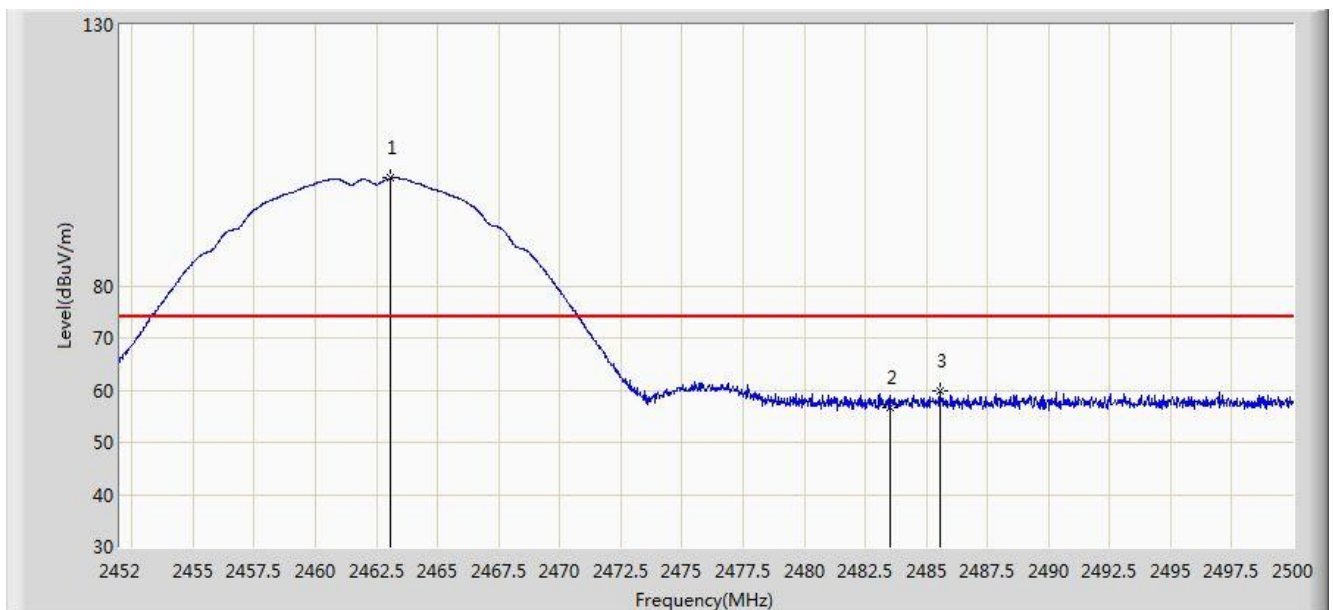


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.088	100.666	68.384	N/A	N/A	32.282	PK
2			2483.500	56.741	24.402	-17.259	74.000	32.340	PK
3			2485.552	59.723	27.376	-14.277	74.000	32.347	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/10/19 - 05:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz Ant 0	

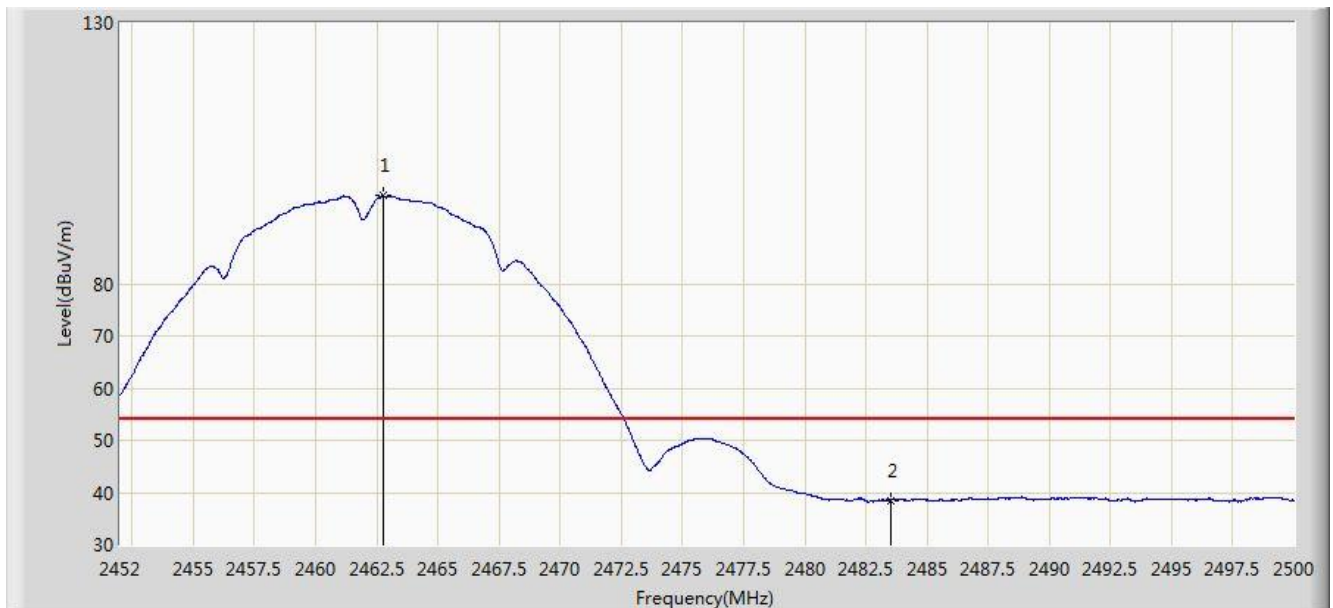


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.752	96.927	64.645	N/A	N/A	32.282	AV
2			2483.500	38.526	6.187	-15.474	54.000	32.340	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/10/19 - 05:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz Ant 0	

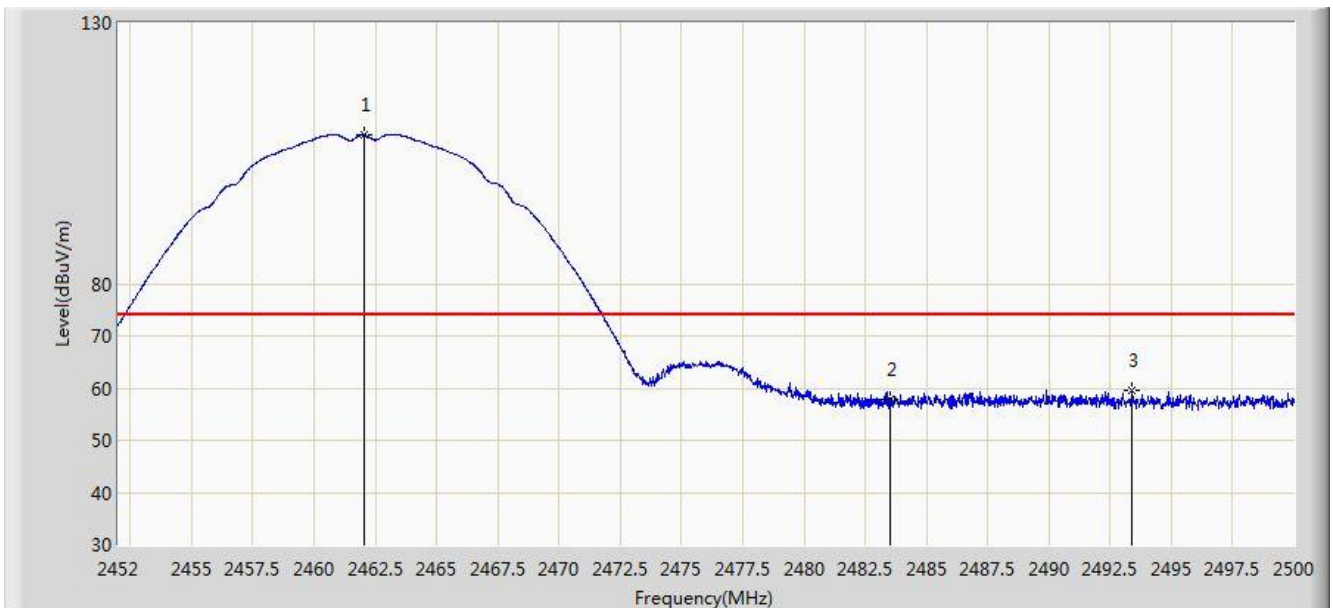

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.056	108.444	76.164	N/A	N/A	32.280	PK
2			2483.500	57.971	25.632	-16.029	74.000	32.340	PK
3			2493.400	59.519	27.141	-14.481	74.000	32.378	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/10/19 - 05:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz Ant 0	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.240	104.936	72.657	N/A	N/A	32.279	AV
2			2483.500	40.822	8.483	-13.178	54.000	32.340	AV
3			2488.696	42.065	9.705	-11.935	54.000	32.360	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/10/19 - 05:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2412MHz Ant 1	

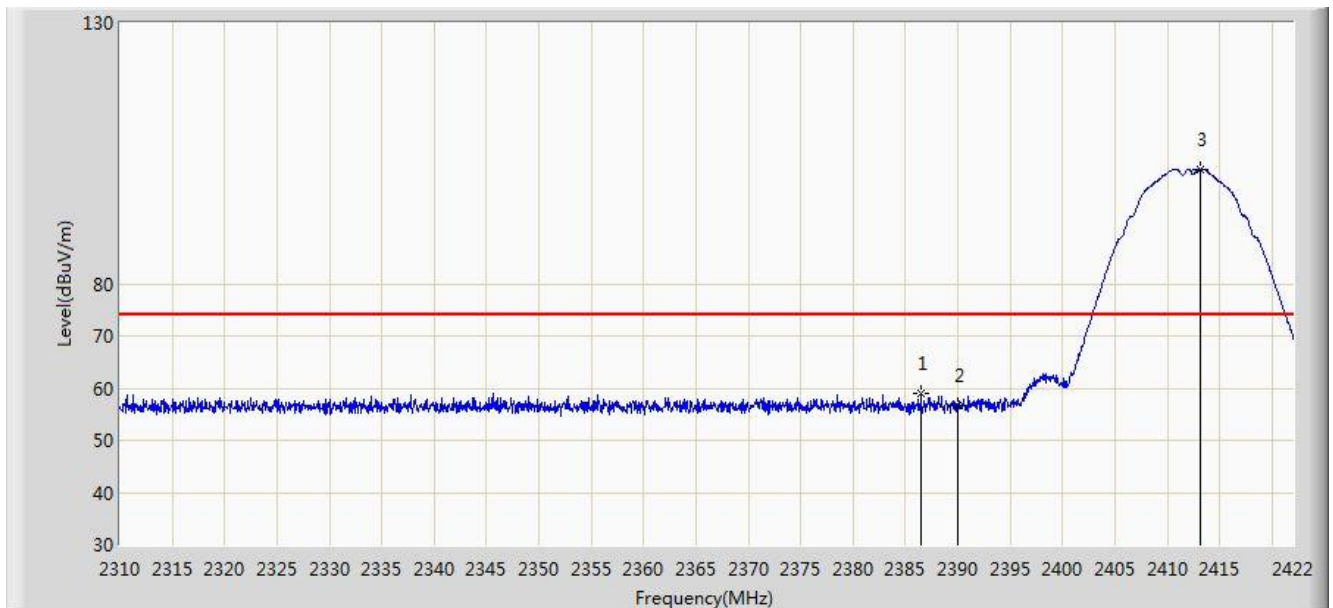


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.496	59.080	26.748	-14.920	74.000	32.332	PK
2			2390.000	56.780	24.453	-17.220	74.000	32.327	PK
3		*	2413.208	101.992	69.708	N/A	N/A	32.284	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/10/19 - 05:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2412MHz Ant 1	

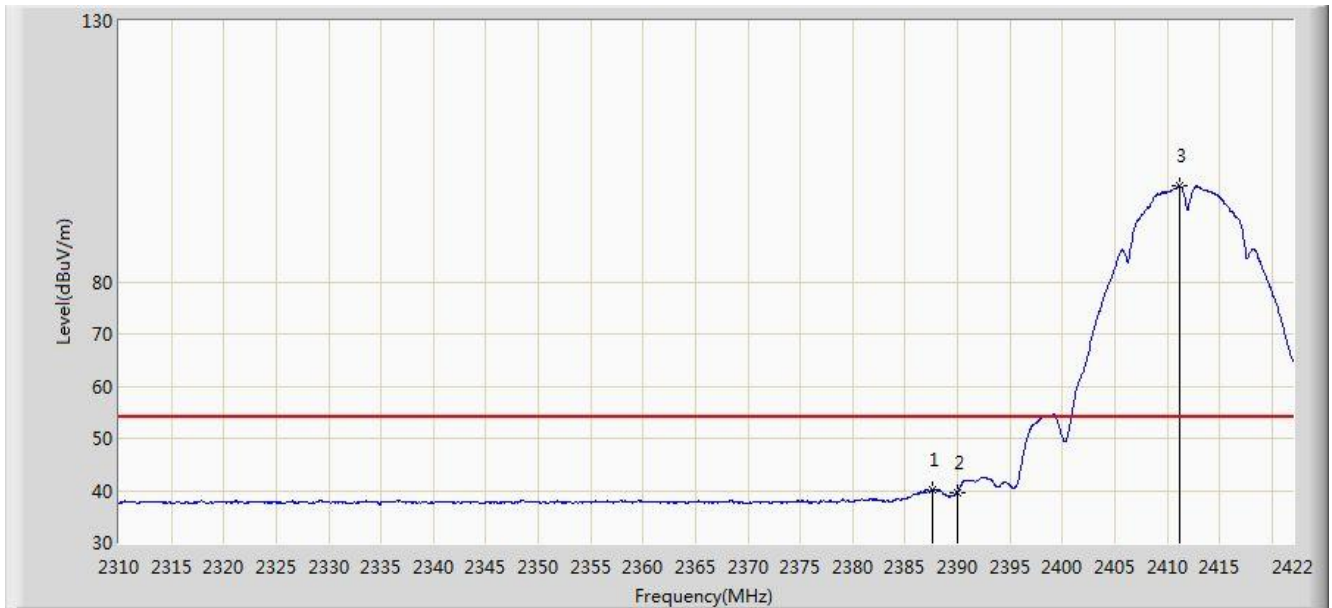


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.560	40.126	7.796	-13.874	54.000	32.330	AV
2			2390.000	39.691	7.364	-14.309	54.000	32.327	AV
3		*	2411.136	98.315	66.030	N/A	N/A	32.285	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/10/19 - 05:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2412MHz Ant 1	

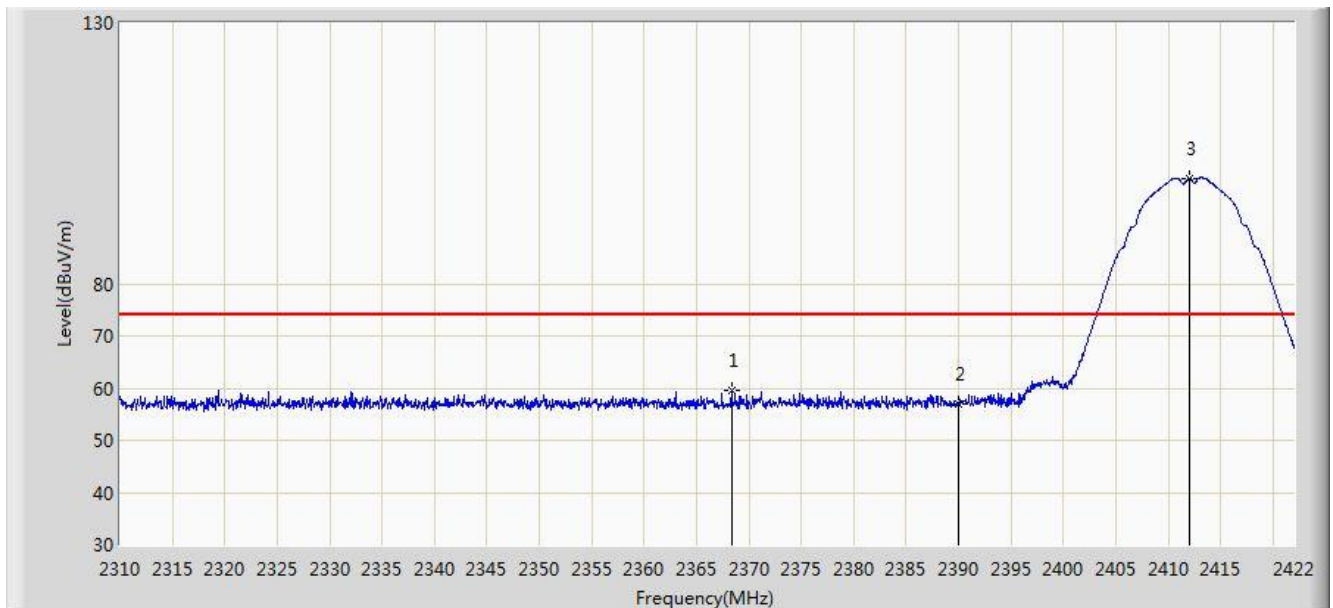

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2368.352	59.490	27.129	-14.510	74.000	32.361	PK
2			2390.000	57.078	24.751	-16.922	74.000	32.327	PK
3		*	2412.032	100.198	67.913	N/A	N/A	32.285	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/10/19 - 05:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2412MHz Ant 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	38.622	6.295	-15.378	54.000	32.327	AV
2		*	2411.192	96.615	64.330	N/A	N/A	32.285	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/10/19 - 06:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz Ant 1	

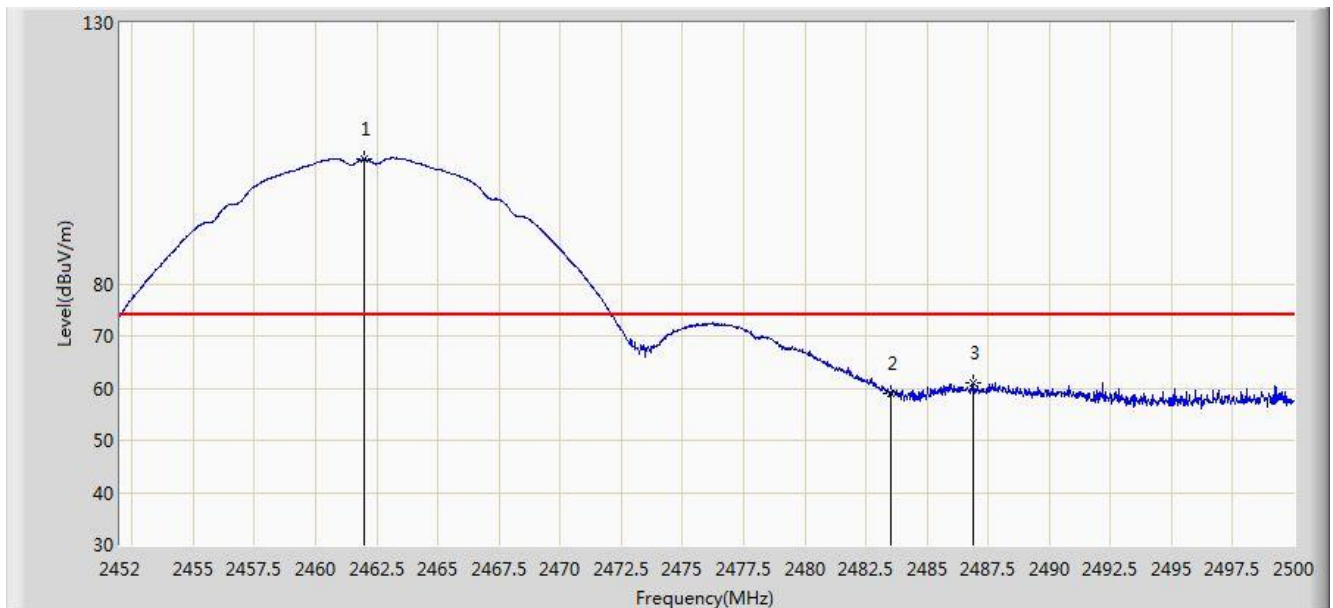

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.984	103.838	71.558	N/A	N/A	32.280	PK
2			2483.500	58.881	26.542	-15.119	74.000	32.340	PK
3			2486.872	61.122	28.770	-12.878	74.000	32.353	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/10/19 - 06:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz Ant 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.240	100.433	68.154	N/A	N/A	32.279	AV
2			2483.500	47.075	14.736	-6.925	54.000	32.340	AV
3			2485.864	47.861	15.513	-6.139	54.000	32.349	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/10/19 - 06:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz Ant 1	

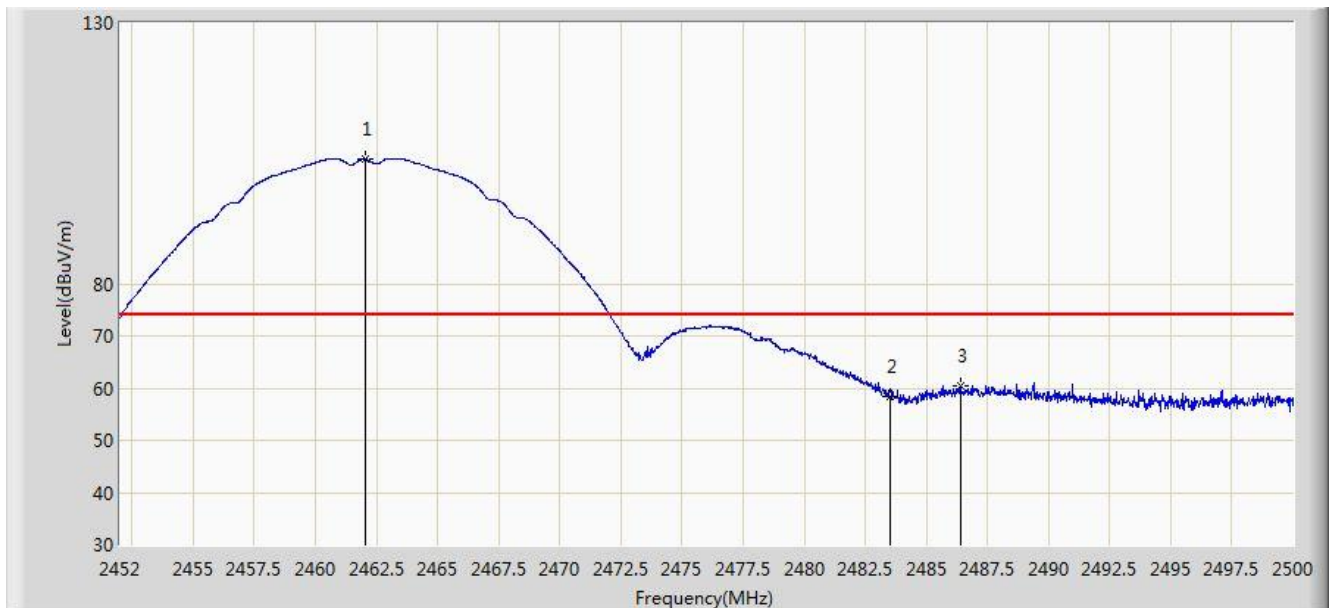

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.056	103.823	71.543	N/A	N/A	32.280	PK
2			2483.500	58.405	26.066	-15.595	74.000	32.340	PK
3			2486.392	60.472	28.122	-13.528	74.000	32.351	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/10/19 - 06:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz Ant 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.144	100.367	68.088	N/A	N/A	32.279	AV
2			2483.500	47.330	14.991	-6.670	54.000	32.340	AV
3			2486.104	48.119	15.770	-5.881	54.000	32.349	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/09/08 - 08:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz (CDD Mode)	

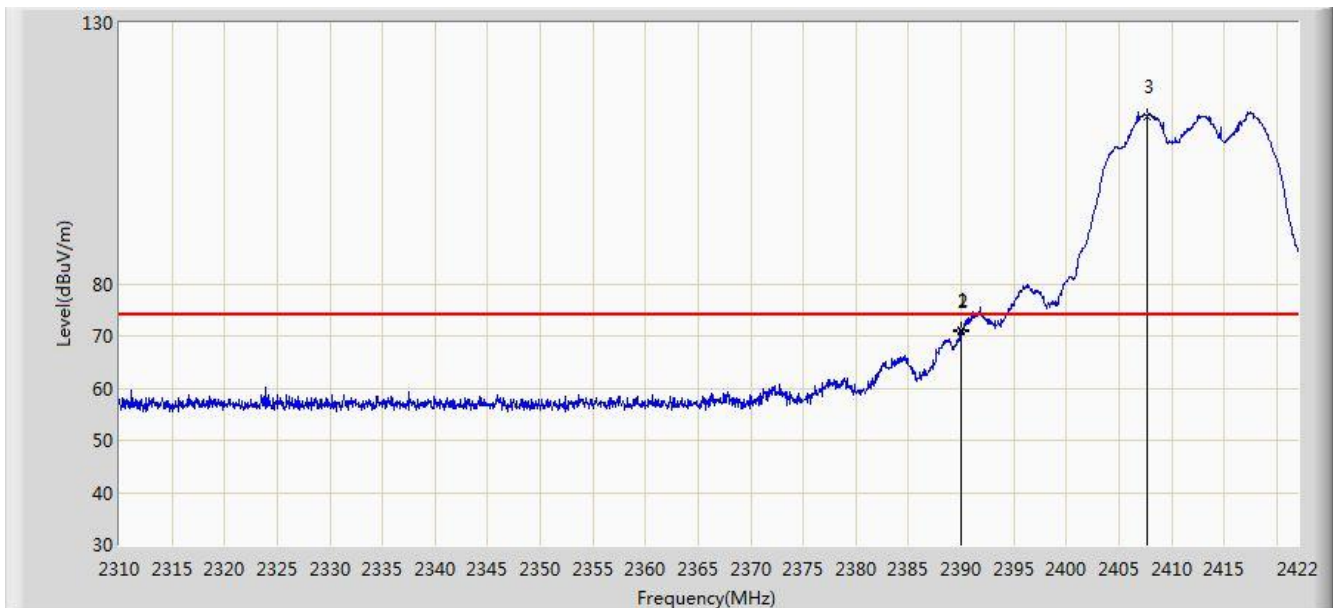


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.968	71.016	38.689	-2.984	74.000	32.327	PK
2			2390.000	70.756	38.429	-3.244	74.000	32.327	PK
3		*	2407.720	112.115	79.823	N/A	N/A	32.292	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/08 - 08:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz (CDD Mode)	

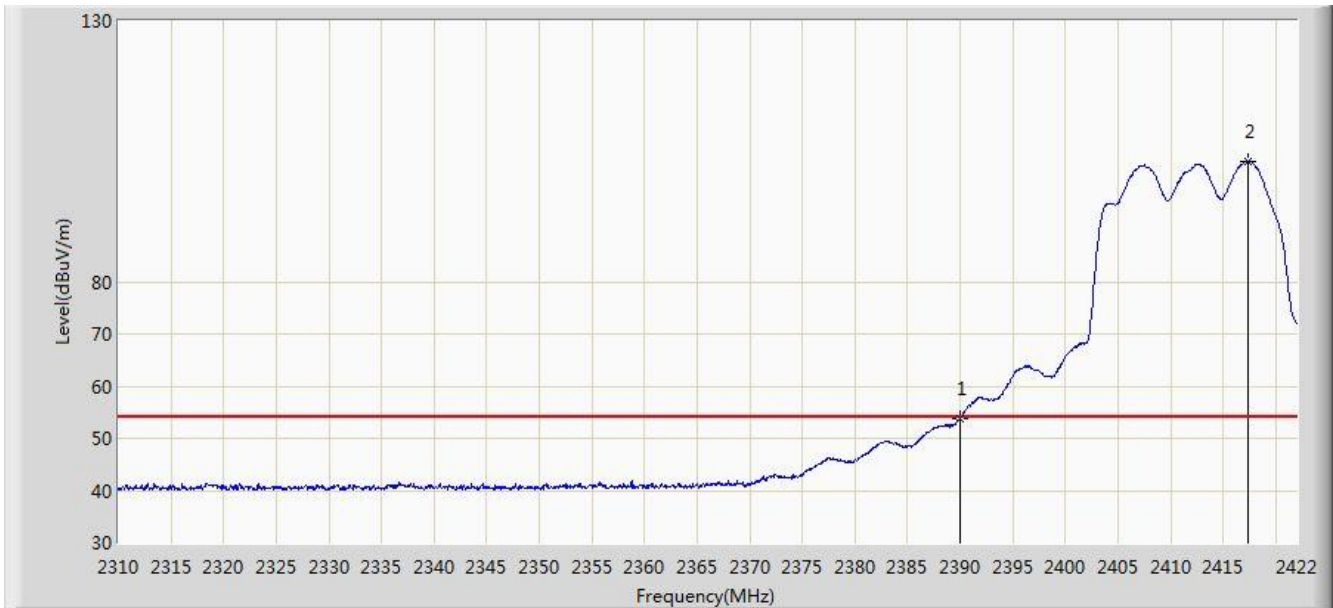


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.673	21.346	-0.327	54.000	32.327	AV
2		*	2417.352	103.179	70.896	N/A	N/A	32.282	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Profile: FCC 15.247 - Bandedge	Page No.: 78
Engineer: Bruce Wang	
Site: AC1	Time: 2018/09/08 - 08:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz (CDD Mode)	

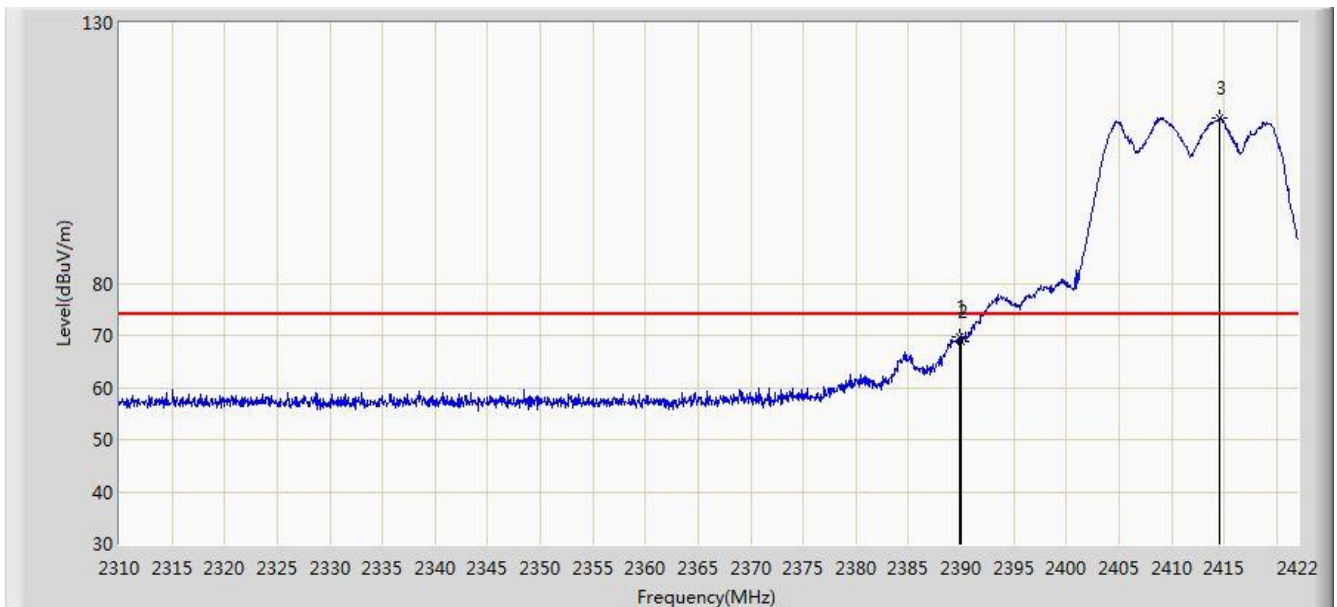


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	69.700	37.373	-4.300	74.000	32.327	PK
2			2390.000	68.898	36.571	-5.102	74.000	32.327	PK
3		*	2414.552	111.815	79.531	N/A	N/A	32.284	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/08 - 08:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz (CDD Mode)	

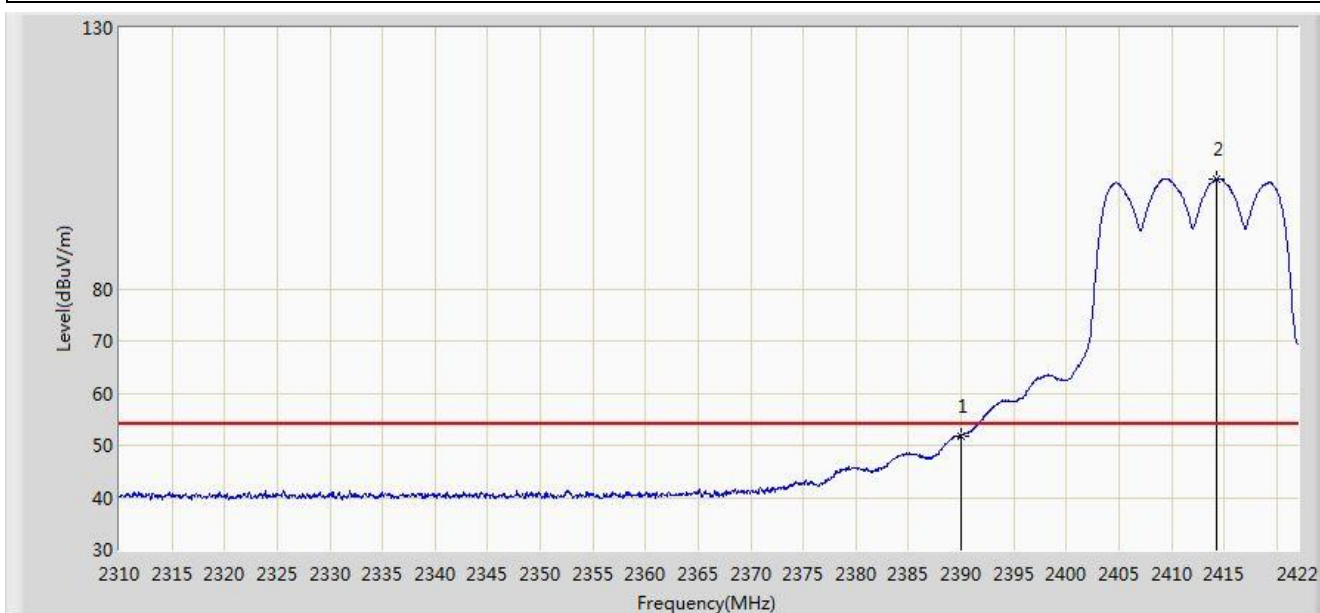

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.871	19.544	-2.129	54.000	32.327	AV
2		*	2414.328	101.131	68.847	N/A	N/A	32.283	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/08 - 09:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.576	110.442	78.149	N/A	N/A	32.293	PK
2			2483.500	70.022	37.683	-3.978	74.000	32.340	PK
3			2483.728	71.034	38.694	-2.966	74.000	32.340	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/08 - 09:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz (CDD Mode)	

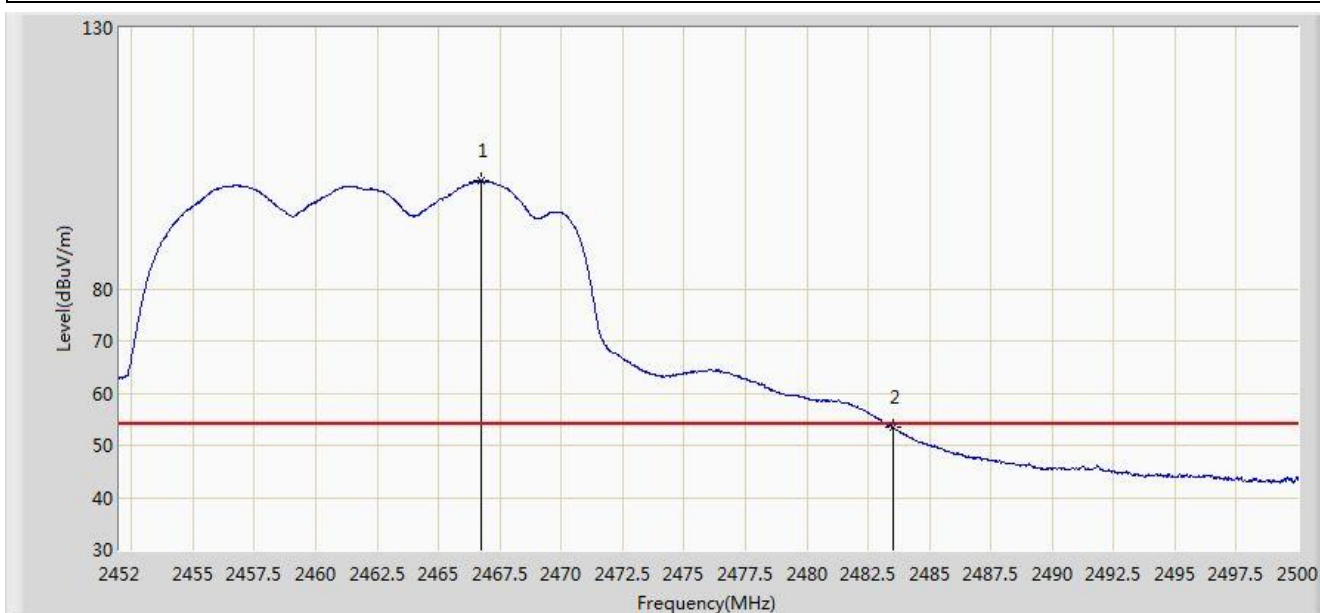


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.712	100.667	68.376	N/A	N/A	32.290	AV
2			2483.500	53.479	21.140	-0.521	54.000	32.340	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/08 - 09:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz (CDD Mode)	

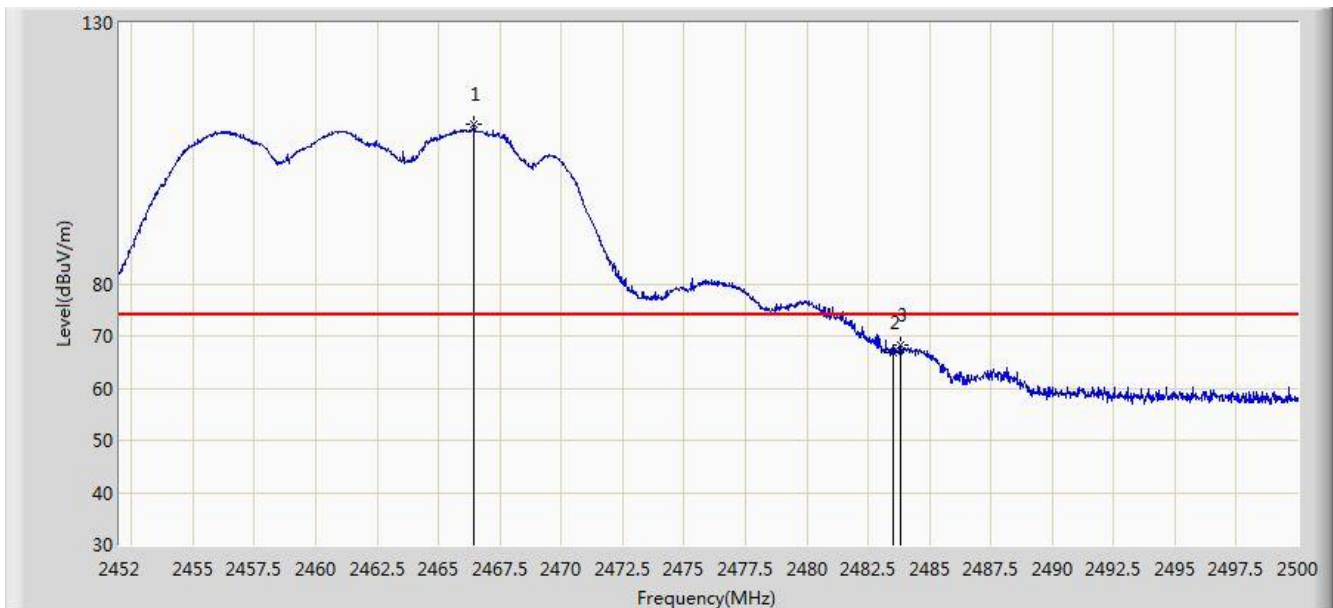

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.448	110.668	78.378	N/A	N/A	32.290	PK
2			2483.500	66.693	34.354	-7.307	74.000	32.340	PK
3			2483.800	68.150	35.810	-5.850	74.000	32.340	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).