



## **REGULATORY COMPLIANCE TEST REPORT**

**FCC CFR 47 Part 15 Subpart C 15.250**

**Report No.: CATA07-U10 Rev A**

**Company:** Catapult Sports Pty Ltd

**Model Name:** S7601

## REGULATORY COMPLIANCE TEST REPORT

**Company:** Catapult Sports Pty Ltd

**Model Name:** S7601

**To:** FCC CFR 47 Part 15 Subpart C 15.250

Test Report Serial No.: CATA07-U10 Rev A

This report supersedes: NONE

Applicant: Catapult Sports Pty Ltd Company  
75-83 High St Prahran  
Melbourne, Victoria 3181  
Australia

Issue Date: 1st April 2022

### **This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**  
575 Boulder Court  
Pleasanton California 94566  
USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



**MiCOM Labs is an ISO 17025 Accredited Testing Laboratory**

## Table of Contents

<b>1. ACCREDITATION, LISTINGS &amp; RECOGNITION .....</b>	<b>4</b>
1.1. TESTING ACCREDITATION .....	4
1.2. RECOGNITION .....	5
1.3. PRODUCT CERTIFICATION .....	6
<b>2. DOCUMENT HISTORY .....</b>	<b>7</b>
<b>3. TEST RESULT CERTIFICATE .....</b>	<b>8</b>
<b>4. REFERENCES AND MEASUREMENT UNCERTAINTY .....</b>	<b>9</b>
4.1. Normative References .....	9
4.2. Test and Uncertainty Procedure .....	10
<b>5. PRODUCT DETAILS AND TEST CONFIGURATIONS .....</b>	<b>11</b>
5.1. Technical Details .....	11
5.2. Test Program Scope .....	12
5.3. Equipment Model(s) and Serial Number(s) .....	13
5.4. Antenna Details .....	13
5.5. Cabling and I/O Ports .....	13
5.6. Test Configurations .....	13
5.7. Equipment Modifications .....	14
5.8. Deviations from the Test Standard .....	14
<b>6. TEST SUMMARY .....</b>	<b>15</b>
<b>7. TEST EQUIPMENT CONFIGURATION(S) .....</b>	<b>16</b>
7.1. Conducted Test Setup .....	16
7.2. Radiated Emissions - 3m Chamber .....	17
<b>8. MEASUREMENT AND PRESENTATION OF TEST DATA .....</b>	<b>20</b>
<b>9. TEST RESULTS .....</b>	<b>21</b>
9.1. WB Bandwidth .....	21
9.2. Transmit Power .....	23
9.3. Peak Power Density .....	25
9.4. Transmitter Spurious Band Emissions .....	27
9.4.1. <i>Transmitter Spurious Emissions</i> .....	29
9.4.2. <i>GPS Band Emissions</i> .....	42
9.4. AC Mains Power Input / Output Ports .....	44

## 1. ACCREDITATION, LISTINGS & RECOGNITION

### 1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2017. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



## 1.2. RECOGNITION

MiCOM Labs, Inc is widely recognized for its wireless testing and certification capabilities. In addition to being recognized for Testing and Certification under Phase 2 Mutual Recognition Agreements (MRA) with Canada, Europe, United Kingdom and Japan, our international recognition includes Conformity Assessment Body (CAB) designation status under agreements with Asia Pacific (APEC) MRA Phase 1 countries giving acceptance of MiCOM test reports. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	MRA Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Test Site Designation #: US1084
Canada	Industry Canada (ISED)	FCB	APEC MRA 2	US0159 Test Company #: 4143A
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	Japan MRA 2	RCB 210
	Japan Approvals Institute for Telecommunication Equipment (JATE)			
	VCCI			
Europe	European Commission	NB	EU MRA 2	A-0012 NB 2280
United Kingdom	Department for Business, Energy & Industrial Strategy (BEIS)	AB	UK MRA 2	AB 2280
Mexico	Instituto Federal de Telecomunicaciones (IFT)	CAB	Mexico MRA 1	US0159
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)			
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)			
Singapore	Infocomm Development Authority (IDA)			
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)			
Vietnam	Ministry of Communication (MIC)			

TCB- Telecommunications Certification Bodies (TCB)

FCB – Foreign Certification Body

CAB – Conformity Assessment Body

NB – Notified Body;

AB – Approved Body

MRA – Mutual Recognition Agreement

### *MRA Phases*

*Phase I - recognition for product testing*

*Phase II – recognition for both product testing and certification*

### 1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)  
Industry Canada – Certification Body, CAB Identifier – US0159  
Europe – Notified Body (NB), NB Identifier - 2280  
UK – Approved Body (AB), AB Identifier - 2280  
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

## 2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	31st March 2022	Draft report for client review.
Rev A	1 <sup>st</sup> April 2022	Initial release.

In the above table the latest report revision will replace all earlier versions.



### 3. TEST RESULT CERTIFICATE

<b>Manufacturer:</b> Catapult Sports Pty Ltd 75-83 High St Prahran Melbourne, Victoria 3181 AUS	<b>Tested By:</b> MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
<b>Model:</b> S7601	<b>Telephone:</b> +1 925 462 0304
<b>Equipment Type:</b> Mobile & Portable Client Device	<b>Fax:</b> +1 925 462 0306
<b>S/N's:</b> Conducted Testing: 21777 Radiated Testing: 21034	
<b>Test Date(s):</b> 2 <sup>nd</sup> – 11 <sup>th</sup> January 2020, 23 <sup>th</sup> March 2022	<b>Website:</b> www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC CFR 47 Part 15 Subpart C 15.250	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

#### Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:



  
\_\_\_\_\_  
Graeme Grieve  
Quality Manager MiCOM Labs, Inc.

  
\_\_\_\_\_  
Gordon Hurst  
President & CEO MiCOM Labs, Inc.



## **4. REFERENCES AND MEASUREMENT UNCERTAINTY**

### **4.1. Normative References**

REF.	PUBLICATION	YEAR	TITLE
I	15.250	Feb 2005	Operation of wideband systems within the band 5925-7250 MHz.
II	A2LA	5 <sup>th</sup> Oct 2020	R105 - Requirement's When Making Reference to A2LA Accreditation Status
III	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
IV	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
V	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
VI	M 3003	Edition 3 Nov.2012	Expression of Uncertainty and Confidence in Measurements
VII	FCC 47 CFR Part 2.1033	2016	FCC requirements and rules regarding photographs and test setup diagrams.

## **4.2. Test and Uncertainty Procedure**

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

## 5. PRODUCT DETAILS AND TEST CONFIGURATIONS

### 5.1. Technical Details

Details	Description
Purpose:	Test of the Catapult Sports Pty Ltd S7601 to FCC Part 15 Subpart 15.250.
Applicant:	Catapult Sports Pty Ltd 75-83 High St Prahran Melbourne, Victoria 3181 Australia
Manufacturer:	As applicant
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	CATA07-U10 Rev A
Date EUT received:	2 <sup>nd</sup> January 2020
Standard(s) applied:	15.250
Dates of test (from - to):	2 <sup>nd</sup> – 11 <sup>th</sup> January 2020, 23 <sup>rd</sup> March 2022
No of Units Tested:	2
Product Family Name:	Vector
Model(s):	S7601
Location for use:	Indoors and Outdoors
Declared Frequency Range(s):	6489.6 GHz
Type of Modulation:	BPM/BPSK
EUT Modes of Operation:	WB
Declared Nominal Output Power (dBm):	-12 dBm
Rated Input Voltage and Current:	3.7Vdc (Li-ion Battery)
Operating Temperature Range:	0°C - 45°C
Equipment Dimensions:	43.5 x 81 x 15.9mm
Weight:	53g
Hardware Rev:	S7601 MP
Software Rev:	6.10
Product Application:	Mobile & Portable Client Devices

## **5.2. Test Program Scope**

### **Catapult Sports Pty Ltd Company S7601**

The scope of the test program was to test the Catapult Sports Pty Ltd Company S7601 in the frequency range 5925 - 7250 MHz for compliance against the following specification:

#### **FCC CFR 47 Part 15 Subpart C 15.250**

Operation of wideband systems within the band 5925 -7250 MHz

### 5.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description	Manufacturer	Model No.	Serial No.
EUT Conducted	Mobile & Portable Client Device	Catapult Sports Pty Ltd	S7601	21777
EUT Radiated	Mobile & Portable Client Device	Catapult Sports Pty Ltd	S7601	21034
Support	External Supply	Catapult Sports	VCS701	--

### 5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
integral	Catapult Sports Pty Ltd	TaoGlas UWB.64	Bespoke	1.93	--	--	--	6000 - 7000

BF Gain - Beamforming Gain  
Dir BW - Directional BeamWidth  
X-Pol - Cross Polarization

### 5.5. Cabling and I/O Ports

Port Type	Max Cable Length	# of Ports	Screened	Connector Type	Data Type	Data Rate(s)
USB	5m	1	Yes	USB	Digital	Unknown

### 5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
		5925 - 7250 MHz		
WB	--	--	6489.6	--

### **5.7. Equipment Modifications**

The following modifications were required to bring the equipment into compliance:

1. NONE

### **5.8. Deviations from the Test Standard**

The following deviations from the test standard were required in order to complete the test program:

1. NONE

## 6. TEST SUMMARY


List of Measurements

Test Header	Result	Data Link
WB Bandwidth	Complies	<a href="#">View Data</a>
Peak Power	Complies	<a href="#">View Data</a>
Peak Power Density	Complies	<a href="#">View Data</a>
Spurious Radiated Emissions	Complies	<a href="#">View Data</a>
Spurious Radiated Emissions in GPS Bands	Complies	<a href="#">View Data</a>
Shutdown Timing Requirements	Complies	<a href="#">View Data</a>
AC Wire line Emissions	Complies	<a href="#">View Data</a>
Comments: None		



## 7. TEST EQUIPMENT CONFIGURATION(S)

### 7.1. Conducted Test Setup

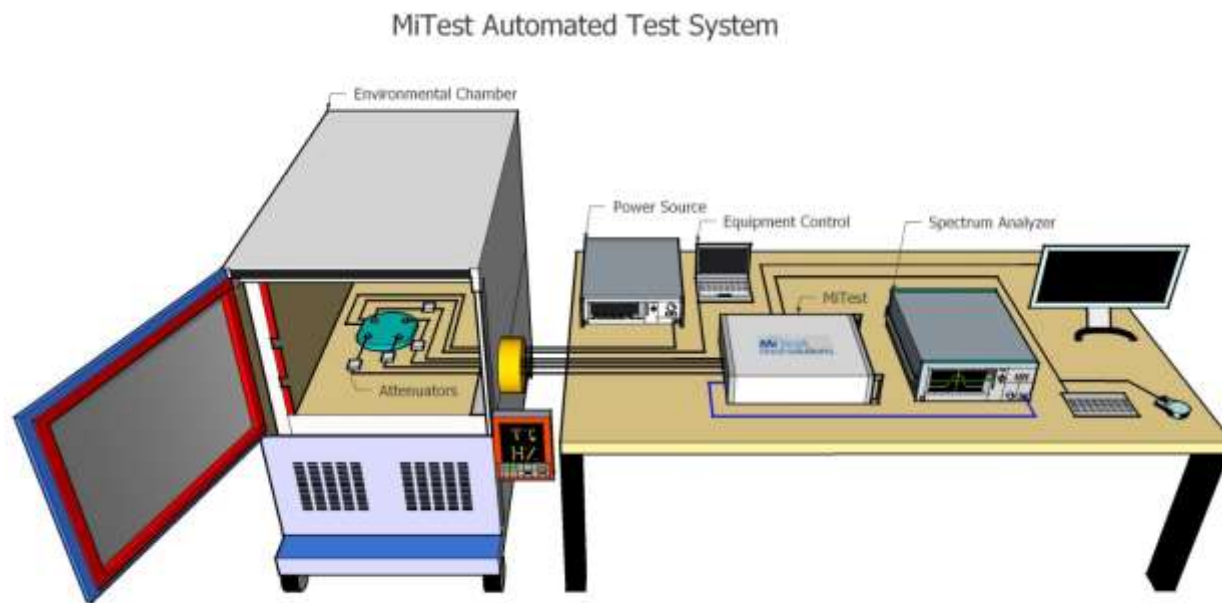


A full system calibration was performed on the test station and any resulting system losses (or gains) were considered in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
249	Thermocouple; Resistance Thermometer	Thermotronics	GR2105-02	9340 #2	30 Oct 2022
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	8 Oct 2022
398	MiTest RF Conducted Test Software	MiCOM	MiTest ATS	Version 4.2.3.0	Not Required
405	DC Power Supply 0-60V	Agilent	6654A	MY4001826	Cal when used
408	USB to GPIB interface	National Instruments	GPIB-USB HS	14C0DE9	Not Required
445	PoE Injector	D-Link	DPE-101GL	QTAH1E2000625	Not Required
510	Barometer/Thermometer	Digi Sense	68000-49	170871375	4 Jan 2023
75	Environmental Chamber	Theratron	SE-300-2-2	27946	20 Feb 2023


## 7.2. Radiated Emissions - 3m Chamber

The following tests were performed using the radiated test set-up shown in the diagram below. Radiated emissions above and below 1GHz.

Radiated Emissions Above 1GHz Test Setup

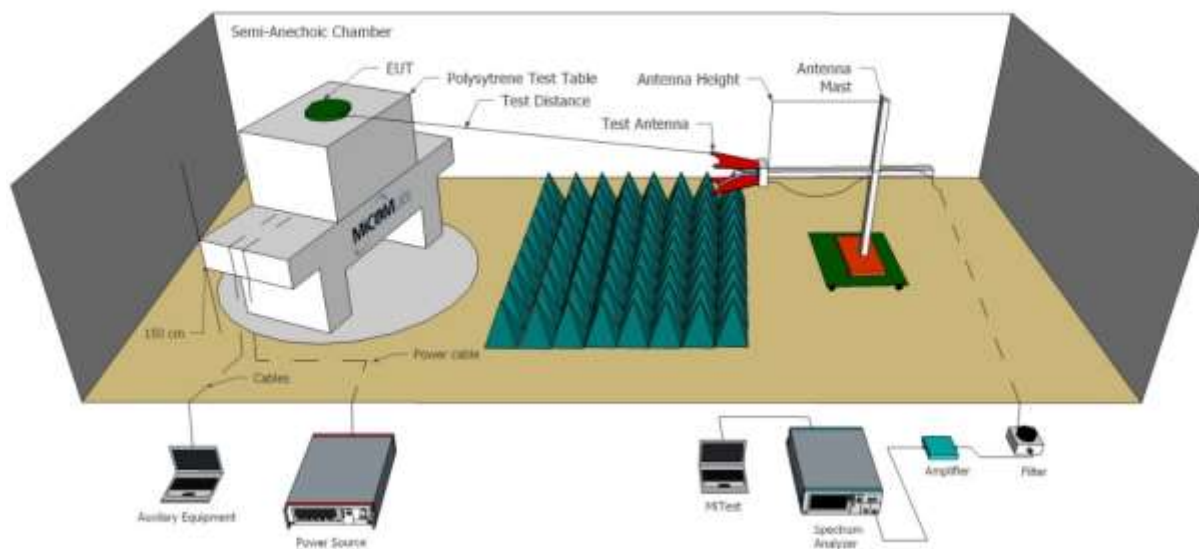

Radiated Emissions Below 1GHz Test Setup

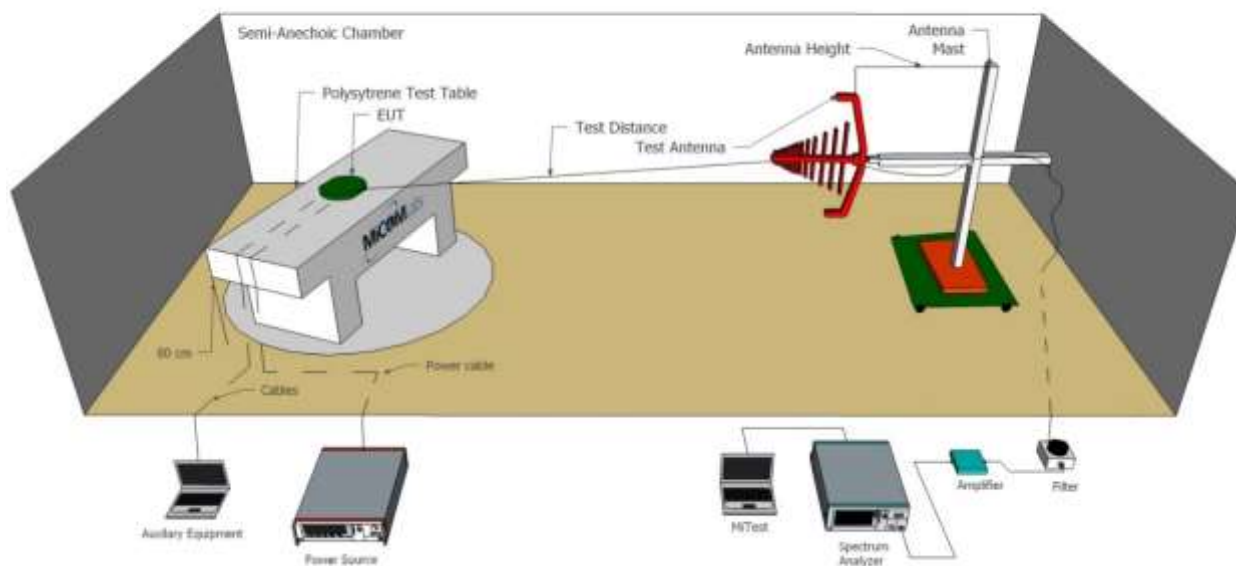

A full system calibration was performed on the test station and any resulting system losses (or gains) were considered in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	8 Oct 2022
298	3M Radiated Emissions Chamber Maintenance Check	MiCOM	3M Chamber	298	24 Jul 2022
330	Variac 0-280 Vac	Staco Energy Co	3PN1020B	0546	Cal when used
336	Active loop Ant 10kHz to 30 MHz	EMCO	EMCO 6502	00060498	29 Nov 2022
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	29 Sep 2023
373	26III RMS Multimeter	Fluke	Fluke 26 series III	76080720	29 Sep 2022
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	6 Oct 2022
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	27 Oct 2022
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	30 Sep 2023
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	2 Nov 2022
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	MiTest Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	27 Oct 2022
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	27 Oct 2022
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	27 Oct 2022
466	Low Pass Filter DC-1500 MHz	Mini-Circuits	NLP-1750+	VUU10401438	6 Oct 2022
476	Low Pass dc-2200MHz	Mini Circuits	15542 NLP-	VUU13801345	6 Oct 2022

	filter		2400+		
480	Cable - Bulkhead to Amp	SRC Haverhill	157-3050360	480	23 Jun 2022
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-3050787	481	23 Jun 2022
510	Barometer/Thermometer	Digi Sense	68000-49	170871375	4 Jan 2023
554	Precision SMA Cable	Fairview Microwave	SCE18060101-400CM	554	23 Jun 2022
555	Rhode & Schwarz Receiver (Firmware Version : 2.00 SP1)	Rhode & Schwarz	ESW 44	101893	28 Jun 2023
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used

## 8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

## 9. TEST RESULTS

### 9.1. WB Bandwidth

Conducted Test Conditions for WB Bandwidth			
Standard:	FCC CFR 47 Part 15 Subpart C 15.250	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	WB Bandwidth	Rel. Humidity (%):	32 - 45
Standard Section(s):	ANSI C63.10 Section 10.1; 5.1(a)(b) 15.250(a)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		
<b>Test Procedure for WB Bandwidth Measurement</b> The WB Bandwidth is measured radiated, at a 3-meter distance, while EUT is operating in transmission mode at the appropriate center frequency. The Resolution Bandwidth was set to 1MHz RBW IAW ANSI C63.10. Testing was performed under ambient conditions at nominal voltage.  Test configuration and setup used for the measurement was per the Radiated Test Set-up section specified in this document.			



### Equipment Configuration for WB Bandwidth

<b>Variant:</b>	WB	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	-	<b>Antenna Gain (dBi):</b>	1.93
<b>Modulation:</b>	--	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

Test Frequency	Measured 10 dB Bandwidth (MHz)	10 dB Bandwidth (MHz)			
		Highest	Lowest		
MHz	Port A				
6489.6	752.10	752.10	752.10		

### Traceability to Industry Recognized Test Methodologies



18:30:07 16.01.2020

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

The above values are representative of the worst-case value between polarities and based on the power measurements.



## 9.2. Transmit Power


Conducted Test Conditions for Maximum Radiated Output Power			
Standard:	FCC CFR 47 Part 15 Subpart C 15.250	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Radiated Emissions WB Transmission	Rel. Humidity (%):	32 - 45
Standard Section(s):	ANSI C63.10 Section 10.3.5; 5.3.1; Section 4 Annex 15.250 (d)(1)	Pressure (mBars):	999 - 1001
Reference Document(s):	None		
<b>Test Procedure for WB Transmission</b>			
Testing was performed under ambient conditions at nominal voltage.			
Test configuration and setup used for the measurement was per the Radiated Test Set-up section specified in this document. Supporting KDB's referenced below.			
<b>Operating Frequency Band:</b> 5925 - 7250 MHz			
<b>Limits Maximum EIRP (dBm)</b>			
Frequency (MHz)	EIRP Limit (dBm)	EIRP at 3 Meters (dBuv/m)	
5925-7250	-41.3	53.9	

### Equipment Configuration for RF Output Power

<b>Variant:</b>	WB	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	-	<b>Antenna Gain (dBi):</b>	1.93
<b>Modulation:</b>	-	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

### Test Measurement Results

Test Frequency MHz	Measured Radiated Output Power (dBm)	Limit (dBm)	Margin (dB)	EUT Power Setting
6489.6	-41.43	-41.3	-0.13	14.0

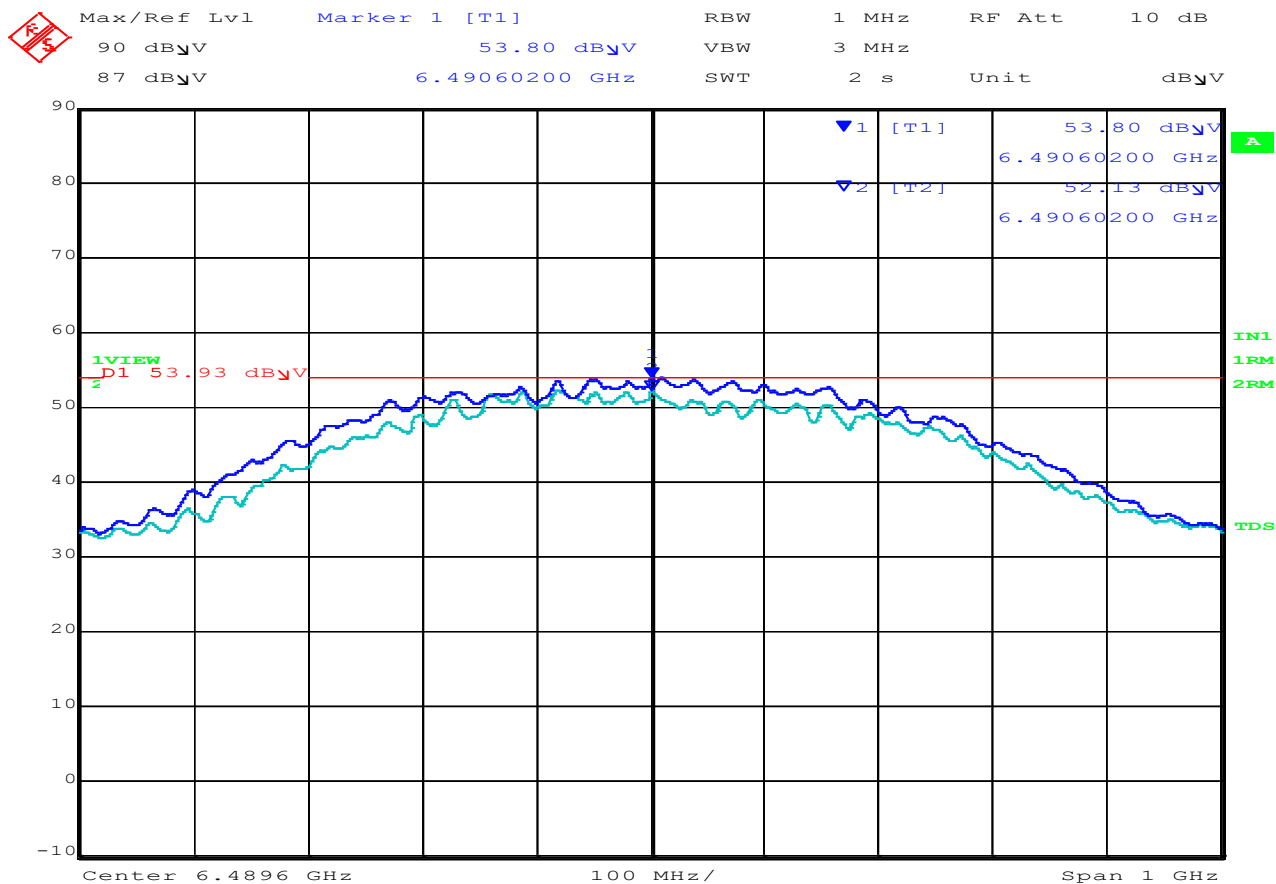

Date: 10.JAN.2020 13:41:24

### Traceability to Industry Recognized Test Methodologies

<b>Work Instruction:</b>	WI-01 MEASURING RF OUTPUT POWER
<b>Uncertainty:</b>	±1.33 dB

### 9.3. Peak Power Density

Test Conditions for Maximum Peak Power Density			
Standard:	FCC CFR 47 Part 15 Subpart C 15.250	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Radiated Emissions WB Transmission	Rel. Humidity (%):	32 - 45
Standard Section(s):	ANSI C63.10 Section 10.3.6; 5.3.1; Section 4 Annex 15.250 (d)(3)	Pressure (mBars):	999 - 1001
Reference Document(s):	None		

**Test Procedure for WB Transmission**

Testing was performed under ambient conditions at nominal voltage.

Test configuration and setup used for the measurement was per the Radiated Test Set-up section specified in this document. Supporting KDB's referenced below.

Measurements were gathered with a RBW of 1MHz and converted to 50MHz using the following formula:

$$\text{EIRP}_{1\text{ MHz}} = \text{EIRP}_{50\text{ MHz}} + 20\log(1\text{MHz}/50\text{MHz}) = 0\text{dBm} + (-34\text{dBm}) = -34\text{dBm}$$

**Operating Frequency Band:**  
5925-7250 MHz

**Limits Maximum EIRP (dBm)**

Frequency (MHz)	EIRP Limit (dBm/50MHz)	EIRP Limit (dBm/1MHz)
5925-7250	0	-34


### Equipment Configuration for Peak Power Density

<b>Variant:</b>	WB	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	-	<b>Antenna Gain (dBi):</b>	1.93
<b>Modulation:</b>	--	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

### Test Measurement Results

Test Frequency MHz	Measured Peak Power Density (dBm)	Limit (dBm)	Margin (dB)	EUT Power Setting
6489.6	-13.74	0.0	-13.74	14.0

### Traceability to Industry Recognized Test Methodologies

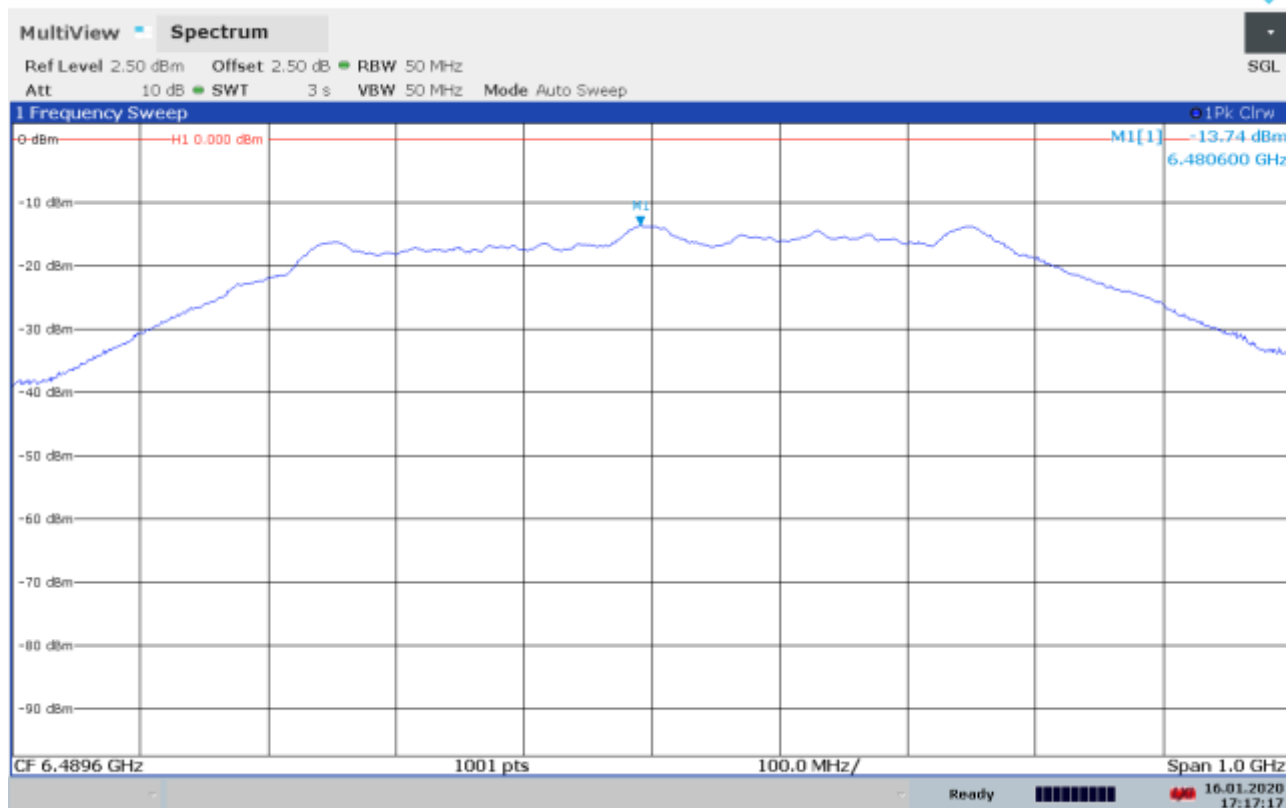

17:17:18 16.01.2020

<b>Work Instruction:</b>	WI-01 MEASURING RF OUTPUT POWER
<b>Uncertainty:</b>	±1.33 dB

## 9.4. Transmitter Spurious Band Emissions

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions			
<b>Standard:</b>	FCC CFR 47 Part 15 Subpart C 15.250	<b>Ambient Temp. (°C):</b>	20.0 - 24.5
<b>Test Heading:</b>	Radiated Spurious Emissions	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	ANSI C63.10 Section 10.2 + 10.3; 5.3.1 15.250 (d)(1)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

### Test Procedure for Radiated Spurious and Band-Edge Emissions

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in max hold mode. Depending on the frequency band spanned a notch filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.  
 $FS = R + AF + CORR - FO$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss

Measurements made at 1 meter to meet noise floor to limit requirements

Frequency Range		Average Limit	
MHz	MHz	EIRP (dBm)	EIRP at 1 Meters (dBuV/m)
960	1610	-75.30	29.40
1610	1990	-63.40	41.40
1990	3100	-61.30	43.40
3100	5925	-51.30	53.40
5925	7250	-41.30	63.40
7250	10600	-51.30	53.40
10600	18000	-61.30	43.40
18000	40000	-61.3	43.40

#### Radiated Spurious Emissions in the GPS Bands

Frequency Range		Average Limit	
MHz	MHz	EIRP (dBm)	EIRP at 1 Meters (dBuV/m)
1164	1240	-85.3	19.47
1559	1610	-85.3	19.47

#### 50 MHz Peak Emissions 15.250 (d)(3)

There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs and this 50 MHz bandwidth must be contained within the 5925-7250 MHz band. The peak EIRP limit is  $20 \log (RBW/50)$  dBm where RBW is the resolution bandwidth in megahertz that is employed by the measurement instrument. RBW shall not be lower than 1 MHz or greater than 50 MHz. The video bandwidth of the measurement instrument shall not be less than RBW. If RBW is greater than 3 MHz, the application for certification filed with the Commission shall contain a detailed description of the test procedure, calibration of the test setup, and the instrumentation employed in the testing

#### 9.4.1. Transmitter Spurious Emissions


##### Equipment Configuration for Radiated Digital Emissions

<b>Antenna:</b>	Taoglas UWB.64	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	1.93	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.6	<b>Data Rate:</b>	
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

##### Test Measurement Results



Variant: WB, Test Freq: 6489.60 MHz, Duty Cycle (%): 99

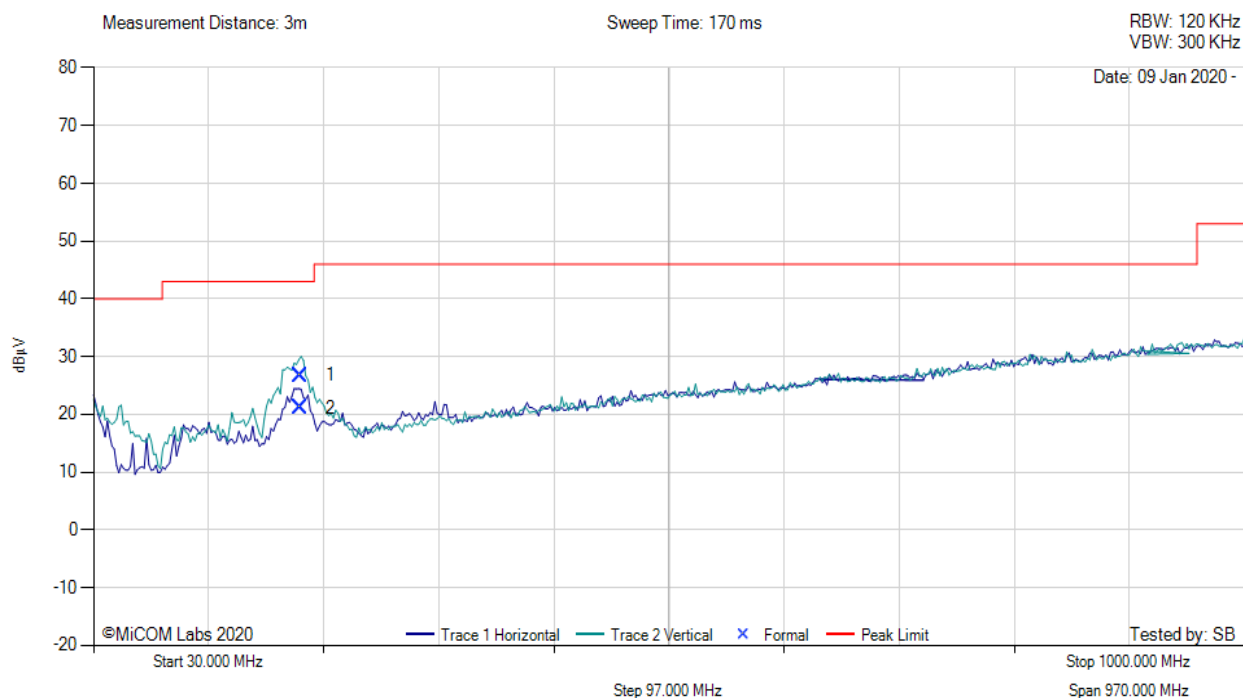

##### 30.00 - 1000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	204.48	38.91	4.54	-16.74	26.71	MaxQP	Vertical	98	294	43.0	-16.3	Pass
2	204.53	33.32	4.54	-16.74	21.12	MaxQP	Horizontal	156	4	43.0	-21.9	Pass

**Test Notes:** EUT in cradle transmitting and charging via ac/dc adapter.



### Equipment Configuration for Spurious Emissions


<b>Antenna:</b>	Taoglas UWB.64	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	1.93	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.6	<b>Data Rate:</b>	
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



#### RADIATED SPURIOUS EMISSIONS 960MHz-1.00GHz

Test Freq: 6489.6 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

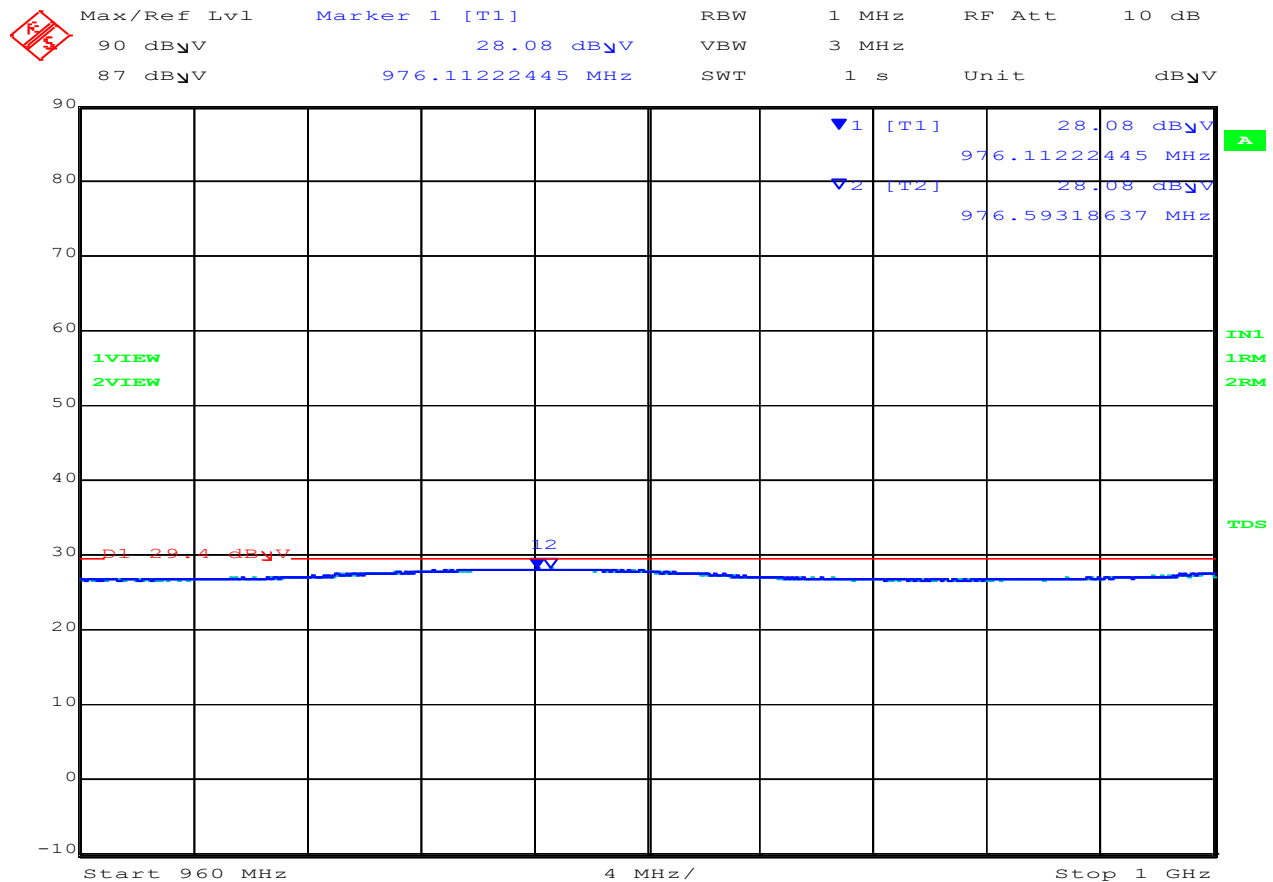

Date: 10.JAN.2020 11:45:20

#### 960.00- 1000.00 MHz

Num	Frequency MHz	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	999.03	28.08	Average	Vertical	150	0	29.4	-1.32	Pass
2	999.51	28.08	Average	Horizontal	150	0	29.4	-1.32	Pass

Test Notes: None

### Equipment Configuration for Spurious Emissions


<b>Antenna:</b>	Taoglas UWB.64	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	1.93	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.6	<b>Data Rate:</b>	
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



#### RADIATED SPURIOUS EMISSIONS 1.0-1.61GHz

Test Freq: 6489.6 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

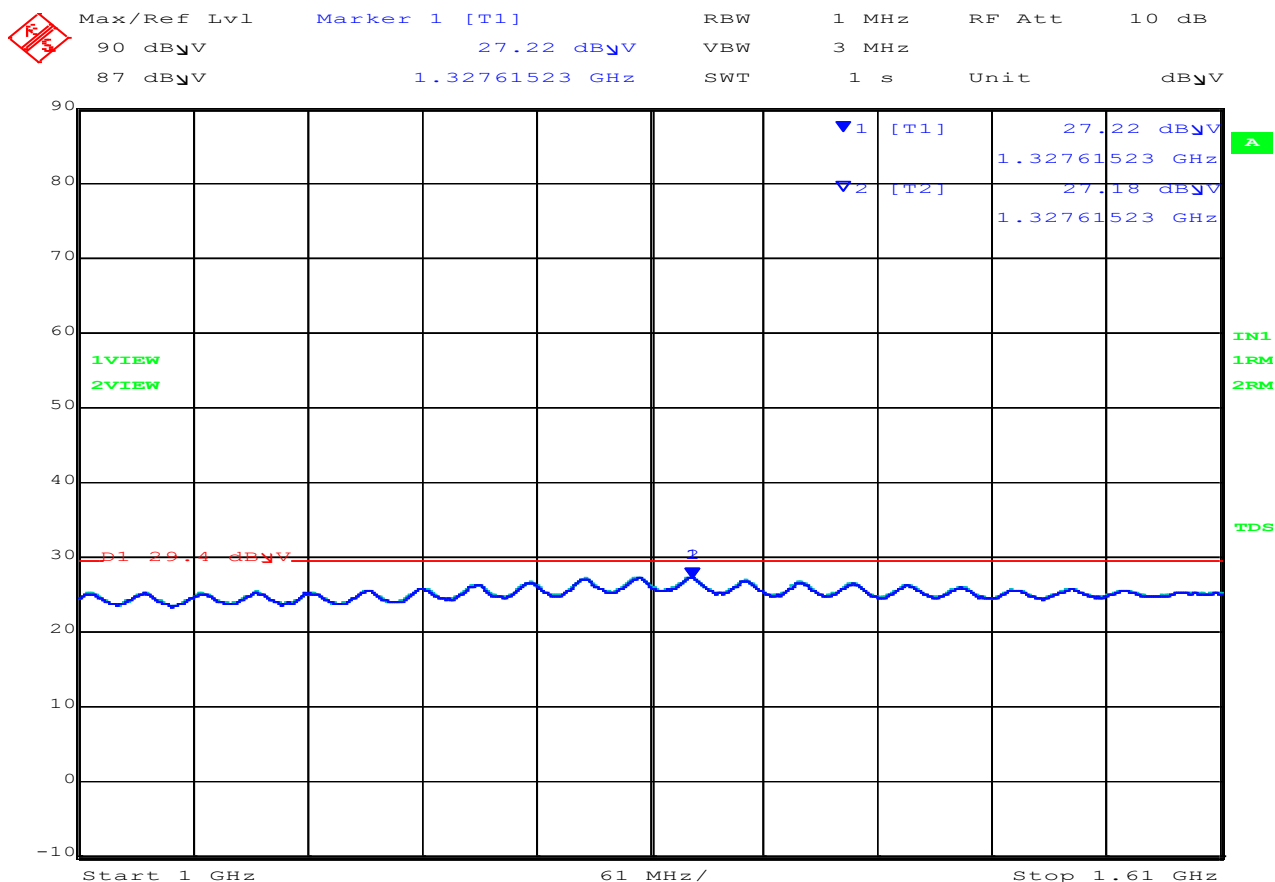

Date: 10.JAN.2020 11:44:00

#### 1000.00– 1610.00 MHz

Num	Frequency MHz	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1299.4	27.22	Average	Vertical	150	0	29.4	-2.18	Pass
2	1298.2	27.18	Average	Horizontal	150	0	29.4	-2.22	Pass

Test Notes: None

### Equipment Configuration for Spurious Emissions


<b>Antenna:</b>	Taoglas UWB.64	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	1.93	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.6	<b>Data Rate:</b>	
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



#### RADIATED SPURIOUS EMISSIONS 1.61-1.99GHz

Test Freq: 6489.6 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

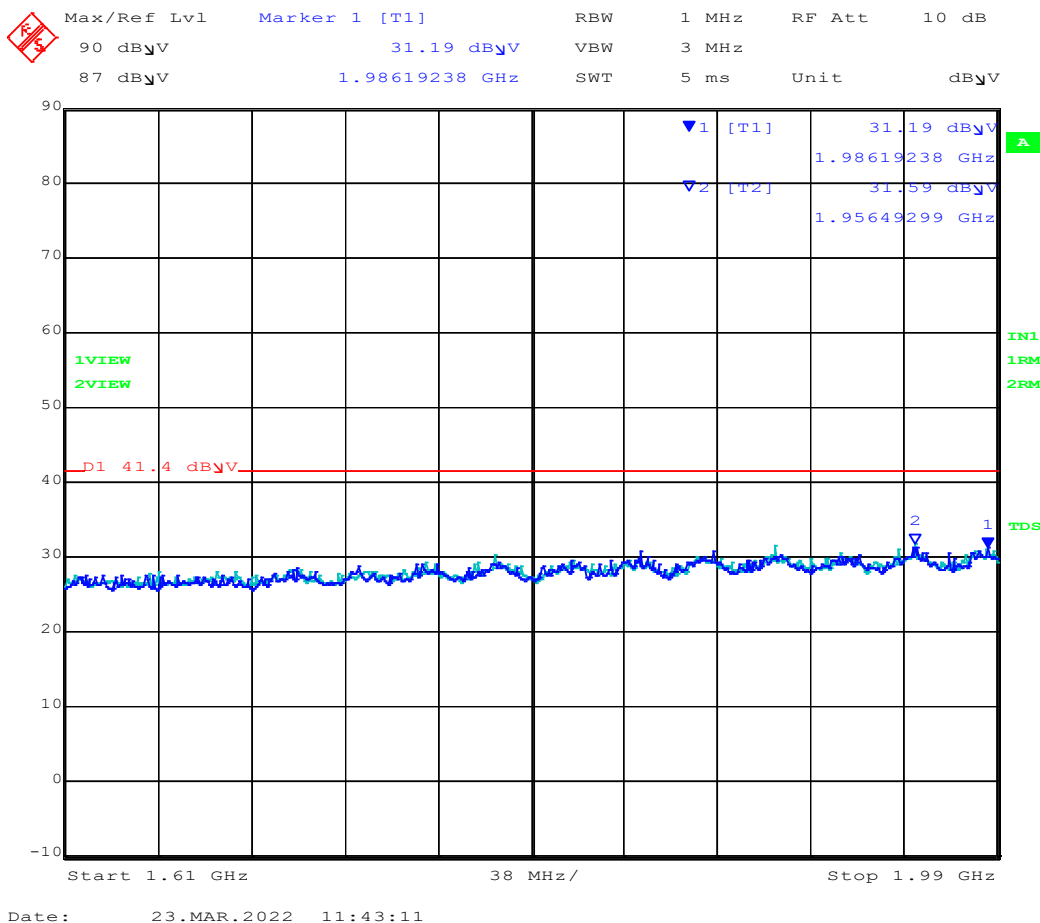

#### 1610.00 – 1990.00 MHz

Num	Frequency MHz	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1986.19	31.19	Average	Horizontal	150	0	41.40	-10.21	Pass
2	1953.44	31.59	Average	Vertical	150	0	41.40	-9.81	Pass

Test Notes: None

### Equipment Configuration for Spurious Emissions


<b>Antenna:</b>	Taoglas UWB.64	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	1.93	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.6	<b>Data Rate:</b>	
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



#### RADIATED SPURIOUS EMISSIONS 1.99-3.10GHz

Test Freq: 6489.6 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

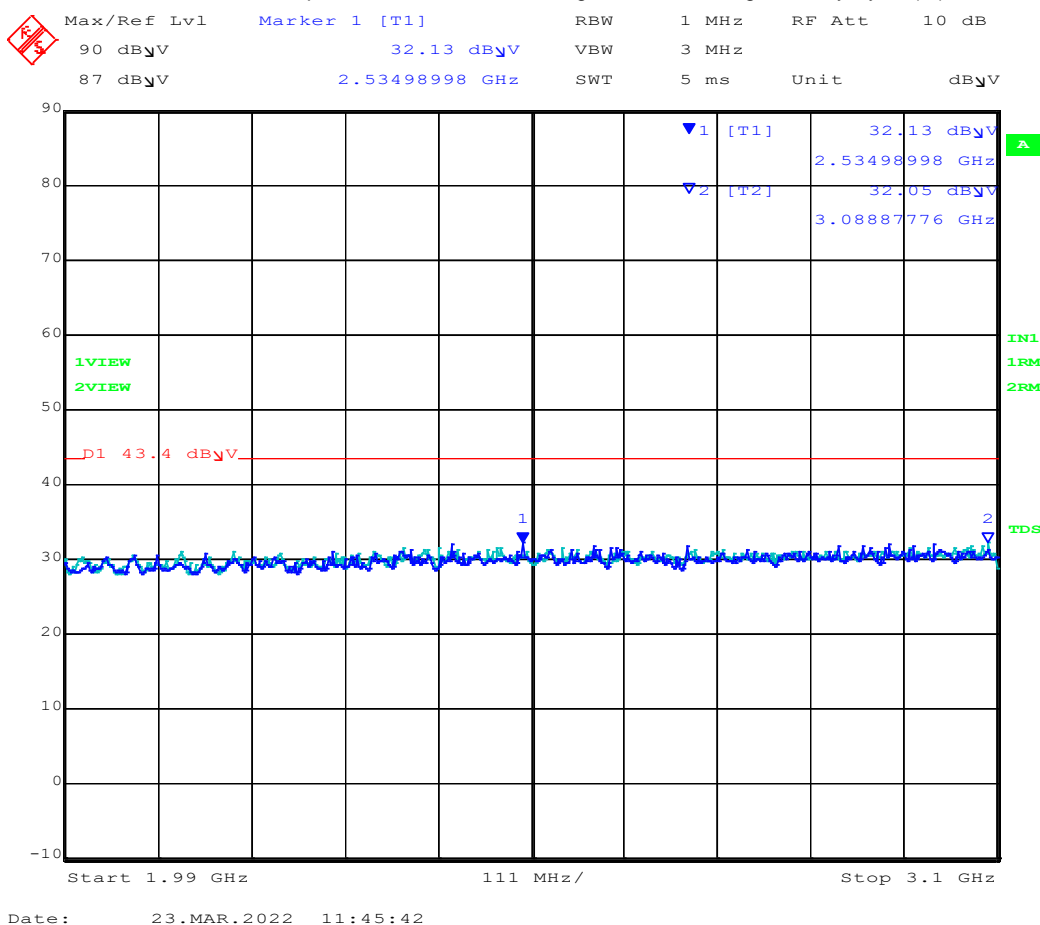

#### 1990.00 – 3100.00 MHz

Num	Frequency MHz	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2534.98	32.13	Average	Horizontal	150	0	43.40	-11.27	Pass
2	3088.87	32.05	Average	Vertical	150	0	43.40	-11.35	Pass

Test Notes: None

### Equipment Configuration for Spurious Emissions


<b>Antenna:</b>	Taoglas UWB.64	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	1.93	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.6	<b>Data Rate:</b>	
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



#### RADIATED SPURIOUS EMISSIONS 3.10-5.925GHz

Test Freq: 6489.6 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

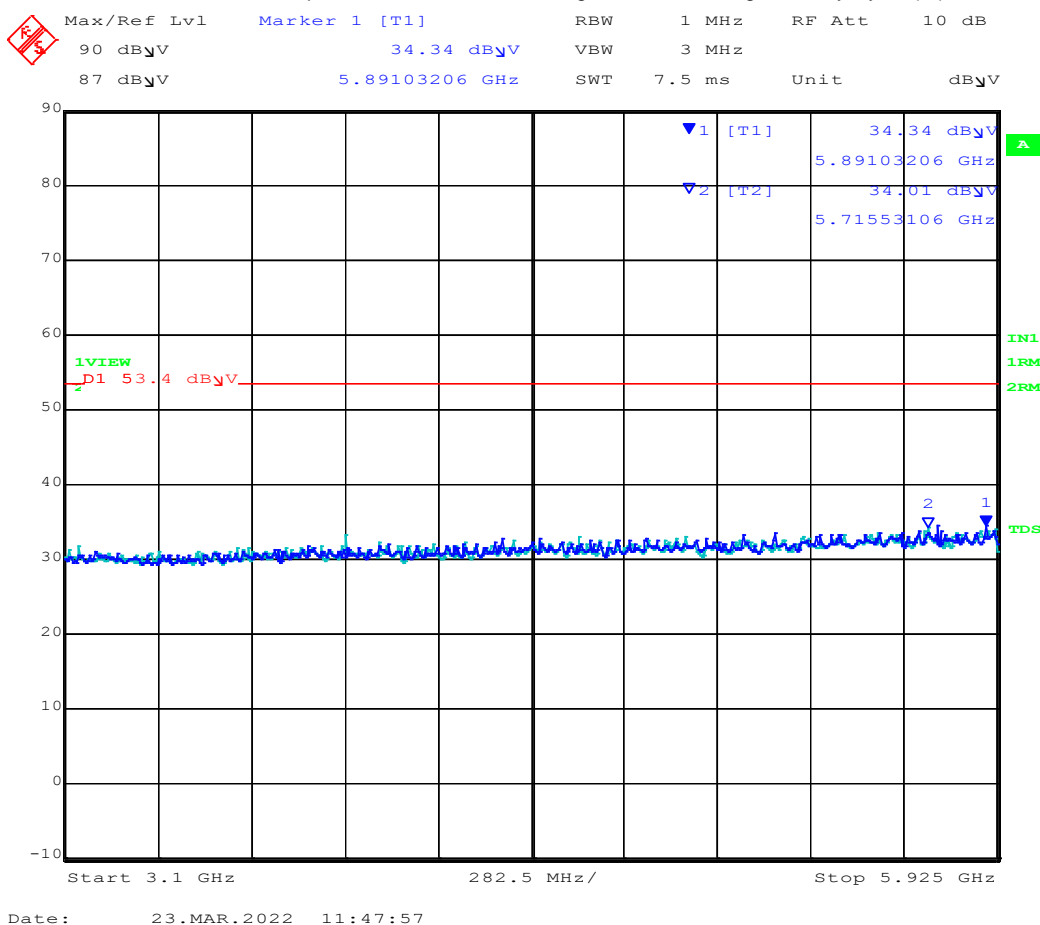

#### 3100.00 – 5925.00 MHz

Num	Frequency MHz	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5891.03	34.34	Average	Horizontal	150	0	53.4	-19.06	Pass
2	5715.53	34.01	Average	Vertical	150	0	53.4	-19.39	Pass

Test Notes: None

### Equipment Configuration for Spurious Emissions


<b>Antenna:</b>	Taoglas UWB.64	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	1.93	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.6	<b>Data Rate:</b>	
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



#### RADIATED SPURIOUS EMISSIONS 5.925-7.250GHz

Test Freq: 6489.6 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

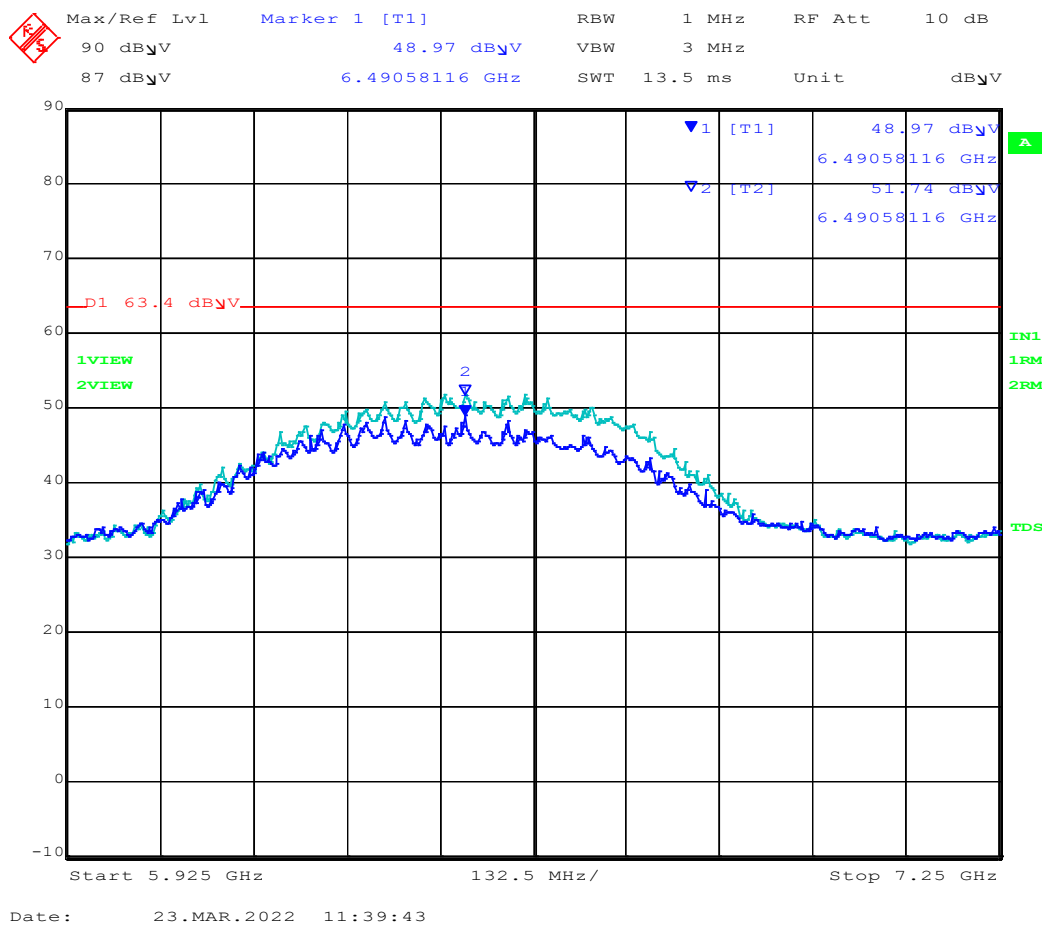

#### 5925.00 – 7250.00 MHz

Num	Frequency MHz	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	6490.58	48.97	Average	Horizontal	150	0	63.40	-14.43	-8.84
2	6490.58	51.74	Average	Vertical	150	0	63.40	-11.66	-11.56

Test Notes: None

### Equipment Configuration for Spurious Emissions


<b>Antenna:</b>	Taoglas UWB.64	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	1.93	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.6	<b>Data Rate:</b>	
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



#### RADIATED SPURIOUS EMISSIONS 7.250 -10.600GHz

Test Freq: 6489.6 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

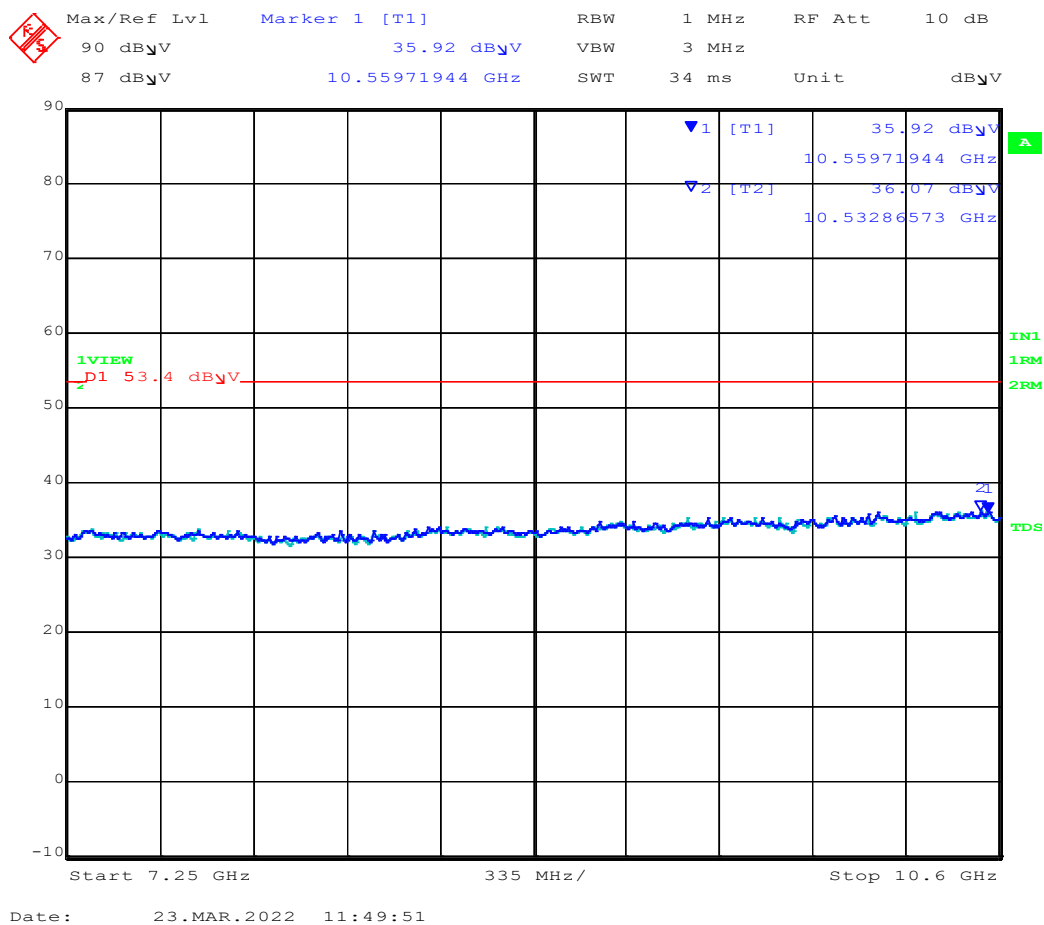

#### 7250.00 – 10600.00 MHz

Num	Frequency MHz	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	10559.71	35.92	Average	Horizontal	150	0	53.40	-17.48	Pass
2	10532.86	36.07	Average	Vertical	150	0	53.40	-17.33	Pass

Test Notes: None



### Equipment Configuration for Spurious Emissions


<b>Antenna:</b>	Taoglas UWB.64	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	1.93	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.6	<b>Data Rate:</b>	
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



#### RADIATED SPURIOUS EMISSIONS 10.600-18.000GHz

Test Freq: 6489.6 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

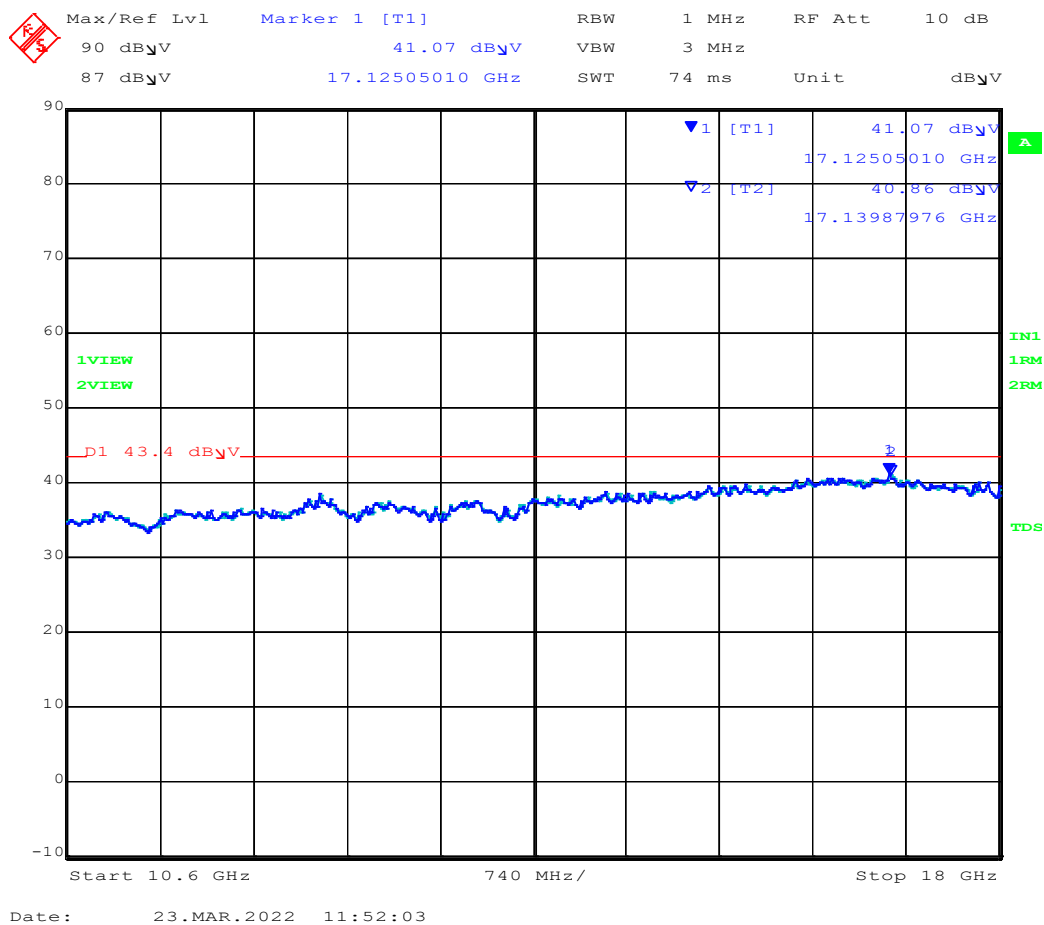

#### 10600.00 – 18000.00 MHz

Num	Frequency MHz	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	17125.05	41.07	Average	Horizontal	150	0	43.40	-2.33	Pass
2	17139.87	40.86	Average	Vertical	150	0	43.40	-2.54	Pass

Test Notes: None

### Equipment Configuration for Spurious Emissions Vertical


<b>Antenna:</b>	Taoglas UWB.64	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	1.93	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.6	<b>Data Rate:</b>	
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



### RADIATED SPURIOUS EMISSIONS 18-26GHz

Test Freq: 6489.6 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

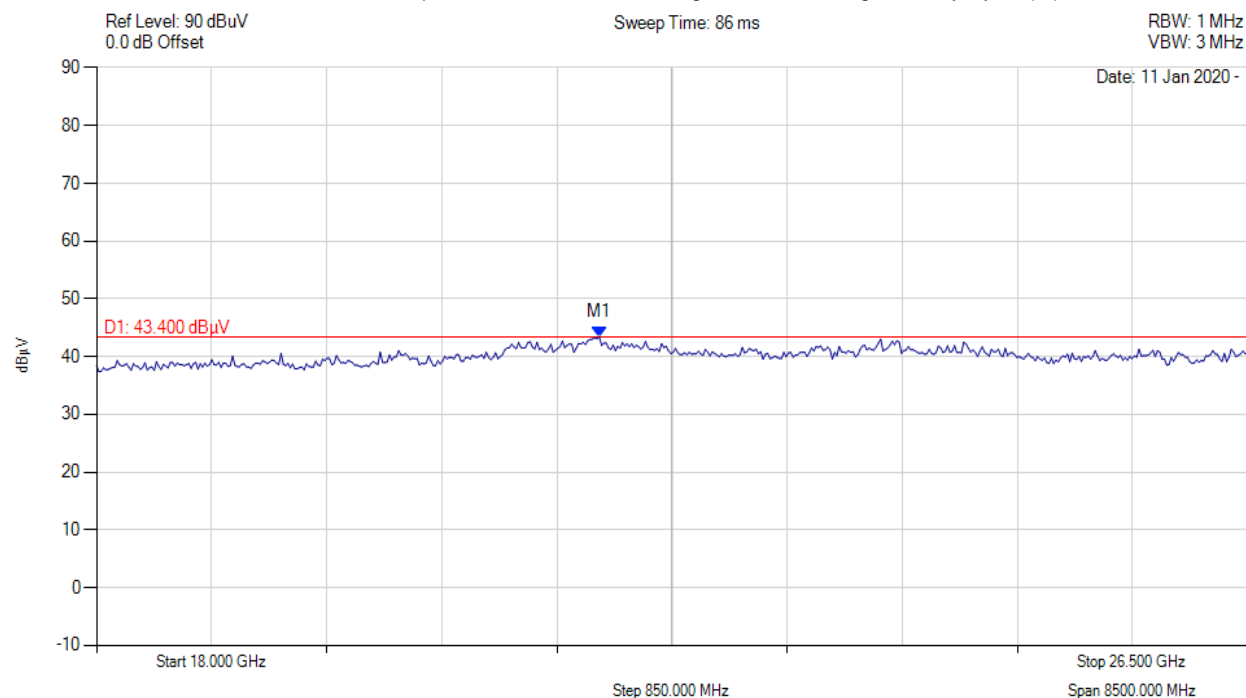

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = MAX HOLD	M1 : 21.713 GHz : 43.363 dBuV	Pass

### Equipment Configuration for Spurious Emissions Vertical


<b>Antenna:</b>	Taoglas UWB.64	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	1.93	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.6	<b>Data Rate:</b>	
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



#### RADIATED SPURIOUS EMISSIONS 26 – 40 GHz

Test Freq: 6489.6 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

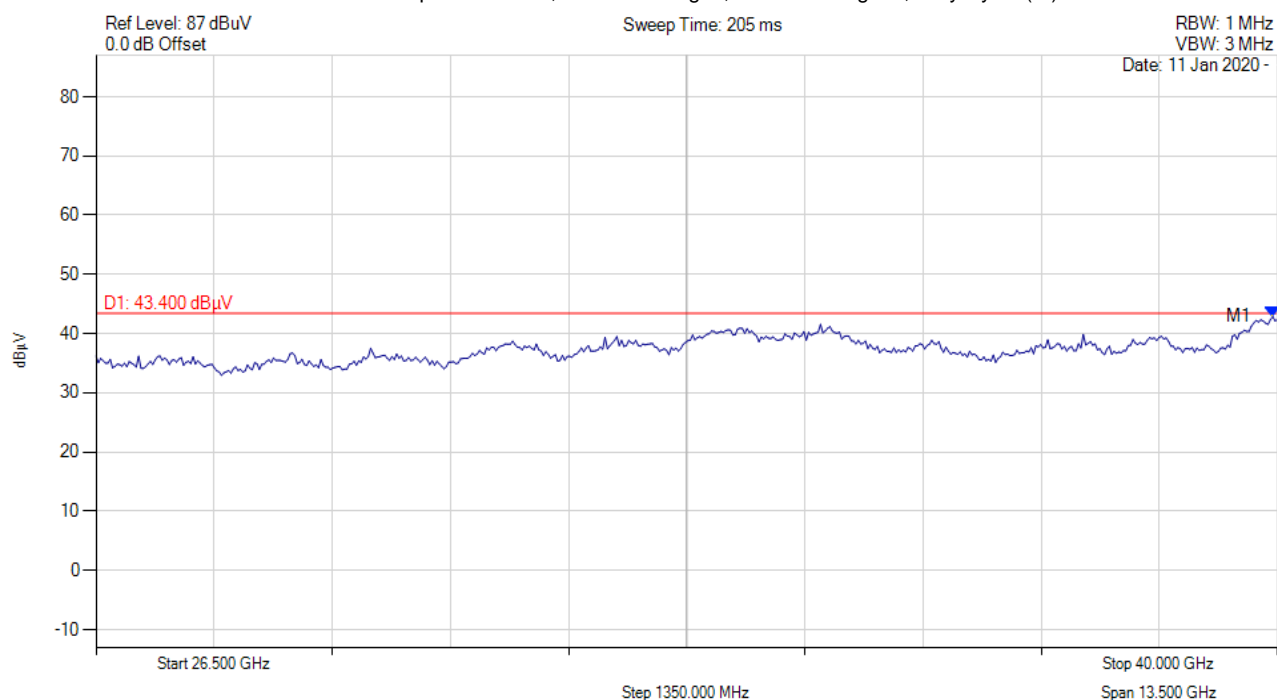

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 39.946 GHz : 42.860 dBuV	Pass

### Equipment Configuration for Spurious Emissions Horizontal


<b>Antenna:</b>	Taoglas UWB.64	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	1.93	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.6	<b>Data Rate:</b>	
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



### RADIATED SPURIOUS EMISSIONS 18-26GHz

Test Freq: 6489.6 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

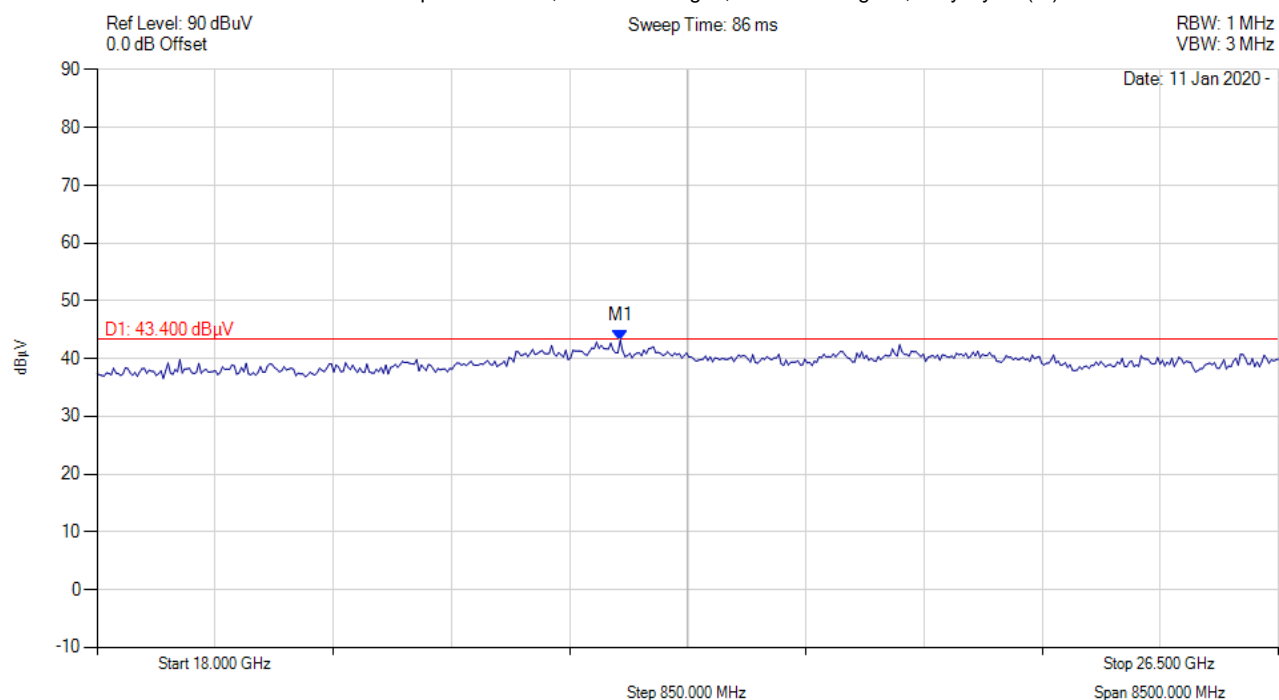

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 21.765 GHz : 43.184 dBuV	Pass

### Equipment Configuration for Spurious Emissions Horizontal


<b>Antenna:</b>	Taoglas UWB.64	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	1.93	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.6	<b>Data Rate:</b>	
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



#### RADIATED SPURIOUS EMISSIONS 26 – 40 GHz

Test Freq: 6489.6 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

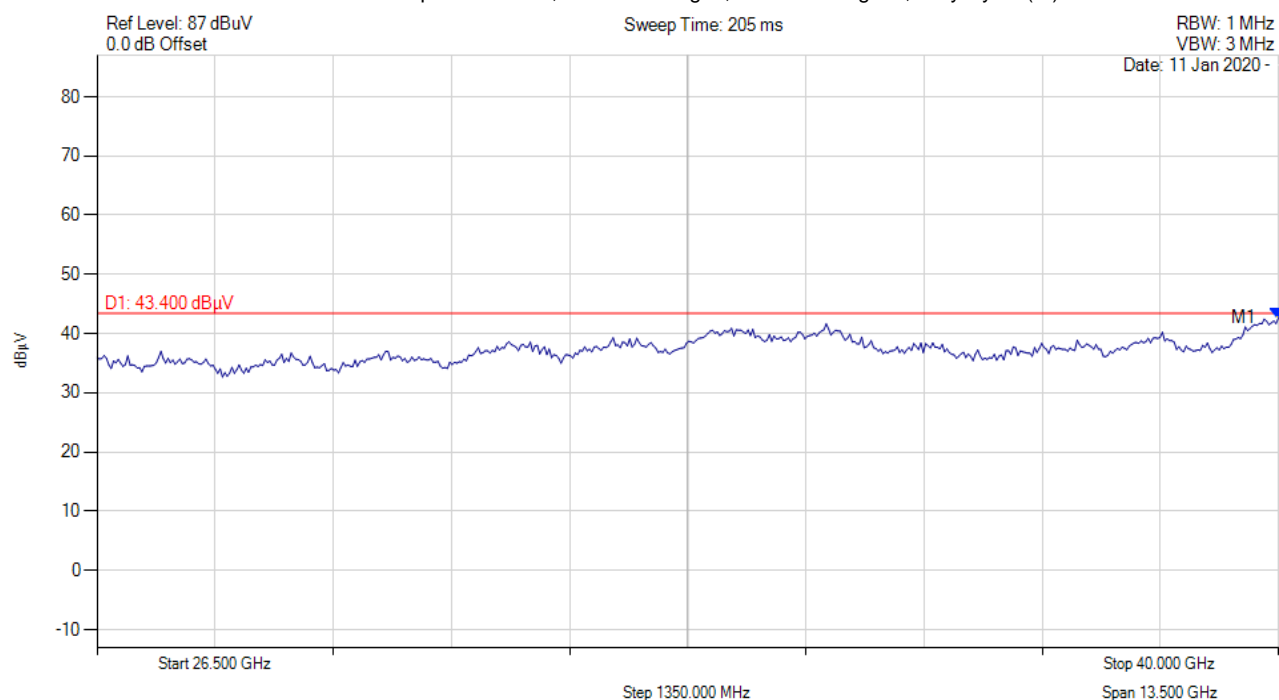

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 40.000 GHz : 42.634 dBuV	Pass

### 9.4.2. GPS Band Emissions

#### Equipment Configuration for Spurious Emissions


<b>Antenna:</b>	Taoglas UWB.64	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	1.93	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.6	<b>Data Rate:</b>	
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

#### Test Measurement Results



#### RADIATED SPURIOUS EMISSIONS GPS 1.164-1.240GHz

Test Freq: 6489.6 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

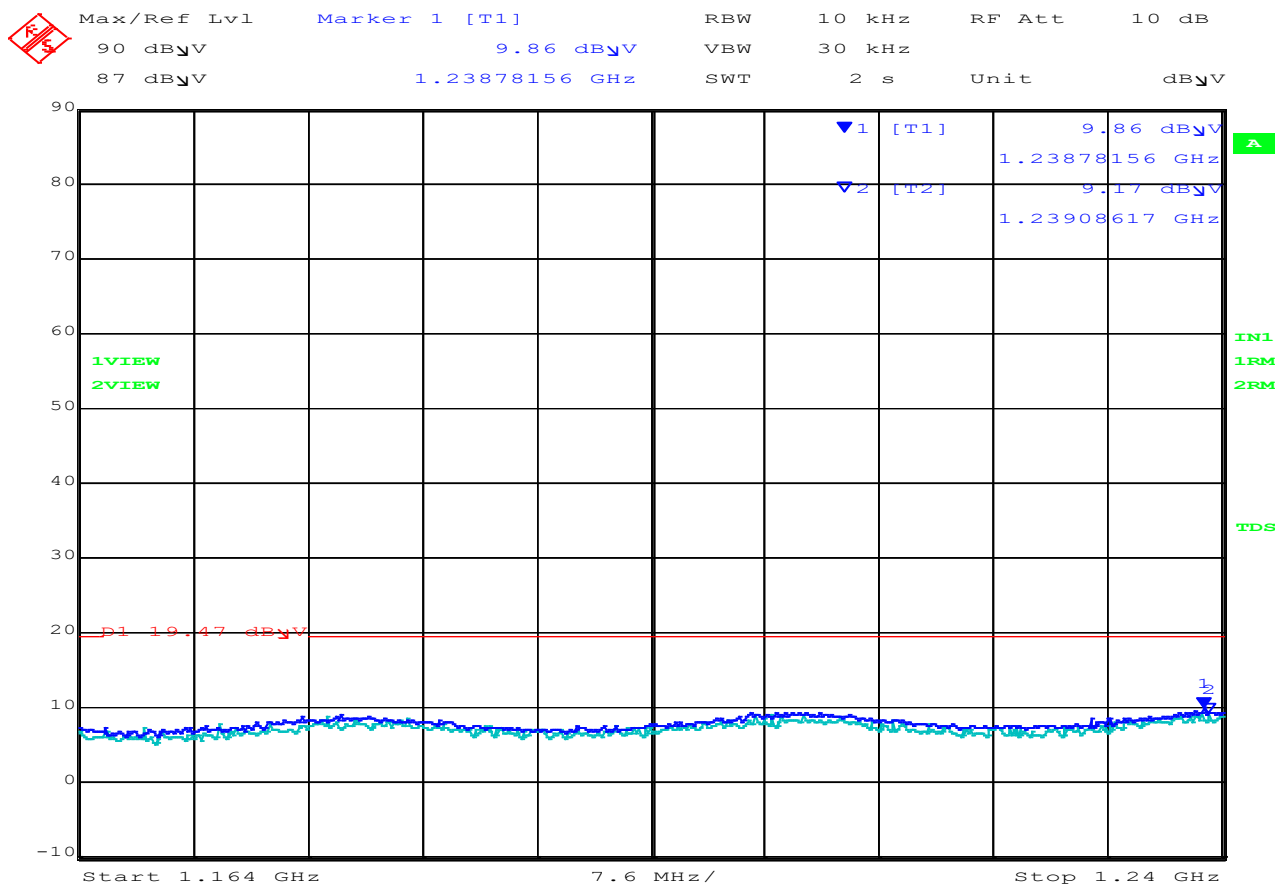

Date: 10.JAN.2020 13:33:32

1164.00-1240.00 MHz									
Num	Frequency MHz	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
No Signals Found within 6 dB of Limit									
Test Notes: None									

### Equipment Configuration for Spurious Emissions


<b>Antenna:</b>	Taoglas UWB.64	<b>Variant:</b>	WB
<b>Antenna Gain (dBi):</b>	1.93	<b>Modulation:</b>	--
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99%
<b>Channel Frequency (MHz):</b>	6489.6	<b>Data Rate:</b>	
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



#### RADIATED SPURIOUS EMISSIONS GPS 1.559-1.61GHz

Test Freq: 6489.6 MHz, Antenna: integral, Power Setting: 16, Duty Cycle (%): 99

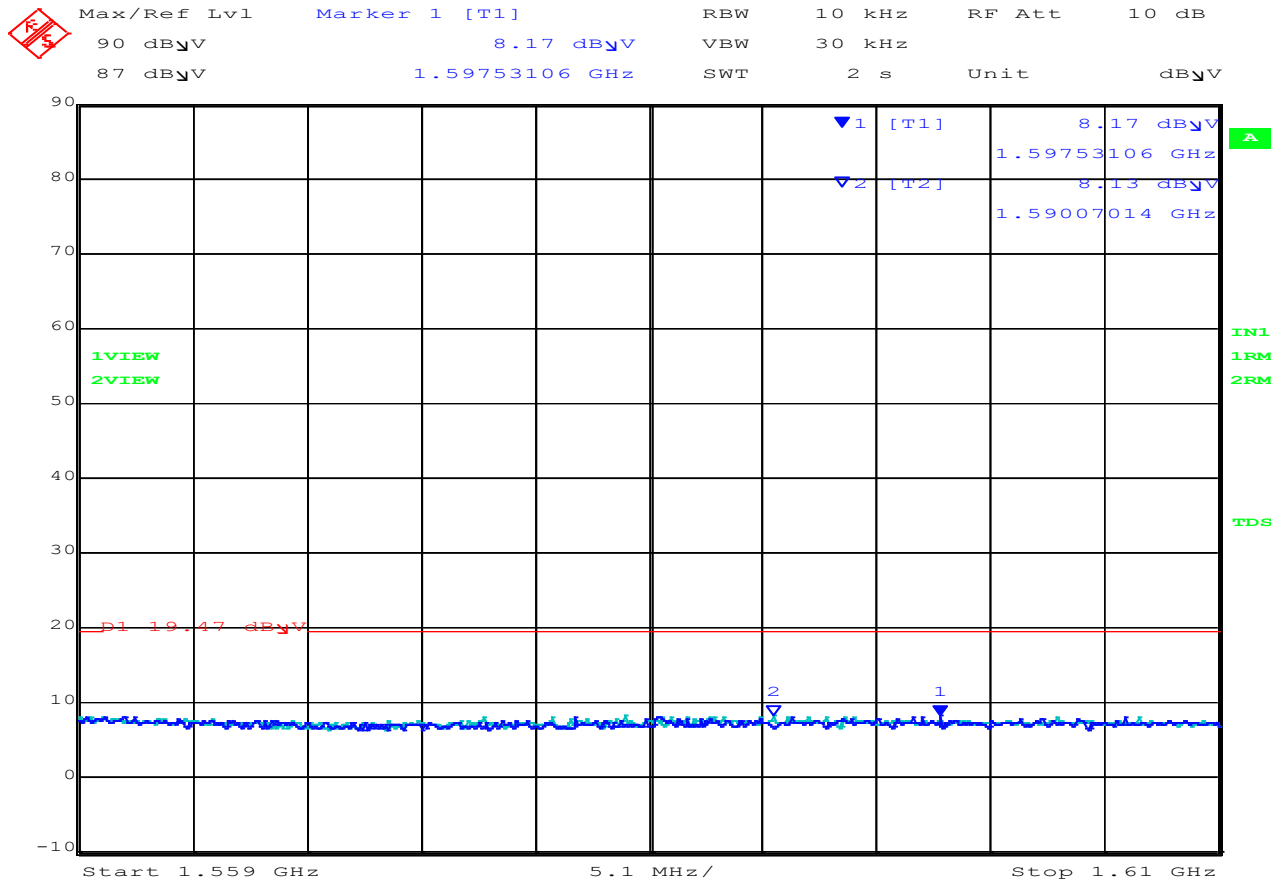

Date: 10.JAN.2020 13:36:44

#### 1164.00-1240.00 MHz

Num	Frequency MHz	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
No Signals Found within 6 dB of Limit									
Test Notes: None									

#### **9.4. AC Mains Power Input / Output Ports**

##### **Scope**

This test assesses the ability of the EUT to limit its internal noise from being present on the AC mains power input/output ports.

##### **Test Procedure**

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.



## Limits

The equipment shall meet the class B limits given in FCC 15.207 & ICES-003. Alternatively, for equipment intended to be used in telecommunication centres only, the class A limits given in FCC 15B, ICES-003 may be used.

Limits for conducted disturbance at the mains ports of class B ITE

Frequency of emission (MHz)	Quasi-peak dBuV	Average dBuV
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50
Note 1	* Decreases with the logarithm of the frequency	
Note 2	* The lower limit applies at the boundary between frequency ranges	

Limits for conducted disturbance at the mains ports of class A ITE

Frequency of emission (MHz)	Quasi-peak dBuV	Average dBuV
0.15–0.5	79	66
0.5–30	73	60
Note 1	* The lower limit shall apply at the transition frequency.	

## Traceability

All conducted emission measurements are traceable to national standards. The uncertainty of measurement at a confidence level of not less than 95 %, with a coverage factor of k=2, in the range 9 kHz – 30 MHz (Average & Quasi-peak) is  $\pm 2.64$  dB.


Laboratory Measurement Uncertainty	
Measurement uncertainty	$\pm 2.64$ dB

Method
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'

## Test Equipment Utilized

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
184	Pulse Limiter	Rhode & Schwarz	ESH3Z2	357.8810.52	22 Oct 2022
190	LISN (two-line V-network)	Rhode & Schwarz	ESH3Z5	836679/006	11 Oct 2022
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	8 Oct 2022
295	Conducted Emissions Chamber Maintenance Check	MiCOM	Conducted Emissions Chamber	295	24 Jul 2022
307	BNC-CABLE	Megaphase	1689 1GVT4	15F50B002	22 Oct 2022
316	Dell desktop computer workstation	Dell	Desktop	WS04	Not Required
372	AC Variable PS	California Instruments	1251P	L06951	Cal when used
389	LISN (3 Phase) 9kHz - 30 MHz for support equipment	Rohde & Schwarz	ESH2-Z5	881493/013	Not Required
496	MiTest Conducted Emissions test software.	MiCOM	Conducted Emissions Test Software Version 1.0	496	Not Required
510	Barometer/Thermometer	Digi Sense	68000-49	170871375	4 Jan 2023
555	Rhode & Schwarz Receiver (Firmware Version : 2.00 SP1)	Rhode & Schwarz	ESW 44	101893	28 Jun 2023
CCEMC01	Confidence Check.	MiCOM	CCEMC01	None	24 Jul 2022


## Test Setup – Power Input / Output Port

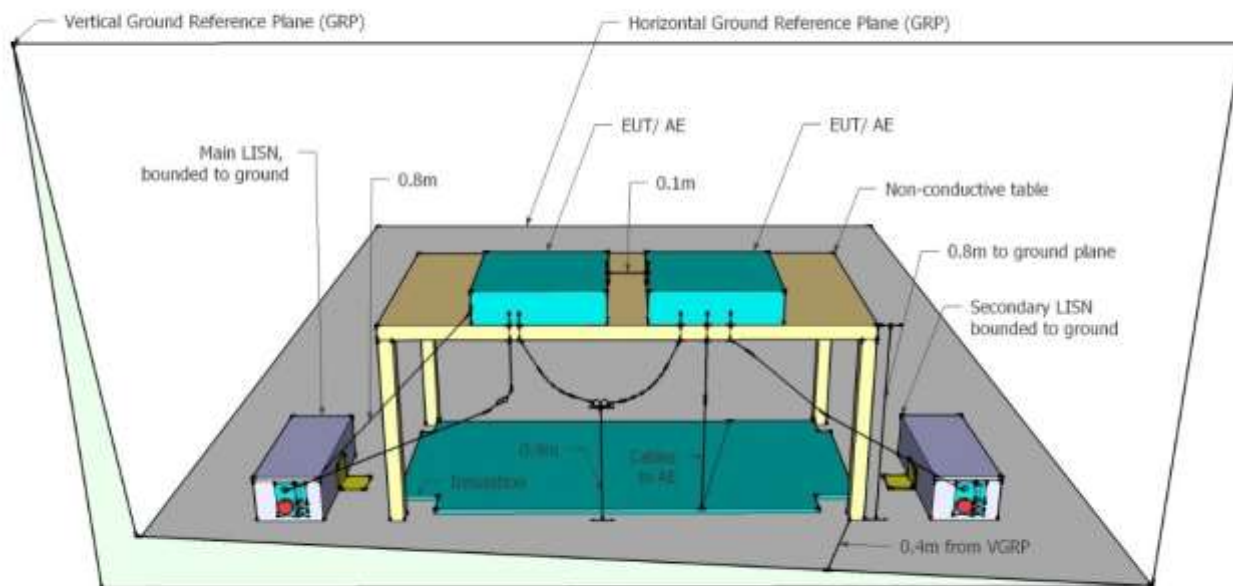

Model:	S7601	Configuration tested:	AC/DC PS
Input power:	120V <sub>AC</sub> /60 <sub>Hz</sub>	Standard:	FCC 15B



Variant: , Test Freq: 0.00 MHz

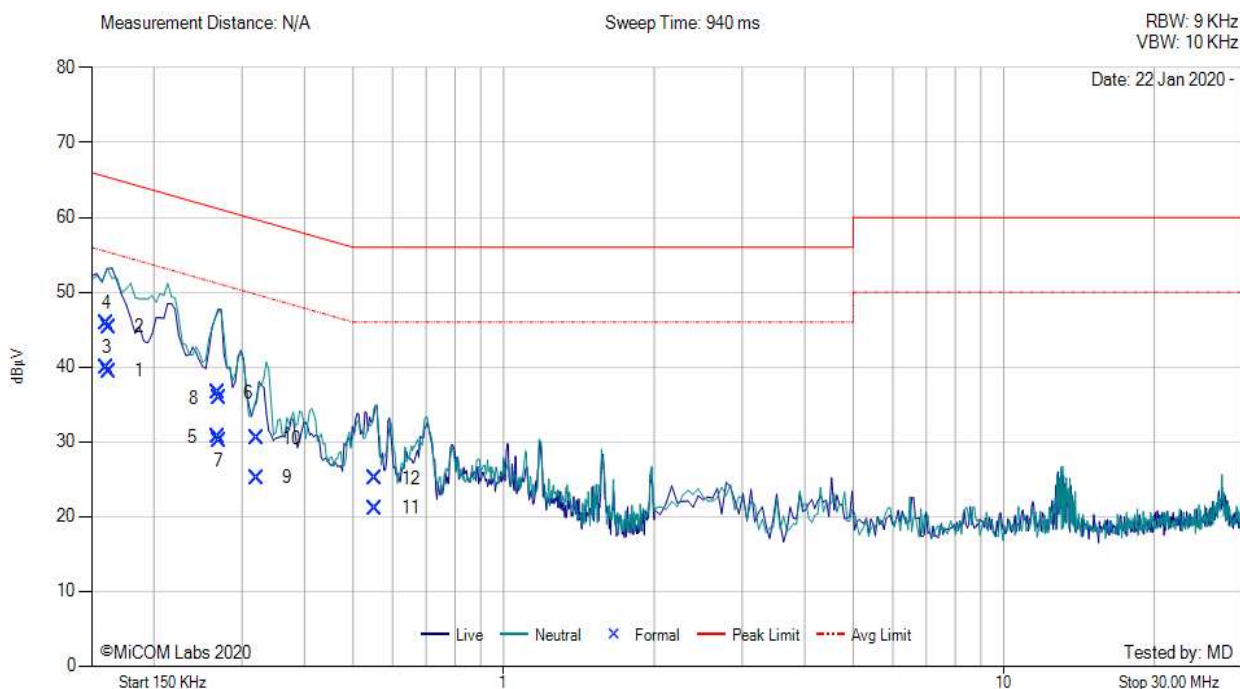

Num	Frequency MHz	Raw dBμV	Cable Loss dB	Factor dB	Total Correction dBμV	Corrected Value dBμV	Measurement Type	Line	Limit dBμV/m	Margin dB	Pass /Fail
1	0.162	29.48	0.05	9.92	9.97	39.45	Max Avg	Live	55.7	-16.2	Pass
2	0.162	35.37	0.05	9.92	9.97	45.34	Max Qp	Live	65.7	-20.3	Pass
3	0.161	29.95	0.05	9.92	9.97	39.92	Max Avg	Neutral	55.7	-15.8	Pass
4	0.161	35.86	0.05	9.92	9.97	45.83	Max Qp	Neutral	65.7	-19.9	Pass
5	0.269	20.61	0.06	9.92	9.98	30.59	Max Avg	Live	52.6	-22.0	Pass
6	0.269	26.54	0.06	9.92	9.98	36.52	Max Qp	Live	62.6	-26.1	Pass
7	0.270	20.17	0.06	9.92	9.98	30.15	Max Avg	Neutral	52.6	-22.4	Pass
8	0.270	25.89	0.06	9.92	9.98	35.87	Max Qp	Neutral	62.6	-26.7	Pass
9	0.321	15.23	0.05	9.92	9.97	25.20	Max Avg	Neutral	51.1	-25.9	Pass
10	0.321	20.45	0.05	9.92	9.97	30.42	Max Qp	Neutral	61.1	-30.7	Pass
11	0.554	11.06	0.10	9.92	10.02	21.08	Max Avg	Live	46.0	-24.9	Pass
12	0.554	15.02	0.10	9.92	10.02	25.04	Max Qp	Live	56.0	-31.0	Pass

**Test Notes:** AC Main on PS and Vector Tag 230v



575 Boulder Court  
Pleasanton, California 94566, USA  
Tel: +1 (925) 462 0304  
Fax: +1 (925) 462 0306  
[www.micomlabs.com](http://www.micomlabs.com)