



Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5230 MHz, MCS 5, HT40, P=19dBm
 Test Date: 2023-06-12
 Note: lower band area

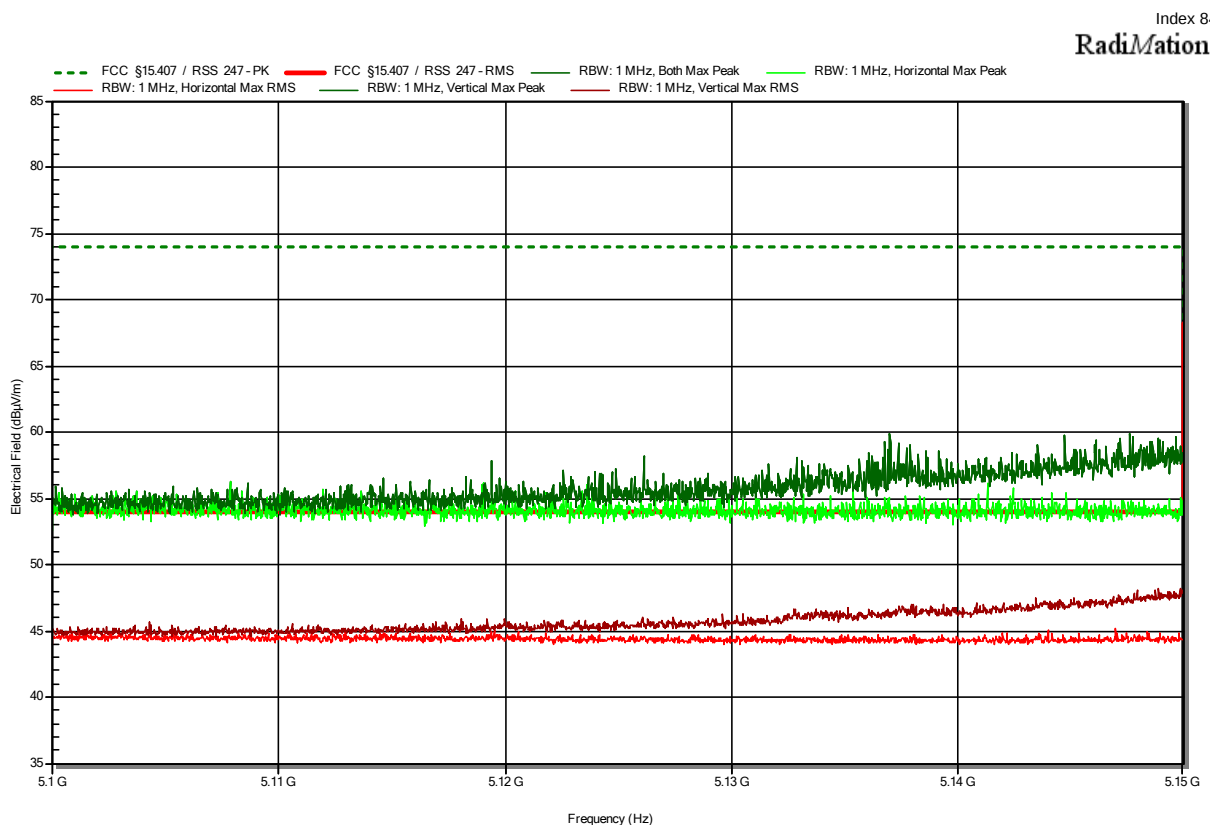

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5230 MHz, MCS 5, HT40, P=19dBm
 Test Date: 2023-06-12

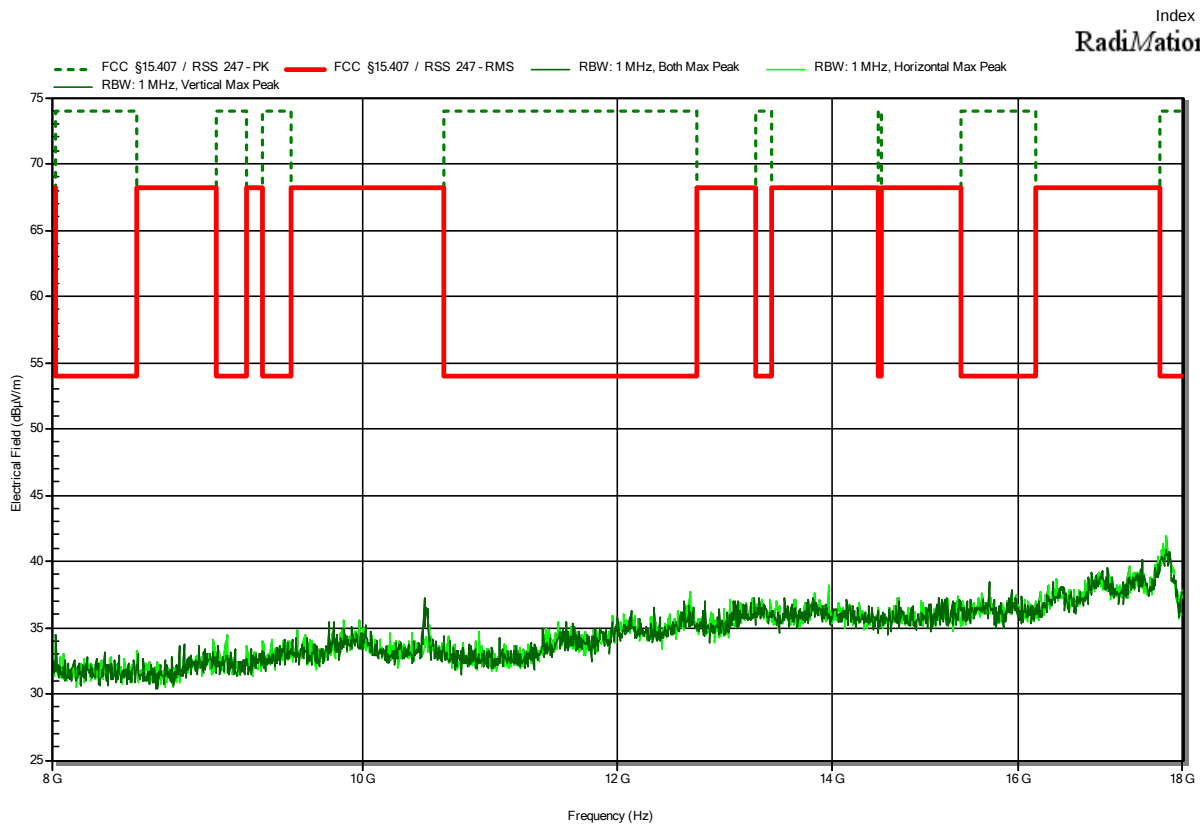


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5230 MHz, MCS 5, HT40, P=19dBm
 Test Date: 2023-06-12

Index 80

RadiMation

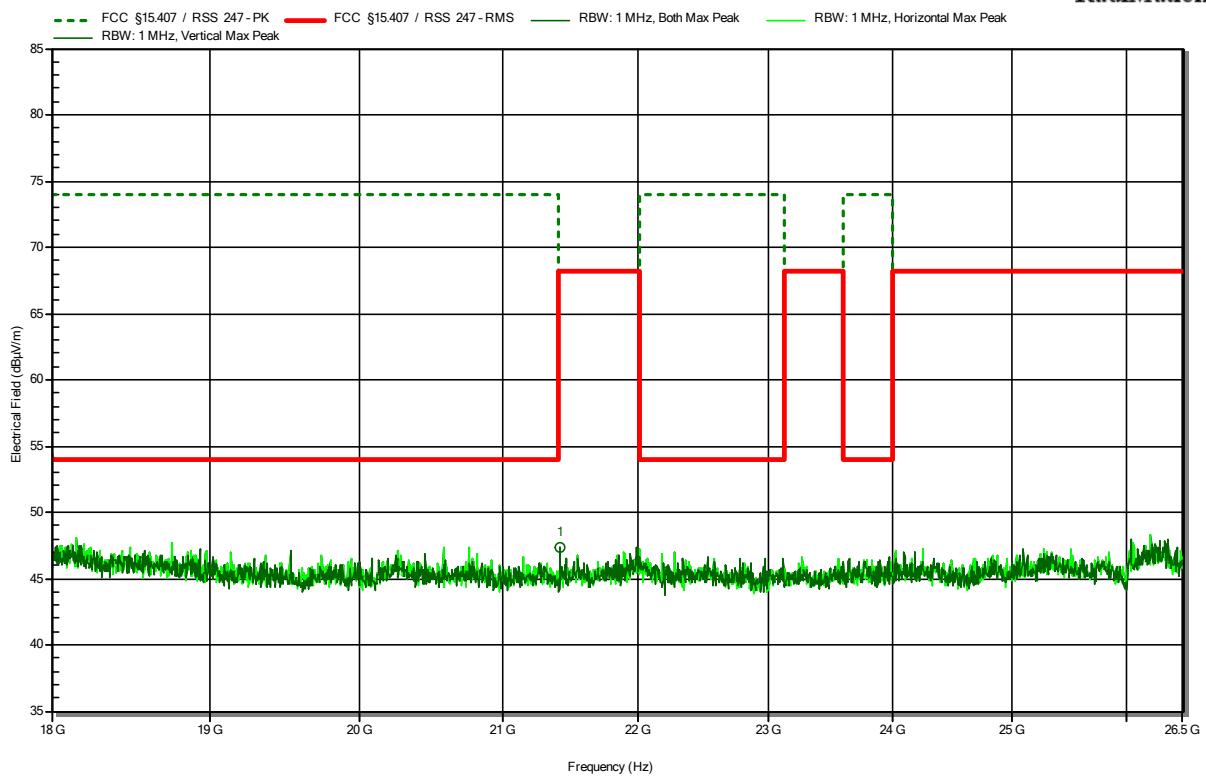


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
21.414 GHz	47.31 dBµV/m	68.2 dBµV/m	-20.89 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5210 MHz, MCS 0, VHT80, P=14dBm
 Test Date: 2023-07-06

Index 200

RadiMation

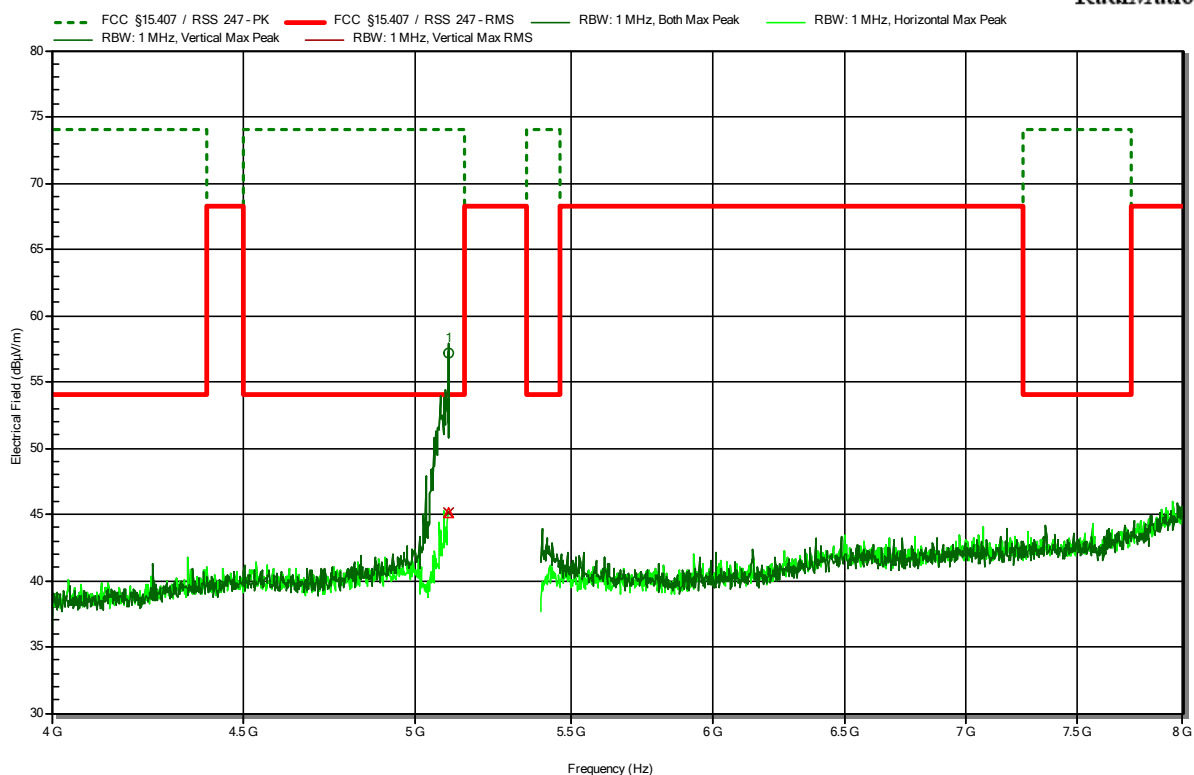


Frequency 5.1 GHz	Peak 57.18 dBμV/m	Peak Limit 74 dBμV/m	Peak Difference -16.82 dB	Peak Status Pass	Polarization Vertical
Frequency 5.1 GHz	RMS 45.1 dBμV/m	RMS Limit 54 dBμV/m	RMS Difference -8.9 dB	RMS Status Pass	Polarization Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5210 MHz, MCS 0, VHT80, P=14dBm
 Test Date: 2023-07-06
 Note: lower band area

Index 201

RadiMation

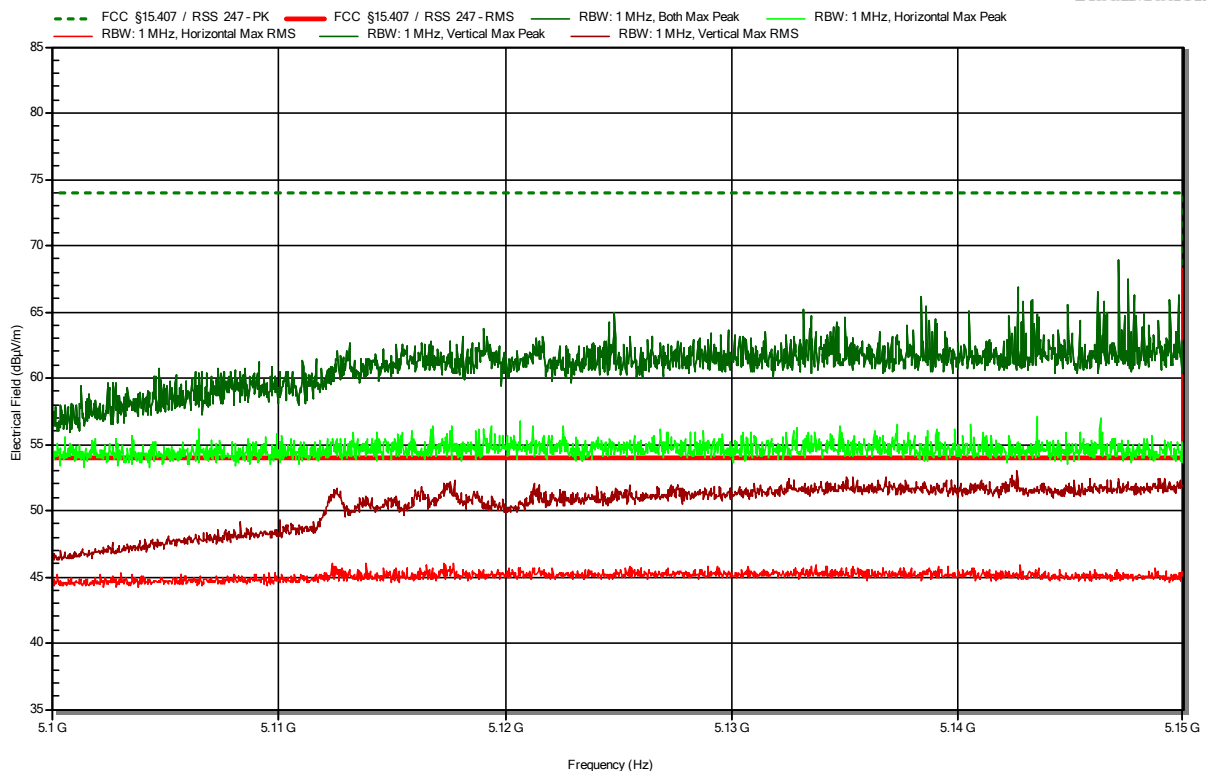


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5210 MHz, MCS 0, VHT80, P=14dBm
 Test Date: 2023-06-09

Index 66

RadiMation

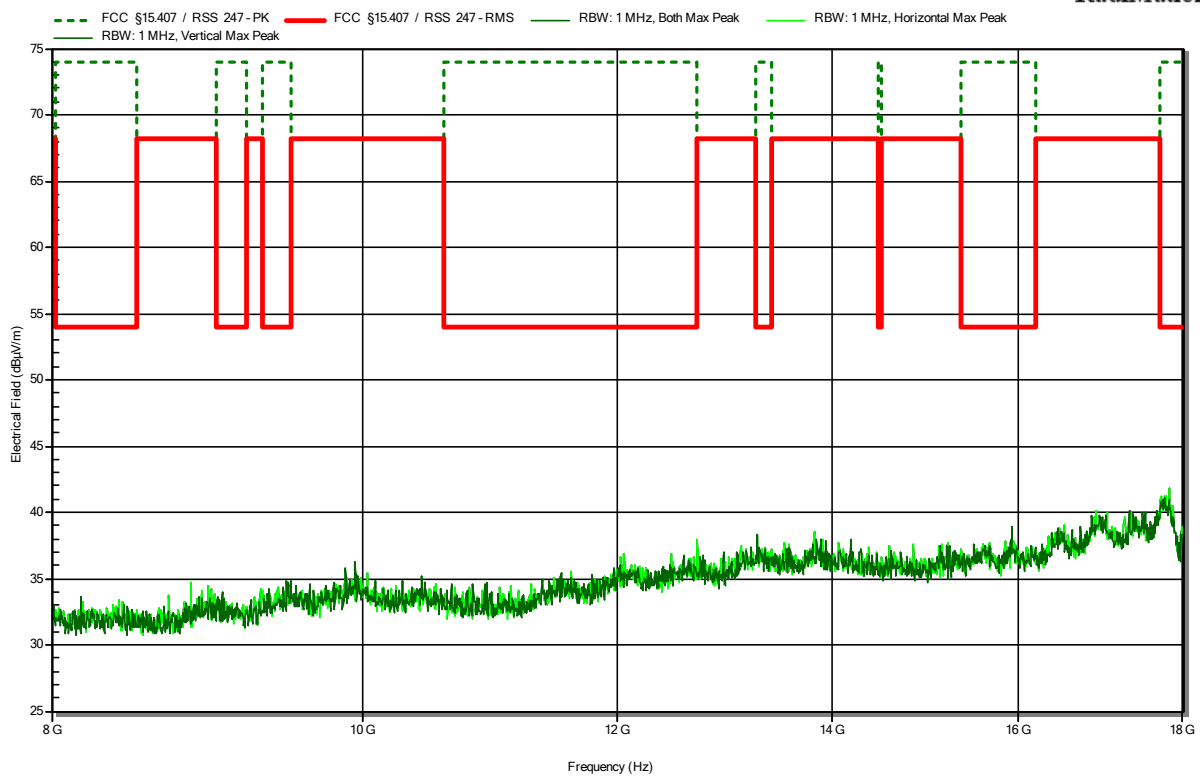


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5210 MHz, MCS 0, VHT80, P=14dBm
 Test Date: 2023-06-09

Index 67

RadiMation

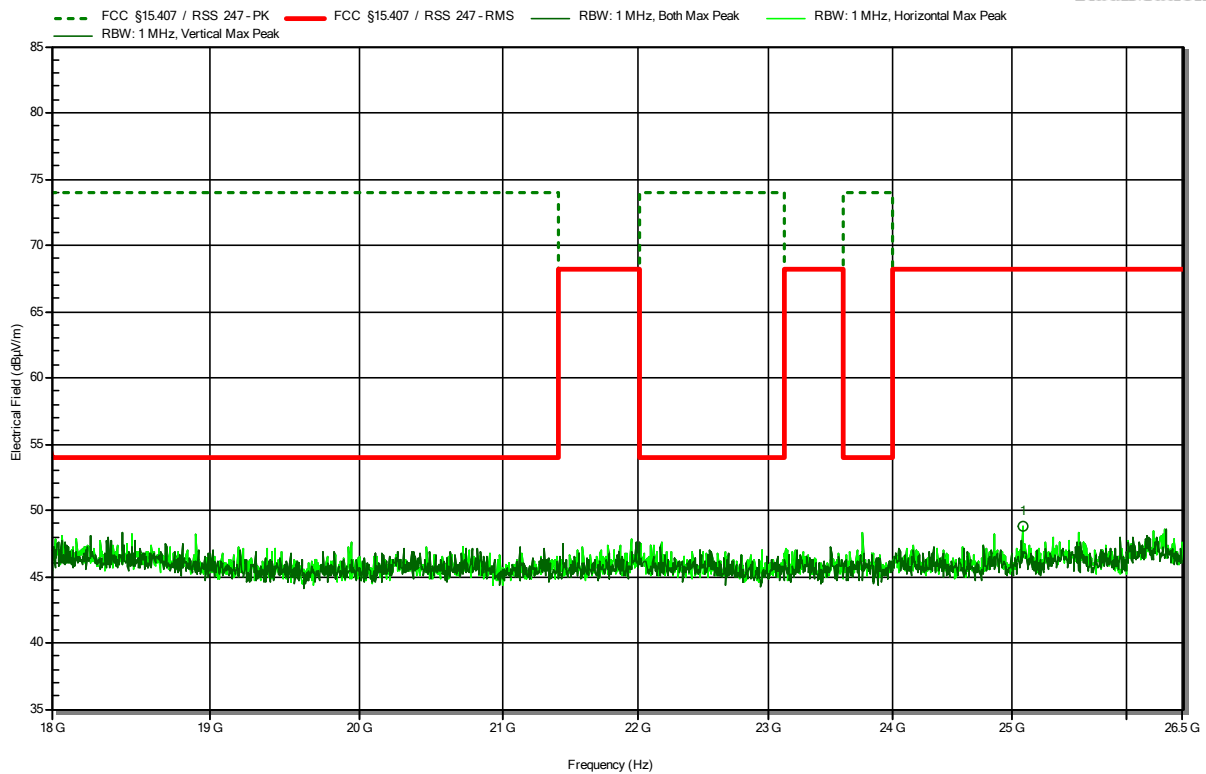


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
25.086 GHz	48.76 dBμV/m	68.2 dBμV/m	-19.44 dB	Pass	Horizontal

U-NII-2A

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5300 MHz, 54 Mbps, OFDM, P=19dBm
 Test Date: 2023-06-13

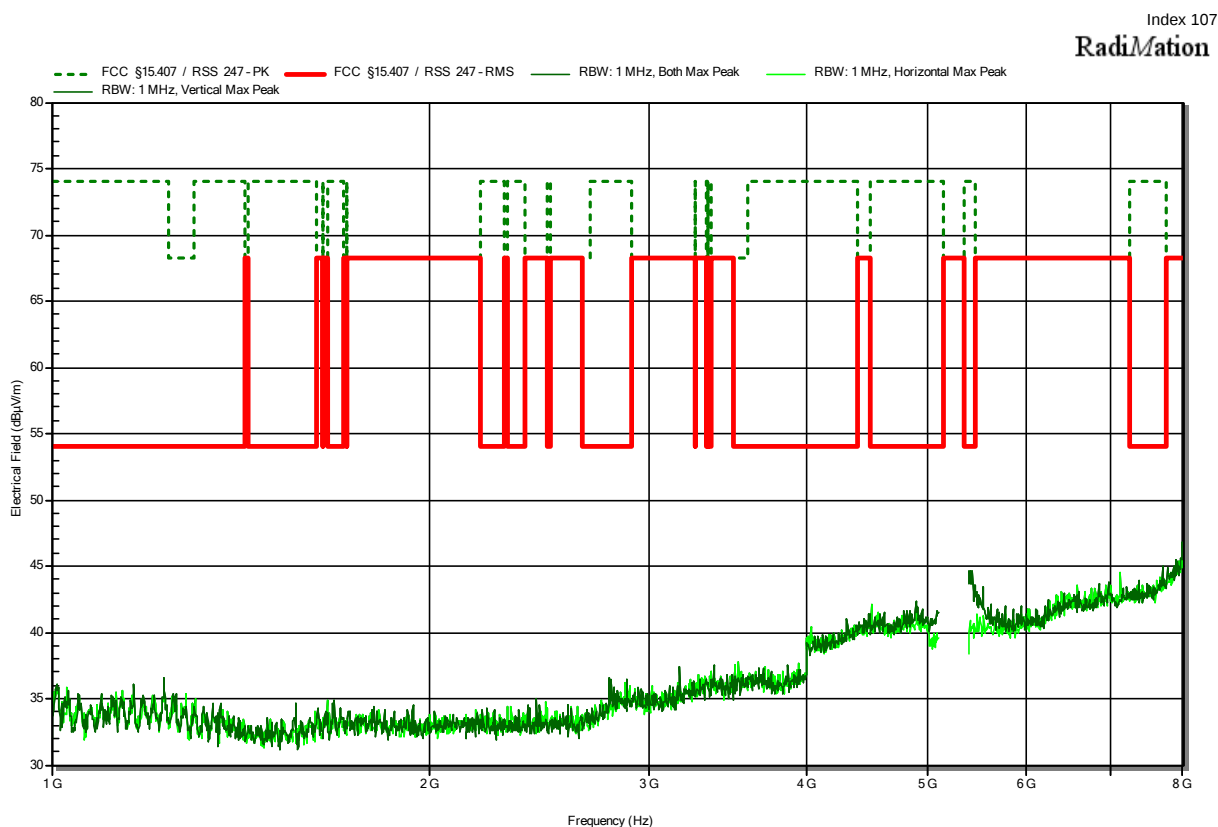


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5300 MHz, 54 Mbps, OFDM, P=19dBm
 Test Date: 2023-06-13
 Note: Upper band area

Index 106

RadiMation

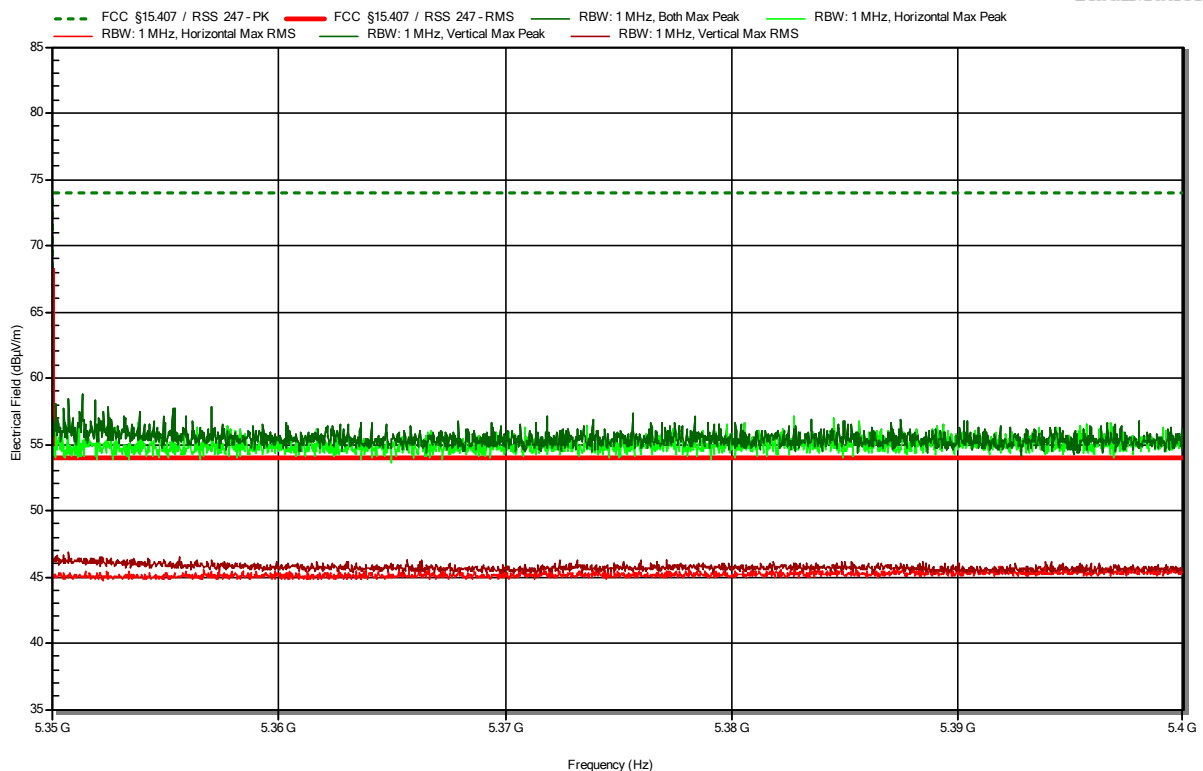


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5300 MHz, 54 Mbps, OFDM, P=19dBm
 Test Date: 2023-06-13

Index 108

RadiMation

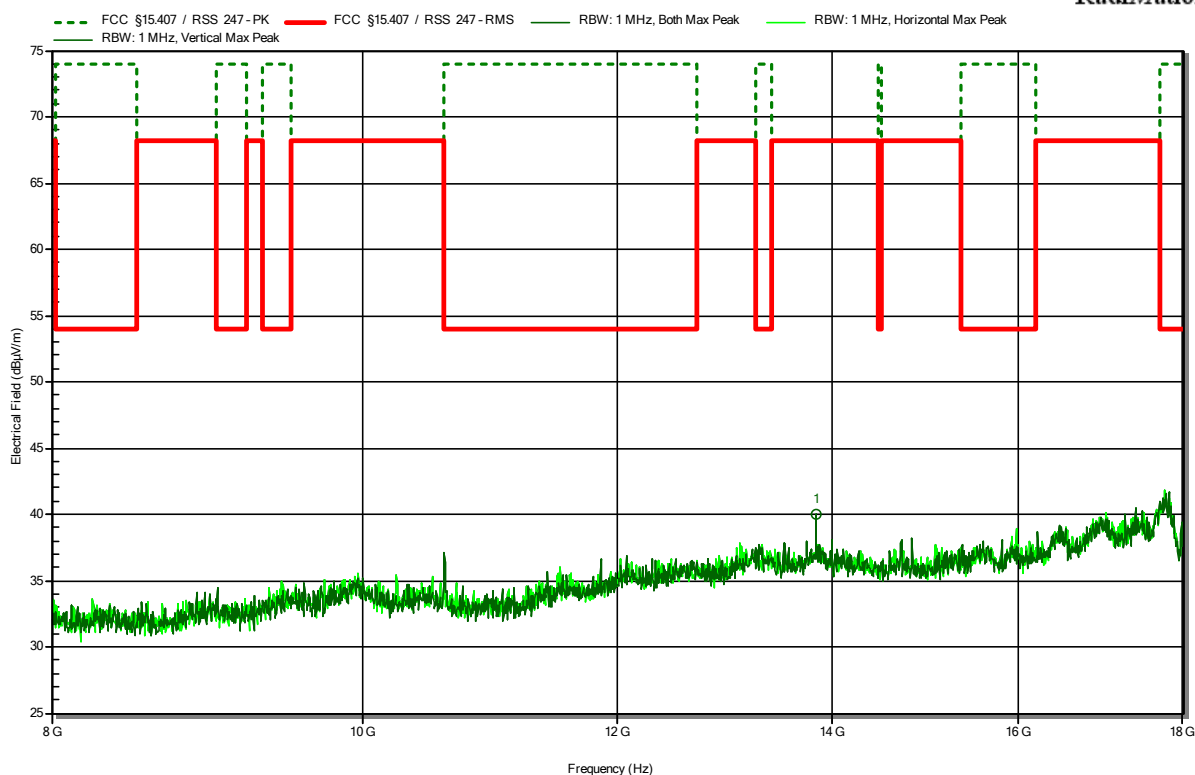


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
13.839 GHz	40 dBµV/m	68.2 dBµV/m	-28.2 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5300 MHz, 54 Mbps, OFDM, P=19dBm
 Test Date: 2023-06-13

Index 109

RadiMation

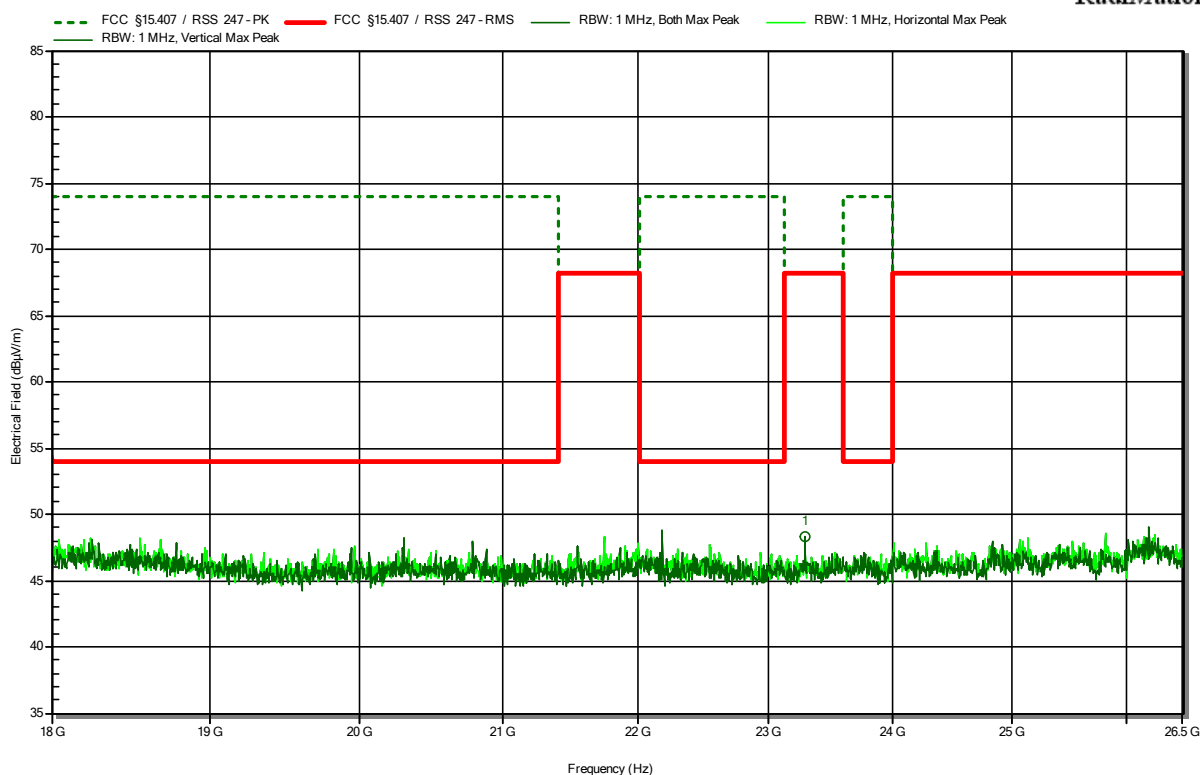


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
23.287 GHz	48.25 dBμV/m	68.2 dBμV/m	-19.95 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Flann 22240-25
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5300 MHz, 54 Mbps, OFDM, P=19dBm
 Test Date: 2023-06-22


Index 182

RadiMation

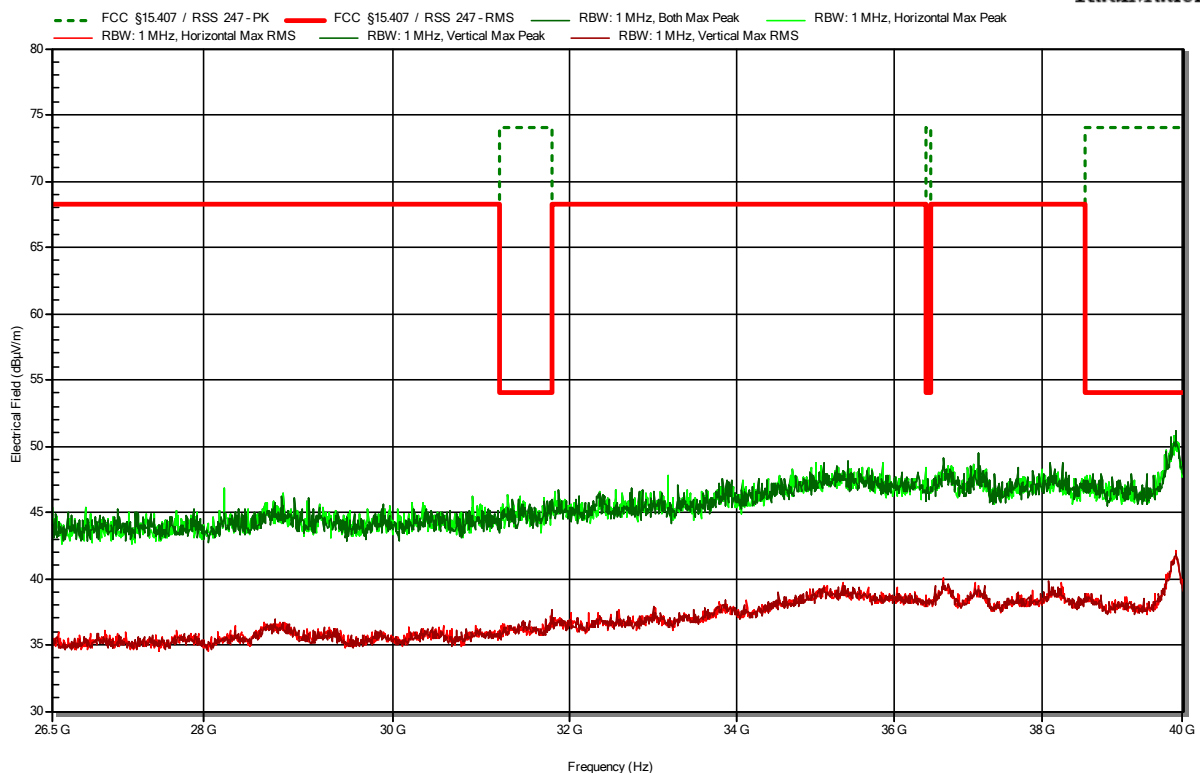

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck VULB 9168
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11a, 5320 MHz, 54 Mbps, OFDM
 Test Date: 2023-06-05

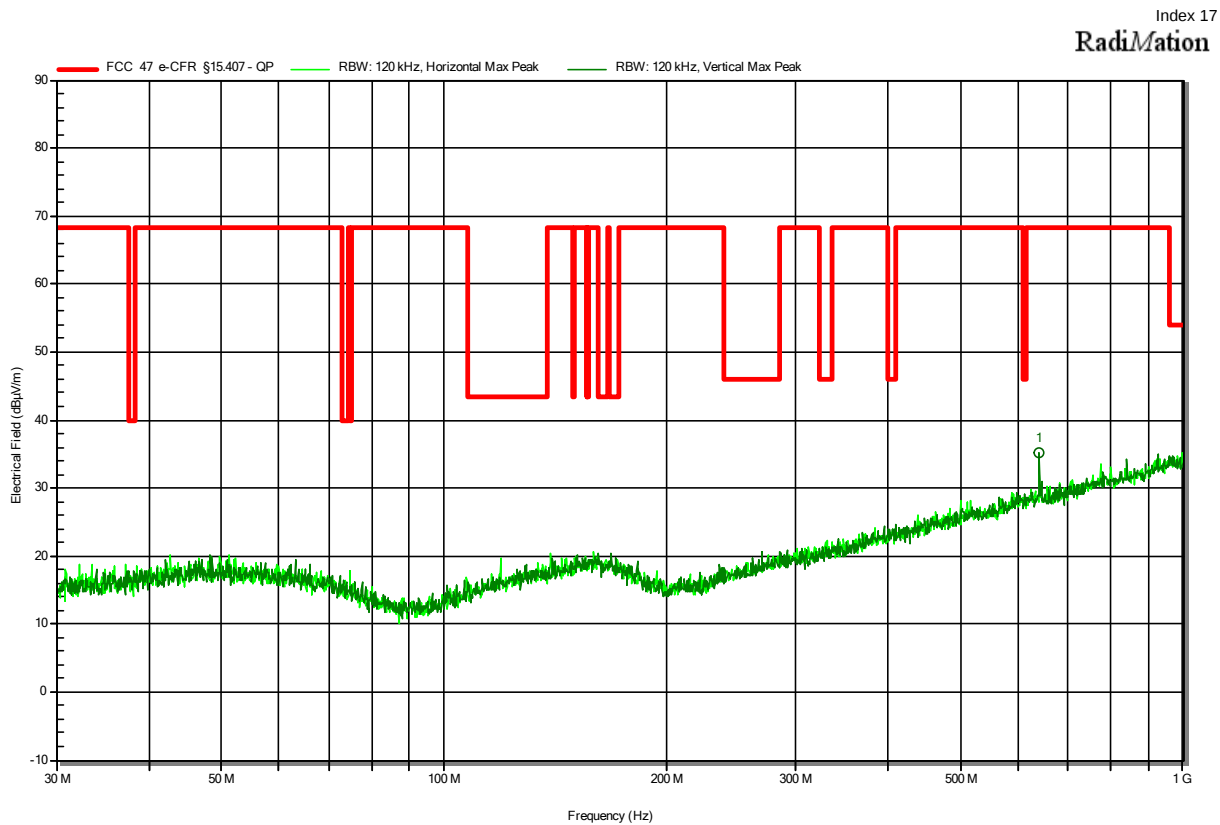


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
639.9845 MHz	35.1 dBμV/m	68.2 dBμV/m	-33.1 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5320 MHz, 54 Mbps, OFDM, P=17dBm
 Test Date: 2023-06-13

Index 111

RadiMation

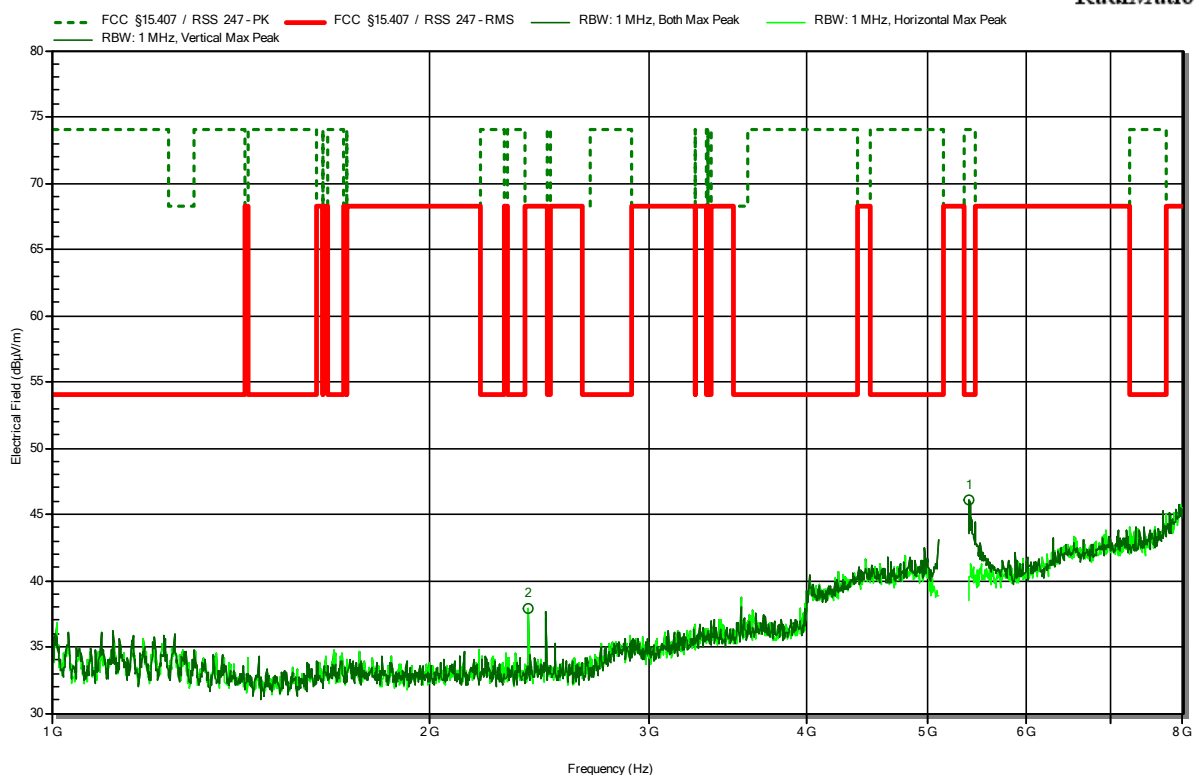


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
2.402 GHz	37.9 dBμV/m	68.2 dBμV/m	-30.3 dB	Pass	Horizontal
5.401 GHz	46.11 dBμV/m	74 dBμV/m	-27.89 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5320 MHz, 54 Mbps, OFDM, P=17dBm
 Test Date: 2023-06-13
 Note: upper band area

Index 110

RadiMation

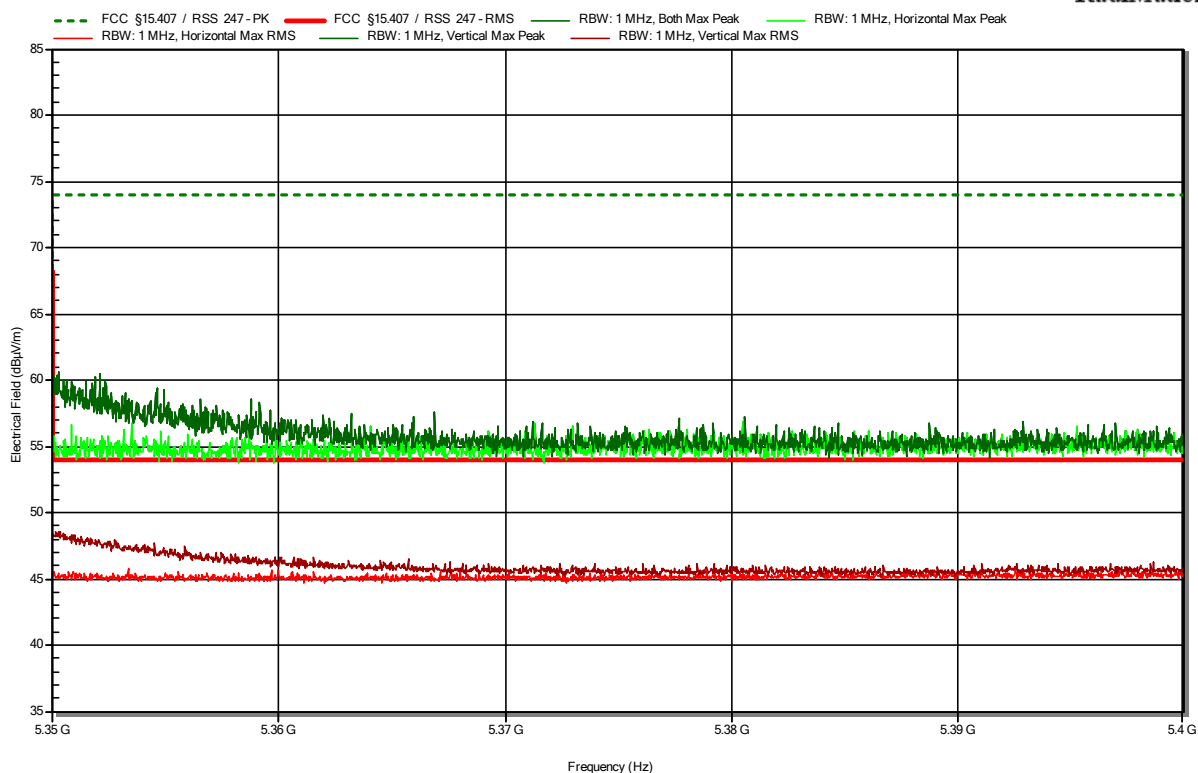


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5320 MHz, 54 Mbps, OFDM, P=17dBm
 Test Date: 2023-06-13

Index 112

RadiMation

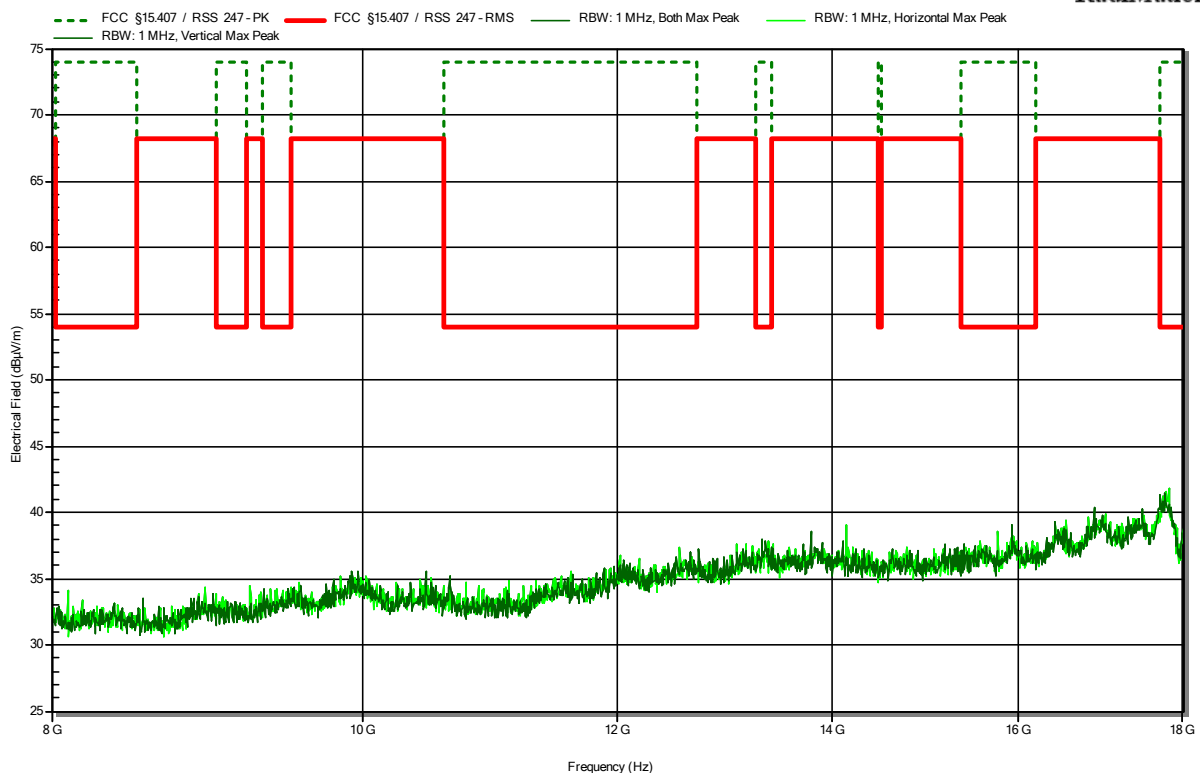


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5320 MHz, 54 Mbps, OFDM, P=17dBm
 Test Date: 2023-06-13

Index 113

RadiMation

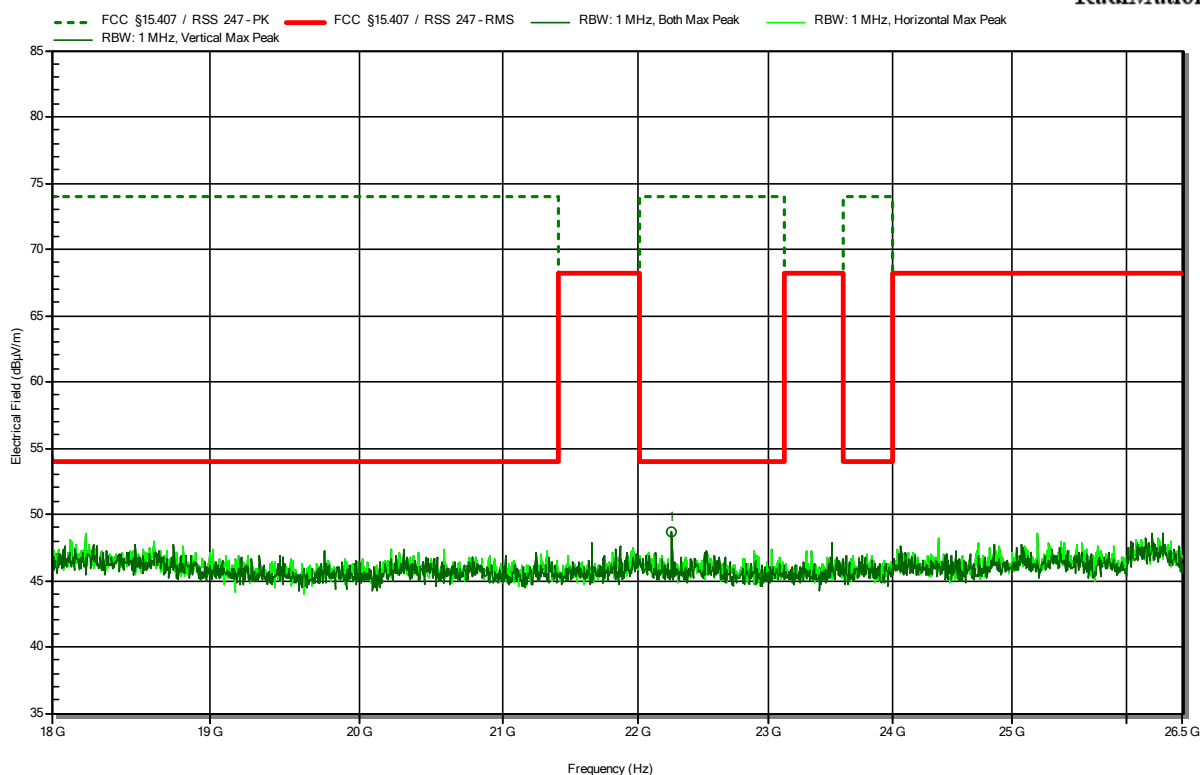


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
22.249 GHz	48.68 dBμV/m	74 dBμV/m	-25.32 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Flann 22240-25
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5320 MHz, 54 Mbps, OFDM, P=17dBm
 Test Date: 2023-06-22

Index 183

RadiMation

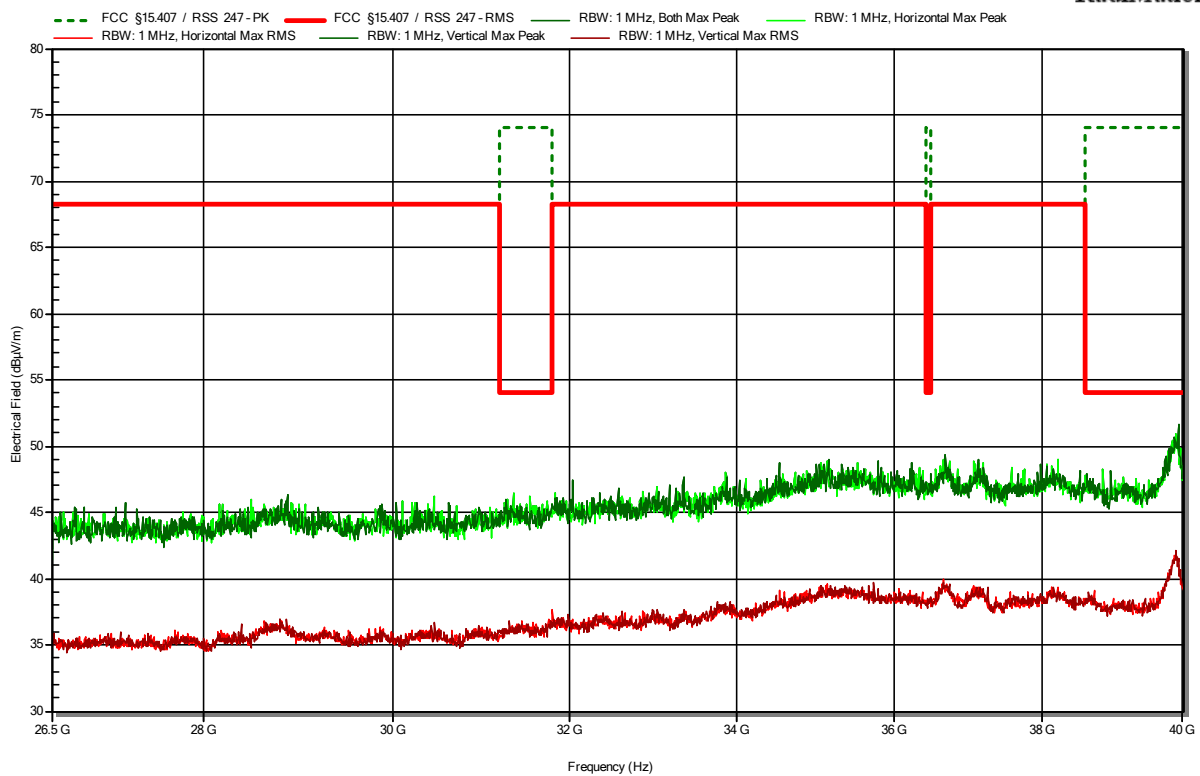


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5270 MHz, MCS 0, HT40, P=19dBm
 Test Date: 2023-06-12

Index 94

RadiMation

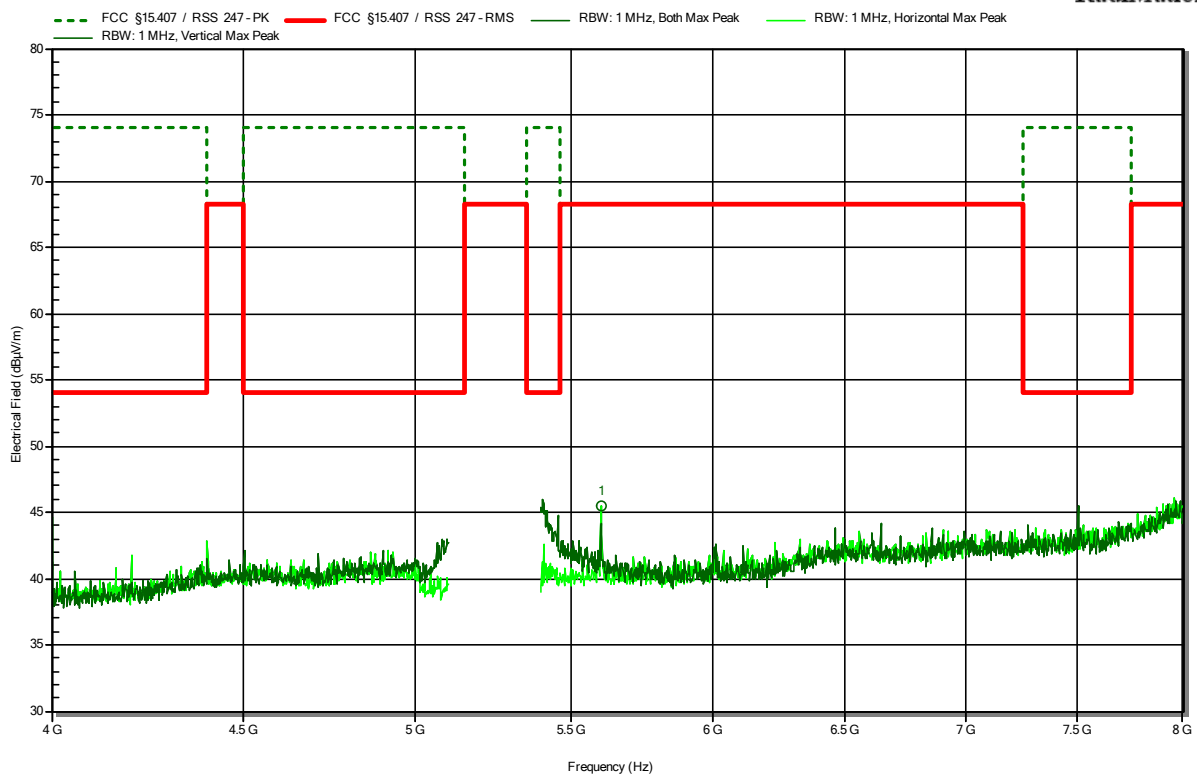


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
5.6 GHz	45.45 dBμV/m	68.2 dBμV/m	-22.75 dB	Pass	Horizontal

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5270 MHz, MCS 0, HT40, P=19dBm
 Test Date: 2023-06-13
 Note: upper band area

Index 114

RadiMation

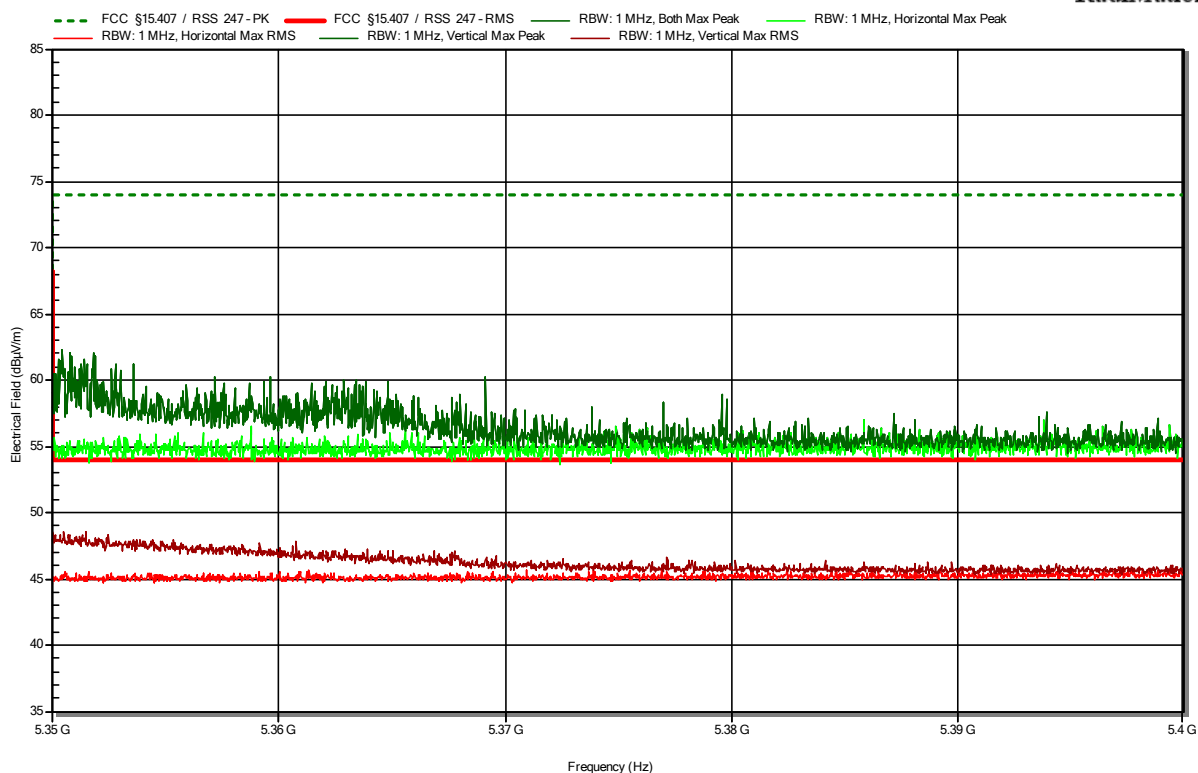


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5270 MHz, MCS 0, HT40, P=19dBm
 Test Date: 2023-06-13

Index 116

RadiMation

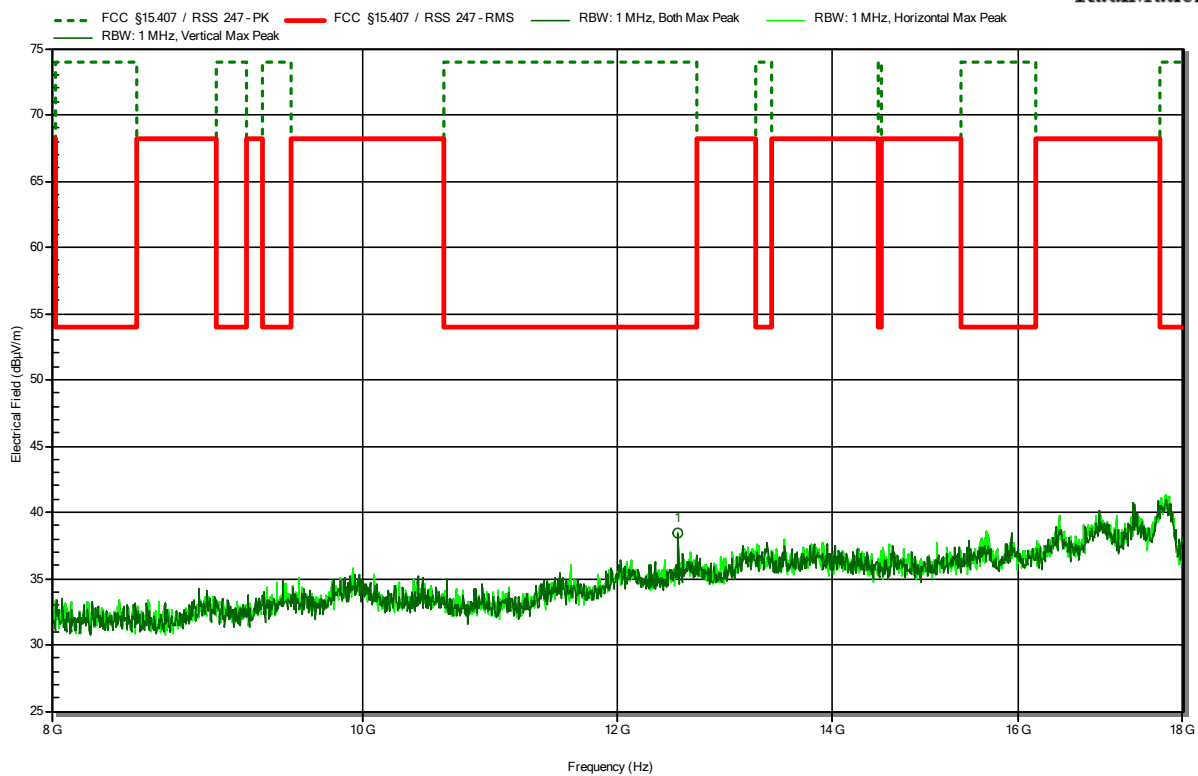


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
12.533 GHz	38.46 dBµV/m	74 dBµV/m	-35.54 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5270 MHz, MCS 0, HT40, P=19dBm
 Test Date: 2023-06-13

Index 117

RadiMation

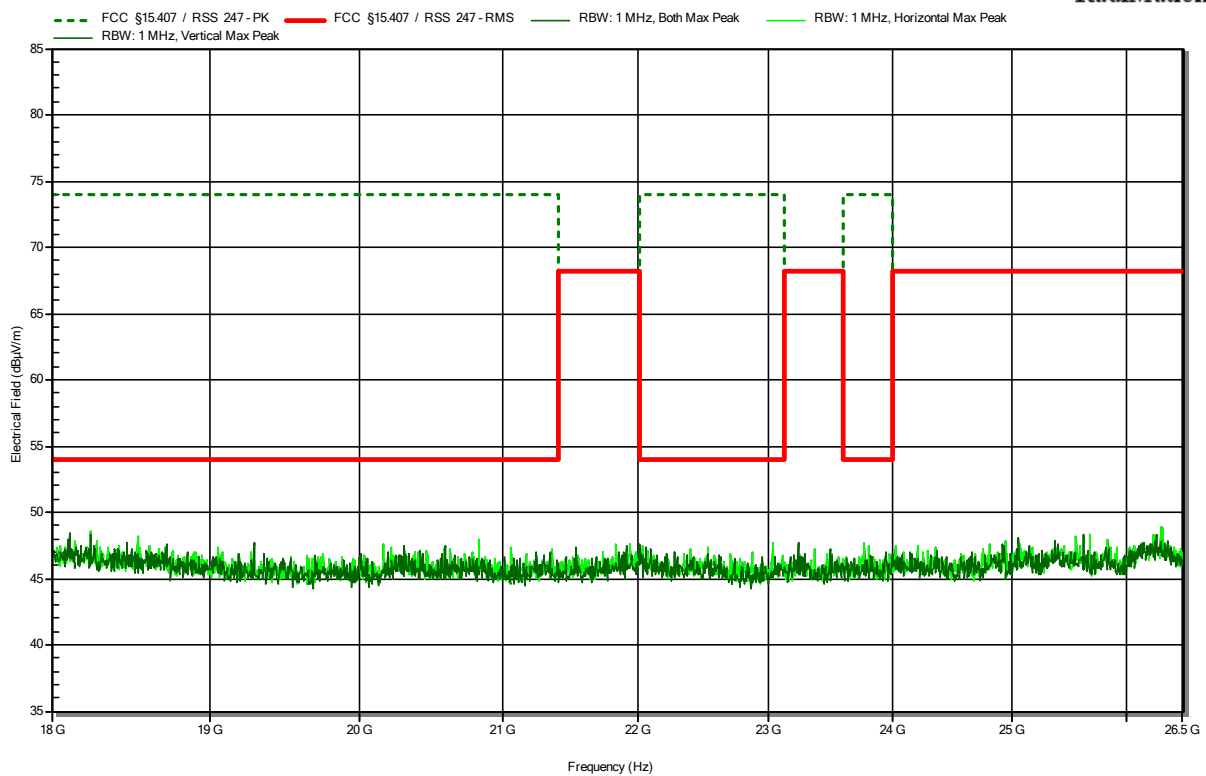


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5310 MHz, MCS 0, HT40, P=14dBm
 Test Date: 2023-06-13

Index 119

RadiMation

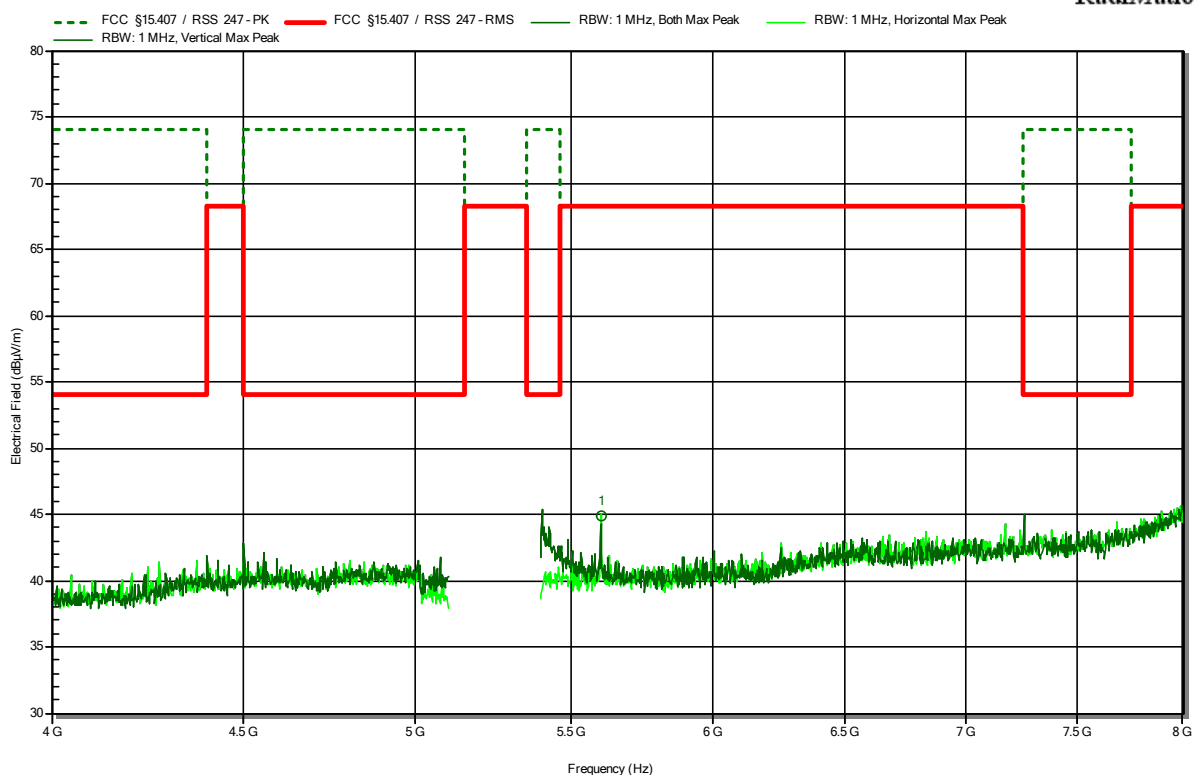


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
5.6 GHz	44.93 dBμV/m	68.2 dBμV/m	-23.27 dB	Pass	Horizontal

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5310 MHz, MCS 0, HT40, P=14dBm
 Test Date: 2023-06-13
 Note: upper band area


Index 118

RadiMation

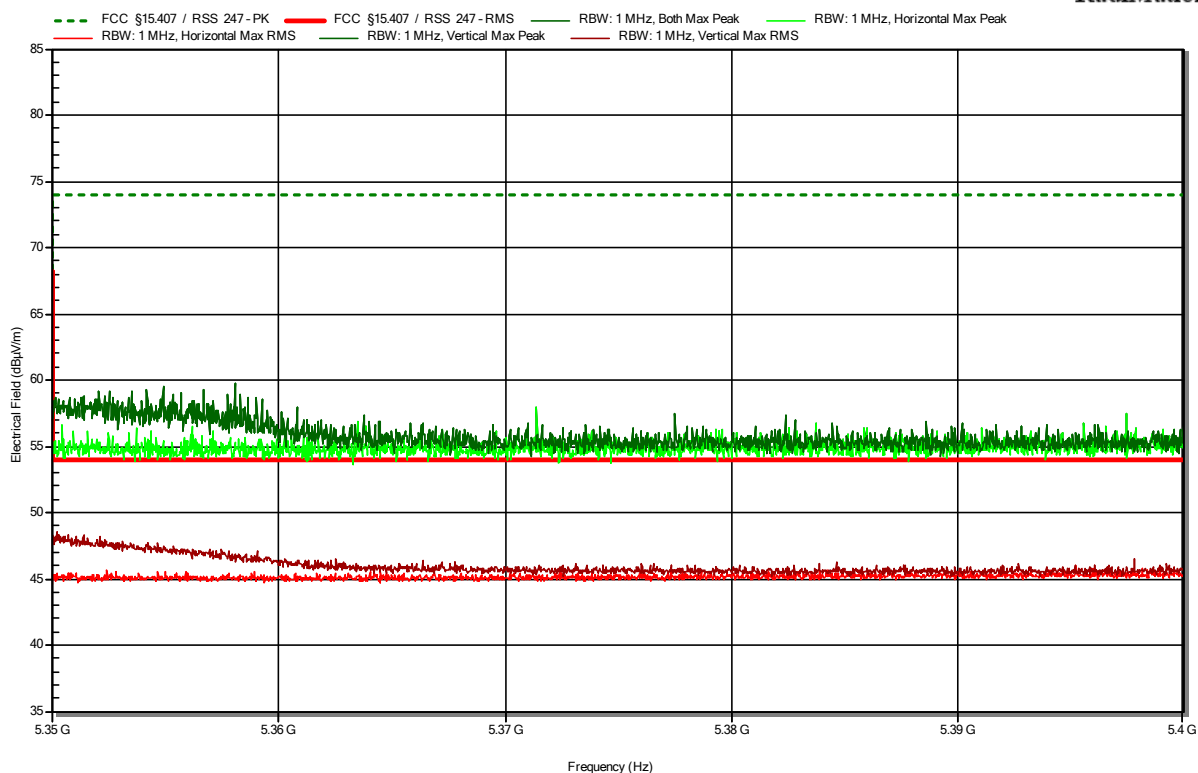

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5310 MHz, MCS 0, HT40, P=14dBm
 Test Date: 2023-06-13

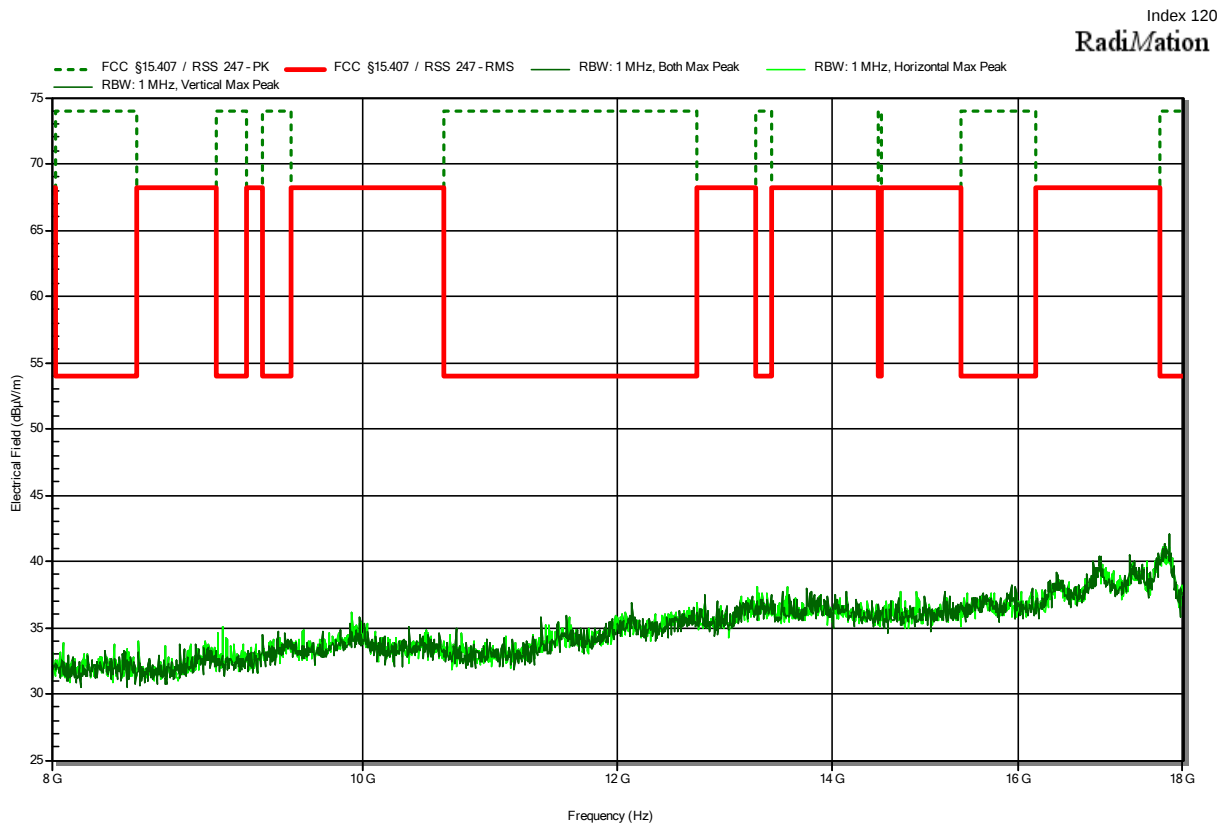


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5310 MHz, MCS 0, HT40, P=14dBm
 Test Date: 2023-06-13

Index 121

RadiMation

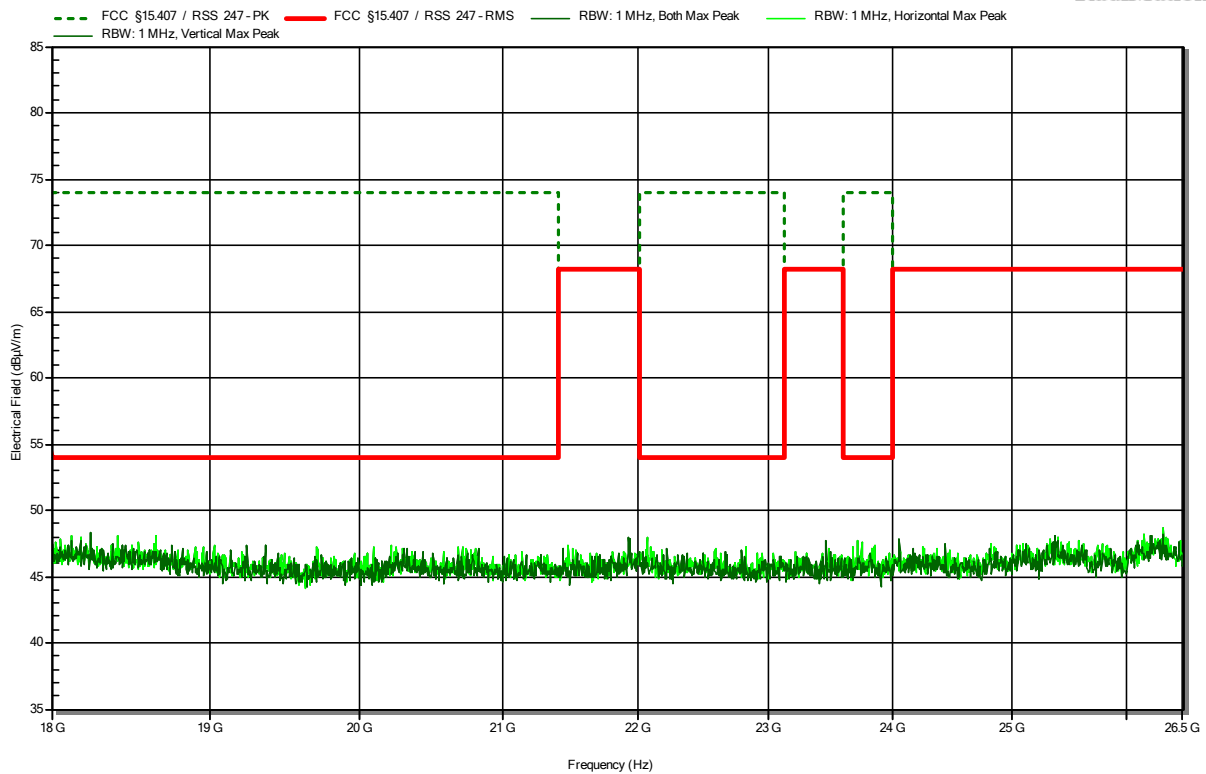


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5290 MHz, MCS 0, VHT80, P=14dBm
 Test Date: 2023-06-12

Index 103

RadiMation

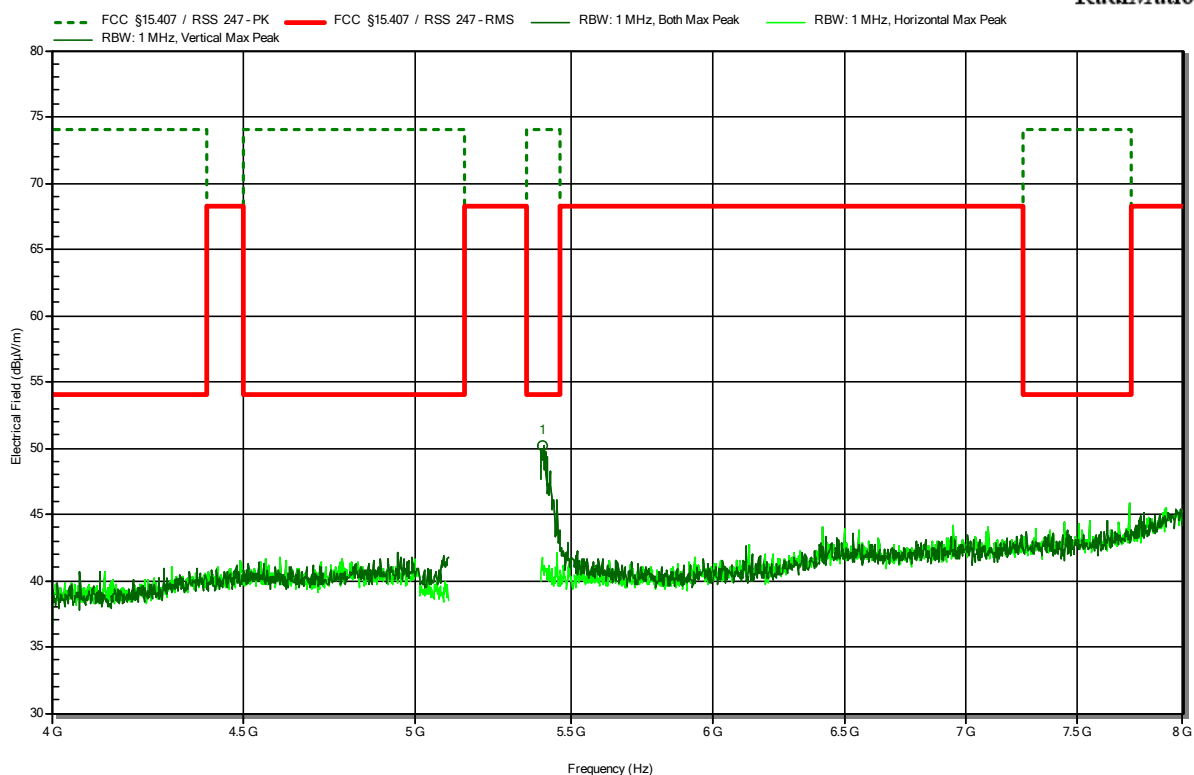


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
5.406 GHz	50.19 dBμV/m	74 dBμV/m	-23.81 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5290 MHz, MCS 0, VHT80, P=14dBm
 Test Date: 2023-06-12
 Note: upper band area

Index 102

RadiMation

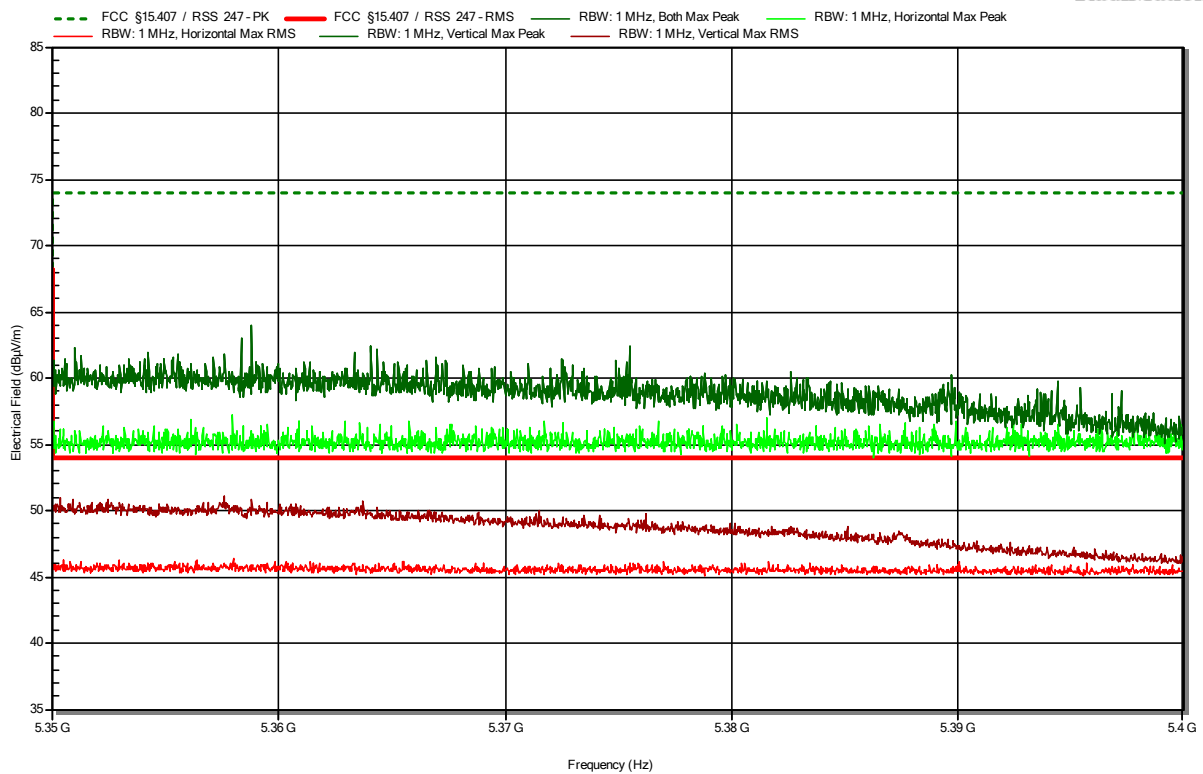


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5290 MHz, MCS 0, VHT80, P=14dBm
 Test Date: 2023-06-12

Index 104

RadiMation

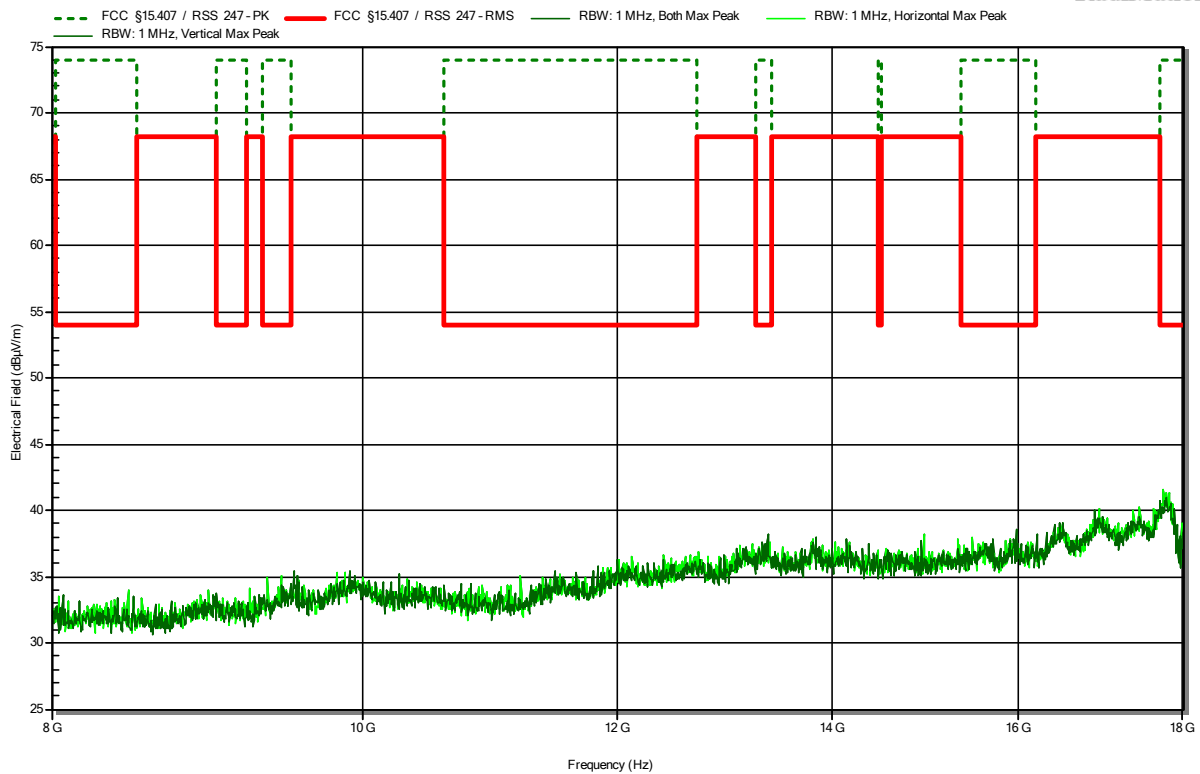


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5290 MHz, MCS 0, VHT80, P=14dBm
 Test Date: 2023-06-12

Index 105


RadiMation

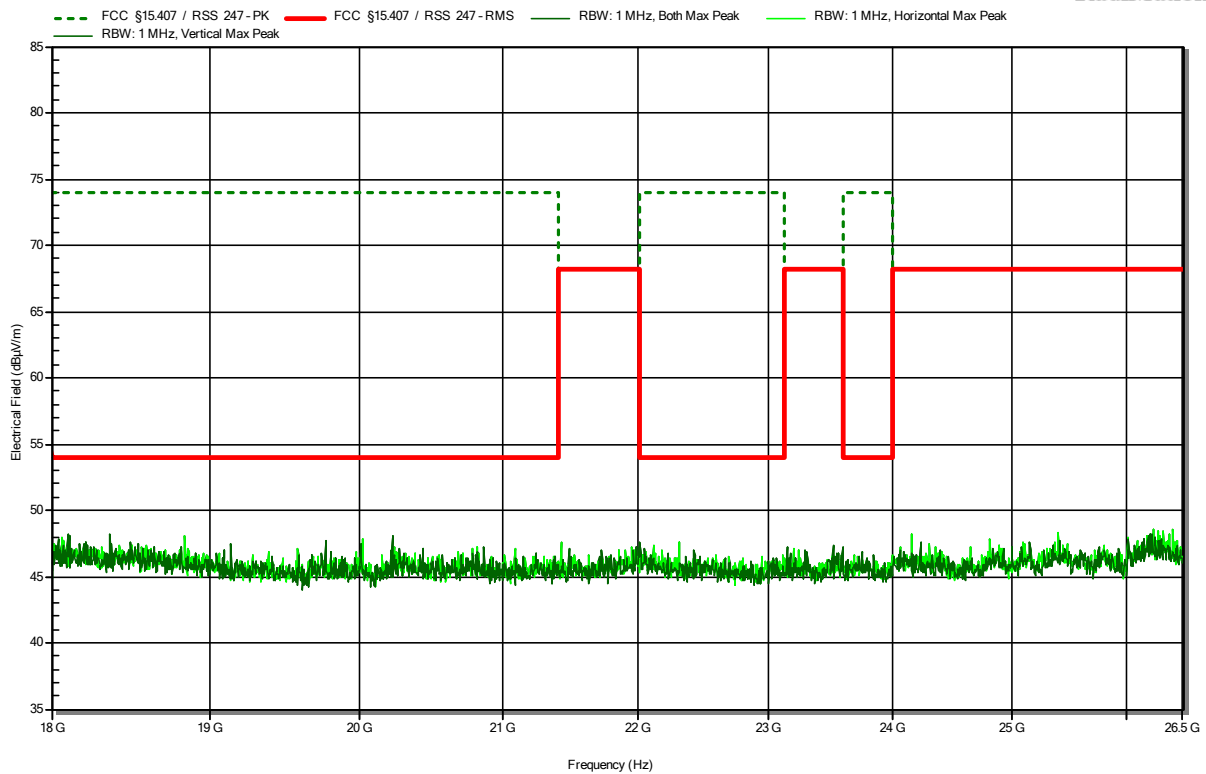

U-NII-2C

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck VULB 9168
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11a, 5500 MHz, 6 Mbps, OFDM
 Test Date: 2023-06-05

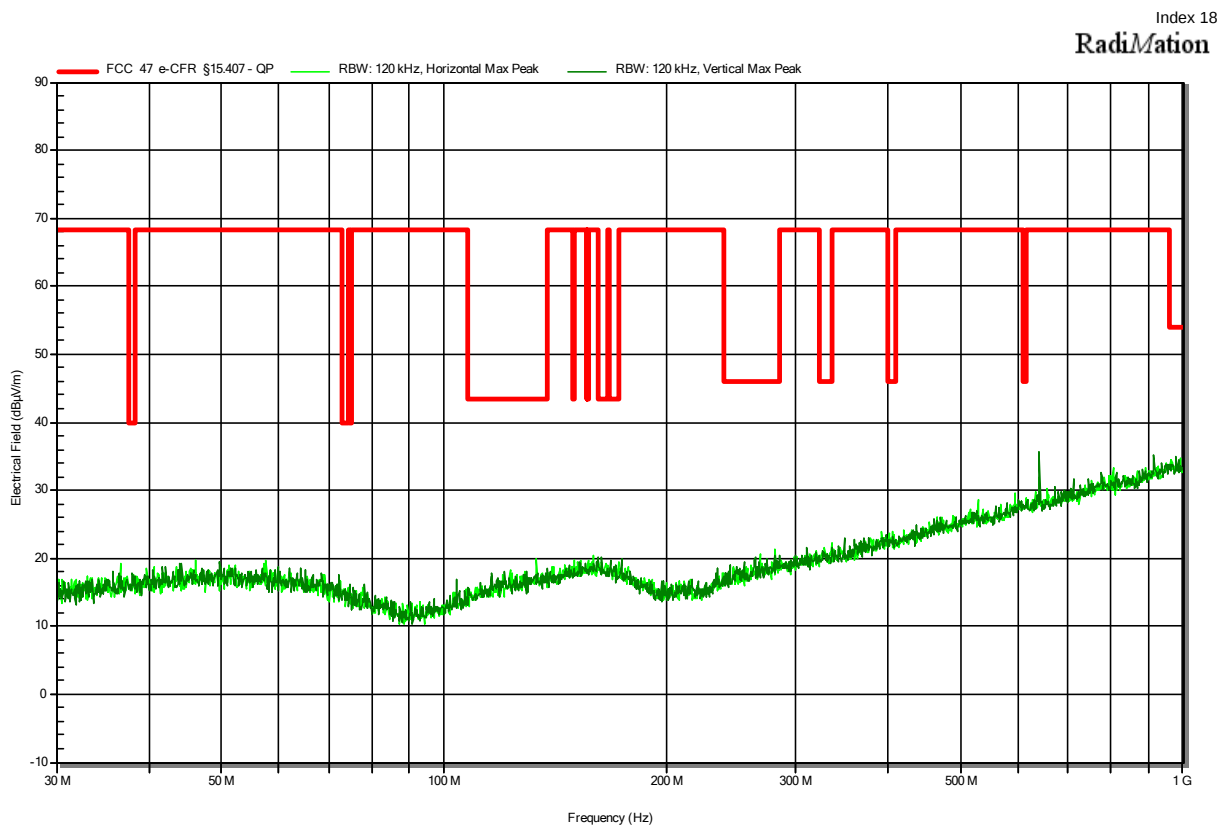


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5500 MHz, 6 Mbps, OFDM, P=17dBm
 Test Date: 2023-06-13

Index 124


RadiMation

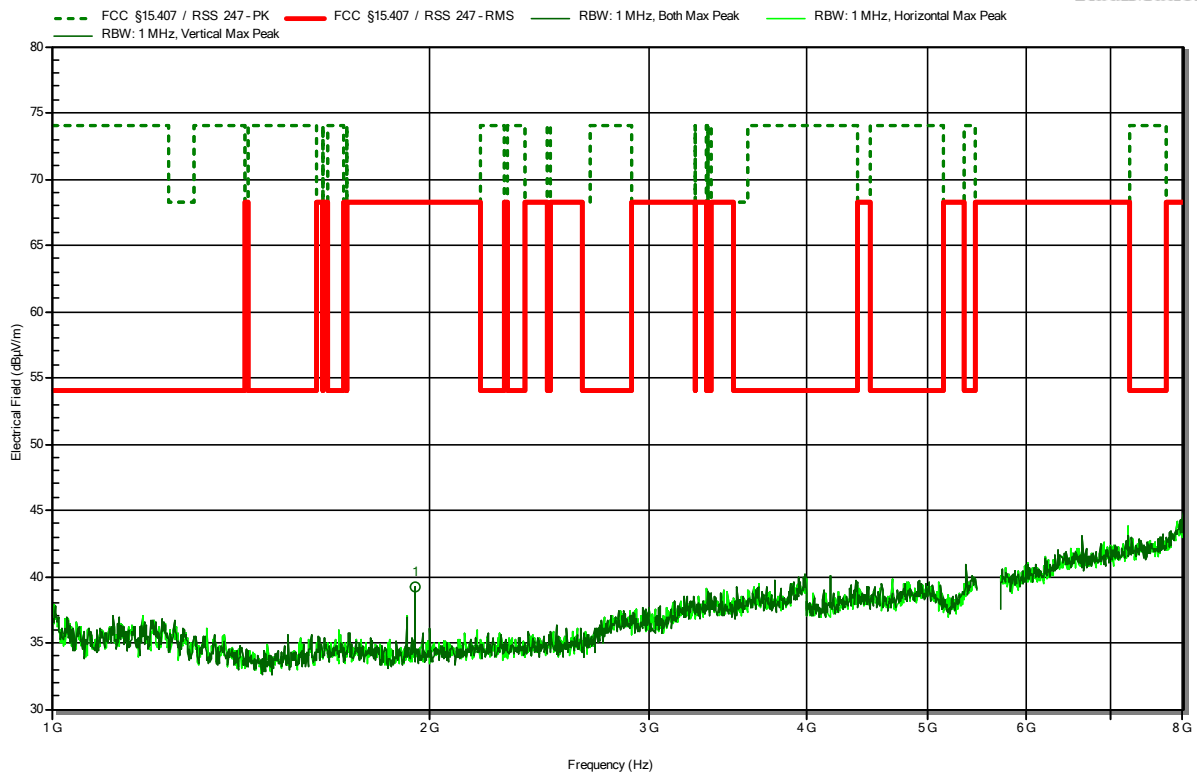

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
1.95 GHz	39.19 dBµV/m	68.2 dBµV/m	-29.01 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5500 MHz, 6 Mbps, OFDM, P=17dBm
 Test Date: 2023-07-07

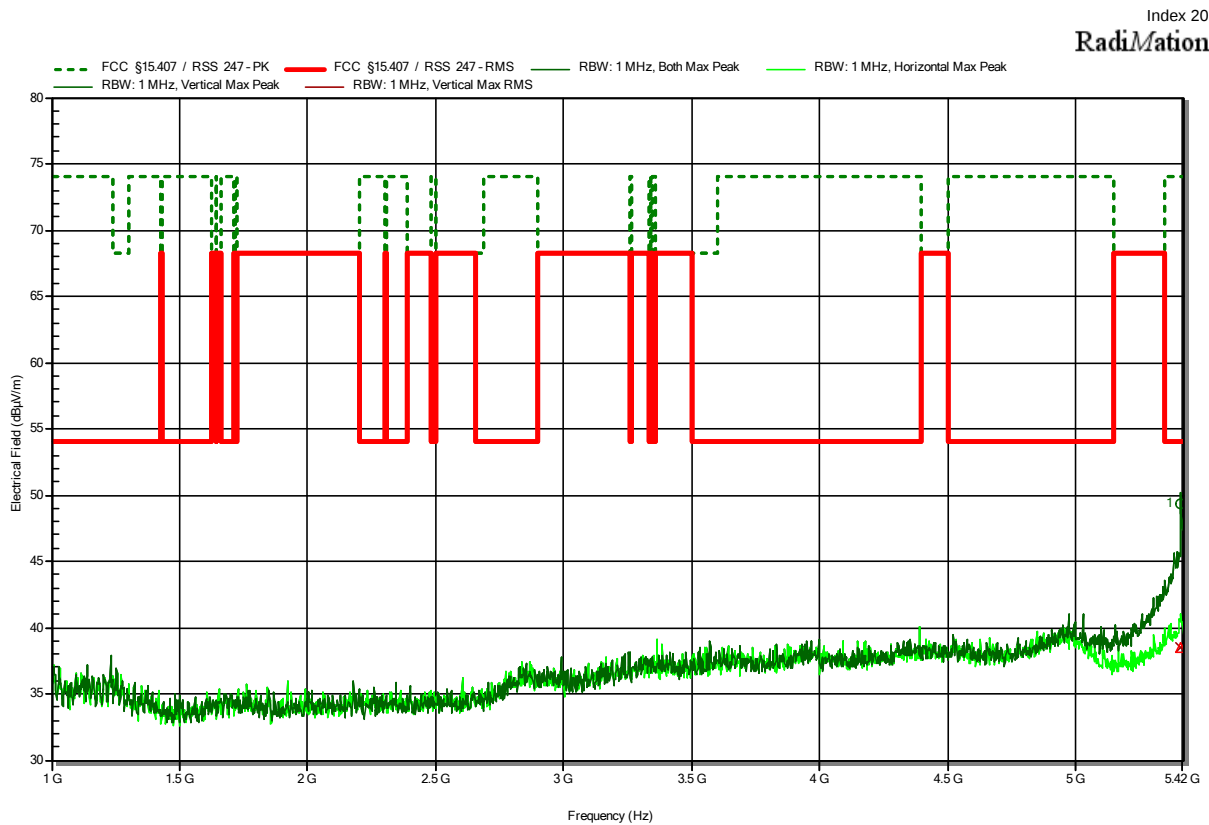


Frequency 5.412 GHz	Peak 49.31 dBμV/m	Peak Limit 74 dBμV/m	Peak Difference -24.69 dB	Peak Status Pass	Polarization Vertical
Frequency 5.412 GHz	RMS 38.54 dBμV/m	RMS Limit 54 dBμV/m	RMS Difference -15.46 dB	RMS Status Pass	Polarization Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Ibraimov Azamat
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5500 MHz, 6 Mbps, OFDM, P=17dBm
 Test Date: 2023-06-29

Index 198

RadiMation

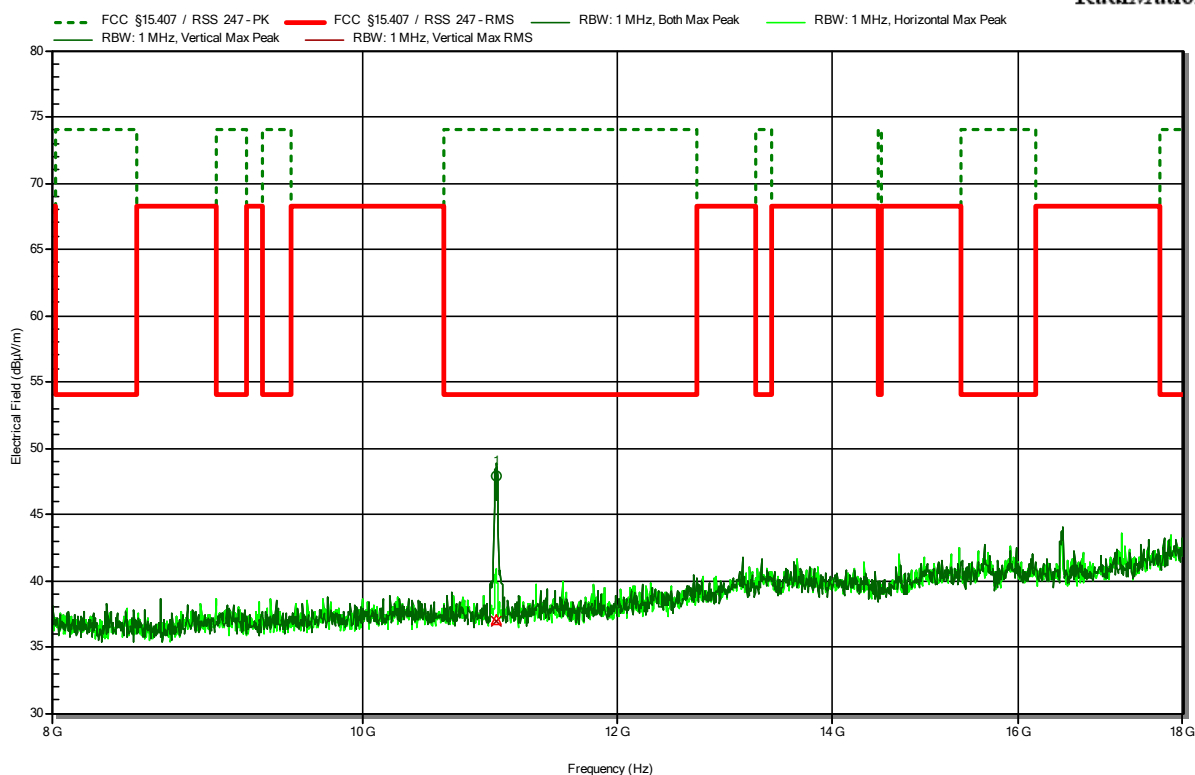


Frequency 11 GHz	Peak 47.86 dBμV/m	Peak Limit 74 dBμV/m	Peak Difference -26.14 dB	Peak Status Pass	Polarization Vertical
Frequency 11 GHz	RMS 37.07 dBμV/m	RMS Limit 54 dBμV/m	RMS Difference -16.93 dB	RMS Status Pass	Polarization Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5500 MHz, 6 Mbps, OFDM, P=17dBm
 Test Date: 2023-06-13

Index 126

RadiMation

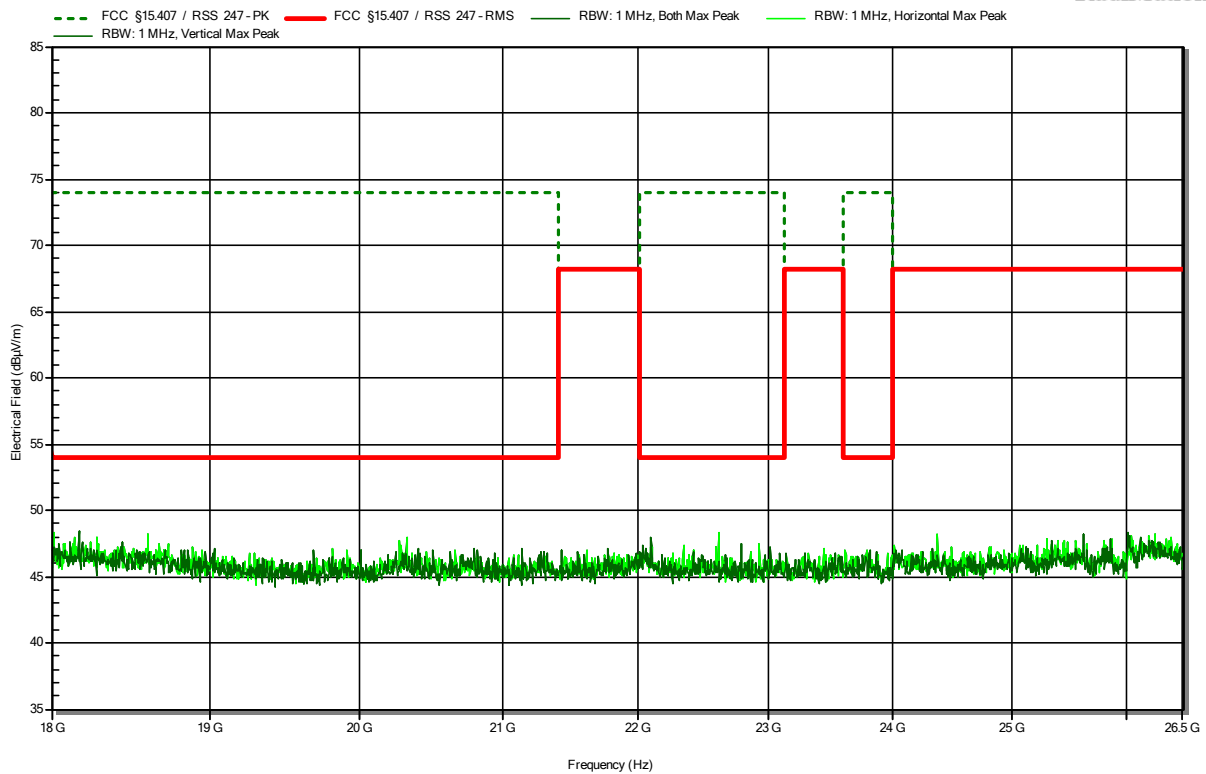


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Flann 22240-25
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5500 MHz, 6 Mbps, OFDM, P=17dBm
 Test Date: 2023-06-22


Index 184

RadiMation

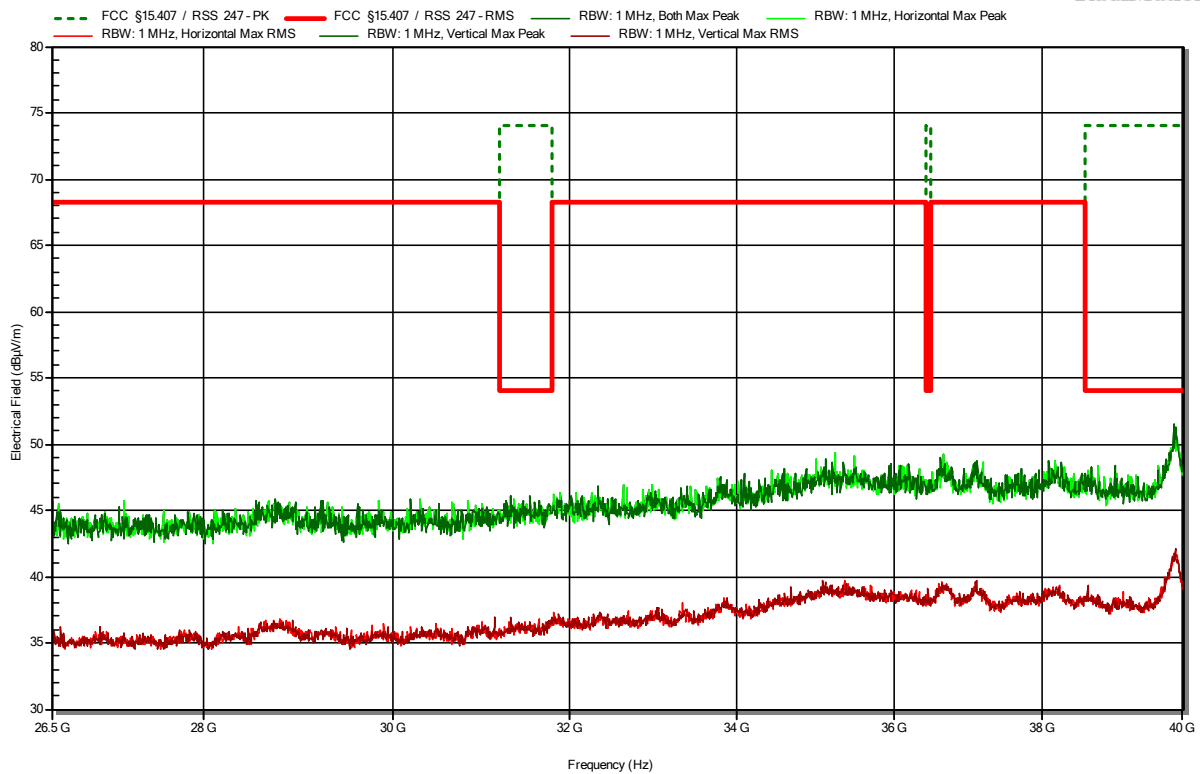

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck VULB 9168
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11a, 5580 MHz, 6 Mbps, OFDM
 Test Date: 2023-06-05

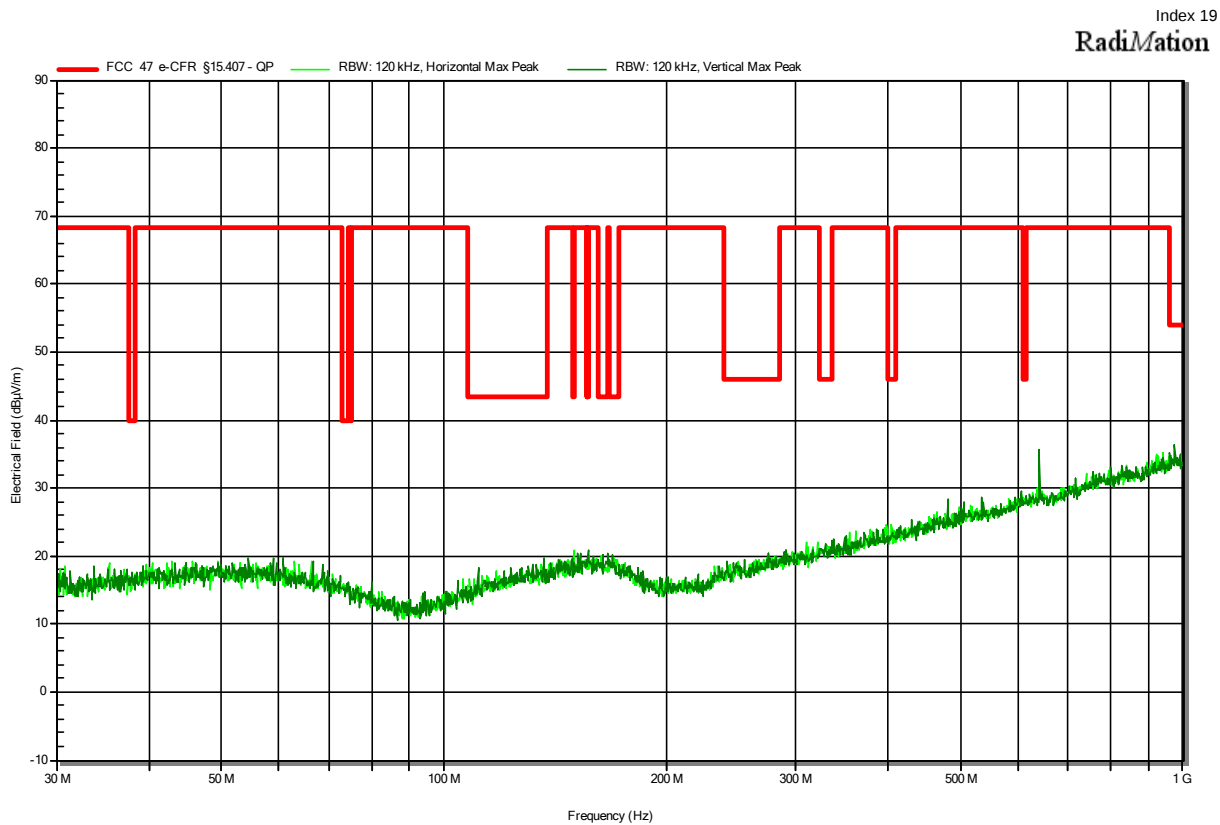


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5580 MHz, 6 Mbps, OFDM, P=19dBm
 Test Date: 2023-06-13

Index 128

RadiMation

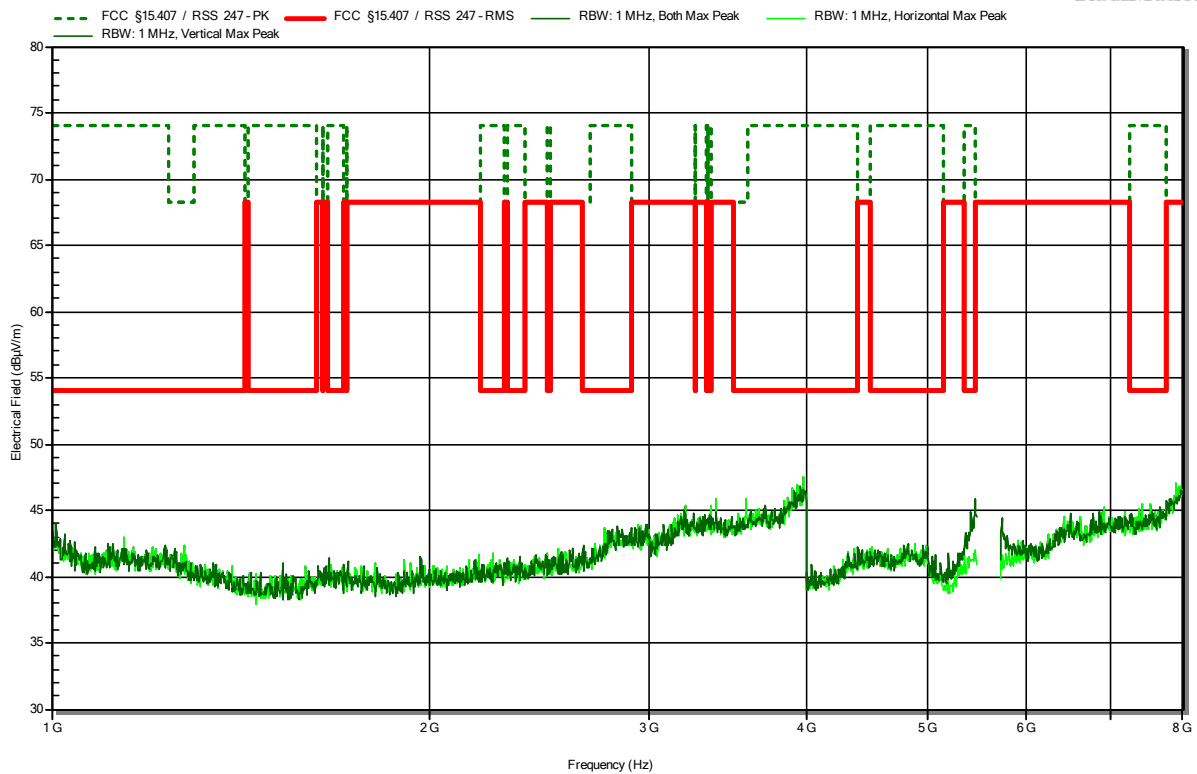


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Ibraimov Azamat
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5580 MHz, 6 Mbps, OFDM, P=19dBm
 Test Date: 2023-06-29

Index 199

RadiMation

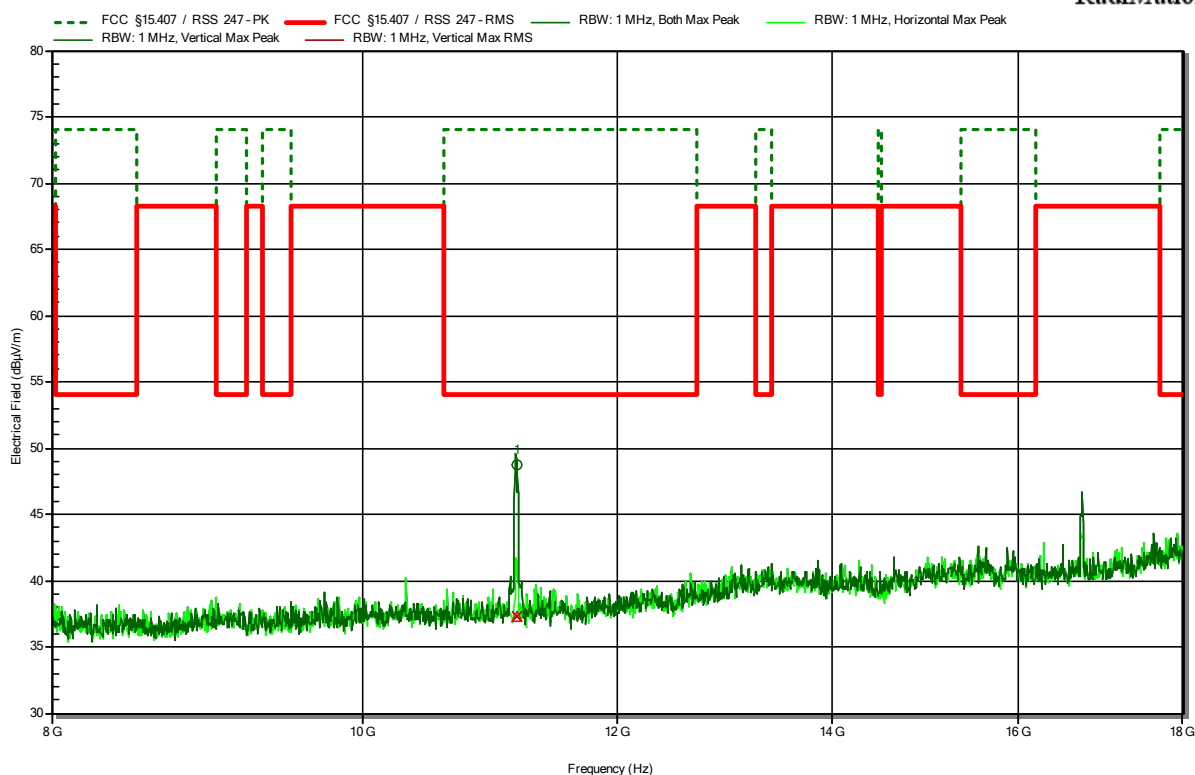


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
11.162 GHz	48.68 dBµV/m	74 dBµV/m	-25.32 dB	Pass	Vertical
Frequency	RMS	RMS Limit	RMS Difference	RMS Status	Polarization
11.162 GHz	37.34 dBµV/m	54 dBµV/m	-16.66 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5580 MHz, 6 Mbps, OFDM, P=19dBm
 Test Date: 2023-06-13

Index 130

RadiMation

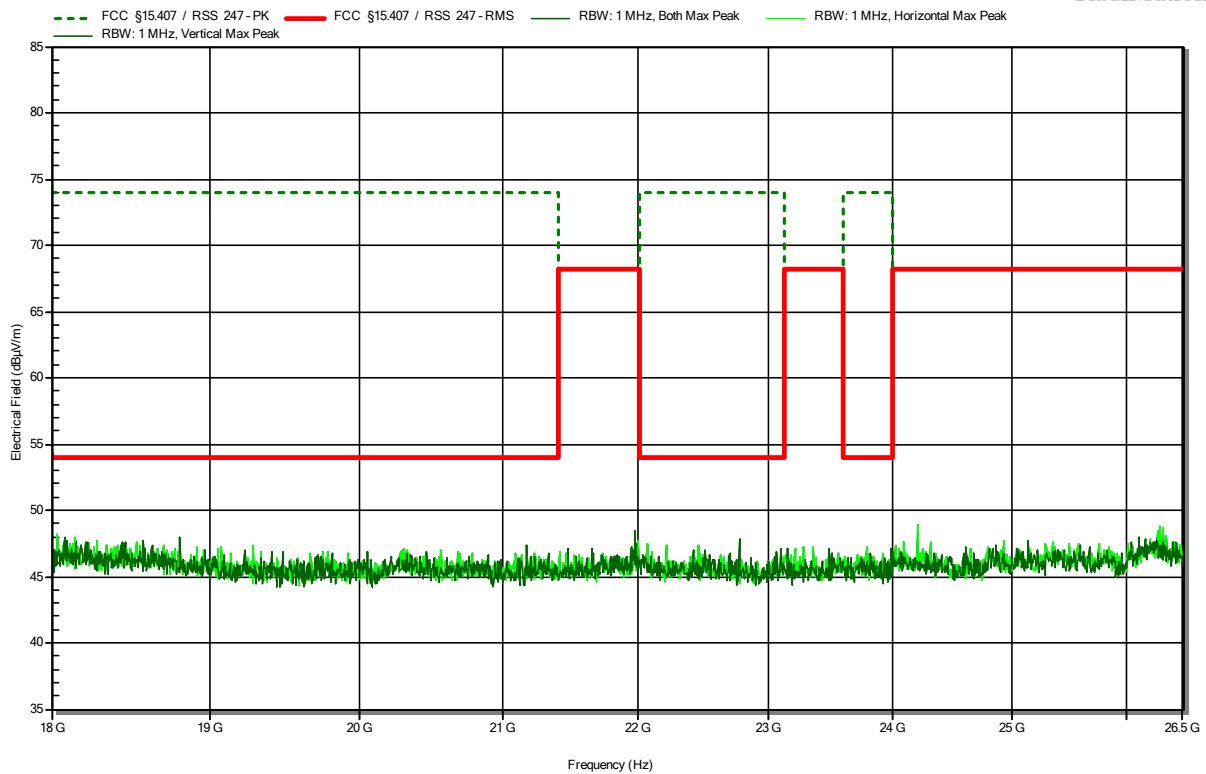


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Flann 22240-25
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5580 MHz, 6 Mbps, OFDM, P=19dBm
 Test Date: 2023-06-22


Index 185

RadiMation

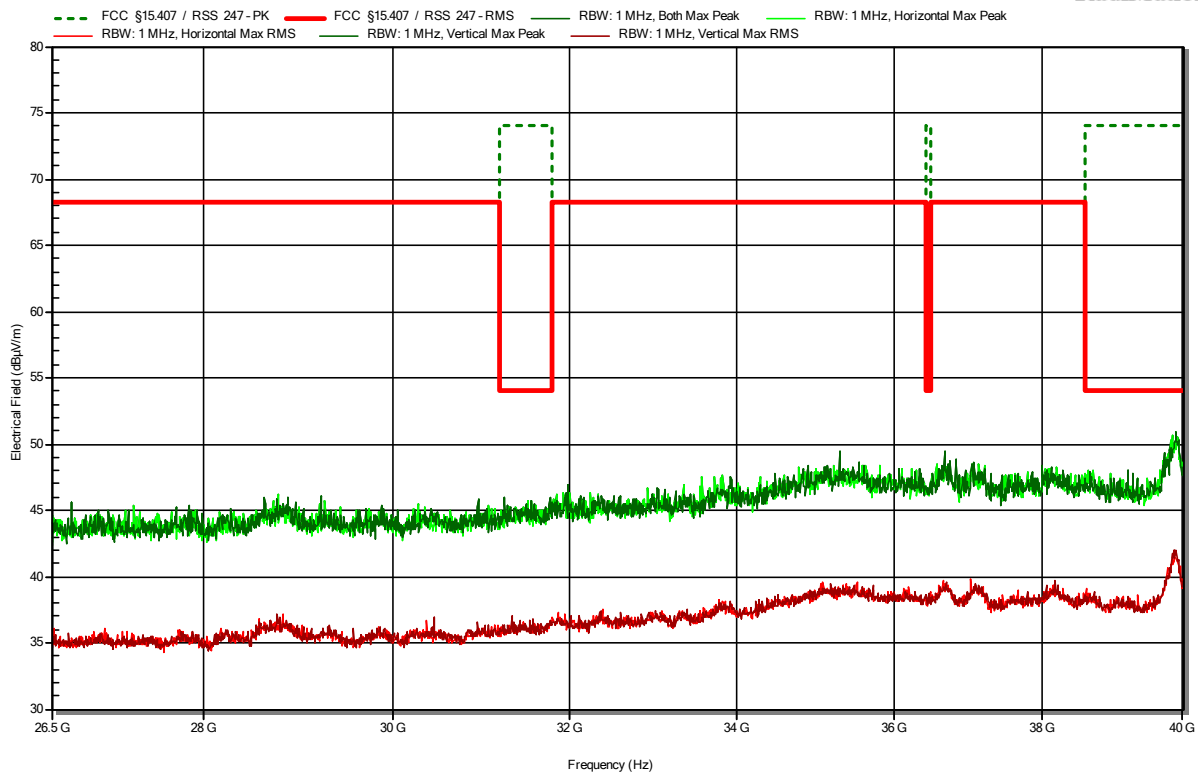


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck VULB 9168
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11a, 5600 MHz, 6 Mbps, OFDM
 Test Date: 2023-06-05

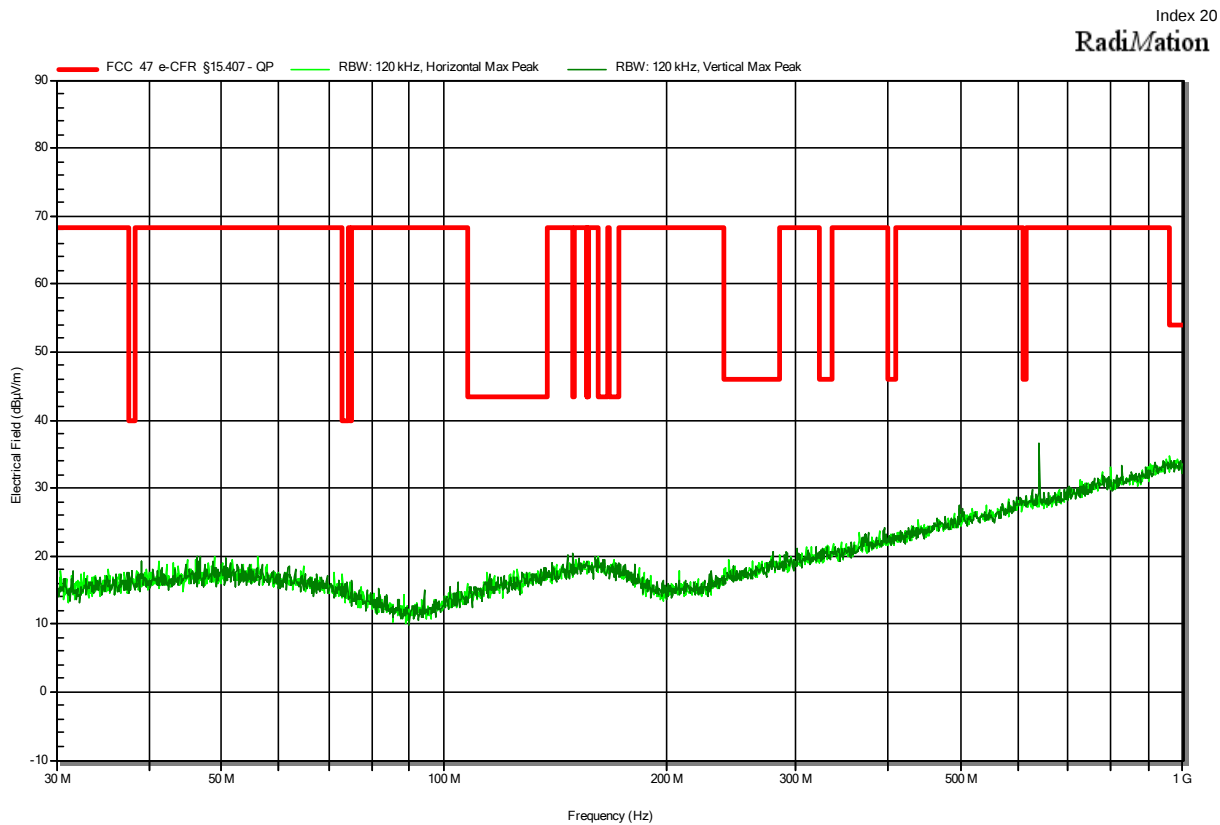

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5600 MHz, 6 Mbps, OFDM, P=19dBm
 Test Date: 2023-06-16

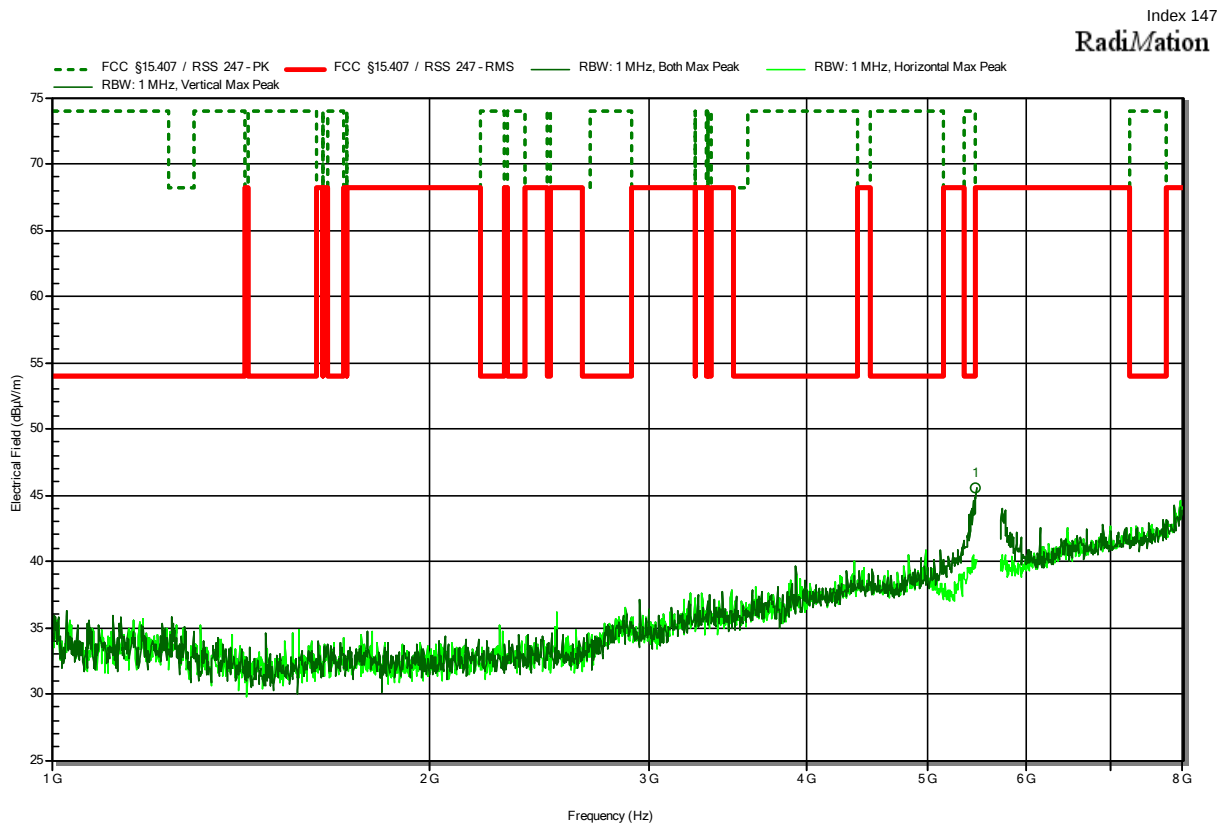


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
5.47 GHz	45.51 dBµV/m	68.2 dBµV/m	-22.69 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5600 MHz, 6Mbps, OFDM, P=19dBm
 Test Date: 2023-06-16

Index 148

RadiMation

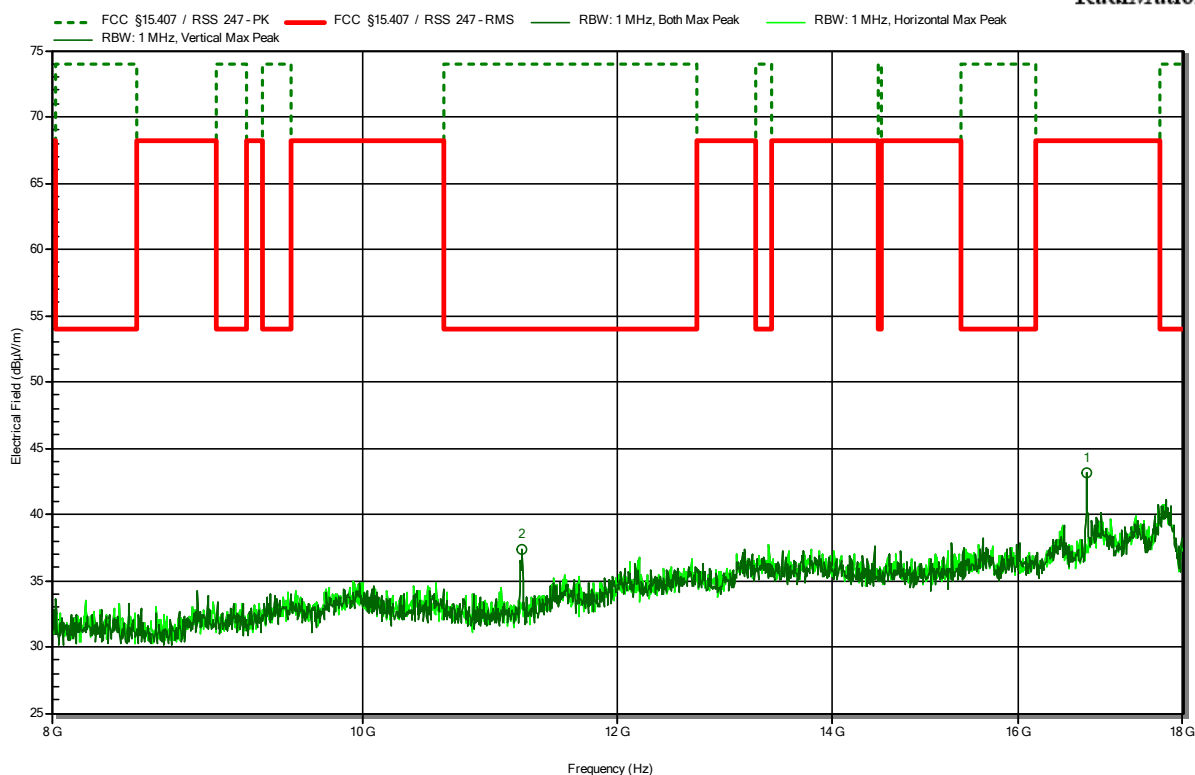


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
11.205 GHz	37.29 dBµV/m	74 dBµV/m	-36.71 dB	Pass	Vertical
16.799 GHz	43.09 dBµV/m	68.2 dBµV/m	-25.11 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5600 MHz, 6Mbps, OFDM, P=19dBm
 Test Date: 2023-06-16

Index 149

RadiMation

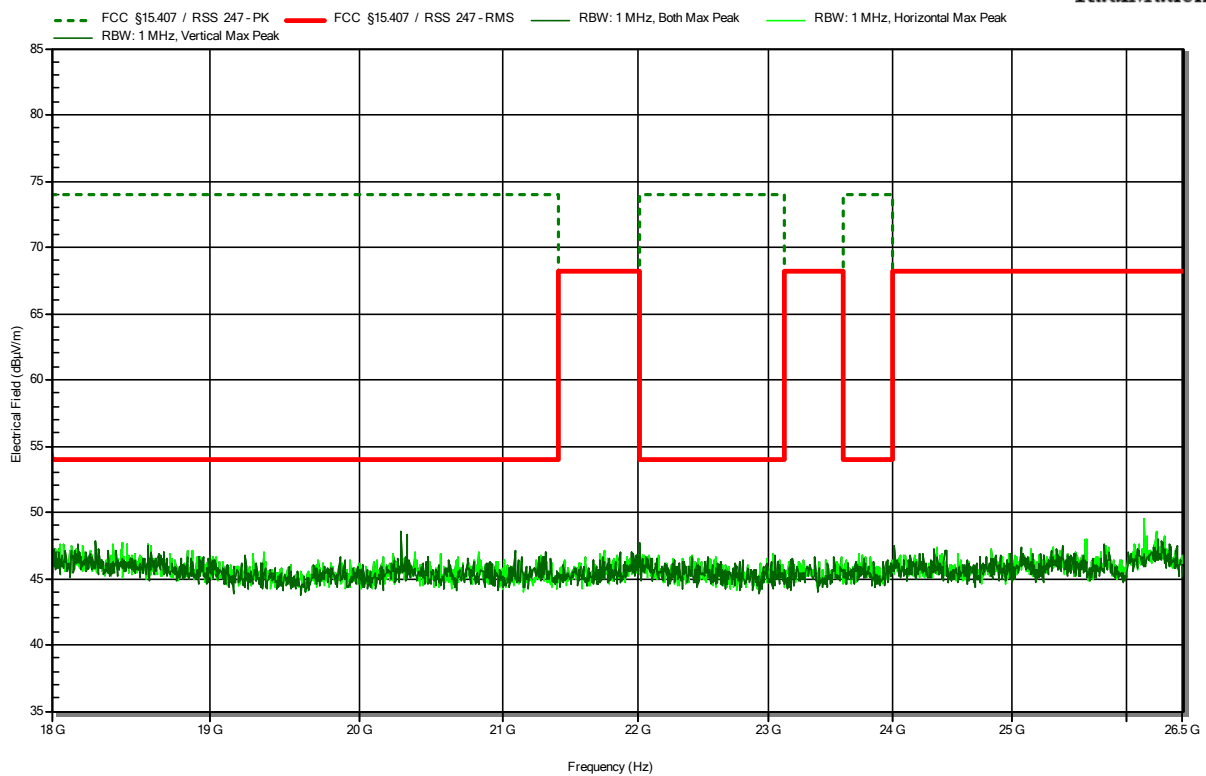


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Flann 22240-25
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5600 MHz, 6 Mbps, OFDM, P=19dBm
 Test Date: 2023-06-22

Index 186

RadiMation

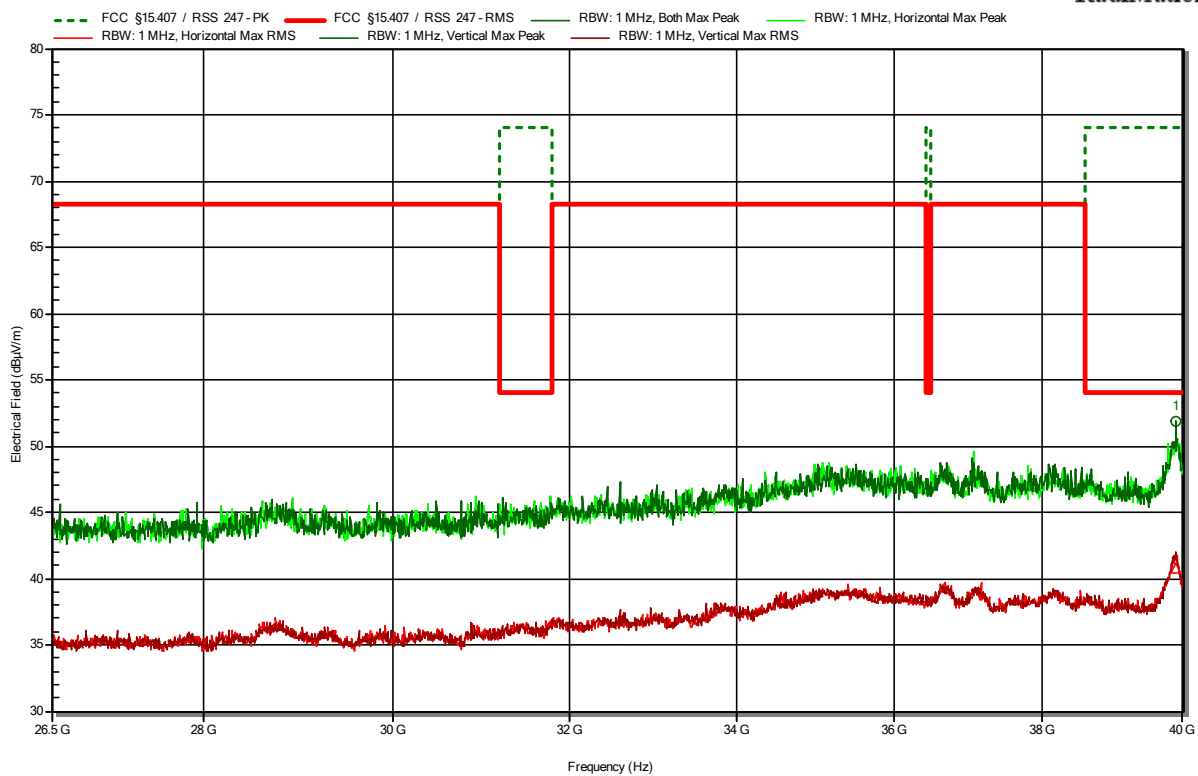


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
39.894 GHz	51.86 dBμV/m	74 dBμV/m	-22.14 dB	Pass	Vertical
Frequency	RMS	RMS Limit	RMS Difference	RMS Status	Polarization
39.894 GHz	40.82 dBμV/m	54 dBμV/m	-13.18 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5700 MHz, 6 Mbps, OFDM, P=14dBm
 Test Date: 2023-06-19

Index 162

RadiMation

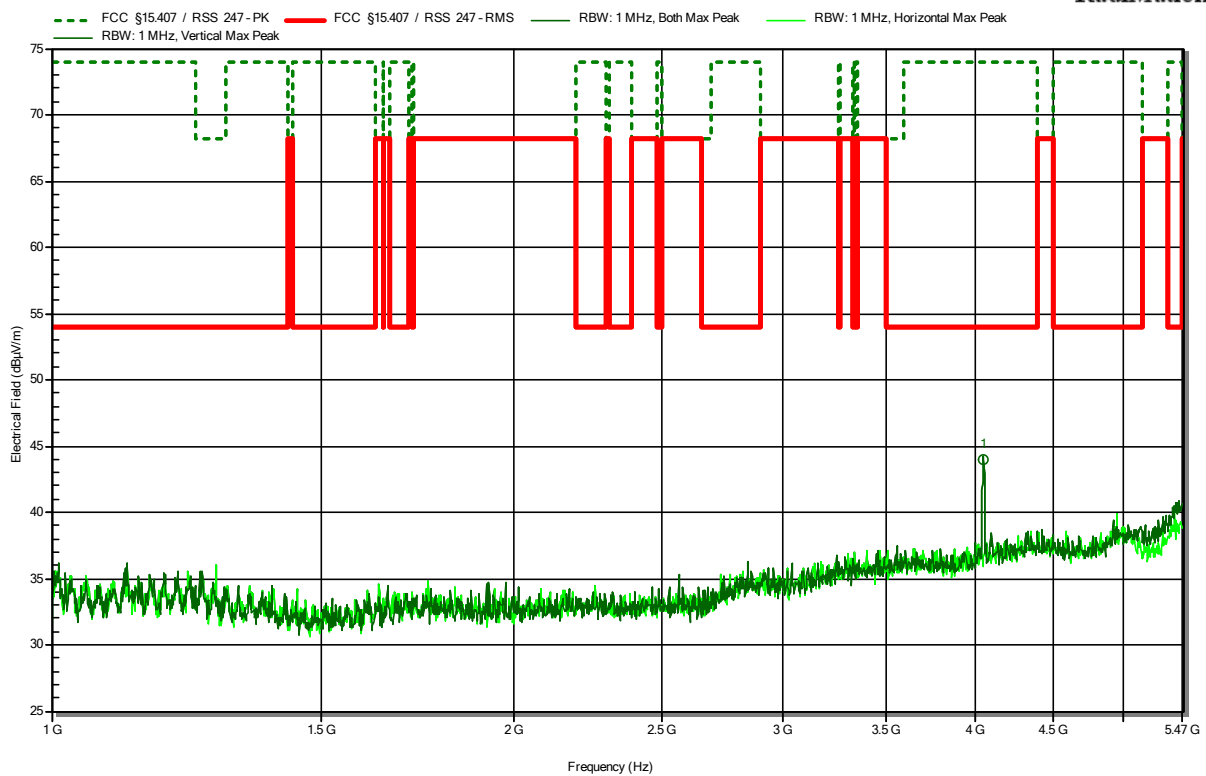


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
4.054 GHz	43.99 dBμV/m	74 dBμV/m	-30.01 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5700 MHz, 6 Mbps, OFDM, P=14dBm
 Test Date: 2023-06-19

Index 163

RadiMation

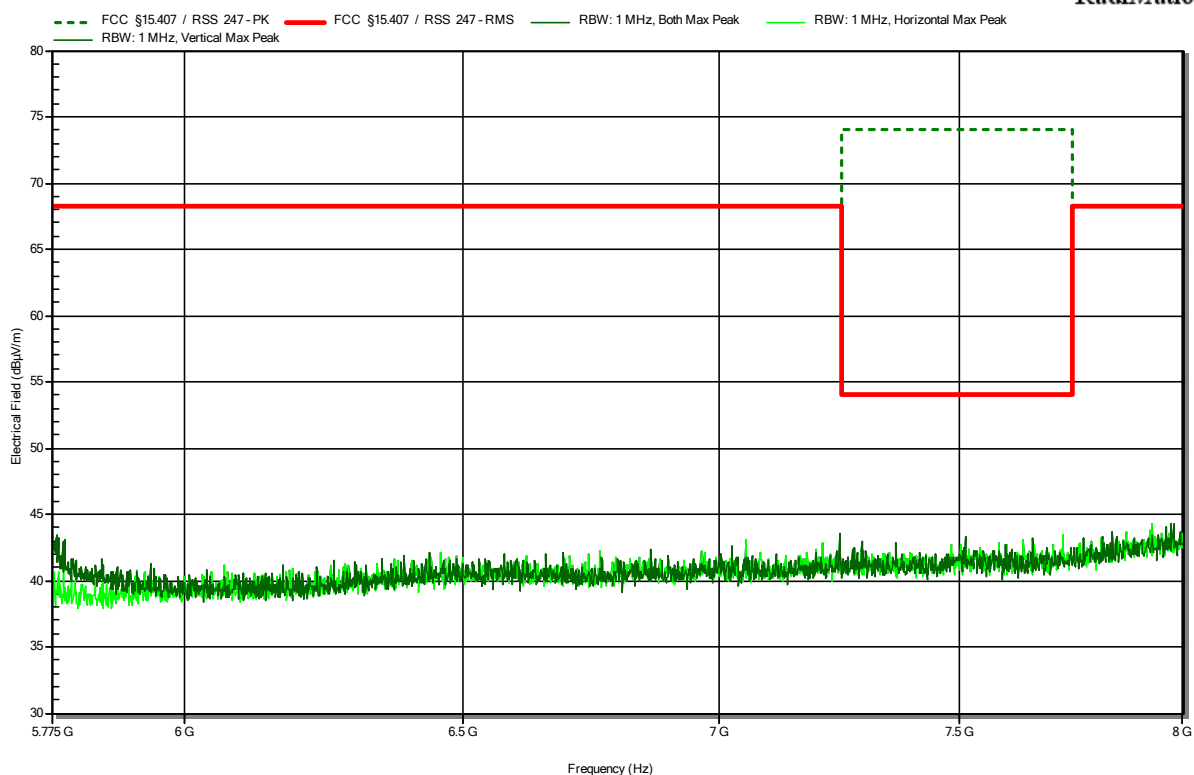


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5700 MHz, 6 Mbps, OFDM, P=14dBm
 Test Date: 2023-06-19

Index 164

RadiMation

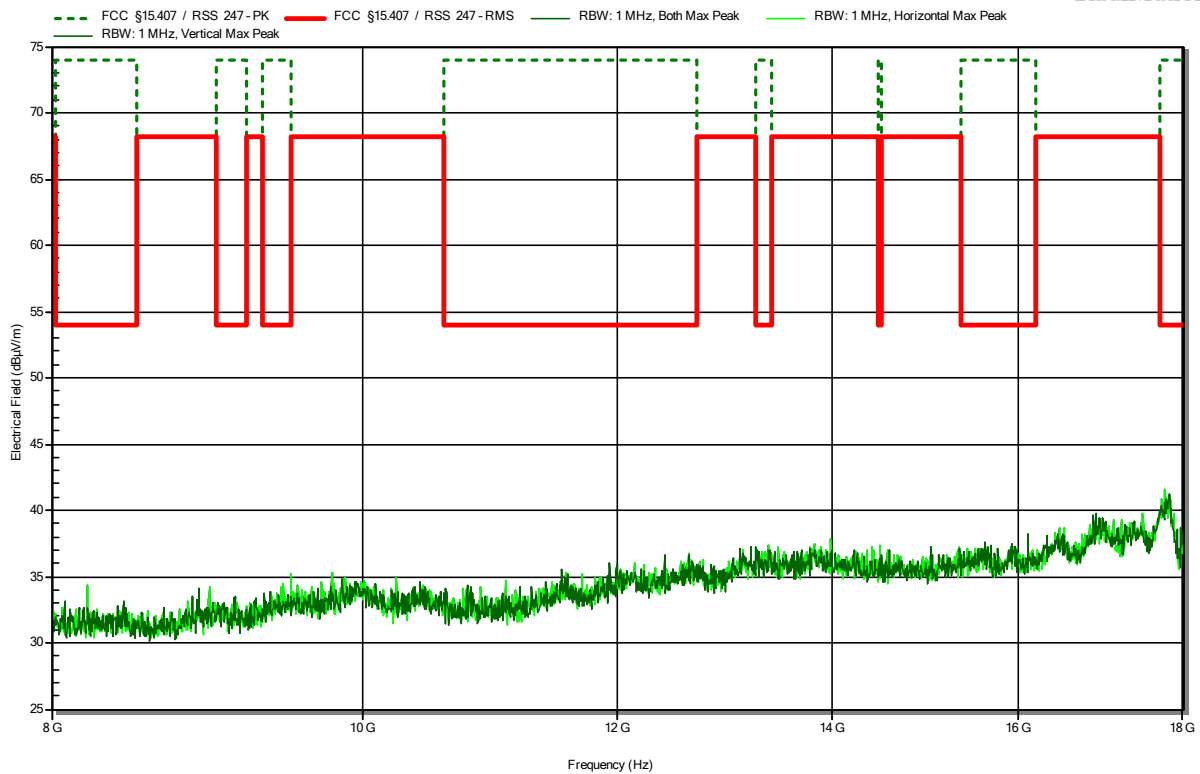


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5700 MHz, 6 Mbps, OFDM, P=14dBm
 Test Date: 2023-06-19

Index 165

RadiMation

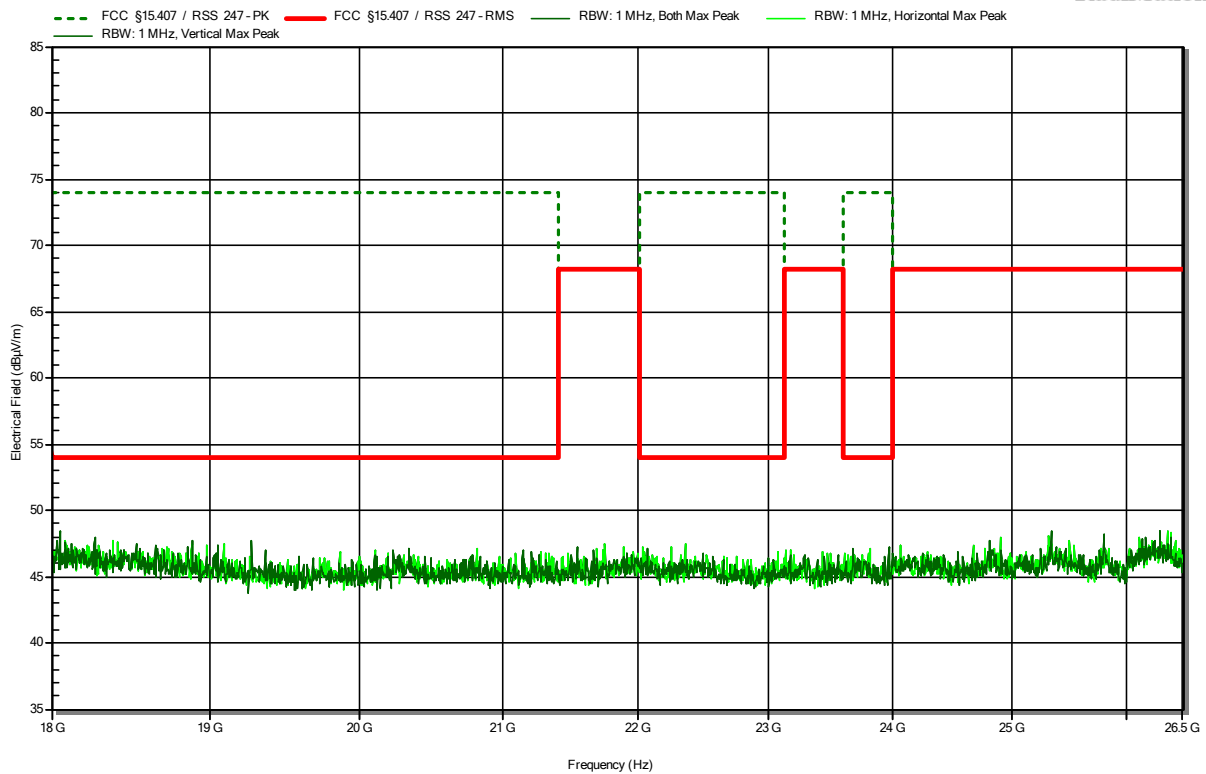


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Flann 22240-25
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5700 MHz, 6 Mbps, OFDM, P=14dBm
 Test Date: 2023-06-22


Index 187

RadiMation

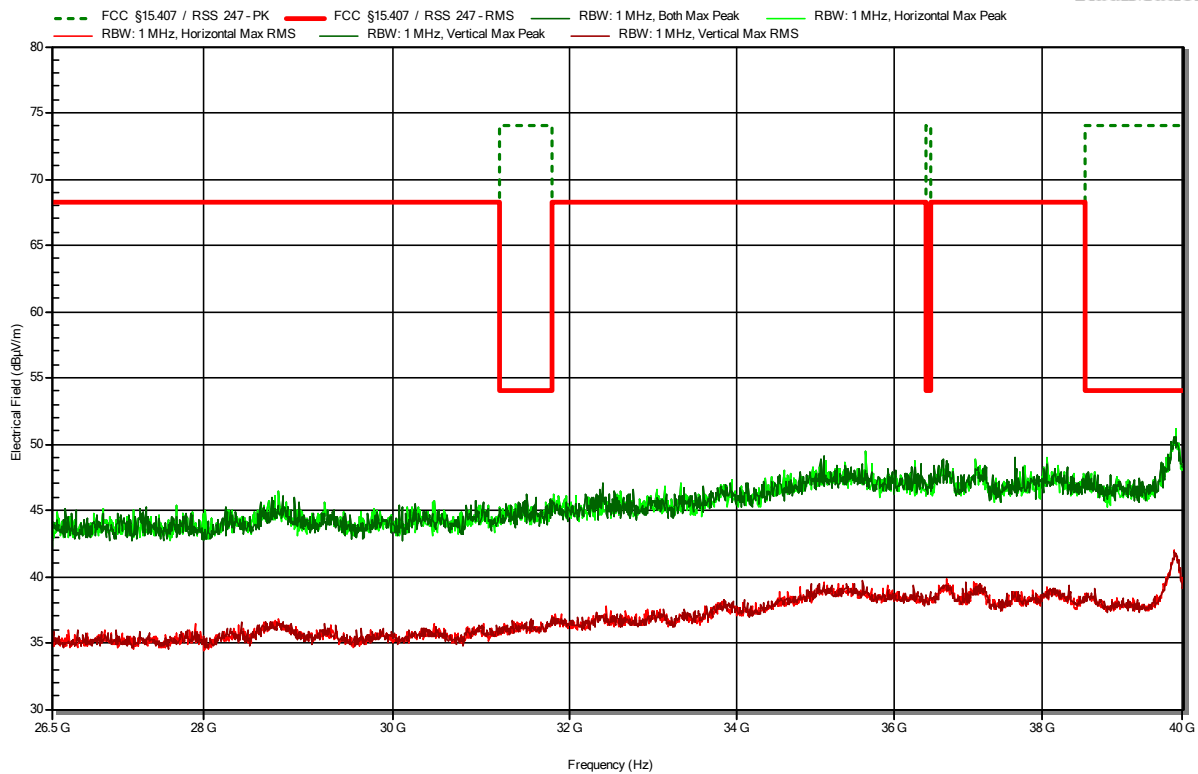

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck VULB 9168
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11a, 5720 MHz, 6 Mbps, OFDM
 Test Date: 2023-06-05

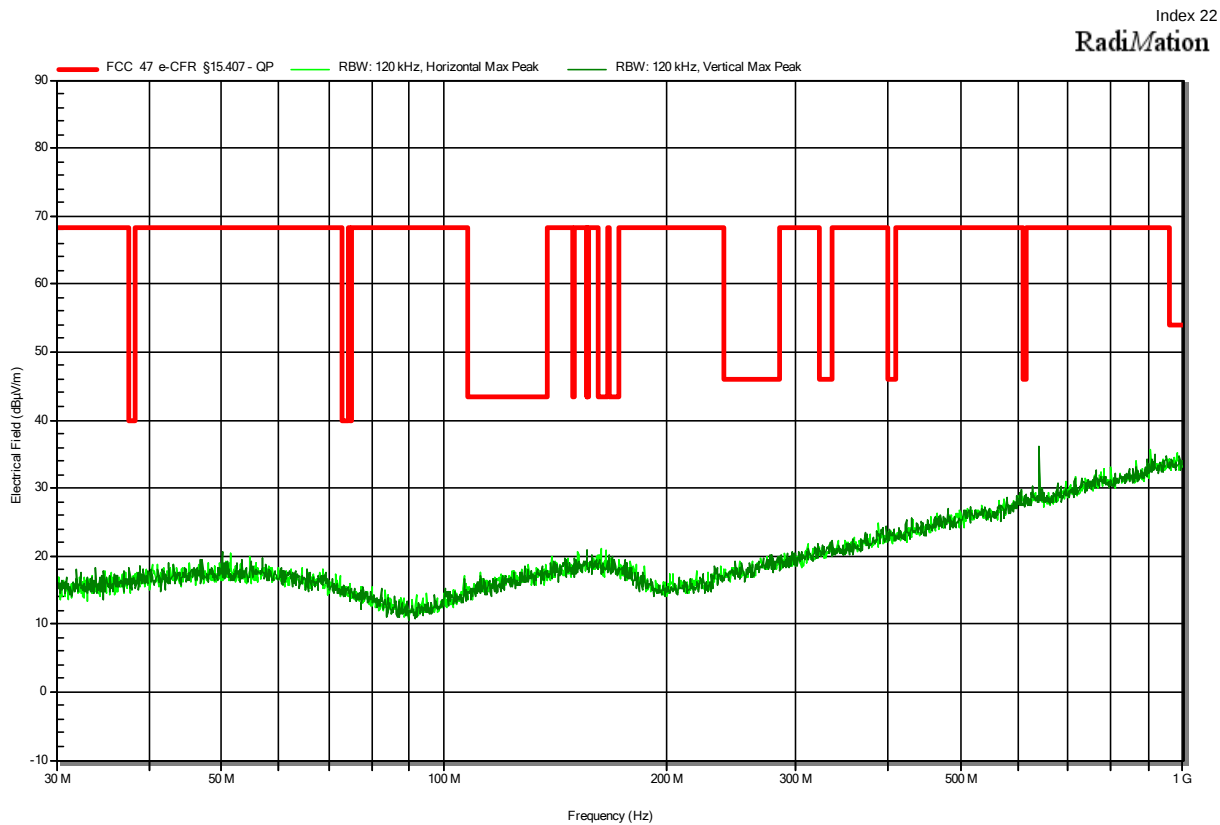


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5720 MHz, 6 Mbps, OFDM, P=16dBm
 Test Date: 2023-06-21

Index 167


RadiMation

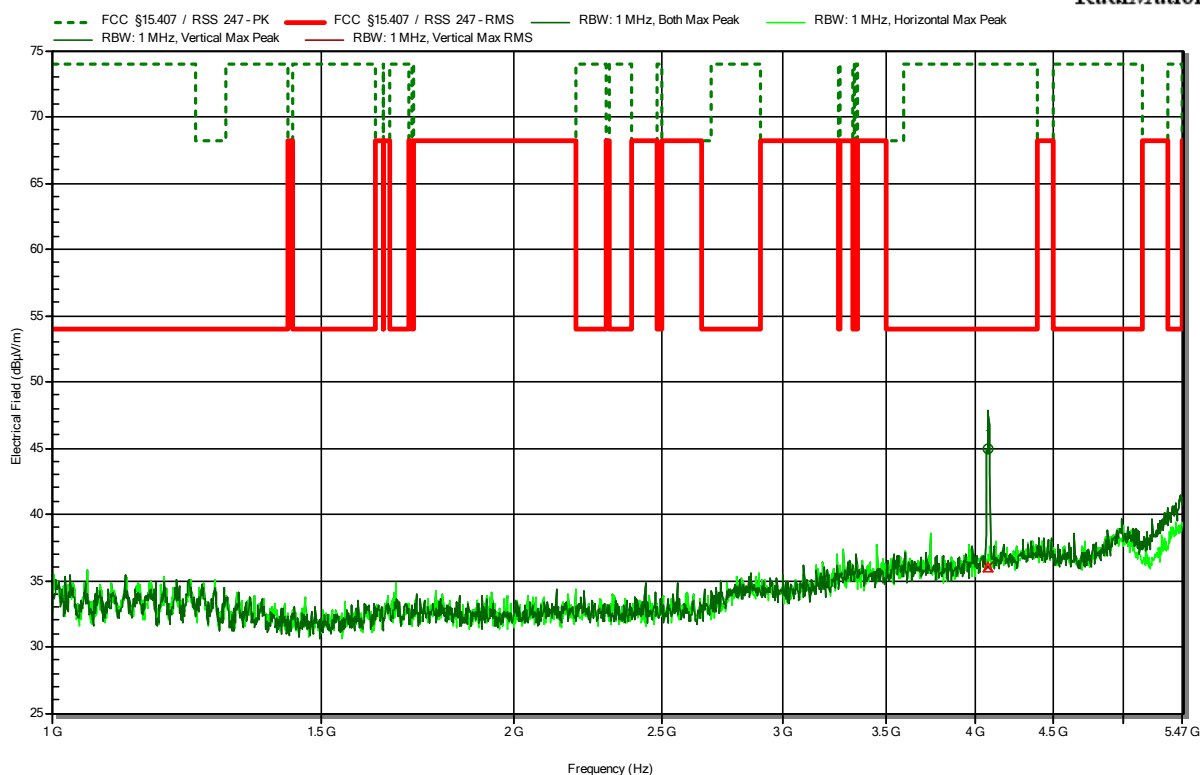

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
4.082 GHz	44.9 dBµV/m	74 dBµV/m	-29.1 dB	Pass	Vertical
Frequency	RMS	RMS Limit	RMS Difference	RMS Status	Polarization
4.082 GHz	35.97 dBµV/m	54 dBµV/m	-18.03 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5720 MHz, 6 Mbps, OFDM, P=16dBm
 Test Date: 2023-06-21

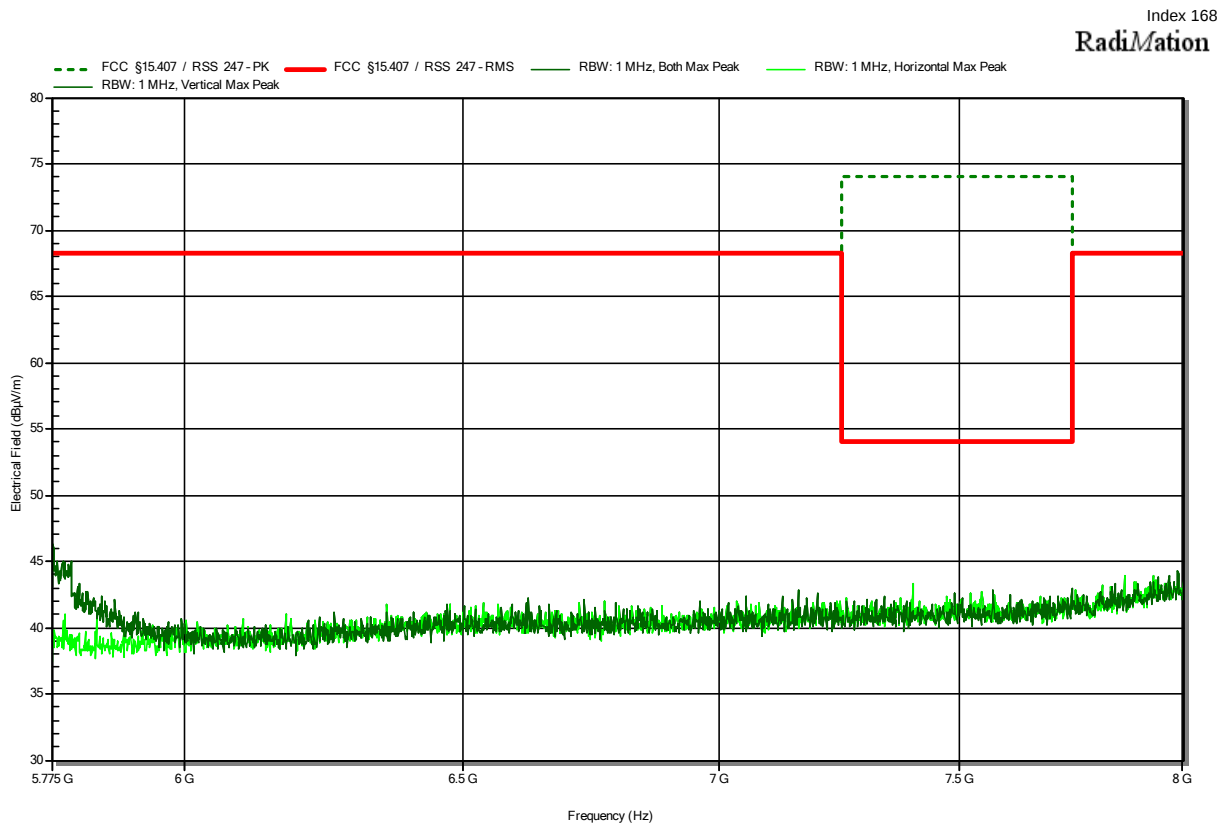


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5720 MHz, 6 Mbps, OFDM, P=16dBm
 Test Date: 2023-07-07

Index 201

RadiMation

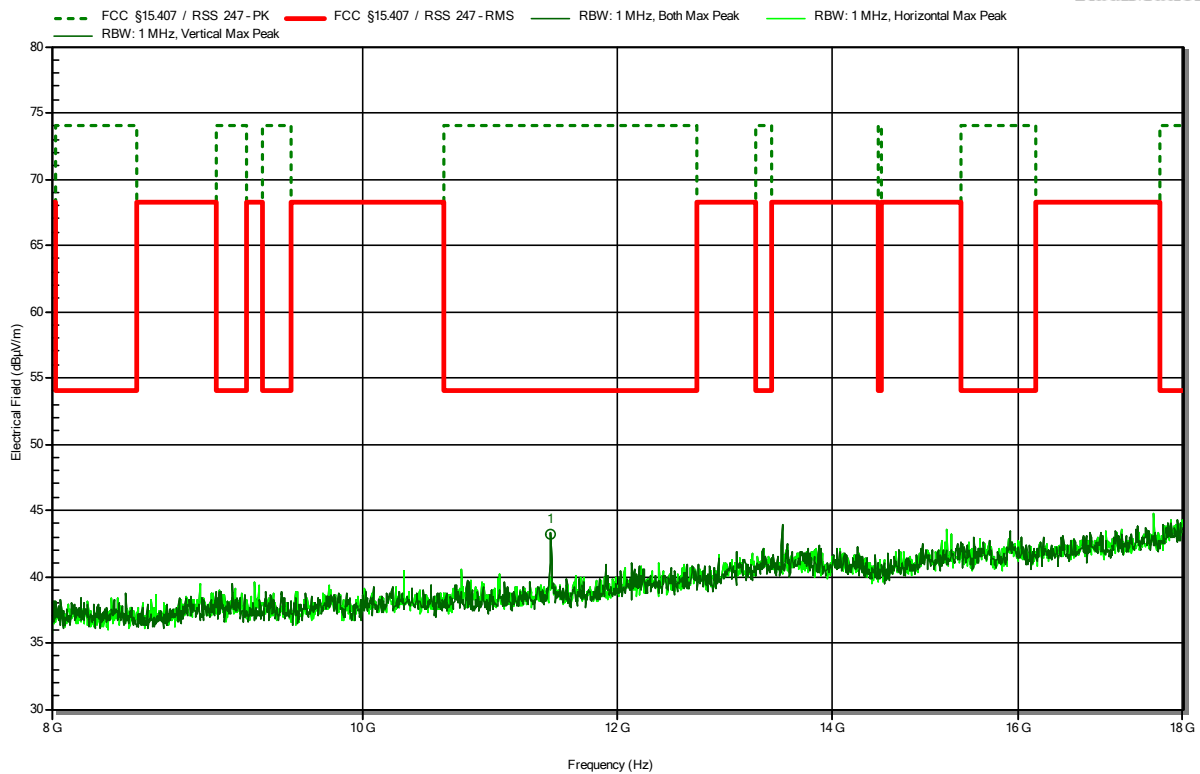


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
11.439 GHz	43.25 dBμV/m	74 dBμV/m	-30.75 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5720 MHz, 6 Mbps, OFDM, P=16dBm
 Test Date: 2023-06-21

Index 169

RadiMation

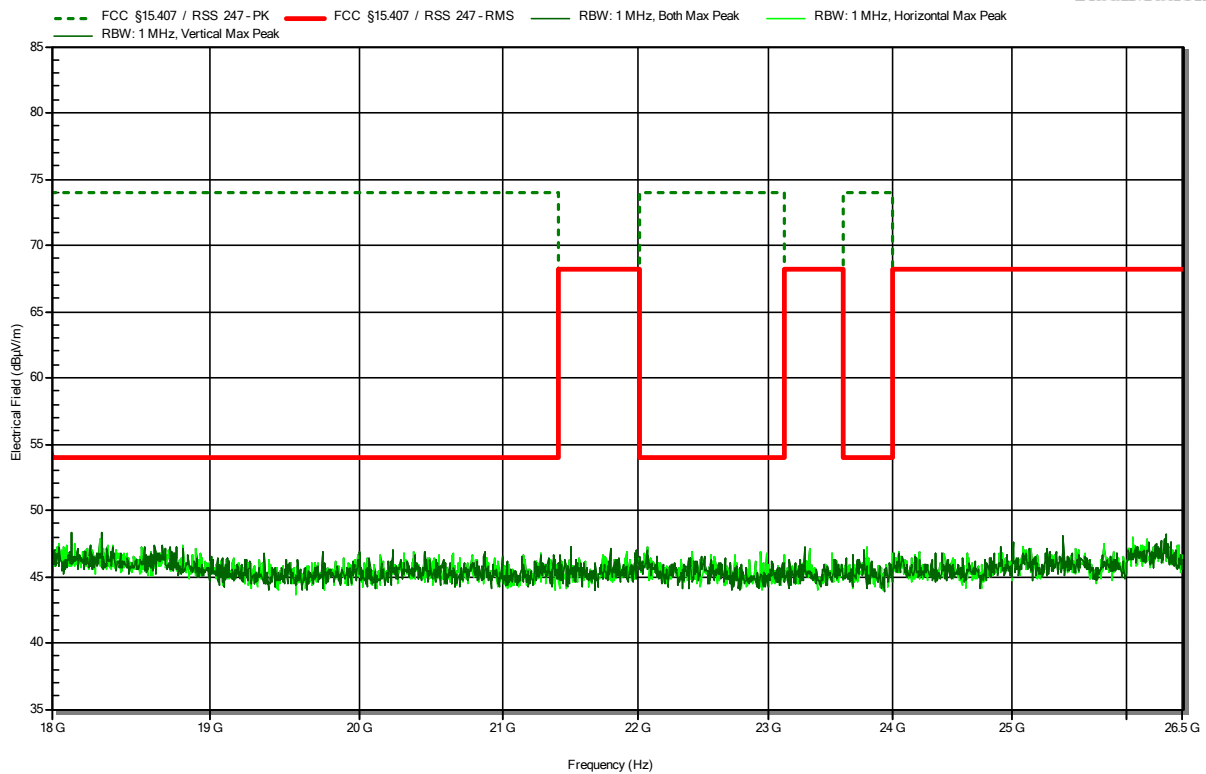


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Flann 22240-25
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5720 MHz, 6 Mbps, OFDM, P=16dBm
 Test Date: 2023-06-22

Index 188

RadiMation

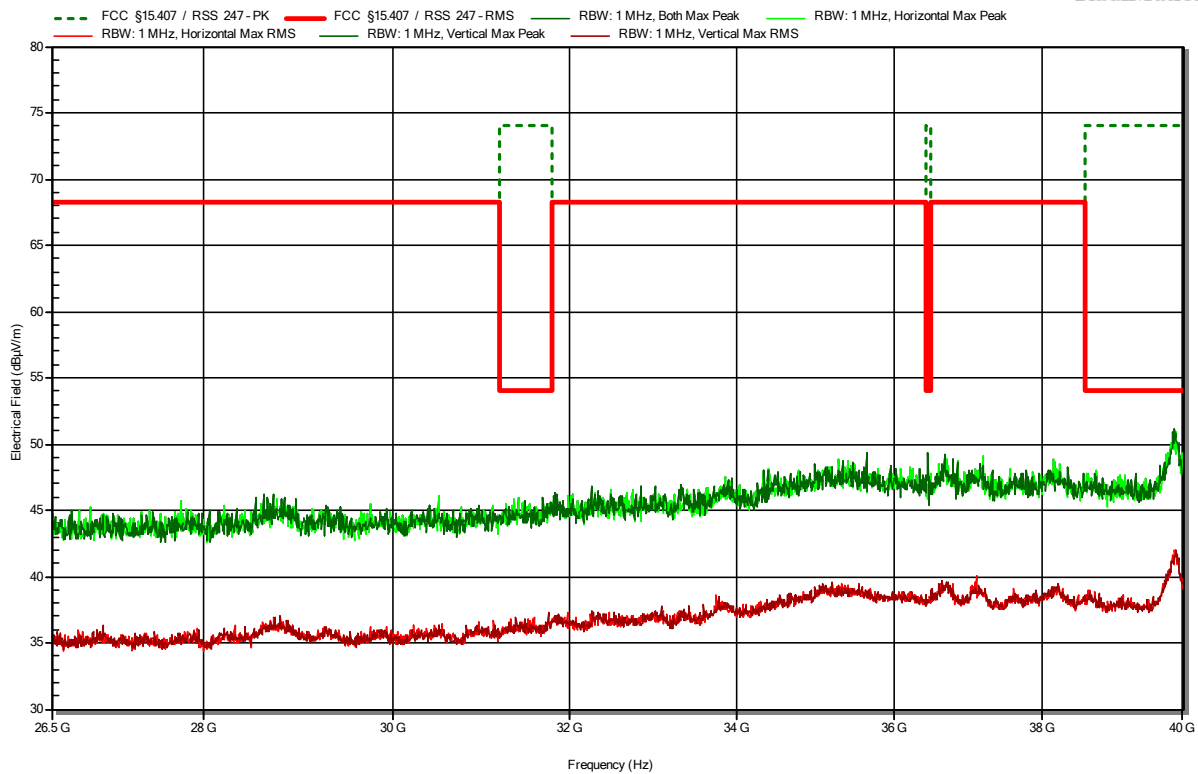


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5510 MHz, MCS 5, HT40, P=12dBm
 Test Date: 2023-06-14

Index 137

RadiMation

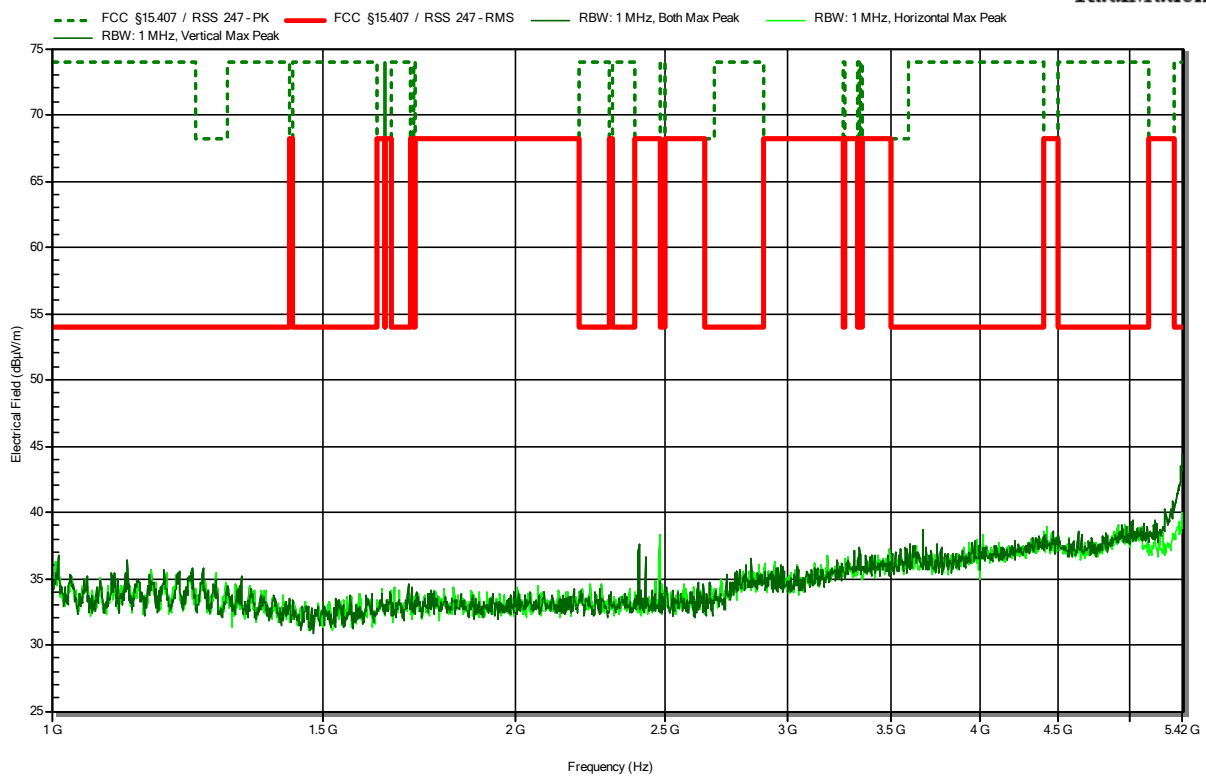


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5510 MHz, MCS 5, HT40, P=12dBm
 Test Date: 2023-06-14

Index 135

RadiMation

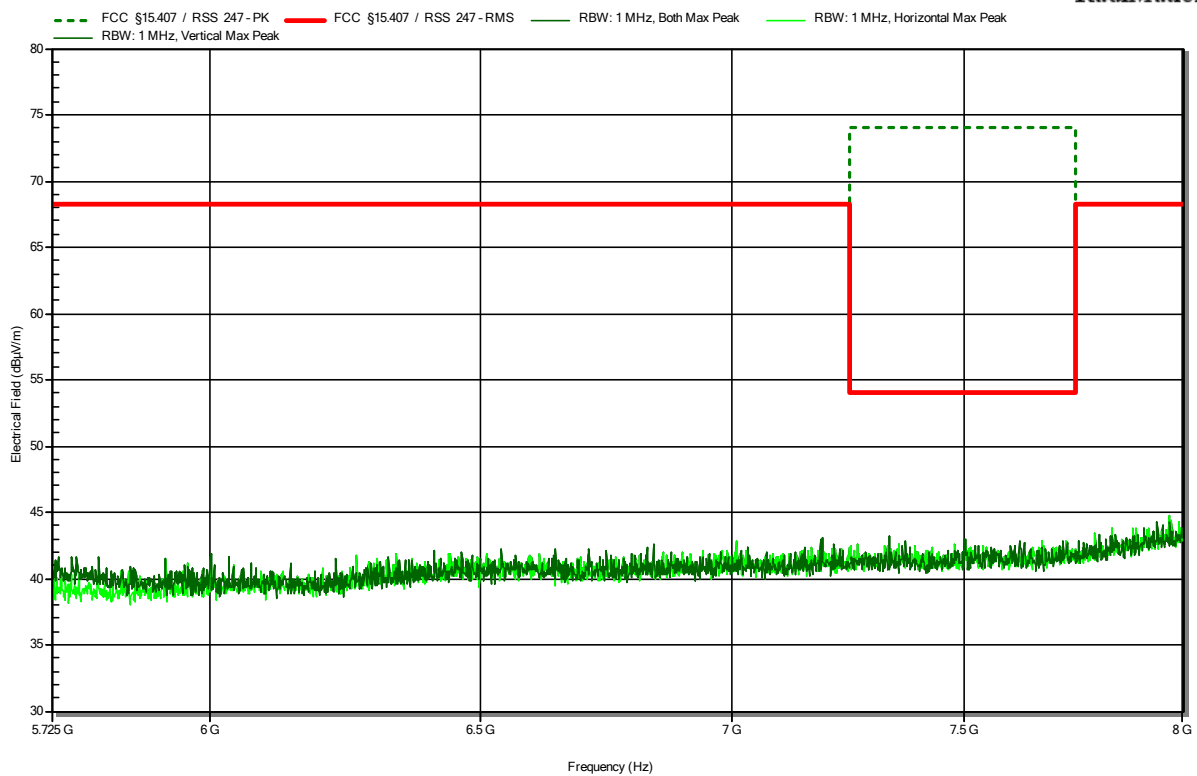


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5510 MHz, MCS 5, HT40, P=12dBm
 Test Date: 2023-06-16

Index 142

RadiMation

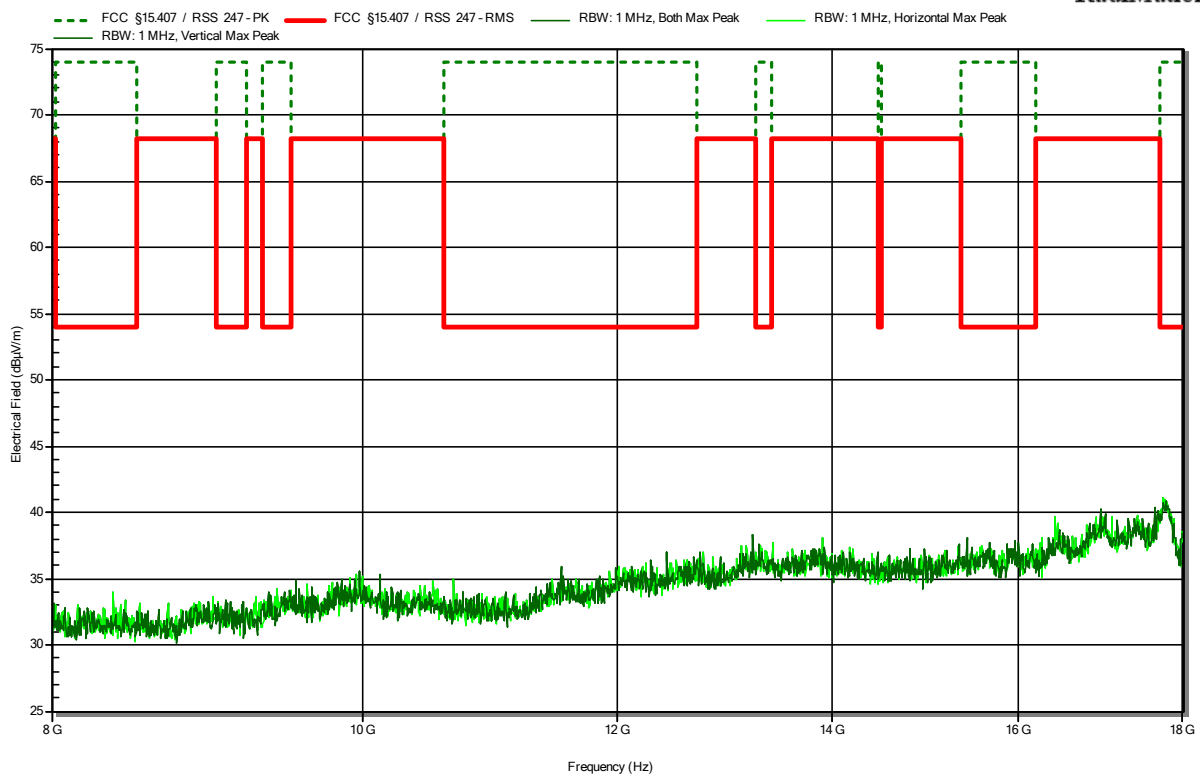


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5510 MHz, MCS 5, HT40, P=12dBm
 Test Date: 2023-06-16

Index 143

RadiMation

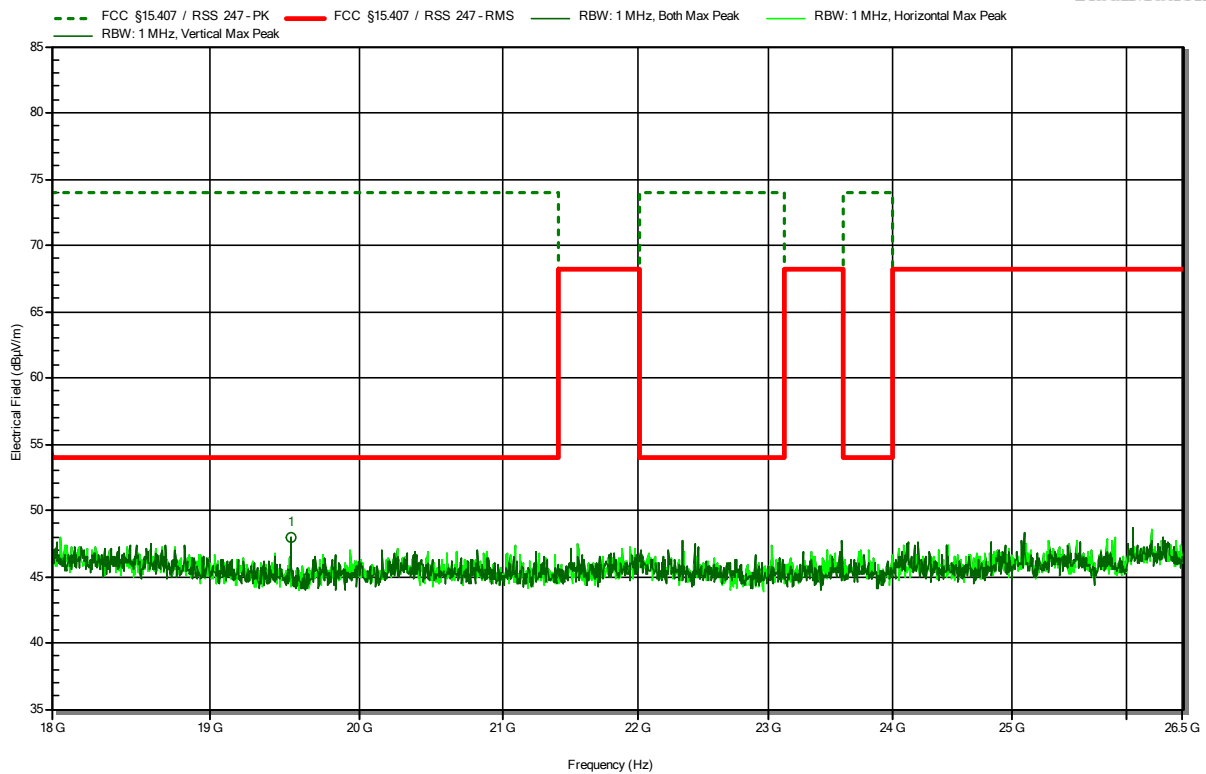


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
19.533 GHz	48 dBµV/m	74 dBµV/m	-26 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5590 MHz, MCS 5, HT40, P=19dBm
 Test Date: 2023-06-16

Index 144


RadiMation

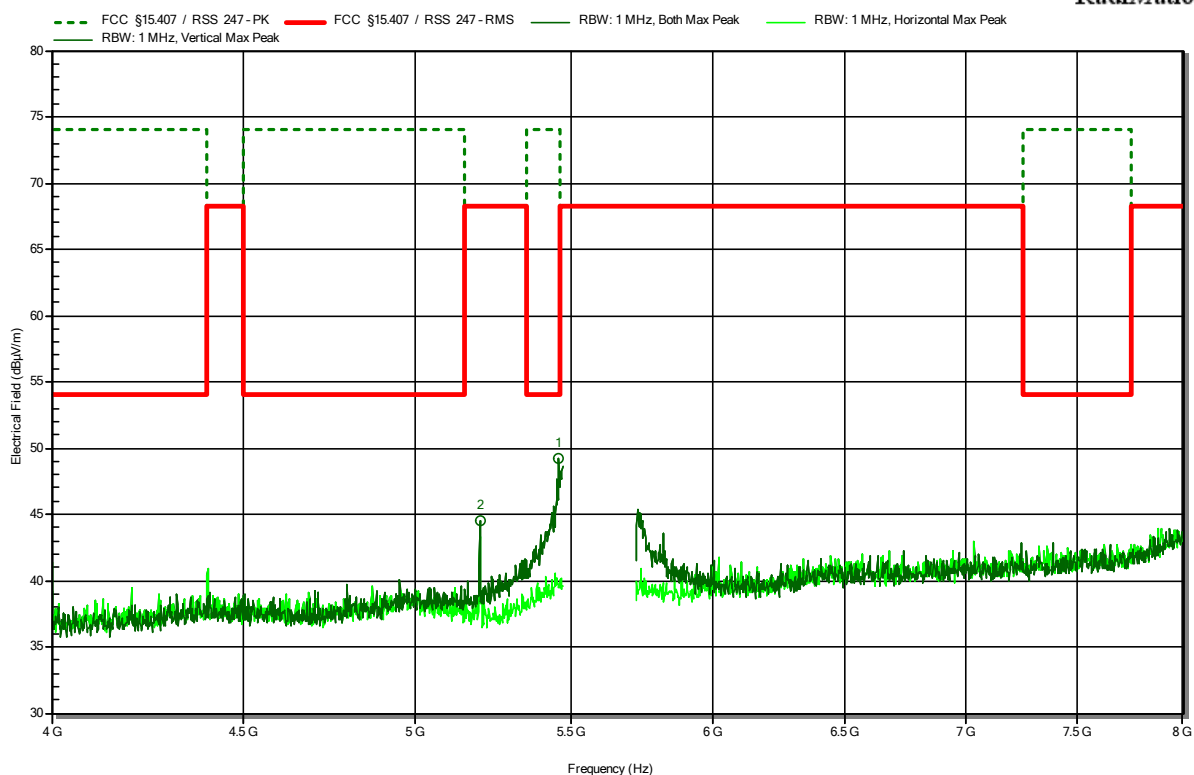

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
5.2 GHz	44.49 dBµV/m	68.2 dBµV/m	-23.71 dB	Pass	Vertical
5.456 GHz	49.24 dBµV/m	74 dBµV/m	-24.76 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5590 MHz, MCS 5, HT40, P=19dBm
 Test Date: 2023-06-16

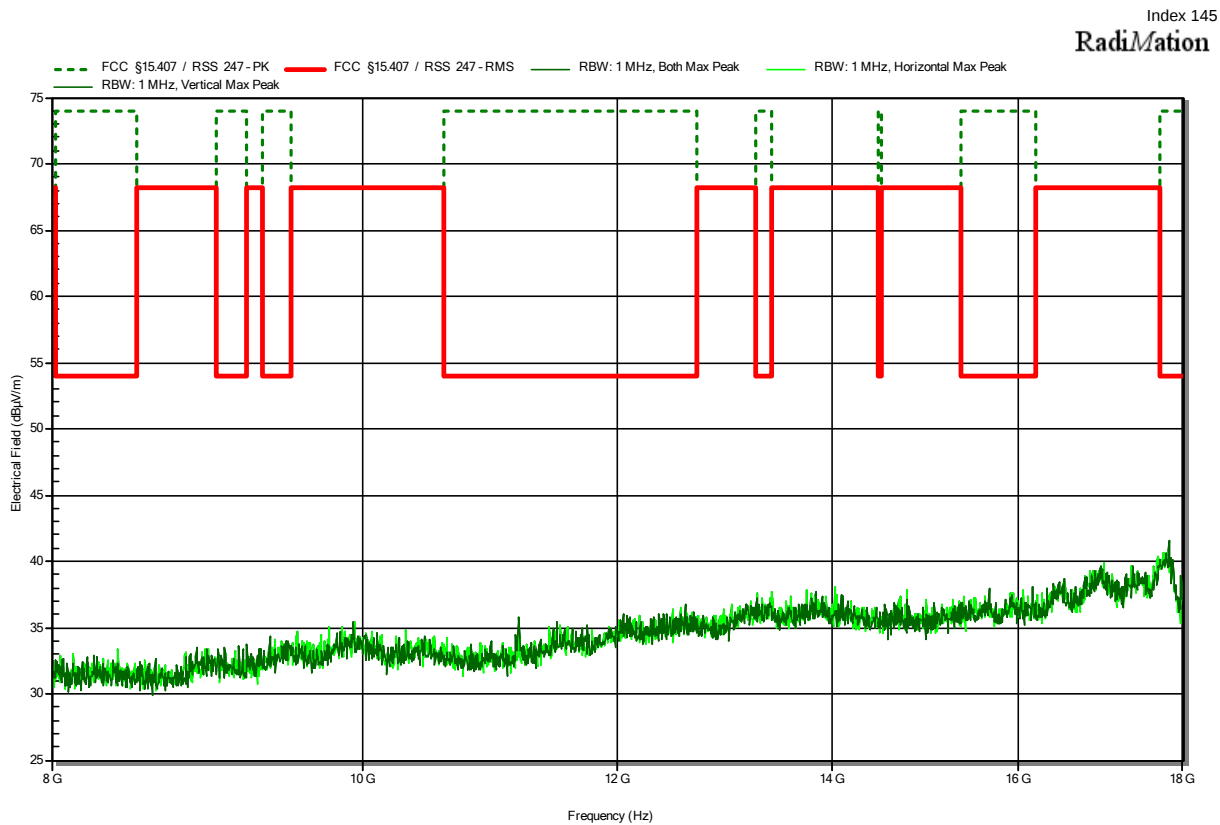


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Oforji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5590 MHz, MCS 5, HT40, P=19dBm
 Test Date: 2023-06-16

Index 146

RadiMation

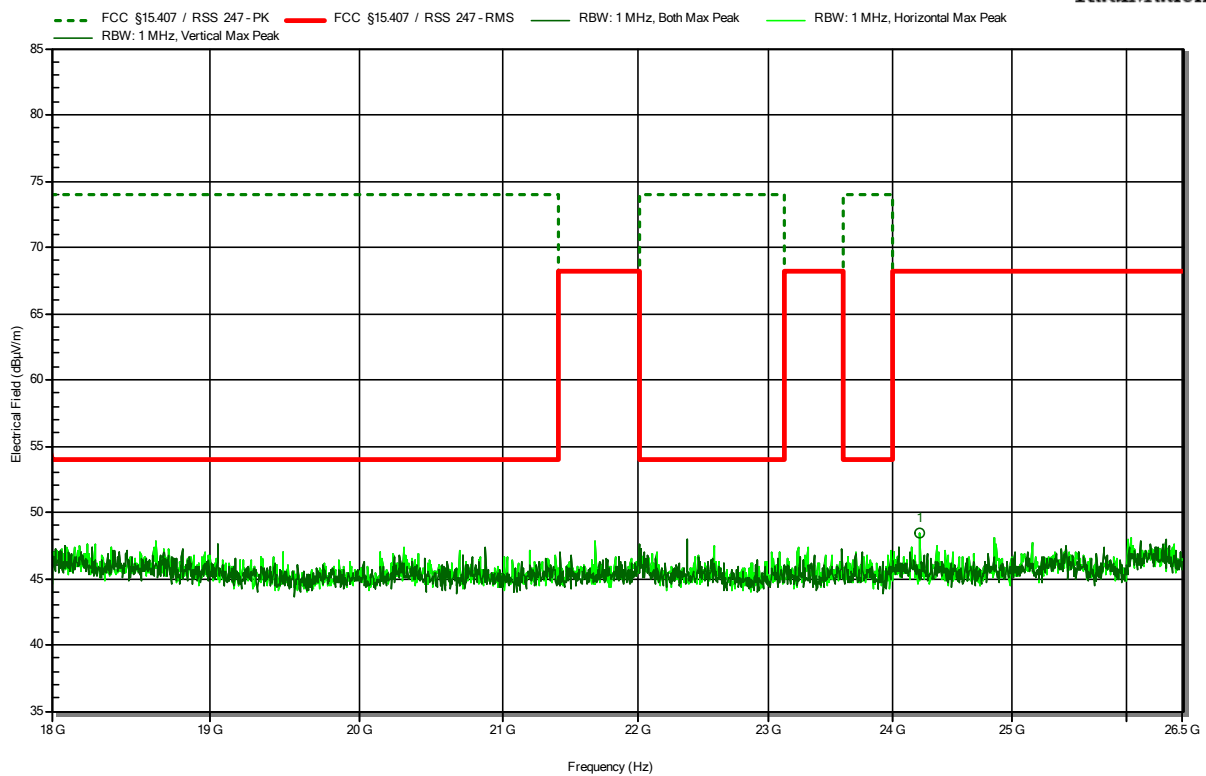


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
24.219 GHz	48.48 dBμV/m	68.2 dBμV/m	-19.72 dB	Pass	Horizontal

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5670 MHz, MCS 5, HT40, P=16dBm
 Test Date: 2023-06-19

Index 158

RadiMation

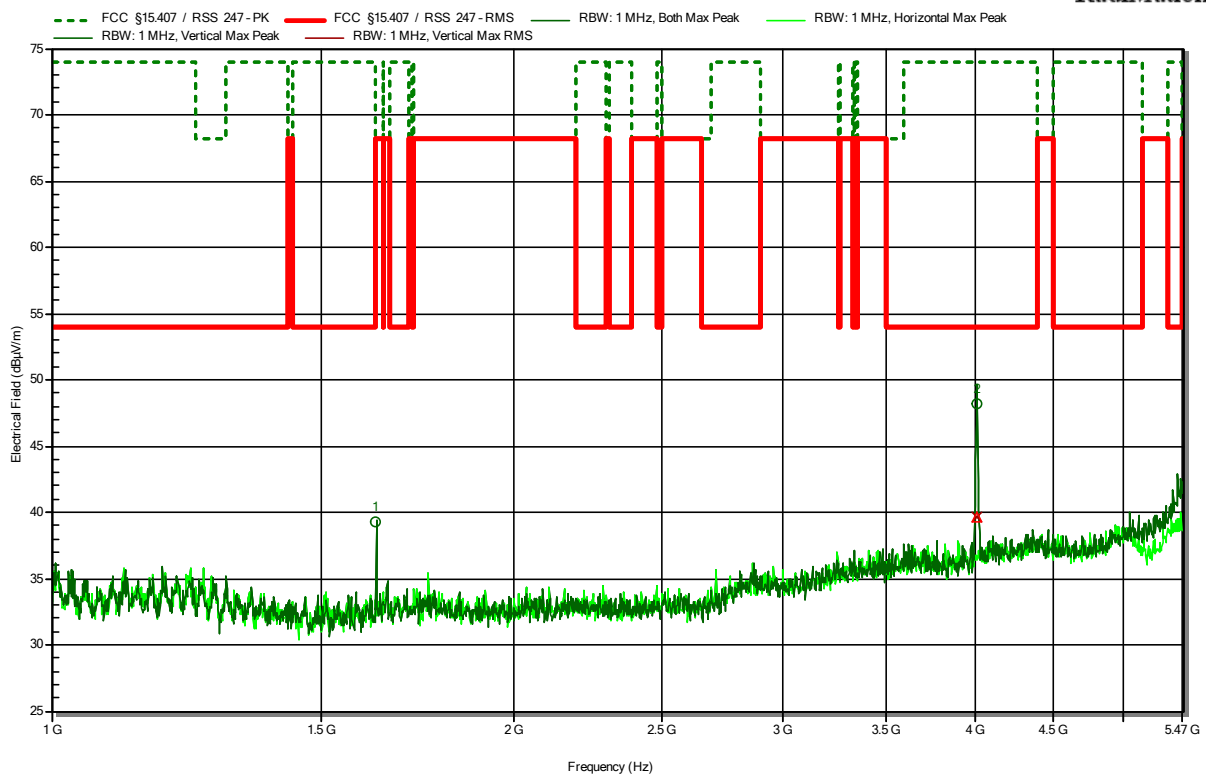


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
1.628 GHz	39.33 dBµV/m	68.2 dBµV/m	-28.87 dB	Pass	Vertical
4.013 GHz	48.18 dBµV/m	74 dBµV/m	-25.82 dB	Pass	Vertical
Frequency	RMS	RMS Limit	RMS Difference	RMS Status	Polarization
4.013 GHz	39.65 dBµV/m	54 dBµV/m	-14.35 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5670 MHz, MCS 5, HT40, P=16dBm
 Test Date: 2023-06-19

Index 159


RadiMation

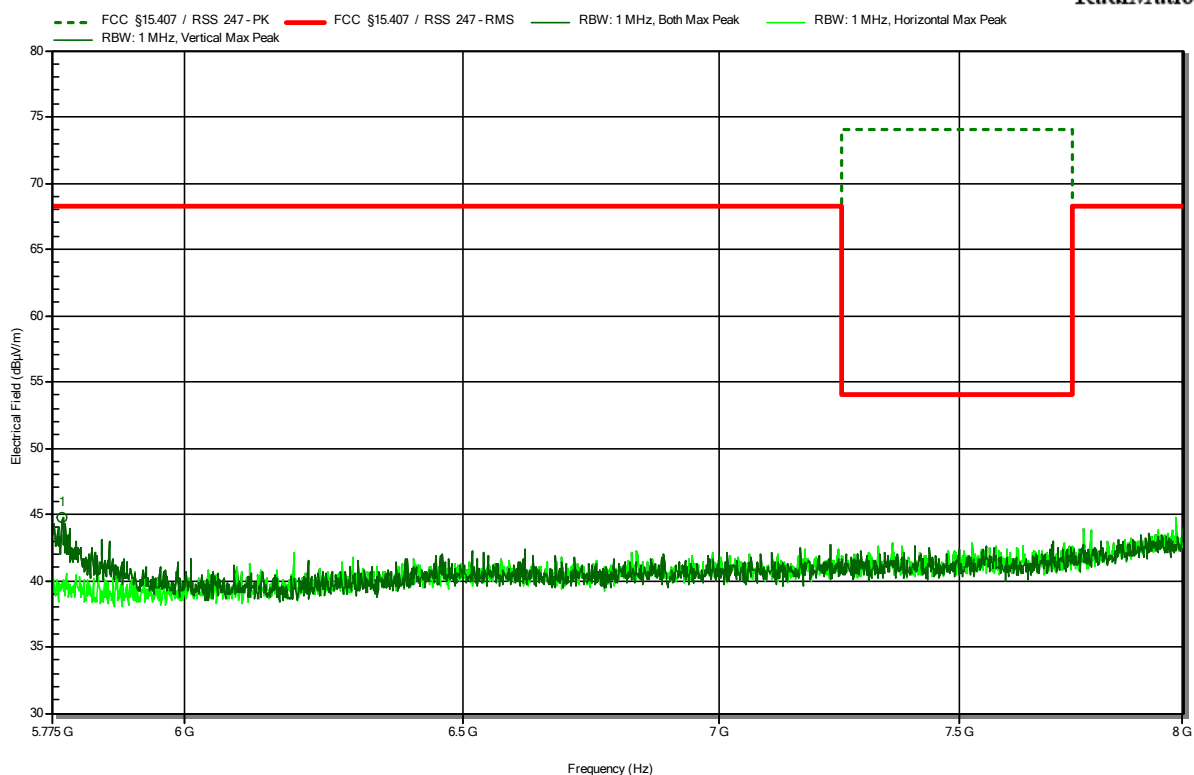

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
5.793 GHz	44.78 dBµV/m	68.2 dBµV/m	-23.42 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5670 MHz, MCS 5, HT40, P=16dBm
 Test Date: 2023-06-19

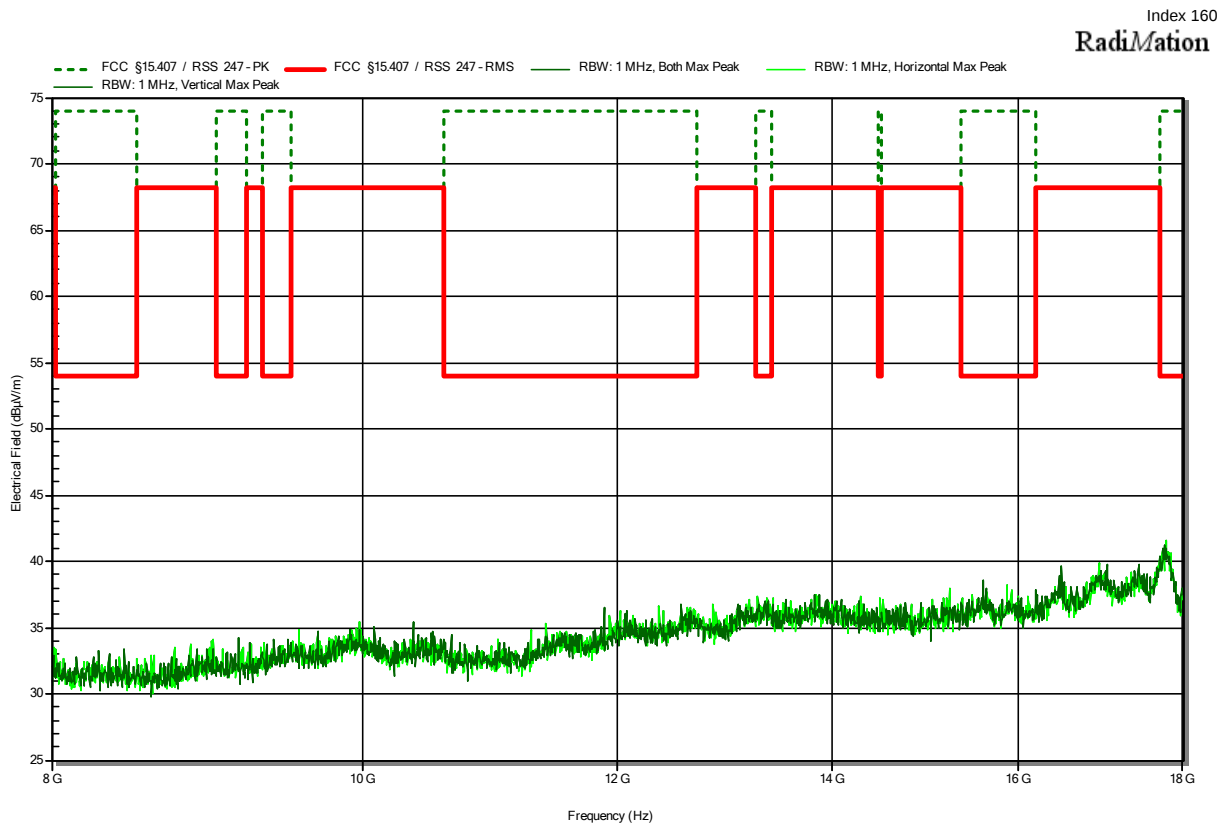


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5670 MHz, MCS 5, HT40, P=16dBm
 Test Date: 2023-06-19


Index 161

RadiMation

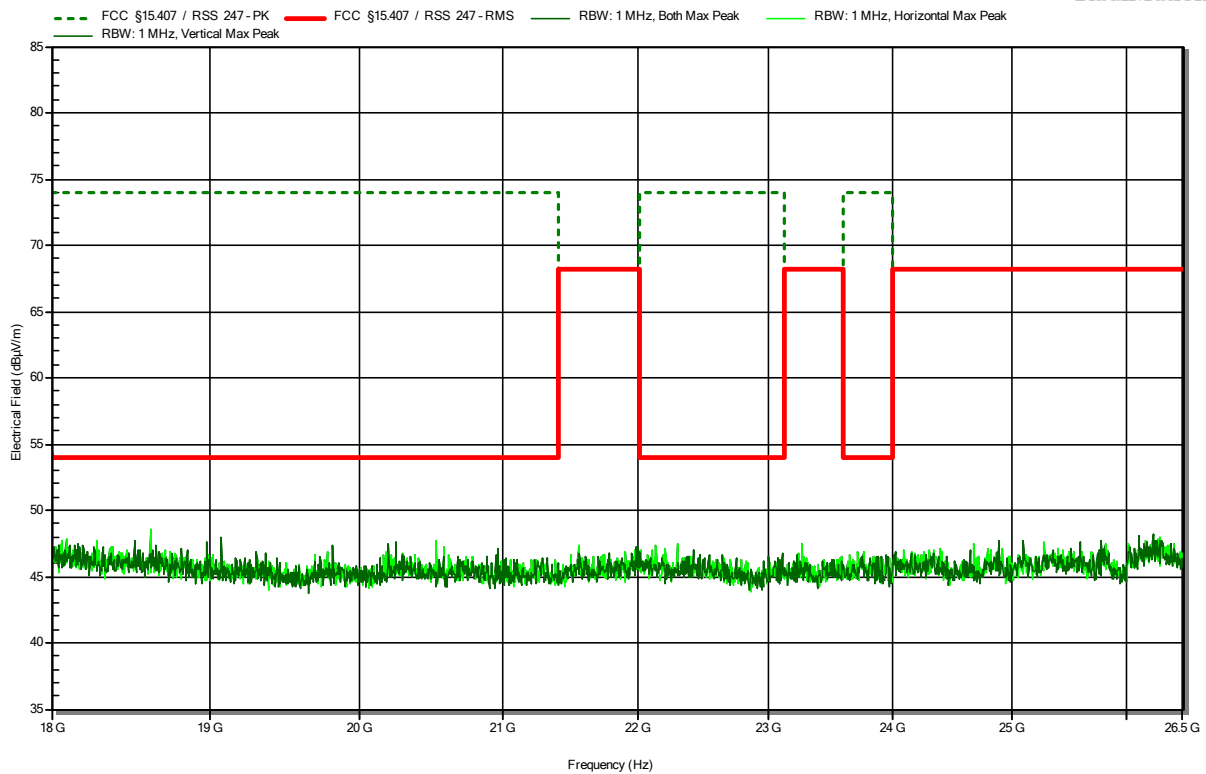

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407


Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5710 MHz, MCS 5, HT40, P=16dBm
 Test Date: 2023-06-21

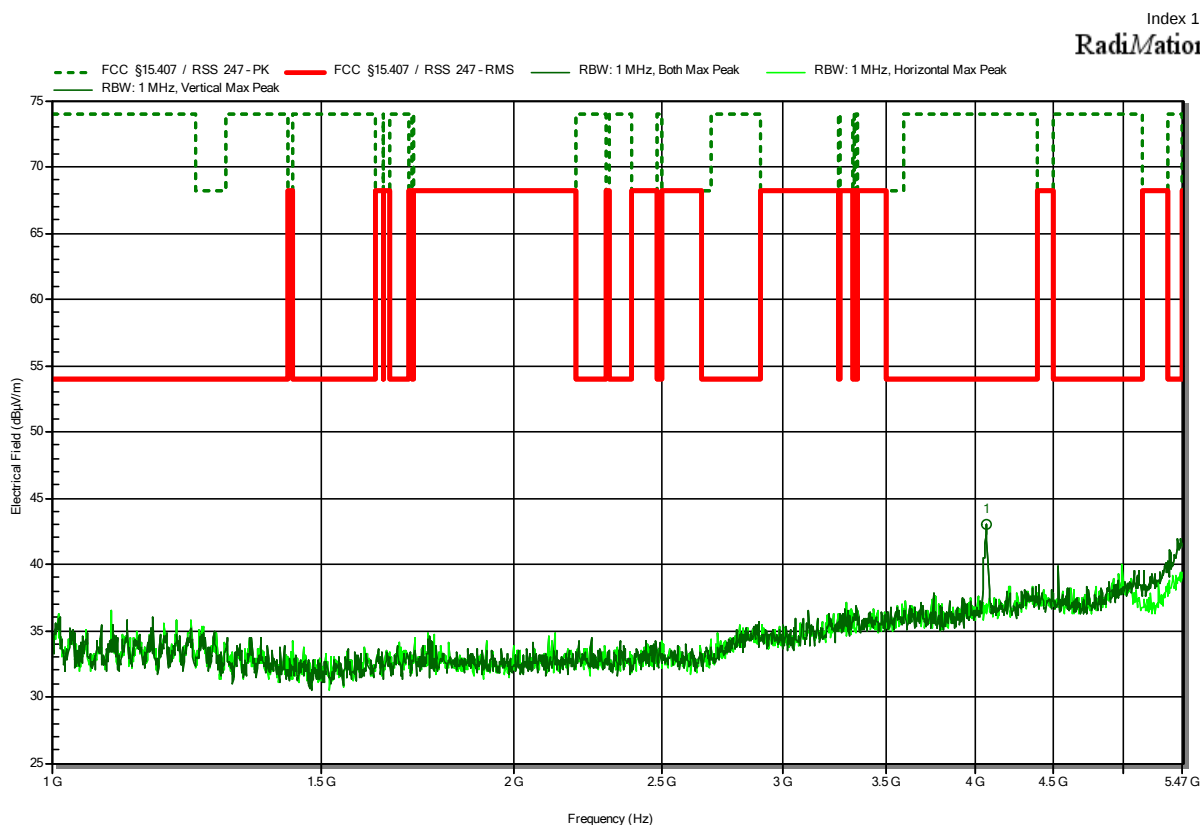

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
4.073 GHz	43.01 dBµV/m	74 dBµV/m	-30.99 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5710 MHz, MCS 5, HT40, P=16dBm
 Test Date: 2023-06-21

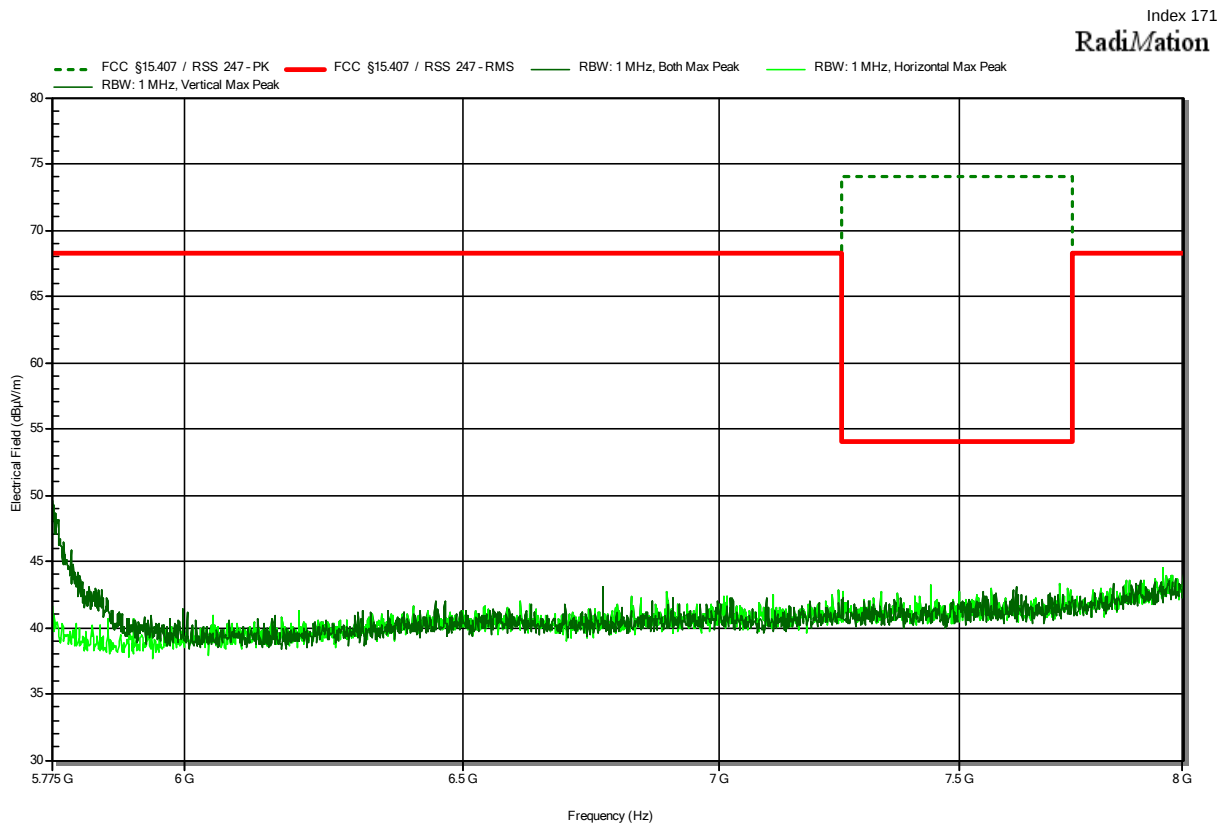


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5710 MHz, MCS 5, HT40, P=16dBm
 Test Date: 2023-07-07

Index 202

RadiMation

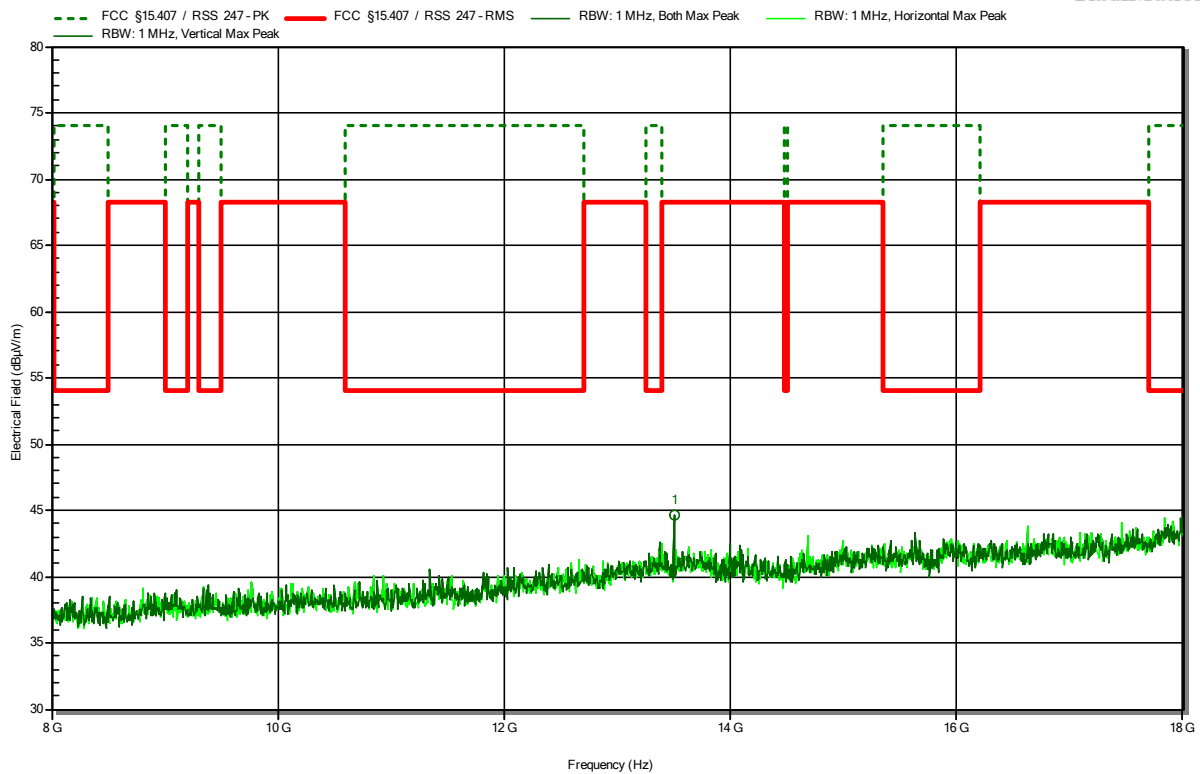


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
13.5 GHz	44.62 dBμV/m	68.2 dBμV/m	-23.58 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5710 MHz, MCS 5, HT40, P=16dBm
 Test Date: 2023-06-21

Index 172


RadiMation

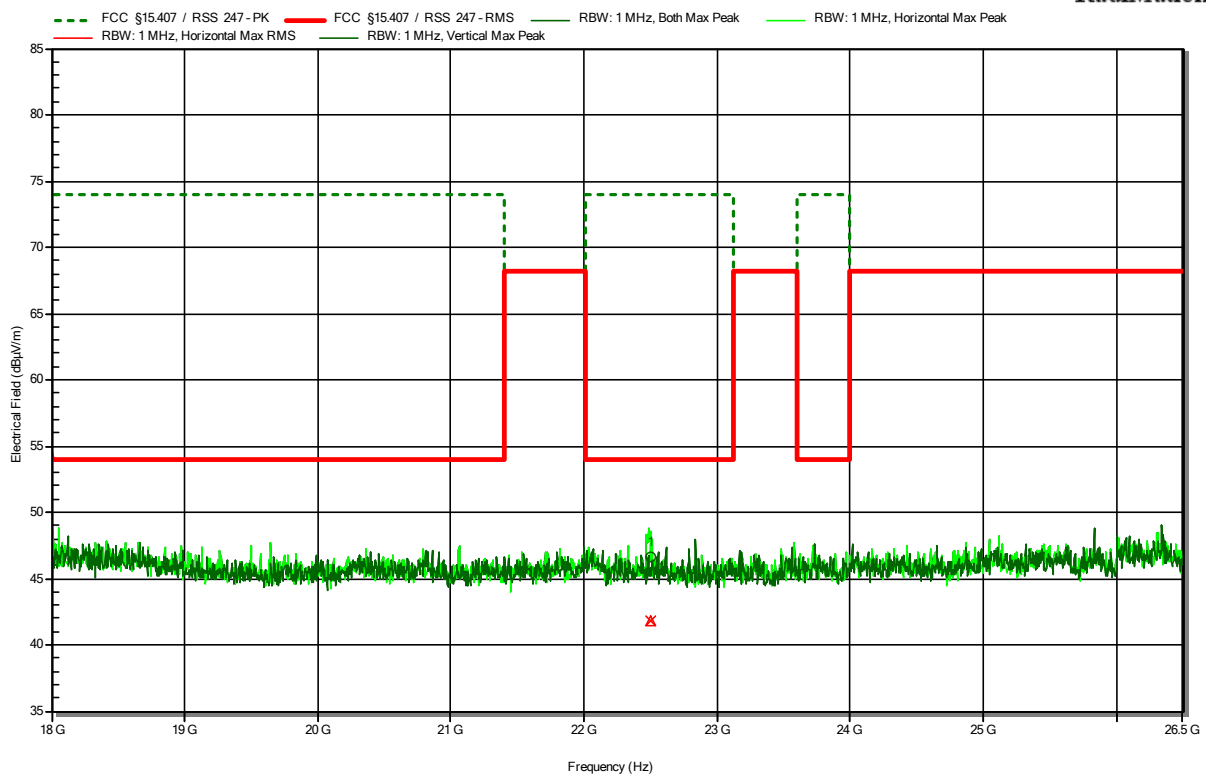

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
22.504 GHz	46.57 dBµV/m	74 dBµV/m	-27.43 dB	Pass	Horizontal
Frequency	RMS	RMS Limit	RMS Difference	RMS Status	Polarization
22.504 GHz	41.76 dBµV/m	54 dBµV/m	-12.24 dB	Pass	Horizontal

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5530 MHz, MCS 4, VHT80, P=12dBm
 Test Date: 2023-06-16

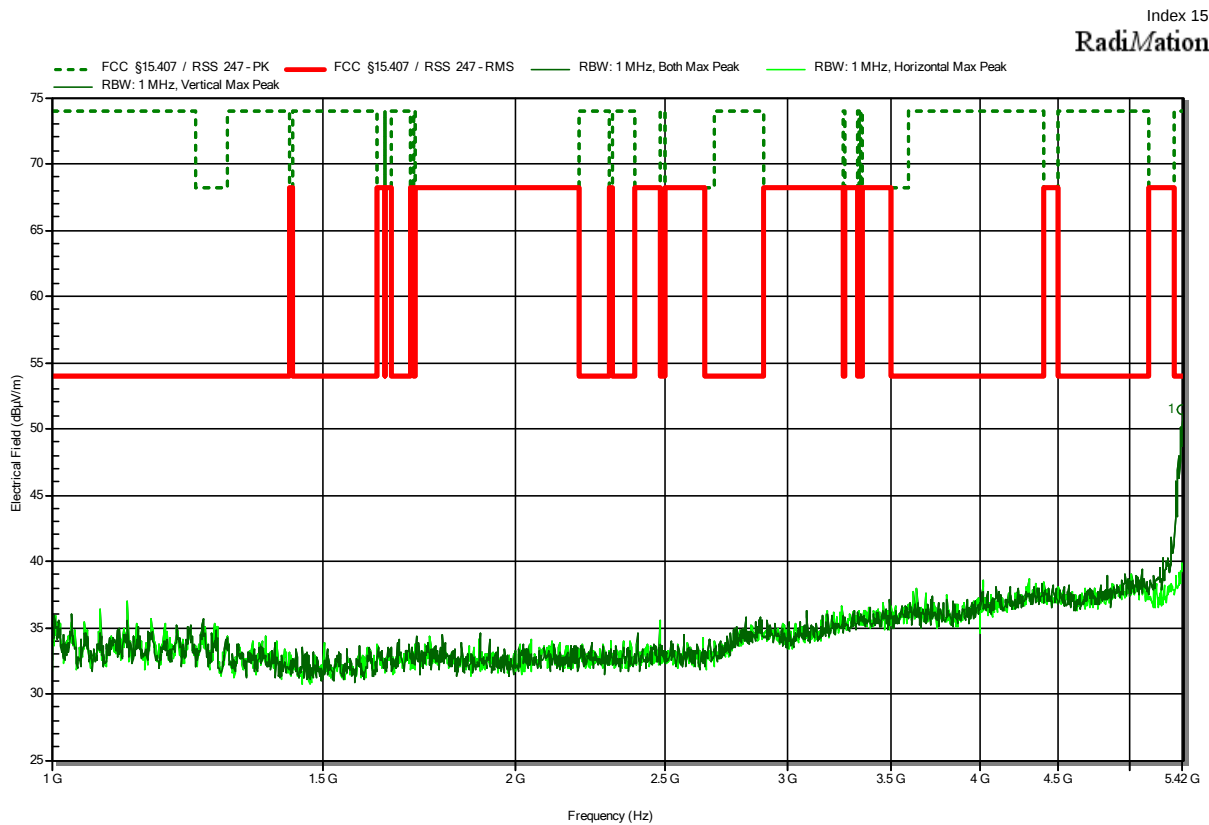


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
5.418 GHz	51.48 dBμV/m	74 dBμV/m	-22.52 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5530 MHz, MCS 4, VHT80, P=12dBm
 Test Date: 2023-06-19

Index 151

RadiMation

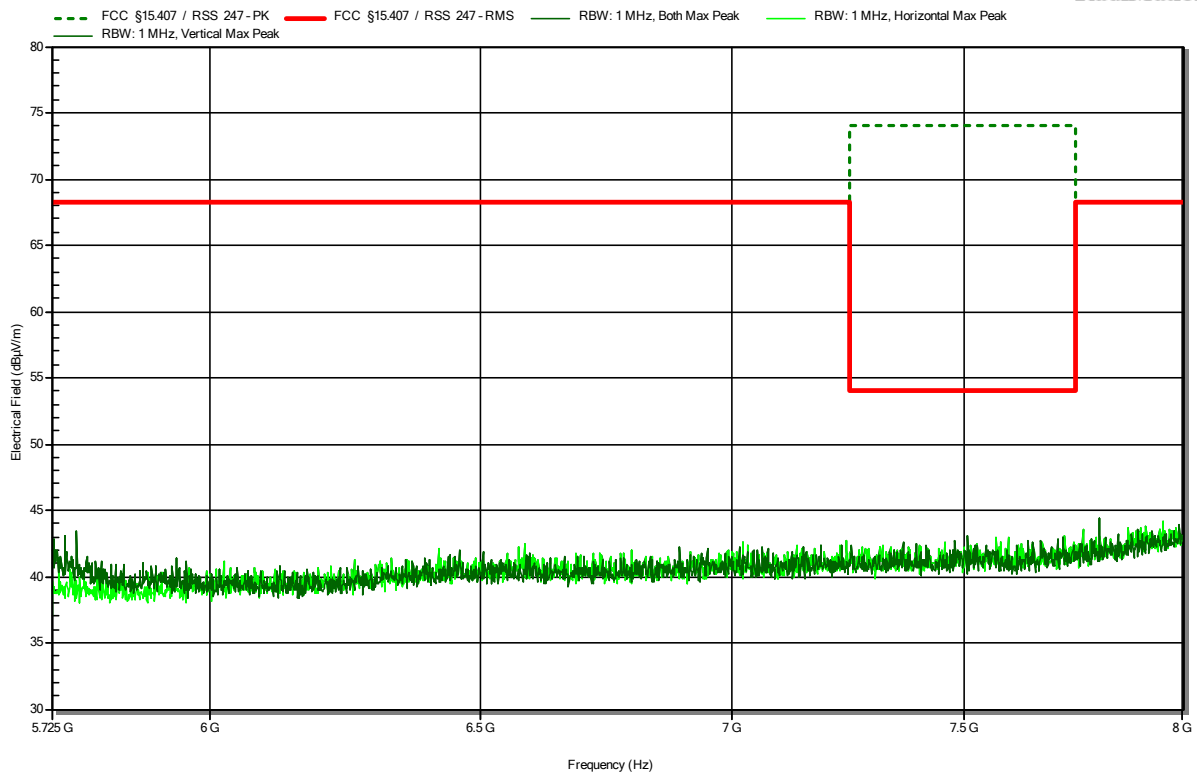


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5530 MHz, MCS 4, VHT80, P=12dBm
 Test Date: 2023-06-19

Index 152

RadiMation

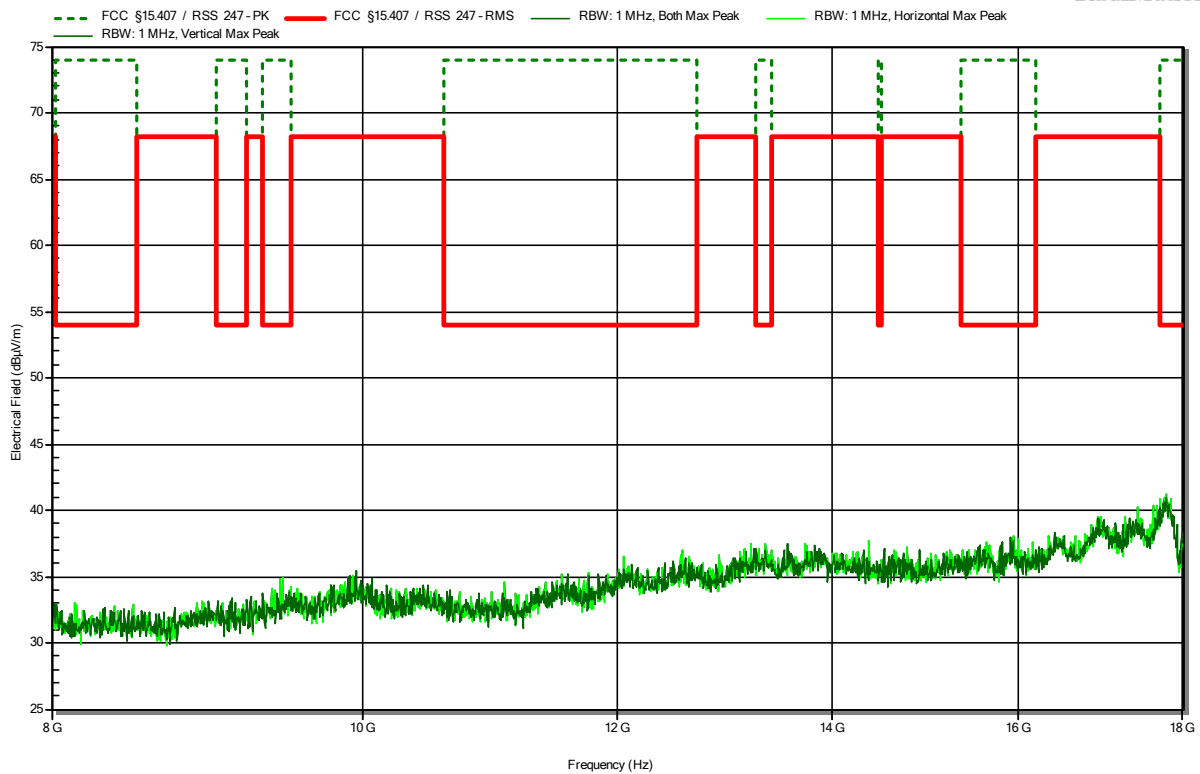


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5530 MHz, MCS 4, VHT80, P=12dBm
 Test Date: 2023-06-19

Index 153

RadiMation

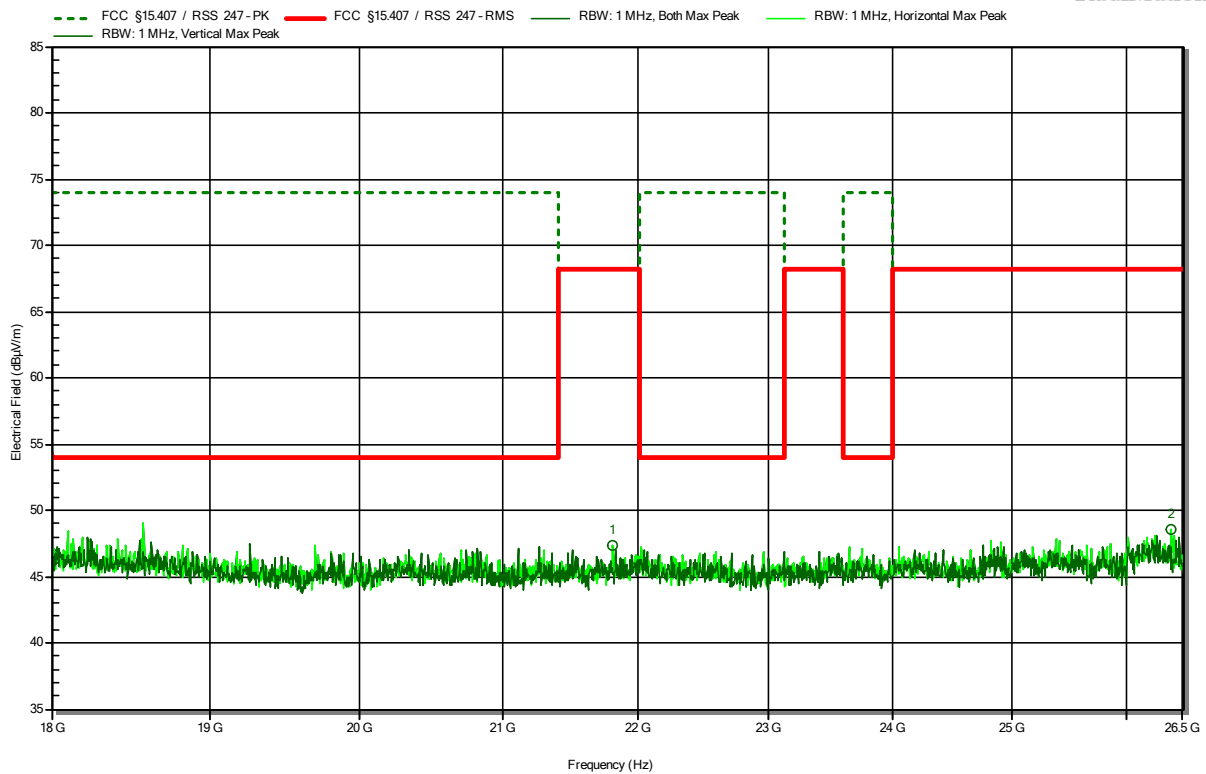


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
21.805 GHz	47.38 dBμV/m	68.2 dBμV/m	-20.82 dB	Pass	Horizontal
26.394 GHz	48.57 dBμV/m	68.2 dBμV/m	-19.63 dB	Pass	Horizontal

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5610 MHz, MCS 4, VHT80, P=16dBm
 Test Date: 2023-06-19

Index 166

RadiMation

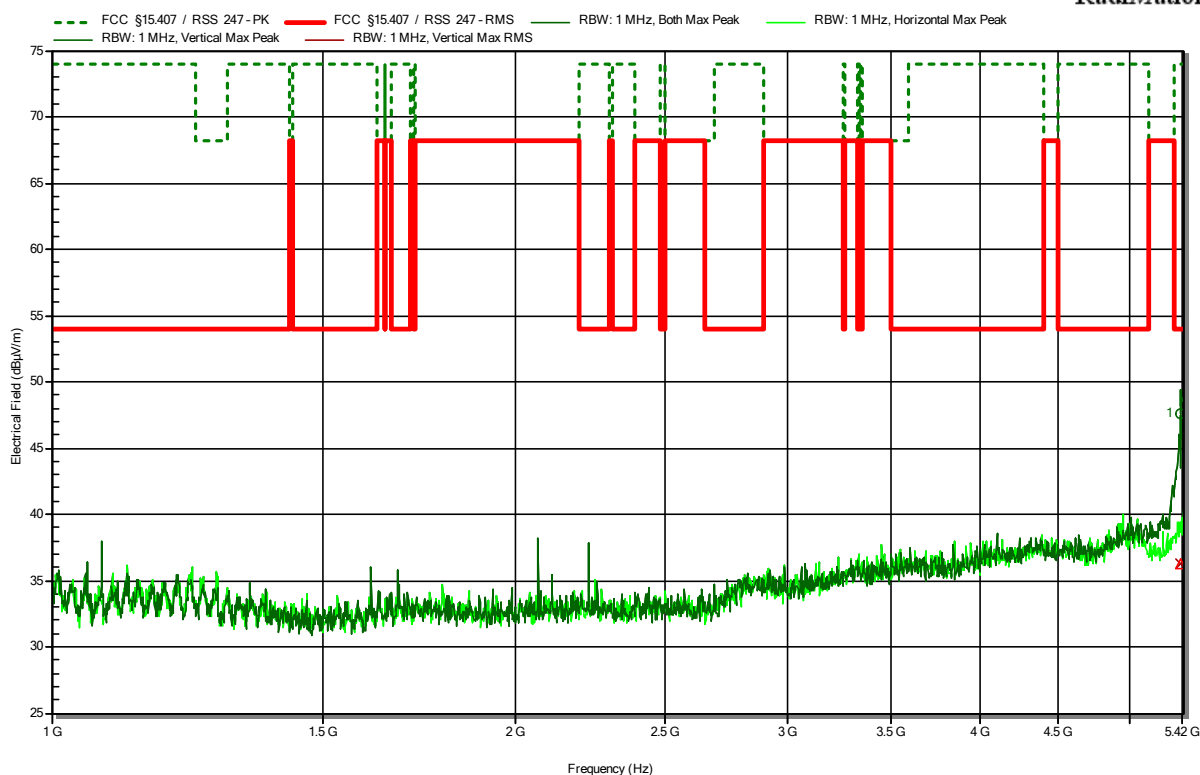


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
5.404 GHz	47.56 dBμV/m	74 dBμV/m	-26.44 dB	Pass	Vertical
Frequency	RMS	RMS Limit	RMS Difference	RMS Status	Polarization
5.404 GHz	36.25 dBμV/m	54 dBμV/m	-17.75 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5610 MHz, MCS 4, VHT80, P=16dBm
 Test Date: 2023-06-19

Index 155

RadiMation

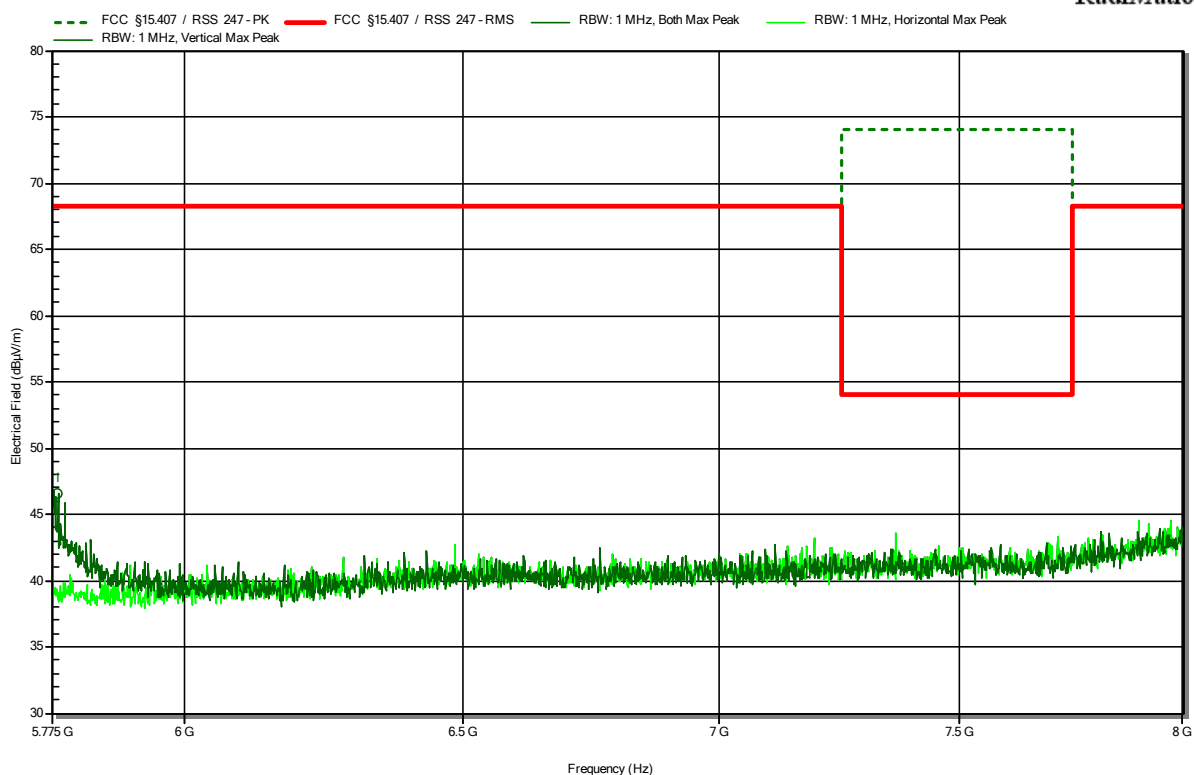


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
5.785 GHz	46.59 dBμV/m	68.2 dBμV/m	-21.61 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5610 MHz, MCS 4, VHT80, P=16dBm
 Test Date: 2023-06-19

Index 156

RadiMation

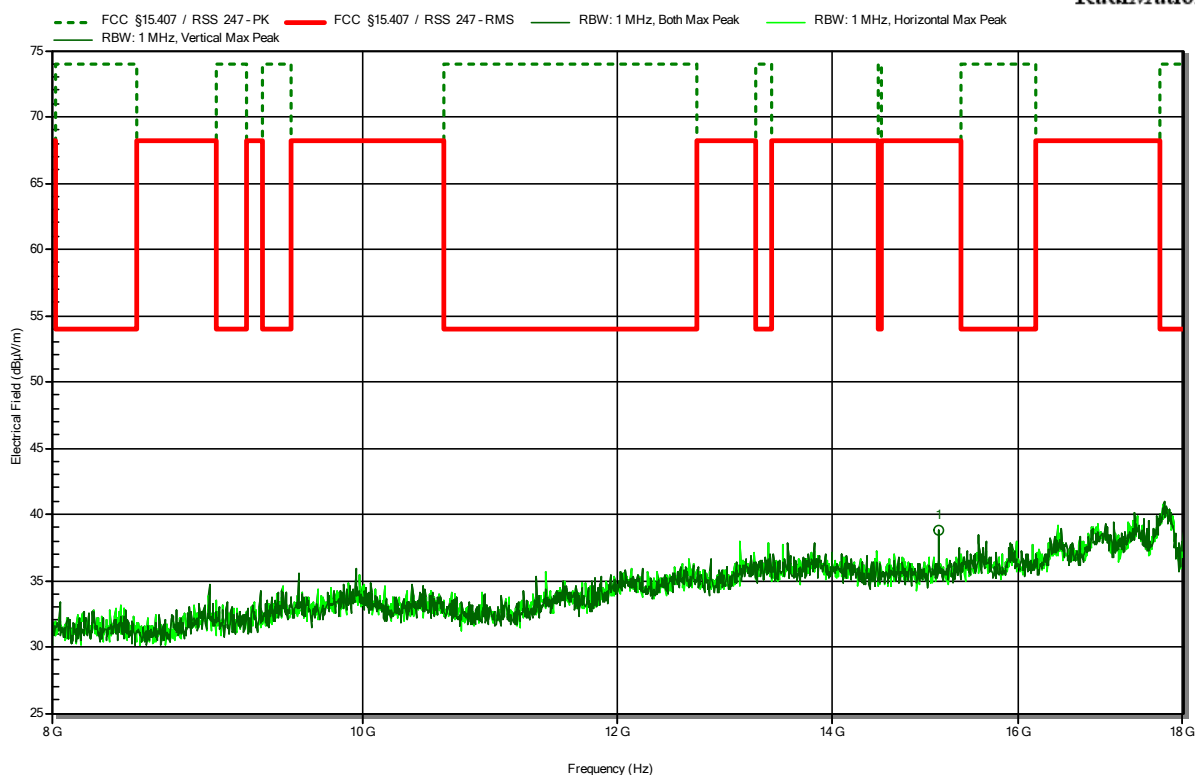


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
15.107 GHz	38.77 dBμV/m	68.2 dBμV/m	-29.43 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5610 MHz, MCS 4, VHT80, P=16dBm
 Test Date: 2023-06-19

Index 157

RadiMation

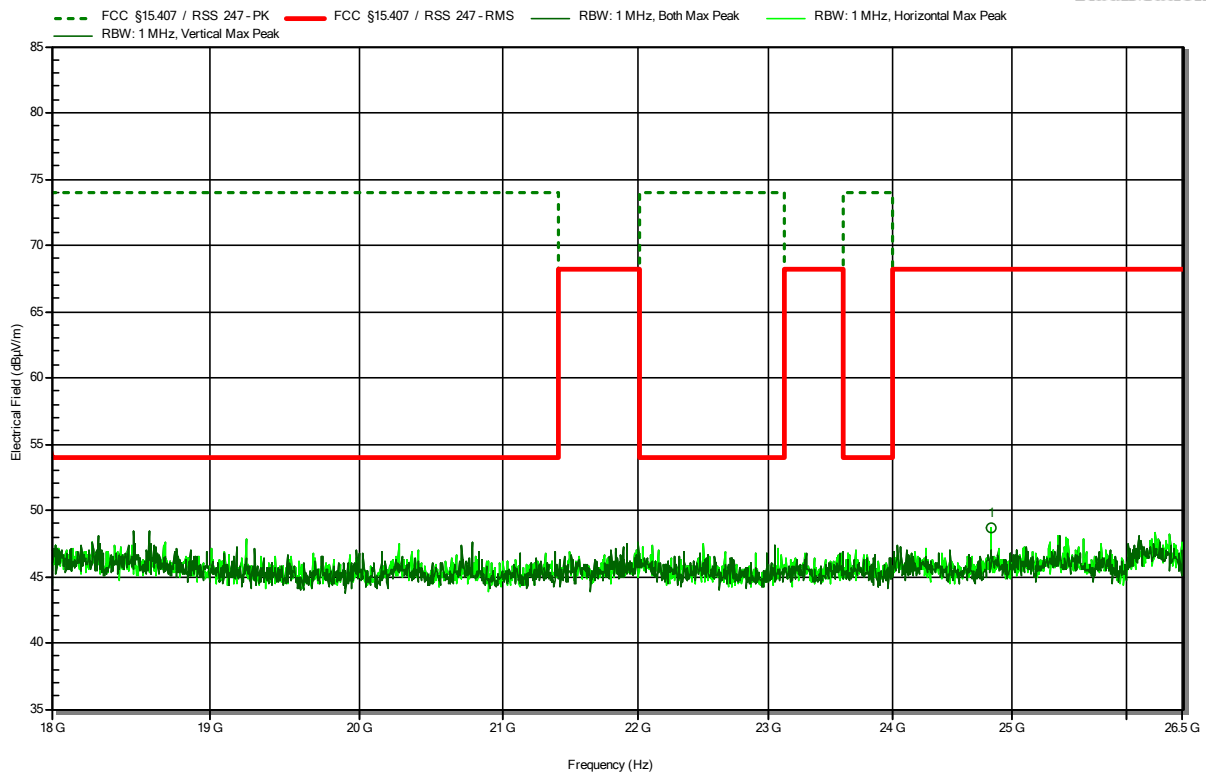


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
24.818 GHz	48.63 dBµV/m	68.2 dBµV/m	-19.57 dB	Pass	Horizontal

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5690 MHz, MCS 4, VHT80, P=16dBm
 Test Date: 2023-06-21

Index 173

RadiMation

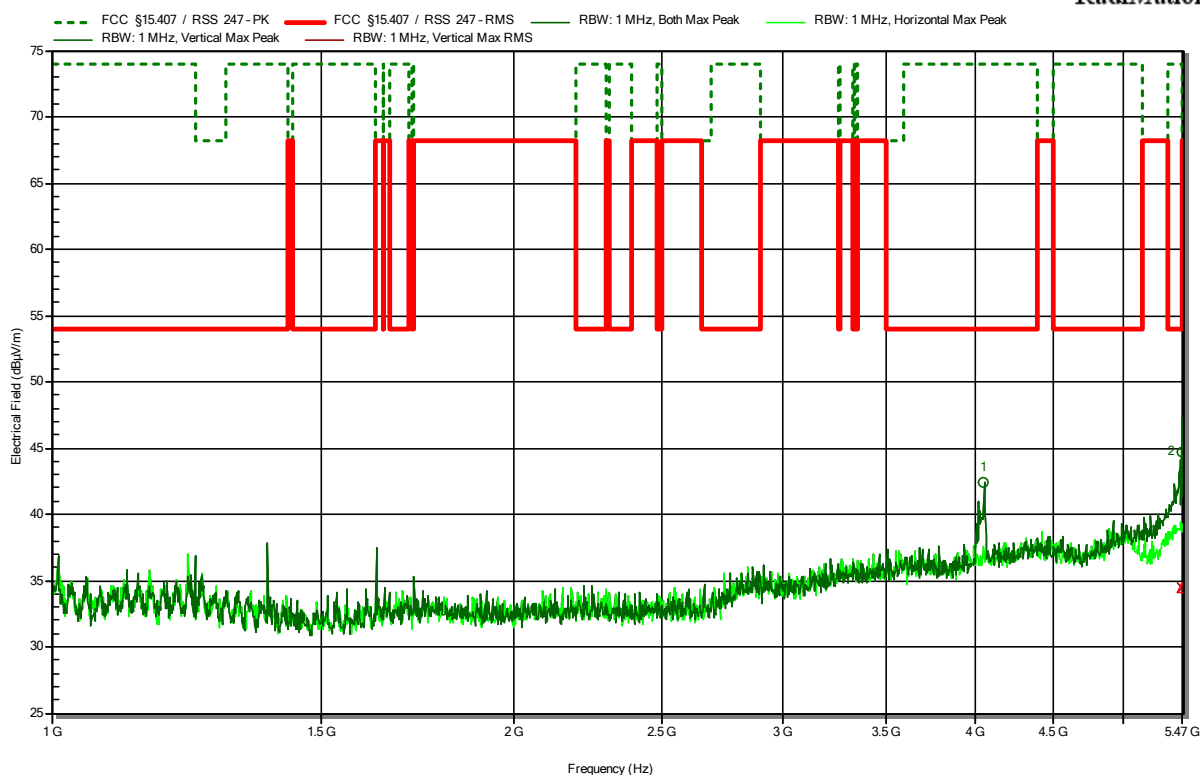


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
4.055 GHz	42.41 dBµV/m	74 dBµV/m	-31.59 dB	Pass	Vertical
5.459 GHz	44.68 dBµV/m	74 dBµV/m	-29.32 dB	Pass	Vertical
Frequency	RMS	RMS Limit	RMS Difference	RMS Status	Polarization
5.459 GHz	34.4 dBµV/m	54 dBµV/m	-19.6 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5690 MHz, MCS 4, VHT80, P=16dBm
 Test Date: 2023-06-21

Index 175

RadiMation

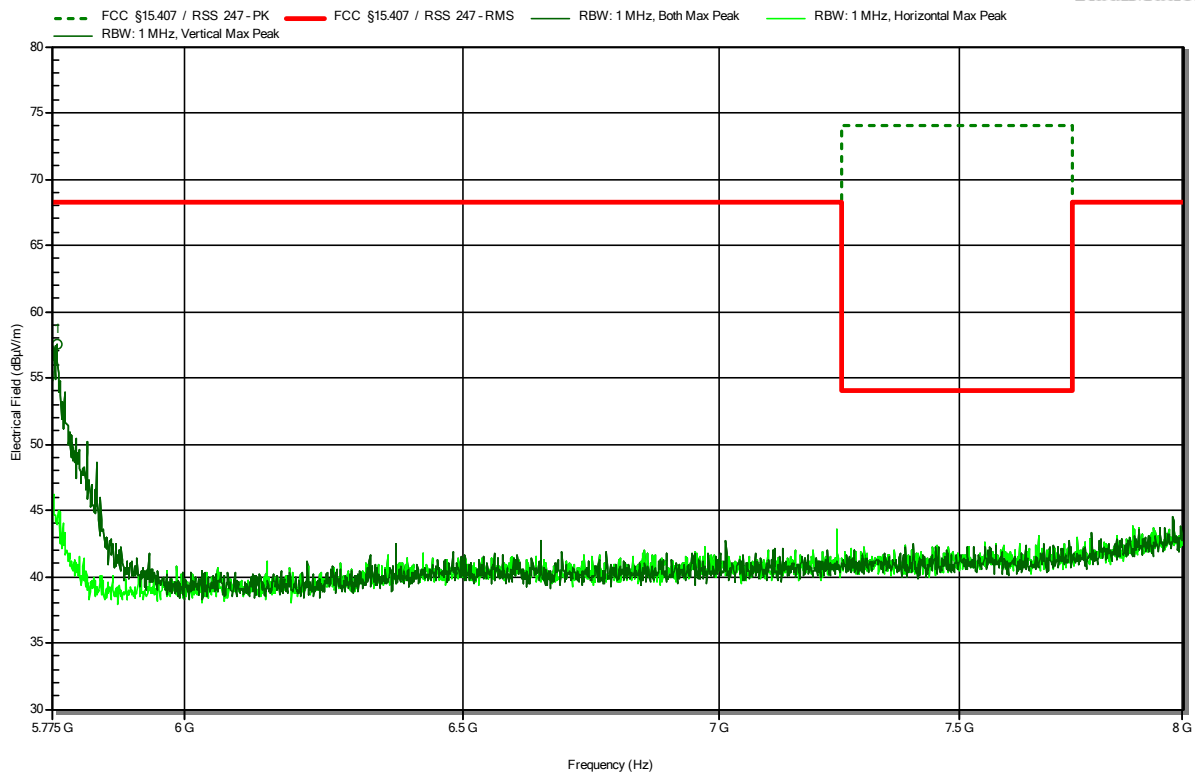


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
5.783 GHz	57.48 dBμV/m	68.2 dBμV/m	-10.72 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5690 MHz, MCS 4, VHT80, P=16dBm
 Test Date: 2023-07-07

Index 203

RadiMation

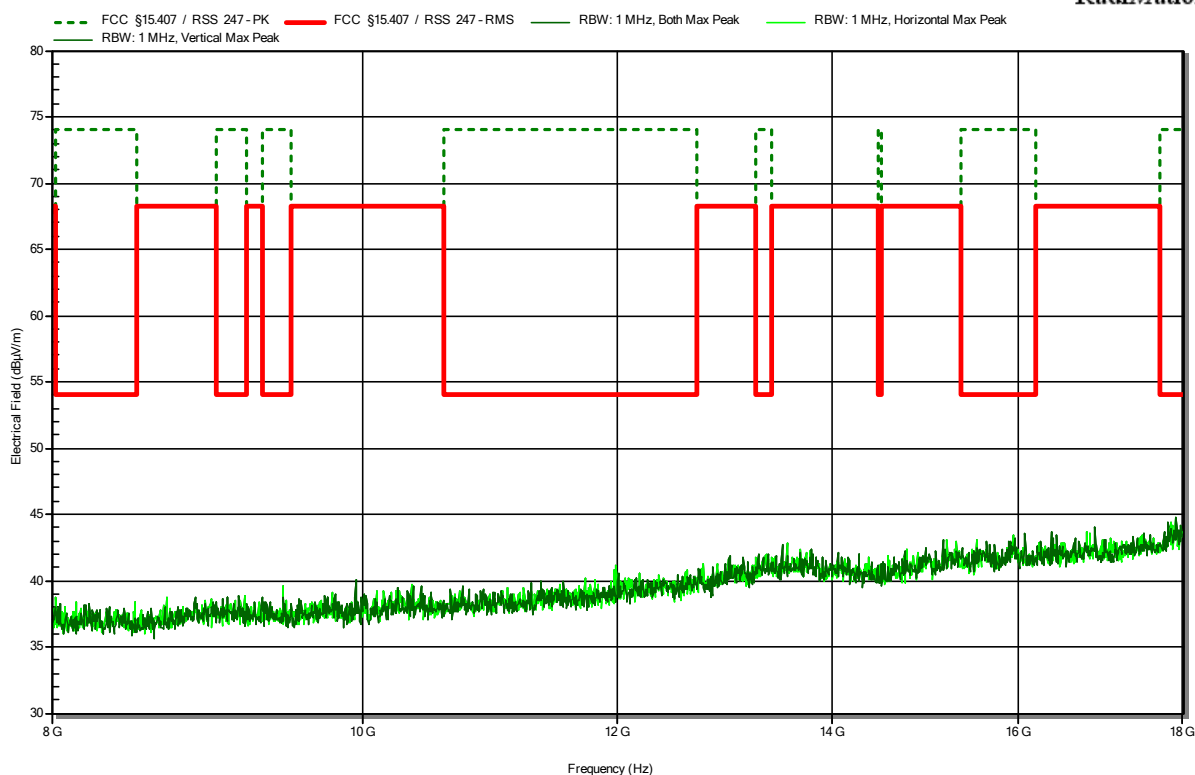


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5690 MHz, MCS 4, VHT80, P=16dBm
 Test Date: 2023-06-21

Index 176


RadiMation

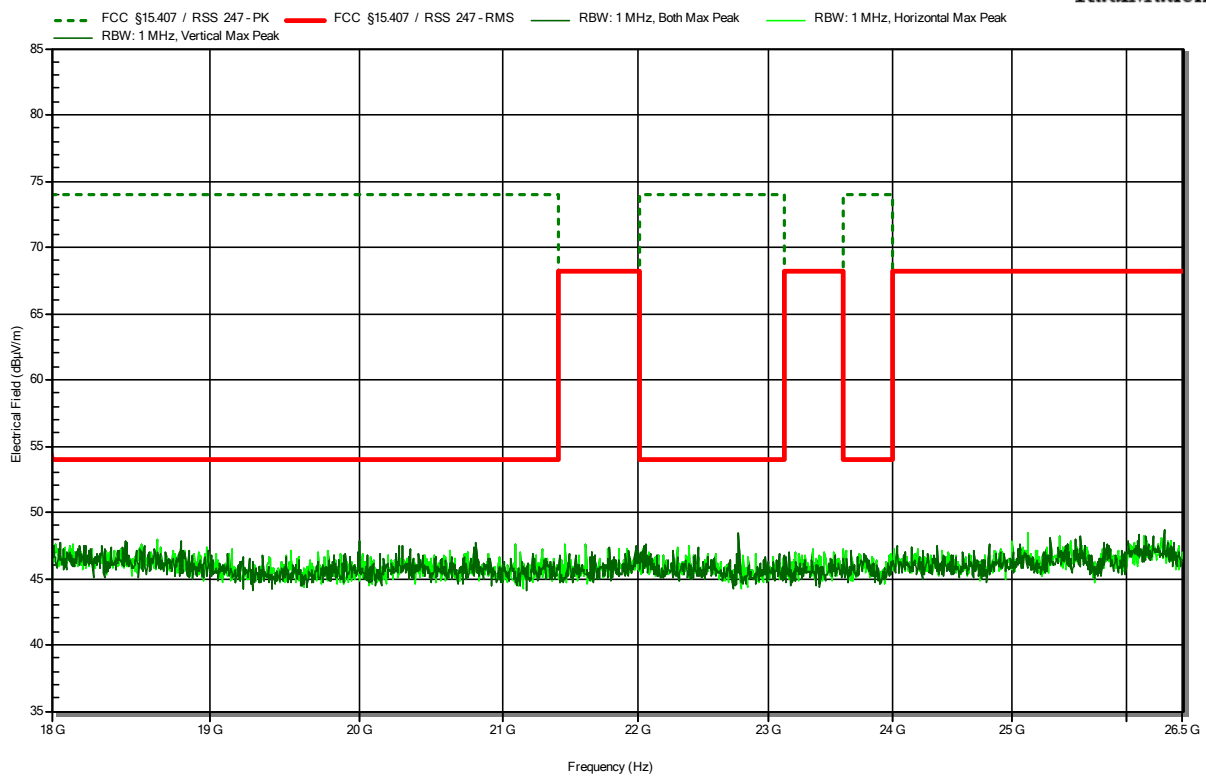

U-NII-3


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck VULB 9168
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11a, 5745 MHz, 6 Mbps, OFDM
 Test Date: 2023-06-05
 Note:

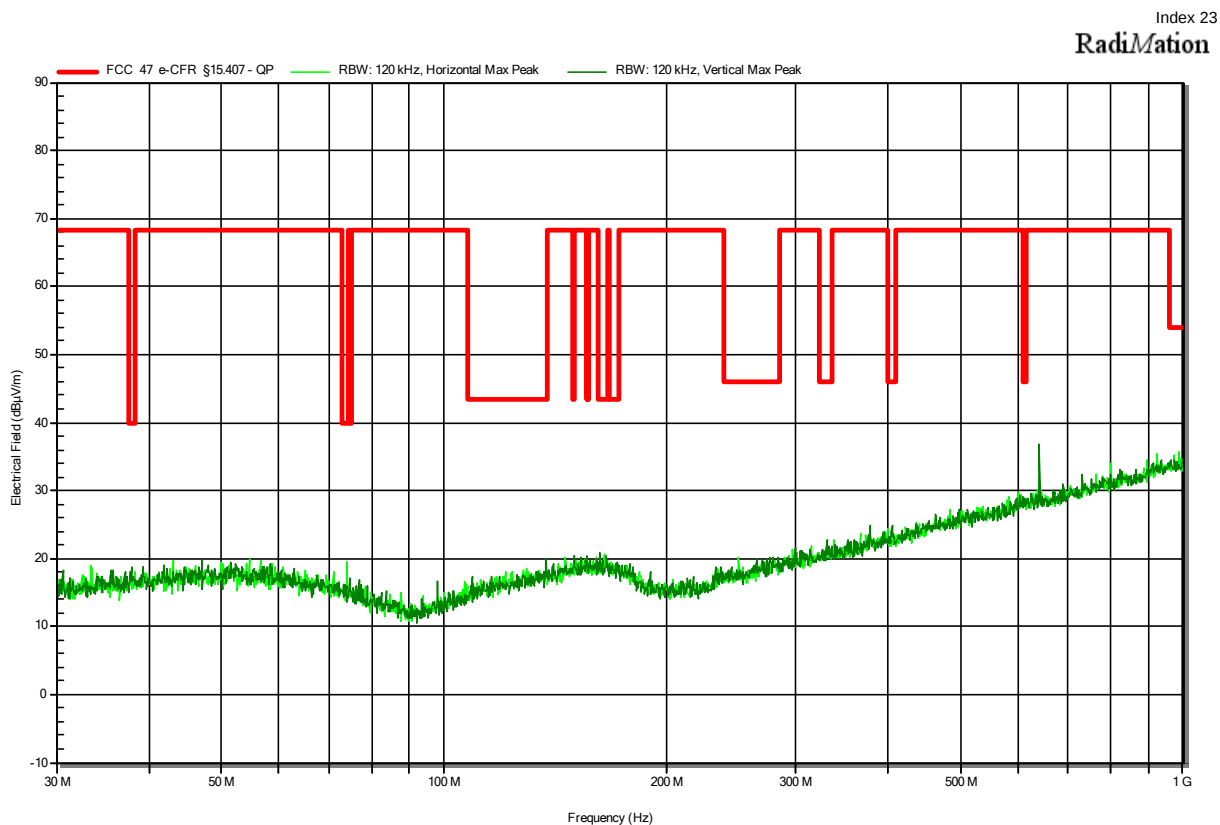


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5745 MHz, 6 Mbps, OFDM, P=16dBm
 Test Date: 2023-07-03
 Note:

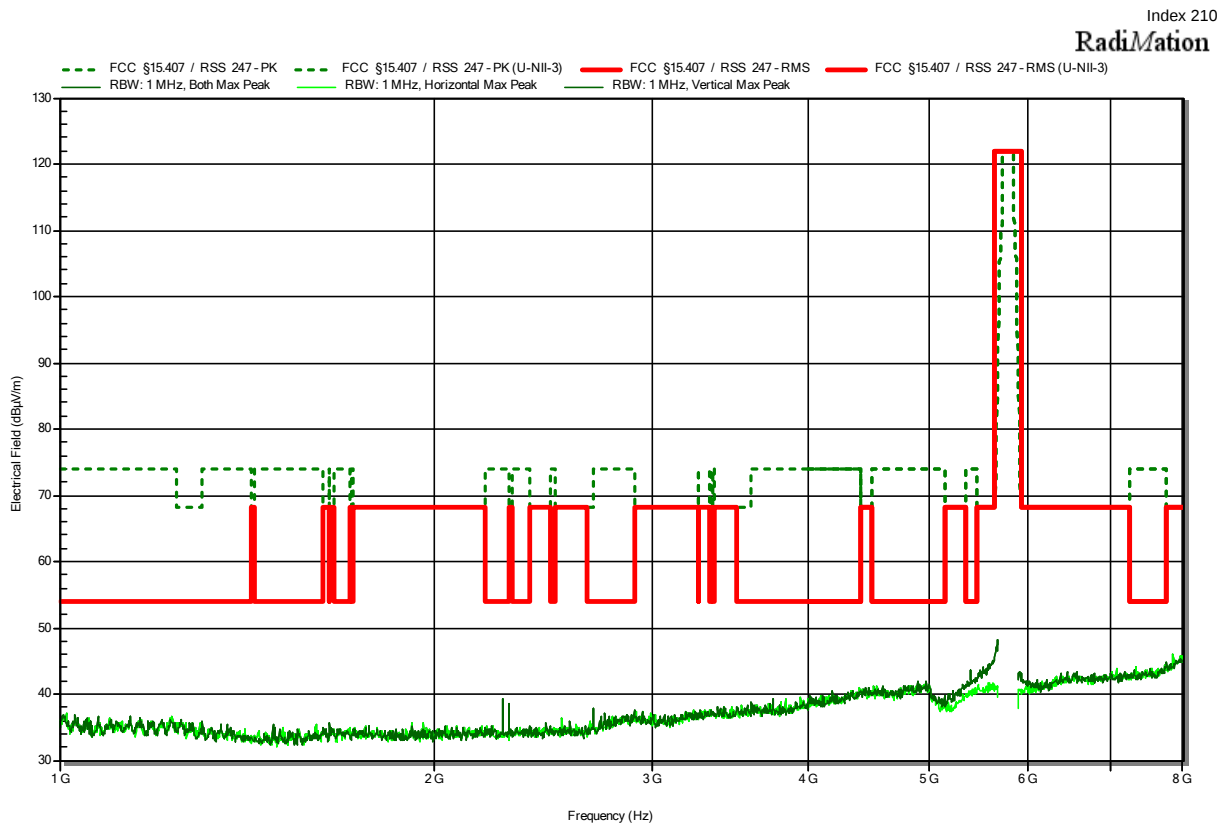

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5745 MHz, 6 Mbps, OFDM, P=16dBm
 Test Date: 2023-07-03
 Note: lower band area

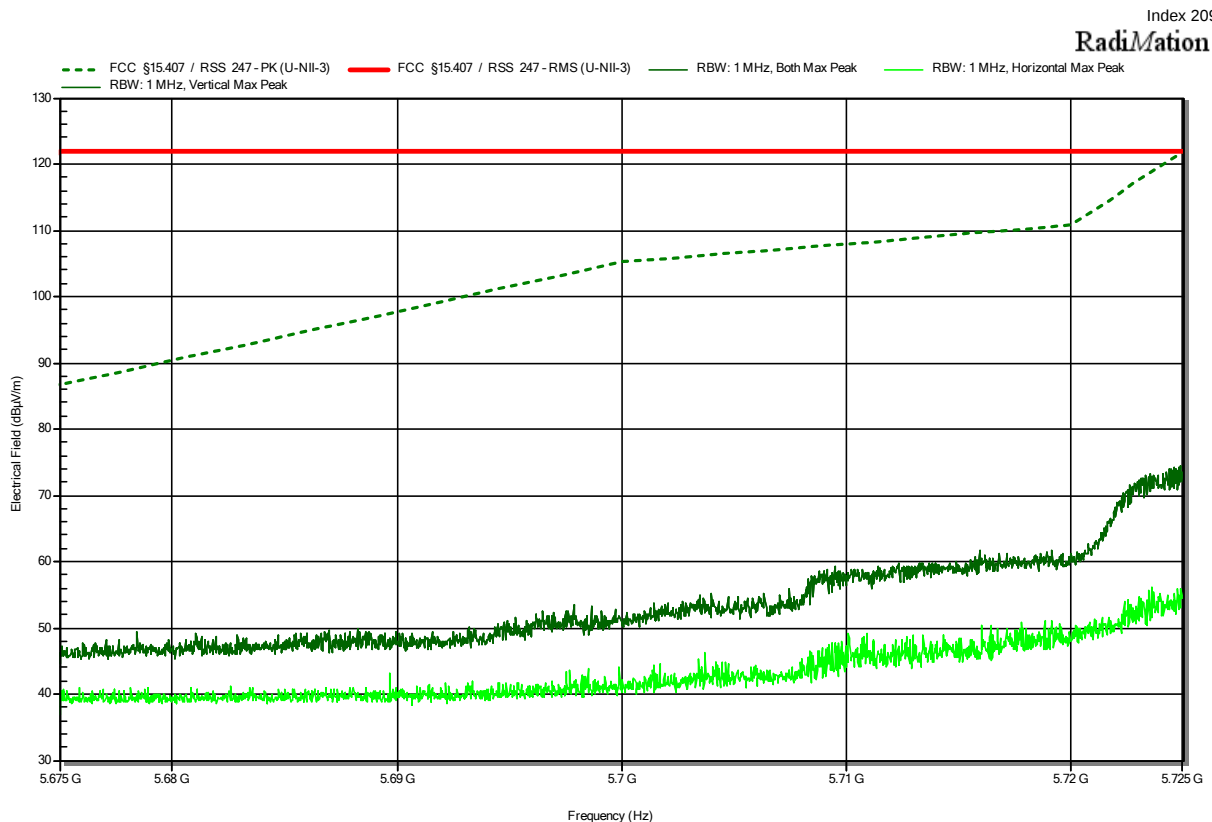


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5745 MHz, 6 Mbps, OFDM, P=16dBm
 Test Date: 2023-07-05
 Note:

Index 223

RadiMation

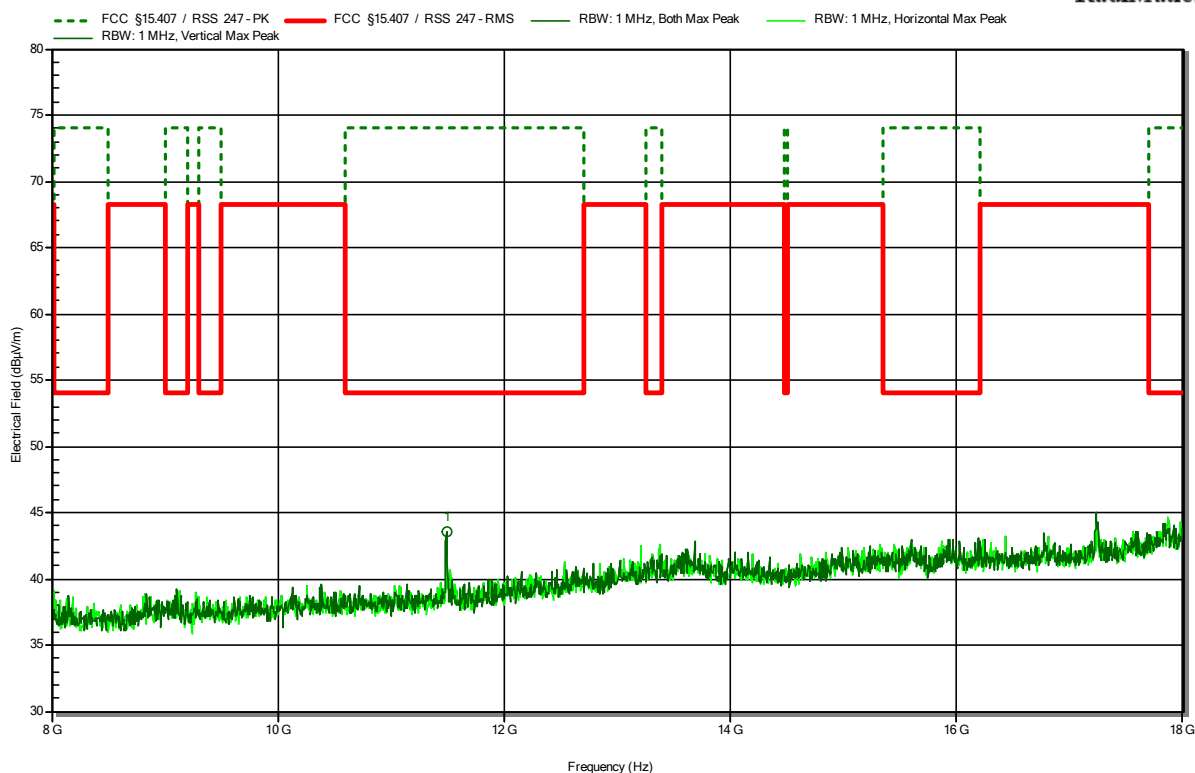


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
11.491 GHz	43.56 dBμV/m	74 dBμV/m	-30.44 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5745 MHz, 6 Mbps, OFDM, P=16dBm
 Test Date: 2023-07-03
 Note:

Index 205

RadiMation

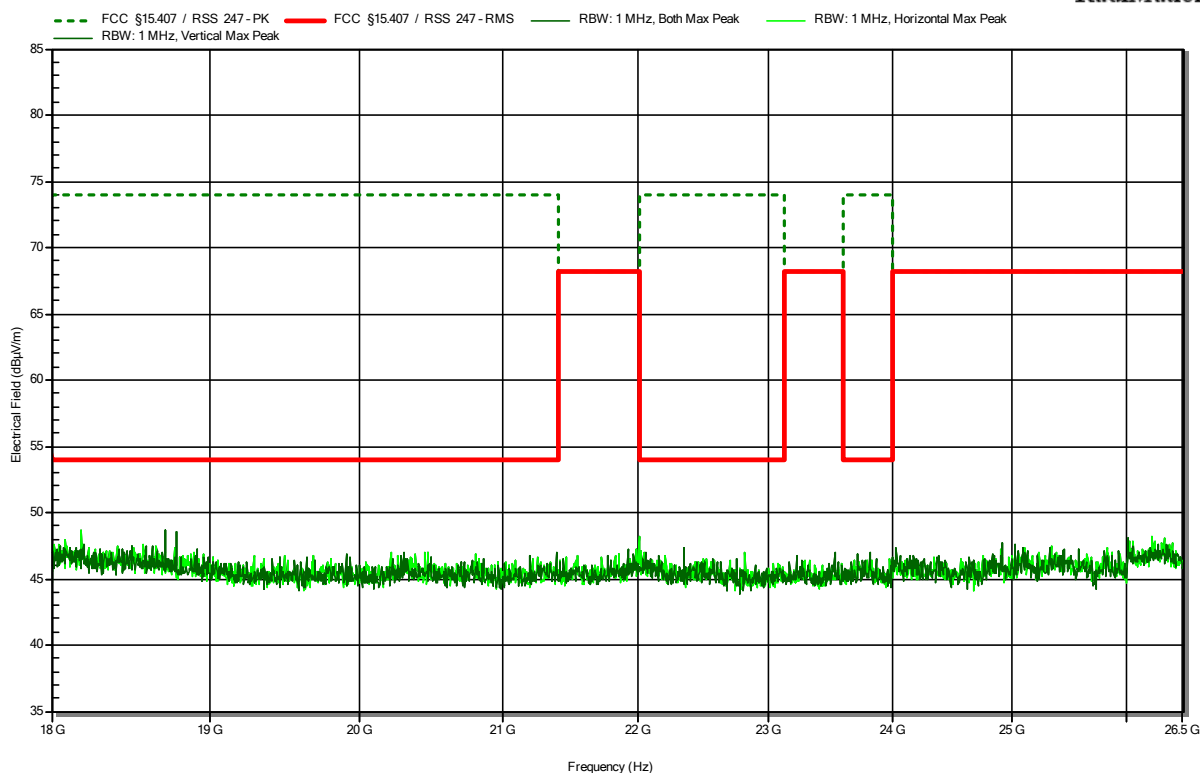


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Flann 22240-25
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5745 MHz, 6 Mbps, OFDM, P=16dBm
 Test Date: 2023-06-22


Index 189

RadiMation

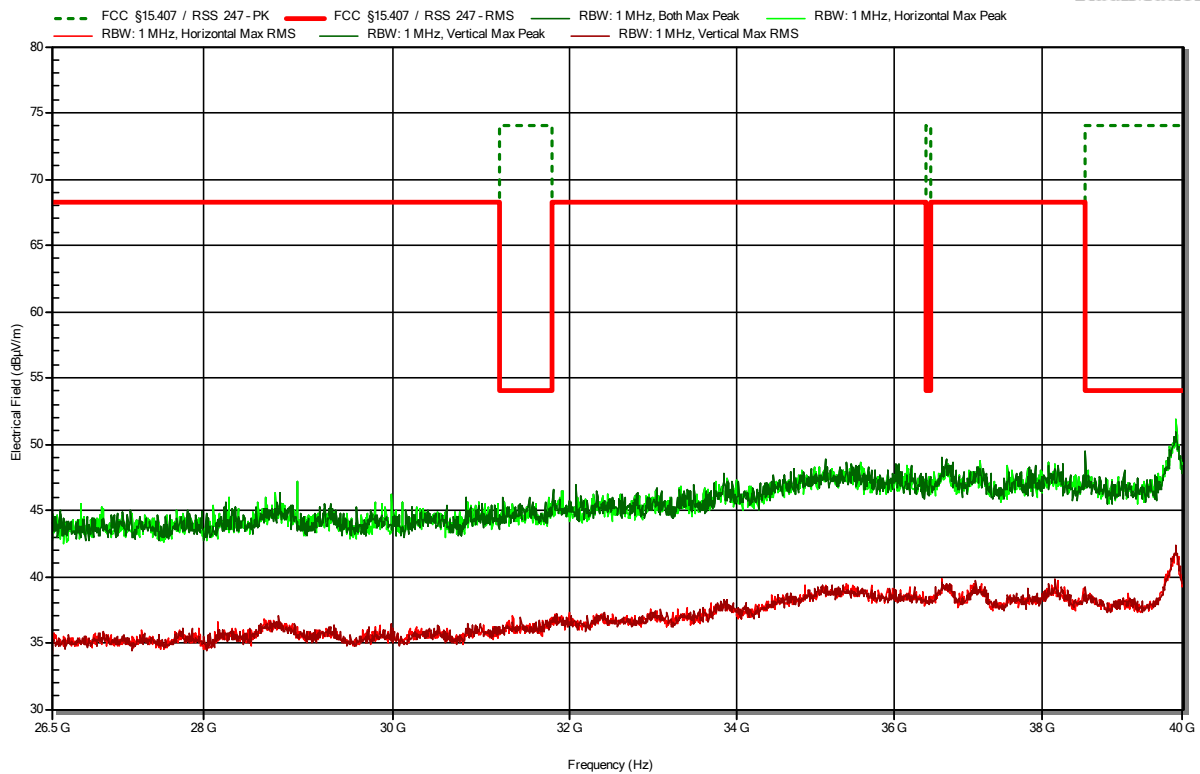


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck VULB 9168
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11a, 5785 MHz, 6 Mbps, OFDM
 Test Date: 2023-06-05
 Note:

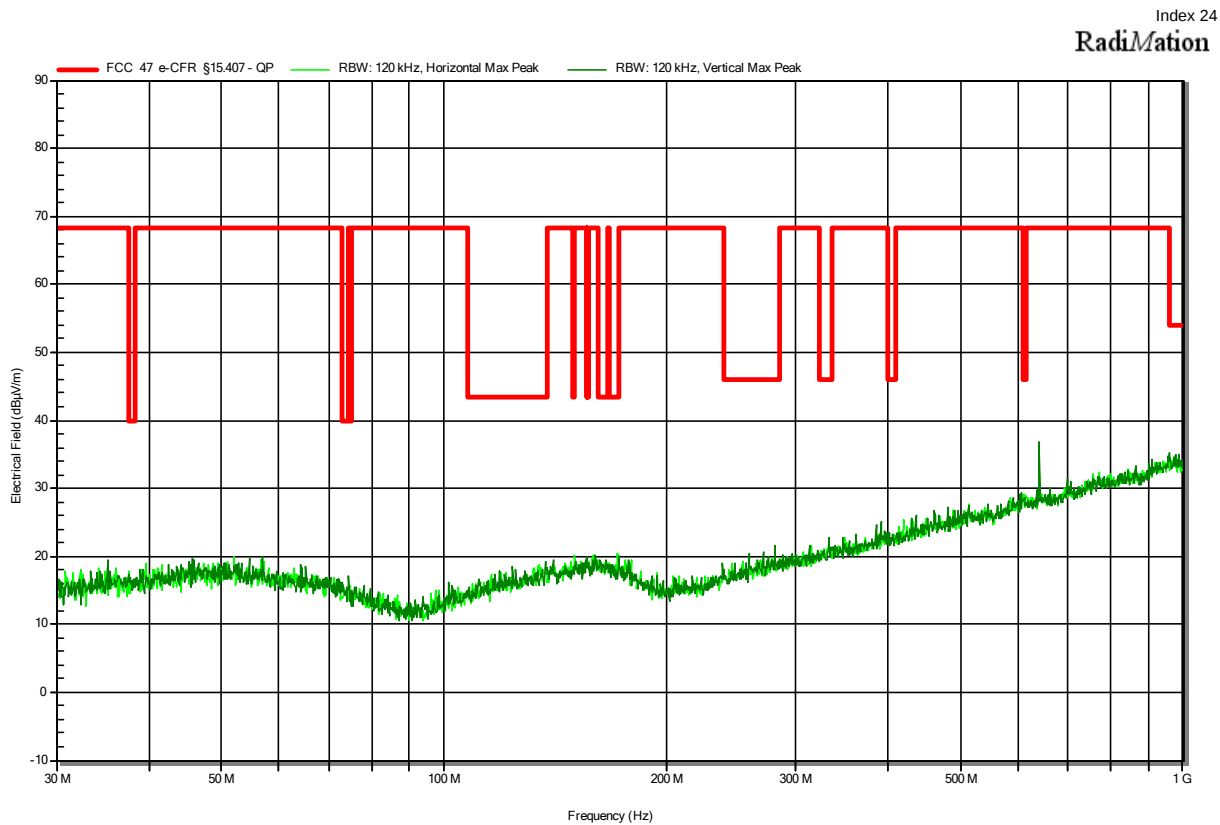

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5785 MHz, 6 Mbps, OFDM, P=19dBm
 Test Date: 2023-07-03
 Note:

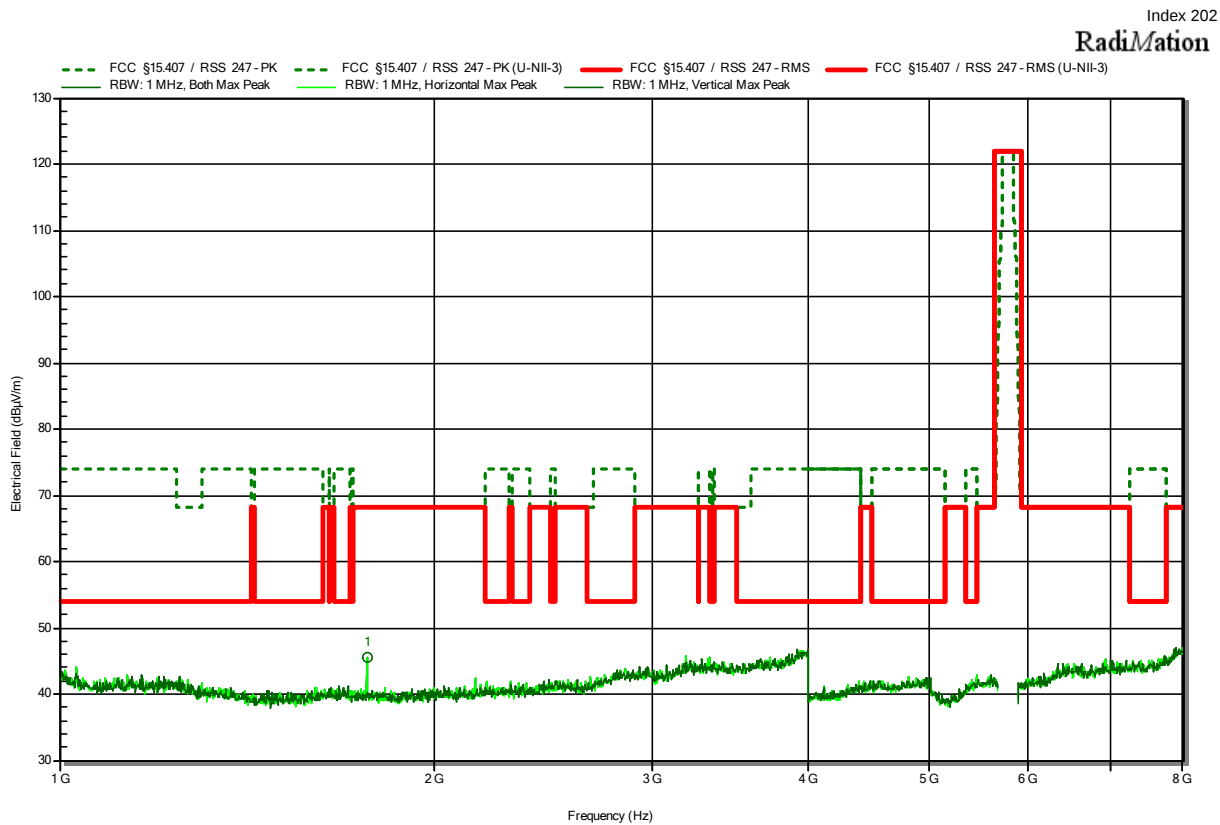


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
1.766 GHz	45.5 dBμV/m	68.2 dBμV/m	-22.7 dB	Pass	Horizontal

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5785 MHz, 6 Mbps, OFDM, P=19dBm
 Test Date: 2023-07-05
 Note:

Index 224

RadiMation

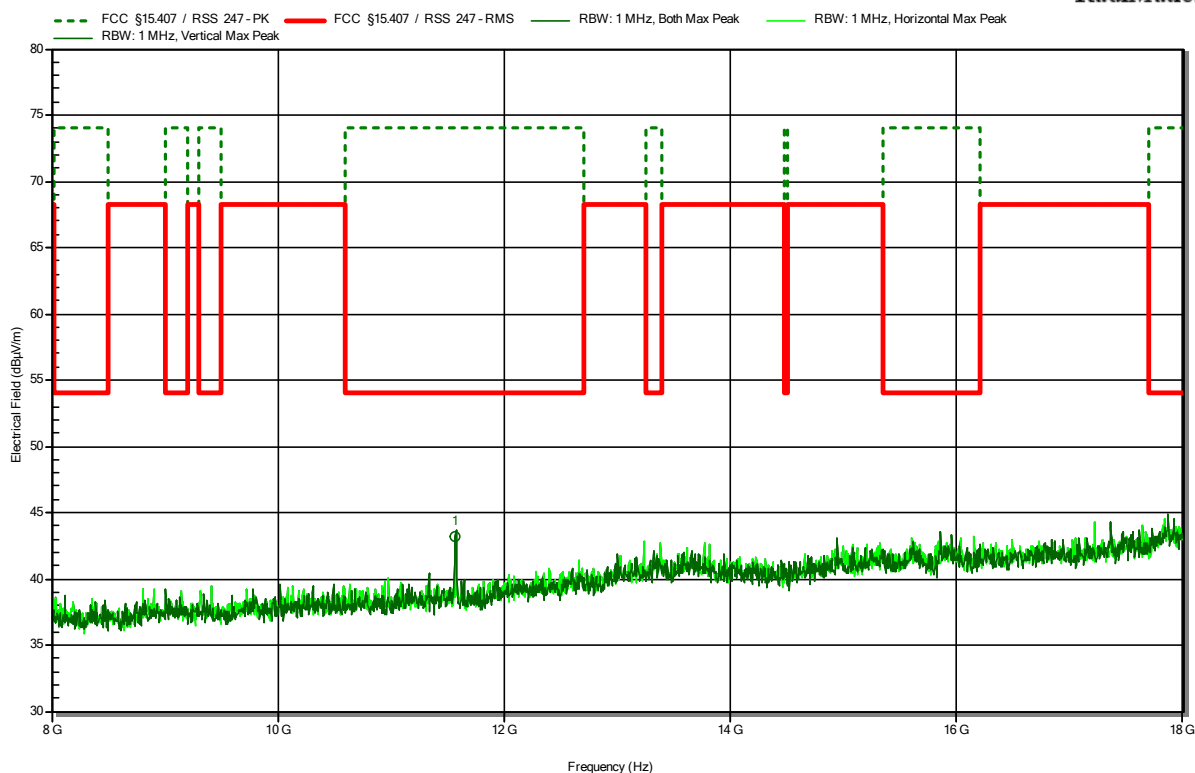


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
11.569 GHz	43.15 dBμV/m	74 dBμV/m	-30.85 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5785 MHz, 6 Mbps, OFDM, P=19dBm
 Test Date: 2023-07-03
 Note:

Index 204

RadiMation

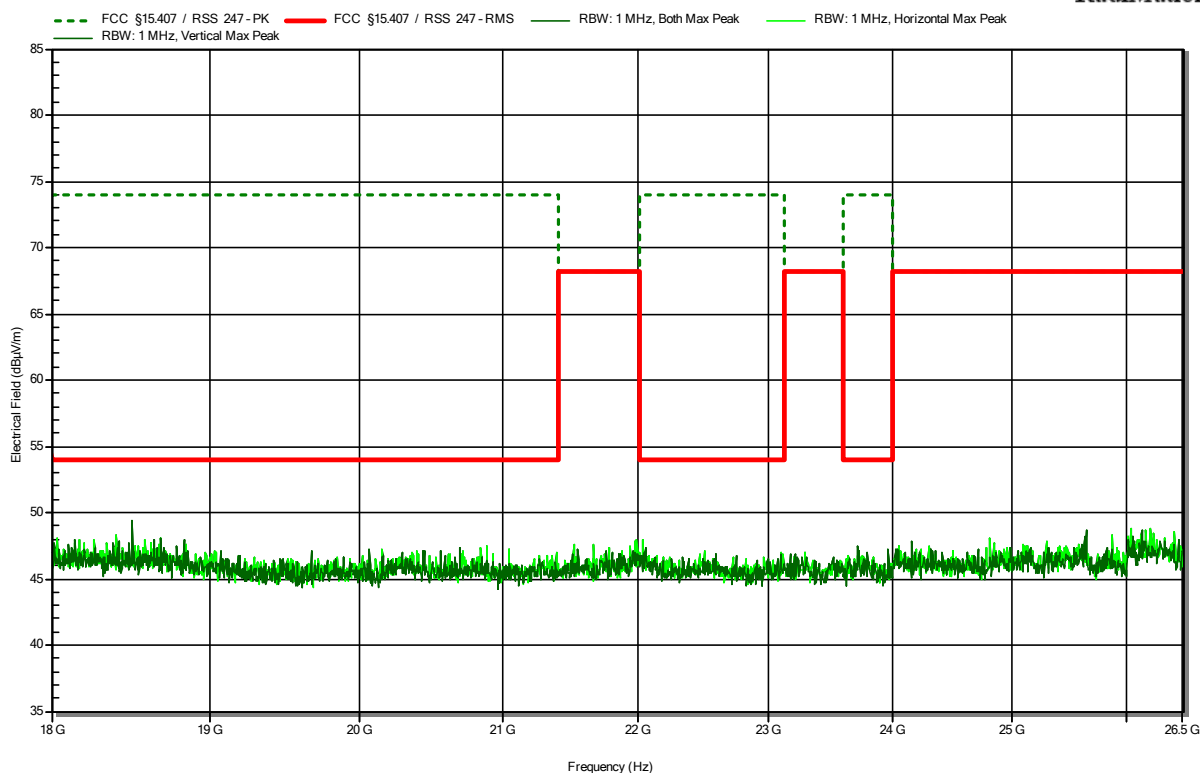


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Flann 22240-25
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5785 MHz, 6 Mbps, OFDM, P=19dBm
 Test Date: 2023-06-22
 Note:


Index 190

RadiMation

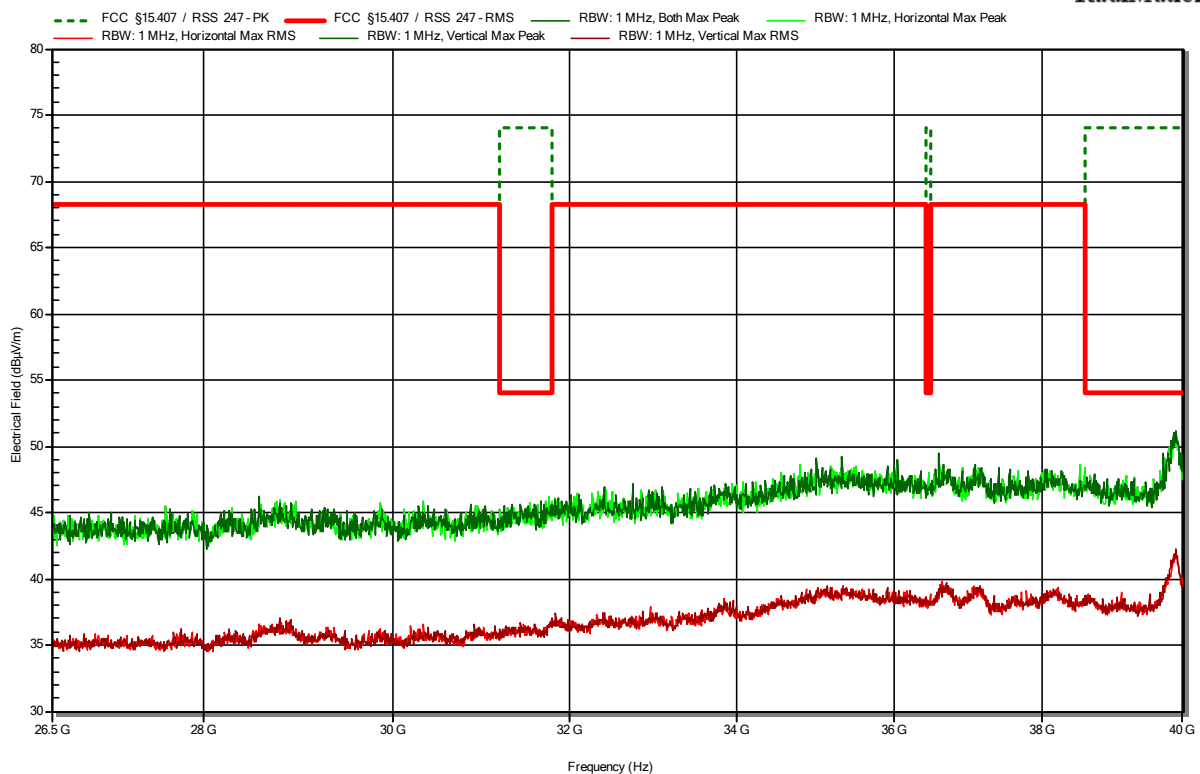

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck VULB 9168
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11a, 5825 MHz, 6 Mbps, OFDM
 Test Date: 2023-06-05
 Note:

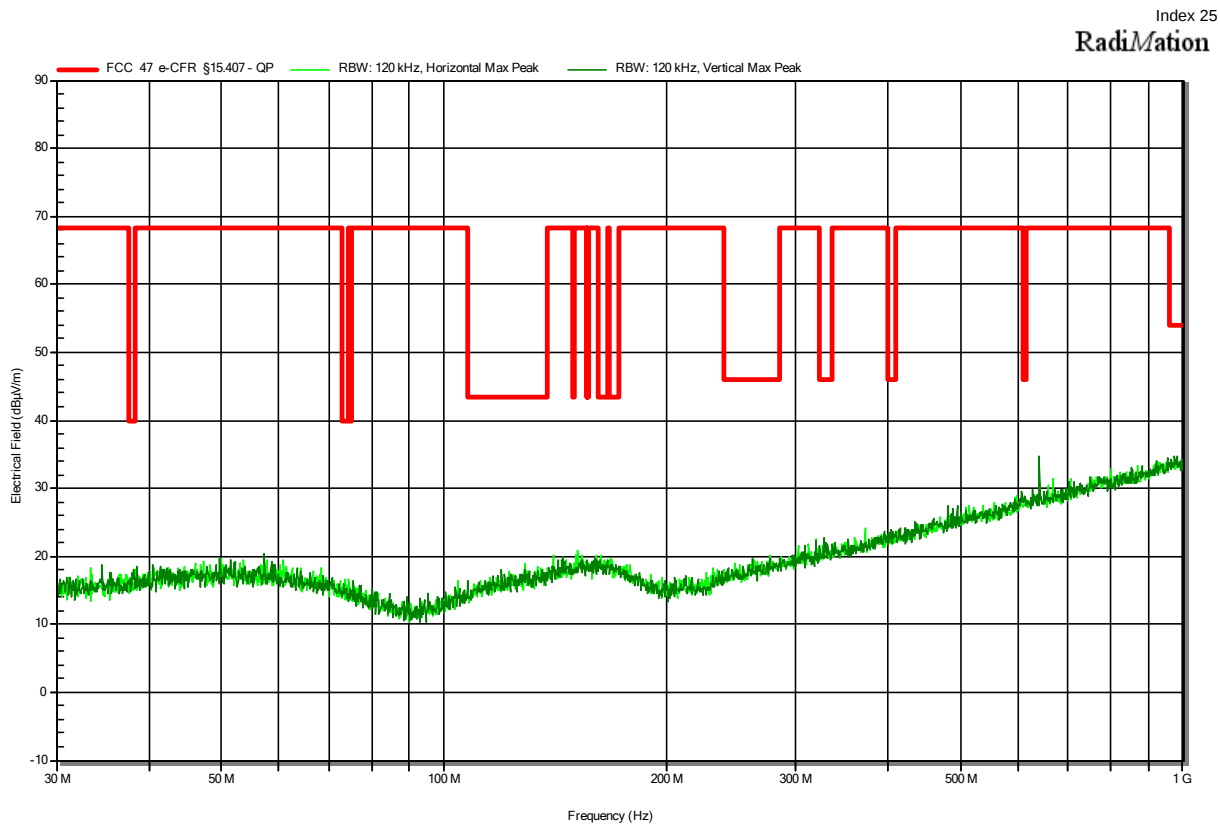


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5825 MHz, 6 Mbps, OFDM, P=19dBm
 Test Date: 2023-06-27
 Note:

Index 193

RadiMation

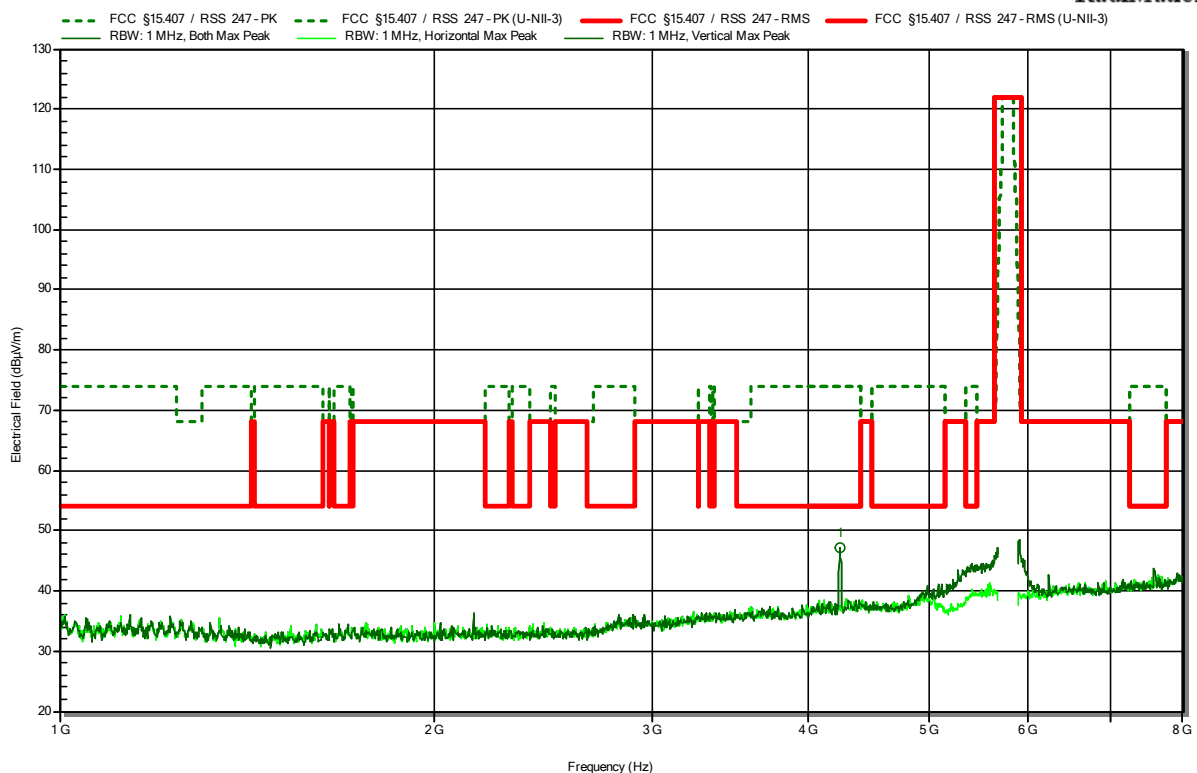


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
4.237 GHz	47.21 dBV/m	74 dBV/m	-26.79 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5825 MHz, 6 Mbps, OFDM, P=19dBm
 Test Date: 2023-06-27
 Note: upper band area

Index 192

RadiMation

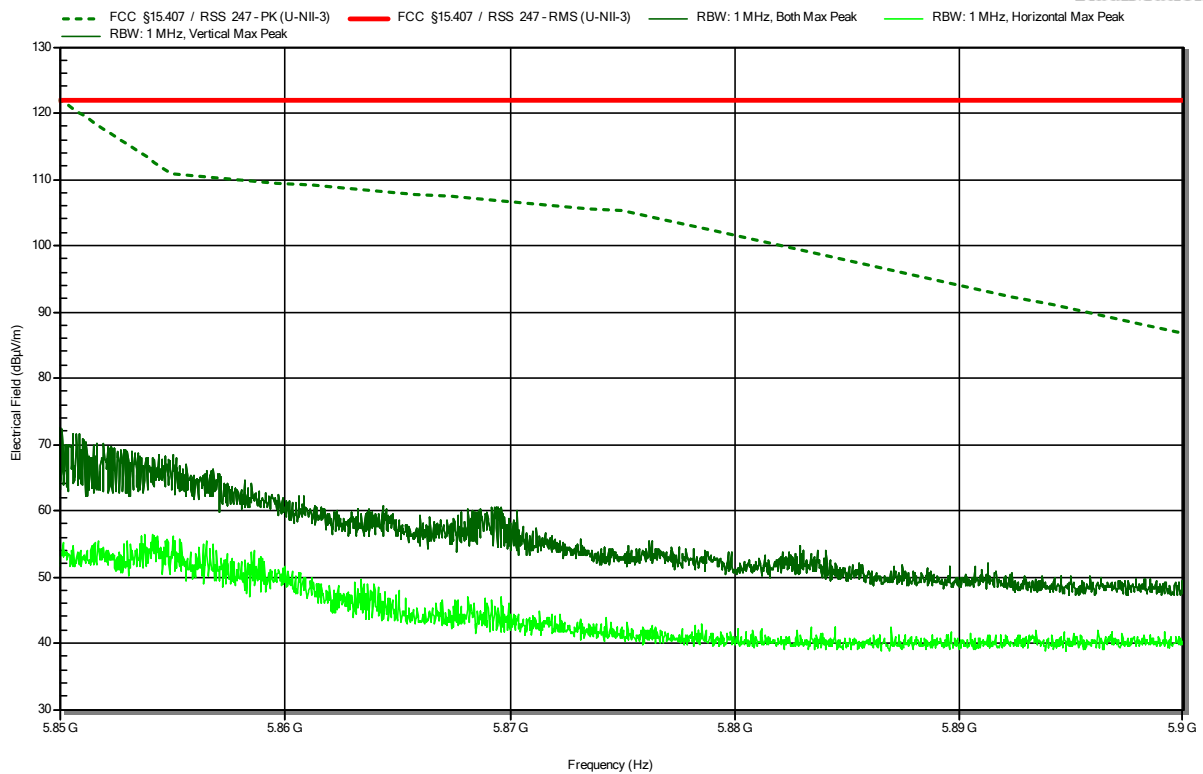


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5825 MHz, 6 Mbps, OFDM, P=19dBm
 Test Date: 2023-07-05
 Note:

Index 225

RadiMation

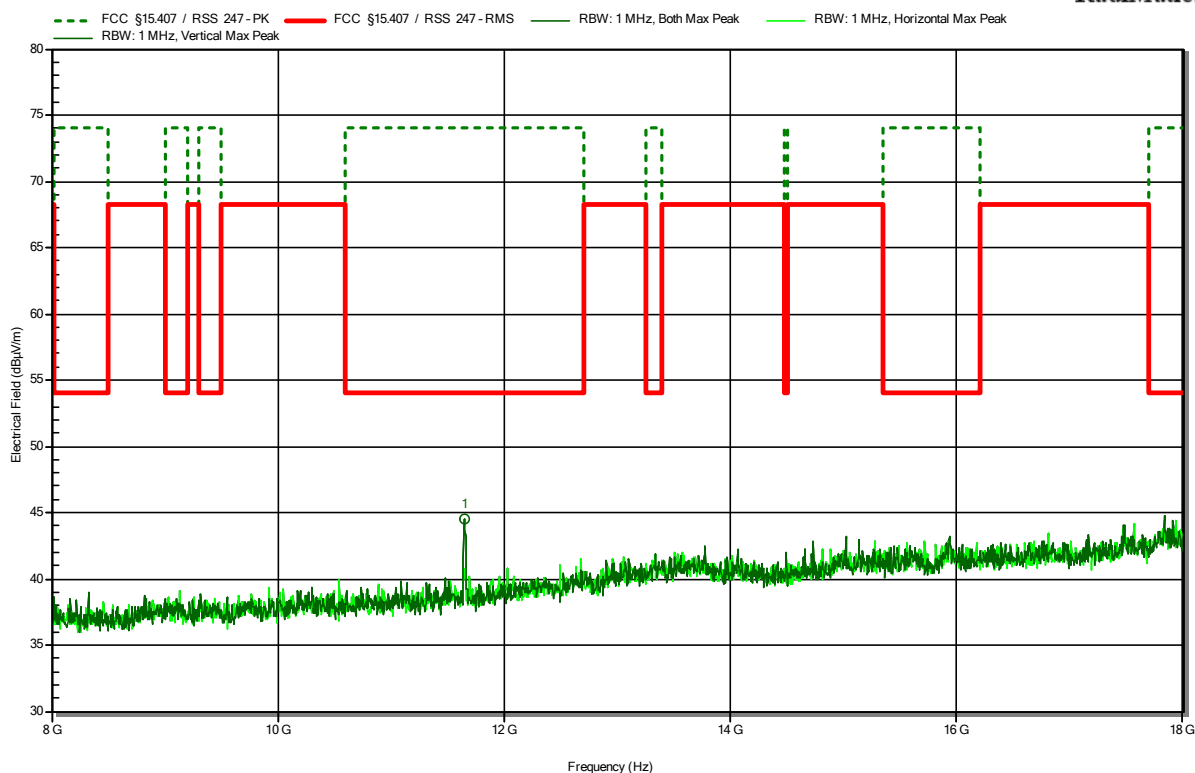


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
11.645 GHz	44.48 dBμV/m	74 dBμV/m	-29.52 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5825 MHz, 6 Mbps, OFDM, P=19dBm
 Test Date: 2023-06-27
 Note:

Index 195

RadiMation

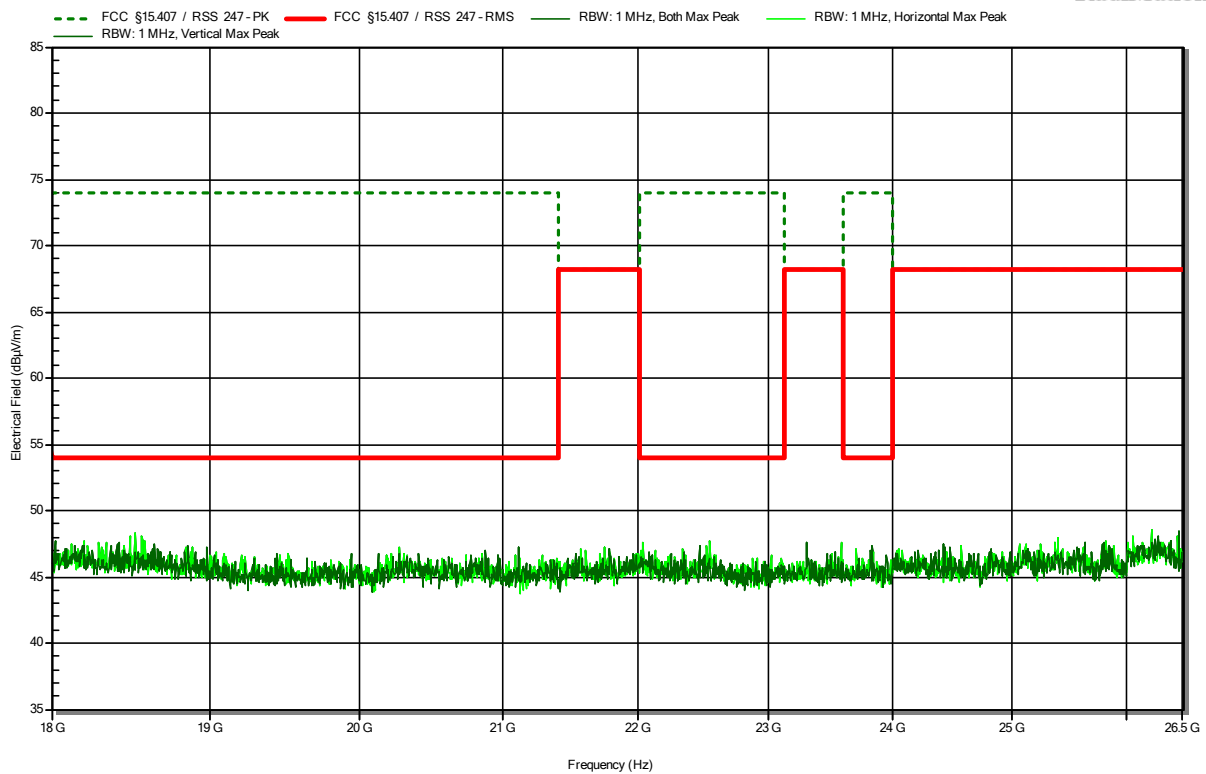


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Flann 22240-25
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5825 MHz, 6 Mbps, OFDM, P=19dBm
 Test Date: 2023-06-22
 Note:

Index 191

RadiMation

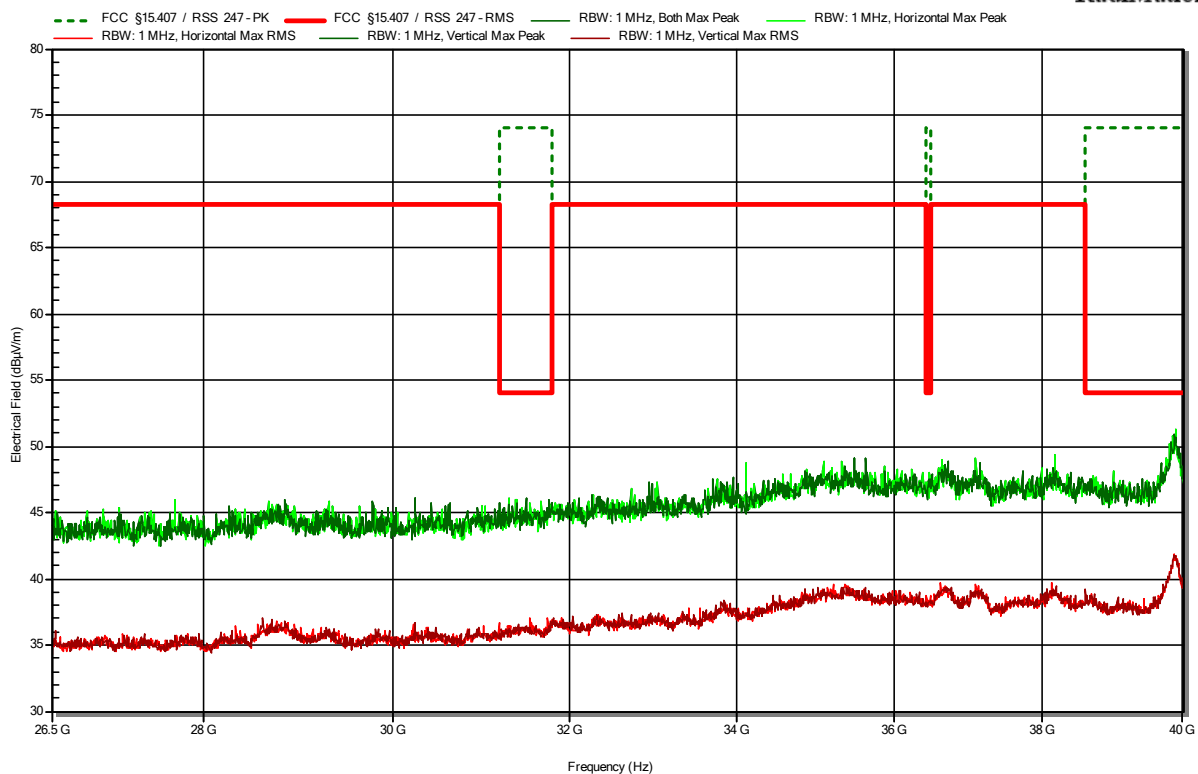


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5755 MHz, MCS 0, HT40, P=16dBm
 Test Date: 2023-07-04
 Note:

Index 214


RadiMation

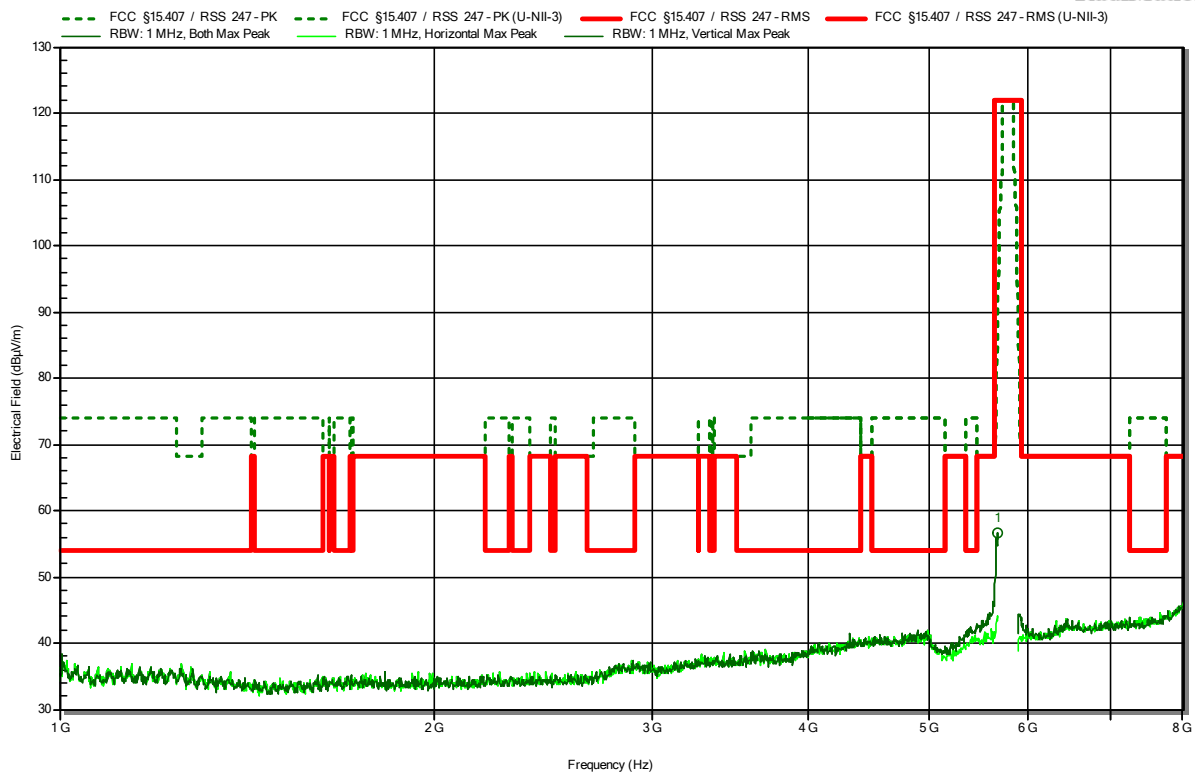

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
5.671 GHz	56.58 dBμV/m	83.56 dBμV/m	-26.98 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5755 MHz, MCS 0, HT40, P=16dBm
 Test Date: 2023-07-04
 Note: lower band area

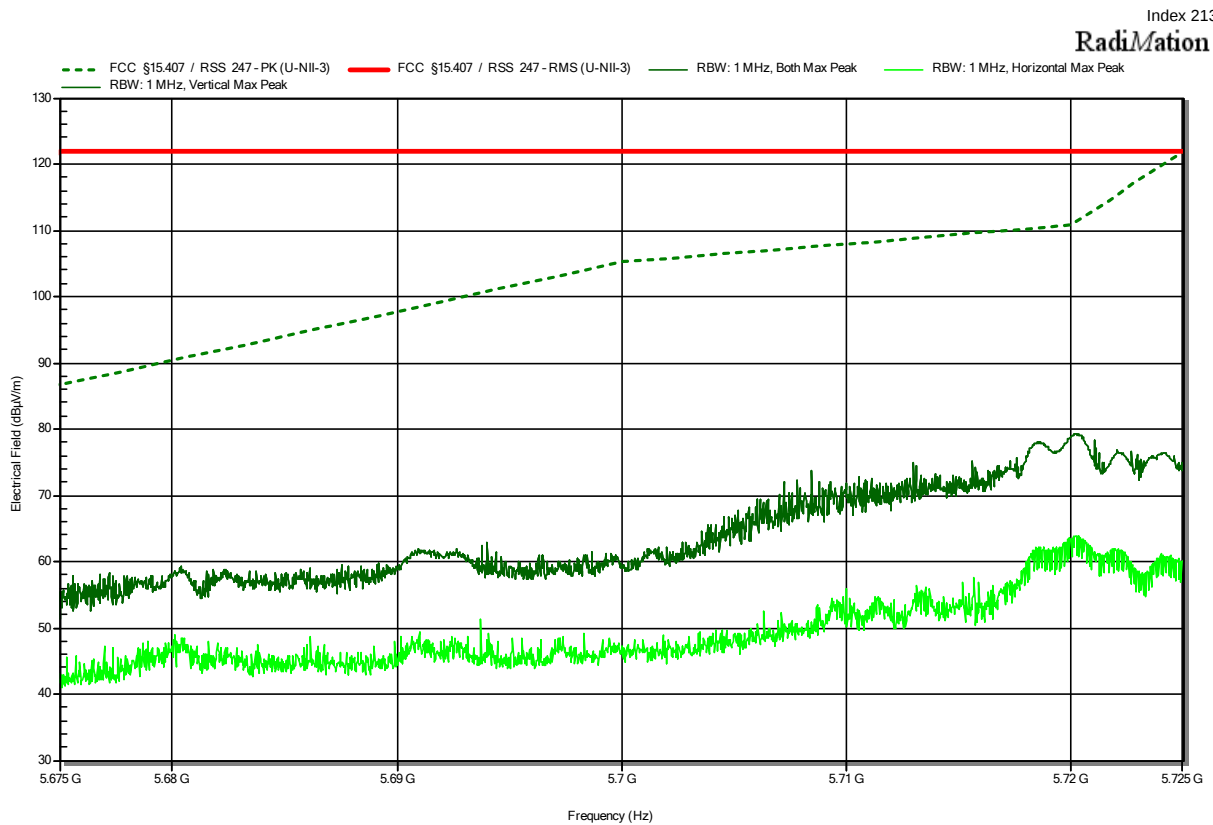


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5755 MHz, MCS 0, HT40, P=16dBm
 Test Date: 2023-07-05
 Note:

Index 226

RadiMation

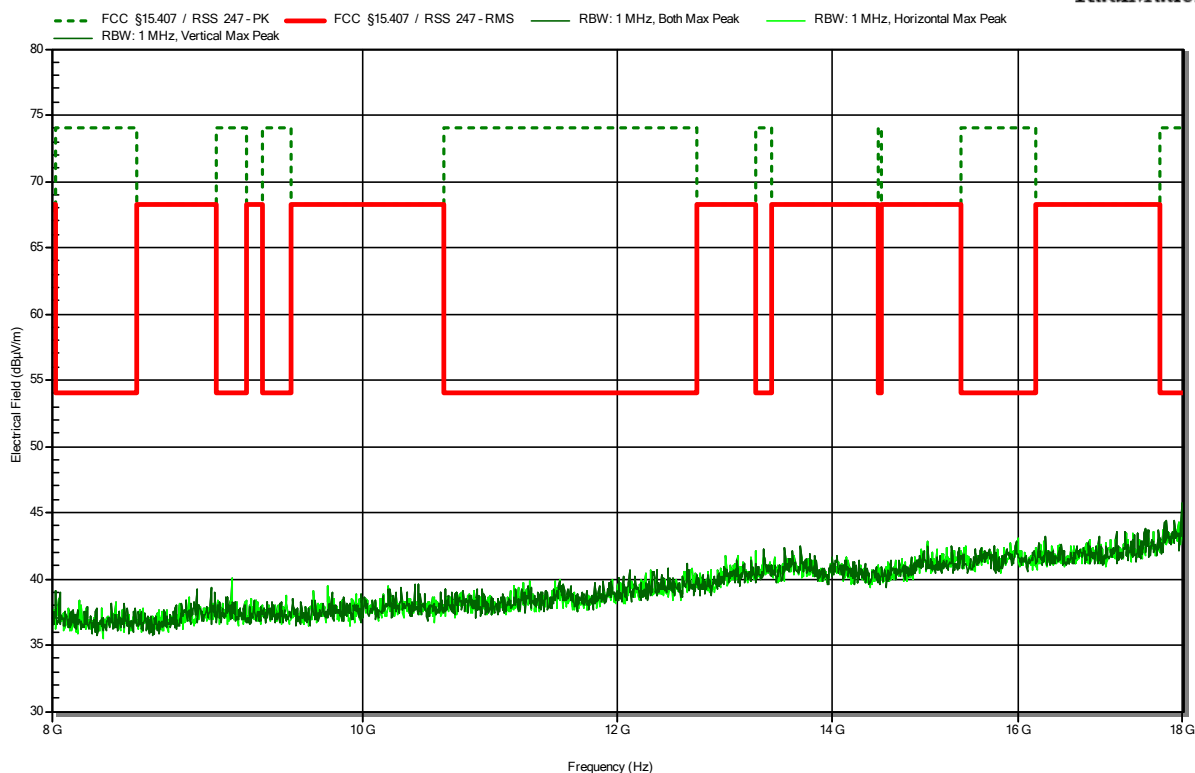


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5755 MHz, MCS 0, HT40, P=16dBm
 Test Date: 2023-07-04
 Note:

Index 216

RadiMation

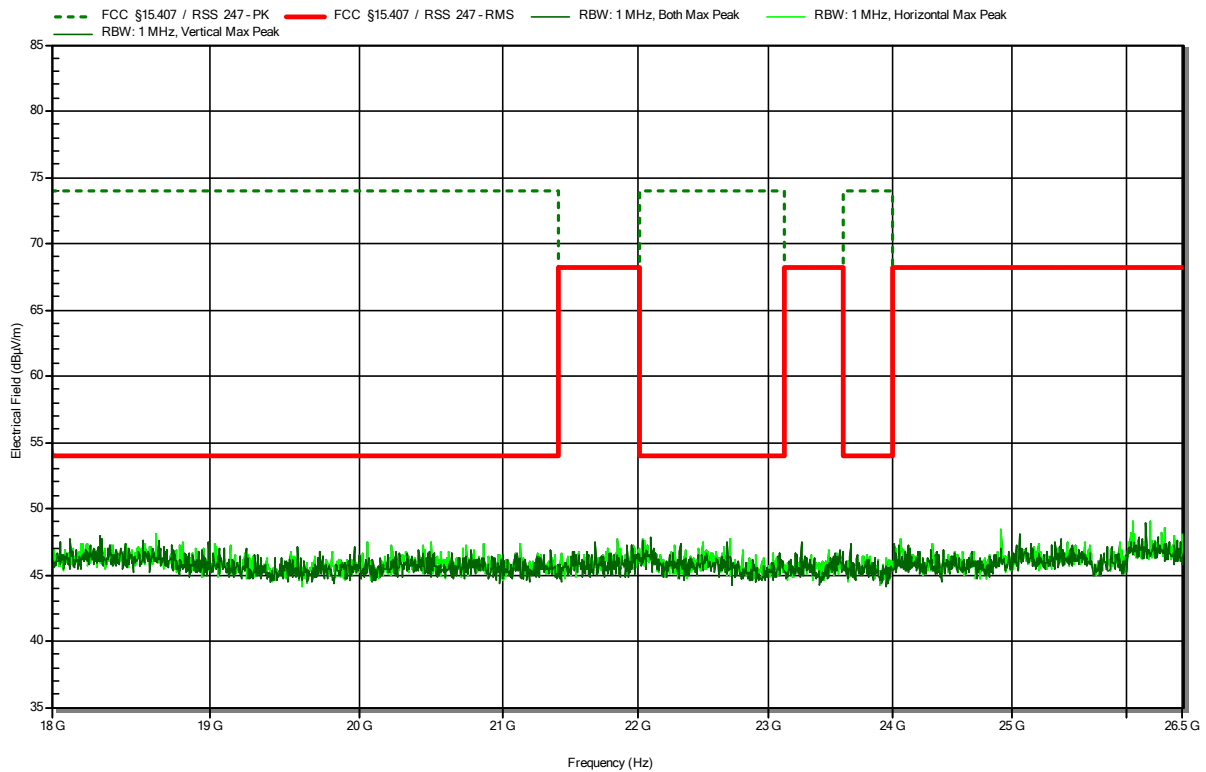


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5795 MHz, MCS 0, HT40, P=19dBm
 Test Date: 2023-07-04
 Note:

Index 218

RadiMation

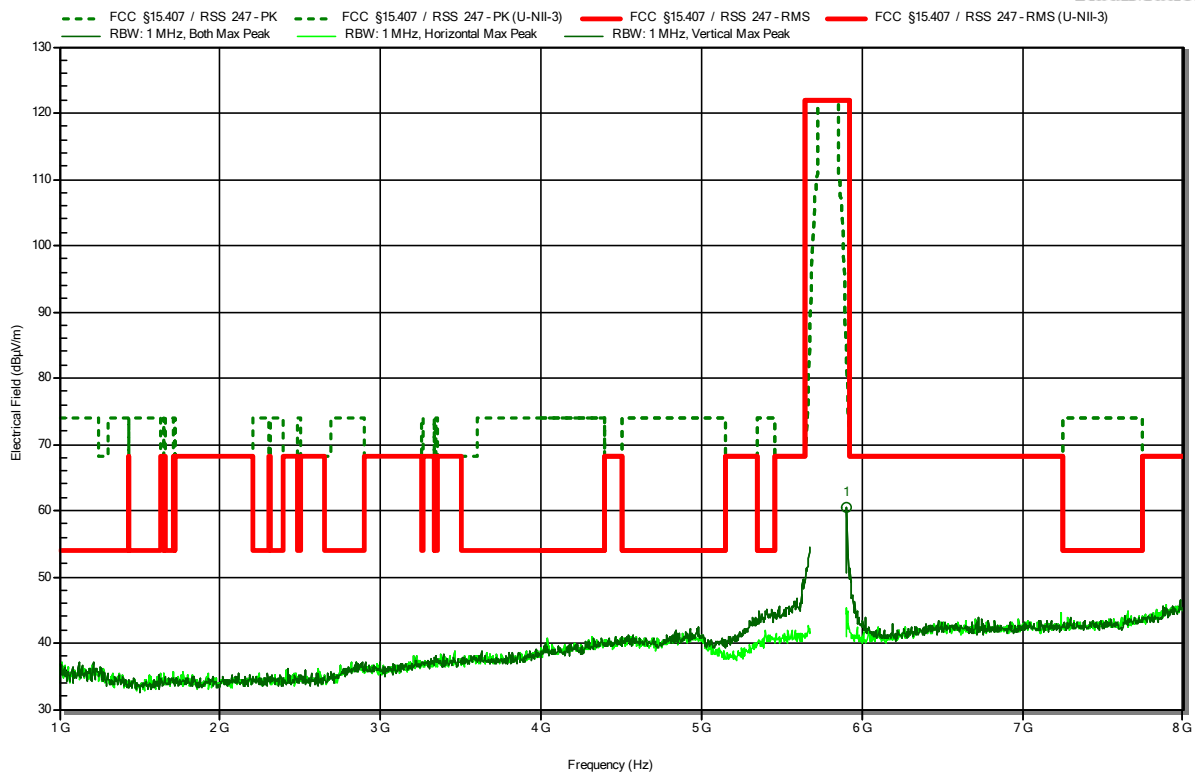


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
5.905 GHz	60.5 dBμV/m	83.13 dBμV/m	-22.63 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5795 MHz, MCS 0, HT40, P=19dBm
 Test Date: 2023-07-04
 Note: upper band area

Index 217

RadiMation

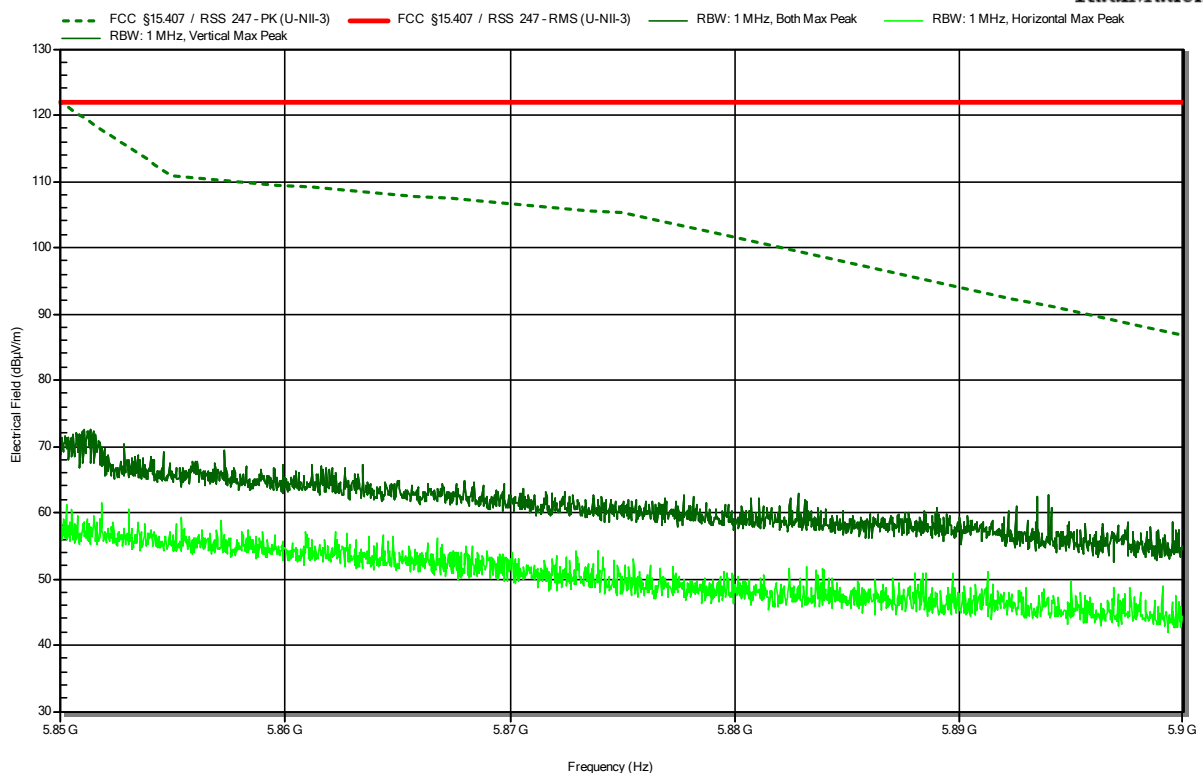


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5795 MHz, MCS 0, HT40, P=19dBm
 Test Date: 2023-07-05
 Note:

Index 227

RadiMation

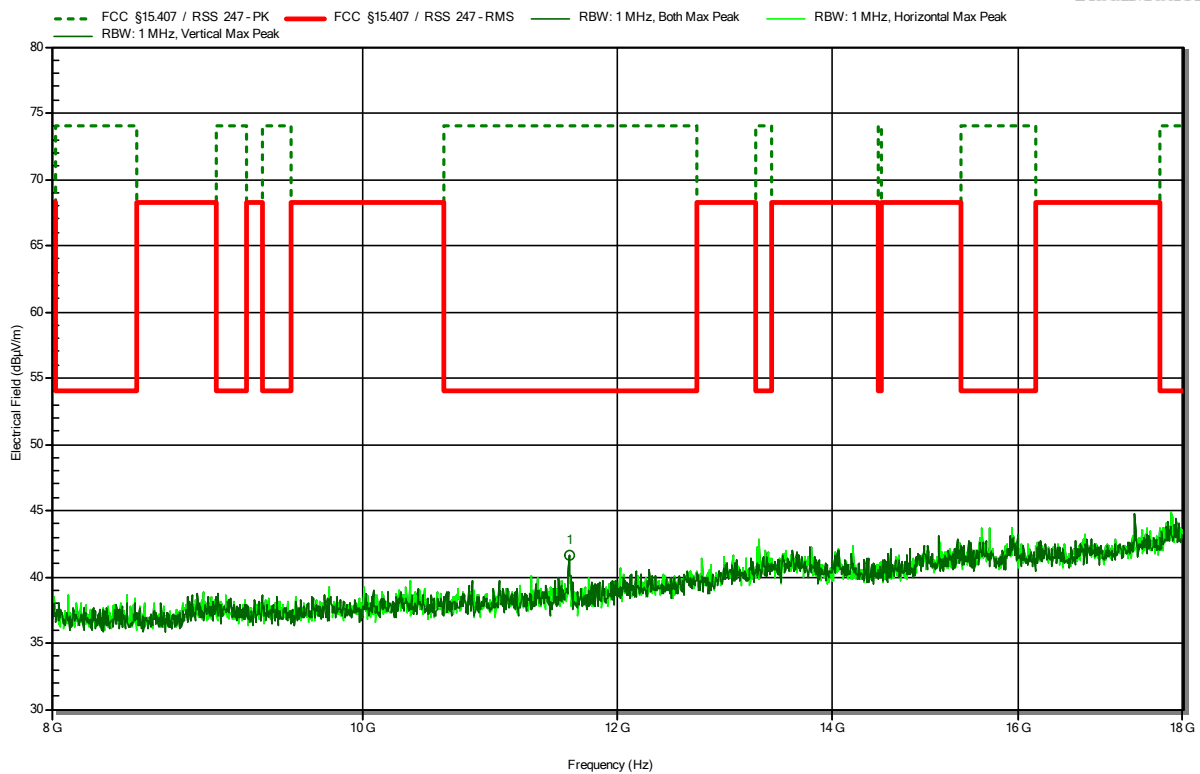


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
11.593 GHz	41.59 dBμV/m	74 dBμV/m	-32.41 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5795 MHz, MCS 0, HT40, P=19dBm
 Test Date: 2023-07-04
 Note:

Index 219

RadiMation

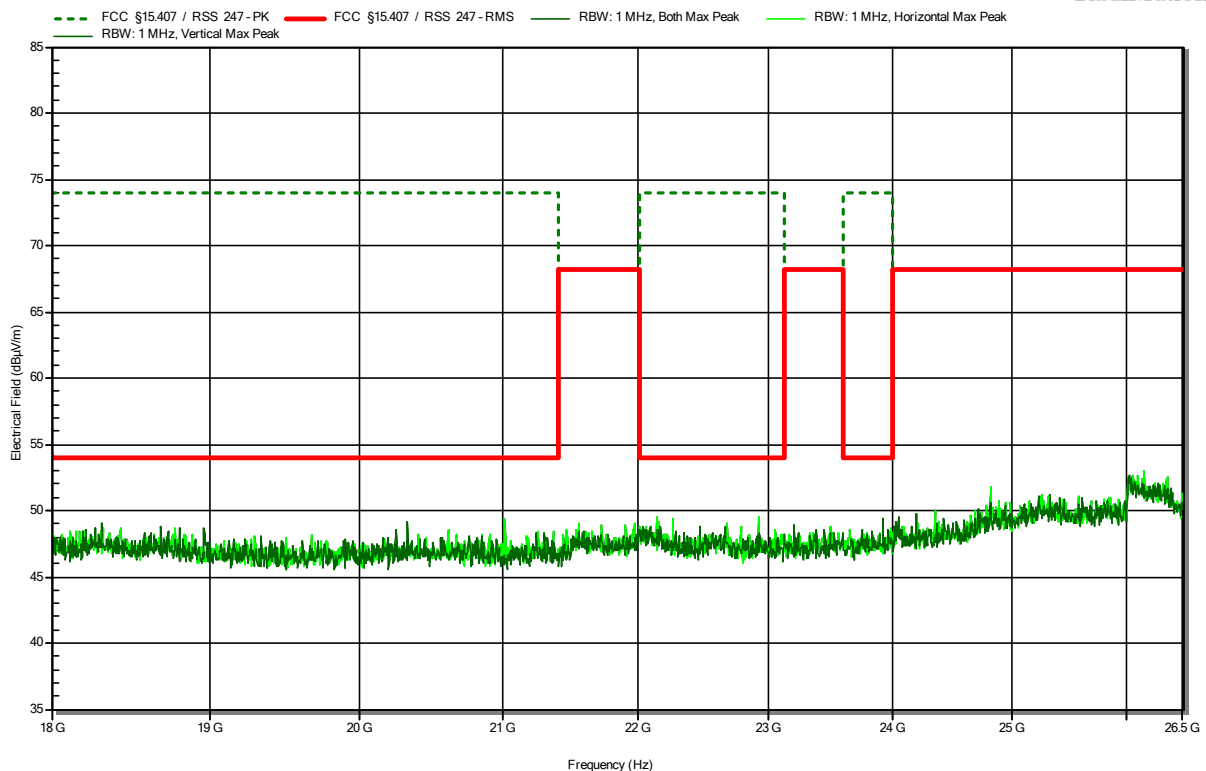


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5775 MHz, MCS 1, VHT40, P=16dBm
 Test Date: 2023-07-04
 Note:

Index 222


RadiMation

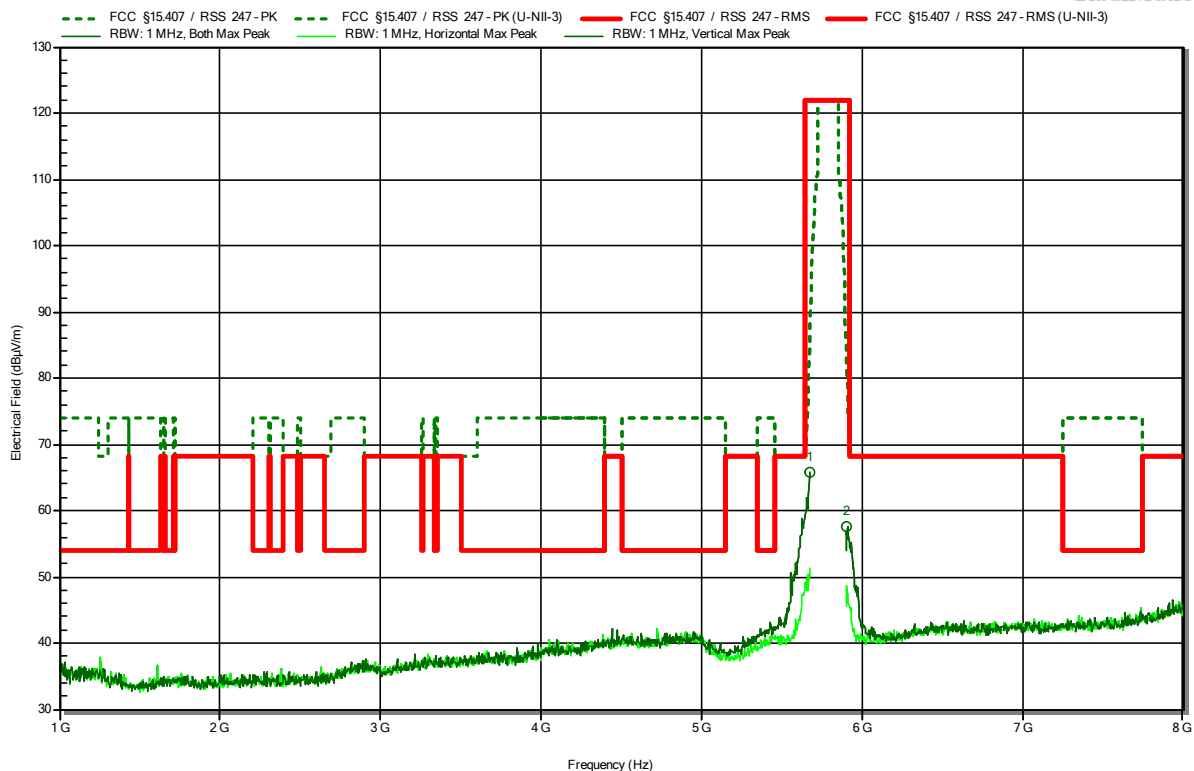

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
5.673 GHz	65.76 dBμV/m	85.54 dBμV/m	-19.78 dB	Pass	Vertical
5.907 GHz	57.56 dBμV/m	81.47 dBμV/m	-23.91 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5775 MHz, MCS 1, VHT40, P=16dBm
 Test Date: 2023-07-04
 Note: lower band area

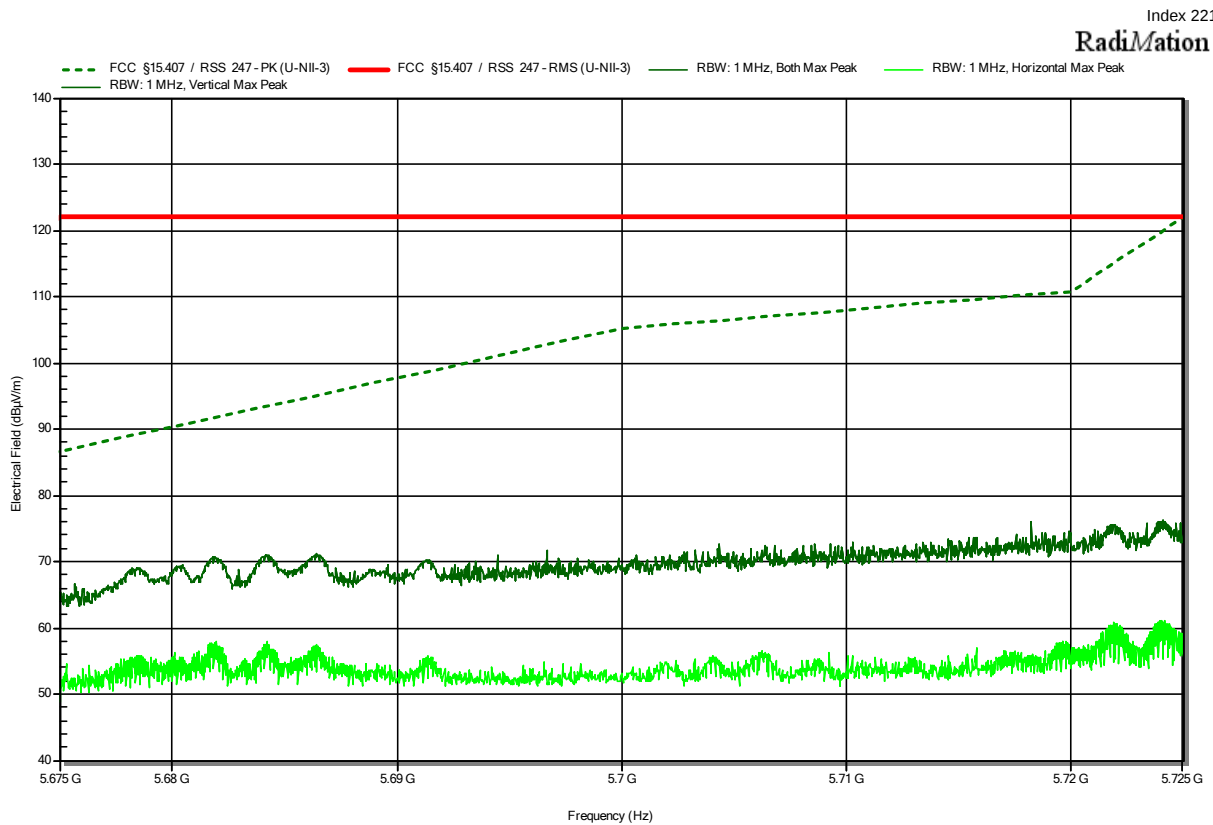


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5775 MHz, MCS 1, VHT40, P=16dBm
 Test Date: 2023-07-05
 Note:

Index 228

RadiMation

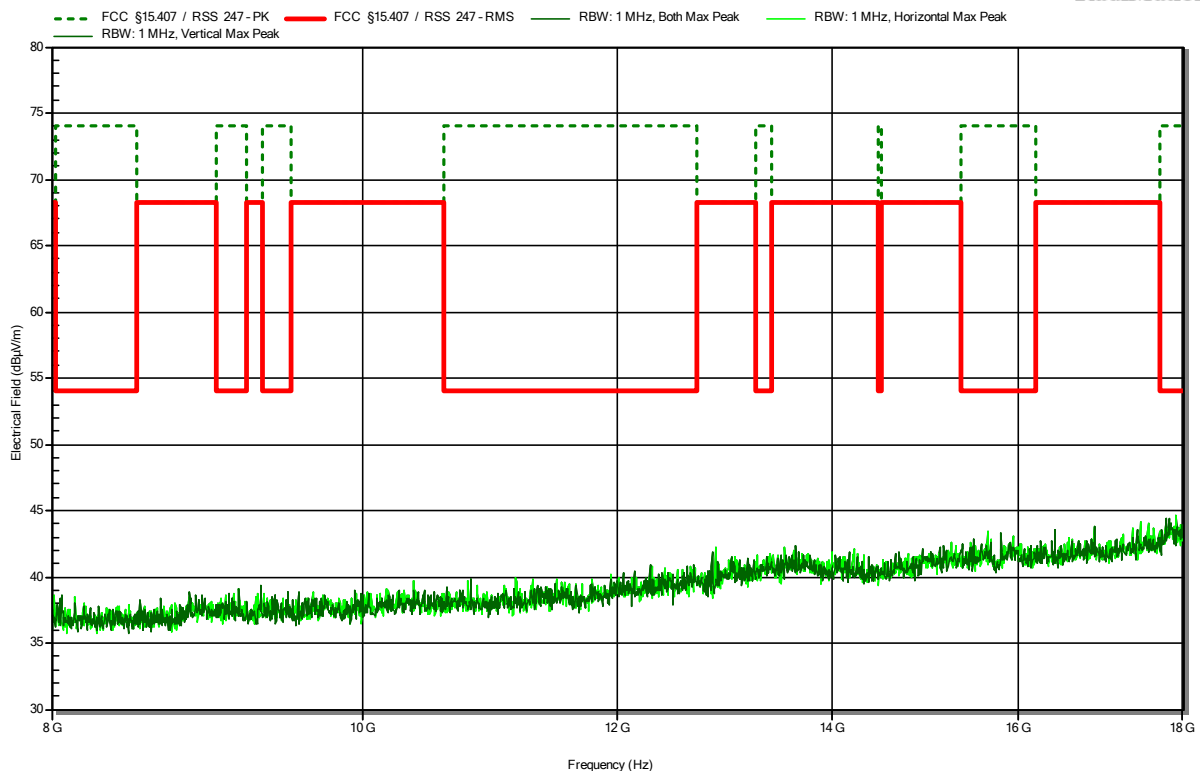


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43225
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5775 MHz, MCS 1, VHT40, P=16dBm
 Test Date: 2023-07-04
 Note:

Index 220

RadiMation

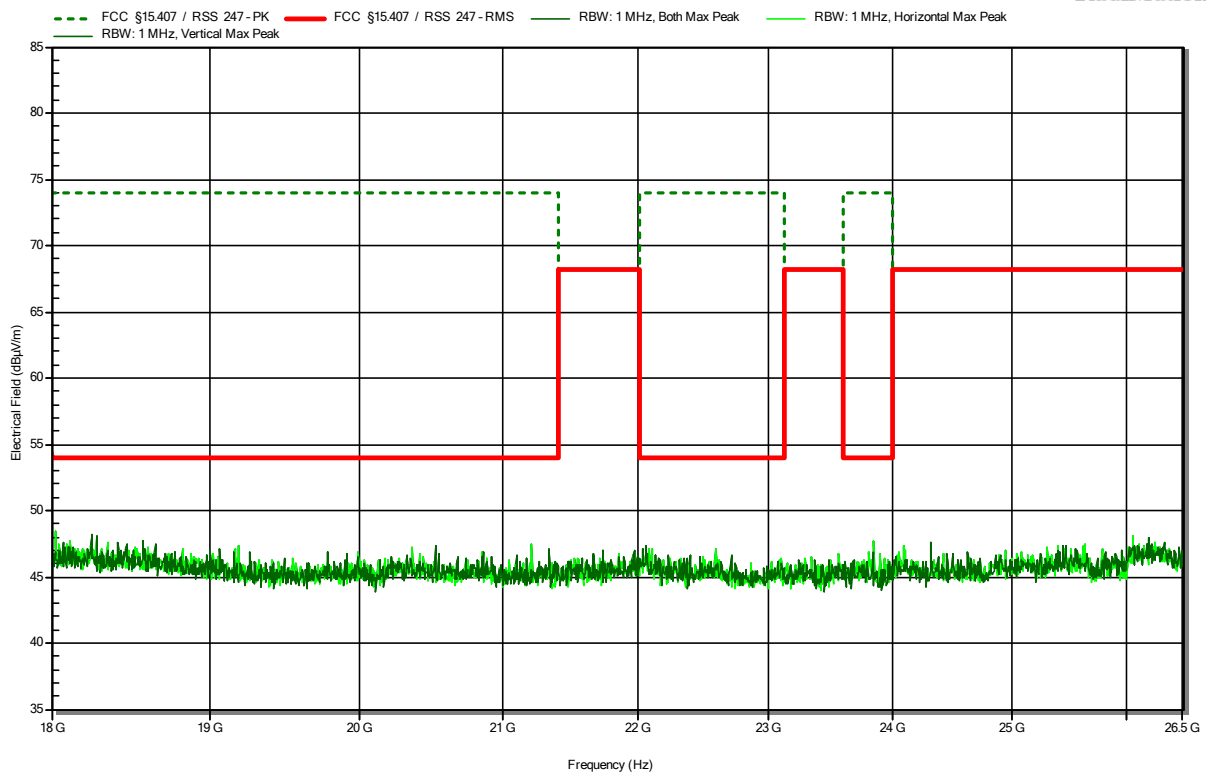

ANNEX B Transmitter radiated emissions with Antenna 2 (Embedded, custom)


U-NII-1

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
Applicant: u-blox Malmö AB
Model Description: Host-based multiradio module
Model: MAYA-W276-00B
Test Sample ID: 44424
Test Site: Eurofins Product Service GmbH
Operator: Mr. Sohrabi
Measurement software: RadiMation, version 2020.1.8
Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
Antenna: Schwarzbeck VULB 9168
Measurement distance: 3 m
Mode: Tx; IEEE 802.11ac, 5180 MHz, MCS-0, VHT20
Test Date: 2023-06-05

Index 13

RadiMation

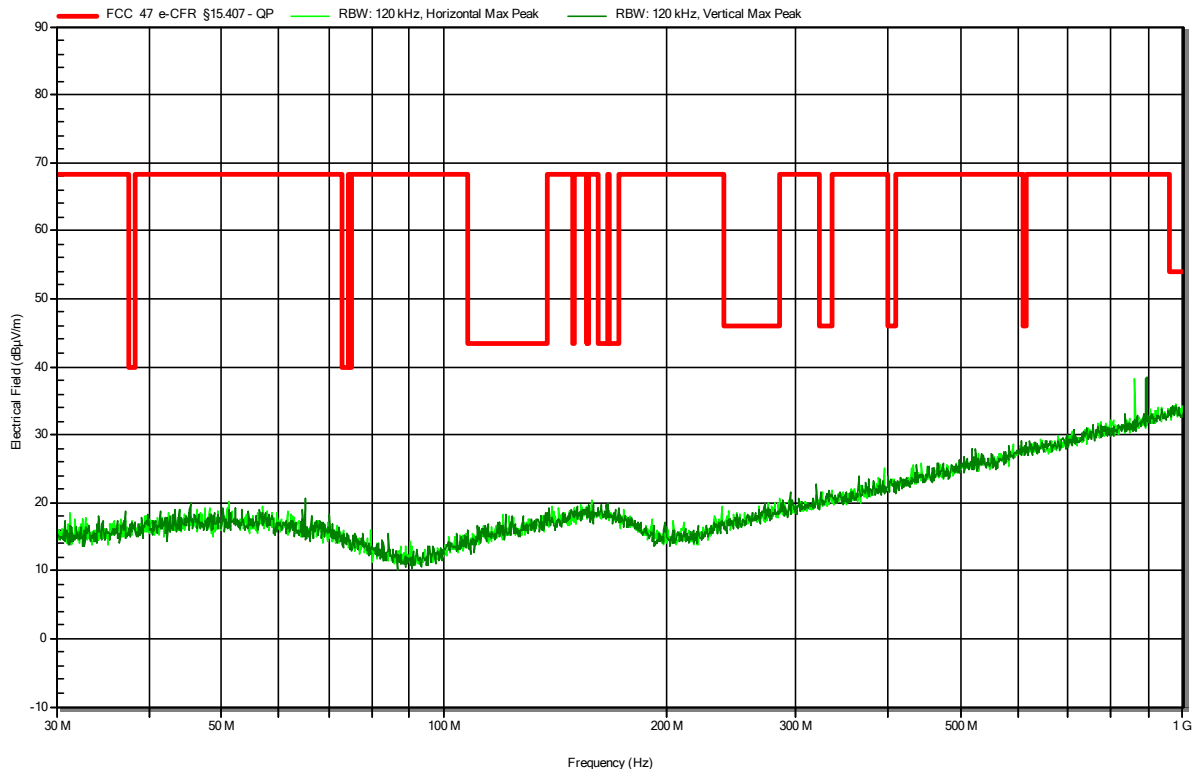


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5180 MHz, MCS 0, VHT20, P=16dBm
 Test Date: 2023-07-04

Index 26

RadiMation

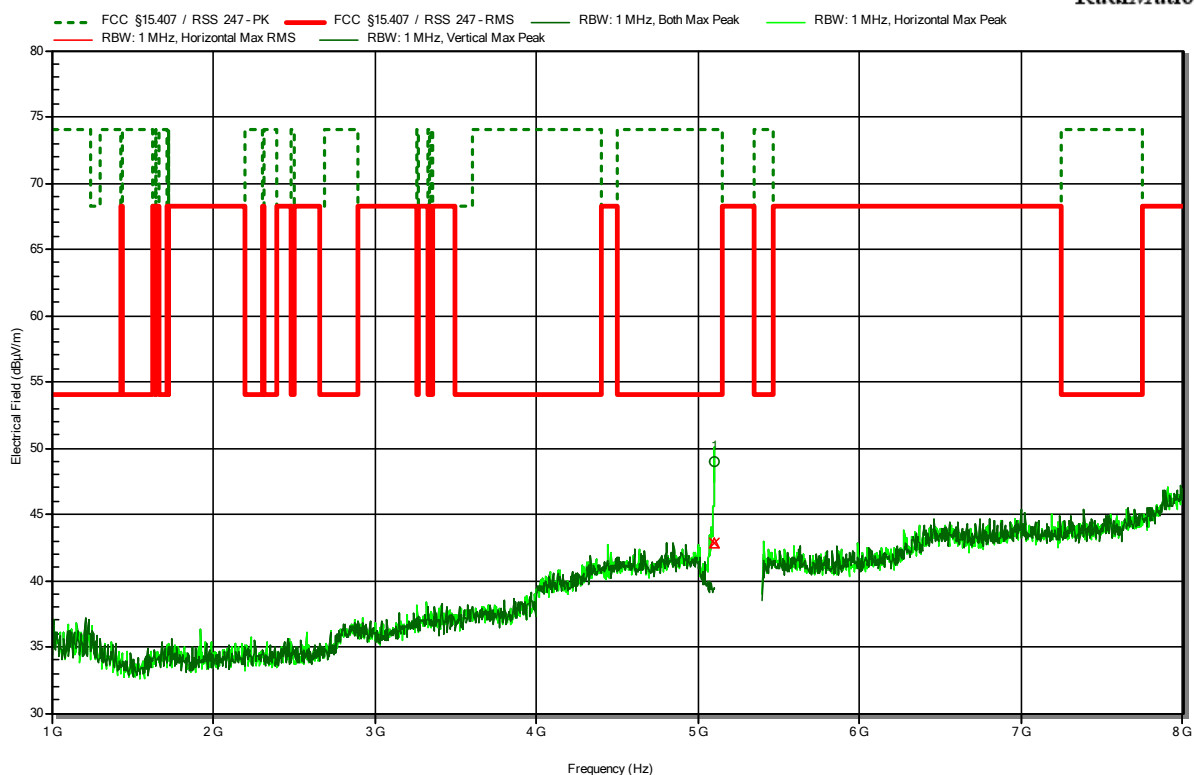


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
5.1 GHz	48.95 dBμV/m	74 dBμV/m	-25.05 dB	Pass	Horizontal
Frequency	RMS	RMS Limit	RMS Difference	RMS Status	Polarization
5.1 GHz	42.85 dBμV/m	54 dBμV/m	-11.15 dB	Pass	Horizontal

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5180 MHz, MCS 0, VHT20, P=16dBm
 Test Date: 2023-07-04
 Note: lower band area

Index 24

RadiMation

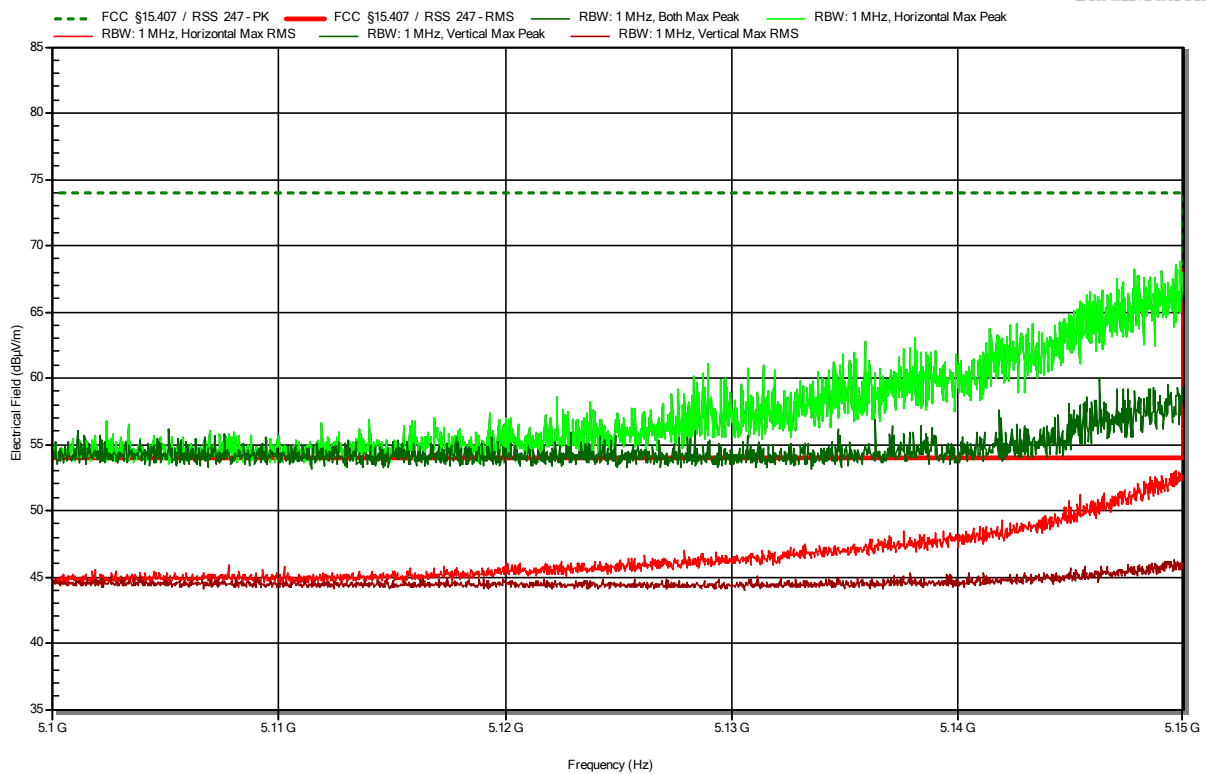


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5180 MHz, MCS 0, VHT20, P=16dBm
 Test Date: 2023-07-05

Index 38

RadiMation

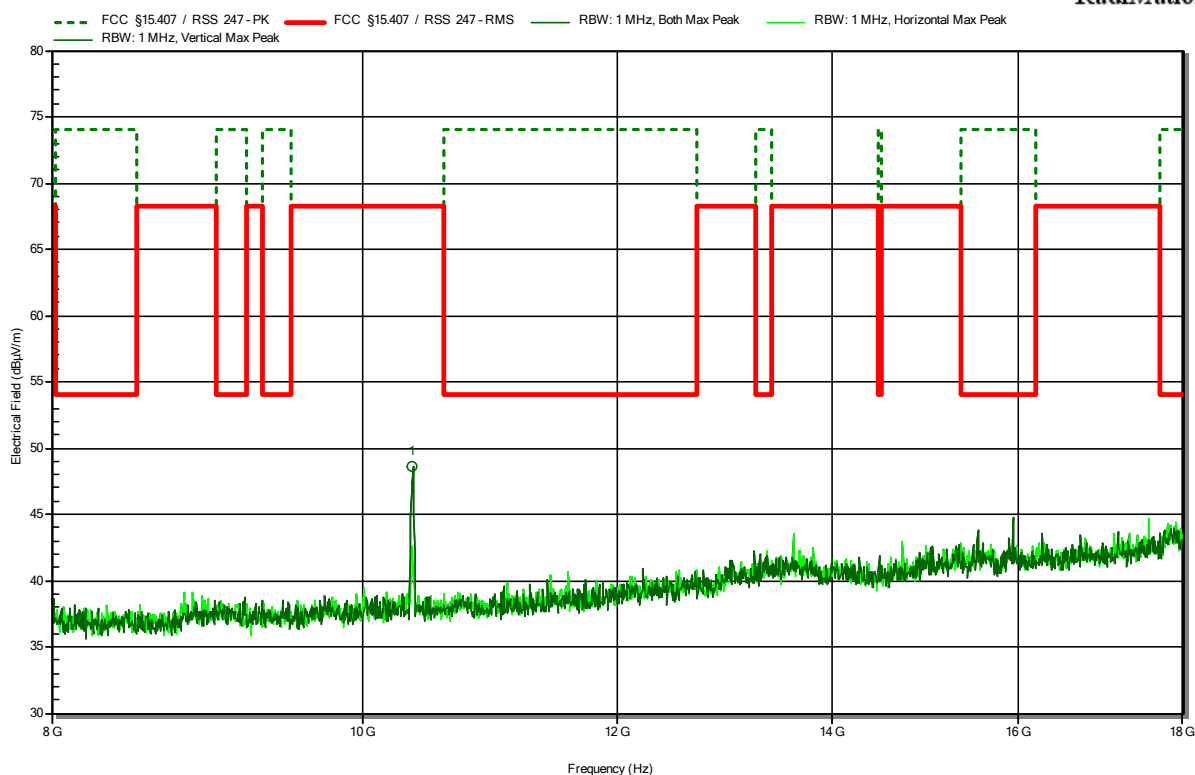


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
10.361 GHz	48.58 dBμV/m	68.2 dBμV/m	-19.62 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5180 MHz, MCS 0, VHT20, P=16dBm
 Test Date: 2023-07-04


Index 27

RadiMation

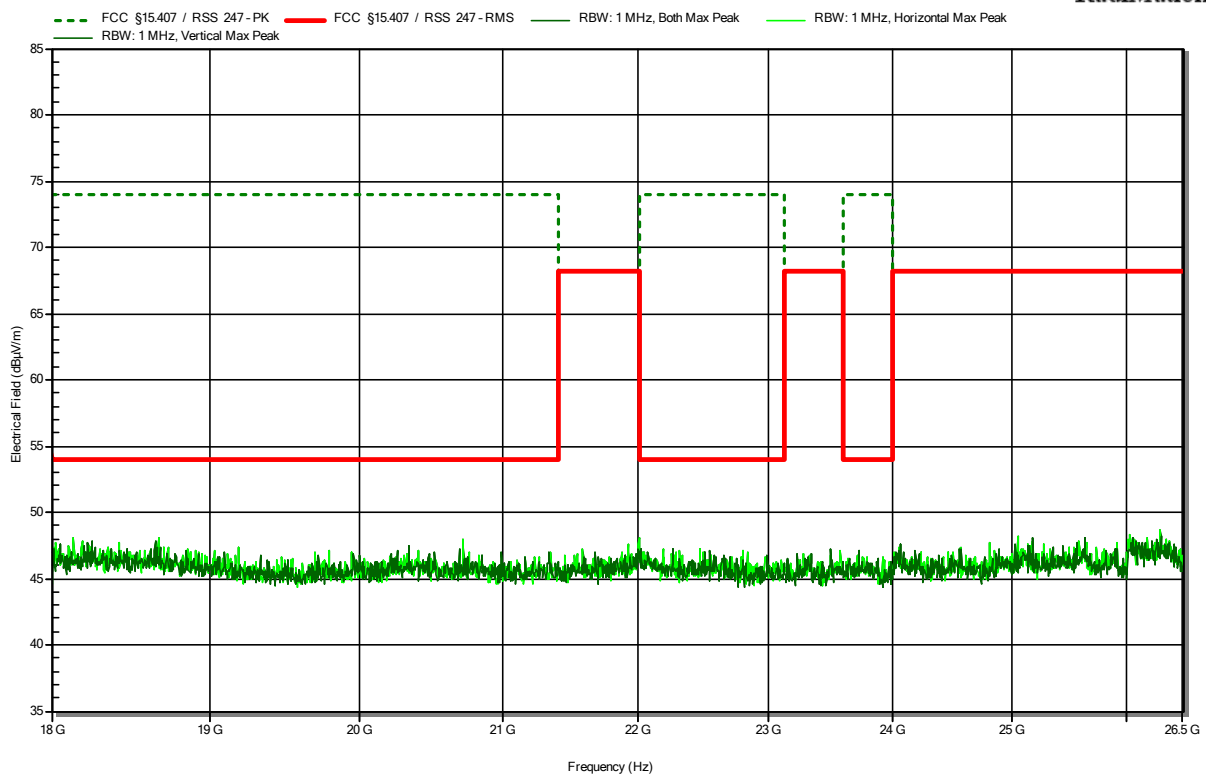

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Sohrabi
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck VULB 9168
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11ac, 5240 MHz, MCS-0, VHT20
 Test Date: 2023-06-05

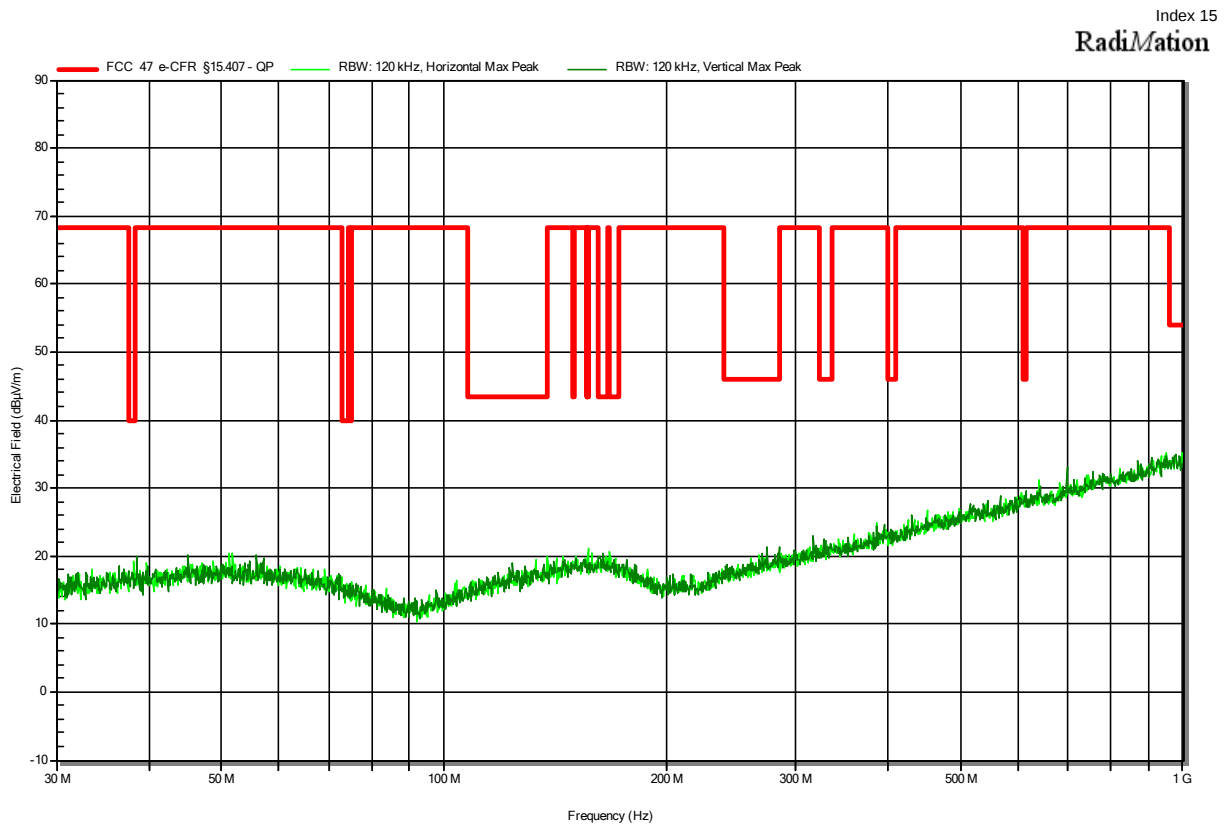


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5240 MHz, MCS 0, VHT20, P=19dBm
 Test Date: 2023-07-04

Index 28

RadiMation

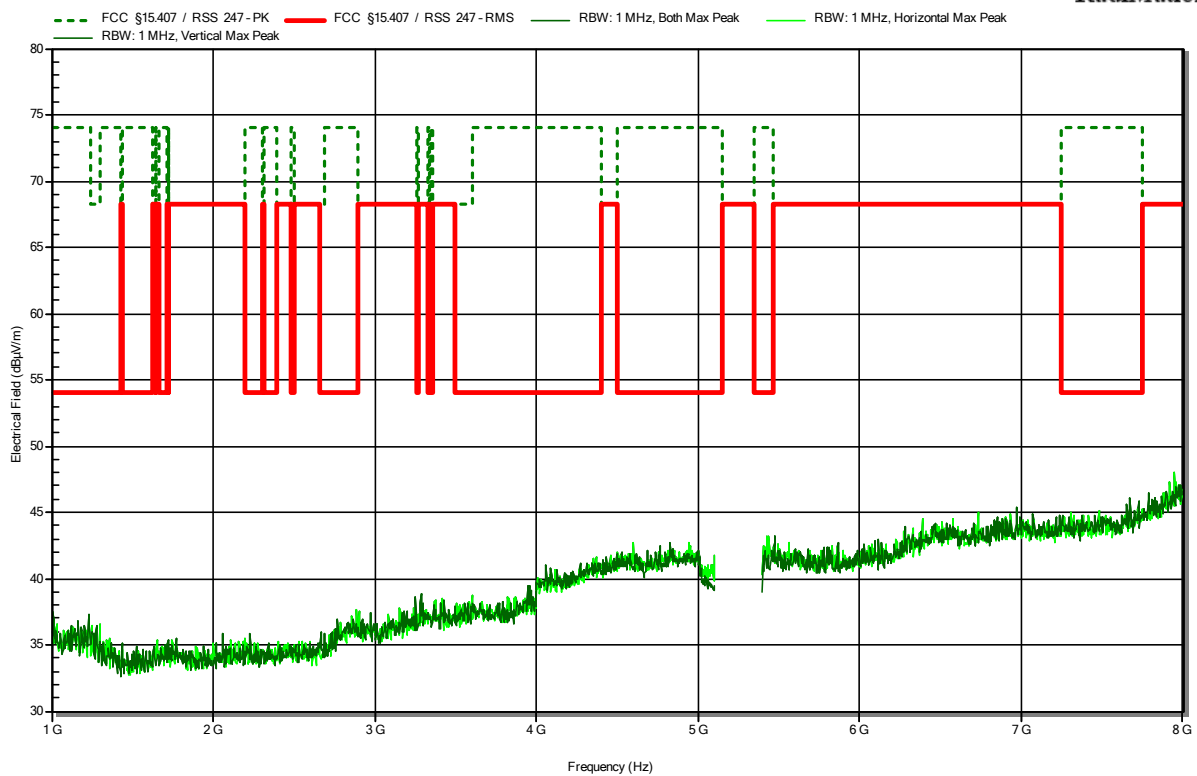


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5240 MHz, MCS 0, VHT20, P=19dBm
 Test Date: 2023-07-05

Index 39

RadiMation

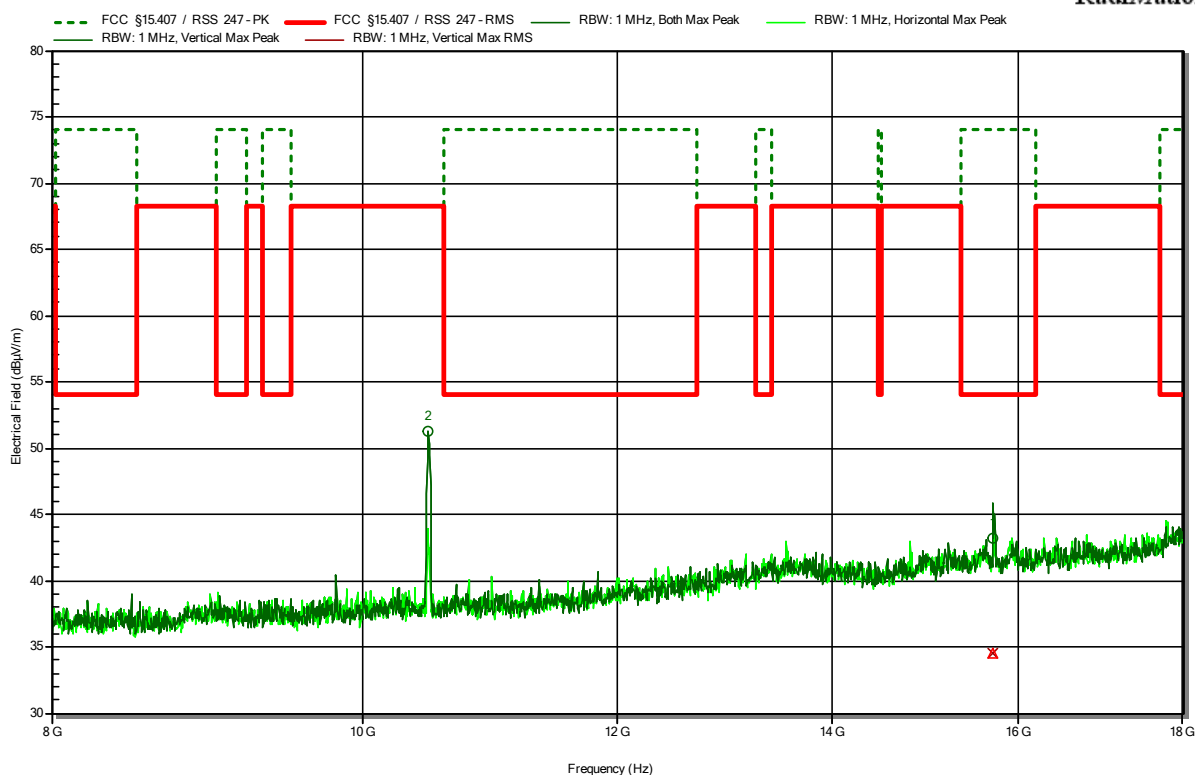


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
10.478 GHz	51.3 dBµV/m	68.2 dBµV/m	-16.9 dB	Pass	Vertical
15.705 GHz	43.22 dBµV/m	74 dBµV/m	-30.78 dB	Pass	Vertical
Frequency	RMS	RMS Limit	RMS Difference	RMS Status	Polarization
15.705 GHz	34.5 dBµV/m	54 dBµV/m	-19.5 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5190 MHz, MCS 5, HT40, P=16dBm
 Test Date: 2023-07-05

Index 32

RadiMation

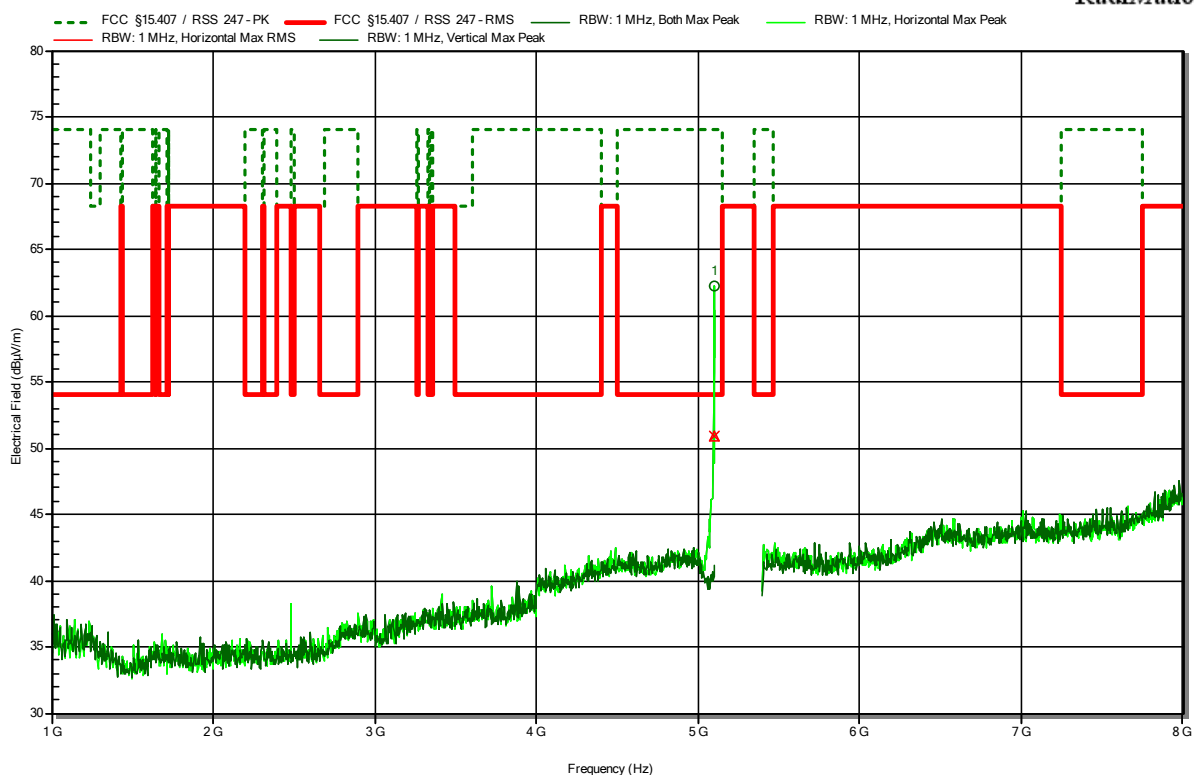


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
5.1 GHz	62.17 dBμV/m	74 dBμV/m	-11.83 dB	Pass	Horizontal
Frequency	RMS	RMS Limit	RMS Difference	RMS Status	Polarization
5.1 GHz	50.89 dBμV/m	54 dBμV/m	-3.11 dB	Pass	Horizontal

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5190 MHz, MCS 5, HT40, P=16dBm
 Test Date: 2023-07-05
 Note: lower band area

Index 31

RadiMation

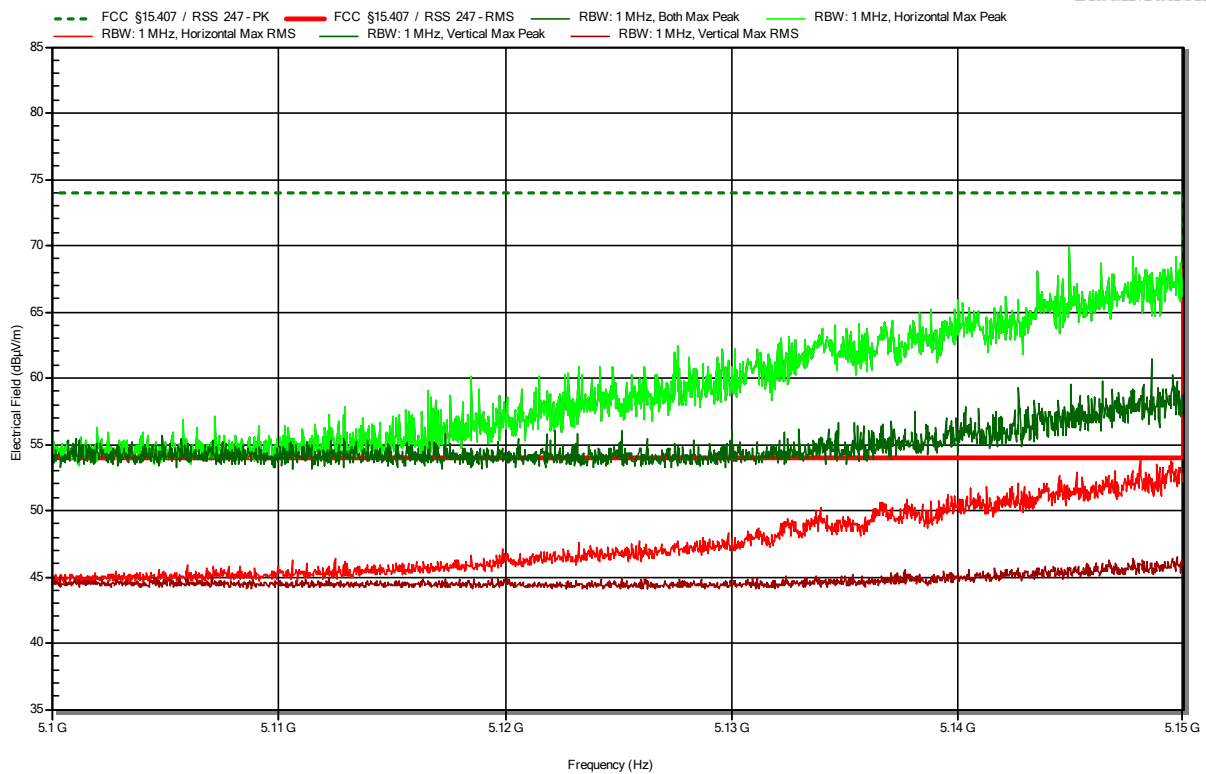


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5190 MHz, MCS 5, HT40, P=16dBm
 Test Date: 2023-07-05

Index 33

RadiMation

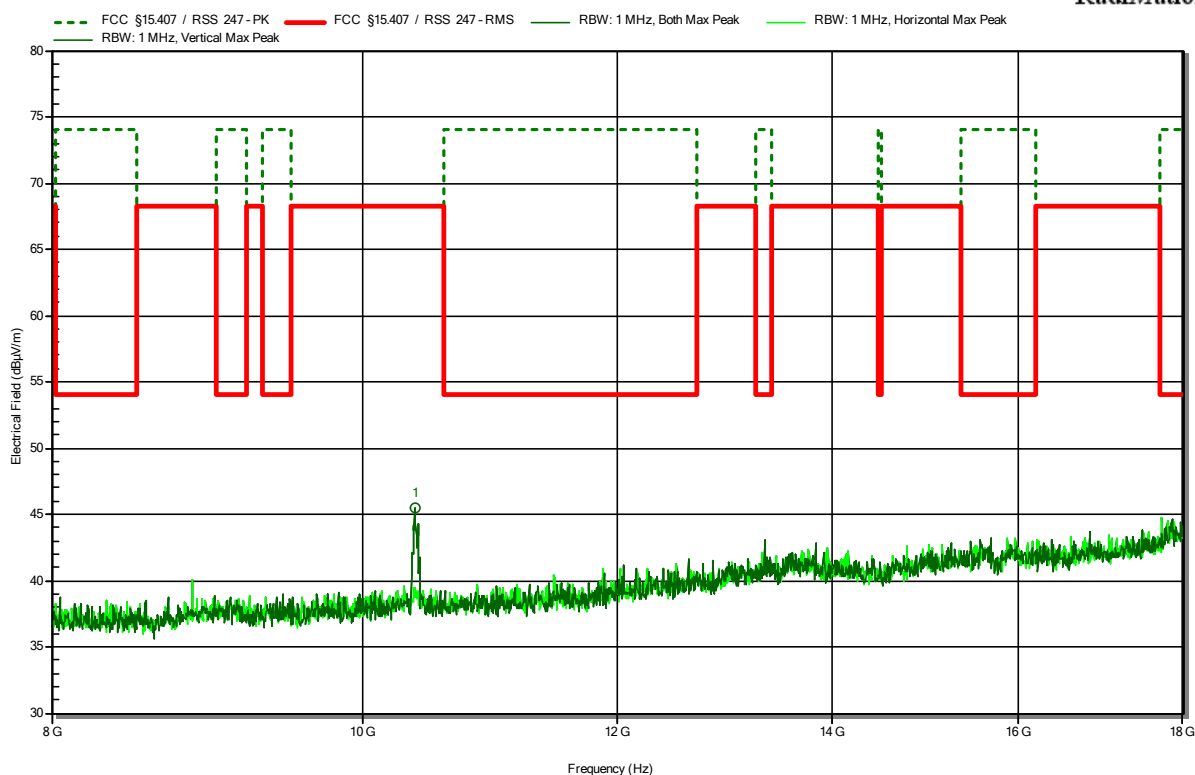


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
10.376 GHz	45.49 dBμV/m	68.2 dBμV/m	-22.71 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5210 MHz, MCS 0, VHT80, P=14dBm
 Test Date: 2023-07-05

Index 36

RadiMation

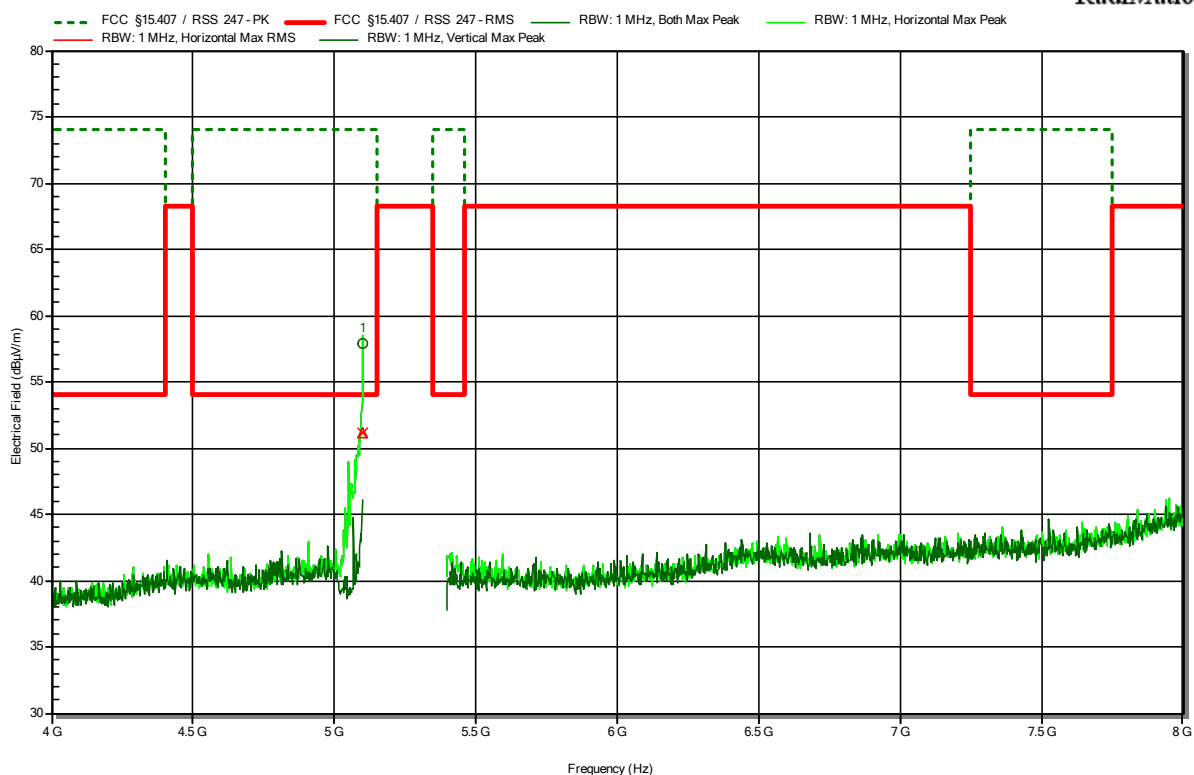


Frequency 5.099 GHz	Peak 57.93 dBμV/m	Peak Limit 74 dBμV/m	Peak Difference -16.07 dB	Peak Status Pass	Polarization Horizontal
Frequency 5.099 GHz	RMS 51.1 dBμV/m	RMS Limit 54 dBμV/m	RMS Difference -2.9 dB	RMS Status Pass	Polarization Horizontal

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5210 MHz, MCS 0, VHT80, P=14dBm
 Test Date: 2023-07-05
 Note: lower band area

Index 35

RadiMation

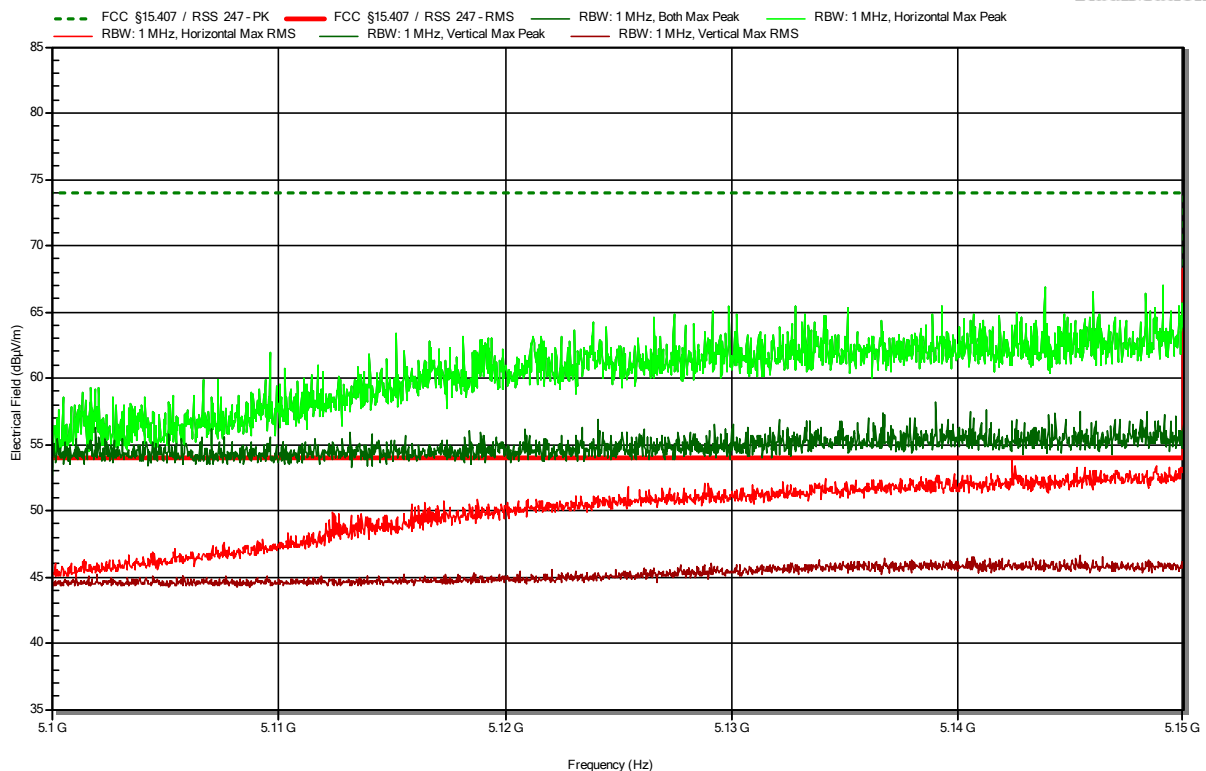


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5210 MHz, MCS 0, VHT80, P=14dBm
 Test Date: 2023-07-05

Index 37


RadiMation

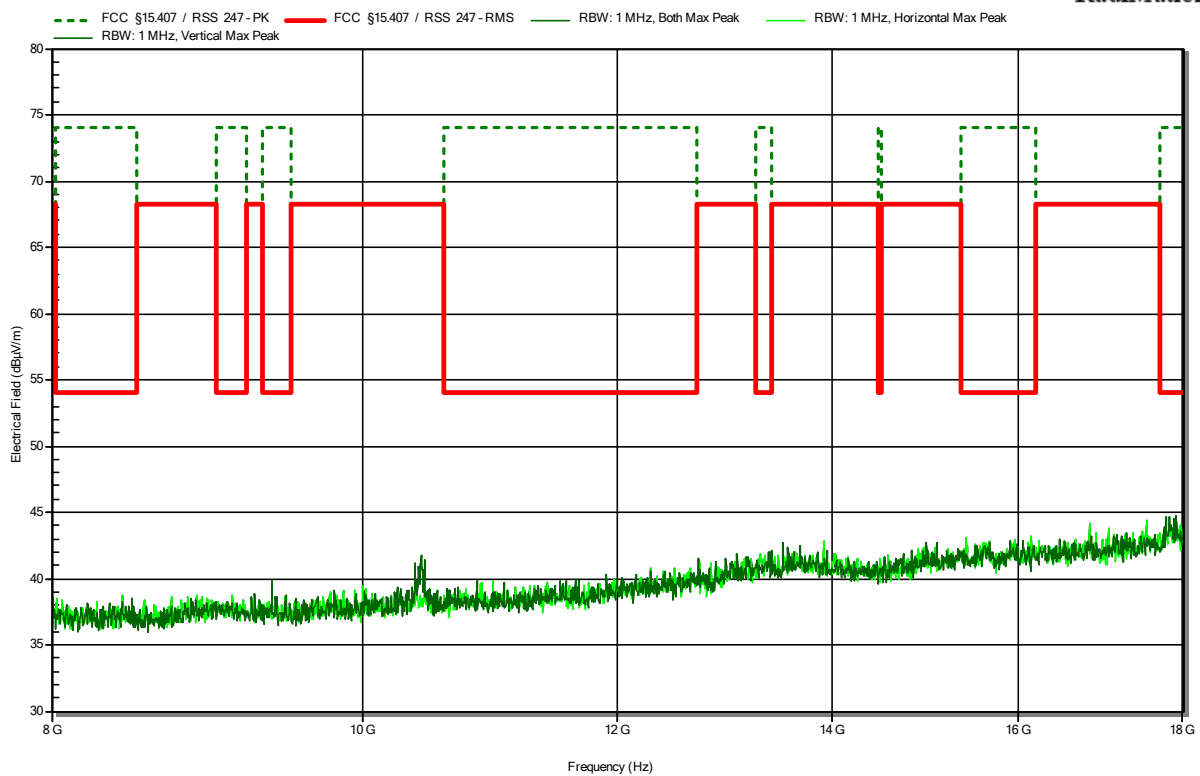

U-NII-2A

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Sohrabi
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck VULB 9168
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11a, 5320 MHz, 54 Mbps, OFDM
 Test Date: 2023-06-05

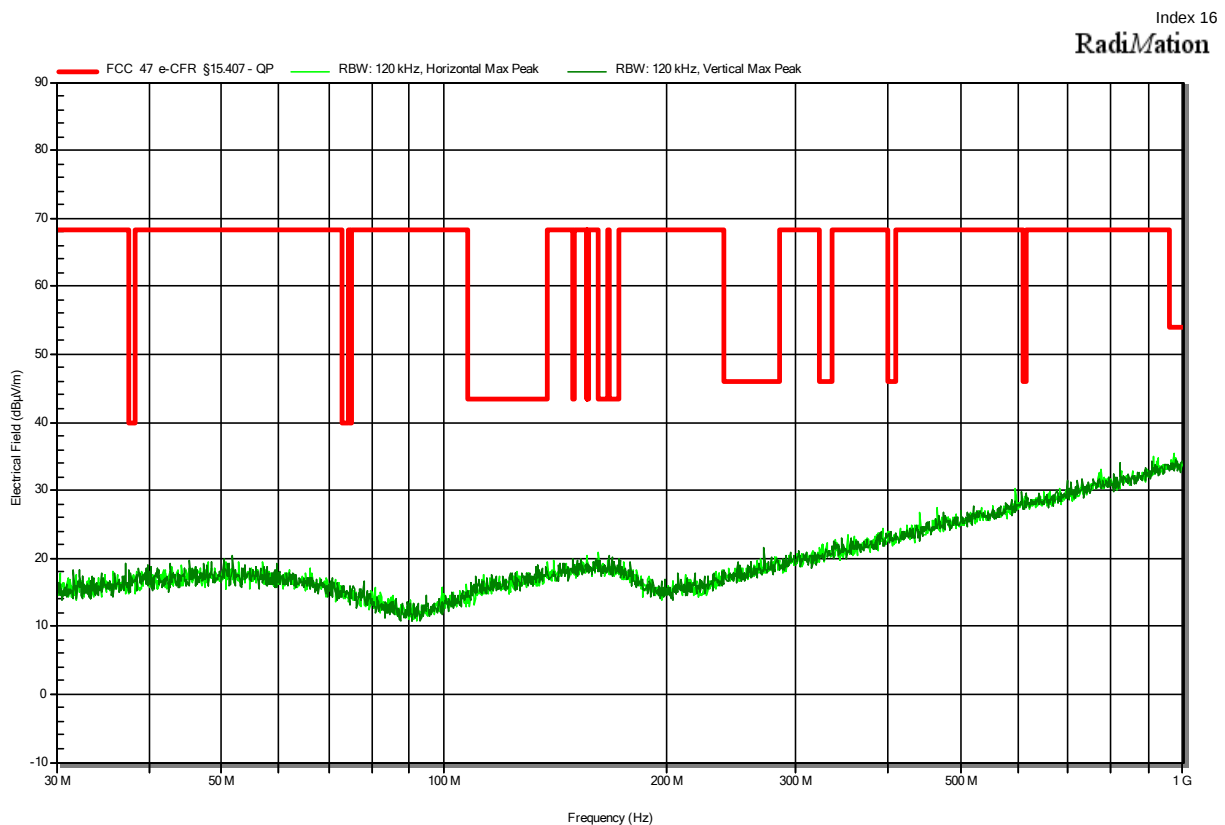


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5320 MHz, 54 Mbps, OFDM, P=17dBm
 Test Date: 2023-07-06

Index 25

RadiMation

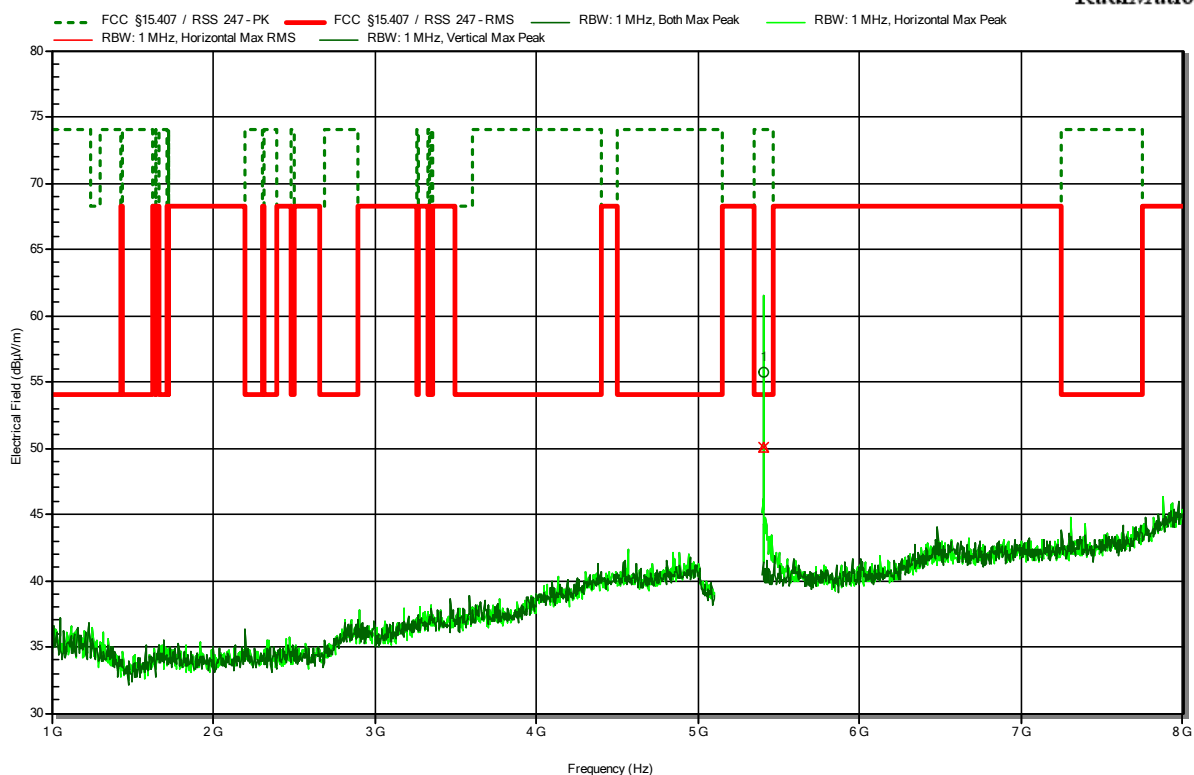


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
5.407 GHz	55.78 dBμV/m	74 dBμV/m	-18.22 dB	Pass	Horizontal
Frequency	RMS	RMS Limit	RMS Difference	RMS Status	Polarization
5.407 GHz	50.08 dBμV/m	54 dBμV/m	-3.92 dB	Pass	Horizontal

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5320 MHz, 54 Mbps, OFDM, P=17dBm
 Test Date: 2023-07-06
 Note: Upper band area

Index 24

RadiMation

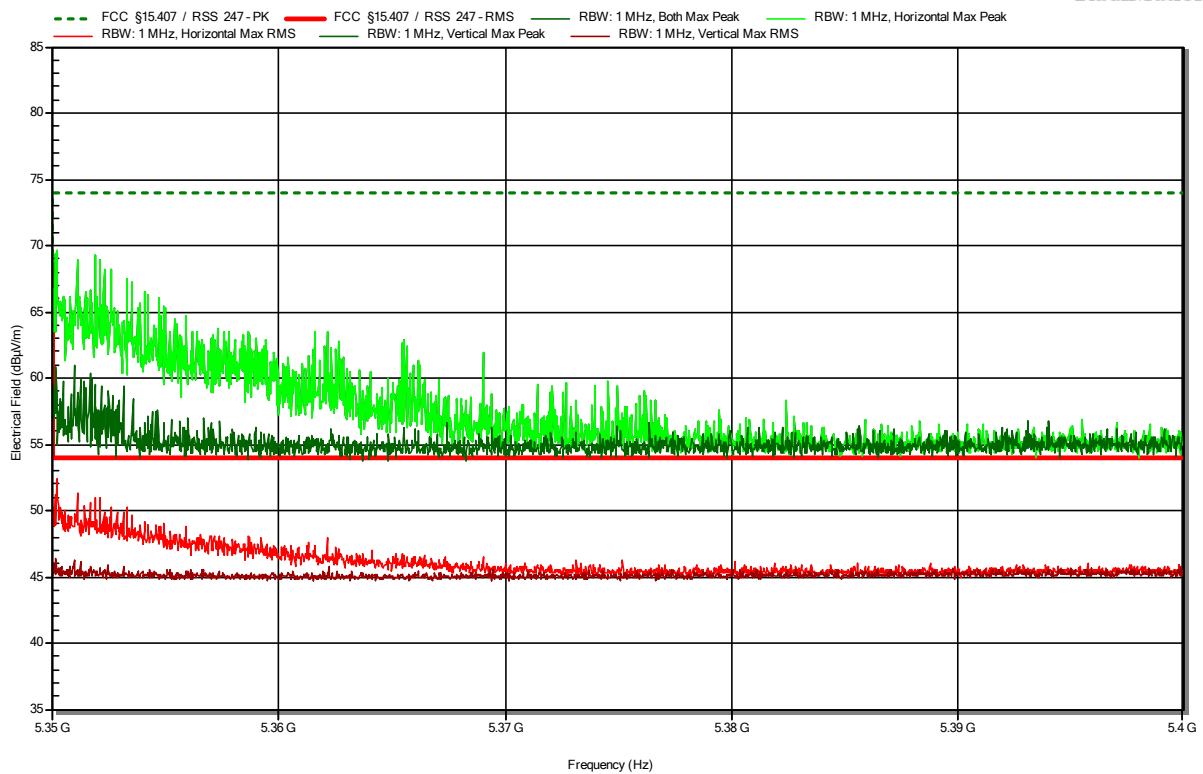


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 a, 5320 MHz, 54 Mbps, OFDM, P=17dBm
 Test Date: 2023-07-06

Index 26

RadiMation

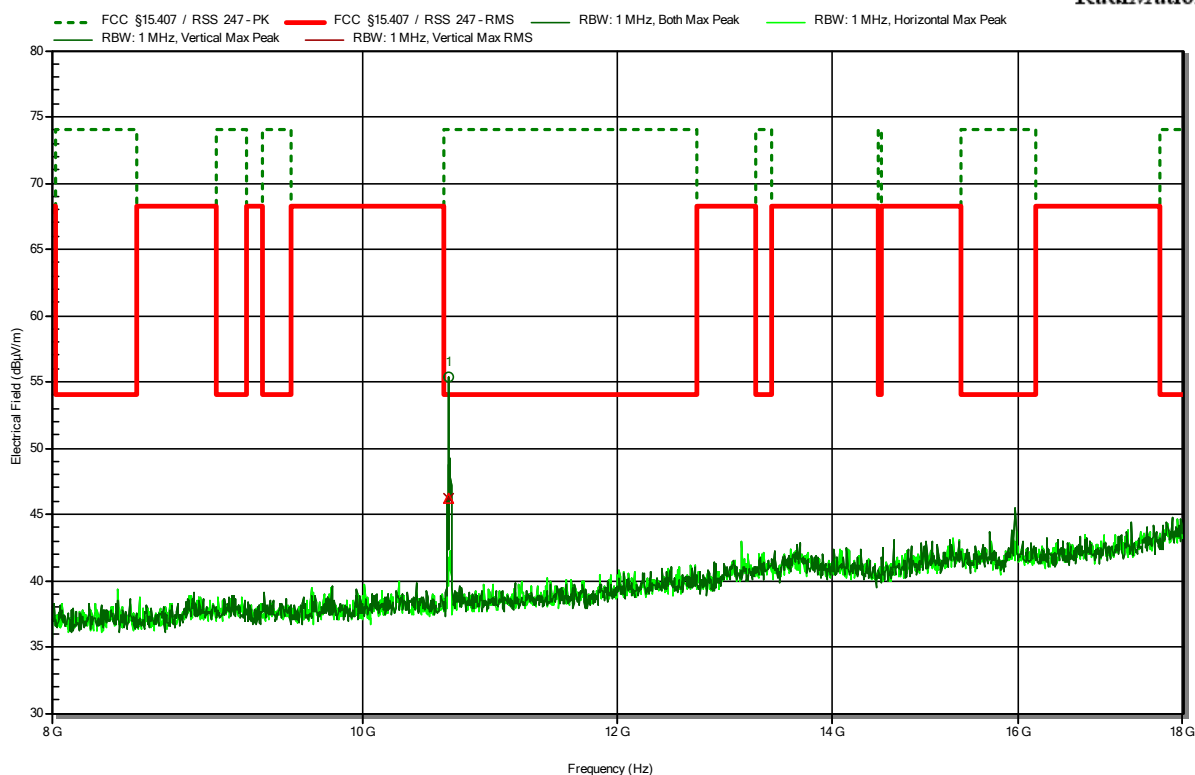


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
10.63 GHz	55.4 dBμV/m	74 dBμV/m	-18.6 dB	Pass	Vertical
Frequency	RMS	RMS Limit	RMS Difference	RMS Status	Polarization
10.63 GHz	46.15 dBμV/m	54 dBμV/m	-7.85 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5310 MHz, MCS 0, HT40, P=14dBm
 Test Date: 2023-07-06

Index 30

RadiMation

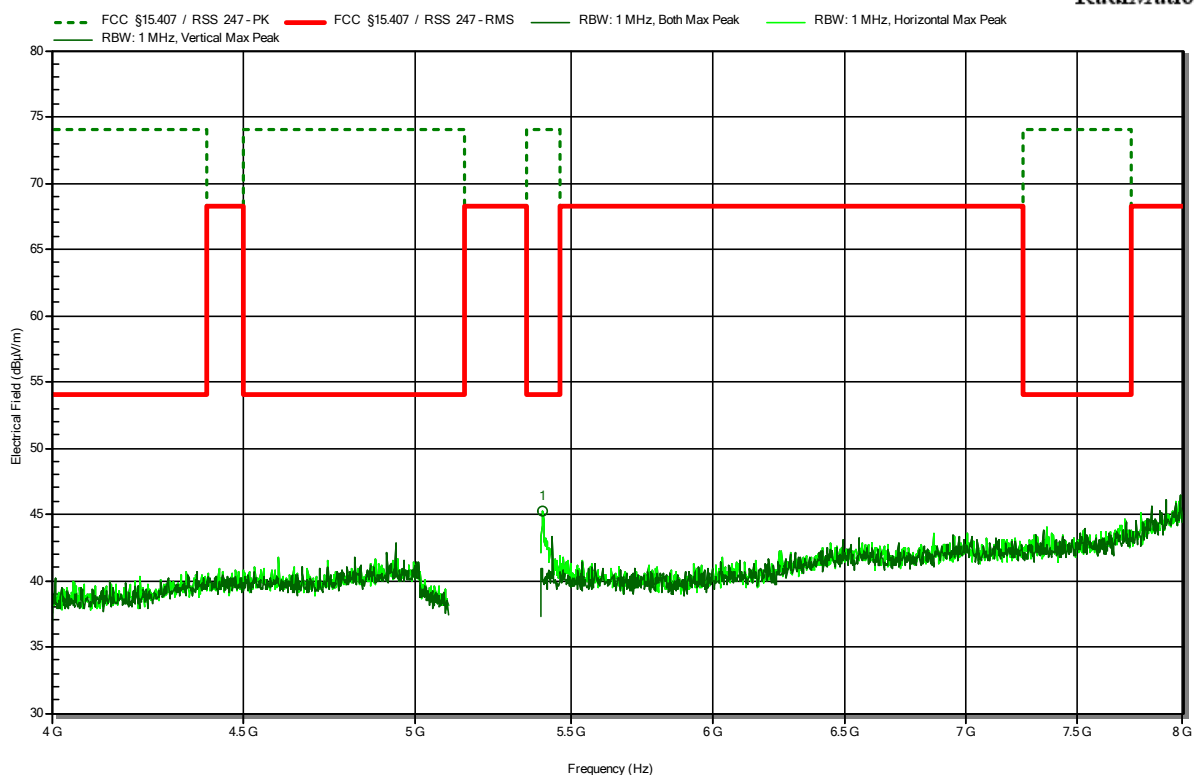


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
5.402 GHz	45.18 dBμV/m	74 dBμV/m	-28.82 dB	Pass	Horizontal

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5310 MHz, MCS 0, HT40, P=14dBm
 Test Date: 2023-07-06
 Note: Upper band area

Index 29

RadiMation

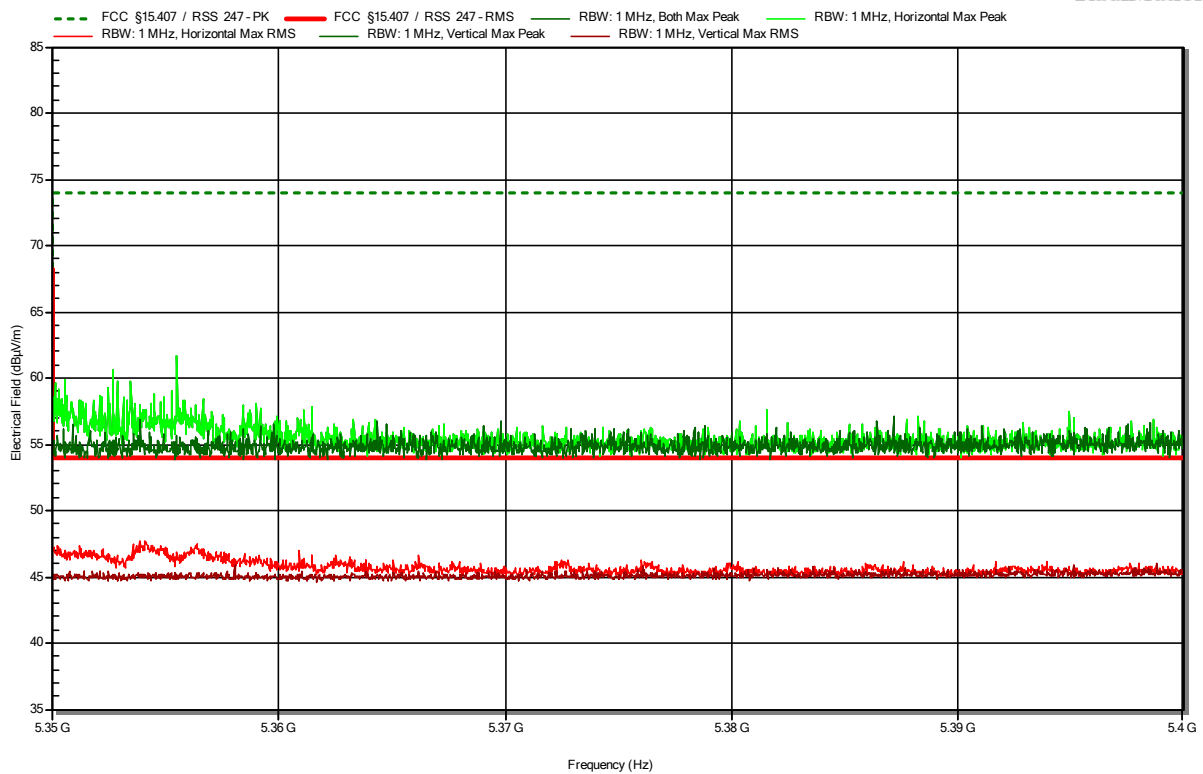


Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 n, 5310 MHz, MCS 0, HT40, P=14dBm
 Test Date: 2023-07-06

Index 28

RadiMation

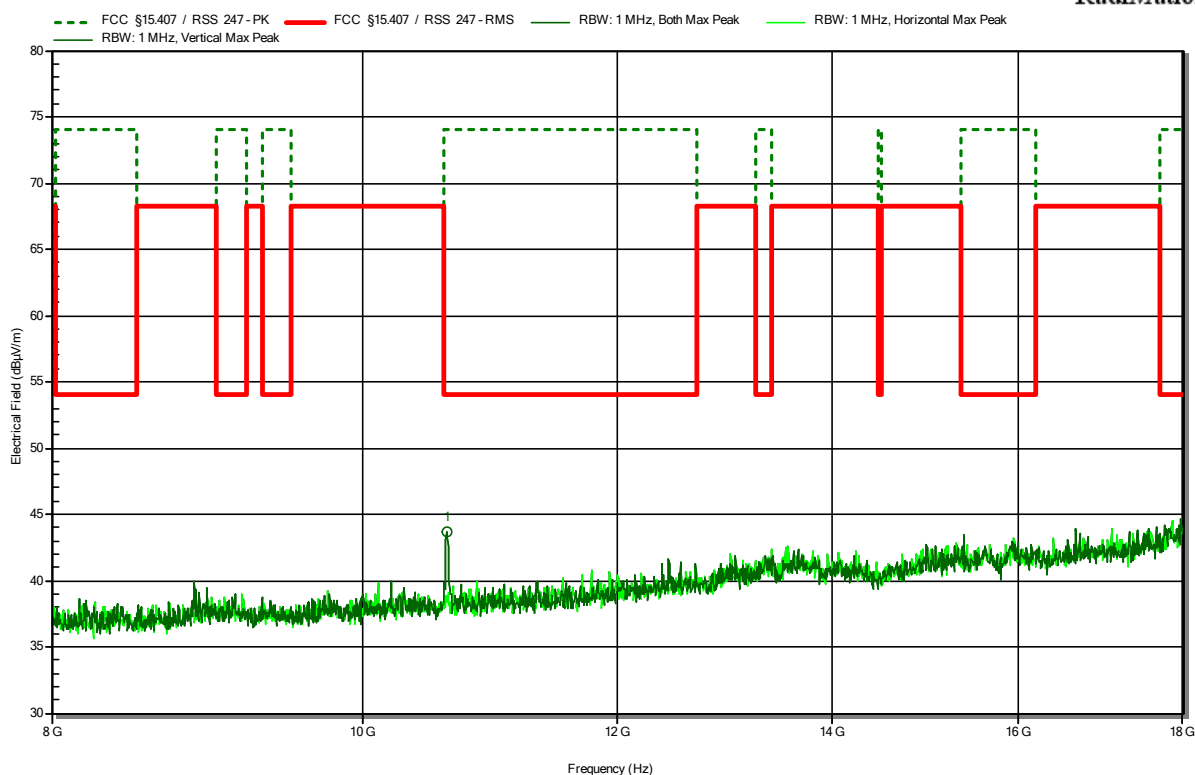


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
10.616 GHz	43.64 dBμV/m	74 dBμV/m	-30.36 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5290 MHz, MCS 0, VHT80, P=14dBm
 Test Date: 2023-07-06

Index 32

RadiMation

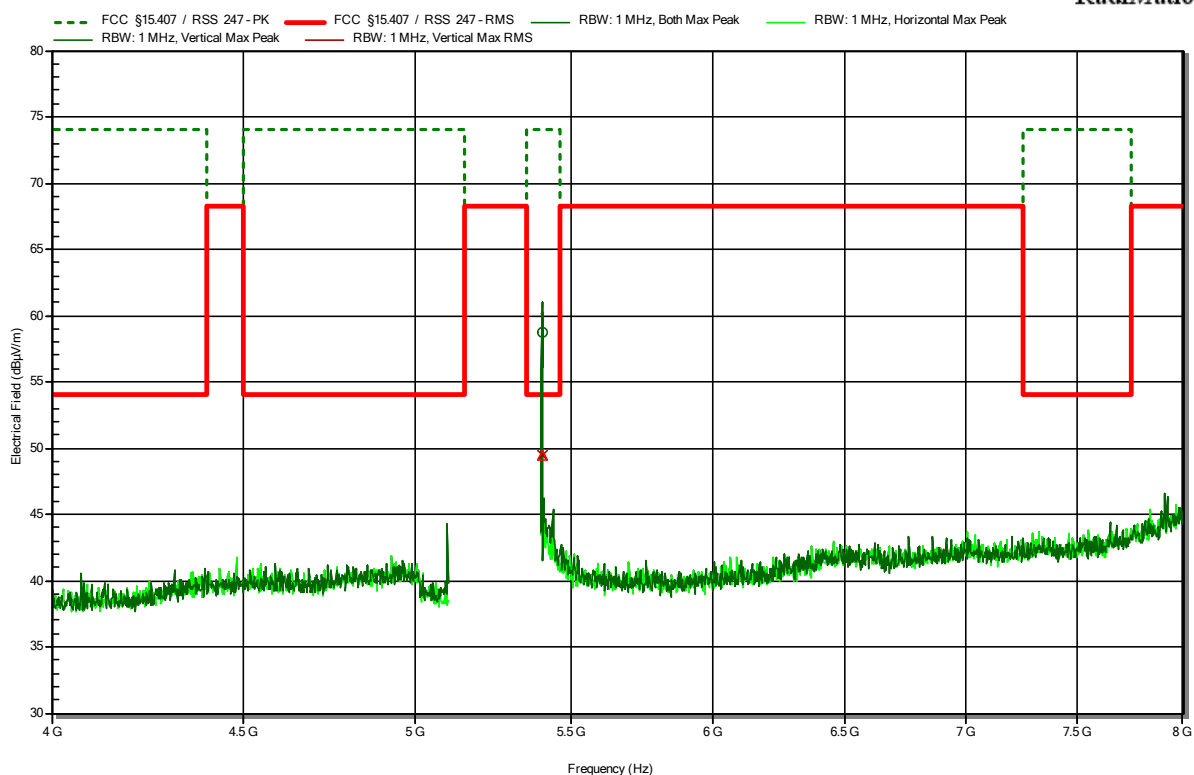


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
5.401 GHz	58.73 dBμV/m	74 dBμV/m	-15.27 dB	Pass	Vertical
Frequency	RMS	RMS Limit	RMS Difference	RMS Status	Polarization
5.401 GHz	49.52 dBμV/m	54 dBμV/m	-4.48 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, 47 CFR Part 15.407

Project Number: G0M-2302-1881
 Applicant: u-blox Malmö AB
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44424
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 1.8 VDC_3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; IEEE 802.11 ac, 5290 MHz, MCS 0, VHT80, P=14dBm
 Test Date: 2023-07-06
 Note: Upper band area

Index 31
RadiMation

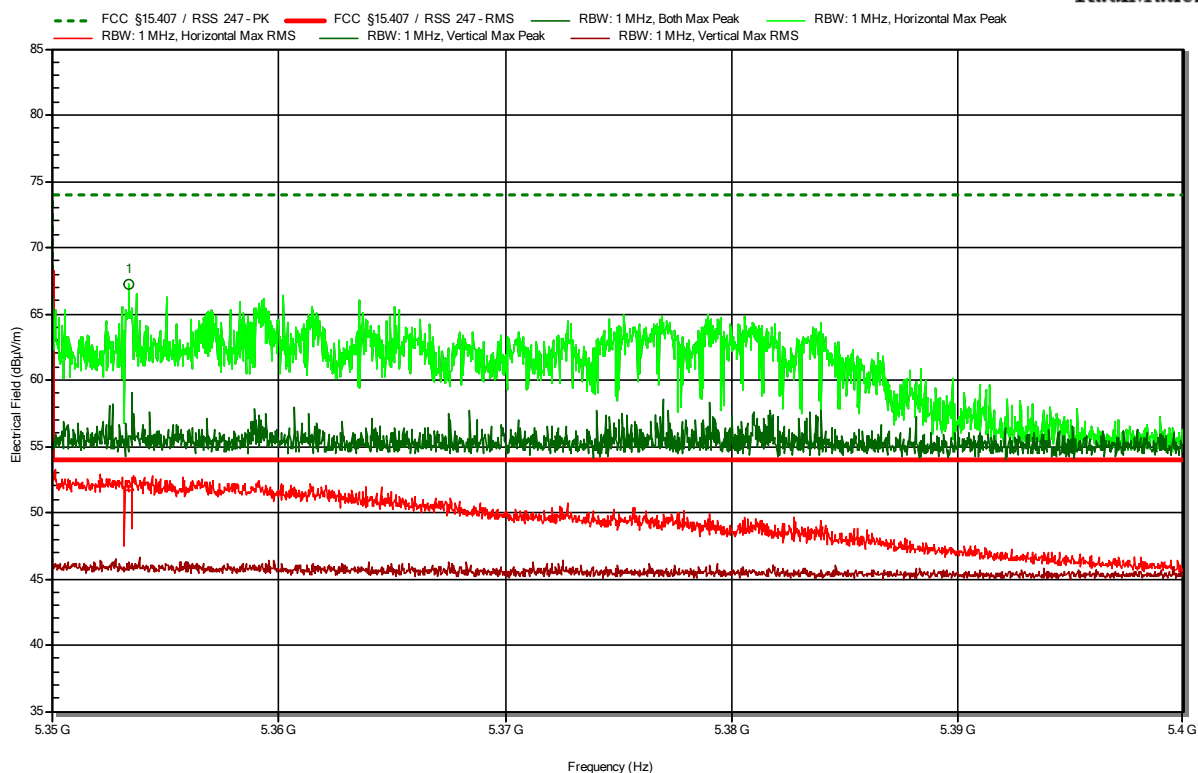

Frequency 5.353 GHz	Peak 67.2 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -6.8 dB	Peak Status Pass	Polarization Horizontal
Frequency 5.353 GHz	RMS 51.99 dBµV/m	RMS Limit 54 dBµV/m	RMS Difference -2.01 dB	RMS Status Pass	Polarization Horizontal

Test Report No.: G0M-2302-1881-TFC407WF-W276-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany