

# **FCC Test Report**

Report No.: AGC11805240901FR03

FCC ID : 2BK8B-DSDR23A

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: ATOM 2 Drone

**BRAND NAME** : Potensic

**MODEL NAME** : DSDR23A, DSDR23B, DSDR23C, DSDR23D

**APPLICANT** : Shenzhen Potensic Intelligent Co., Ltd.

**DATE OF ISSUE** : Dec. 18, 2024

**STANDARD(S)** : FCC Part 15 Subpart E §15.407

**REPORT VERSION** : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 110

# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Dec. 18, 2024	Valid	Initial Release



#### **Table of Contents**

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Table of Carrier Frequency	7
2.3 Related Submittal(S) / Grant (S)	8
2.4Test Methodology	8
2.5 Special Accessories	8
2.6 Equipment Modifications	8
2.7 Antenna Requirement	8
2.10 Description of Test Software	9
3. Test Environment	10
3.1 Address of The Test Laboratory	
3.2 Test Facility	10
3.3 Environmental Conditions	11
3.4 Measurement Uncertainty	11
3.5 List of Equipment Used	12
4.System Test Configuration	13
4.1 EUT Configuration	13
4.2 EUT Exercise	13
4.3 Configuration of Tested System	13
4.4 Equipment Used in Tested System	13
4.5 Summary of Test Results	14
5. Description of Test Modes	15
6. Duty Cycle Measurement	
7. RF Output Power Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	
8. 6dB&26dB Bandwidth Measurement	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
8.4 Measurement Results	
9. Power Spectral Density Measurement	46



Page 4 of 110

9.1 Provisions Applicable	46
9.2 Measurement Procedure	46
9.3 Measurement Setup (Block Diagram of Configuration)	46
9.4 Measurement Result	47
10. Conducted Band Edge and Out-of-Band Emissions	63
10.1 Provisions Applicable	63
10.2 Measurement Procedure	63
10.3 Measurement Setup (Block Diagram of Configuration)	63
10.4 Measurement Results	64
11. Radiated Spurious Emission	84
11.1 Measurement Limit	84
11.2 Measurement Procedure	85
11.3 Measurement Setup (Block Diagram of Configuration)	87
11.4 Measurement Result	88
12. AC Power Line Conducted Emission Test	108
12.1 Measurement limit	108
12.2 Block Diagram of Line Conducted Emission Test	108
12.3 Preliminary Procedure of Line Conducted Emission Test	109
12.4 Final Procedure of Line Conducted Emission Test	109
12.5 Test Result of Line Conducted Emission Test	109
Appendix I: Photographs of Test Setup	110
Appendix II: Photographs of EUT	110



Report No.: AGC11805240901FR03 Page 5 of 110

1. General Information

Applicant	Shenzhen Potensic Intelligent Co., Ltd.	
Address	Room 1901, Jinqizhigu Building, Tangling Road, Nanshan District, Shenzhen, China	
Manufacturer	Shenzhen Potensic Intelligent Co., Ltd.	
Address	Room 1901, Jinqizhigu Building, Tangling Road, Nanshan District, Shenzhen, China	
Factory	Shenzhen Potensic Intelligent Co., Ltd.	
Address	Room 1901, Jinqizhigu Building, Tangling Road, Nanshan District, Shenzhen, China	
Product Designation	ATOM 2 Drone	
Brand Name	Potensic	
Test Model	DSDR23A	
Series Model(s)	DSDR23B, DSDR23C, DSDR23D	
Difference Description	All the same except the model name	
Date of receipt of test item	Sep. 19, 2024	
Date of Test	Sep. 19, 2024~Dec. 18, 2024	
Deviation from Standard	No any deviation from the test method	
Condition of Test Sample	Normal	
Test Result	Pass	
Test Report Form No	AGCER-FCC-5G WLAN-V1	

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Bibo zhang	
	Bibo Zhang (Project Engineer)	Dec. 18, 2024
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Dec. 18, 2024
Approved By	Angole Li	
	Angela Li (Authorized Officer)	Dec. 18, 2024



Page 6 of 110

## 2. Product Information

## 2.1 Product Technical Description

Equipment Type				
Equipment Type	☐ Fixed P2P access points ☐ Client devices			
	□ U-NII 1:5150MHz~5250MHz     □ U-NII 2A: 5250MHz~5350MHz			
Operation Frequency	☐ U-NII 2C:5470MHz~5725MHz ☐ U-NII 3: 5725MHz~5850MHz			
Hardware Version	V06			
Software Version	V4.2.4			
	For 802.11a/n-HT20/ac-VHT20:5180~5240MHz/5745~5825MHz;			
Test Frequency Range	For 802.11n-HT40/ac-VHT40:5190~5230MHz/5755~5795MHz;			
	For 802.11ac-VHT80:5210MHz/5775MHz			
	802.11a:12.29dBm,802.11n(HT20):11.85dBm; 802.11n(HT40):11.63dBm;			
RF Output Power	802.11ac (VHT20):11.52dBm;802.11ac (VHT40): 11.87dBm;			
	802.11ac (VHT80): 11.15dBm			
Modulation	802.11a/n:(64-QAM, 16-QAM, QPSK, BPSK) OFDM			
Modulation	802.11ac:(256-QAM, 64-QAM, 16-QAM, QPSK, BPSK) OFDM			
	802.11a:6/9/12/18/24/36/48/54Mbps;			
Data Rate	802.11n:up to 300Mbps;			
	802.11ac:up to 866.7Mbps;			
Number of channels	7 channels of U-NII 1 Band			
Number of Chamileis	8 channels of U-NII 3 Band			
Antenna Designation	PIFA Antenna			
Antenna Gain	3.02dBi			
Power Supply	DC 7.7V by battery			



Page 7 of 110

## 2.2 Table of Carrier Frequency

#### For 5180~5240MHz:

## 4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

## 2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

## 1 channel is provided for 802.11ac (VHT80):

Channel	Frequency	Channel	Frequency
42	5210 MHz		

#### For 5745~5825MHz:

## 5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

## 2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

## 1 channel is provided for 802.11ac (VHT80):

Channel	Frequency	Channel	Frequency
155	5775 MHz	-	



Page 8 of 110

## 2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2BK8B-DSDR23A**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

#### 2.4Test Methodology

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 789033	789033 D02 General U-NII Test Procedures New Rules v02r01

#### 2.5 Special Accessories

Refer to section 4.4.

#### 2.6 Equipment Modifications

Not available for this EUT intended for grant.

#### 2.7 Antenna Requirement


## Standard Requirement

#### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### **EUT Antenna:**

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 3.02dBi






#### 2.8 Description of Test Software

## For IEEE 802.11 mode:

The test utility software used during testing was "SecureCRT", and the version was "6.6.1".

Software Setting Diagram

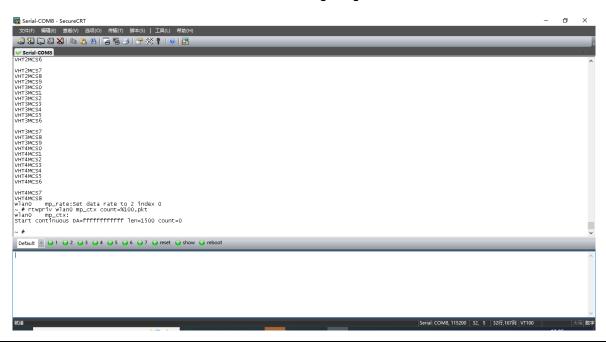

Test Mode (U-NII 1 Band)	Channel	Power Index
802.11a	L/M/H	24
802.11n (HT20)	L/M/H	55
802.11n (HT40)	L/M/H	52
802.11ac (VHT20)	L/M/H	55
802.11ac (VHT40)	L/M/H	52
802.11ac (VHT80)	L/M/H	54
Test Mode (U-NII 3 Band)	Channel	Power Index
802.11a	L/M/H	60
802.11n (HT20)	L/M/H	58
802.11n (HT40)	L/M/H	56
802.11ac (VHT20)	L/M/H	58
802.11ac (VHT40)	L/M/H	56
802.11ac (VHT80)	L/M/H	54



Page 10 of 110

#### 3. Test Environment

## 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

#### 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

## CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

#### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

#### IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 11 of 110

## 3.3 Environmental Conditions

	Normal Conditions		
Temperature range (°C)	15 - 35		
Relative humidity range	20% - 75%		
Pressure range (kPa)	86 - 106		
Power supply	DC 7.7V		

## 3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty	
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$	
Uncertainty of Radiated Emission for 9kHz-30MHz	$U_c = \pm 3.9 \text{ dB}$	
Uncertainty of Radiated Emission for 30MHz-1GHz	$U_c = \pm 3.9 \text{ dB}$	
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$	
Uncertainty of RF Power Sensor, Conducted	$U_c = \pm 0.8 \text{ dB}$	
Uncertainty of total RF Power, Conducted	$U_c = \pm 1.8 \text{ dB}$	
Uncertainty of RF Power Density, Conducted	$U_c = \pm 2.6 \text{ dB}$	
Uncertainty of Conducted Spurious Emissions for 9kHz-40GHz	$U_c = \pm 2.7 dB$	
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2.0 \%$	
Uncertainty of Dwell Time	$U_c = \pm 0.2 \%$	



Page 12 of 110

## 3.5 List of Equipment Used

• R	RF Conducted Test System									
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)			
$\boxtimes$	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23			
$\boxtimes$	☑       AGC-ER-E062       Power Sensor         ☑       AGC-ER-E063       Power Sensor         ☑       AGC-ER-A001       6dB Attenuator         ☑       N/A       RF Connection Cable	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31				
$\boxtimes$		Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31			
$\boxtimes$		6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20			
$\boxtimes$			N/A	1#	N/A	Each time	N/A			
	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A			

• F	Radiated Spurious Emission									
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)			
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31			
$\boxtimes$	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23			
$\boxtimes$	☐ AGC-EM-E061 Spectru	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27			
$\boxtimes$	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04			
$\boxtimes$	AGC-EM-E001 Wideband Antenna		SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10			
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30			
$\boxtimes$	<ul><li>✓ AGC-EM-E082 Horn Antenna</li><li>✓ AGC-EM-E083 Pre-amplifier</li></ul>		SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23			
$\boxtimes$			CHENGXI	EMC184045SE	980508	2023-09-20	2025-09-19			
$\boxtimes$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23			
$\boxtimes$	AGC-EM-A118	5G Filter	SongYi	BRM50716	N/A	2024-05-23	2025-05-22			
$\boxtimes$	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08			

Test Software									
Used	Equipment No.	ent No. Test Equipment Mai		Model No.	Version Information				
$\boxtimes$	AGC-EM-S001 CE Test System  AGC-EM-S003 RE Test System  AGC-ER-S012 BT/WIFI Test System		R&S	ES-K1	V1.71				
			FARA	EZ-EMC	VRA-03A				
$\boxtimes$			Tonscend	JS1120-2	2.6				
	AGC-EM-S011	GC-EM-S011 RSE Test System		TS+-Ver2.1(JS36-RSE)	4.0.0.0				



Page 13 of 110

# 4. System Test Configuration


## 4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

## 4.3 Configuration of Tested System



# Power from battery

## 4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

☐ Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Battery	Xi'an SAFTY Energy Technology Co., Ltd	DSBT02B	DC 7.7V 2230mAh	N/A



Page 14 of 110

## 4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.407(a/1/3)	RF Output Power	Pass
3	§15.407(e)	6dB Bandwidth Measurement	Pass
4	§15.407(i)	26dB bandwidth Measurement	Pass
5	§15.407(a/1/3)	Power Spectral Density	Pass
6	§15.407(g)	Frequency Stability	Pass (See Note 1)
7	§15.407(c)	Transmission Discontinuation Requirement	Pass (See Note 2)
8	§15.407(b)(1/4)	Conducted Spurious Emission	Pass
9	§15.209/§15.407(b)(1/4)	Radiated Emission& Band Edge	Pass
10	§15.207	AC Power Line Conducted Emission	N/A

#### Note:

- 1. Refer to the manufacturer's declaration in the user manual.
- 2. The device operates without the transmission of information.



Page 15 of 110

#### 5. Description of Test Modes

EUT Configure Mode		Applic	able To	Description	
201 Comigaro Modo	RE > 1G	RE < 1G	PLC	APCM	Bookiplion
А		_			Powered by Adapter with WIFI(5G) Link
В	$\boxtimes$			Powered by Battery with WIFI(5G) Link	
С					Powered by USB with WIFI(5G) Link

Where, RE > 1G: Radiated Emission above 1GHz PLC: Power Line Conducted Emission

NOTE 1: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on X-plane.

NOTE 2: "--"means no effect.

## Radiated Emission Test (Above 1GHz):

$\boxtimes$	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen
	available modulations, data rates and antenna ports (IF EUT with antenna diversity architecture).
	Support 802.11ax, device debugging is tested in Full RU state

The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
В	802.11n (20MHz)	5180-5240	36 to 48	36, 40, 48	OFDM	MCS0
В	802.11n (20MHz)	5745-5825	149 to 165	149, 157, 165	OFDM	MCS0

#### Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).
- ☐ The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
В	802.11n(20MHz)	5180-5240	36 to 48	36	OFDM	MCS0
В	802.11n(20MHz)	5745-5825	149 to 165	149	OFDM	MCS0



Report No.: AGC11805240901FR03 Page 16 of 110

Band edge Measurement:

$\boxtimes$	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen
	available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).
	Support 802.11ax, device debugging is tested in Full RU state
	The device under test has multiple antennas. The mode that supports MIMO technology records the worst
	data, and the mode that does not support MIMO technology records antenna 1 as the worst data.
$\boxtimes$	Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
В	802.11n (20MHz)		36 to 48	36	OFDM	MCS0
В	802.11n (40MHz)	5180-5240	38 to 46	39	OFDM	MCS0
В	802.11ac (80MHz)		42	42	OFDM	MCS0
В	802.11n (20MHz)	5745-5825	149 to 165	149, 165	OFDM	MCS0

Note: Only the data of band edge emission at the restricted band 4.5GHz-5.15GHz and 5.35GHz-5.46GHz record in the report. Other restricted band 7.25GHz-7.77GHz were considered as ambient noise. No recording in the test report.

## • Antenna Port Conducted Measurement:

available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).

☐ Support 802.11ax, device debugging is tested in Full RU state

⊠ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
В	802.11a		36 to 48	36, 40, 48	OFDM	6.0
В	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	MCS0
В	802.11n (40MHz)	5180-5240	38 to 46	38, 46	OFDM	MCS0
В	802.11ac (20MHz)	3160-3240	36 to 48	36, 40, 48	OFDM	MCS0
В	802.11ac (40MHz)		38 to 46	38, 46	OFDM	MCS0
В	802.11ac (80MHz)		42	42	OFDM	MCS0
В	802.11a		149 to 165	149, 157, 165	OFDM	6.0
В	802.11n (20MHz)		149 to 165	149, 157, 165	OFDM	MCS0
В	802.11n (40MHz)	E74E E00E	151 to 159	151, 159	OFDM	MCS0
В	802.11ac (20MHz)	5745-5825	149 to 165	149, 157, 165	OFDM	MCS0
В	802.11ac (40MHz)		151 to 159	151, 159	OFDM	MCS0
В	802.11ac (80MHz)		155	155	OFDM	MCS0



Page 17 of 110


## 6. Duty Cycle Measurement

5GHz WLAN (NII) operation is possible in 20MHz, 40MHz and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Average. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	Data rates (Mbps)	Duty Cycle (%)	Duty Cycle Factor (dB)			
Band U-NII1:5150MHz-5250MHz						
802.11a	6	51	2.92			
802.11n_HT20	MCS0	50	3.01			
802.11n_HT40	MCS0	24	6.2			
802.11ac_VHT20	MCS0	48	3.19			
802.11ac_VHT40	MCS0	23	6.38			
802.11ac_VHT80	MCS0	12	9.21			
	Band U-NII 3:5725M	MHz-5850MHz				
802.11a	6	52	2.84			
802.11n_HT20	MCS0	47	3.28			
802.11n_HT40	MCS0	23	6.38			
802.11ac_VHT20	MCS0	49	3.10			
802.11ac_VHT40	MCS0	25	6.02			
802.11ac_VHT80	MCS0	11	9.59			

#### Remark:


- 1. Duty Cycle factor = 10 \* log (1/ Duty cycle)
- 2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value.
- 3. Involving the test items of duty cycle compensation coefficient, the final results have been added and calculated by the software and presented.






## The test plots as follows:







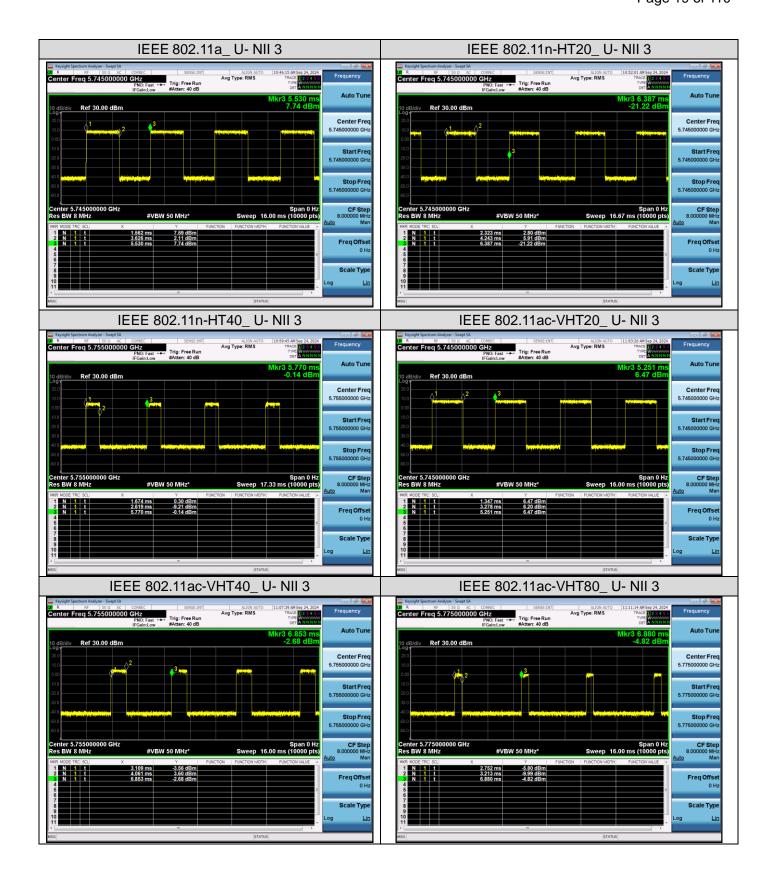



Page 20 of 110

## 7. RF Output Power Measurement

## 7.1 Provisions Applicable

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p < 125mW (21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
0		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
		Client devices	250mW (23.98 dBm)
U-NII-2A		/	250mW (23.98 dBm) or 11 dBm+10 log B*
U-NII-2C	/		250mW (23.98 dBm) or 11 dBm+10 log B*
U-NII-3		/	1 Watt (30 dBm)


Note: Where B is the 26dB emission bandwidth in MHz.

#### 7.2 Measurement Procedure

Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 12.3.3.1
- 2. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
- 3. The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 4. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 5. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 6. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 7. Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- 8. Adjust the measurement in dBm by adding [10 log (1 / D)], where D is the duty cycle {e.g., [10 log (1 / 0.25)], if the duty cycle is 25%}.
- 9. The final test results have been increased by the duty cycle factor and recorded in the report.

## 7.3 Measurement Setup (Block Diagram of Configuration)

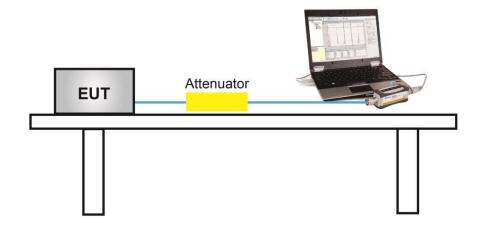



Page 21 of 110

## 7.4 Measurement Result

	Test Data of Conducted Output Power for band 5.15-5.25 GHz						
Test Mode	Test Frequency (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail			
	5180	12.29	30	Pass			
802.11a	5200	11.63	30	Pass			
	5240	11.67	30	Pass			
	5180	11.51	30	Pass			
802.11n20	5200	11.85	30	Pass			
	5240	11.83	30	Pass			
802.11n40	5190	10.80	30	Pass			
802.111140	5230	11.63	30	Pass			
	5180	11.32	30	Pass			
802.11ac20	5200	11.52	30	Pass			
	5240	11.47	30	Pass			
000 11 0010	5190	11.25	30	Pass			
802.11ac40	5230	10.89	30	Pass			
802.11ac80	5210	10.84	30	Pass			

# • E.I.R.P. (30 degrees elevation at any horizontal plane) measurements for outdoor equipment

Test Data of E.I.R.P. for band 5.15-5.25 GHz						
Test Mode	Test Frequency (MHz)	E.I.R.P. (dBm)	Limits (dBm)	Pass or Fail		
	5180	8.92	21	Pass		
802.11a	5200	9.01	21	Pass		
	5240	8.55	21	Pass		
	5180	8.36	21	Pass		
802.11n20	5200	9.03	21	Pass		
	5240	9.12	21	Pass		
802.11n40	5190	8.75	21	Pass		
002.111140	5230	8.77	21	Pass		
	5180	8.92	21	Pass		
802.11ac20	5200	9.02	21	Pass		
	5240	7.95	21	Pass		
802.11ac40	5190	9.05	21	Pass		
802.11ac40	5230	8.14	21	Pass		
802.11ac80	5210	7.89	21	Pass		



Page 22 of 110

Test Data of Conducted Output Power for band 5.725-5.850 GHz						
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail		
	5745	11.63	30	Pass		
802.11a	5785	11.82	30	Pass		
	5825	12.04	30	Pass		
	5745	11.06	30	Pass		
802.11n20	5785	11.19	30	Pass		
	5825	11.06	30	Pass		
000 44=40	5755	10.77	30	Pass		
802.11n40	5795	10.98	30	Pass		
	5745	10.48	30	Pass		
802.11ac20	5785	11.07	30	Pass		
	5825	10.94	30	Pass		
000 44 40	5755	10.09	30	Pass		
802.11ac40	5795	11.87	30	Pass		
802.11ac80	5775	11.15	30	Pass		



Page 23 of 110

#### 8. 6dB&26dB Bandwidth Measurement

## 8.1 Provisions Applicable

The minimum 6dB bandwidth shall be at least 500 kHz.

#### **8.2 Measurement Procedure**

#### ◆ -6dB bandwidth (DTS bandwidth) Test setting:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on operation frequency individually.
- 3. Set RBW = 100kHz.
- 4. Set the VBW ≥3\*RBW. Detector = Peak. Trace mode = max hold.
- 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.

#### ♦ 99% occupied bandwidth test setting:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 1.5 to 5 times the OBW, centered on a nominal channel
  The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
  bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

#### -26dB Bandwidth test setting:

- 1. Set RBW = approximately 1% of the emission bandwidth.
- 2. Set the VBW > RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Note: The EUT was tested according to KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

## 8.3 Measurement Setup (Block Diagram of Configuration)

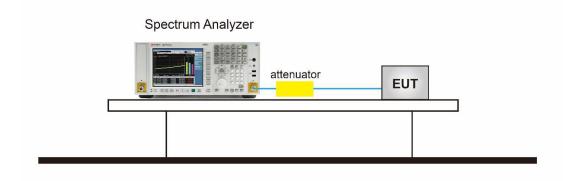




Page 24 of 110

## 8.4 Measurement Results


Tes	Test Data of Occupied Bandwidth and -26dB Bandwidth for band 5.15-5.25 GHz						
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-26dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail		
	5180	16.475	19.982	N/A	Pass		
802.11a	5200	16.642	20.531	N/A	Pass		
	5240	16.607	20.569	N/A	Pass		
	5180	17.612	20.772	N/A	Pass		
802.11n20	5200	17.656	20.736	N/A	Pass		
	5240	17.661	21.004	N/A	Pass		
802.11n40	5190	36.056	40.811	N/A	Pass		
002.111140	5230	36.137	41.374	N/A	Pass		
	5180	17.674	20.518	N/A	Pass		
802.11ac20	5200	17.683	21.243	N/A	Pass		
	5240	17.663	21.437	N/A	Pass		
902 110040	5190	36.199	41.901	N/A	Pass		
802.11ac40	5230	36.154	41.407	N/A	Pass		
802.11ac80	5210	75.299	80.344	N/A	Pass		


Test Data of Occupied Bandwidth and DTS Bandwidth for band 5.725-5.85 GHz						
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	DTS Limits (MHz)	Pass or Fail	
	5745	16.560	16.376	0.5	Pass	
802.11a	5785	16.588	16.360	0.5	Pass	
	5825	16.724	16.320	0.5	Pass	
	5745	17.659	17.047	0.5	Pass	
802.11n20	5785	17.666	16.954	0.5	Pass	
	5825	17.696	17.030	0.5	Pass	
802.11n40	5755	36.114	34.739	0.5	Pass	
802.111140	5795	36.223	35.143	0.5	Pass	
	5745	17.624	16.348	0.5	Pass	
802.11ac20	5785	17.665	16.774	0.5	Pass	
	5825	17.695	16.815	0.5	Pass	
802.11ac40	5755	36.174	35.358	0.5	Pass	
802.11ac40	5795	36.189	35.318	0.5	Pass	
802.11ac80	5775	75.362	75.129	0.5	Pass	






#### Test Graphs of Occupied Bandwidth and -26dB Bandwidth for band 5.15-5.25 GHz

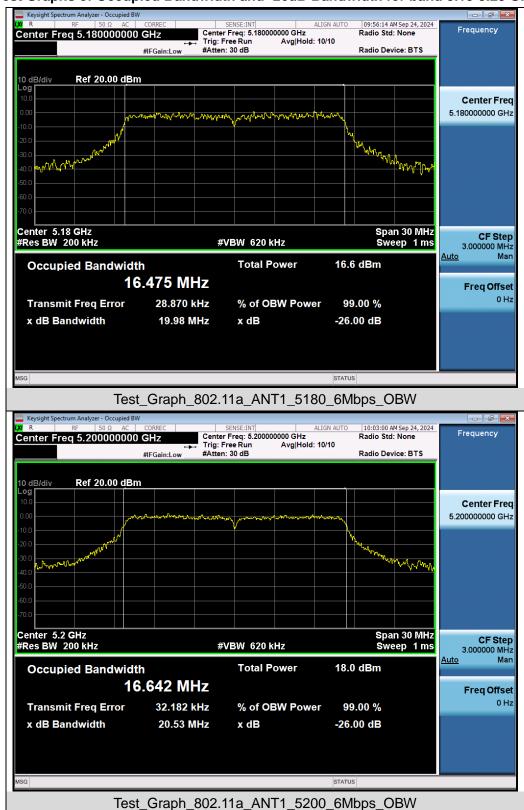







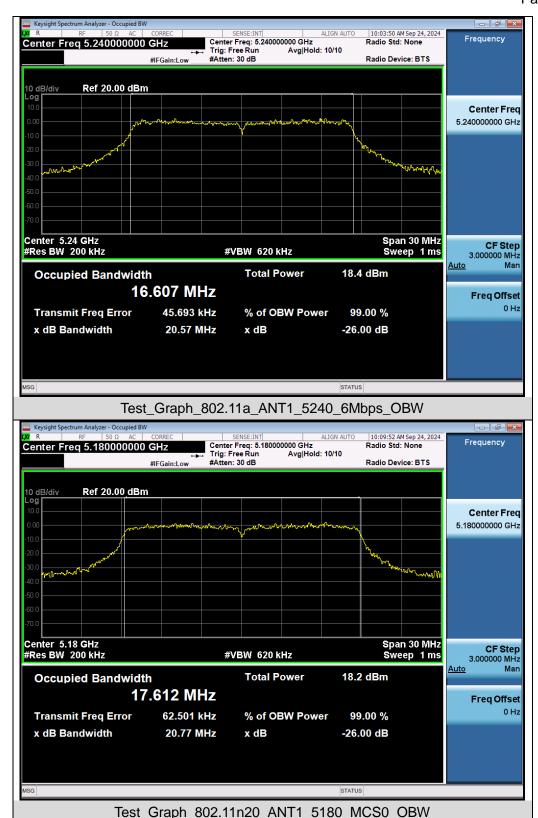


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






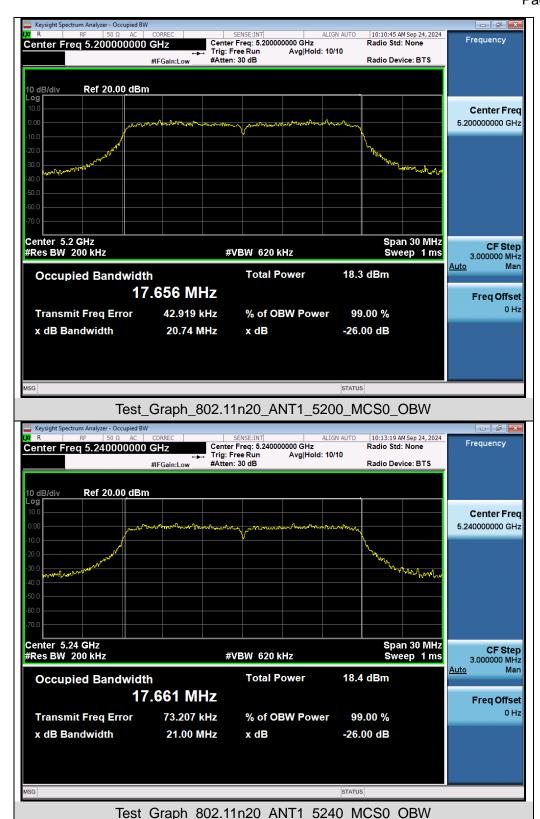


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/







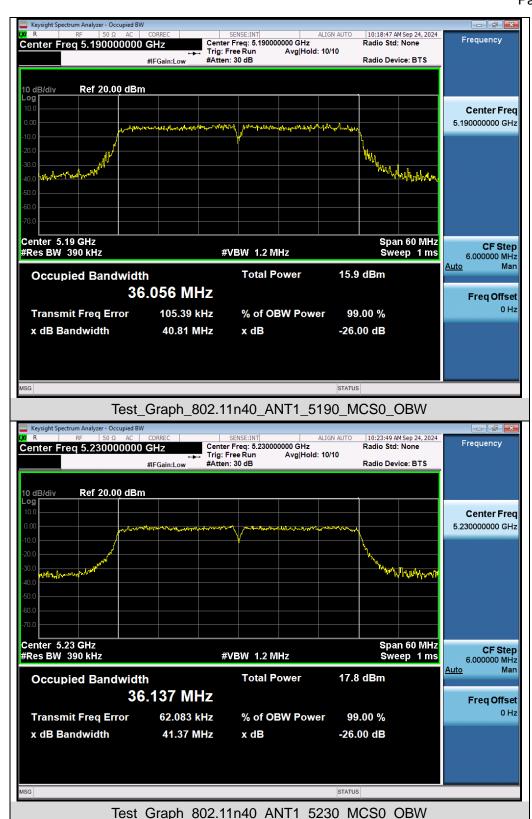






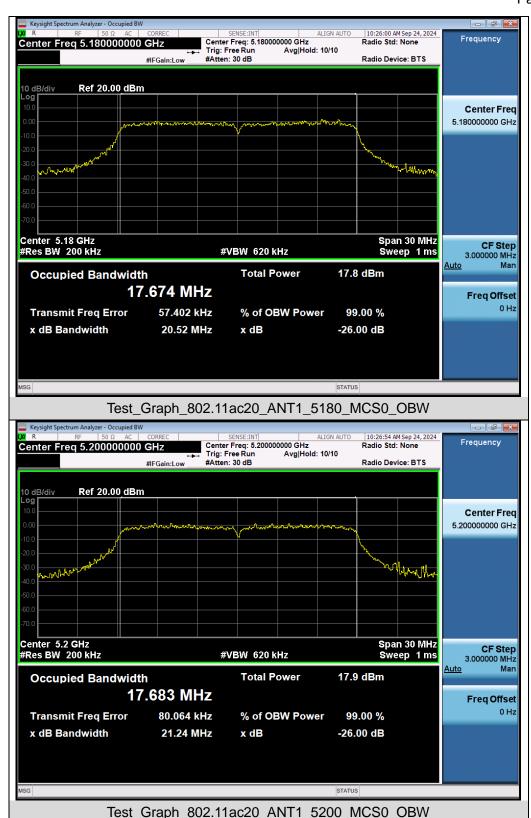







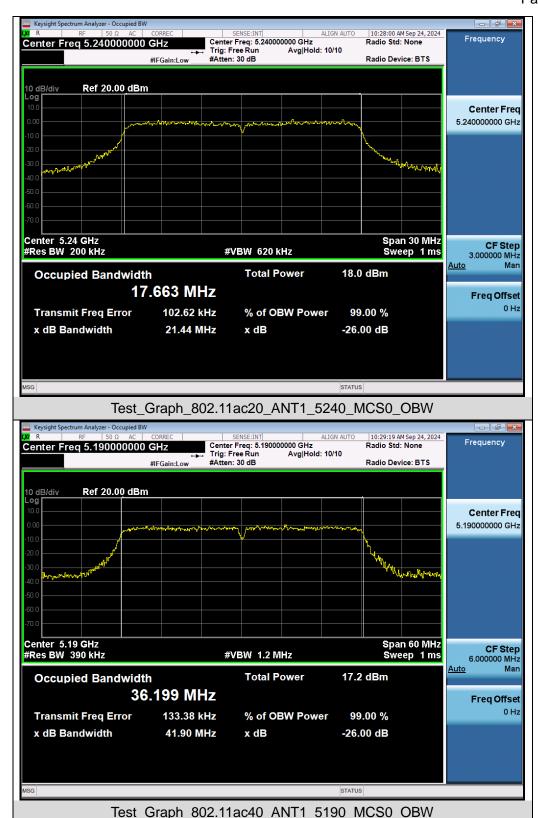


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






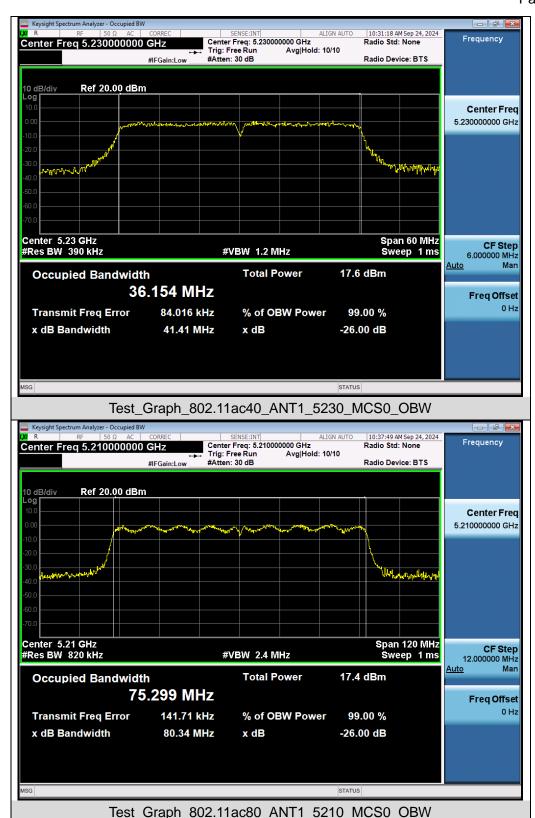








#### Test Graphs of Occupied Bandwidth and -26dB Bandwidth for band 5.745-5.825 GHz

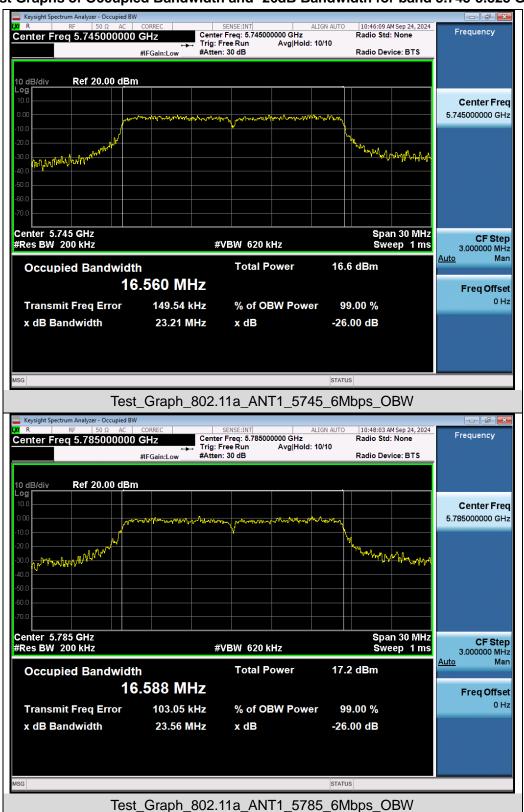






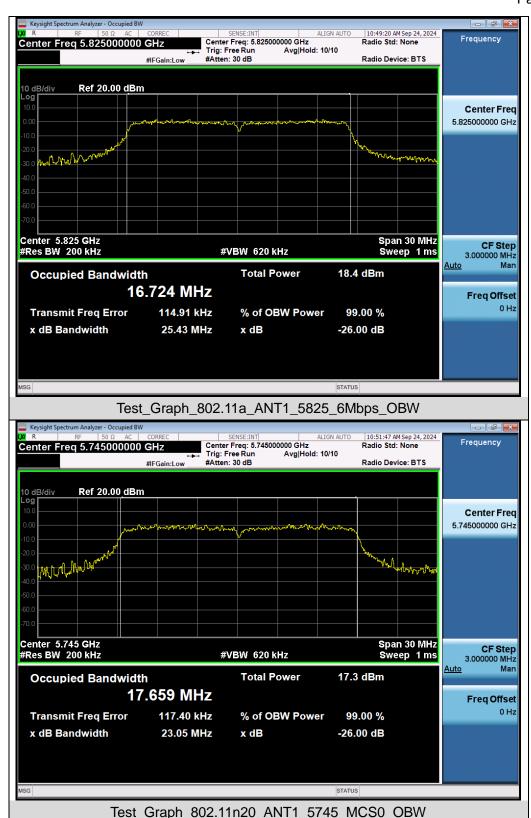







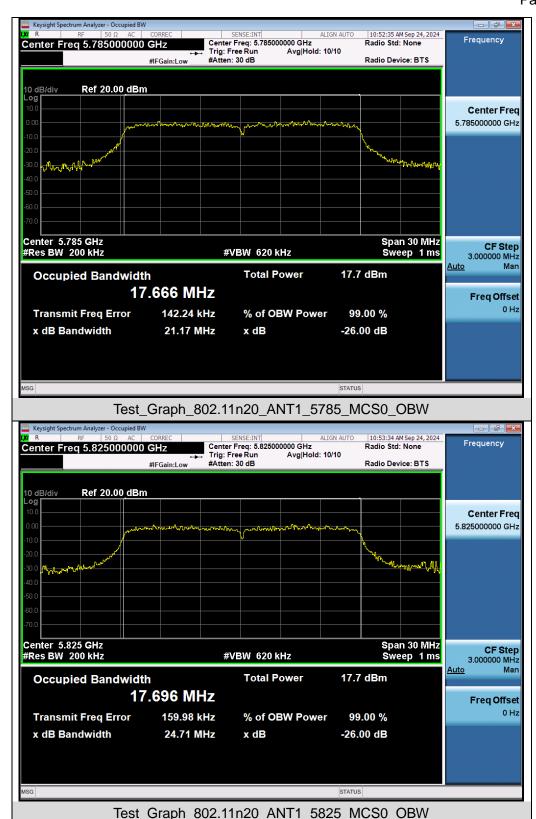


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






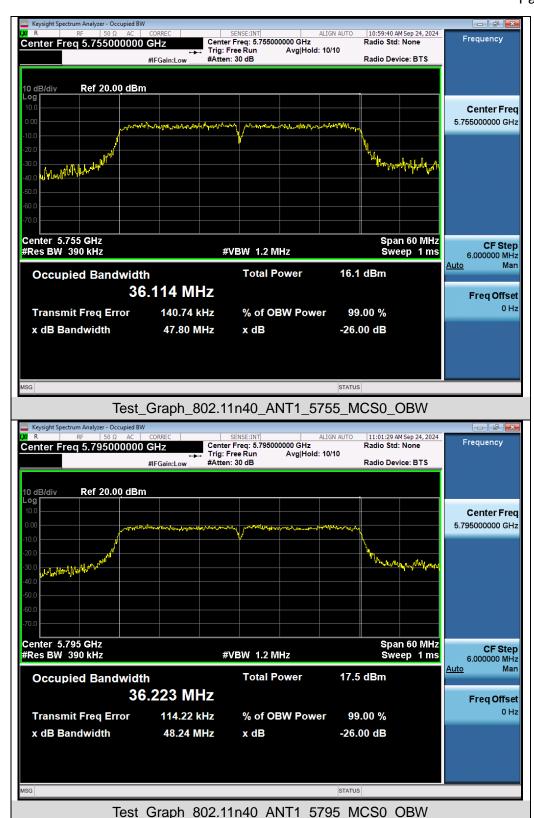


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/







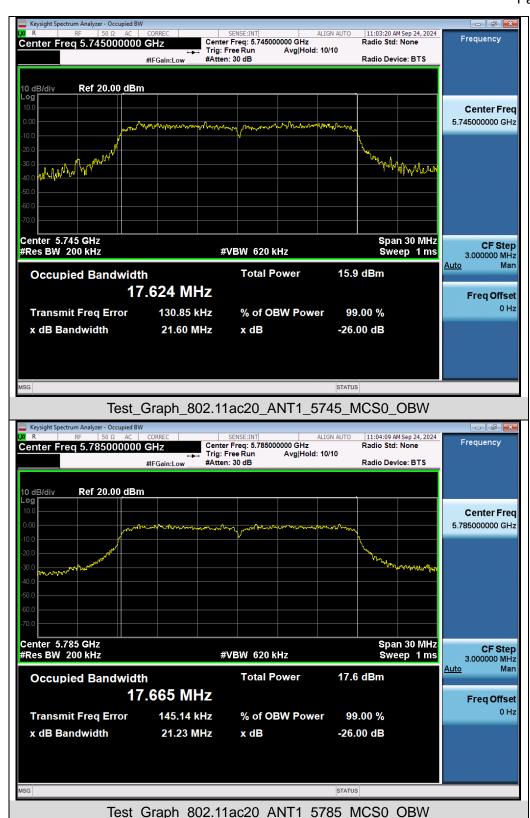






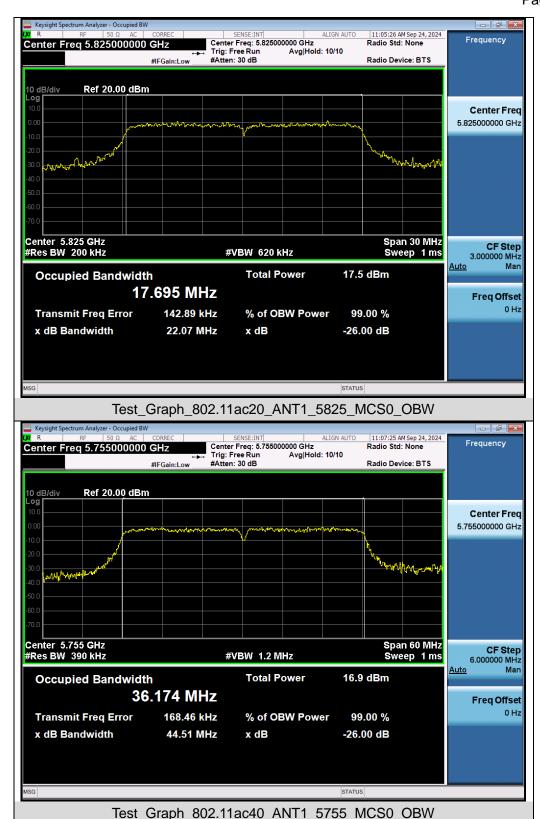






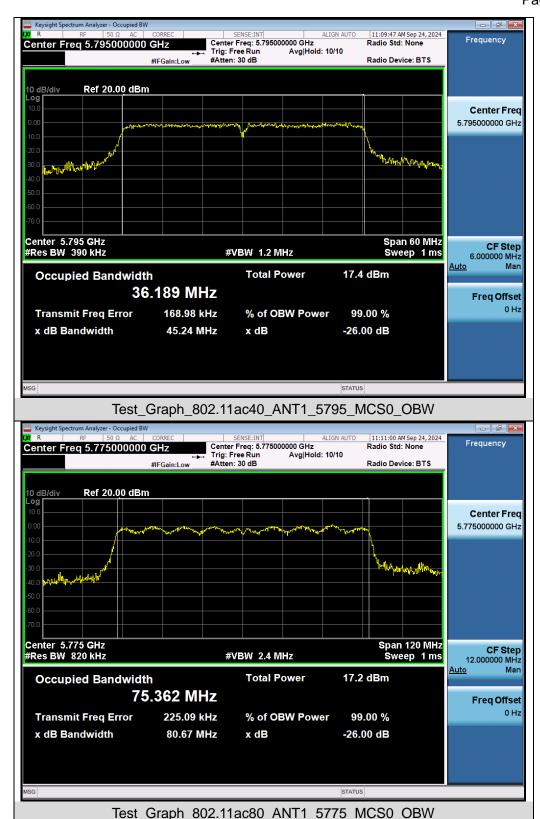


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






### Test Graphs of DTS Bandwidth for band 5.725-5.85 GHz

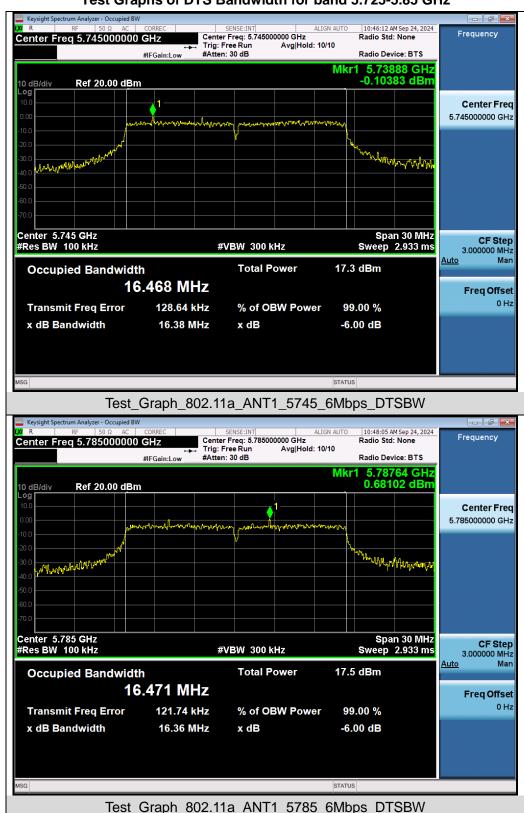



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/







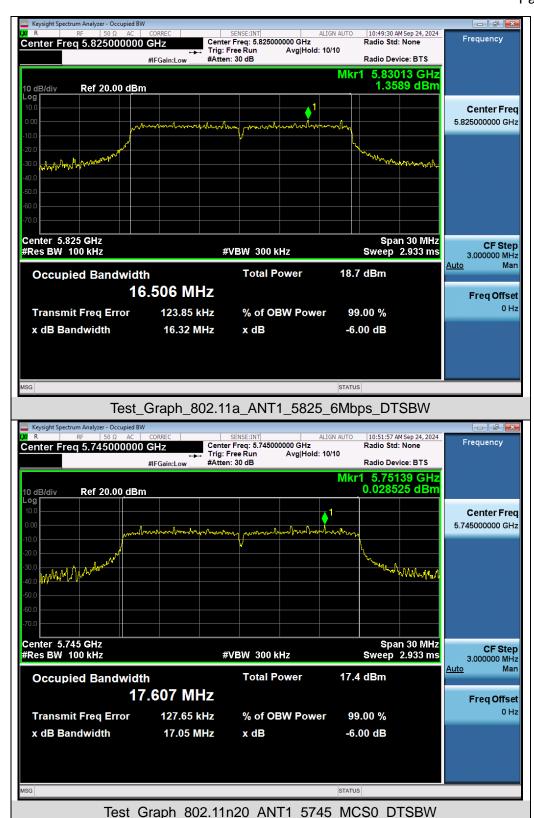







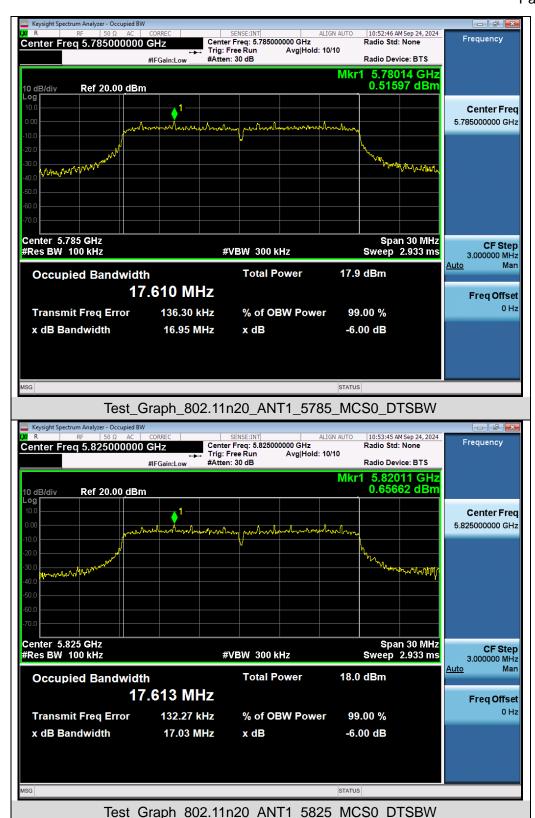







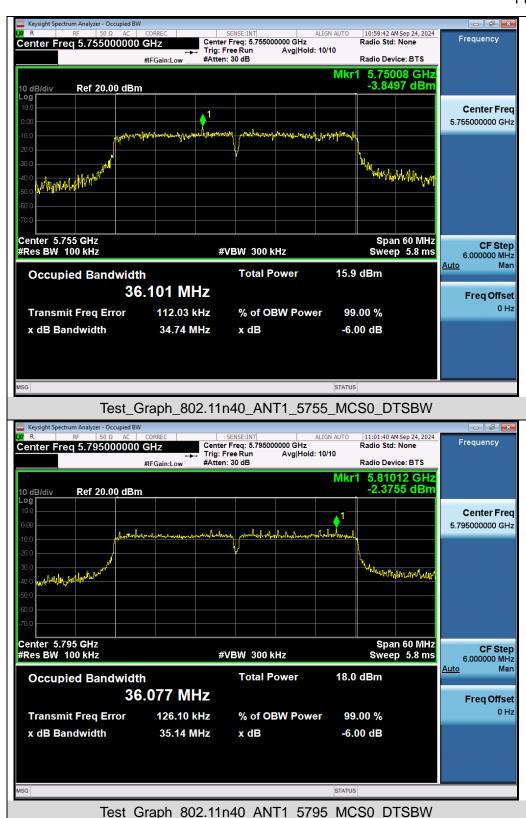







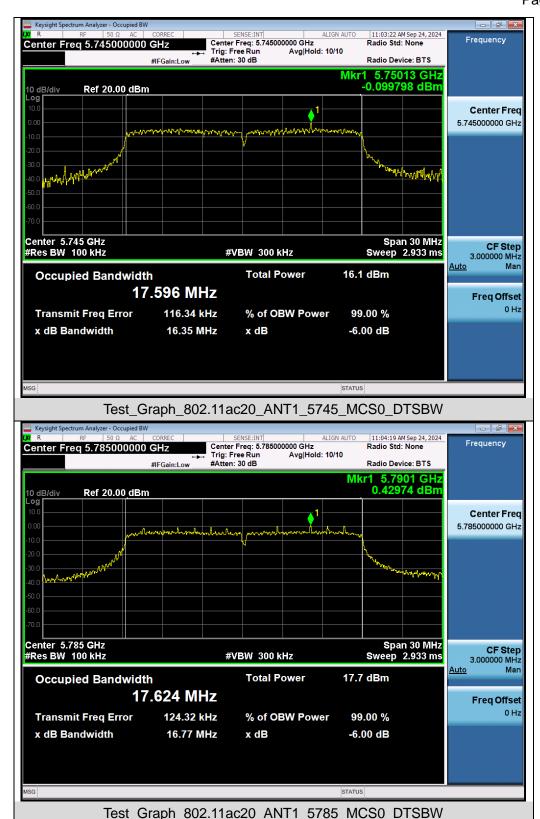






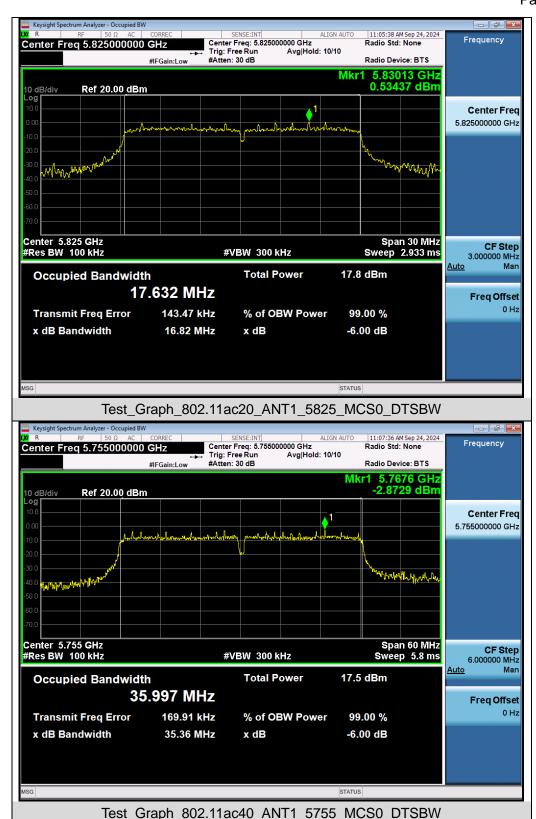





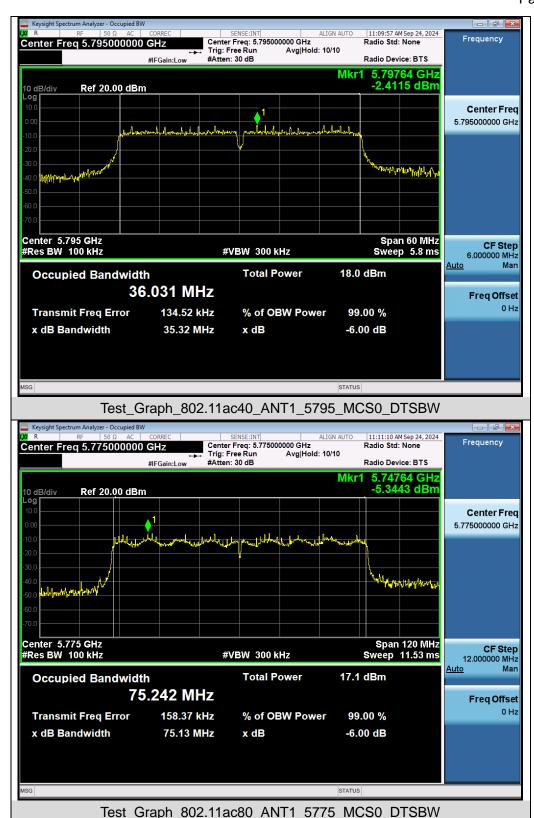



Report No.: AGC11805240901FR03

Page 46 of 110

# 9. Power Spectral Density Measurement

# 9.1 Provisions Applicable


Operation Band	EUT Category		LIMIT	
U-NII-1	$\boxtimes$	Outdoor Access Point	17dBm/ MHz	
		Fixed point-to-point Access Point	17dBm/ MHz	
		Indoor Access Point	17dBm/ MHz	
		Client devices	11dBm/ MHz	
U-NII-2A	/		11dBm/ MHz	
U-NII-2C	/		11dBm/ MHz	
U-NII-3	/		30 dBm/500kHz	

### 9.2 Measurement Procedure

⊠For Average power spectral density test:

- Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
- 2. Span was set to encompass the entire 26dB EBW of the signal.
- 3. RBW = 1MHz.
- 4. If measurement bandwidth of Maximum PSD is specified in 500 kHz, RBW = 100KHz
- 5. Set VBW≥[3×RBW].
- 6. Sweep Time=Auto couple.
- 7. Detector function=RMS (i.e., power averaging).
- 8. Trace average at least 100 traces in power averaging (rms) mode.
- 9. When the measurement bandwidth of Maximum PSD is specified in 100 kHz, add a constant factor 10\*log(500kHz/100kHz) = 6.99 dB to the measured result.
- 10. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 11. Add [10 log (1/D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is 25%.
- 12. The final test results have been increased by the duty cycle factor and recorded in the report

#### 9.3 Measurement Setup (Block Diagram of Configuration)

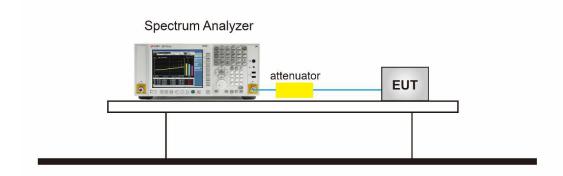



Report No.: AGC11805240901FR03

Page 47 of 110

# 9.4 Measurement Result


Test Data of Conducted Output Power Density for band 5.15-5.25 GHz								
Test Mode	Test Channel (MHz)	Average Power Density (dBm/MHz)	Limits (dBm/MHz)	Pass or Fail				
802.11a	5180	2.084	≤17	Pass				
	5200	0.986	≤17	Pass				
	5240	0.519	≤17	Pass				
802.11n20	5180	0.499	≤17	Pass				
	5200	0.766	≤17	Pass				
	5240	0.749	≤17	Pass				
802.11n40	5190	-4.648	≤17	Pass				
	5230	-2.561	≤17	Pass				
802.11ac20	5180	0.937	≤17	Pass				
	5200	0.668	≤17	Pass				
	5240	0.486	≤17	Pass				
802.11ac40	5190	-3.117	≤17	Pass				
	5230	-0.907	≤17	Pass				
802.11ac80	5210	-4.567	≤17	Pass				



Report No.: AGC11805240901FR03


Page 48 of 110

Test Data of Conducted Output Power Density for band 5.725-5.85 GHz							
Test Mode	Test Channel (MHz)	Average Power Density (dBm/100kHz)	Average Power Density (dBm/500kHz)	Limits (dBm/500kHz)	Pass or Fail		
802.11a	5745	-8.318	-1.328	≤30	Pass		
	5785	-7.65	-0.660	≤30	Pass		
	5825	-7.866	-0.876	≤30	Pass		
802.11n20	5745	-9.047	-2.057	≤30	Pass		
	5785	-8.725	-1.735	≤30	Pass		
	5825	-9.026	-2.036	≤30	Pass		
802.11n40	5755	-11.357	-4.367	≤30	Pass		
	5795	-11.637	-4.647	≤30	Pass		
802.11ac20	5745	-9.347	-2.357	≤30	Pass		
	5785	-8.835	-1.845	≤30	Pass		
	5825	-8.976	-1.986	≤30	Pass		
802.11ac40	5755	-11.926	-4.936	≤30	Pass		
	5795	-11.206	-4.216	≤30	Pass		
802.11ac80	5775	-13.738	-6.748	≤30	Pass		






### Test Graphs of Conducted Output Power Spectral Density for band 5.15-5.25 GHz

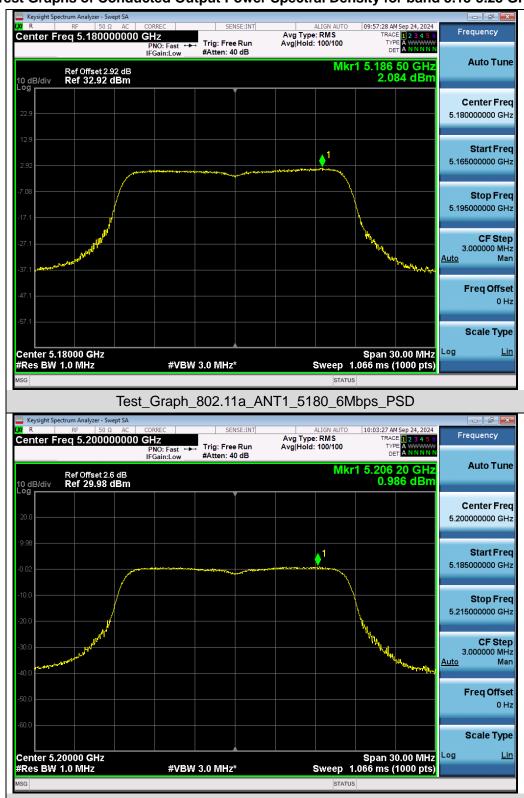



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11a\_ANT1\_5200\_6Mbps\_PSD







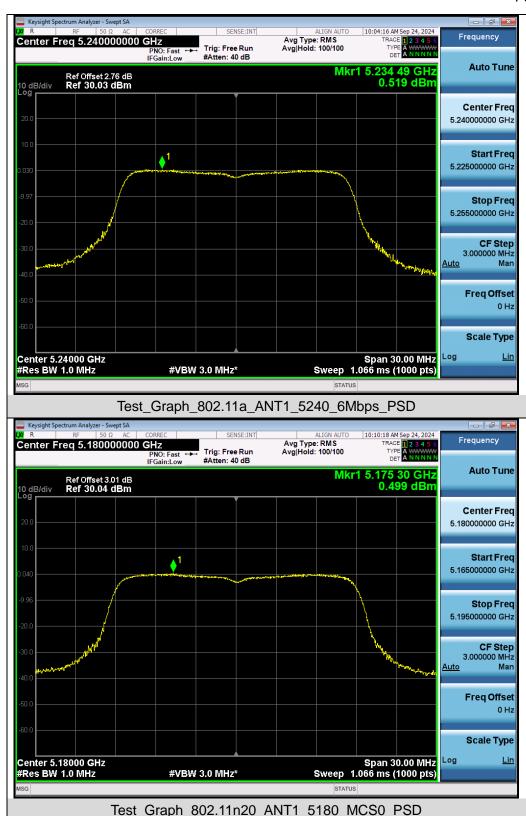






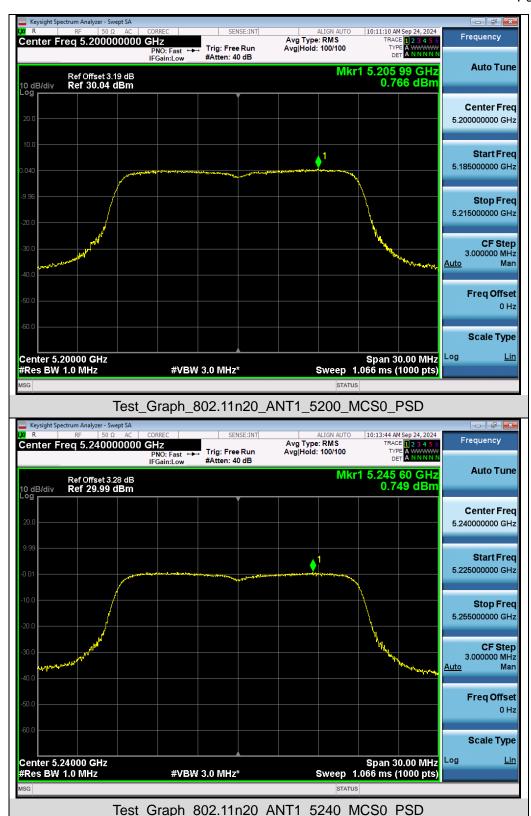















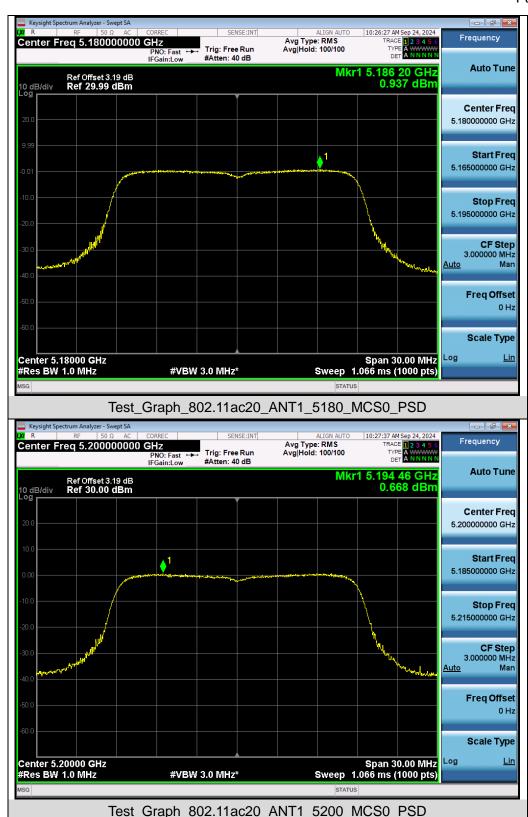






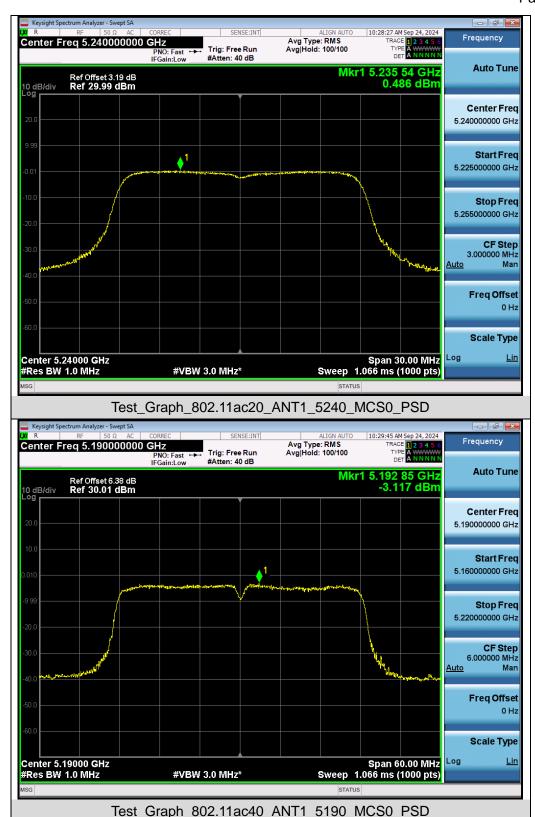











### Test Graphs of Conducted Output Power Spectral Density for band 5.725-5.85 GHz

