



# TEST REPORT

*For*

**Applicant :** Alinco Incorporated, Electronics Division

**Address :** Yodoyabashi Dai Building 13F, 4-4-9 Koraibashi,  
Chuo-Ku, Osaka 541-0043, Japan

**Product Name :** UHF DIGITAL TRANSCEIVER

**Model Name :** DJ-AXD4

**Brand Name :** ALINCO

**FCC Number :** FCC ID : PH3DJ-AXD4

**Report No. :** MTE/TAC/B17010059

**Date of Issue :** Jan.11, 2017

**Issued by :** Most Technology Service Co., Ltd.

**Address :** No.5, 2nd Langshan Road, North District, Hi-tech Industrial  
Park, Nanshan, Shenzhen, Guangdong, China

**Tel :** 86-755-8602 6850

**Fax :** 86-755-2601 6850

*The report consists 51 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by MOST. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.*

## TABLE OF CONTENTS

|                                                                       |           |
|-----------------------------------------------------------------------|-----------|
| <b>1. TEST STANDARDS .....</b>                                        | <b>3</b>  |
| <b>1.1 VERIFICATION OF CONFORMITY .....</b>                           | <b>4</b>  |
| <b>2. <u>SUMMARY</u> .....</b>                                        | <b>5</b>  |
| 2.1 General Remarks .....                                             | 5         |
| 2.2 Equipment Under Test .....                                        | 5         |
| 2.3 Short description of the Equipment under Test (EUT) .....         | 6         |
| 2.4 Short description of the Equipment under Test (EUT) .....         | 7         |
| 2.5 EUT operation mode .....                                          | 7         |
| <b>3. <u>TEST ENVIRONMENT</u> .....</b>                               | <b>8</b>  |
| 3.1 TEST FACILITY .....                                               | 8         |
| 3.2 Environmental conditions .....                                    | 8         |
| 3.3 Configuration of Tested System .....                              | 8         |
| 3.4 Measurement uncertainty .....                                     | 9         |
| 3.5. Equipments Used during the Test .....                            | 10        |
| 3.5. Equipments Used during the Test .....                            | 10        |
| 3.6. General Technical Requirements and Summary of Test Results ..... | 11        |
| <b>4. TEST CONDITIONS AND RESULTS .....</b>                           | <b>12</b> |
| 4.1 Conducted Emissions Test .....                                    | 12        |
| 4.2 Occupied Bandwidth and Emission Mask .....                        | 15        |
| 4.2.1 Occupied Bandwidth .....                                        | 15        |
| 4.3 Emission Mask .....                                               | 20        |
| 4.3. Radiated Spurious Emission Test .....                            | 27        |
| 4.4. Spurious Emission On Antenna Port .....                          | 30        |
| 4.5. Modulation Characteristics .....                                 | 40        |
| 4.6. Frequency Stability Measurement .....                            | 41        |
| 4.7. Conducted Output Power .....                                     | 44        |
| 4.8. Transient frequency behavior .....                               | 48        |
| <b>5 Test Setup Photos of the EUT .....</b>                           | <b>50</b> |

## **1. TEST STANDARDS**

The tests were performed according to following standards:

FCC Part 90: PRIVATE LAND MOBILE RADIO SERVICES

TIA/EIA 603-D-2010: Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

47 CFR FCC Part 15 Subpart B - Unintentional Radiators

FCC Part 2: FREQUENCY ALLOCA-TIONS AND RADIO TREATY MAT-TERS; GENERAL RULES AND REG-ULATIONS

## 1.1 VERIFICATION OF CONFORMITY

**Equipment Under Test:** UHF DIGITAL TRANSCEIVER  
**Brand Name:** ALINCO  
**Model Number:** DJ-AXD4  
**FCC ID:** FCC ID: PH3DJ-AXD4  
**Applicant:** Alinco Incorporated, Electronics Division  
Yodoyabashi Dai Building 13F, 4-4-9 Koraibashi, Chuo-Ku, Osaka  
541-0043, Japan  
**Manufacturer:** Alinco Incorporated, Electronics Division  
Yodoyabashi Dai Building 13F, 4-4-9 Koraibashi, Chuo-Ku, Osaka  
541-0043, Japan  
**Technical Standards:** FCC Part 90  
**File Number:** MTE/TAC/B17010059  
**Date of test:** Jan. 6-11. 2017  
**Deviation:** None  
**Condition of Test Sample:** Normal  
**Test Result:** PASS

The above equipment was tested by Most Technology Service Co., Ltd. for compliance with the requirements set forth in FCC rules and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Tested by (+ signature): Tammy  
 Tammy Wang (Engineer) Jan. 6-11. 2017  
 Review by (+ signature): Henry  
 Henry Chen (Engineer) Jan . 11. 2017  
 Approved by (+ signature): Yvette  
 Yvette Zhou (Manager) Jan . 16. 2017



## 2. SUMMARY

### 2.1 General Remarks

|                                |   |                 |
|--------------------------------|---|-----------------|
| Data of receipt of test sample | : | Jan. 6. 2017    |
|                                |   |                 |
| Testing commenced on           | : | Jan. 6-11. 2017 |
|                                |   |                 |
| Testing concluded on           | : | Jan. 11. 2017   |

### 2.2 Equipment Under Test

#### Power supply system utilised

|                      |   |                                  |                                 |                       |           |
|----------------------|---|----------------------------------|---------------------------------|-----------------------|-----------|
| Power supply voltage | : | <input type="radio"/>            | 120V/60 Hz                      | <input type="radio"/> | 115V/60Hz |
|                      |   | <input type="radio"/>            | 12V DC                          | <input type="radio"/> | 24V DC    |
|                      |   | <input checked="" type="radio"/> | Other(specified in blank below) |                       |           |

7.4V by battery

## 2.3 Short description of the Equipment under Test (EUT)

The Alinco Incorporated, Electronics Division Model: DJ-AXD4 or the “EUT” as referred to in this report; more general information as follows, for more details, refer to the user’s manual of the EUT.

|                      |                                      |                                        |
|----------------------|--------------------------------------|----------------------------------------|
| Name of EUT          | UHF DIGITAL TRANSCEIVER              |                                        |
| Model Number         | DJ-AXD4                              |                                        |
| FCC ID Number        | FCC ID: PH3DJ-AXD4                   |                                        |
| Rated Output Power   | 5Watts(36.72dBm)                     |                                        |
| Support data rate    | 9.6 kbps                             |                                        |
| Modulation Type      | 4FSK for Digital Voice/ Digital Data |                                        |
|                      | 4FSK for Digital Data                |                                        |
|                      | Digital                              | F1W&F1D for 12.5KHz Channel Separation |
| Channel Separation   | Digital Voice/ Data                  | 12.5KHz: F1W                           |
|                      | Digital Data                         | 12.5KHz: F1D                           |
| Antenna Type         | External                             |                                        |
| Frequency Range      | From 400MHz to 470MHz                |                                        |
| Maximum Output Power | Digital                              | 5.0W for 12.5KHz Channel Separation    |

Note: The product has the same digital working characters when operating in both two digitized voice/data mode. So only one set of test results for digital modulation modes are provided in this test report.

### Test frequency list

| Frequency Range<br>(MHz) | Modulation Type | Channel Separation<br>(KHz) | Test frequency<br>(MHz) |
|--------------------------|-----------------|-----------------------------|-------------------------|
| 400-470                  | Digital/4FSK    | 12.5                        | 406.1125                |
|                          |                 |                             | 429.5000                |
|                          |                 |                             | 469.9875                |

## 2.4 Short description of the Equipment under Test (EUT)

400-470MHz UHF DIGITAL TRANSCEIVER (DJ-AXD4).  
 For more details, refer to the user's manual of the EUT.  
 Serial number: Nil

## 2.5 EUT operation mode

The EUT has been tested under typical operating condition.

## 2.6 EUT operation mode

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

|   |             |               |   |
|---|-------------|---------------|---|
| ○ | Power Cable | Length(m):    | / |
|   |             | Shield:       | / |
|   |             | Detachable:   | / |
| ○ | Multimeter  | Manufacturer: | / |
|   |             | Model No:     | / |

## 2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: PH3DJ-AXD4 filing to comply with the FCC Part 90 Rules.

## 2.8 Modifications

No modifications were implemented to meet testing criteria.

### 3. TEST ENVIRONMENT

#### 3. 1 TEST FACILITY

|                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test Site:</b>    | Most Technology Service Co., Ltd                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Location:</b>     | No.5, Langshan 2nd Rd., North Hi-Tech Industrial park, Nanshan, Shenzhen, Guangdong, China                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description:</b>  | There is one 3m semi-anechoic an area test sites and two line conducted labs for final test. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014 and CISPR 16 requirements.<br>The FCC Registration Number is <b>490827</b> . The IC Registration Number is <b>7103A-1</b> .                                                                                                                                                                                                                                                                                                                                        |
| <b>Site Filing:</b>  | The site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Instrument</b>    | All measuring equipment is in accord with ANSI C63.4:2014 and CISPR 16                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Tolerance:</b>    | requirements that meet industry regulatory agency and accreditation agency requirement.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Ground Plane:</b> | Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna. |

#### 3.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 15-35 ° C    |
| Humidity:             | 30-60 %      |
| Atmospheric pressure: | 950-1050mbar |

#### 3.3 Configuration of Tested System

Configuration of Tested System




Table 2-1 Equipment Used in Tested System

Adapter: Input:100-240V~50/60Hz  
Output: 12V DC 0.5A  
Power Cable: 150cm  
◇ Shielded ◆ Unshielded

### 3.4 Measurement uncertainty

| No. | Item                                       | Uncertainty |
|-----|--------------------------------------------|-------------|
| 1.  | Uncertainty for Conducted Disturbance Test | 1.25dB      |
| 2.  | Uncertainty for Radiated Disturbance Test  | 3.15dB      |

### 3.5. Equipments Used during the Test

| Test Equipment                       | Manufacturer         | Model No.                 | Serial No.           | Calibration Date | Calibration Due Date |
|--------------------------------------|----------------------|---------------------------|----------------------|------------------|----------------------|
| Bilog Antenna                        | Sunol Sciences Corp. | JB1                       | A061713              | 2016/07/11       | 2017/07/10           |
| EMI Test Receiver& Spectrum Analyzer | R&S                  | ESCI                      | 103710               | 2016/07/09       | 2017/07/08           |
| Spectrum Analyzer                    | Agilent              | E4407B                    | E4407B<br>MY45108355 | 2016/07/05       | 2017/07/04           |
| Controller                           | EM Electronics       | Controller<br>EM 1000     | N/A                  | 2016/07/05       | 2017/07/05           |
| Horn Antenna                         | Sunol Sciences Corp. | DRH-118                   | A062013              | 2016/07/11       | 2017/07/10           |
| Horn Antenna                         | SCHWARZBECK          | BBHA9170                  | 1562                 | 2016/07/11       | 2017/07/10           |
| Active Loop Antenna                  | SCHWARZBECK          | FMZB1519                  | 1519-037             | 2016/07/11       | 2017/07/10           |
| LISN                                 | R&S                  | ENV216                    | 101316               | 2016/07/09       | 2017/07/08           |
| LISN                                 | SCHWARZBECK          | NSLK8127                  | 8127687              | 2016/07/09       | 2017/07/08           |
| Microwave Preamplifier               | HP                   | 8349B                     | 3155A00882           | 2016/07/09       | 2017/07/08           |
| Amplifier                            | HP                   | 8447D                     | 3113A07663           | 2016/07/09       | 2017/07/08           |
| Transient Limiter                    | Com-Power            | LIT-153                   | 532226               | 2016/07/09       | 2017/07/08           |
| Radio Communication Tester           | R&S                  | CMU200                    | 3655A03522           | 2016/07/05       | 2017/07/04           |
| Temperature/Humidity Meter           | zhicheng             | ZC1-2                     | 22522                | 2016/07/09       | 2017/07/08           |
| SIGNAL GENERATOR                     | HP                   | 8647A                     | 3200A00852           | 2016/07/09       | 2017/07/08           |
| Wideband Peak Power Meter            | Anritsu              | ML2495A                   | 220.23.35            | 2016/07/05       | 2017/07/04           |
| Climate Chamber                      | ESPEC                | EL-10KA                   | A20120523            | 2016/07/05       | 2017/07/04           |
| High-Pass Filter                     | K&L                  | 9SH10-2700/X<br>12750-O/O | /                    | 2016/07/05       | 2017/07/04           |
| High-Pass Filter                     | K&L                  | 41H10-1375/U<br>12750-O/O | /                    | 2016/07/05       | 2017/07/04           |
| Storage oscilloscope                 | KENWOOD              | CS-5450                   | 3070002              | 2016/07/17       | 2017/07/17           |


### 3.6. General Technical Requirements and Summary of Test Results

| FCC Rules | Description of Test                    | Test Result |
|-----------|----------------------------------------|-------------|
| § 90.205  | Maximum Transmitter Power              | Complies    |
| § 90.207  | Modulation Characteristic              | Complies    |
| § 90.209  | Occupied Bandwidth                     | Complies    |
| § 90.210  | Emission Mask                          | Complies    |
| § 90.213  | Frequency Stability                    | Complies    |
| § 90.214  | Transient frequency behavior           | Complies    |
| § 90.210  | Transmitter Radiated Spurious Emission | Complies    |
| § 90.210  | Spurious Emission On Antenna Port      | Complies    |

## 4. TEST CONDITIONS AND RESULTS

### 4.1 Conducted Emissions Test

#### TEST CONFIGURATION

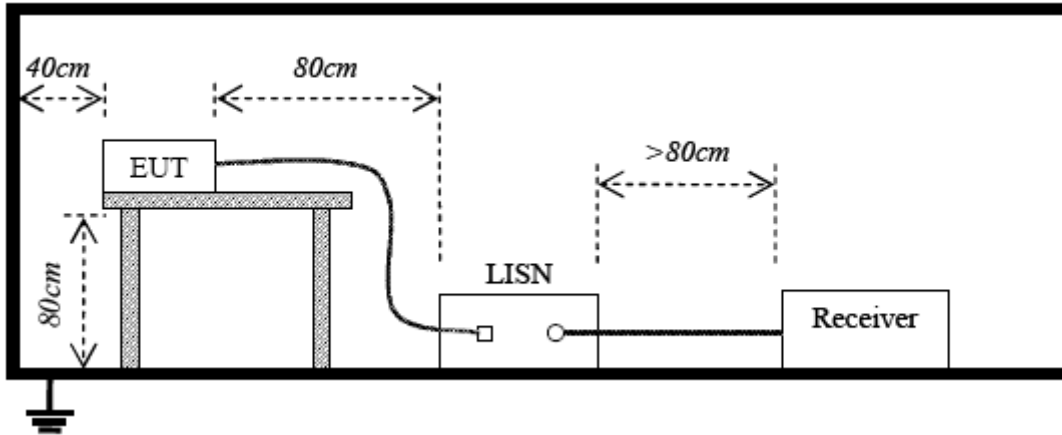

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4.
- 2 Support equipment, if needed, was placed as per ANSI C63.4.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4 The EUT received DC7.4V power from the battery.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :


| Frequency (MHz) | Maximum RF Line Voltage (dBμV) |      |         |       |
|-----------------|--------------------------------|------|---------|-------|
|                 | CLASS A                        |      | CLASS B |       |
|                 | Q.P.                           | Ave. | Q.P.    | Ave.  |
| 0.15-0.50       | 79                             | 66   | 66-65   | 56-46 |
| 0.50-5.00       | 73                             | 60   | 56      | 46    |
| 5.00-30.0       | 73                             | 60   | 60      | 50    |

\* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

**TEST RESULTS****For 4FSK Modulation @ 12.5 KHz**


|                         |                         |            |                   |
|-------------------------|-------------------------|------------|-------------------|
| EUT:                    | UHF DIGITAL TRANSCEIVER | M/N:       | DJ-AXD4           |
| Mode:                   | charging                | Phase:     | L                 |
| Tested by:              | Bilg Li (Engineer)      | Power:     | DC 12V by Adapter |
| Temperature: / Humidity | 24.0°C / 50.5%          | Test date: | 2017-01-06        |

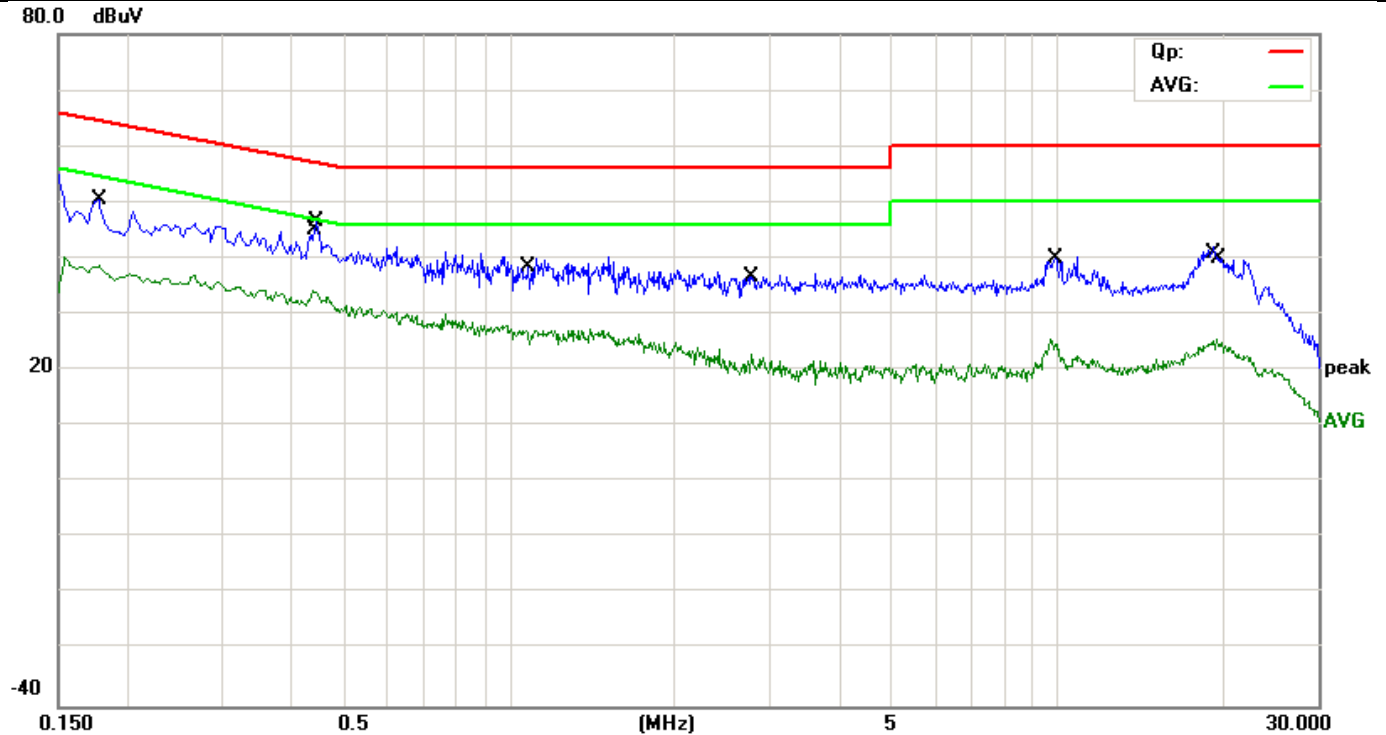

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   |     | 0.1780       | 40.83                    | 9.61                    | 50.44                    | 64.58         | -14.14     | QP       |         |
| 2   |     | 0.1780       | 29.02                    | 9.61                    | 38.63                    | 54.58         | -15.95     | AVG      |         |
| 3   |     | 0.4340       | 34.52                    | 9.59                    | 44.11                    | 57.18         | -13.07     | QP       |         |
| 4   | *   | 0.4380       | 24.55                    | 9.59                    | 34.14                    | 47.10         | -12.96     | AVG      |         |
| 5   |     | 1.0740       | 17.36                    | 9.60                    | 26.96                    | 46.00         | -19.04     | AVG      |         |
| 6   |     | 1.0860       | 28.99                    | 9.60                    | 38.59                    | 56.00         | -17.41     | QP       |         |
| 7   |     | 2.7420       | 27.04                    | 9.61                    | 36.65                    | 56.00         | -19.35     | QP       |         |
| 8   |     | 2.7700       | 13.37                    | 9.61                    | 22.98                    | 46.00         | -23.02     | AVG      |         |
| 9   |     | 9.9300       | 30.30                    | 9.69                    | 39.99                    | 60.00         | -20.01     | QP       |         |
| 10  |     | 9.9300       | 14.99                    | 9.69                    | 24.68                    | 50.00         | -25.32     | AVG      |         |
| 11  |     | 19.5900      | 15.87                    | 9.73                    | 25.60                    | 50.00         | -24.40     | AVG      |         |
| 12  |     | 19.6700      | 30.29                    | 9.73                    | 40.02                    | 60.00         | -19.98     | QP       |         |

\*:Maximum data    x:Over limit    l:over margin

|                         |                         |            |                   |
|-------------------------|-------------------------|------------|-------------------|
| EUT:                    | UHF DIGITAL TRANSCEIVER | M/N:       | DJ-AXD4           |
| Mode:                   | charging                | Phase:     | N                 |
| Tested by:              | Bilg Li (Engineer)      | Power:     | DC 12V by Adapter |
| Temperature: / Humidity | 24.0°C / 50.5%          | Test date: | 2017-01-06        |

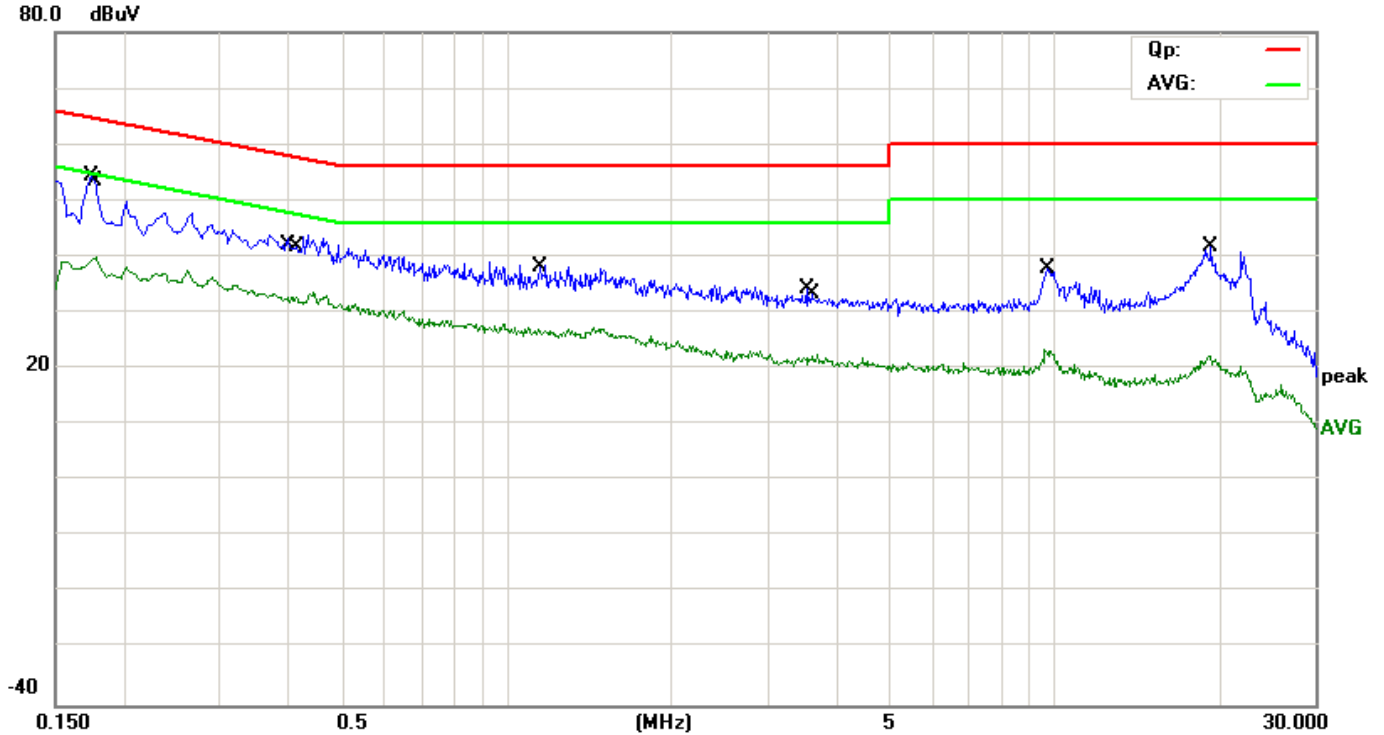

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   | *   | 0.1740       | 44.76                    | 9.61                    | 54.37                    | 64.77         | -10.40     | QP       |         |
| 2   |     | 0.1780       | 30.30                    | 9.61                    | 39.91                    | 54.58         | -14.67     | AVG      |         |
| 3   |     | 0.4060       | 23.30                    | 9.59                    | 32.89                    | 47.73         | -14.84     | AVG      |         |
| 4   |     | 0.4140       | 32.05                    | 9.59                    | 41.64                    | 57.57         | -15.93     | QP       |         |
| 5   |     | 1.1420       | 27.00                    | 9.60                    | 36.60                    | 56.00         | -19.40     | QP       |         |
| 6   |     | 1.1420       | 17.41                    | 9.60                    | 27.01                    | 46.00         | -18.99     | AVG      |         |
| 7   |     | 3.5300       | 24.57                    | 9.62                    | 34.19                    | 56.00         | -21.81     | QP       |         |
| 8   |     | 3.6340       | 12.54                    | 9.62                    | 22.16                    | 46.00         | -23.84     | AVG      |         |
| 9   |     | 9.6140       | 13.92                    | 9.68                    | 23.60                    | 50.00         | -26.40     | AVG      |         |
| 10  |     | 9.7060       | 28.31                    | 9.69                    | 38.00                    | 60.00         | -22.00     | QP       |         |
| 11  |     | 19.1940      | 12.64                    | 9.73                    | 22.37                    | 50.00         | -27.63     | AVG      |         |
| 12  |     | 19.3660      | 31.91                    | 9.73                    | 41.64                    | 60.00         | -18.36     | QP       |         |

\*:Maximum data    x:Over limit    !:over margin

## 4.2 Occupied Bandwidth and Emission Mask

### PROVISIONS APPLICABLE

a). Occupied Bandwidth: The EUT was connected to the audio signal generator and the spectrum analyzer via the main RF connector, and through an appropriate attenuator. The EUT was controlled to transmit its maximum power. Then the bandwidth of 99% power can be measured by the spectrum analyzer.

(b). Emission Mask B: For transmitters that are equipped with an audio low-pass filter pursuant to §90.211(a), the power of any emission must be below the unmodulated carrier power (P) as follows:

(1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.

(2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.

(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least  $43 + 10 \log (P)$  dB.


(c). Emission Mask D, 12.5 kHz channel bandwidth equipment: For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(1) On any frequency from the center of the authorized bandwidth  $f_0$  to 5.625 kHz removed from  $f_0$ : Zero dB.

(2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least  $7.27(f_d - 2.88 \text{ kHz})$  dB.

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz: At least  $50 + 10 \log (P)$  dB or 70 dB, whichever is the lesser attenuation.

### TEST CONFIGURATION

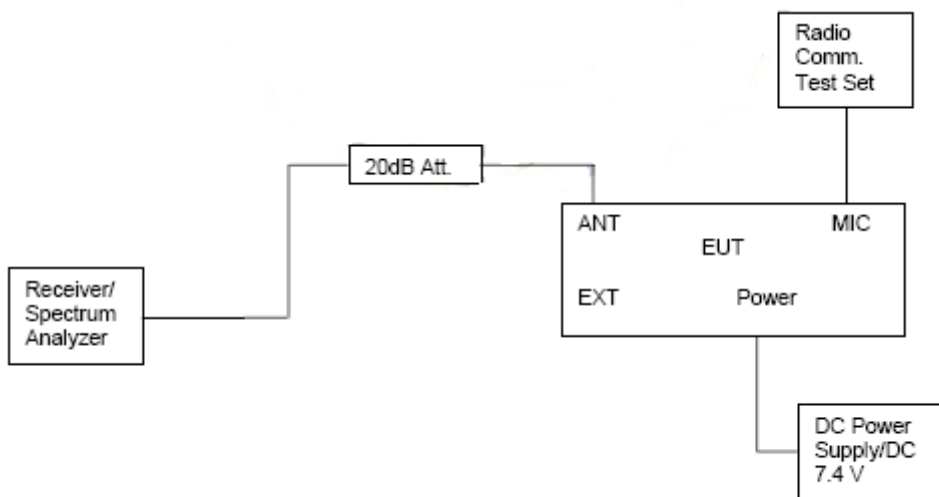

### TEST PROCEDURE

- 1 Set EUT as normal operation.
- 2 Set SPA Center Frequency = fundamental frequency, RBW=300Hz, VBW= 3 KHz, span =50 KHz.
- 3 Set SPA Max hold. Mark peak, Set 99% Occupied Bandwidth and 26dB Occupied Bandwidth.
- 4 Set SPA Center Frequency=fundamental frequency, set =100Hz, VBW=1 KHz, span=50 KHz for 12.5 channel spacing and set =100Hz, VBW=1 KHz, span=50 KHz for 6.25 channel spacing

### TEST RESULTS:

#### 4.2.1 Occupied Bandwidth

High power:

| Modulation Type | Channel Separation | Test Channel                            | Test Frequency | 99% Occupied Bandwidth (KHz) | 26dB Occupied Band width (KHz) |
|-----------------|--------------------|-----------------------------------------|----------------|------------------------------|--------------------------------|
| 4FSK            | 12.5KHz            | Low                                     | 406.1125 MHz   | 7.2                          | 8.64                           |
|                 |                    | Middle                                  | 429.5000 MHz   | 7.2                          | 8.96                           |
|                 |                    | High                                    | 469.9875 MHz   | 6.72                         | 8.32                           |
| Limit           |                    | 11.25KHz for 12.5KHz Channel Separation |                |                              |                                |
|                 |                    | 6.00KHz for 6.25KHz Channel Separation  |                |                              |                                |
| Test Results    |                    | Compliance                              |                |                              |                                |


Low power:

| Modulation Type | Channel Separation | Test Channel                            | Test Frequency | 99% Occupied Bandwidth (KHz) | 26dB Occupied Band width (KHz) |
|-----------------|--------------------|-----------------------------------------|----------------|------------------------------|--------------------------------|
| 4FSK            | 12.5KHz            | Low                                     | 406.1125 MHz   | 7.36                         | 9.44                           |
|                 |                    | Middle                                  | 429.5000 MHz   | 7.2                          | 9.44                           |
|                 |                    | High                                    | 469.9875 MHz   | 7.04                         | 9.12                           |
| Limit           |                    | 11.25KHz for 12.5KHz Channel Separation |                |                              |                                |
|                 |                    | 6.00KHz for 6.25KHz Channel Separation  |                |                              |                                |
| Test Results    |                    | Compliance                              |                |                              |                                |

**Plots of 99% and 26dB Bandwidth Measurement**


High power:

| Modulation Type | Channel Separation | Freq.(MHz) | 99% Bandwidth (KHz) | 26dB Bandwidth (KHz) | FCC Limit (KHz) | Results    |
|-----------------|--------------------|------------|---------------------|----------------------|-----------------|------------|
| 4FSK            | 12.5KHz            | 406.1125   | 7.2                 | 8.64                 | 11.25           | Compliance |

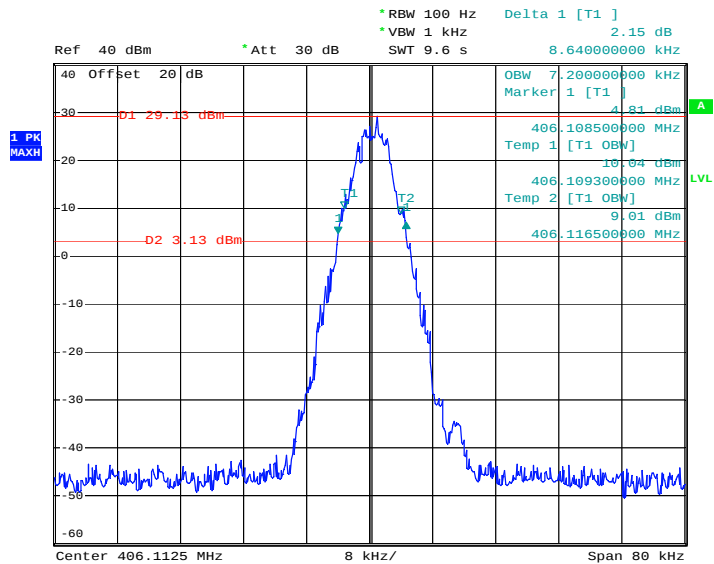


High power:

| Modulation Type | Channel Separation | Freq.(MHz) | 99% Bandwidth (KHz) | 26dB Bandwidth (KHz) | FCC Limit (KHz) | Results    |
|-----------------|--------------------|------------|---------------------|----------------------|-----------------|------------|
| 4FSK            | 12.5KHz            | 429.5000   | 7.2                 | 8.96                 | 11.25           | Compliance |

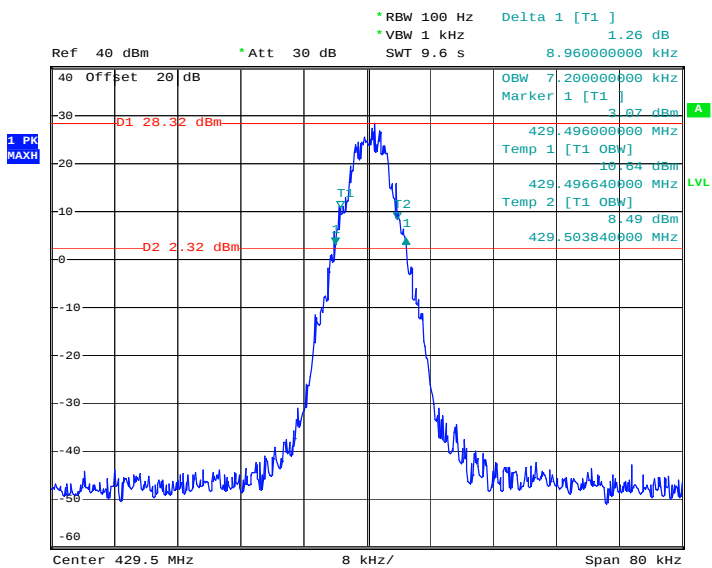


High power:

| Modulation Type | Channel Separation | Freq.(MHz) | 99% Bandwidth (KHz) | 26dB Bandwidth (KHz) | FCC Limit (KHz) | Results    |
|-----------------|--------------------|------------|---------------------|----------------------|-----------------|------------|
| 4FSK            | 12.5KHz            | 469.9875   | 6.72                | 8.32                 | 11.25           | Compliance |

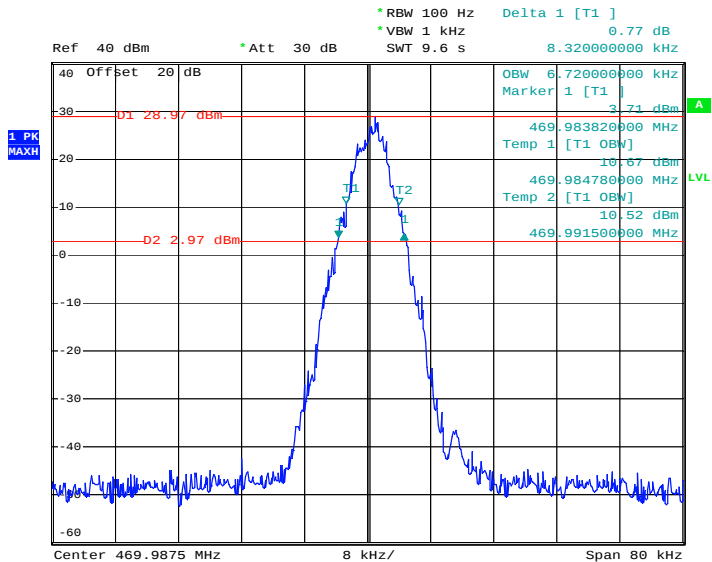


Low power:

| Modulation Type | Channel Separation | Freq.(MHz) | 99% Bandwidth (KHz) | 26dB Bandwidth (KHz) | FCC Limit (KHz) | Results    |
|-----------------|--------------------|------------|---------------------|----------------------|-----------------|------------|
| 4FSK            | 12.5KHz            | 406.1125   | 7.36                | 9.44                 | 11.25           | Compliance |

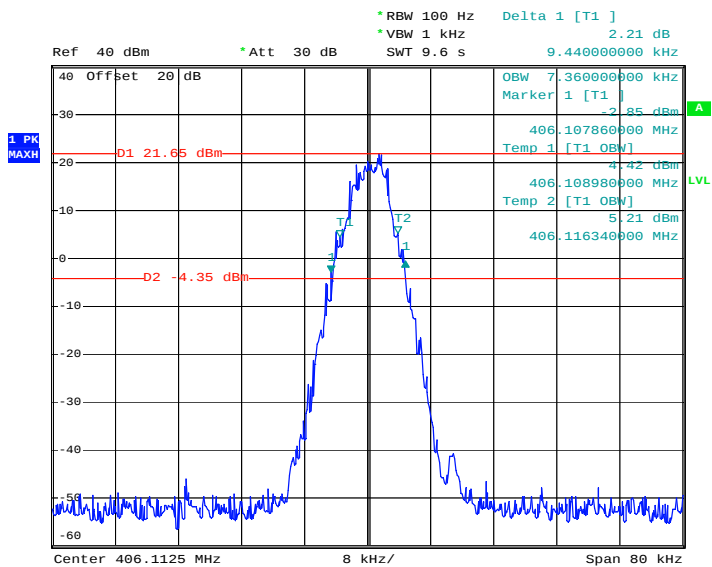


Low power:

| Modulation Type | Channel Separation | Freq.(MHz) | 99% Bandwidth (KHz) | 26dB Bandwidth (KHz) | FCC Limit (KHz) | Results    |
|-----------------|--------------------|------------|---------------------|----------------------|-----------------|------------|
| 4FSK            | 12.5KHz            | 429.5000   | 7.2                 | 9.44                 | 11.25           | Compliance |

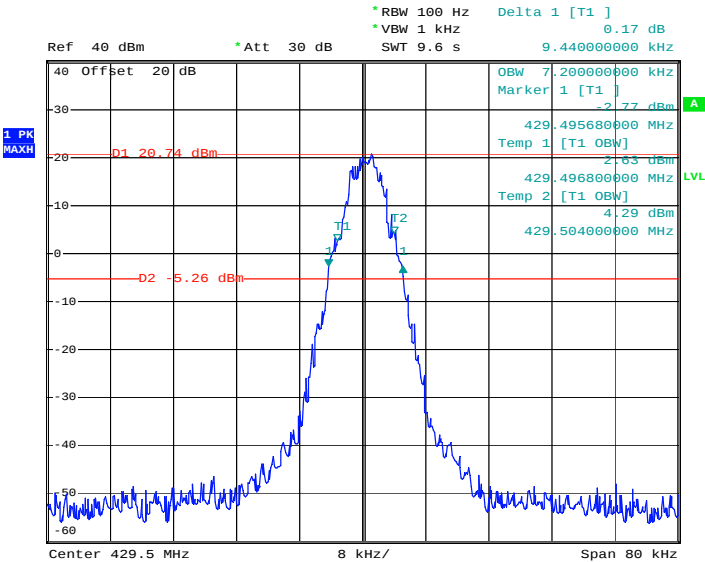

Low power:

| Modulation Type | Channel Separation | Freq.(MHz) | 99% Bandwidth (KHz) | 26dB Bandwidth (KHz) | FCC Limit (KHz) | Results    |
|-----------------|--------------------|------------|---------------------|----------------------|-----------------|------------|
| 4FSK            | 12.5KHz            | 469.9875   | 7.04                | 9.12                 | 11.25           | Compliance |

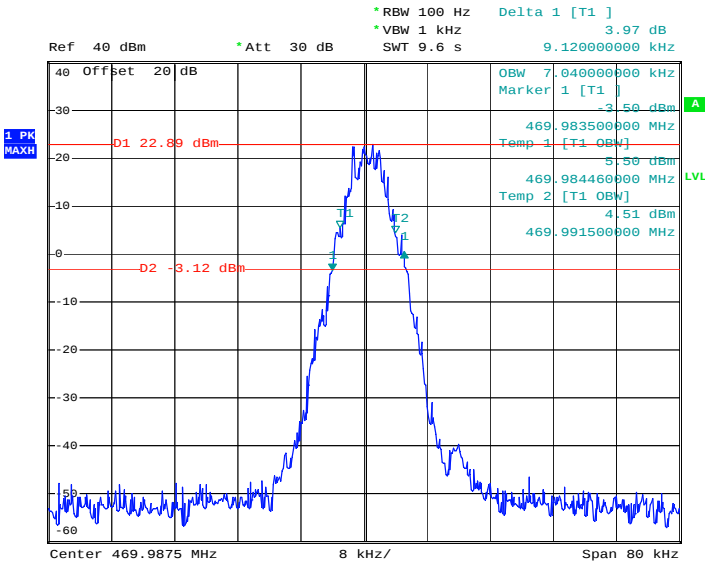

### 4.3 Emission Mask

#### Applicable Standard

FCC § 90.210

(b) Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

(1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.

(2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.

(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least  $43 + 10 \log (P)$  dB.

(d) Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(1) On any frequency from the center of the authorized bandwidth  $f_0$  to 5.625 kHz removed from  $f_0$ : Zero dB.

(2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least  $7.27(f_d - 2.88 \text{ kHz})$  dB.

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz: At least  $50 + 10 \log (P)$  dB or 70 dB, whichever is the lesser attenuation.


(4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

| Modulation Type | Channel Separation | Test Channel | Test Frequency | FCC Applicable Mask | RBW   |
|-----------------|--------------------|--------------|----------------|---------------------|-------|
| 4FSK            | 12.5KHz            | Low          | 406.1125 MHz   | B                   | 100Hz |
|                 |                    | Middle       | 429.5000 MHz   | D                   | 100Hz |
|                 |                    | High         | 469.9875 MHz   | D                   | 100Hz |
| Test Results    |                    | Compliance   |                |                     |       |

Referred as the attached plot hereinafter

High power


| Modulation Type | Channel Separation | Freq.(MHz) | FCC Applicable Mask | RBW   | Audio Freq. (KHz) | Results    |
|-----------------|--------------------|------------|---------------------|-------|-------------------|------------|
| 4FSK            | 12.5KHz            | 406.1125   | B                   | 100Hz | /                 | Compliance |

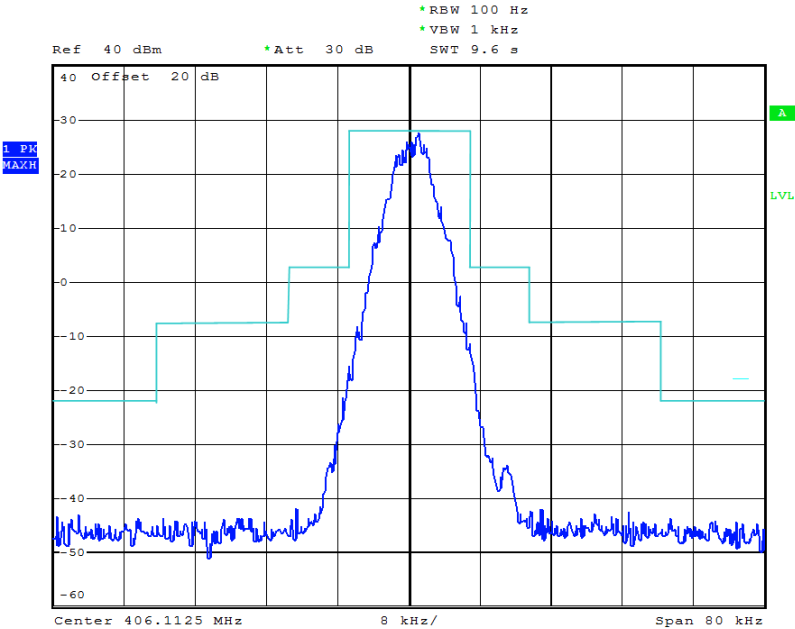

12.5 kHz Channel Spacing, 406.1125 MHz, 4FSK Modulation Only

High power


| Modulation Type | Channel Separation | Freq.(MHz) | FCC Applicable Mask | RBW   | Audio Freq. (KHz) | Results    |
|-----------------|--------------------|------------|---------------------|-------|-------------------|------------|
| 4FSK            | 12.5KHz            | 429.5000   | D                   | 100Hz | /                 | Compliance |

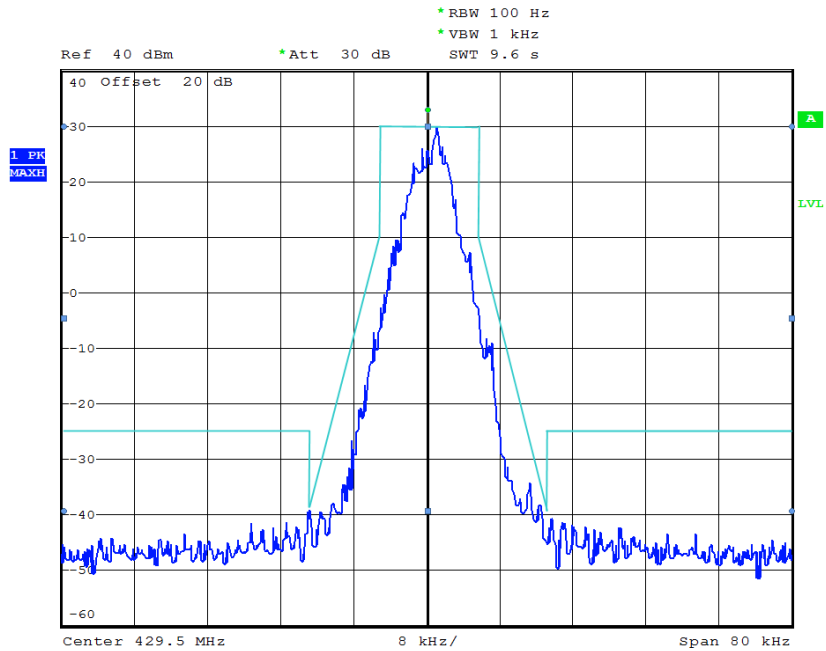

12.5 kHz Channel Spacing, 429.5000 MHz, 4FSK Modulation Only

High power


| Modulation Type | Channel Separation | Freq.(MHz) | FCC Applicable Mask | RBW   | Audio Freq. (KHz) | Results    |
|-----------------|--------------------|------------|---------------------|-------|-------------------|------------|
| 4FSK            | 12.5KHz            | 469.9875   | D                   | 100Hz | /                 | Compliance |

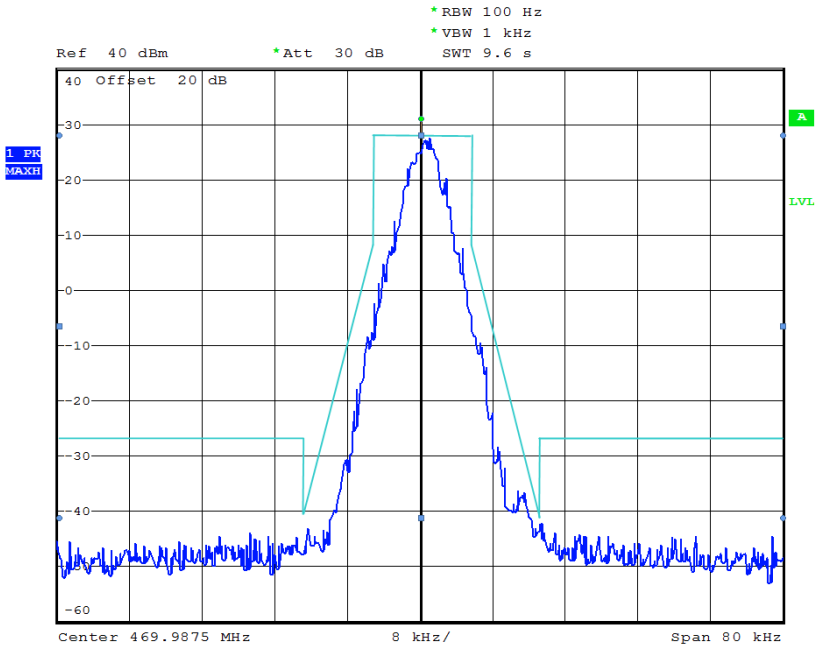

12.5 kHz Channel Spacing, 469.9875 MHz, 4FSK Modulation Only

Low power


| Modulation Type | Channel Separation | Freq.(MHz) | FCC Applicable Mask | RBW   | Audio Freq. (KHz) | Results    |
|-----------------|--------------------|------------|---------------------|-------|-------------------|------------|
| 4FSK            | 12.5KHz            | 406.1125   | B                   | 100Hz | /                 | Compliance |

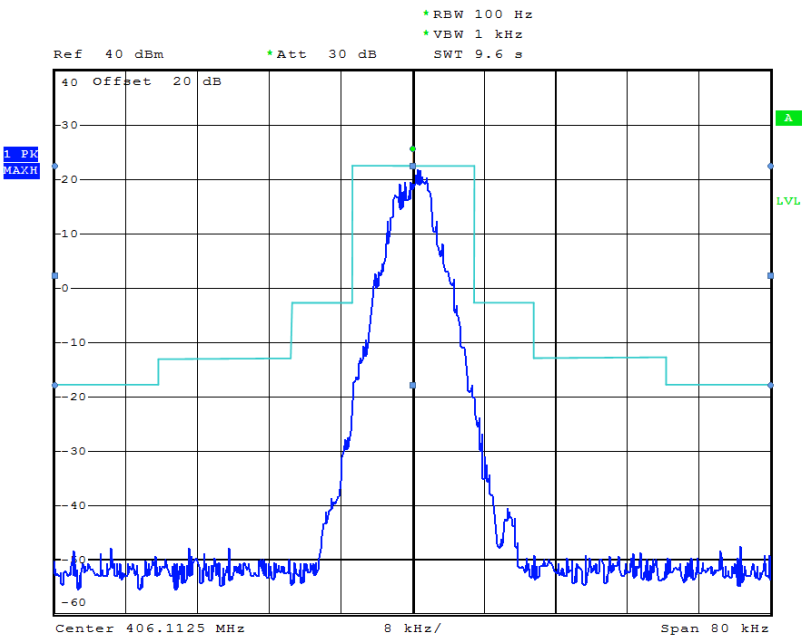

12.5 kHz Channel Spacing, 406.1125 MHz, 4FSK Modulation Only

Low power


| Modulation Type | Channel Separation | Freq.(MHz) | FCC Applicable Mask | RBW   | Audio Freq. (KHz) | Results    |
|-----------------|--------------------|------------|---------------------|-------|-------------------|------------|
| 4FSK            | 12.5KHz            | 429.5000   | D                   | 100Hz | /                 | Compliance |

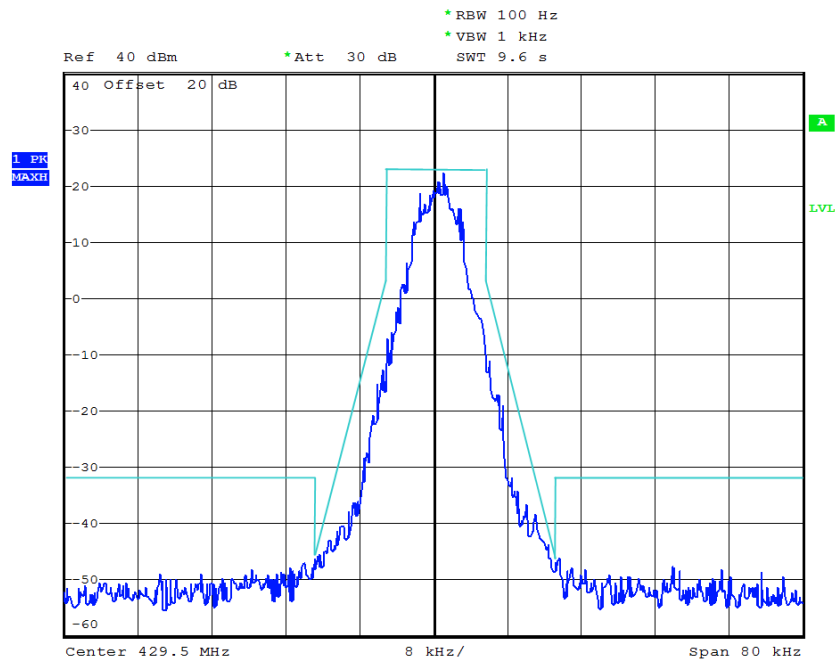

12.5 kHz Channel Spacing, 429.5000 MHz, 4FSK Modulation Only

Low power

| Modulation Type | Channel Separation | Freq.(MHz) | FCC Applicable Mask | RBW   | Audio Freq. (KHz) | Results    |
|-----------------|--------------------|------------|---------------------|-------|-------------------|------------|
| 4FSK            | 12.5KHz            | 469.9875   | D                   | 100Hz | /                 | Compliance |

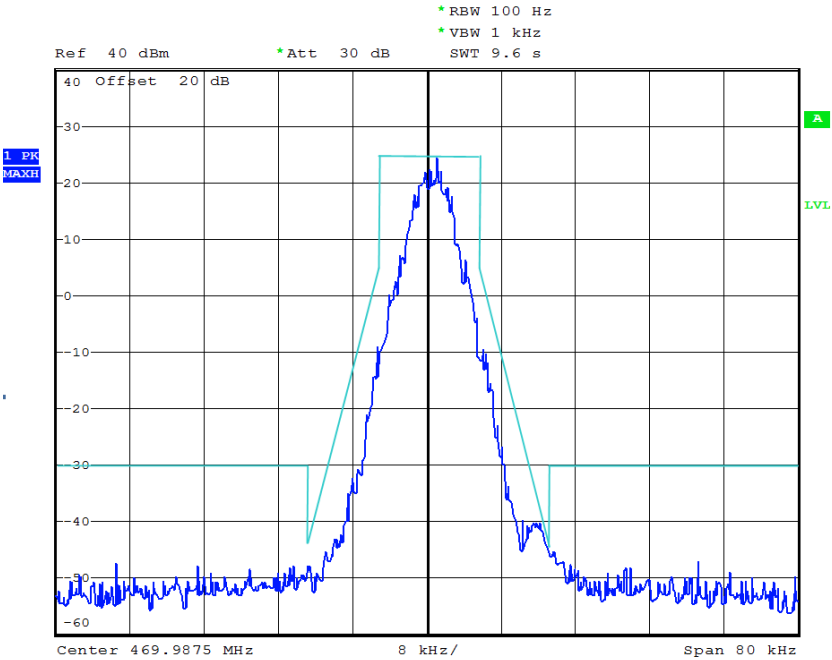

12.5 kHz Channel Spacing, 469.9875 MHz, 4FSK Modulation Only

### 4.3. Radiated Spurious Emission Test

#### TEST APPLICABLE

According to the TIA/EIA 603 test method, and according to Section 90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with 12.5 KHz channel bandwidth:


- 1 On any frequency removed from the center of the authorized bandwidth  $f_0$  to 5.625 KHz removed from  $f_0$ : Zero dB
- 2 On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in KHz)  $f_0$  of more than 5.625 KHz but no more than 12.5 KHz: At least 7.27dB
- 3 On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in KHz)  $f_0$  of more than 12.5 KHz: At least  $50 + 10 \log (P)$  dB or 70 dB, which ever is lesser attenuation.


For transmitters designed to transmit with 6.25 KHz channel separation and equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as following:

- 1 On any frequency from the center of the authorized bandwidth  $f_0$  to 3.0 kHz removed from  $f_0$ : Zero dB.
- 2 On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least  $30 + 16.67(f_d - 3 \text{ kHz})$  or  $55 + 10 \log (P)$  or 65 dB, whichever is the lesser attenuation.
- 3 On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least  $55 + 10 \log (P)$  or 65 dB, whichever is the lesser attenuation.

#### TEST CONFIGURATION

Below 1GHz:

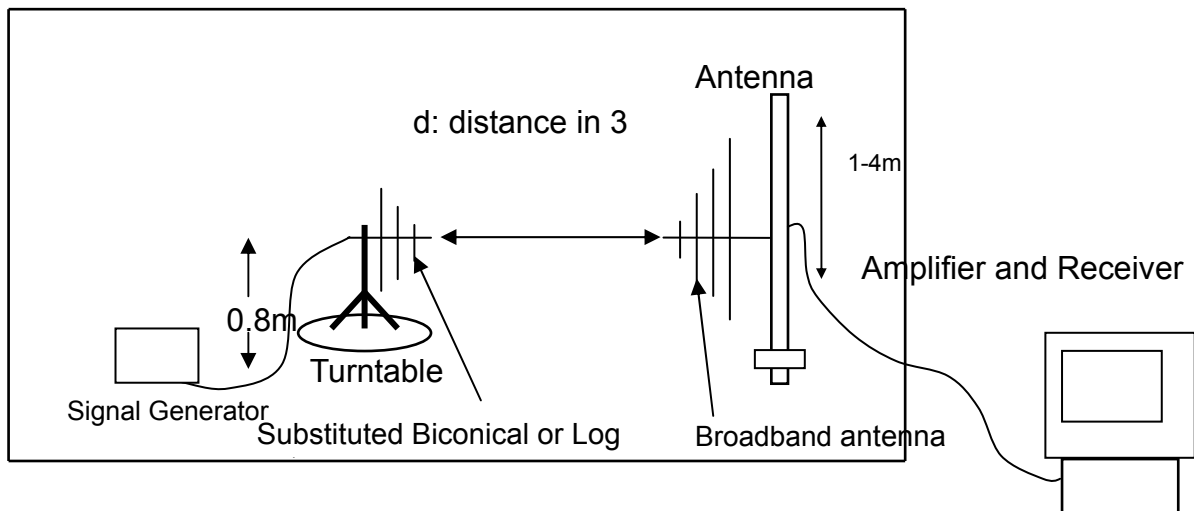

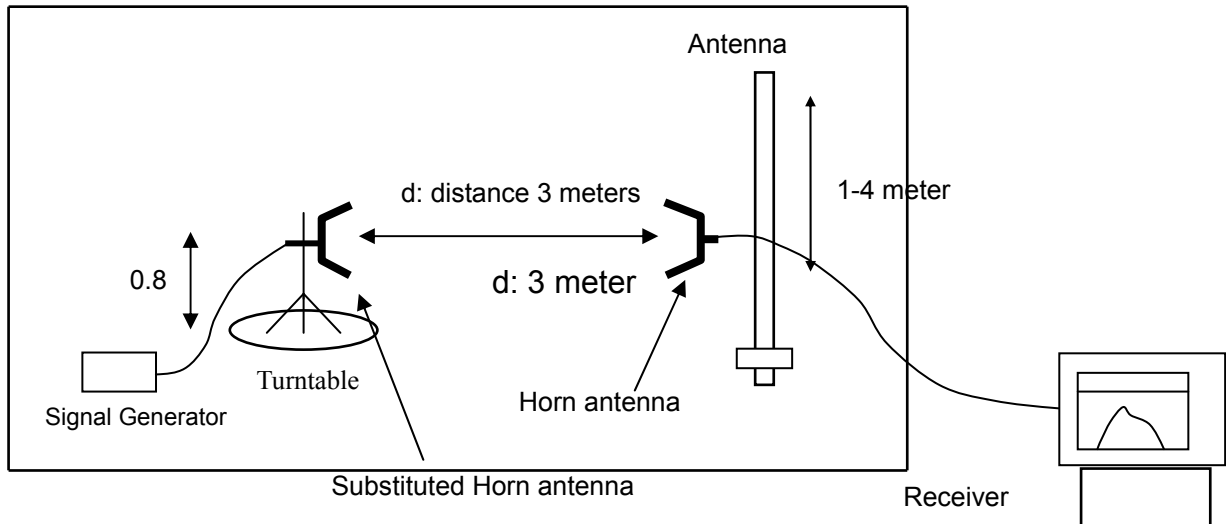**Above 1GHz:****TEST PROCEDURE**

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB =  $10 \lg(\text{TXpwr in Watts}/0.001)$  - the absolute level Spurious attenuation limit in dB =  $50 + 10 \lg(\text{power out in Watts})$  for EUT with a 12.5 kHz channel bandwidth.

**TEST RESULTS****Modulation Type: 4FSK**

Note: 1. In general, the worse case attenuation requirement shown above was applied.

2. The measurement frequency range from 30 MHz to 5 GHz.

3. \*\*\* means that the emission level is too low to be measured or at least 20 dB down than the limit.

| Modulation      |                        | 4FSK                   |                      | Channel Separation  |                      | 12.5KHz                                  |             |             |
|-----------------|------------------------|------------------------|----------------------|---------------------|----------------------|------------------------------------------|-------------|-------------|
| Test Channel    |                        | Low Channel            |                      | Test Frequency      |                      | 406.1125 MHz                             |             |             |
| Frequency (MHz) | E-Field Level (dBuv/m) | EMI Detector (Peak/QP) | Antenna Polarization | Antenna Height (cm) | Table Angle (Degree) | ERP measured by Substitution Method(dBm) | Limit (dBm) | Margin (dB) |
| 200.012         | 45.07                  | Peak                   | H                    | 140                 | 247                  | -53.25                                   | -20         | -33.25      |
| 2431.35         | 47.39                  | Peak                   | H                    | 120                 | 152                  | -47.33                                   | -20         | -27.33      |
| 3214.04         | 40.86                  | Peak                   | H                    | 120                 | 47                   | -54.84                                   | -20         | -34.84      |
| ...             |                        |                        | H                    |                     |                      |                                          |             |             |
| 513.36          | 50.25                  | Peak                   | V                    | 100                 | 345                  | -47.54                                   | -20         | -27.54      |
| 2376.55         | 49.84                  | Peak                   | V                    | 130                 | 94                   | -46.25                                   | -20         | -26.25      |
| 3235.52         | 43.46                  | Peak                   | V                    | 120                 | 123                  | -54.32                                   | -20         | -34.32      |
| ...             | ...                    | /                      | V                    | /                   | /                    | /                                        | /           | /           |

| Modulation      |                        | 4FSK                   |                      | Channel Separation  |                      | 12.5KHz                                  |             |             |
|-----------------|------------------------|------------------------|----------------------|---------------------|----------------------|------------------------------------------|-------------|-------------|
| Test Channel    |                        | Middle Channel         |                      | Test Frequency      |                      | 429.5000 MHz                             |             |             |
| Frequency (MHz) | E-Field Level (dBuv/m) | EMI Detector (Peak/QP) | Antenna Polarization | Antenna Height (cm) | Table Angle (Degree) | ERP measured by Substitution Method(dBm) | Limit (dBm) | Margin (dB) |
| 455.12          | 45.28                  | Peak                   | H                    | 140                 | 261                  | -47.55                                   | -20         | -27.55      |
| 2362.37         | 47.48                  | Peak                   | H                    | 120                 | 156                  | -42.77                                   | -20         | -22.77      |
| 3136.85         | 45.01                  | Peak                   | H                    | 120                 | 44                   | -53.54                                   | -20         | -33.54      |
| ...             |                        |                        | H                    |                     |                      |                                          |             |             |
| 481.43          | 51.34                  | Peak                   | V                    | 100                 | 350                  | -45.23                                   | -20         | -25.23      |
| 2344.25         | 54.06                  | Peak                   | V                    | 130                 | 101                  | -43.54                                   | -20         | -23.54      |
| 3258.24         | 41.62                  | Peak                   | V                    | 120                 | 147                  | -47.42                                   | -20         | -27.42      |
| ...             | ...                    | /                      | V                    | /                   | /                    | /                                        | /           | /           |

| Modulation      |                        | 4FSK                   |                      | Channel Separation  |                      | 12.5KHz                                  |             |             |
|-----------------|------------------------|------------------------|----------------------|---------------------|----------------------|------------------------------------------|-------------|-------------|
| Test Channel    |                        | High Channel           |                      | Test Frequency      |                      | 469.9875 MHz                             |             |             |
| Frequency (MHz) | E-Field Level (dBuv/m) | EMI Detector (Peak/QP) | Antenna Polarization | Antenna Height (cm) | Table Angle (Degree) | ERP measured by Substitution Method(dBm) | Limit (dBm) | Margin (dB) |
| 554.61          | 40.19                  | Peak                   | H                    | 100                 | 302                  | -52.65                                   | -20         | -32.65      |
| 2416.28         | 44.82                  | Peak                   | H                    | 200                 | 78                   | -44.72                                   | -20         | -24.72      |
| 3274.21         | 42.15                  | Peak                   | H                    | 200                 | 149                  | -56.53                                   | -20         | -36.53      |
| ...             |                        |                        | H                    |                     |                      |                                          |             |             |
| 482.32          | 48.22                  | Peak                   | V                    | 100                 | 274                  | -48.33                                   | -20         | -28.33      |
| 2443.24         | 51.75                  | Peak                   | V                    | 200                 | 105                  | -47.54                                   | -20         | -27.54      |
| 3146.63         | 43.93                  | Peak                   | V                    | 100                 | 43                   | -53.34                                   | -20         | -33.34      |
| ...             | ...                    | /                      | V                    | /                   | /                    | /                                        | /           | /           |

#### 4.4. Spurious Emission On Antenna Port

##### TEST APPLICABLE


The same as Section 4.3

##### TEST PROCEDURE

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set to 100 kHz. Sufficient scans were taken to show any out of band emission up to 10th. Harmonic for the lower and the highest frequency range. Set RBW 100 kHz, VBW 300 kHz in the frequency band 30MHz to 1GHz, while set RBW=1MHz, VBW=3MHz from the 1GHz to 10th Harmonic.

The audio input was set to 0 to get the unmodulated carrier, the resulting picture is print out for each channel separation.

##### TEST CONFIGURATION

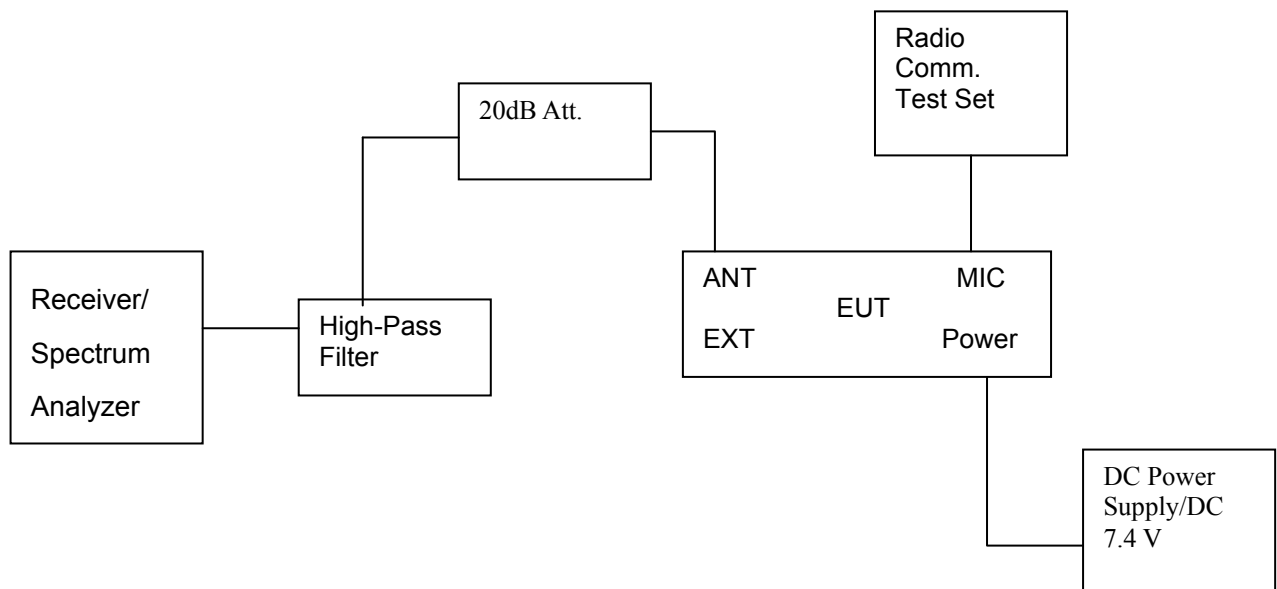

##### TEST RESULTS:

##### **Modulation Type: 4FSK**



Note: 1. In general, the worse case attenuation requirement shown above was applied.


2. The measurement frequency range from 30 MHz to 5 GHz.

##### Plots of Spurious Emission on Antenna Port Measurement


See next pages.



| Modulation Type | Channel Separation | Rated Power (Watt) | Test Frequency (MHz) | Maximum Conducted Spurious Emissions Below 1GHz |               | Maximum Conducted Spurious Emissions Above 1GHz |               | FCC limit |
|-----------------|--------------------|--------------------|----------------------|-------------------------------------------------|---------------|-------------------------------------------------|---------------|-----------|
|                 |                    |                    |                      | Frequency (MHz)                                 | Results (dBm) | Frequency (MHz)                                 | Results (dBm) |           |
| 4FSK            | 12.5KHz            | 1                  | 406.1125             | 859.00                                          | -26.09        | 2740.00                                         | -16.28        | -20dBc    |
| Test Results    |                    | Compliance         |                      |                                                 |               |                                                 |               |           |

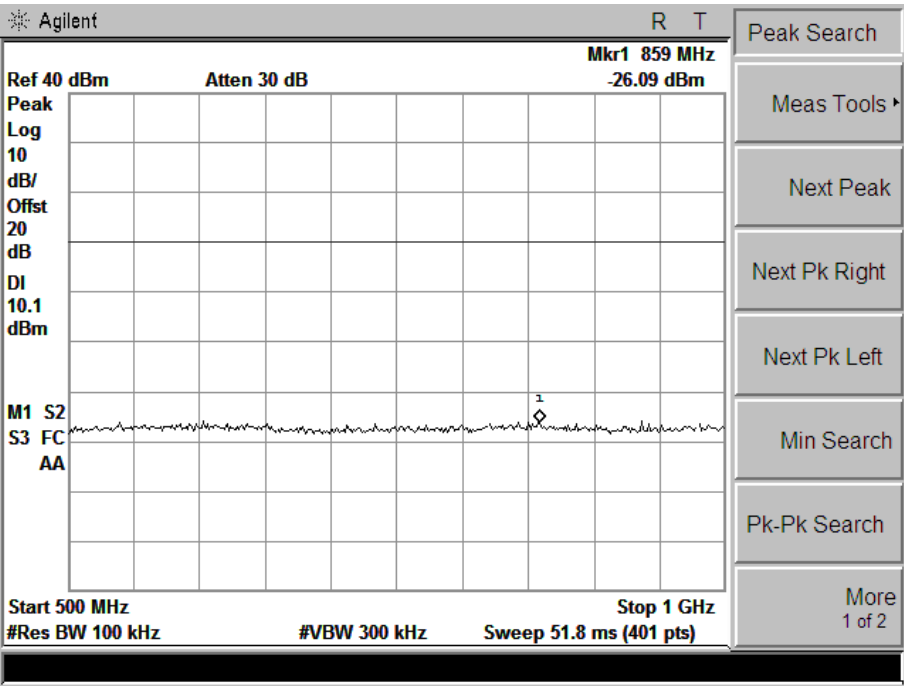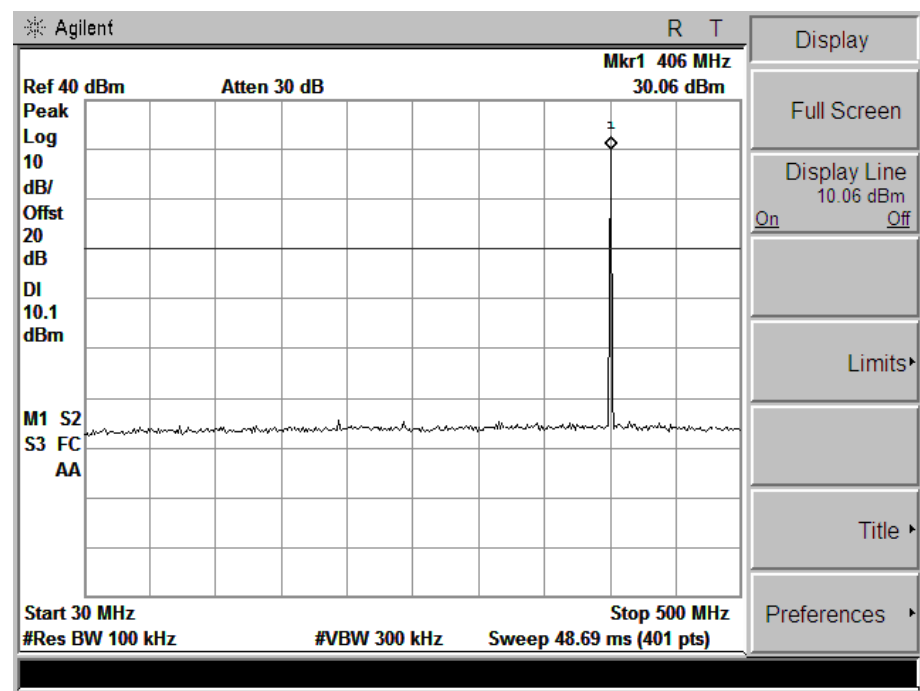


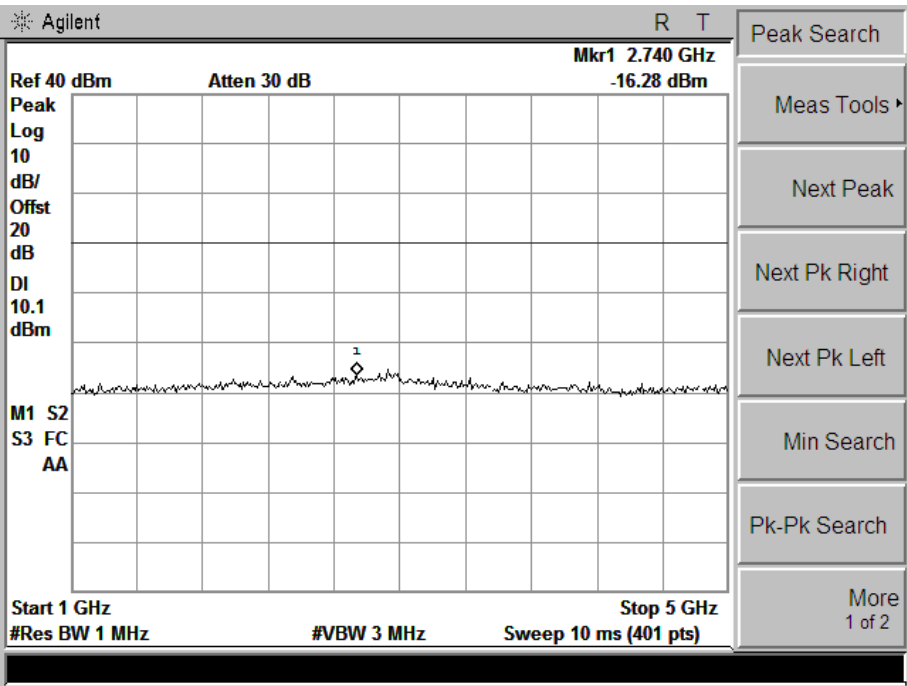



| Modulation Type | Channel Separation | Rated Power (Watt) | Test Frequency (MHz) | Maximum Conducted Spurious Emissions Below 1GHz |               | Maximum Conducted Spurious Emissions Above 1GHz |               | FCC limit |
|-----------------|--------------------|--------------------|----------------------|-------------------------------------------------|---------------|-------------------------------------------------|---------------|-----------|
|                 |                    |                    |                      | Frequency (MHz)                                 | Results (dBm) | Frequency (MHz)                                 | Results (dBm) |           |
| 4FSK            | 12.5KHz            | 1                  | 429.5000             | 761.00                                          | -26.25        | 2980.00                                         | -15.88        | -20dBc    |
| Test Results    |                    | Compliance         |                      |                                                 |               |                                                 |               |           |

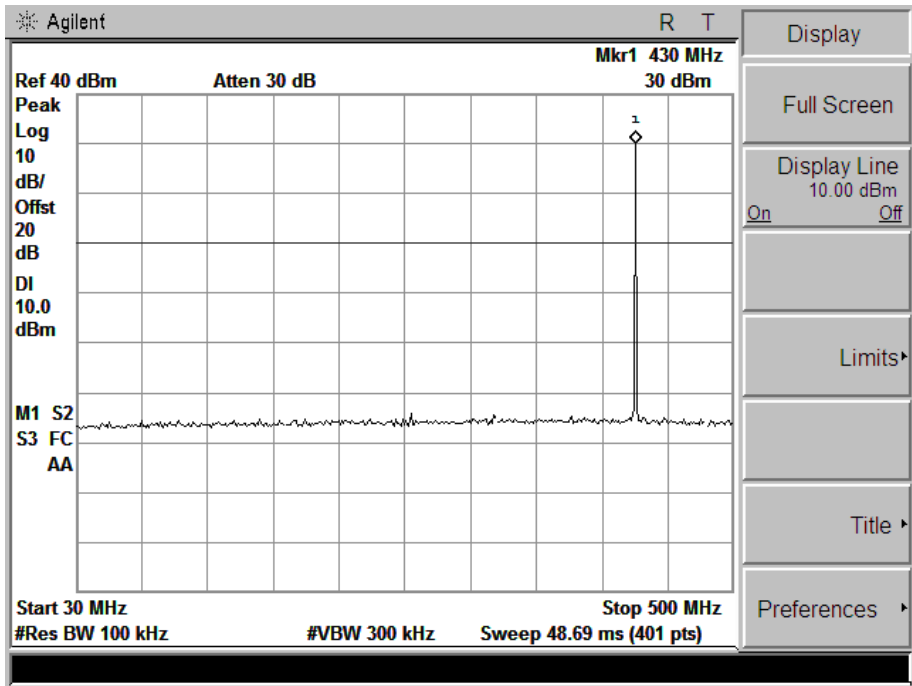

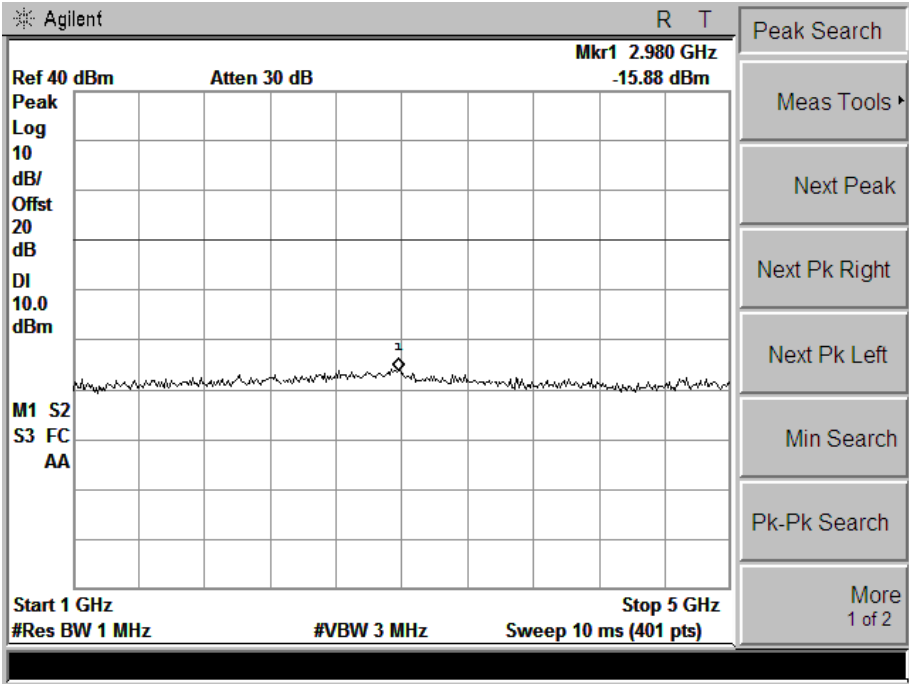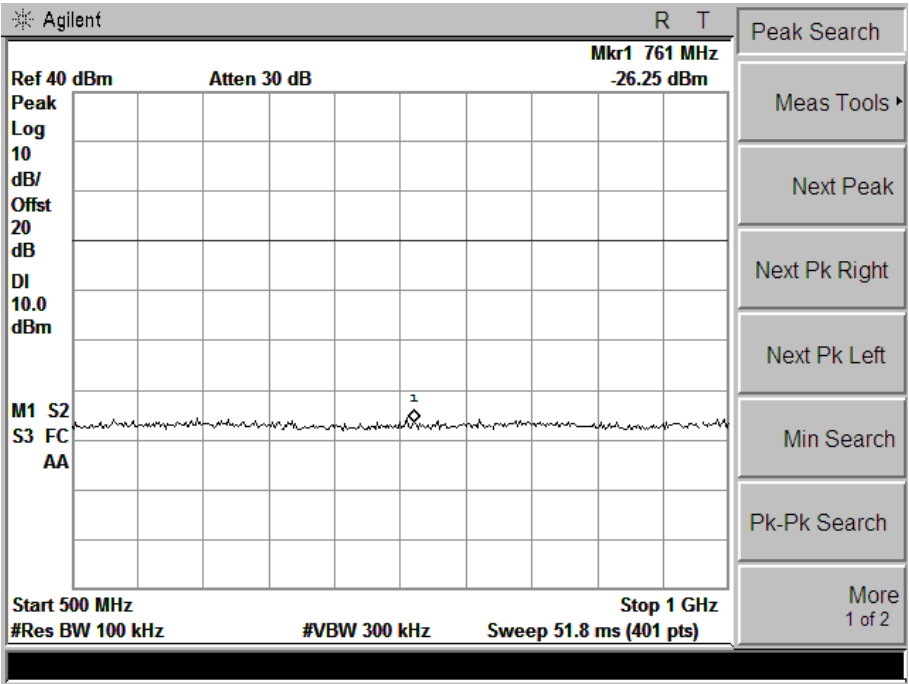




| Modulation Type | Channel Separation | Rated Power (Watt) | Test Frequency (MHz) | Maximum Conducted Spurious Emissions Below 1GHz |               | Maximum Conducted Spurious Emissions Above 1GHz |               | FCC limit |
|-----------------|--------------------|--------------------|----------------------|-------------------------------------------------|---------------|-------------------------------------------------|---------------|-----------|
|                 |                    |                    |                      | Frequency (MHz)                                 | Results (dBm) | Frequency (MHz)                                 | Results (dBm) |           |
| 4FSK            | 12.5KHz            | 1                  | 469.9875             | 844.00                                          | -25.9         | 2990                                            | -13.8         | -20dBc    |
| Test Results    |                    | Compliance         |                      |                                                 |               |                                                 |               |           |

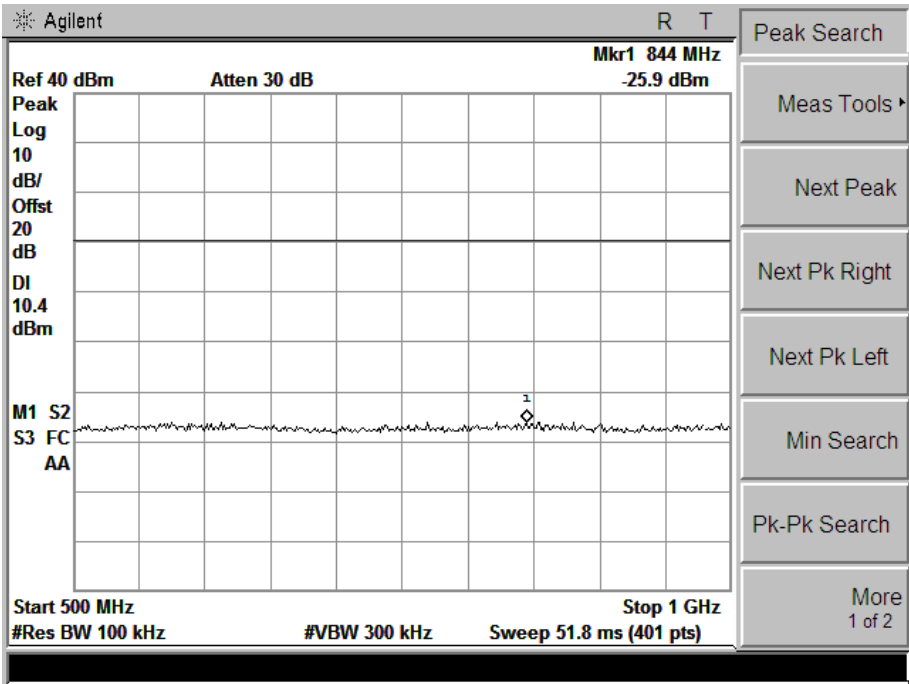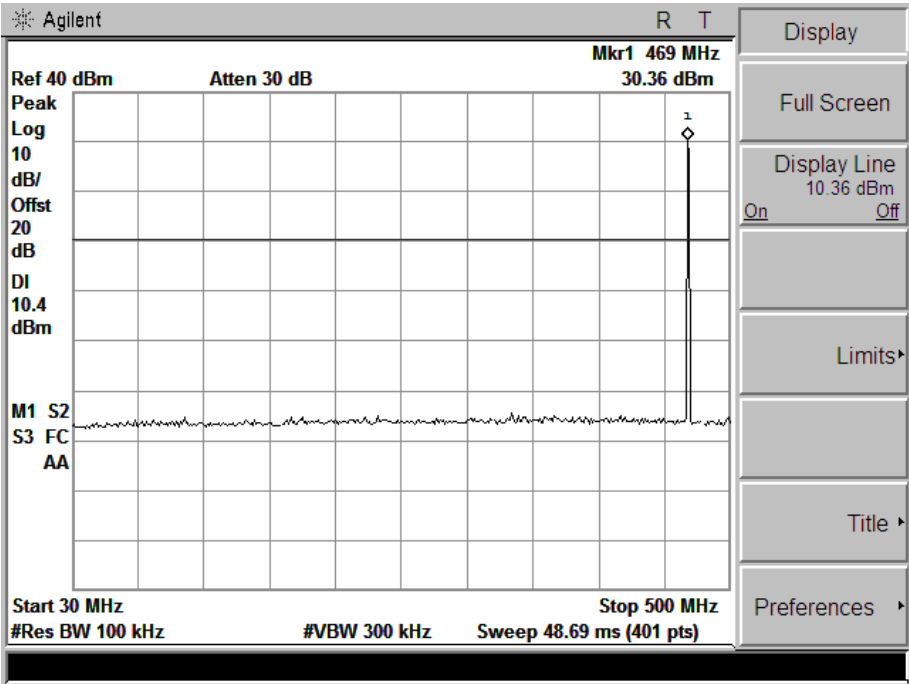


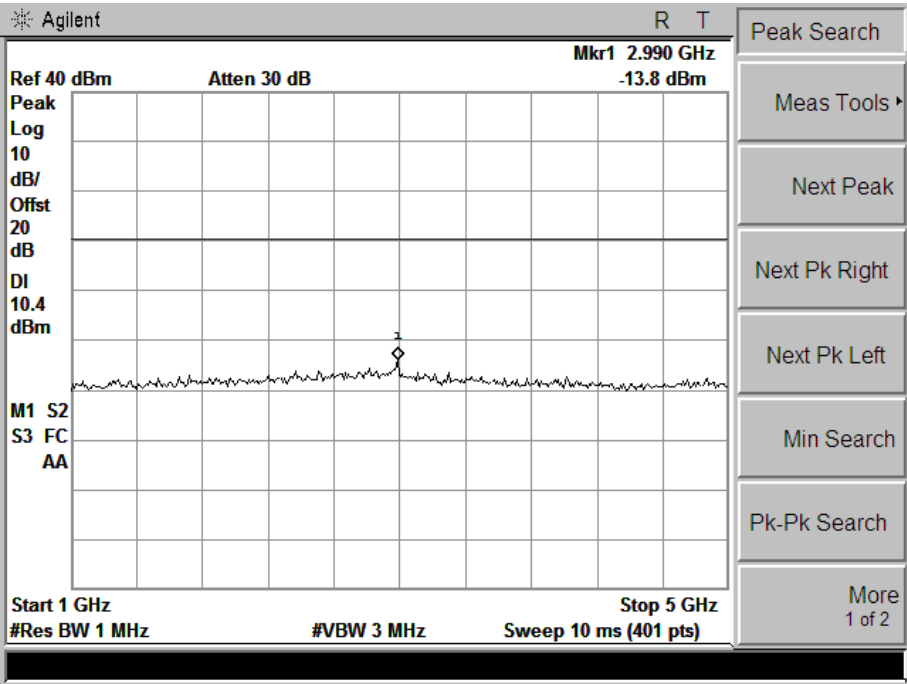



| Modulation Type | Channel Separation | Rated Power (Watt) | Test Frequency (MHz) | Maximum Conducted Spurious Emissions Below 1GHz |               | Maximum Conducted Spurious Emissions Above 1GHz |               | FCC limit |
|-----------------|--------------------|--------------------|----------------------|-------------------------------------------------|---------------|-------------------------------------------------|---------------|-----------|
|                 |                    |                    |                      | Frequency (MHz)                                 | Results (dBm) | Frequency (MHz)                                 | Results (dBm) |           |
| 4FSK            | 12.5KHz            | 5                  | 406.1125             | 556.00                                          | -25.85        | 2990.00                                         | -16.3         | -20dBc    |
| Test Results    |                    | Compliance         |                      |                                                 |               |                                                 |               |           |

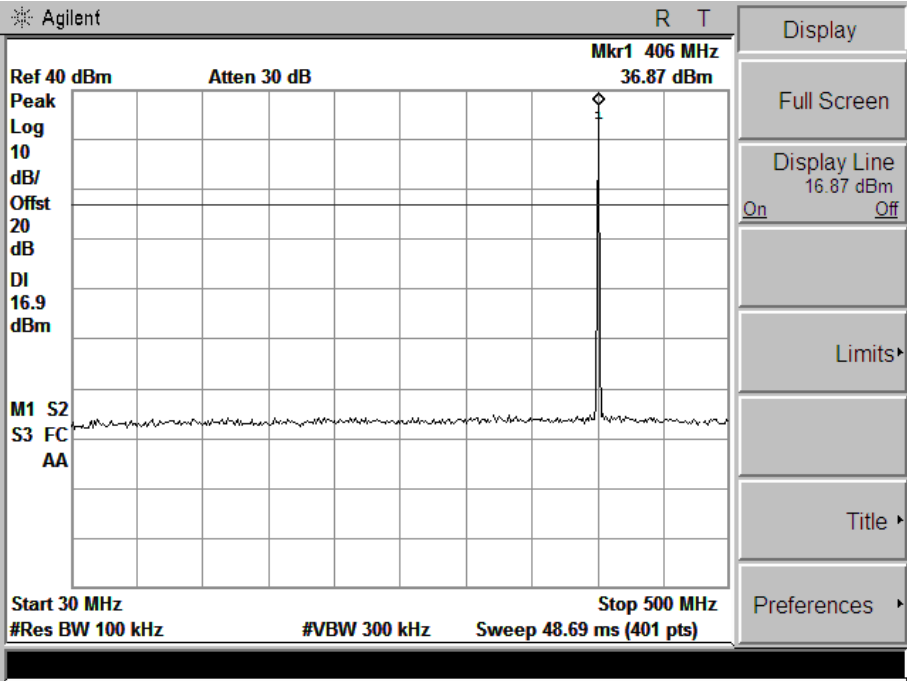

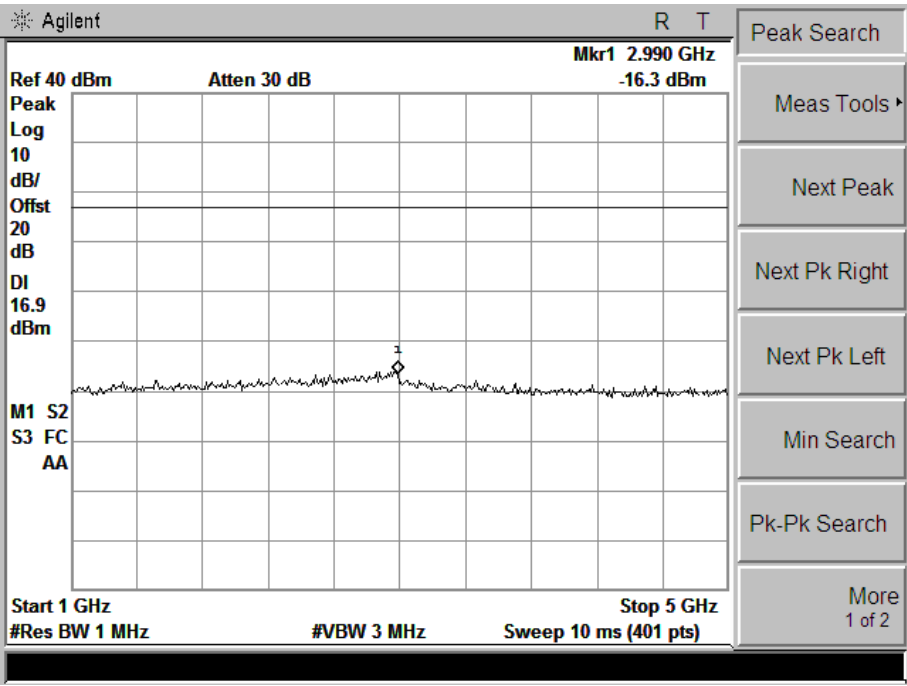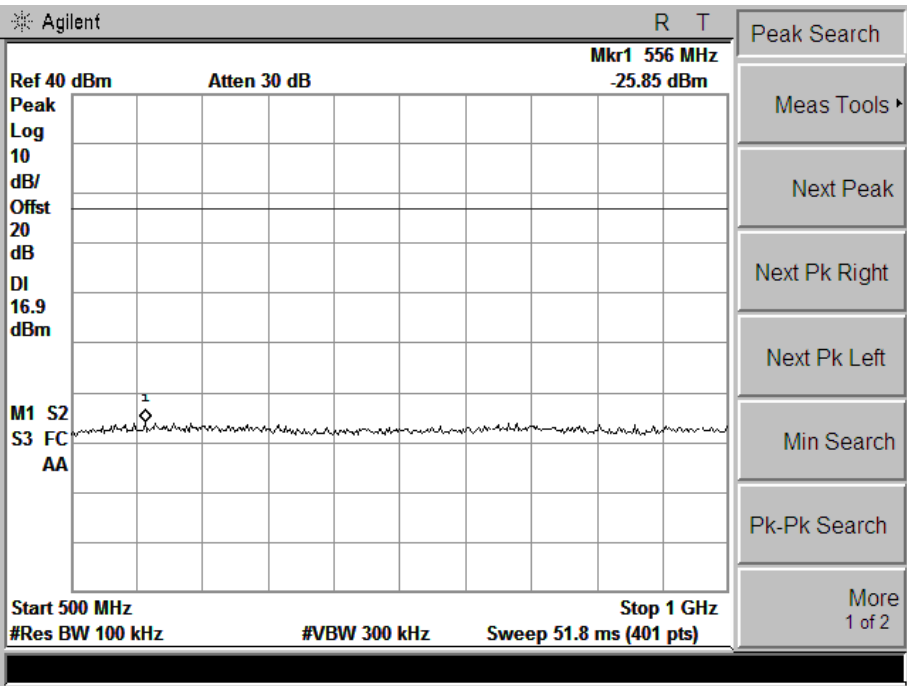




| Modulation Type | Channel Separation | Rated Power (Watt) | Test Frequency (MHz) | Maximum Conducted Spurious Emissions Below 1GHz |               | Maximum Conducted Spurious Emissions Above 1GHz |               | FCC limit |
|-----------------|--------------------|--------------------|----------------------|-------------------------------------------------|---------------|-------------------------------------------------|---------------|-----------|
|                 |                    |                    |                      | Frequency (MHz)                                 | Results (dBm) | Frequency (MHz)                                 | Results (dBm) |           |
| 4FSK            | 12.5KHz            | 5                  | 429.5000             | 973.00                                          | -26.68        | 2970.00                                         | -15.78        | -20dBc    |
| Test Results    |                    | Compliance         |                      |                                                 |               |                                                 |               |           |

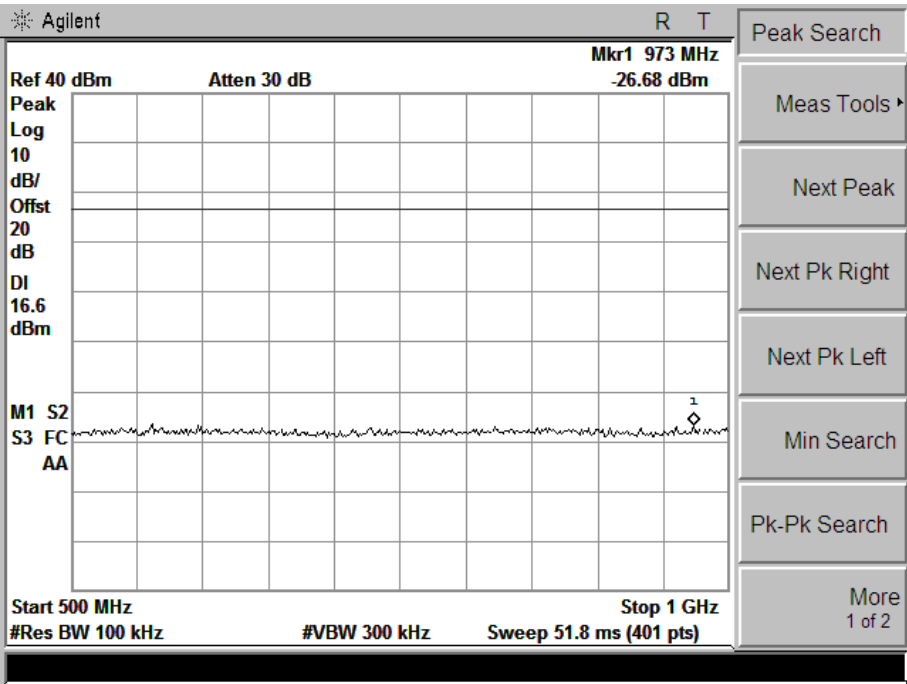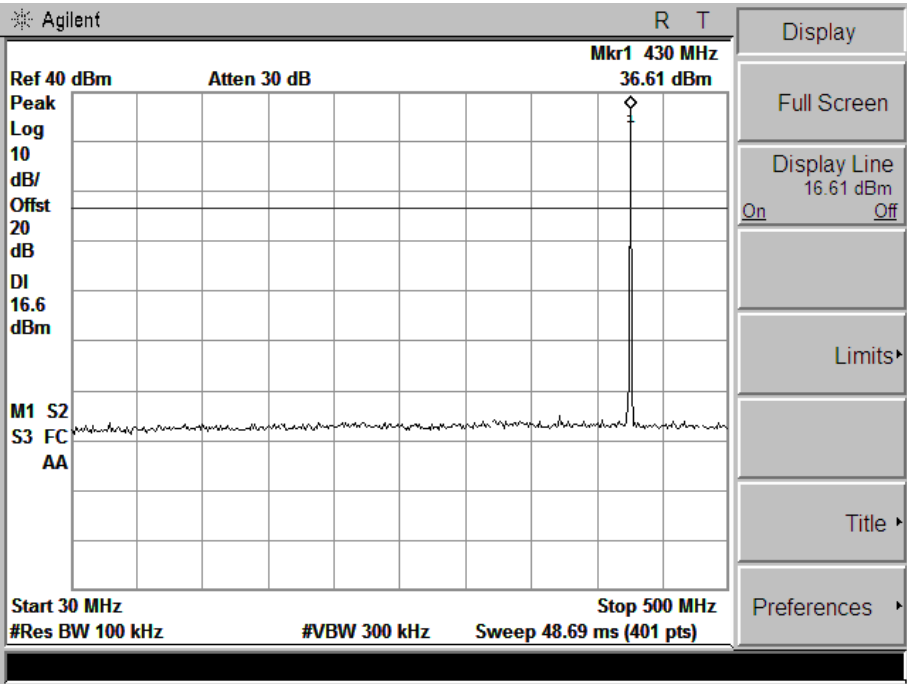

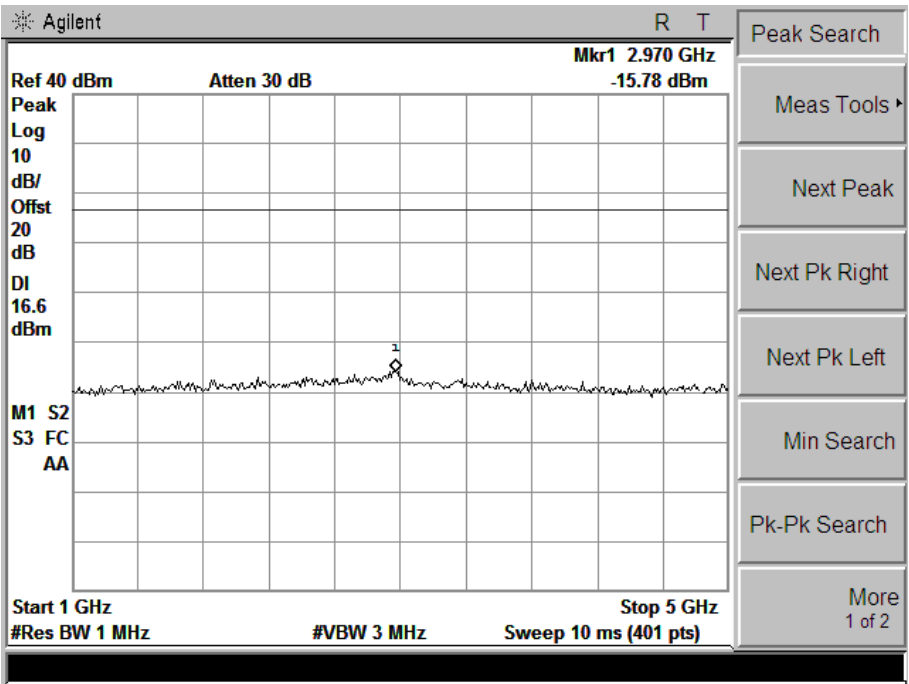

| Modulation Type | Channel Separation | Rated Power (Watt) | Test Frequency (MHz) | Maximum Conducted Spurious Emissions Below 1GHz |               | Maximum Conducted Spurious Emissions Above 1GHz |               | FCC limit |
|-----------------|--------------------|--------------------|----------------------|-------------------------------------------------|---------------|-------------------------------------------------|---------------|-----------|
|                 |                    |                    |                      | Frequency (MHz)                                 | Results (dBm) | Frequency (MHz)                                 | Results (dBm) |           |
| 4FSK            | 12.5KHz            | 5                  | 469.9875             | 860.00                                          | -26.24        | 3010.00                                         | -15.47        | -20dBc    |
| Test Results    |                    | Compliance         |                      |                                                 |               |                                                 |               |           |

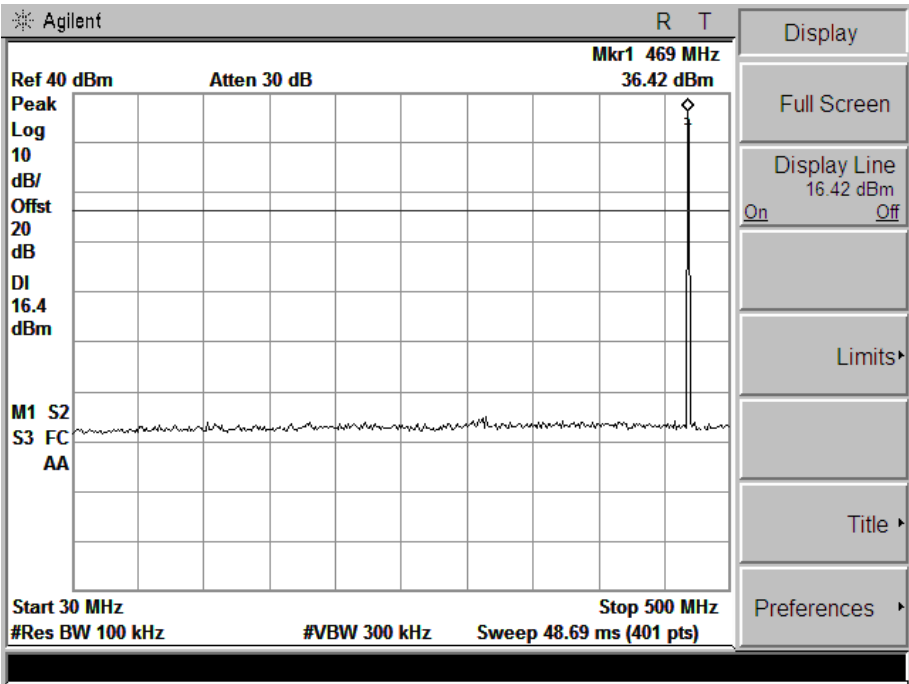

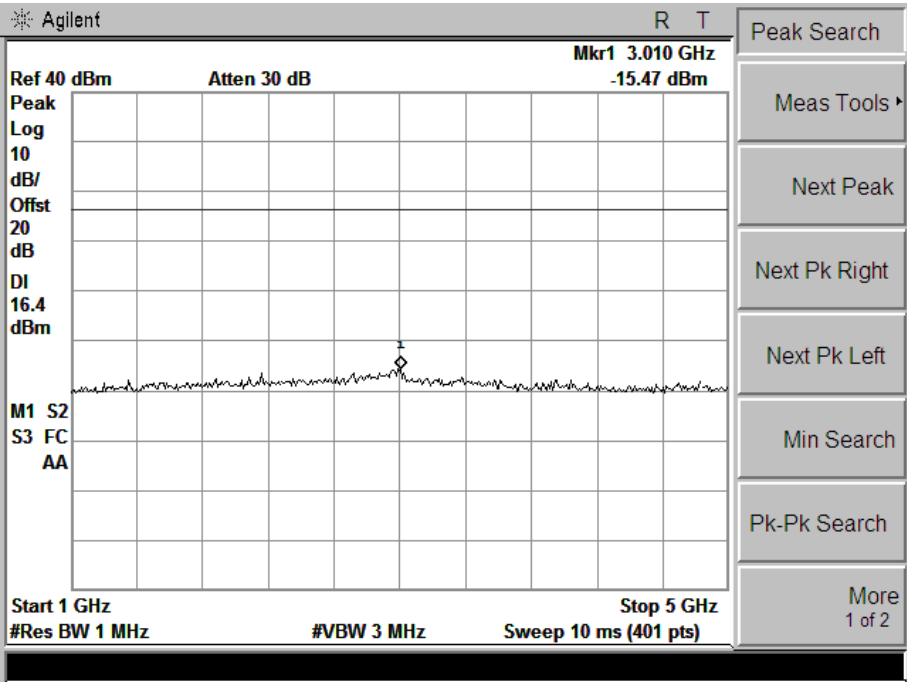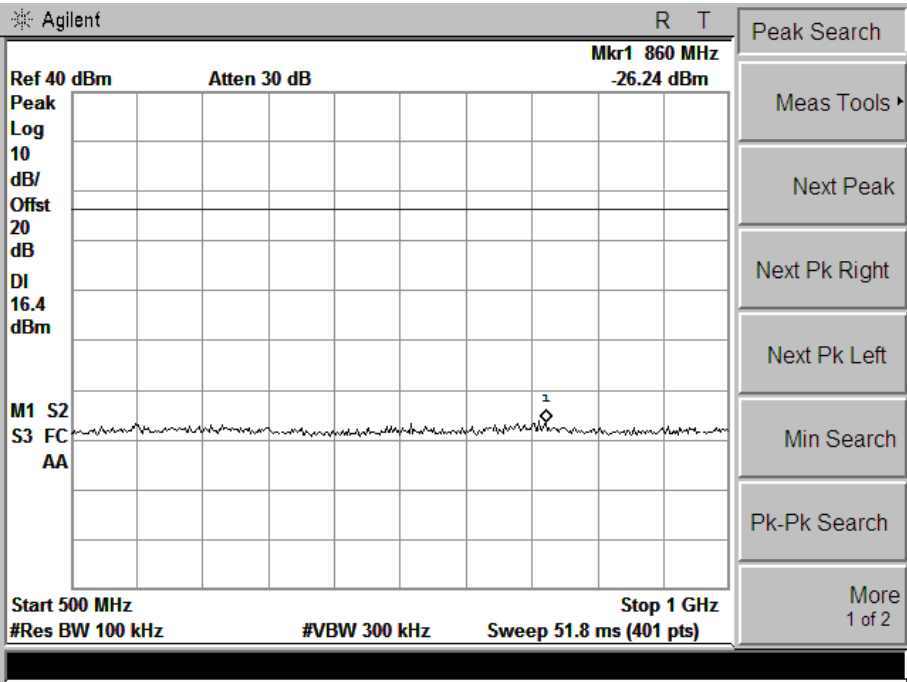

## 4.5. Modulation Characteristics

### TEST APPLICABLE

According to CFR47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

### TEST PROCEDURE

#### **Modulation Limit**

1 Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1 KHz using this level as a reference (0dB) and vary the input level from -20 to +20dB. Record the frequency deviation obtained as a function of the input level.

2 Repeat step 1 with input frequency changing to 300, 1004, 1500 and 2500Hz in sequence.

#### **Audio Frequency Response**


1 Configure the EUT as shown in figure 1.

2 Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0dB).

3 Vary the Audio frequency from 100 Hz to 3 KHz and record the frequency deviation.

4 Audio Frequency Response =  $20\log_{10}$  (Deviation of test frequency/Deviation of 1 KHz reference).

### TEST CONFIGURATION

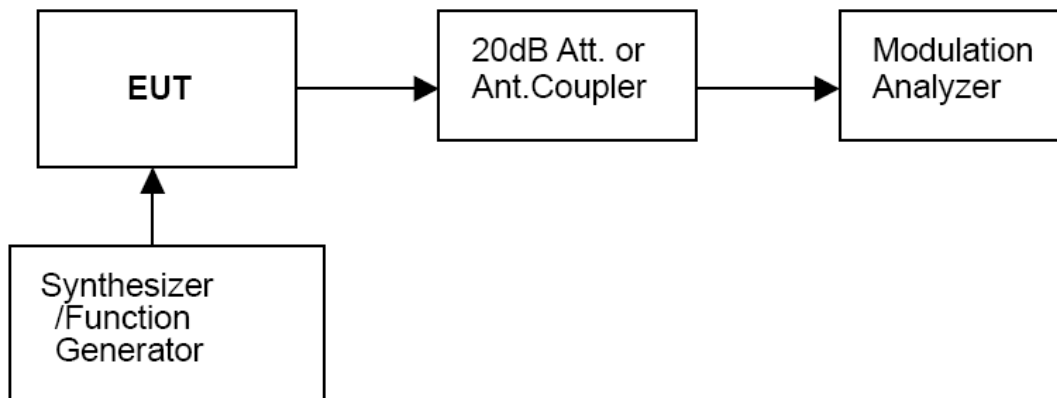

### TEST RESULTS

It is not applicable for devices which operate with the digitized voice/data modulation type.

## 4.6. Frequency Stability Measurement

### TEST APPLICABLE

1 According to FCC Part 2 Section 2.1055 (a)(1), the frequency stability shall be measured with variation of ambient temperature from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  centigrade.

2 According to FCC Part 2 Section 2.1055 (a) (2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacture.


3 Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and tested end point voltage.

4 According to §90.213, the frequency stability limit is 2.5 ppm for 12.5 KHz channel separation and 1.0 ppm for 6.25KHz channel separation.

### TEST PROCEDURE

The EUT was set in the climate chamber and connected to an external DC power supply. The RF output was directly connected to Spectrum Analyzer ESCI. The coupling loss of the additional cables was recorded and taken in account for all the measurements. After temperature stabilization (approx. 20 min for each stage), the frequency for the lower, the middle and the highest frequency range was recorded. For Frequency stability Vs. Voltage the EUT was connected to a DC power supply and the voltage was adjusted in the required ranges. The result was recorded.

### TEST SETUP BLOCK DIAGRAM

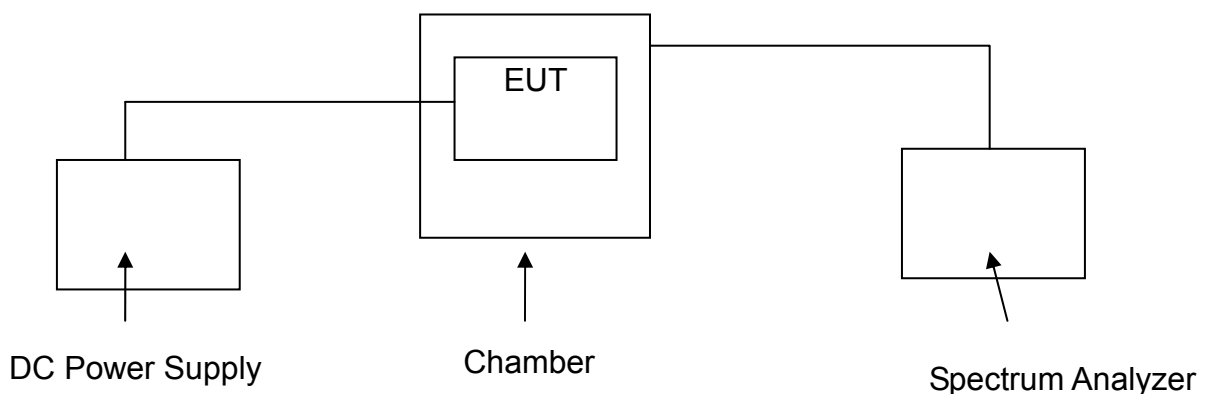

**TEST LIMITS**

According to 90.213, Transmitters used must have minimum frequency stability as specified in the following table.

| Frequency range (MHz)          | Fixed and base stations | Mobile stations           |                              |
|--------------------------------|-------------------------|---------------------------|------------------------------|
|                                |                         | Over 2 watts output power | 2 watts or less output power |
| Below 25 .....                 | <sup>1,2,3</sup> 100    | 100                       | 200                          |
| 25–50 .....                    | 20                      | 20                        | 50                           |
| 72–76 .....                    | 5                       | .....                     | 50                           |
| 150–174 .....                  | <sup>6,11</sup> 5       | <sup>6</sup> 5            | <sup>4,6</sup> 50            |
| 216–220 .....                  | 1.0                     | .....                     | 1.0                          |
| 220–222 <sup>12</sup> .....    | 0.1                     | 1.5                       | 1.5                          |
| 421–512 .....                  | <sup>7,11,14</sup> 2.5  | <sup>8</sup> 5            | <sup>8</sup> 5               |
| 806–809 .....                  | <sup>14</sup> 1.0       | 1.5                       | 1.5                          |
| 809–824 .....                  | <sup>14</sup> 1.5       | 2.5                       | 2.5                          |
| 851–854 .....                  | 1.0                     | 1.5                       | 1.5                          |
| 854–869 .....                  | 1.5                     | 2.5                       | 2.5                          |
| 896–901 .....                  | <sup>14</sup> 0.1       | 1.5                       | 1.5                          |
| 902–928 .....                  | 2.5                     | 2.5                       | 2.5                          |
| 902–928 <sup>13</sup> .....    | 2.5                     | 2.5                       | 2.5                          |
| 929–930 .....                  | 1.5                     | .....                     | .....                        |
| 935–940 .....                  | 0.1                     | 1.5                       | 1.5                          |
| 1427–1435 .....                | <sup>9</sup> 300        | 300                       | 300                          |
| Above 2450 <sup>10</sup> ..... | .....                   | .....                     | .....                        |

| Modulation Type | Channel separation | Test conditions   |         | Frequency error (ppm) |                |                |
|-----------------|--------------------|-------------------|---------|-----------------------|----------------|----------------|
|                 |                    | Voltage(V)        | Temp(℃) | 406.1125 (MHz)        | 429.5000 (MHz) | 469.9875 (MHz) |
| Digital/4FSK    | 12.5KHz            | 7.40              | -30     | -0.48                 | -0.63          | -0.55          |
|                 |                    |                   | -20     | -0.52                 | -0.62          | -0.52          |
|                 |                    |                   | 10      | -0.57                 | -0.54          | -0.54          |
|                 |                    |                   | 0       | -0.50                 | -0.52          | -0.48          |
|                 |                    |                   | 10      | -0.43                 | -0.45          | -0.35          |
|                 |                    |                   | 20      | -0.21                 | -0.15          | -0.19          |
|                 |                    |                   | 30      | -0.32                 | -0.35          | -0.34          |
|                 |                    |                   | 40      | -0.43                 | -0.43          | -0.42          |
|                 |                    |                   | 50      | -0.65                 | -0.44          | -0.57          |
|                 |                    | 6.25 (End Point)  | 25      | -0.50                 | -0.65          | -0.66          |
|                 |                    | 6.29 (85% Rated)  | 20      | -0.37                 | -0.35          | -0.23          |
|                 |                    | 8.51 (115% Rated) | 20      | -0.22                 | -0.22          | -0.25          |
|                 |                    | Limit             |         |                       | 1.00           | 1.00           |
| Conclusion      |                    | Complies          |         |                       |                |                |

4.7. Conducted Output Power

TEST APPLICABLE

Per FCC § 2.1046 and § 90.205: Maximum ERP is dependent upon the station’s antenna HAAT and required service area.

Typical transmitter output powers are 110 watts for base and/or fixed stations (paging transmitters excepted), and 30 watts for mobile stations. Higher powers may be certified, but it should be noted that mobile stations are normally only licensed up to 30 watts. See the SRSP relevant to the operating frequency for equipment power limits.

TEST PROCEDURE

Measurements shall be made to establish the radio frequency power delivered by the transmitter the standard output termination. The power output shall be monitored and recorded and no adjustment shall be made to the transmitter after the test has begun, except as noted below:

f the power output is adjustable, measurements shall be made for the highest and lowest power levels.

The EUT connect to the Receiver through 40 dB attenuator.

Measurement with Spectrum Analyzer FSP40 or Aglient E4407B conducted, external power supply with 12.50 V stabilized supply voltage.

TEST CONFIGURATION


|     |  |            |  |                               |
|-----|--|------------|--|-------------------------------|
|     |  |            |  | Spectrum<br>Analyzer/Receiver |
| EUT |  | Attenuator |  |                               |
|     |  |            |  |                               |
|     |  |            |  |                               |

The EUT was directly connected to a RF Communication


Test set by a 20 dB attenuator

**TEST RESULTS****Plots of Maximum Transmitter Power Measurement**


| Modulation | Channel Separation | Freq.(MHz) | Rated Power (Watt) | Measurement (dBm) | FCC Limit | Type Results |
|------------|--------------------|------------|--------------------|-------------------|-----------|--------------|
| 4FSK       | 12.5 KHz           | 406.1125   | 1                  | 30.5              | Varies    | Compliance   |

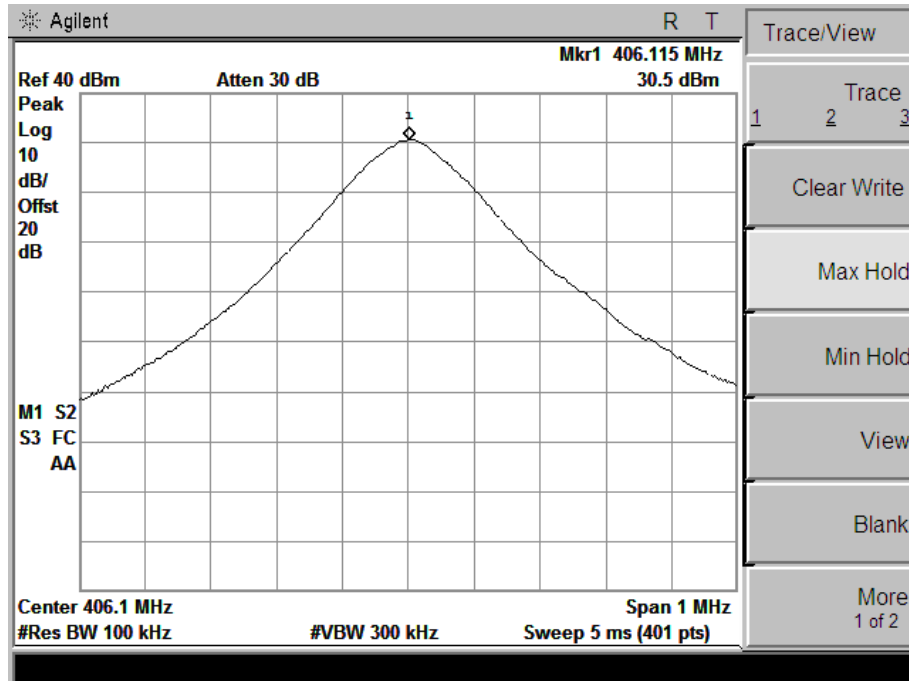


| Modulation | Channel Separation | Freq.(MHz) | Rated Power (Watt) | Measurement (dBm) | FCC Limit | Type Results |
|------------|--------------------|------------|--------------------|-------------------|-----------|--------------|
| 4FSK       | 12.5 KHz           | 429.5000   | 1                  | 30.19             | Varies    | Compliance   |

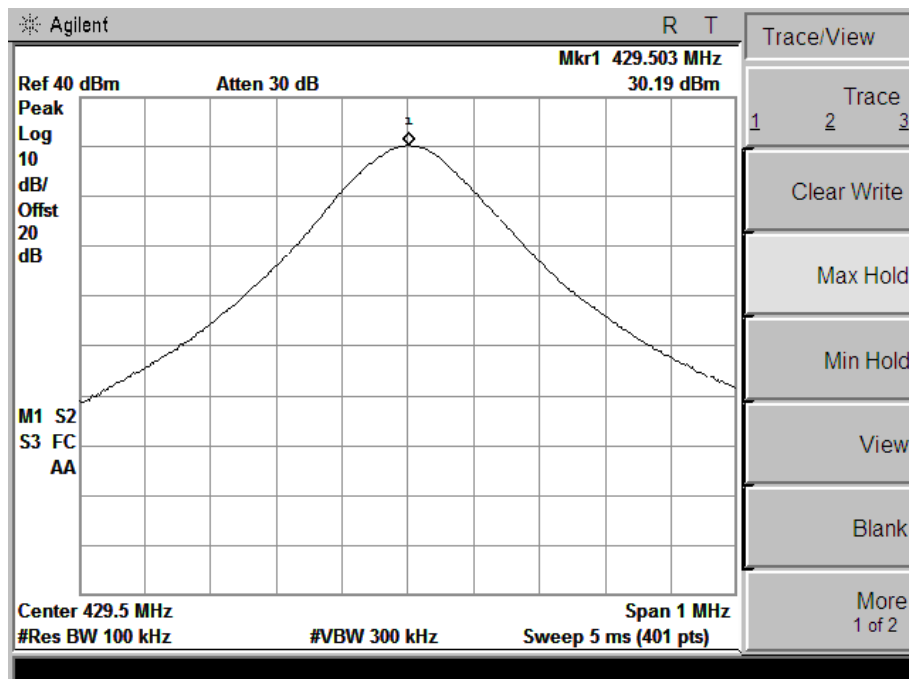


| Modulation | Channel Separation | Freq.(MHz) | Rated Power (Watt) | Measurement (dBm) | FCC Limit | Type Results |
|------------|--------------------|------------|--------------------|-------------------|-----------|--------------|
| 4FSK       | 12.5 KHz           | 469.9875   | 1                  | 30.4              | Varies    | Compliance   |

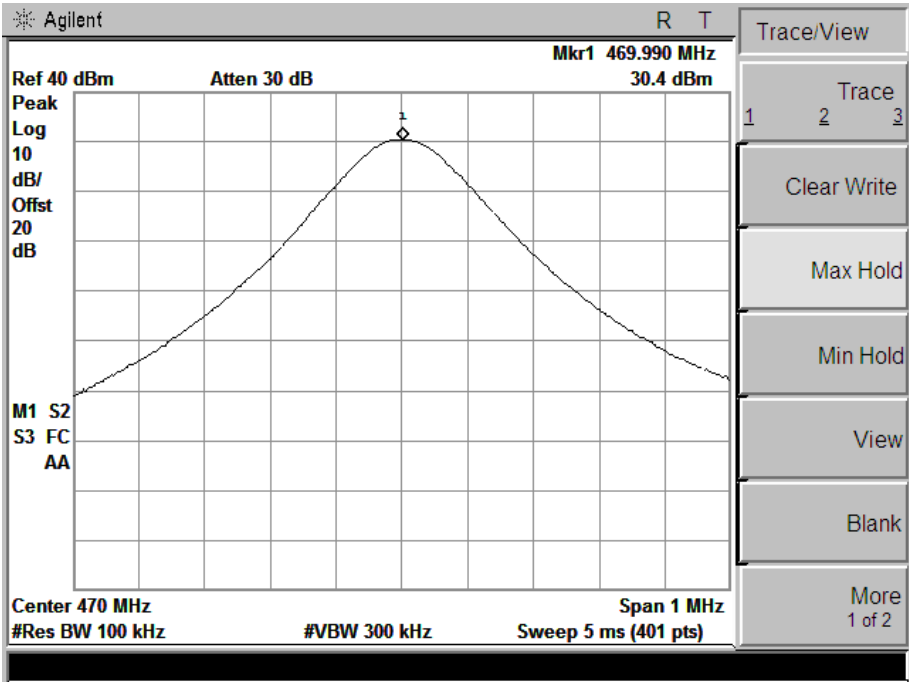


| Modulation | Channel Separation | Freq.(MHz) | Rated Power (Watt) | Measurement (dBm) | FCC Limit | Type Results |
|------------|--------------------|------------|--------------------|-------------------|-----------|--------------|
| 4FSK       | 12.5 KHz           | 406.1125   | 5                  | 36.72             | Varies    | Compliance   |

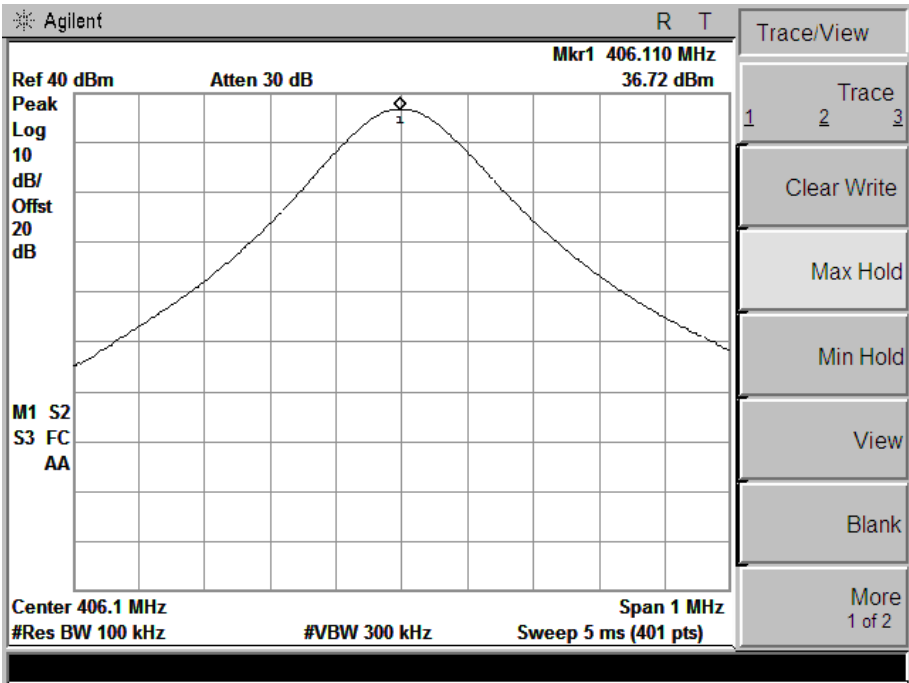

| Modulation | Channel Separation | Freq.(MHz) | Rated Power (Watt) | Measurement (dBm) | FCC Limit | Type Results |
|------------|--------------------|------------|--------------------|-------------------|-----------|--------------|
| 4FSK       | 12.5 KHz           | 429.5000   | 5                  | 36.6              | Varies    | Compliance   |

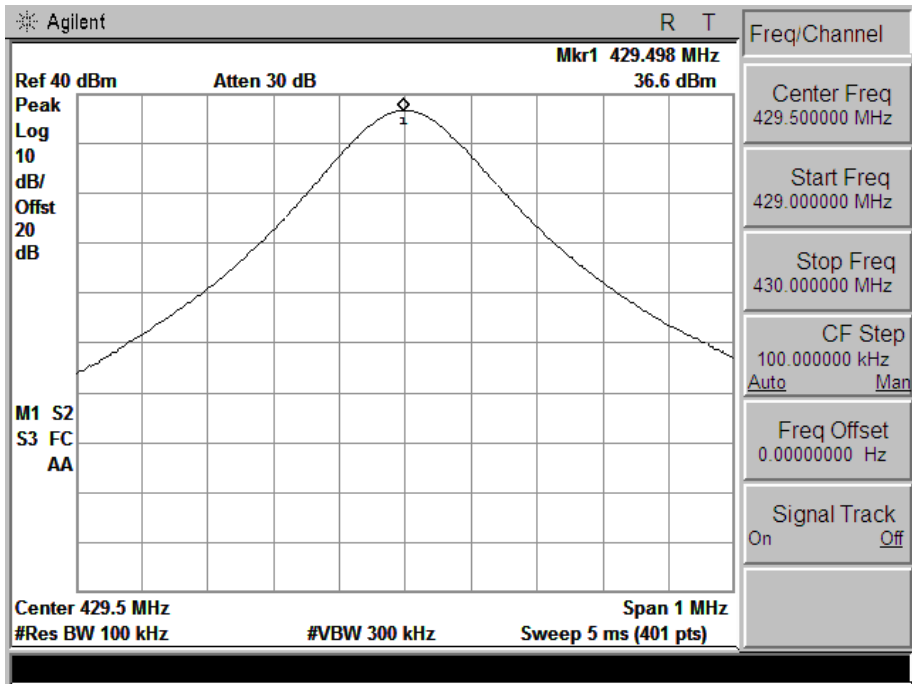

| Modulation | Channel Separation | Freq.(MHz) | Rated Power (Watt) | Measurement (dBm) | FCC Limit | Type Results |
|------------|--------------------|------------|--------------------|-------------------|-----------|--------------|
| 4FSK       | 12.5 KHz           | 469.9875   | 5                  | 36.37             | Varies    | Compliance   |

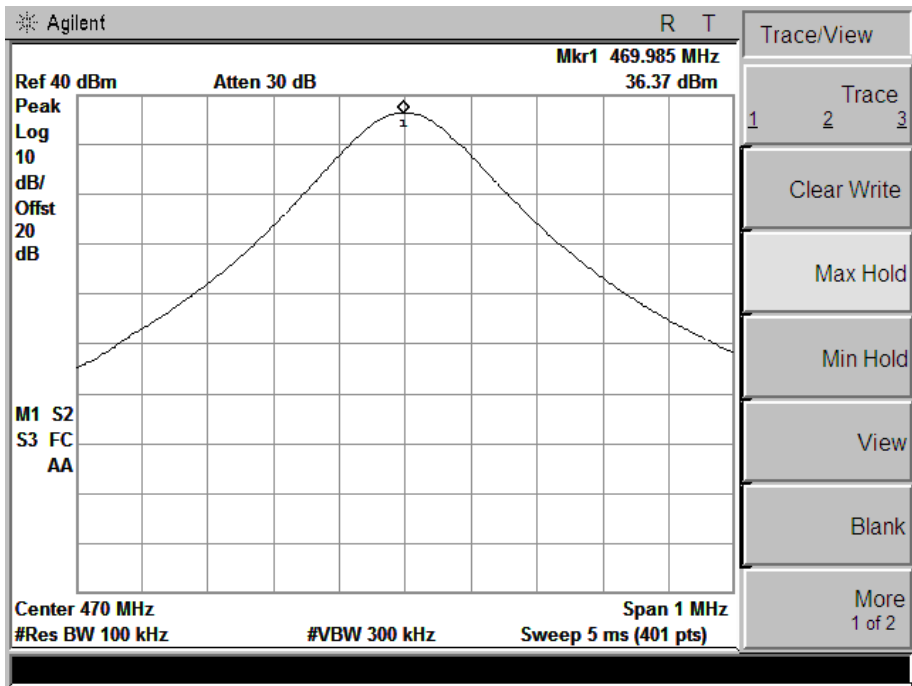

## 4.8. Transient frequency behavior

### TEST APPLICABLE

Section 90.214

Transient frequencies must be within the maximum frequency difference limits during the time intervals indicated:


| Time intervals <sup>1, 2</sup>                                                      | Maximum frequency difference <sup>3</sup> | All equipment  |               |
|-------------------------------------------------------------------------------------|-------------------------------------------|----------------|---------------|
|                                                                                     |                                           | 150 to 174 MHz | 421 to 512MHz |
| Transient Frequency Behavior for Equipment Designed to Operate on 25 KHz Channels   |                                           |                |               |
| t <sub>1</sub> <sup>4</sup> .....                                                   | ± 25.0 KHz                                | 5.0 ms         | 10.0 ms       |
| t <sub>2</sub> .....                                                                | ± 12.5 KHz                                | 20.0 ms        | 25.0 ms       |
| t <sub>3</sub> <sup>4</sup> .....                                                   | ± 25.0 KHz                                | 5.0 ms         | 10.0 ms       |
| Transient Frequency Behavior for Equipment Designed to Operate on 12.5 KHz Channels |                                           |                |               |
| t <sub>1</sub> <sup>4</sup> .....                                                   | ± 12.5 KHz                                | 5.0 ms         | 10.0 ms       |
| t <sub>2</sub> .....                                                                | ± 6.25 KHz                                | 20.0 ms        | 25.0 ms       |
| t <sub>3</sub> <sup>4</sup> .....                                                   | ± 12.5 KHz                                | 5.0 ms         | 10.0 ms       |
| Transient Frequency Behavior for Equipment Designed to Operate on 6.25 KHz Channels |                                           |                |               |
| t <sub>1</sub> <sup>4</sup> .....                                                   | ±6.25 KHz                                 | 5.0 ms         | 10.0 ms       |
| t <sub>2</sub> .....                                                                | ±3.125 KHz                                | 20.0 ms        | 25.0 ms       |
| t <sub>3</sub> <sup>4</sup> .....                                                   | ±6.25 KHz                                 | 5.0 ms         | 10.0 ms       |

1.  $t_{on}$  is the instant when a 1 KHz test signal is completely suppressed, including any capture time due to phasing.  
 $t_1$  is the time period immediately following  $t_{on}$ .  
 $t_2$  is the time period immediately following  $t_1$ .  
 $t_3$  is the time period from the instant when the transmitter is turned off until  $t_{off}$ .  
 $t_{off}$  is the instant when the 1 KHz test signal starts to rise.
2. During the time from the end of  $t_2$  to the beginning of  $t_3$ , the frequency difference must not exceed the limits specified in § 90.213.
3. Difference between the actual transmitter frequency and the assigned transmitter frequency.
4. If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

### TEST PROCEDURE

TIA/EIA-603 2.2.19


### TEST CONFIGURATION

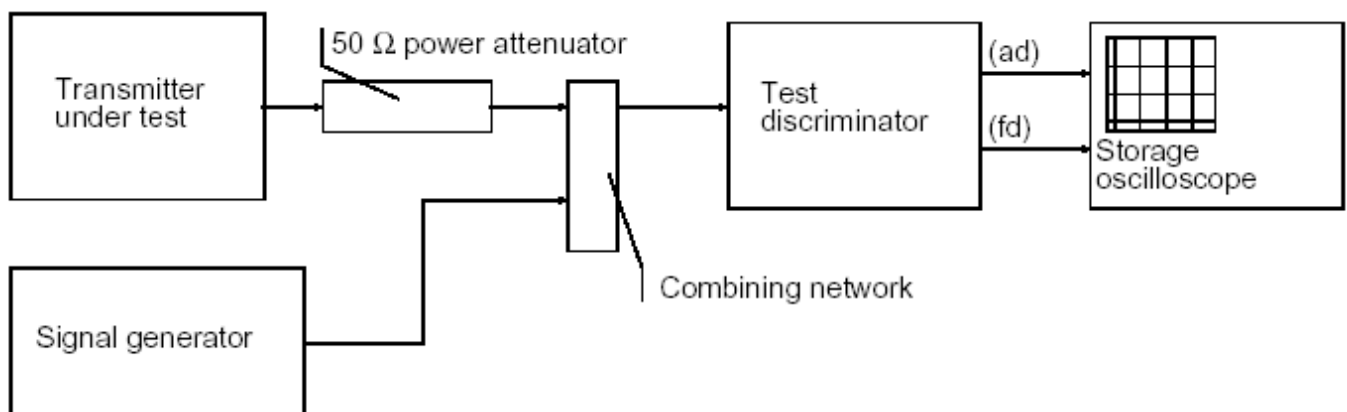


**TEST RESULTS**

Modulation Type: 4FSK

Transient frequency behavior @ 12.5 KHz Channel Separation-----Off – On


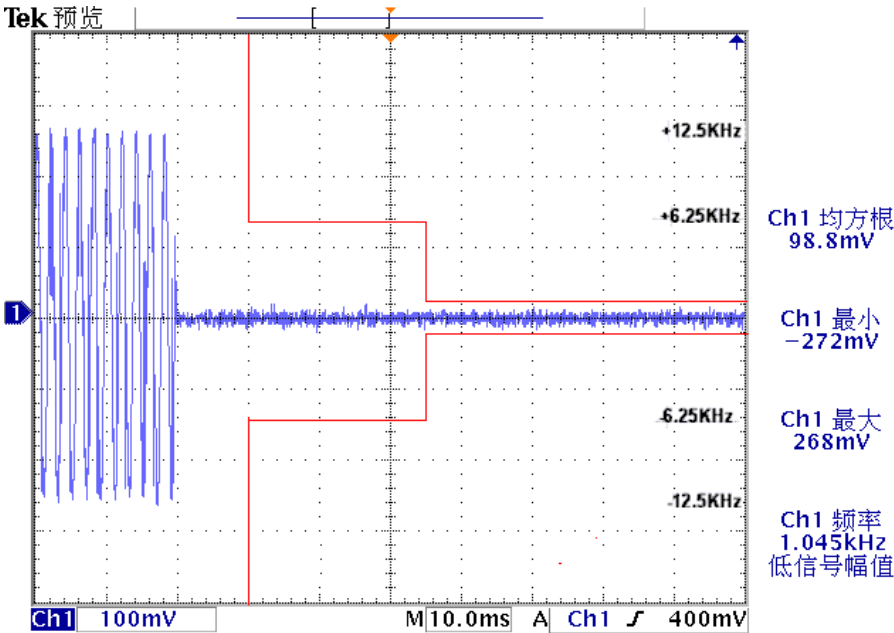


Transient frequency behavior @ 12.5KHz Channel Separation-----Off – On

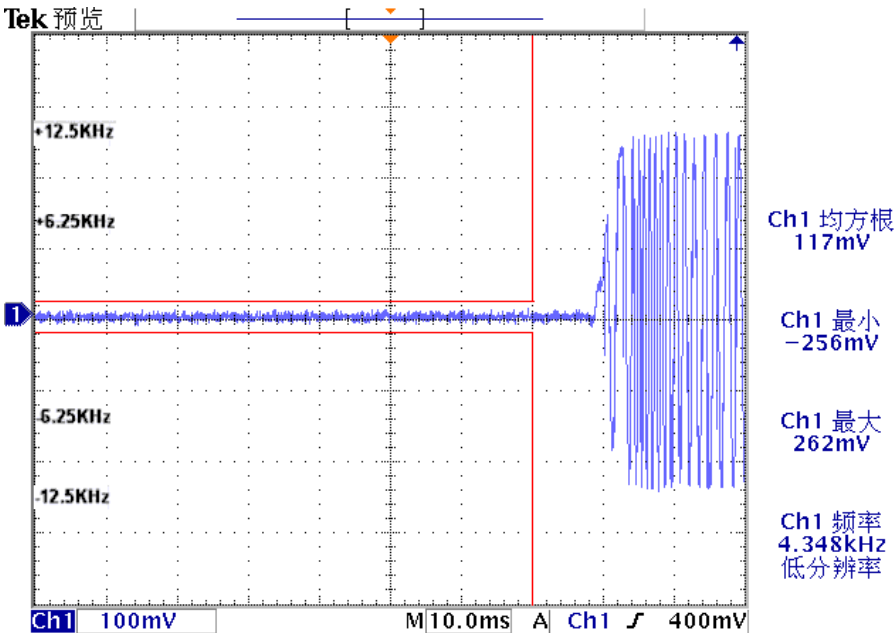


## 5 Test Setup Photos of the EUT

### Radiated emission test

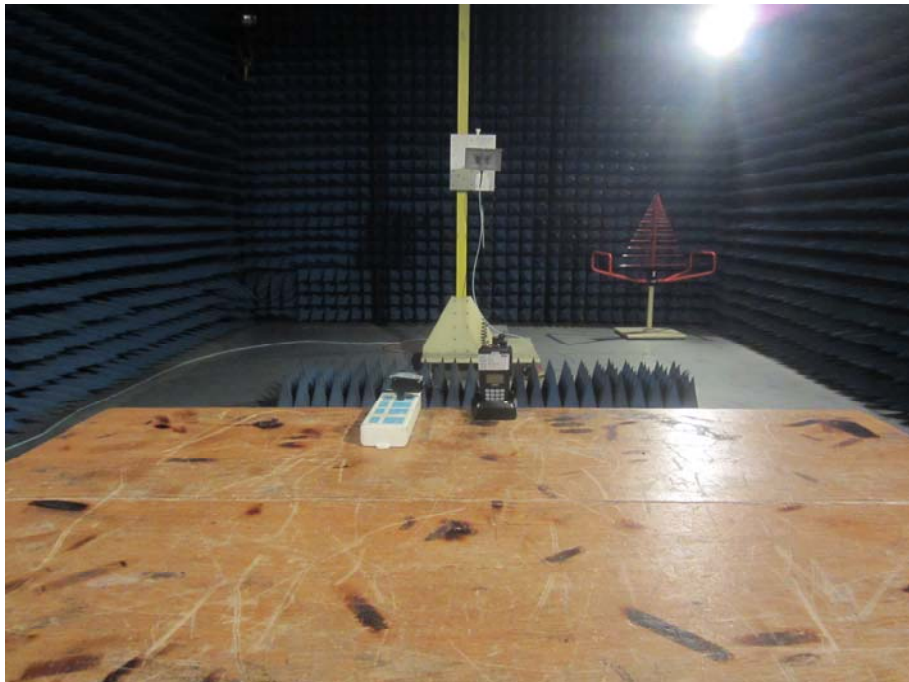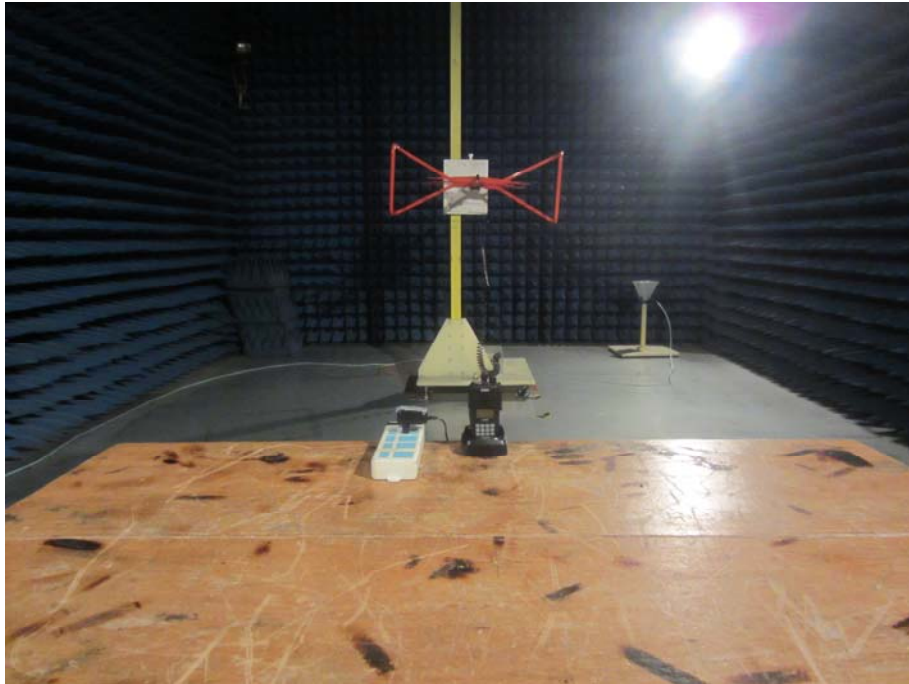

Conducted emission test

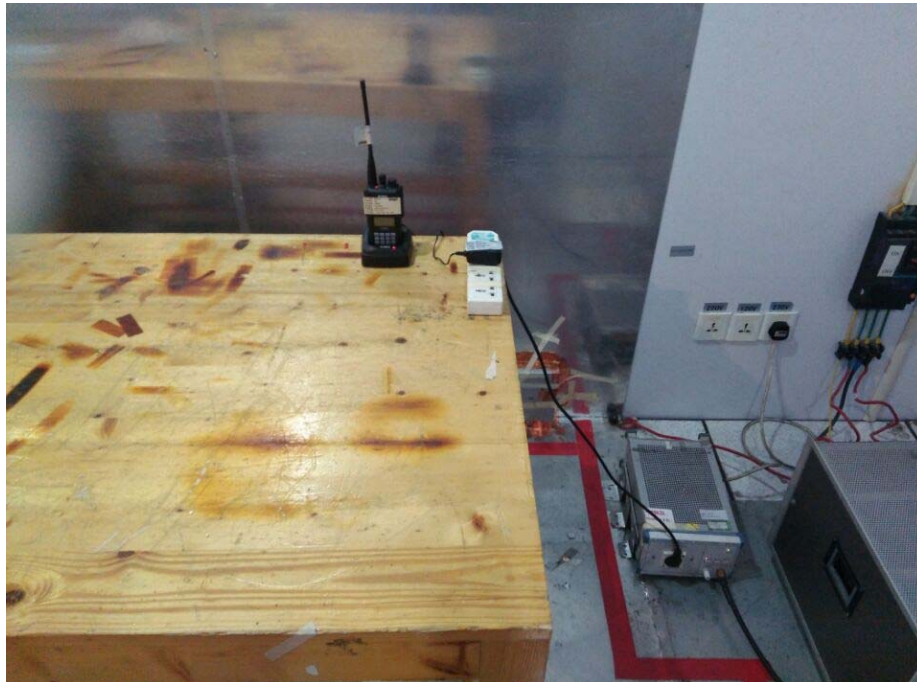

RF test



End of the report