



Test Report No.: PSU-QSU2307030110EM01



Certificate #6613.01

## EMC TEST REPORT



Applicant:	Cohda Wireless Pty Ltd.
Address:	27 Greenhill Road Wayville SA 5034 Australia

Manufacturer or Supplier:	Cohda Wireless Pty Ltd.
Address:	27 Greenhill Road Wayville SA 5034 Australia
Product:	On board (Transceiver) unit for Automotive.
Brand Name:	Cohda Wireless
Model Name:	MK6 OBU
Series Model:	MK6 OBU
FCC ID:	2AEGPMK6OBU
Date of tests:	Jul. 03, 2023 ~ Nov. 03, 2023

The submitted sample of the above equipment has been tested for according to the requirements of the following standards:

- ☐ FCC Part 15, Subpart B, Class A  
☒ FCC Part 15, Subpart B, Class B  
☒ ANSI C63.4:2014

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Prepared by Chao Wu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
 Date: Nov. 03, 2023	 Date: Nov. 03, 2023

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

# TABLE OF CONTENTS

<b>TABLE OF CONTENTS .....</b>	<b>2</b>
<b>RELEASE CONTROL RECORD .....</b>	<b>3</b>
<b>1 GENERAL INFORMATION .....</b>	<b>4</b>
1.1 GENERAL DESCRIPTION OF EUT .....	4
1.2 SUMMARY OF TEST RESULTS .....	7
1.3 MEASUREMENT UNCERTAINTY .....	8
1.4 DESCRIPTION OF TEST MODES .....	9
1.5 DESCRIPTION OF SUPPORT UNITS .....	12
<b>2 EMISSION TEST .....</b>	<b>13</b>
2.1 CONDUCTED EMISSION MEASUREMENT .....	13
2.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	13
2.1.2 TEST INSTRUMENTS .....	13
2.1.3 TEST PROCEDURES .....	15
2.1.4 DEVIATION FROM TEST STANDARD .....	15
2.1.5 TEST SETUP .....	16
2.1.6 EUT OPERATING CONDITIONS .....	16
2.1.7 TEST RESULTS .....	17
2.2 RADIATED EMISSION MEASUREMENT .....	19
2.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	19
2.2.2 TEST INSTRUMENTS .....	20
2.2.3 TEST PROCEDURE .....	21
2.2.4 DEVIATION FROM TEST STANDARD .....	22
2.2.5 TEST SETUP .....	23
2.2.6 EUT OPERATING CONDITIONS .....	24
2.2.7 TEST RESULTS .....	25
<b>3 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>29</b>



Test Report No.: PSU-QSU2307030110EM01

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
PSU-QSU2307030110EM01	Original release	Nov. 03, 2023



# 1 GENERAL INFORMATION

## 1.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT*</b>	On board (Transceiver) unit for Automotive.	
<b>BRAND NAME*</b>	Cohda Wireless	
<b>MODEL NAME*</b>	MK6 OBU	
<b>NOMINAL VOLTAGE*</b>	EUT 12Vdc	
<b>MODULATION TYPE*</b>	<b>BT_LE</b>	GFSK
	<b>Bluetooth</b>	GFSK, $\pi/4$ -DQPSK, 8DPSK
	<b>WLAN</b>	DSSS, OFDM
	<b>GPS/GALILEO/GLONASS/BDS</b>	BPSK
	<b>GSM/GPRS/EDGE</b>	GMSK, 8PSK
	<b>WCDMA</b>	HSDPA/HSUPA/ HSUPA+/DC-HSDPA
	<b>LTE</b>	QPSK/16QAM/64QAM
	<b>5G NR</b>	DFT-s-OFMA( $\pi/2$ BPSK,QPSK,16QAM,64QAM,256QAM); CP-OFMA(QPSK,16QAM,64QAM,256QAM);
	<b>DSRC</b>	BPSK,QPSK,16QAM,64QAM
<b>OPERATING FREQUENCY</b>	<b>Bluetooth/BT_LE</b>	2402MHz ~ 2480MHz
	<b>WLAN</b>	2412 ~ 2462MHz for 11b/g/n(HT20/40) 5180 ~ 5240MHz, 5260~5320 MHz, 5500~5720 MHz , 5745 ~ 5825 MHz for 11a/ n(HT20)/ n(HT40) / ac(VHT20)/ ac(VHT40) / ac(VHT80)
	<b>GPS/GALILEO/GLONASS/BDS</b>	1559MHz ~ 1610MHz
	<b>GSM/GPRS/EDGE</b>	1850.2MHz ~ 1909.8MHz (FOR GSM 1900)
	<b>WCDMA</b>	1852.4MHz ~ 1907.6MHz(FOR WCDMA Band 2) 1712.4MHz ~ 1752.6MHz(FOR WCDMA Band 4) 826.4MHz ~ 846.6MHz (FOR WCDMA Band 5)
	<b>LTE</b>	1850.7MHz ~ 1909.3MHz (FOR LTE Band2) 1710.7MHz ~ 1754.3MHz (FOR LTE Band4) 824.7MHz ~ 848.3MHz (FOR LTE Band5) 2502.5MHz ~ 2567.5MHz (FOR LTE Band7) 699.7MHz ~ 715.3MHz (FOR LTE Band12) 706.5MHz ~ 713.5MHz (FOR LTE Band17) 1850.7MHz ~ 1914.3 MHz (FOR LTE Band25) DL:717MHz ~ 728MHz (FOR LTE Band29)



		DL:2307.5MHz ~ 2312.5MHz (FOR LTE Band30) 2498.5MHz~ 2687.5MHz (FOR LTE Band41) 1710.7MHz ~ 1779.3MHz (FOR LTE Band66) 665.5MHz ~695.5MHz (FOR LTE Band71)
	5G NR	SA/NSA: N2 (1852.5MHz ~1907.5MHz) N5 (826.5MHz ~ 846.5MHz) N25 (1852.5MHz ~ 1912.5MHz) N66 (1712.5 ~ 1777.5MHz) N71 (665.5 ~ 695.5MHz) n77(Part27Q)(3460.02MHz ~ 3540MHz) n77(Part27O)(3710.01MHz ~ 3969.99MHz) n78(Part 27Q) (3460.02MHz ~ 3540MHz) n78(Part 27O) (3710.01MHz ~ 3789.99MHz) NSA: DC_2A-n77A(Part 27Q) (3460.02MHz ~ 3540MHz) DC_2A-n77A(Part 27O) (3710.01MHz ~ 3789.99MHz) DC_2A-n78A(Part 27Q) (3460.02MHz ~ 3540MHz) DC_2A-n78A(Part 27O) (3710.01MHz ~ 3789.99MHz) DC_5A-n78A(Part 27Q) (3460.02MHz ~ 3540MHz) DC_5A-n78A(Part 27O) (3710.01MHz ~ 3789.99MHz) DC_7A-n78A(Part 27Q) (3460.02MHz ~ 3540MHz) DC_7A-n78A(Part 27O) (3710.01MHz ~ 3789.99MHz) DC_12A-n78A(Part 27Q) (3460.02MHz ~ 3540MHz) DC_12A-n78A(Part 27O) (3710.01MHz ~ 3789.99MHz) DC_66A-n78A(Part 27Q) (3460.02MHz ~ 3540MHz) DC_66A-n78A(Part 27O) (3710.01MHz ~ 3789.99MHz)
	DSRC	5895 MHz – 5925 MHz
HIGHEST FREQUENCY	5925MHz	
HW VERSION*	Rev 1.0	
SW VERSION*	19.Release.134186	
I/O PORTS*	Refer to user's manual	
CABLE SUPPLIED*	USB cable: non-shielded cable, with w/o ferrite core, 1 meter	
ACCESSORY DEVICES*	Refer to note as below	

**NOTE:**

- \*Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information , Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.



3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

**List of Accessory:**

ACCESSORIES	MANUFACTURER	ANTENNA TYPE	MODEL
2x Antenna for LTE/2G/3G/CDMA	Taoglas	Monopole Antenna	TG.66.0723
1x Antenna for WLAN/BT	Taoglas	Monopole Antenna	GW.05.0E23
1x Antenna for WLAN	Taoglas	Monopole Antenna	GW.05.0E23
2x Antenna for C-V2X	MobileMark	DOM Antenna	MGWG-303
2x Antenna for DSRC	MobileMark	DOM Antenna	MGWG-303
1x Antenna for GNSS	MobileMark	DOM Antenna	MGWG-303

## 1.2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart B			
Standard Section	Test Item	Result	Test lab*
FCC Part 15, Subpart B, Class B ANSI C63.4:2014	Conducted Test	Compliance	A
	Radiated Emission Test (30MHz ~ 1GHz)	Compliance	A
	Radiated Emission Test (Above 1GHz)	Compliance	A

### \*Test Lab Information Reference

**Lab A:**

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

**Lab Address:**

Tower N, Innovation Center, 88 Zhuyi Road, High-tech District, Suzhou City, Anhui Province

**Accredited Test Lab Cert 6613.01**

The FCC Site Registration No. is 434559; The Designation No. is CN1325.

### 1.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz ~ 30MHz	$\pm 2.70\text{dB}$
Radiated emissions	30MHz~1GMHz	$\pm 4.98\text{dB}$
	1GMHz ~6GMHz	$\pm 4.70\text{dB}$
	6GMHz ~18GMHz	$\pm 4.60\text{dB}$





## 1.4 DESCRIPTION OF TEST MODES

Test Mode	Test Condition
<b>Radiated emission test</b>	
1	GSM1900 idle + DC Source + GPS RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
2	WCDMA B2 idle + DC Source + Glonass RX + BT idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
3	WCDMA B4 idle + DC Source + Beidou RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
4	WCDMA B5 idle + DC Source + Galileo RX + BT idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
5	LTE B2 idle + DC Source + GPS RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
6	LTE B4 idle + DC Source + Glonass RX + BT idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
7	LTE B5 idle + DC Source + Beidou RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
8	LTE B7 idle + DC Source + Galileo RX + BT idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
9	LTE B12 idle + DC Source + GPS RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
10	LTE B17 idle + DC Source + Galileo RX + BT idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
11	LTE B25 idle + DC Source + GPS RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
12	LTE B29 idle + DC Source + Beidou RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
13	LTE B30 idle + DC Source + Galileo RX + BT idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
14	LTE B41 idle + DC Source + GPS RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
15	LTE B66 idle + DC Source + Beidou RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
16	LTE B71 idle + DC Source + Galileo RX + BT idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
17	GSM 1900 Idle + DC Source + GPS RX + BT Idle + WIFI Idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
18	WCDMA B2 Idle + DC Source + Glonass RX + BT Idle + WIFI Idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
19	LTE B2 Idle + DC Source + Beidou RX + BT Idle + WIFI Idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
20	5G N2 idle + DC Source + Galileo RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
21	5G N5 idle + DC Source + GPS RX + BT idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica + DSRC
22	5G N25 idle + DC Source + Glonass RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica



23	5G N66 idle + DC Source + Beidou RX + BT idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
24	5G N71 idle + DC Source + Galileo RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
25	5G N78 idle + DC Source + GPS RX + BT idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
26	5G N2 Idle + DC Source + Glonass RX + BT Idle + WIFI Idle(2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
27	5G N77 Idle + DC Source + Beidou RX + BT Idle + WIFI Idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
28	5G N78 Idle + DC Source + Beidou RX + BT Idle + WIFI Idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
29	DC_2A-n78A idle + DC Source + Galileo RX + BT Idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
30	DC_5A-n78A idle + DC Source + GPS RX + BT Idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
31	DC_7A-n78A idle + DC Source + Glonass RX + BT Idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
32	DC_12A-n78A idle + DC Source + Beidou RX + BT Idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
33	DC_66A-n78A idle + DC Source + Galileo RX + BT Idle + WIFI idle (2.4G) + Storage Card + SIM + CAN + Technica

Test Mode	Test Condition
<b>Conducted emission test</b>	
1	GSM1900 idle + DC Source + GPS RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
2	WCDMA B2 idle + DC Source + Glonass RX + BT idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
3	WCDMA B4 idle + DC Source + Beidou RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
4	WCDMA B5 idle + DC Source + Galileo RX + BT idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
5	LTE B2 idle + DC Source + GPS RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
6	LTE B4 idle + DC Source + Glonass RX + BT idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
7	LTE B5 idle + DC Source + Beidou RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
8	LTE B7 idle + DC Source + Galileo RX + BT idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
9	LTE B12 idle + DC Source + GPS RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
10	LTE B17 idle + DC Source + Galileo RX + BT idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
11	LTE B25 idle + DC Source + GPS RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica



12	LTE B29 idle + DC Source + Beidou RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
13	LTE B30 idle + DC Source + Galileo RX + BT idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
14	LTE B41 idle + DC Source + GPS RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
15	LTE B66 idle + DC Source + Beidou RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
16	LTE B71 idle + DC Source + Galileo RX + BT idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
17	GSM 1900 Idle + DC Source + GPS RX + BT Idle + WIFI Idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
18	WCDMA B2 Idle + DC Source + Glonass RX + BT Idle + WIFI Idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
19	LTE B2 Idle + DC Source + Beidou RX + BT Idle + WIFI Idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
20	5G N2 idle + DC Source + Galileo RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
21	5G N5 idle + DC Source + GPS RX + BT idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica + DSRC
22	5G N25 idle + DC Source + Glonass RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
23	5G N66 idle + DC Source + Beidou RX + BT idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
24	5G N71 idle + DC Source + Galileo RX + BT idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
25	5G N78 idle + DC Source + GPS RX + BT idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
26	5G N2 Idle + DC Source + Glonass RX + BT Idle + WIFI Idle(2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
27	5G N77 Idle + DC Source + Beidou RX + BT Idle + WIFI Idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
28	5G N78 Idle + DC Source + Beidou RX + BT Idle + WIFI Idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
29	DC_2A-n78A idle + DC Source + Galileo RX + BT Idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
30	DC_5A-n78A idle + DC Source + GPS RX + BT Idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
31	DC_7A-n78A idle + DC Source + Glonass RX + BT Idle + WIFI idle (2.4G) + Storage Card + USB flash disk + SIM + CAN + Technica
32	DC_12A-n78A idle + DC Source + Beidou RX + BT Idle + WIFI idle (5G) + Storage Card + USB flash disk + SIM + CAN + Technica
33	DC_66A-n78A idle + DC Source + Galileo RX + BT Idle + WIFI idle (2.4G) + Storage Card + SIM + CAN + Technica

**NOTE:**

1. For radiated emission test, test mode 1 was the verification case and only this mode was presented in this report
2. For conducted emission test, test mode 8 was the verification case and only this mode was presented in this report

## 1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

### FOR ALL TESTS

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Laptop	Lenovo	Thinkpad E14	SL10W47313	N/A
2	Micro SD	SAM SUNG	N/A	N/A	N/A
3	Bluetooth	Rohde&Schwarz	SMBV100B	102176	N/A
4	GPS Simulator+Antenna	Rohde&Schwarz	SMBV100A	261436	N/A
5	Universal radio communication tester	Rohde&Schwarz	CMW500	169399	N/A
6	WIFI Router	HUAWEI	N/A	N/A	N/A
7	PC	Lenovo	ThinkPad E14	HRSW00024	N/A
8	DC Source	HYELEC	HY3010B	551016	N/A
9	Ethernet	N/A	N/A	N/A	N/A
10	CAN Connector	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable, 1.0m;
2	PC USB Line: Unshielded, Detachable, 1.0m;
3	CAN Box: Unshielded, Detachable, 1.8m;
4	Ethernet: Unshielded, Detachable, 0.8m;
5	Router:Unshielded, Detachable, 2.0m;

## 2 EMISSION TEST

### 2.1 CONDUCTED EMISSION MEASUREMENT

#### 2.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

TEST STANDARD: FCC Part 15, Subpart B (Section: 15.107 a CLASS B)

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

TEST STANDARD: FCC Part 15, Subpart B (Section: 15.107 b CLASS A)

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15 ~ 0.5	79	66
0.5 ~ 30	73	60

**NOTE:** 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 2.1.2 TEST INSTRUMENTS

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date
WIDEBANDRADIO COMMUNICATION TESTER	Rohde&Schwarz	CMW500	169399	Jun.27,22	Jun.26,24
EMI Test Receiver	Rohde&Schwarz	ESR3	102749	Feb.25,22	Feb.24,24
ELEKTRA test software	Rohde&Schwarz	ELEKTRA	NA	N/A	N/A
LISN network	Rohde&Schwarz	ENV216	102640	Feb.17,22	Feb.16,24
CABLE	Rohde&Schwarz	W61.01	N/A	Apr.28,23	Oct.27,23
CABLE	Rohde&Schwarz	W61.01	N/A	Oct.27,23	Apr.26,24
CABLE	Rohde&Schwarz	W601	N/A	Apr.28,23	Oct.27,23
CABLE	Rohde&Schwarz	W601	N/A	Oct.27,23	Apr.26,24

**NOTE:** 1. The test was performed in CE shielded room.



Test Report No.: PSU-QSU2307030110EM01

### 2.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

### 2.1.4 DEVIATION FROM TEST STANDARD

No deviation.

## 2.1.5 TEST SETUP

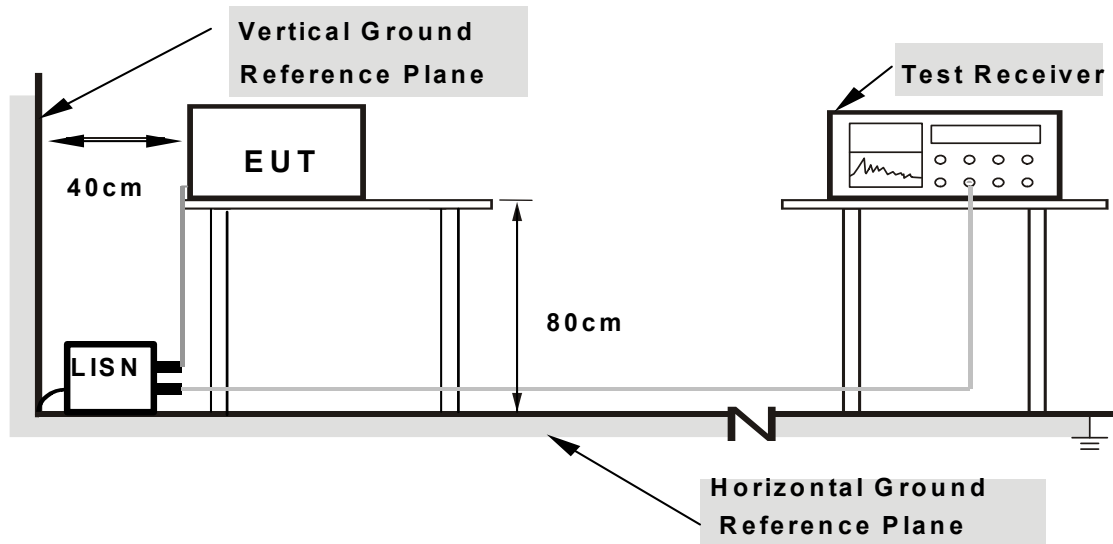

**Note:** 1.Support units were connected to second LISN.  
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

## 2.1.6 EUT OPERATING CONDITIONS

- Turned on the power and connected of all equipment.
- EUT was operated according to the use type described in the manufacturer's specifications or the user's manual.






## 2.1.7 TEST RESULTS

Worst case data:

TEST VOLTAGE	DC 12V	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
ENVIRONMENTAL CONDITIONS	26deg. C, 51%RH	TESTED BY	Chao Wu

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154000	---	10.13	55.78	45.65	L1	ON	9.7
0.154000	33.23	---	65.78	32.55	L1	ON	9.7
1.784000	---	10.93	46.00	35.07	L1	ON	9.7
1.784000	12.71	---	56.00	43.29	L1	ON	9.7
2.276000	---	9.06	46.00	36.94	L1	ON	9.7
2.276000	11.07	---	56.00	44.93	L1	ON	9.7
10.040000	---	13.45	50.00	36.55	L1	ON	9.8
10.040000	17.48	---	60.00	42.52	L1	ON	9.8
16.892000	---	30.78	50.00	19.22	L1	ON	9.8
16.892000	32.65	---	60.00	27.35	L1	ON	9.8
25.000000	---	33.40	50.00	16.60	L1	ON	9.8
25.000000	37.78	---	60.00	22.22	L1	ON	9.8


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. The emission levels of other frequencies were very low against the limit.
  3. Margin value = Limit value- Emission level
  4. Correction factor = Insertion loss + Cable loss + Attenuate
  5. Emission Level = Correction Factor + Reading Value.

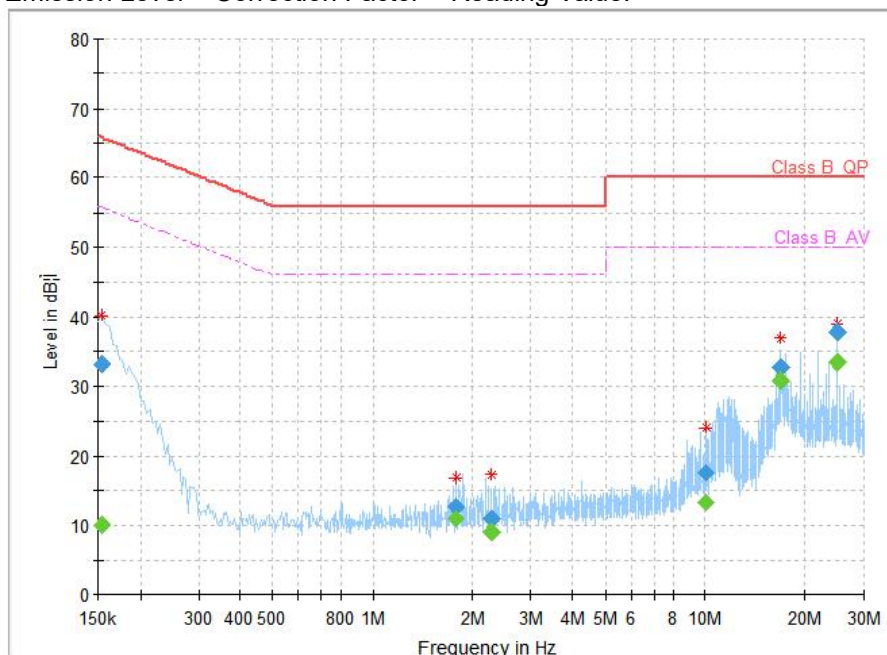

<b>TEST VOLTAGE</b>	DC 12V	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 51%RH	<b>TESTED BY</b>	Chao Wu

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	10.18	56.00	45.82	N	ON	9.7
0.150000	32.96	---	66.00	33.04	N	ON	9.7
1.826000	---	9.27	46.00	36.73	N	ON	9.8
1.826000	10.98	---	56.00	45.02	N	ON	9.8
3.836000	---	3.87	46.00	42.13	N	ON	9.8
3.836000	5.56	---	56.00	50.44	N	ON	9.8
11.948000	---	20.67	50.00	29.33	N	ON	9.8
11.948000	25.41	---	60.00	34.59	N	ON	9.8
16.896000	---	29.83	50.00	20.17	N	ON	9.9
16.896000	31.77	---	60.00	28.23	N	ON	9.9
25.000000	---	33.95	50.00	16.05	N	ON	9.9
25.000000	38.33	---	60.00	21.67	N	ON	9.9

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. The emission levels of other frequencies were very low against the limit.
  3. Margin value = Limit value- Emission level
  4. Correction factor = Insertion loss + Cable loss + Attenuate
  5. Emission Level = Correction Factor + Reading Value.

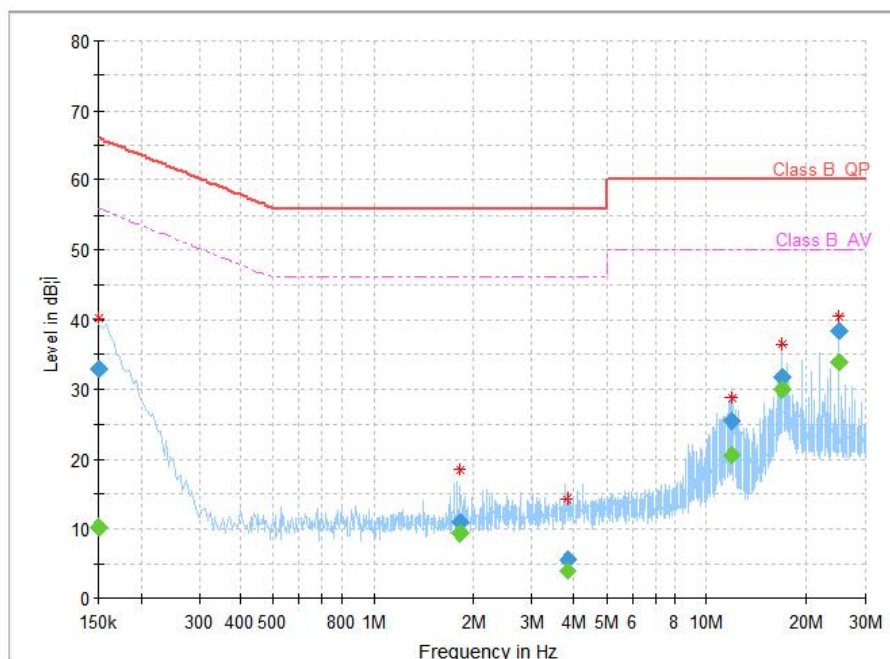

## 2.2 RADIATED EMISSION MEASUREMENT

### 2.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

**TEST STANDARD: FCC Part 15, Subpart B (Section: 15.109)**

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

Radiated Emissions Limits at 3 meters (dBμV/m)		
Frequencies (MHz)	FCC 15B Class A	FCC 15B Class B
30-88	49	40
88-216	53.5	43.5
216-960	56	46
960-1000	59.5	54
Above 1000	Avg: 59.5 Peak: 79.5	Avg: 54 Peak: 74

**Frequency Range (For unintentional radiators)**

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40GHz, whichever is lower

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
  3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
  4. QP detector shall be applied if not specified.

## 2.2.2 TEST INSTRUMENTS

### Frequency range below 1GHz

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date
WIDEBANDRADIO COMMUNICATION TESTER	Rohde&Schwarz	CMW500	169399	Jun.27,22	Jun.26,24
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02Chamber	Nov.24,22	Nov.23,25
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.28,22	Feb.27,24
EMI Test Receiver	R&S	ESW44	101973	Feb.25,22	Feb.24,24
Measurement Software	R&S	ELEKTRA	N/A	N/A	N/A
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
CABLE	R&S	W13.01	N/A	Apr.28,23	Oct.27,23
CABLE	R&S	W13.01	N/A	Oct.27,23	Apr.26,24
CABLE	R&S	W13.02	N/A	Apr.28,23	Oct.27,23
CABLE	R&S	W13.02	N/A	Oct.27,23	Apr.26,24
CABLE	R&S	W12.14	N/A	Apr.28,23	Oct.27,23
CABLE	R&S	W12.14	N/A	Oct.27,23	Apr.26,24

### Frequency range above 1GHz

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date
WIDEBANDRADIO COMMUNICATION TESTER	Rohde&Schwarz	CMW500	169399	Jun.27,22	Jun.26,24
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.24,22	Nov.23,25
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,22	Aug.21,24
EMI Test Receiver	R&S	ESW44	101973	Feb.25,22	Feb.24,24
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
Measurement Software	R&S	ELEKTRA	N/A	N/A	N/A
CABLE	R&S	W13.01	N/A	Apr.28,23	Oct.27,23
CABLE	R&S	W13.01	N/A	Oct.27,23	Apr.26,24
CABLE	R&S	W13.02	N/A	Apr.28,23	Oct.27,23
CABLE	R&S	W13.02	N/A	Oct.27,23	Apr.26,24
CABLE	R&S	W12.14	N/A	Apr.28,23	Oct.27,23
CABLE	R&S	W12.14	N/A	Oct.27,23	Apr.26,24

**NOTE:** 1. The calibration interval of the above test instruments is 6 months or 24 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.  
2. The test was performed in 3m Chamber.



## 2.2.3 TEST PROCEDURE

### <Frequency Range below 1GHz>

The basic test procedure was in accordance with ANSI C63.4:2014 (section 12).

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.

#### NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2.  $\text{Emission level(dBuV/m)} = \text{Raw Value(dBuV)} + \text{Correction Factor(dB/m)}$
3.  $\text{Correction Factor(dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Factor (dB)}$  (if the raw value not contains the amplifier);
4.  $\text{Correction Factor(dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Factor (dB)} - \text{Amplifier Gain(dB)}$  (if the raw value contains the amplifier).
5.  $\text{Margin value} = \text{Limit value} - \text{Emission level}$ .

### <Frequency Range above 1GHz>

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. The bore sight should be used during the test above 1GHz.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz

#### NOTE:


- 1.The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2.The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth of test receiver/spectrum analyzer is 1Hz for Average detection (AV) at frequency above 1GHz.
- 3.For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the receiver antenna.
- 4.Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 5.Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) (if the raw value not contains the amplifier);
- 6.Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB) (if the raw value contains the amplifier)
- 7.Margin value = Limit value- Emission level.

## 2.2.4 DEVIATION FROM TEST STANDARD


No deviation.

## 2.2.5 TEST SETUP

<Frequency Range below 1GHz>

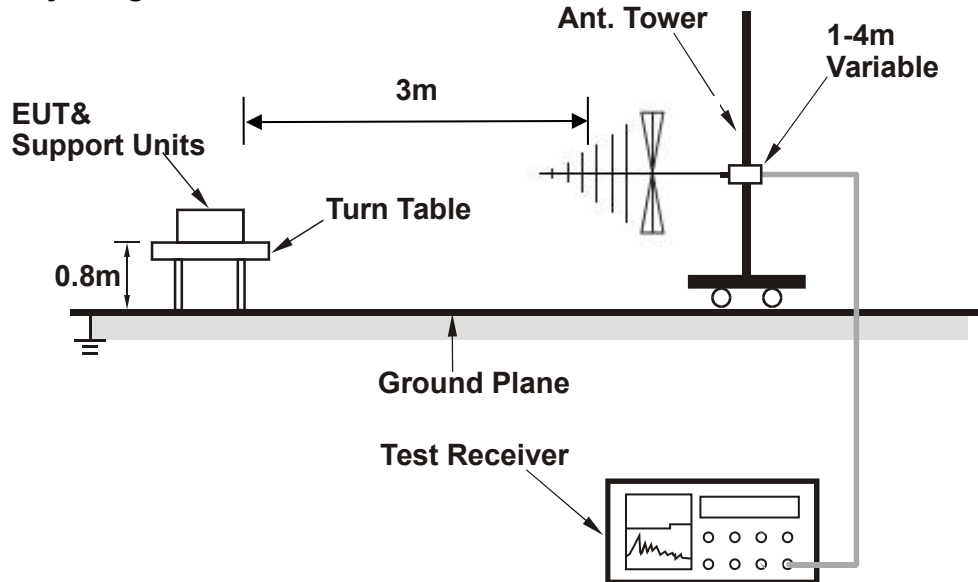

<Frequency Range above 1GHz>

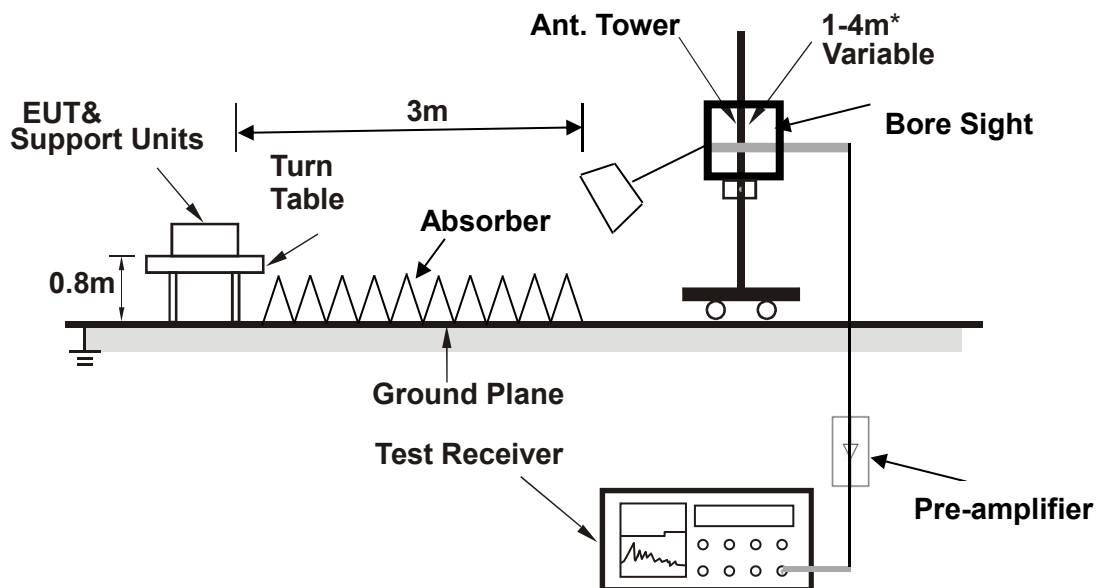

**Note:** Above 1G is a directional antenna

depends on the EUT height and the antenna 3dB bandwidth both, refer to section 7.3 of CISPR 16-2-3.



Test Report No.: PSU-QSU2307030110EM01

## 2.2.6 EUT OPERATING CONDITIONS

Same as item 2.1.6.



## 2.2.7 TEST RESULTS


Worst case:

<b>TEST VOLTAGE</b>	DC 12V	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>DETECTOR FUNCTION &amp; RESOLUTION BANDWIDTH</b>	Quasi-Peak, 120 kHz
<b>TESTED BY</b>	Chao Wu		

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	66.084	29.98	40.00	10.02	-13.31	H	226.6	2	120.000
1	140.435	27.69	43.50	15.81	-16.00	H	89.2	2	120.000
1	212.409	32.01	43.50	11.49	-11.49	H	1	2	120.000
1	324.977	35.60	46.00	10.40	-7.14	H	132	1	120.000
1	574.946	24.28	46.00	21.72	-4.64	H	355	2	120.000
1	936.029	24.65	46.00	21.35	0.49	H	132	1	120.000

- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 30MHz to 1000MHz.
  4. Only emissions significantly above equipment noise floor are reported.

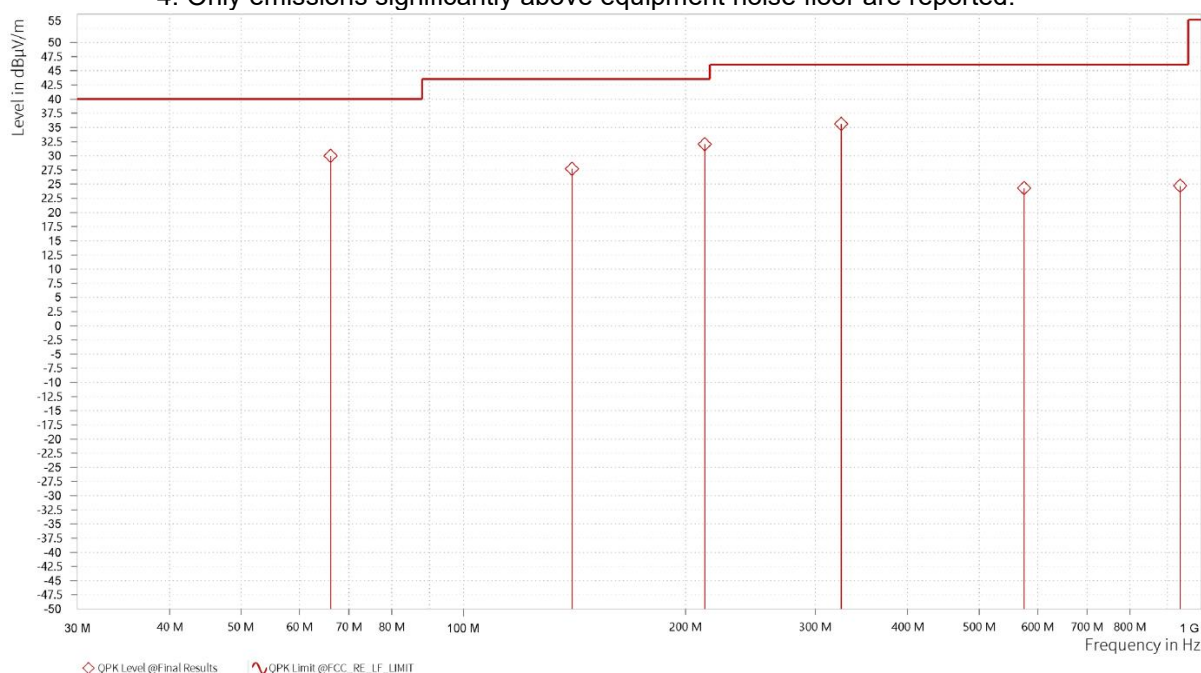


TEST VOLTAGE	DC 12V	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70 %RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak, 120 kHz
TESTED BY	Chao Wu		

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	42.028	30.76	40.00	9.24	-10.82	V	270.8	1	120.000
1	65.551	35.46	40.00	4.54	-13.15	V	270.8	1	120.000
1	145.139	29.37	43.50	14.13	-15.94	V	133.3	1	120.000
1	210.372	26.74	43.50	16.76	-11.64	V	133.3	1	120.000
1	475.036	23.73	46.00	22.27	-5.40	V	133.3	1	120.000
1	853.045	23.96	46.00	22.04	-0.56	V	359	1	120.000

- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 30MHz to 1000MHz.
  4. Only emissions significantly above equipment noise floor are reported.

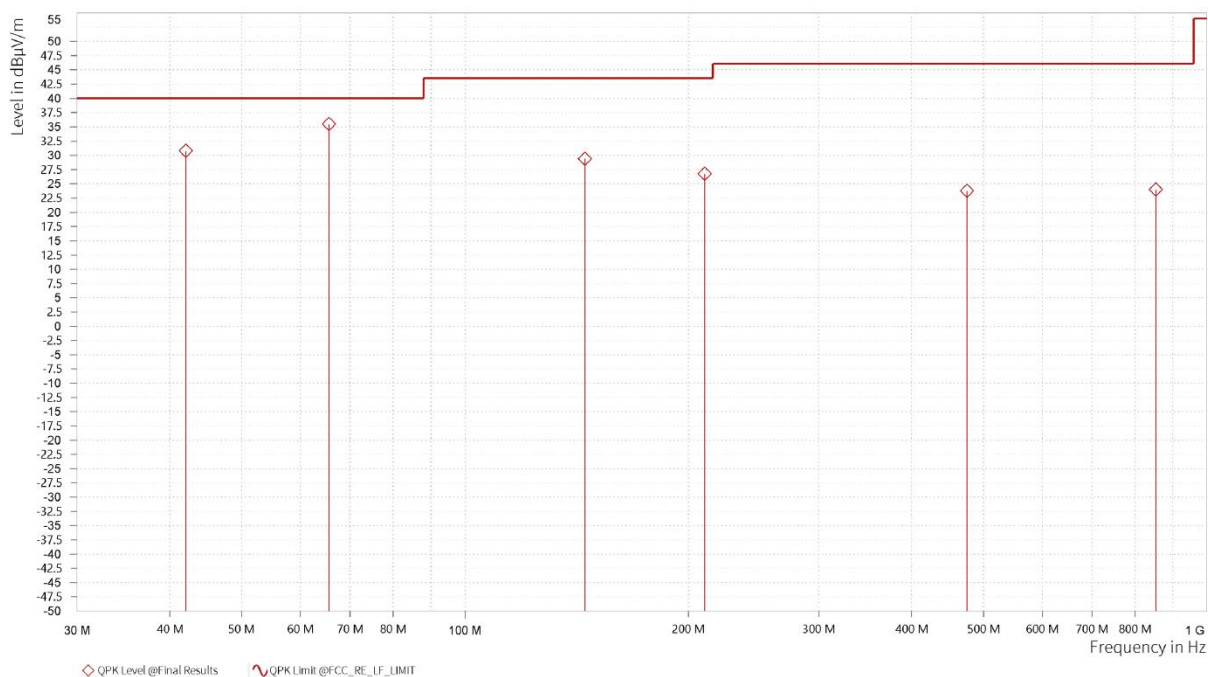


<b>TEST VOLTAGE</b>	DC 12V	<b>FREQUENCY RANGE</b>	1-18 GHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70 %RH	<b>DETECTOR FUNCTION &amp; RESOLUTION BANDWIDTH</b>	Peak/Average, 1 MHz
<b>TESTED BY</b>	Chao Wu		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	2,014.000	43.80	74.00	30.20	30.93	54.00	23.07	5.95	H	303.1	1	1,000.000
1	7,466.500	52.66	74.00	21.34	39.76	54.00	14.24	16.03	H	359	2	1,000.000

- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 1GHz to 5th harmonic of the highest frequency or 40GHz, whichever is lower. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.
  4. Only emissions significantly above equipment noise floor are reported.

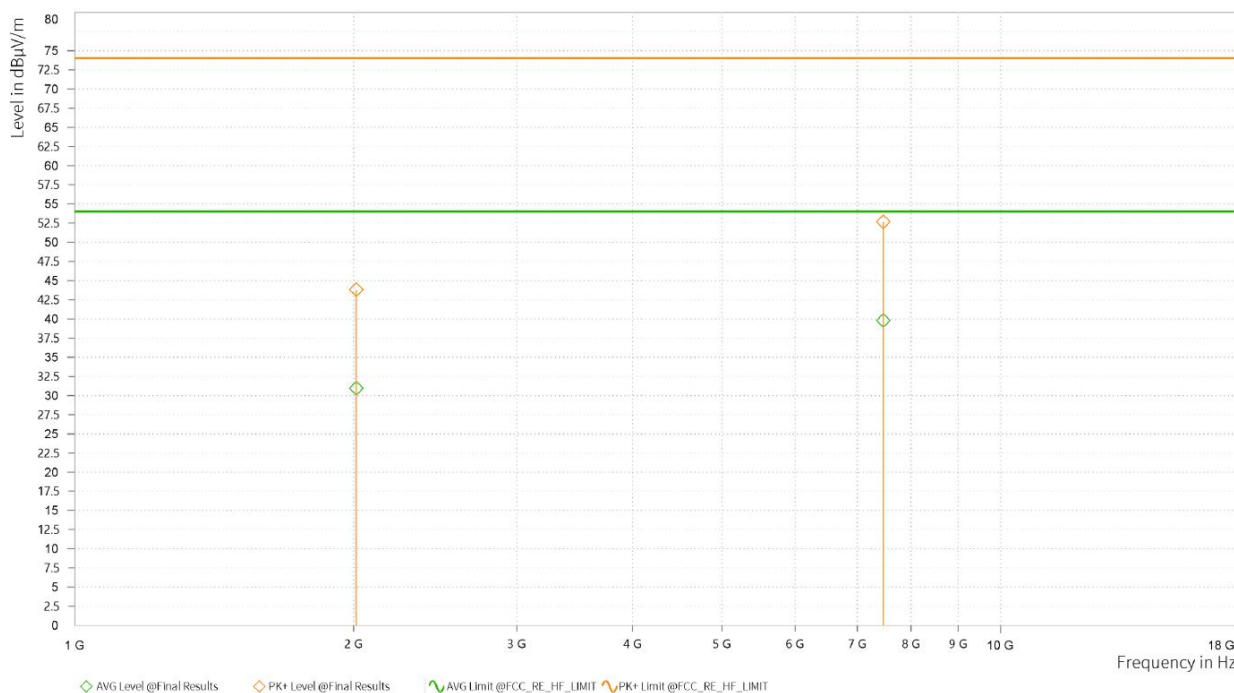


TEST VOLTAGE	DC 12V	FREQUENCY RANGE	1-18 GHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70 %RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Peak/Average, 1 MHz
TESTED BY	Chao Wu		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	2,253.000	45.36	74.00	28.64	31.44	54.00	22.56	6.63	V	1	2	1,000.000
1	7,432.500	52.90	74.00	21.10	39.77	54.00	14.23	16.05	V	359	2	1,000.000

- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 1GHz to 5th harmonic of the highest frequency or 40GHz, whichever is lower. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.
  4. Only emissions significantly above equipment noise floor are reported.

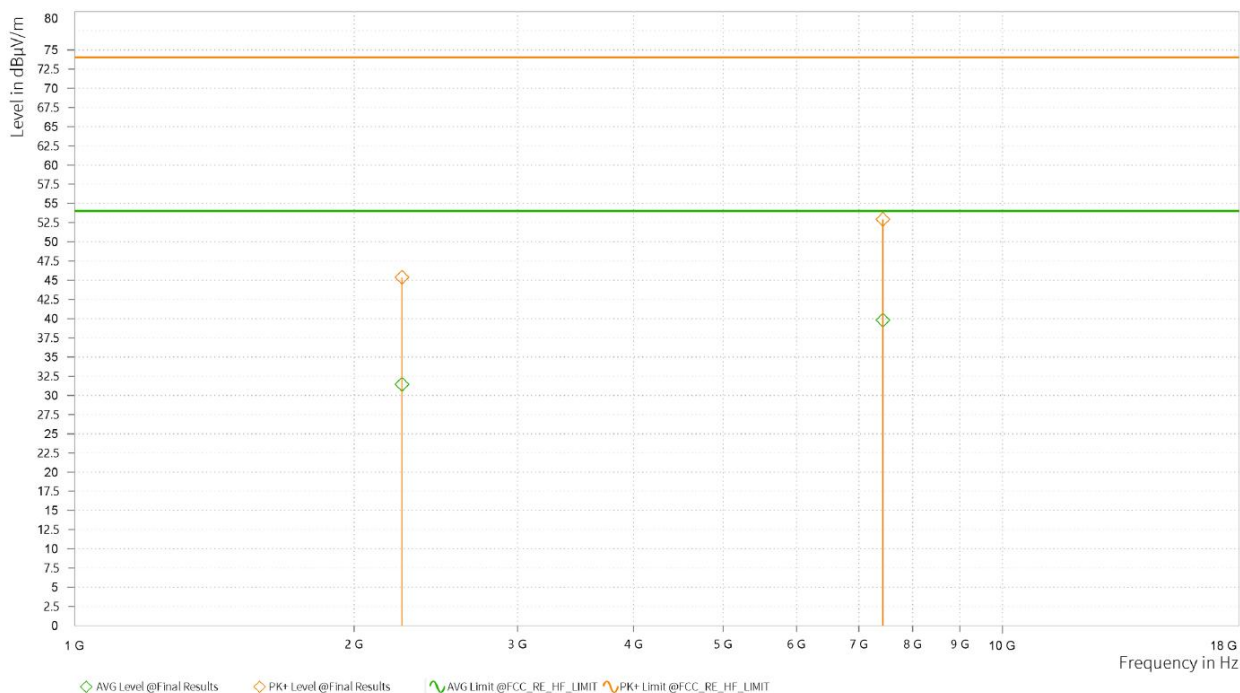



Test Report No.: PSU-QSU2307030110EM01

### **3 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications were made to the EUT by the lab during the test.

**---END---**