



FCC TEST REPORT
FCC ID: 2AP2N-STAND100

On Behalf of

Shenzhen Esorun Technology Co., LTD

6 in 1 MagSafe Charging Station

Model No.: Stand100

Prepared for : Shenzhen Esorun Technology Co., LTD
Address : Room 226, Building A, B, C, Zone B, Yuanfen Industrial Zone, Taoyuan
Community, Dalang Street, Longhua District, Shenzhen

Prepared By : Shenzhen PSI Testing Co., Ltd.
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road,
Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2501003-C01-R07
Date of Receipt : January 2, 2025
Date of Test : January 3, 2025-January 17, 2025
Date of Report : February 6, 2025
Version Number : V0

TABLE OF CONTENTS

	<u>Description</u>	<u>Page</u>
1.	Test Result Summary	5
2.	EUT Description	6
2.1.	DESCRIPTION OF DEVICE (EUT)	6
2.2.	ACCESSORIES OF DEVICE (EUT)	7
2.3.	TESTED SUPPORTING SYSTEM DETAILS	7
2.4.	BLOCK DIAGRAM OF CONNECTION BETWEEN EUT AND SIMULATORS	7
2.5.	DESCRIPTION OF TEST MODES	8
2.6.	TEST CONDITIONS	9
2.7.	TEST FACILITY	9
2.8.	MEASUREMENT UNCERTAINTY	9
3.	Test Results and Measurement Data	10
3.1.	RF EXPOSURE TEST	10
4.	Photos of test setup	18

TEST REPORT DECLARATION

Applicant : Shenzhen Esorun Technology Co., LTD
Address : Room 226, Building A, B, C, Zone B, Yuanfen Industrial Zone, Taoyuan
Community, Dalang Street, Longhua District, Shenzhen
Manufacturer : Shenzhen Esorun Technology Co., LTD
Address : Room 226, Building A, B, C, Zone B, Yuanfen Industrial Zone, Taoyuan
Community, Dalang Street, Longhua District, Shenzhen
EUT Description : 6 in 1 MagSafe Charging Station
(A) Model No. : Stand100
(B) Trademark : ESORUN

Measurement Standard Used:


FCC CFR 47 PART 1, FCC CFR 47 part1, 1.1307(b), 1.1310, 2.1093

KDB 680106 D01 Wireless Power Transfer v04

Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness test. Also, this report shows that the EUT is technically compliant with the KDB 680106 D01 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....: Felix Pang
Test Engineer 

Approved by (name + signature).....: Simple Guan
Project Manager 

Date of issue.....: February 6, 2025

Revision History

Revision	Issue Date	Revisions	Revised By
V0	February 6, 2025	Initial released Issue	Felix Pang

1. Test Result Summary

Requirement	CFR 47 Section	Result
RF EXPOSURE	§1.1307(b)(1), §1.1310, §2.1093 & KDB680106 D01	PASS

Note:

1. *PASS: Test item meets the requirement.*
2. *Fail: Test item does not meet the requirement.*
3. *N/A: Test case does not apply to the test object.*
4. *The test result judgment is decided by the limit of test standard.*
5. Decision rules for the conclusion of this test report: decision by actual test data without considering measurement uncertainty.

2. EUT Description

2.1. Description of Device (EUT)

EUT Name	: 6 in 1 MagSafe Charging Station
Model No.	: Stand100
DIFF.	: N/A
	Type-C Cable Input: 5V $\overline{=}$ 3A, 9V $\overline{=}$ 3A, 12V $\overline{=}$ 3A, 15V $\overline{=}$ 3A, 20V $\overline{=}$ 3.25A(65W Max) Type-C1 Input: 5V $\overline{=}$ 3A, 9V $\overline{=}$ 3A, 12V $\overline{=}$ 3A, 15V $\overline{=}$ 3A, 20V $\overline{=}$ 3.25A(65W Max) Type-C1 Output: 5V $\overline{=}$ 3A, 9V $\overline{=}$ 3A, 12V $\overline{=}$ 3A, 15V $\overline{=}$ 3A, 20V $\overline{=}$ 5A(100W Max) Type-C2 Output: 5V $\overline{=}$ 3A, 9V $\overline{=}$ 2A, 12V $\overline{=}$ 1.5A
Power supply	: Type-C Cable Output: 5V $\overline{=}$ 3A, 9V $\overline{=}$ 3A, 12V $\overline{=}$ 3A, 15V $\overline{=}$ 3A, 20V $\overline{=}$ 5A(100W Max) Wireless Output(Phone): 5W, 7.5W, 10W ,15W Wireless Output(Earphone): 5W Wireless Output(Watch): 2W DC 21.9V from battery

Radio Technology	: Wireless power transmission systems
------------------	---------------------------------------

Operation frequency	: WPT(Phone): 110-205KHz, 360KHz(MPP) WPT(Earphone): 110-205KHz WPT(Watch): 323KHz
---------------------	--

Modulation	: MSK
------------	-------

Antenna Type	: Coil Antenna
--------------	----------------

Software version	: V1.0
------------------	--------

Hardware version	: V2.3
------------------	--------

Note	: 1. Antenna information is provided by applicant. Testing lab is not responsible for the accuracy of the information. 2. When the product is only used for wireless magnetic charging of mobile phones, it is in a portable state.
------	---


2.2. Accessories of Device (EUT)

Accessories	:	N/A
Manufacturer	:	N/A
Model	:	N/A
specifications	:	N/A

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification
1	Cellphone	Apple	iPhone 15 Pro Max	N/A	N/A
2	Earphone	Xiaomi	buds3 pro	N/A	N/A
3	Apple Watch	Apple	Watch 5	N/A	N/A
4	Adapter	Baseus	CCXFK65CC	N/A	N/A
5	USB cable	UGREEN	1M	N/A	N/A
6	Load	N/A	N/A	N/A	N/A

2.4. Block Diagram of connection between EUT and simulators

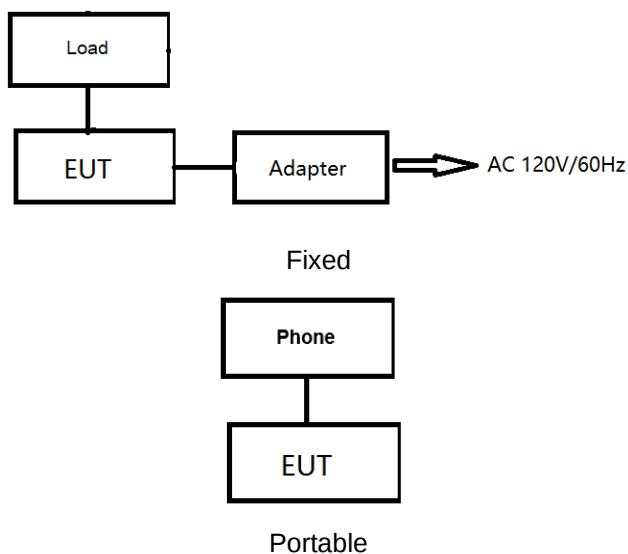

2.5. Equipment Approval Considerations

The EUT does comply with KDB 680106 D01 as follow table.

Requirements of KDB 680106 D01	Yes/ No	Description
Mobile Device and Portable Device Configurations	Yes	Portable Device
Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz	Yes	The device operate in the frequency range 110KHz~205KHz, 323KHz, 360KHz

2.6. Description of Test Modes

Fixed type:

Mode	Test mode description
1	C1(In)+Phone Wireless(Out) =65W+15W
2	C1(In) +Airpods Wireless(Out) =65W+5W
3	C1(In)+Apple Watch Wireless(Out) =65W+2W
4	C1(In)+Airpods Wireless(Out)+Apple Watch Wireless(Out)= 65W+5W+2W
※5	C1(In)+Phone Wireless(Out)+Airpods Wireless(Out) +Apple Watch Wireless(Out)=65W+15W+5W+2W
6	C1+Phone Magnet Wireless=65W+15W
7	C1+Phone Magnet Wireless=65W+10W
8	C1+Phone Magnet Wireless=65W+7.5W
9	C1+Phone Magnet Wireless=65W+5W
10	C1+Apple Watch Wireless=65W+2W
11	C1+Airpods Wireless=65W+5W
12	C1+Airpods Wireless+Apple Watch Wireless=65W+5W+2W
13	C1+Phone Magnet Wireless+Airpods Wireless+Apple Watch Wireless =30W+15W+5W+2W
14	C_Cable+Phone Magnet Wireless= 65W+15W
15	C_Cable+Apple Watch Wireless=65W+5W(Max)
16	C_Cable+Airpods Wireless=65W+2W(Max)
17	C_Cable+Airpods Wireless+Apple Watch Wireless =65W+5W+2W
18	C_Cable+Phone Magnet Wireless+Airpods Wireless+Apple Watch Wireless =30W+15W+5W+2W
19	C2+Phone Magnet Wireless=18W+15W
20	C2+Apple Watch Wireless=18W+5W(Max)
21	C2+Airpods Wireless=18W+2W(Max)
22	C1+C_Cable+Phone Magnet Wireless=30W+30W+15W
23	C1+C_Cable+Apple Watch Wireless=65W+30W+2W
24	C1+C_Cable+Airpods Wireless=65W+30W+5W
25	Wireless Output for 3 devices= 15W +5W+2W
26	No Load

Note: The client operating modes have been tested and only display data for the worst-case scenario Mode 5 of the client battery status.

Portable type:

Mode	Test mode description
※1	Phone Magnet Wireless=15W
2	Phone Magnet Wireless=10W
3	Phone Magnet Wireless=7.5W
4	Phone Magnet Wireless=5W
5	No Load

Note: The client operating modes (client battery status 1%, 50%, 99%) have been tested and only display data for the worst-case scenario Mode 1 of the client battery status.

2.7. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	26°C
Humidity range:	25-75%	54%
Pressure range:	86-106kPa	101kPa

2.8. Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission
Registration Number: 916281

2.9. Measurement Uncertainty

(95% confidence levels, k=2)



Item	Uncertainty
Uncertainty for H-Field	2.39dB
Uncertainty for E-Field	2.45dB
Uncertainty for conducted RF Power	0.65dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

3. Test Results and Measurement Data

3.1. RF EXPOSURE TEST

3.1.1. Test Specification

Test Requirement:	FCC Rules and Regulations KDB680106																																																																	
Test Method:	According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB680106 D01: KDB 680106 D01 Wireless Power Transfer v04.																																																																	
Limits:	According to the item 3 of KDB 680106 D01v04: Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation. (1) Mobile Device and Portable Device Configurations (2) Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz (3) The aggregate H-field strengths anywhere at (0/2/4/6/8/10/12/14/16/18/20cm) surrounding the device six surfaces. The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b) Limits for Maximum Permissible Exposure (MPE) <table><thead><tr><th>Frequency range (MHz)</th><th>Electric field strength (V/m)</th><th>Magnetic field strength (A/m)</th><th>Power density (mW/cm²)</th><th>Averaging time (minutes)</th></tr></thead><tbody><tr><td colspan="5">(A) Limits for Occupational/Controlled Exposures</td></tr><tr><td>0.3-3.0</td><td>614</td><td>1.63</td><td>*(100)</td><td>6</td></tr><tr><td>3.0-30</td><td>1842/f</td><td>4.89/f</td><td>*(900/f²)</td><td>6</td></tr><tr><td>30-300</td><td>61.4</td><td>0.163</td><td>1.0</td><td>6</td></tr><tr><td>300-1500</td><td>/</td><td>/</td><td>f/300</td><td>6</td></tr><tr><td>1500-100,000</td><td>/</td><td>/</td><td>5</td><td>6</td></tr><tr><td colspan="5">(B) Limits for General Population/Uncontrolled Exposure</td></tr><tr><td>0.3-1.34</td><td>614</td><td>1.63</td><td>*(100)</td><td>30</td></tr><tr><td>1.34-30</td><td>824/f</td><td>2.19/f</td><td>*(180/f²)</td><td>30</td></tr><tr><td>30-300</td><td>27.5</td><td>0.073</td><td>0.2</td><td>30</td></tr><tr><td>300-1500</td><td>/</td><td>/</td><td>f/1500</td><td>30</td></tr><tr><td>1500-100,000</td><td>/</td><td>/</td><td>1.0</td><td>30</td></tr></tbody></table> F=frequency in MHz *=Plane-wave equivalent power density RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).	Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)	(A) Limits for Occupational/Controlled Exposures					0.3-3.0	614	1.63	*(100)	6	3.0-30	1842/f	4.89/f	*(900/f ²)	6	30-300	61.4	0.163	1.0	6	300-1500	/	/	f/300	6	1500-100,000	/	/	5	6	(B) Limits for General Population/Uncontrolled Exposure					0.3-1.34	614	1.63	*(100)	30	1.34-30	824/f	2.19/f	*(180/f ²)	30	30-300	27.5	0.073	0.2	30	300-1500	/	/	f/1500	30	1500-100,000	/	/	1.0	30
Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)																																																														
(A) Limits for Occupational/Controlled Exposures																																																																		
0.3-3.0	614	1.63	*(100)	6																																																														
3.0-30	1842/f	4.89/f	*(900/f ²)	6																																																														
30-300	61.4	0.163	1.0	6																																																														
300-1500	/	/	f/300	6																																																														
1500-100,000	/	/	5	6																																																														
(B) Limits for General Population/Uncontrolled Exposure																																																																		
0.3-1.34	614	1.63	*(100)	30																																																														
1.34-30	824/f	2.19/f	*(180/f ²)	30																																																														
30-300	27.5	0.073	0.2	30																																																														
300-1500	/	/	f/1500	30																																																														
1500-100,000	/	/	1.0	30																																																														
Test Setup:																																																																		

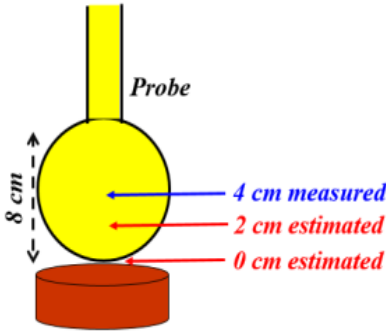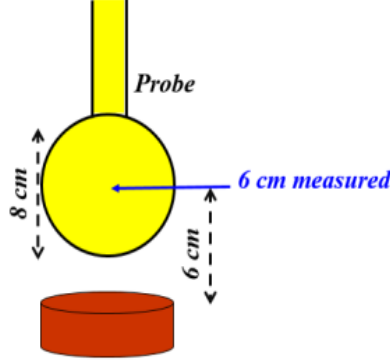	Figure 1  Figure 2 
Test Mode:	Communication Mode (Mobile phone will be charged at zero charge, intermediate charge, and full charge.)
Test Procedure:	1) The RF exposure test was performed in anechoic chamber. 2) The measurement probe was placed at test distance (0/2/4/6/8/10/12/14/16/18/20cm) which is between the edge of the charger and the geometric center of probe. 3) The highest emission level was recorded and compared with limit as soon as measurement of each point (A, B, C, D, E, F) were completed. 4) The EUT was measured according to the dictates of KDB 680106 D01v04. 5) Large size probes may prevent the measurement of E- and/or H-fields near the surface of the radiating structure (e.g., a WPT source coil), as in the example shown in Figure 2. These estimates shall include points spaced no more than 2 cm from each other. Thus, in the example of Figure 2, at least the estimates at 0 cm and 2 cm are required, while only one point would not be sufficient. In addition, the model needs to be validated through the probe measurements for the two closest points to the device surface, and with 2-cm increments, as indicated in Figure 2. In that example, the same model must also be applied to the 4 cm and 6 cm positions, and then compared with the measured data, for validation purposes. The validation is considered sufficient if a 30% agreement between the model and the (E- and/or H-field) probe measurements is demonstrated. If such a level of agreement cannot be shown, a more accurate model (and/or a smaller probe) shall be used.
Test Result:	PASS

3.1.2. Test Instruments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Exposure Level Tester	narda	ELT-400	N-0231	2024.12.18	1 Year
2	Magnetic field probe 100cm2	narda	ELT probe 100cm2	M0675	2024.12.18	1 Year
3	Isotropic Electric Field Probe	narda	EP-601	511WX60706	2024.12.18	1 Year

Note: The probe radius is 8 cm

3.1.3. Test data

Portable type: Phone Magnet Wireless=15W

The probe radius is 8 cm.

E-Field Strength at 8/10/12/14/16/18/20cm from the edges surrounding the EUT

Charging Battery Level	Measured Distance (cm)	Measured E-Field Strength Values (V/m)						FCC E-Field Strength Limits (V/m)
		Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
99%	8	16.458	18.721	19.020	23.246	25.085	24.023	614
50%	8	17.396	19.203	19.591	23.865	26.027	24.961	614
1%	8	17.920	19.789	20.379	24.391	27.327	25.985	614
99%	10	15.080	16.969	17.307	20.782	22.342	21.384	614
50%	10	16.018	17.451	17.878	21.401	23.284	22.322	614
1%	10	16.542	18.037	18.666	21.927	24.584	23.346	614
99%	12	13.702	15.218	15.595	18.319	19.599	18.745	614
50%	12	14.640	15.700	16.166	18.938	20.541	19.683	614
1%	12	15.164	16.286	16.954	19.464	21.841	20.707	614
99%	14	12.323	13.466	13.882	15.855	16.857	16.105	614
50%	14	13.261	13.948	14.453	16.474	17.799	17.043	614
1%	14	13.785	14.534	15.241	17.000	19.099	18.067	614
99%	16	10.945	11.714	12.169	13.391	14.114	13.466	614
50%	16	11.883	12.196	12.740	14.010	15.056	14.404	614
1%	16	12.407	12.782	13.528	14.536	16.356	15.428	614
99%	18	9.566	9.963	10.457	10.927	11.372	10.827	614
50%	18	10.504	10.445	11.028	11.546	12.314	11.765	614
1%	18	11.028	11.031	11.816	12.072	13.614	12.789	614
99%	20	8.188	8.211	8.744	8.463	8.629	8.188	614
50%	20	9.126	8.693	9.315	9.082	9.571	9.126	614
1%	20	9.65	9.279	10.103	9.608	10.871	10.15	614

Note: V/m= A/m *377

H-Field Strength at 8/10/12/14/16/18/20cm from the edges surrounding the EUT

Charging Battery Level	Measured Distance (cm)	Unit	Measured H-Field Strength Values (A/m)						FCC H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
99%	8	uT	0.055	0.062	0.063	0.077	0.083	0.080	--
99%	8	A/m	0.044	0.050	0.050	0.062	0.067	0.064	1.63
50%	8	uT	0.058	0.064	0.065	0.079	0.086	0.083	--
50%	8	A/m	0.046	0.051	0.052	0.063	0.069	0.066	1.63
1%	8	uT	0.059	0.066	0.068	0.081	0.091	0.086	--
1%	8	A/m	0.048	0.052	0.054	0.065	0.072	0.069	1.63
99%	10	uT	0.050	0.056	0.057	0.069	0.074	0.071	--
99%	10	A/m	0.040	0.045	0.046	0.055	0.059	0.057	1.63
50%	10	uT	0.053	0.058	0.059	0.071	0.077	0.074	--
50%	10	A/m	0.042	0.046	0.047	0.057	0.062	0.059	1.63
1%	10	uT	0.055	0.060	0.062	0.073	0.082	0.077	--
1%	10	A/m	0.044	0.048	0.050	0.058	0.065	0.062	1.63
99%	12	uT	0.045	0.050	0.052	0.061	0.065	0.062	--
99%	12	A/m	0.036	0.040	0.041	0.049	0.052	0.050	1.63
50%	12	uT	0.049	0.052	0.054	0.063	0.068	0.065	--
50%	12	A/m	0.039	0.042	0.043	0.050	0.054	0.052	1.63
1%	12	uT	0.050	0.054	0.056	0.065	0.072	0.069	--
1%	12	A/m	0.040	0.043	0.045	0.052	0.058	0.055	1.63
99%	14	uT	0.041	0.045	0.046	0.053	0.056	0.053	--
99%	14	A/m	0.033	0.036	0.037	0.042	0.045	0.043	1.63
50%	14	uT	0.044	0.046	0.048	0.055	0.059	0.057	--
50%	14	A/m	0.035	0.037	0.038	0.044	0.047	0.045	1.63
1%	14	uT	0.046	0.048	0.051	0.056	0.063	0.060	--
1%	14	A/m	0.037	0.039	0.040	0.045	0.051	0.048	1.63
99%	16	uT	0.036	0.039	0.040	0.044	0.047	0.045	--
99%	16	A/m	0.029	0.031	0.032	0.036	0.037	0.036	1.63
50%	16	uT	0.039	0.040	0.042	0.046	0.050	0.048	--
50%	16	A/m	0.032	0.032	0.034	0.037	0.040	0.038	1.63
1%	16	uT	0.041	0.042	0.045	0.048	0.054	0.051	--
1%	16	A/m	0.033	0.034	0.036	0.039	0.043	0.041	1.63
99%	18	uT	0.032	0.033	0.035	0.036	0.038	0.036	--
99%	18	A/m	0.025	0.026	0.028	0.029	0.030	0.029	1.63
50%	18	uT	0.035	0.035	0.037	0.038	0.041	0.039	--
50%	18	A/m	0.028	0.028	0.029	0.031	0.033	0.031	1.63
1%	18	uT	0.037	0.037	0.039	0.040	0.045	0.042	--
1%	18	A/m	0.029	0.029	0.031	0.032	0.036	0.034	1.63
99%	20	uT	0.027	0.027	0.029	0.028	0.029	0.027	--
99%	20	A/m	0.022	0.022	0.023	0.022	0.023	0.022	1.63
50%	20	uT	0.030	0.029	0.031	0.030	0.032	0.030	--
50%	20	A/m	0.024	0.023	0.025	0.024	0.025	0.024	1.63

1%	20	uT	0.032	0.031	0.033	0.032	0.036	0.034	--
1%	20	A/m	0.026	0.025	0.027	0.025	0.029	0.027	1.63

Note: $A/m = uT/1.25$

According to the formula:

The formula for the magnetic field strength at a distance r from the coil is


$$H = I/(2\pi r) \cdot \mu$$

H is A/m

I is the current intensity

μ is the permeability, and its value depends on the medium.

The other parameters are fixed, so H is inversely proportional to r .

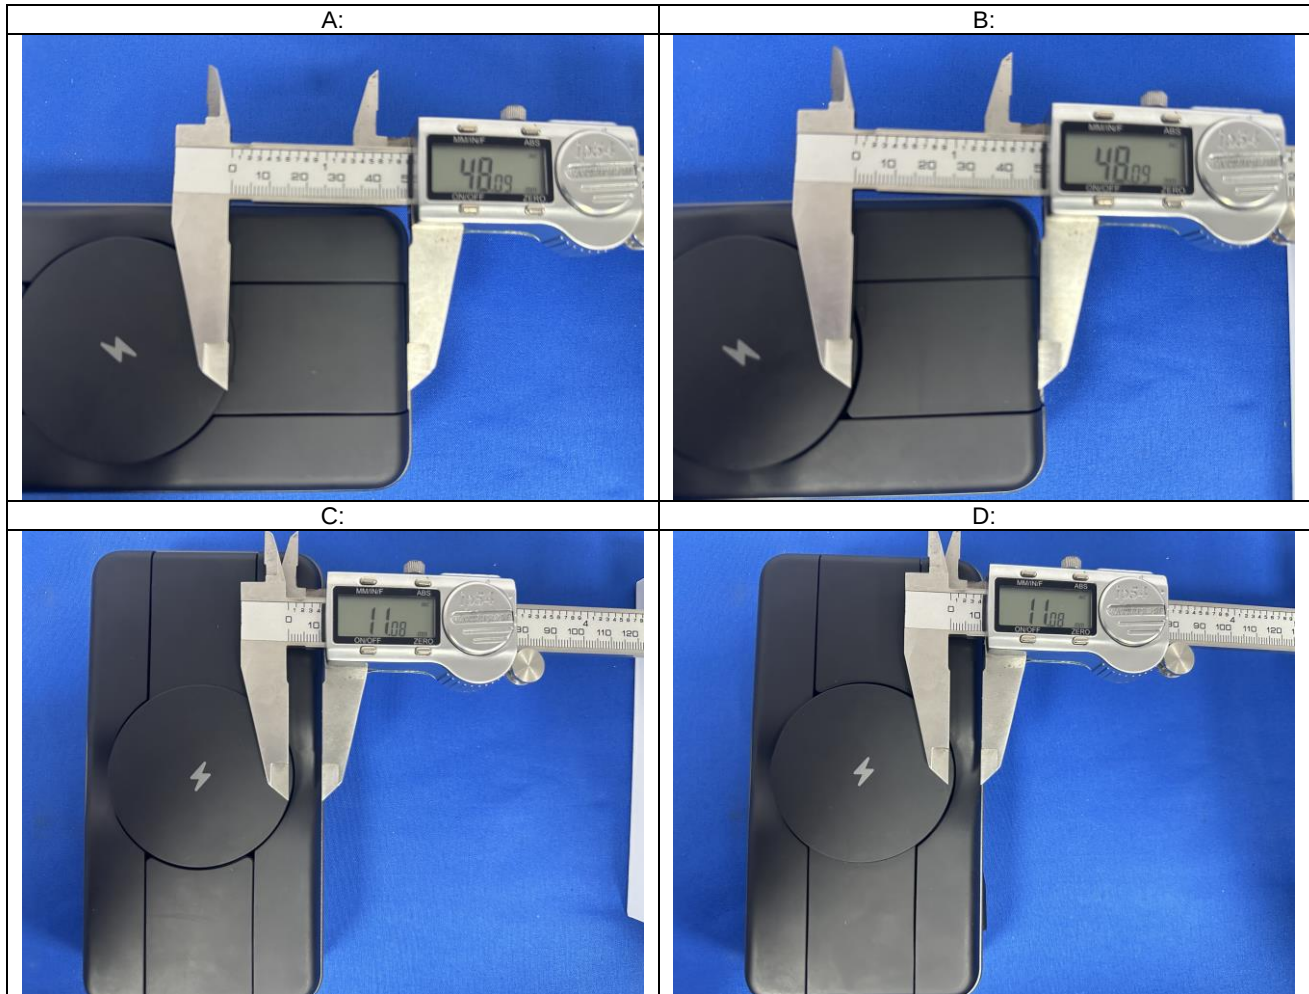

ABCDEF direction The actual distance(r) to the antenna coil.

measured distance(cm)	Actual distance r to the antenna (cm)					
	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F
20	24.809	24.809	21.108	21.108	20.835	22.900
18	22.809	22.809	19.108	19.108	18.835	20.900
16	20.809	20.809	17.108	17.108	16.835	18.900
14	18.809	18.809	15.108	15.108	14.835	16.900
12	16.809	16.809	13.108	13.108	12.835	14.900
10	14.809	14.809	11.108	11.108	10.835	12.900
8	12.809	12.809	9.108	9.108	8.835	10.900
6	10.809	10.809	7.108	7.108	6.835	8.900
4	8.809	8.809	5.108	5.108	4.835	6.900
2	6.809	6.809	3.108	3.108	2.835	4.900
0	4.809	4.809	1.108	1.108	0.835	2.900

Note: The phone is 8.35mm thick.

The result is calculated by the above formula:

H-Field Strength at 0/2/4/6cm from the edges surrounding the EUT

Charging Battery Level	Measured Distance (cm)	Unit	Measured H-Field Strength Values (A/m)						FCC H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
1%	0	A/m	0.232	0.652	0.740	0.373	1.168	1.043	1.63
50%	0	A/m	0.219	0.551	0.683	0.303	0.939	0.888	1.63
99%	0	A/m	0.192	0.446	0.560	0.258	0.657	0.718	1.63
1%	2	A/m	0.117	0.248	0.290	0.093	0.251	0.114	1.63
50%	2	A/m	0.115	0.240	0.281	0.092	0.244	0.112	1.63
99%	2	A/m	0.096	0.193	0.224	0.083	0.199	0.099	1.63
1%	4	A/m	0.093	0.179	0.207	0.083	0.188	0.098	1.63
50%	4	A/m	0.081	0.151	0.173	0.077	0.160	0.089	1.63
99%	4	A/m	0.079	0.143	0.163	0.076	0.153	0.087	1.63
1%	6	A/m	0.071	0.117	0.133	0.074	0.132	0.084	1.63
50%	6	A/m	0.064	0.101	0.112	0.070	0.115	0.077	1.63
99%	6	A/m	0.058	0.088	0.096	0.067	0.102	0.073	1.63

**Fixed type: C1(In)+Phone Wireless(Out)+Airpods Wireless(Out) +Apple Watch
Wireless(Out)=65W+15W+5W+2W:**

E-Field Strength at 20 cm for position A, B, C, D, E from the edges surrounding the EUT (V/m)

Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limits Test (V/m)
110KHz~205KHz, 323KHz, 360KHz	27.988	27.114	28.863	27.988	31.487	614

Note: V/m= A/m *377

H-Filed Strength at 20 cm for position A, B, C, D, E from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limits Test (A/m)
110KHz~205KHz, 323KHz, 360KHz	0.093	0.090	0.096	0.093	0.104	uT
110KHz~205KHz, 323KHz, 360KHz	0.074	0.072	0.077	0.074	0.084	1.63

Note: uT to A/m: A/m = uT/1.25

3.1.4. Conclusion

Portable type:

A minimum safety distance of 0 cm to the antenna is required when the device is charging a smart phone for mobile exposure. The detected emissions are below the limitations according FCC KDB 680106.

The model was established with a 30% agreement, so it was considered to be approved.

Fixed type:


The detected emissions are below the limitations according FCC KDB 680106. The E-field and H-field strengths at 10 cm surrounding the device from all simultaneous transmitting coils are demonstrated to be less than 30% of the MPE limit.

4. Photos of test setup

Portable type



Fixed type

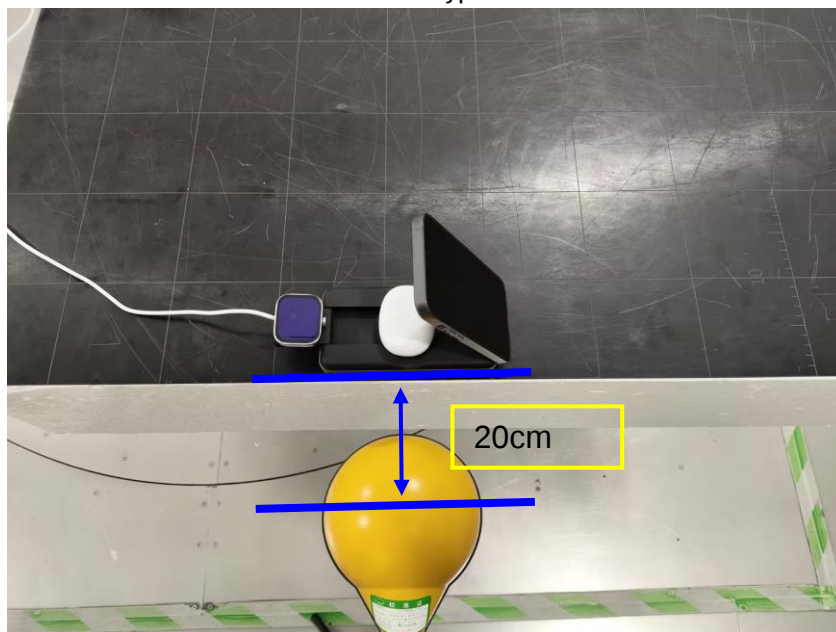

-----END OF REPORT-----