


Appendix B

Peak Output Power




Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 3.02 dBm VBW 1 MHz
20 dBm 2.40211924 GHz SWT 5 ms Unit dBm

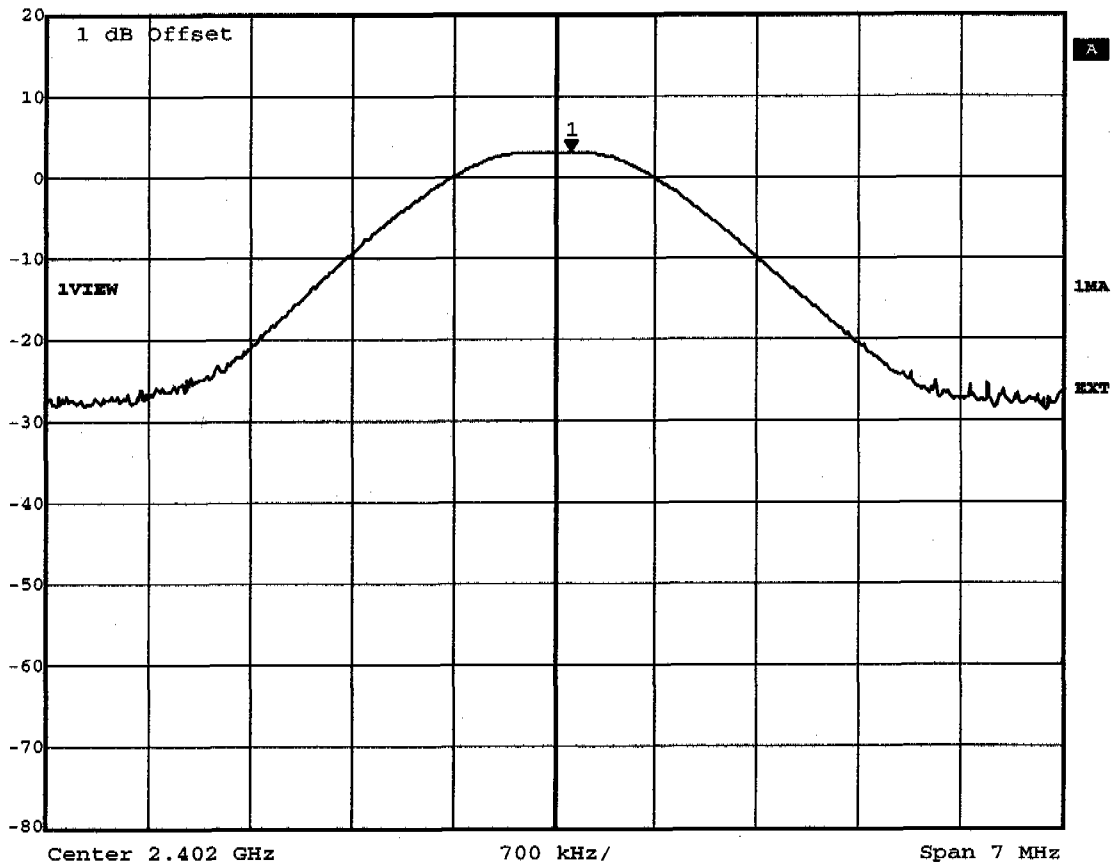

Title: Peak Output Power conducted Ch.: 0
Comment A: Jabra BT110
Date: 29.JUL.2004 08:34:07




Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 3.18 dBm VBW 1 MHz
20 dBm 2.44110521 GHz SWT 5 ms Unit dBm

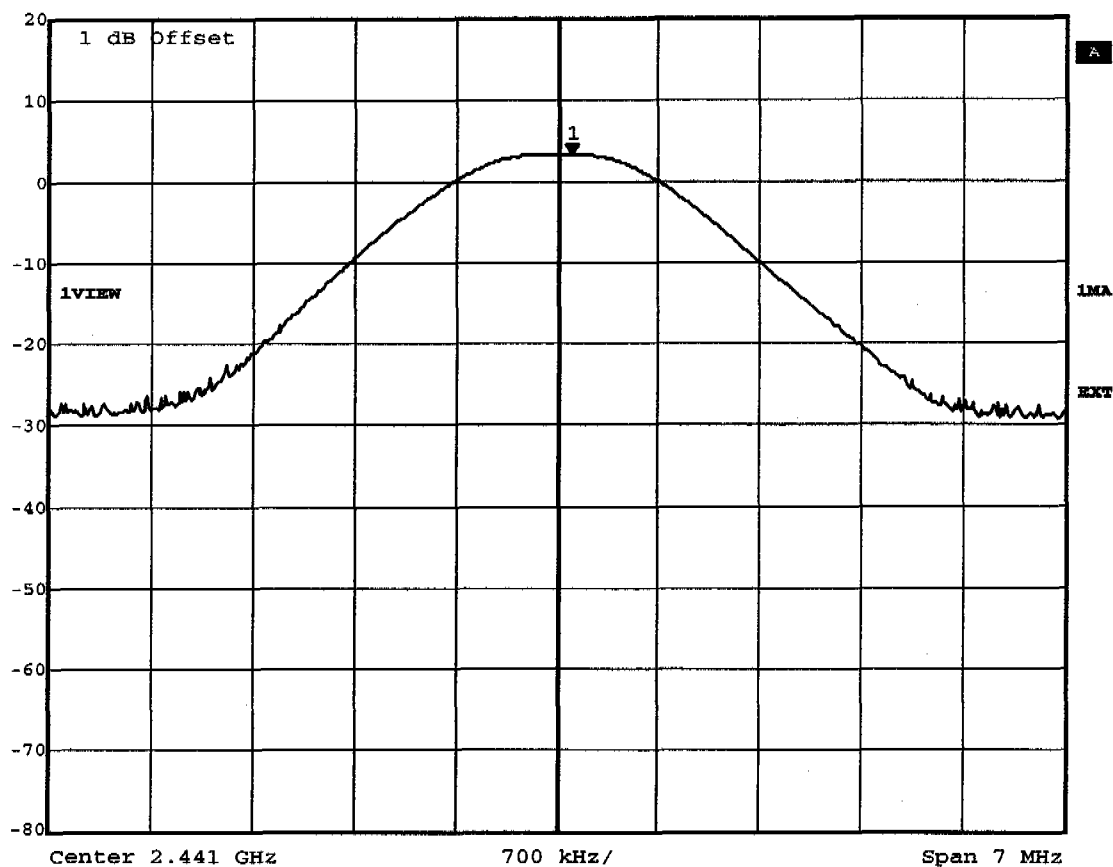

Title: Peak Output Power conducted Ch.: 39
Comment A: Jabra BT110
Date: 29.JUL.2004 08:37:12




Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 2.93 dBm VBW 1 MHz
20 dBm 2.48007715 GHz SWT 5 ms Unit dBm

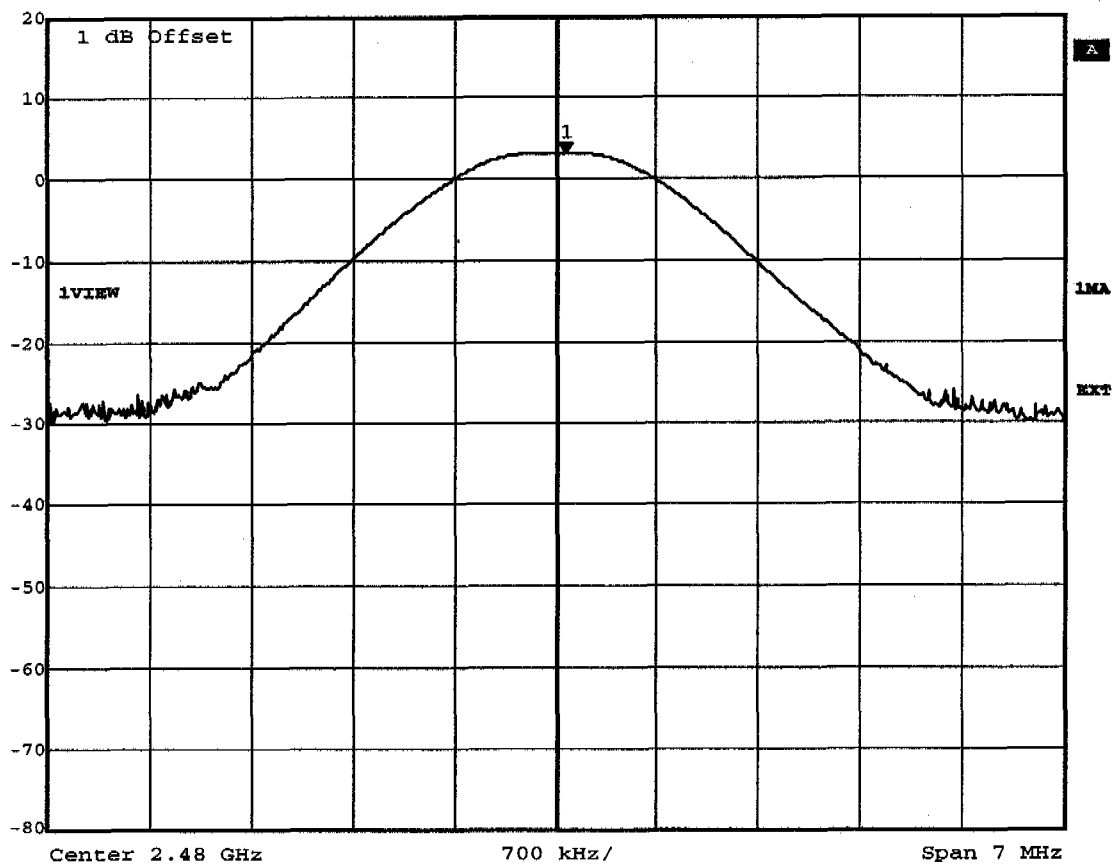

Title: Peak Output Power conducted Ch.: 78
Comment A: Jabra BT110
Date: 29.JUL.2004 08:37:56


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2402MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 3.36dBm, RBW: 5MHz

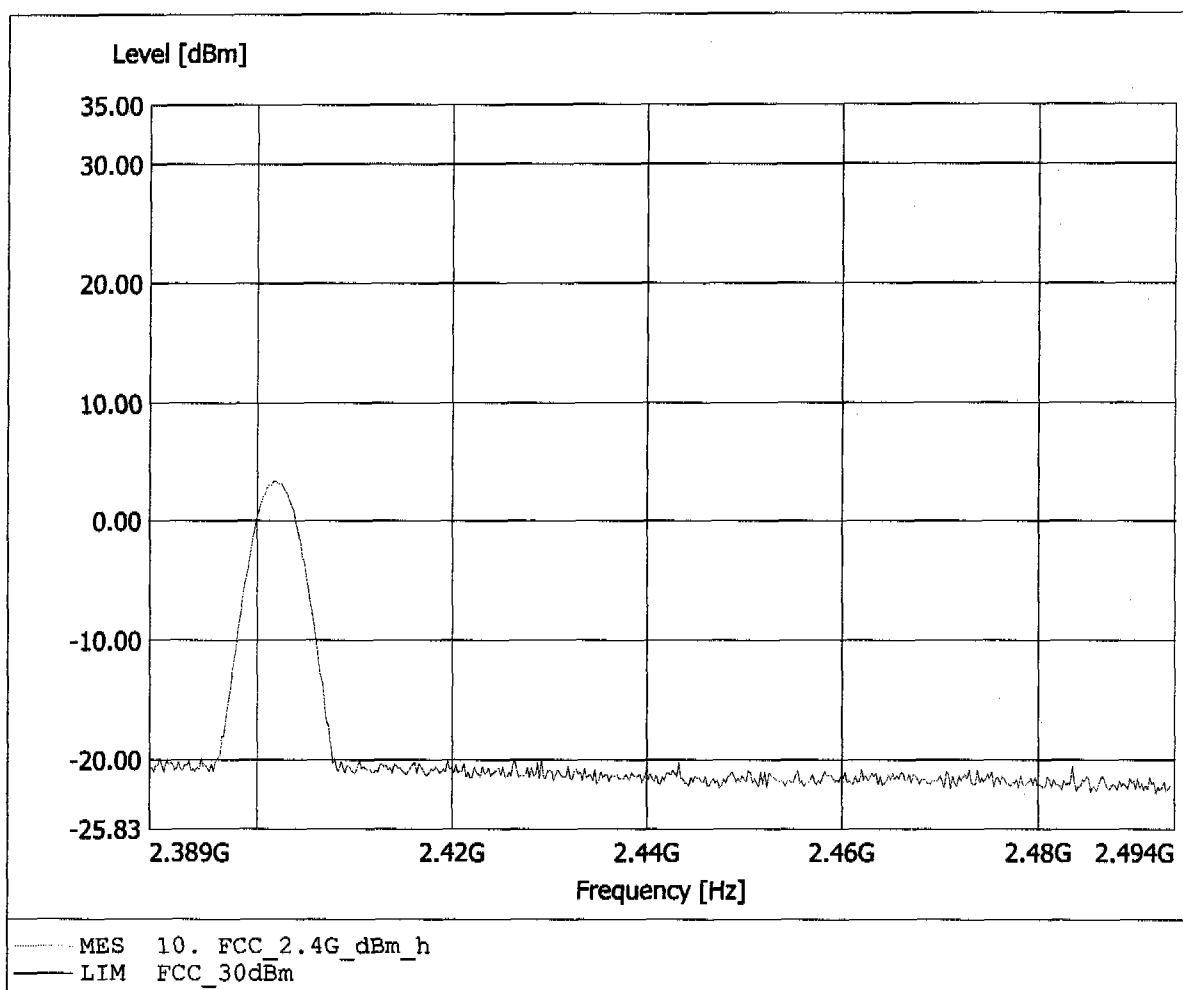


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2402MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 0.92dBm, RBW: 5MHz

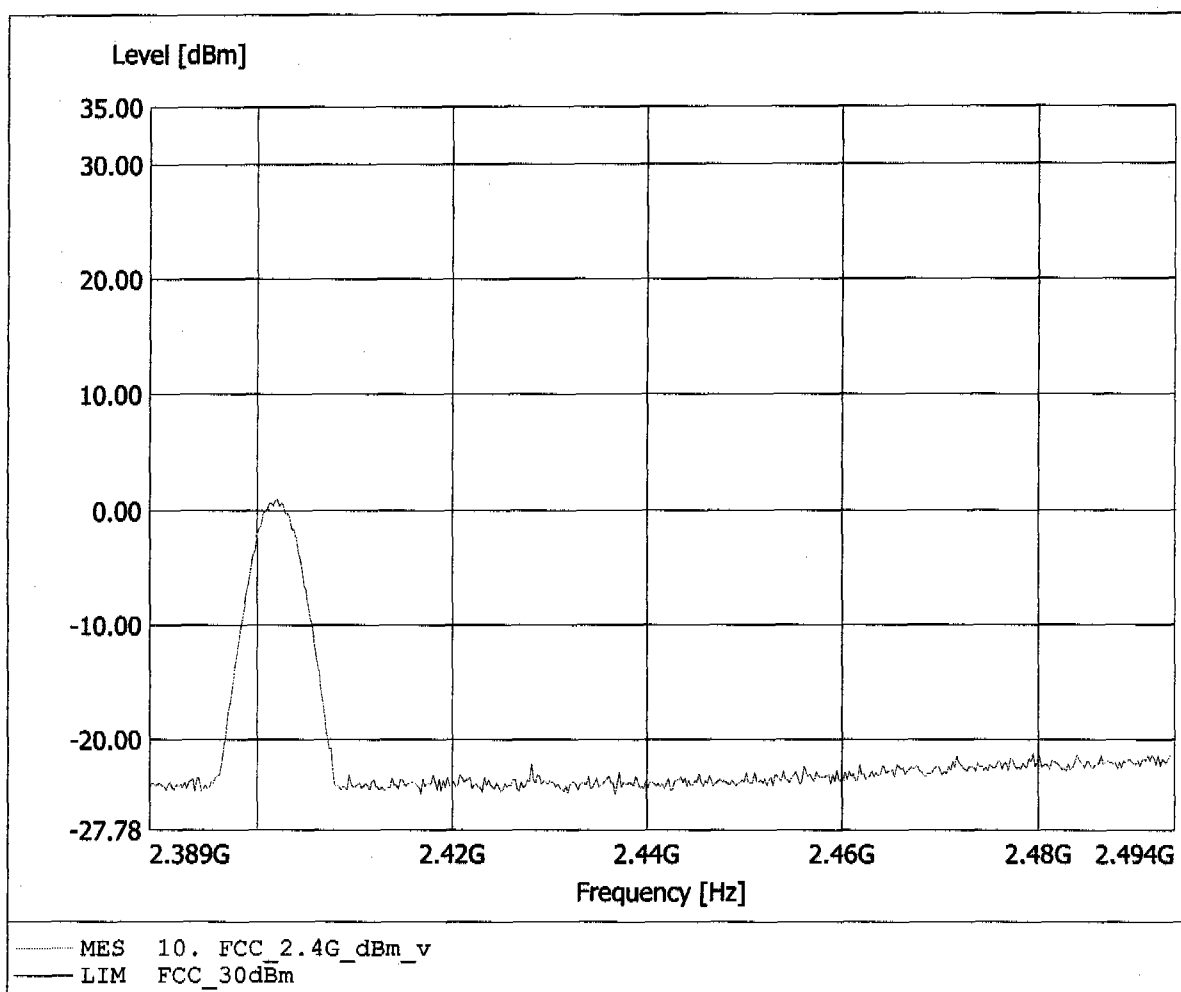


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2441MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 2.93dBm, RBW: 5MHz

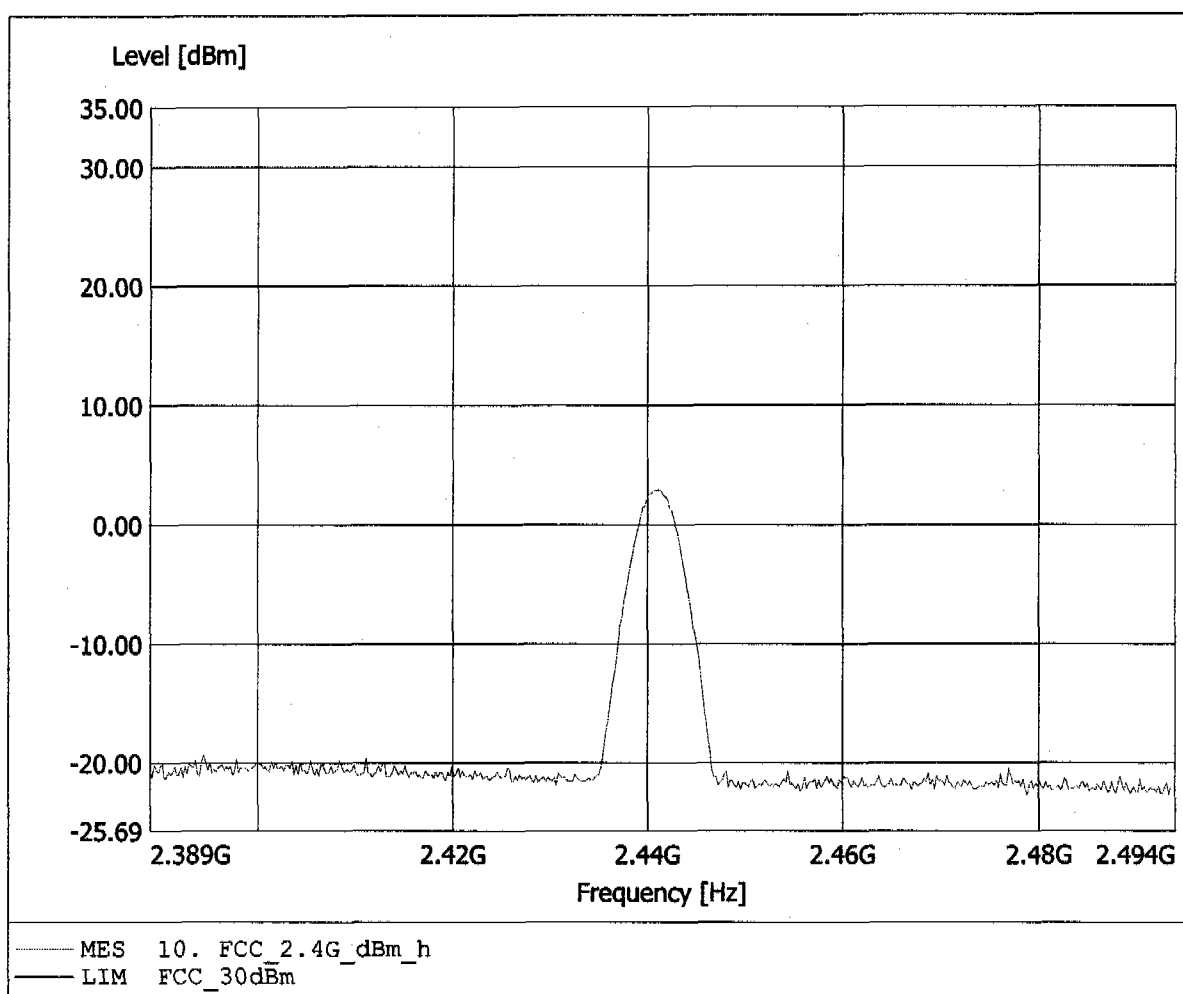


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2441MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -0.16dBm, RBW: 5MHz

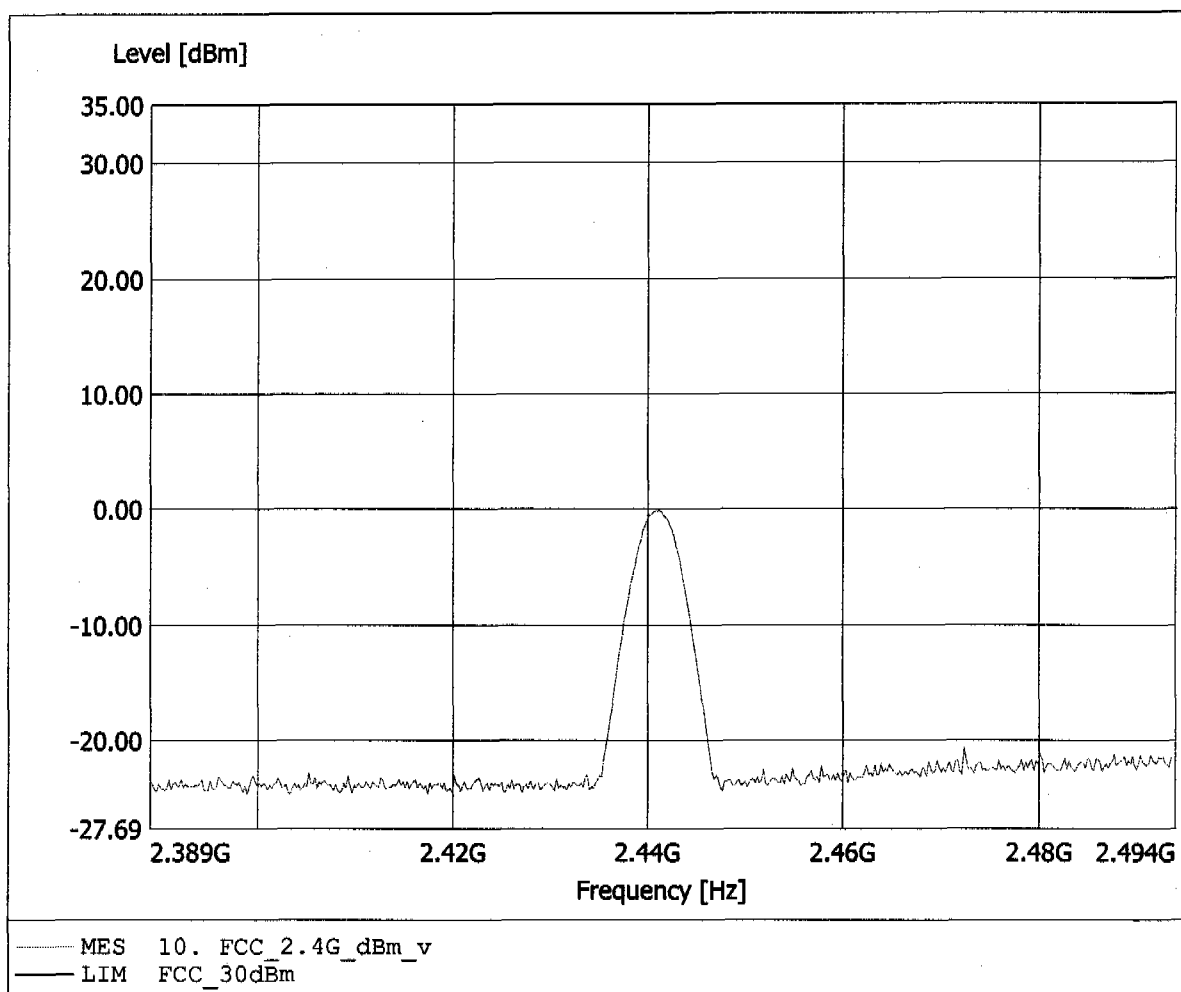


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2480MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: 1.62dBm, RBW: 5MHz

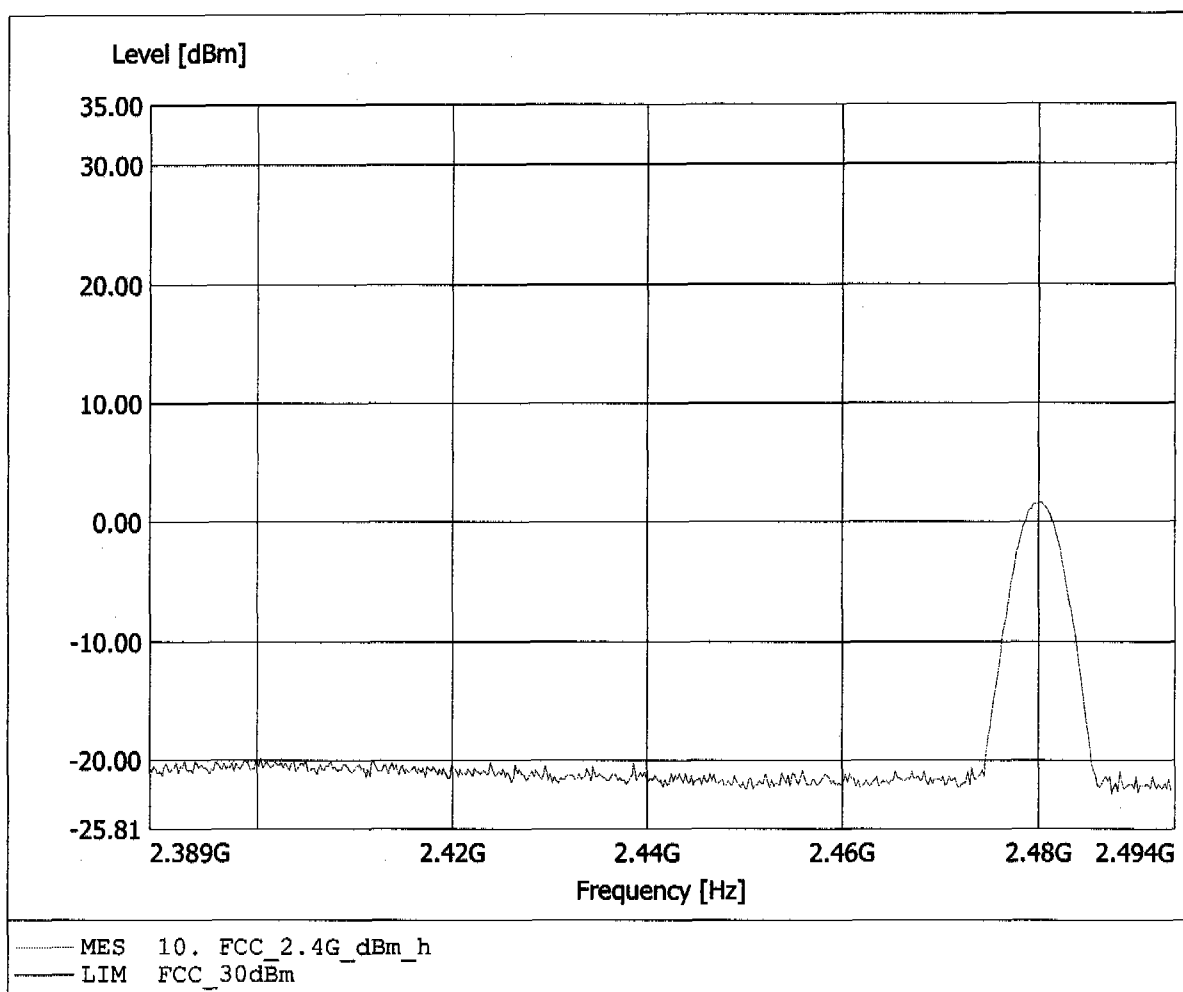

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2480MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -2.09dBm, RBW: 5MHz

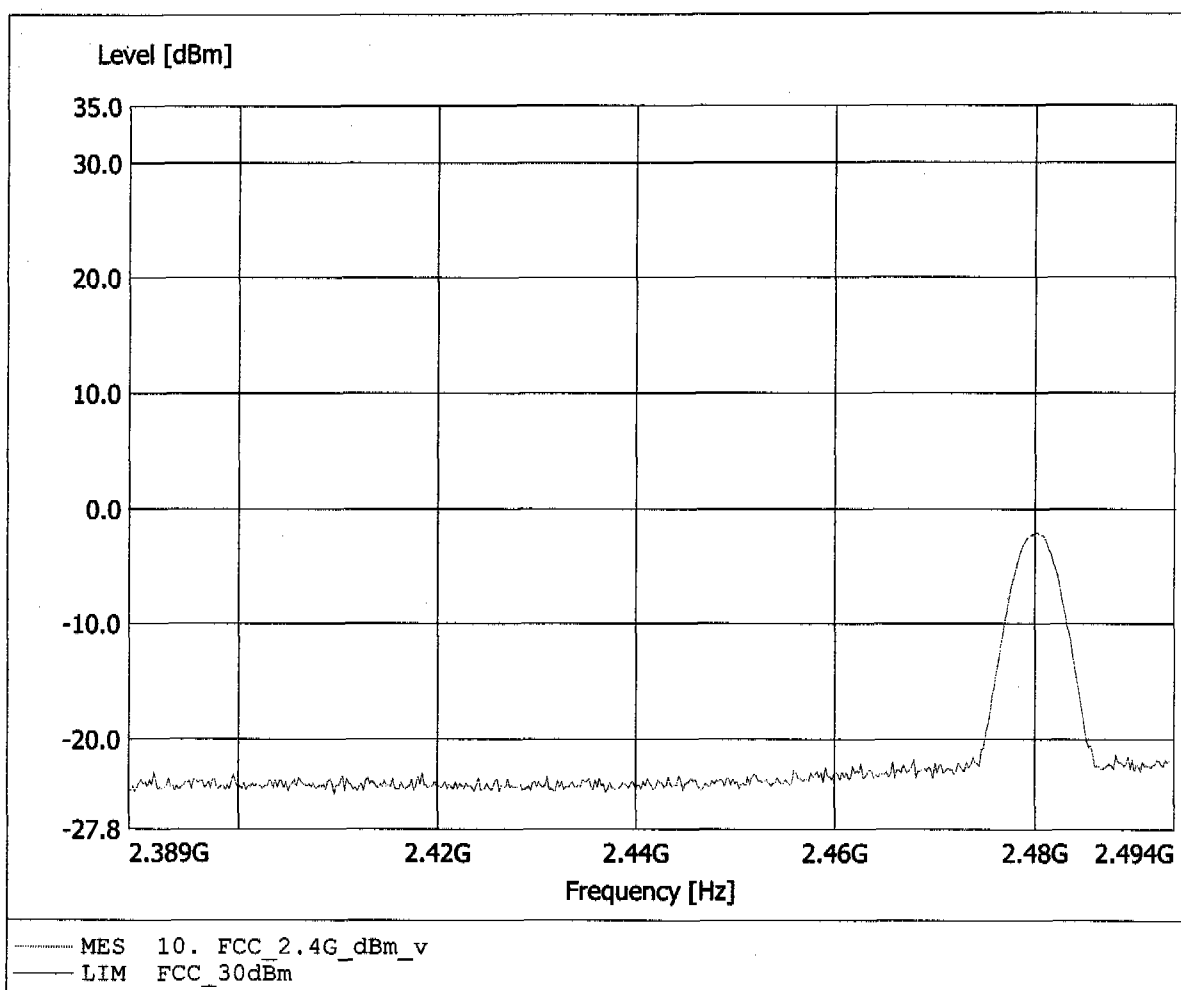


Appendix C

Spurious Emissions radiated - Transmitter operating


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2480MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Emax: 90.17dBµV/m, RBW: 100kHz

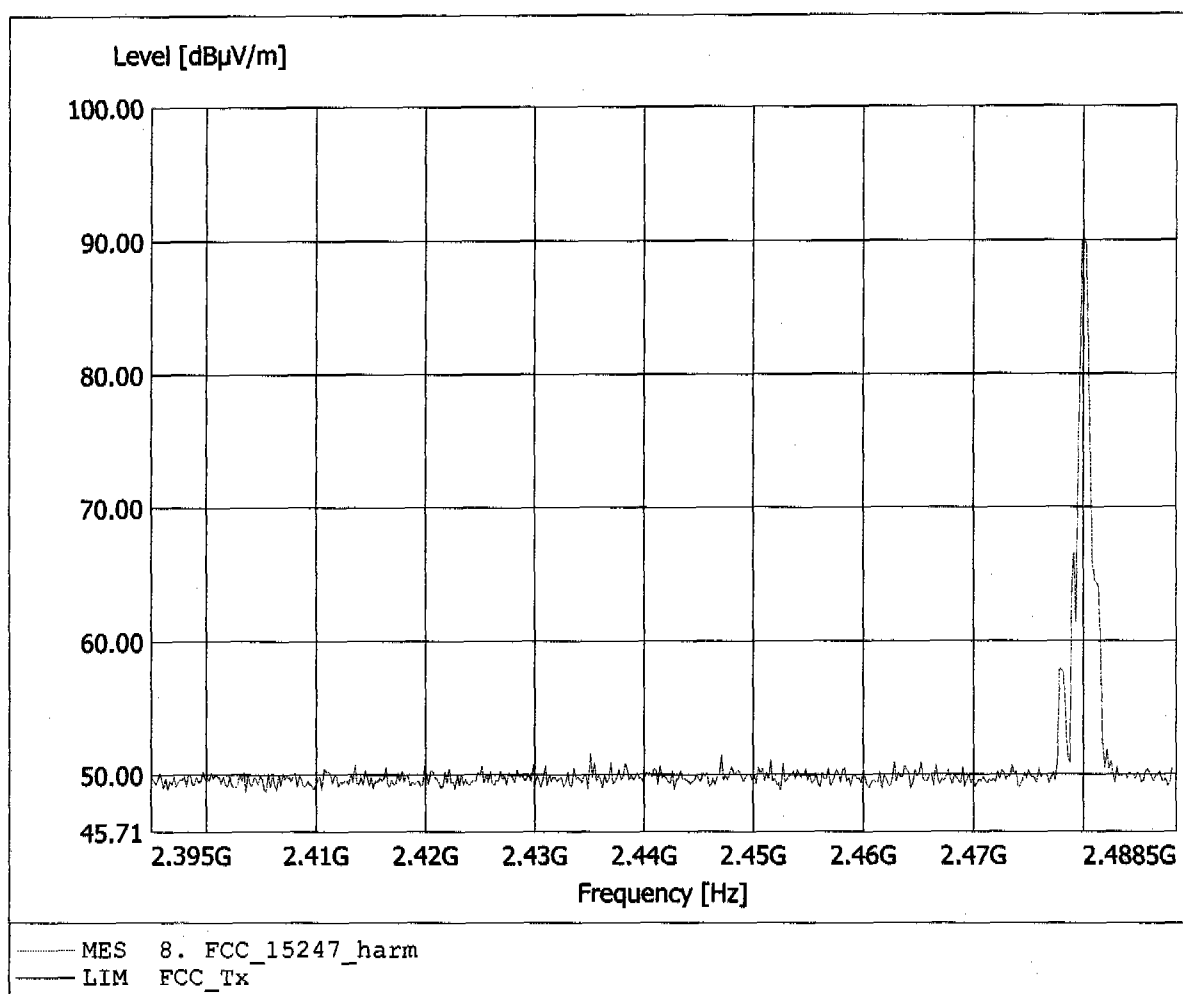


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2480MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 193.186MHz, Emax: 32.96dBµV/m, RBW: 100kHz

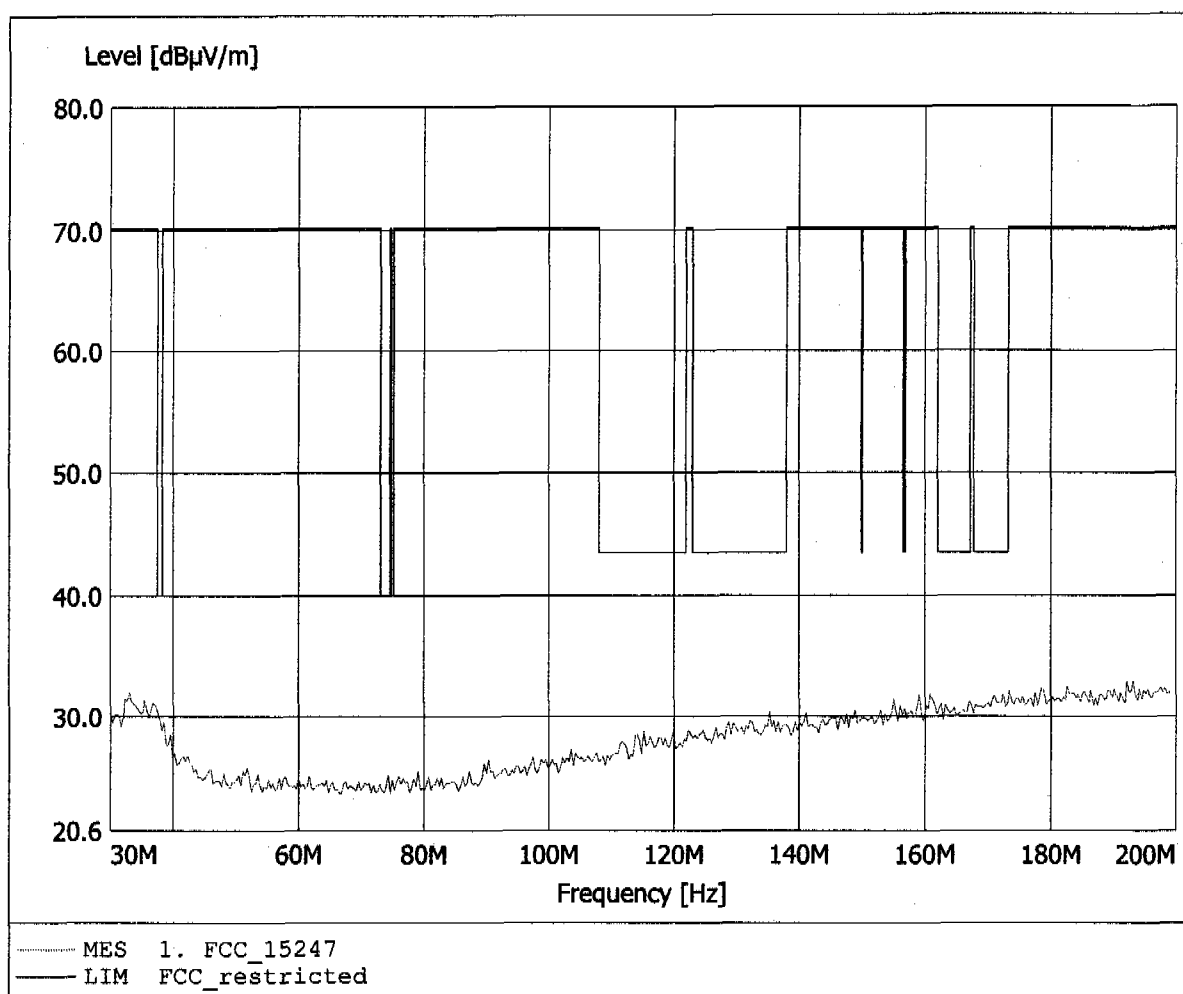


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2480MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 33.066MHz, Emax: 36.36dBµV/m, RBW: 100kHz

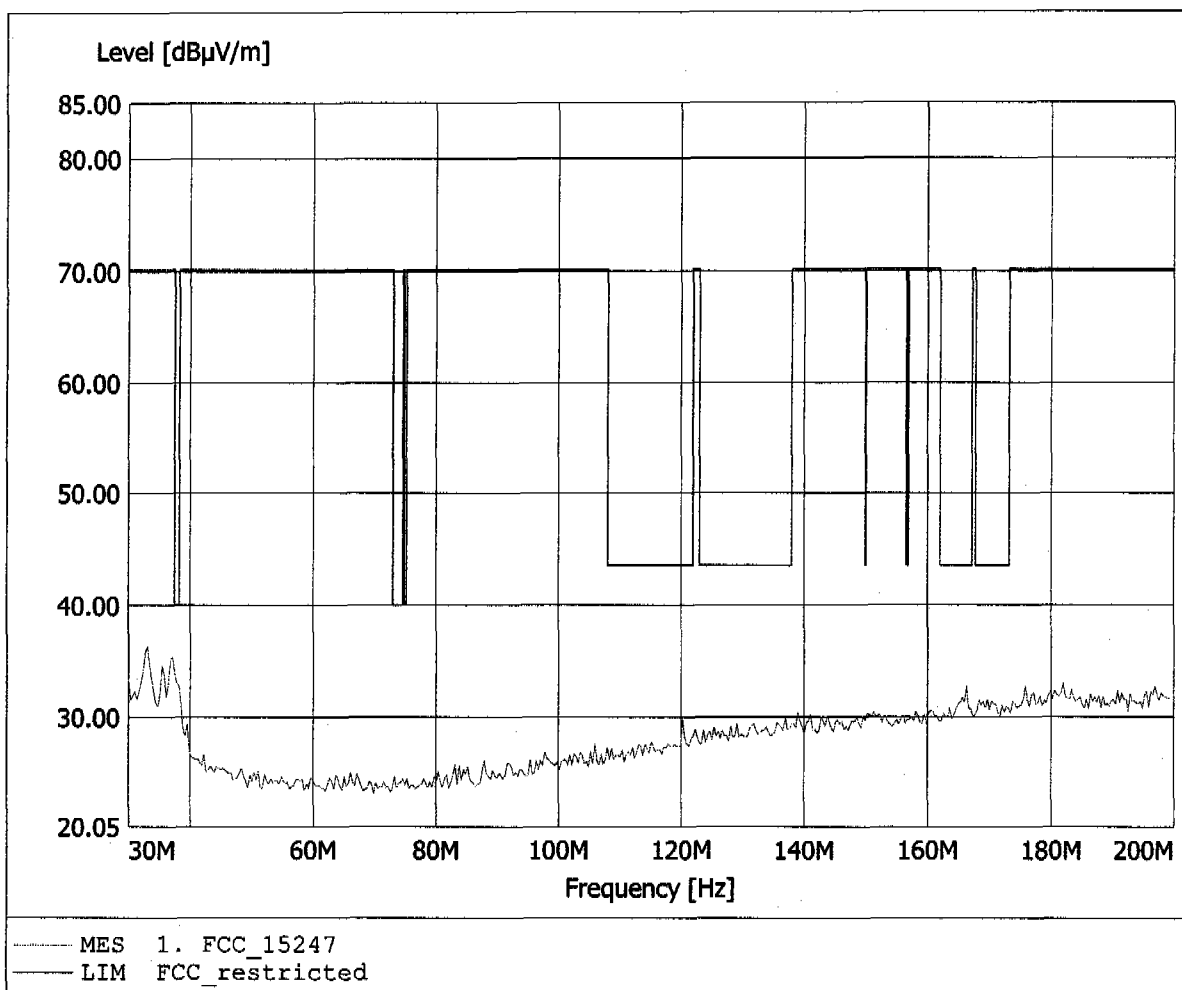


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2480MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 432.465MHz, Emax: 32.57dBµV/m, RBW: 100kHz

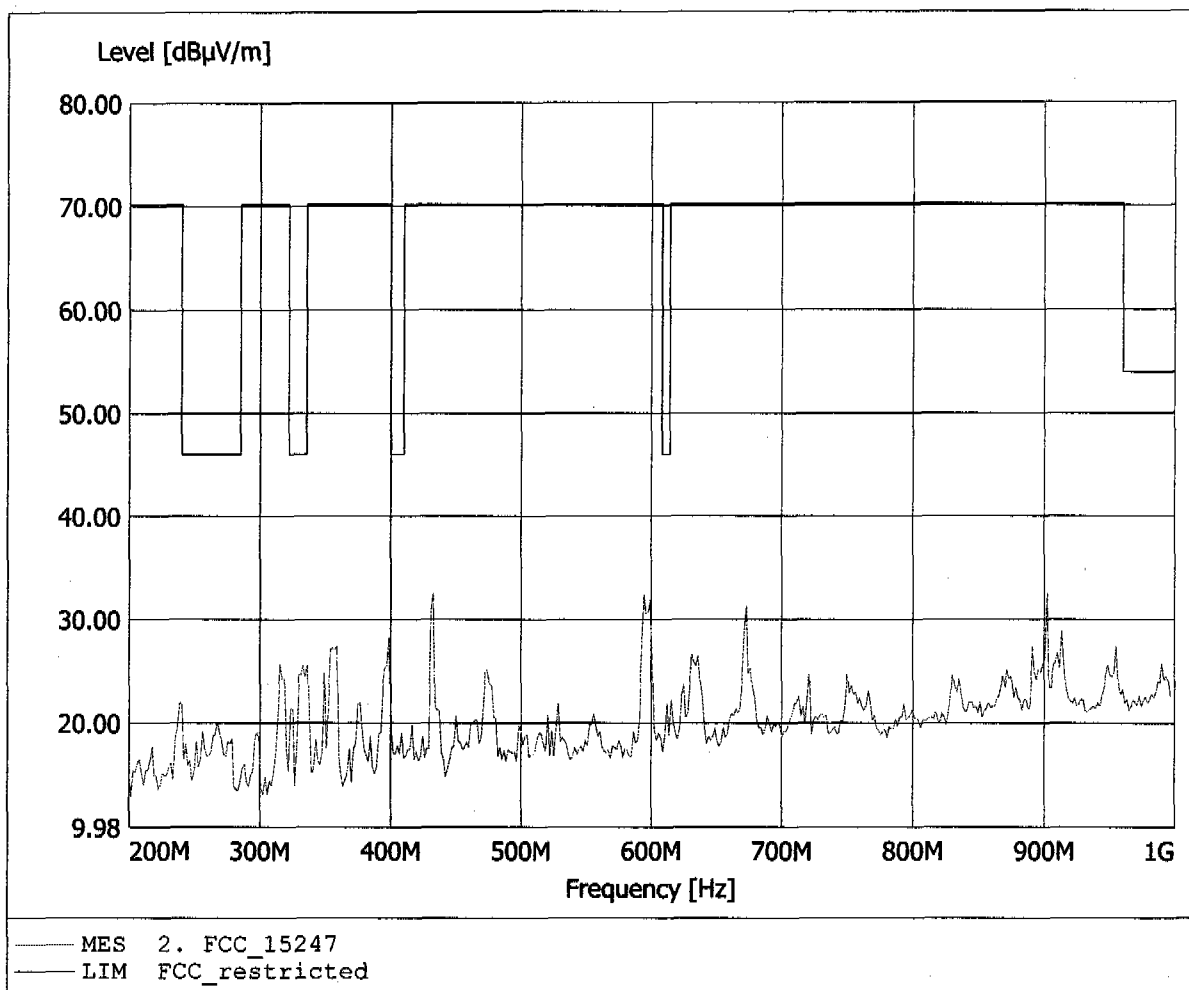


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2480MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 432.465MHz, Emax: 35.09dBµV/m, RBW: 100kHz

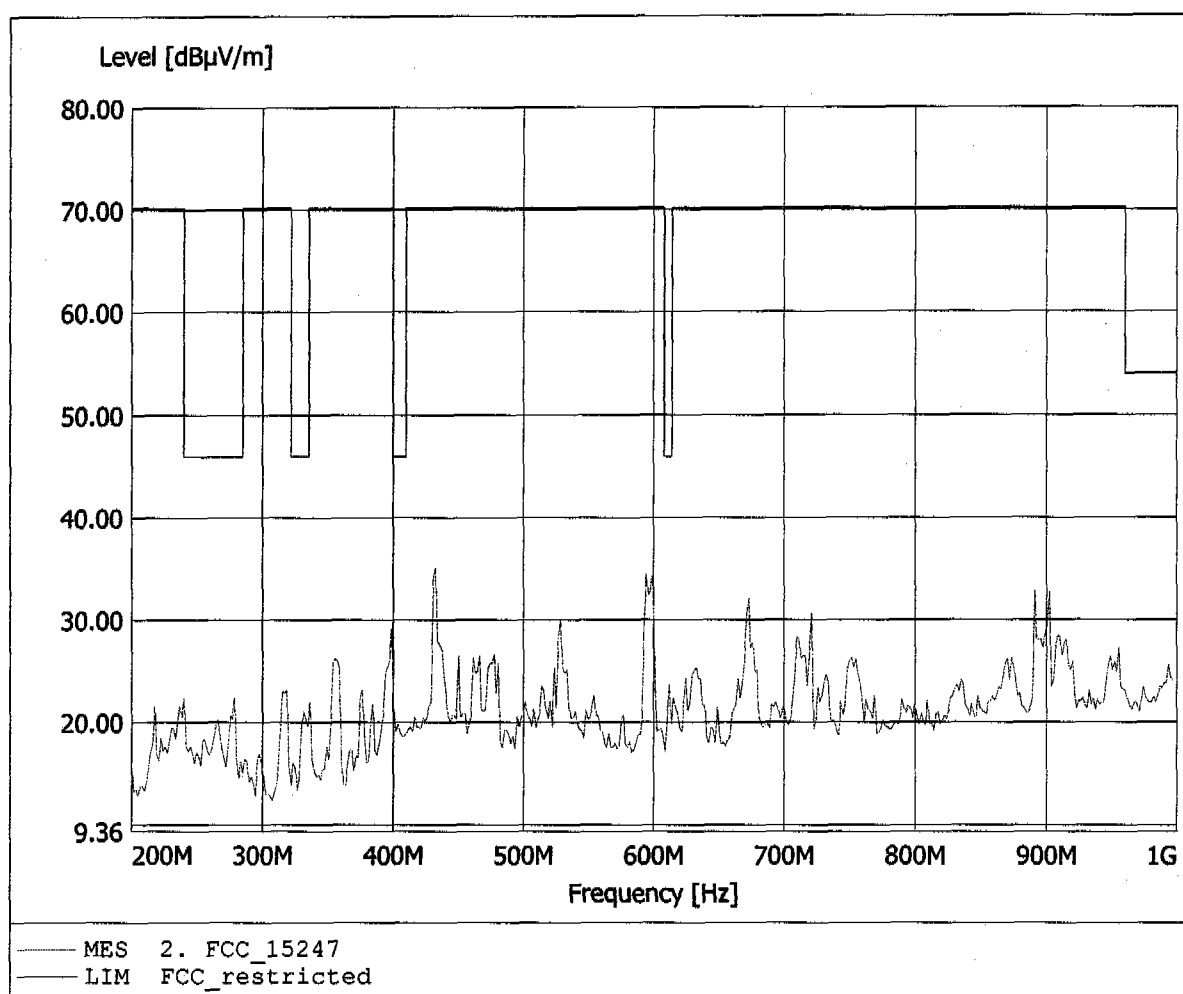


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2480MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 44.06dBµV/m, RBW: 1MHz

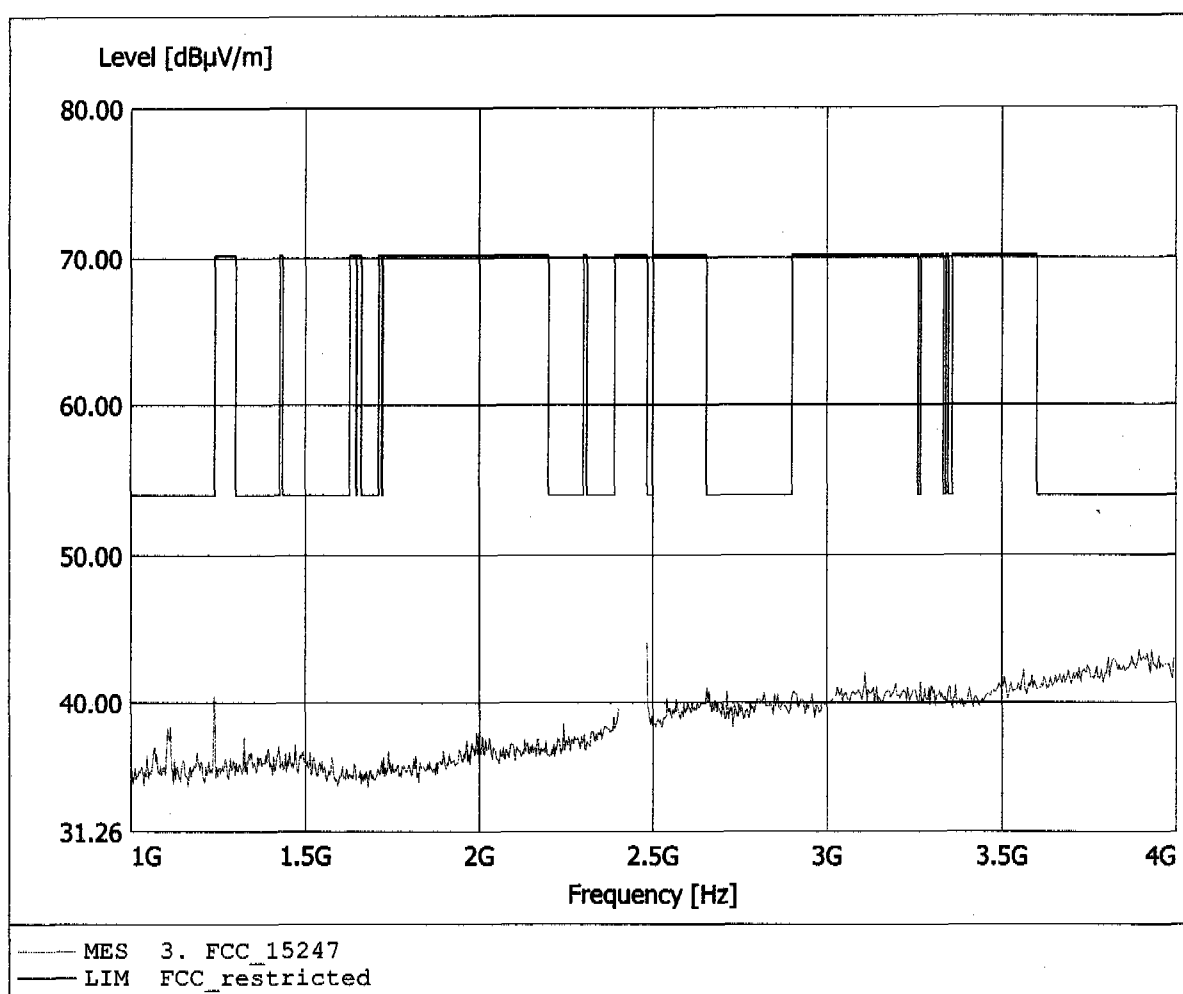


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2480MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.967GHz, Emax: 44.07dBµV/m, RBW: 1MHz

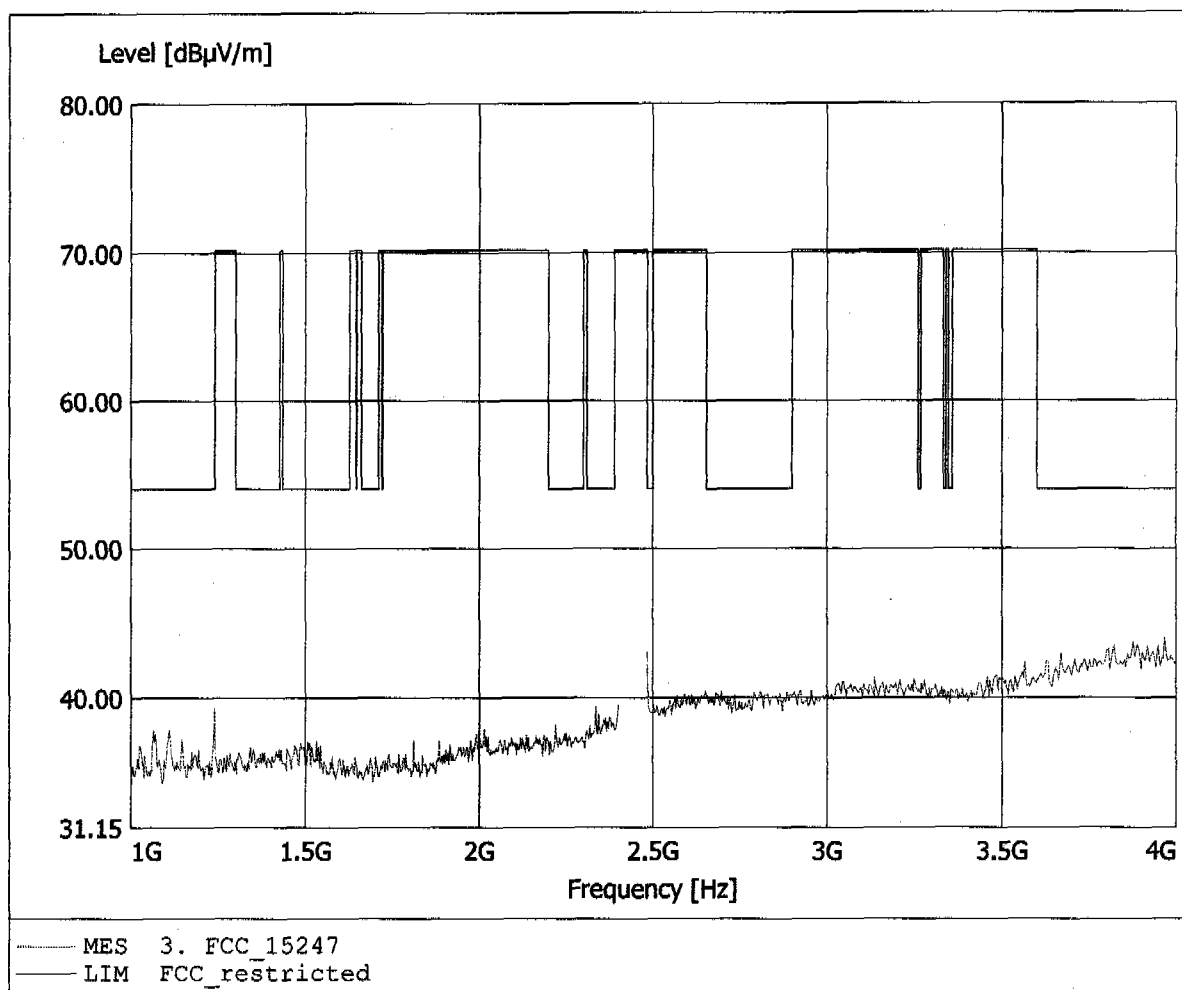


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2480 MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.944GHz, Emax: 38.43dBµV/m, RBW: 1MHz

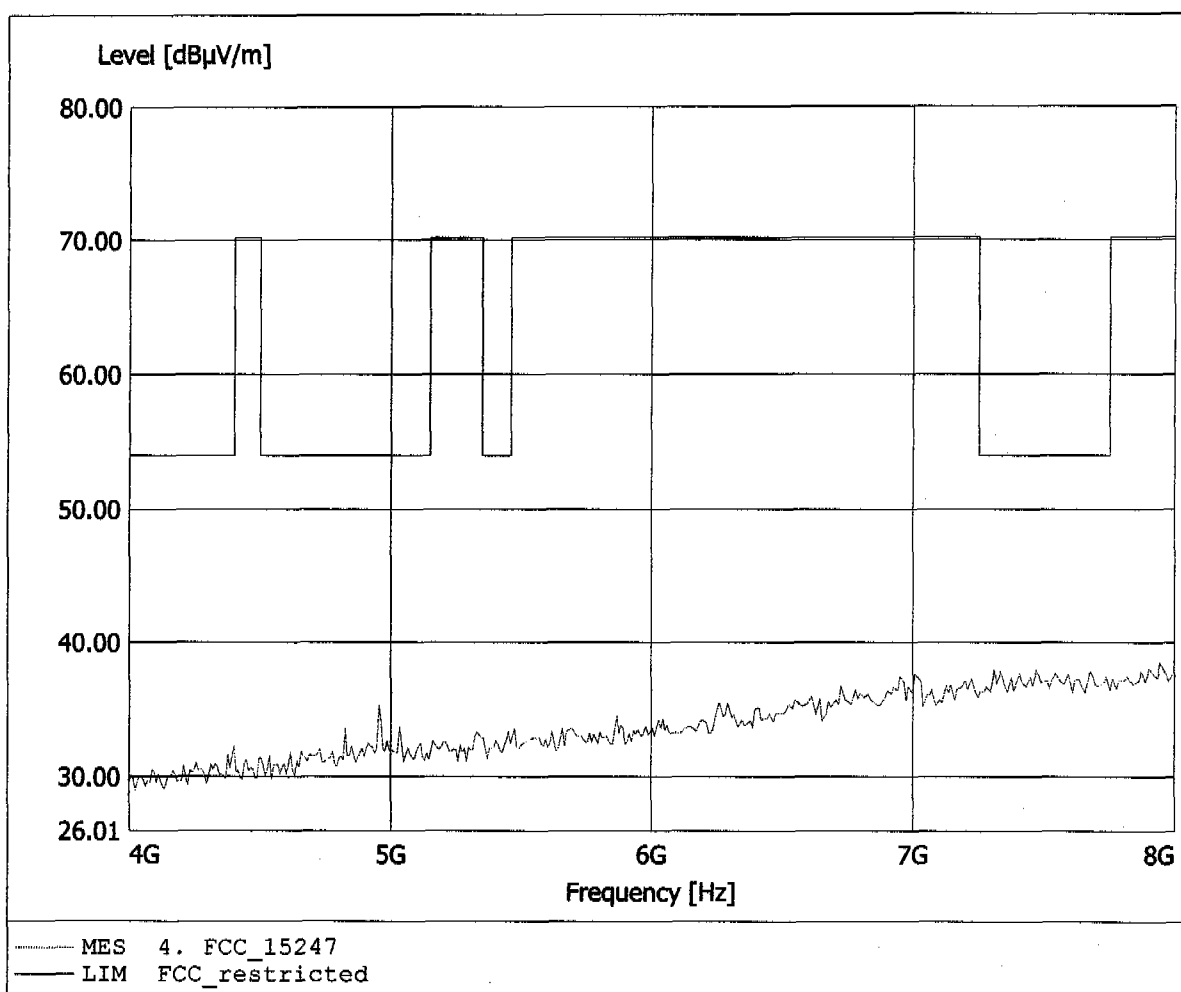


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2480 MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.872GHz, Emax: 39.53dBµV/m, RBW: 1MHz

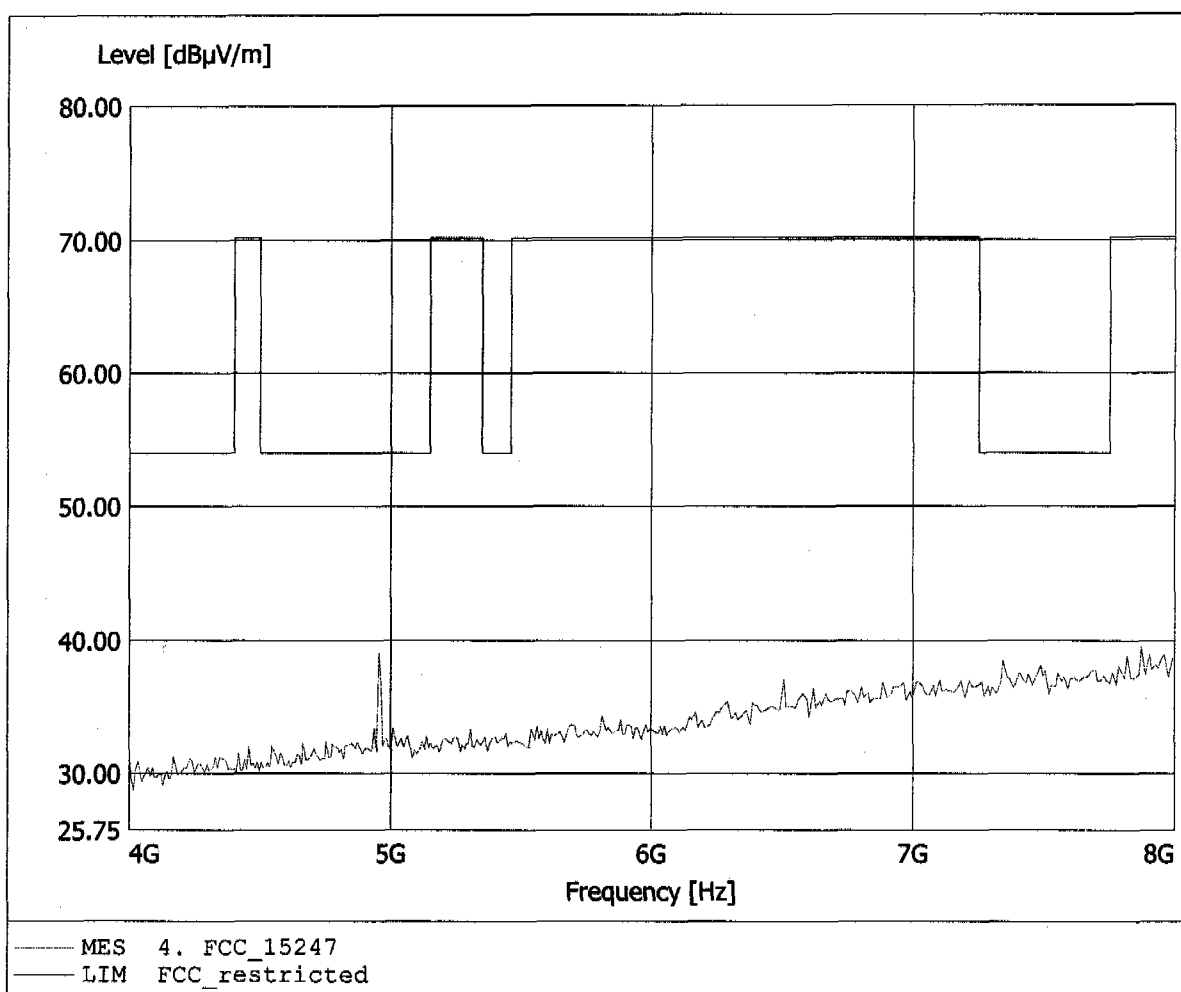


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2480 MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.924GHz, Emax: 43.53dBµV/m, RBW: 1MHz

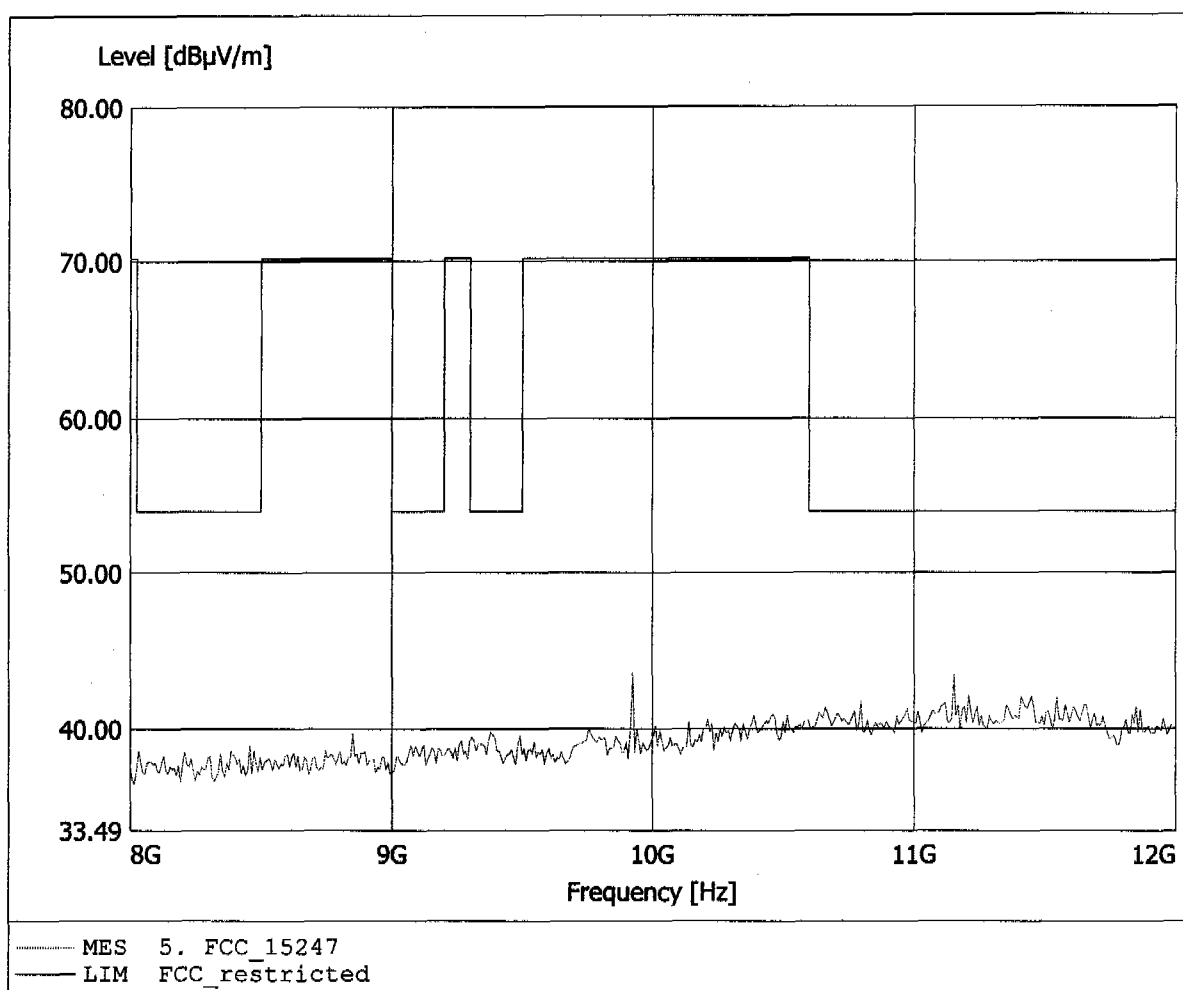


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2480 MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.367GHz, Emax: 42.20dBµV/m, RBW: 1MHz

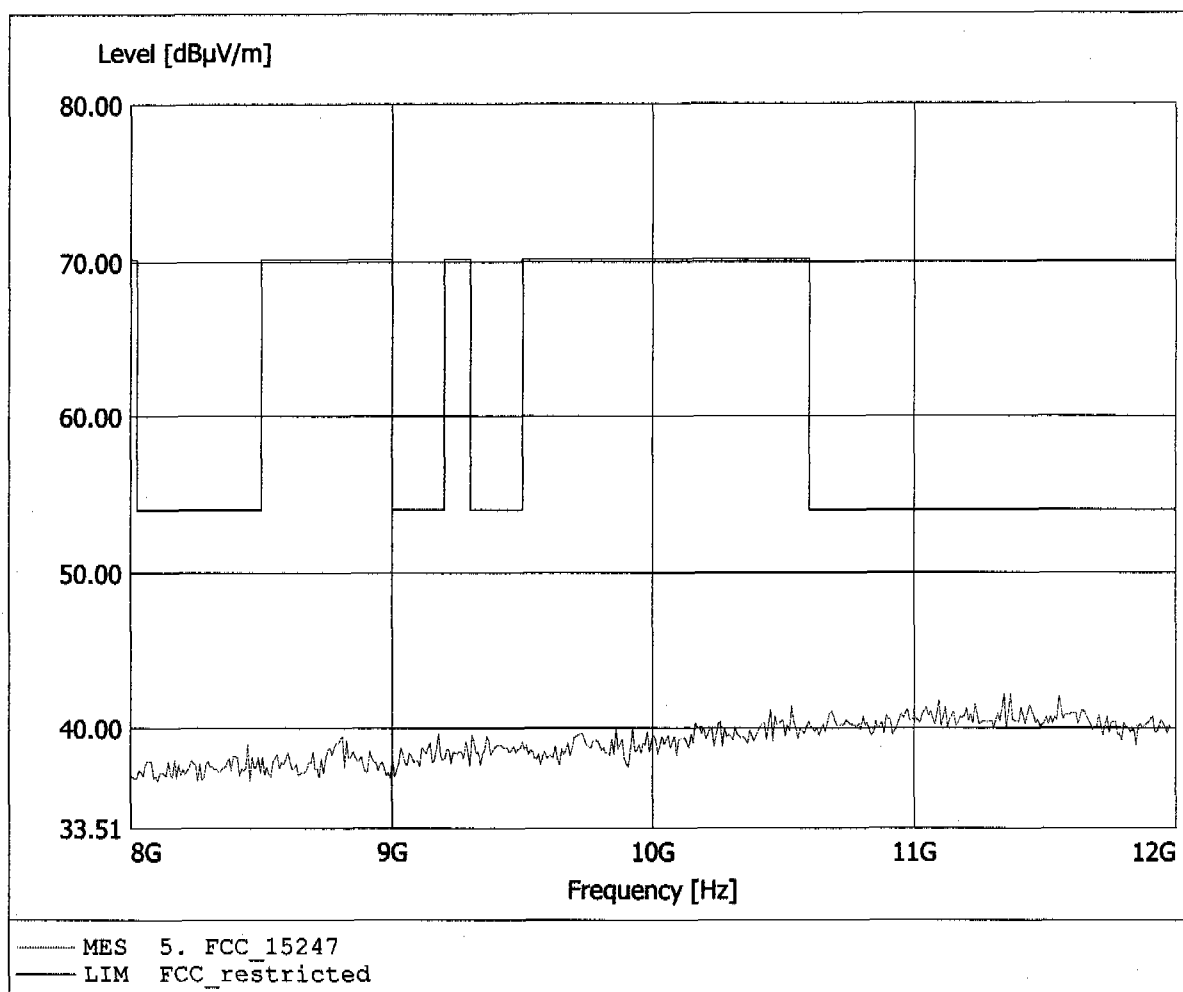


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2480 MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.255GHz, Emax: 44.61dBµV/m, RBW: 1MHz

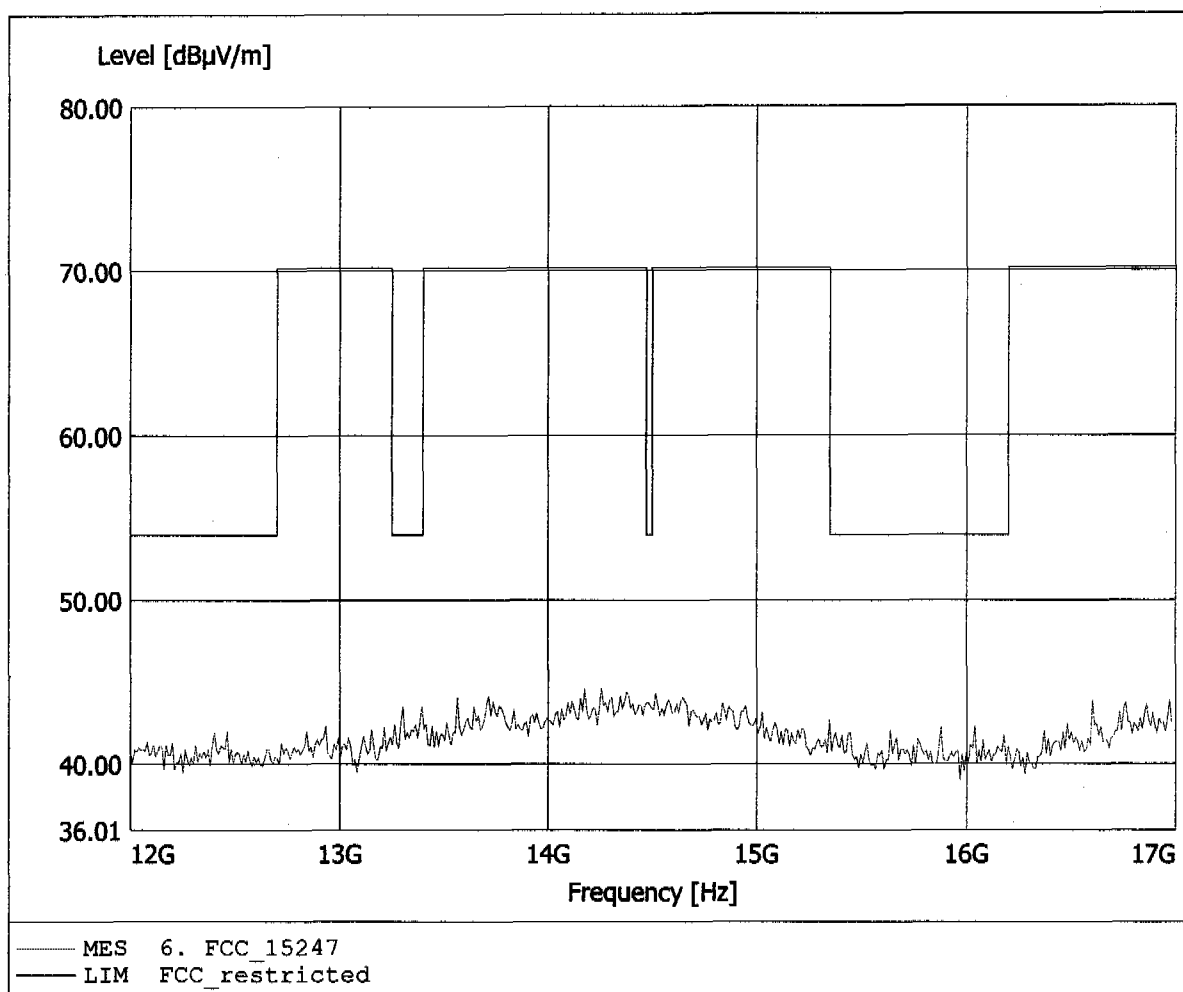


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2480 MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.495GHz, Emax: 44.89dBµV/m, RBW: 1MHz

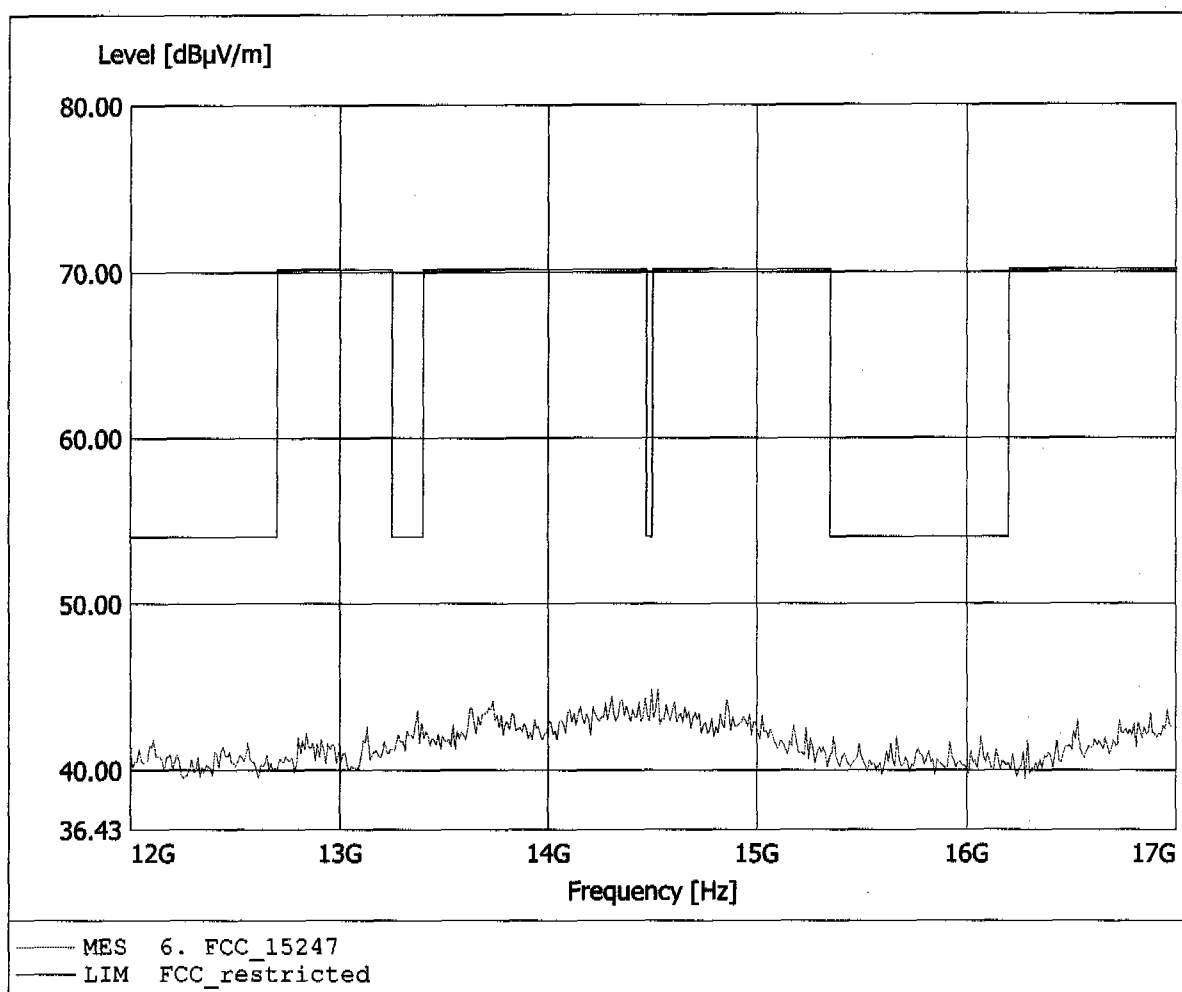


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2480 MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 45.12dBµV/m, RBW: 1MHz

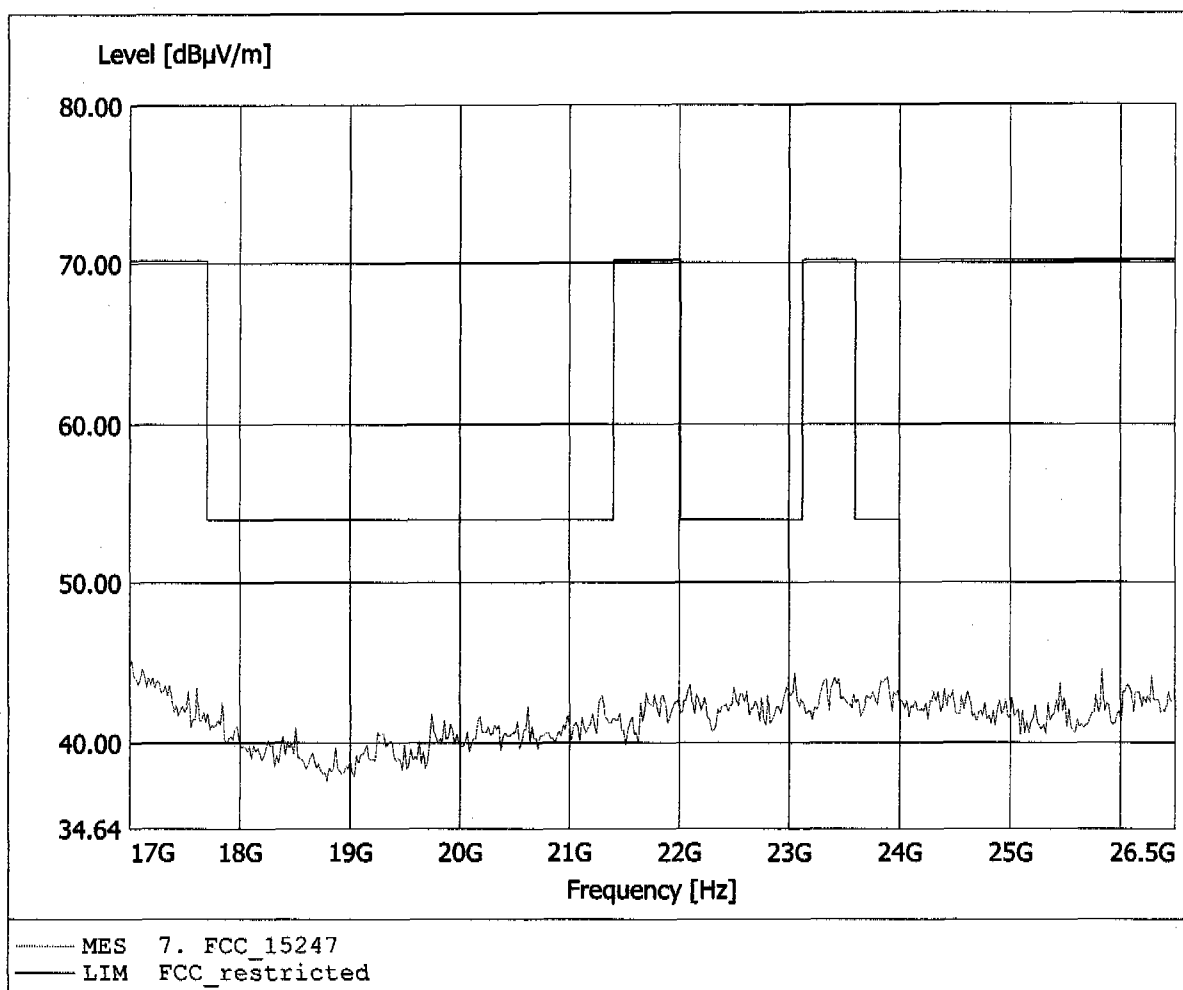


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2480 MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 45.31dB μ V/m, RBW: 1MHz

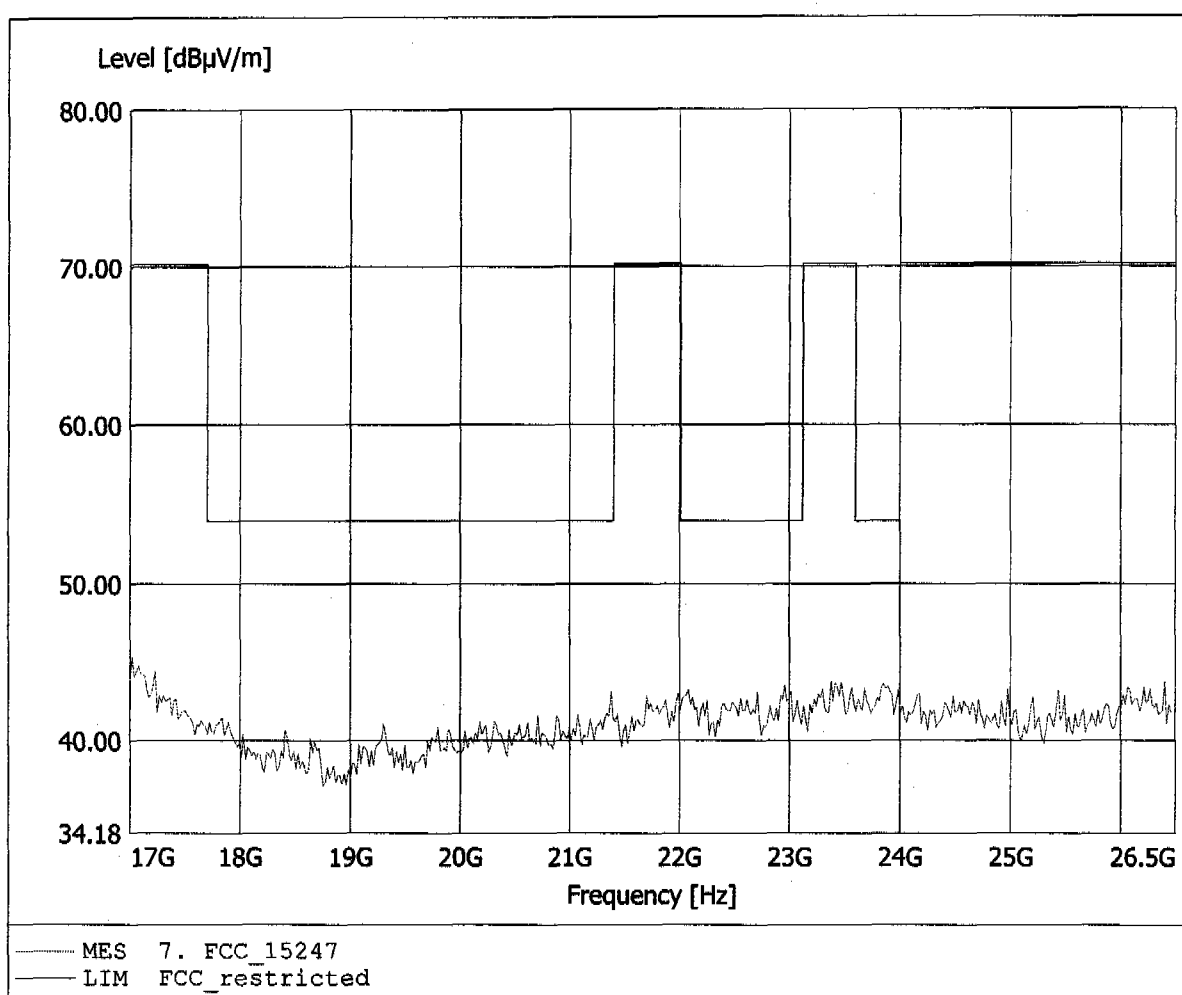


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2441MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 199.319MHz, Emax: 32.97dBµV/m, RBW: 100kHz

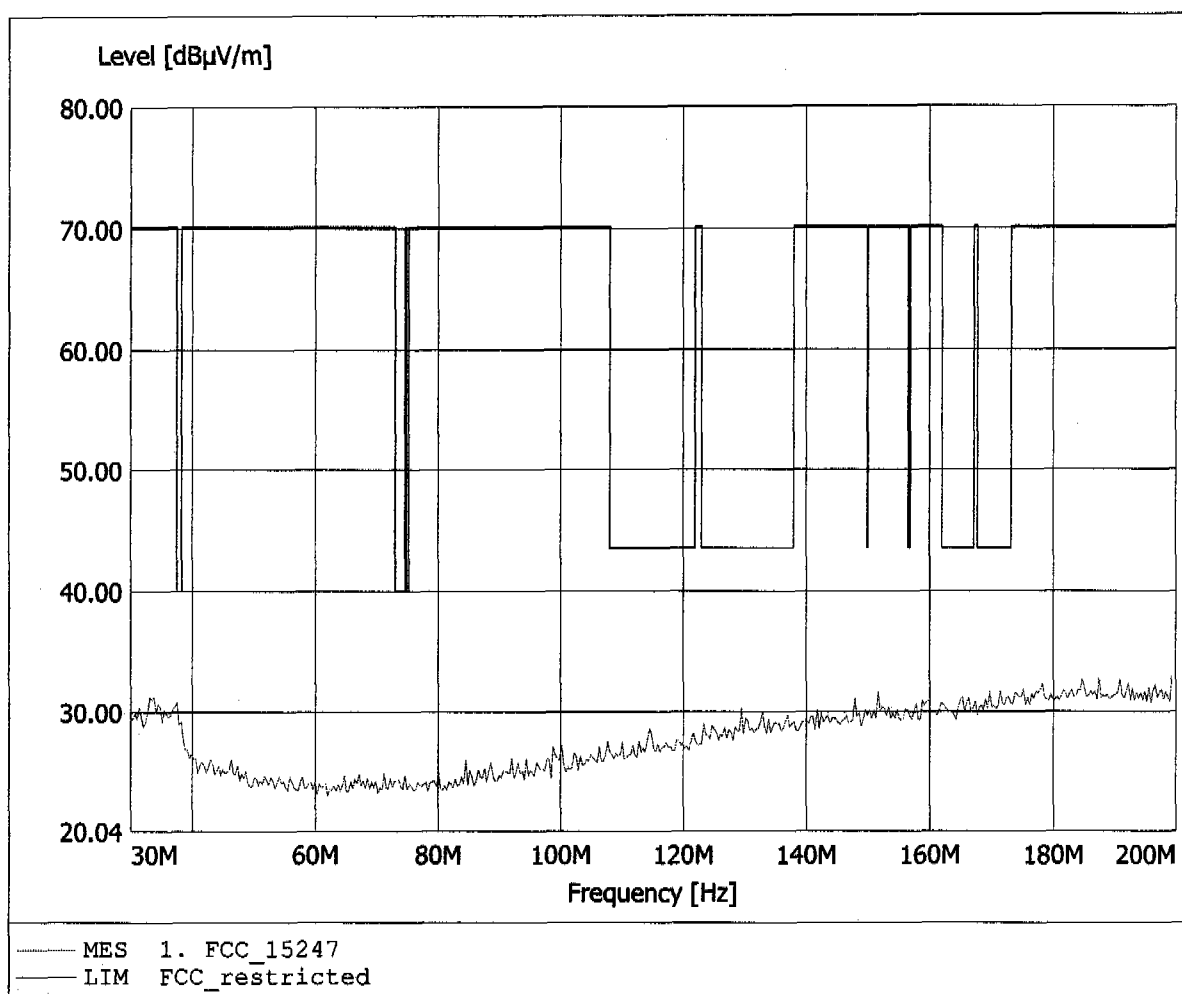


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2441MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 33.066MHz, Emax: 35.95dBµV/m, RBW: 100kHz

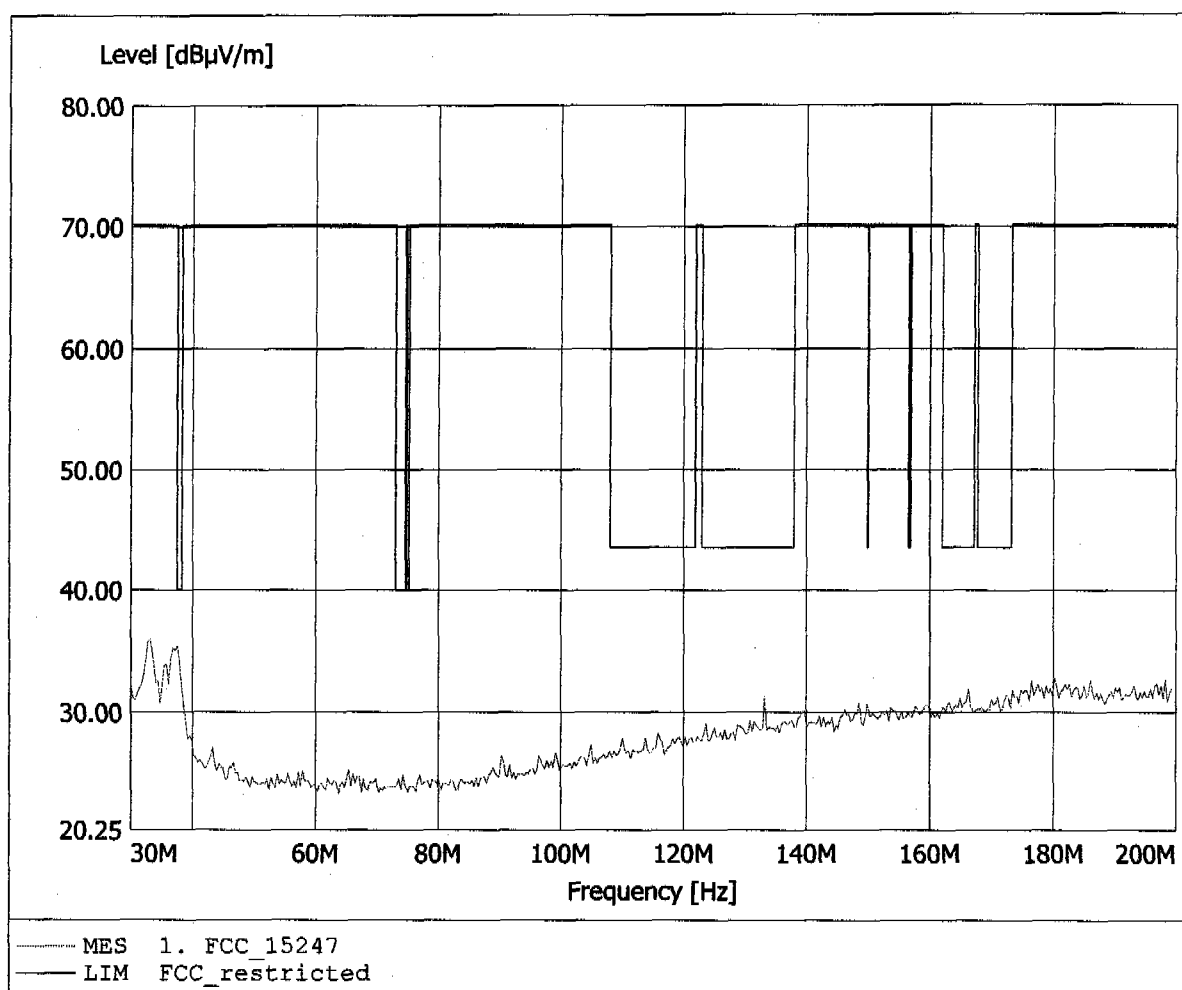


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2441MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 432.465MHz, Emax: 32.70dBµV/m, RBW: 100kHz

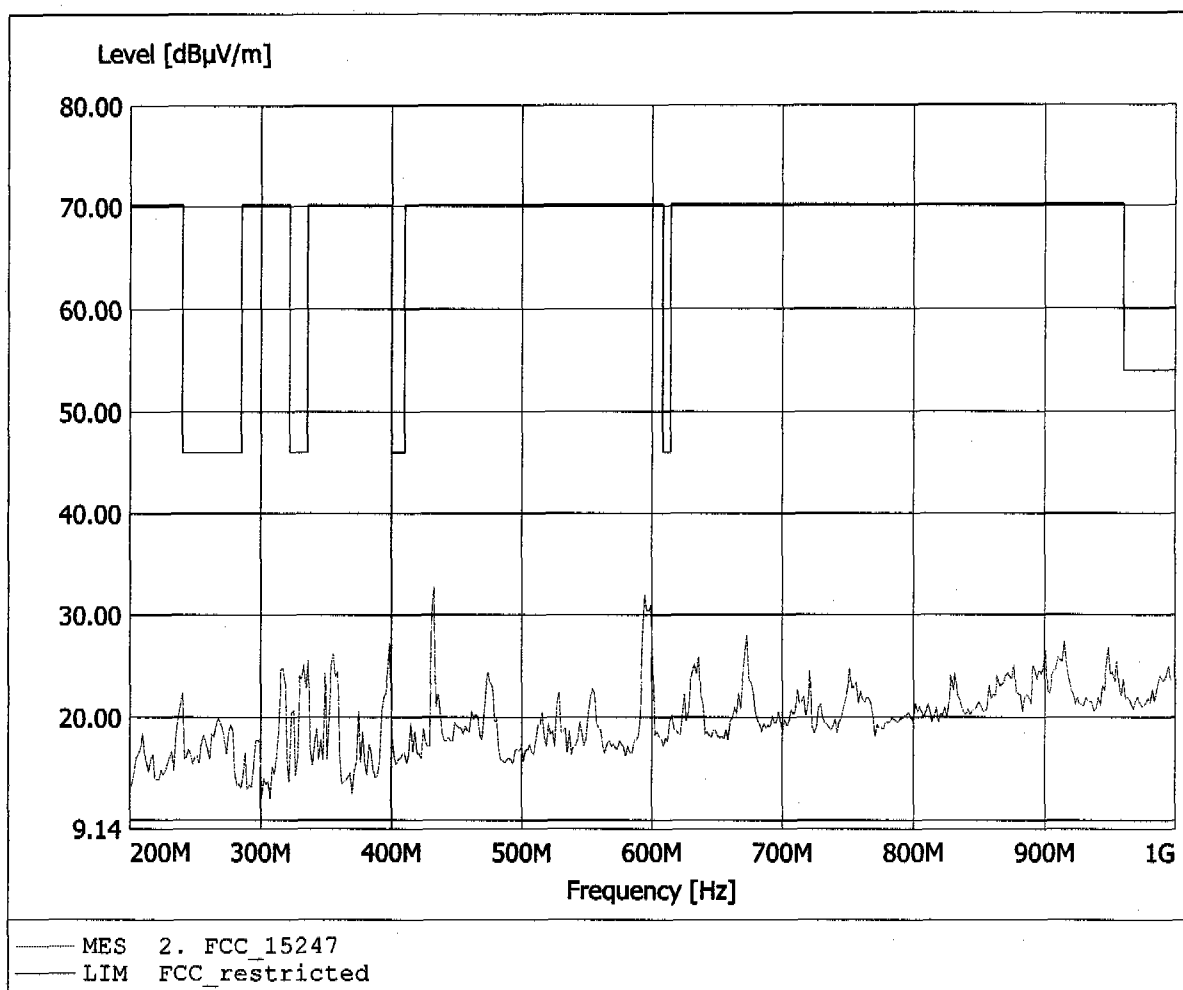


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2441MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 594.389MHz, Emax: 35.34dBµV/m, RBW: 100kHz

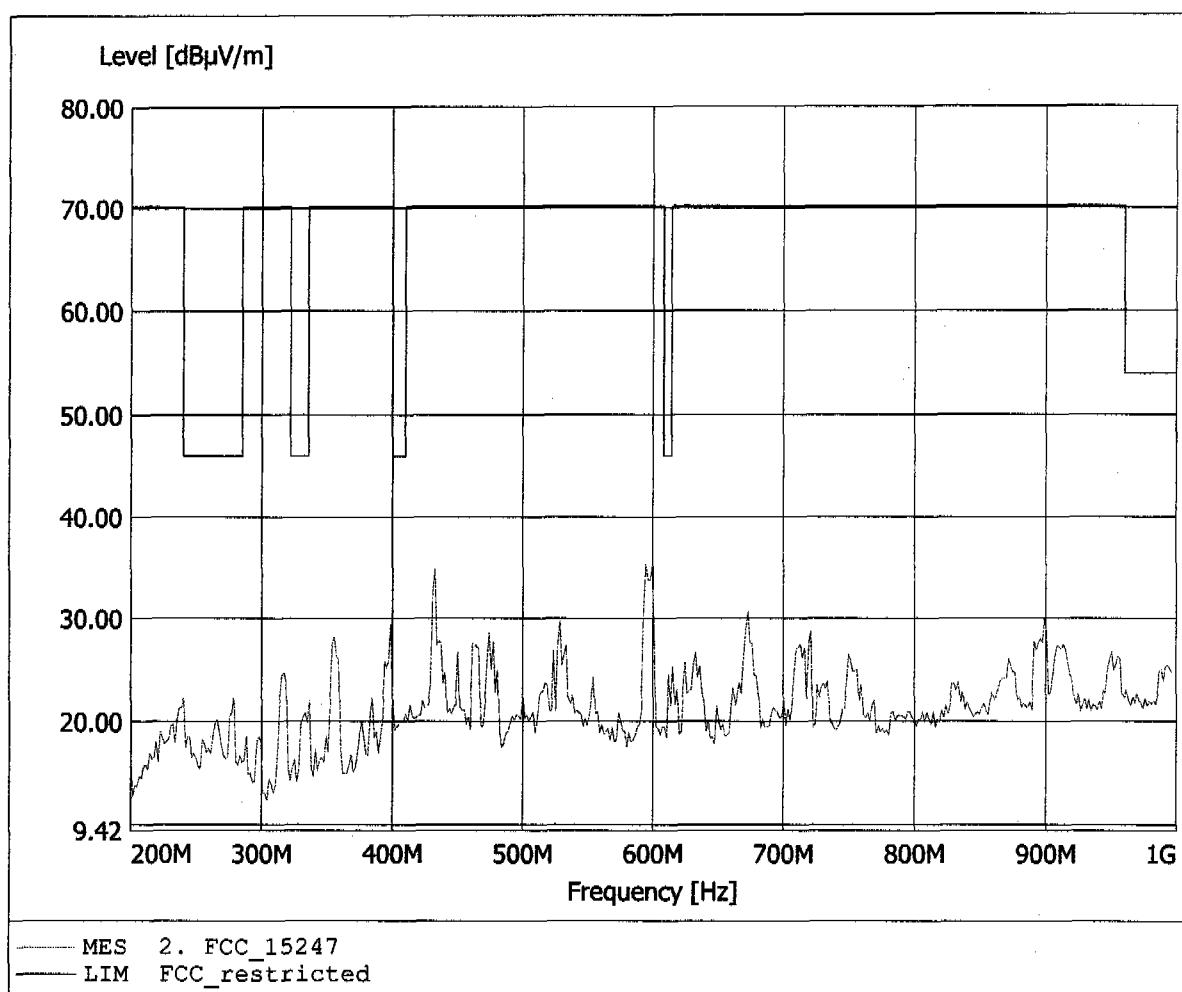


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2441MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.854GHz, Emax: 43.85dBµV/m, RBW: 1MHz

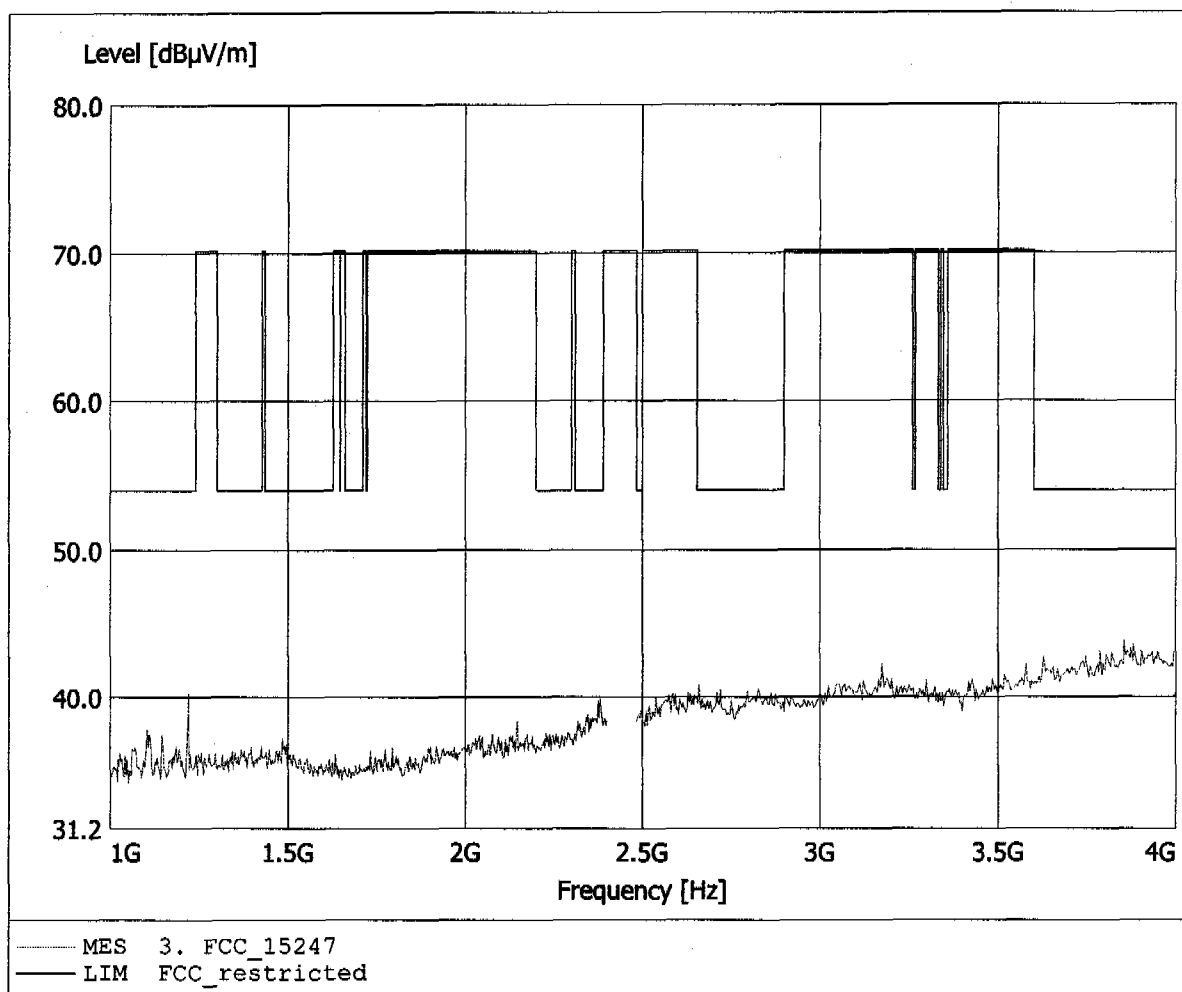


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2441MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.927GHz, Emax: 43.65dBuV/m, RBW: 1MHz

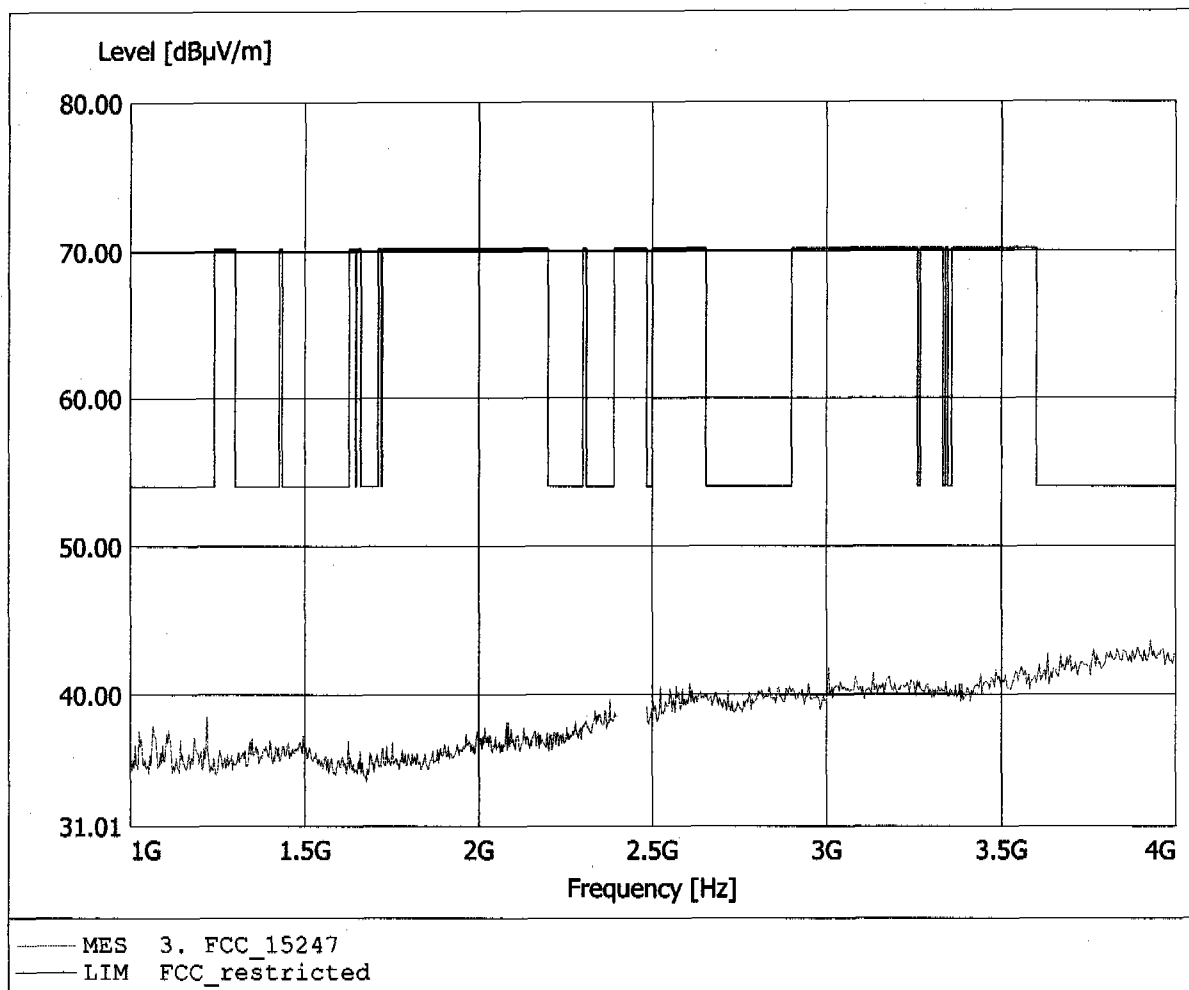


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2441MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.976GHz, Emax: 38.86dBµV/m, RBW: 1MHz

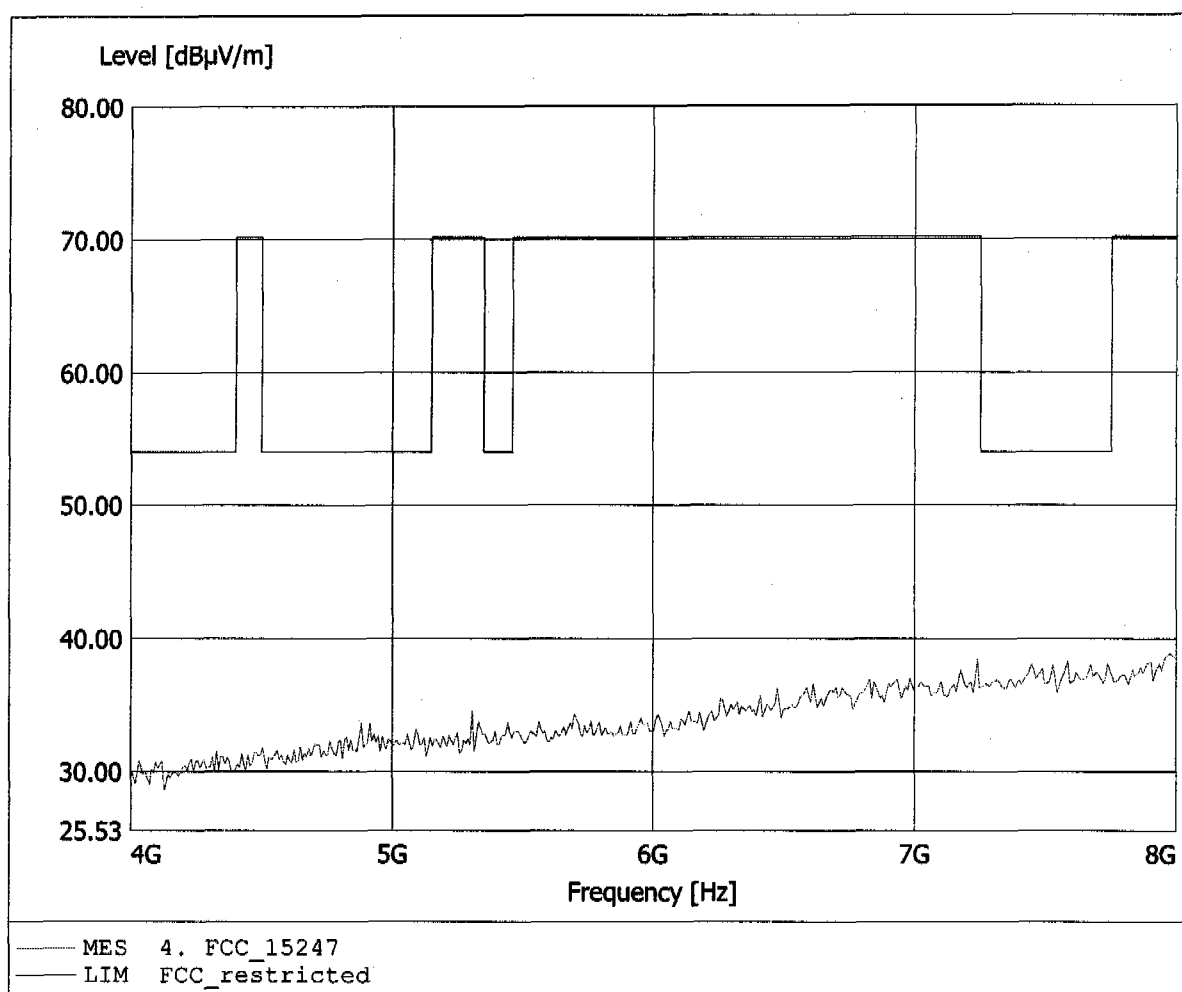


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2441MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.984GHz, Emax: 38.91dBµV/m, RBW: 1MHz

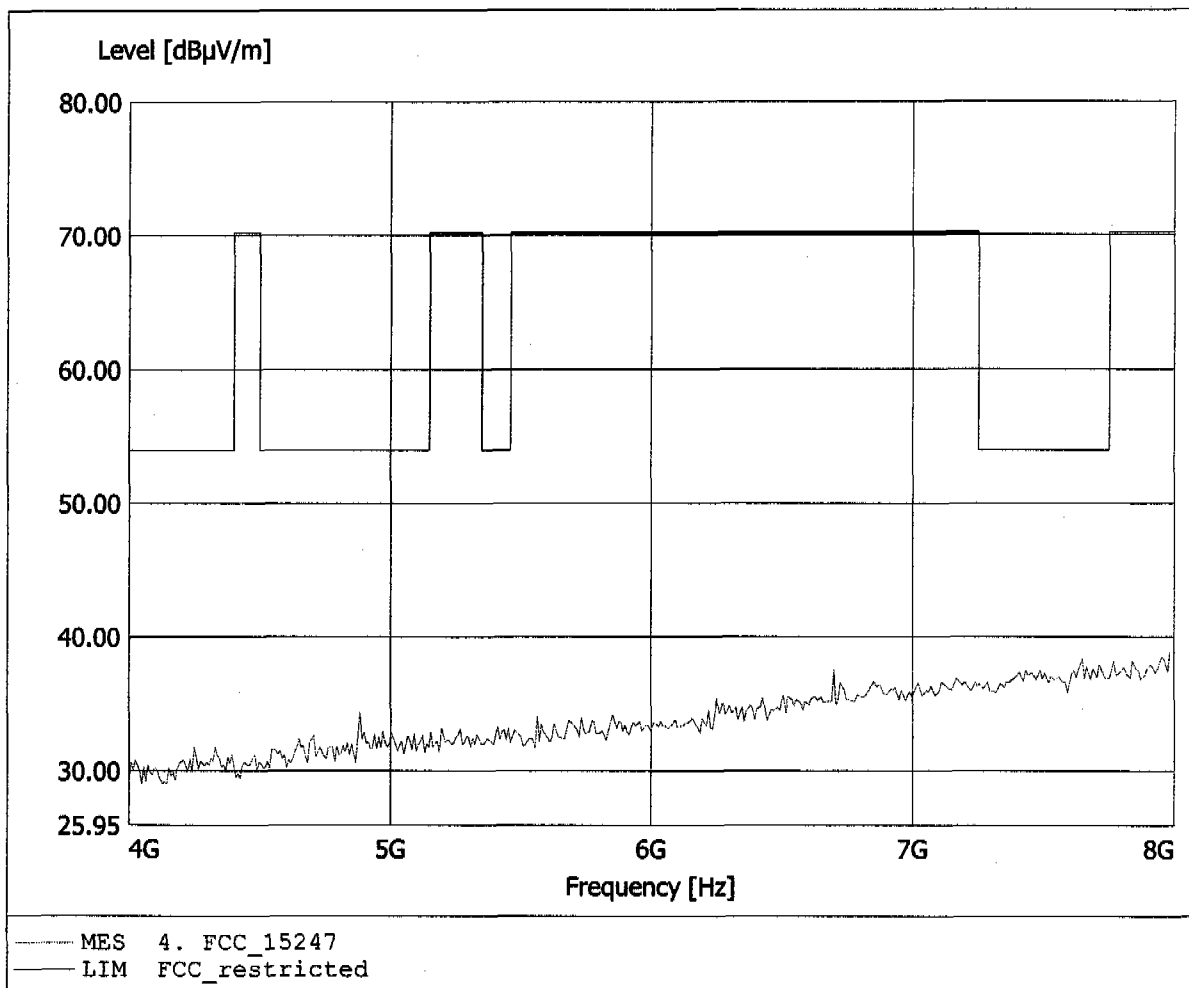


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2441MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.415GHz, Emax: 42.40dBµV/m, RBW: 1MHz

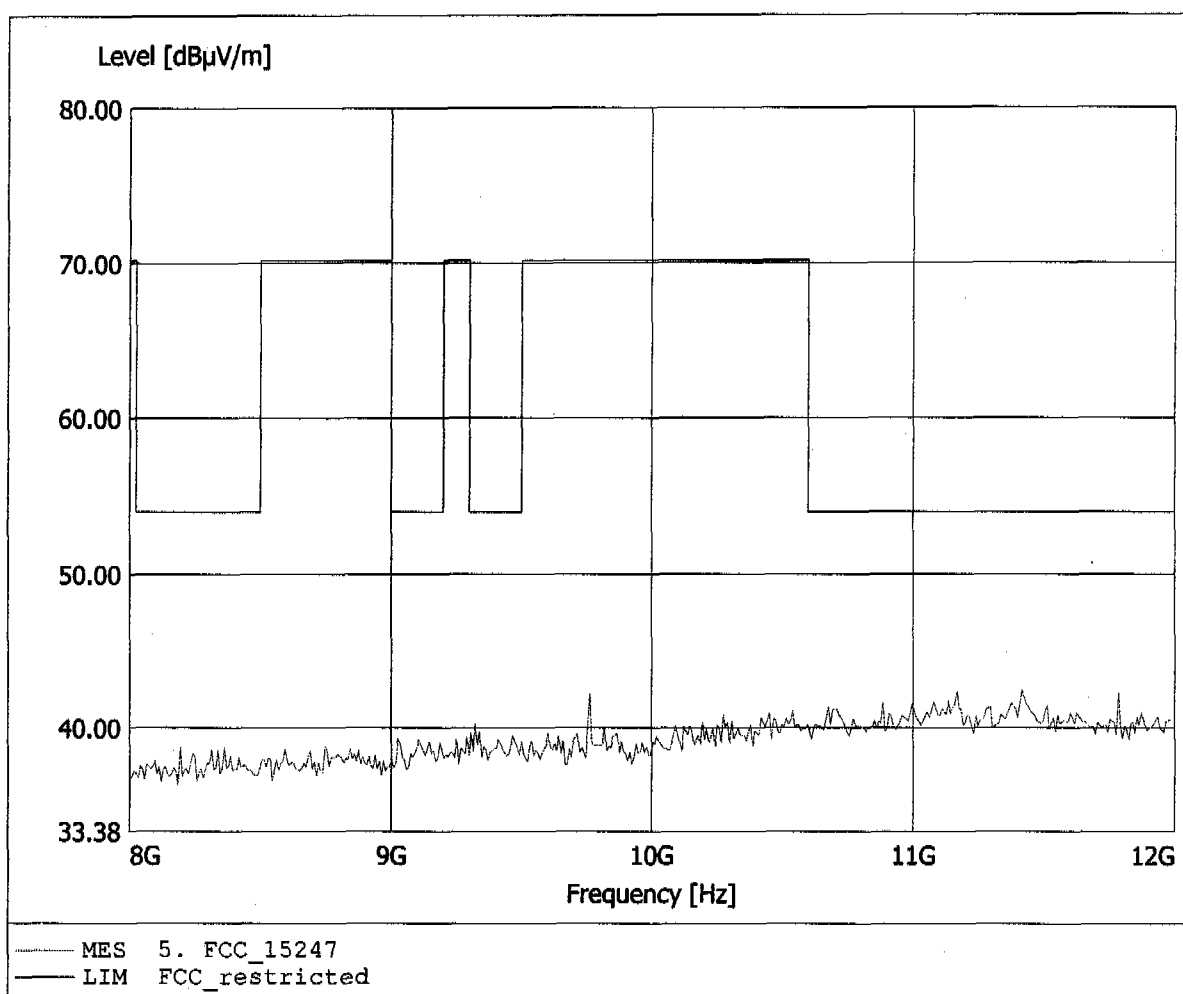


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2441MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 10.669GHz, Emax: 41.83dBµV/m, RBW: 1MHz

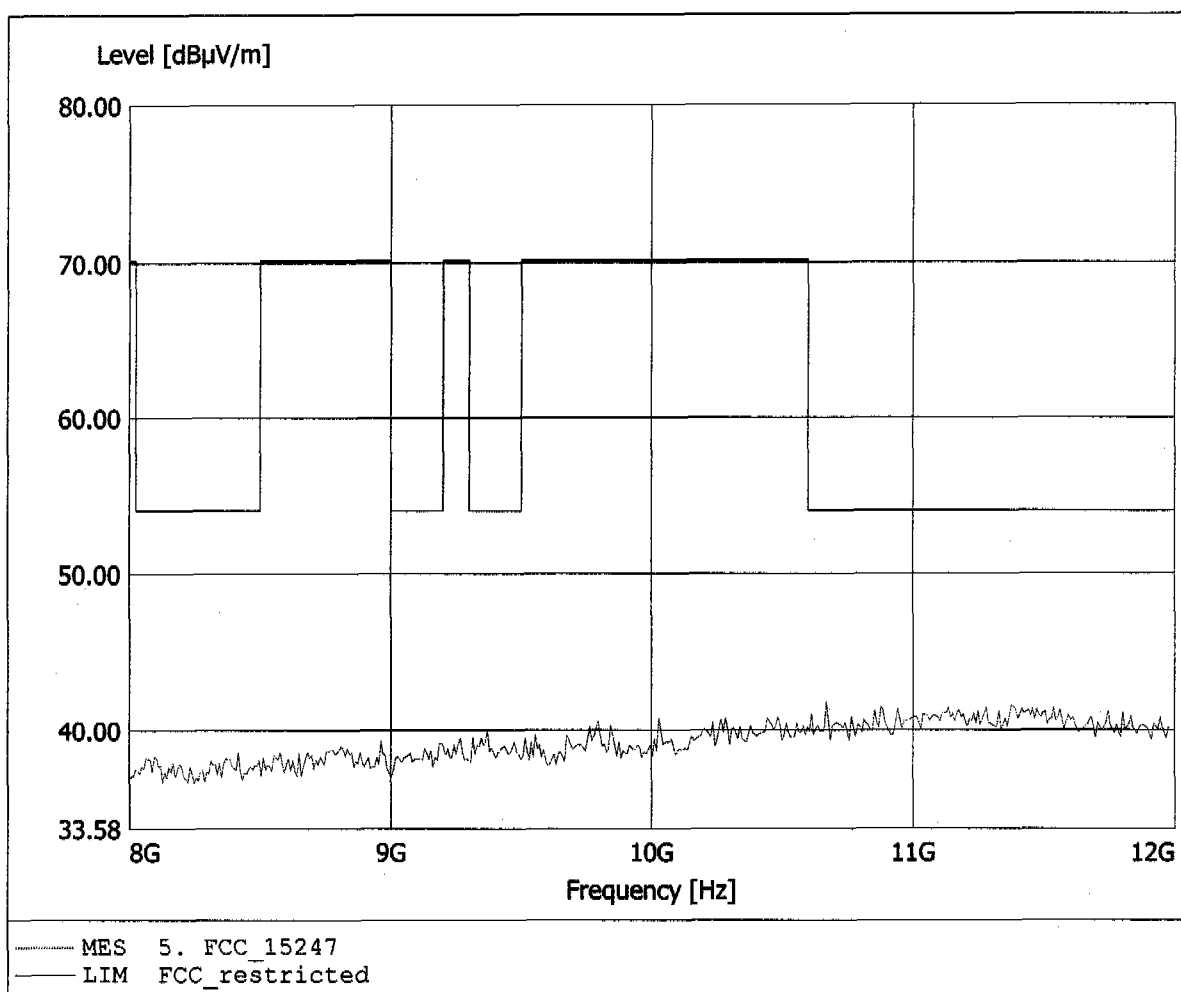


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2441MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.365GHz, Emax: 45.57dBµV/m, RBW: 1MHz

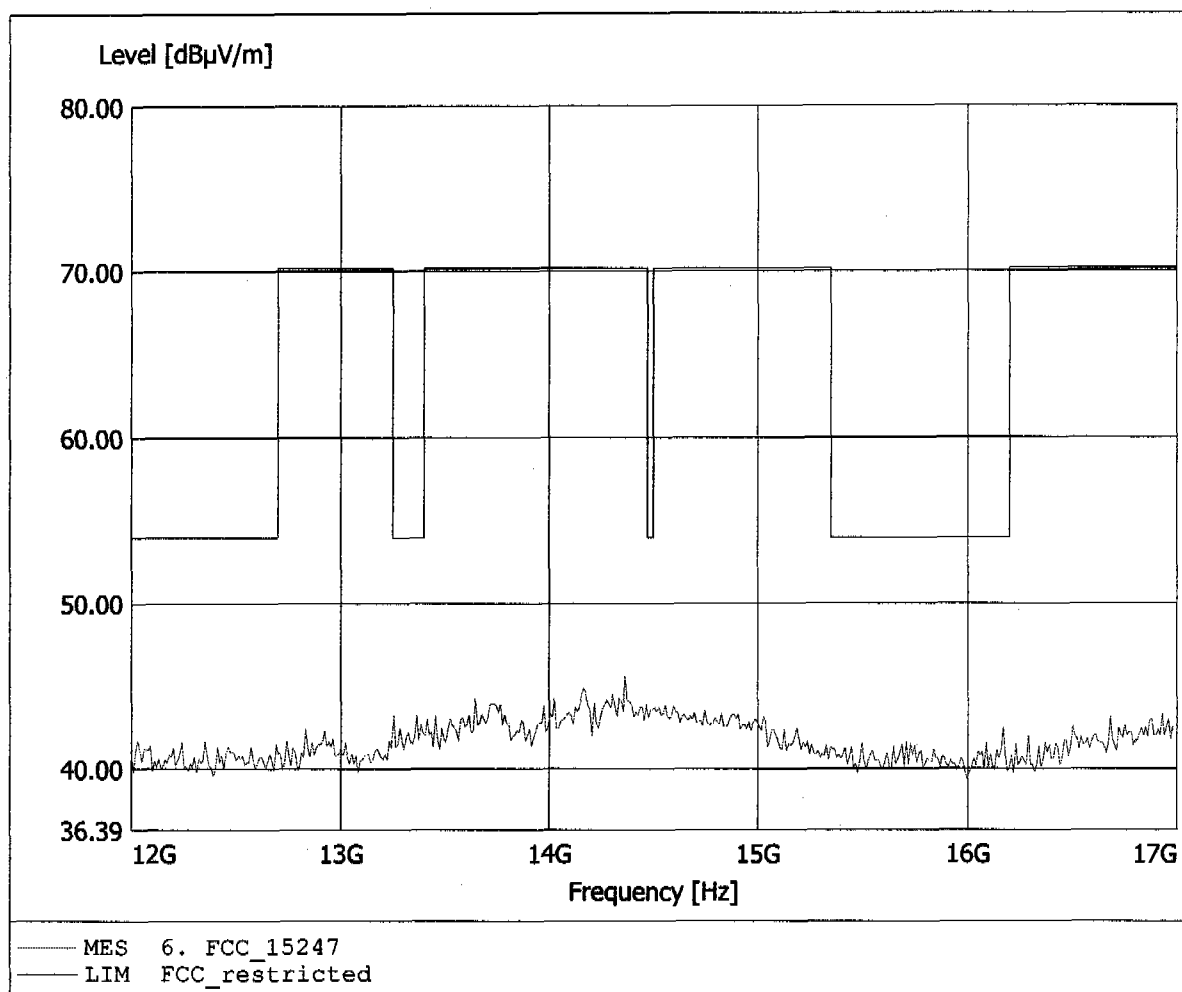


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2441MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.836GHz, Emax: 45.11dBµV/m, RBW: 1MHz

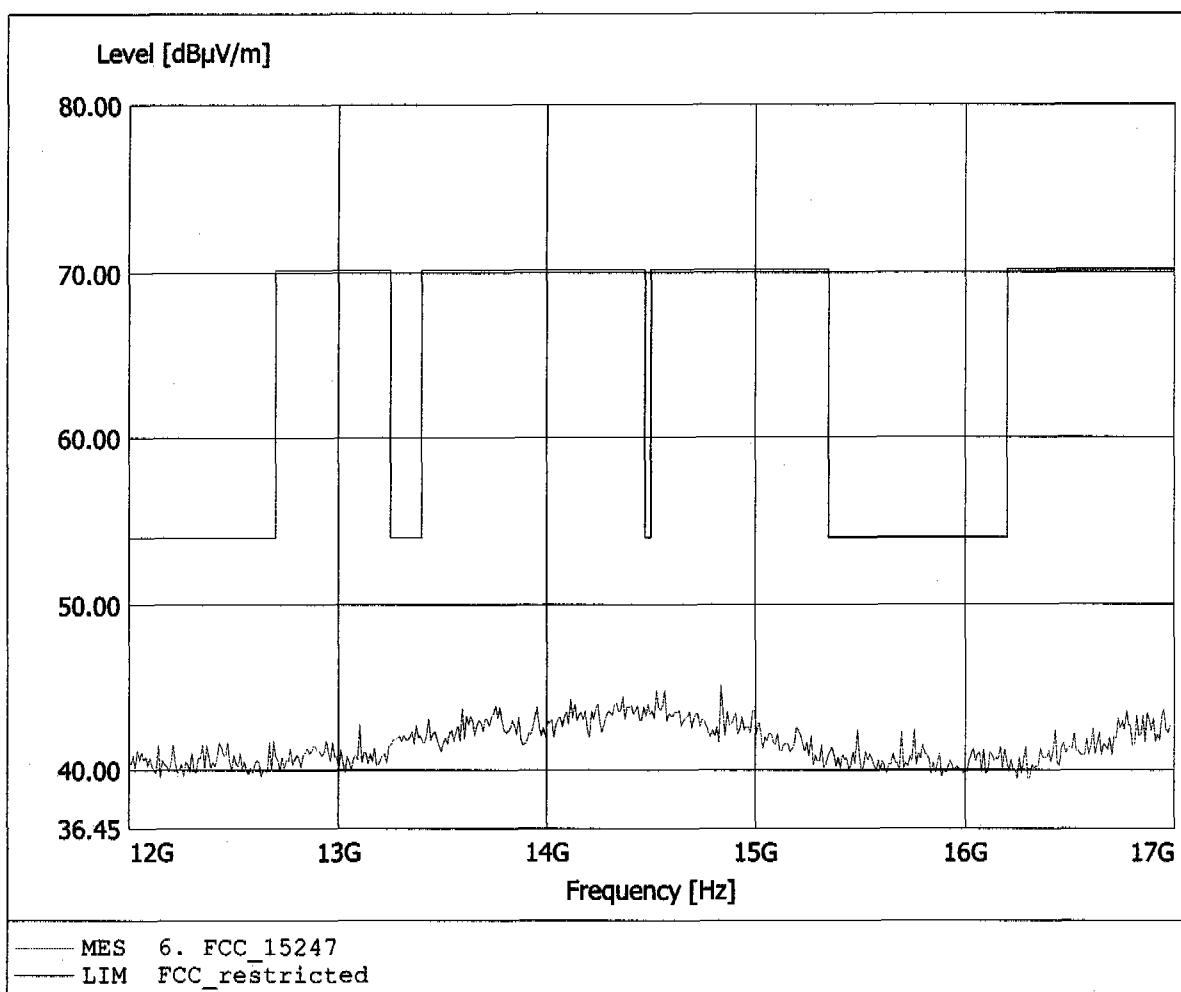


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2441 MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 45.09dBµV/m, RBW: 1MHz

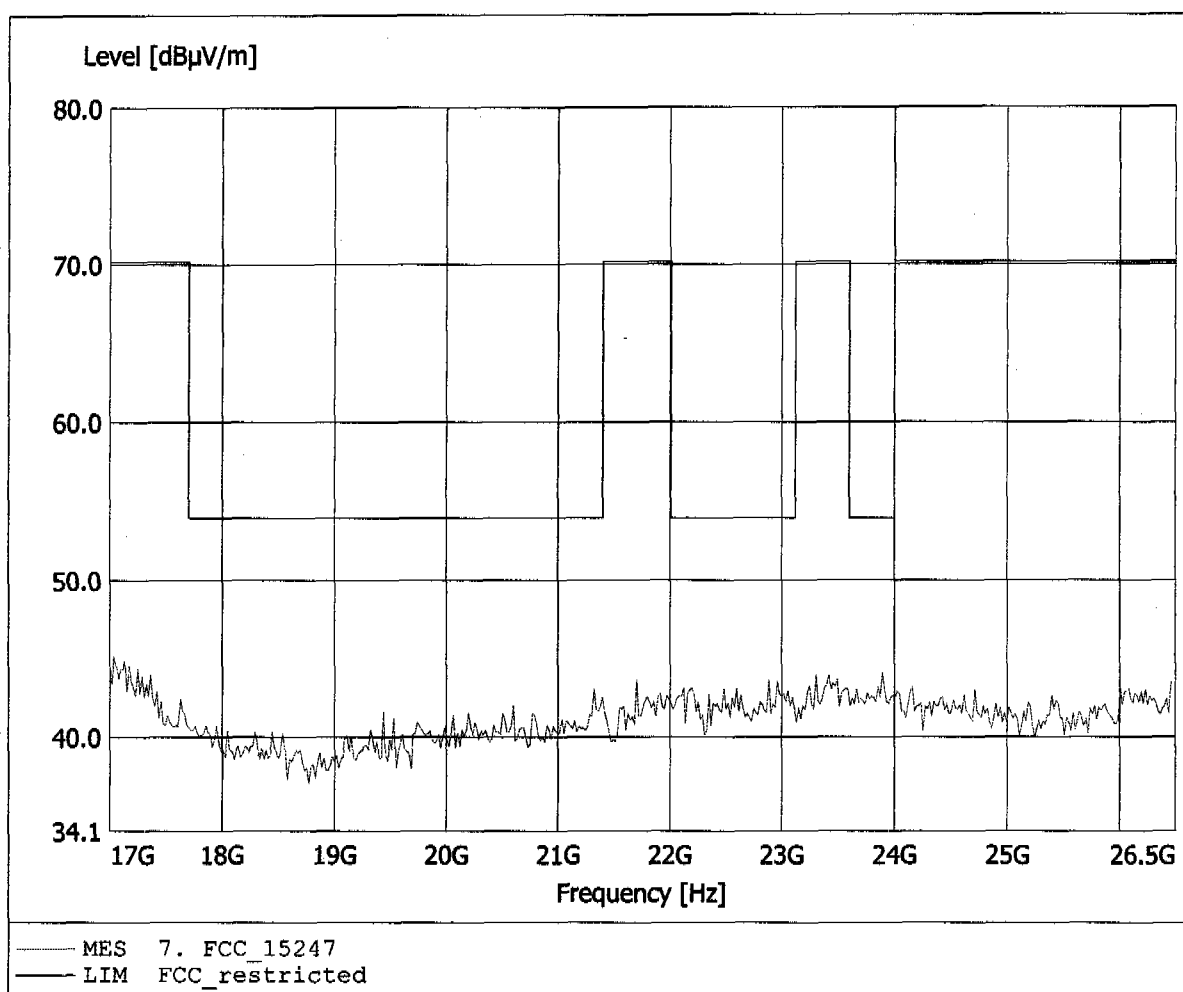


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2441 MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.228GHz, Emax: 44.72dBµV/m, RBW: 1MHz

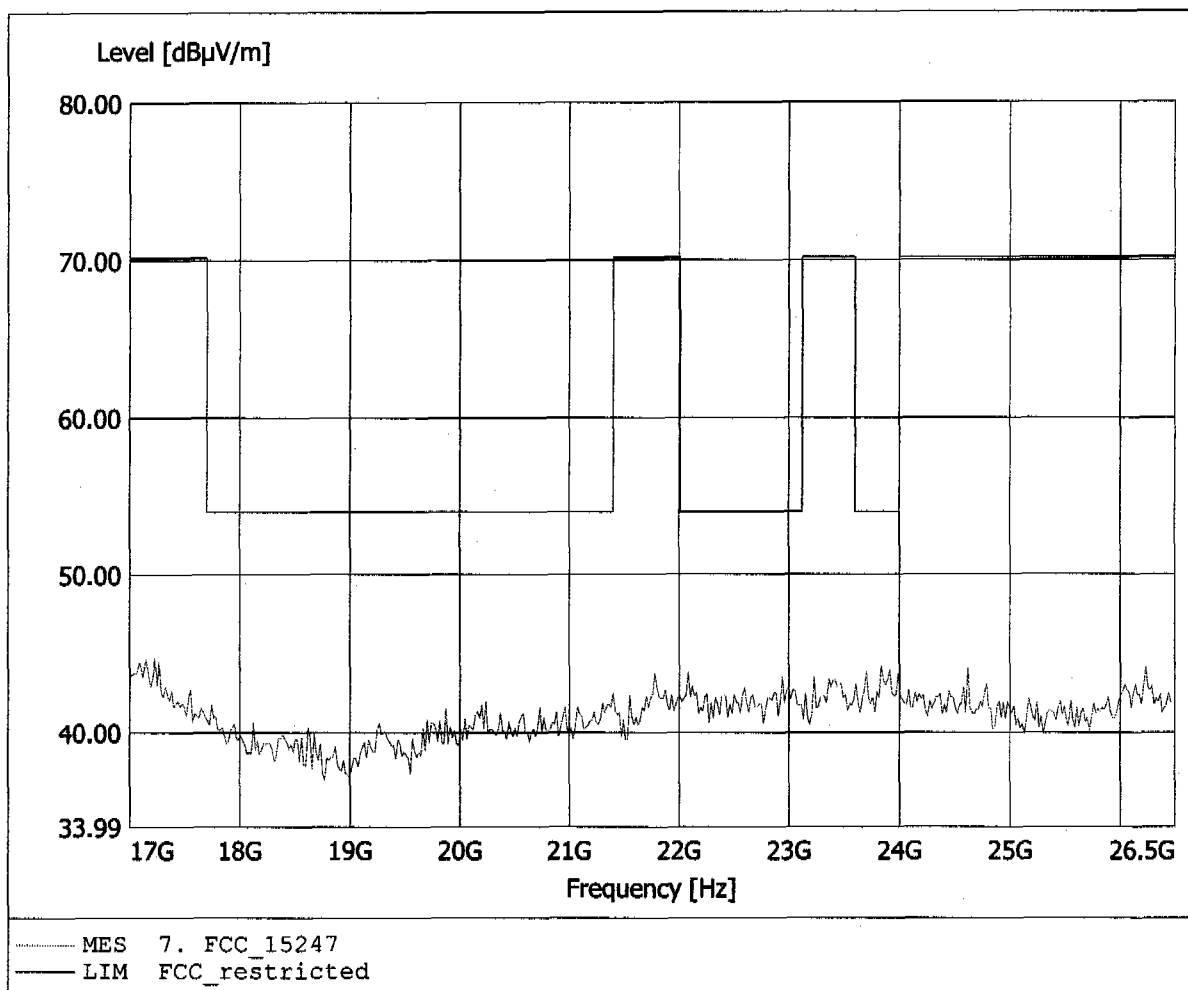


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2402MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 186.032MHz, Emax: 32.92dBµV/m, RBW: 100kHz

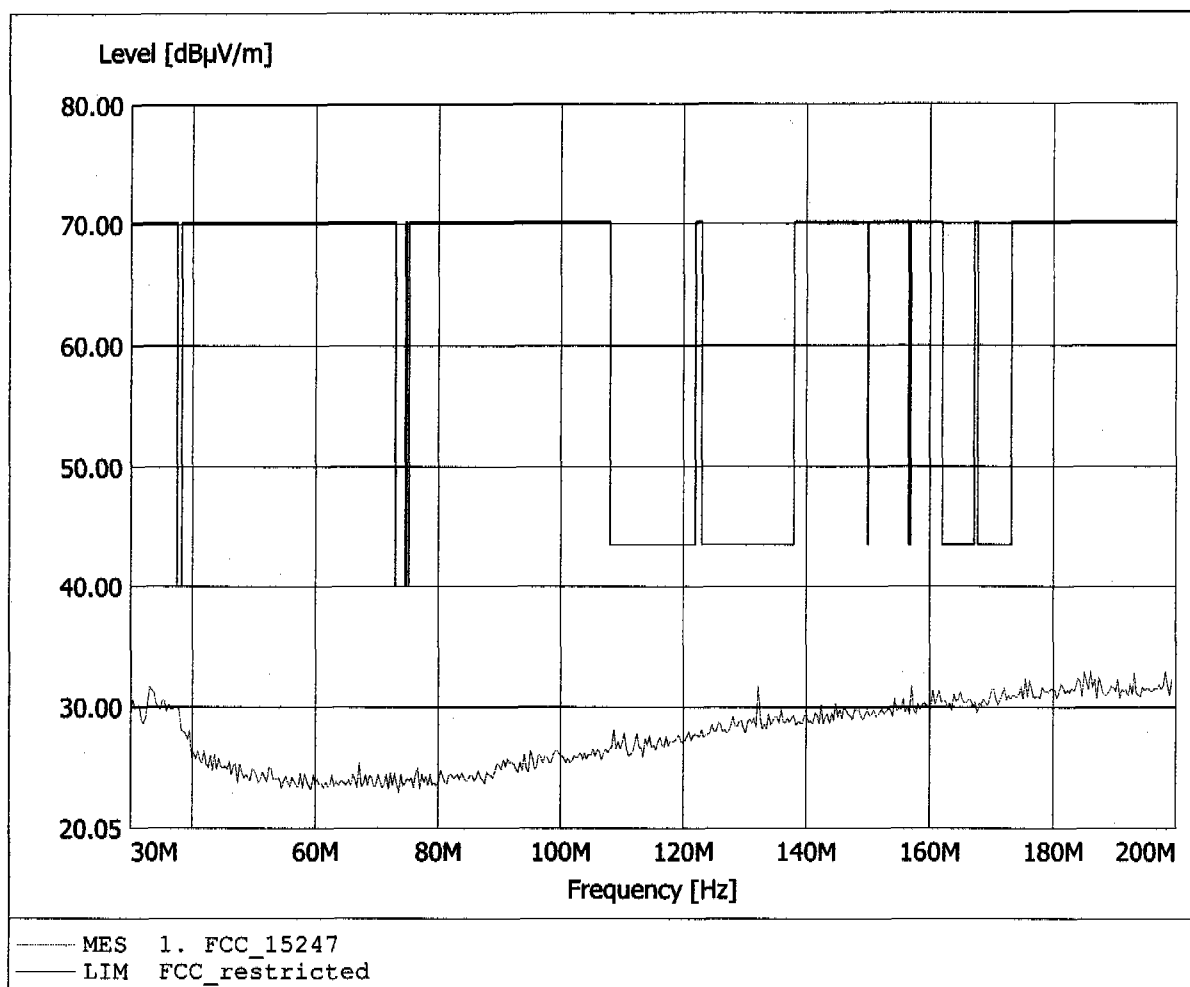


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2402MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 32.725MHz, Emax: 36.91dBµV/m, RBW: 100kHz

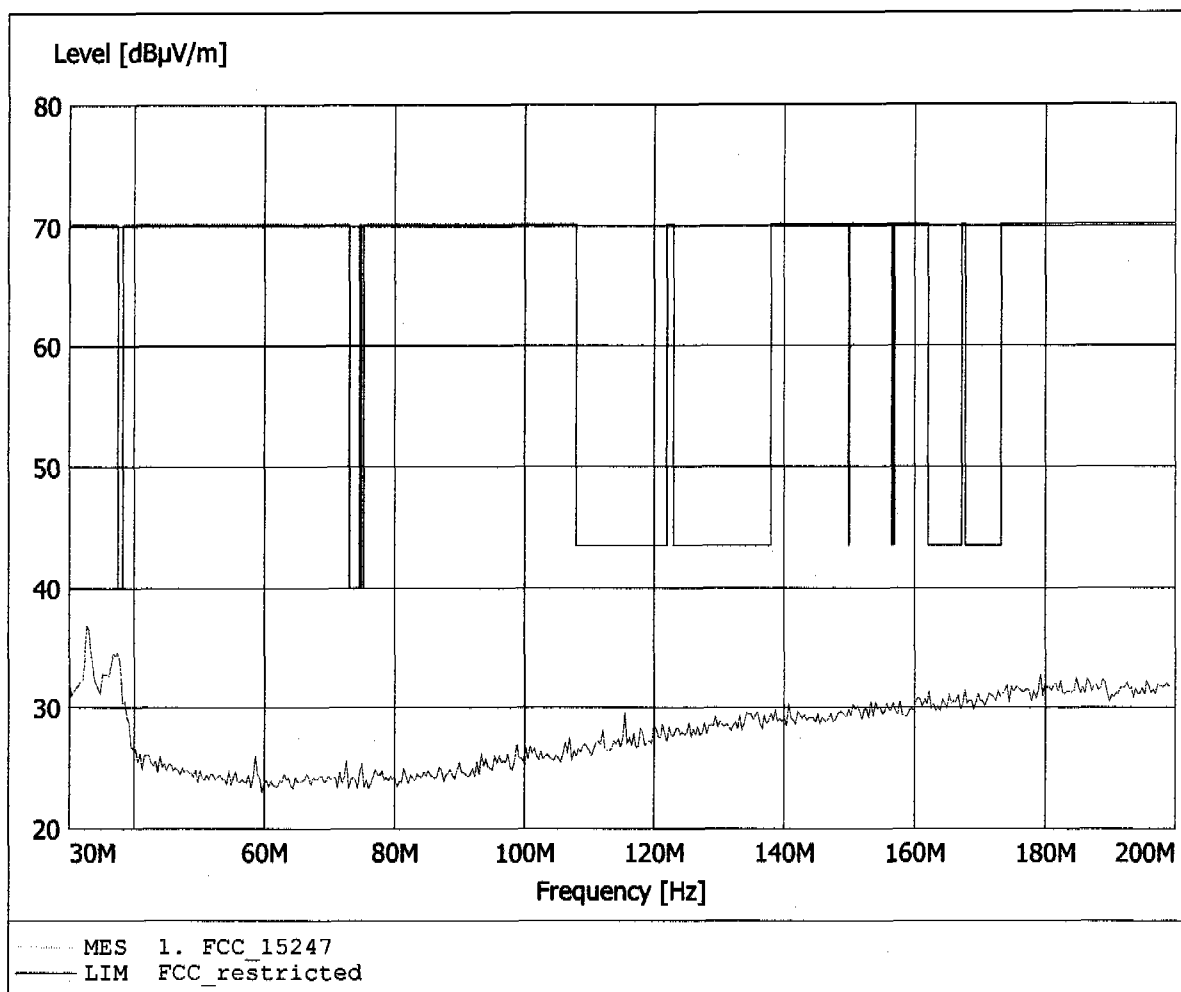


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2402MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 594.389MHz, Emax: 32.22dBµV/m, RBW: 100kHz

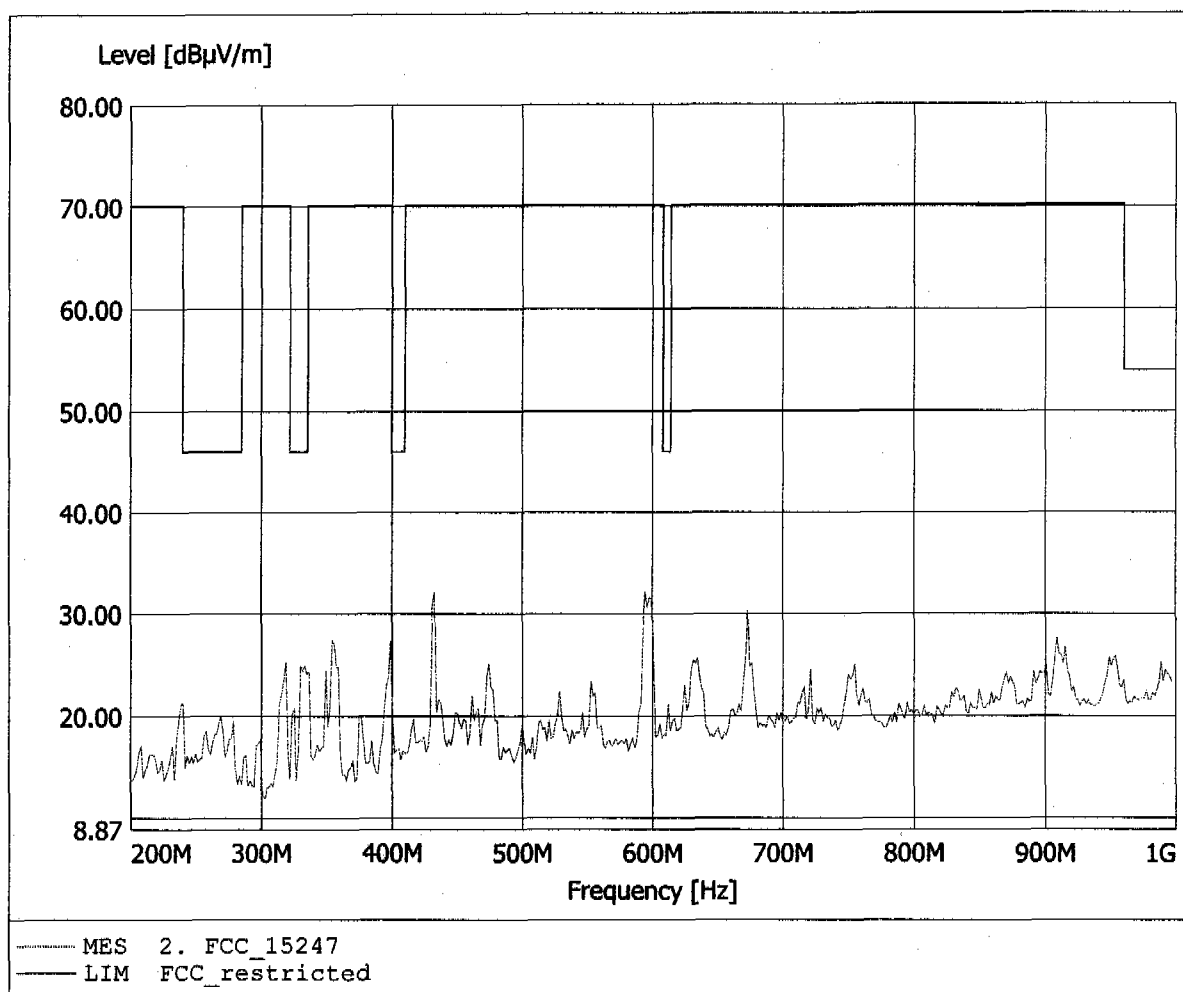


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2402MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 599.198MHz, Emax: 35.16dBµV/m, RBW: 100kHz

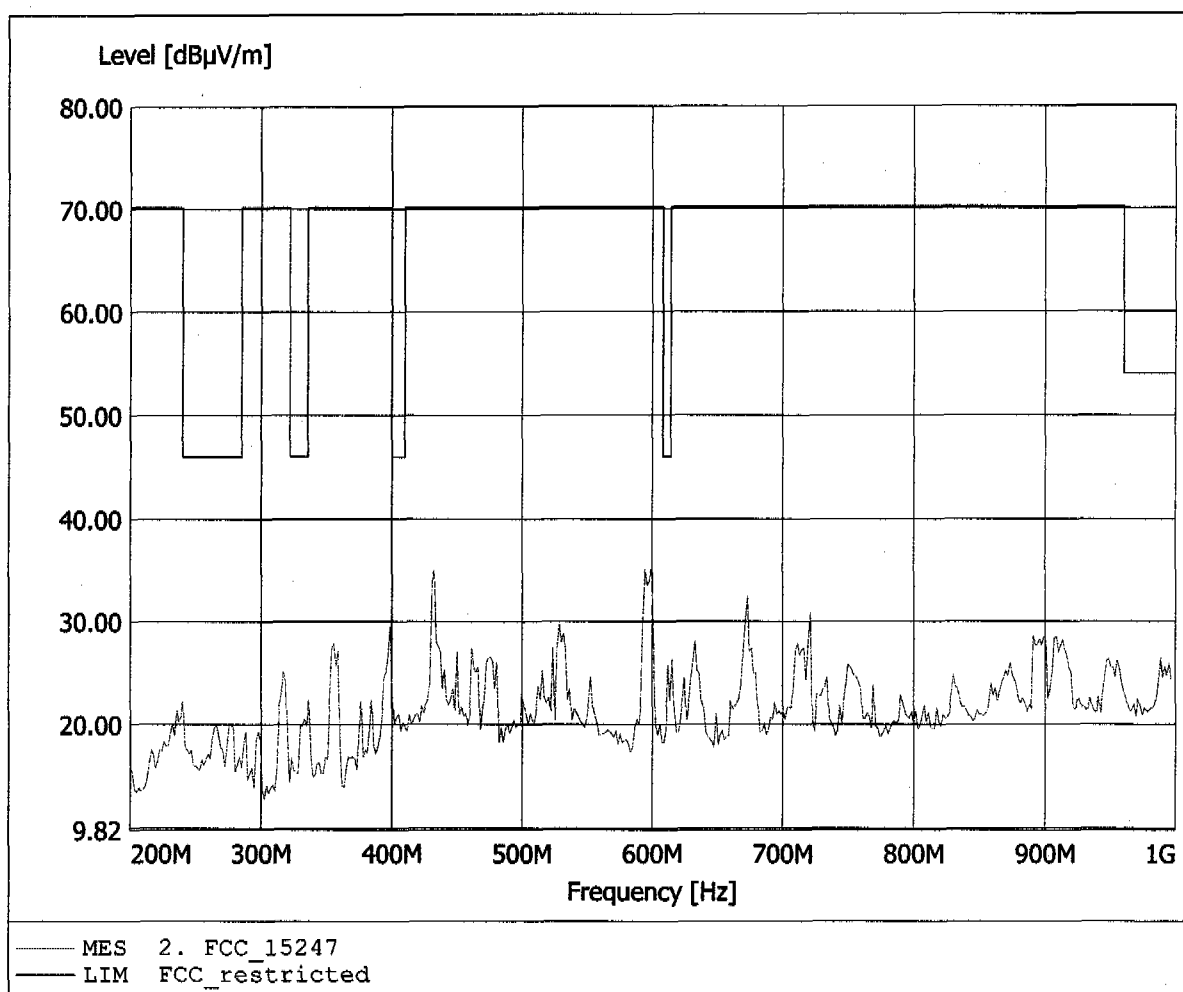


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2402MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 62.30dBµV/m, RBW: 1MHz

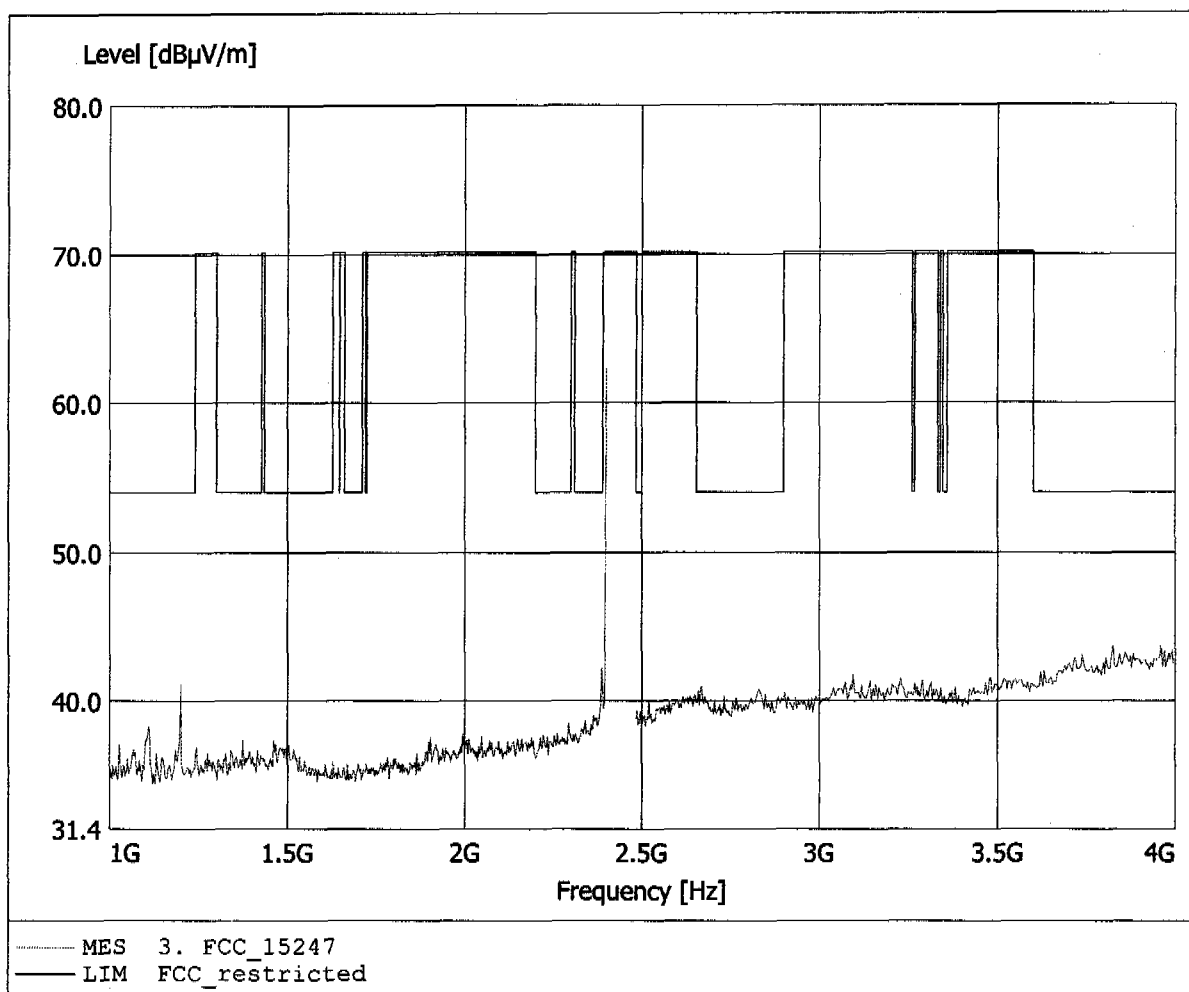


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2402MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 62.30dBµV/m, RBW: 1MHz

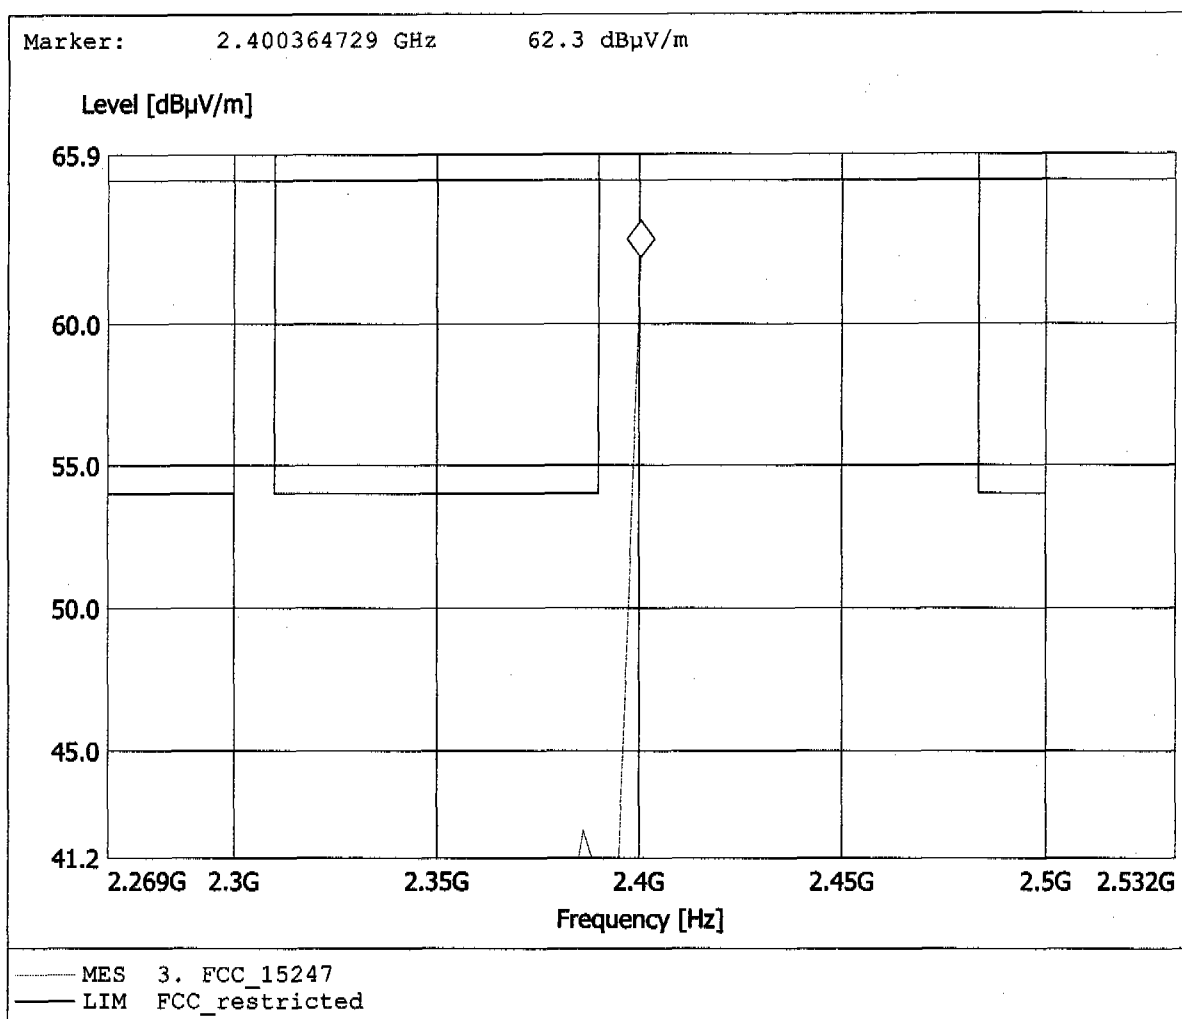


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2402MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 62.14dBµV/m, RBW: 1MHz

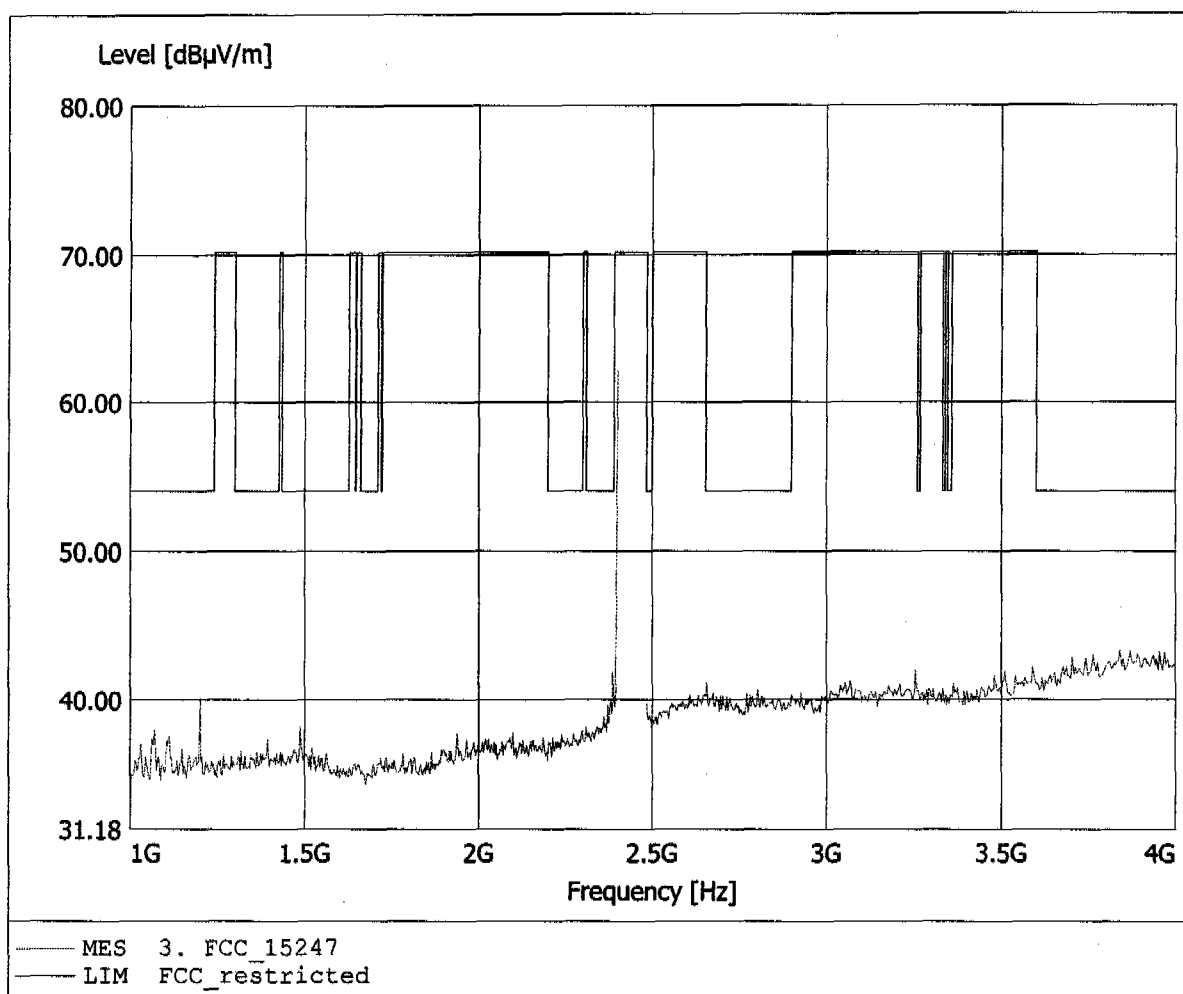


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2402MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 62.14dBµV/m, RBW: 1MHz

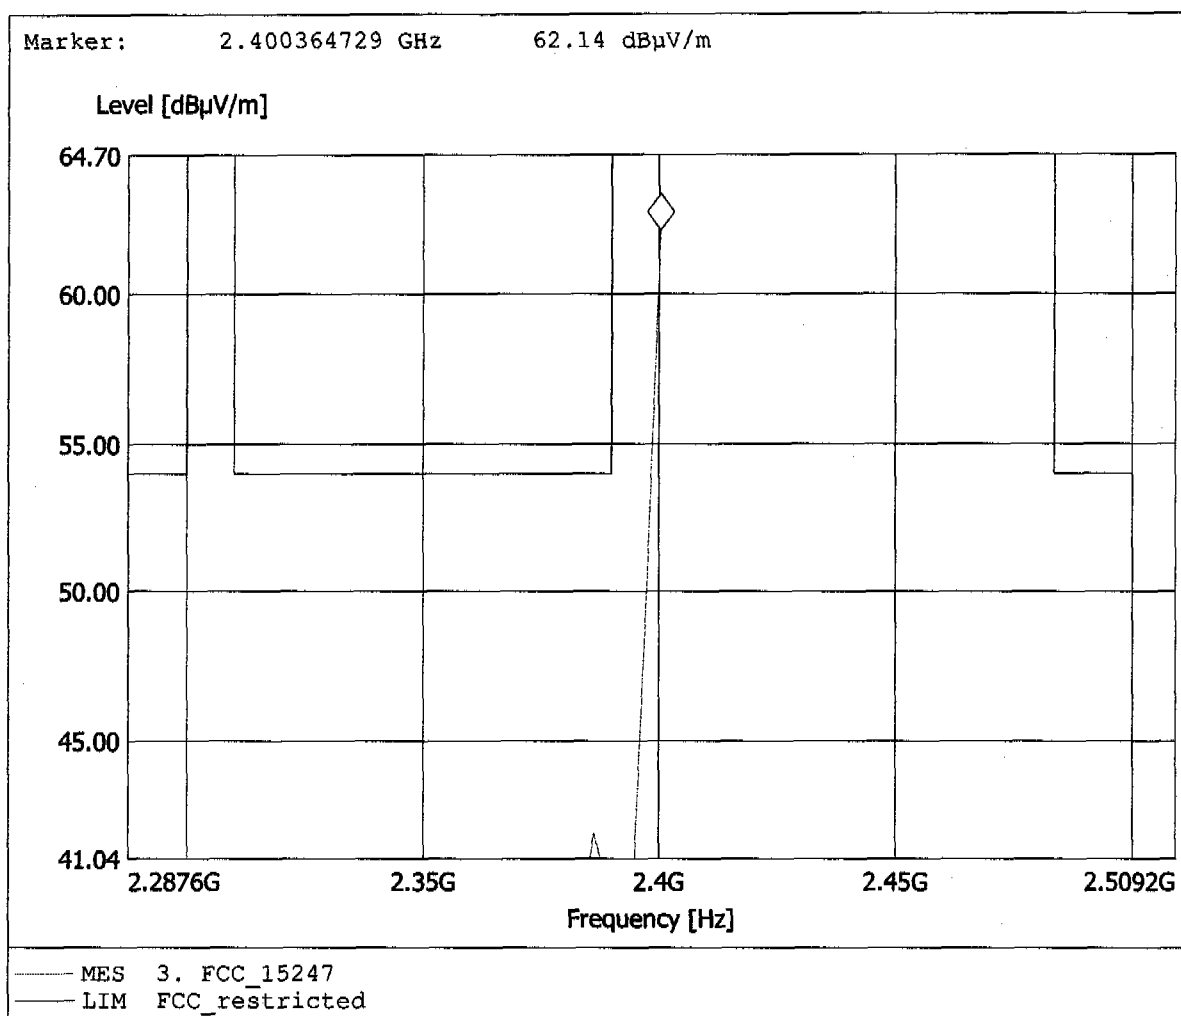


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2402MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.992GHz, Emax: 38.70dBµV/m, RBW: 1MHz

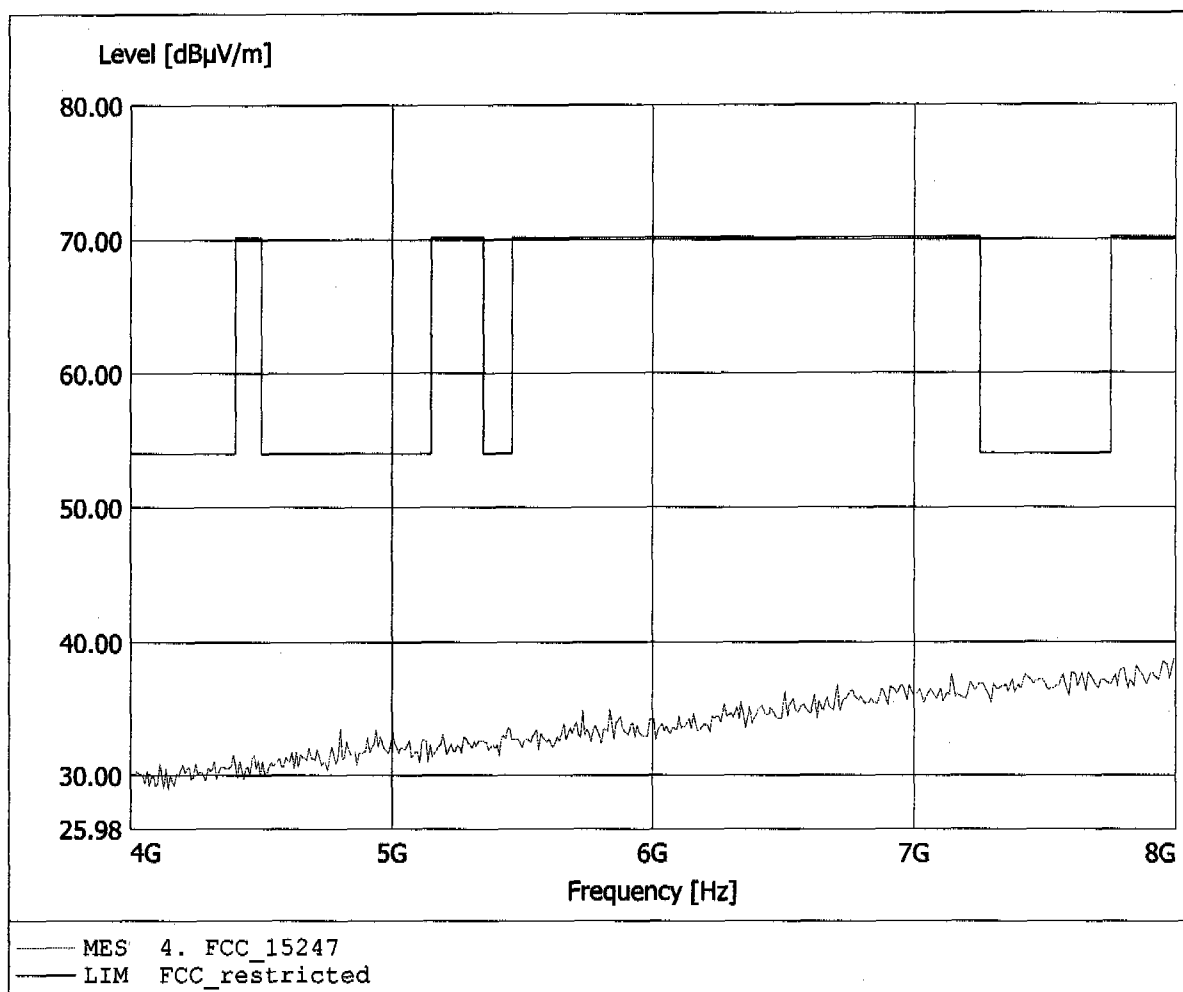


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2402MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.960GHz, Emax: 39.37dBµV/m, RBW: 1MHz

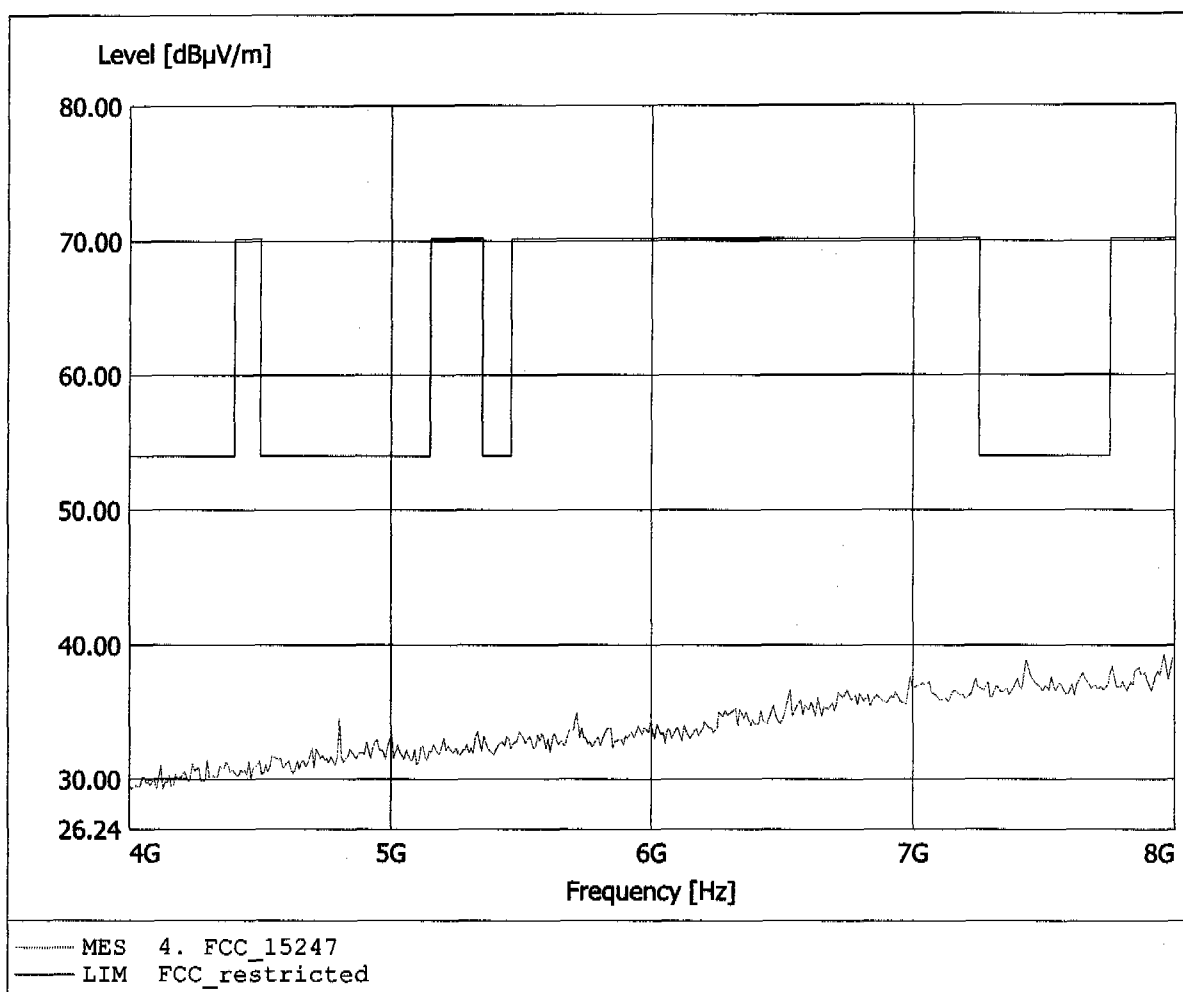


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2402MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.078GHz, Emax: 42.26dBµV/m, RBW: 1MHz

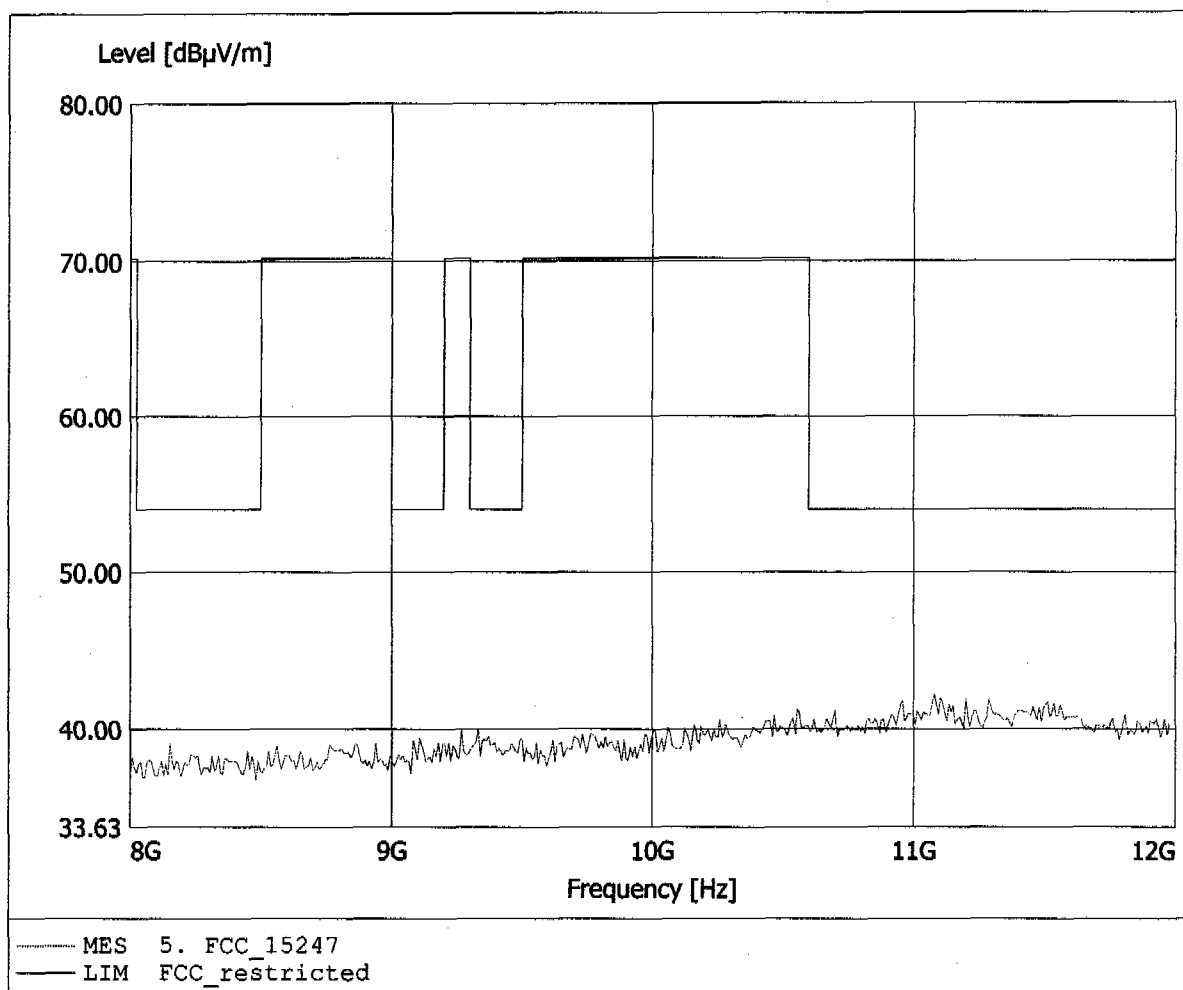


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2402MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.463GHz, Emax: 42.52dBµV/m, RBW: 1MHz

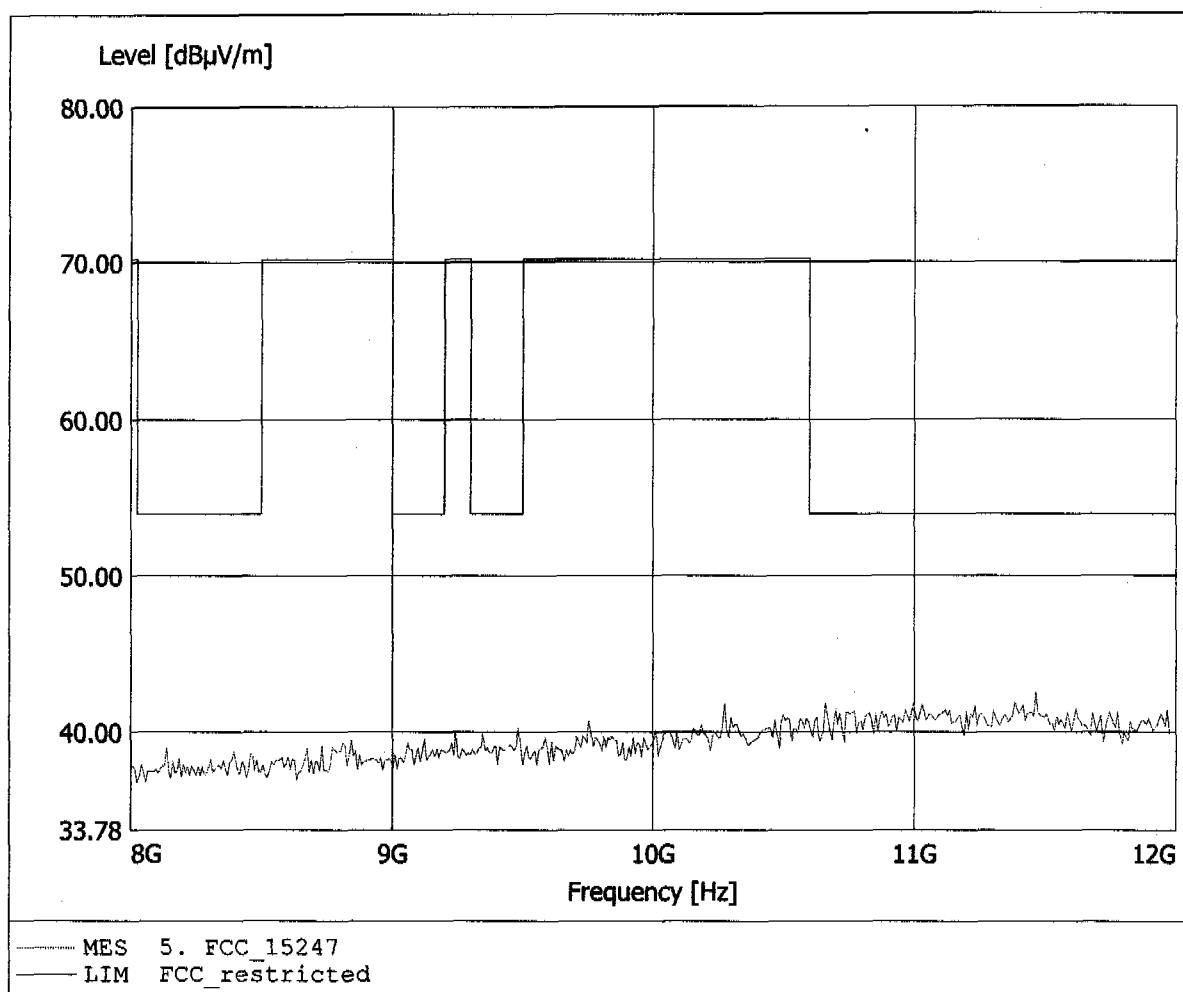


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2402MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.485GHz, Emax: 45.01dBµV/m, RBW: 1MHz

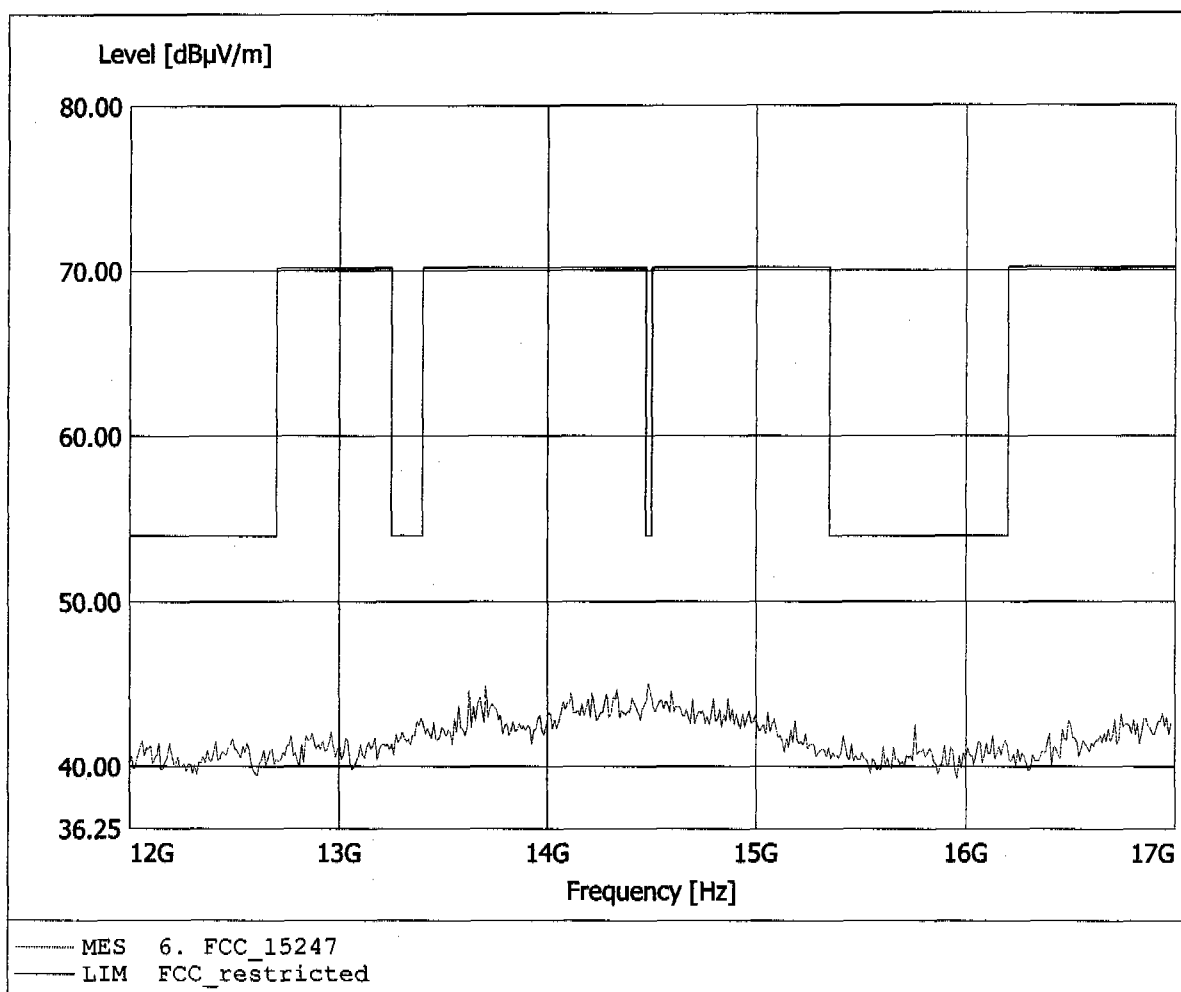


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2402MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.385GHz, Emax: 45.06dBµV/m, RBW: 1MHz

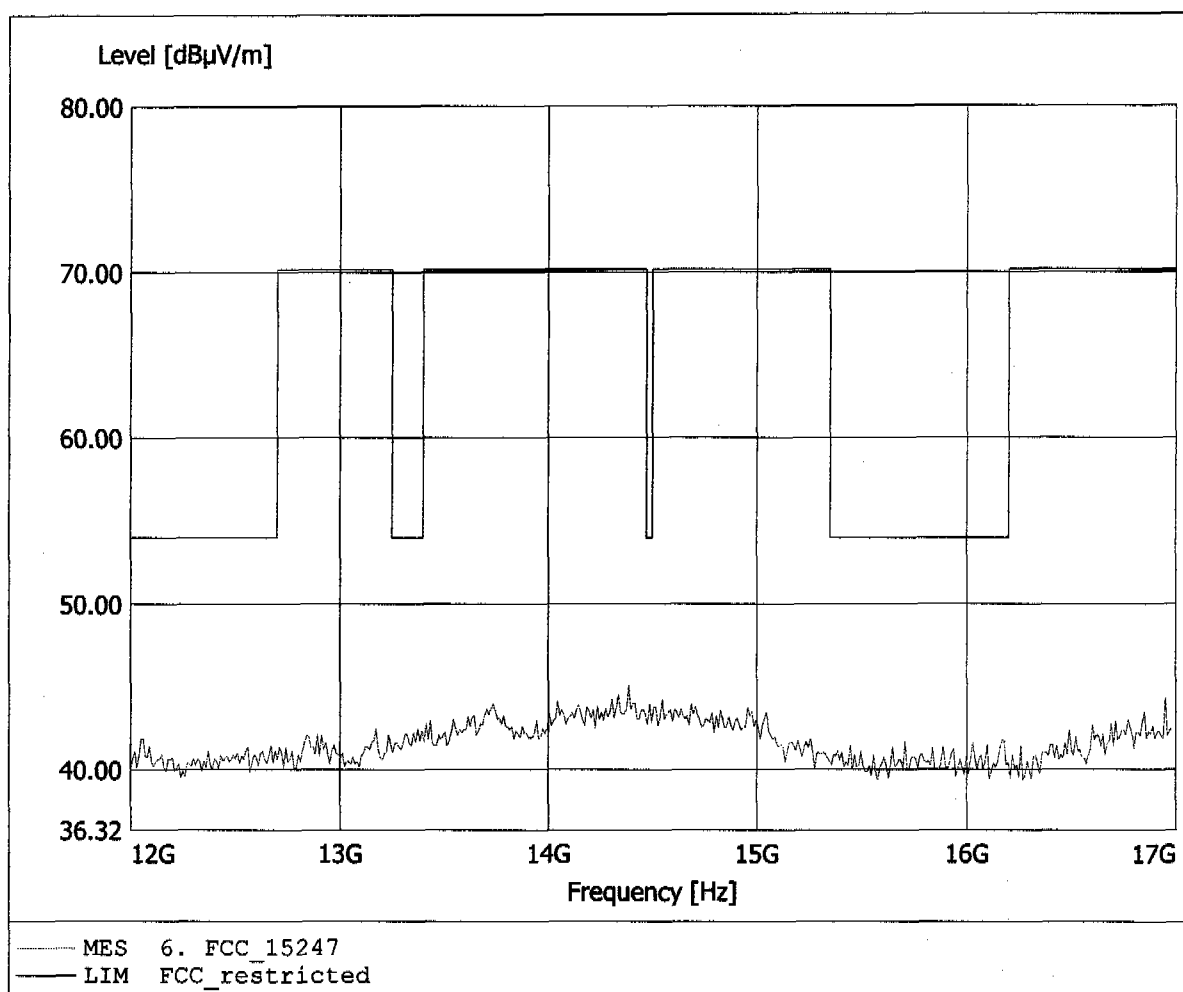


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2402 MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.114GHz, Emax: 45.32dBµV/m, RBW: 1MHz

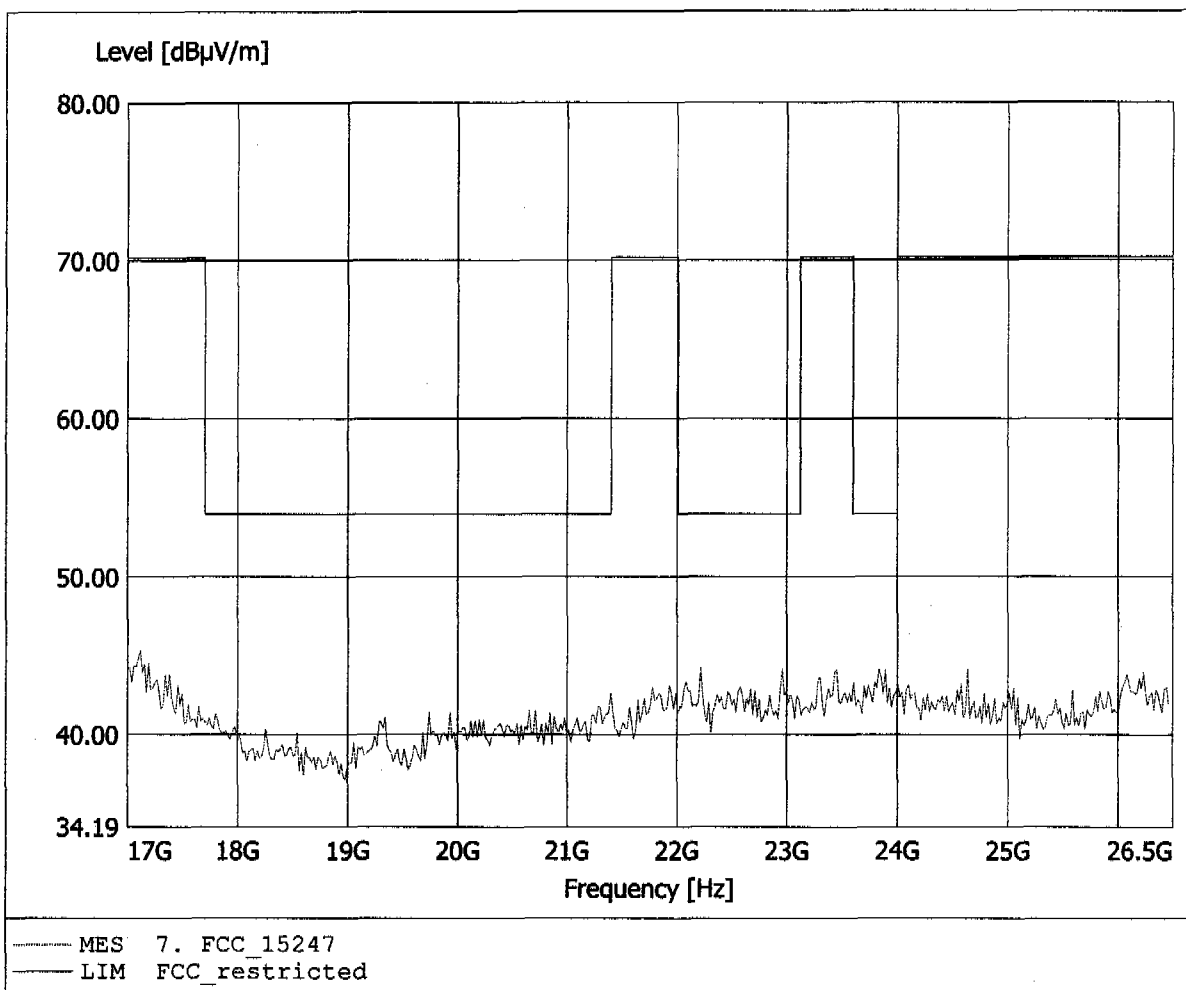

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset / 2402 MHz
Model: Jabra BT110
Test Site / Operator: ETS / Mr. Meng
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.095GHz, Emax: 45.26dBµV/m, RBW: 1MHz

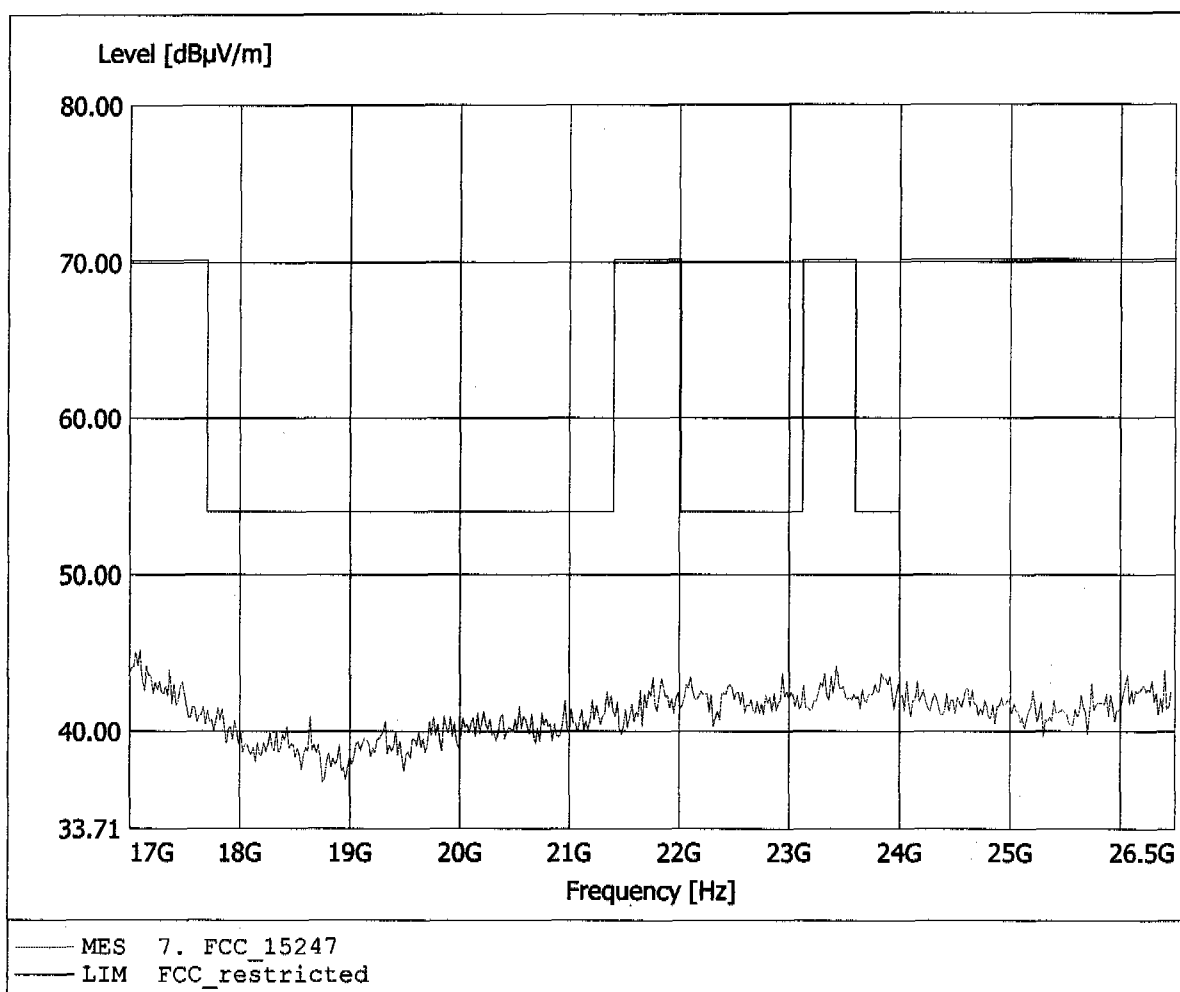

Appendix D


Spurious Emissions conducted - Transmitter operating

Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl 0.04 dB VBW 100 kHz
10 dBm 1.00080160 MHz SWT 5 ms Unit dBm

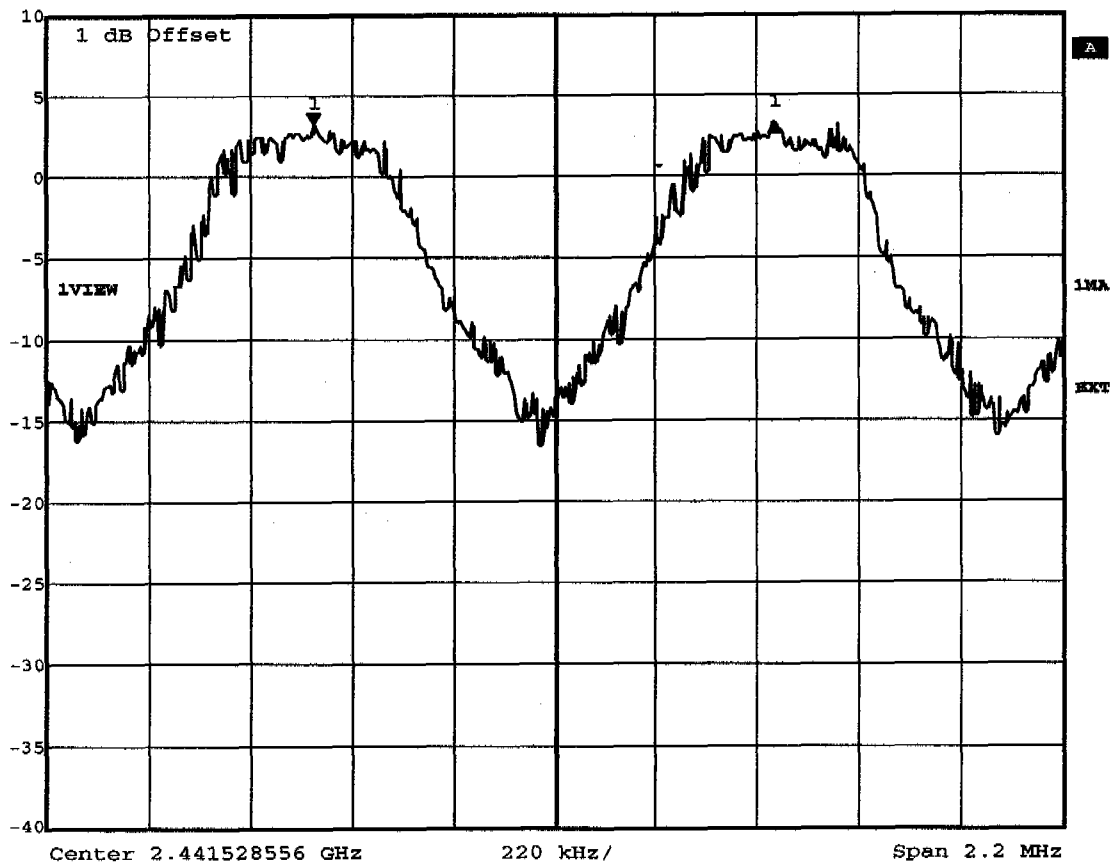

Title: Carrier Frequency Separation
Comment A: Jabra BT110
Date: 29.JUL.2004 09:45:32


Appendix F

Number of Hopping Frequencies



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

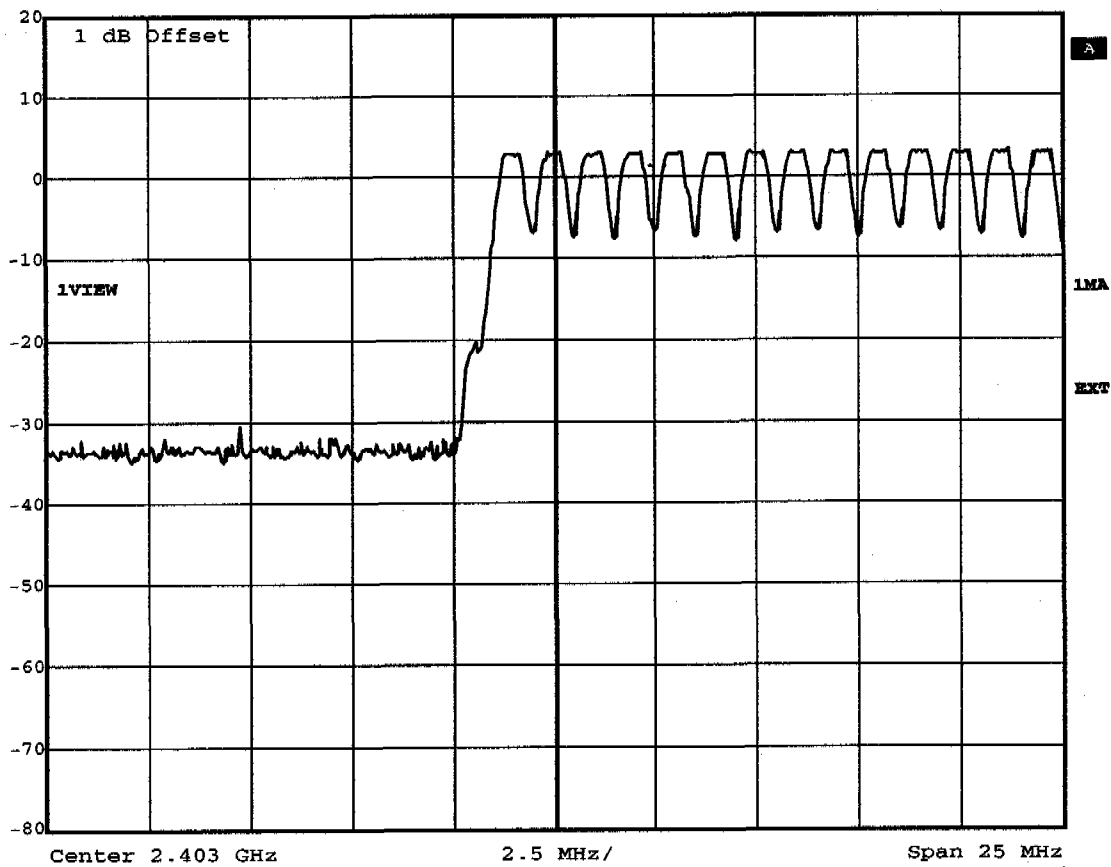


Title: Number of Hopping Frequencies Ch.: 0-13
Comment A: Jabra BT110
Date: 29.JUL.2004 09:51:33



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

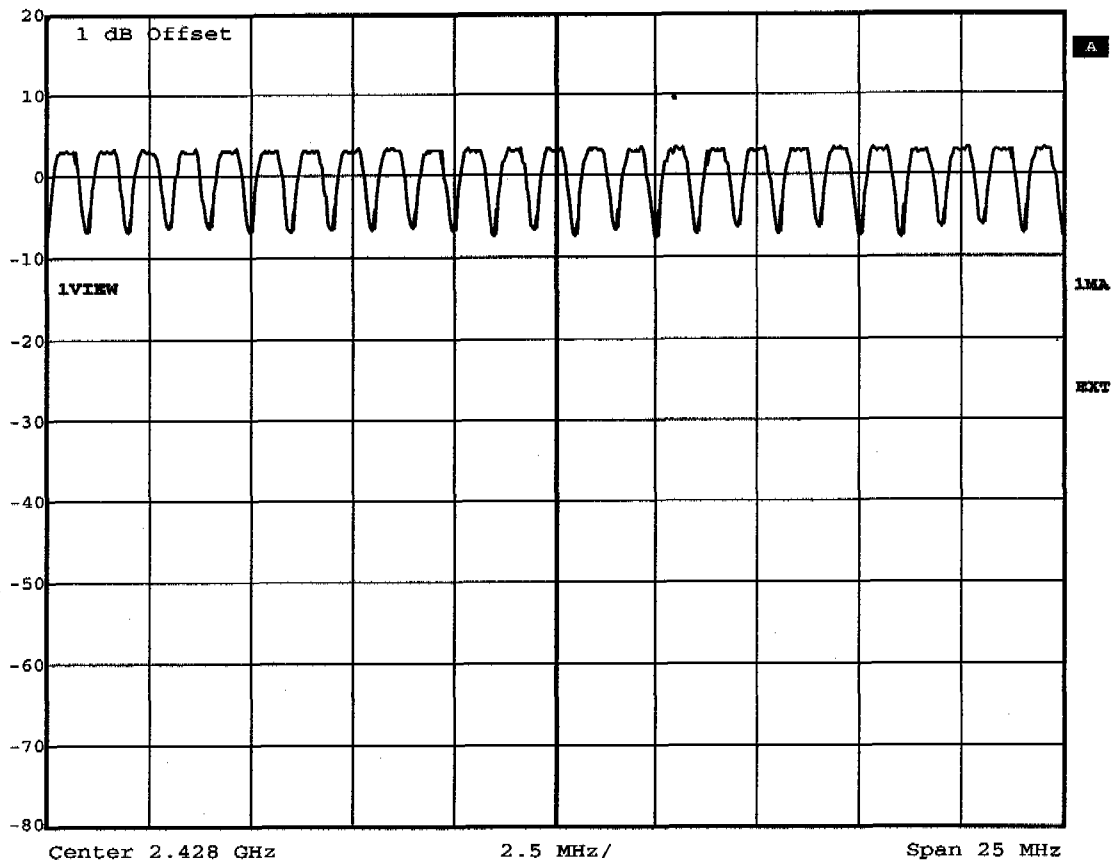


Title: Number of Hopping Frequencies Ch.: 14-38
Comment A: Jabra BT110
Date: 29.JUL.2004 09:52:55



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

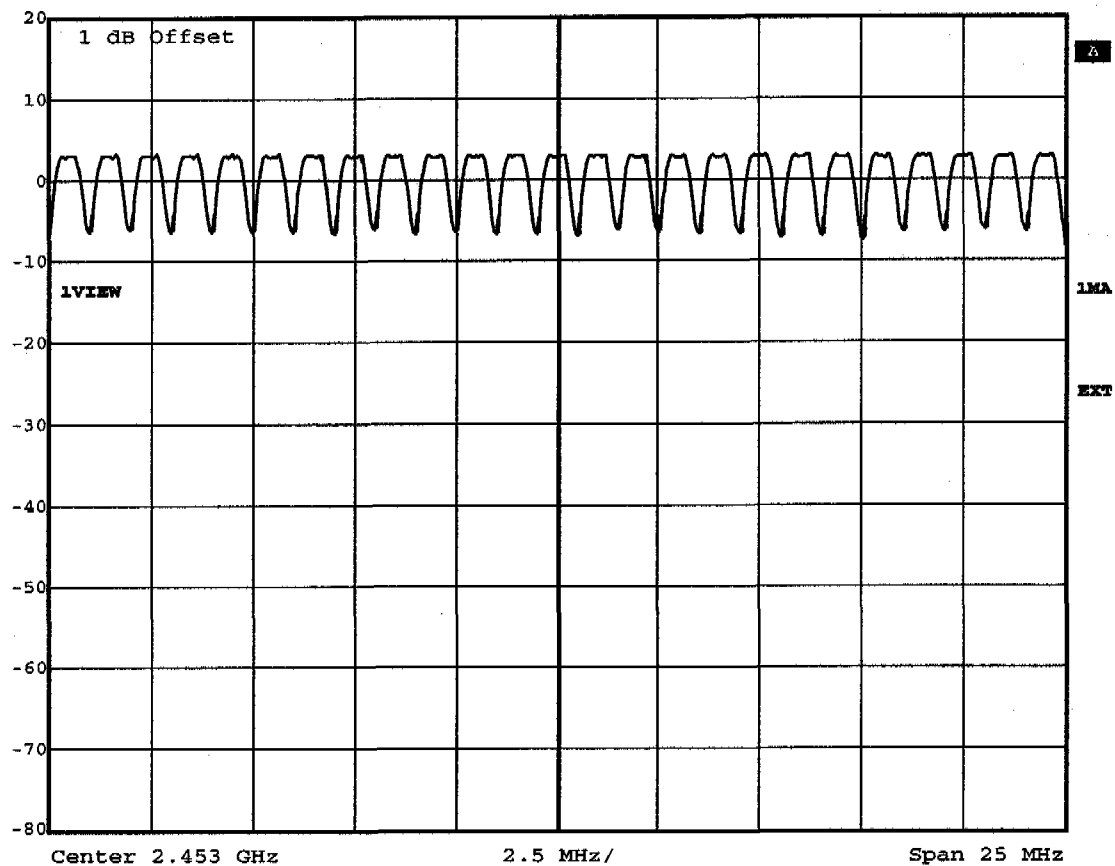


Title: Number of Hopping Frequencies Ch.: 39-63
Comment A: Jabra BT110
Date: 29.JUL.2004 09:56:21



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

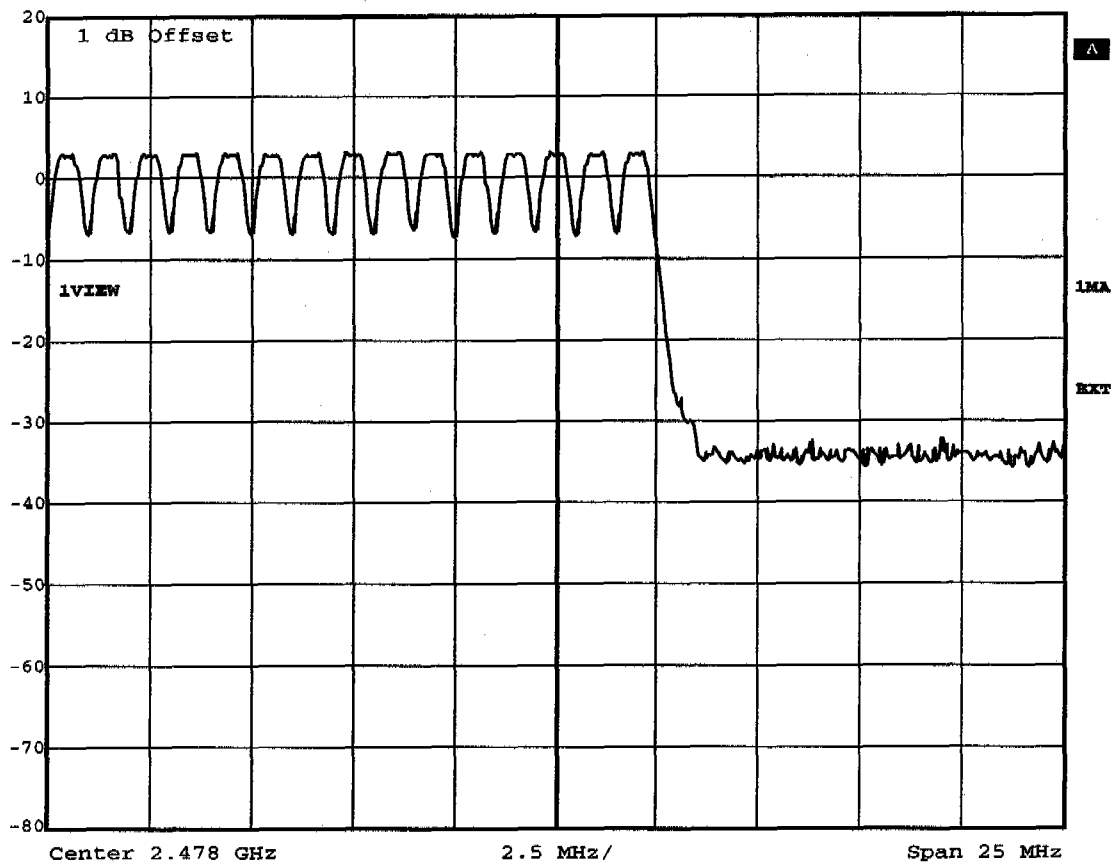


Title: Number of Hopping Frequencies Ch.: 64-78
Comment A: Jabra BT110
Date: 29.JUL.2004 09:57:33

Appendix G

Time of Occupancy (Dwell Time)




Delta 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl -0.11 dB VBW 1 MHz
10 dBm 2.912689 ms SWT 5 ms Unit dBm

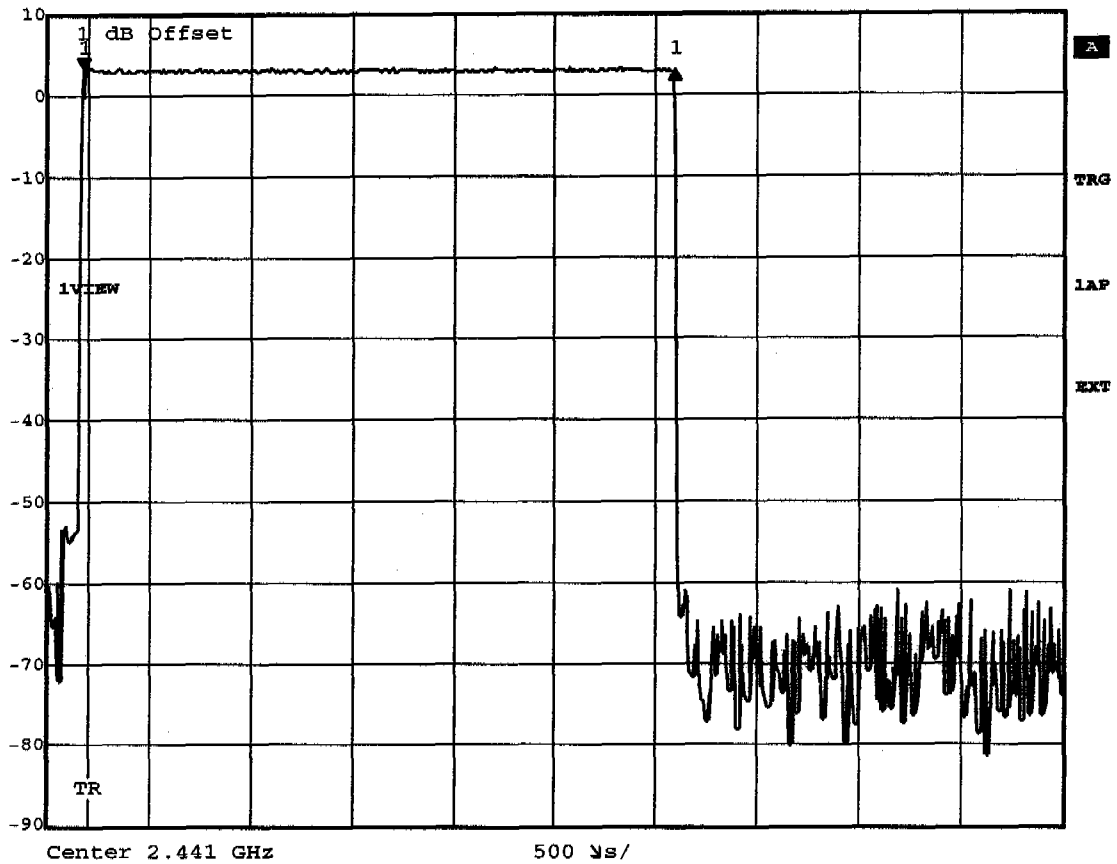

Title: Time of occupancy (Hopping DH5) 64 events * 2.913ms=186.43ms
Comment A: Jabra BT110
Date: 29.JUL.2004 09:33:39



Delta 2 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl -0.15 dB VBW 1 MHz
28 dBm 6.288377 ms SWT 11 ms Unit dBm

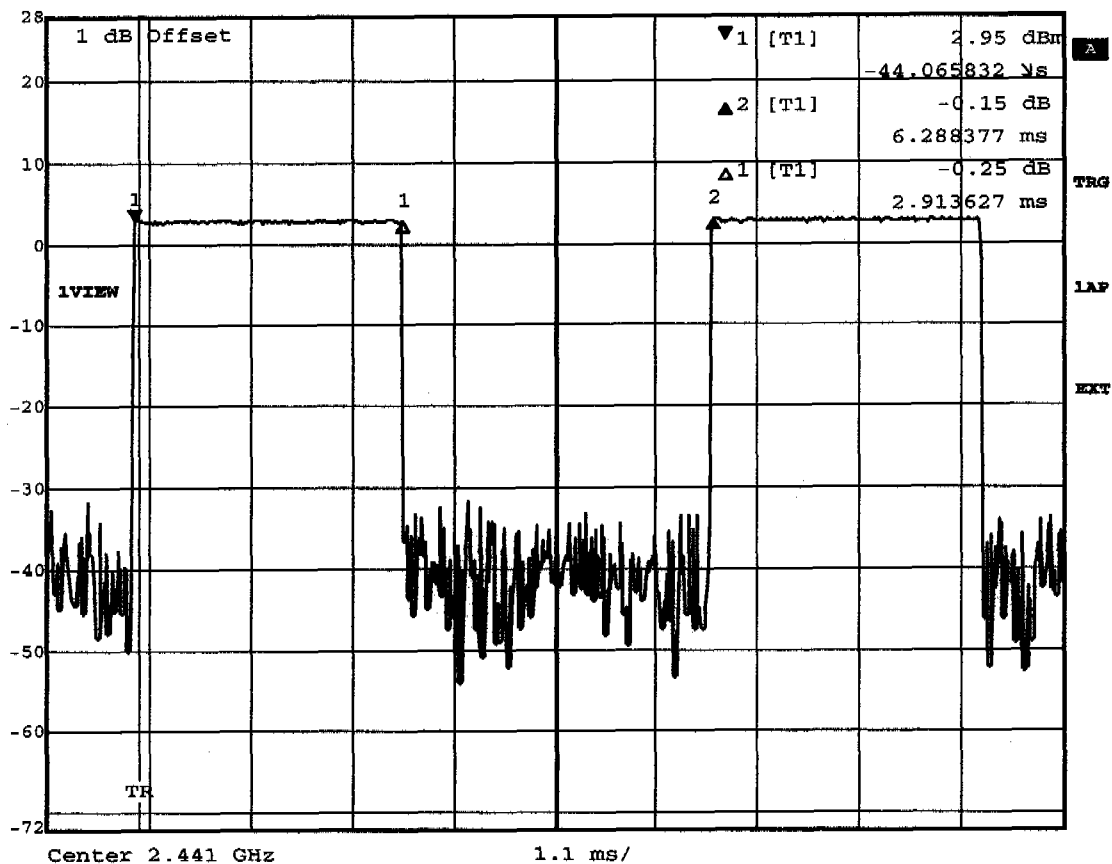


Title: Duty Cycle
Comment A: Jabra BT110
Date: 29.JUL.2004 08:48:34

Appendix H

20dB Bandwidth




Delta 1 [T1] RBW 10 kHz RF Att 40 dB
Ref Lvl -0.71 dB VBW 10 kHz
20 dBm 824.44889779 kHz SWT 56 ms Unit dBm

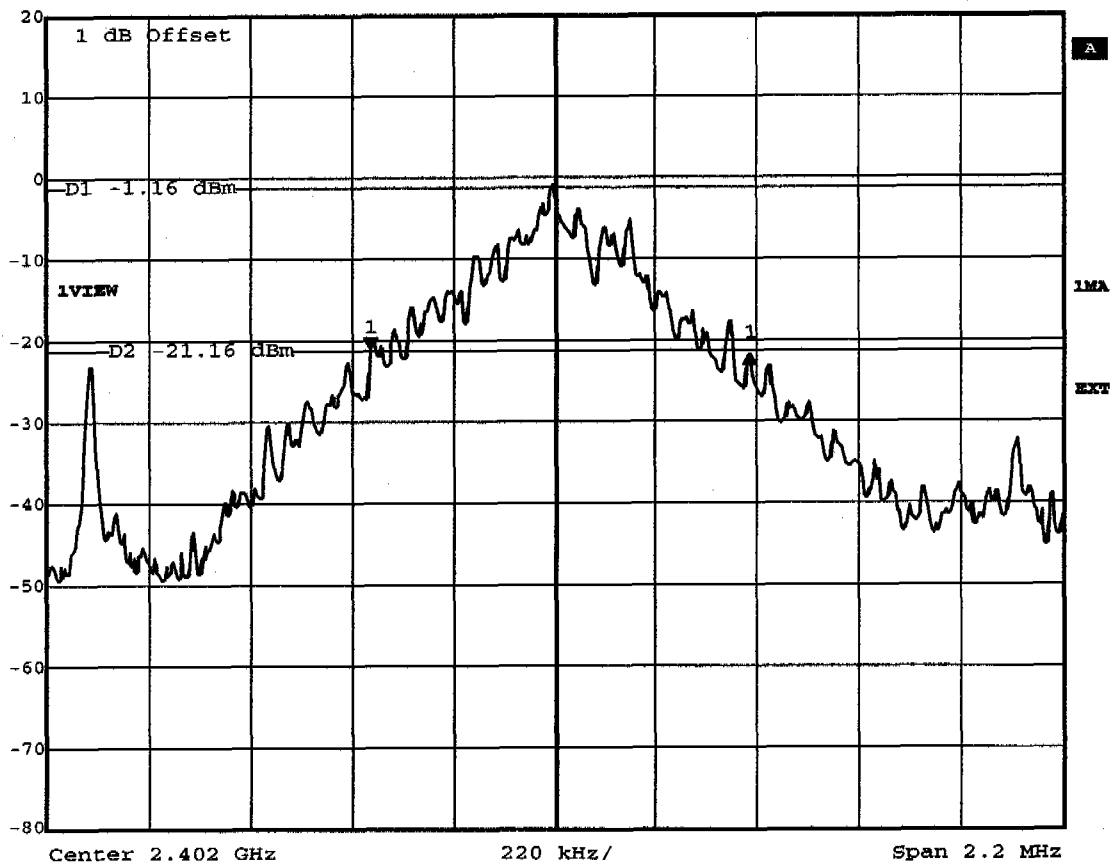

Title: -20dB Bandwidth Ch.: 0
Comment A: Jabra BT110
Date: 29.JUL.2004 08:44:40




Delta 1 [T1] RBW 10 kHz RF Att 40 dB
Ref Lvl -0.47 dB VBW 10 kHz
20 dBm 824.44889779 kHz SWT 56 ms Unit dBm

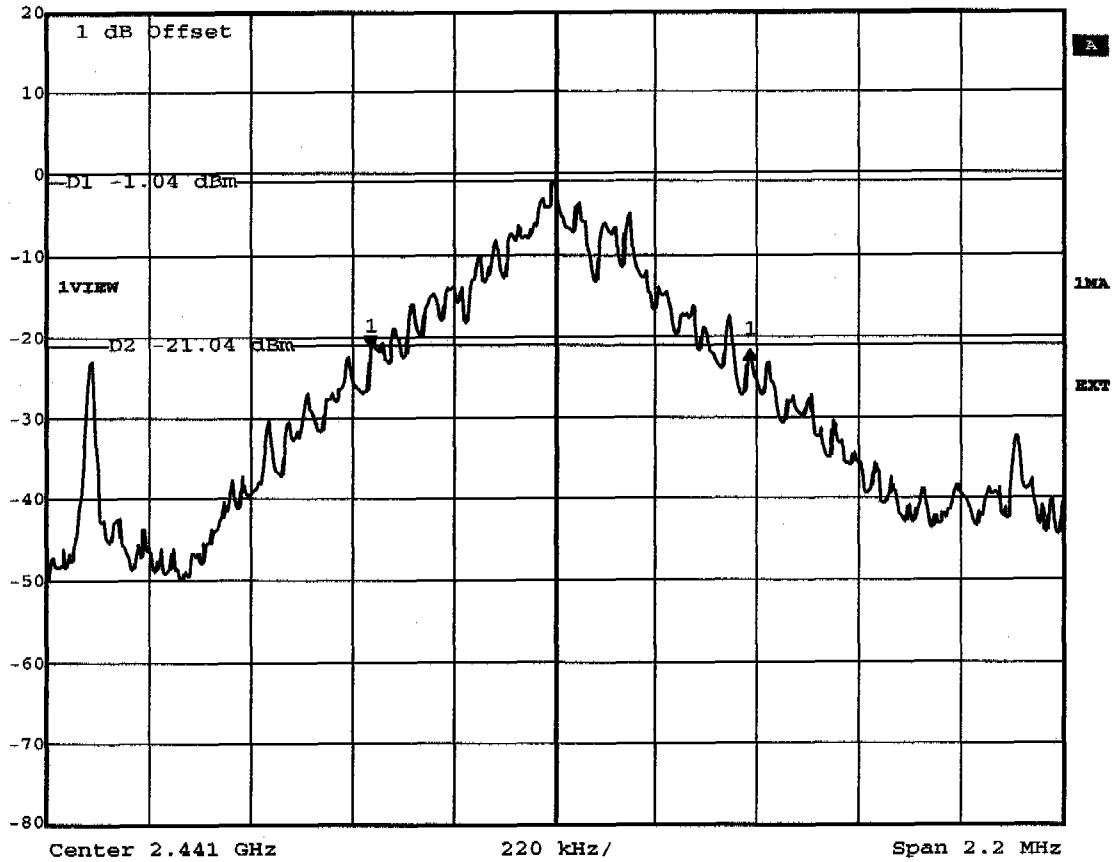

Title: -20dB Bandwidth Ch.: 39
Comment A: Jabra BT110
Date: 29.JUL.2004 08:45:50



Delta 1 [T1] RBW 10 kHz RF Att 40 dB
Ref Lvl -0.77 dB VBW 10 kHz
20 dBm 824.44889780 kHz SWT 56 ms Unit dBm

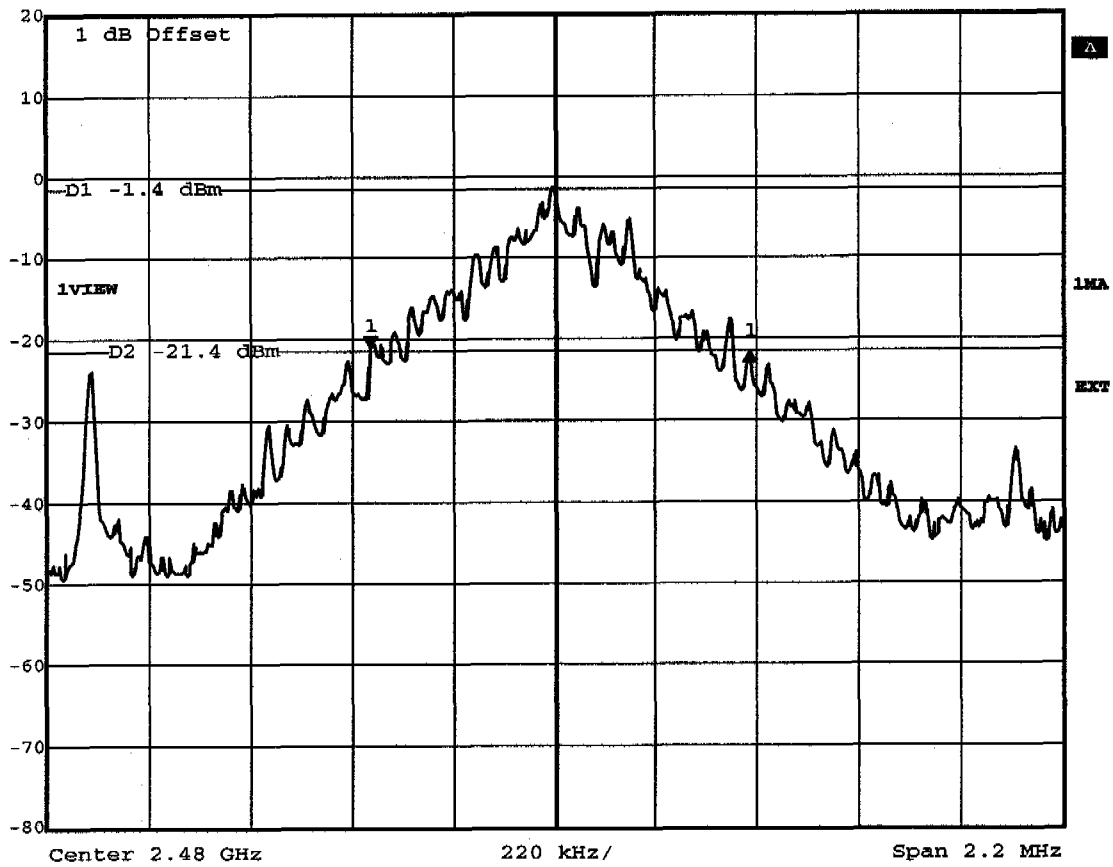


Title: -20dB Bandwidth Ch.: 78
Comment A: Jabra BT110
Date: 29.JUL.2004 08:41:44

Appendix I

Band-edge Compliance of RF Emissions




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 38.37 dB VBW 50 kHz
25 dBm 2.00300601 MHz SWT 5 ms Unit dBm

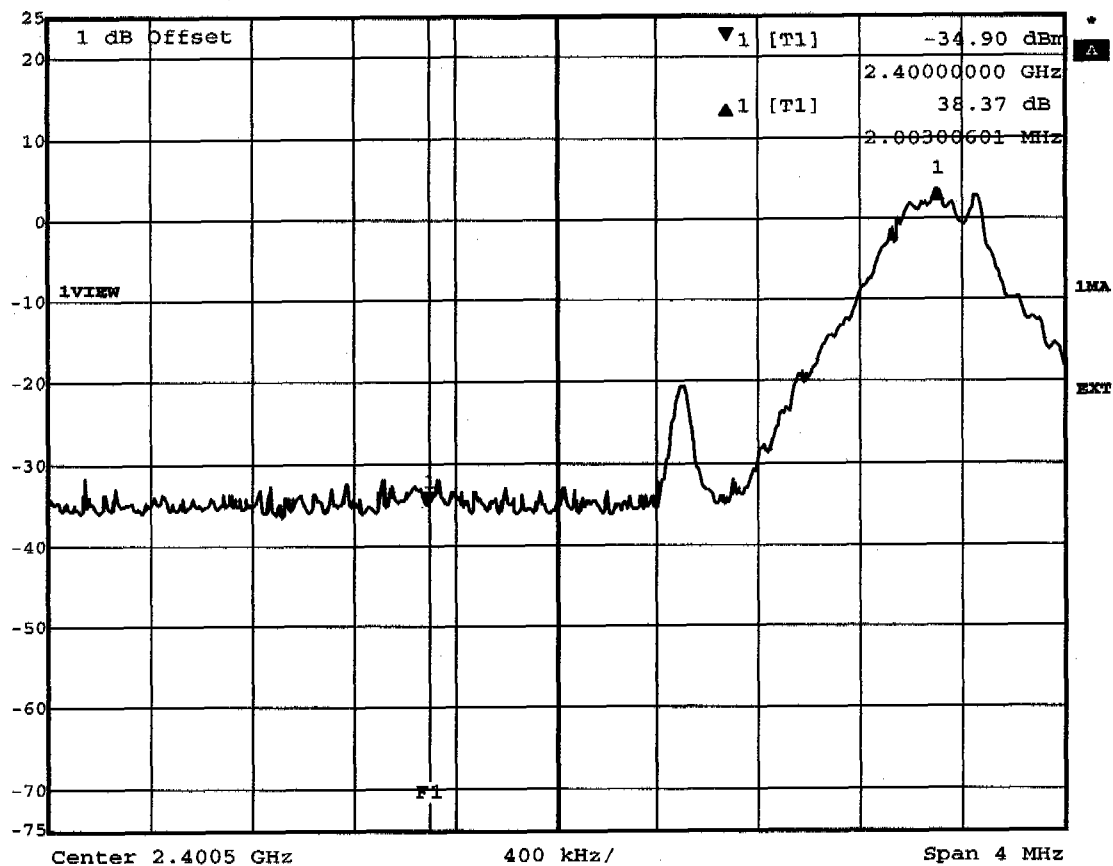

Title: Band-edge Compliance (conducted, single frequency)
Comment A: Jabra BT110
Date: 29.JUL.2004 09:02:37




Delta 1 [T1] REW 50 kHz RF Att 50 dB
Ref Lvl 35.87 dB VBW 50 kHz
26 dBm 2.00124248 MHz SWT 5 ms Unit dBm

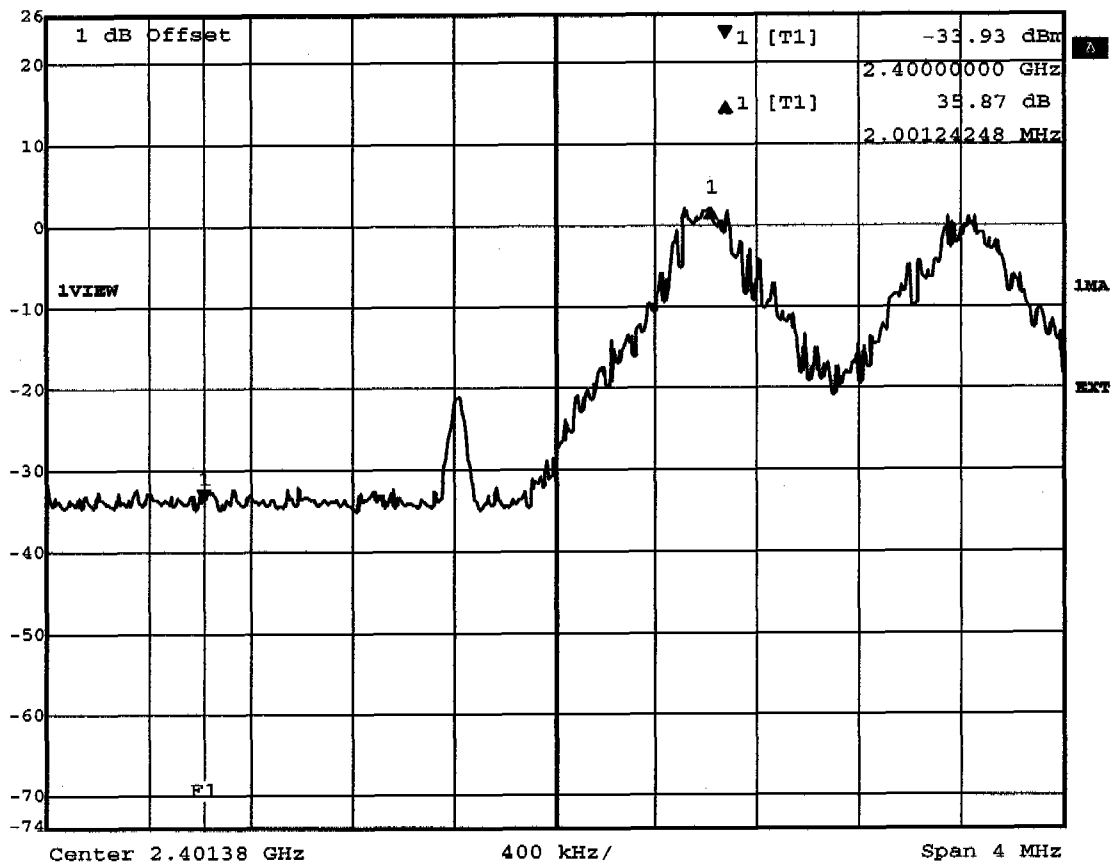

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: Jabra BT110
Date: 29.JUL.2004 09:15:41



Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 35.90 dB VBW 50 kHz
26 dBm -3.55759519 MHz SWT 5 ms Unit dBm

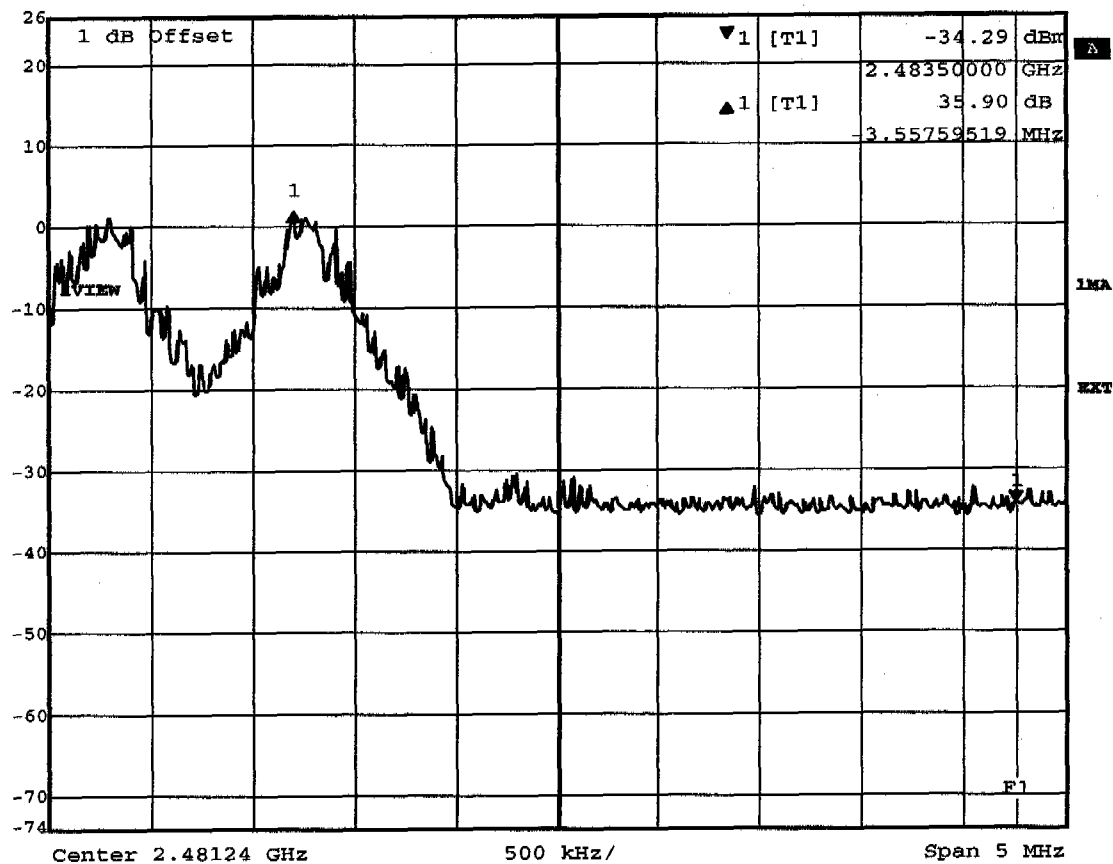

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: Jabra BT110
Date: 29.JUL.2004 09:10:15

Appendix J

Conducted Measurement at (AC) Power Line