

# RF Test Report

For

**HUNAN FN-LINK TECHNOLOGY LIMITED**

Test Standards:	<u>Part 15C Subpart C §15.247</u>
Product Name:	<u>WIFI+BT Module</u>
Tested Model:	<u>K255B-SR</u>
Brand Name:	<b>FN-LINK</b>
FCC ID:	<u>2AATL-K255B-SR</u>
Classification	<u>(DTS) Digital Transmission System</u>
Report No.:	<u>EC2105014RF04</u>
Tested Date:	<u>2021-05-25 to 2021-07-14</u>
Issued Date:	<u>2021-07-14</u>
Prepared By:	<u>Jack Liu</u> Jack Liu / Engineer
Approved By:	<u>Tiny Yang</u> Tiny Yang / RF Manager

**Hunan Ecloud Testing Technology Co., Ltd.**  
Building A1, Changsha E Center, No. 18 Xiangtai Avenue, Liuyang Economic and  
Technological Development Zone, Hunan, P.R.C  
Tel.: +86-731-89634887 Fax.: +86-731-89634887  
[www.hn-ecloud.com](http://www.hn-ecloud.com)

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Hunan Ecloud Testing Technology Co., Ltd., the test report shall not be reproduced except in full.

## Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	2021.07.14	Valid	Original Report

## TABLE OF CONTENTS

<b>1. GENERAL DESCRIPTION.....</b>	<b>5</b>
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 General Description Of EUT.....	5
1.4 Modification of EUT.....	6
1.5 Applicable Standards.....	6
<b>2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>7</b>
2.1 Descriptions of Test Mode.....	7
2.2 Test Mode.....	7
2.3 Support Equipment.....	8
2.4 Test Setup.....	9
2.5 Measurement Results Explanation Example.....	12
<b>3. TEST RESULT .....</b>	<b>13</b>
3.1 6dB and 99% Bandwidth Measurement.....	13
3.2 Peak Output Power Measurement.....	14
3.3 Power Spectral Density Measurement.....	15
3.4 Conducted Band Edges and Spurious Emission Measurement.....	16
3.5 Radiated Band Edges and Spurious Emission Measurement.....	17
3.6 AC Conducted Emission Measurement.....	41
3.7 Antenna Requirements.....	44
<b>4. LIST OF MEASURING EQUIPMENT.....</b>	<b>45</b>
<b>5. UNCERTAINTY OF EVALUATION.....</b>	<b>47</b>
<b>APPENDIX A: DTS BANDWIDTH.....</b>	<b>48</b>
<b>APPENDIX B: OCCUPIED CHANNEL BANDWIDTH .....</b>	<b>55</b>
<b>APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER .....</b>	<b>62</b>
<b>APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY .....</b>	<b>69</b>
<b>APPENDIX E: BAND EDGE MEASUREMENTS .....</b>	<b>76</b>
<b>APPENDIX F: CONDUCTED SPURIOUS EMISSION .....</b>	<b>81</b>
<b>APPENDIX G: SETUP PHOTOGRAPHS.....</b>	<b>101</b>

## Summary of Test RESULT

FCC Rule	Description	Limit	Result	Remark
15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
-	99% Bandwidth	-	Pass	-
15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 2.58 dB at 9608 MHz
15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 15.51 dB at 0.549 MHz
15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

## 1. General Description

### 1.1 Applicant

**HUNAN FN-LINK TECHNOLOGY LIMITED**

No. 8 , Litong Road , Liuyang Economic Development Zone , Liuyang City, Hunan Province, China

### 1.2 Manufacturer

**HUNAN FN-LINK TECHNOLOGY LIMITED**

No. 8 , Litong Road , Liuyang Economic Development Zone , Liuyang City, Hunan Province, China

### 1.3 General Description Of EUT

<b>Product</b>	WIFI+BT Module
<b>Model No.</b>	K255B-SR
<b>Additional No.</b>	N/A
<b>Difference Description</b>	N/A
<b>FCC ID</b>	2AATL-K255B-SR
<b>Power Supply</b>	3.3Vdc for EUT
<b>Modulation Technology</b>	BLE
<b>Modulation Type</b>	GFSK
<b>Operating Frequency</b>	2402MHz~2480MHz
<b>Number Of Channel</b>	40
<b>Max. Output Power</b>	6.85 dBm (0.0048 W)
<b>Antenna Type</b>	FPC Antenna with 2dBi gain
<b>HW Version</b>	V5.0
<b>SW Version</b>	V5.0
<b>I/O Ports</b>	Refer to user's manual

**NOTE:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

## 1.4 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013
- ♦ KDB 558074 D01 15.247 Meas Guidance v05r02

### Remark:

1. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B , recorded in a separate test report.

## 2. Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

The transmitter has a maximum peak conducted output power as follows:

TestMode	Channel	Result[dBm]
BLE_125K	2402	6.34
	2440	6.59
	2480	6.77
BLE_1M	2402	6.4
	2440	6.66
	2480	6.85
BLE_2M	2402	6.23
	2440	6.46
	2480	6.76
BLE_500K	2402	6.31
	2440	6.65
	2480	6.83
BLE_BT5.0	2402	6.34
	2440	6.59
	2480	6.77

- Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.
- The data rate was set in 1Mbps for all the test items due to the highest RF output power

## 2.2 Test Mode

### 2.2.1 Antenna Port Conducted Measurement

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 5.0 – LE GFSK 1Mbps
Conducted Test Cases	Mode 1: CH00_2402 MHz Mode 2: CH19_2440 MHz Mode 3: CH39_2480 MHz

### 2.2.2 Radiated Emission Test (Below 1GHz)

Radiated Test Cases	Bluetooth 5.0 – LE GFSK 1Mbps
	Mode 1: CH00_2402 MHz

Note : 1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type. Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

2. Following channel(s) was (were) selected for the final test as listed above

### 2.2.3 Radiated Emission Test (Above 1GHz)

Radiated Test Cases	Bluetooth 5.0 – LE GFSK 1Mbps
	Mode 1: CH00_2402 MHz Mode 2: CH19_2440 MHz Mode 3: CH39_2480 MHz

Note : 1. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

2. Following channel(s) was (were) selected for the final test as listed above

3. For frequency above 18GHz, the measured value is much lower than the limit, therefore, it is not reflected in the report.

### 2.2.4 Power Line Conducted Emission Test:

AC Conducted Emission	Mode 1 : BT Linking+ RJ45 Ping + Adapter
-----------------------------	--

## 2.3 Support Equipment

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	NETGARE	R7800	PY315100319	N/A	unshielded AC I/P cable1.2 m
2.	Notebook	Lenovo	E470C	FCC sDoC	N/A	shielded cable DC O/P 1.8 m unshielded AC I/P cable1.2 m
3.	Adapter	SWITHCHING	FJ-SW0502000U	FCC sDoC	N/A	N/A
4.	WiFi ANT/FPC /L=55mm x2	GMTC	IP15A3	N/A	N/A	N/A




5.	Logitech	Wired Mouse	M-U0026	FCC sDoC	N/A	N/A
----	----------	-------------	---------	----------	-----	-----

## 2.4 Test Setup

EUT was set in the Hidden menu mode to enable BT communications.

The following picture is a screenshot of the test software

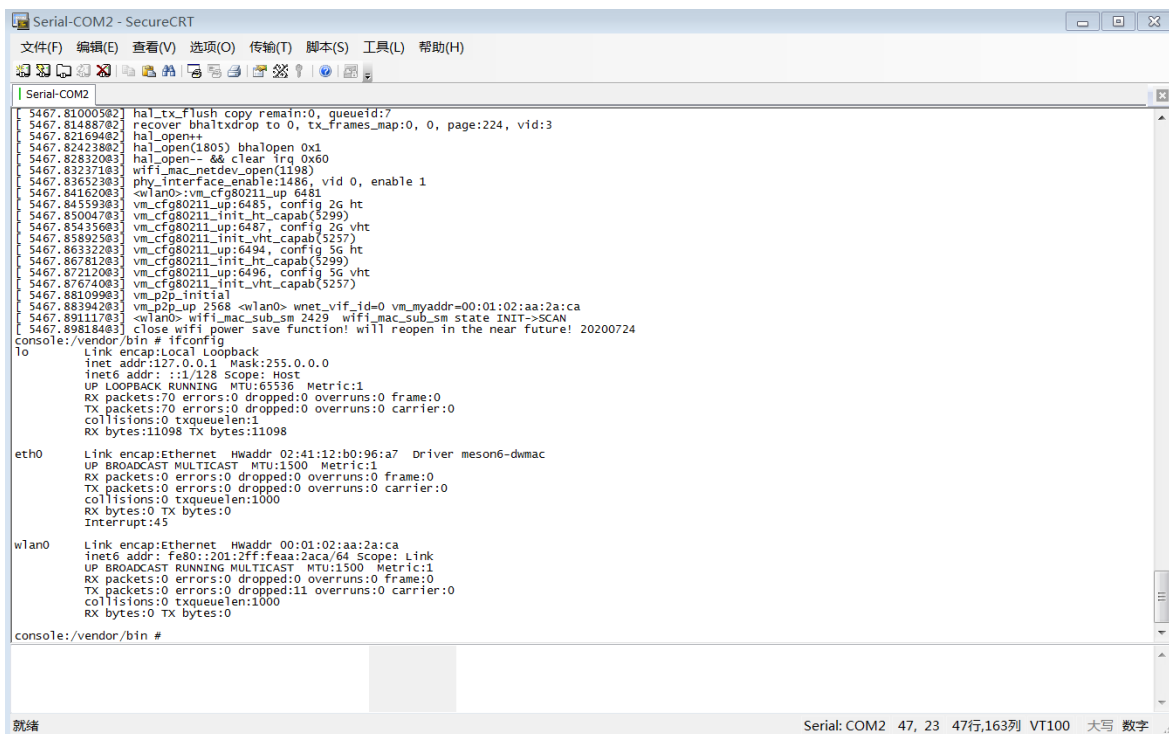

```

Serial-COM2 - SecureCRT
文件(F) 编辑(E) 查看(V) 选项(O) 传输(T) 脚本(S) 工具(L) 帮助(H)

Serial-COM2
5467.81000582] hal_tx_flush copy remain:0, queueid:7
5467.81488782] recover bhaltxdrop to 0, tx_frames_map:0, 0, page:224, vid:3
5467.82169482] hal_open++
5467.82423882] hal_open(1805) bhalopen 0x1
5467.82832082] hal_open-- && clear irq 0x60
5467.83237183] wifi_mac_netdev_open(1198)
5467.83652383] phy_interface_enable:1486, vid 0, enable 1
5467.84162083] <wlan0>:vm_cfg80211_up:6481
5467.84559383] vm_cfg80211_up:6485, config 2G ht
5467.85004783] vm_cfg80211_init_ht_capab(5299)
5467.85435683] vm_cfg80211_up:6487, config 2G vht
5467.85892583] vm_cfg80211_init_vht_capab(5257)
5467.86332283] vm_cfg80211_up:6494, config 5G ht
5467.86781283] vm_cfg80211_init_ht_capab(5299)
5467.87212083] vm_cfg80211_up:6496, config 5G vht
5467.87674083] vm_cfg80211_init_vht_capab(5257)
5467.88109983] vm_p2p_initial
5467.88394283] vm_p2p_up 2568 <wlan0> wnet_vif_id=0 vm_myaddr=00:01:02:aa:2a:ca
5467.89111783] <wlan0> wifi_mac_sub_sm 2429 wifi_mac_sub_sm state INIT->SCAN
5467.89818483] close wifi power save function! will reopen in the near future! 20200724
console:/vendor/bin # ifconfig
lo
  Link encap:Local Loopback
  inet addr:127.0.0.1 Mask:255.0.0.0
  inet6 addr:::1/128 Scope: Host
  UP LOOPBACK RUNNING MTU:65536 Metric:1
  RX packets:70 errors:0 dropped:0 overruns:0 frame:0
  TX packets:70 errors:0 dropped:0 overruns:0 carrier:0
  collisions:0 txqueuelen:1
  RX bytes:11098 TX bytes:11098


eth0
  Link encap:Ethernet Hwaddr 02:41:12:b0:96:a7 Driver meson6-dwmac
  UP BROADCAST MULTICAST MTU:1500 Metric:1
  RX packets:0 errors:0 dropped:0 overruns:0 frame:0
  TX packets:0 errors:0 dropped:0 overruns:0 carrier:0
  collisions:0 txqueuelen:1000
  RX bytes:0 TX bytes:0
  Interrupt:45

wlan0
  Link encap:Ethernet Hwaddr 00:01:02:aa:2a:ca
  inet6 addr: fe80::201:2ff:feaa:2aca/64 Scope: Link
  UP BROADCAST RUNNING MULTICAST MTU:1500 Metric:1
  RX packets:0 errors:0 dropped:0 overruns:0 frame:0
  TX packets:0 errors:0 dropped:11 overruns:0 carrier:0
  collisions:0 txqueuelen:1000
  RX bytes:0 TX bytes:0


console:/vendor/bin #
就緒
Serial: COM2 47, 23 47行,163列 VT100 大写 数字

```


### Setup diagram for Conducted Test

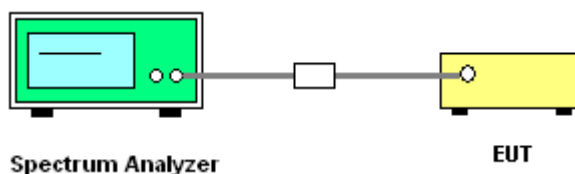


### Setup diagram for Radiation(9KHz~30MHz) Test

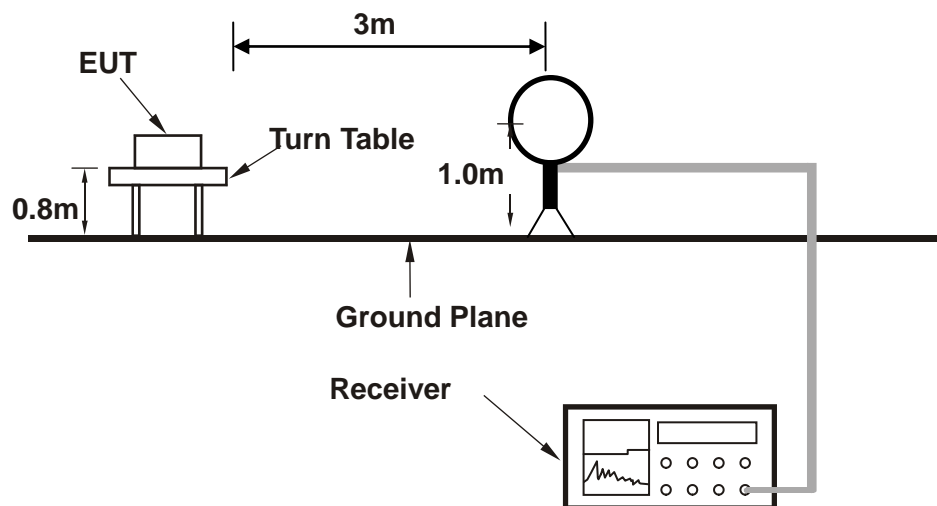


### Setup diagram for Radiation(Below 1G) Test

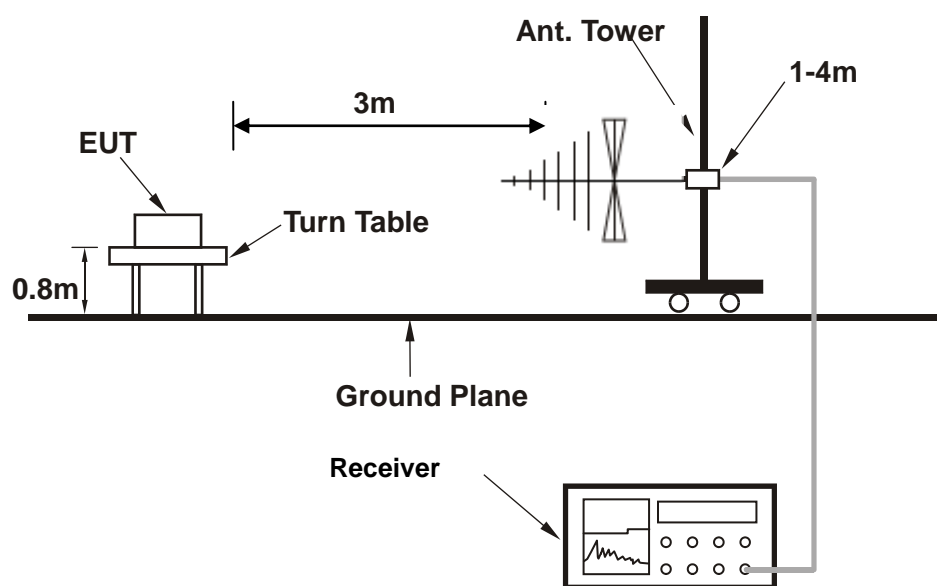

### Setup diagram for Radiation (Above1G) Test

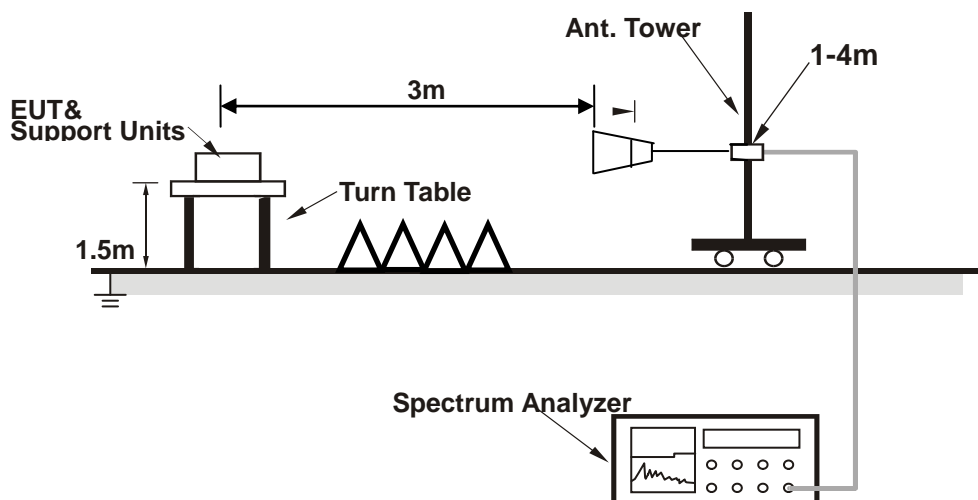

### Setup diagram for AC Conducted Emission Test

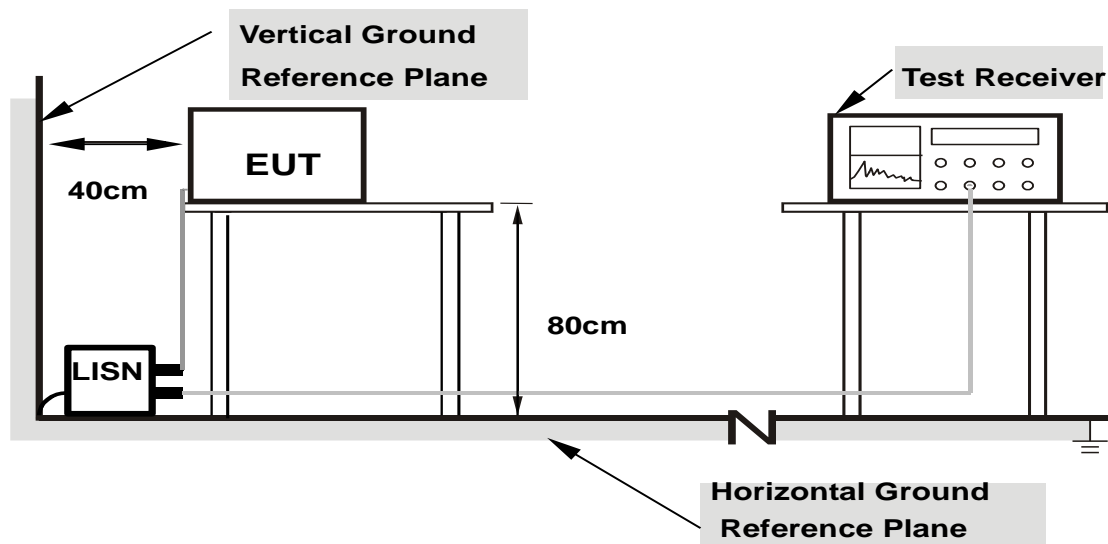

**Note: 1.Support units were connected to second LISN.**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

## 2.5 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 5 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5 + 10 = 15 \text{ (dB)}\end{aligned}$$

### For all radiated test items:

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Over Limit (dB  $\mu$  V/m) = Level(dB  $\mu$  V/m) - Limit Level (dB  $\mu$  V/m)

### 3. Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set to the maximum power setting and enable the EUT transmit continuously
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.

##### 3.1.3 Test Result of 6dB Bandwidth

Refer to Appendix A of this test report.

##### 3.1.4 Test Result of 99% Bandwidth

Refer to Appendix B of this test report.

## 3.2 Peak Output Power Measurement

### 3.2.1 Limit of Peak Output Power

FCC §15.247 (b)(3)

For systems using digital modulation in the 2400-2483.5 MHz bands: 30dBm.

### 3.2.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to spectrum analyzer.
3. Set to the maximum power setting and enable the EUT transmit continuously
4. Set the  $RBW \geq DTS$  Bandwidth,  $VBW \geq 3 * RBW$ ,  $Span \geq 1.5 * DTS$  Bandwidth, Detector=Peak, Sweep time=auto couple, Trace mode=max holde.
5. Allow trace to fully stabilize, Use peak marker function to determine the peak amplitude level.
6. Measure the conducted output power

### 3.2.3 Test Result of Peak Output Power

Refer to Appendix C of this test report.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limits of Power Spectral Density

FCC§15.247(e)

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

#### 3.3.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
5. Measure and record the results in the test report.
6. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.3 Test Result of Power Spectral Density

Refer to Appendix D of this test report.

### **3.4 Conducted Band Edges and Spurious Emission Measurement**

#### **3.4.1 Limit of Conducted Band Edges and Spurious Emission**

FCC §15.247 (d)

Maximum conducted (average) output power was used to determine compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

#### **3.4.2 Test Procedures**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
4. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

#### **3.4.3 Test Result of Conducted Band Edges**

Refer to Appendix E of this test report.

#### **3.4.4 Test Result of Conducted Spurious Emission**

Refer to Appendix F of this test report.



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

FCC §15.247 (d)

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The measurement distance is 3 meter.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz, RBW=1MHz for  $f > 1$ GHz ; VBW RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement:  
VBW = 10 Hz, when duty cycle is no less than 98 percent.  
VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control

level for the tested mode of operation.

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth 5.0(1M) - LE	32.00	0.40	2.5	3kHz

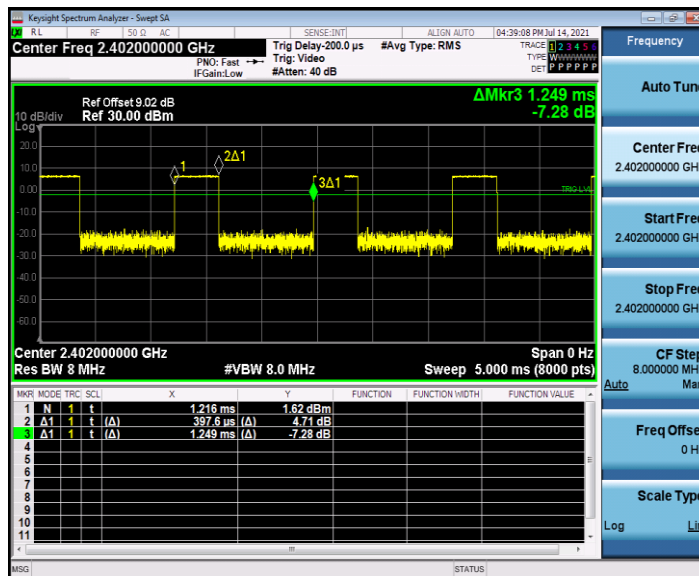


### 3.5.3 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.5.4 Test Result of Radiated Spurious at Band Edges

Test Mode :	BLE CH00 (2402 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	2.3GHz~2.405GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH00(2402MHz)	Power rating	: 120VAc
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

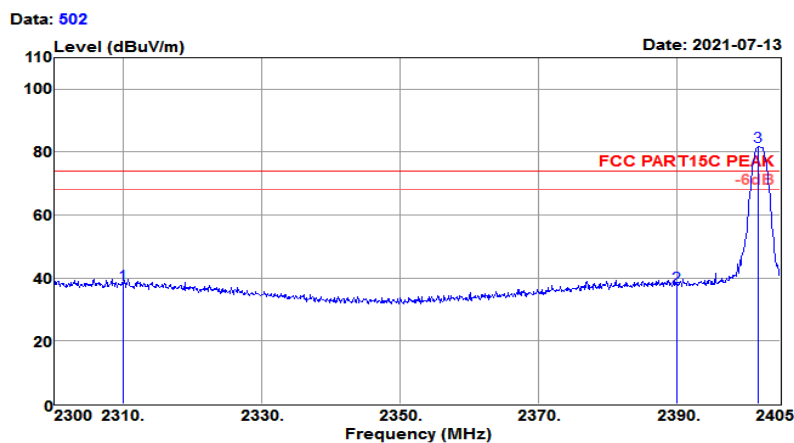


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	42.18	27.38	4.08	35.68	37.96	74.00	-36.04	Peak
2390.000	41.49	27.56	4.16	35.88	37.33	74.00	-36.67	Peak
2401.850	85.82	27.58	4.17	35.90	81.67	74.00	7.67	Peak

Test Mode :	BLE CH00 (2402 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	2.3GHz~2.405GHz	Polarization :	Horizontal

Test Site : 3m Chamber  
 Temp/Humi : 23℃/62%  
 Tested by : Jack  
 Pol/Phase : HORIZONTAL  
 Test Mode : Ble CH00(2402MHz)  
 Power rating: 120Wac  
 EUT : WIFI+BT Module  
 Model No. : K255B-SR

Data: 503

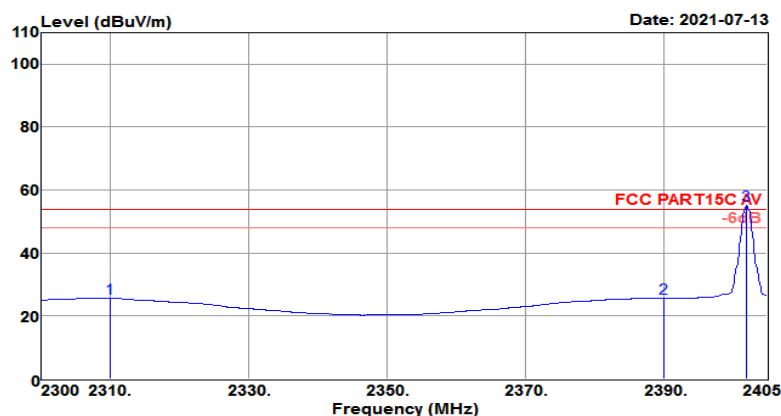


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	29.85	27.38	4.08	35.68	25.63	54.00	-28.37	Average
2390.000	29.87	27.56	4.16	35.88	25.71	54.00	-28.29	Average
2402.060	59.20	27.58	4.17	35.91	55.04	54.00	1.04	Average

Test Mode :	BLE CH00 (2402 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	2.3GHz~2.405GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH00(2402MHz)	Power rating	: 120VAc
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

Data: 505

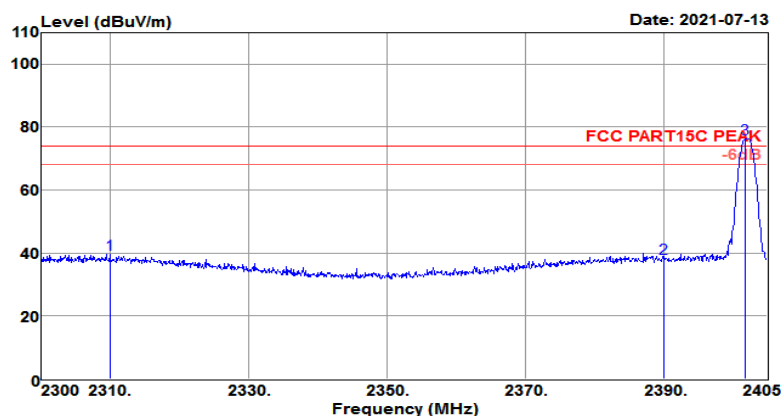


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	43.83	27.38	4.08	35.68	39.61	74.00	-34.39	Peak
2390.000	42.44	27.56	4.16	35.88	38.28	74.00	-35.72	Peak
2401.850	80.52	27.58	4.17	35.90	76.37	74.00	2.37	Peak

Test Mode :	BLE CH00 (2402 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	2.3GHz~2.405GHz	Polarization :	Vertical

Test Site : 3m Chamber  
 Temp/Humi : 23℃/62%  
 Tested by : Jack  
 Pol/Phase : VERTICAL  
 Test Mode : Ble CH00(2402MHz)  
 Power rating: 120Wac  
 EUT : WIFI+BT Module  
 Model No. : K255B-SR

Data: 506

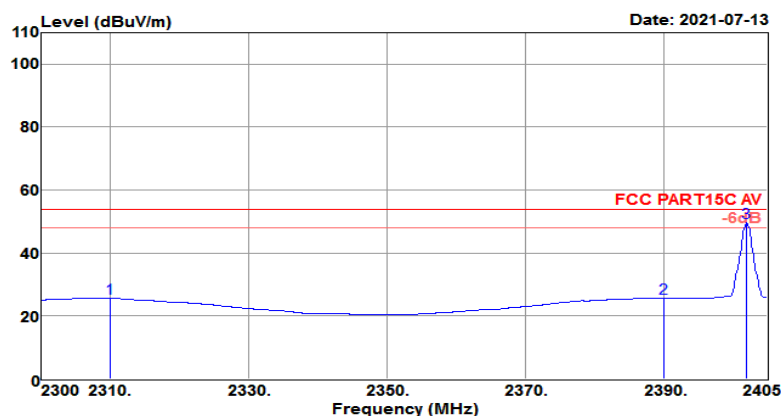


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	29.87	27.38	4.08	35.68	25.65	54.00	-28.35	Average
2390.000	29.80	27.56	4.16	35.88	25.64	54.00	-28.36	Average
2402.060	53.73	27.58	4.17	35.91	49.57	54.00	-4.43	Average

Test Mode :	BLE CH39 (2480 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	2.477GHz~2.51GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH39(2480MHz)	Power rating:	120VAc
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

Data: 510

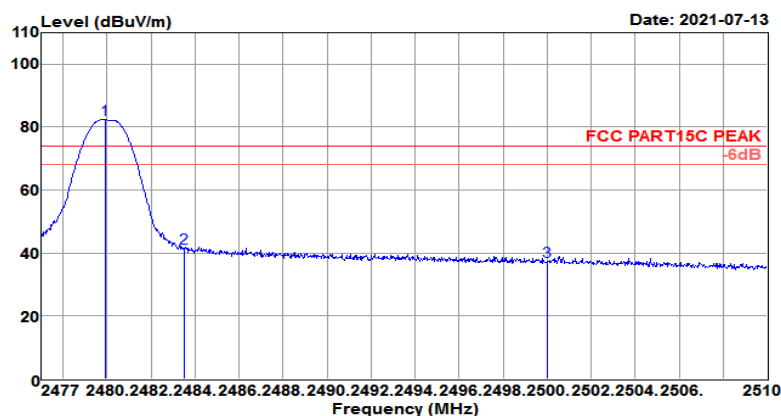


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2479.937	86.48	27.76	4.19	36.10	82.33	74.00	8.33	Peak
2483.500	45.63	27.76	4.19	36.11	41.47	74.00	-32.53	Peak
2500.000	41.48	27.80	4.19	36.15	37.32	74.00	-36.68	Peak

Test Mode :	BLE CH39 (2480 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	2.477GHz~2.51GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH39(2480MHz)	Power rating:	: 120VAC
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

Data: 511

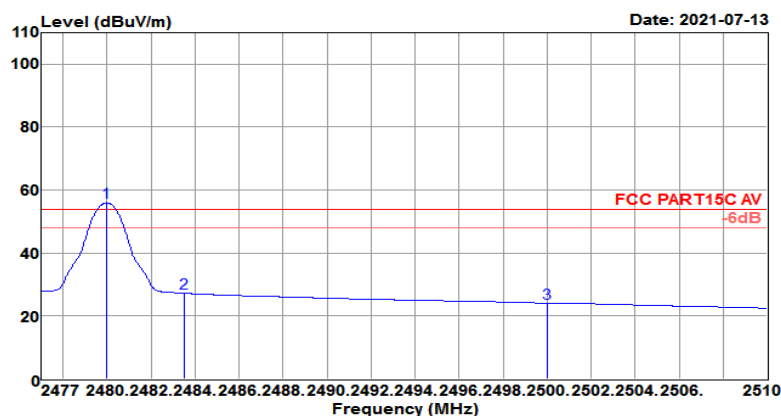


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2479.970	60.14	27.76	4.19	36.10	55.99	54.00	1.99	Average
2483.500	31.38	27.76	4.19	36.11	27.22	54.00	-26.78	Average
2500.000	28.24	27.80	4.19	36.15	24.08	54.00	-29.92	Average



Test Mode :	BLE CH39 (2480 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	2.477GHz~2.51GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH39(2480MHz)	Power rating:	: 120VAc
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

Data: 513

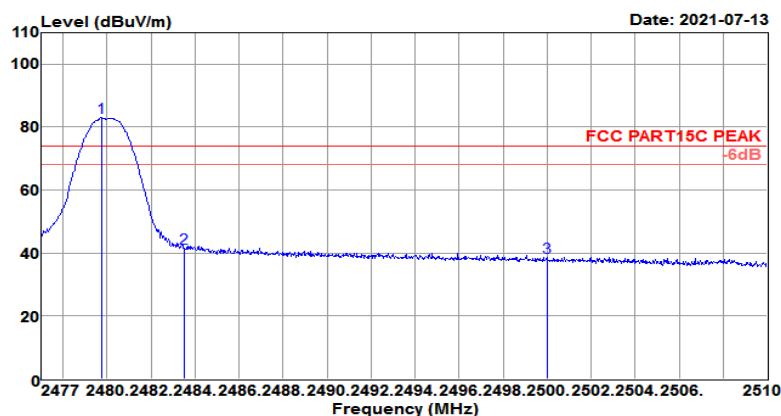


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2479.772	87.10	27.76	4.19	36.10	82.95	74.00	8.95	Peak
2483.500	45.76	27.76	4.19	36.11	41.60	74.00	-32.40	Peak
2500.000	42.77	27.80	4.19	36.15	38.61	74.00	-35.39	Peak

Test Mode :	BLE CH39 (2480 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	2.477GHz~2.51GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH39(2480MHz)	Power rating:	: 120VAc
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

Data: 514

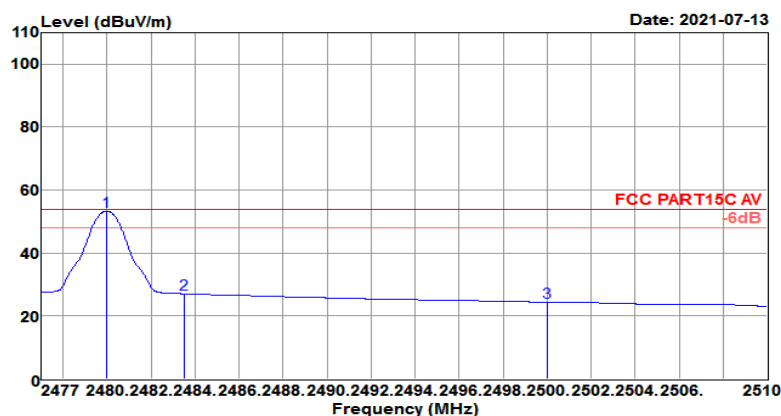


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2479.970	57.53	27.76	4.19	36.10	53.38	54.00	-0.62	Average
2483.500	31.24	27.76	4.19	36.11	27.08	54.00	-26.92	Average
2500.000	28.63	27.80	4.19	36.15	24.47	54.00	-29.53	Average

### 3.5.5 Test Result of Radiated Spurious Emission (1GHz ~ 10<sup>th</sup> Harmonic)

Test Mode :	BLE CH00 (2402 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	1GHz~3GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH00(2402MHz)	Power rating	: 120VAC
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

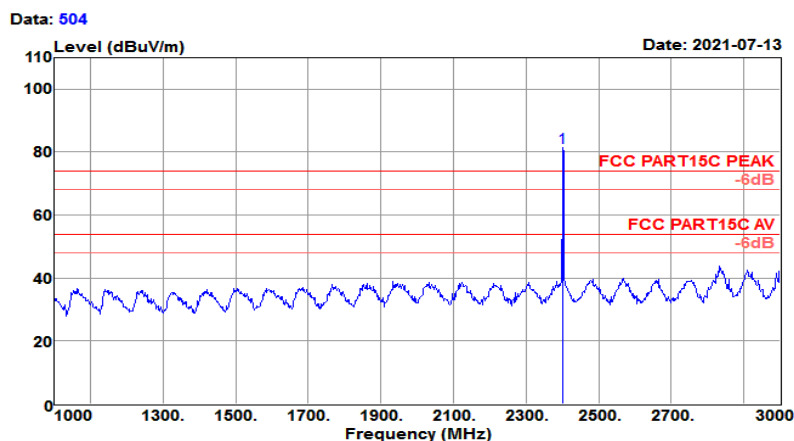

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2402.000	85.75	27.58	4.17	35.91	81.59	74.00	7.59	Peak

Test Mode :	BLE CH00 (2402 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal

Test Site : 3m Chamber  
 Temp/Humi : 24℃/62%  
 Tested by : Jack  
 Pol/Phase : HORIZONTAL  
 Test Mode : Ble CH00(2402MHz)  
 Power rating: DC 5V  
 EUT : WIFI+BT Module  
 Model No. : K255B-SR

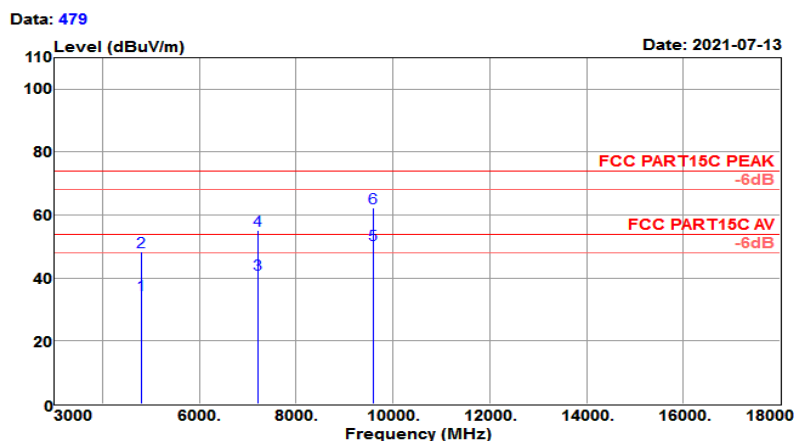


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4804.000	31.39	30.93	6.44	34.12	34.64	54.00	-19.36	Average
4804.000	45.01	30.93	6.44	34.12	48.26	74.00	-25.74	Peak
7206.000	31.56	35.39	8.61	34.39	41.17	54.00	-12.83	Average
7206.000	45.55	35.39	8.61	34.39	55.16	74.00	-18.84	Peak
9608.000	34.66	38.39	11.69	34.14	50.60	54.00	-3.40	Average
9608.000	46.48	38.39	11.69	34.14	62.42	74.00	-11.58	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	BLE CH00 (2402 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	1GHz~3GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH00(2402MHz)	Power rating:	120Wac
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

Data: 507

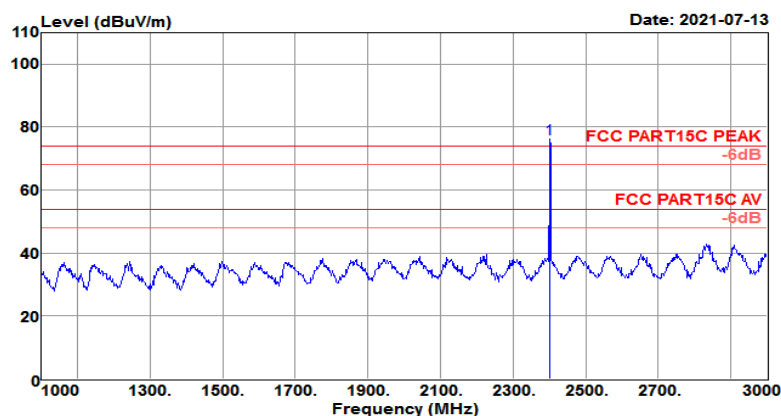


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2402.000	80.46	27.58	4.17	35.91	76.30	74.00	2.30	Peak

Test Mode :	BLE CH00 (2402 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 24℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH00(2402MHz)	Power rating:	DC 5V
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		


Data: 477

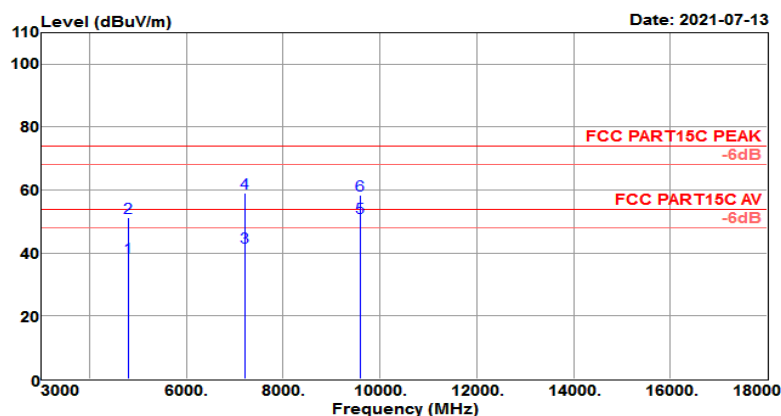

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4804.000	35.22	30.93	6.44	34.12	38.47	54.00	-15.53	Average
4804.000	48.07	30.93	6.44	34.12	51.32	74.00	-22.68	Peak
7206.000	32.41	35.39	8.61	34.39	42.02	54.00	-11.98	Average
7206.000	49.52	35.39	8.61	34.39	59.13	74.00	-14.87	Peak
9608.000	35.48	38.39	11.69	34.14	51.42	54.00	-2.58	Average
9608.000	42.60	38.39	11.69	34.14	58.54	74.00	-15.46	Peak

Test Mode :	BLE CH19 (2440 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	1GHz~3GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH19(2440MHz)	Power rating:	120VAc
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

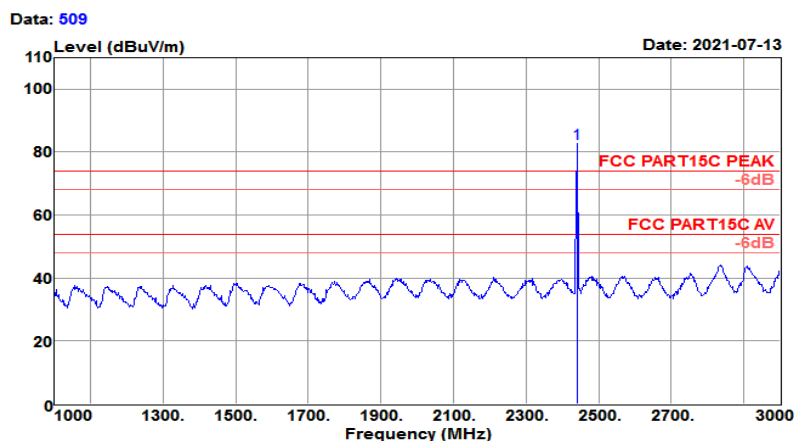

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2440.000	86.93	27.67	4.18	36.00	82.78	74.00	8.78	Peak

Test Mode :	BLE CH19 (2440 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 24℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH19(2440MHz)	Power rating:	DC 5V
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

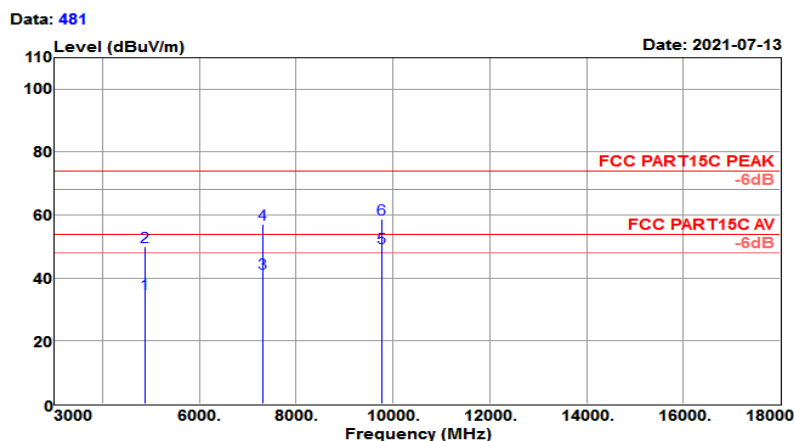


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	31.17	31.03	7.01	34.03	35.18	54.00	-18.82	Average
4880.000	45.83	31.03	7.01	34.03	49.84	74.00	-24.16	Peak
7320.000	31.42	35.67	8.97	34.49	41.57	54.00	-12.43	Average
7320.000	47.05	35.67	8.97	34.49	57.20	74.00	-16.80	Peak
9760.000	34.28	38.51	11.16	34.20	49.75	54.00	-4.25	Average
9760.000	43.26	38.51	11.16	34.20	58.73	74.00	-15.27	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



Test Mode :	BLE CH19 (2440 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	1GHz~3GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH19(2440MHz)	Power rating:	120VAc
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

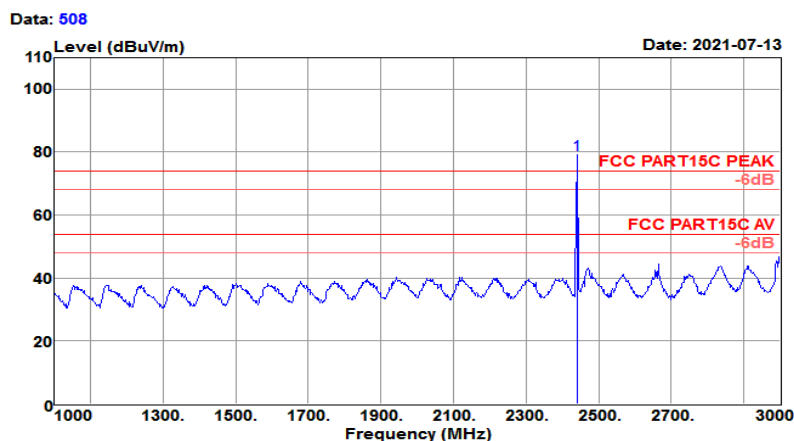

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2440.000	83.29	27.67	4.18	36.00	79.14	74.00	5.14	Peak

Test Mode :	BLE CH19 (2440 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 24℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH19(2440MHz)	Power rating:	DC 5V
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

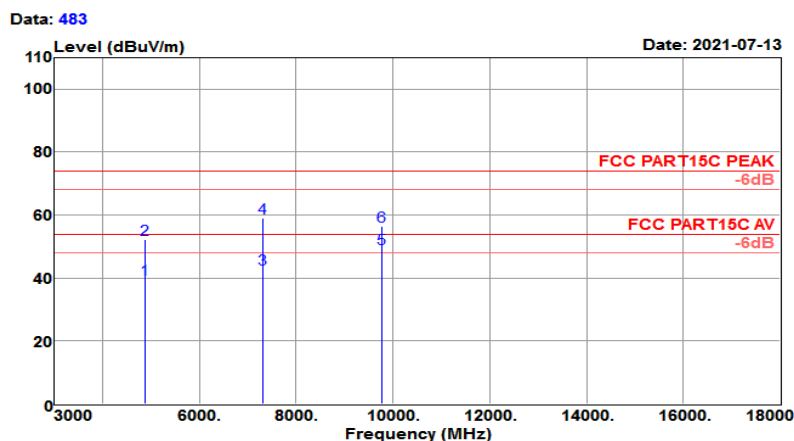


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	35.52	31.03	7.01	34.03	39.53	54.00	-14.47	Average
4880.000	48.13	31.03	7.01	34.03	52.14	74.00	-21.86	Peak
7320.000	32.82	35.67	8.97	34.49	42.97	54.00	-11.03	Average
7320.000	49.08	35.67	8.97	34.49	59.23	74.00	-14.77	Peak
9760.000	33.83	38.51	11.16	34.20	49.30	54.00	-4.70	Average
9760.000	40.86	38.51	11.16	34.20	56.33	74.00	-17.67	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	BLE CH39 (2480 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	1GHz~3GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH39(2480MHz)	Power rating:	: 120Wac
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

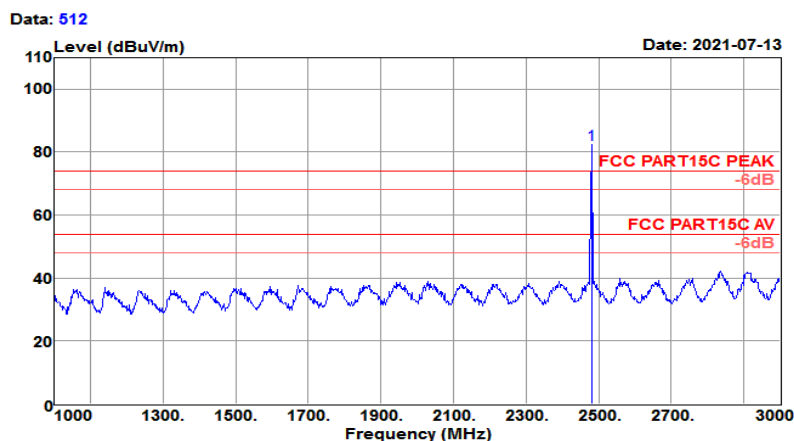


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2480.000	86.42	27.76	4.19	36.10	82.27	74.00	8.27	Peak

Test Mode :	BLE CH39 (2480 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal

Test Site : 3m Chamber  
 Temp/Humi : 24℃/62%  
 Tested by : Jack  
 Pol/Phase : HORIZONTAL  
 Test Mode : Ble CH39(2480MHz)  
 Power rating: DC 5V  
 EUT : WIFI+BT Module  
 Model No. : K255B-SR

Data: 487

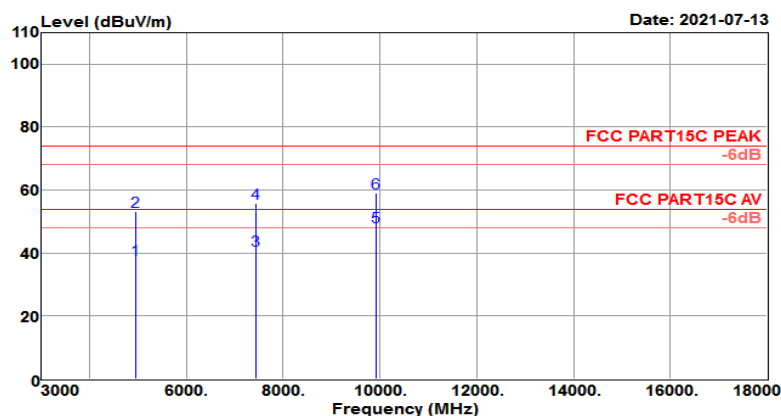


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4960.000	33.02	31.14	7.62	33.94	37.84	54.00	-16.16	Average
4960.000	48.50	31.14	7.62	33.94	53.32	74.00	-20.68	Peak
7440.000	30.38	35.96	9.03	34.60	40.77	54.00	-13.23	Average
7440.000	45.54	35.96	9.03	34.60	55.93	74.00	-18.07	Peak
9920.000	31.77	38.64	12.18	34.27	48.32	54.00	-5.68	Average
9920.000	42.66	38.64	12.18	34.27	59.21	74.00	-14.79	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	BLE CH39 (2480 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	1GHz~3GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH39(2480MHz)	Power rating:	120VAc
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

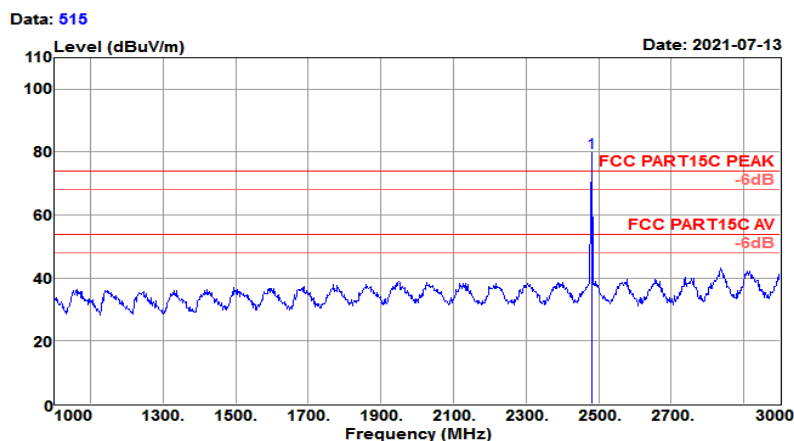


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2480.000	83.90	27.76	4.19	36.10	79.75	74.00	5.75	Peak

Test Mode :	BLE CH39 (2480 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 24℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH39(2480MHz)	Power rating:	DC 5V
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

Data: 485

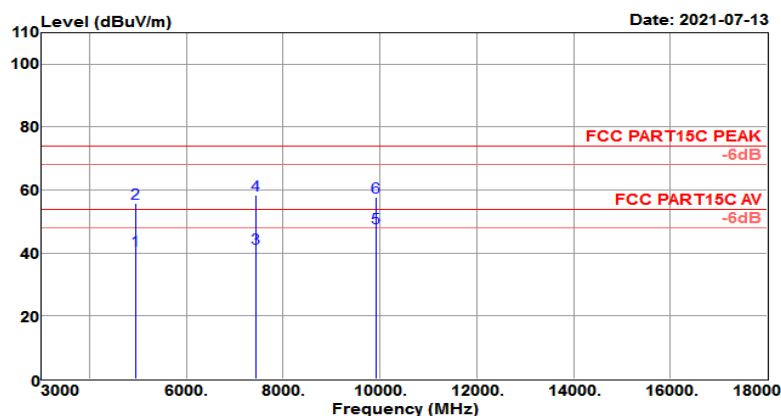


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4960.000	35.99	31.14	7.62	33.94	40.81	54.00	-13.19	Average
4960.000	51.15	31.14	7.62	33.94	55.97	74.00	-18.03	Peak
7440.000	31.04	35.96	9.03	34.60	41.43	54.00	-12.57	Average
7440.000	48.16	35.96	9.03	34.60	58.55	74.00	-15.45	Peak
9920.000	31.50	38.64	12.18	34.27	48.05	54.00	-5.95	Average
9920.000	41.32	38.64	12.18	34.27	57.87	74.00	-16.13	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### 3.5.6 Test Result of Radiated Spurious Emission (30MHz ~ 1GHz)

Test Mode :	BLE CH00 (2402 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	30MHz~1GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH00(2402MHz)	Power rating:	120Vac
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

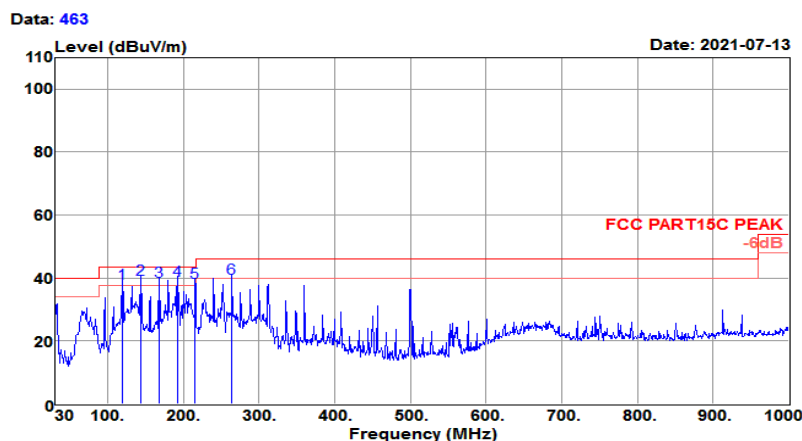


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
119.240	57.87	11.23	1.86	32.52	38.44	43.50	-5.06	QP
143.490	56.19	13.87	2.03	32.54	39.55	43.50	-3.95	QP
167.740	55.87	13.45	2.22	32.57	38.97	43.50	-4.53	QP
191.990	58.83	10.80	2.38	32.59	39.42	43.50	-4.08	QP
215.270	58.70	9.89	2.55	32.60	38.54	43.50	-4.96	QP
263.770	57.88	11.84	2.81	32.60	39.93	46.00	-6.07	QP

Test Mode :	BLE CH00 (2402 MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	30MHz~1GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH00(2402MHz)	Power rating:	120VAc
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

Data: 462

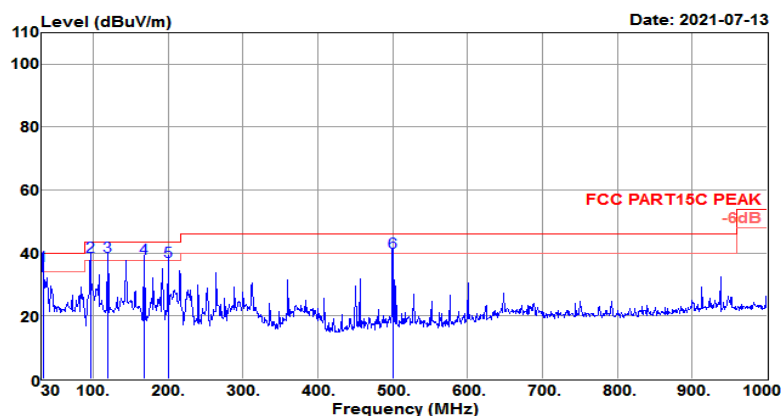

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
32.910	53.88	13.94	0.95	32.60	36.17	40.00	-3.83	QP
95.960	61.01	8.84	1.63	32.51	38.97	43.50	-4.53	QP
119.240	58.44	11.23	1.86	32.52	39.01	43.50	-4.49	QP
167.740	55.27	13.45	2.22	32.57	38.37	43.50	-5.13	QP
199.750	57.51	10.06	2.43	32.60	37.40	43.50	-6.10	QP
500.450	52.22	16.84	4.00	32.80	40.26	46.00	-5.74	QP



## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

FCC §15.207

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


\*Decreases with the logarithm of the frequency.

### 3.6.2 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.6.3 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	25.5°C
Test Engineer :	Jack Liu	Relative Humidity :	62%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	BT Linking+ RJ45 Ping + Adapter		

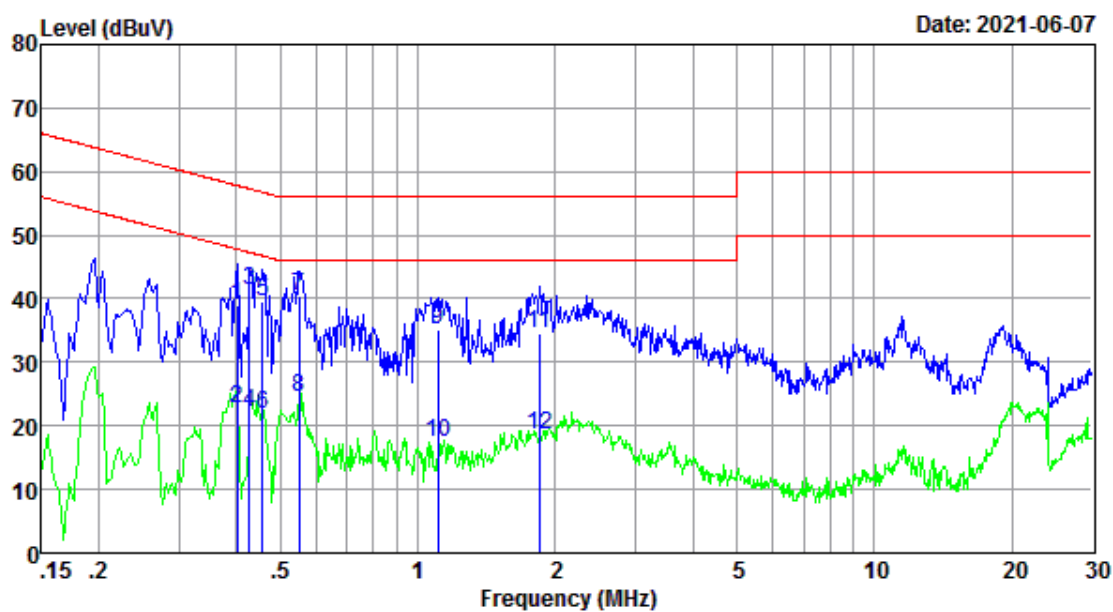

Result Level= Reading Level + LISN Factor + Cable Loss

Test Mode :	Mode 1	Temperature :	25.5°C
Test Engineer :	Jack Liu	Relative Humidity :	62%
Test Voltage :	120Vac / 60Hz	Phase :	NEUTRAL
Function Type :	BT Linking+ RJ45 Ping + Adapter		

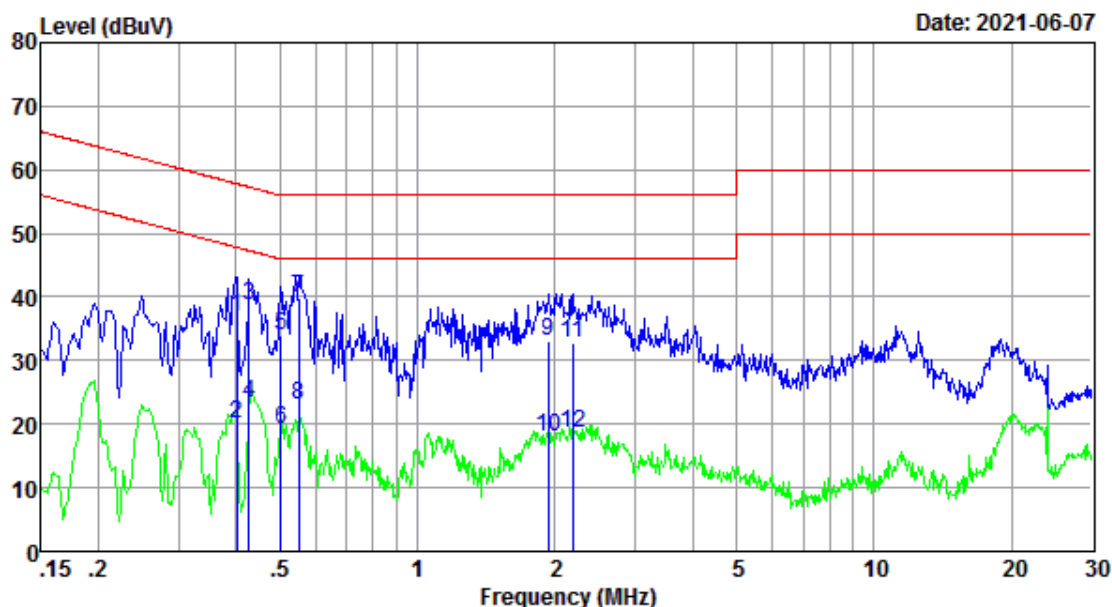

Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	Result level dBuV	Limit level dBuV	Over limit dB	Remark
0.402	27.20	9.57	0.01	36.78	57.81	-21.03	QP
0.402	10.50	9.57	0.01	20.08	47.81	-27.73	Average
0.428	29.20	9.57	0.01	38.78	57.29	-18.51	QP
0.428	13.80	9.57	0.01	23.38	47.29	-23.91	Average
0.502	24.50	9.57	0.01	34.08	56.00	-21.92	QP
0.502	9.50	9.57	0.01	19.08	46.00	-26.92	Average
0.549	30.20	9.58	0.01	39.79	56.00	-16.21	QP
0.549	13.40	9.58	0.01	22.99	46.00	-23.01	Average
1.939	23.40	9.59	0.03	33.02	56.00	-22.98	QP
1.939	8.50	9.59	0.03	18.12	46.00	-27.88	Average
2.190	23.11	9.59	0.03	32.73	56.00	-23.27	QP
2.190	8.91	9.59	0.03	18.53	46.00	-27.47	Average

Result Level= Reading Level + LISN Factor + Cable Loss

## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded..

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### **3.7.2 Antenna Connected Construction**

An FPC Antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	Keysight	N9010A	MY56070788	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY56510025	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY57030005	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY56510018	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY56480002	2021-01-05	2022-01-04	Conducted
Thermal Chamber	Howkin	UHL-34	19111801	2021-04-21	2022-04-20	Conducted
Base Station	R&S	CMW 270	101231	2021-01-05	2022-01-04	Conducted
Signal Generator (Interferer)	Keysight	N5182B	MY56200384	2021-01-05	2022-01-04	Conducted
Signal Generator (Blocker)	Keysight	N5171B	MY56200661	2021-01-05	2022-01-04	Conducted

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV 40	101433	2021-01-05	2022-01-04	Radiation
Amplifier	Sonoma	310	363917	2021-01-06	2022-01-05	Radiation
Amplifier	Schwarzbeck	BBV 9718	327	2021-01-06	2022-01-05	Radiation
Amplifier	Narda	TTA1840-35-HG	2034380	2020-11-28	2021-11-27	Radiation
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-051	2020-02-14	2023-02-13	Radiation
Broadband Antenna	Schwarzbeck	VULB 9168	9168-757	2020-09-27	2023-09-26	Radiation
Horn Antenna	Schwarzbeck	BBHA 9120 D	1677	2020-02-14	2023-02-13	Radiation
Horn Antenna	COM-POWER	AH-1840	101117	2021-06-05	2024-06-04	Radiation
Test Software	Audix	E3	6.111221a	N/A	N/A	Radiation
Filter	Micro-Tronics	BRM 50702	G266	N/A	N/A	Radiation

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
LISN	R&S	ENV216	102125	2021-01-05	2022-01-04	Conducted
LISN	R&S	ENV432	101327	2021-01-06	2022-01-05	Conducted
EMI Test Receiver	R&S	ESR3	102143	2021-01-06	2022-01-05	Conducted
EMI Test Software	Audix	E3	N/A	N/A	N/A	Conducted

N/A: No Calibration Required

## 5. Uncertainty of Evaluation

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.42dB
Radiated emission	30MHz ~ 1GMHz	2.50dB
	1GHz ~ 18GHz	3.51dB
	18GHz ~ 40GHz	3.96dB

MEASUREMENT	UNCERTAINTY
Occupied Channel Bandwidth	$\pm 196.4\text{Hz}$
RF output power, conducted	$\pm 2.31\text{dB}$
Power density, conducted	$\pm 2.31\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .


## Appendix A: DTS Bandwidth

### Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_125K	Ant1	2402	0.672	2401.668	2402.340	0.5	PASS
		2440	0.636	2439.676	2440.312	0.5	PASS
		2480	0.640	2479.688	2480.328	0.5	PASS
BLE_1M	Ant1	2402	0.640	2401.676	2402.316	0.5	PASS
		2440	0.712	2439.644	2440.356	0.5	PASS
		2480	0.624	2479.668	2480.292	0.5	PASS
BLE_2M	Ant1	2402	1.116	2401.432	2402.548	0.5	PASS
		2440	1.080	2439.436	2440.516	0.5	PASS
		2480	1.084	2479.428	2480.512	0.5	PASS
BLE_500K	Ant1	2402	0.672	2401.672	2402.344	0.5	PASS
		2440	0.664	2439.676	2440.340	0.5	PASS
		2480	0.688	2479.672	2480.360	0.5	PASS



## Test Graphs

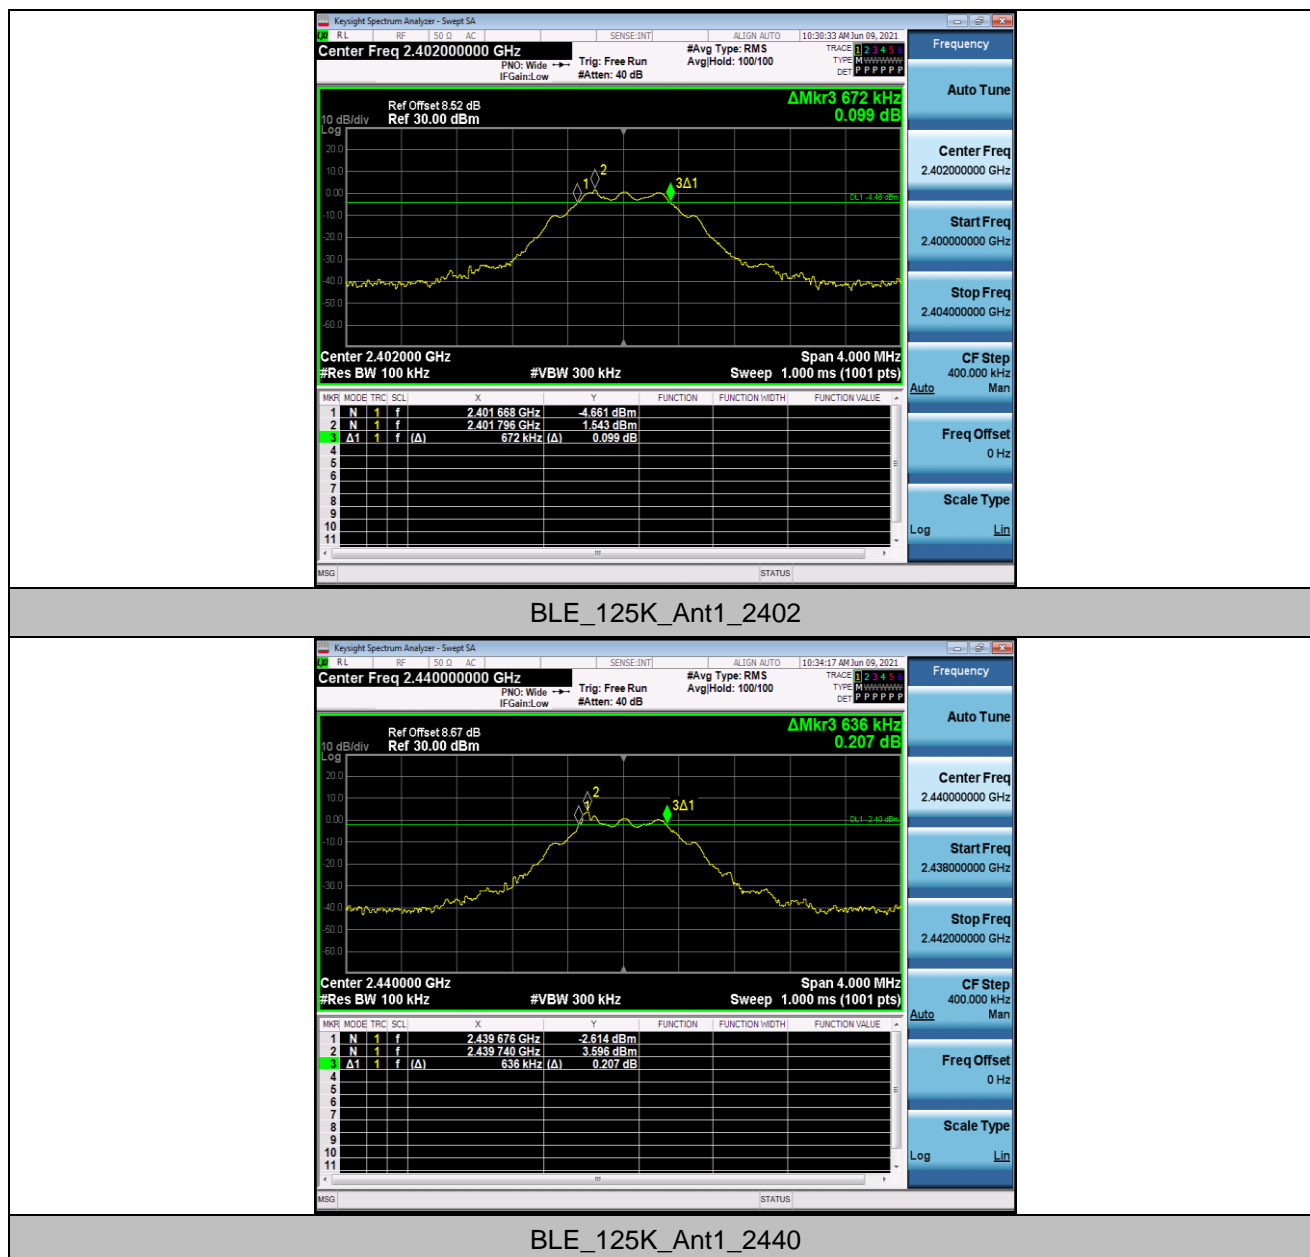



BLE\_125K\_Ant1\_2480



BLE\_1M\_Ant1\_2402



BLE\_1M\_Ant1\_2440



BLE	1M	Ant1	2480
-----	----	------	------



BLE\_2M\_Ant1\_2402



BLE\_2M\_Ant1\_2440



BLE\_2M\_Ant1\_2480



BLE\_500K\_Ant1\_2402



BLE\_500K\_Ant1\_2440



BLE\_500K\_Ant1\_2480

## Appendix B: Occupied Channel Bandwidth

### Test Result

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_125K	Ant1	2402	1.0884	2401.462	2402.550	---	PASS
		2440	1.0895	2439.462	2440.552	---	PASS
		2480	1.0817	2479.467	2480.549	---	PASS
BLE_1M	Ant1	2402	1.0451	2401.494	2402.540	---	PASS
		2440	1.0521	2439.490	2440.542	---	PASS
		2480	1.0784	2479.482	2480.560	---	PASS
BLE_2M	Ant1	2402	2.0784	2400.993	2403.071	---	PASS
		2440	2.0683	2439.004	2441.072	---	PASS
		2480	2.0732	2478.995	2481.068	---	PASS
BLE_500K	Ant1	2402	1.0596	2401.479	2402.538	---	PASS
		2440	1.0545	2439.483	2440.537	---	PASS
		2480	1.0478	2479.486	2480.534	---	PASS

## Test Graphs








BLE\_125K\_Ant1\_2480



BLE\_1M\_Ant1\_2402



BLE\_1M\_Ant1\_2440

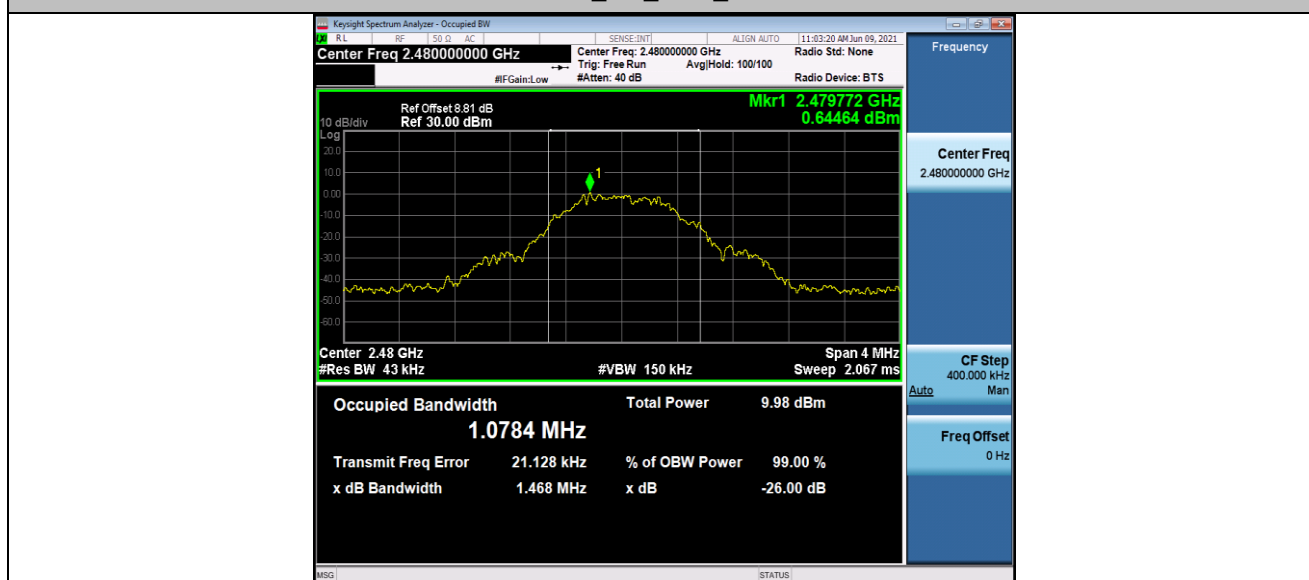

BLE\_1M\_Ant1\_2480



BLE\_2M\_Ant1\_2402



BLE\_2M\_Ant1\_2440



BLE\_2M\_Ant1\_2480



BLE\_500K\_Ant1\_2402



BLE\_500K\_Ant1\_2440




BLE\_500K\_Ant1\_2480


## Appendix C: Maximum conducted output power

### Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_125K	Ant1	2402	6.34	<=30	PASS
		2440	6.59	<=30	PASS
		2480	6.77	<=30	PASS
BLE_1M	Ant1	2402	6.4	<=30	PASS
		2440	6.66	<=30	PASS
		2480	6.85	<=30	PASS
BLE_2M	Ant1	2402	6.23	<=30	PASS
		2440	6.46	<=30	PASS
		2480	6.76	<=30	PASS
BLE_500K	Ant1	2402	6.31	<=30	PASS
		2440	6.65	<=30	PASS
		2480	6.83	<=30	PASS

## Test Graphs

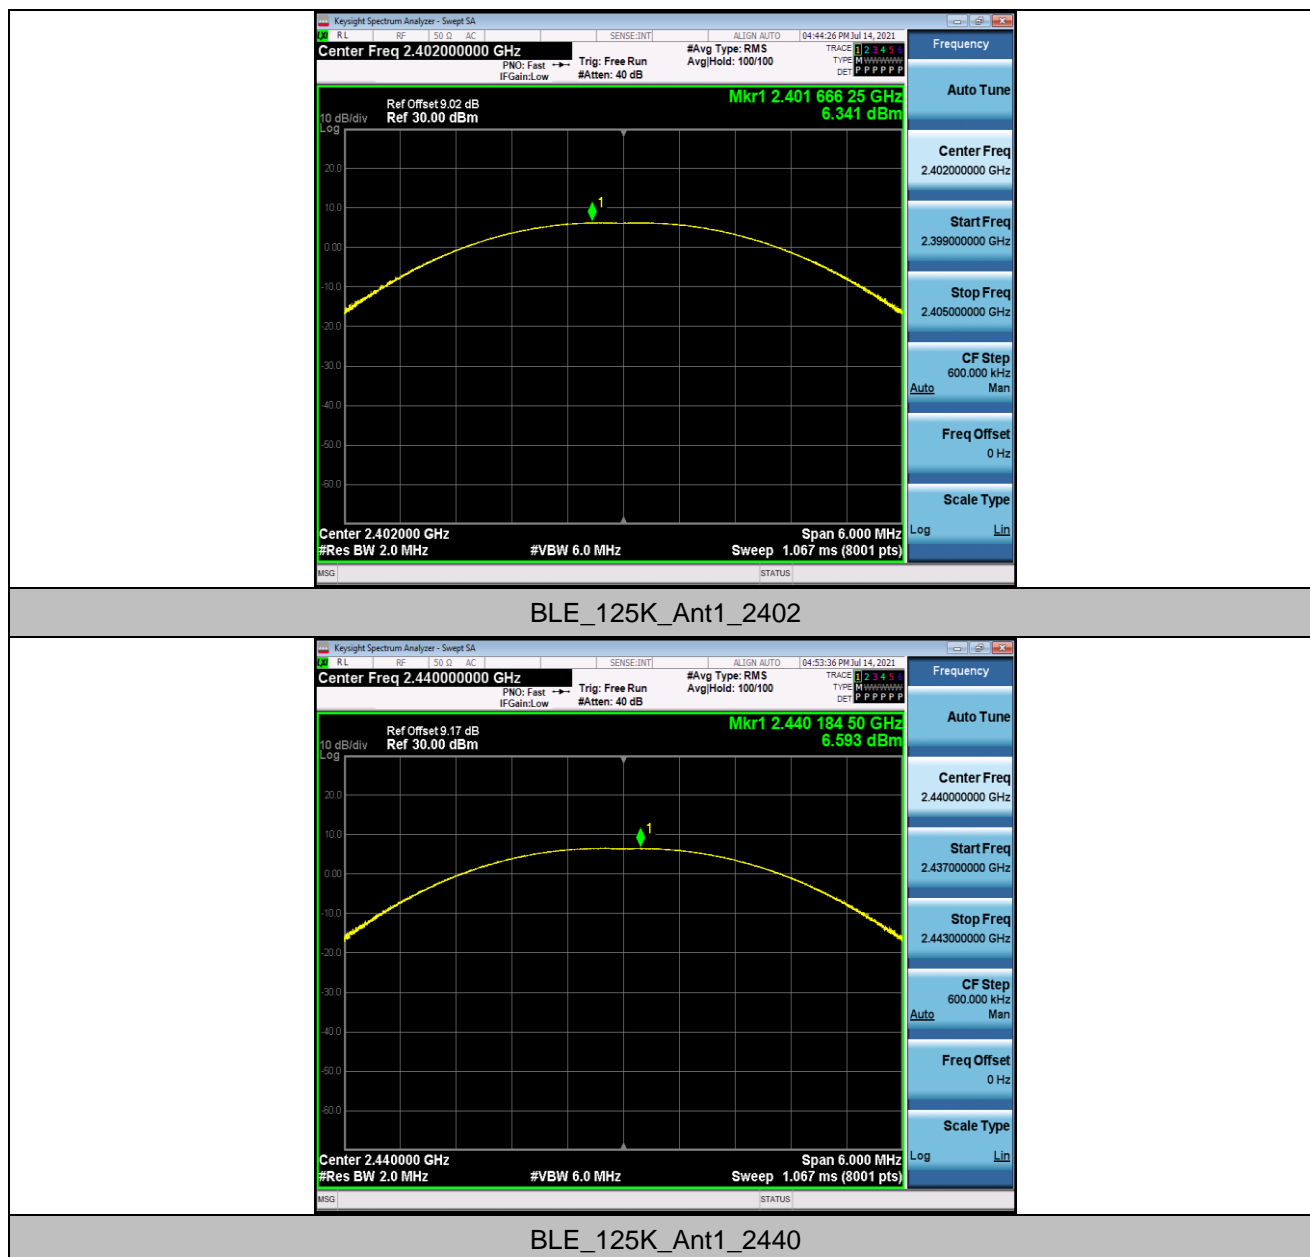

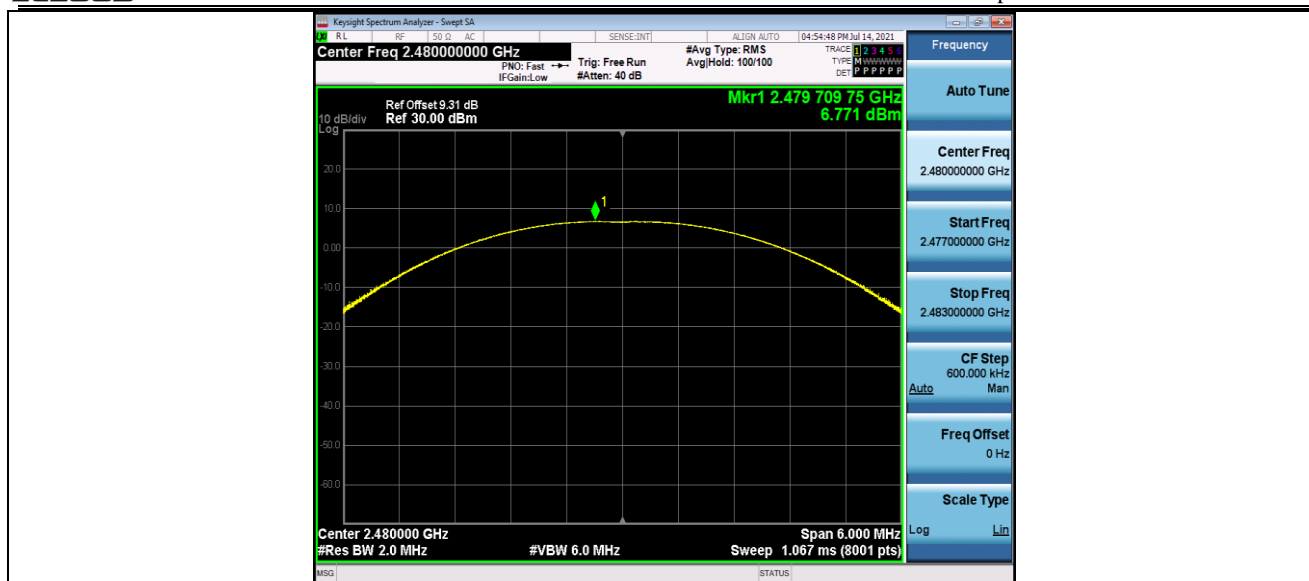


BLE\_125K\_Ant1\_2480




BLE\_1M\_Ant1\_2402




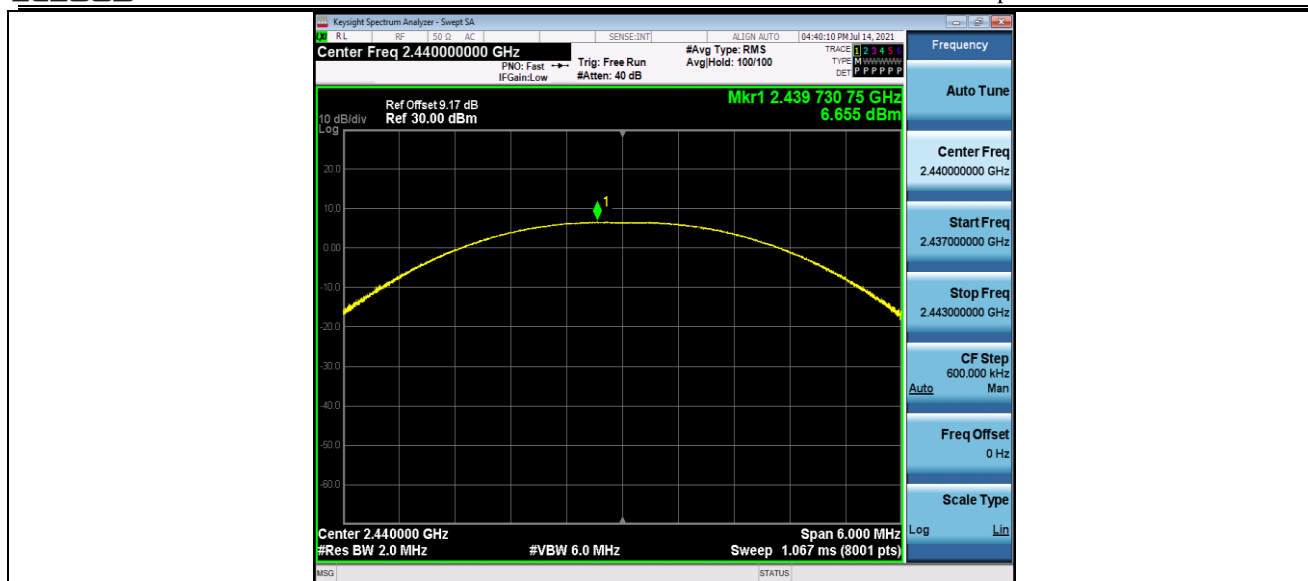


BLE\_1M\_Ant1\_2440

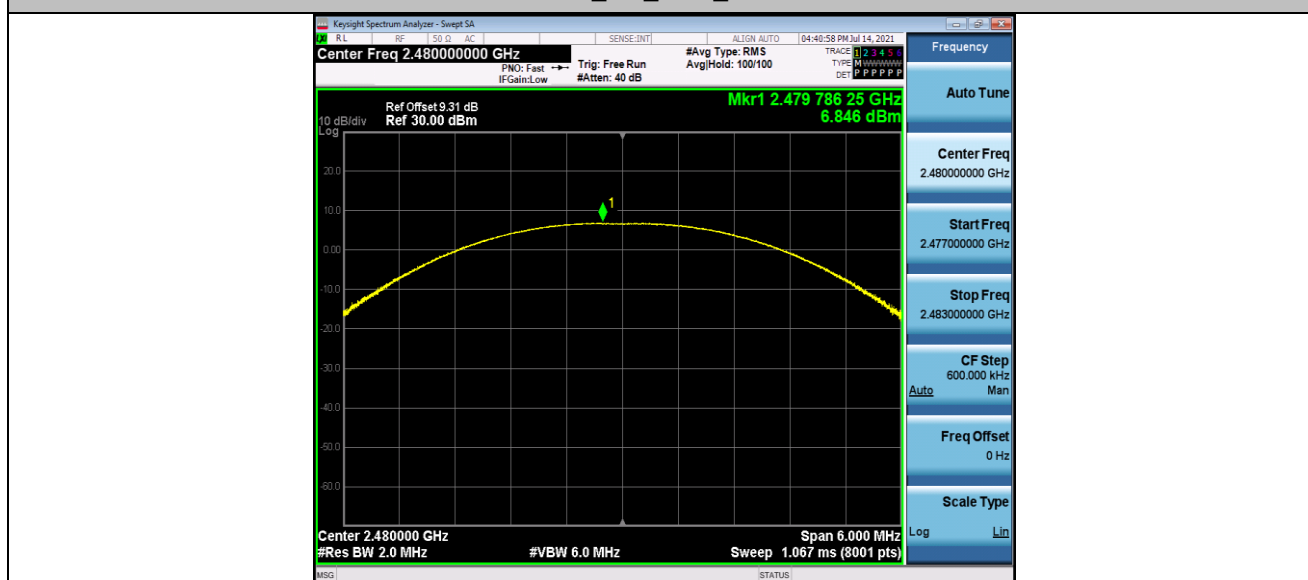


BLE\_1M\_Ant1\_2480

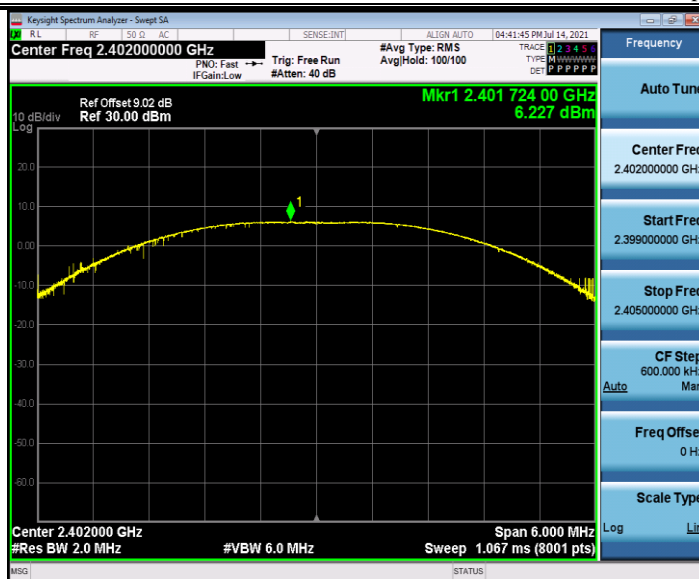


BLE\_2M\_Ant1\_2402

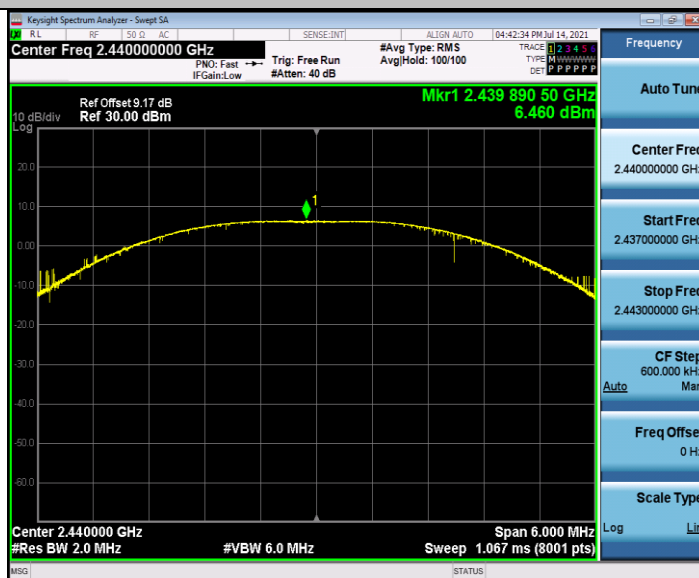


BLE\_2M\_Ant1\_2440

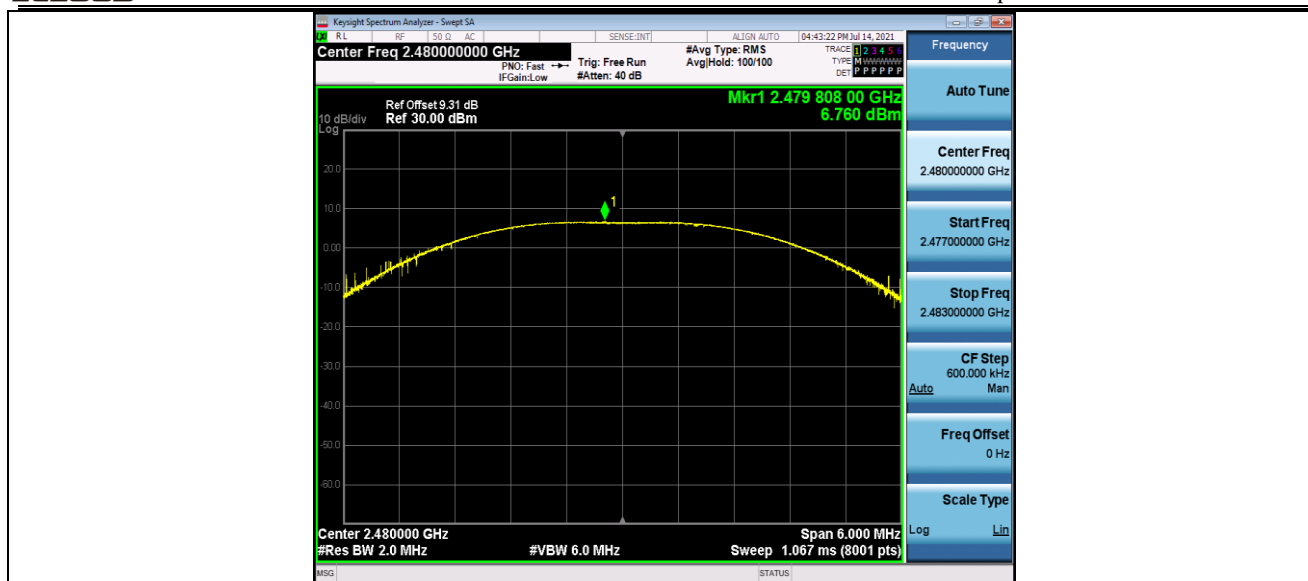


BLE\_2M\_Ant1\_2480

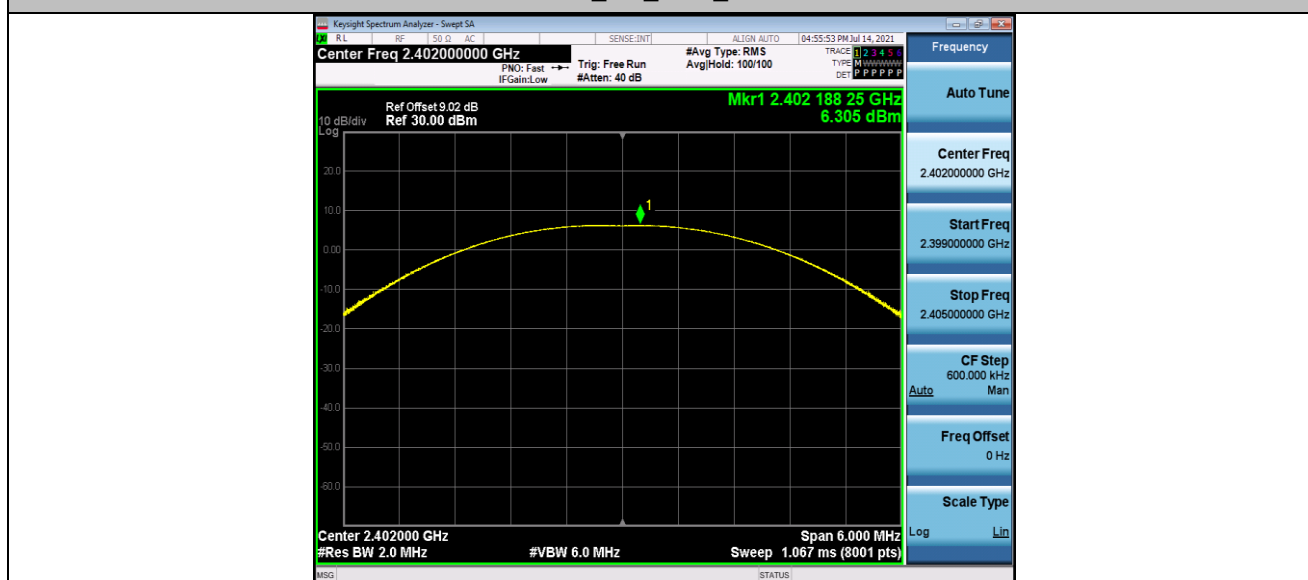

BLE\_500K\_Ant1\_2402

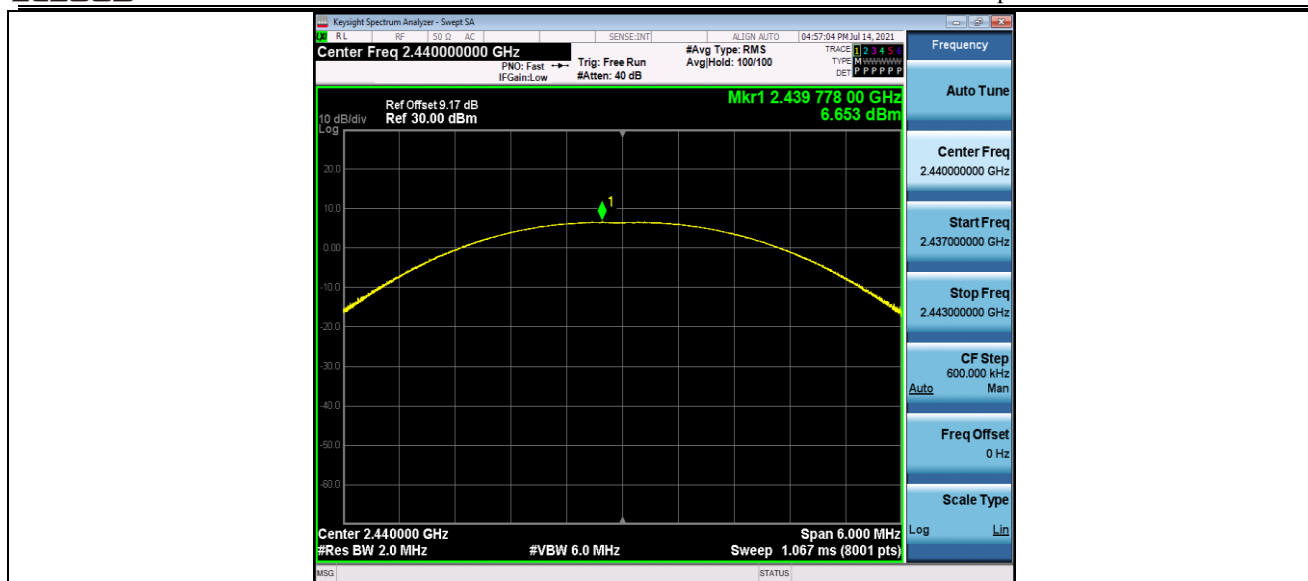

BLE\_500K\_Ant1\_2440

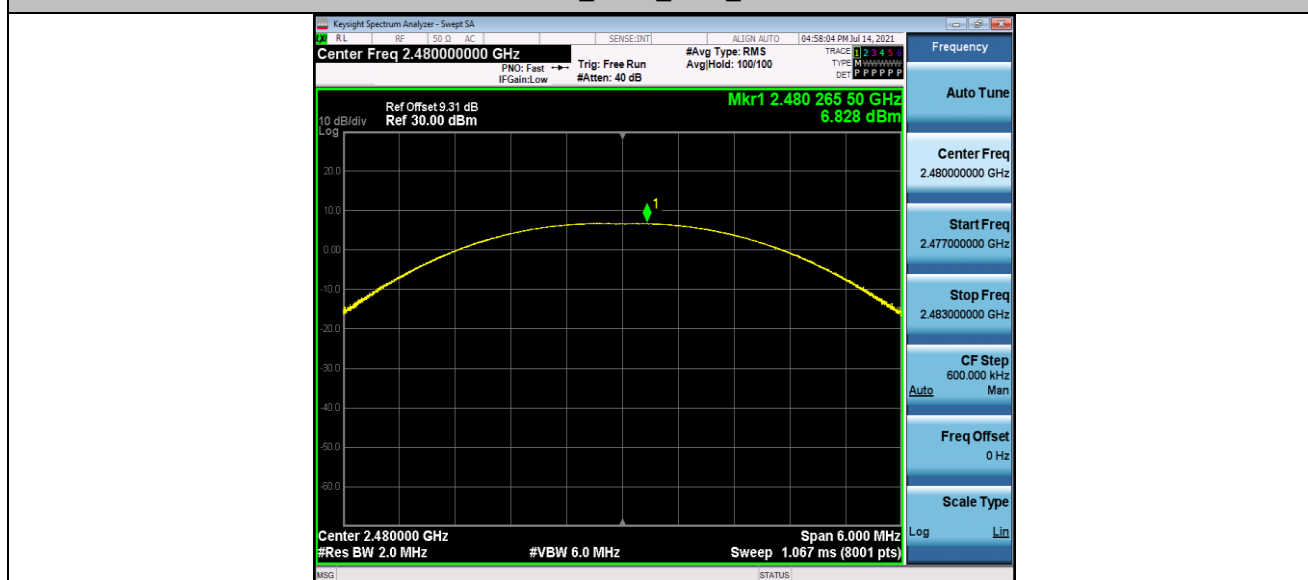

BLE\_500K\_Ant1\_2480

## Appendix D: Maximum power spectral density

### Test Result


TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_125K	Ant1	2402	-0.47	<=8	PASS
		2440	-0.23	<=8	PASS
		2480	0.06	<=8	PASS
BLE_1M	Ant1	2402	-8.31	<=8	PASS
		2440	-8.03	<=8	PASS
		2480	-7.79	<=8	PASS
BLE_2M	Ant1	2402	-11.88	<=8	PASS
		2440	-11.6	<=8	PASS
		2480	-11.28	<=8	PASS
BLE_500K	Ant1	2402	-0.54	<=8	PASS
		2440	-0.3	<=8	PASS
		2480	-0.01	<=8	PASS

## Test Graphs





BLE\_125K\_Ant1\_2480

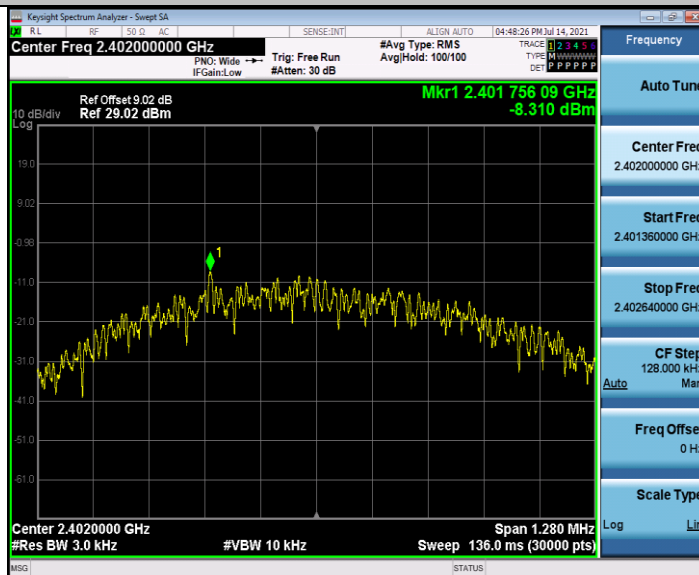

BLE\_1M\_Ant1\_2402