



Shenzhen Shuodian Electronic Technology Co.,Ltd
Page number 1-12

SPECIFICATION

for

SD101-C/FPC 天线 2.4G 天线

Customer No.

Product No.

SD101-C/FPC 天线 2.4G 天线

Author: 曾小凤 Review: 李明

Release Date: 2023.06.21

ShenZhen Shuodian Electronic Technology Co., Ltd

508 West, building 64, Jinlong Industrial City, majialong, Nanshan District, Shenzhen

E-mail: sz_shuodian@163.com

Tel: 0755-86006322

Fax: 0755-86006323

Shenzhen Shuodian Electronic Technology Co.,Ltd



Contents

<u>SPECIFICATION.....</u>	<u>1</u>
<u>SHENZHEN SHUODIAN ELECTRONIC TECHNOLOGY CO., LTD</u>	<u>1</u>
<u>CONTENTS</u>	<u>2</u>
<u>2. GENERAL</u>	<u>3</u>
<u>3. GENERAL PRODUCT SPECIFICATIONS</u>	<u>3</u>
<u>4. SPECIFICATION DETIALS</u>	<u>4</u>
<u>4.1 MECHANICAL PROPERTIES</u>	<u>4</u>
<u>4.2 ELECTRIC PERFORMANCE</u>	<u>6</u>
<u>5. PRODUCT PACKAGING.....</u>	<u>9</u>
<u>6. DOCUMENT RESUME</u>	<u>9</u>



2. General

2.1 Scope of application

SD101-C/FPC 天线 2.4G 天线

2.2 Operating temperature range

Temperature range of this product: -20 ~ +65 °C

2.3 Storage temperature range:

This product is stored at - 30 ~ + 75 °C

3. General product specifications

NO.	ITEMS	DETAILS
1	Type	SD101-C/FPC 天线 2.4G 天线
2	Operating Frequency Band	2400-2500MHz
3	VSWR	<2.0
5	Radiation Efficiency	≥50%
6	Impedance	50Ω
7	Antenna Type	Dipole Array
8	Antenna composition	FPC



4. Specification Detials

4.1 Mechanical Properties

4.11 Product Composition:

No.	Material	Size (MM)
1	FPC	27. 48*26. 23
2	Coxial Line	Ø1.13 55MM Black

4.12 Apperance


Good appearance without scars 、 dirts、 protuberances, etc.

4.13 Antenna Picture and Structure Dimension

Refer to product drawings:



Product drawings:

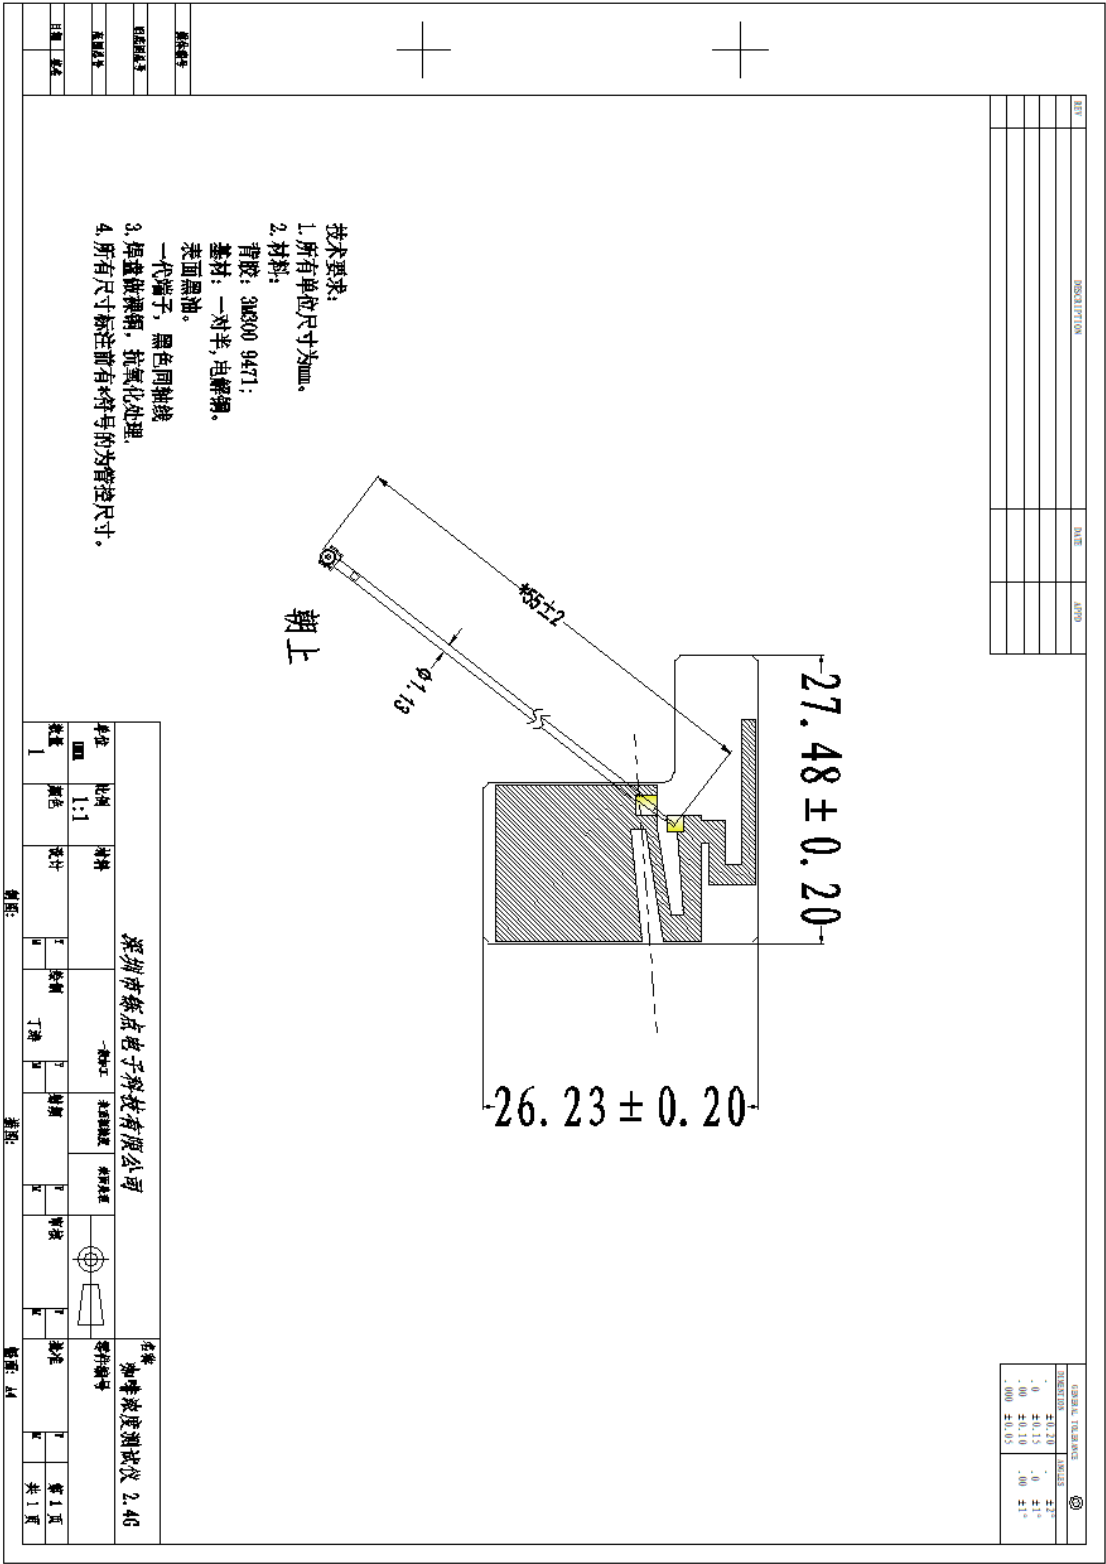



4.2 Electric Performance


4.21 Test condition


Environment:	Equipment:
Temperature: 10℃——+30℃	Network Analyzer: Agilent E8358A
Humidity: ≤80% (+40℃)	Anechior Chamber: ETS
Atmospher: 750mmkg ±30mmkg	

4.22 Test Data for Electrical Performance:

4.22.1 S11 of the Antenna:

Marker	2400MHz	2450MHz	2500MHz
Returnloss	-15.5	-18.9	-18.7
VSWR	1.4	1.2	1.2

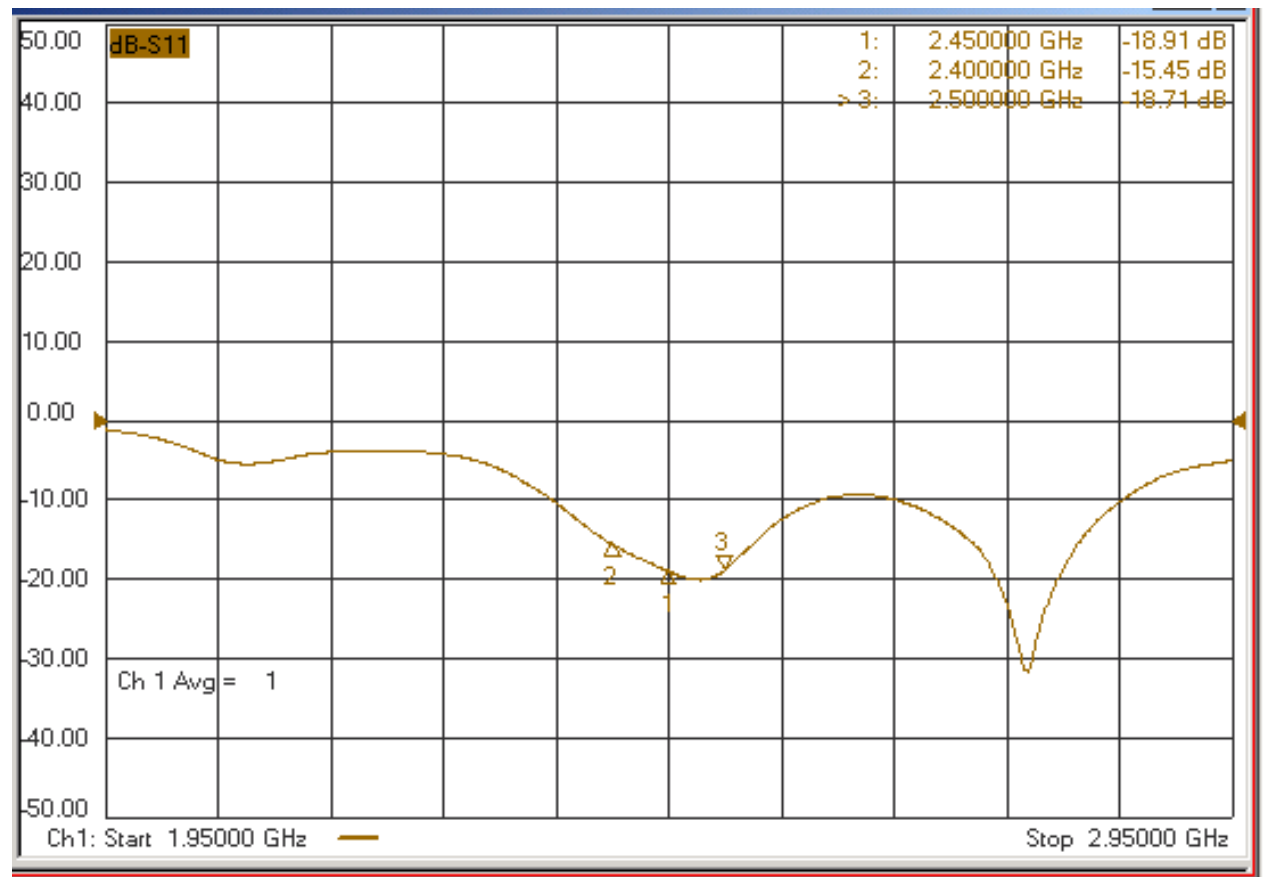

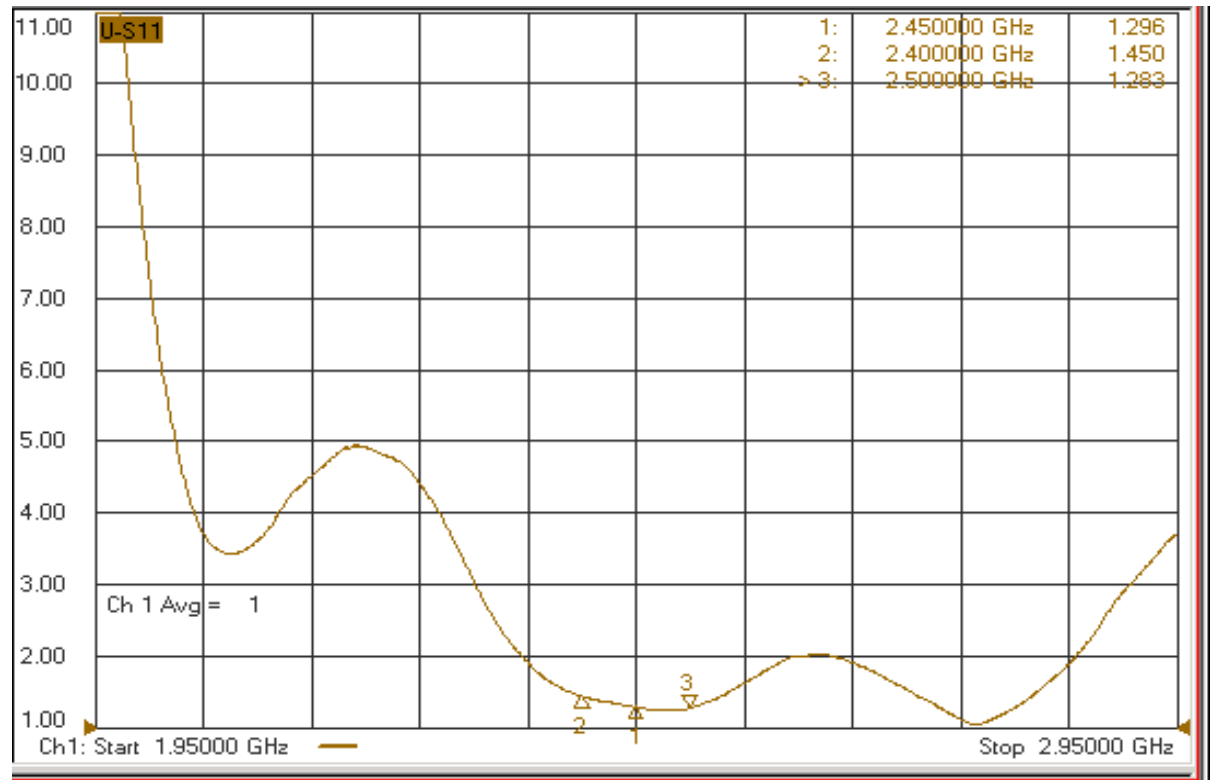


4. 22. 2 天线的增益效率和辐射方向图:

频率 (Mhz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Gain(dBi)	1.02	1.12	1.15	1.21	1.17	1.26	1.49	1.64	1.62	1.56	1.47
Efficenc (%)	39.62	40.10	40.11	40.31	40.32	40.42	40.70	41.62	41.18	40.85	40.63



Radiation pattern: frequency 2450MHz

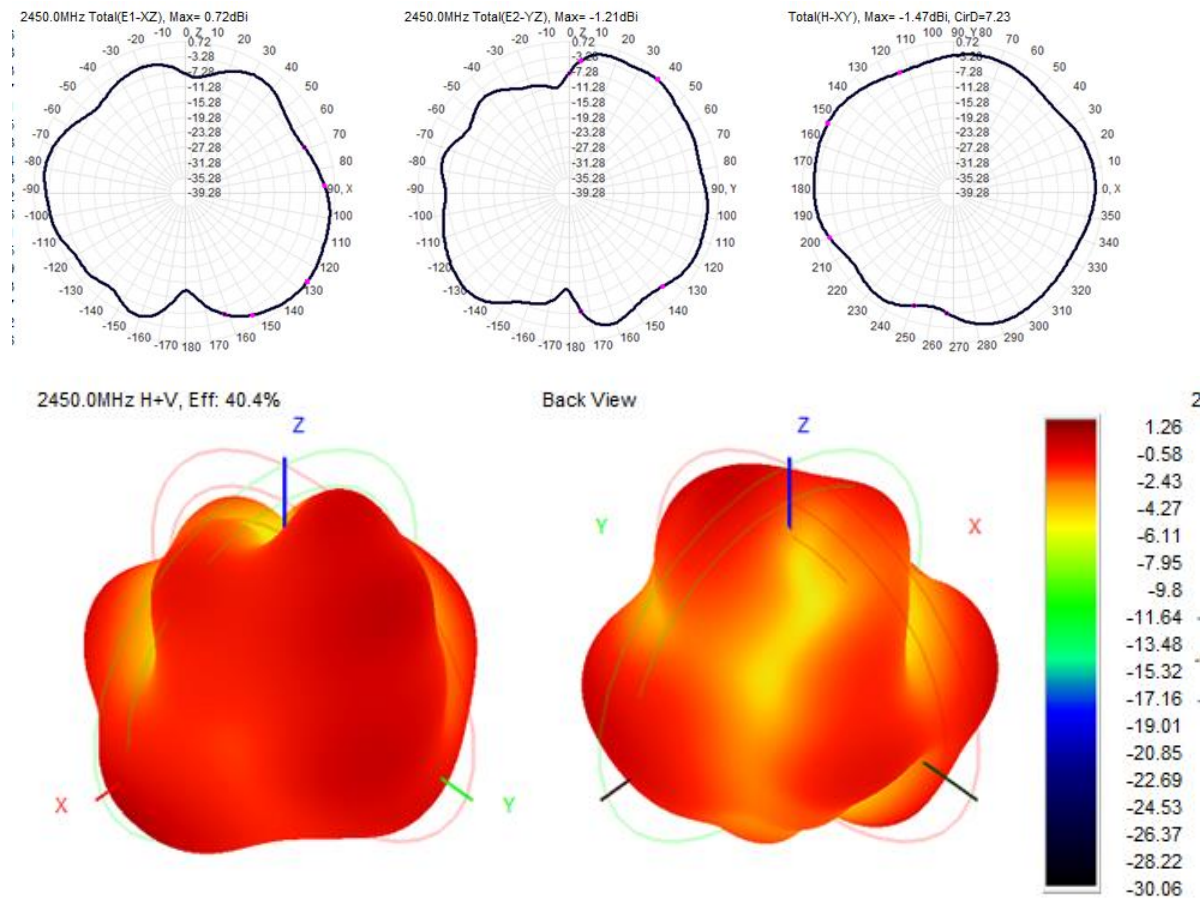



5. Product Packaging

Manner of packing:

Packed in self sealed bags, 200 pcs each.

6. Document Resume

Document No.	
Release Date	2023/6/21
Author	Hungjie
Review	WH

Revised History

Date	Version	Revised Record
2023/6/21	1.00	New Project