

Antenna specification

Antenna Sample Confirmation From

Name of supplier	ShenZhen Aihui Technology Co. , Ltd				
Customer name	Zhi Teng				
Sample name	F108W				
model					
Sample size	WIFI antenna: line length: 120mm 4G terminal				
Inspection item	Performance test	Visual inspection	Structure	In the news	Test results
Notes					
Quality Audit		Project Audit		Business confirmation	
The following is to be completed by the client					

Shenzhen Aihui Technology Co. , Ltd.

Customer feedback	
Customer signature/seal	date:

Antenna Test Report

Test Unit: Shenzhen Aihui Technology Co. , Ltd.			
Materials	FPC coaxial line		
Antenna type	MonopoleType	Polarization mode	Linear
Application scenario			
Working band	WIFI /BT	VSWR	≤2
Power		Impedance	50 Ω

dBi	
Test Equipment	HPE5071C、Shielding Room、3D automatic turntable
Antenna Description:: 1. Grounding processing and picture description: no 2. Need to change the motherboard to match: no ● Test voltage: 3.6V, check the antenna contact is good before testing. ● The RF cable of the integrated tester is kept in a natural state and can not be curled. Specification:test the specified power level, all indicators must conform to the specifications.	

1. Project Image
2. Test Fixture
3. Antenna matching circuit
4. S11 test
5. Antenna passive efficiency and gain
6. Darkroom test equipment and data
7. Schematic diagram of antenna assembly
8. Antenna environment handling
9. Antenna mass production index
10. Structural drawing


1.Project Image

The final verification antenna performance prototype in our company for at least one year, easy to analyze and solve the problem of antenna mass production, to ensure the quality of antenna shipment

2.Test Fixture

Objective: to test the passive parameters of antenna as accurately as possible. Making Method: the handset is made of a 50 ohm coaxial cable, one end of which is connected to the test point of the back end of the matching circuit of the handset motherboard (front end of the RF test hole) , and the other end is connected to the SMA joint. The diagram is as follows:

3、 Antenna matching circuit

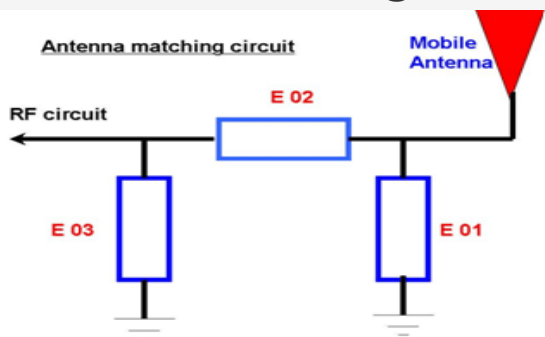


Modify

E01	E02	E03
No	No	No

Note: The match is unmodified.

4.S11 test


4.0 4.0s11 test method description of test equipment: Network Analyzer (E5071C) test method: a 50 ohm CABLE is used to export from the instrument test port. The SMA connector for connecting the handset is calibrated using a calibration piece, record the echo loss and standing wave ratio corresponding to the relevant frequency points. The test schematic is as follows:

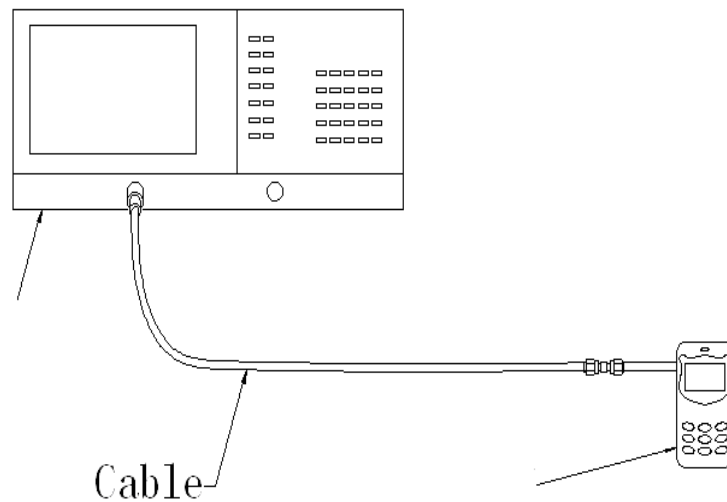


5.Darkroom test equipment and data


WIFI&BT

WIFI 2.4G		
Freq(MHz)	Efficiency (%)	Gain (dBi)
2400	54.74	1.30
2410	55.65	1.58
2420	58.63	1.99
2430	52.69	1.60
2440	57.41	2.10
2450	59.31	1.44
2460	54.85	1.60
2470	56.32	1.55
2480	51.56	1.52

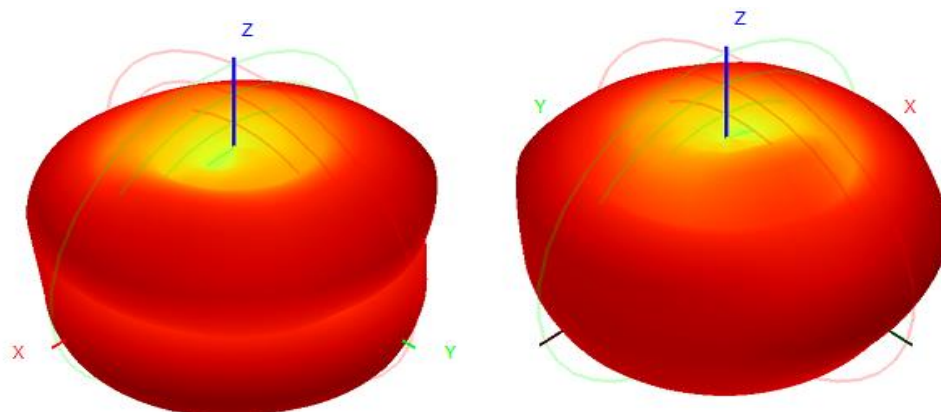


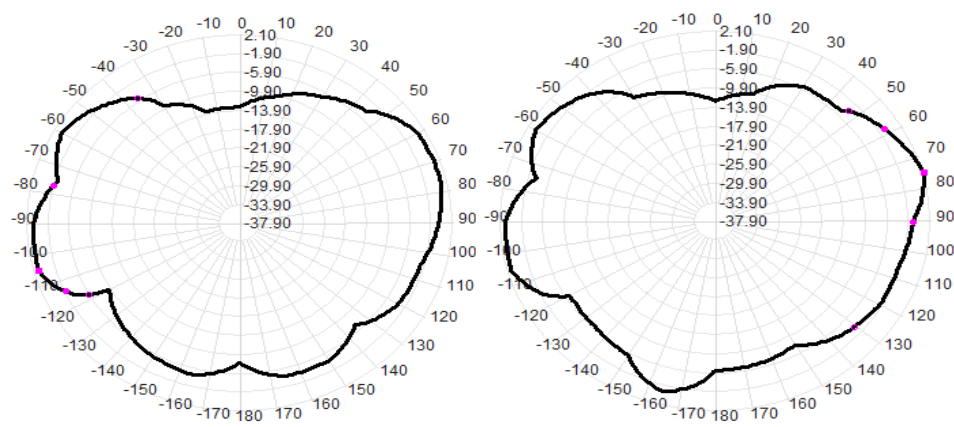

WIFI 5.8G		
Freq(MHz)	Efficiency (%)	Gain (dBi)
5100	55.54	1.35
5200	56.85	1.42
5300	57.41	1.11
5400	56.31	1.25
5500	58.14	1.65
5600	52.65	1.25
5700	54.25	1.44
5800	55.41	1.45
5900	56.30	1.55

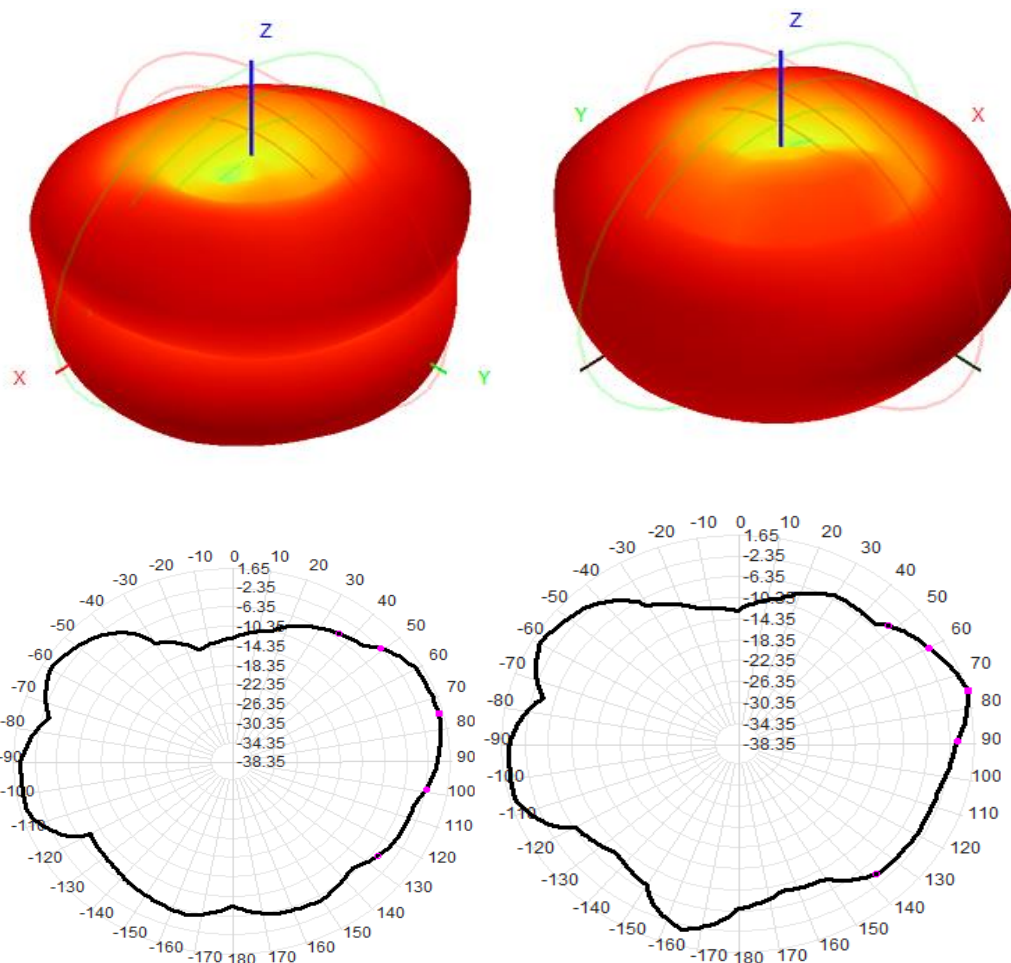

SWR

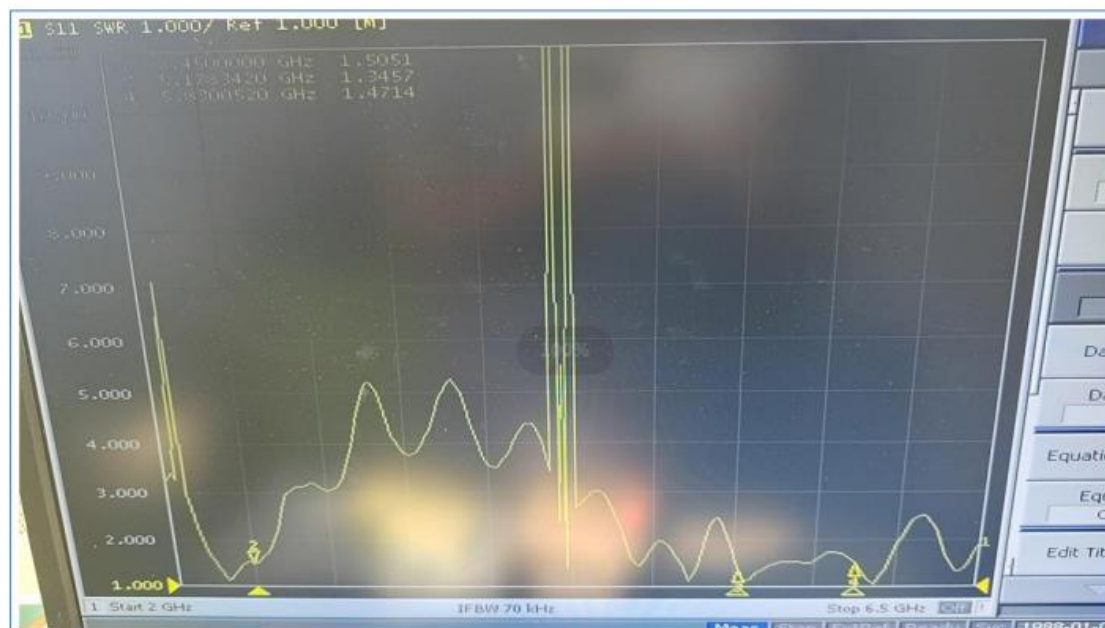

0.1 1111刀切人 天例




Address: 402TEL: 0755-23203435fax: 0755-23203435, Block C, Juxin Science and
Technology Industrial Park, Nanchang community, xixiang, Baoan District, Shenzhen

6.Test Equipment

Test system: shielded darkroom

The temperature was $22^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and the humidity was $50\% \pm 15\%$

Test equipment: when testing passive data, use the Network analyzer AGILENT E5071C to test active data, use the omnibus CMW500

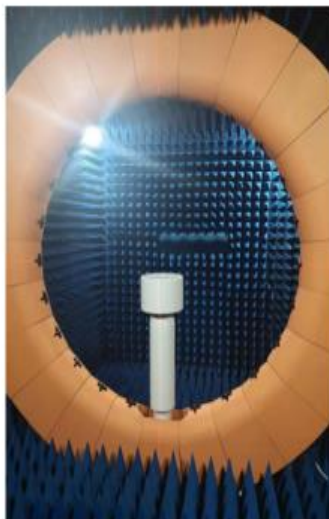

7.Active antenna test data

Frequency Band	2.4GWIFI-B			5.8GWIFI-A		
channel	L	M	H	L	M	H
TRP	15.41	15.77	15.89	13.56	13.13	12.25
TIS			-81.23			-68.39
Frequency Band	2.4WIFI-G			2.4WIFI-N		
channel	L	M	H	L	M	H
TRP	13.86	13.58	13.73	13.44	13.69	13.73
TIS			-68.18			-67.69

8.Schematic diagram of antenna assembly




9.Antenna environment handling

10.Antenna mass production index

When the antenna is mass-produced, the standing wave ratio is taken as the mass-produced test standard. Based on the differences of the project itself, the following criteria are given:	Standard for volume production
680MHZ-2700Mhz	VSWR (Mass Production performance) & LT; VSWR(recognition performance) 0.5

10.1 Structural drawings

Shenzhen Aihui Technology Co. , Ltd.

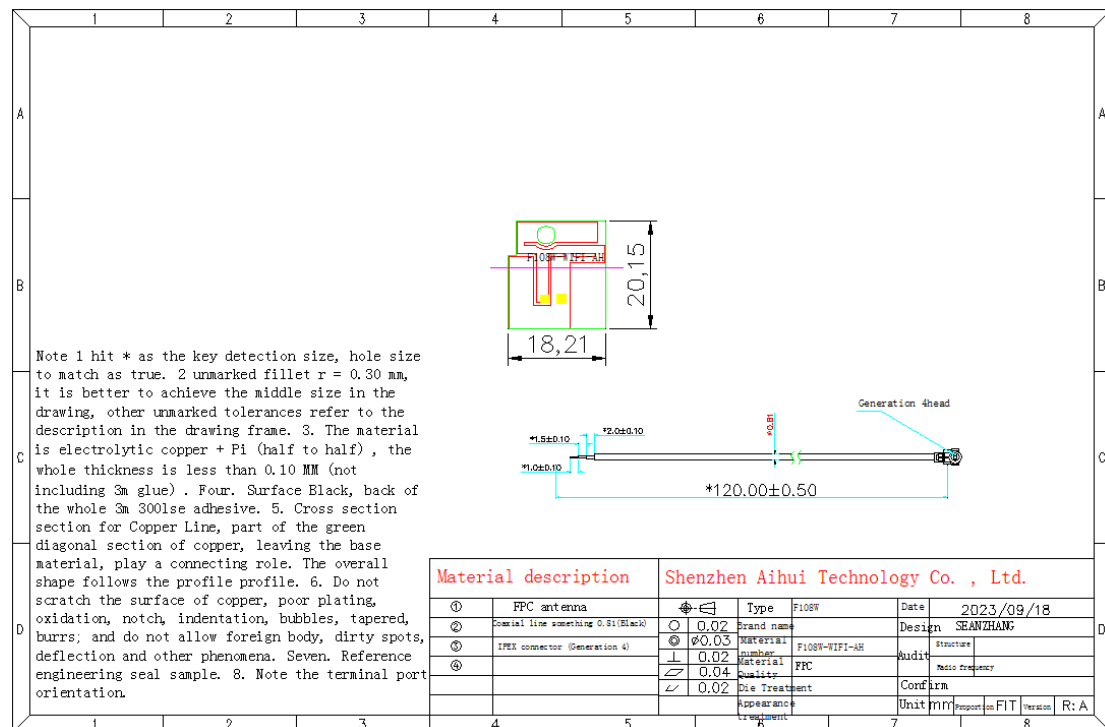

Address: 402TEL: 0755-23203435fax: 0755-23203435, Block C, Juxin Science and Technology Industrial Park, Nanchang community, xixiang, Baoan District, Shenzhen