

## FCC Test Report

### (PART 27)

**Report No.:** RF200325E02A

**FCC ID:** MAD-G06RRH-46-01B

**Test Model:** G06RRH-46-01B

**Received Date:** Mar. 25, 2020

**Test Date:** July 01 to 02, 2020

**Issued Date:** July 10, 2020

**Applicant:** Microelectronics Technology Inc.

**Address:** No. 1, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan, R.O.C.

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

**Test Location:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

**FCC Registration /  
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. This report should not be used by the client to claim any endorsement by TAF.

## Table of Contents

|                                                                   |           |
|-------------------------------------------------------------------|-----------|
| <b>Release Control Record .....</b>                               | <b>4</b>  |
| <b>1 Certificate of Conformity .....</b>                          | <b>5</b>  |
| <b>2 Summary of Test Results .....</b>                            | <b>6</b>  |
| 2.1 Measurement Uncertainty .....                                 | 6         |
| 2.2 Test Site and Instruments .....                               | 7         |
| <b>3 General Information .....</b>                                | <b>9</b>  |
| 3.1 General Description of EUT .....                              | 9         |
| 3.2 Configuration of System under Test .....                      | 11        |
| 3.2.1 Description of Support Units .....                          | 12        |
| 3.3 Test Mode Applicability and Tested Channel Detail .....       | 13        |
| 3.4 General Description of Applied Standards and References ..... | 15        |
| <b>4 Test Types and Results .....</b>                             | <b>16</b> |
| 4.1 Output Power Measurement .....                                | 16        |
| 4.1.1 Limits of Output Power Measurement .....                    | 16        |
| 4.1.2 Test Procedures .....                                       | 16        |
| 4.1.3 Test Setup .....                                            | 16        |
| 4.1.4 Test Results .....                                          | 17        |
| 4.2 Modulation characteristics Measurement .....                  | 21        |
| 4.2.1 Limits of Modulation characteristics .....                  | 21        |
| 4.2.2 Test Procedure .....                                        | 21        |
| 4.2.3 Test Setup .....                                            | 21        |
| 4.2.4 Test Results .....                                          | 22        |
| 4.3 Frequency Stability Measurement .....                         | 23        |
| 4.3.1 Limits of Frequency Stability Measurement .....             | 23        |
| 4.3.2 Test Procedure .....                                        | 23        |
| 4.3.3 Test Setup .....                                            | 23        |
| 4.3.4 Test Results .....                                          | 24        |
| 4.4 Emission Bandwidth Measurement .....                          | 26        |
| 4.4.1 Limits of Emission Bandwidth Measurement .....              | 26        |
| 4.4.2 Test Procedure .....                                        | 26        |
| 4.4.3 Test Setup .....                                            | 26        |
| 4.4.4 Test Results (-26dBc Bandwidth) .....                       | 27        |
| 4.4.5 Test Results (Occupied Bandwidth) .....                     | 59        |
| 4.5 Channel Edge Measurement .....                                | 91        |
| 4.5.1 Limits of Band Edge Measurement .....                       | 91        |
| 4.5.2 Test Setup .....                                            | 91        |
| 4.5.3 Test Procedures .....                                       | 91        |
| 4.5.4 Test Results .....                                          | 92        |
| 4.6 Peak to Average Ratio .....                                   | 96        |
| 4.6.1 Limits of Peak to Average Ratio Measurement .....           | 96        |
| 4.6.2 Test Setup .....                                            | 96        |
| 4.6.3 Test Procedures .....                                       | 96        |
| 4.6.4 Test Results .....                                          | 97        |
| 4.7 Conducted Spurious Emissions .....                            | 101       |
| 4.7.1 Limits of Conducted Spurious Emissions Measurement .....    | 101       |
| 4.7.2 Test Setup .....                                            | 101       |
| 4.7.3 Test Procedure .....                                        | 101       |
| 4.7.4 Test Results .....                                          | 102       |
| 4.8 Radiated Emission Measurement .....                           | 110       |
| 4.8.1 Limits of Radiated Emission Measurement .....               | 110       |
| 4.8.2 Test Procedure .....                                        | 110       |
| 4.8.3 Deviation from Test Standard .....                          | 110       |
| 4.8.4 Test Setup .....                                            | 111       |

|                                                                 |            |
|-----------------------------------------------------------------|------------|
| 4.8.5 Test Results .....                                        | 112        |
| <b>5 Pictures of Test Arrangements .....</b>                    | <b>136</b> |
| <b>Appendix – Information of the Testing Laboratories .....</b> | <b>137</b> |

### Release Control Record

| Issue No.    | Description       | Date Issued   |
|--------------|-------------------|---------------|
| RF200325E02A | Original release. | July 10, 2020 |

## 1 Certificate of Conformity

**Product:** 2x40W B71 RRH

**Brand:** MTI

**Test Model:** G06RRH-46-01B

**Sample Status:** ENGINEERING SAMPLE

**Applicant:** Microelectronics Technology Inc.

**Test Date:** July 01 to 02, 2020

**Standards:** FCC Part 27, Subpart N  
FCC Part 2

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Joyce Kuo , **Date:** July 10, 2020  
Joyce Kuo / Specialist

**Approved by :** Clark Lin , **Date:** July 10, 2020  
Clark Lin / Technical Manager

## 2 Summary of Test Results

| Applied Standard: FCC Part 27, Subpart N & Part 2 |                                                                    |        |                                                                                   |
|---------------------------------------------------|--------------------------------------------------------------------|--------|-----------------------------------------------------------------------------------|
| FCC Clause                                        | Test Item                                                          | Result | Remarks                                                                           |
| 2.1046<br>27.50(d)(4)                             | Equivalent Isotropically radiated power                            | PASS   | Meet the requirement of limit.                                                    |
| 2.1047                                            | Modulation characteristics                                         | PASS   | Meet the requirement                                                              |
| 2.1055<br>27.54                                   | Frequency Stability<br>Stay with the authorized bands of operation | PASS   | Meet the requirement of limit.                                                    |
| 2.1049<br>27.53(g)                                | Occupied Bandwidth                                                 | PASS   | Meet the requirement of limit.                                                    |
| 27.53(g)                                          | Band Edge Measurements                                             | PASS   | Meet the requirement of limit.                                                    |
| 27.50(d)(5)                                       | Peak To Average Ratio                                              | PASS   | Meet the requirement of limit.                                                    |
| 2.1051<br>27.53(g)                                | Conducted Spurious Emissions                                       | PASS   | Meet the requirement of limit.                                                    |
| 2.1053<br>27.53(g)                                | Radiated Spurious Emissions                                        | PASS   | Meet the requirement of limit.<br>Minimum passing margin is -36.09dB at 92.75MHz. |

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement                        | Frequency      | Expanded Uncertainty (k=2) (±) |
|------------------------------------|----------------|--------------------------------|
| Conducted Emissions at mains ports | 150kHz ~ 30MHz | 1.9 dB                         |
| Radiated Emissions up to 1 GHz     | 9kHz ~ 30MHz   | 3.1 dB                         |
|                                    | 30MHz ~ 1GHz   | 5.4 dB                         |
| Radiated Emissions above 1 GHz     | 1GHz ~ 18GHz   | 5.0 dB                         |
|                                    | 18GHz ~ 40GHz  | 5.3 dB                         |

## 2.2 Test Site and Instruments

For radiated spurious emissions test:

| DESCRIPTION & MANUFACTURER                 | MODEL NO.            | SERIAL NO.  | CALIBRATED DATE | CALIBRATED UNTIL |
|--------------------------------------------|----------------------|-------------|-----------------|------------------|
| Test Receiver<br>Keysight                  | N9038A               | MY54450088  | July 03, 2019   | July 02, 2020    |
| Pre-Amplifier<br>EMCI                      | EMC001340            | 980142      | May 25, 2020    | May 24, 2021     |
| Loop Antenna<br>Electro-Metrics            | EM-6879              | 264         | Feb. 18, 2020   | Feb. 17, 2021    |
| RF Cable                                   | NA                   | LOOPCAB-001 | Jan. 08, 2020   | Jan. 07, 2021    |
| RF Cable                                   | NA                   | LOOPCAB-002 | Jan. 08, 2020   | Jan. 07, 2021    |
| Pre-Amplifier<br>Mini-Circuits             | ZFL-1000VH2B         | AMP-ZFL-05  | Apr. 28, 2020   | Apr. 27, 2021    |
| Trilog Broadband<br>Antenna<br>SCHWARZBECK | VULB 9168            | 9168-361    | Nov. 11, 2019   | Nov. 10, 2020    |
| RF Cable                                   | 8D                   | 966-3-1     | Mar. 17, 2020   | Mar. 16, 2021    |
| RF Cable                                   | 8D                   | 966-3-2     | Mar. 17, 2020   | Mar. 16, 2021    |
| RF Cable                                   | 8D                   | 966-3-3     | Mar. 17, 2020   | Mar. 16, 2021    |
| Fixed attenuator<br>Mini-Circuits          | UNAT-5+              | PAD-3m-3-01 | Sep. 26, 2019   | Sep. 25, 2020    |
| Horn_Antenna<br>SCHWARZBECK                | BBHA9120-D           | 9120D-406   | Nov. 24, 2019   | Nov. 23, 2020    |
| Pre-Amplifier<br>EMCI                      | EMC12630SE           | 980384      | Jan. 15, 2020   | Jan. 14, 2021    |
| RF Cable                                   | EMC104-SM-SM-1200    | 160922      | Jan. 15, 2020   | Jan. 14, 2021    |
| RF Cable                                   | EMC104-SM-SM-2000    | 180601      | June 09, 2020   | June 08, 2021    |
| RF Cable                                   | EMC104-SM-SM-6000    | 180602      | June 09, 2020   | June 08, 2021    |
| Spectrum Analyzer<br>Keysight              | N9030A               | MY54490679  | July 17, 2019   | July 16, 2020    |
| Pre-Amplifier<br>EMCI                      | EMC184045SE          | 980387      | Jan. 15, 2020   | Jan. 14, 2021    |
| Horn_Antenna<br>SCHWARZBECK                | BBHA 9170            | BBHA9170519 | Nov. 24, 2019   | Nov. 23, 2020    |
| RF Cable                                   | EMC102-KM-KM-1200    | 160924      | Jan. 15, 2020   | Jan. 14, 2021    |
| RF Cable                                   | EMC-KM-KM-4000       | 200214      | Mar. 11, 2020   | Mar. 10, 2021    |
| Software                                   | ADT_Radiated_V8.7.08 | NA          | NA              | NA               |
| Antenna Tower & Turn<br>Table<br>Max-Full  | MF-7802              | MF780208406 | NA              | NA               |
| Boresight Antenna<br>Fixture               | FBA-01               | FBA-SIP01   | NA              | NA               |

### Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. Tested Date: July 01, 2020

**For other test:**

| DESCRIPTION & MANUFACTURER                 | MODEL NO.                     | SERIAL NO.  | CALIBRATED DATE | CALIBRATED UNTIL |
|--------------------------------------------|-------------------------------|-------------|-----------------|------------------|
| Spectrum Analyzer Keysight                 | N9030A                        | MY55410176  | Jul 03, 2019    | Jul 02, 2020     |
| 18GHz 30dB 100W Fixed Attenuator(*) woken  | WATT-10018FS-30               | N/A         | May 19, 2020    | May 18, 2021     |
| DC Power Supply Topward                    | 6603D                         | 795558      | NA              | NA               |
| Temperature & Humidity Chamber Giant Force | GTH-150-40-SP-AR              | MAA0812-008 | Jan. 16, 2020   | Jan. 15, 2021    |
| Digital Multimeter FLUKE                   | 87III                         | 73680266    | Dec. 13, 2019   | Dec. 12, 2020    |
| Software                                   | ADT_RF Test Software V6.6.5.4 | NA          | NA              | NA               |

- NOTE:**
1. The test was performed in Oven room 2.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  3. (\*)The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
  4. Tested Date: July 02, 2020

### 3 General Information

#### 3.1 General Description of EUT

|                       |                                    |                          |                     |
|-----------------------|------------------------------------|--------------------------|---------------------|
| Product               | 2x40W B71 RRH                      |                          |                     |
| Brand                 | MTI                                |                          |                     |
| Test Model            | G06RRH-46-01B                      |                          |                     |
| Status of EUT         | ENGINEERING SAMPLE                 |                          |                     |
| Power Supply Rating   | DC -40.5 to -57 V (Nominal -48Vdc) |                          |                     |
| Modulation Type       | QPSK, 16QAM, 64QAM, 256QAM         |                          |                     |
| Modulation Technology | 5G NR FDD                          |                          |                     |
| Operating Frequency   | Band n71                           | Channel Bandwidth: 5MHz  | 619.5MHz ~649.5MHz  |
|                       |                                    | Channel Bandwidth: 10MHz | 622MHz ~647MHz      |
|                       |                                    | Channel Bandwidth: 15MHz | 624.5MHz ~644.5MHz  |
|                       |                                    | Channel Bandwidth: 20MHz | 627MHz ~642MHz      |
| Max. ERP Power        | Channel Bandwidth: 5MHz            |                          | 1541700.45mW (QPSK) |
|                       | Channel Bandwidth: 10MHz           |                          | 1614358.56mW (QPSK) |
|                       | Channel Bandwidth: 15MHz           |                          | 1566751.07mW (QPSK) |
|                       | Channel Bandwidth: 20MHz           |                          | 1584893.19mW (QPSK) |
| Emission Designator   | Channel Bandwidth: 5MHz            |                          | QPSK: 4M48G7D       |
|                       |                                    |                          | 16QAM: 4M50D7W      |
|                       |                                    |                          | 64QAM: 4M48D7W      |
|                       |                                    |                          | 256QAM: 4M47D7W     |
|                       | Channel Bandwidth: 10MHz           |                          | QPSK: 9M22G7D       |
|                       |                                    |                          | 16QAM: 9M16D7W      |
|                       |                                    |                          | 64QAM: 9M24D7W      |
|                       |                                    |                          | 256QAM: 9M20D7W     |
|                       | Channel Bandwidth: 15MHz           |                          | QPSK: 14M0G7D       |
|                       |                                    |                          | 16QAM: 14M0D7W      |
|                       |                                    |                          | 64QAM: 14M0D7W      |
|                       |                                    |                          | 256QAM: 14M0D7W     |
|                       | Channel Bandwidth: 20MHz           |                          | QPSK: 18M6G7D       |
|                       |                                    |                          | 16QAM: 18M7D7W      |
|                       |                                    |                          | 64QAM: 18M6D7W      |
|                       |                                    |                          | 256QAM: 18M6D7W     |
| Antenna Type          | Refer to note as below             |                          |                     |
| Antenna Connector     | Refer to user's manual             |                          |                     |
| Accessory Device      | NA                                 |                          |                     |
| Data Cable Supplied   | NA                                 |                          |                     |

Note:

1. This report is prepared for FCC class II permissive change. This report is issued as a supplementary report of BV CPS report no.: RF200325E02. Difference compared with the original report is adding 5G NR band n71(Single Carrier mode / SCS=15kHz) by software upgrade. And all data were verified to meet the requirements.

2. The EUT incorporates a MIMO function.


| Channel Bandwidth | Modulation                 | TX & RX configuration |     |
|-------------------|----------------------------|-----------------------|-----|
| 5MHz              | QPSK, 16QAM, 64QAM, 256QAM | 2TX                   | 2RX |
| 10MHz             | QPSK, 16QAM, 64QAM, 256QAM | 2TX                   | 2RX |
| 15MHz             | QPSK, 16QAM, 64QAM, 256QAM | 2TX                   | 2RX |
| 20MHz             | QPSK, 16QAM, 64QAM, 256QAM | 2TX                   | 2RX |

3. The antennas provided to the EUT, please refer to the following table:

| Antenna Gain (dBi) | Frequency range(MHz) | Antenna Type | Connector Type  |
|--------------------|----------------------|--------------|-----------------|
| 18                 | 617-698              | Sector       | 4×4.3-10 Female |

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Configuration of System under Test

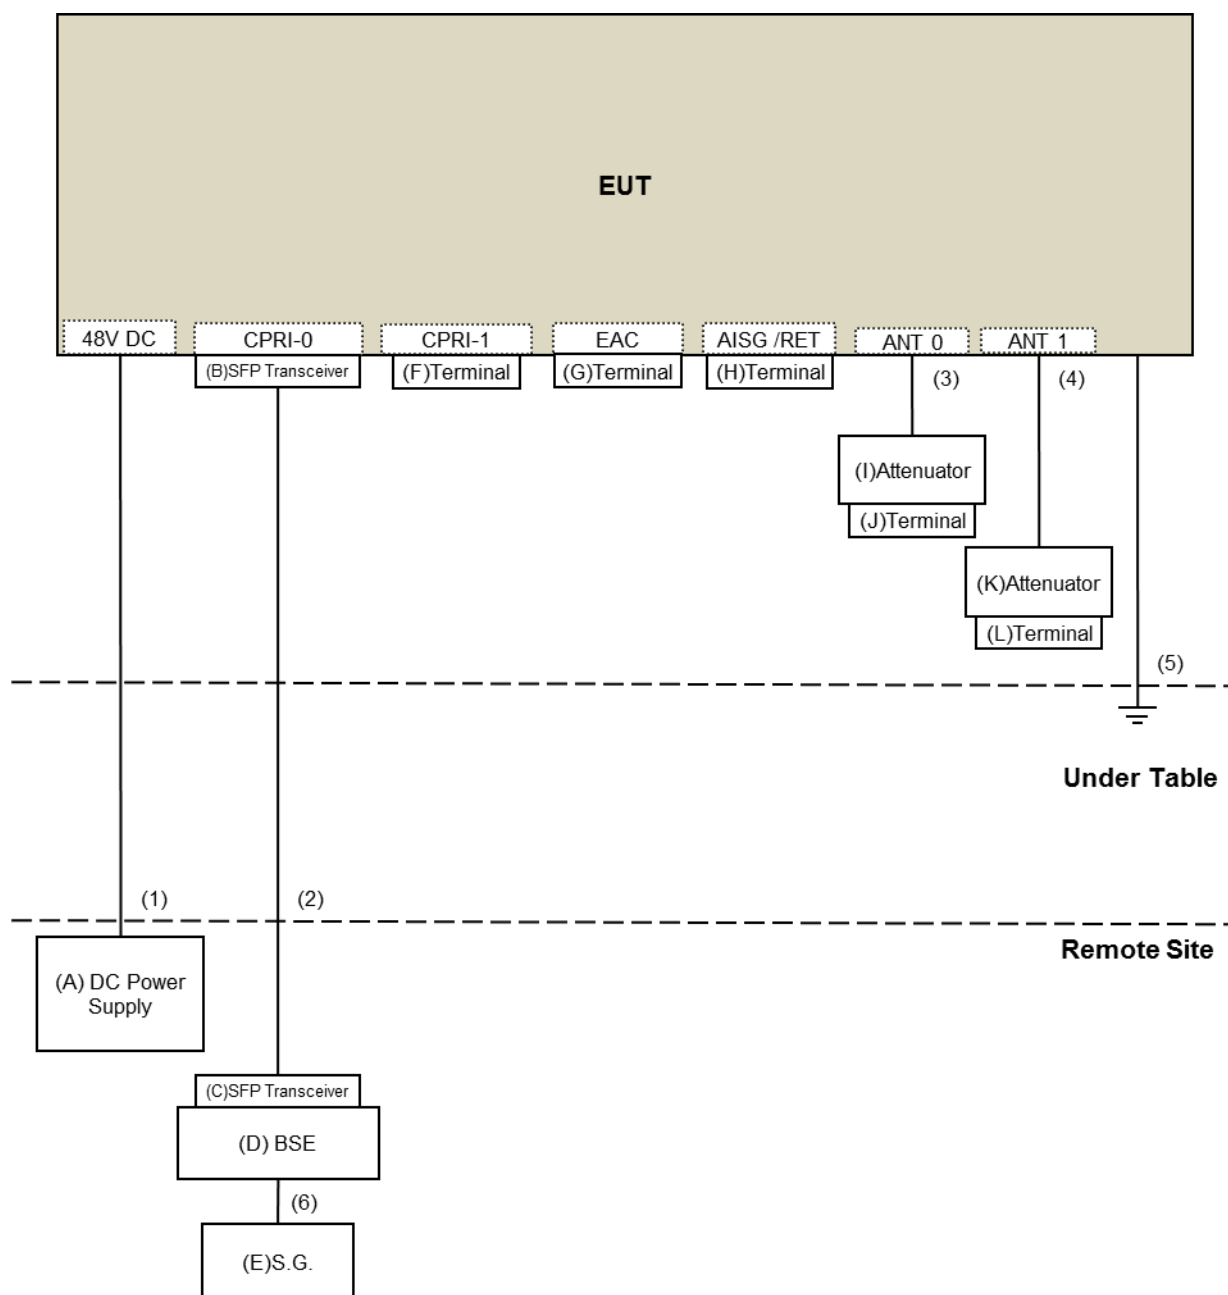

### 3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| No. | Product         | Brand   | Model No. | Serial No. | FCC ID | Remark             |
|-----|-----------------|---------|-----------|------------|--------|--------------------|
| A   | DC Power Supply | NA      | NA        | NA         | NA     | Supplied by client |
| B   | SFP Transceiver | NA      | NA        | NA         | NA     | Supplied by client |
| C   | SFP Transceiver | NA      | NA        | NA         | NA     | Supplied by client |
| D   | BSE (Note 2)    | NA      | NA        | NA         | NA     | Supplied by client |
| E   | S.G             | Agilent | E4438C    | NA         | NA     | Provided by Lab    |
| F   | Terminal        | NA      | NA        | NA         | NA     | Supplied by client |
| G   | Terminal        | NA      | NA        | NA         | NA     | Supplied by client |
| H   | Terminal        | NA      | NA        | NA         | NA     | Supplied by client |
| I   | Attenuator      | NA      | NA        | NA         | NA     | Supplied by client |
| J   | Terminal        | NA      | NA        | NA         | NA     | Supplied by client |
| K   | Attenuator      | NA      | NA        | NA         | NA     | Supplied by client |
| L   | Terminal        | NA      | NA        | NA         | NA     | Supplied by client |

**NOTE:**

1. All power cords of the above support units are non-shielded (1.8 m).
2. BSE: Based Station Emulator which is to transmit/receive the waveform
3. Items B-C acted as communication partners to transfer data.

| No. | Cable          | Qty. | Length (m) | Shielded (Yes/ No) | Cores (Number) | Remark             |
|-----|----------------|------|------------|--------------------|----------------|--------------------|
| 1   | DC Power Cable | 1    | 10         | Yes                | 0              | Supplied by client |
| 2   | Coaxial Cable  | 1    | 10         | Yes                | 0              | Supplied by client |
| 3   | RF Cable       | 1    | 1.5        | Yes                | 0              | Supplied by client |
| 4   | RF Cable       | 1    | 1.5        | Yes                | 0              | Supplied by client |
| 5   | GND Cable      | 1    | 3          | No                 | 0              | Provided by Lab    |
| 6   | RF Cable       | 1    | 3          | No                 | 0              | Supplied by client |

### 3.3 Test Mode Applicability and Tested Channel Detail

Following channel(s) was (were) selected for the final test as listed below:

| Test Item             | Available Frequency (MHz) | Tested Frequency (MHz) | Channel Bandwidth    | Modulation                   |
|-----------------------|---------------------------|------------------------|----------------------|------------------------------|
| Output Power          | 619.5 to 649.5            | 619.5, 634.5, 649.5    | 5MHz Single Carrier  | QPSK, 16QAM, 64QAM, , 256QAM |
|                       |                           | 622, 634.5, 647        | 10MHz Single Carrier | QPSK, 16QAM, 64QAM, , 256QAM |
|                       |                           | 624.5, 634.5, 644.5    | 15MHz Single Carrier | QPSK, 16QAM, 64QAM, , 256QAM |
|                       |                           | 627, 634.5, 642        | 20MHz Single Carrier | QPSK, 16QAM, 64QAM, , 256QAM |
| Frequency Stability   | 619.5 to 649.5            | 619.5, 634.5, 649.5    | 5MHz Single Carrier  | QPSK                         |
|                       |                           | 622, 634.5, 647        | 10MHz Single Carrier | QPSK                         |
|                       |                           | 624.5, 634.5, 644.5    | 15MHz Single Carrier | QPSK                         |
|                       |                           | 627, 634.5, 642        | 20MHz Single Carrier | QPSK                         |
| Emission Bandwidth    | 619.5 to 649.5            | 619.5, 634.5, 649.5    | 5MHz Single Carrier  | QPSK, 16QAM, 64QAM, , 256QAM |
|                       |                           | 622, 634.5, 647        | 10MHz Single Carrier | QPSK, 16QAM, 64QAM, , 256QAM |
|                       |                           | 624.5, 634.5, 644.5    | 15MHz Single Carrier | QPSK, 16QAM, 64QAM, , 256QAM |
|                       |                           | 627, 634.5, 642        | 20MHz Single Carrier | QPSK, 16QAM, 64QAM, , 256QAM |
| Channel Edge          | 619.5 to 649.5            | 619.5, 634.5, 649.5    | 5MHz Single Carrier  | QPSK                         |
|                       |                           | 622, 634.5, 647        | 10MHz Single Carrier | QPSK                         |
|                       |                           | 624.5, 634.5, 644.5    | 15MHz Single Carrier | QPSK                         |
|                       |                           | 627, 634.5, 642        | 20MHz Single Carrier | QPSK                         |
| Peak To Average Ratio | 619.5 to 649.5            | 619.5, 634.5, 649.5    | 5MHz Single Carrier  | QPSK, 16QAM, 64QAM, , 256QAM |
|                       |                           | 622, 634.5, 647        | 10MHz Single Carrier | QPSK, 16QAM, 64QAM, , 256QAM |
|                       |                           | 624.5, 634.5, 644.5    | 15MHz Single Carrier | QPSK, 16QAM, 64QAM, , 256QAM |
|                       |                           | 627, 634.5, 642        | 20MHz Single Carrier | QPSK, 16QAM, 64QAM, , 256QAM |
| Conducted Emission    | 619.5 to 649.5            | 619.5, 634.5, 649.5    | 5MHz Single Carrier  | QPSK                         |
|                       |                           | 622, 634.5, 647        | 10MHz Single Carrier | QPSK                         |
|                       |                           | 624.5, 634.5, 644.5    | 15MHz Single Carrier | QPSK                         |
|                       |                           | 627, 634.5, 642        | 20MHz Single Carrier | QPSK                         |

| Test Item                    | Available Frequency (MHz) | Tested Frequency (MHz) | Channel Bandwidth    | Modulation |
|------------------------------|---------------------------|------------------------|----------------------|------------|
| Radiated Emission Below 1GHz | 619.5 to 649.5            | 619.5, 634.5, 649.5    | 5MHz Single Carrier  | QPSK       |
|                              |                           | 622, 634.5, 647        | 10MHz Single Carrier | QPSK       |
|                              |                           | 624.5, 634.5, 644.5    | 15MHz Single Carrier | QPSK       |
|                              |                           | 627, 634.5, 642        | 20MHz Single Carrier | QPSK       |
| Radiated Emission Above 1GHz | 619.5 to 649.5            | 619.5, 634.5, 649.5    | 5MHz Single Carrier  | QPSK       |
|                              |                           | 622, 634.5, 647        | 10MHz Single Carrier | QPSK       |
|                              |                           | 624.5, 634.5, 644.5    | 15MHz Single Carrier | QPSK       |
|                              |                           | 627, 634.5, 642        | 20MHz Single Carrier | QPSK       |

**NOTE:**

1. All supported modulation types were evaluated. The Worst case of QPSK was selected. Therefore, the Frequency Stability and Radiated Emission were performed under QPSK mode only.

**Test Condition:**

| Test Item                  | Environmental Conditions | Input Power (System) | Tested By    |
|----------------------------|--------------------------|----------------------|--------------|
| Output Power               | 25deg. C, 63%RH          | 120Vac, 60Hz         | Allen Chuang |
| Modulation characteristics | 25deg. C, 63%RH          | 120Vac, 60Hz         | Allen Chuang |
| Frequency Stability        | 25deg. C, 63%RH          | 120Vac, 60Hz         | Allen Chuang |
| Emission Bandwidth         | 25deg. C, 63%RH          | 120Vac, 60Hz         | Allen Chuang |
| Band Edge                  | 25deg. C, 63%RH          | 120Vac, 60Hz         | Allen Chuang |
| Peak To Average Ratio      | 25deg. C, 63%RH          | 120Vac, 60Hz         | Allen Chuang |
| Conducted Emission         | 25deg. C, 75%RH          | 120Vac, 60Hz         | Nelson Teng  |
| Radiated Emission          | 25deg. C, 75%RH          | 120Vac, 60Hz         | Nelson Teng  |

Note: Above input power with the AC/DC PSU used during testing.

### **3.4 General Description of Applied Standards and References**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

**Test Standard:**

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 27, Subpart N**

**ANSI/TIA/EIA-603-E 2016**

**ANSI 63.26-2015**

All test items have been performed and recorded as per the above standards.

**References Test Guidance:**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

All test items have been performed and recorded as per the above standards and KDB test guidance.

## 4 Test Types and Results

### 4.1 Output Power Measurement

#### 4.1.1 Limits of Output Power Measurement

The radiated peak output power shall be according to the specific rule Part 27.50(c)(3) that are limited to ERP of 1000 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.

#### 4.1.2 Test Procedures

EIRP / ERP Measurement:

Conducted Power Measurement:

- A spectrum analyzer was used on the output port of the EUT and recorded output power from the spectrum analyzer.
- The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation as follows:

$$\text{ERP or EIRP} = \text{PMeas} + \text{GT}$$


Where ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as PMeas, e.g., dBm or dBW)

PMeas : measured transmitter output power or PSD, in dBm or dBW

GT : gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

#### 4.1.3 Test Setup

CONDUCTED POWER MEASUREMENT:

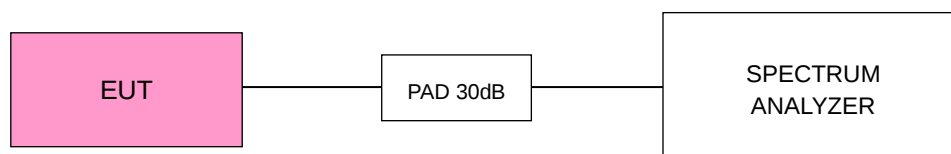

#### 4.1.4 Test Results

##### Single Carrier

##### 5MHz

| Channel Number | Freq. (MHz) | QPSK                          |       |       |          |        |            |            |            | PASS /FAIL | Setting |
|----------------|-------------|-------------------------------|-------|-------|----------|--------|------------|------------|------------|------------|---------|
|                |             | Conducted Average Power (dBm) |       | Gain  | ERP(dBm) |        | ERP(mW)    |            | Limit(dBm) |            |         |
|                |             |                               |       |       | CHAIN0   | CHAIN1 | CHAIN0     | CHAIN1     | Maximum    |            |         |
| 123900         | 619.5       | 45.72                         | 45.85 | 18.00 | 61.57    | 61.70  | 1435489.43 | 1479108.39 | 66.99      | PASS       | 46      |
| 126900         | 634.5       | 45.83                         | 46.03 | 18.00 | 61.68    | 61.88  | 1472312.50 | 1541700.45 | 66.99      | PASS       | 46      |
| 129900         | 649.5       | 45.65                         | 45.79 | 18.00 | 61.50    | 61.64  | 1412537.54 | 1458814.26 | 66.99      | PASS       | 46      |

##### 10MHz

| Channel Number | Freq. (MHz) | QPSK                          |       |       |          |        |            |            |            | PASS /FAIL | Setting |
|----------------|-------------|-------------------------------|-------|-------|----------|--------|------------|------------|------------|------------|---------|
|                |             | Conducted Average Power (dBm) |       | Gain  | ERP(dBm) |        | ERP(mW)    |            | Limit(dBm) |            |         |
|                |             |                               |       |       | CHAIN0   | CHAIN1 | CHAIN0     | CHAIN1     | Maximum    |            |         |
| 124400         | 622         | 46.19                         | 45.95 | 18.00 | 62.04    | 61.80  | 1599558.03 | 1513561.25 | 70.00      | PASS       | 46      |
| 126900         | 634.5       | 46.23                         | 46.03 | 18.00 | 62.08    | 61.88  | 1614358.56 | 1541700.45 | 70.00      | PASS       | 46      |
| 129400         | 647         | 46.08                         | 46.05 | 18.00 | 61.93    | 61.90  | 1559552.50 | 1548816.62 | 70.00      | PASS       | 46      |

##### 15MHz

| Channel Number | Freq. (MHz) | QPSK                          |       |       |          |        |            |            |            | PASS /FAIL | Setting |
|----------------|-------------|-------------------------------|-------|-------|----------|--------|------------|------------|------------|------------|---------|
|                |             | Conducted Average Power (dBm) |       | Gain  | ERP(dBm) |        | ERP(mW)    |            | Limit(dBm) |            |         |
|                |             |                               |       |       | CHAIN0   | CHAIN1 | CHAIN0     | CHAIN1     | Maximum    |            |         |
| 124900         | 624.5       | 45.92                         | 45.88 | 18.00 | 61.77    | 61.73  | 1503141.97 | 1489361.08 | 71.76      | PASS       | 46      |
| 126900         | 634.5       | 46.05                         | 46.04 | 18.00 | 61.90    | 61.89  | 1548816.62 | 1545254.44 | 71.76      | PASS       | 46      |
| 128900         | 644.5       | 46.10                         | 46.10 | 18.00 | 61.95    | 61.95  | 1566751.07 | 1566751.07 | 71.76      | PASS       | 46      |

##### 20MHz

| Channel Number | Freq. (MHz) | QPSK                          |       |       |          |        |            |            |            | PASS /FAIL | Setting |
|----------------|-------------|-------------------------------|-------|-------|----------|--------|------------|------------|------------|------------|---------|
|                |             | Conducted Average Power (dBm) |       | Gain  | ERP(dBm) |        | ERP(mW)    |            | Limit(dBm) |            |         |
|                |             |                               |       |       | CHAIN0   | CHAIN1 | CHAIN0     | CHAIN1     | Maximum    |            |         |
| 125400         | 627         | 46.15                         | 46.13 | 18.00 | 62.00    | 61.98  | 1584893.19 | 1577611.27 | 73.01      | PASS       | 46      |
| 126900         | 634.5       | 46.10                         | 46.05 | 18.00 | 61.95    | 61.90  | 1566751.07 | 1548816.62 | 73.01      | PASS       | 46      |
| 128400         | 642         | 46.12                         | 46.07 | 18.00 | 61.97    | 61.92  | 1573982.86 | 1555965.63 | 73.01      | PASS       | 46      |

### 5MHz

| Channel Number | Freq. (MHz) | 16QAM                         |        |       |          |        |            |            |            | PASS /FAIL | Setting |
|----------------|-------------|-------------------------------|--------|-------|----------|--------|------------|------------|------------|------------|---------|
|                |             | Conducted Average Power (dBm) |        | Gain  | ERP(dBm) |        | ERP(mW)    |            | Limit(dBm) |            |         |
|                |             | CHAIN0                        | CHAIN1 |       | CHAIN0   | CHAIN1 | CHAIN0     | CHAIN1     | Maximum    |            |         |
| 123900         | 619.5       | 45.66                         | 45.59  | 18.00 | 61.51    | 61.44  | 1415793.78 | 1393156.80 | 66.99      | PASS       | 46      |
| 126900         | 634.5       | 45.70                         | 45.79  | 18.00 | 61.55    | 61.64  | 1428893.96 | 1458814.26 | 66.99      | PASS       | 46      |
| 129900         | 649.5       | 45.62                         | 45.51  | 18.00 | 61.47    | 61.36  | 1402813.70 | 1367728.83 | 66.99      | PASS       | 46      |

### 10MHz

| Channel Number | Freq. (MHz) | 16QAM                         |        |       |          |        |            |            |            | PASS /FAIL | Setting |
|----------------|-------------|-------------------------------|--------|-------|----------|--------|------------|------------|------------|------------|---------|
|                |             | Conducted Average Power (dBm) |        | Gain  | ERP(dBm) |        | ERP(mW)    |            | Limit(dBm) |            |         |
|                |             | CHAIN0                        | CHAIN1 |       | CHAIN0   | CHAIN1 | CHAIN0     | CHAIN1     | Maximum    |            |         |
| 124400         | 622         | 46.05                         | 45.85  | 18.00 | 61.90    | 61.70  | 1548816.62 | 1479108.39 | 70.00      | PASS       | 46      |
| 126900         | 634.5       | 46.16                         | 45.92  | 18.00 | 62.01    | 61.77  | 1588546.75 | 1503141.97 | 70.00      | PASS       | 46      |
| 129400         | 647         | 45.97                         | 45.89  | 18.00 | 61.82    | 61.74  | 1520547.53 | 1492794.41 | 70.00      | PASS       | 46      |

### 15MHz

| Channel Number | Freq. (MHz) | 16QAM                         |        |       |          |        |            |            |            | PASS /FAIL | Setting |
|----------------|-------------|-------------------------------|--------|-------|----------|--------|------------|------------|------------|------------|---------|
|                |             | Conducted Average Power (dBm) |        | Gain  | ERP(dBm) |        | ERP(mW)    |            | Limit(dBm) |            |         |
|                |             | CHAIN0                        | CHAIN1 |       | CHAIN0   | CHAIN1 | CHAIN0     | CHAIN1     | Maximum    |            |         |
| 124900         | 624.5       | 45.83                         | 45.67  | 18.00 | 61.68    | 61.52  | 1472312.50 | 1419057.52 | 71.76      | PASS       | 46      |
| 126900         | 634.5       | 45.56                         | 45.77  | 18.00 | 61.41    | 61.62  | 1383566.38 | 1452111.62 | 71.76      | PASS       | 46      |
| 128900         | 644.5       | 45.87                         | 45.86  | 18.00 | 61.72    | 61.71  | 1485935.64 | 1482518.09 | 71.76      | PASS       | 46      |

### 20MHz

| Channel Number | Freq. (MHz) | 16QAM                         |        |       |          |        |            |            |            | PASS /FAIL | Setting |
|----------------|-------------|-------------------------------|--------|-------|----------|--------|------------|------------|------------|------------|---------|
|                |             | Conducted Average Power (dBm) |        | Gain  | ERP(dBm) |        | ERP(mW)    |            | Limit(dBm) |            |         |
|                |             | CHAIN0                        | CHAIN1 |       | CHAIN0   | CHAIN1 | CHAIN0     | CHAIN1     | Maximum    |            |         |
| 125400         | 627         | 45.99                         | 45.98  | 18.00 | 61.84    | 61.83  | 1527566.06 | 1524052.75 | 73.01      | PASS       | 46      |
| 126900         | 634.5       | 46.00                         | 45.96  | 18.00 | 61.85    | 61.81  | 1531087.46 | 1517050.37 | 73.01      | PASS       | 46      |
| 128400         | 642         | 46.09                         | 45.95  | 18.00 | 61.94    | 61.80  | 1563147.64 | 1513561.25 | 73.01      | PASS       | 46      |

### 5MHz

| Channel Number | Freq. (MHz) | 64QAM                         |        |       |          |        |            |            |            | PASS /FAIL | Setting |
|----------------|-------------|-------------------------------|--------|-------|----------|--------|------------|------------|------------|------------|---------|
|                |             | Conducted Average Power (dBm) |        | Gain  | ERP(dBm) |        | ERP(mW)    |            | Limit(dBm) |            |         |
|                |             | CHAIN0                        | CHAIN1 |       | CHAIN0   | CHAIN1 | CHAIN0     | CHAIN1     | Maximum    |            |         |
| 123900         | 619.5       | 45.69                         | 45.65  | 18.00 | 61.54    | 61.50  | 1425607.59 | 1412537.54 | 66.99      | PASS       | 46      |
| 126900         | 634.5       | 45.76                         | 45.66  | 18.00 | 61.61    | 61.51  | 1448771.85 | 1415793.78 | 66.99      | PASS       | 46      |
| 129900         | 649.5       | 45.50                         | 45.64  | 18.00 | 61.35    | 61.49  | 1364583.14 | 1409288.80 | 66.99      | PASS       | 46      |

### 10MHz

| Channel Number | Freq. (MHz) | 64QAM                         |        |       |          |        |            |            |            | PASS /FAIL | Setting |
|----------------|-------------|-------------------------------|--------|-------|----------|--------|------------|------------|------------|------------|---------|
|                |             | Conducted Average Power (dBm) |        | Gain  | ERP(dBm) |        | ERP(mW)    |            | Limit(dBm) |            |         |
|                |             | CHAIN0                        | CHAIN1 |       | CHAIN0   | CHAIN1 | CHAIN0     | CHAIN1     | Maximum    |            |         |
| 124400         | 622         | 45.86                         | 45.80  | 18.00 | 61.71    | 61.65  | 1482518.09 | 1462177.17 | 70.00      | PASS       | 46      |
| 126900         | 634.5       | 46.12                         | 45.88  | 18.00 | 61.97    | 61.73  | 1573982.86 | 1489361.08 | 70.00      | PASS       | 46      |
| 129400         | 647         | 45.96                         | 45.93  | 18.00 | 61.81    | 61.78  | 1517050.37 | 1506607.07 | 70.00      | PASS       | 46      |

### 15MHz

| Channel Number | Freq. (MHz) | 64QAM                         |        |       |          |        |            |            |            | PASS /FAIL | Setting |
|----------------|-------------|-------------------------------|--------|-------|----------|--------|------------|------------|------------|------------|---------|
|                |             | Conducted Average Power (dBm) |        | Gain  | ERP(dBm) |        | ERP(mW)    |            | Limit(dBm) |            |         |
|                |             | CHAIN0                        | CHAIN1 |       | CHAIN0   | CHAIN1 | CHAIN0     | CHAIN1     | Maximum    |            |         |
| 124900         | 624.5       | 45.90                         | 45.78  | 18.00 | 61.75    | 61.63  | 1496235.66 | 1455459.08 | 71.76      | PASS       | 46      |
| 126900         | 634.5       | 45.98                         | 45.85  | 18.00 | 61.83    | 61.70  | 1524052.75 | 1479108.39 | 71.76      | PASS       | 46      |
| 128900         | 644.5       | 45.91                         | 45.87  | 18.00 | 61.76    | 61.72  | 1499684.84 | 1485935.64 | 71.76      | PASS       | 46      |

### 20MHz

| Channel Number | Freq. (MHz) | 64QAM                         |        |       |          |        |            |            |            | PASS /FAIL | Setting |
|----------------|-------------|-------------------------------|--------|-------|----------|--------|------------|------------|------------|------------|---------|
|                |             | Conducted Average Power (dBm) |        | Gain  | ERP(dBm) |        | ERP(mW)    |            | Limit(dBm) |            |         |
|                |             | CHAIN0                        | CHAIN1 |       | CHAIN0   | CHAIN1 | CHAIN0     | CHAIN1     | Maximum    |            |         |
| 125400         | 627         | 46.00                         | 45.87  | 18.00 | 61.85    | 61.72  | 1531087.46 | 1485935.64 | 73.01      | PASS       | 46      |
| 126900         | 634.5       | 45.96                         | 45.84  | 18.00 | 61.81    | 61.69  | 1517050.37 | 1475706.53 | 73.01      | PASS       | 46      |
| 128400         | 642         | 46.06                         | 45.96  | 18.00 | 61.91    | 61.81  | 1552387.01 | 1517050.37 | 73.01      | PASS       | 46      |

### 5MHz

| Channel Number | Freq. (MHz) | 256QAM                        |        |       |          |        |            |            |            | PASS /FAIL | Setting |
|----------------|-------------|-------------------------------|--------|-------|----------|--------|------------|------------|------------|------------|---------|
|                |             | Conducted Average Power (dBm) |        | Gain  | ERP(dBm) |        | ERP(mW)    |            | Limit(dBm) |            |         |
|                |             | CHAIN0                        | CHAIN1 |       | CHAIN0   | CHAIN1 | CHAIN0     | CHAIN1     | Maximum    |            |         |
| 123900         | 619.5       | 45.54                         | 45.66  | 18.00 | 61.39    | 61.51  | 1377209.47 | 1415793.78 | 66.99      | PASS       | 46      |
| 126900         | 634.5       | 45.62                         | 45.53  | 18.00 | 61.47    | 61.38  | 1402813.70 | 1374041.98 | 66.99      | PASS       | 46      |
| 129900         | 649.5       | 45.58                         | 45.50  | 18.00 | 61.43    | 61.35  | 1389952.63 | 1364583.14 | 66.99      | PASS       | 46      |

### 10MHz

| Channel Number | Freq. (MHz) | 256QAM                        |        |       |          |        |            |            |            | PASS /FAIL | Setting |
|----------------|-------------|-------------------------------|--------|-------|----------|--------|------------|------------|------------|------------|---------|
|                |             | Conducted Average Power (dBm) |        | Gain  | ERP(dBm) |        | ERP(mW)    |            | Limit(dBm) |            |         |
|                |             | CHAIN0                        | CHAIN1 |       | CHAIN0   | CHAIN1 | CHAIN0     | CHAIN1     | Maximum    |            |         |
| 124400         | 622         | 45.83                         | 45.84  | 18.00 | 61.68    | 61.69  | 1472312.50 | 1475706.53 | 70.00      | PASS       | 46      |
| 126900         | 634.5       | 45.76                         | 45.74  | 18.00 | 61.61    | 61.59  | 1448771.85 | 1442115.35 | 70.00      | PASS       | 46      |
| 129400         | 647         | 45.62                         | 45.77  | 18.00 | 61.47    | 61.62  | 1402813.70 | 1452111.62 | 70.00      | PASS       | 46      |

### 15MHz

| Channel Number | Freq. (MHz) | 256QAM                        |        |       |          |        |            |            |            | PASS /FAIL | Setting |
|----------------|-------------|-------------------------------|--------|-------|----------|--------|------------|------------|------------|------------|---------|
|                |             | Conducted Average Power (dBm) |        | Gain  | ERP(dBm) |        | ERP(mW)    |            | Limit(dBm) |            |         |
|                |             | CHAIN0                        | CHAIN1 |       | CHAIN0   | CHAIN1 | CHAIN0     | CHAIN1     | Maximum    |            |         |
| 124900         | 624.5       | 45.69                         | 45.88  | 18.00 | 61.54    | 61.73  | 1425607.59 | 1489361.08 | 71.76      | PASS       | 46      |
| 126900         | 634.5       | 45.93                         | 45.92  | 18.00 | 61.78    | 61.77  | 1506607.07 | 1503141.97 | 71.76      | PASS       | 46      |
| 128900         | 644.5       | 45.68                         | 45.93  | 18.00 | 61.53    | 61.78  | 1422328.79 | 1506607.07 | 71.76      | PASS       | 46      |

### 20MHz

| Channel Number | Freq. (MHz) | 256QAM                        |        |       |          |        |            |            |            | PASS /FAIL | Setting |
|----------------|-------------|-------------------------------|--------|-------|----------|--------|------------|------------|------------|------------|---------|
|                |             | Conducted Average Power (dBm) |        | Gain  | ERP(dBm) |        | ERP(mW)    |            | Limit(dBm) |            |         |
|                |             | CHAIN0                        | CHAIN1 |       | CHAIN0   | CHAIN1 | CHAIN0     | CHAIN1     | Maximum    |            |         |
| 125400         | 627         | 46.03                         | 45.92  | 18.00 | 61.88    | 61.77  | 1541700.45 | 1503141.97 | 73.01      | PASS       | 46      |
| 126900         | 634.5       | 45.97                         | 45.95  | 18.00 | 61.82    | 61.80  | 1520547.53 | 1513561.25 | 73.01      | PASS       | 46      |
| 128400         | 642         | 46.08                         | 45.99  | 18.00 | 61.93    | 61.84  | 1559552.50 | 1527566.06 | 73.01      | PASS       | 46      |

## 4.2 Modulation characteristics Measurement


### 4.2.1 Limits of Modulation characteristics

N/A


### 4.2.2 Test Procedure

Connect the EUT to spectrum analyzer. The frequency band is set as EUT supported modulation and channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

### 4.2.3 Test Setup

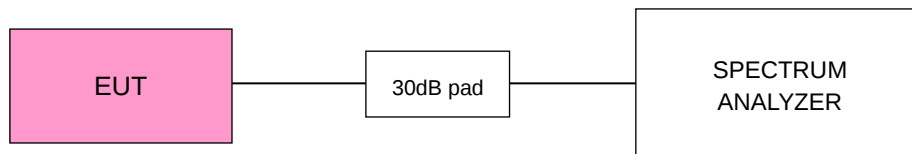

## 4.2.4 Test Results

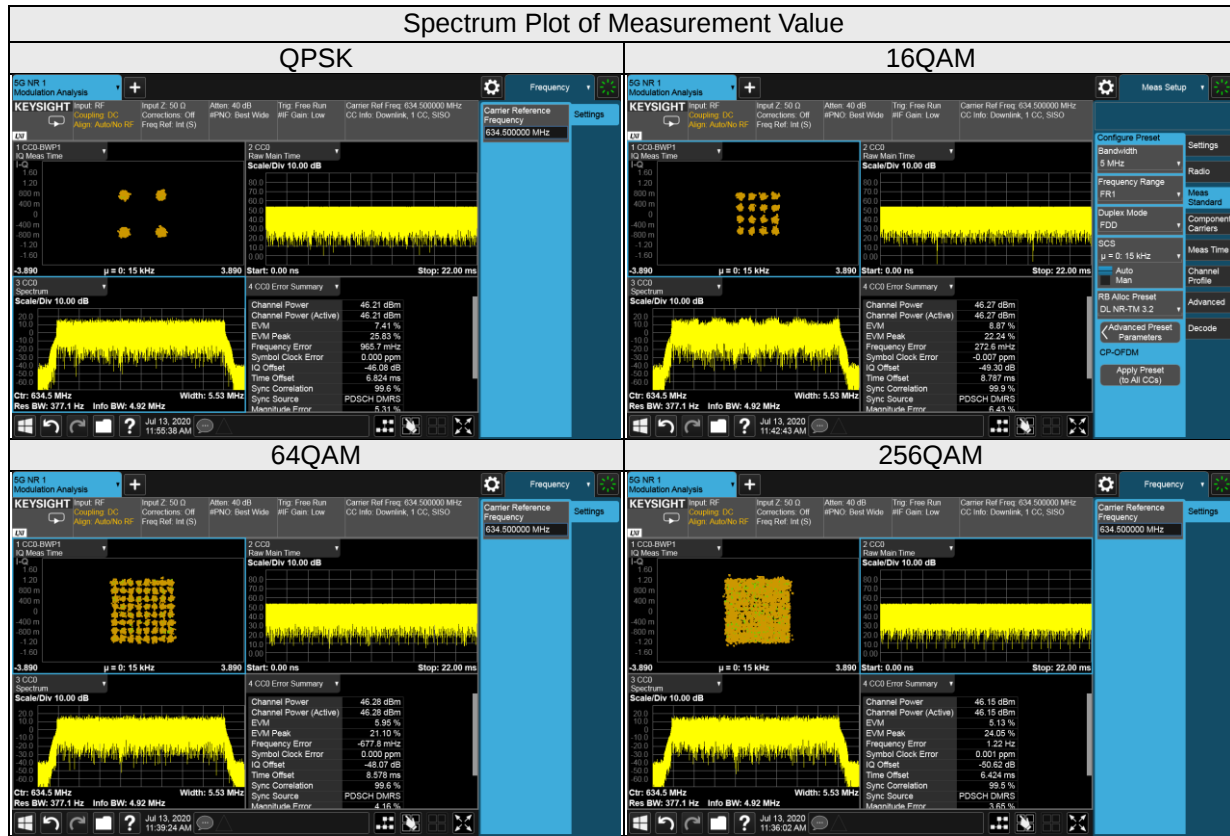

### 4.3 Frequency Stability Measurement

#### 4.3.1 Limits of Frequency Stability Measurement


According to the FCC part 2.1055 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with specification of EUT  $-40^{\circ}\text{C} \sim 55^{\circ}\text{C}$ .

#### 4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded from the spectrum analyzer.

#### 4.3.3 Test Setup

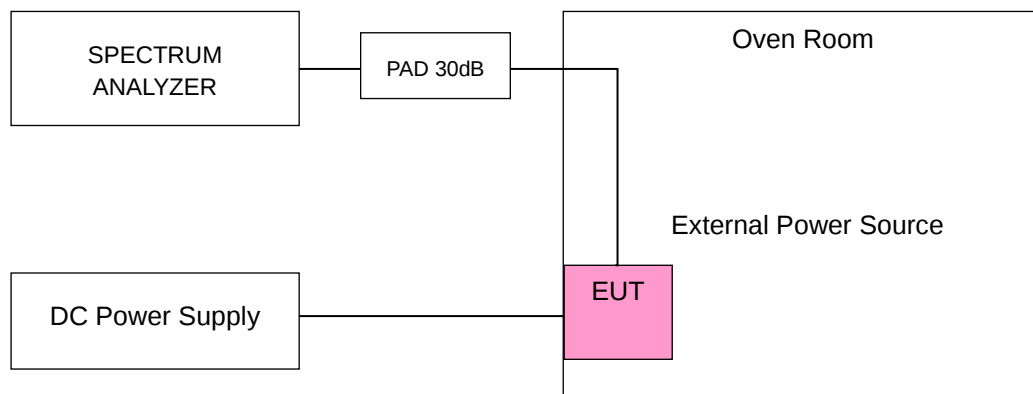

#### 4.3.4 Test Results

##### SC Mode- Chain 0

| FREQUENCY ERROR vs. VOLTAGE |                   |          |        |        |          |          |        |        | Limit (MHz) |           | PASS/FAIL |
|-----------------------------|-------------------|----------|--------|--------|----------|----------|--------|--------|-------------|-----------|-----------|
| Voltage (Volts)             | Test result (MHz) |          |        |        |          |          |        |        |             |           |           |
|                             | 5MHz              |          | 10MHz  |        | 15MHz    |          | 20MHz  |        |             |           |           |
|                             | 619.5MHz          | 649.5MHz | 622MHz | 647MHz | 624.5MHz | 644.5MHz | 627MHz | 642MHz | Low Edge    | High Edge |           |
| 40.8                        | 617.27            | 651.75   | 617.37 | 651.63 | 617.47   | 651.46   | 617.65 | 651.31 | 617         | 652       | PASS      |
| 55.2                        | 617.26            | 651.74   | 617.35 | 651.62 | 617.48   | 651.45   | 617.63 | 651.33 | 617         | 652       | PASS      |

| FREQUENCY ERROR vs. Temperature |                   |          |        |        |          |          |        |        | Limit (MHz) |           | PASS/FAIL |
|---------------------------------|-------------------|----------|--------|--------|----------|----------|--------|--------|-------------|-----------|-----------|
| Temp.<br>(°C)                   | Test result (MHz) |          |        |        |          |          |        |        |             |           |           |
|                                 | 5MHz              |          | 10MHz  |        | 15MHz    |          | 20MHz  |        |             |           |           |
|                                 | 619.5MHz          | 649.5MHz | 622MHz | 647MHz | 624.5MHz | 644.5MHz | 627MHz | 642MHz | Low Edge    | High Edge |           |
| 55                              | 617.26            | 651.74   | 617.36 | 651.62 | 617.48   | 651.46   | 617.64 | 651.32 | 617         | 652       | PASS      |
| 50                              | 617.26            | 651.74   | 617.36 | 651.61 | 617.49   | 651.45   | 617.63 | 651.31 | 617         | 652       | PASS      |
| 40                              | 617.25            | 651.76   | 617.36 | 651.63 | 617.47   | 651.47   | 617.64 | 651.31 | 617         | 652       | PASS      |
| 30                              | 617.25            | 651.74   | 617.35 | 651.62 | 617.48   | 651.47   | 617.64 | 651.32 | 617         | 652       | PASS      |
| 20                              | 617.26            | 651.76   | 617.35 | 651.63 | 617.48   | 651.46   | 617.63 | 651.32 | 617         | 652       | PASS      |
| 10                              | 617.26            | 651.75   | 617.35 | 651.61 | 617.47   | 651.46   | 617.64 | 651.31 | 617         | 652       | PASS      |
| 0                               | 617.25            | 651.74   | 617.37 | 651.61 | 617.48   | 651.46   | 617.64 | 651.33 | 617         | 652       | PASS      |
| -10                             | 617.26            | 651.75   | 617.36 | 651.61 | 617.49   | 651.45   | 617.64 | 651.33 | 617         | 652       | PASS      |
| -20                             | 617.26            | 651.76   | 617.35 | 651.62 | 617.49   | 651.46   | 617.65 | 651.31 | 617         | 652       | PASS      |
| -30                             | 617.25            | 651.75   | 617.35 | 651.63 | 617.47   | 651.45   | 617.64 | 651.31 | 617         | 652       | PASS      |
| -40                             | 617.26            | 651.75   | 617.35 | 651.62 | 617.49   | 651.47   | 617.63 | 651.33 | 617         | 652       | PASS      |

### SC Mode- Chain 1

| FREQUENCY ERROR vs. VOLTAGE |                   |          |        |        |          |          |        |        | Limit (MHz) |           | PASS/FAIL |
|-----------------------------|-------------------|----------|--------|--------|----------|----------|--------|--------|-------------|-----------|-----------|
| Voltage<br>(Volts)          | Test result (MHz) |          |        |        |          |          |        |        |             |           |           |
|                             | 5MHz              |          | 10MHz  |        | 15MHz    |          | 20MHz  |        |             |           |           |
|                             | 619.5MHz          | 649.5MHz | 622MHz | 647MHz | 624.5MHz | 644.5MHz | 627MHz | 642MHz | Low Edge    | High Edge |           |
| 40.8                        | 617.25            | 651.76   | 617.37 | 651.63 | 617.48   | 651.45   | 617.63 | 651.33 | 617         | 652       | PASS      |
| 55.2                        | 617.26            | 651.74   | 617.35 | 651.62 | 617.48   | 651.47   | 617.65 | 651.31 | 617         | 652       | PASS      |

| FREQUENCY ERROR vs. Temperature |                   |          |        |        |          |          |        |        | Limit (MHz) |           | PASS/FAIL |
|---------------------------------|-------------------|----------|--------|--------|----------|----------|--------|--------|-------------|-----------|-----------|
| Temp.<br>(°C)                   | Test result (MHz) |          |        |        |          |          |        |        |             |           |           |
|                                 | 5MHz              |          | 10MHz  |        | 15MHz    |          | 20MHz  |        |             |           |           |
|                                 | 619.5MHz          | 649.5MHz | 622MHz | 647MHz | 624.5MHz | 644.5MHz | 627MHz | 642MHz | Low Edge    | High Edge |           |
| 55                              | 617.26            | 651.75   | 617.36 | 651.62 | 617.48   | 651.46   | 617.64 | 651.32 | 617         | 652       | PASS      |
| 50                              | 617.27            | 651.76   | 617.36 | 651.62 | 617.49   | 651.47   | 617.64 | 651.31 | 617         | 652       | PASS      |
| 40                              | 617.25            | 651.74   | 617.36 | 651.63 | 617.47   | 651.47   | 617.63 | 651.33 | 617         | 652       | PASS      |
| 30                              | 617.26            | 651.75   | 617.37 | 651.63 | 617.48   | 651.46   | 617.64 | 651.32 | 617         | 652       | PASS      |
| 20                              | 617.25            | 651.76   | 617.37 | 651.62 | 617.49   | 651.45   | 617.64 | 651.33 | 617         | 652       | PASS      |
| 10                              | 617.26            | 651.75   | 617.36 | 651.61 | 617.49   | 651.46   | 617.64 | 651.32 | 617         | 652       | PASS      |
| 0                               | 617.26            | 651.74   | 617.36 | 651.61 | 617.47   | 651.46   | 617.63 | 651.31 | 617         | 652       | PASS      |
| -10                             | 617.26            | 651.74   | 617.37 | 651.63 | 617.48   | 651.46   | 617.64 | 651.33 | 617         | 652       | PASS      |
| -20                             | 617.25            | 651.75   | 617.35 | 651.63 | 617.49   | 651.46   | 617.65 | 651.31 | 617         | 652       | PASS      |
| -30                             | 617.26            | 651.75   | 617.35 | 651.62 | 617.47   | 651.46   | 617.64 | 651.31 | 617         | 652       | PASS      |
| -40                             | 617.27            | 651.74   | 617.37 | 651.61 | 617.49   | 651.45   | 617.64 | 651.32 | 617         | 652       | PASS      |

## 4.4 Emission Bandwidth Measurement

### 4.4.1 Limits of Emission Bandwidth Measurement

#### -26dBc Bandwidth

According to FCC 27.53(h)(3) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.


#### Occupied Bandwidth

All measurements were done at low, middle and high operational frequency range. EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

### 4.4.2 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW = 51kHz and VBW = 160kHz (Channel Bandwidth: 5MHz), RBW = 100kHz and VBW = 300kHz (Channel Bandwidth: 10MHz), RBW = 150kHz and VBW = 470kHz (Channel Bandwidth: 15MHz), RBW = 200kHz and VBW = 620kHz (Channel Bandwidth: 20MHz). The 26dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 26dB.

### 4.4.3 Test Setup

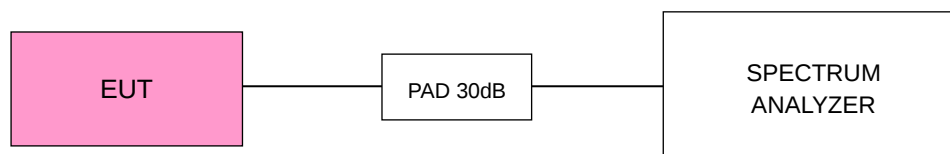


#### 4.4.4 Test Results (-26dBc Bandwidth) Single Carrier

##### 5MHz


| Channel Number | Freq. (MHz) | 26dB DOWN BANDWIDTH (MHz) |       |       |        |        |       |       |        |
|----------------|-------------|---------------------------|-------|-------|--------|--------|-------|-------|--------|
|                |             | Chain0                    |       |       |        | Chain1 |       |       |        |
|                |             | QPSK                      | 16QAM | 64QAM | 256QAM | QPSK   | 16QAM | 64QAM | 256QAM |
| 123900         | 619.5       | 4.81                      | 4.79  | 4.79  | 4.76   | 4.81   | 4.79  | 4.79  | 4.79   |
| 126900         | 634.5       | 4.81                      | 4.76  | 4.79  | 4.76   | 4.81   | 4.76  | 4.79  | 4.78   |
| 129900         | 649.5       | 4.79                      | 4.77  | 4.78  | 4.74   | 4.80   | 4.77  | 4.76  | 4.78   |

##### Chain 0

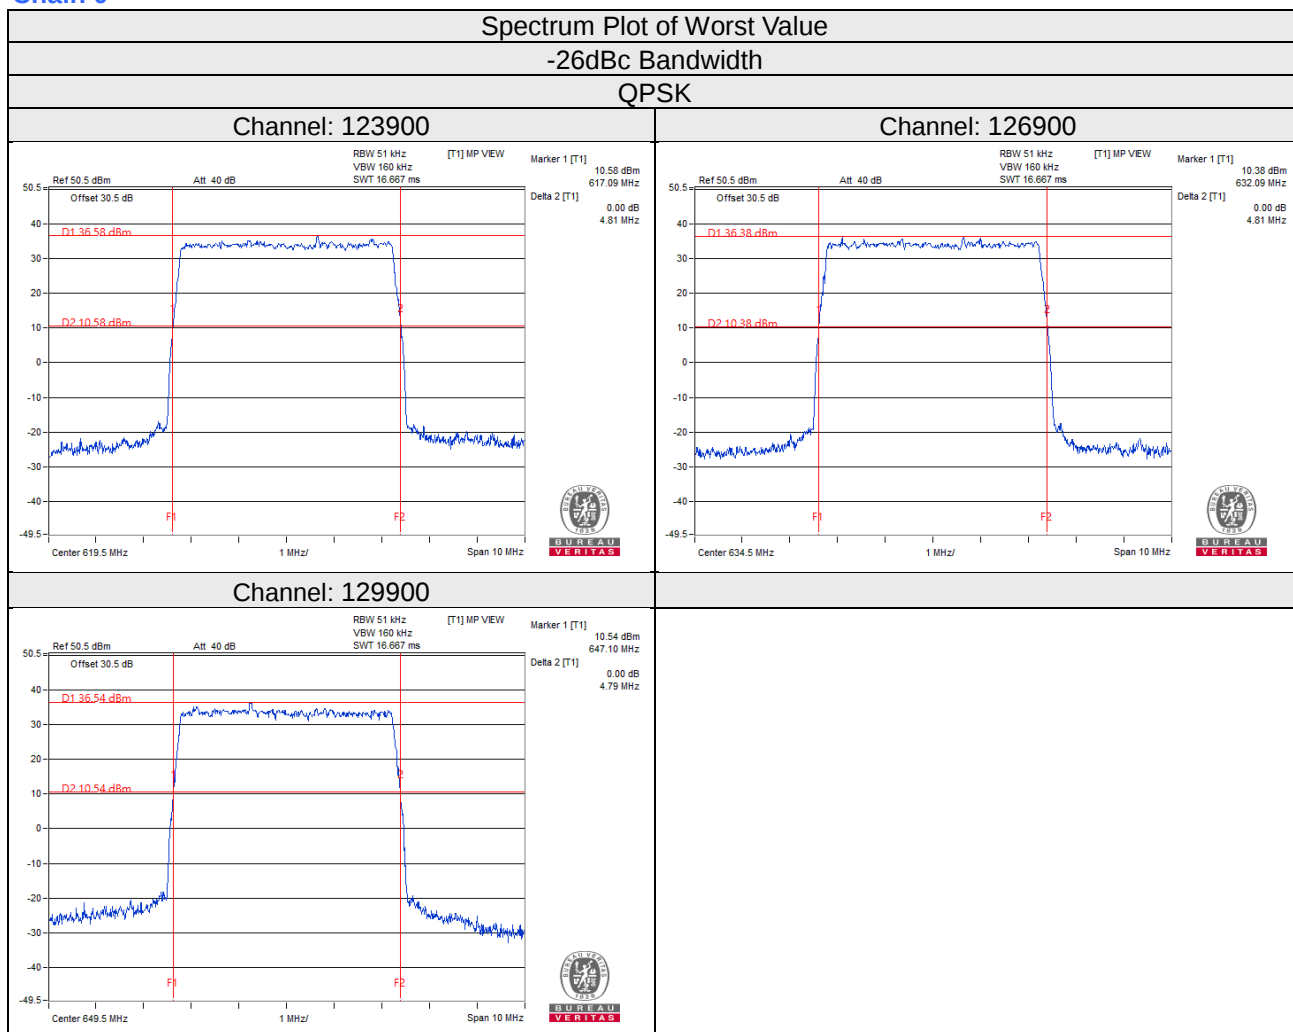


# 16QAM


## Channel: 123900

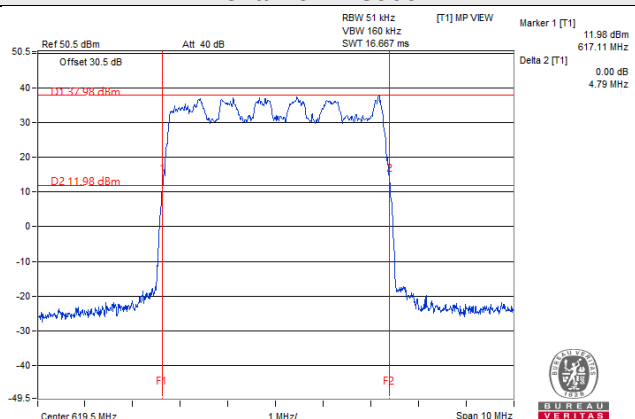

## Channel: 126900

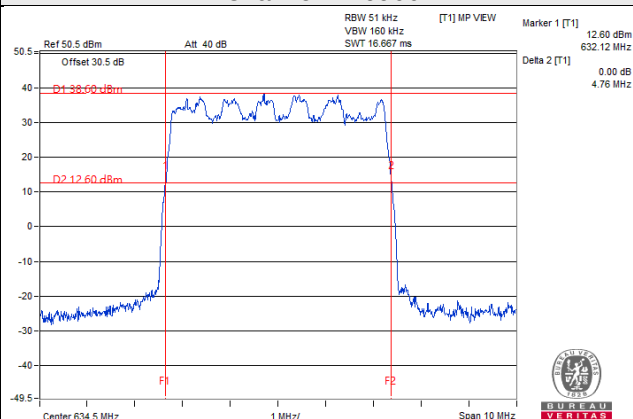


## Channel: 129900

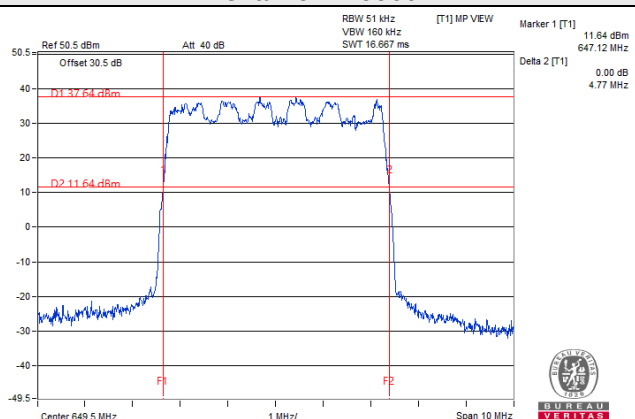


# 64QAM


## Channel: 123900

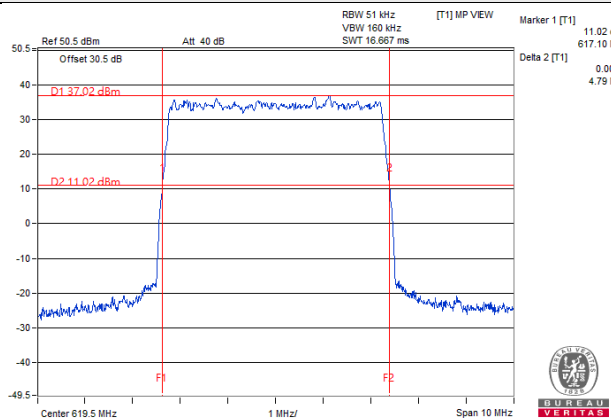

## Channel: 126900

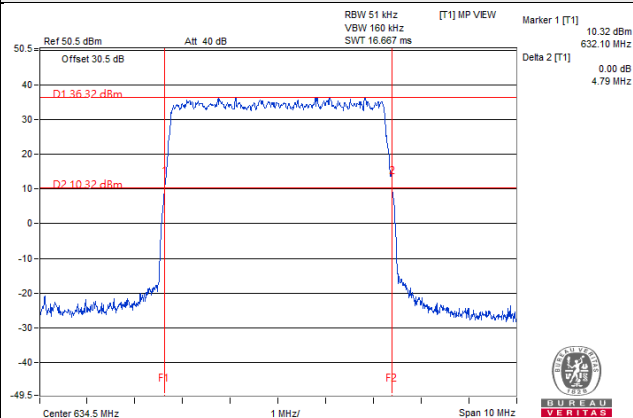


## Channel: 129900

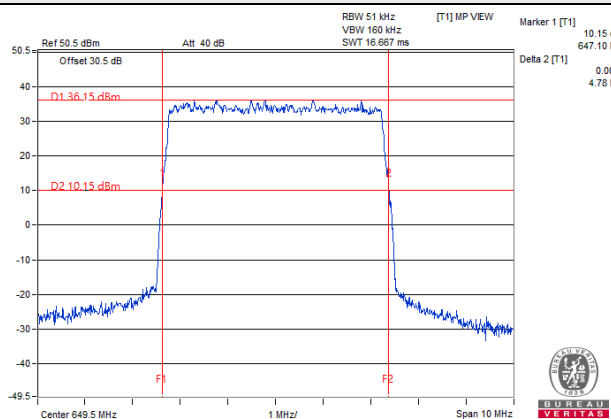


## 256QAM


### Channel: 123900

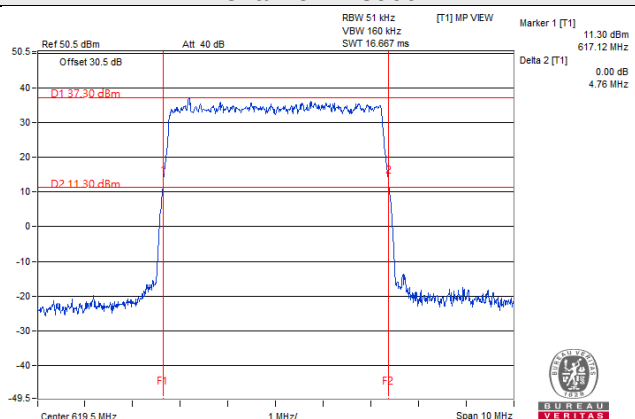

### Channel: 126900

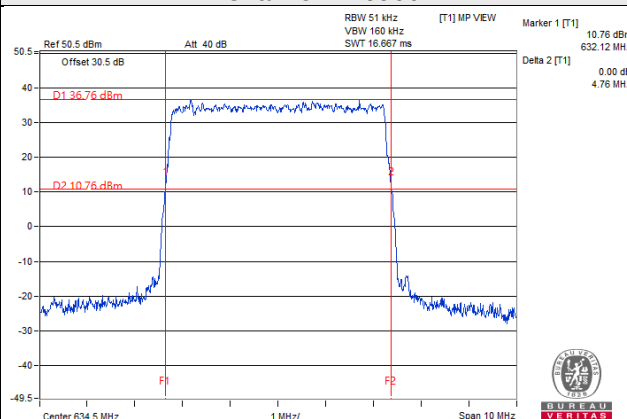

### Channel: 129900

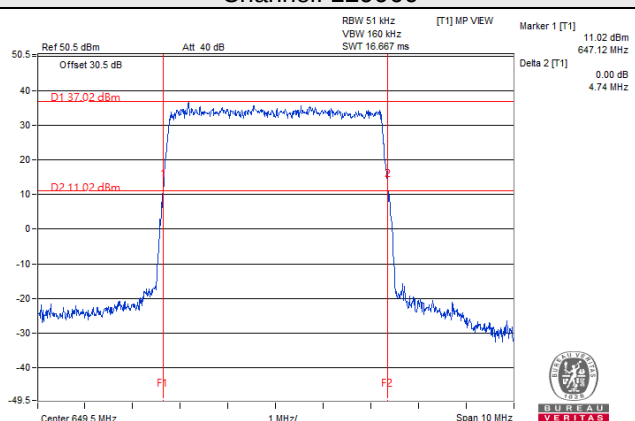

## Chain 1



### Spectrum Plot of Worst Value

-26dBc Bandwidth


QPSK

Channel: 123900

Channel: 126900

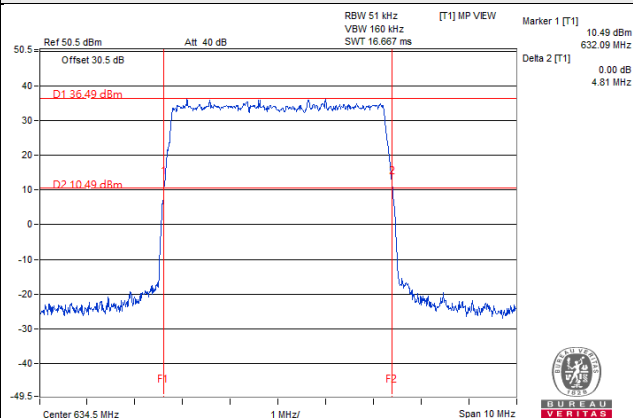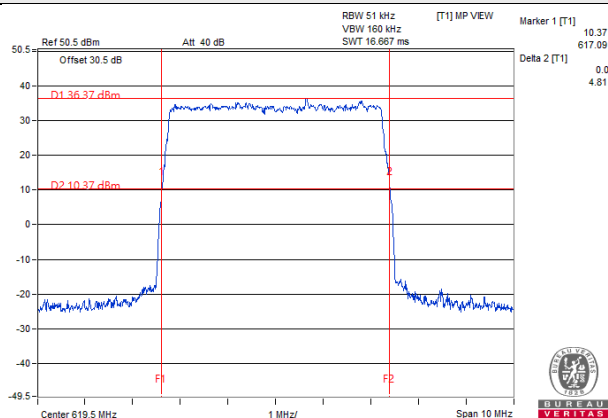


Channel: 129900

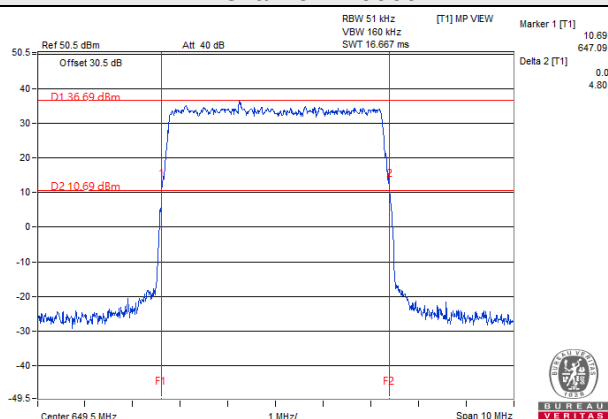


# 16QAM


## Channel: 123900

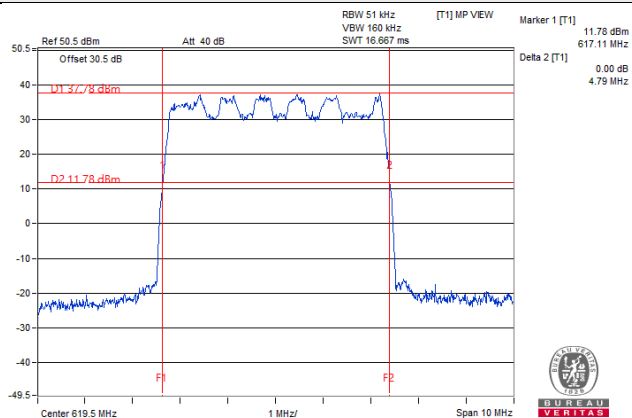

## Channel: 126900

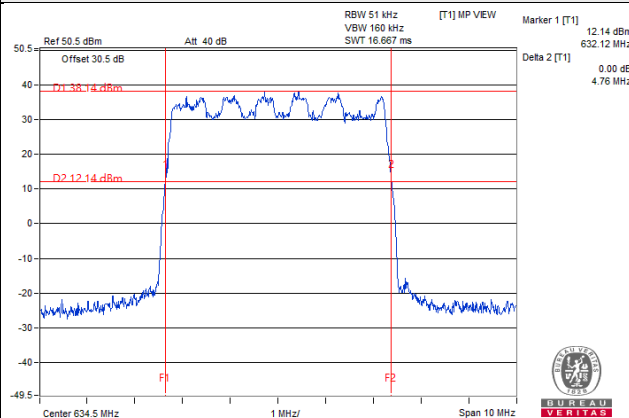


## Channel: 129900

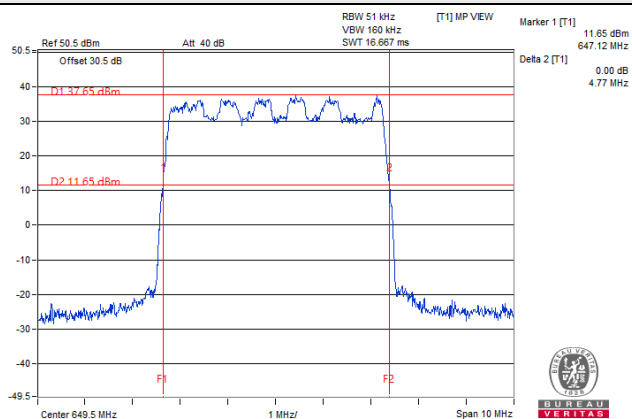


# 64QAM


## Channel: 123900

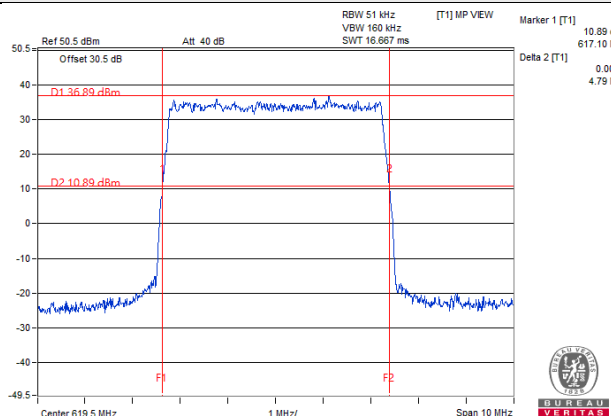

## Channel: 126900

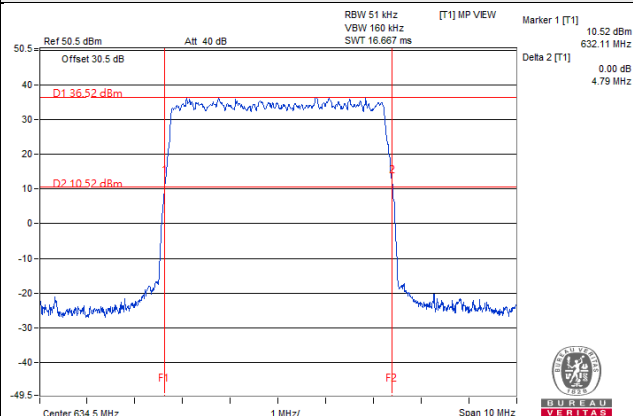


## Channel: 129900

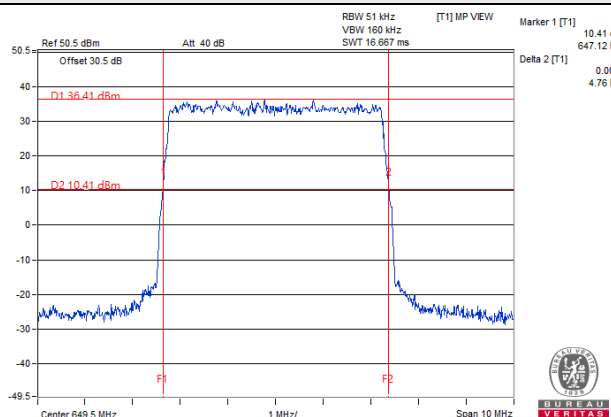


## 256QAM


### Channel: 123900

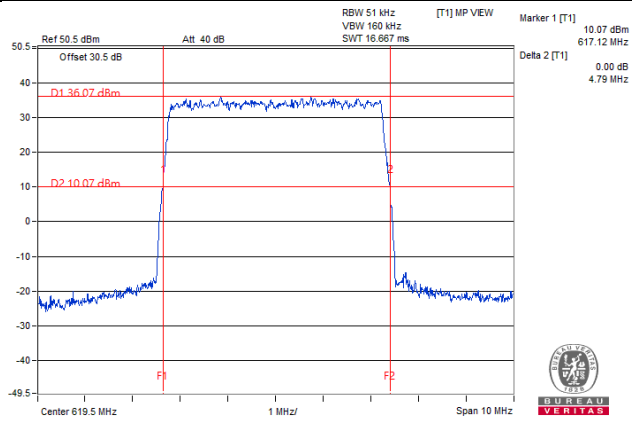

### Channel: 126900

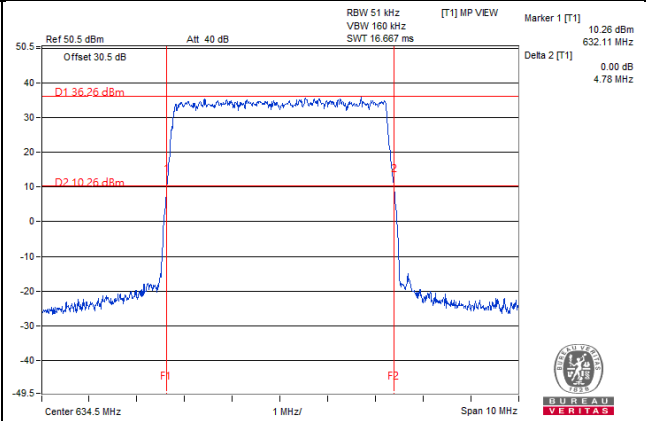


### Channel: 129900

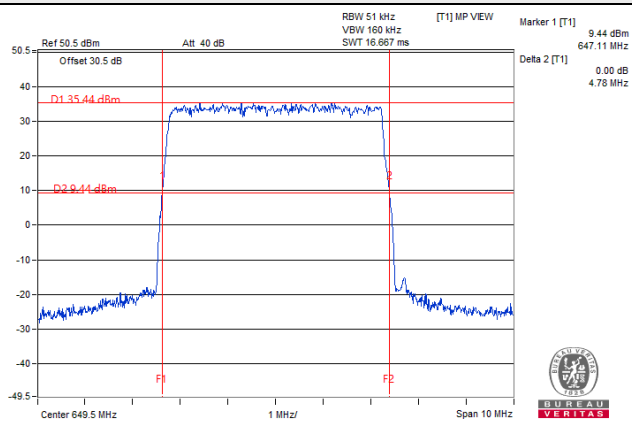

## 10MHz


| Channel Number | Freq. (MHz) | 26dB DOWN BANDWIDTH (MHz) |       |       |        |        |       |       |        |
|----------------|-------------|---------------------------|-------|-------|--------|--------|-------|-------|--------|
|                |             | Chain0                    |       |       |        | Chain1 |       |       |        |
|                |             | QPSK                      | 16QAM | 64QAM | 256QAM | QPSK   | 16QAM | 64QAM | 256QAM |
| 124400         | 622         | 9.69                      | 9.61  | 9.66  | 9.69   | 9.66   | 9.60  | 9.67  | 9.69   |
| 126900         | 634.5       | 9.68                      | 9.61  | 9.68  | 9.70   | 9.67   | 9.62  | 9.67  | 9.70   |
| 129400         | 647         | 9.67                      | 9.63  | 9.65  | 9.70   | 9.71   | 9.62  | 9.67  | 9.69   |

## Chain 0

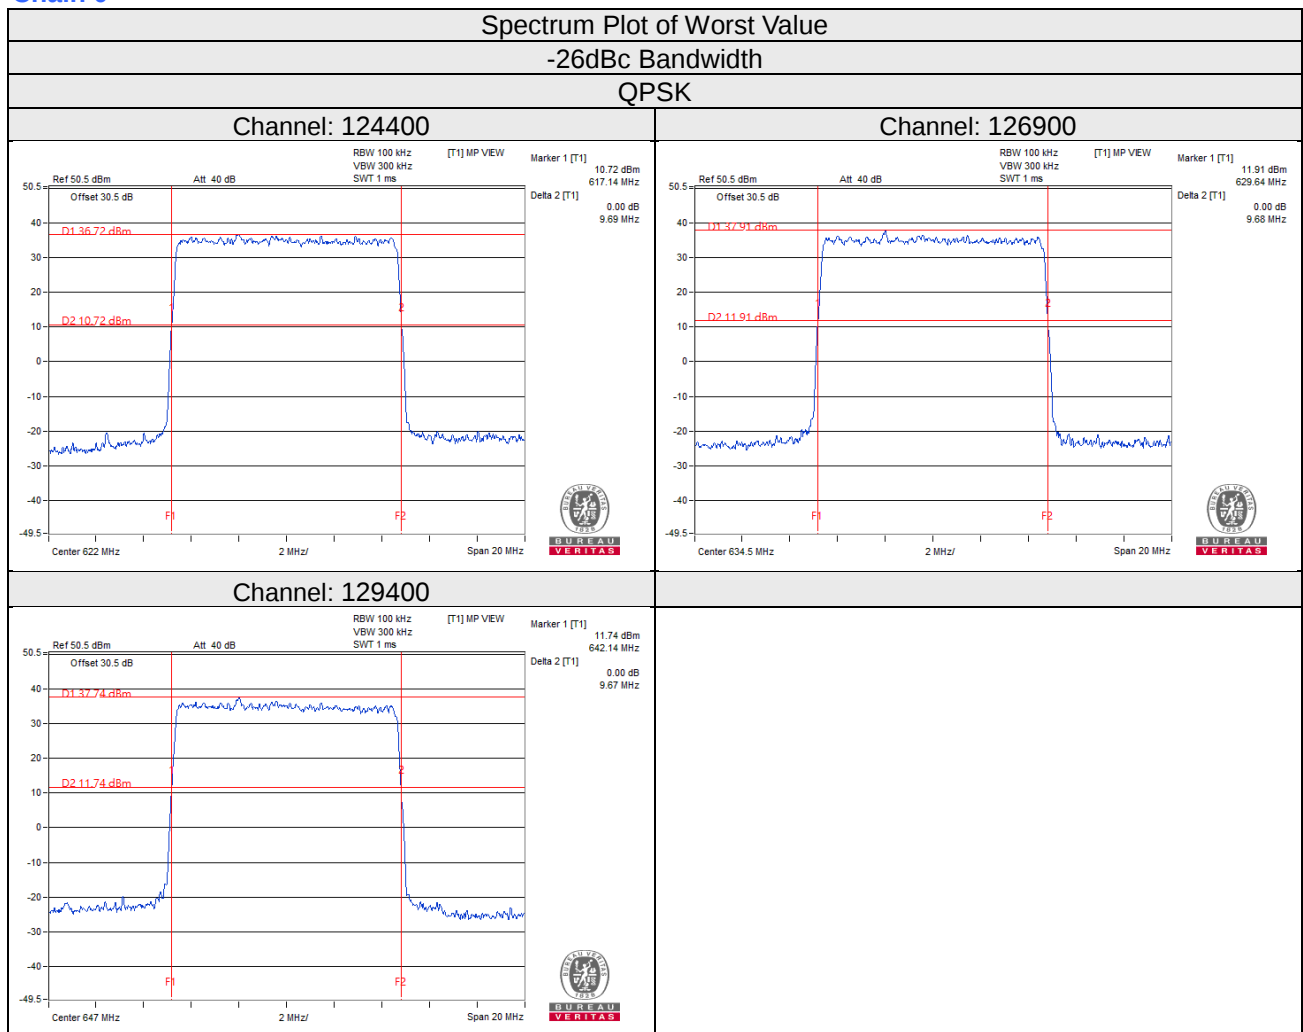


# 16QAM


## Channel: 124400

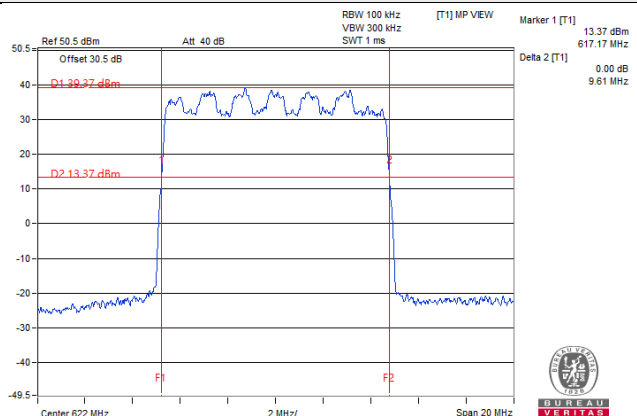

## Channel: 126900

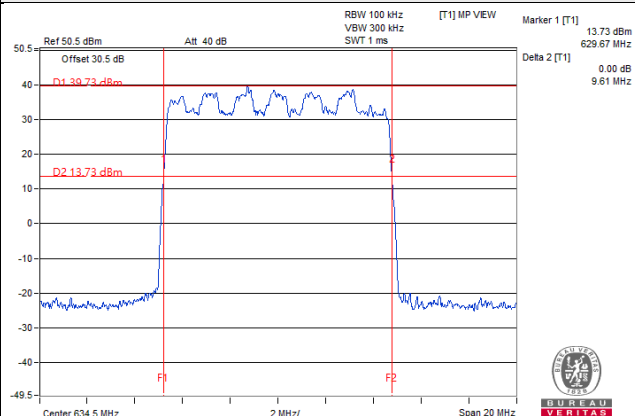


## Channel: 129400

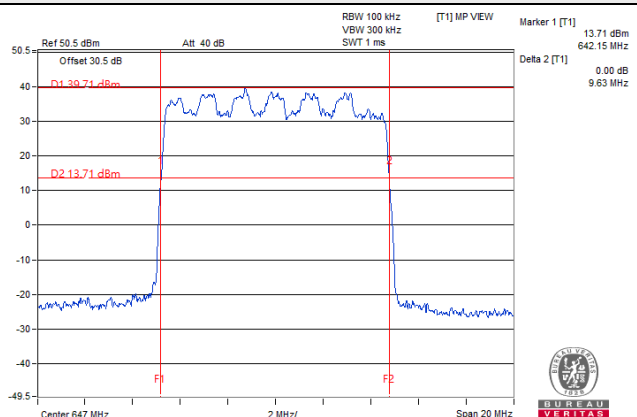


# 64QAM


## Channel: 124400

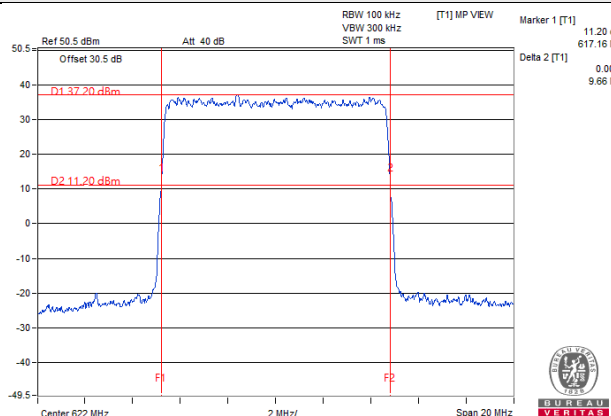

## Channel: 126900

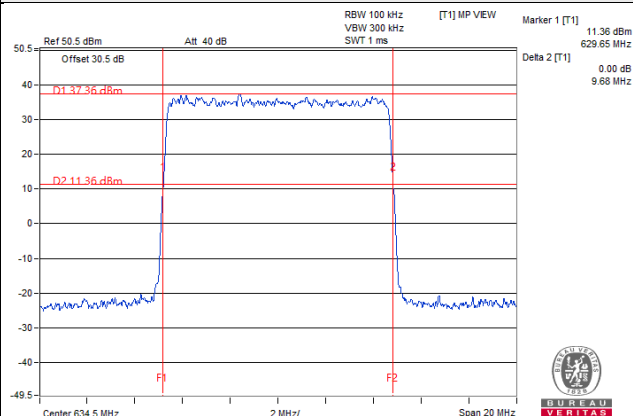


## Channel: 129400

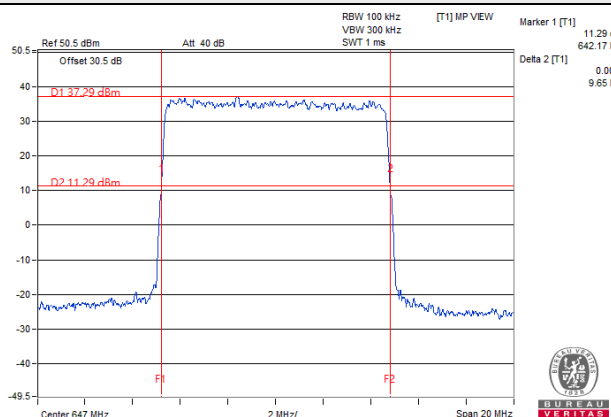


## 256QAM


### Channel: 124400

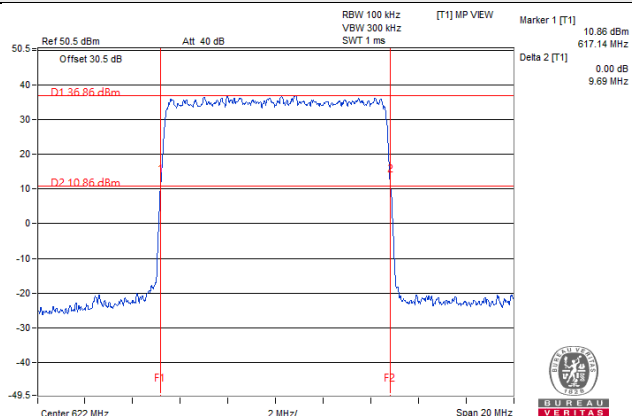

### Channel: 126900

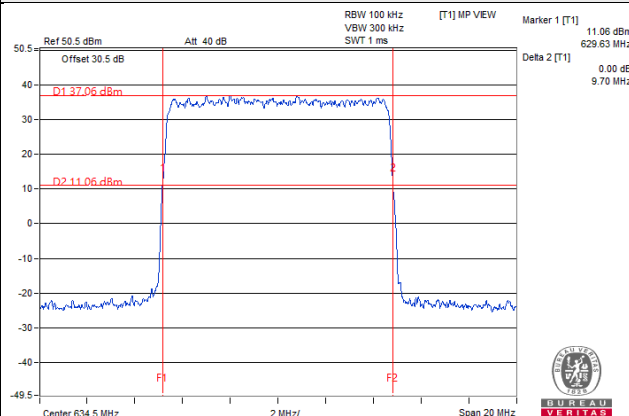

### Channel: 129400

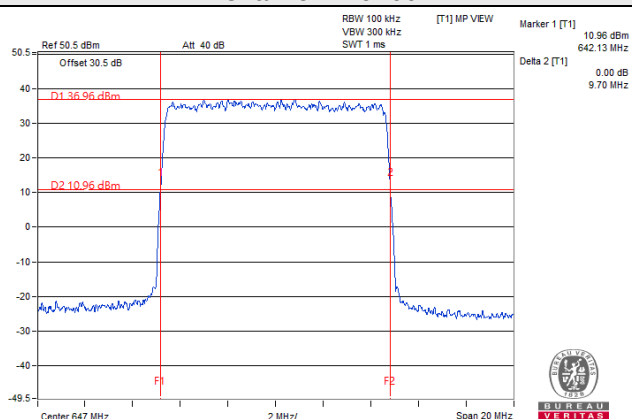

## Chain 1



### Spectrum Plot of Worst Value

-26dBc Bandwidth


QPSK

Channel: 124400

Channel: 126900

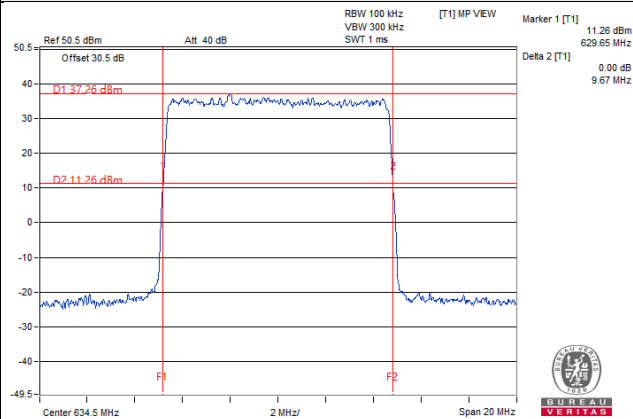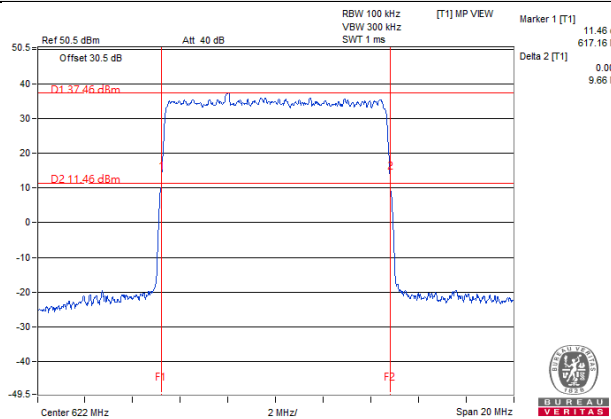


Channel: 129400

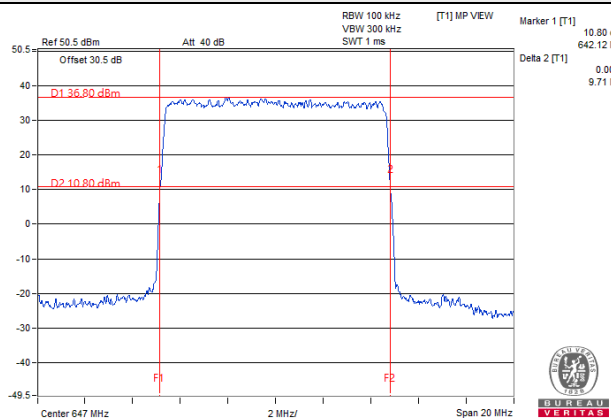


# 16QAM


## Channel: 124400

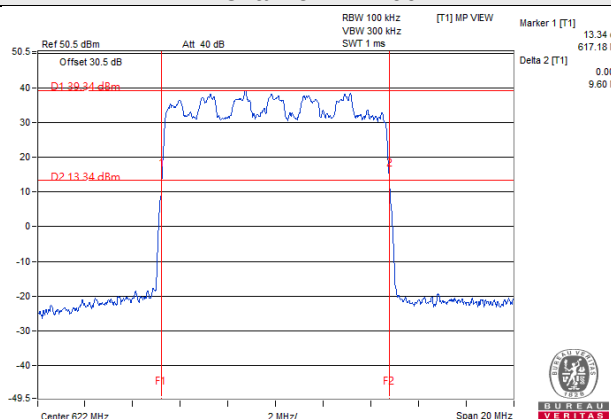

## Channel: 126900

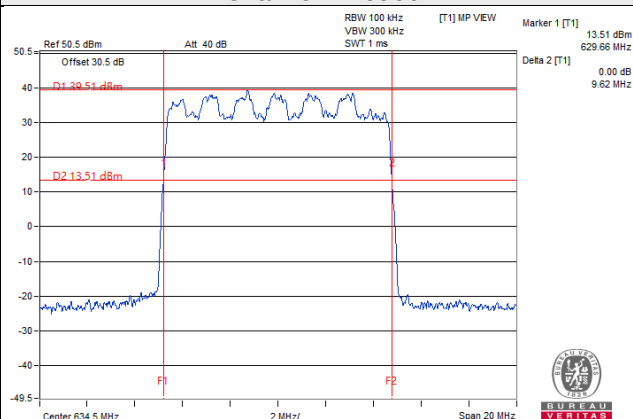


## Channel: 129400

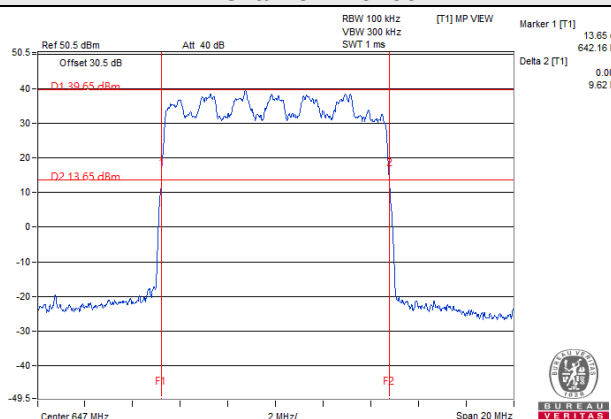


# 64QAM


## Channel: 124400

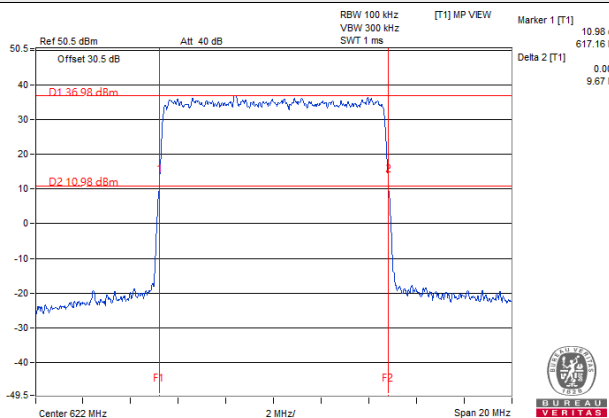

## Channel: 126900

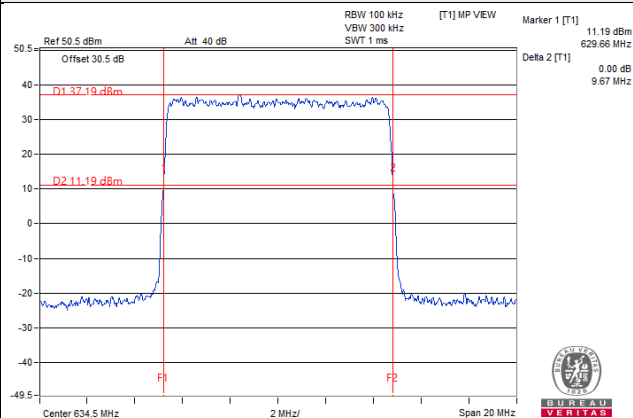


## Channel: 129400

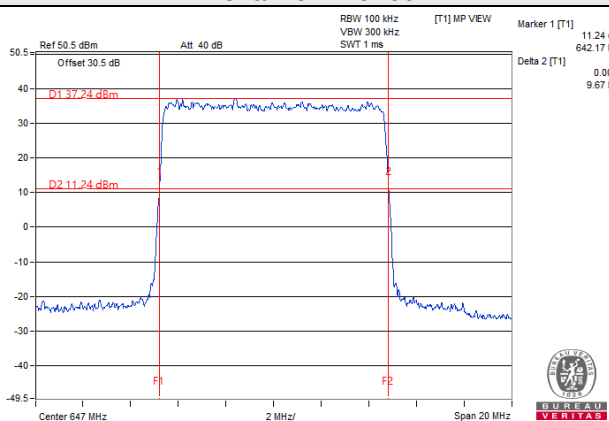


## 256QAM


### Channel: 124400

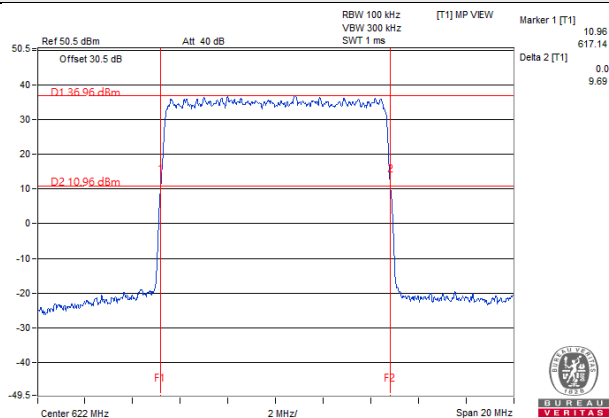

### Channel: 126900

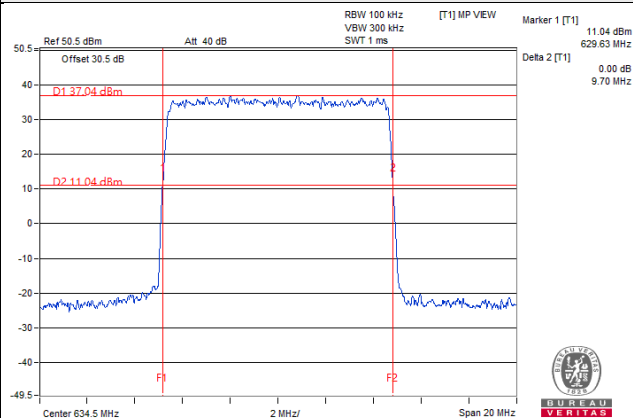


### Channel: 129400

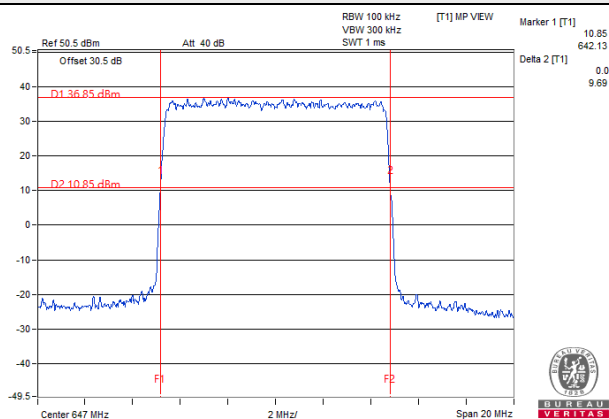

## 15MHz


| Channel Number | Freq. (MHz) | 26dB DOWN BANDWIDTH (MHz) |       |       |        |        |       |       |        |
|----------------|-------------|---------------------------|-------|-------|--------|--------|-------|-------|--------|
|                |             | Chain0                    |       |       |        | Chain1 |       |       |        |
|                |             | QPSK                      | 16QAM | 64QAM | 256QAM | QPSK   | 16QAM | 64QAM | 256QAM |
| 124900         | 624.5       | 14.73                     | 14.61 | 14.68 | 14.62  | 14.76  | 14.64 | 14.67 | 14.62  |
| 126900         | 634.5       | 14.63                     | 14.71 | 14.67 | 14.68  | 14.66  | 14.68 | 14.67 | 14.64  |
| 128900         | 644.5       | 14.72                     | 14.66 | 14.66 | 14.60  | 14.72  | 14.68 | 14.67 | 14.62  |

## Chain 0

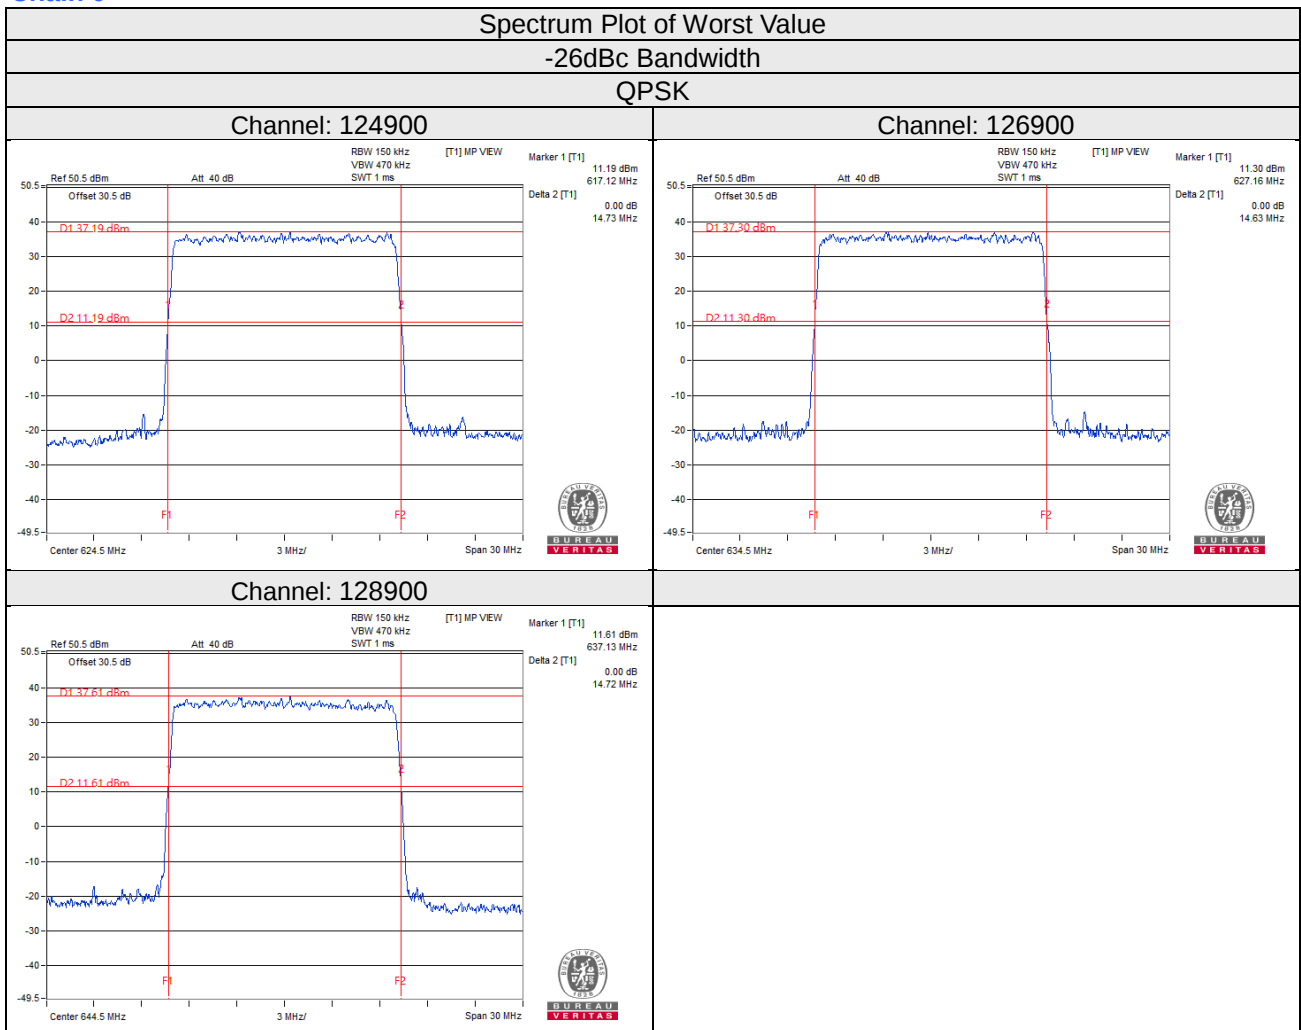


# 16QAM


## Channel: 124900

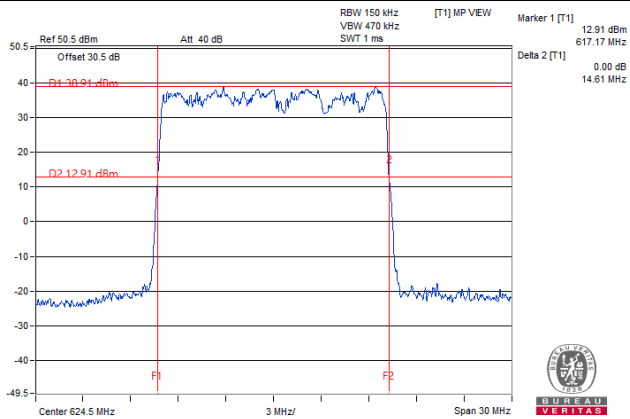

## Channel: 126900

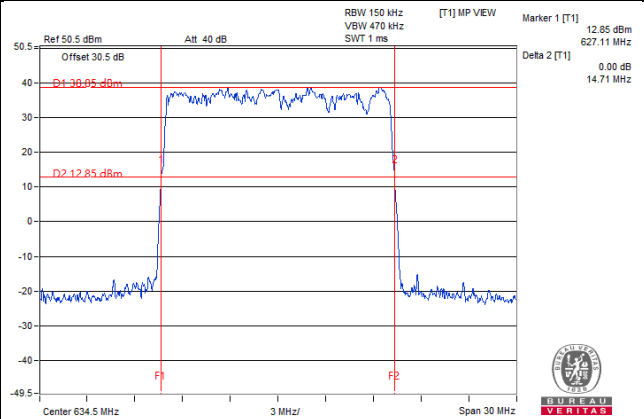


## Channel: 128900

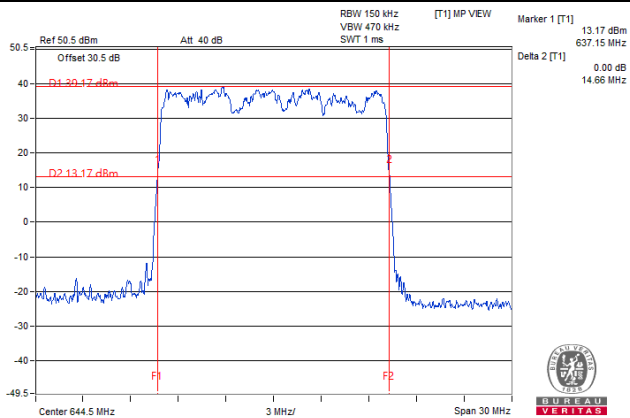


# 64QAM


## Channel: 124900

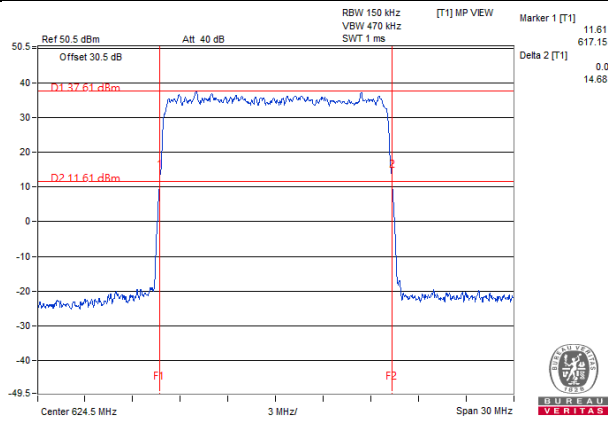

## Channel: 126900

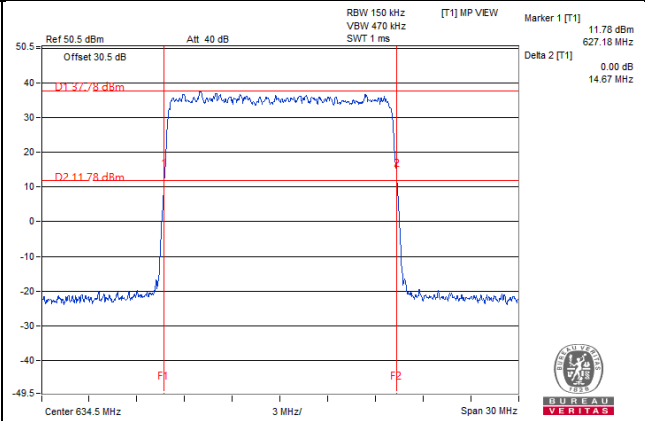


## Channel: 128900

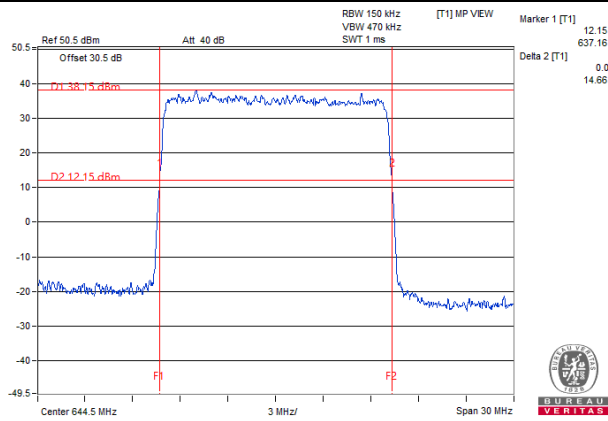


## 256QAM


### Channel: 124900

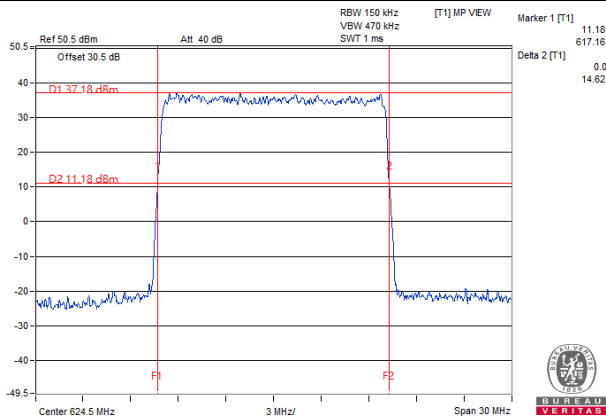

### Channel: 126900

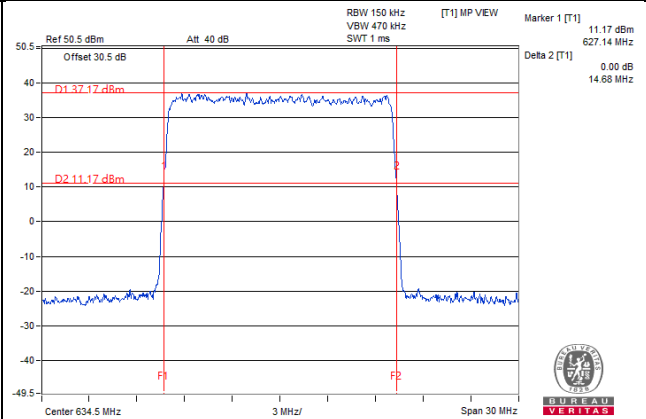

### Channel: 128900

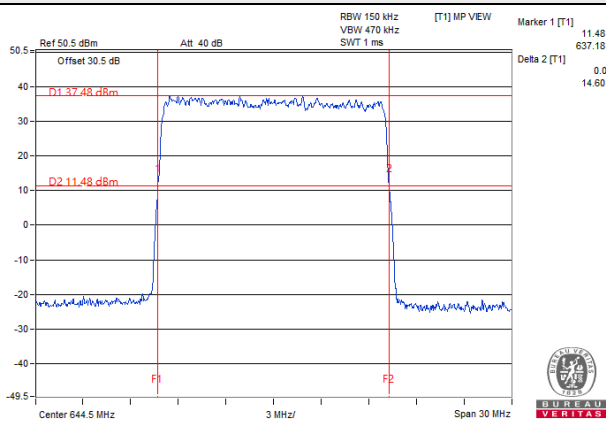

## Chain 1



### Spectrum Plot of Worst Value

-26dBc Bandwidth


QPSK

Channel: 124900

Channel: 126900

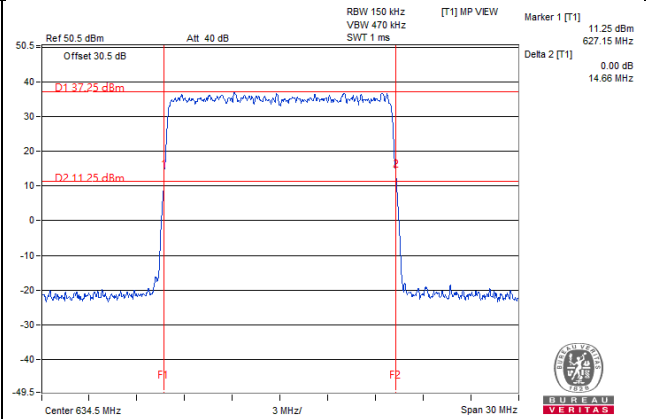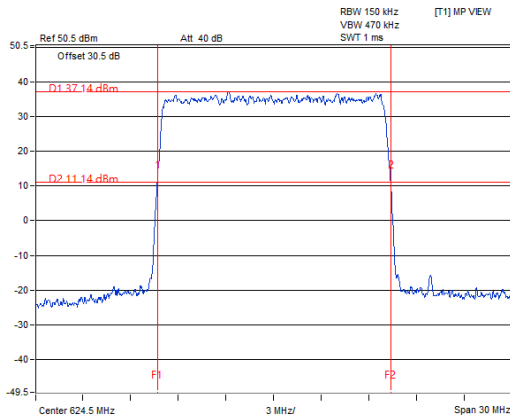


Channel: 128900

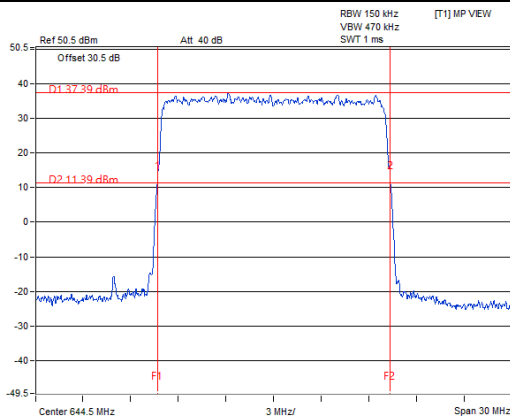


# 16QAM


## Channel: 124900

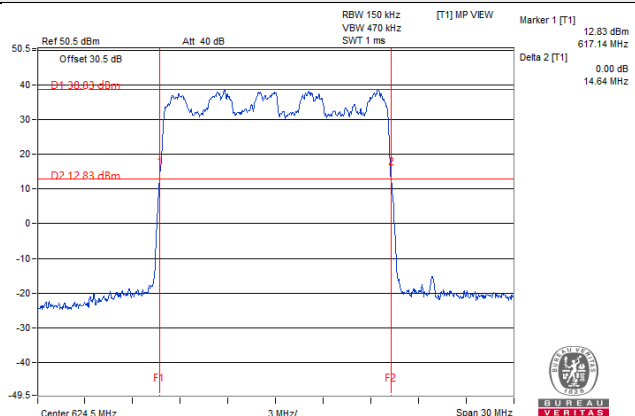

## Channel: 126900

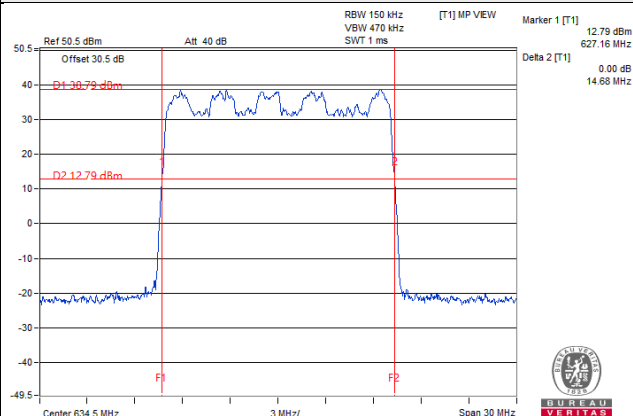


## Channel: 128900

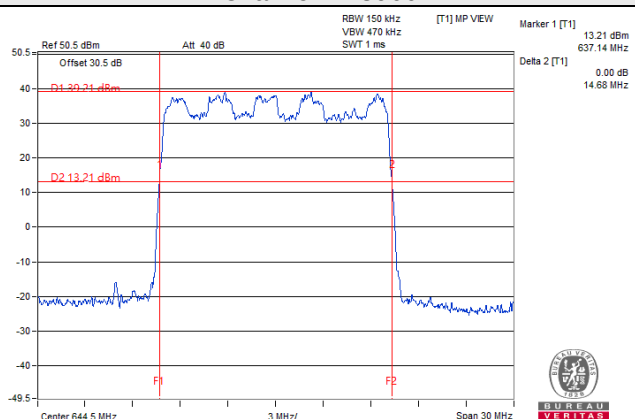


# 64QAM


## Channel: 124900

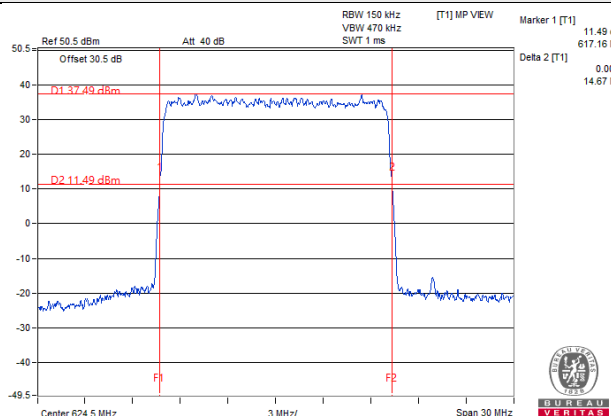

## Channel: 126900

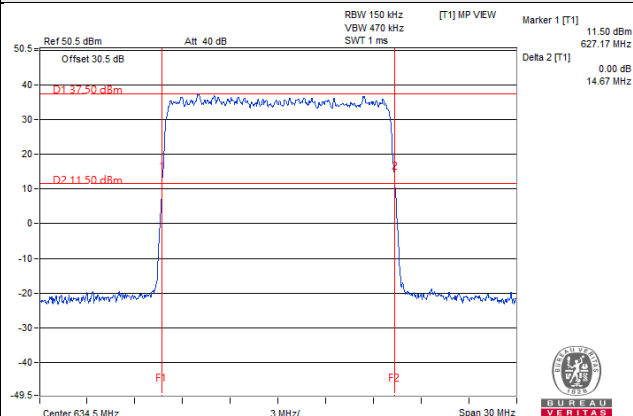


## Channel: 128900

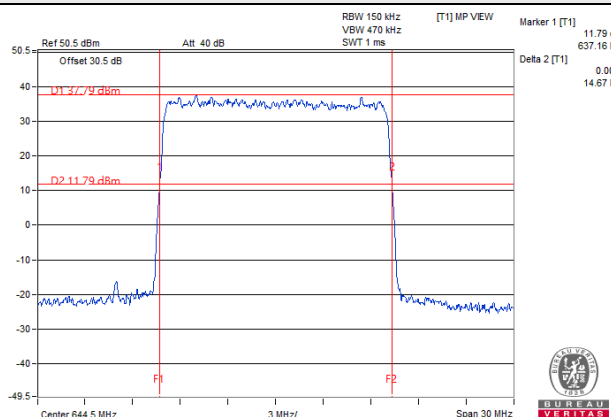


## 256QAM


### Channel: 124900

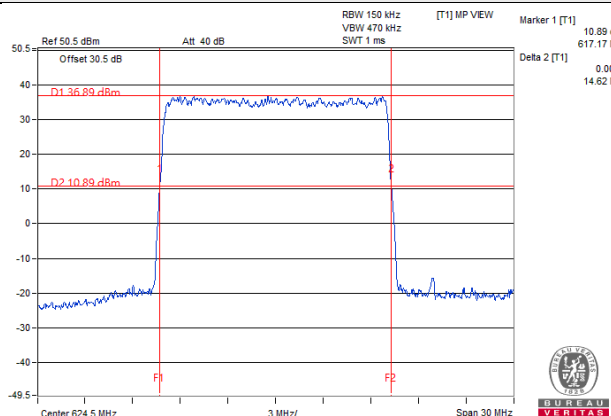

### Channel: 126900

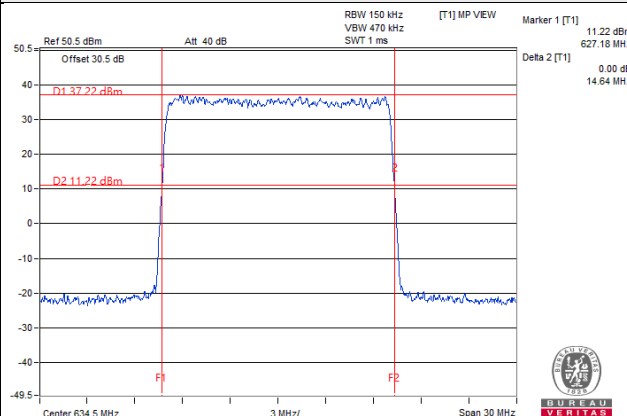


### Channel: 128900

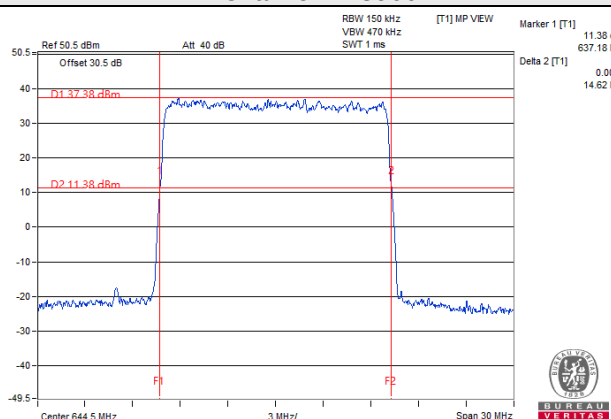

## 20MHz


| Channel Number | Freq. (MHz) | 26dB DOWN BANDWIDTH (MHz) |       |       |        |        |       |       |        |
|----------------|-------------|---------------------------|-------|-------|--------|--------|-------|-------|--------|
|                |             | Chain0                    |       |       |        | Chain1 |       |       |        |
|                |             | QPSK                      | 16QAM | 64QAM | 256QAM | QPSK   | 16QAM | 64QAM | 256QAM |
| 125400         | 627         | 19.53                     | 19.50 | 19.54 | 19.55  | 19.50  | 19.49 | 19.54 | 19.55  |
| 126900         | 634.5       | 19.54                     | 19.47 | 19.54 | 19.53  | 19.51  | 19.47 | 19.53 | 19.54  |
| 128400         | 642         | 19.49                     | 19.46 | 19.54 | 19.54  | 19.50  | 19.44 | 19.51 | 19.54  |

## Chain 0

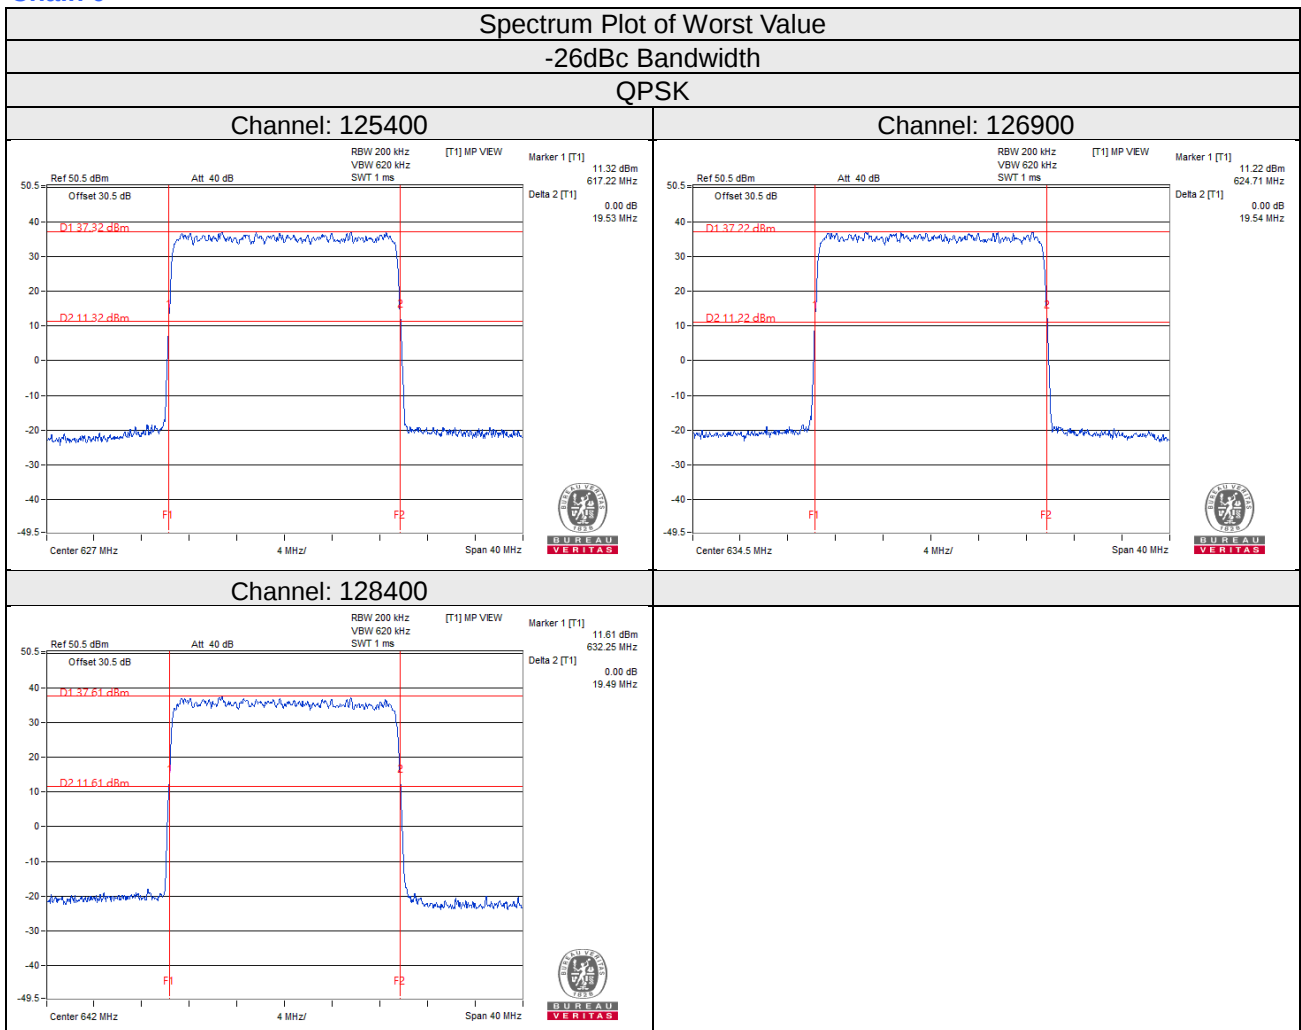


# 16QAM


## Channel: 125400

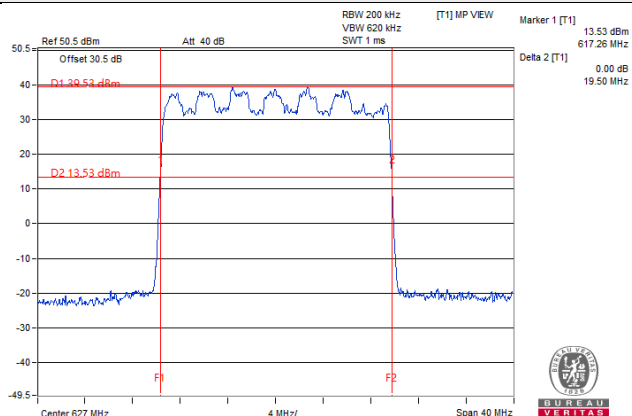

## Channel: 126900

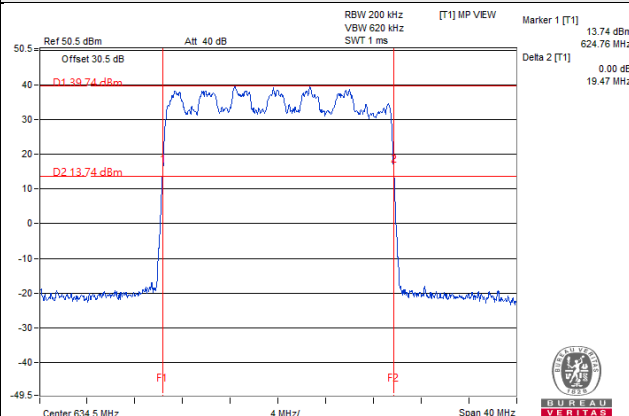


## Channel: 128400

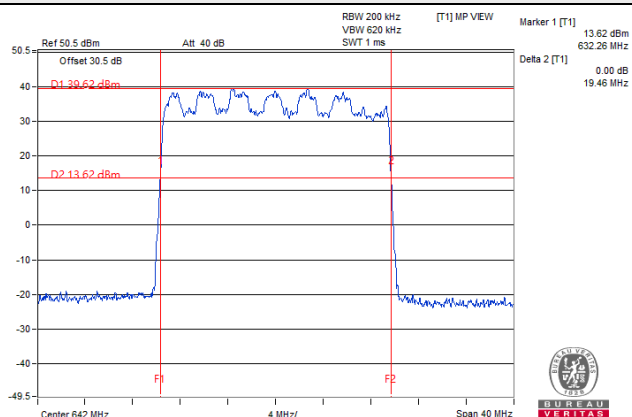


# 64QAM


## Channel: 125400

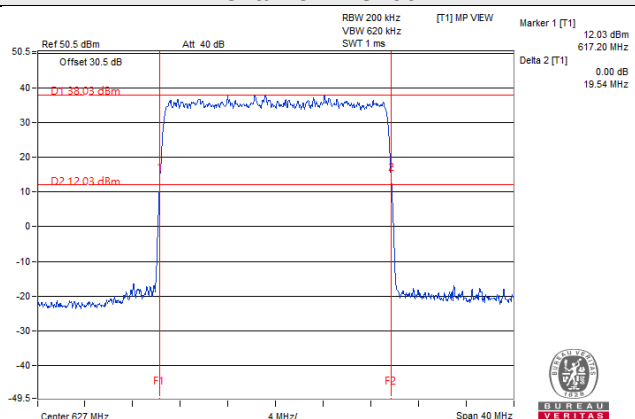

## Channel: 126900

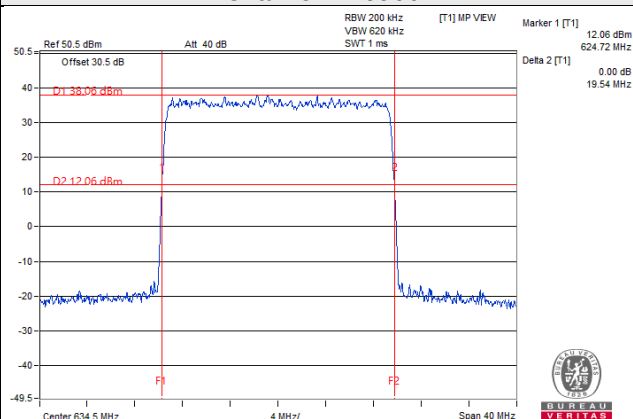


## Channel: 128400

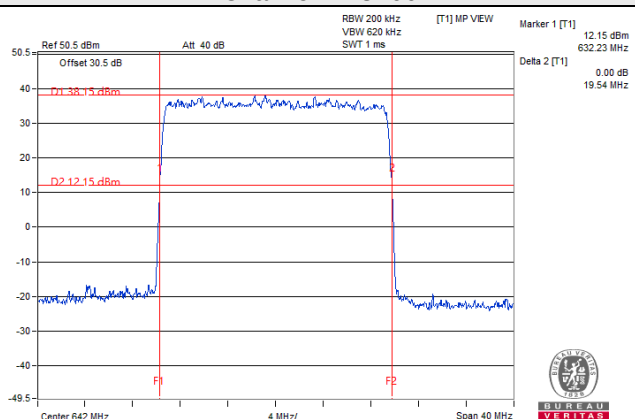


## 256QAM


### Channel: 125400

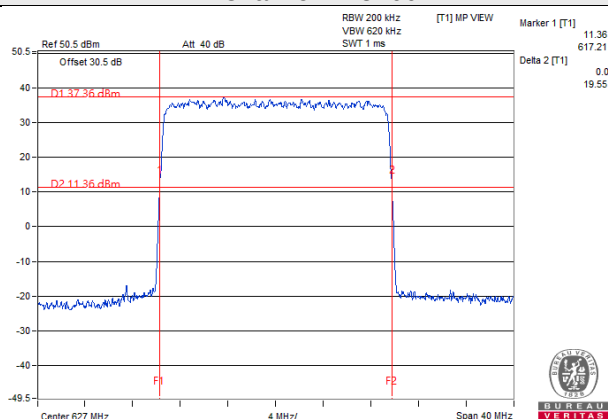

### Channel: 126900

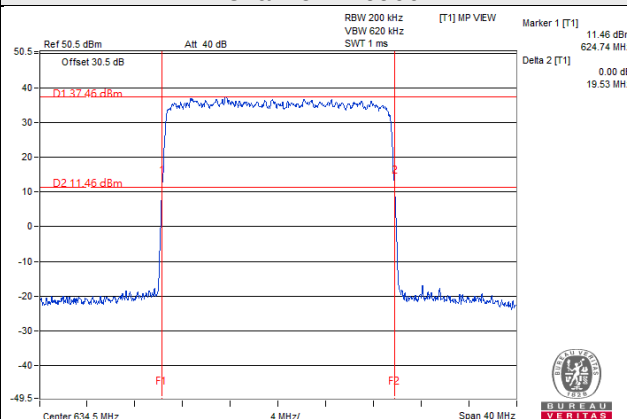

### Channel: 128400

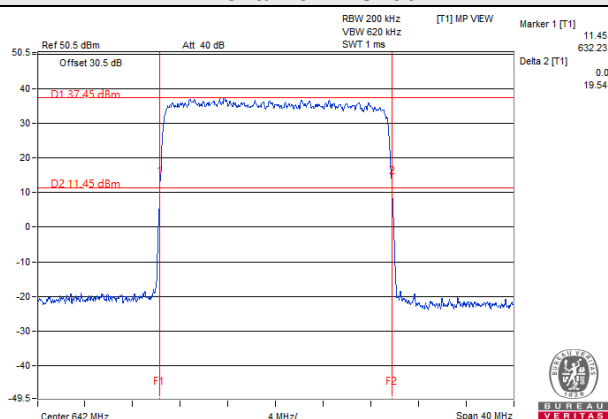

## Chain 1



### Spectrum Plot of Worst Value

-26dBc Bandwidth


QPSK

Channel: 125400

Channel: 126900

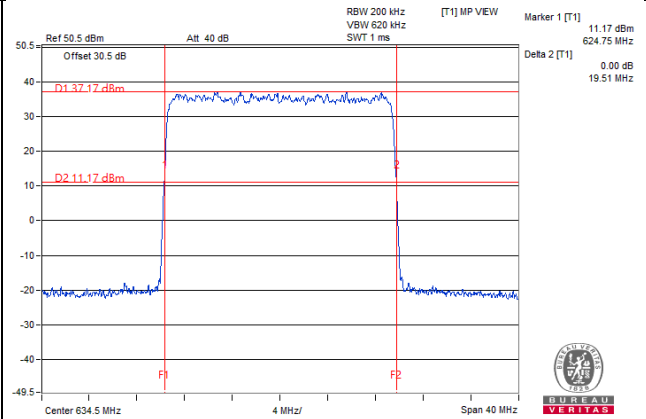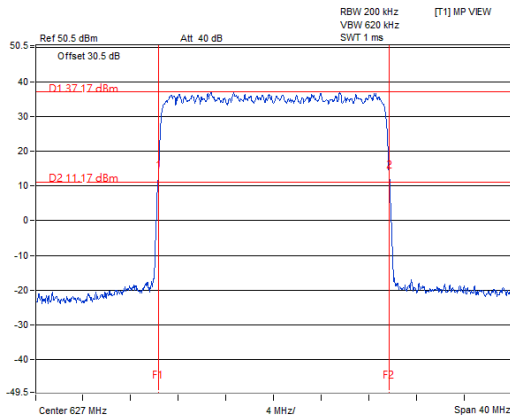


Channel: 128400

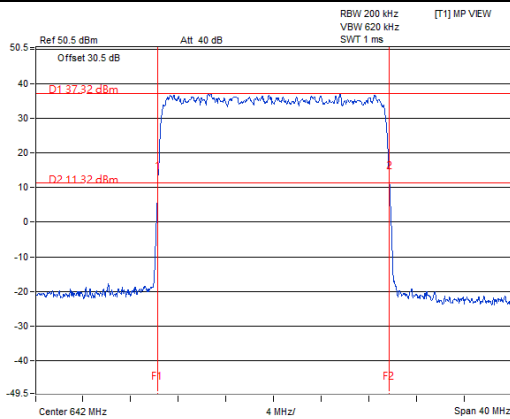


# 16QAM


## Channel: 125400

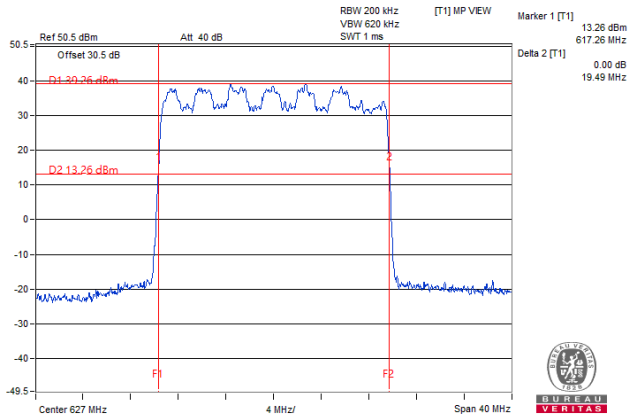

## Channel: 126900

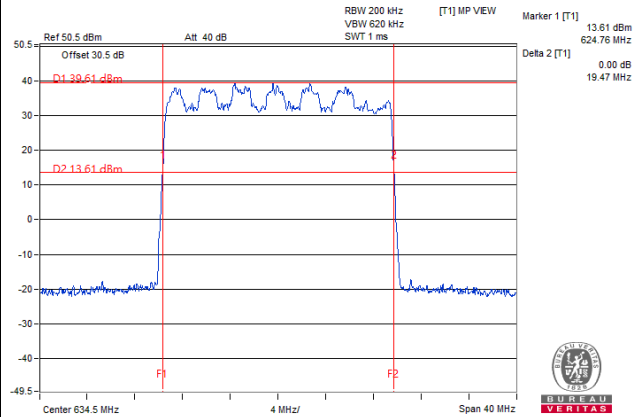


## Channel: 128400

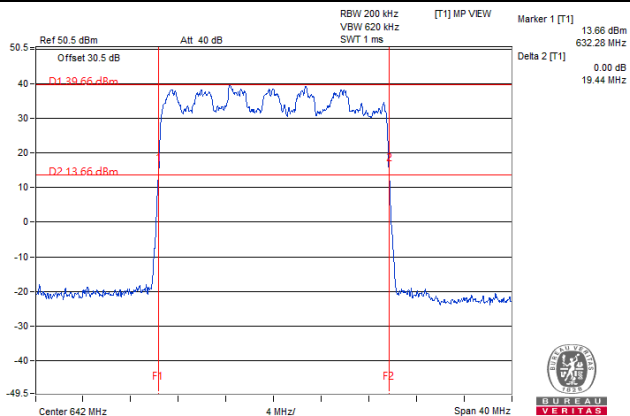


# 64QAM


## Channel: 125400

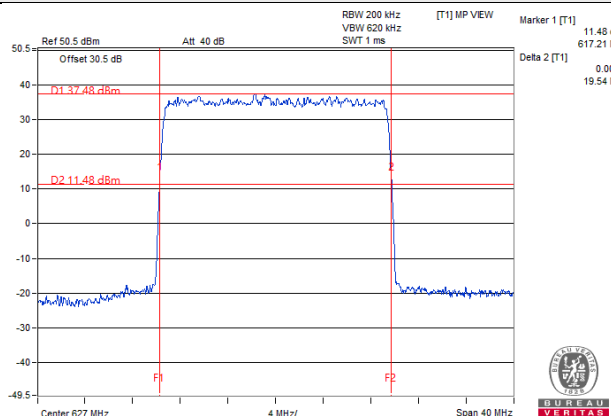

## Channel: 126900

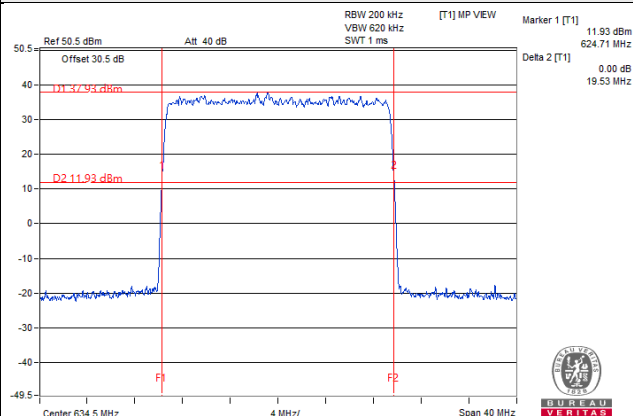


## Channel: 128400

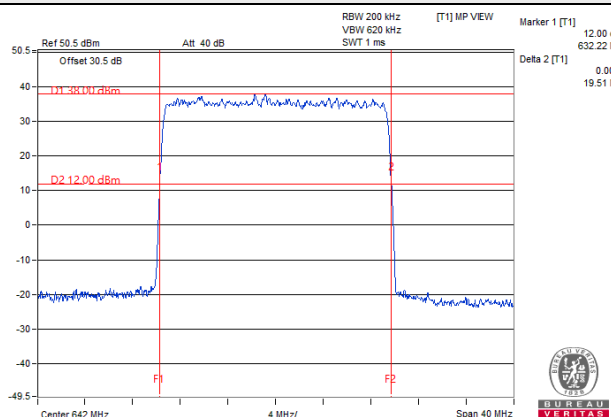


## 256QAM


### Channel: 125400

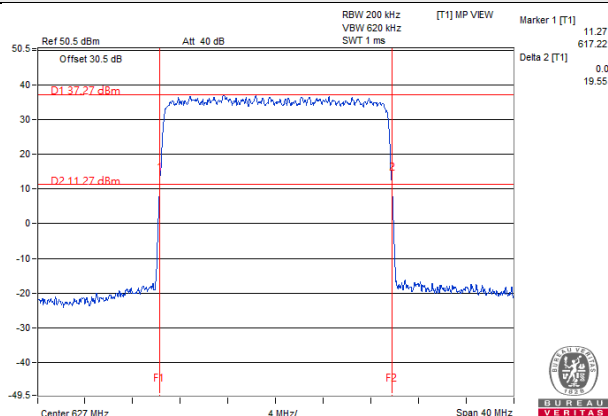

### Channel: 126900

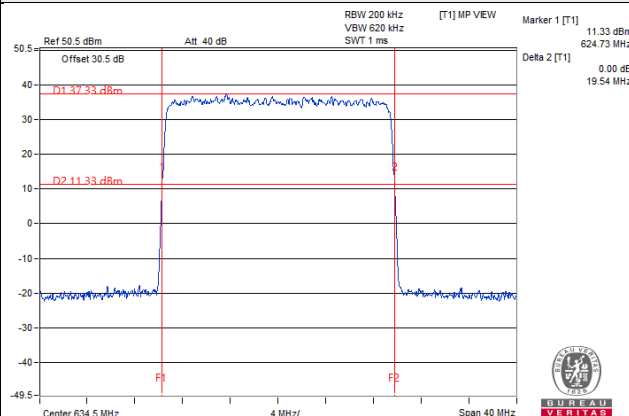

### Channel: 128400

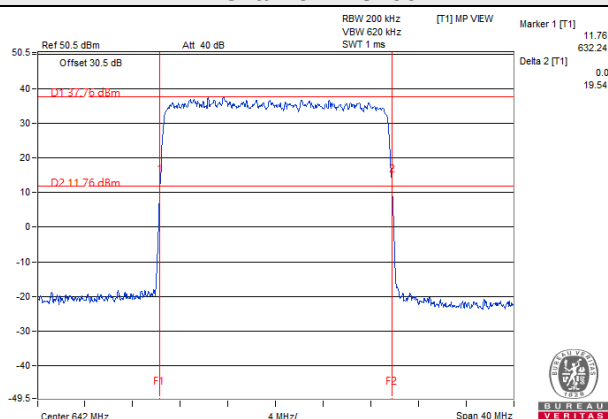


#### 4.4.5 Test Results (Occupied Bandwidth)

##### Single Carrier

##### 5MHz


| Channel Number | Freq. (MHz) | OCP 99 BAND WIDTH (MHz) |       |       |        |        |       |       |        |
|----------------|-------------|-------------------------|-------|-------|--------|--------|-------|-------|--------|
|                |             | Chain0                  |       |       |        | Chain1 |       |       |        |
|                |             | QPSK                    | 16QAM | 64QAM | 256QAM | QPSK   | 16QAM | 64QAM | 256QAM |
| 123900         | 619.5       | 4.47                    | 4.49  | 4.47  | 4.46   | 4.47   | 4.50  | 4.47  | 4.46   |
| 126900         | 634.5       | 4.47                    | 4.47  | 4.46  | 4.46   | 4.47   | 4.47  | 4.47  | 4.47   |
| 129900         | 649.5       | 4.47                    | 4.48  | 4.48  | 4.46   | 4.48   | 4.49  | 4.46  | 4.47   |

##### Chain 0

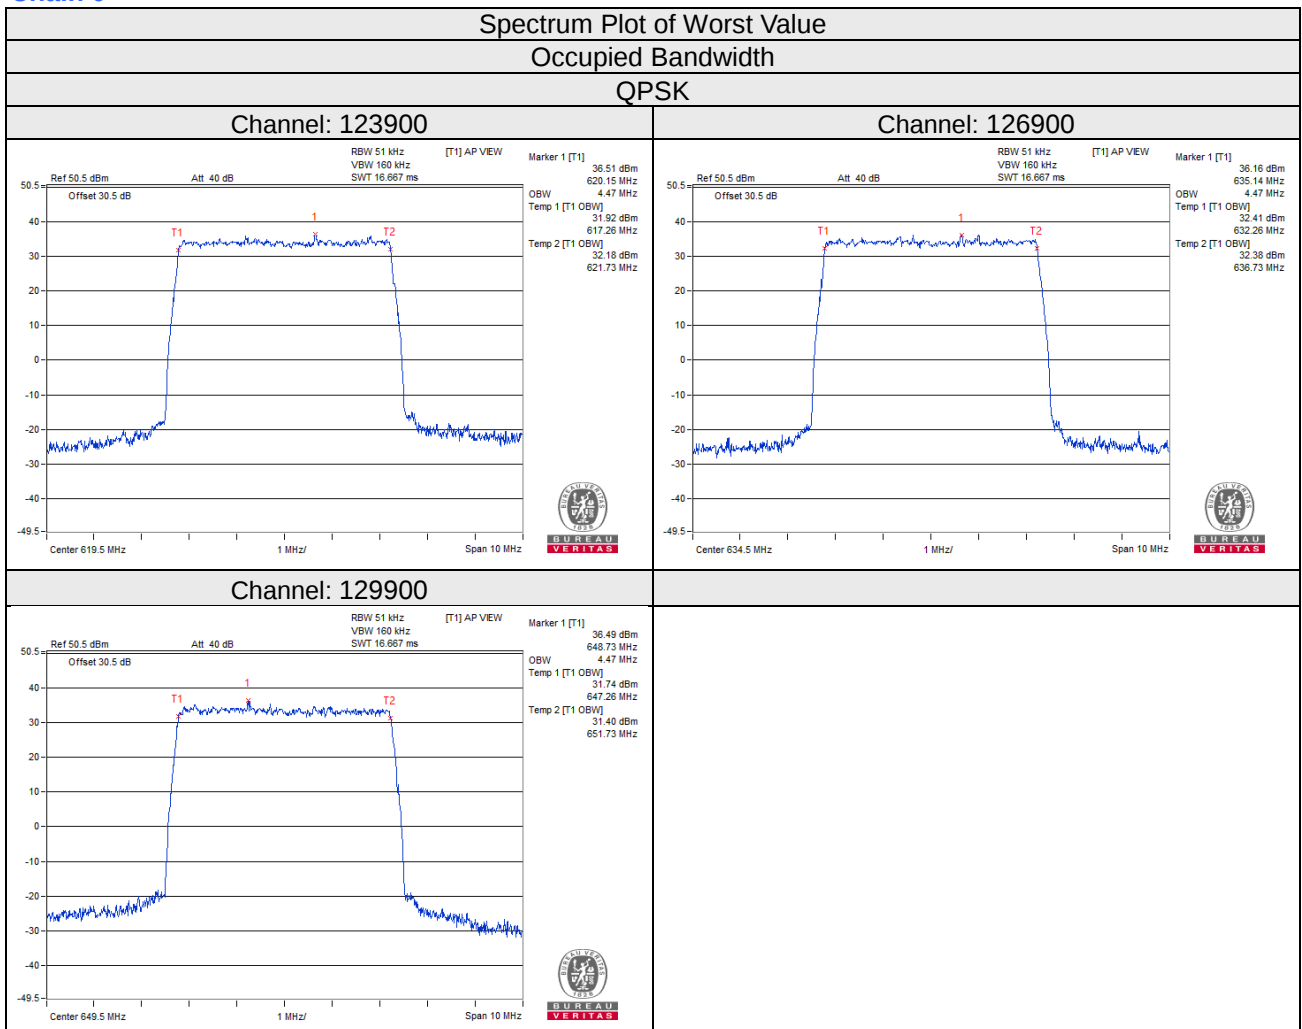


# 16QAM


## Channel: 123900

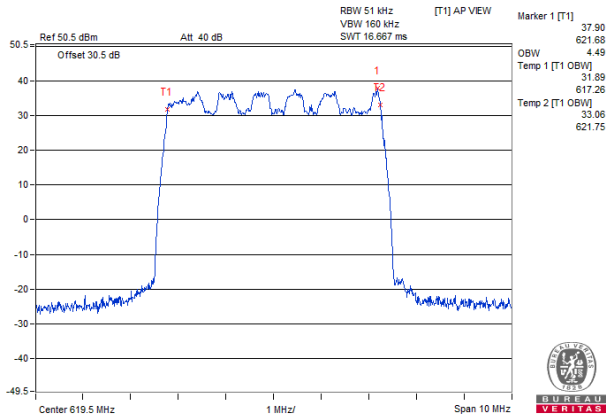

## Channel: 126900

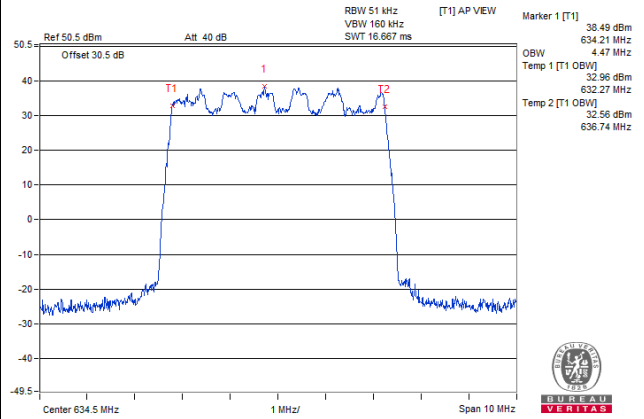


## Channel: 129900

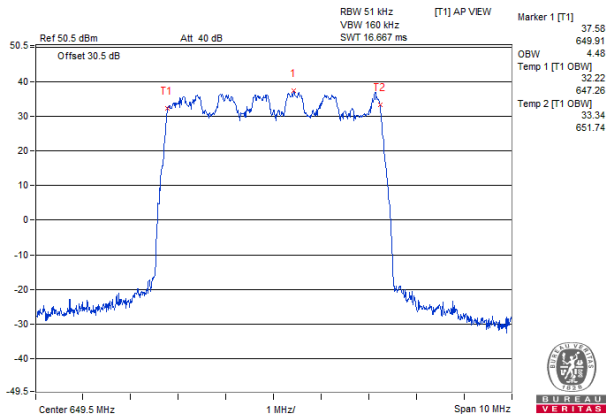


# 64QAM


## Channel: 123900

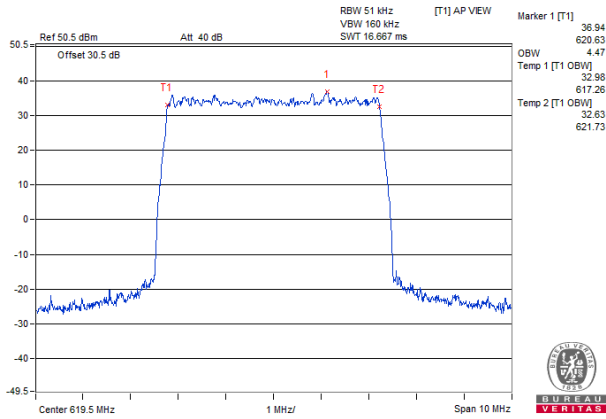

## Channel: 126900

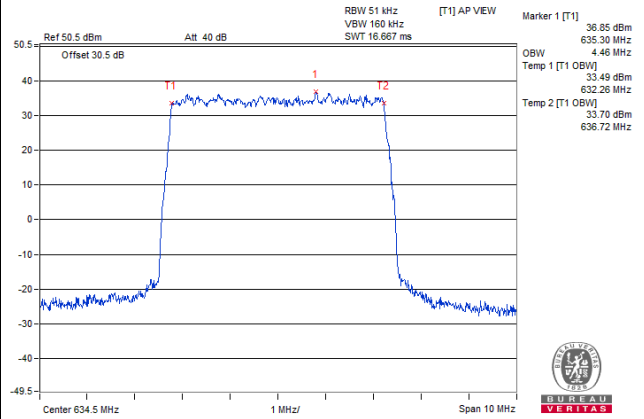


## Channel: 129900

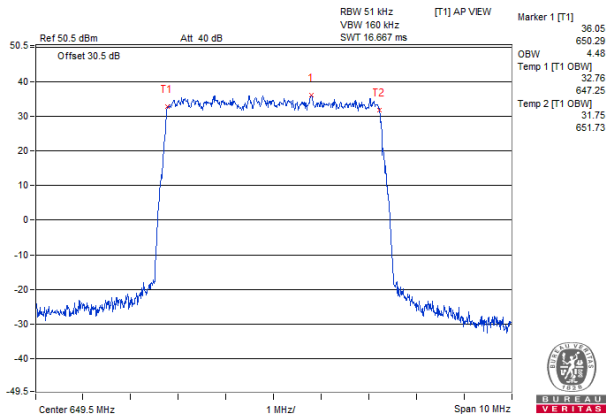


## 256QAM


### Channel: 123900

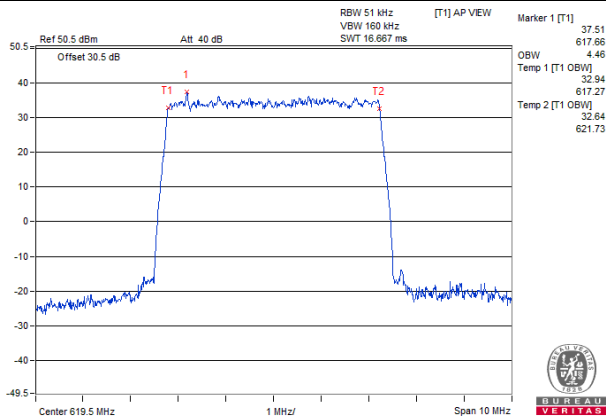

### Channel: 126900

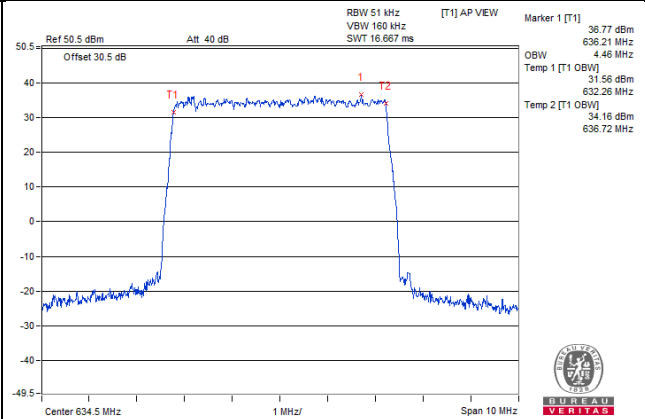

### Channel: 129900

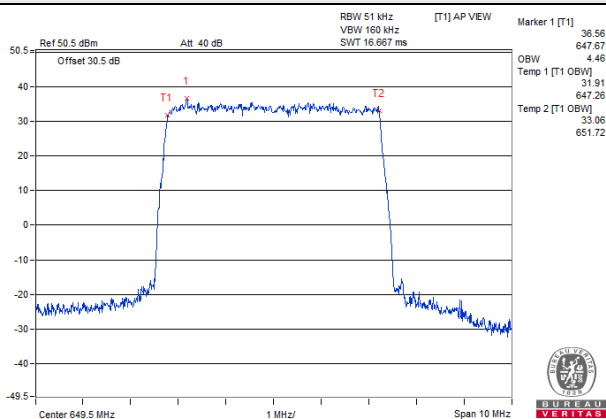


## Chain 1

### Spectrum Plot of Worst Value


#### Occupied Bandwidth

#### QPSK


#### Channel: 123900

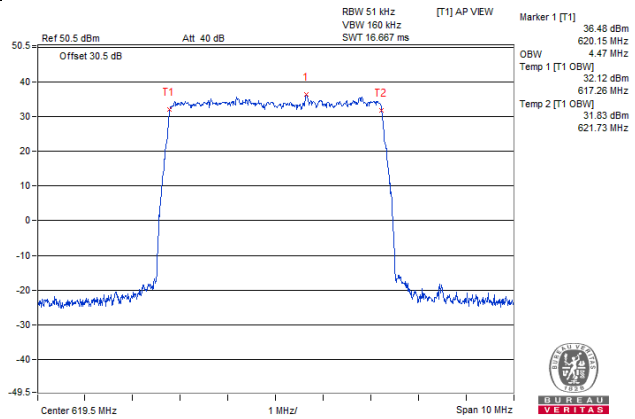

#### Channel: 126900

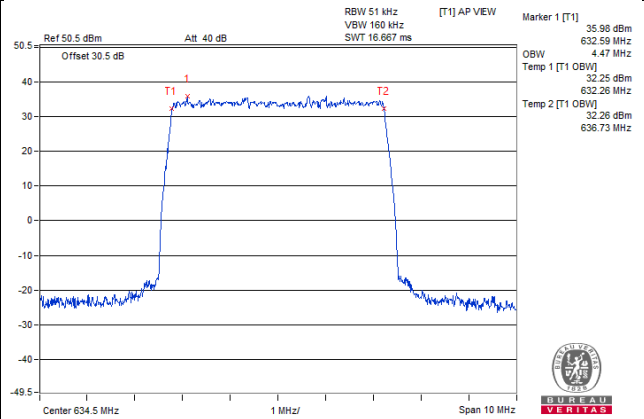


#### Channel: 129900

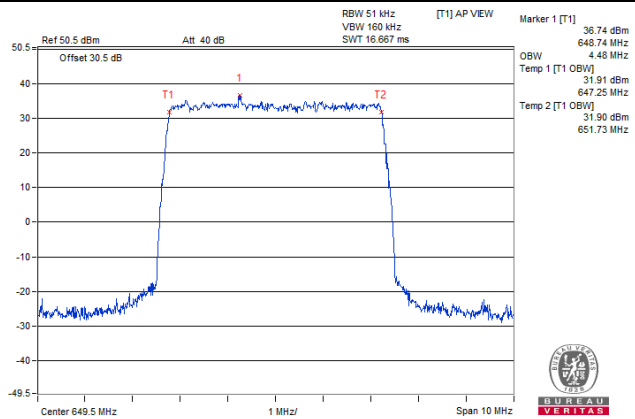


# 16QAM


## Channel: 123900

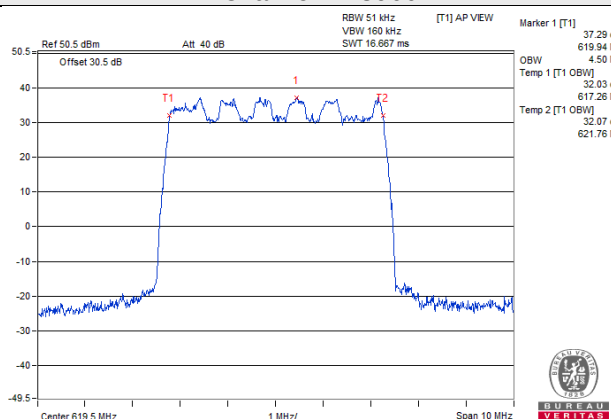

## Channel: 126900

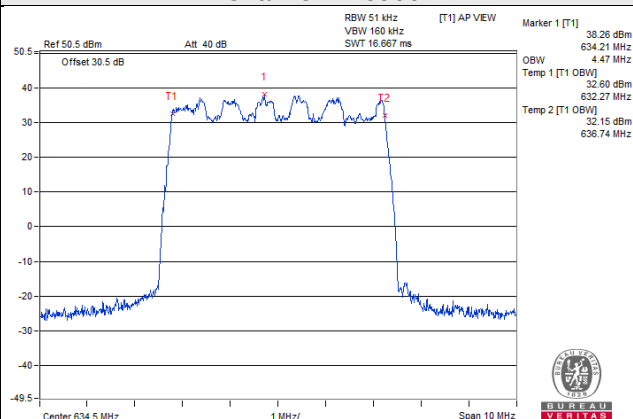


## Channel: 129900

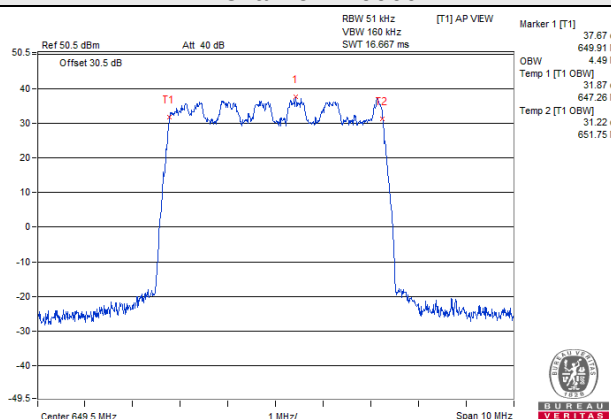


# 64QAM


## Channel: 123900

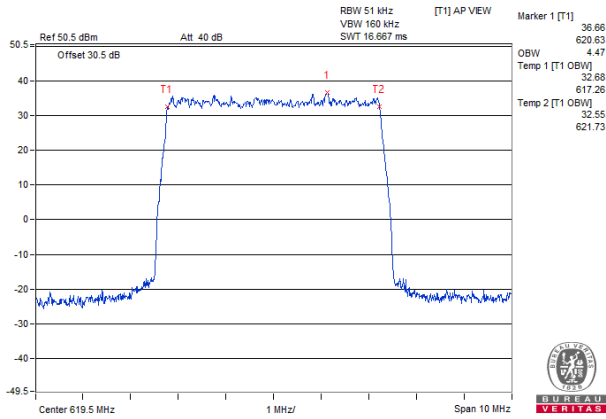

## Channel: 126900

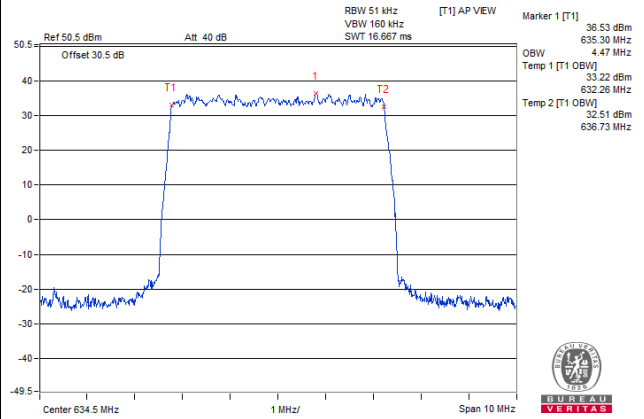


## Channel: 129900

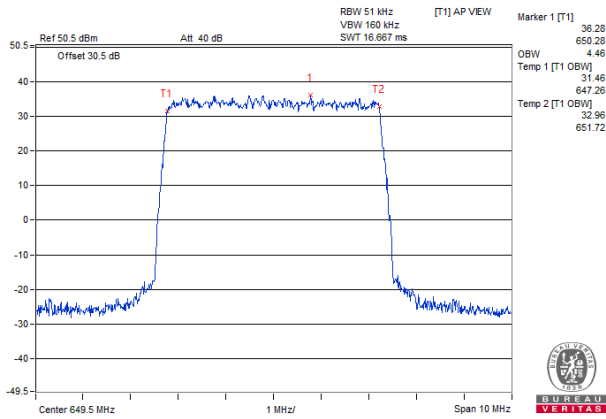


## 256QAM


### Channel: 123900

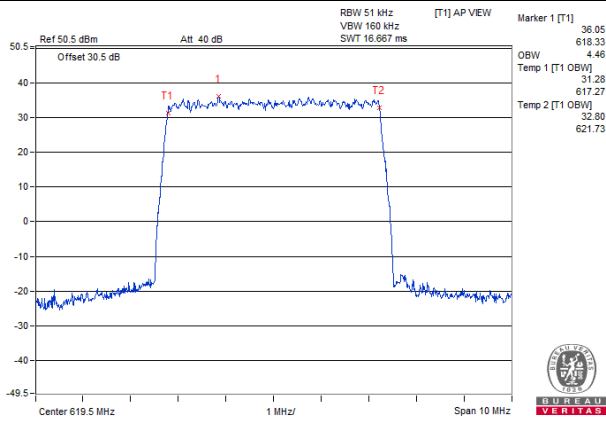

### Channel: 126900

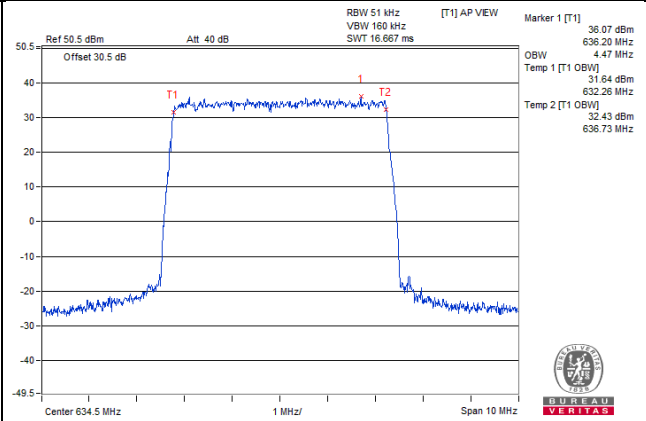


### Channel: 129900

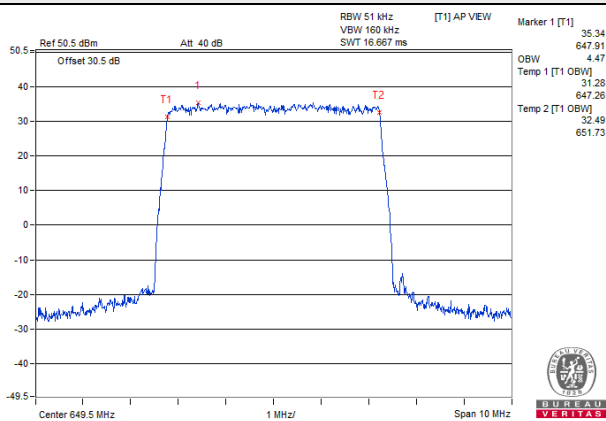

## 10MHz


| Channel Number | Freq. (MHz) | OCP 99 BAND WIDTH (MHz) |       |       |        |        |       |       |        |
|----------------|-------------|-------------------------|-------|-------|--------|--------|-------|-------|--------|
|                |             | Chain0                  |       |       |        | Chain1 |       |       |        |
|                |             | QPSK                    | 16QAM | 64QAM | 256QAM | QPSK   | 16QAM | 64QAM | 256QAM |
| 124400         | 622         | 9.22                    | 9.16  | 9.24  | 9.20   | 9.20   | 9.16  | 9.22  | 9.20   |
| 126900         | 634.5       | 9.22                    | 9.16  | 9.22  | 9.20   | 9.22   | 9.16  | 9.22  | 9.20   |
| 129400         | 647         | 9.22                    | 9.14  | 9.22  | 9.20   | 9.22   | 9.16  | 9.22  | 9.20   |

## Chain 0

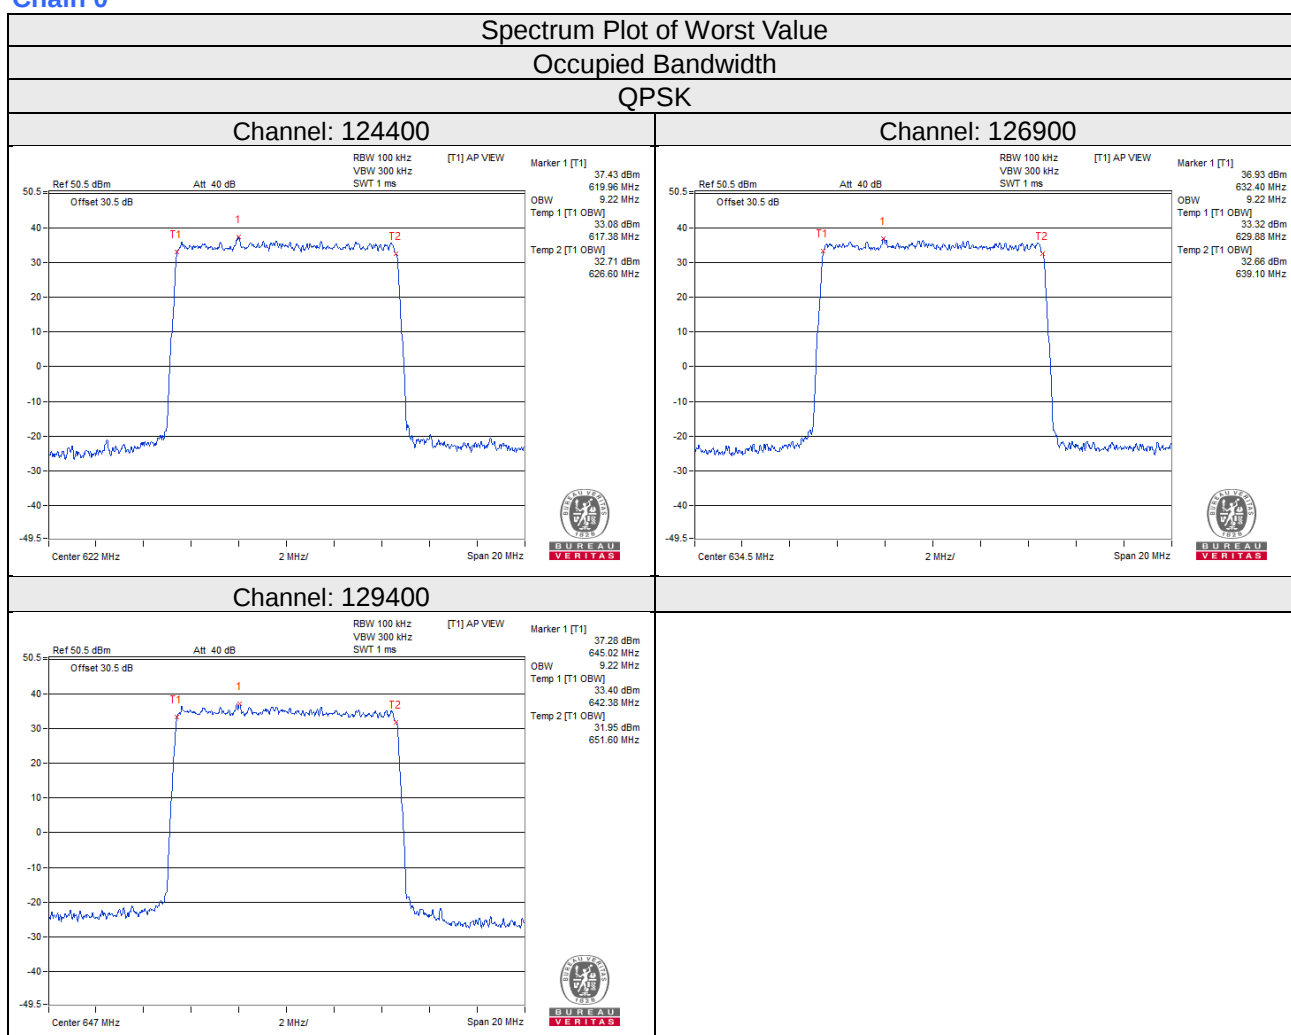


# 16QAM


## Channel: 124400

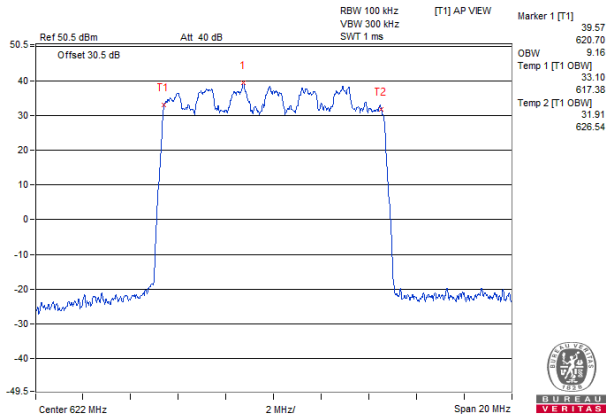

## Channel: 126900

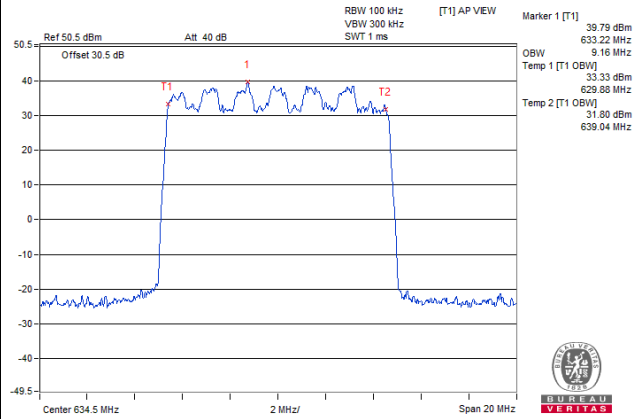


## Channel: 129400

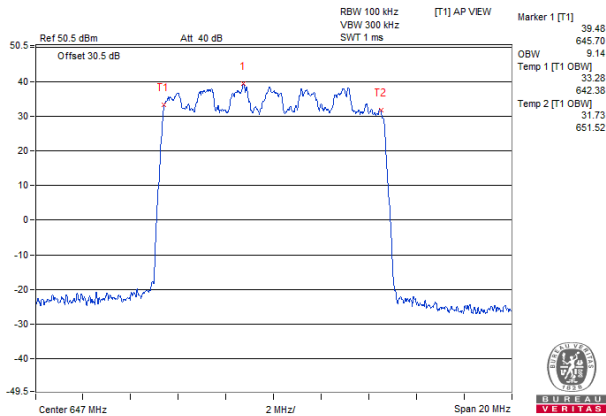


## 64QAM

### Channel: 124400

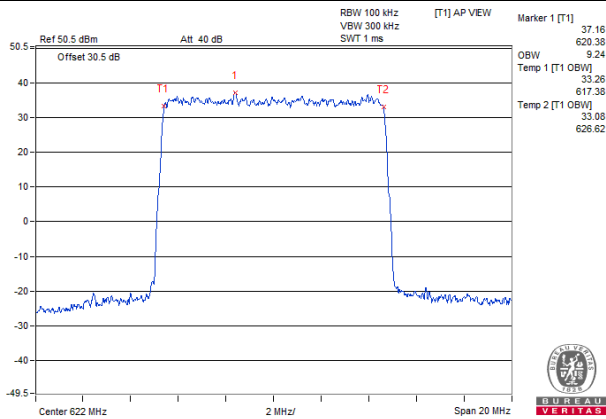

### Channel: 126900

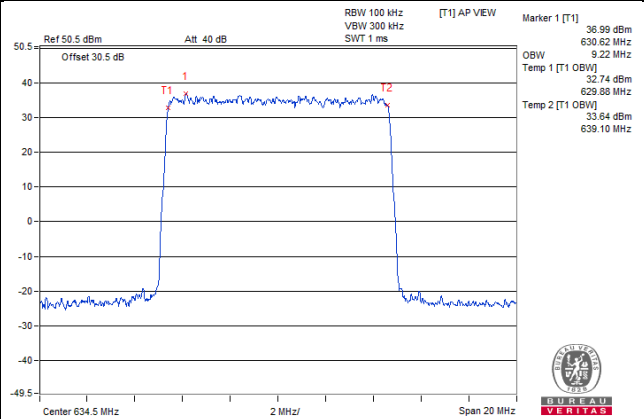

### Channel: 129400

