

# Low Electric Fittings Company

## MPE ASSESSMENT REPORT

**Report Type:**

FCC MPE assessment report

**Model:**

PUR/xx/xxx/QWC-xxxx, PUR/xx/xxx/IOQWC-xxxx  
PUR/xx/xxx/QD-xxxx, PUR/xx/xxx/IOQD-xxxx

**REPORT NUMBER:**

240800132SHA-002

**ISSUE DATE:**

November 1, 2024

**DOCUMENT CONTROL NUMBER:**

TTRFFCCMPE-02\_V1 © 2018 Intertek



## TEST REPORT

**Applicant:** Lew Electric Fittings Company  
1626 Tobacco Rd, Augusta, GA 30906

**Manufacturer:** Zhejiang Sino Electro-Technical Co.,Ltd.  
A5 Building, Sulv Industrial Zone,Yueqing City, Zhejiang Province 325604

**Manufacturer Site:** Zhejiang Sino Electro-Technical Co.,Ltd.  
A5 Building, Sulv Industrial Zone,Yueqing City, Zhejiang Province 325604

**Product Name:** Furniture Power Distribution Units, Attachment Plugs and Receptacles

**Type/Model:** PUR/xx/xxxx/QWC-xxxx, PUR/xx/xxxx/IOQWC-xxxx  
PUR/xx/xxxx/QD-xxxx, PUR/xx/xxxx/IOQD-xxxx


**FCC ID:** 2A7NLPURQWC

## SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

**FCC PART 1 SECTION 1.1310**  
**KDB447498 D01 General RF Exposure Guidance v06**  
**KDB 680106 D01 Wireless Power Transfer v04**

## PREPARED BY:

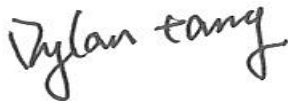

Project Engineer  
Dylan Tang

## REVIEWED BY:



Reviewer  
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

## Revision History

Report No.	Version	Description	Issued Date
240800132SHA-002	Rev. 01	Initial issue of report	November 1, 2024

## Measurement result summary

TEST ITEM	FCC REFERENCE	TEST RESULT	NOTE
RF Exposure	1.1310	Pass	-

Notes: 1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

# 1 GENERAL INFORMATION

## 1.1 Description of Equipment Under Test (EUT)

Product name:	Furniture Power Distribution Units, Attachment Plugs and Receptacles
Type/Model:	<p>PUR/xx/xxxx/QWC-xxxx, PUR/xx/xxxx/IOQWC-xxxx  PUR/xx/xxxx/QD-xxxx, PUR/xx/xxxx/IOQD-xxxx  “xx”: denotes the current specification of receptacles, can be  15=15amp, 20=20amp  “xxxx” denotes installed with different type receptacles, can be G=with  a GFCI, DS=with a decora receptacle, AC=with an A/C receptacle,  GAC=with a GFCI and an A/C receptacle, AC2P= with two A/C  receptacles, no code=without receptacles  “xxxx”: denotes different kind of tops, can be  B=Brass top; SS=Stainless steel top; BK= Black painting top;  WT= White painting top;DB= Dark bronze painting top;  OW = Off white painting top; AWT= White painting top and white  housing; NS= Nickel silver top; BS= Black stainless top;  SN= Stain-nickel top; G=Graphite top; CB=Champagne Bronze top;  RBK=Black PC top; RWT=Whitie pc top; RSS=Silver PC top;  ROW= Off white PC top; RDB=Dark bronze pc top; RBR=Brass colored  pc top; RAWT=White PC top base and white housing  (XXXX can be 1 character, 2 characters, 3 characters or 4 characters)</p>
Description of EUT:	<p>The EUT is a Bluetooth Module which supports Bluetooth and Wireless  charging function. The difference between the models is the AC Power  line, and their circuitry is the same exactly. The model  PUR/xx/xxxx/QWC-xxxx was chosen to test.</p>
Rating:	<p>125V 15A for 15A receptacle  125V/120V 20A for 20A receptacle</p>
Category of EUT:	Class B
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Software Version:	V1.0
Hardware Version:	V1.0
Sample received date:	January 15, 2024
Date of test:	January 15, 2024 ~ March 5, 2024

## 1.2 Technical Specification

Frequency Range:	111kHz – 205kHz
Modulation:	FSK
Antenna:	Coil antenna

### 1.3 Description of Test Facility

Name:	Intertek Testing Services (Shanghai FTZ) Co., Ltd.
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L21189
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

## 2 TEST SPECIFICATIONS

### 2.1 Standards or specification

FCC PART 1 SECTION 1.1310

KDB 680106 D01 Wireless Power Transfer v04

KDB447498 D01 General RF Exposure Guidance v06

### 2.2 Mode of operation during the test

Within this test report, EUT was tested under all modes and tested under its rating voltage and frequency. Other voltage and frequency are specified if used. The worst data was listed in the report.

### 2.3 Test peripherals list

Item No.	Name	Band and Model	Description
1	Wireless load	iphone x	100% power level
2	Wireless load	iphone x	50% power level
3	Wireless load	iphone x	0% power level

### 2.4 Record of climatic conditions

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (kPa)
RF Exposure	24	53	101

## 2.5 Instrument list

Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Exposure Level Tester	Narda	NBM-550	EC 6113	2025-04-07
<input checked="" type="checkbox"/>	E-Field sensor(100kHz-3GHz)	Narda	EF 0391	EC 6113-1	2025-04-07
<input checked="" type="checkbox"/>	H-Field sensor(300kHz-30MHz)	Narda	HF 3061	EC 6113-2	2025-04-07
<input checked="" type="checkbox"/>	Exposure Level Tester(1Hz-400kHz)	Narda	ELT-400	EC 2928	2025-07-15

## 2.6 Measurement uncertainty

Test Items	Expanded Uncertainty (k=2)
H-field	0.9 dB
E-field	1.1 dB



### 3 RF Exposure Assessment

Test result: Pass

#### 3.1 Assessment Limit

Reference: 47 CFR §1.1310, KDB 680106


Limits for General Population/Uncontrolled Exposure

Frequency range [MHz]	Electric field strength [V/m]	Magnetic field strength [A/m]	Power density [mW/cm <sup>2</sup> ]	Averaging time [minutes]
0.1 – 0.3	614	1.63	*100	30
0.3 – 1.34	614	1.63	*100	30
1.34 – 30	824/f	2.19/f	*180/f <sup>2</sup>	30
30 – 300	27.5	0.073	0.2	30
300 – 1 500	-	-	f/1500	30
1 500 – 100 000	-	-	1.0	30

Limits for Occupational/Controlled Exposure

Frequency range [MHz]	Electric field strength [V/m]	Magnetic field strength [A/m]	Power density [mW/cm <sup>2</sup> ]	Averaging time [minutes]
0.1 – 0.3	614	1.63	*100	6
0.3 – 3.0	614	1.63	*100	6
3.0 – 30	1842/f	4.89/f	*900/f <sup>2</sup>	6
30 – 300	61.4	0.163	1.0	6
300 – 1 500	-	-	f/300	6
1 500 – 100 000	-	-	5	6

#### 3.2 Assessment Configuration

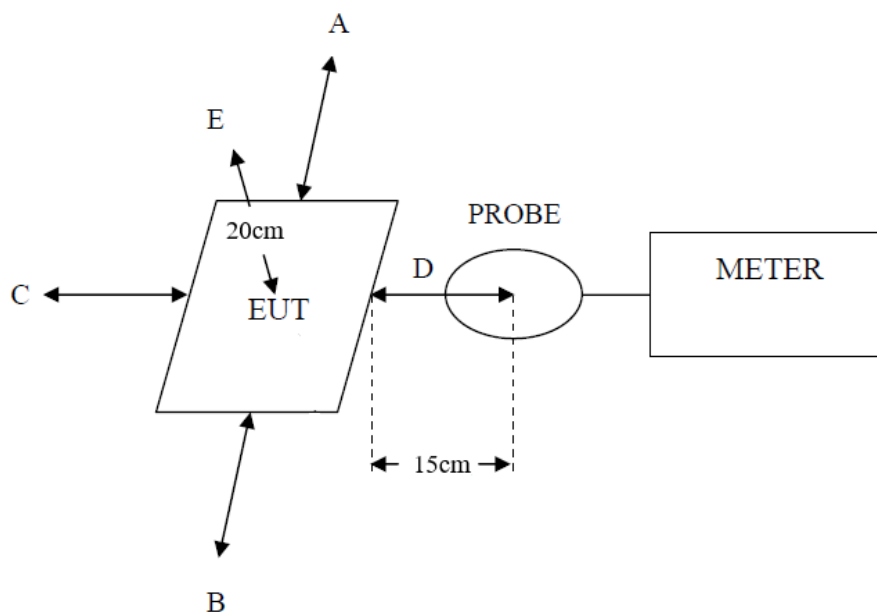

## TEST REPORT

### 3.3 Assessment Results

Test result of Magnetic Field Strength:

Test Position	Test distance (cm)	Test result (A/m)	Limit (A/m)	Result (Pass/Fail)
A: Right	15	0.252	1.63 *0.5	Pass
B: Left	15	0.163	1.63 *0.5	Pass
C: Front	15	0.365	1.63 *0.5	Pass
D: Back	15	0.116	1.63 *0.5	Pass
E: Top	20	0.053	1.63 *0.5	Pass

Test result of Electric Field Strength:

Test Position	Test distance (cm)	Test result (V/m)	Limit (V/m)	Result (Pass/Fail)
A: Right	15	1.155	614 *0.5	Pass
B: Left	15	1.298	614 *0.5	Pass
C: Front	15	1.165	614 *0.5	Pass
D: Back	15	1.265	614 *0.5	Pass
E: Top	20	0.603	614 *0.5	Pass

\*\*\*\*\* END \*\*\*\*\*