


东莞市超能电子科技有限公司
产品规格承认书

SPECIFICATION FOR APPROVAL

产品型号 DESC	50*5.3*0.8 (Diskette exposed 8mm)	版本 REV:A	客户		
			客户料号		
			超能料号		
一、尺寸 DIMENSION: (mm) 			A	50.00±2.00	
			B	20.50±2.00	
			C	5.00±0.50	
			D	8.00±3.00	
				Line length can be customized according to customer requirements	
			E	4.00±2.00	
			I	0.80MAX	
			T	2.0MAX	
			Unit	mm	
			备注		
			1	Wire diameter: 0.15*28P copper-covered aluminum wire	
			2	Number of coils :10TS	
			3	Whether the start and end lines cross: Yes	
			4	Wrap coil with 8mm wide or so high temperature tape	
5	Double-sided tape is affixed to the back of the magnetic disc				
二、原理图 SCHEMATIC DIAGRAM:					
三、绕线参数 Winding Specification:					
序号 NO	端子 TERMINAL		线径 WIRE	圈数 Tums	绕线方向 Winding Direction
1	S	F	Copper-covered aluminum wire 0.15*28P	10Ts	CCW
温度TEMPERATURE:25±10°C,湿度RELATIVE HUMIDITY:65±20%					
序号 NO	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	L	S-F	6.5±10% μH	100KHz/1.0V	■ TH2817B
2	Q Value	S-F	85 (Min)	100KHz/1.0V	■ TH2817B
3	DCR	S-F	50mΩ (Max)	@25°C	■ CH-502BC

EUT Photo

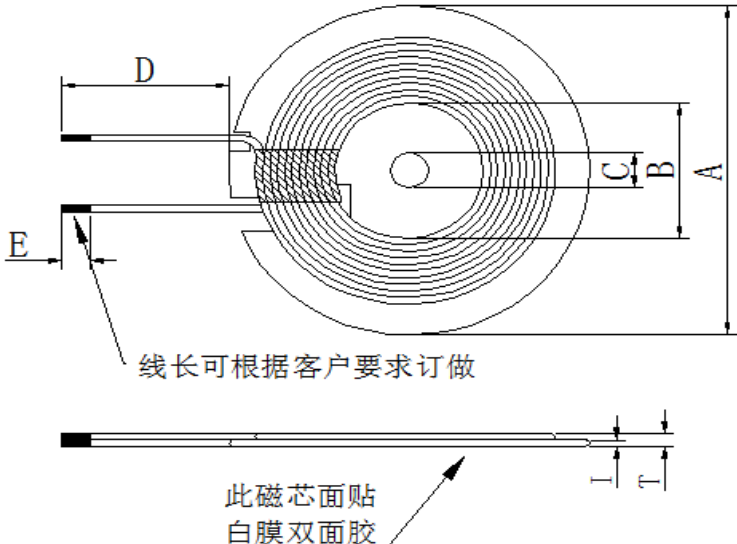