




Middle Channel_1RB_Low

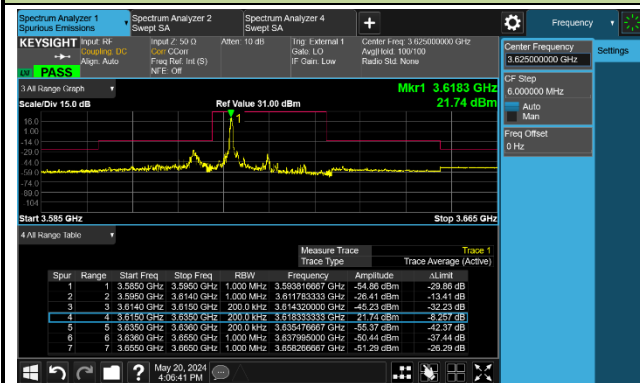


Middle Channel_1RB_High

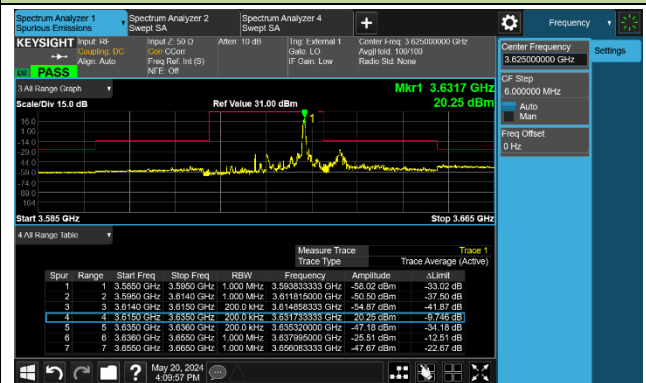

High Channel_1RB_Low

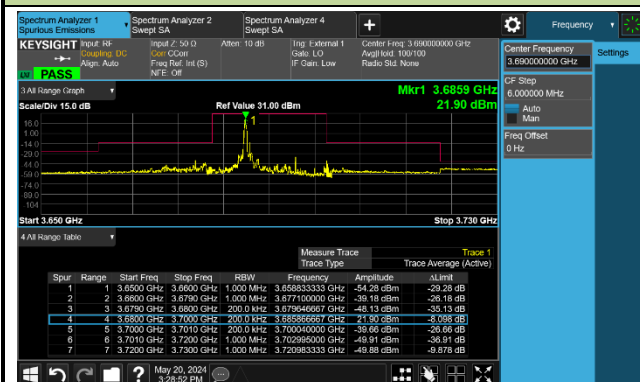


High Channel_1RB_High

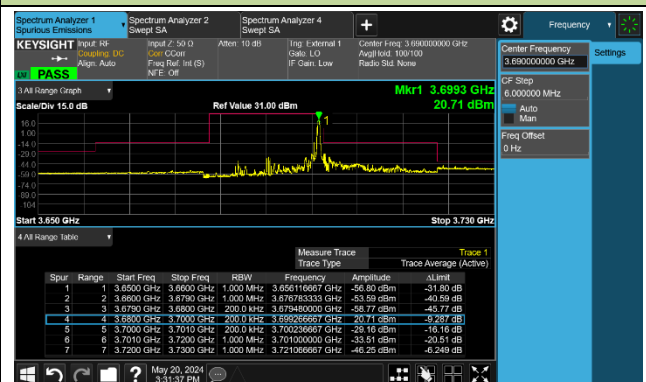


20MHz Channel Bandwidth - 1RB


Low Channel_1RB_Low

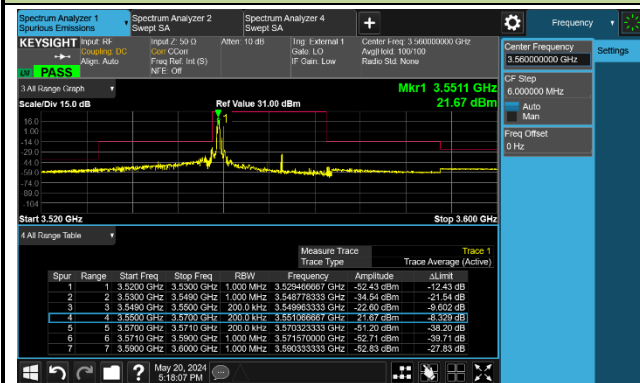


Low Channel_1RB_Low - Extended

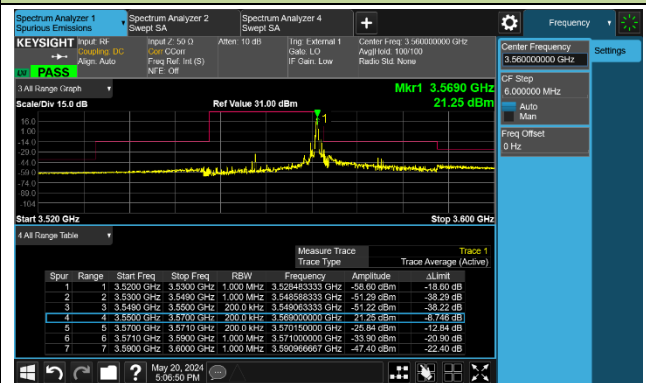


Middle Channel_1RB_Low

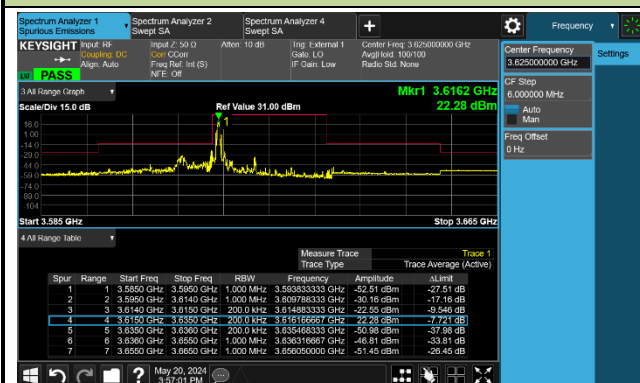


Middle Channel_1RB_High

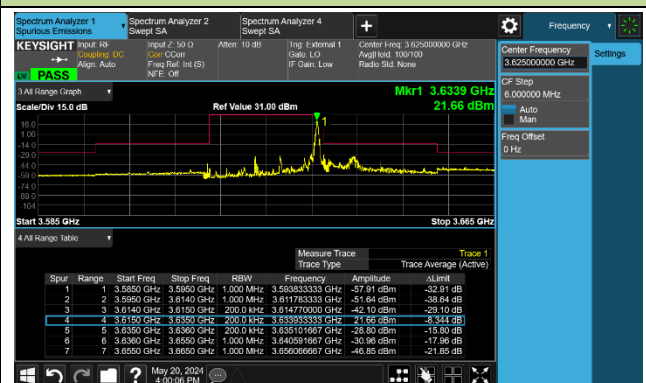

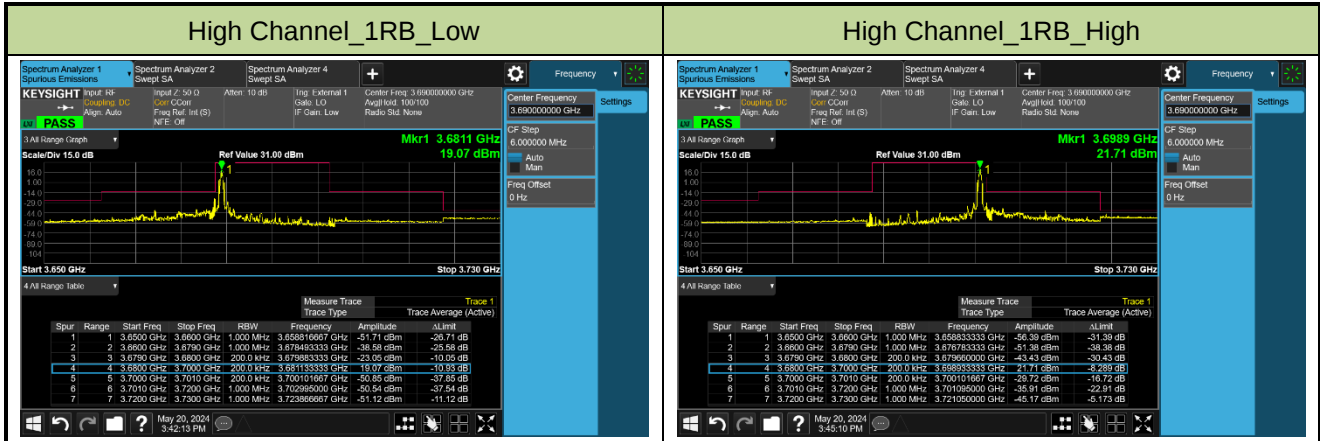


5MHz Channel Bandwidth - Full RB


Low Channel

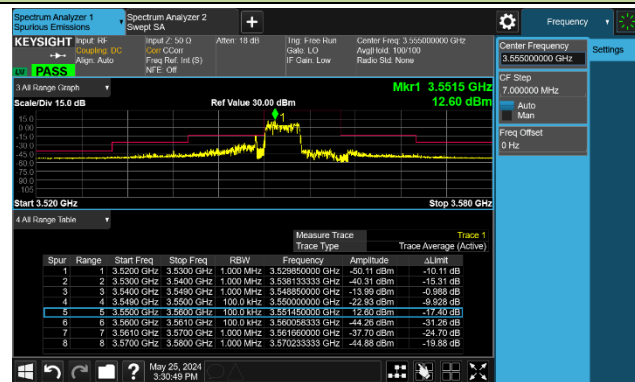

Middle Channel

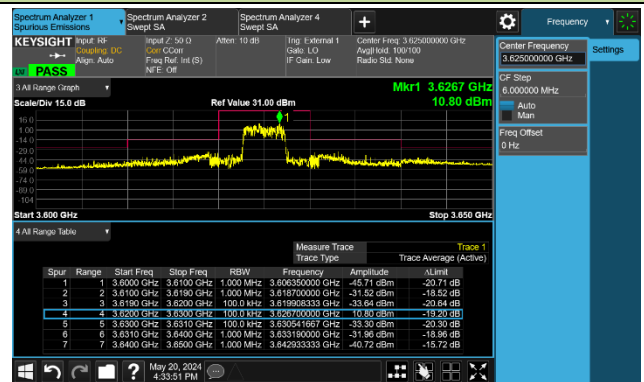


High Channel

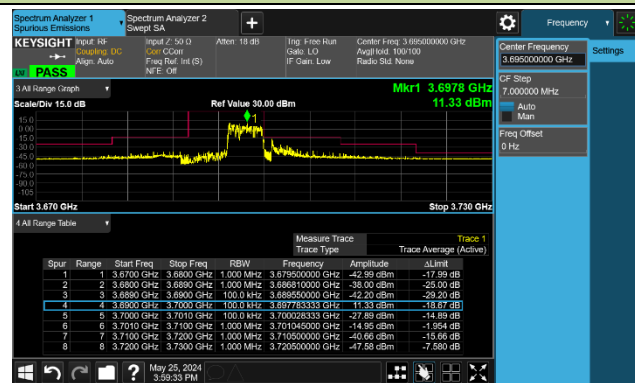


10MHz Channel Bandwidth - Full RB


Low Channel

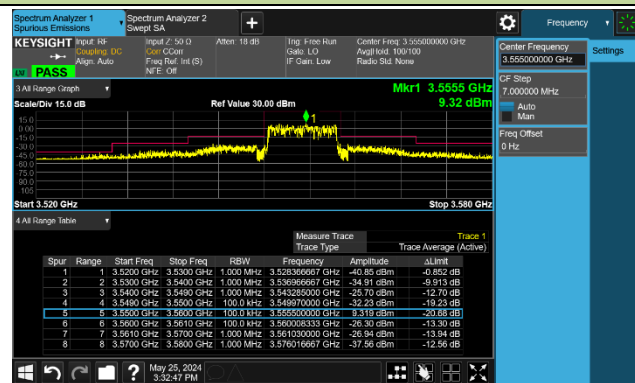

Middle Channel

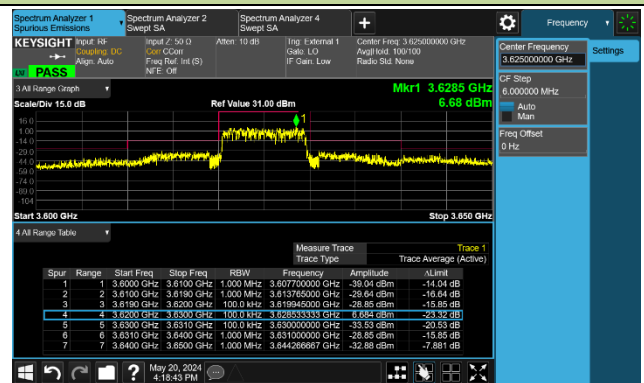


High Channel

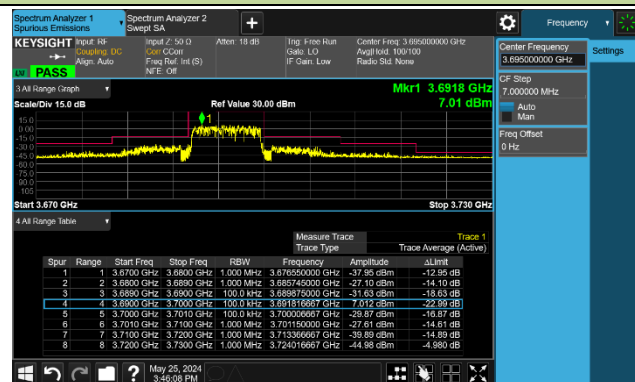


15MHz Channel Bandwidth - Full RB


Low Channel

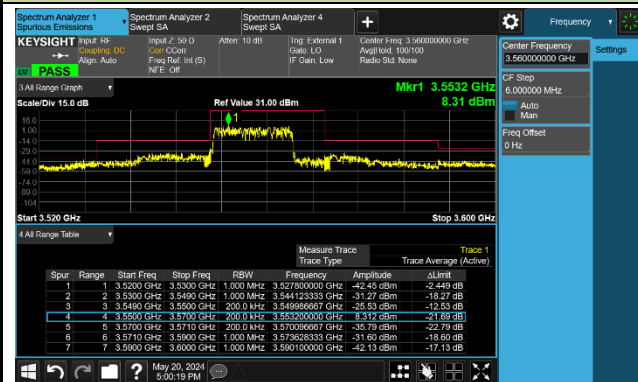


Middle Channel

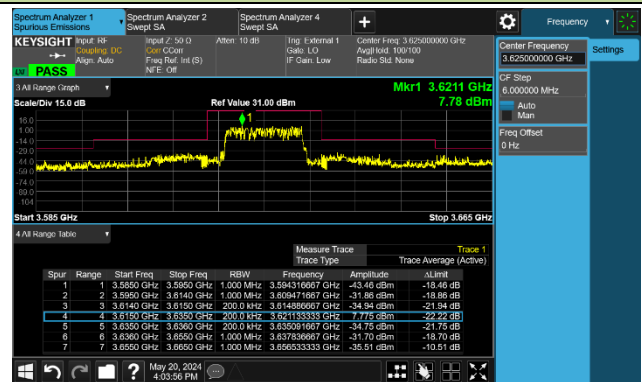

High Channel

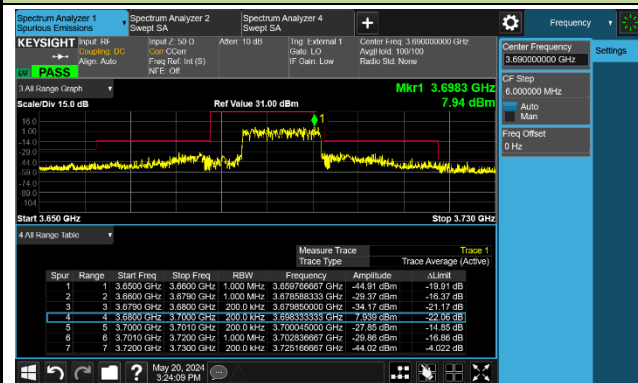


High Channel - Extended

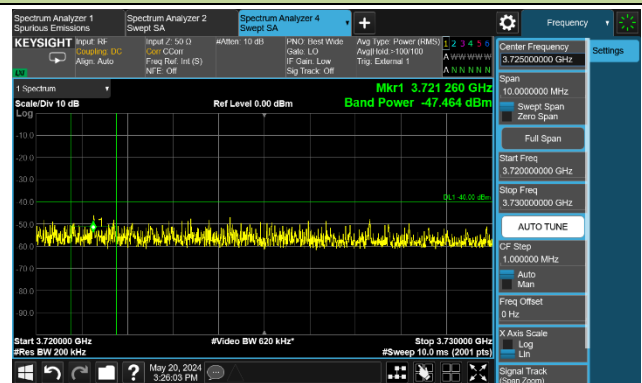

20MHz Channel Bandwidth - Full RB


Low Channel

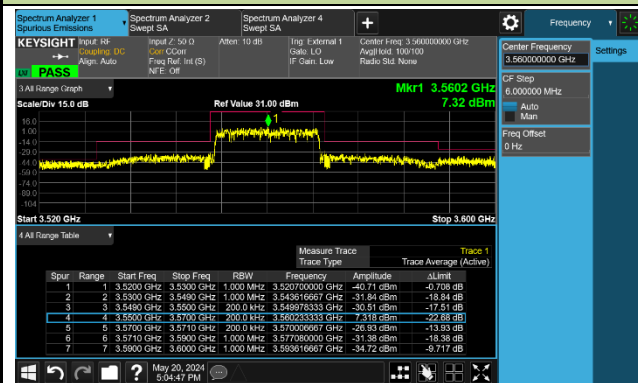


Middle Channel



High Channel

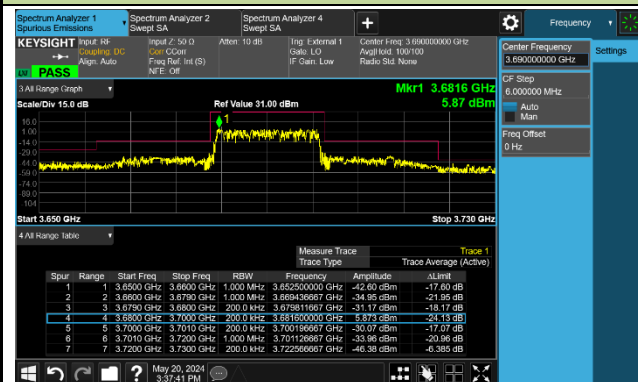

High Channel - Extended

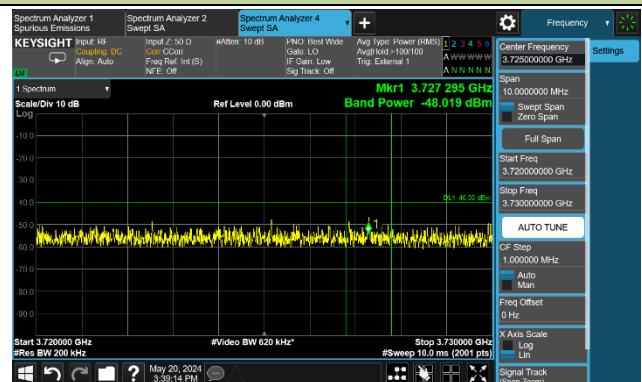

A.5 Transmitter unwanted emissions (spurious) Test Result


Test Site	SIP-SR1	Test Engineer	Yoniter Yang
Test Date	2024-05-28	Test Band	Band 42 & 43/48, 1RB, QPSK

Channel Bandwidth (MHz)	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
5	3552.5	30 ~ 1000	-57.39	≤ -40.00	Pass
		1000 ~ 37000	-40.30	≤ -40.00	Pass
	3625.0	30 ~ 1000	-58.23	≤ -40.00	Pass
		1000 ~ 37000	-44.64	≤ -40.00	Pass
	3697.0	30 ~ 1000	-58.65	≤ -40.00	Pass
		1000 ~ 37000	-44.56	≤ -40.00	Pass
10	3555.0	30 ~ 1000	-57.30	≤ -40.00	Pass
		1000 ~ 37000	-44.05	≤ -40.00	Pass
	3625.0	30 ~ 1000	-58.06	≤ -40.00	Pass
		1000 ~ 37000	-43.39	≤ -40.00	Pass
	3695.0	30 ~ 1000	-58.31	≤ -40.00	Pass
		1000 ~ 37000	-40.17	≤ -40.00	Pass
15	3557.5	30 ~ 1000	-58.47	≤ -40.00	Pass
		1000 ~ 37000	-44.56	≤ -40.00	Pass
	3625.0	30 ~ 1000	-58.44	≤ -40.00	Pass
		1000 ~ 37000	-43.57	≤ -40.00	Pass
	3692.5	30 ~ 1000	-58.50	≤ -40.00	Pass
		1000 ~ 37000	-44.65	≤ -40.00	Pass
20	3560.0	30 ~ 1000	-57.34	≤ -40.00	Pass
		1000 ~ 37000	-44.49	≤ -40.00	Pass
	3625.0	30 ~ 1000	-58.48	≤ -40.00	Pass
		1000 ~ 37000	-44.59	≤ -40.00	Pass
	3690.0	30 ~ 1000	-58.48	≤ -40.00	Pass
		1000 ~ 37000	-44.39	≤ -40.00	Pass


Note: The amplitude of Conducted Spurious emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

5MHz Channel Bandwidth


Low Channel 30 ~ 1000MHz

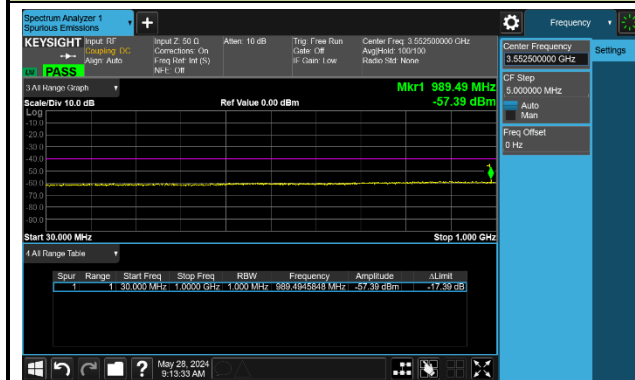


Low Channel 1000 ~ 37000MHz

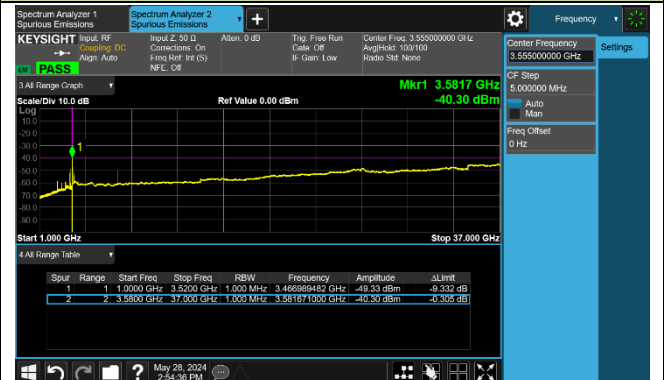


Middle Channel 30 ~ 1000MHz

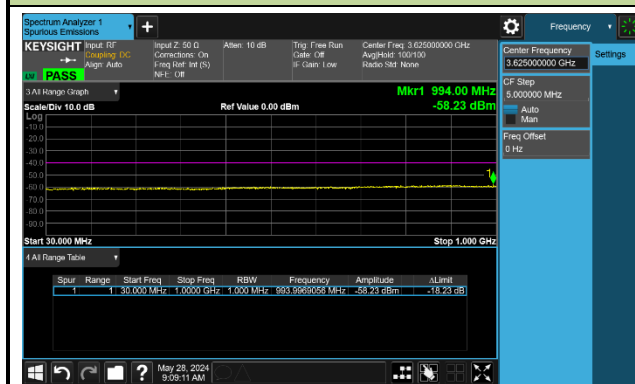


Middle Channel 1000 ~ 37000MHz

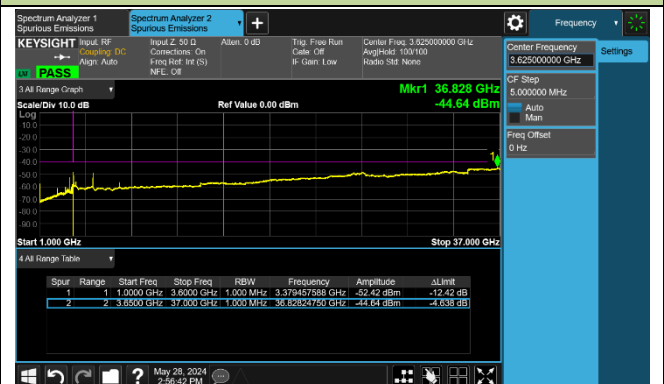

High Channel 30 ~ 1000MHz

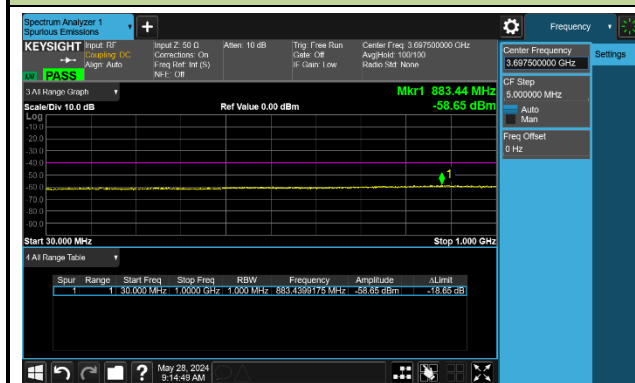


High Channel 1000 ~ 37000MHz

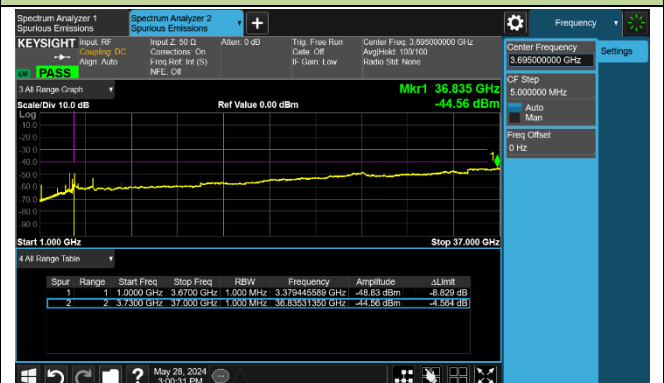


10MHz Channel Bandwidth


Low Channel 30 ~ 1000MHz

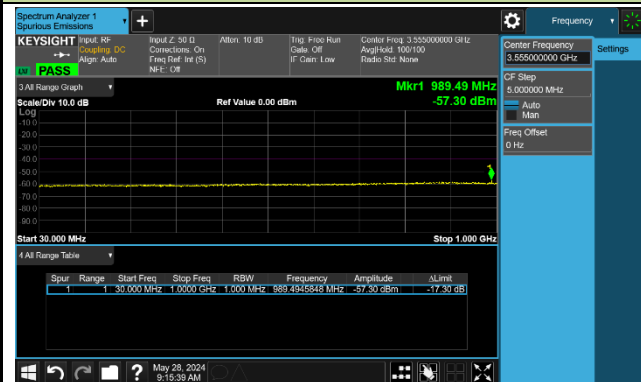


Low Channel 1000 ~ 37000MHz

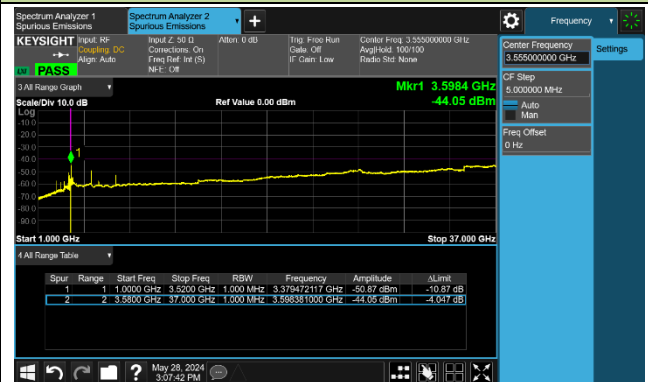


Middle Channel 30 ~ 1000MHz

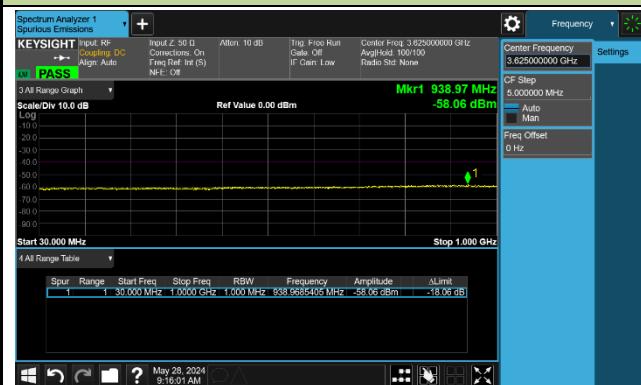


Middle Channel 1000 ~ 37000MHz

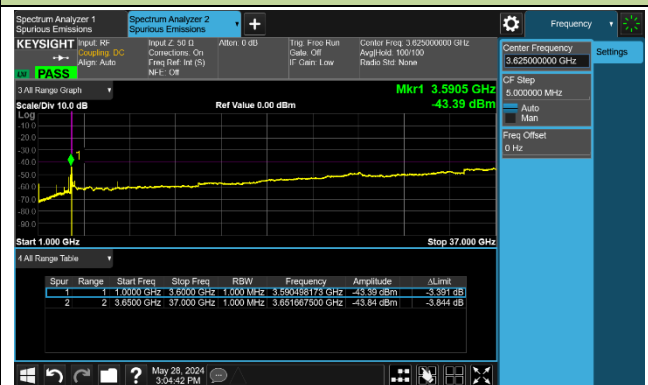

High Channel 30 ~ 1000MHz

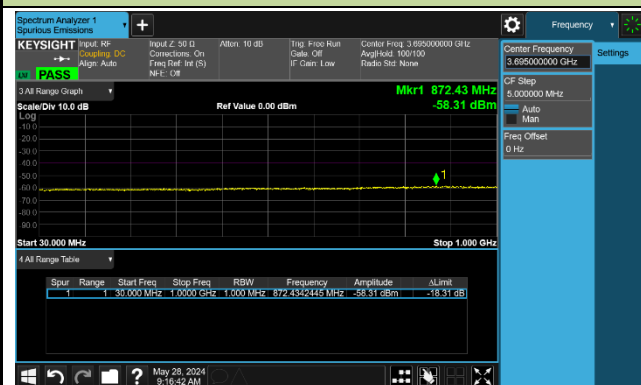


High Channel 1000 ~ 37000MHz

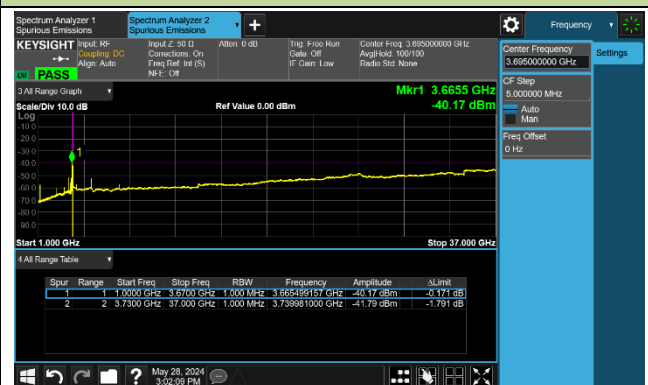


15MHz Channel Bandwidth


Low Channel 30 ~ 1000MHz

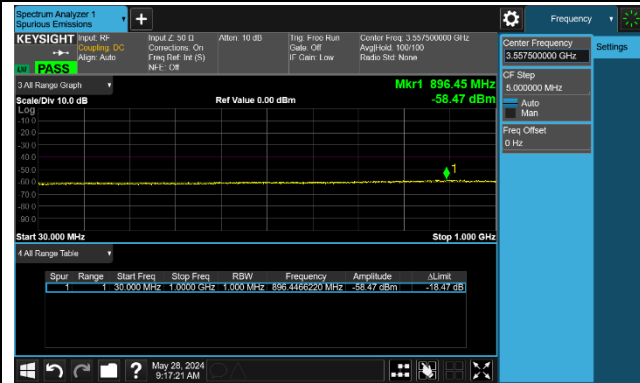


Low Channel 1000 ~ 37000MHz

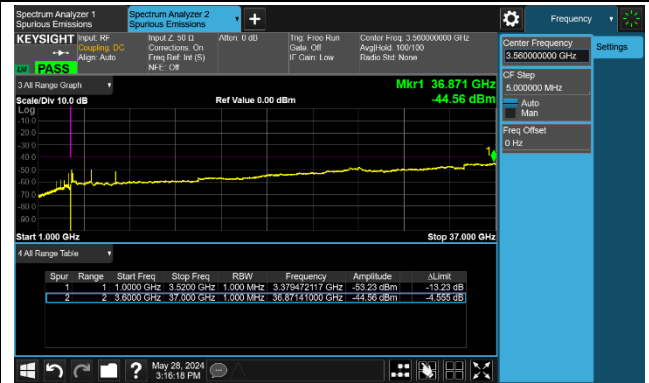


Middle Channel 30 ~ 1000MHz

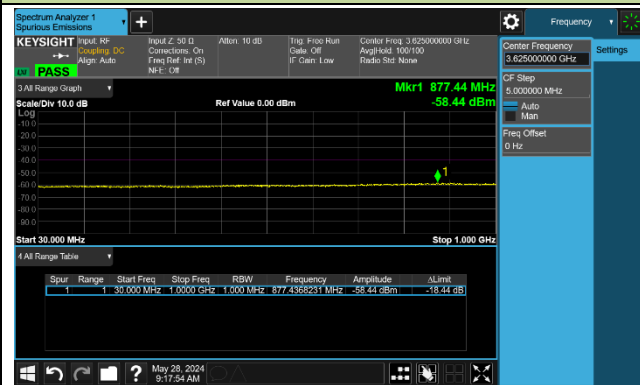


Middle Channel 1000 ~ 37000MHz

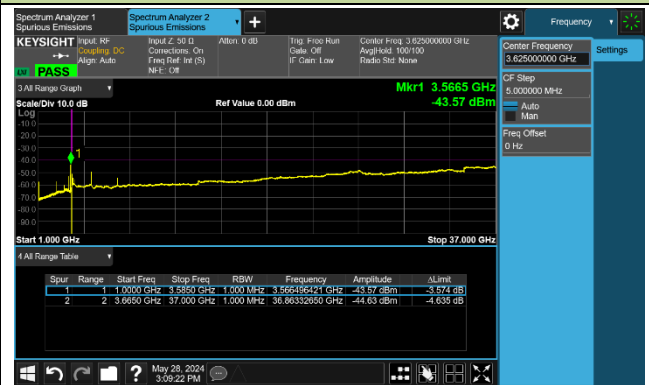

High Channel 30 ~ 1000MHz

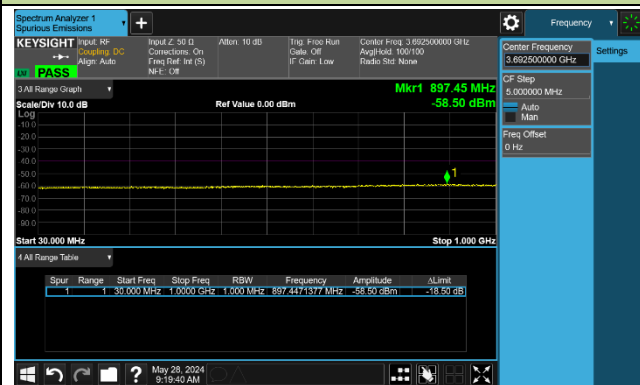


High Channel 1000 ~ 37000MHz

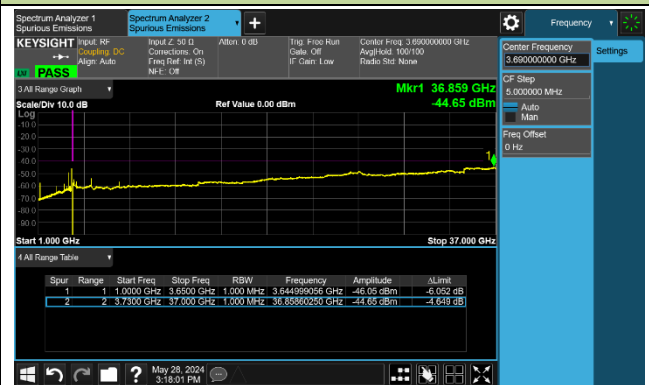


20MHz Channel Bandwidth


Low Channel 30 ~ 1000MHz

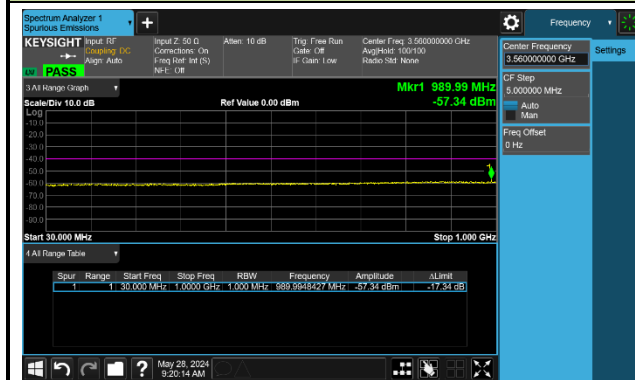


Low Channel 1000 ~ 37000MHz

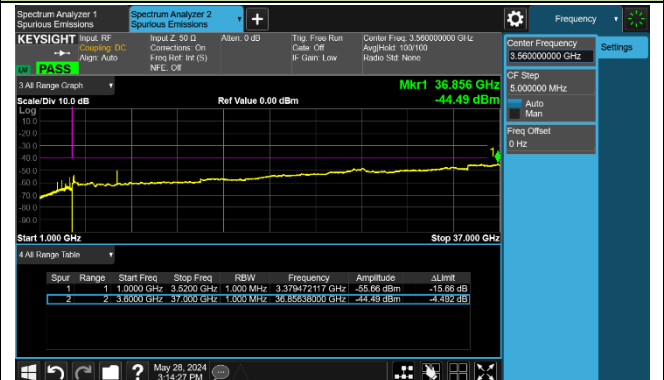


Middle Channel 30 ~ 1000MHz

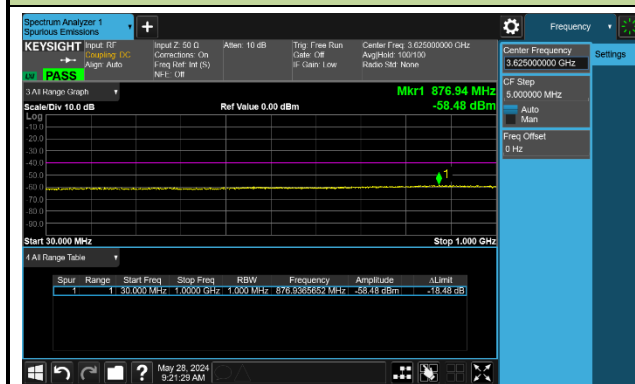


Middle Channel 1000 ~ 37000MHz

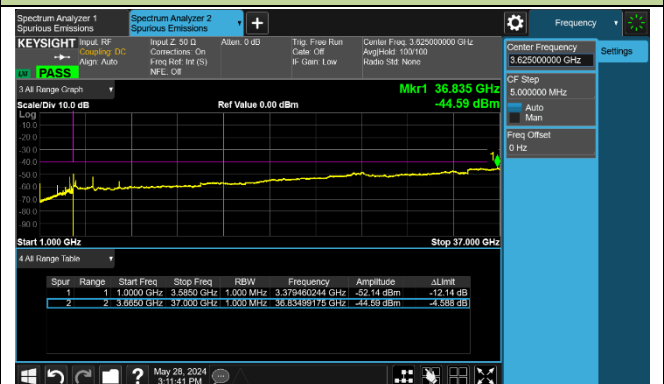

High Channel 30 ~ 1000MHz

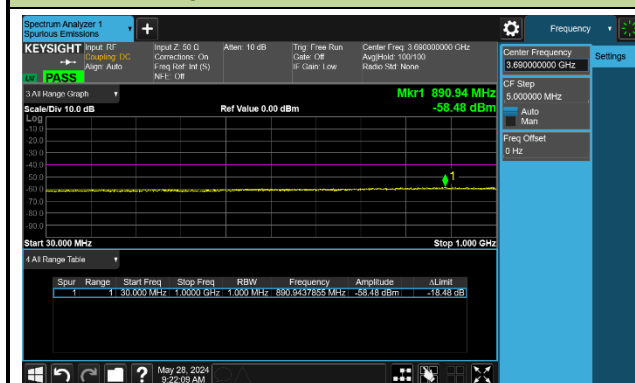

High Channel 1000 ~ 37000MHz

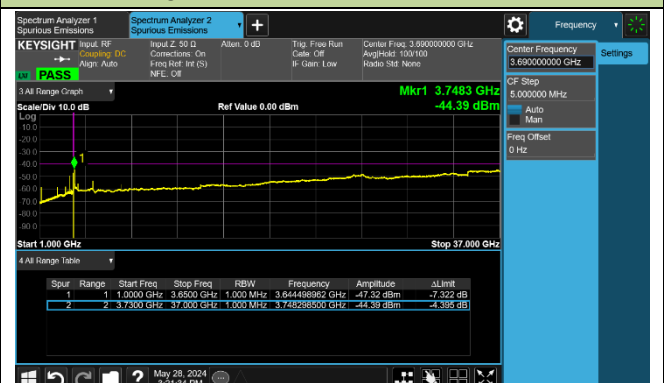

A.6 Radiated Spurious Emissions Test Result

Test Site	SIP-AC2	Test Engineer	Oliver Cheng
Test Date	2024-06-01	Test Band	Band 42, 1RB, QPSK

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
217.2	8.3	15.1	23.4	55.3	-31.9	Quasi-Peak	Horizontal
980.1	-7.9	30.8	22.9	55.3	-32.4	Quasi-Peak	Horizontal
37.3	11.9	17.4	29.3	55.3	-26.0	Quasi-Peak	Vertical
872.0	-8.6	30.0	21.4	55.3	-33.9	Quasi-Peak	Vertical
7103.0	53.3	-1.4	51.9	55.3	-3.4	Peak	Horizontal
10520.0	43.6	4.4	48.0	55.3	-7.3	Peak	Horizontal
7103.0	50.1	-1.4	48.7	55.3	-6.6	Peak	Vertical
14846.5	39.6	9.0	48.6	55.3	-6.7	Peak	Vertical
Middle Channel							
215.3	11.2	15.2	26.4	55.3	-28.9	Quasi-Peak	Horizontal
872.9	-9.3	30.0	20.7	55.3	-34.6	Quasi-Peak	Horizontal
37.3	14.2	17.4	31.6	55.3	-23.7	Quasi-Peak	Vertical
836.1	-8.3	29.4	21.1	55.3	-34.2	Quasi-Peak	Vertical
7145.5	51.9	-1.0	50.9	55.3	-4.4	Average	Horizontal
14566.0	38.9	9.1	48.0	55.3	-7.3	Peak	Horizontal
7145.5	52.1	-1.0	51.1	55.3	-4.2	Average	Vertical
11157.5	41.3	5.2	46.5	55.3	-8.8	Peak	Vertical
High Channel							
219.2	8.3	15.1	23.4	55.3	-31.9	Quasi-Peak	Horizontal
899.1	-8.6	30.7	22.1	55.3	-33.2	Quasi-Peak	Horizontal
37.8	14.2	17.4	31.6	55.3	-23.7	Quasi-Peak	Vertical
975.8	-8.3	30.6	22.3	55.3	-33.0	Quasi-Peak	Vertical
7196.5	54.0	-1.0	53.0	55.3	-2.3	Average	Horizontal
14566.0	39.6	9.1	48.7	55.3	-6.6	Peak	Horizontal
7196.5	53.9	-1.0	52.9	55.3	-2.4	Average	Vertical
11344.5	41.3	5.4	46.7	55.3	-8.6	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than average-detection value. In a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case results.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and above 18GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	SIP-AC2	Test Engineer	Oliver Cheng
Test Date	2024-06-01	Test Band	Band 43, 1RB, QPSK

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
216.7	10.6	15.1	25.7	55.3	-29.6	Quasi-Peak	Horizontal
918.0	-8.3	30.5	22.2	55.3	-33.1	Quasi-Peak	Horizontal
37.3	14.2	17.4	31.6	55.3	-23.7	Quasi-Peak	Vertical
927.7	-7.3	30.4	23.1	55.3	-32.2	Quasi-Peak	Vertical
7196.5	54.6	-1.0	53.6	55.3	-1.7	Average	Horizontal
11378.5	41.0	6.0	47.0	55.3	-8.3	Peak	Horizontal
7205.0	54.1	-1.0	53.1	55.3	-2.2	Average	Vertical
11140.5	41.4	5.0	46.4	55.3	-8.9	Peak	Vertical
Middle Channel							
220.1	8.3	15.1	23.4	55.3	-31.9	Quasi-Peak	Horizontal
968.5	-8.3	30.5	22.2	55.3	-33.1	Quasi-Peak	Horizontal
37.3	15.7	17.4	33.1	55.3	-22.2	Quasi-Peak	Vertical
938.4	1.3	30.2	31.5	55.3	-23.8	Quasi-Peak	Vertical
7298.5	53.1	-0.7	52.4	55.3	-2.9	Average	Horizontal
11489.0	40.4	5.7	46.1	55.3	-9.2	Peak	Horizontal
7298.5	54.7	-0.7	54.0	55.3	-1.3	Average	Vertical
11361.5	42.5	5.5	48.0	55.3	-7.3	Peak	Vertical
High Channel							
218.2	8.3	15.1	23.4	55.3	-31.9	Quasi-Peak	Horizontal
890.9	-8.6	30.6	22.0	55.3	-33.3	Quasi-Peak	Horizontal
36.8	12.6	17.3	29.9	55.3	-25.4	Quasi-Peak	Vertical
888.5	-8.9	30.5	21.6	55.3	-33.7	Quasi-Peak	Vertical
7400.5	48.6	-0.6	48.0	55.3	-7.3	Average	Horizontal
11149.0	41.8	5.1	46.9	55.3	-8.4	Peak	Horizontal
7400.5	53.3	-0.6	52.7	55.3	-2.6	Peak	Vertical
11412.5	41.0	5.6	46.6	55.3	-8.7	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than average-detection value. In a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case results.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and

above 18GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	SIP-AC1	Test Engineer	Fusco Pan
Test Date	2024-05-11 ~ 2024-05-12	Test Band	Band 48, 1RB, QPSK

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
57.2	2.8	17.6	20.4	55.3	-34.9	Quasi-Peak	Horizontal
884.6	0.5	28.9	29.4	55.3	-25.9	Quasi-Peak	Horizontal
39.2	10.5	17.3	27.8	55.3	-27.5	Quasi-Peak	Vertical
112.9	14.2	15.1	29.3	55.3	-26.0	Quasi-Peak	Vertical
7111.5	45.5	7.9	53.4	55.3	-1.9	Peak	Horizontal
8888.0	37.3	9.9	47.2	55.3	-8.1	Peak	Horizontal
7103.0	44.6	7.9	52.5	55.3	-2.8	Peak	Vertical
12254.0	33.8	14.2	48.0	55.3	-7.3	Peak	Vertical
Middle Channel							
57.6	1.6	17.5	19.1	55.3	-36.2	Quasi-Peak	Horizontal
902.0	-0.8	29.7	28.9	55.3	-26.4	Quasi-Peak	Horizontal
40.2	10.2	17.5	27.7	55.3	-27.6	Quasi-Peak	Vertical
979.6	-1.6	29.7	28.1	55.3	-27.2	Quasi-Peak	Vertical
7256.0	45.2	8.1	53.3	55.3	-2.0	Peak	Horizontal
12118.0	34.3	14.0	48.3	55.3	-7.0	Peak	Horizontal
7247.5	43.9	8.1	52.0	55.3	-3.3	Peak	Vertical
12288.0	34.5	14.5	49.0	55.3	-6.3	Peak	Vertical
High Channel							
58.6	3.0	17.5	20.5	55.3	-34.8	Quasi-Peak	Horizontal
928.2	-1.1	29.7	28.6	55.3	-26.7	Quasi-Peak	Horizontal
39.2	10.8	17.3	28.1	55.3	-27.2	Quasi-Peak	Vertical
995.2	-0.9	29.7	28.8	55.3	-26.5	Quasi-Peak	Vertical
7392.0	42.5	7.9	50.4	55.3	-4.9	Peak	Horizontal
12407.0	33.5	14.9	48.4	55.3	-6.9	Peak	Horizontal
7392.0	39.9	7.9	47.8	55.3	-7.5	Peak	Vertical
12347.5	34.3	14.7	49.0	55.3	-6.3	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than average-detection value. In a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case results.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and

above 18GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.7 End User Device Additional Requirement (CBSD Protocol) Test Result

Test Site	WZ-SR6	Test Engineer	Jone Zhang
Test Date	2024-05-14	Test Band	CBSD transmit at 3570MHz (20MHz BW), 8dBm/MHz




Marker 1: CBSD sends instructions to discontinue LTE operations.

Marker 2: EUT discontinues operation.

Marker 3: 10 seconds elapsed time from CBSD sending instructions to EUT.

Test Site	WZ-SR6	Test Engineer	Jone Zhang
Test Date	2024-05-14	Test Band	CBSD transmit at 3680MHz (20MHz BW), 8dBm/MHz

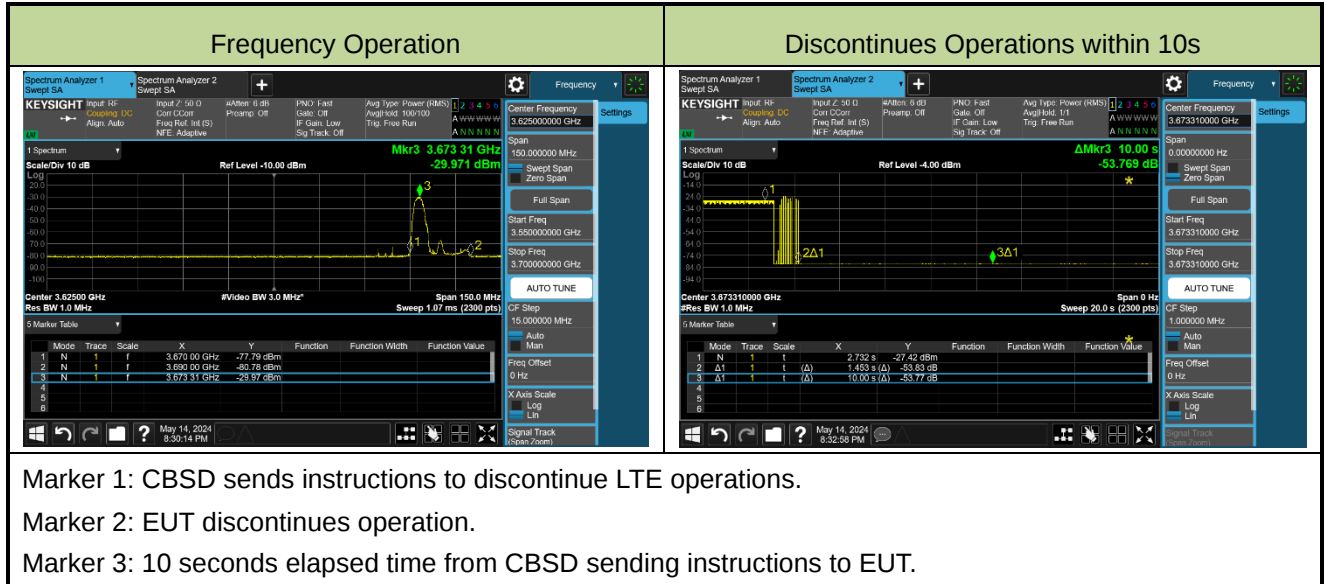

Appendix B - Test Setup Photograph

Refer to “2404RSU035-UT” file.

Appendix C - EUT Photograph

Refer to “2404RSU035-UE” file.