



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-26636041

MPE TEST REPORT

FCC Per 47 CFR 2.1091(b)

Report Reference No.....: CTL1412082952-WM

FCC ID.....:

Compiled by

(position+printed name+signature)...: File administrators Jennifer NI

Jennifer NI

Name of the organization performing the tests

Test Engineer Jacky Chen

Jacky Chen

(position+printed name+signature)...:

Approved by

(position+printed name+signature)...: Manager Tracy Qi

Tracy Qi

Date of issue.....: Dec. 30, 2014

Test Firm.....: Shenzhen CTL Testing Technology Co., Ltd.

Address.....: Floor 1-A, Baisha Technology Park, No.3011, Shaheji Road, Nanshan District, Shenzhen, China 518055

Applicant's name.....: Shenzhen Hollyland Technology Co.,Ltd

Address.....: 6/F, 3rd Bldg., 2nd South Zone, Honghualing Industrial Park, No.1213 Liuxian Avenue, Xili Town, Nanshan District, Shenzhen, China P.C.518055

Test specification:

Standard: FCC Per 47 CFR 2.1091(b)

TRF Originator.....: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF.....: Dated 2011-01

Shenzhen CTL Testing Technology Co., Ltd.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Wireless Video Transmission System

FCC ID.....: 2ADZCHLWH003B

Trade Mark: N/A

Model/Type reference.....: HLWH003B, HLWH005, HLWH006

Modulation: DSSS

Work Frequency Range.....: 5750MHz~5830MHz

Antenna Type: MIMO

Antenna Gain.....: 2.5dBi

Result.....: Positive

Test Report

Test Report No. : CTL1412082952-WM	Dec. 30, 2014 Date of issue
---	--------------------------------

Equipment under Test : Wireless Video Transmission System

Type / Model(s) : HLWH003B

Listed Models : HLWH005, HLWH006

Difference Description : Only the color and model's name is different

Applicant : **Shenzhen Hollyland Technology Co.,Ltd**

Address : 6/F, 3rd Bldg., 2nd South Zone, Honghualing Industrial Park, No.1213
Liuxian Avenue, Xili Town, Nanshan District, Shenzhen, China
P.C.518055

Manufacturer : **Shenzhen Hollyland Technology Co.,Ltd**

Address : 6/F, 3rd Bldg., 2nd South Zone, Honghualing Industrial Park, No.1213
Liuxian Avenue, Xili Town, Nanshan District, Shenzhen, China
P.C.518055

Test Result according to the
standards on page 4:


Positive

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Content

1.	SUMMARY	4
1.1.	EUT configuration	4
1.2.	Equipment Under Test	4
1.3.	Description of the test mode	4
1.4.	NOTE	4
2.	TEST ENVIRONMENT	4
2.1.	Address of the test laboratory	5
2.2.	Environmental conditions	5
2.3.	Statement of the measurement uncertainty	5
3.	METHOD OF MEASUREMENT	6

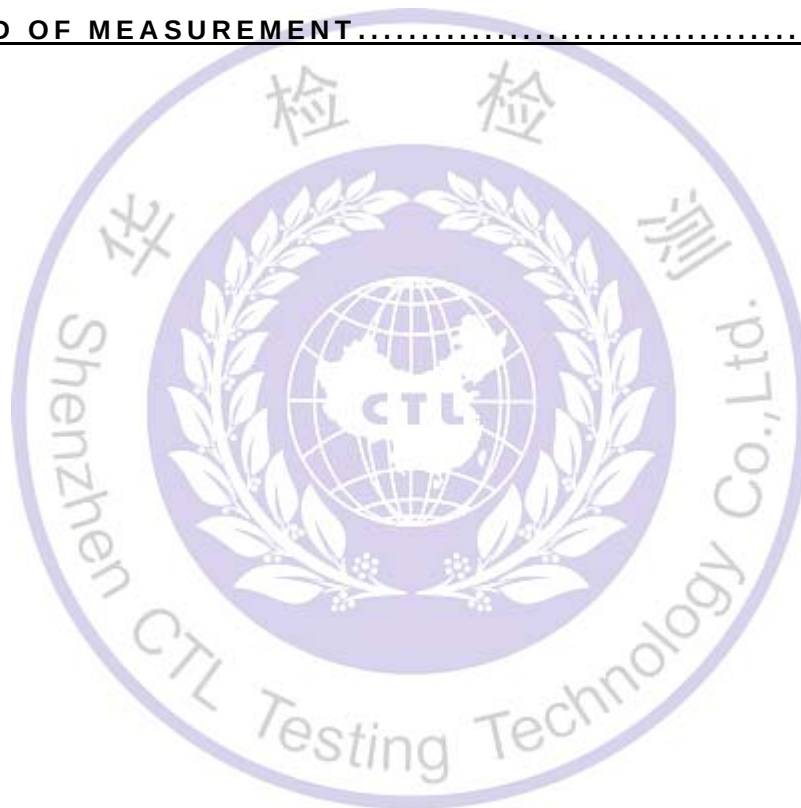

1. SUMMARY

1.1. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer

- o - supplied by the lab

- o Battery

Manufacturer: Jingnengte

Model: F970

1.2. Equipment Under Test

Power supply system utilised

Power supply voltage :

- o 120V / 60 Hz
- o 115V / 60Hz
- o 12 V DC
- o 24 V DC
- Other (specified in blank below)

DC 7.4V from battery

1.3. Description of the test mode

1. Test program used to control the EUT for staying in continuous transmitting mode is programmed. Channel low (5750MHz), mid (5790MHz) and high (5830MHz) with highest data rate are chosen for full testing.
2. Test Mode:

Test Mode(TM)	Description	Remark
1	Transmitting	5750MHz
2	Transmitting	5790MHz
3	Transmitting	5830MHz

1.4. NOTE

The EUT is a Wireless Video Transmission System, The functions of the EUT listed as below:

	Test Standards	Reference Report
Wireless Video Transmission System(5750-5830MHz)	FCC Part 15 Subpart C (Section15.247)	CTL1412082952-WF
	FCC Per 47 CFR 2.1091(b)	CTL1412082952-WM

2. TEST ENVIRONMENT

2.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

The sites are constructed in conformance with the requirements of ANSI C6230, ANSI C63.4 (2009) and CISPR Publication 22.

2.2. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

2.3. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	1~12.75GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.22dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. Method of measurement

3.1. Applicable Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

3.2. Limit

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3 – 3.0	614	1.63	(100) *	6
3.0 – 30	1842/f	4.89/f	(900/f)*	6
30 – 300	61.4	0.163	1.0	6
300 – 1500	/	/	f/300	6
1500 – 100,000	/	/	5	6

Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3 – 3.0	614	1.63	(100) *	30
3.0 – 30	824/f	2.19/f	(180/f)*	30
30 – 300	27.5	0.073	0.2	30
300 – 1500	/	/	f/1500	30
1500 – 100,000	/	/	1.0	30

F=frequency in MHz

*=Plane-wave equivalent power density

3.3. MPE Calculation Method

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S=power density

P=power input to antenna

G=power gain of the antenna in the direction of interest relative to an isotropic radiator

R=distance to the center of radiation of the antenna

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna is 2.5 dBi, the RF power density can be obtained.

TEST RESULTS

Test Frequency (MHz)	Minimum Separation Distance (cm)	Output Power (dBm)	Output Power (mW)	Directional Ant Gain (Nemeric)	Power Density Limit (mW/cm2)	Power Density At 20 cm (mW/cm2)	Test Results
5750	20.00	12.85	19.28	3.556	1.000	0.1361	Pass
5790	20.00	12.79	19.01	3.556	1.000	0.1342	Pass
5830	20.00	12.79	19.01	3.556	1.000	0.1342	Pass

4. Conclusion

The measurement results comply with the FCC Limit per 47 CFR 2.1091 (b) for the controlled RF Exposure.

.....End of Report.....

