



# TEST REPORT

**Report Reference No.**..... : **TRE1712003205** R/C.....: 74619

**FCC ID**..... : **WA6S5036**

**Applicant's name**..... : **Verykool USA Inc**

Address..... : 3636 Nobel Drive,Suite 325, San Diego,CA 92122 USA

Manufacturer..... : HUAWO TECHNOLOGY LIMITED

Address..... : 3 floor west,B building,New world shopping plaza,Gushu 2nd road,Xixiang street,Baoan District,Shenzhen,China

**Test item description** ..... : **Mobile Phone**

Trade Mark ..... : Verykool

Model/Type reference..... : s5037

Listed Model(s) ..... : s5036

**Standard** ..... : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample..... : Dec.05, 2017

Date of testing..... : Dec.05, 2017 - Dec.26, 2017

Date of issue..... : Dec.27, 2017

**Result**..... : **PASS**

Compiled by  
( position+printedname+signature).... : File administrators Candy Liu *Candy Liu*

Supervised by  
(position+printedname+signature).... : Project Engineer : Edward Pan *Edward Pan*

Approved by  
( Position+Printed name+Signature) : RF Manager Hans Hu *Hans Hu*

**Testing Laboratory Name** ..... : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

## Contents

<b>1.</b>	<b><u>TEST STANDARDS AND REPORT VERSION</u></b>	<b>3</b>
1.1.	Test Standards	3
1.2.	Report version	3
<b>2.</b>	<b><u>TEST DESCRIPTION</u></b>	<b>4</b>
<b>3.</b>	<b><u>SUMMARY</u></b>	<b>5</b>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
<b>4.</b>	<b><u>TEST ENVIRONMENT</u></b>	<b>7</b>
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.5.	Equipments Used during the Test	9
<b>5.</b>	<b><u>TEST CONDITIONS AND RESULTS</u></b>	<b>11</b>
5.1.	Antenna Requirement	11
5.2.	Conducted Emissions (AC Main)	12
5.3.	Conducted Peak Output Power	15
5.4.	Power Spectral Density	16
5.5.	6dB bandwidth	18
5.6.	Restricted band	20
5.7.	Band edge and Spurious Emissions (conducted)	25
5.8.	Spurious Emissions (radiated)	30
<b>6.</b>	<b><u>TEST SETUP PHOTOS</u></b>	<b>34</b>
<b>7.</b>	<b><u>EXTERANAL AND INTERNAL PHOTOS</u></b>	<b>35</b>

## 1. TEST STANDARDS AND REPORT VERSION

### 1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10:2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 558074 D01 DTS Meas Guidance v04](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating under §15.247

### 1.2. Report version

Version No.	Date of issue	Description
00	Dec.27, 2017	Original

## **2. TEST DESCRIPTION**

<b>Test Item</b>	<b>FCC Rule</b>	<b>Result</b>	<b>Test Engineer</b>
Antenna requirement	15.203/15.247(c)	PASS	Baozhu.hu
Line Conducted Emissions (AC Main)	15.207	PASS	Baozhu.hu
Conducted Peak Output Power	15.247(b)(3)	PASS	Baozhu.hu
Power Spectral Density	15.247(e)	PASS	Baozhu.hu
6dB Bandwidth	15.247(a)(2)	PASS	Baozhu.hu
Restricted band	15.247(d)/15.205	PASS	Baozhu.hu
Spurious Emissions	15.247(d)/15.209	PASS	Baozhu.hu

Note: The measurement uncertainty is not included in the test result.

### 3. SUMMARY

#### 3.1. Client Information

Applicant:	Verykool USA Inc
Address:	3636 Nobel Drive,Suite 325, San Diego,CA 92122 USA
Manufacturer:	HUAWO TECHNOLOGY LIMITED
Address:	3 floor west,B building,New world shopping plaza,Gushu 2nd road, Xixiang street,Baoan District,Shenzhen,China

#### 3.2. Product Description

Name of EUT:	Mobile Phone
Trade Mark:	Verykool
Model No.:	s5037
Listed Model(s):	s5036
IMEI 1:	355288090315468
IMEI 2:	355288090315476
Power supply:	DC 3.7V
Adapter information:	Input: 100-240Va.c., 50/60Hz, 0.2A Output: 5Vd.c.,1000mA
Hardware version:	30DWM88ET
Software version:	s5036_VK_Generic_Dual_SW_1.0
<b>Bluetooth</b>	
Version:	Supported BT4.0+BLE
Modulation:	GFSK
Operation frequency:	2402MHz~2480MHz
Channel number:	40
Channel separation:	2MHz
Antenna type:	Integral antenna
Antenna gain:	-1.0dBi

### 3.3. Operation state

➤ **Test frequency list**

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
00	2402
01	2404
:	:
19	2440
:	:
38	2478
39	2480

➤ **Test mode**

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit (duty cycle>98%).
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated suprious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit(duty cycle>98%). The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data Recorded in the report.

### 3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

/	Manufacturer:	/
	Model No.:	/
/	Manufacturer:	/
	Model No.:	/

### 3.5. Modifications

No modifications were implemented to meet testing criteria.

## **4. TEST ENVIRONMENT**

### **4.1. Address of the test laboratory**

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

### **4.2. Test Facility**

#### **CNAS-Lab Code: L1225**

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

#### **A2LA-Lab Cert. No.: 3902.01**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### **FCC-Registration No.: 762235**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

#### **IC-Registration No.:5377B-1**

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B-1.

#### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

### 4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

### 4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.39 dB	(1)
Radiated Emissions 30~1000MHz	4.24 dB	(1)
Radiated Emissions 1~18GHz	5.16 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

**4.5. Equipments Used during the Test**

Conducted Emissions						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	EMI Test Receiver	R&S	ESCI	101247	11/11/2017	11/10/2018
2	Artificial Mains	SCHWARZBECK	NNLK 8121	573	11/11/2017	11/10/2018
3	2-Line V-Network	R&S	ESH3-Z5	100049	11/11/2017	11/10/2018
4	Pulse Limiter	R&S	ESH3-Z2	101488	11/11/2017	11/10/2018
5	RF Connection Cable	HUBER+SUHNER	EF400	N/A	11/21/2017	11/20/2018
6	Test Software	R&S	ES-K1	N/A	N/A	N/A

Radiated Emissions						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	EMI Test Receiver	R&S	ESCI	101247	11/11/2017	11/10/2018
2	Loop Antenna	R&S	HFH2-Z2	100020	11/20/2017	11/19/2018
3	Ultra-Broadband Antenna	SCHWARZBECK	VULB9163	538	4/5/2017	4/4/2018
4	Preamplifier	SCHWARZBECK	BBV 9743	9743-0022	10/18/2017	10/17/2018
5	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	11/21/2017	11/20/2018
6	EMI Test Software	R&S	ESK1	N/A	N/A	N/A
7	Spectrum Analyzer	R&S	FSP40	100597	11/11/2017	11/10/2018
8	Horn Antenna	SCHWARZBECK	9120D	1011	3/27/2017	3/26/2018
9	Horn Antenna	SCHWARZBECK	BBHA9170	25841	3/27/2017	3/26/2018
10	Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-248	10/18/2017	10/17/2018
11	High pass filter	Compliance Direction systems	BSU-6	34202	11/11/2017	11/10/2018
12	RF Connection Cable	HUBER+SUHNER	RE-7-FH	N/A	11/21/2017	11/20/2018
13	EMI Test Software	Audix	E3	N/A	N/A	N/A
14	Turntable	MATURO	TT2.0	/	N/A	N/A
15	Antenna Mast	MATURO	TAM-4.0-P	/	N/A	N/A

RF Conducted Test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	Spectrum Analyzer	R&S	FSV40	100048	11/11/2017	11/10/2018
2	EXA Signal Analyzer	Agilent	N9020A	184247	9/22/2017	9/21/2018
3	Power Meter	Agilent	U2021XA	178231	9/22/2017	9/21/2018
4	OSP	R&S	OSP120	101317	N/A	N/A

The Cal.Interval was one year.

## 5. TEST CONDITIONS AND RESULTS

### 5.1. Antenna Requirement

#### Requirement

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):**

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

#### TEST RESULTS

Passed       Not Applicable

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.



## 5.2. Conducted Emissions (AC Main)


### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### TEST CONFIGURATION

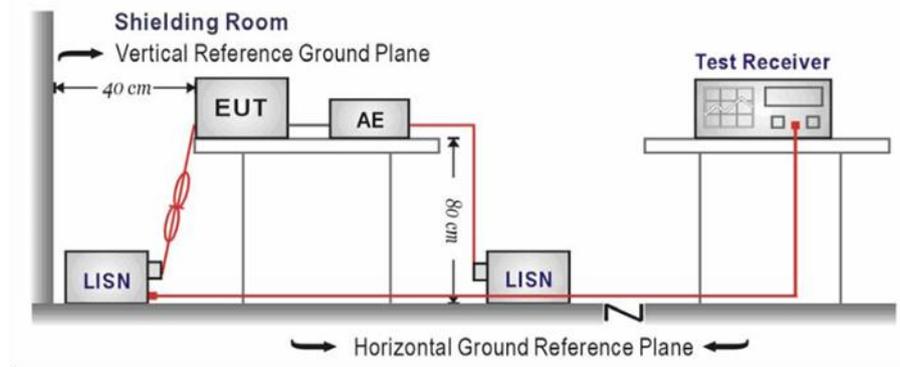

### TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

### TEST MODE:

Please refer to the clause 3.3


### TEST RESULTS

Passed       Not Applicable

Note:

- 1) Transd = Cable lose + Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin = Limit - Level

Test Line: L

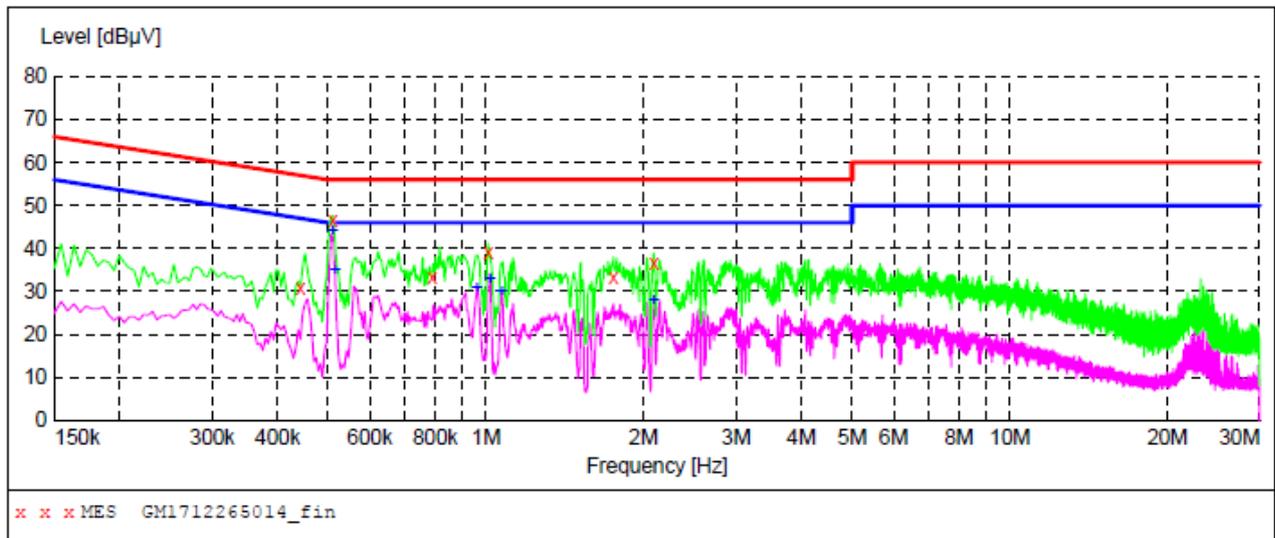

**MEASUREMENT RESULT: "GM1712265014\_fin"**


26/12/2017 09:38

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.442500	30.80	9.9	57	26.2	QP	L1	GND
0.510000	46.70	10.0	56	9.3	QP	L1	GND
0.789000	33.20	10.0	56	22.8	QP	L1	GND
1.009500	39.10	10.1	56	16.9	QP	L1	GND
1.752000	33.20	10.1	56	22.8	QP	L1	GND
2.089500	36.50	10.1	56	19.5	QP	L1	GND

**MEASUREMENT RESULT: "GM1712265014\_fin2"**

26/12/2017 09:38

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.510000	43.90	10.0	46	3.1	AV	L1	GND
0.514500	35.10	10.0	46	10.9	AV	L1	GND
0.960000	30.70	10.0	46	15.3	AV	L1	GND
1.018500	32.80	10.1	46	13.2	AV	L1	GND
1.072500	29.90	10.1	46	16.1	AV	L1	GND
2.089500	28.00	10.1	46	18.0	AV	L1	GND

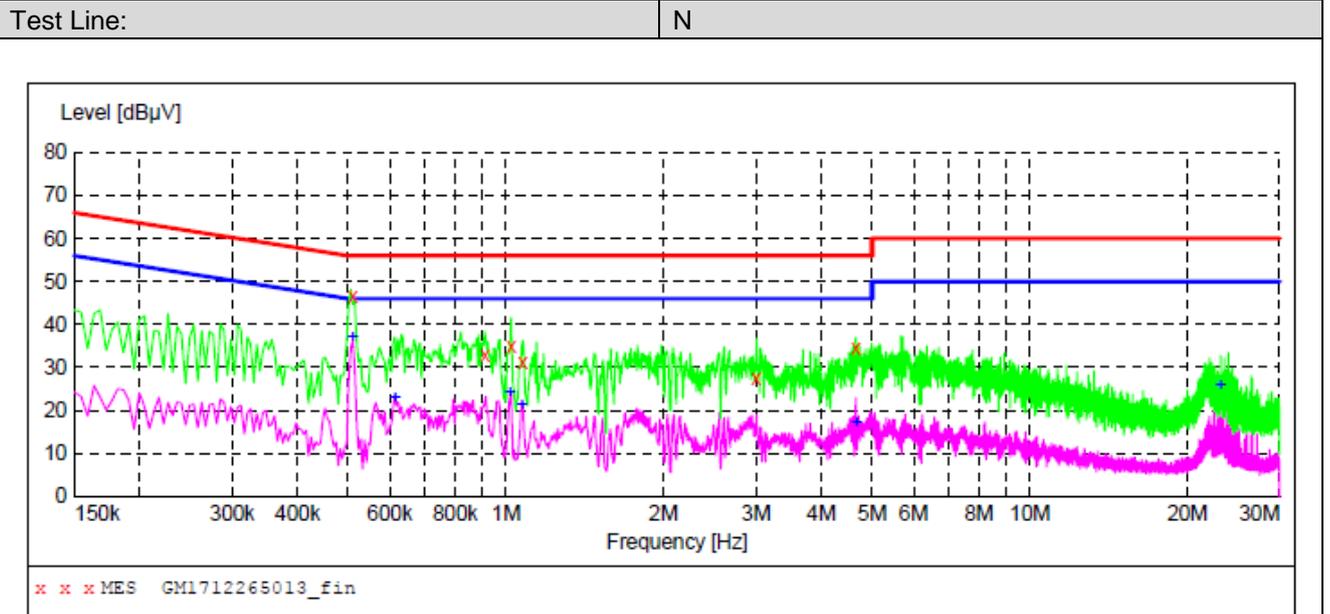

**MEASUREMENT RESULT: "GM1712265013\_fin"**

26/12/2017 09:35

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.510000	46.50	10.0	56	9.5	QP	N	GND
0.910500	33.00	10.0	56	23.0	QP	N	GND
1.023000	35.10	10.1	56	20.9	QP	N	GND
1.077000	31.10	10.1	56	24.9	QP	N	GND
2.998500	27.60	10.1	56	28.4	QP	N	GND
4.654500	34.50	10.2	56	21.5	QP	N	GND

**MEASUREMENT RESULT: "GM1712265013\_fin2"**

26/12/2017 09:35


Frequency MHz	Level dB <sub>AV</sub>	Transd dB	Limit dB <sub>AV</sub>	Margin dB	Detector	Line	PE
0.510000	37.00	10.0	46	9.0	AV	N	GND
0.613500	22.90	10.0	46	23.1	AV	N	GND
1.018500	24.20	10.1	46	21.8	AV	N	GND
1.072500	21.20	10.1	46	24.8	AV	N	GND
4.659000	17.20	10.2	46	28.8	AV	N	GND
23.127000	25.80	10.7	50	24.2	AV	N	GND

### 5.3. Conducted Peak Output Power

#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30 dBm

#### TEST CONFIGURATION

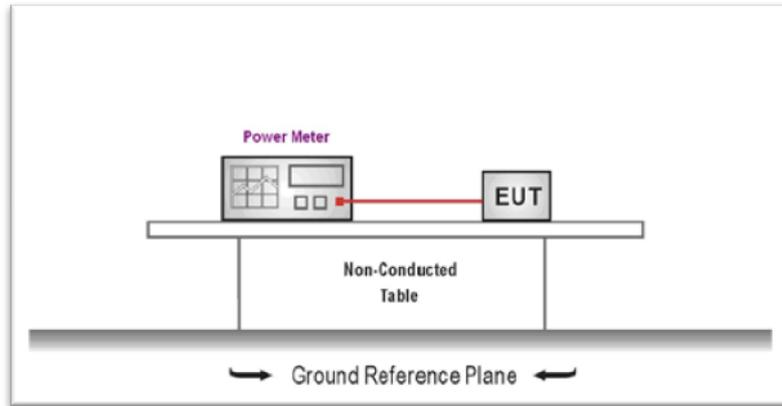

#### TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10: 2013 and KDB 558074 D01 for compliance to FCC 47 CFR 15.247 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.
4. Record the measurement data.

#### TEST MODE:

Please refer to the clause 3.3

#### TEST RESULTS

Passed       Not Applicable

Type	Channel	Output power (dBm)	Limit (dBm)	Result
BT-BLE	00	-4.86	≤30.00	Pass
	19	-4.18		
	39	-4.45		


### 5.4. Power Spectral Density

#### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### TEST CONFIGURATION

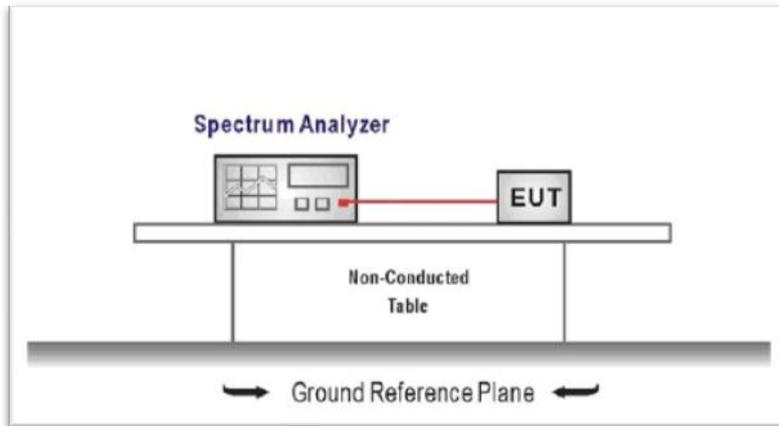

#### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:  
 Center frequency=DTS channel center frequency  
 Span =1.5 times the DTS bandwidth  
 RBW = 3 kHz ≤ RBW ≤ 100 kHz, VBW ≥ 3 × RBW  
 Sweep time = auto couple  
 Detector = peak  
 Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### TEST MODE:

Please refer to the clause 3.3

#### TEST RESULTS

Passed       Not Applicable

Type	Channel	Power Spectral Density(dBm/3KHz)	Limit (dBm/3KHz)	Result
BT-BLE	00	-20.35	≤8.00	Pass
	19	-19.59		
	39	-19.82		

Test plot as follows:

CH00	 <p>Agilent Spectrum Analyzer Swept SA Center Freq 2.40200000 GHz Ref Offset 0.5 dB Ref 10.50 dBm Mkr1 2.401974 GHz -20.353 dBm Span 1.000 MHz Res BW 3.0 kHz #VBW 10 kHz Sweep 105.5 ms (1001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.40150000 GHz</p> <p>Stop Freq 2.40250000 GHz</p> <p>CF Step 100.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>
CH19	 <p>Agilent Spectrum Analyzer Swept SA Center Freq 2.44000000 GHz Ref Offset 0.5 dB Ref 10.50 dBm Mkr1 2.439975 GHz -19.589 dBm Span 1.000 MHz Res BW 3.0 kHz #VBW 10 kHz Sweep 105.5 ms (1001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.44000000 GHz</p> <p>Start Freq 2.43950000 GHz</p> <p>Stop Freq 2.44050000 GHz</p> <p>CF Step 100.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>
CH39	 <p>Agilent Spectrum Analyzer Swept SA Center Freq 2.48000000 GHz Ref Offset 0.5 dB Ref 10.50 dBm Mkr1 2.479976 GHz -19.822 dBm Span 1.000 MHz Res BW 3.0 kHz #VBW 10 kHz Sweep 105.5 ms (1001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.48000000 GHz</p> <p>Start Freq 2.47950000 GHz</p> <p>Stop Freq 2.48050000 GHz</p> <p>CF Step 100.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>


**5.5. 6dB bandwidth**

**LIMIT**

**FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):**

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

**TEST CONFIGURATION**

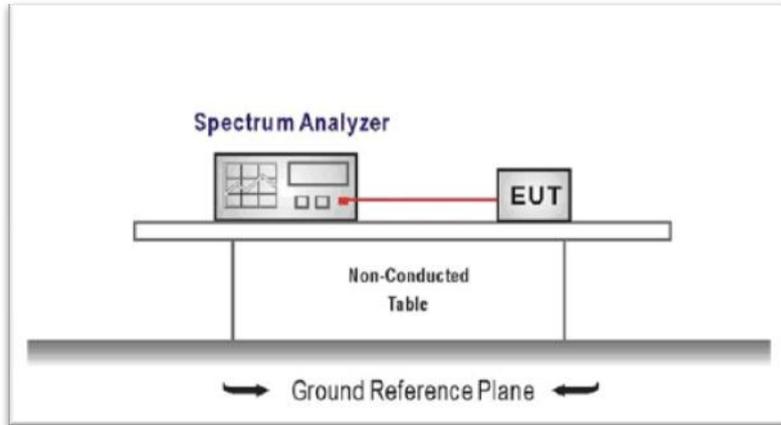

**TEST PROCEDURE**

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).  
 Center Frequency =DTS channel center frequency  
 Span=2 x DTS bandwidth  
 RBW = 100 kHz, VBW ≥ 3 × RBW  
 Sweep time= auto couple  
 Detector = Peak  
 Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

**TEST MODE:**

Please refer to the clause 3.3

**TEST RESULTS**

Passed       Not Applicable

Type	Channel	6dB Bandwidth(MHz)	Limit (kHz)	Result
BT-BLE	00	0.72	≥500	Pass
	19	0.71		
	39	0.72		

Test plot as follows:

CH00	 <p>The screenshot shows a spectrum analyzer interface for channel CH00. The center frequency is 2.40200000 GHz. The main display shows a signal peak at 2.402242 GHz with a magnitude of -5.8499 dBm. The occupied bandwidth is 1.0690 MHz, and the total power is 1.34 dBm. The transmit frequency error is 1.872 kHz, and the OBW power is 99.00%.</p> <table border="1"><thead><tr><th>Parameter</th><th>Value</th></tr></thead><tbody><tr><td>Center Freq</td><td>2.40200000 GHz</td></tr><tr><td>Occupied Bandwidth</td><td>1.0690 MHz</td></tr><tr><td>Total Power</td><td>1.34 dBm</td></tr><tr><td>Transmit Freq Error</td><td>1.872 kHz</td></tr><tr><td>OBW Power</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>716.7 kHz</td></tr><tr><td>x dB</td><td>-6.00 dB</td></tr></tbody></table>	Parameter	Value	Center Freq	2.40200000 GHz	Occupied Bandwidth	1.0690 MHz	Total Power	1.34 dBm	Transmit Freq Error	1.872 kHz	OBW Power	99.00 %	x dB Bandwidth	716.7 kHz	x dB	-6.00 dB	Frequency Center Freq 2.40200000 GHz CF Step 200.000 kHz Auto Man Freq Offset 0 Hz
Parameter	Value																	
Center Freq	2.40200000 GHz																	
Occupied Bandwidth	1.0690 MHz																	
Total Power	1.34 dBm																	
Transmit Freq Error	1.872 kHz																	
OBW Power	99.00 %																	
x dB Bandwidth	716.7 kHz																	
x dB	-6.00 dB																	
CH19	 <p>The screenshot shows a spectrum analyzer interface for channel CH19. The center frequency is 2.44000000 GHz. The main display shows a signal peak at 2.440248 GHz with a magnitude of -5.0172 dBm. The occupied bandwidth is 1.0697 MHz, and the total power is 2.17 dBm. The transmit frequency error is 3.827 kHz, and the OBW power is 99.00%.</p> <table border="1"><thead><tr><th>Parameter</th><th>Value</th></tr></thead><tbody><tr><td>Center Freq</td><td>2.44000000 GHz</td></tr><tr><td>Occupied Bandwidth</td><td>1.0697 MHz</td></tr><tr><td>Total Power</td><td>2.17 dBm</td></tr><tr><td>Transmit Freq Error</td><td>3.827 kHz</td></tr><tr><td>OBW Power</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>711.9 kHz</td></tr><tr><td>x dB</td><td>-6.00 dB</td></tr></tbody></table>	Parameter	Value	Center Freq	2.44000000 GHz	Occupied Bandwidth	1.0697 MHz	Total Power	2.17 dBm	Transmit Freq Error	3.827 kHz	OBW Power	99.00 %	x dB Bandwidth	711.9 kHz	x dB	-6.00 dB	Frequency Center Freq 2.44000000 GHz CF Step 200.000 kHz Auto Man Freq Offset 0 Hz
Parameter	Value																	
Center Freq	2.44000000 GHz																	
Occupied Bandwidth	1.0697 MHz																	
Total Power	2.17 dBm																	
Transmit Freq Error	3.827 kHz																	
OBW Power	99.00 %																	
x dB Bandwidth	711.9 kHz																	
x dB	-6.00 dB																	
CH39	 <p>The screenshot shows a spectrum analyzer interface for channel CH39. The center frequency is 2.48000000 GHz. The main display shows a signal peak at 2.480246 GHz with a magnitude of -5.3068 dBm. The occupied bandwidth is 1.0696 MHz, and the total power is 1.90 dBm. The transmit frequency error is 3.900 kHz, and the OBW power is 99.00%.</p> <table border="1"><thead><tr><th>Parameter</th><th>Value</th></tr></thead><tbody><tr><td>Center Freq</td><td>2.48000000 GHz</td></tr><tr><td>Occupied Bandwidth</td><td>1.0696 MHz</td></tr><tr><td>Total Power</td><td>1.90 dBm</td></tr><tr><td>Transmit Freq Error</td><td>3.900 kHz</td></tr><tr><td>OBW Power</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>715.7 kHz</td></tr><tr><td>x dB</td><td>-6.00 dB</td></tr></tbody></table>	Parameter	Value	Center Freq	2.48000000 GHz	Occupied Bandwidth	1.0696 MHz	Total Power	1.90 dBm	Transmit Freq Error	3.900 kHz	OBW Power	99.00 %	x dB Bandwidth	715.7 kHz	x dB	-6.00 dB	Frequency Center Freq 2.48000000 GHz CF Step 200.000 kHz Auto Man Freq Offset 0 Hz
Parameter	Value																	
Center Freq	2.48000000 GHz																	
Occupied Bandwidth	1.0696 MHz																	
Total Power	1.90 dBm																	
Transmit Freq Error	3.900 kHz																	
OBW Power	99.00 %																	
x dB Bandwidth	715.7 kHz																	
x dB	-6.00 dB																	


**5.6. Restricted band**

**LIMIT**

**FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

**TEST CONFIGURATION**

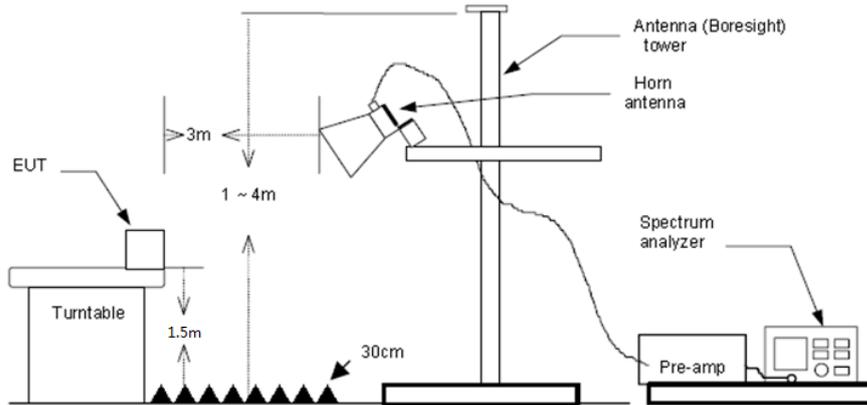

**TEST PROCEDURE**

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:  
 RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
 RBW=1MHz, VBW=3MHz RMS detector for Average value.

**TEST MODE:**



Please refer to the clause 3.3



**TEST RESULTS**


**Passed**       **Not Applicable**


**Note:**

- 1) Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor
- 2) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.

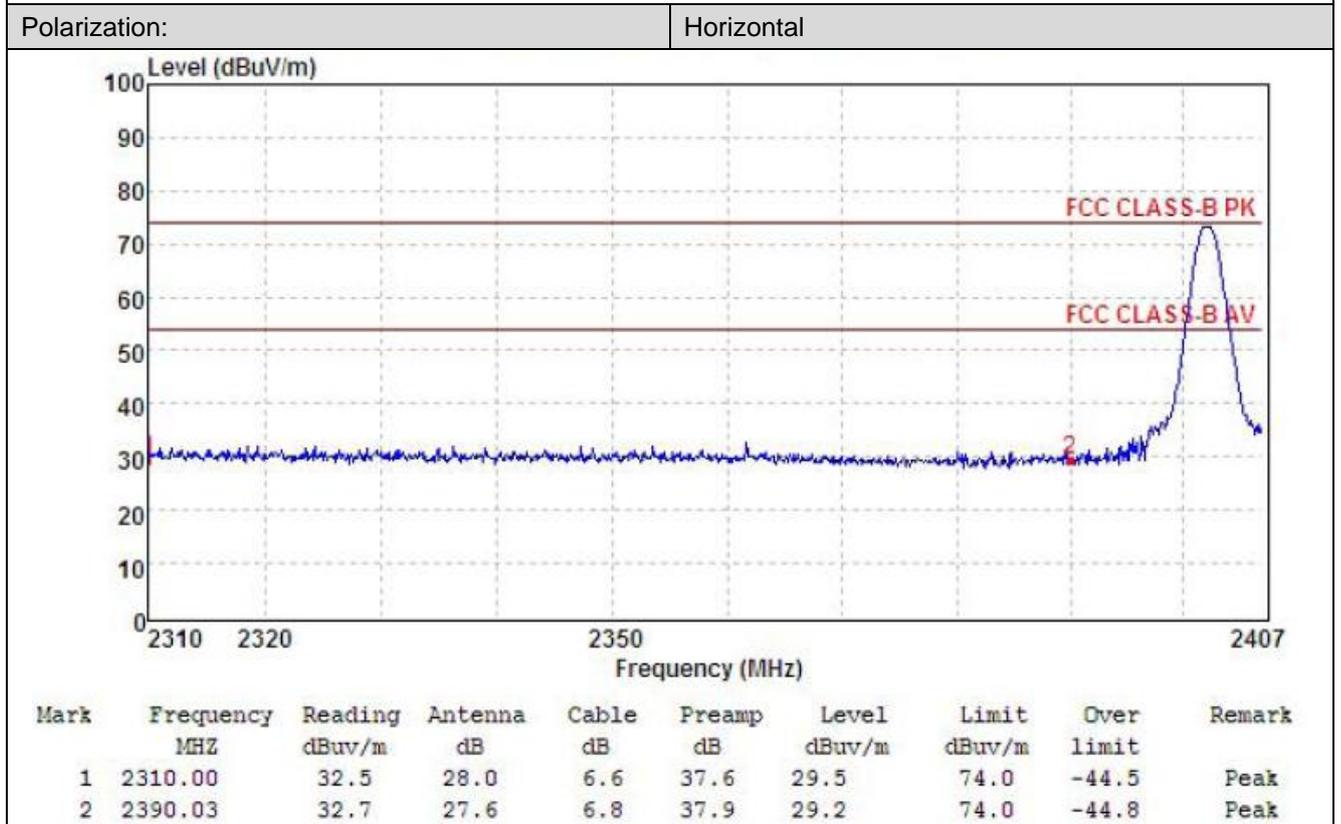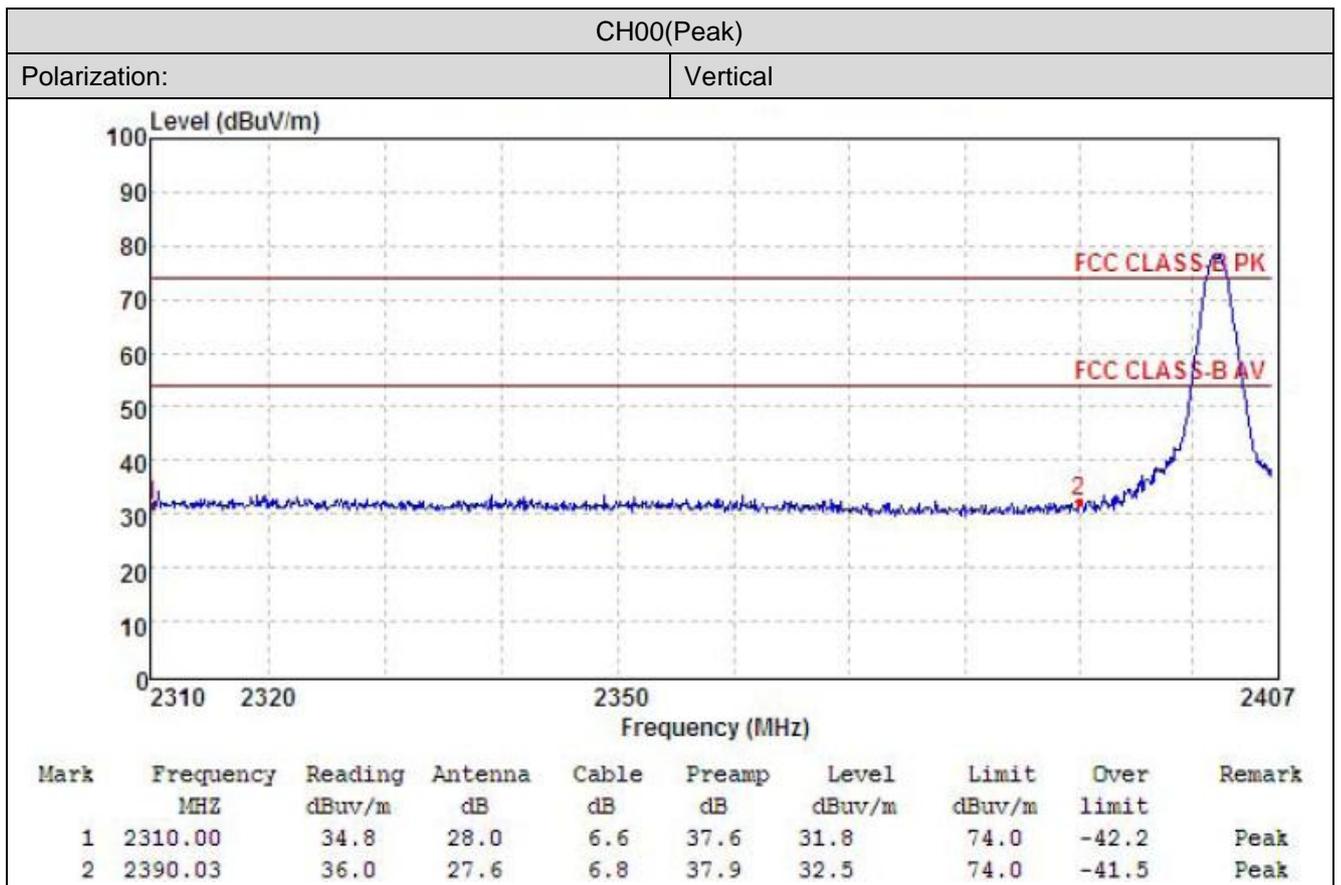

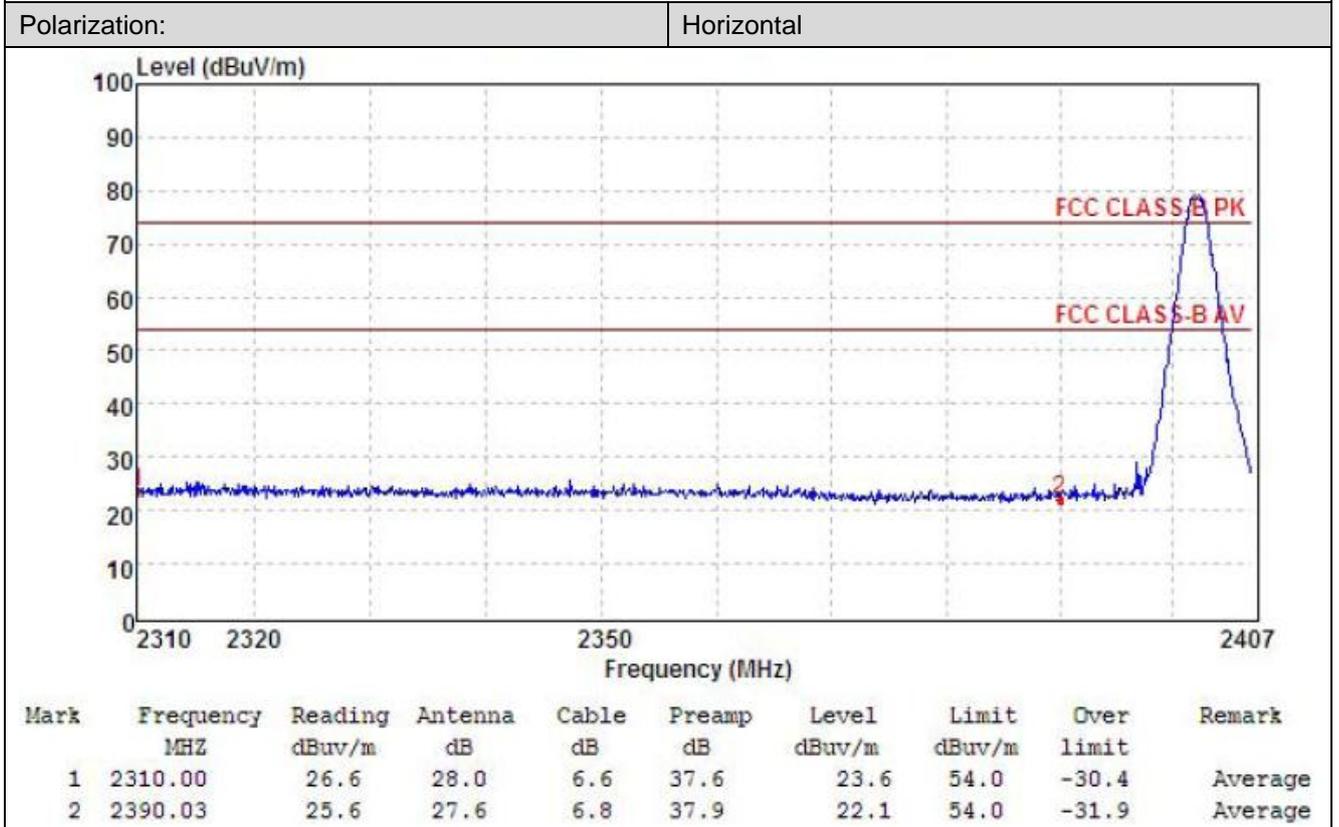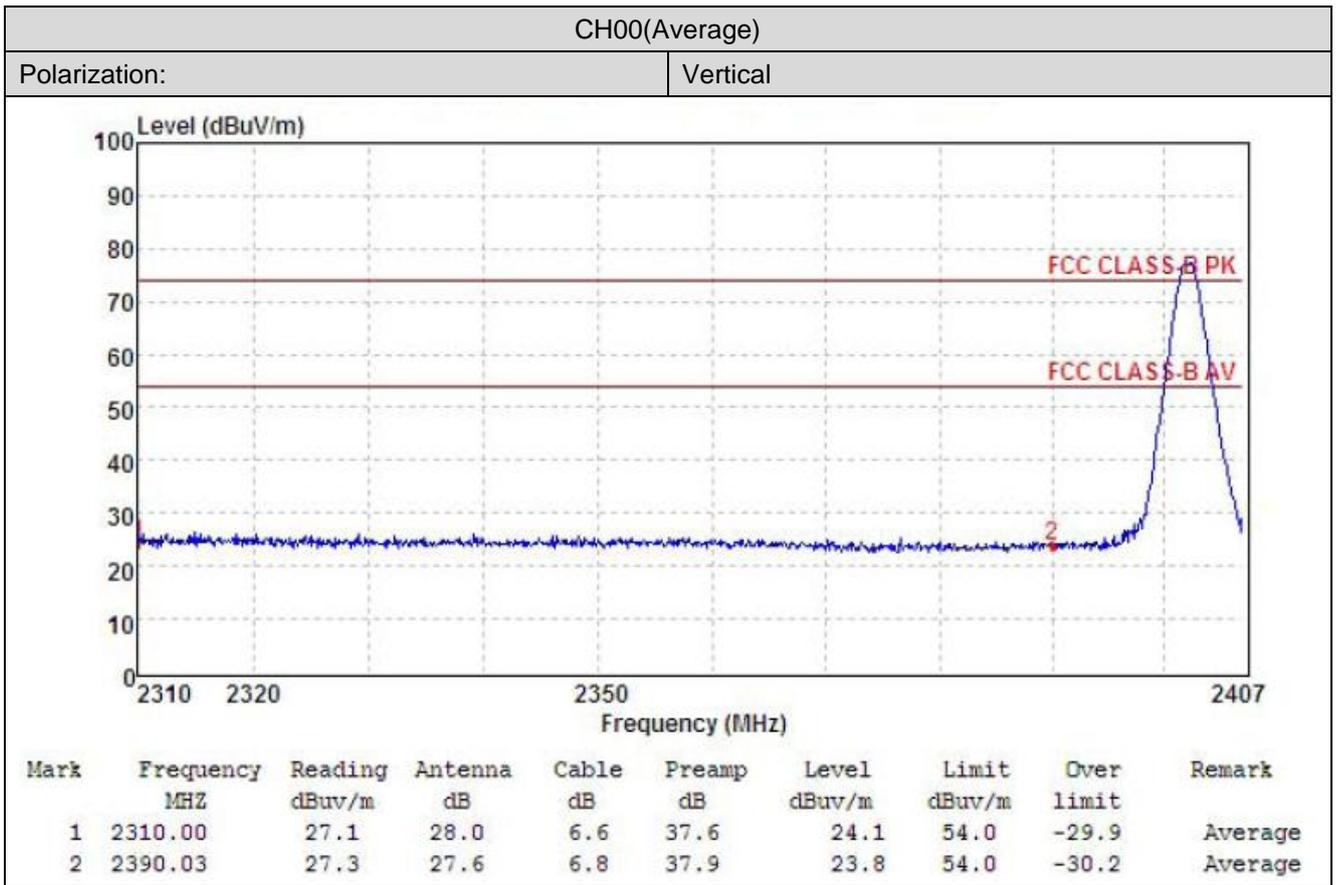

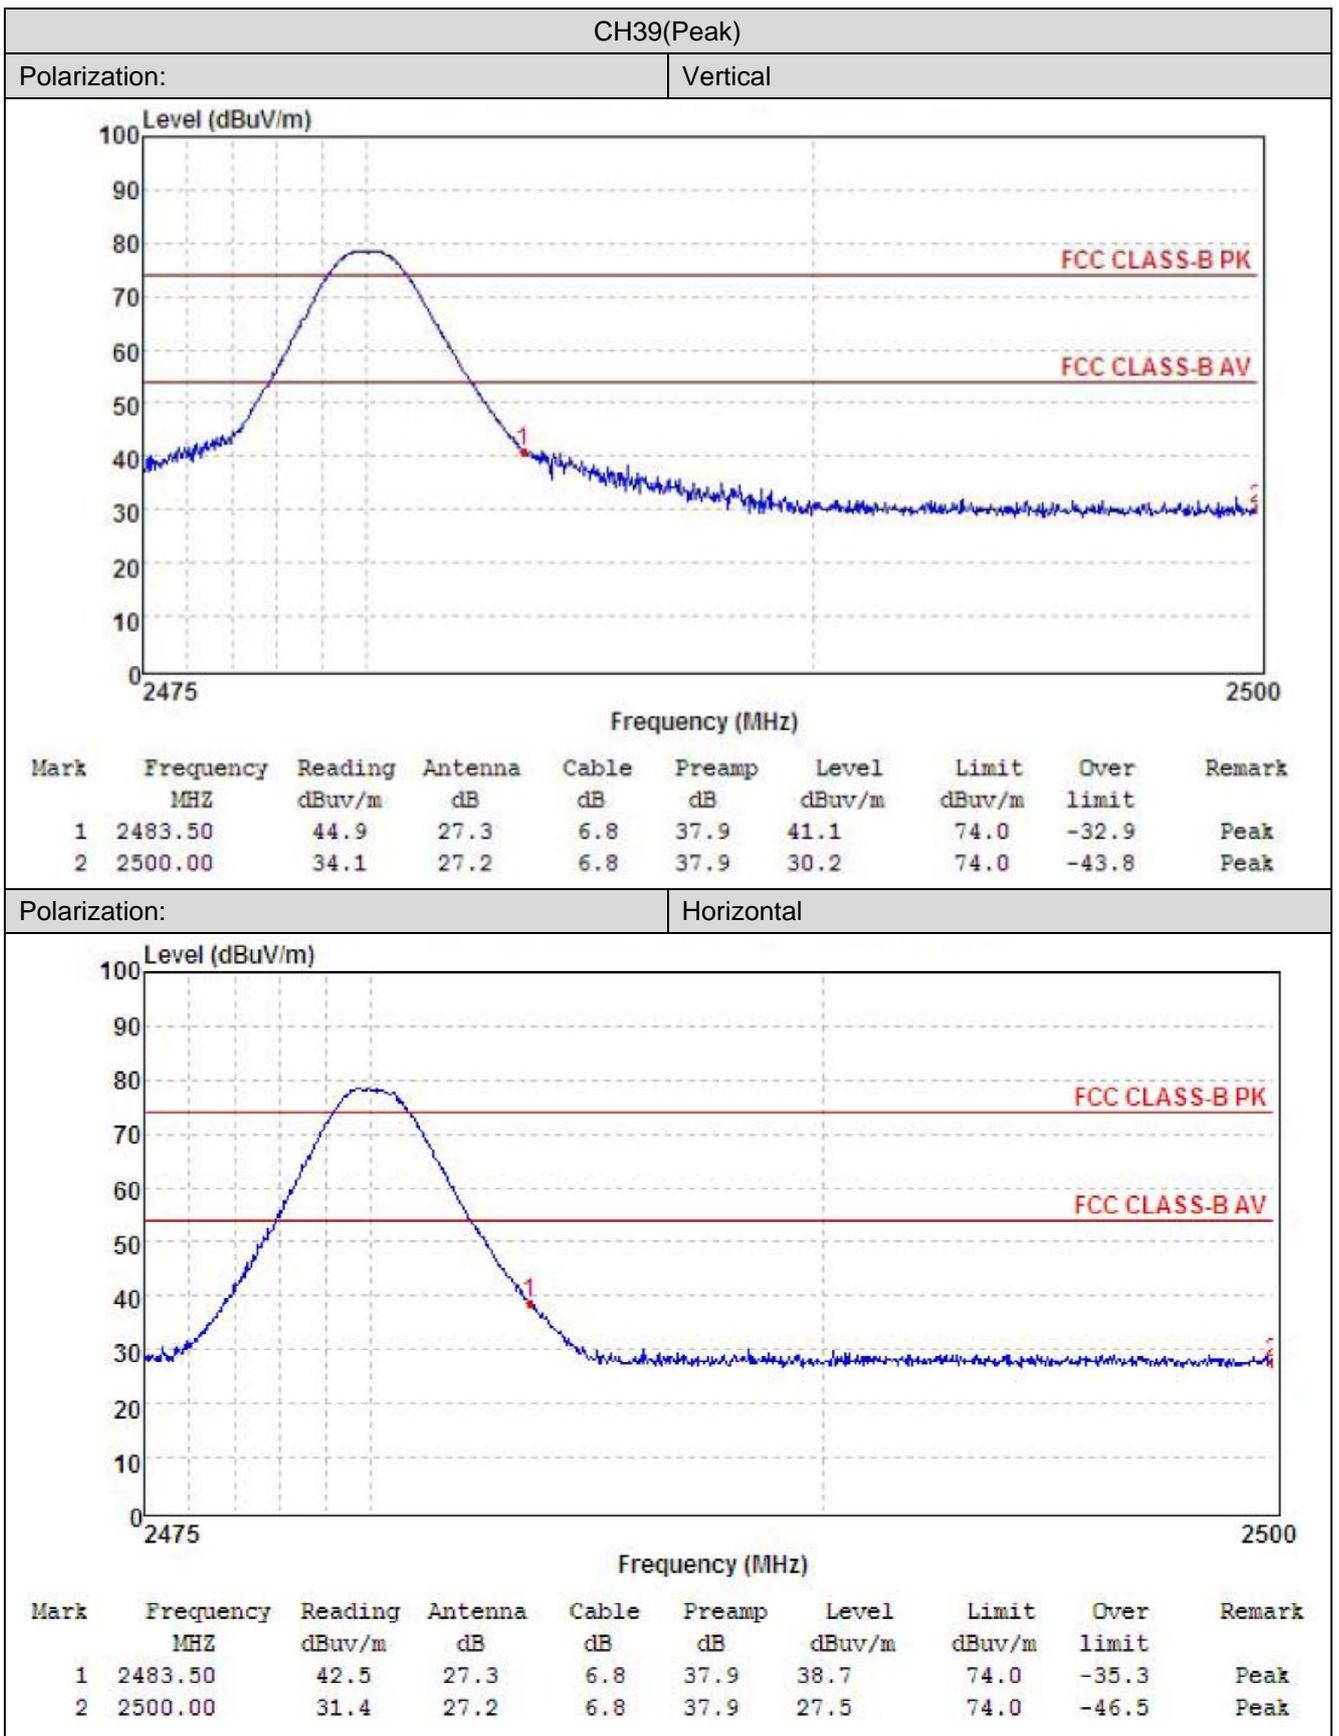

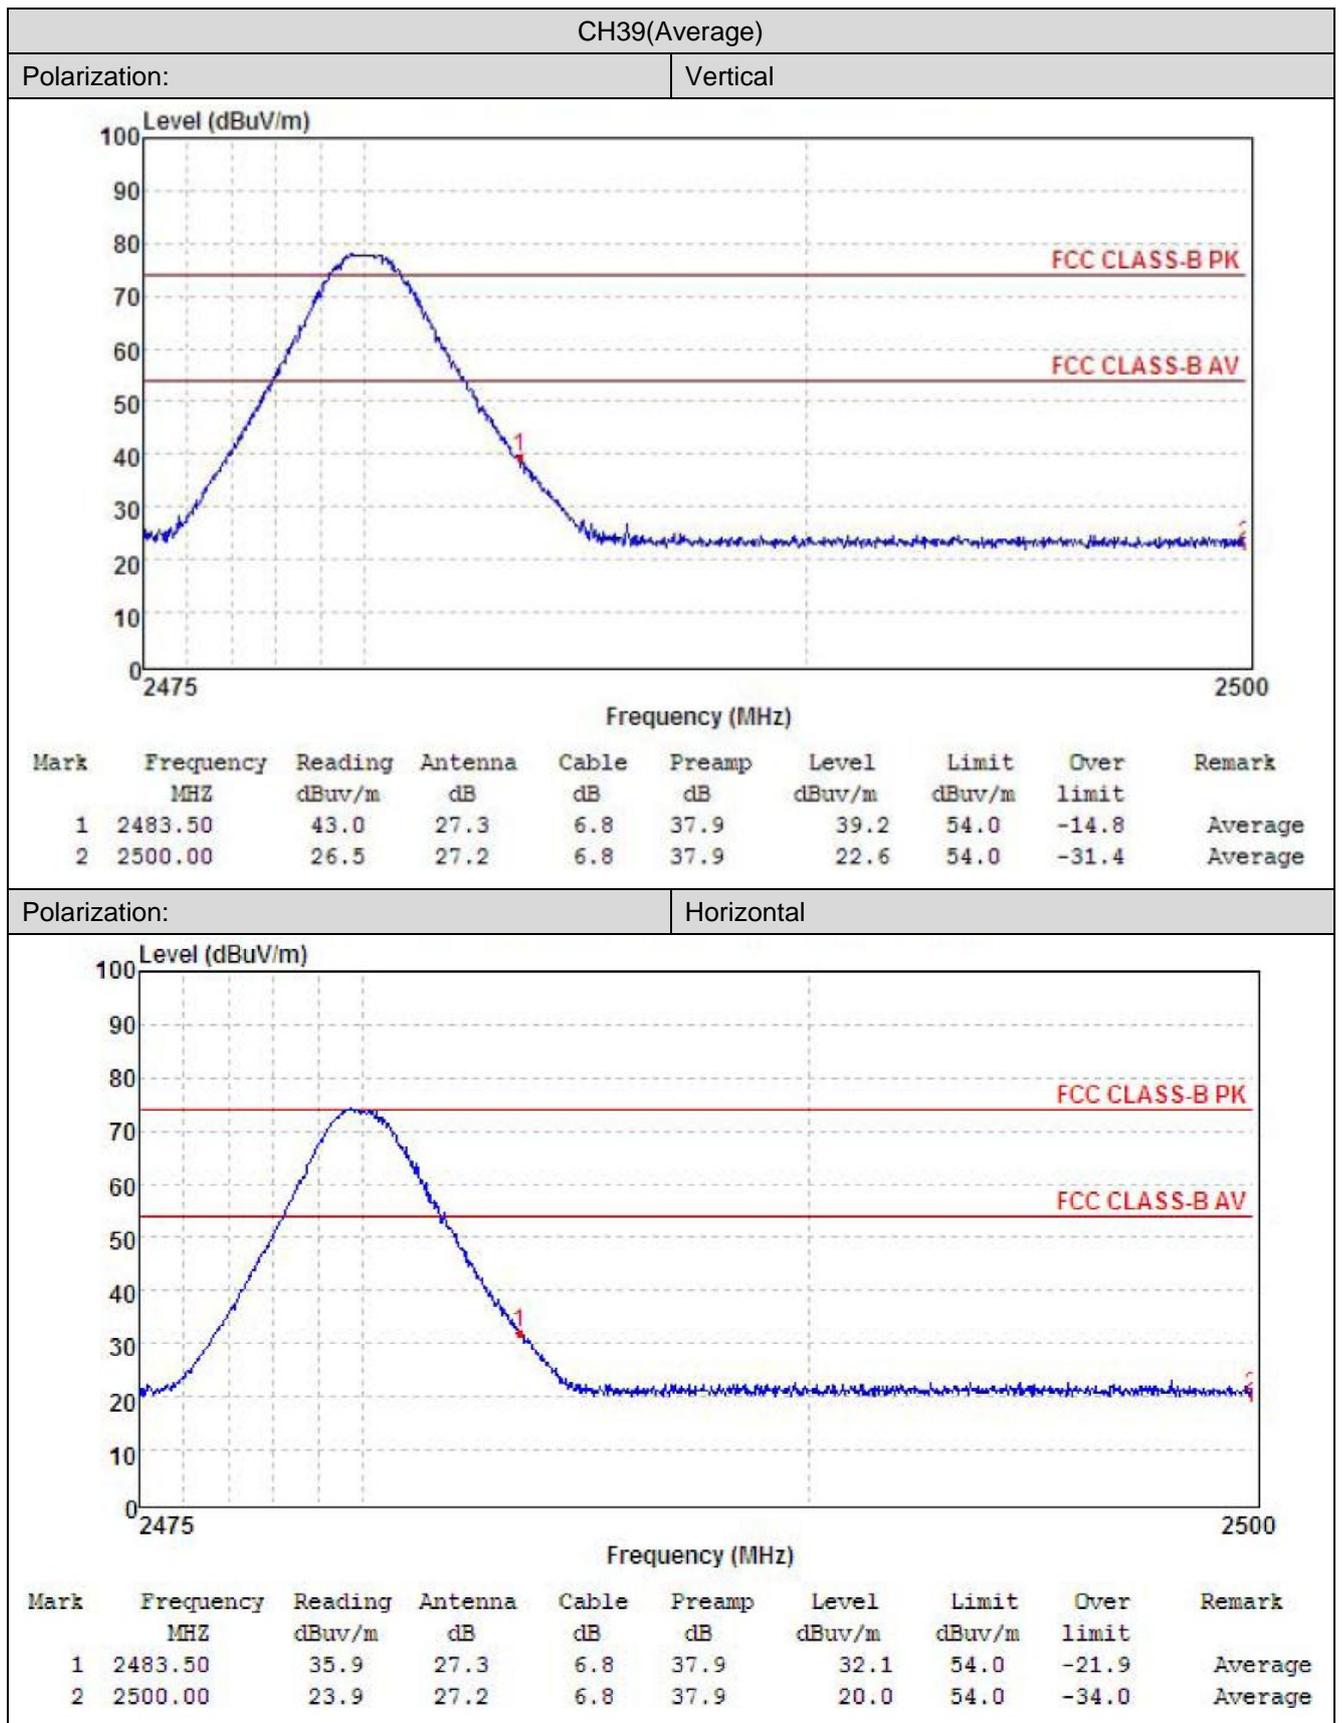


## 5.7. Band edge and Spurious Emissions (conducted)

### LIMIT

**FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### TEST CONFIGURATION

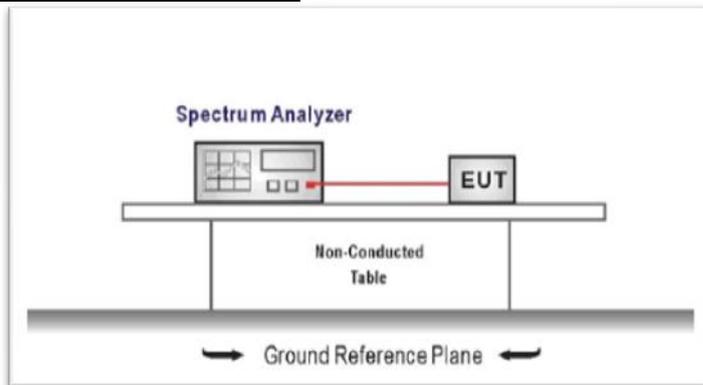

### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Establish a reference level by using the following procedure  
Center frequency=DTS channel center frequency  
The span = 1.5 times the DTS bandwidth.  
RBW = 100 kHz, VBW  $\geq 3 \times$  RBW  
Detector = peak, Sweep time = auto couple, Trace mode = max hold  
Allow trace to fully stabilize  
Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.



3. Emission level measurement  
Set the center frequency and span to encompass frequency range to be measured  
RBW = 100 kHz, VBW  $\geq 3 \times$  RBW  
Detector = peak, Sweep time = auto couple, Trace mode = max hold  
Allow trace to fully stabilize  
Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.



### TEST MODE:

Please refer to the clause 3.3


### TEST RESULTS

Passed       Not Applicable

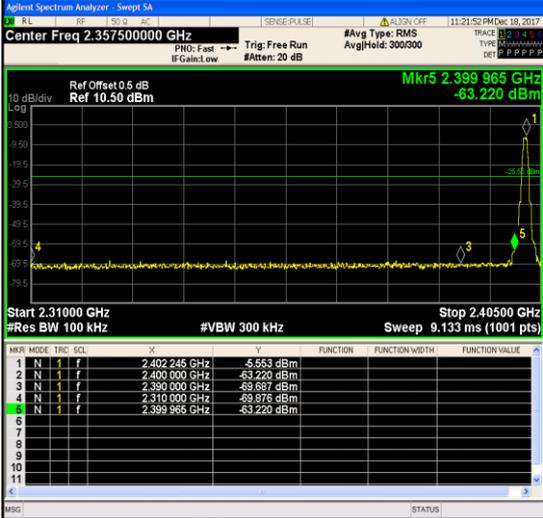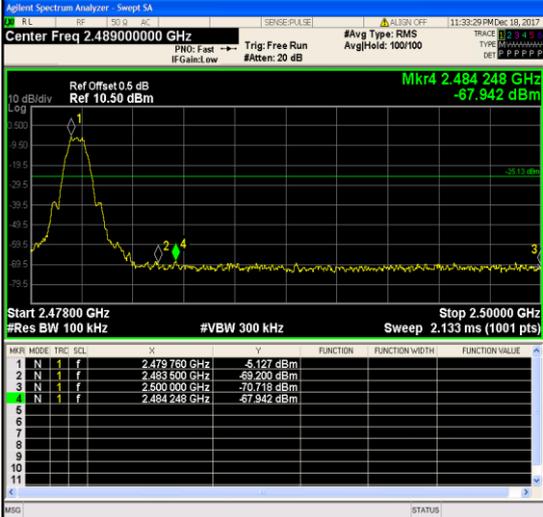Test Item:	Band edge																																																							
CH00	 <p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.357500000 GHz          Ref Offset 0.5 dB          Ref 10.50 dBm          Mkr5 2.399 965 GHz          -63.220 dBm          Start 2.31000 GHz          #Res BW 100 kHz          #VBW 300 kHz          Stop 2.40500 GHz          Sweep 9.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 245 GHz</td> <td>-5.553 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-63.220 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-69.887 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.310 000 GHz</td> <td>-69.876 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>2.399 965 GHz</td> <td>-63.220 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 245 GHz	-5.553 dBm				2	N	1	f	2.400 000 GHz	-63.220 dBm				3	N	1	f	2.390 000 GHz	-69.887 dBm				4	N	1	f	2.310 000 GHz	-69.876 dBm				5	N	1	f	2.399 965 GHz	-63.220 dBm				<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.357500000 GHz</p> <p>Start Freq 2.310000000 GHz</p> <p>Stop Freq 2.405000000 GHz</p> <p>CF Step 9.500000 MHz</p> <p>Freq Offset 0 Hz</p>
MKR	MODE	TRC	SCL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.402 245 GHz	-5.553 dBm																																																			
2	N	1	f	2.400 000 GHz	-63.220 dBm																																																			
3	N	1	f	2.390 000 GHz	-69.887 dBm																																																			
4	N	1	f	2.310 000 GHz	-69.876 dBm																																																			
5	N	1	f	2.399 965 GHz	-63.220 dBm																																																			
CH39	 <p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.489000000 GHz          Ref Offset 0.5 dB          Ref 10.50 dBm          Mkr4 2.484 248 GHz          -67.942 dBm          Start 2.47800 GHz          #Res BW 100 kHz          #VBW 300 kHz          Stop 2.50000 GHz          Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479 760 GHz</td> <td>-5.127 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 GHz</td> <td>-69.200 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 GHz</td> <td>-70.718 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.484 248 GHz</td> <td>-67.942 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 760 GHz	-5.127 dBm				2	N	1	f	2.483 500 GHz	-69.200 dBm				3	N	1	f	2.500 000 GHz	-70.718 dBm				4	N	1	f	2.484 248 GHz	-67.942 dBm				<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.489000000 GHz</p> <p>Start Freq 2.478000000 GHz</p> <p>Stop Freq 2.500000000 GHz</p> <p>CF Step 2.200000 MHz</p> <p>Freq Offset 0 Hz</p>									
MKR	MODE	TRC	SCL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.479 760 GHz	-5.127 dBm																																																			
2	N	1	f	2.483 500 GHz	-69.200 dBm																																																			
3	N	1	f	2.500 000 GHz	-70.718 dBm																																																			
4	N	1	f	2.484 248 GHz	-67.942 dBm																																																			

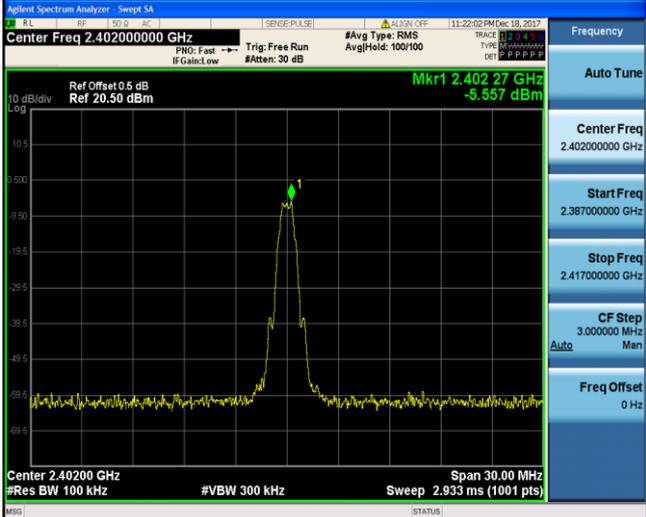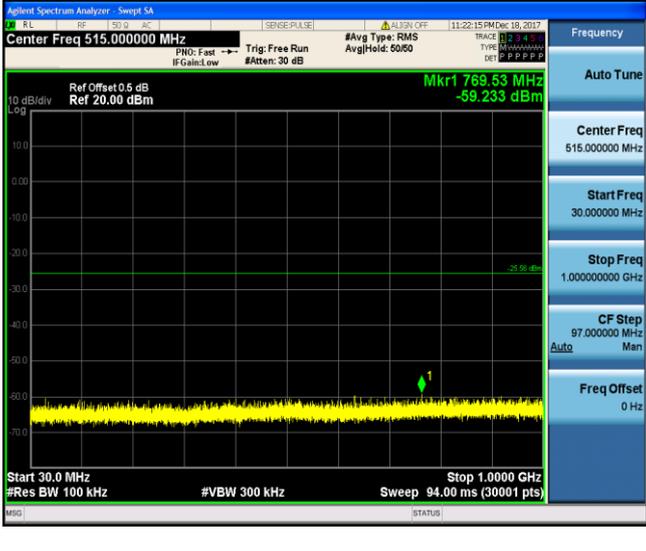Test Item:	SE
Reference level CH00	
CH00	
	


Reference level CH19

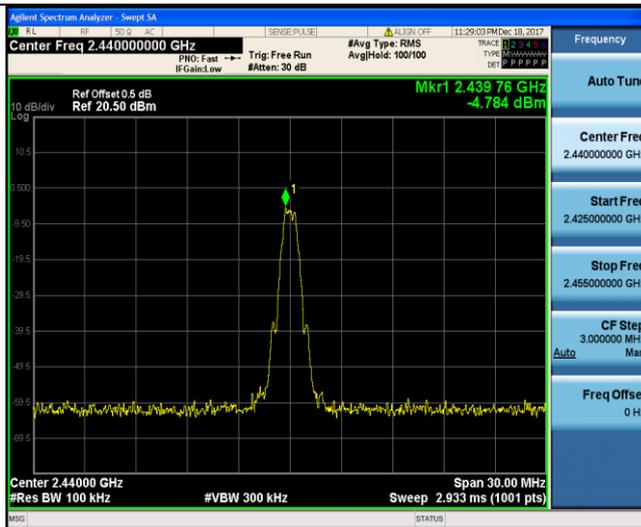


CH19



Reference level CH39

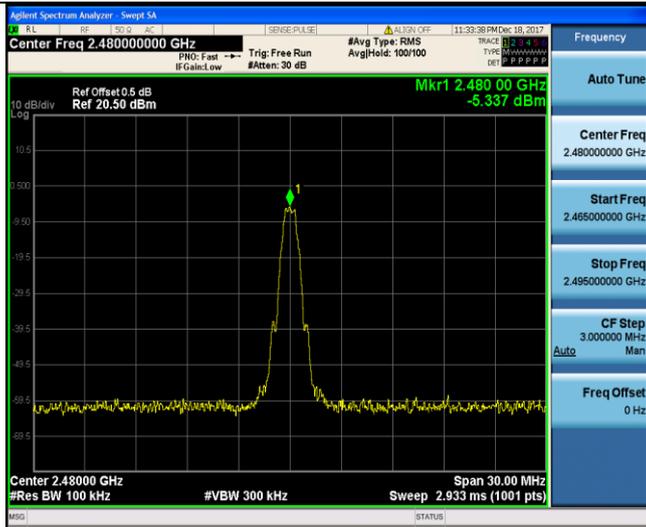

CH39

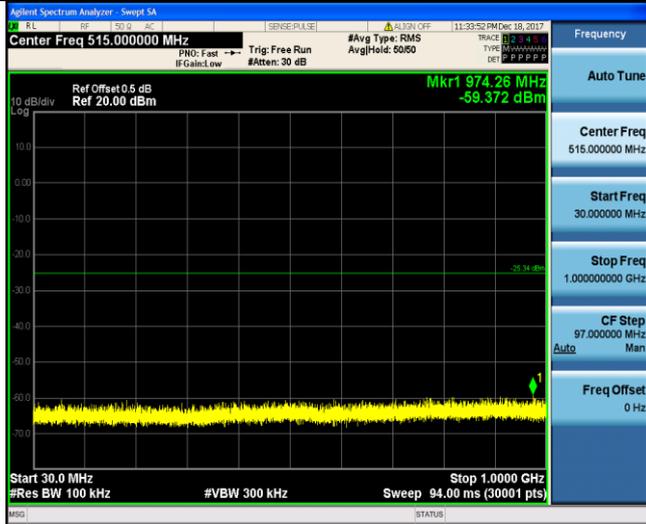

### 5.8. Spurious Emissions (radiated)


#### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

#### TEST CONFIGURATION


- 9 kHz ~ 30 MHz

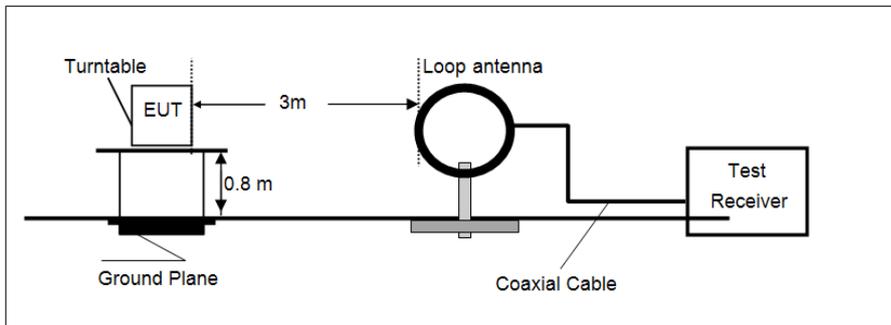

- 30 MHz ~ 1 GHz

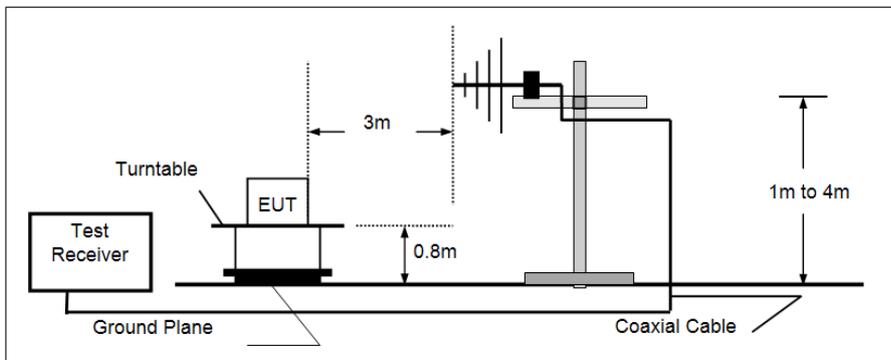

- Above 1 GHz

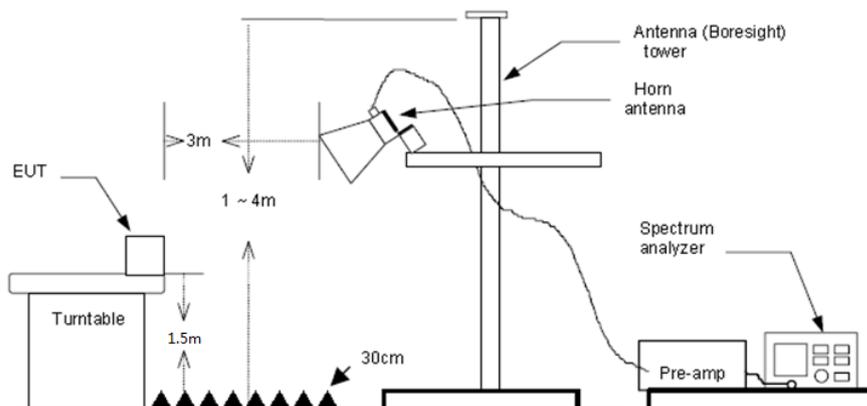

**TEST PROCEDURE**

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Below 1 GHz:  
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;  
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
  - (3) From 1 GHz to 10<sup>th</sup> harmonic:  
RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
RBW=1MHz, VBW=3MHz RMS detector for Average value.

**TEST MODE:**

Please refer to the clause 3.3

**TEST RESULTS**


**Passed**       **Not Applicable**

**Note:**

- 1) Above 1GHz Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
  - 2) The emission levels of other frequencies are very lower than the limit and not show in test report.
- **9 kHz ~ 30 MHz**  
The EUT was pre-scanned the frequency band (9 kHz ~ 30 MHz), found the radiated level lower than the limit, so don't show on the report.
- **30 MHz ~ 1000 MHz**  
Have pre-scan all modulation mode, found the BT-BLE mode CH39 which it was worst case, so only the worst case's data on the test report.

➤ 30 MHz ~ 1 GHz

Polarization: Vertical

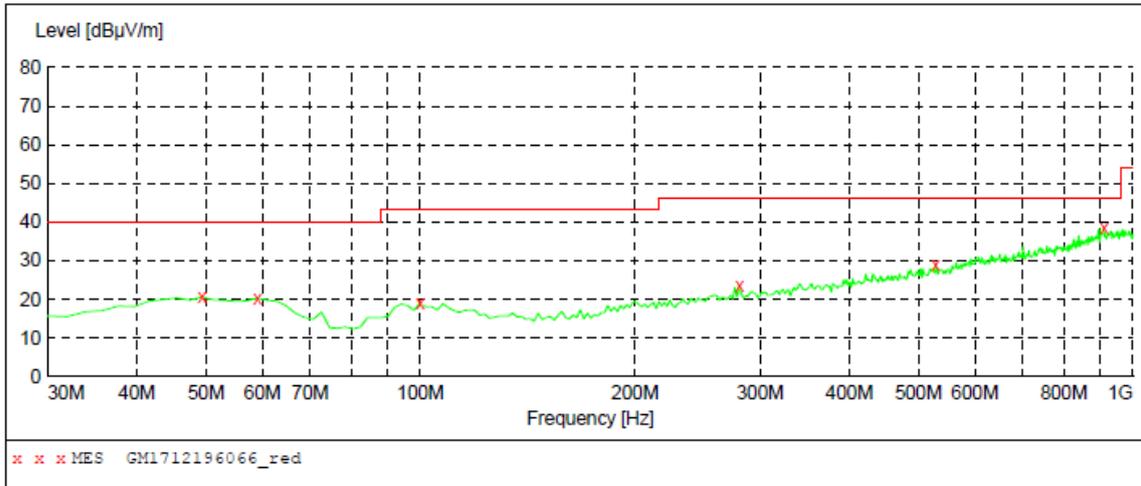


**MEASUREMENT RESULT: "GM1712196066\_red"**

12/19/2017 5:52PM

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
49.400000	20.70	-8.7	40.0	19.3	QP	100.0	241.00	VERTICAL
59.100000	20.30	-9.8	40.0	19.7	QP	100.0	201.00	VERTICAL
99.840000	19.00	-10.6	43.5	24.5	QP	100.0	28.00	VERTICAL
280.260000	23.40	-7.7	46.0	22.6	QP	100.0	241.00	VERTICAL
528.580000	29.00	-1.2	46.0	17.0	QP	100.0	92.00	VERTICAL
910.760000	38.50	6.9	46.0	7.5	QP	100.0	320.00	VERTICAL

Polarization: Horizontal

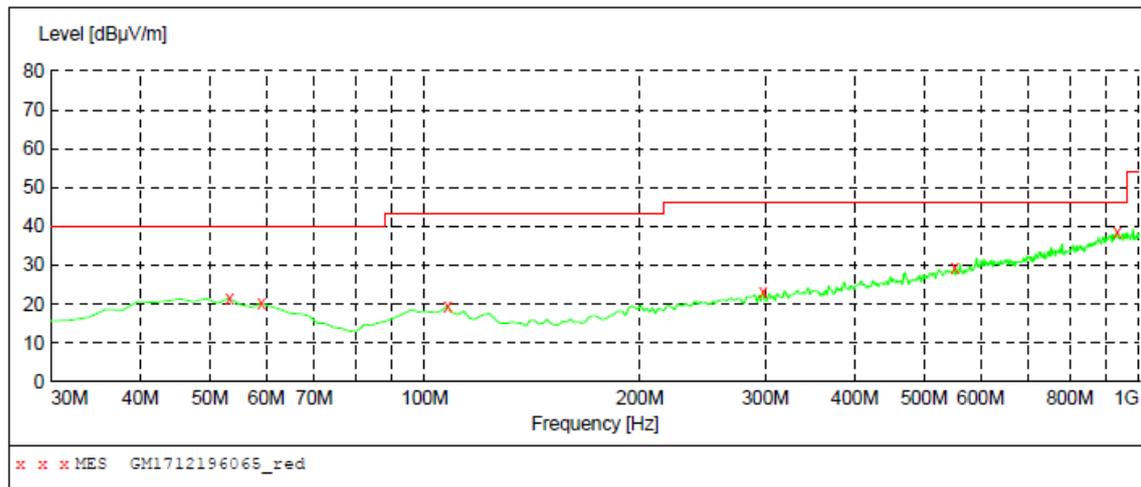

**MEASUREMENT RESULT: "GM1712196065\_red"**

12/19/2017 5:49PM

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.280000	21.60	-9.0	40.0	18.4	QP	100.0	265.00	HORIZONTAL
59.100000	20.10	-9.8	40.0	19.9	QP	100.0	74.00	HORIZONTAL
107.600000	19.50	-10.6	43.5	24.0	QP	300.0	119.00	HORIZONTAL
297.720000	23.00	-7.3	46.0	23.0	QP	300.0	51.00	HORIZONTAL
551.860000	29.40	-0.7	46.0	16.6	QP	300.0	131.00	HORIZONTAL
932.100000	38.50	7.1	46.0	7.5	QP	300.0	239.00	HORIZONTAL

## ➤ 1 GHz ~ 25 GHz

CH00									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1764.12	48.47	25.33	5.89	37.06	42.63	74.00	-31.37	Vertical	Peak
4034.78	35.51	29.77	8.81	38.03	36.06	74.00	-37.94	Vertical	Peak
4772.91	35.76	31.49	9.53	37.00	39.78	74.00	-34.22	Vertical	Peak
7432.62	32.80	36.23	12.18	34.85	46.36	74.00	-27.64	Vertical	Peak
2129.79	42.60	26.94	6.38	37.33	38.59	74.00	-35.41	Horizontal	Peak
3662.78	35.89	29.30	8.34	38.26	35.27	74.00	-38.73	Horizontal	Peak
4809.50	38.46	31.58	9.55	36.93	42.66	74.00	-31.34	Horizontal	Peak
7800.94	32.71	36.11	13.26	35.07	47.01	74.00	-26.99	Horizontal	Peak

CH19									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1057.60	43.17	25.38	4.34	36.64	36.25	74.00	-37.75	Vertical	Peak
1768.62	36.96	25.34	5.90	37.07	31.13	74.00	-42.87	Vertical	Peak
4086.46	34.49	29.87	8.85	37.91	35.30	74.00	-38.70	Vertical	Peak
6886.15	32.41	34.60	11.71	34.90	43.82	74.00	-30.18	Vertical	Peak
1746.25	41.23	25.29	5.86	37.03	35.35	74.00	-38.65	Horizontal	Peak
2129.79	40.09	26.94	6.38	37.33	36.08	74.00	-37.92	Horizontal	Peak
4245.51	39.78	30.09	8.98	37.63	41.22	74.00	-32.78	Horizontal	Peak
7451.57	33.12	36.20	12.24	34.86	46.70	74.00	-27.30	Horizontal	Peak

CH39									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1777.65	39.99	25.36	5.92	37.09	34.18	74.00	-39.82	Vertical	Peak
3963.52	36.29	29.70	8.73	38.13	36.59	74.00	-37.41	Vertical	Peak
5230.96	34.36	31.44	9.88	36.29	39.39	74.00	-34.61	Vertical	Peak
7027.82	32.05	35.38	11.85	34.83	44.45	74.00	-29.55	Vertical	Peak
1777.65	39.99	25.36	5.92	37.09	34.18	74.00	-39.82	Horizontal	Peak
3795.66	35.17	29.59	8.50	38.23	35.03	74.00	-38.97	Horizontal	Peak
5022.19	33.28	31.59	9.69	36.38	38.18	74.00	-35.82	Horizontal	Peak
7027.82	32.05	35.38	11.85	34.83	44.45	74.00	-29.55	Horizontal	Peak

Remark:


- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- The peak level is lower than average limit (54 dBuV/m), this data is the too weak instrument of signal is unable to test.
- The emission levels of other frequencies are very lower than the limit and not show in test report.


## 6. TEST SETUP PHOTOS

### Conducted Emissions



### Radiated Emissions

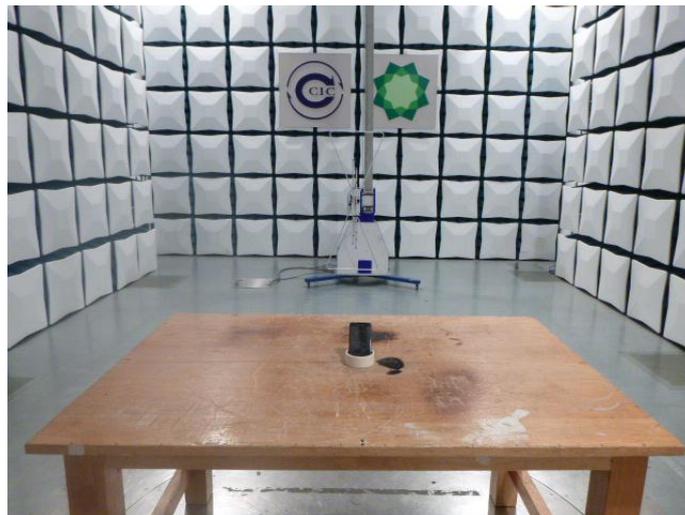

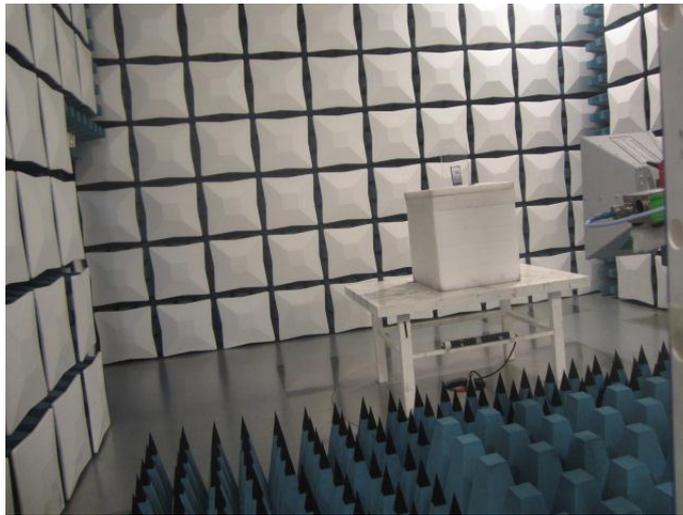

## 7. EXTERANAL AND INTERNAL PHOTOS

Reference to the test report No.: TRE1712003201

-----End of Report-----