

TEST REPORT

Product Name : LED PC GU10 wifi, 5.5W, 50W EQ,
400lm, RGB+Adj.CCT2000-5000K,
15000hrs,DIM, ES,50D,SILVER
HOUSING

Brand Mark : NOMA

Model No. : GU10-5.5-RGB9T/B159/15D/CB

Report Number : BLA-EMC-202304-A3202

FCC ID : 2AQUQGB16311

Date of Sample Receipt : 2023/4/10

Date of Test : 2023/4/10 to 2023/5/5

Date of Issue : 2023/5/5

Test Standard : 47 CFR Part 15, Subpart C 15.247

Test Result : Pass

Prepared for:

Globe Electric Company Inc.
150 Oneida, Montreal, Quebec, Canada, H9R 1A8

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by:

Jozu

Review by:

Sueels

Approved by:

Blue Zheng

Date:

2023/5/5



REPORT REVISE RECORD

Version No.	Date	Description
00	2023/5/5	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	5
2	GENERAL INFORMATION	6
3	GENERAL DESCRIPTION OF E.U.T.	6
4	TEST ENVIRONMENT	8
5	TEST MODE	8
6	MEASUREMENT UNCERTAINTY	8
7	DESCRIPTION OF SUPPORT UNIT	9
8	LABORATORY LOCATION	9
9	TEST INSTRUMENTS LIST	10
10	ANTENNA REQUIREMENT	12
10.1	CONCLUSION	12
11	RADIATED SPURIOUS EMISSIONS	13
11.1	LIMITS	13
11.2	BLOCK DIAGRAM OF TEST SETUP	14
11.3	PROCEDURE	14
11.4	TEST DATA	16
12	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	25
12.1	LIMITS	25
12.2	BLOCK DIAGRAM OF TEST SETUP	26
12.3	PROCEDURE	26
12.4	TEST DATA	28
13	CONDUCTED SPURIOUS EMISSIONS	45
13.1	LIMITS	45
13.2	BLOCK DIAGRAM OF TEST SETUP	45
13.3	TEST DATA	45
14	CONDUCTED BAND EDGES MEASUREMENT	46
14.1	LIMITS	46
14.2	BLOCK DIAGRAM OF TEST SETUP	46
14.3	TEST DATA	46

15	MINIMUM 6DB BANDWIDTH	47
15.1	LIMITS	47
15.2	BLOCK DIAGRAM OF TEST SETUP	47
15.3	TEST DATA	47
16	POWER SPECTRUM DENSITY	48
16.1	LIMITS	48
16.2	BLOCK DIAGRAM OF TEST SETUP	48
16.3	TEST DATA	48
17	CONDUCTED PEAK OUTPUT POWER	49
17.1	LIMITS	49
17.2	BLOCK DIAGRAM OF TEST SETUP	49
17.3	TEST DATA	50
18	CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)	51
18.1	LIMITS	51
18.2	BLOCK DIAGRAM OF TEST SETUP	51
18.3	PROCEDURE	51
18.4	TEST DATA	53
19	APPENDIX	56
APPENDIX A: PHOTOGRAPHS OF TEST SETUP		106
APPENDIX B: PHOTOGRAPHS OF EUT		108

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5 & Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(1) & 15.247(b)(3)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass

2 GENERAL INFORMATION

Applicant	Globe Electric Company Inc.
Address	150 Oneida, Montreal, Quebec, Canada, H9R 1A8
Manufacturer	FOSHAN ELECTRICAL AND LIGHTING CO.LTD
Address	64 NORTH FENJIANG ROAD FOSHAN CHINA
Factory	FOSHAN ELECTRICAL AND LIGHTING CO.LTD GAOMING FITTING BRANCH
Address	FUWAN INDUSTRIAL ZONE, HECHENG STREET, GAOMING DISTRICT, FOSHAN CITY, GUANGDONG PROVINCE, CHINA
Product Name	LED PC GU10 wifi, 5.5W, 50W EQ, 400lm, RGB+Adj.CCT2000-5000K, 15000hrs,DIM, ES,50D,SILVER HOUSING
Test Model No.	GU10-5.5-RGB9T/B159/15D/CB

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	V1.0.1
Software Version	1.5.21
Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz 802.11n(HT40): 2422MHz to 2452MHz
Modulation Type:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Channel Spacing:	5MHz
Number of Channels:	802.11b/g/n(HT20):11 802.11n(HT40):7
Antenna Type:	Internal Antenna
Antenna Gain:	3.87dBi (Provided by the applicant)

Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz	X	

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
	802.11b/802.11g/802.11n(HT20)
Lowest channel	2412MHz
Middle channel	2437MHz
Highest channel	2462MHz
Test channel	Frequency (MHz)
	802.11n(HT40)
Lowest channel	2422MHz
Middle channel	2437MHz
Highest channel	2452MHz

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	3.3Vdc

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
Transmitting mode	Keep the EUT in continuously transmitting mode with modulation. (The duty cycle is greater than 98%)
Remark: During all test except ac conducted emission, 802.11b/g/n(HT20) and 802.11n(HT40) all have been tested, During the radiated spurious emission test, 802.11b/11g/11nH20/11nH40 modulations all have been tested, only worse case 802.11b is reported.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Unwanted Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Unwanted Radiated Emission (1GHz ~ 18GHz)	±4.44 dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
N/A	N/A	N/A	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.

Building C, No. 107, Shihuan Road, Shiyao Sub-District, Baoan District, Shenzhen, Guangdong Province, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

9 TEST INSTRUMENTS LIST

Test Equipment Of RF Conducted Test					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Spectrum	Agilent	N9020A	MY49100060	2022/09/07	2023/09/06
Spectrum	KEYSIGHT	N9030A	MY52350152	2022/07/01	2023/06/30
Spectrum	KEYSIGHT	N9010A	MY54330814	2022/07/01	2023/06/30
Signal Generator	Agilent	N5182A	MY47420955	2022/09/07	2023/09/06
Signal Generator	Agilent	E8257D	MY44320250	2022/07/01	2023/06/30
Signal Generator	Agilent	N5181A	MY46240904	2022/08/02	2023/08/01
Signal Generator	R&S	CMW500	132429	2022/09/07	2023/09/06
BluetoothTester	Anritsu	MT8852B	06262047872	2022/09/07	2023/09/06
Power probe	DARE	RPR3006W	14I00889SN042	2022/09/07	2023/09/06
DCPowersupply	zhaoxin	KXN-305D	20K305D1221363	2022/09/14	2023/09/13
DCPowersupply	zhaoxin	RXN-1505D	19R1505D050168	2022/09/14	2023/09/13

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber 1	SKET	966	N/A	2020/11/10	2023/11/9
Chamber 2	SKET	966	N/A	2021/07/20	2024/07/19
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Receiver	R&S	ESR7	101199	2022/09/15	2023/09/14
Receiver	R&S	ESPI7	101477	2022/07/16	2023/07/15
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/09/15	2023/09/14
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Amplifier	SKET	LNPA_30M01G-30	SK2021060801	2022/07/16	2023/07/15
Amplifier	SKET	PA-000318G-45	N/A	2022/09/13	2023/09/12
Amplifier	SKET	LNPA_18G40G-50	SK2022071301	2022/07/14	2023/07/13
Filter group	SKET	2.4G/5G Filter group r	N/A	2022/07/16	2023/07/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/9/14	2025/9/13

Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2022/09/14	2023/09/13
LISN	R&S	ENV216	3560.6550.15	2022/09/14	2023/09/13
LISN	AT	AT166-2	AKK1806000003	2022/09/14	2023/09/13
ISN	TESEQ	ISNT8-cat6	53580	2022/09/14	2023/09/13
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01045	2022/08/17	2023/08/16
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01075	2022/08/17	2023/08/16
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

10 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A

10.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The best case gain of the antenna is 3.87dBi.

11 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

11.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

11.2 BLOCK DIAGRAM OF TEST SETUP

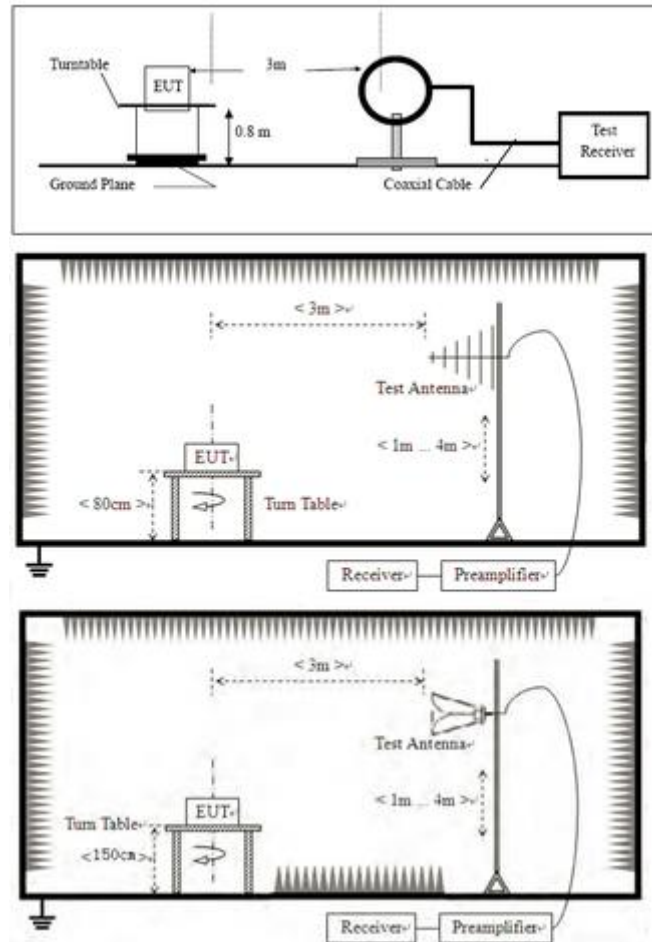

11.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

11.4 TEST DATA


[TestMode: TX below 1G]; [Polarity: Horizontal]

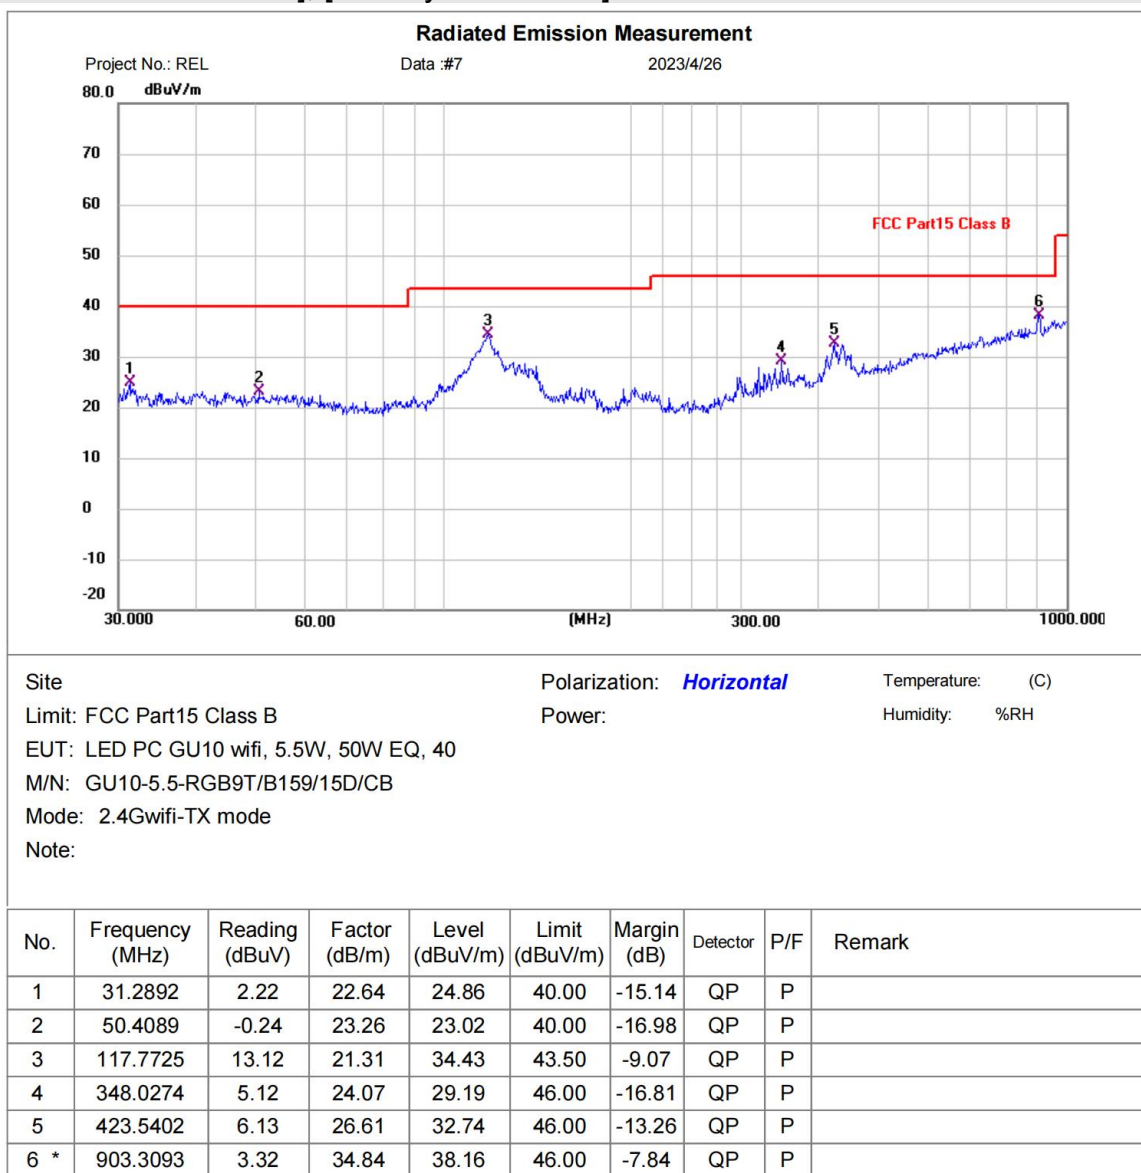

*:Maximum data x:Over limit !:over margin

Test Result: Pass

[TestMode: TX below 1G]; [Polarity: Vertical]

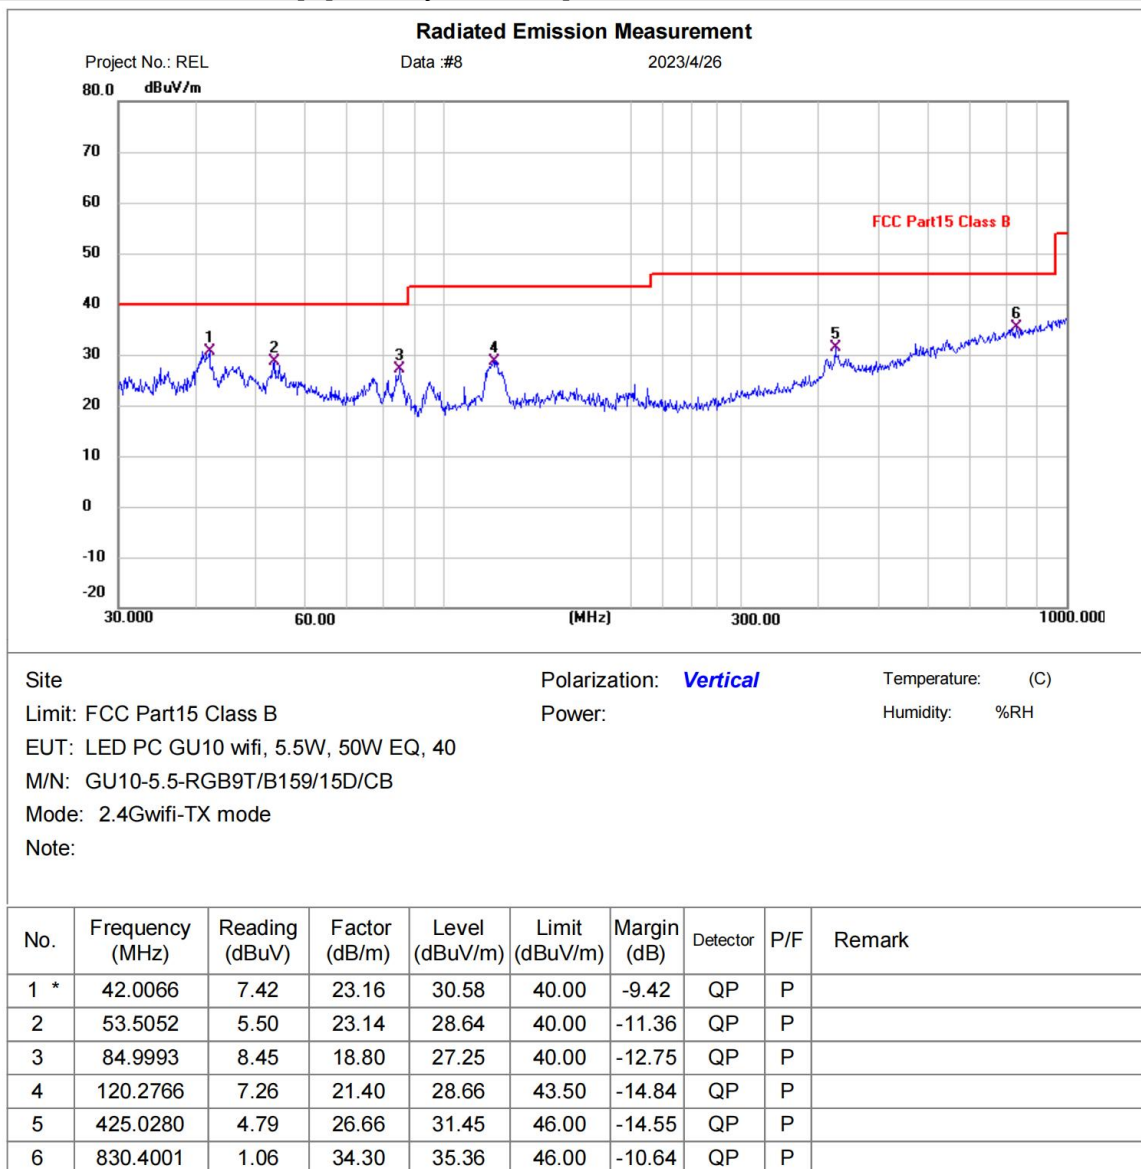


*:Maximum data x:Over limit !:over margin

Test Result: Pass

Remark: During the test, pre-scan the 802.11b/g/n mode, and found the 802.11b mode which it is worse case.

[TestMode: TX low channel]; [Polarity: Horizontal]

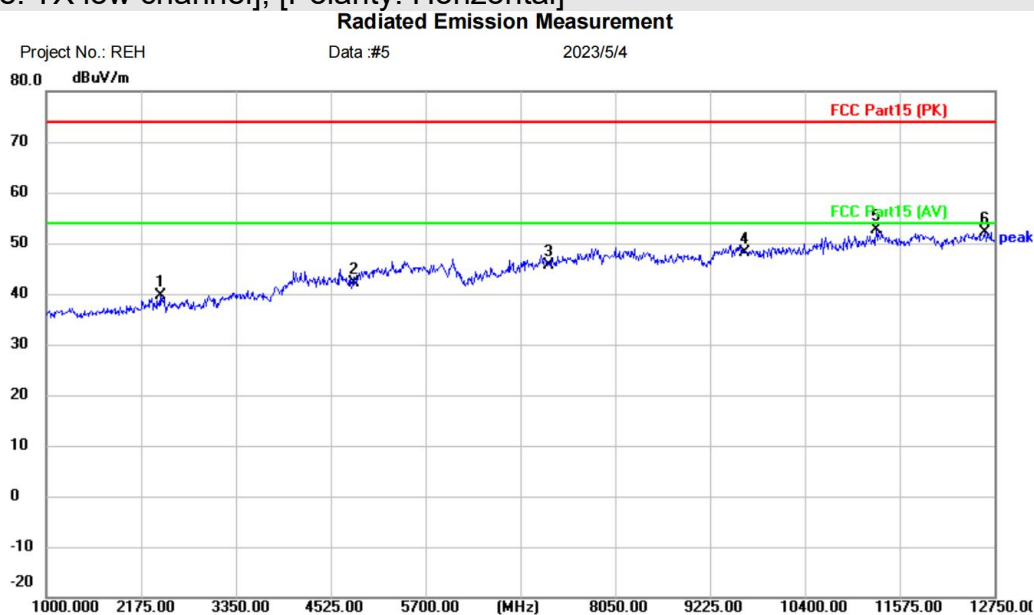

Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40		
M/N: GU10-5.5-RGB9T/B159/15D/CB		
Mode: 2.4GWiFi-11B-TX-L		
Note:		

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2410.000	40.88	-1.26	39.62	74.00	-34.38	peak	
2	4824.000	38.11	4.13	42.24	74.00	-31.76	peak	
3	7236.000	37.59	8.00	45.59	74.00	-28.41	peak	
4	9648.000	37.19	11.01	48.20	74.00	-25.80	peak	
5 *	11281.25	39.15	13.58	52.73	74.00	-21.27	peak	
6	12632.50	38.22	13.86	52.08	74.00	-21.92	peak	

*:Maximum data x:Over limit !:over margin


(Reference Only)

Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Vertical]

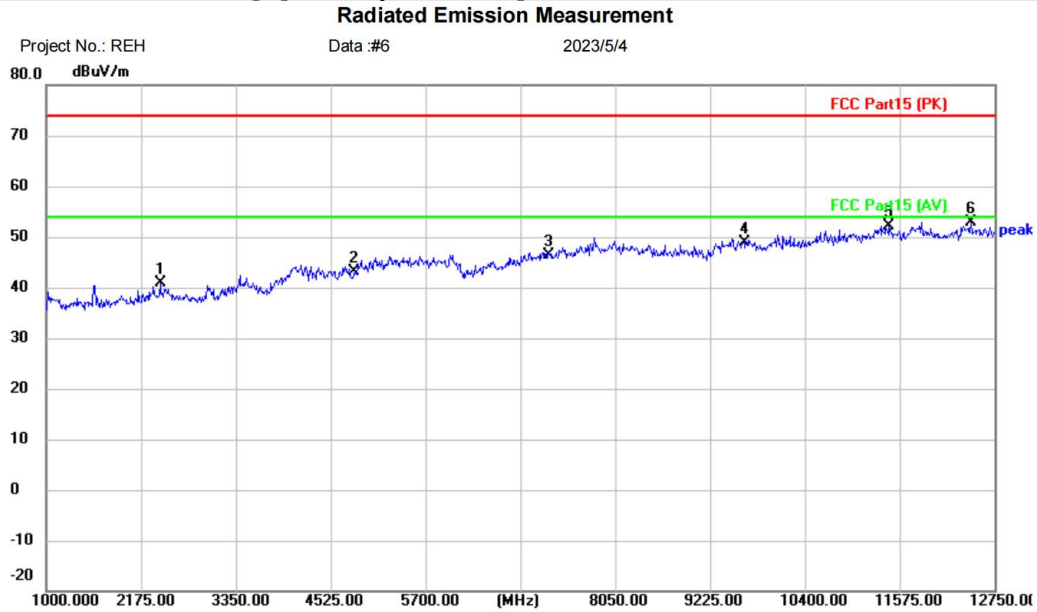

Site: Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40
M/N: GU10-5.5-RGB9T/B159/15D/CB
Mode: 2.4GWiFi-11B-TX-L
Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2410.000	42.10	-1.26	40.84	74.00	-33.16	peak	
2		4824.000	38.91	4.13	43.04	74.00	-30.96	peak	
3		7236.000	38.48	8.00	46.48	74.00	-27.52	peak	
4		9648.000	37.80	11.01	48.81	74.00	-25.19	peak	
5		11445.75	38.49	13.65	52.14	74.00	-21.86	peak	
6	*	12456.25	39.11	13.88	52.99	74.00	-21.01	peak	

*:Maximum data x:Over limit !:over margin (Reference Only)
Receiver: ESR_1 Spectrum Analyzer: FSP40

Test Result: Pass

[TestMode: TX mid channel]; [Polarity: Horizontal]

Radiated Emission Measurement

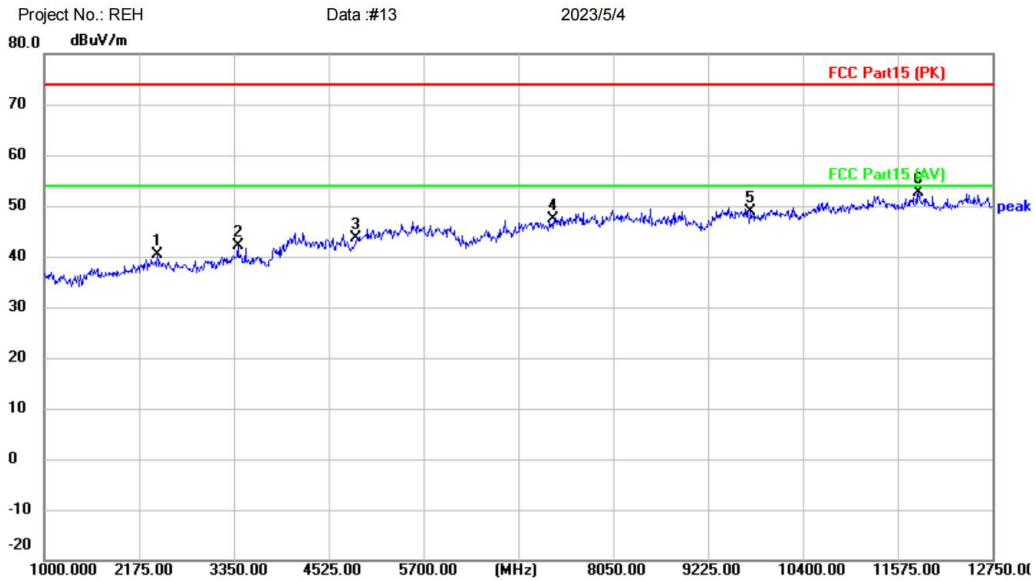

Site: Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40
M/N: GU10-5.5-RGB9T/B159/15D/CB
Mode: 2.4GWiFi-11B-TX-M
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2398.250	41.50	-1.14	40.36	74.00	-33.64	peak	
2		3397.000	43.82	-1.77	42.05	74.00	-31.95	peak	
3		4874.000	39.29	4.32	43.61	74.00	-30.39	peak	
4		7311.000	39.27	8.18	47.45	74.00	-26.55	peak	
5		9748.000	37.52	11.26	48.78	74.00	-25.22	peak	
6	*	11833.50	38.69	13.82	52.51	74.00	-21.49	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[TestMode: TX mid channel]; [Polarity: Vertical]

Radiated Emission Measurement



Site: Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40
M/N: GU10-5.5-RGB9T/B159/15D/CB
Mode: 2.4GWiFi-11B-TX-M
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		1587.500	44.87	-5.56	39.31	74.00	-34.69	peak	
2		3068.000	43.71	-2.53	41.18	74.00	-32.82	peak	
3		4874.000	39.60	4.32	43.92	74.00	-30.08	peak	
4		7311.000	38.30	8.18	46.48	74.00	-27.52	peak	
5		9748.000	36.14	11.26	47.40	74.00	-26.60	peak	
6	*	11281.25	38.99	13.58	52.57	74.00	-21.43	peak	

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Receiver: ESR_1

Spectrum Analyzer:

FSP40

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]

Radiated Emission Measurement



Site: Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40
M/N: GU10-5.5-RGB9T/B159/15D/CB
Mode: 2.4GWiFi-11B-TX-H
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2445.250	43.75	-1.65	42.10	74.00	-31.90	peak	
2		3491.000	43.77	-1.21	42.56	74.00	-31.44	peak	
3		4924.000	38.65	4.82	43.47	74.00	-30.53	peak	
4		7386.000	39.33	8.36	47.69	74.00	-26.31	peak	
5		9848.000	36.17	11.52	47.69	74.00	-26.31	peak	
6	*	11974.50	39.21	13.89	53.10	74.00	-20.90	peak	

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Receiver: ESR_1

Spectrum Analyzer:

FSP40

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]

Radiated Emission Measurement



Site: Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40
M/N: GU10-5.5-RGB9T/B159/15D/CB
Mode: 2.4GWiFi-11B-TX-H
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2410.000	43.20	-1.26	41.94	74.00	-32.06	peak	
2		4102.000	42.12	2.75	44.87	74.00	-29.13	peak	
3		4924.000	39.03	4.82	43.85	74.00	-30.15	peak	
4		7386.000	38.65	8.36	47.01	74.00	-26.99	peak	
5		9848.000	36.75	11.52	48.27	74.00	-25.73	peak	
6	*	11904.00	39.08	13.86	52.94	74.00	-21.06	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

Remark:

1. Final Level = Receiver Read level + Correct factor
2. Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

BlueAsia

12 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

12.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

12.2 BLOCK DIAGRAM OF TEST SETUP

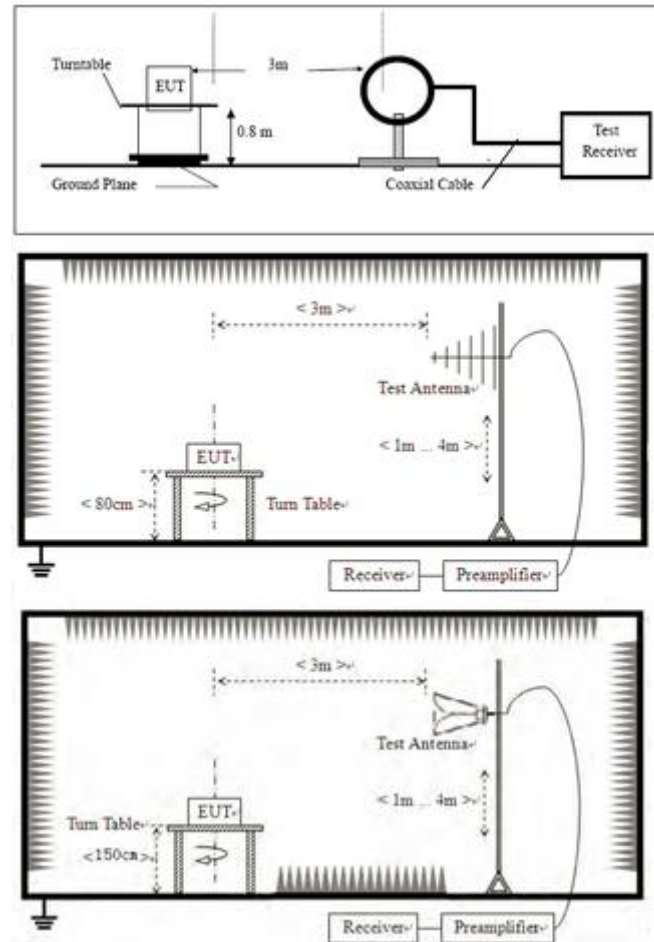

12.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$


Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

12.4 TEST DATA

[TestMode: TX b low channel]; [Polarity: Horizontal]

Radiated Emission Measurement

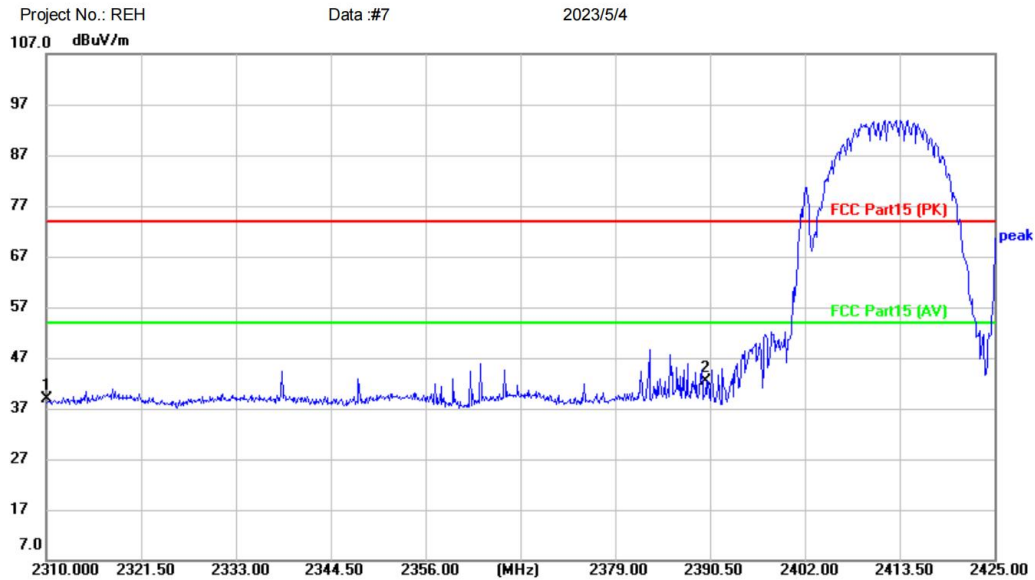

Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40
M/N: GU10-5.5-RGB9T/B159/15D/CB
Mode: 2.4GWiFi-11B-TX-L
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		2310.000	43.21	-4.27	38.94	74.00	-35.06	peak
2	*	2390.000	46.15	-3.82	42.33	74.00	-31.67	peak

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1


Spectrum Analyzer:

FSP40

Test Result: Pass

[TestMode: TX b low channel]; [Polarity: Vertical]

Radiated Emission Measurement

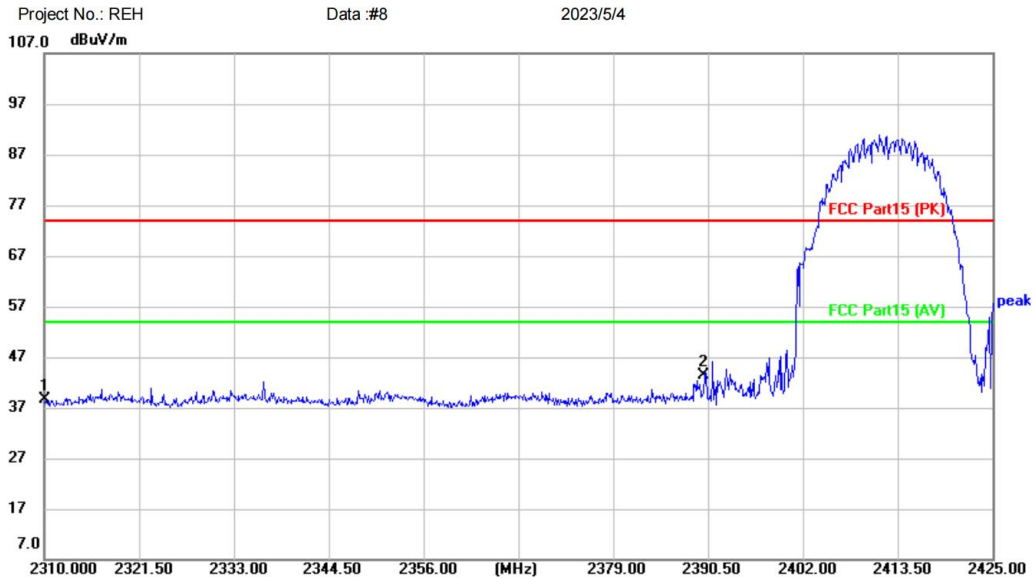

Site Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40
M/N: GU10-5.5-RGB9T/B159/15D/CB
Mode: 2.4GWiFi-11B-TX-L
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2310.000	42.78	-4.27	38.51	74.00	-35.49	peak	
2	*	2390.000	47.13	-3.82	43.31	74.00	-30.69	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)


Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[TestMode: TX b high channel]; [Polarity: Vertical]

Radiated Emission Measurement

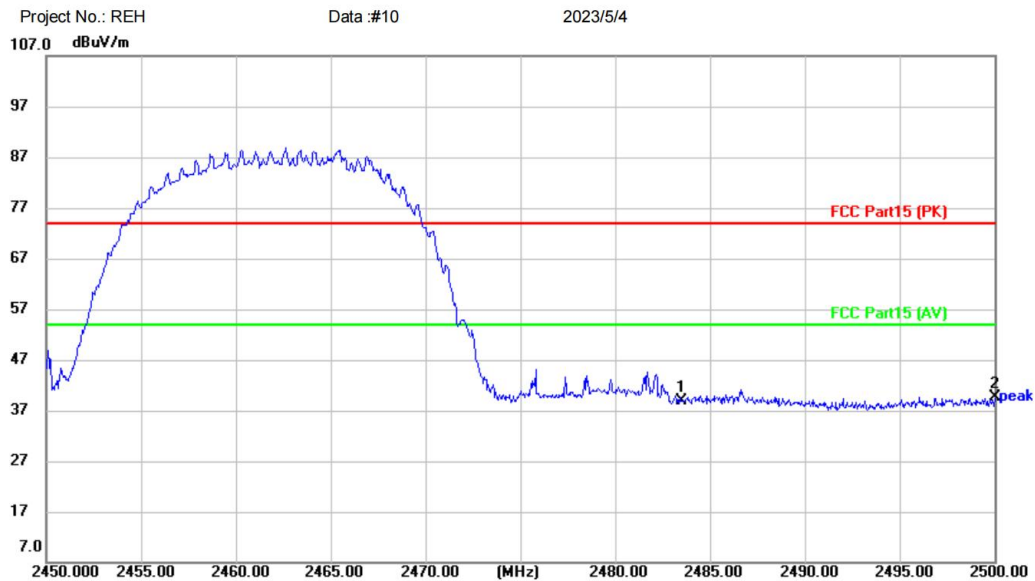

Site Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40
M/N: GU10-5.5-RGB9T/B159/15D/CB
Mode: 2.4GWiFi-11B-TX-H
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	42.88	-3.96	38.92	74.00	-35.08	peak	
2	*	2500.000	43.65	-4.00	39.65	74.00	-34.35	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass