

# Test Report

Report Number:

**F240384E5**

Equipment under Test (EUT):

**Two Wire Transmitter  
Liquiline CM42B**

**Applicant:**

**Endress+Hauser Conducta GmbH+Co.KG**

**Manufacturer:**

**Endress+Hauser Conducta GmbH+Co.KG**



Deutsche  
Akkreditierungsstelle  
D-PL-17186-01-00

## References

- [1] **ANSI C63.4:2014** American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- [2] **FCC 47 CFR Part 2:** General Rules and Regulations
- [3] **FCC 47 CFR Part 15:** Radio Frequency Devices (Subpart B)
- [4] **ICES-003 Issue 7: (October 2020)** Spectrum Management and Telecommunications. Interference-Causing Equipment Standard. Information Technology Equipment (Including Digital Apparatus) —Limits and Methods of Measurement

## Test Result

The requirements of the tests performed as shown in the overview (clause 4) were fulfilled by the equipment under test. The complete test results are presented in the following.

“Passed” indicates that the equipment under test conforms with the relevant limits of the testing standard without taking any measurement uncertainty into account as stated in clause 10.2.8.2 of ANSI C63.4 (2014). However, the measurement uncertainty is calculated and shown in this test report.

Tested by:

Signature

Written by:

Signature

Reviewed and  
approved by:

Signature

**This test report is only valid in its original form.**

Any reproduction of its contents in extracts without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT NUMBER.

<b>Contents:</b>	<b>Page</b>
1 Identification .....	5
1.1 Applicant.....	5
1.2 Manufacturer .....	5
1.3 Test Laboratory .....	5
1.4 EUT (Equipment under Test) .....	6
1.5 Technical Data of Equipment .....	7
1.6 Dates .....	7
2 Operational States .....	8
3 Additional Information .....	8
4 Overview.....	9
5 Results.....	10
5.1 Test setups .....	10
5.2 Radiated emissions .....	15
5.3 AC power-line conducted emissions .....	21
6 Measurement Uncertainties .....	23
7 Test Equipment used for Tests .....	24
8 Test site verification .....	24
9 Report History.....	25
10 List of Annexes .....	25

# 1 Identification

## 1.1 Applicant

Name:	Endress+Hauser Conducta GmbH+Co. KG
Address:	Dieselstrasse 24, 70839 Gerlingen
Country:	Germany
Name for contact purposes:	Mr. Henryk HOFMANN
Phone:	+49 7156 209 10211
eMail address:	henryk.hofmann@endress.com
Applicant represented during the test by the following person:	-

## 1.2 Manufacturer

Name:	Endress+Hauser Conducta GmbH+Co. KG
Address:	Dieselstrasse 24, 70839 Gerlingen
Country:	Germany
Name for contact purposes:	Mr. Henryk HOFMANN
Phone:	+49 7156 209 10211
eMail address:	henryk.hofmann@endress.com
Manufacturer represented during the test by the following person:	-

## 1.3 Test Laboratory

The tests were carried out by: **PHOENIX TESTLAB GmbH**  
**Königswinkel 10**  
**32825 Blomberg**  
**Germany**

accredited by Deutsche Akkreditierungsstelle GmbH (DAkkS) according to DIN EN ISO/IEC 17025:2018. The accreditation is only valid for the scope of accreditation listed in the annex of the certificate D-PL-17186-01-00. FCC Test Firm Designation Number DE0004, FCC Test Firm Registration Number 469623, CAB Identifier DE0003 and ISED# 3469A.

## 1.4 EUT (Equipment under Test)

Test object: *	Two Wire Transmitter
Model name: *	Liquiline CM42B
Model number: *	CM42B
Order number: *	CM42B
FCC ID: *	2AKGY-CM42B (FCC company number 2AKGY, Product number: -CM42B)
IC certification number: *	22173-CM42B (IC company number: 22173, Product number: CM42B)
PMN: *	CM42B
HVIN: *	CM42B
FVIN: *	SoftDevice S132 Version: 7.2.0

\* Declared by the applicant

		EUT number	
		1	2
Serial number: *		WB000805G00	-
PCB identifier: *	Board 1	VXCM1	-
	Board 2	VICO1	-
	Board 3	VD2W1	-
Hardware version: *	Board 1	Vx.04.xx	
	Board 2	Vx.03.xx	
	Board 3	Vx.04.xx	
Software version: *		SoftDevice S132 Version: 7.2.0	-

\* Declared by the applicant

One EUT was used for all tests.

Note: PHOENIX TESTLAB GmbH does not take samples. The samples used for tests are provided exclusively by the applicant.

## 1.5 Technical Data of Equipment

General EUT data			
Power supply EUT: *	DC		
Supply voltage EUT: *	U <sub>nom</sub> = 24 V <sub>DC</sub>	U <sub>min</sub> = 17 V <sub>DC</sub>	U <sub>max</sub> = 30 V <sub>DC</sub>
Temperature range: *	-30 °C to +70 °C		
Lowest / highest internal clock frequency:	32 kHz * / 2480 MHz		

\* Declared by the applicant

Ports / Connectors				
Identification	Connector		Length during test	Shielding (Yes / No)
	EUT	Ancillary		
SA1 – Current output *	Fixed cable feed-through	4 mm laboratory plug	5 m	No
SA2 – Current output *	Fixed cable feed-through	4 mm laboratory plug	5 m	No
Sensor input	Fixed cable feed-through	Memocheck CYP02E	5 m	Yes
Cable feed-through 4 *	Left open	Left open	-	-
Cable feed-through 5 *	Left open	Left open	-	-
Functional earth	Customized screw connector	4 mm laboratory plug	5 m	No

\* Declared by the applicant

Equipment used for testing	
USB-to-BLE-adapter * <sup>1</sup>	USB_BT_053
Test laptop * <sup>2</sup>	Fujitsu Lifebook U748
Test software * <sup>1</sup>	"MasterTestGUI"
AC adapter * <sup>2</sup>	PHOENIX CONTACT MINI-PS.100-240AC/24DC/1.3

\*<sup>1</sup> Provided by the applicant

\*<sup>2</sup> Provided by the laboratory

Ancillary Equipment	
Sensor *	Memocheck CYP02E
-	-

\* Provided by the applicant

## 1.6 Dates

Date of receipt of test sample:	12.11.2024
Start of test:	15.11.2024
End of test:	20.11.2024

## 2 Operational States


### Description of function of the EUT:

The device is a two-wire transmitter for connecting digital sensors with Memosens technology or analog sensors. It is configurable and has a current output of 4...20 mA with optional HART communication. It can be operated via a local display or optionally via smartphone or other mobile devices using Bluetooth (BTLE).

### The following states were defined as the operating conditions:

The EUT was supplied by 24 V<sub>DC</sub> during all tests. For the radiated emission tests a connection to a test laptop via an external antenna was established. Therefore Bluetooth® low energy with a data rate of 1 Mbps was used. The sensor was simulating measuring data and the display was active.

### The system was setup as follows:

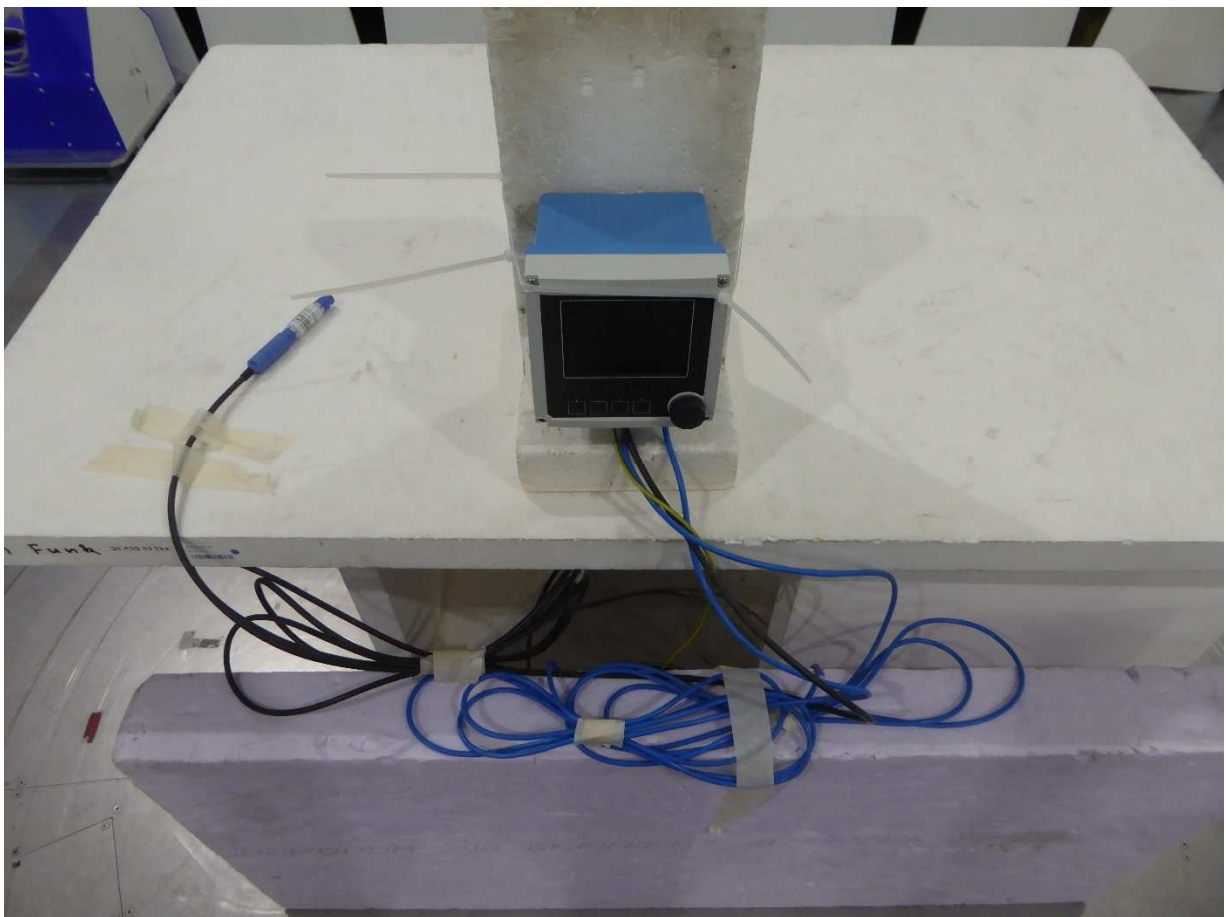

The EUT

## 3 Additional Information

The EUT was not labeled as required by FCC / IC.



## 4 Overview

Conducted emissions    FCC 47 CFR Part 15 section 15.107 (a), (b) [3] ICES-003 Issue 7 section 3.2.1[4]					
Application	Frequency range	Limits	Reference standard	Tested EUT	Status
AC supply line Class B	0.15 to 0.5 MHz	66 to 56 dB(μV) QP*	ANSI C63.4	1	Passed
	0.5 to 5 MHz	56 to 46 dB(μV) AV*			
	5 to 30 MHz	56 dB(μV) QP 46 dB(μV) AV 60 dB(μV) QP 50 dB(μV) AV			
*: Decreases with the logarithm of the frequency					

Radiated emissions FCC 47 CFR Part 15 section 15.109 (a), (b) [3]					
Application	Frequency range	Limits	Reference standard	Tested EUT	Status
Radiated Emission Class B	30 to 88 MHz	40.0 dB(μV/m) QP at 3 m	ANSI C63.4	1	Passed
	88 to 216 MHz	43.5 dB(μV/m) QP at 3 m			
	216 to 960 MHz	46.0 dB(μV/m) QP at 3 m			
	960 to 1000 MHz	54.0 dB(μV/m) QP at 3 m			
	above 1000 MHz	54.0 dB(μV/m) AV at 3 m and 74.0 dB(μV/m) PK at 3 m			

Radiated emissions ICES-003 Issue 7 section 3.2.2 [4]					
Application	Frequency range	Limits	Reference standard	Tested EUT	Status
Radiated Emission Class B	30 to 88 MHz	40.0 dB(μV/m) QP at 3 m	ANSI C63.4	1	Passed
	88 to 216 MHz	43.5 dB(μV/m) QP at 3 m			
	216 to 230 MHz	46.0 dB(μV/m) QP at 3 m			
	230 to 960 MHz	47.0 dB(μV/m) QP at 3 m			
	960 to 1000 MHz	54.0 dB(μV/m) QP at 3 m			
	above 1000 MHz	54 dB(μV/m) AV at 3 m and 74 dB(μV/m) PK at 3 m			

Remark: The highest internal frequency of the EUT is 2.48 GHz.  
Therefore the radiated emission measurement must be carried out up to 5<sup>th</sup> of the highest internal clock frequency up to 12.4 GHz, in this case the measurement was carried out up to 13 GHz.

The EUT was classified by the applicant as CLASS B equipment.

## 5 Results

### 5.1 Test setups

#### 5.1.1 Radiated: 30 MHz to 1 GHz


##### 5.1.1.1 Preliminary and final measurement 30 MHz to 1 GHz

The preliminary and final measurements are performed in a semi-anechoic chamber with a metal ground plane at a measuring distance of 3 meters. Table-top devices are set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices are placed directly on the turntable / ground plane. The setup of the equipment under test is in accordance with [1].

During the tests the EUT is rotated in the range of 0 ° to 360 °, the measuring antenna is set to horizontal and vertical polarization and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI receiver is set to the following values:

Test	Frequency range	Step-size	Resolution bandwidth	Measuring time	Detector
Preliminary measurement	30 MHz to 1 GHz	30 kHz	120 kHz	-	Peak Average
Frequency peak search	$\pm 120$ kHz	10 kHz	120 kHz	1 s	Peak
Final measurement	30 MHz to 1 GHz	-	120 kHz	1 s	QuasiPeak

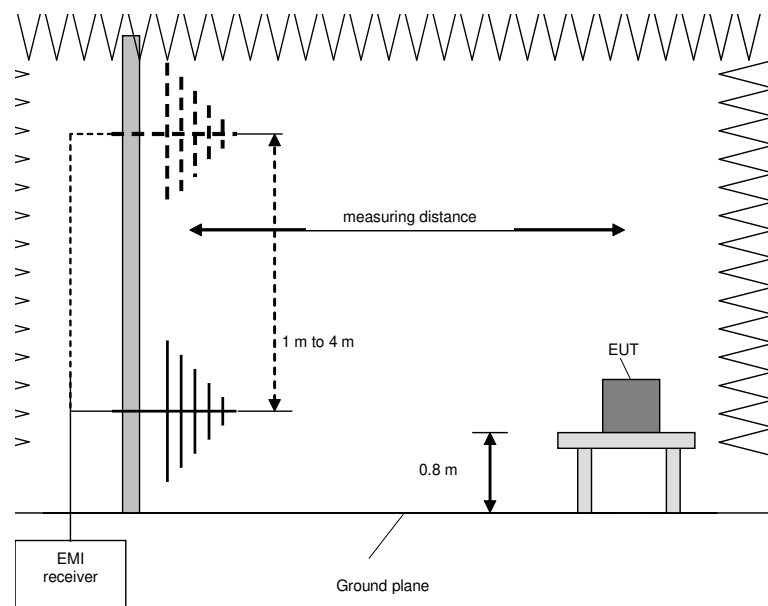

Procedure preliminary measurement:

The following procedure is used:

- 1) Set the measuring antenna to 1 m height.
- 2) Monitor the frequency range at horizontal polarization of the measuring antenna and an EUT / turntable azimuth of 0 °.
- 3) Rotate the EUT by 360° to maximize the detected signals.
- 4) Repeat steps 2 to 3 with the vertical polarization of the measuring antenna.
- 5) Increase the height of the measuring antenna for 0.5 m and repeat steps 2 to 4 until the final height of 4 m is reached.
- 6) The highest values for each frequency are saved by the software, including the measuring antenna height and polarization and the turntable azimuth for that value.

Procedure final measurement:

The following procedure is used:

- 1) Select the highest frequency peaks (lowest margin to the limit) for the final measurement.
- 2) The software determines the exact peak frequencies by doing a partial scan with reduced step size of the pre-scan of the selected peaks.
- 3) If the EUT is portable or ceiling mounted, find the worst-case EUT orientation (x,y,z) for the final test.
- 4) The worst-case measuring antenna height is found via varying the height by +/- 0.5 m from the value obtained in the preliminary measurement while monitoring the emission level.
- 5) The worst-case turntable position is found via varying the turntable azimuth by +/- 30° from the value obtained in the preliminary measurement while monitoring the emission level.
- 6) The final measurement is performed at the worst-case measuring antenna height and the worst-case turntable azimuth.
- 7) Steps 2 to 6 are repeated for each frequency peak selected in step 1.

## 5.1.2 Radiated: 1 GHz to 40 GHz


### 5.1.2.1 Preliminary and final measurement 1 to 40 GHz

The preliminary and final measurements are performed in a semi-anechoic chamber at a measuring distance of 3 meters, with floor absorbers between EUT and measuring antenna. Table-top devices are set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices are placed directly on the turntable / ground plane. The setup of the equipment under test is in accordance with [1].

During the tests the EUT is rotated in the range of 0 ° to 360 °, the measuring antenna is set to horizontal and vertical polarization and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions. While changing the height, the measuring antenna gets tilted so that it is always aiming at the EUT.

The resolution bandwidth of the EMI receiver is set to the following values:

Test	Frequency range	Step-size	Resolution bandwidth	Measuring time	Detector
Preliminary measurement	1 - 40 GHz	250 kHz	1 MHz	-	Peak Average
Frequency peak search	+ / - 1 MHz	50 kHz	1 MHz	100 ms	Peak
Final measurement	1 - 40 GHz	-	1 MHz	100 ms	Peak Average

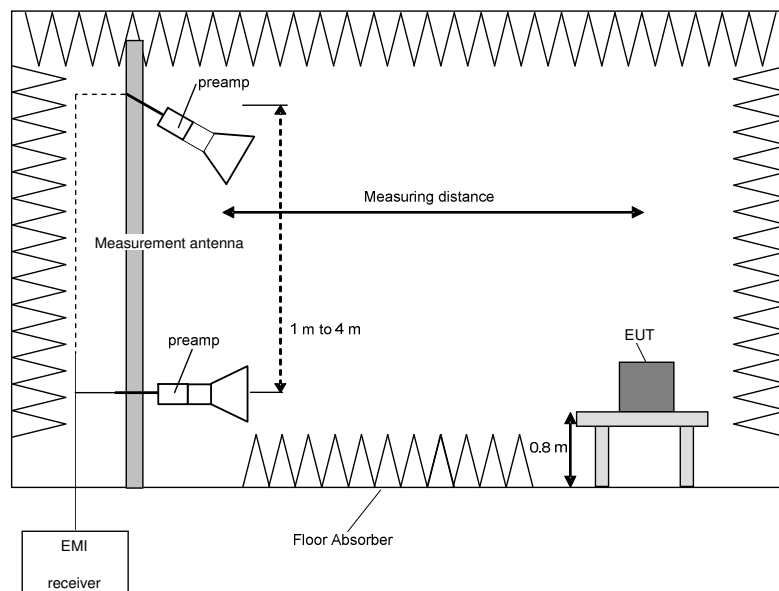

Procedure preliminary measurement:

The following procedure is used:

- 1) Set the measuring antenna to 1 m height.
- 2) Monitor the frequency range at horizontal polarization of the measuring antenna and an EUT / turntable azimuth of 0 °.
- 3) Rotate the EUT by 360° to maximize the detected signals.
- 4) Repeat steps 2 to 3 with the vertical polarization of the measuring antenna.
- 5) Increase the height of the measuring antenna for 0.5 m and repeat steps 2 to 4 until the final height of 4 m is reached.
- 6) The highest values for each frequency are saved by the software, including the measuring antenna height and polarization and the turntable azimuth for that value.

Procedure final measurement:

The following procedure is used:


- 1) Select the highest frequency peaks (lowest margin to the limit) for the final measurement.
- 2) The software determines the exact peak frequencies by doing a partial scan with reduced step size of the pre-scan of the selected peaks.
- 3) If the EUT is portable or ceiling mounted, find the worst-case EUT orientation (x,y,z) for the final test.
- 4) The worst-case measuring antenna height is found via varying the height by +/- 0.5 m from the value obtained in the preliminary measurement while monitoring the emission level.
- 5) The worst-case turntable position is found via varying the turntable azimuth by +/- 30° from the value obtained in the preliminary measurement while monitoring the emission level.
- 6) The final measurement is performed at the worst-case measuring antenna height and the worst-case turntable azimuth.
- 7) Steps 2 to 6 are repeated for each frequency peak selected in step 1.

### 5.1.3 Conducted: AC power line

The test is carried out in a shielded chamber. Table-top devices are set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm above the ground plane. Floor-standing devices are placed directly on the ground plane. In case of DC powered equipment, which is not exclusively powered by a battery, it is connected to the LISN via a suitable AC/DC adaptor. The setup of the equipment under test is in accordance with [1].

The frequency range 150 kHz to 30 MHz is measured with an EMI receiver set to MAX hold mode with Peak and Average detectors and a resolution bandwidth of 9 kHz. A scan is carried out on the phase and neutral line of the AC mains network. If emissions less than 10 dB below the appropriate limit are detected, these emissions are measured with an Average and Quasi-Peak detector on all lines.

Frequency range	Resolution bandwidth	Measuring time
150 kHz to 30 MHz	9 kHz	5 s

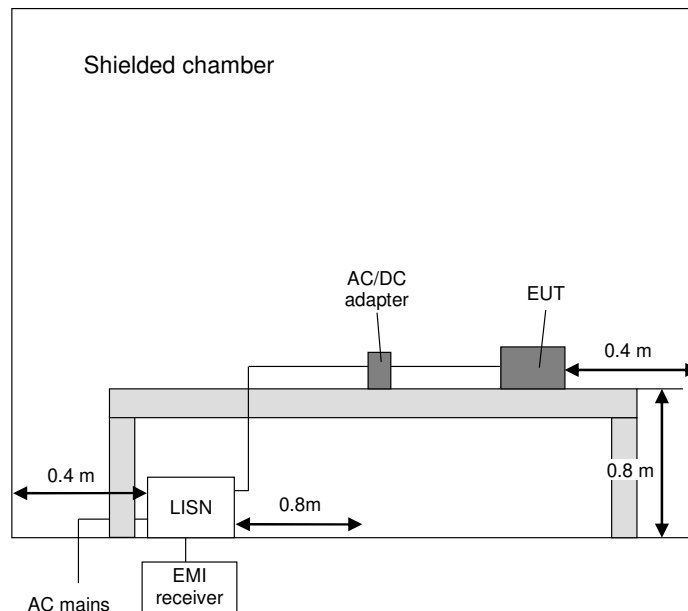

## 5.2 Radiated emissions

### 5.2.1 Test setup (Maximum unwanted emissions)

Test setup (Maximum unwanted emissions)			
Used	Setup	See sub-clause	Comment
<input checked="" type="checkbox"/>	Radiated: 30 MHz to 1 GHz / 1 GHz to 40 GHz	5.1.1 / 5.1.2	-

### 5.2.2 Test method (Maximum unwanted emissions)

☒ Test method (radiated) see sub-clause 5.1.1 / 5.1.2 as described herein

### 5.2.3 Test results (Maximum unwanted emissions)

#### 5.2.3.1 Test results (30 MHz – 1 GHz)

Ambient temperature:	22 °C
Relative humidity:	31 %

Date:	15.11.2024
Tested by:	B. ROHDE

Position of EUT: For tests for f between 30 MHz to 1 GHz, the EUT was set-up on a table with a height of 80 cm. The distance between EUT and antenna was 3 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in the annex A in the test report.

Test record: Plots for each frequency range are submitted below.

Remark: Only the nominal position was tested.

Calculations:

Result [dBμV/m] = Reading [dBμV] + Correction [dB/m]


Correction [dB/m] = AF [dB/m] + Cable attenuation [dB] + optional preamp gain [dB]

Margin [dB] = Limit [dBμV/m] - Result [dBμV/m]

The results are presented on the following page.

The measured points and the limit line in the following diagram refer to the standard measurement of the emitted interference in compliance with the above-mentioned standard. The measured points marked with “◇” are the measured results of the standard subsequent measurement in a semi-anechoic chamber.

### Measurement plot:

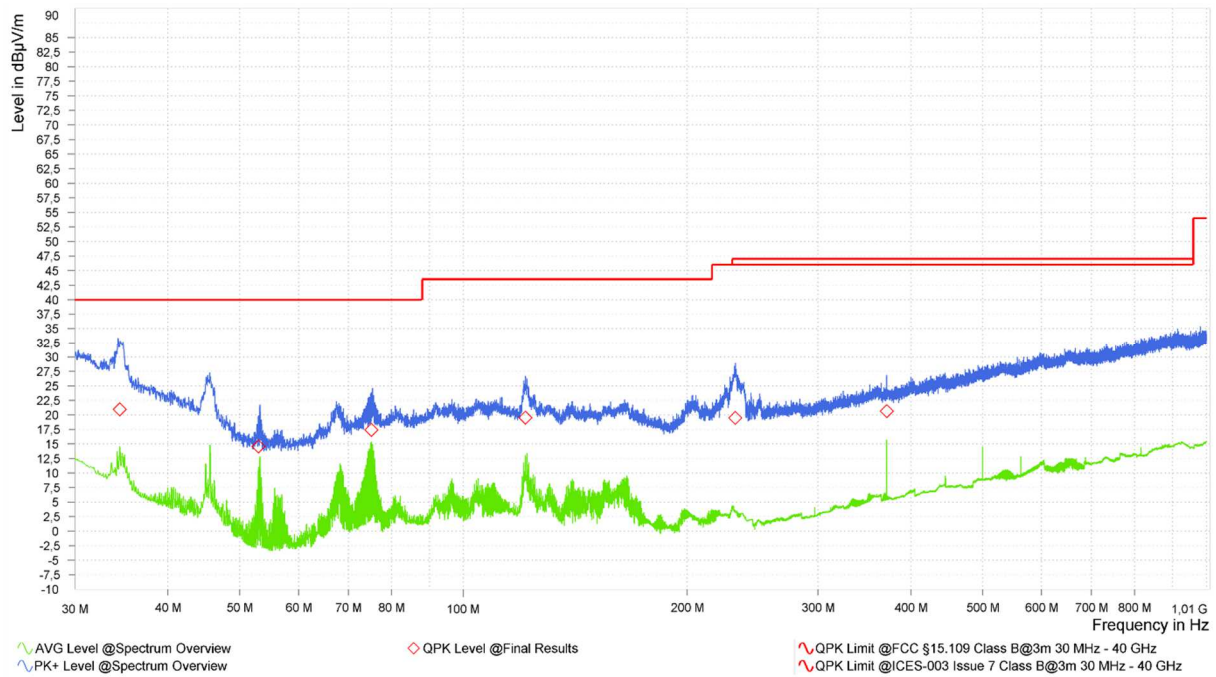

### Result tables:

FCC §15.109 Class B@3m limit:

Frequency [MHz]	Result (QP) [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Correction [dB/m]	Antenna height [m]	Azimuth [deg]	Pol. (H/V)
34.470	21.0	40.0	19.0	23.9	1.11	146	V
52.980	14.6	40.0	25.4	12.4	1.07	201	V
75.210	17.4	40.0	22.6	15.7	2.19	352	H
121.200	19.5	43.5	24.0	17.4	1.06	0	V
232.290	19.5	47.0	27.5	16.7	1.54	58	H
371.280	20.6	47.0	26.4	20.9	2.47	135	V

Test result: Passed

The next result table is presented on the following page.



ICES-003 Issue 7 Class B@3m limit:

Frequency [MHz]	Result (QP) [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Correction [dB/m]	Antenna height [m]	Azimuth [deg]	Pol. (H/V)
34.470	21.0	40.0	19.0	23.9	1.11	146	V
52.980	14.6	40.0	25.4	12.4	1.07	201	V
75.210	17.4	40.0	22.6	15.7	2.19	352	H
121.200	19.5	43.5	24.0	17.4	1.06	0	V
232.290	19.5	46.0	26.5	16.7	1.54	58	H
371.280	20.6	47.0	26.4	20.9	2.47	135	V

Test result: Passed

Test equipment (please refer to chapter 7 for details)
1 - 9

### 5.2.3.2 Test results (radiated 1 to 40 GHz)

Ambient temperature:	22 °C
Relative humidity:	31 %

Date:	15.11.2024
Tested by:	B. ROHDE

Position of EUT: For tests for f between 1 GHz and the 5<sup>th</sup> harmonic, the EUT was set-up on a table with a height of 80 cm. The distance between EUT and antenna was 3 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in the annex A in the test report.

Test record: Plots for each frequency range are submitted below.

Remark: Only the nominal position was tested.

Calculation:

Max Peak [dBμV/m] = Reading [dBμV] + Correction [dB/m]

Average [dBμV/m] = Reading [dBμV] + Correction [dB/m]

Correction [dB/m] = AF [dB/m] + Cable attenuation [dB] + optional preamp gain [dB] + DCCF\* [dB]  
\* (if applicable – only for Average values, that are fundamental related)

Margin [dB] = Limit [dBμV/m] – Max Peak | Average [dBμV/m]


The curves in the diagram only represent the maximum measured value for each frequency point of all preliminary measurements, which were carried out with various EUT and antenna positions.

The top measured curve represents the peak measurement. The measured points marked with "◇" are frequency points for the final peak detector measurement. These values are indicated in the following table. The bottom measured curve represents the average measurement. The measured points marked with "◇" are frequency points for the final average detector measurement.

The results are presented on the following pages.


## Measurement plots:

Spurious emissions from 1 GHz to 4 GHz:

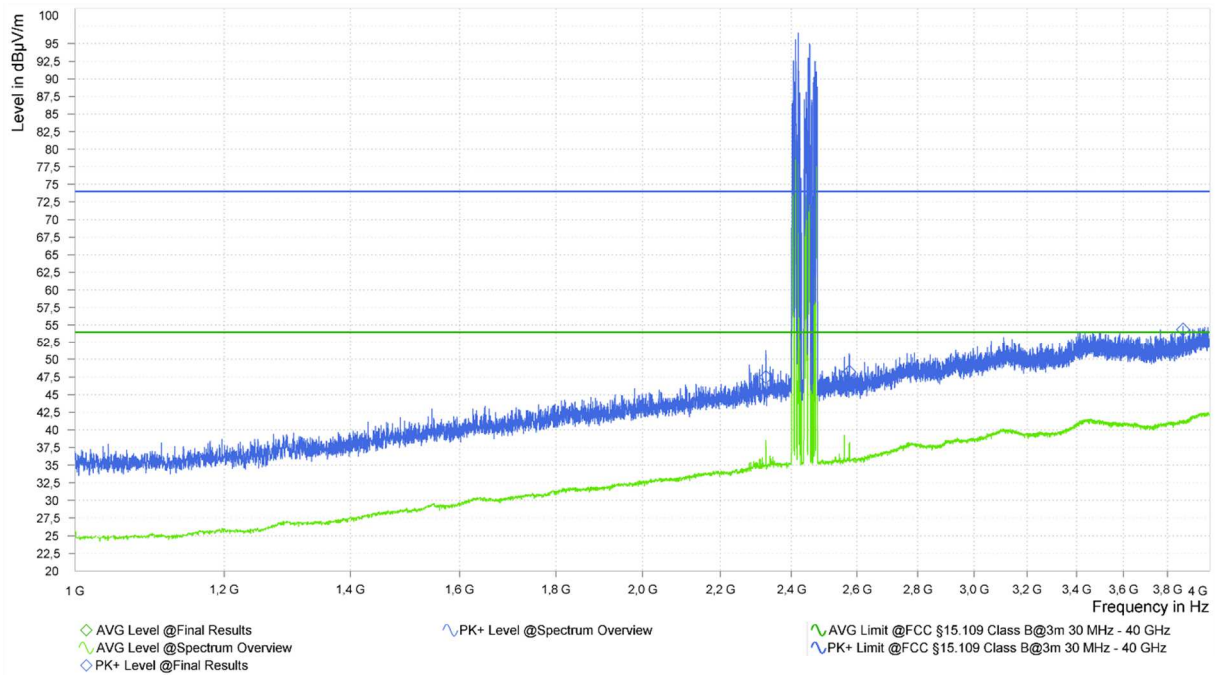

Remark: Emissions above the limit line are caused by the wanted BLE signal

Spurious emissions from 4 GHz to 13 GHz:

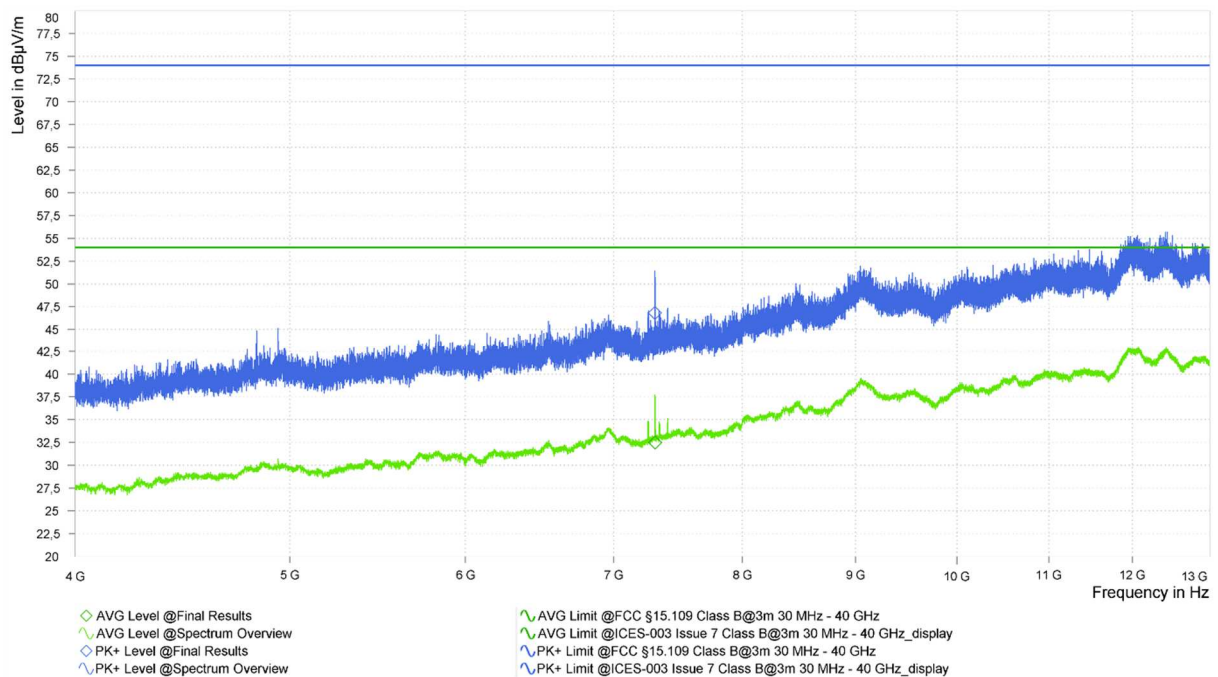

**Result table:**

Frequency [MHz]	MaxPeak [dB(μV/m)]	Average [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [m]	Pol [H/V]	Azimuth [deg]	Corr. [dB/m]
2325.750	47.5	-	74.0	26.5	1.00	H	33	34.4
2575.750	48.2	-	74.0	25.8	1.15	H	358	34.8
3872.000	54.3	-	74.0	19.7	1.52	V	254	39.2
7307.250	46.8	-	74.0	27.2	3.17	H	351	13.1
7308.500	-	37.4	54.0	16.6	3.23	H	2	18.0
12414.000	53.1	-	74.0	20.9	2.94	V	231	21.8

Test result: Passed

Test equipment (please refer to chapter 7 for details)

3 - 12

## 5.3 AC power-line conducted emissions

### 5.3.1 Test setup (Conducted emissions on power supply lines)

Test setup (Conducted emissions on power supply lines)			
Used	Setup	See sub-clause	Comment
<input checked="" type="checkbox"/>	Conducted: AC power line	5.1.3	-
<input type="checkbox"/>	Not applicable, because ...	-	-

### 5.3.2 Test method (Conducted emissions on power supply lines)

Test setup (Conducted emissions on power supply lines)				
Used	Clause [1]	Name of method	Sub-clause	Comment
<input checked="" type="checkbox"/>	7.3; 11.5; 11.8	Tabletop equipment testing	5.1.3	AC power adaptor *
<input type="checkbox"/>	7.3; 11.6; 11.8	Floor-standing equipment testing	-	-


\* The AC power adapter as declared in clause 1.5 of this test report was used for the tests.  
The power adapter itself was supplied by 120V<sub>AC</sub> 60Hz.

### 5.3.3 Test results (Conducted emissions on power supply lines)

Ambient temperature:	22 °C
Relative humidity:	27 %

Date:	20.11.2024
Tested by:	B. ROHDE

The curves in the diagrams below only represent for each frequency point the maximum measured value of all preliminary measurements which were made for each power supply line. The top measured curve represents the peak measurement and the bottom measured curve the average measurement. The quasi-peak measured points are marked by ◆ and the average measured points by ▼.

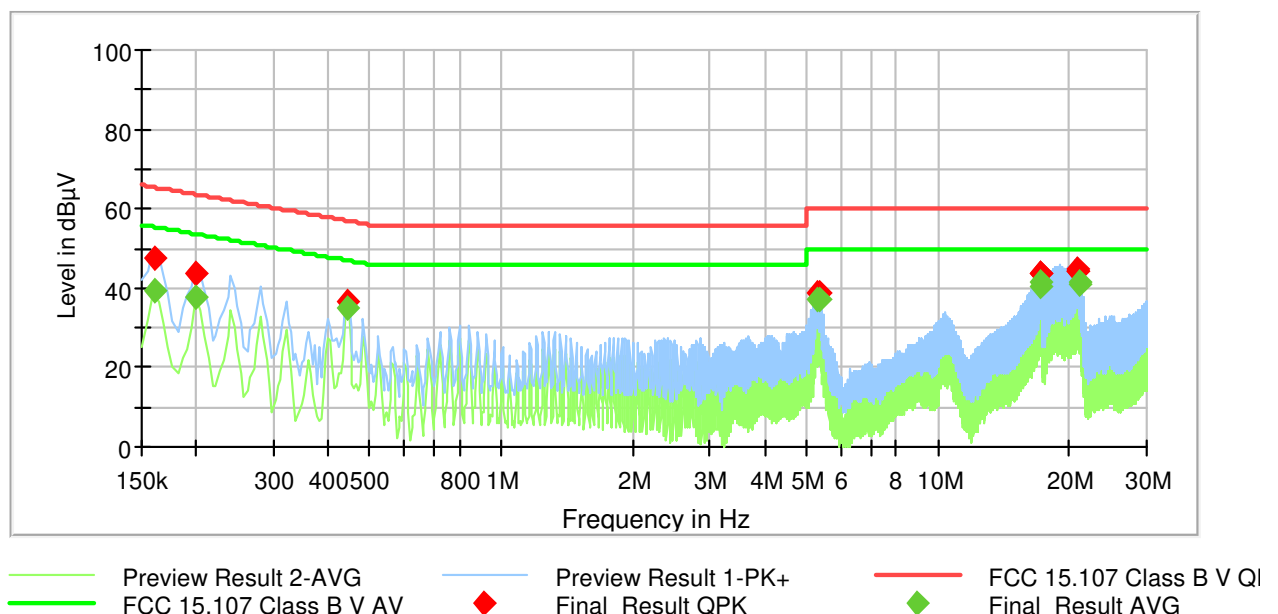

**Result table:**

Frequency [MHz]	QuasiPeak [dB(μV)]	Average [dB(μV)]	Limit [dB(μV)]	Margin [dB]	Line	PE	Corr. [dB]
0.160800	47.38	-	65.42	18.04	L1	GND	9.8
0.160800	-	39.40	55.42	16.03	L1	GND	9.8
0.200400	43.67	-	63.59	19.93	L1	GND	9.8
0.200400	-	37.65	53.59	15.94	L1	GND	9.8
0.442500	36.65	-	57.01	20.37	N	GND	9.9
0.441600	-	35.22	47.03	11.81	L1	GND	9.9
5.291700	38.95	-	60.00	21.05	L1	GND	10.3
5.291700	-	37.31	50.00	12.69	L1	GND	10.3
5.331300	38.69	-	60.00	21.31	L1	GND	10.3
5.332200	-	37.02	50.00	12.98	L1	GND	10.3
17.155500	43.47	-	60.00	16.53	L1	GND	10.9
17.196000	43.88	-	60.00	16.12	L1	GND	10.9
17.196900	-	40.22	50.00	9.78	N	GND	10.9
17.235600	-	41.56	50.00	8.44	L1	GND	10.8
20.763600	44.37	-	60.00	15.63	N	GND	11.0
20.803200	44.49	-	60.00	15.51	N	GND	11.0
20.924700	44.80	-	60.00	15.20	L1	GND	10.9
21.005700	-	41.16	50.00	8.84	N	GND	11.0
21.044400	-	41.45	50.00	8.55	L1	GND	10.9

Test result: Passed

Test equipment (please refer to chapter 7 for details)

13 - 18

## 6 Measurement Uncertainties

Conducted measurements		
Measurement method	Standard used for calculating measurement uncertainty	Expanded measurement uncertainty (95 %) $U_{lab}$
Conducted emissions from 150 kHz to 30 MHz with LISN	CISPR 16-4-2	2.8 dB

Radiated measurements		
Radiated field strength M276		
R&S HL562E @ 3 m 30 MHz – 1 GHz	CISPR 16-4-2	4.8 dB
R&S HL050 @ 3 m	-	
1 – 6 GHz	CISPR 16-4-2	5.1 dB
6 – 18 GHz	CISPR 16-4-2	5.4 dB
Flann Standard Gain Horns 18 – 40 GHz	-	5.9 dB

## 7 Test Equipment used for Tests

No.	Test equipment	Type	Manufacturer	Serial No.	PM. No.	Cal. Date	Cal Due
1	Attenuator 6 dB	WA2-6	Weinschel	-	482793	Calibration not necessary	
2	Ultralog antenna	HL562E	Rohde & Schwarz	101079	482978	24.04.2024	04.2027
3	EMC test software	Elektra V5.05.00	Rohde & Schwarz	-	483755	Calibration not necessary	
4	RF switch matrix	OSP220	Rohde & Schwarz	101391	482976	Calibration not necessary	
5	Turntable	TT3.0-3t	Maturo	825/2612/.01	483224	Calibration not necessary	
6	Antenna support	BAM 4.5-P-10kg	Maturo	222/2612.01	483225	Calibration not necessary	
7	Controller	NCD	Maturo	474/2612.01	483226	Calibration not necessary	
8	Semi anechoic chamber M276	SAC5-2	Albatross Projects	C62128-A540-A138-10-0006	483227	Calibration not necessary	
9	EMI test receiver	ESW44	Rohde & Schwarz	101828	482979	21.02.2024	02.2026
10	Low noise amplifier 100 MHz - 18 GHz	LNA-30-00101800-25-10P	Narda-Miteq	2110917	482967	20.02.2024	02.2026
11	Log.-Per. antenna	HL050	Rohde & Schwarz	100908	482977	22.09.2022	09.2025
12	High-pass filter	WHKX4.0/18G-8SS	Wainwright	1	480587	Calibration not necessary	
13	LISN	NSLK8128	Schwarzbeck	8128161	480138	28.02.2024	02.2026
14	AC power supply	AC6803A AC Quelle 2000VA	Keysight	JPVJ002509	482350	Calibration not necessary	
15	Software	EMC32	Rohde & Schwarz	100061	481022	Calibration not necessary	
16	Shielded chamber M4	B83117-S1-X158	Siemens	190075	480088	Calibration not necessary	
17	EMI receiver / Spectrum analyser	ESIB 26	Rohde & Schwarz	100292	481182	22.02.2024	02.2026
18	Transient filter limiter	CFL 9206A	Teseq GmbH	38268	481982	28.03.2024	03.2026

## 8 Test site verification

Test equipment	PM. No.	Frequency range	Type of validation	According to	Val. Date	Val Due
Shielded chamber M4	480088	9 kHz – 30 MHz	GND-Plane	ANSI C63.4-2014	08.11.2022	07.11.2025
Semi anechoic chamber M276	483227	30 – 1000 MHz	NSA	ANSI C63.4-2014 ANSI C63.4a-2017	01.03.2023	28.02.2026
Semi anechoic chamber M276	483227	1 -18 GHz	SVSWR	CISPR 16-1-4 + Cor1:2010 + A1:2012 +A2:2017	28.02.2023	27.02.2026



## 9 Report History

Report Number	Date	Comment
F240384E5	10.02.2025	Initial Test Report
-	-	-
-	-	-

## 10 List of Annexes

Annex A	Test Setup Photos	4 pages
Annex B	EUT External Photos	9 pages
Annex C	EUT Internal Photos *	4 pages

The internal EUT photos were partly provided by the applicant.

----- end of test report -----