

FCC TEST REPORT (15.247)

REPORT NO.: RF940301L04
MODEL NO.: CB3000
RECEIVED: Mar. 04, 2005
TESTED: Mar. 07 ~ Mar. 16, 2005
ISSUED: Mar. 21, 2005

APPLICANT: SYMBOL TECHNOLOGIES, INC.

ADDRESS: One Symbol Plaza, Holtsville, NY 11742-1300 U.S.A.

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 100 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



No. 2177-01

Table of Contents

1.	CERTIFICATION	5
2.	SUMMARY OF TEST RESULTS	6
2.1	MEASUREMENT UNCERTAINTY	7
3.	GENERAL INFORMATION	8
3.1	GENERAL DESCRIPTION OF EUT	8
3.2	DESCRIPTION OF TEST MODES.....	9
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST.....	10
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	11
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	13
3.4	DESCRIPTION OF SUPPORT UNITS	14
4.	TEST TYPES AND RESULTS (802.11b & g 2412~2462MHz BAND)	15
4.1	CONDUCTED EMISSION MEASUREMENT	15
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	15
4.1.2	TEST INSTRUMENTS	15
4.1.3	TEST PROCEDURES	16
4.1.4	DEVIATION FROM TEST STANDARD	16
4.1.5	TEST SETUP	17
4.1.6	EUT OPERATING CONDITIONS	17
4.1.7	TEST RESULTS.....	18
4.2	RADIATED EMISSION MEASUREMENT	24
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	24
4.2.2	TEST INSTRUMENTS	25
4.2.3	TEST PROCEDURES	26
4.2.4	DEVIATION FROM TEST STANDARD	26
4.2.5	TEST SETUP	27
4.2.6	EUT OPERATING CONDITIONS	27
4.2.7	TEST RESULTS.....	28
4.3	6dB BANDWIDTH MEASUREMENT	36
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	36
4.3.2	TEST INSTRUMENTS	36
4.3.3	TEST PROCEDURE.....	37
4.3.4	DEVIATION FROM TEST STANDARD	37
4.3.5	TEST SETUP	37
4.3.6	EUT OPERATING CONDITIONS	37
4.3.7	TEST RESULTS.....	38
4.4	MAXIMUM PEAK OUTPUT POWER	44
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	44
4.4.2	INSTRUMENTS.....	44

4.4.3	TEST PROCEDURES	45
4.4.4	DEVIATION FROM TEST STANDARD	45
4.4.5	TEST SETUP	45
4.4.6	EUT OPERATING CONDITIONS	45
4.4.7	TEST RESULTS.....	46
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	48
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	48
4.5.2	TEST INSTRUMENTS	48
4.5.3	TEST PROCEDURE.....	49
4.5.4	DEVIATION FROM TEST STANDARD	49
4.5.5	TEST SETUP	49
4.5.6	EUT OPERATING CONDITION.....	49
4.5.7	TEST RESULTS.....	50
4.6	BAND EDGES MEASUREMENT	56
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	56
4.6.2	TEST INSTRUMENTS	56
4.6.3	TEST PROCEDURE.....	56
4.6.4	DEVIATION FROM TEST STANDARD	56
4.6.5	EUT OPERATING CONDITION.....	56
4.6.6	TEST RESULTS.....	57
4.7	ANTENNA REQUIREMENT	65
4.7.1	STANDARD APPLICABLE.....	65
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	65
5.	TEST TYPES AND RESULTS (802.11a 5725~5850MHz BAND).....	66
5.1	CONDUCTED EMISSION MEASUREMENT	66
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	66
5.1.2	TEST INSTRUMENTS	66
5.1.3	TEST PROCEDURES	67
5.1.4	DEVIATION FROM TEST STANDARD	67
5.1.5	TEST SETUP	68
5.1.6	EUT OPERATING CONDITIONS	68
5.1.7	TEST RESULTS.....	69
5.2	RADIATED EMISSION MEASUREMENT	71
5.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	71
5.2.2	TEST INSTRUMENTS	72
5.2.3	TEST PROCEDURES	73
5.2.4	DEVIATION FROM TEST STANDARD	73
5.2.5	TEST SETUP	74
5.2.6	EUT OPERATING CONDITIONS	74
5.2.7	TEST RESULTS.....	75
5.3	6dB BANDWIDTH MEASUREMENT	79



5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	79
5.3.2	TEST INSTRUMENTS	79
5.3.3	TEST PROCEDURE	80
5.3.4	DEVIATION FROM TEST STANDARD	80
5.3.5	TEST SETUP	80
5.3.6	EUT OPERATING CONDITIONS	80
5.3.7	TEST RESULTS	81
5.4	MAXIMUM PEAK OUTPUT POWER	84
5.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	84
5.4.2	INSTRUMENTS	84
5.4.3	TEST PROCEDURES	85
5.4.4	DEVIATION FROM TEST STANDARD	85
5.4.5	TEST SETUP	85
5.4.6	EUT OPERATING CONDITIONS	85
5.4.7	TEST RESULTS	86
5.5	POWER SPECTRAL DENSITY MEASUREMENT	87
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	87
5.5.2	TEST INSTRUMENTS	87
5.5.3	TEST PROCEDURE	88
5.5.4	DEVIATION FROM TEST STANDARD	88
5.5.5	TEST SETUP	88
5.5.6	EUT OPERATING CONDITION	88
5.5.7	TEST RESULTS	89
5.6	BAND EDGES MEASUREMENT	92
5.6.1	LIMITS OF BAND EDGES MEASUREMENT	92
5.6.2	TEST INSTRUMENTS	92
5.6.3	TEST PROCEDURE	92
5.6.4	DEVIATION FROM TEST STANDARD	92
5.6.5	EUT OPERATING CONDITION	93
5.6.6	TEST RESULTS	93
5.7	ANTENNA REQUIREMENT	97
5.7.1	STANDARD APPLICABLE	97
5.7.2	ANTENNA CONNECTED CONSTRUCTION	97
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION	98
7.	INFORMATION ON THE TESTING LABORATORIES	100



1. CERTIFICATION

PRODUCT: Client Bridge 3000 Series
BRAND NAME: symbol
MODEL NO.: CB3000
TEST SAMPLE: ENGINEERING SAMPLE
TESTED: Mar. 07 ~ Mar. 16, 2005
APPLICANT: SYMBOL TECHNOLOGIES, INC.
STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Candice Chen , **DATE:** Mar. 21, 2005
(Candice Chen)

TECHNICAL
ACCEPTANCE : Gary Chang , **DATE:** Mar. 21, 2005
Responsible for RF (Gary Chang)

APPROVED BY : Cody Chang , **DATE:** Mar. 21, 2005
(Cody Chang,
Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -12.83dB at 0.150MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -2.09dB at 2360.00MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.55 dB
	200MHz ~1000MHz	3.58 dB
	1GHz ~ 18GHz	1.10 dB
	18GHz ~ 40GHz	0.91 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Client Bridge 3000 Series
MODEL NO.	CB3000
POWER SUPPLY	12Vdc from AC adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11a: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	802.11b & 802.11g: 2412 ~ 2462MHz 802.11a: 5.15 ~ 5.35GHz and 5.725 ~ 5.850GHz
NUMBER OF CHANNEL	802.11b & 802.11g: 11 802.11a: 13
CHANNEL SPACING	802.11b & 802.11g: 5MHz 802.11a: 20MHz
OUTPUT POWER	802.11b: 80.724mW 802.11g: 89.743mW 802.11a: 80.724mW
DATA CABLE	1.8m non-shielded UTP RJ45 cable without core
ANTENNA TYPE	Dipole antenna with 3.0dBi gain (for 2.4GHz) Dipole antenna with 4.0dBi gain (for 5.0GHz)
I/O PORTS	RJ45
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT was operated with following power adapter:

BRAND:	LEADER ELECTRONICS INC.
MODEL:	IU15-2120100-WP
INPUT:	100~240Vac, 50-60Hz, 0.5A
OUTPUT:	12Vdc, 1.0A
POWER LINE:	DC 1.8m non-shielded cable without core

2. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11b, 802.11g technology.
3. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

For 802.11b/g: Eleven channels are provided to this EUT.


Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

Operated in 5725 ~ 5850MHz band:

For 802.11a: Five channels are provided to this EUT.

Channel	Frequency
1	5745 MHz
2	5765 MHz
3	5785 MHz
4	5805 MHz
5	5825 MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

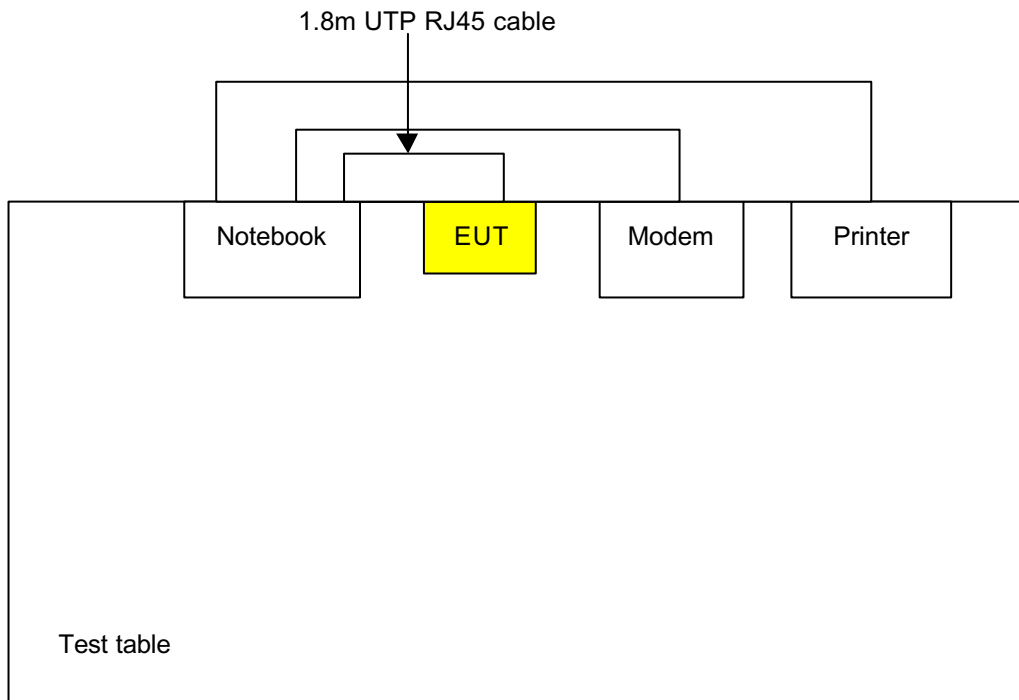

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	X	X	X	X	NA

Where PLC: Power Line Conducted Emission

RE<1G RE: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- ☒? Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11a	1 to 5	3	OFDM	BPSK	6

Radiated Emission Test (Below 1 GHz):

- ☒? Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6
802.11a	1 to 5	3	OFDM	BPSK	6

Radiated Emission Test (Above 1 GHz):

- ☒? Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11a	1 to 5	1, 3, 5	OFDM	BPSK	6

**Bandedge Measurement:**

- ☒? Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	11
802.11g	1 to 11	1, 11	OFDM	BPSK	6
802.11a	1 to 5	1, 5	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- ☒? Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11a	1 to 5	1, 3, 5	OFDM	BPSK	6



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Client Bridge 3000 Series. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	25191592336	E2K24CLNS
2	PRINTER	EPSON	LQ-300+	DCGY047265	FCC DoC Approved
3	MODEM	ACEEX	1414V/3	0401008248	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.8 m shielded cable without core
3	1.2 m shielded cable without core

NOTE: All power cords of the above support units are non shielded (1.8m).



4. TEST TYPES AND RESULTS (802.11b & g 2412~2462MHz Band)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 16, 2005
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 09, 2006
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Feb. 15, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 15, 2006
Software ADT	ADT_Conc_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

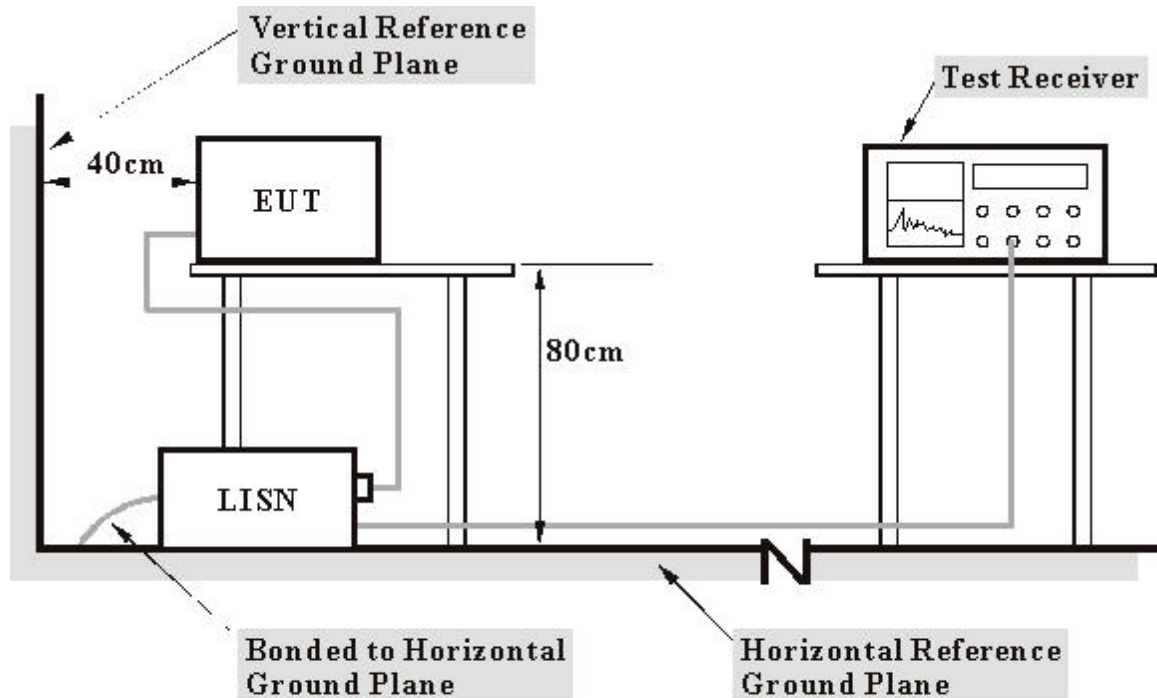

- Note:** 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- Connected the EUT to a notebook system via RJ45 cable placed on a testing table.
- The notebook system ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- The notebook system sent "H" messages to its screen.
- The notebook system sent "H" messages to modem.
- The notebook system sent "H" messages to printer, and the printer printed them on paper.
- Steps c ~ e were repeated.


4.1.7 TEST RESULTS

Conducted Worst-Case Data

EUT	Client Bridge 3000 Series	MODEL	CB3000
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	52.71	-	52.81	-	66.00	56.00	-13.19	-
2	0.248	0.11	43.87	-	43.98	-	61.84	51.84	-17.85	-
3	0.345	0.11	36.85	-	36.96	-	59.07	49.07	-22.11	-
4	2.027	0.21	32.40	-	32.61	-	56.00	46.00	-23.39	-
5	3.754	0.28	29.16	-	29.44	-	56.00	46.00	-26.56	-
6	12.746	0.54	29.48	-	30.02	-	60.00	50.00	-29.98	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

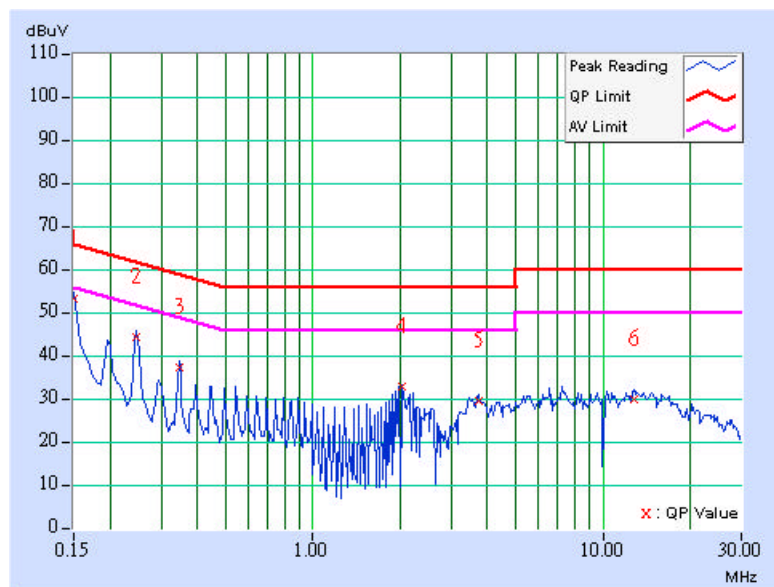

EUT	Client Bridge 3000 Series	MODEL	CB3000
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	51.78	-	51.88	-	66.00	56.00	-14.12	-
2	0.248	0.10	40.58	-	40.68	-	61.84	51.84	-21.15	-
3	1.236	0.19	30.19	-	30.38	-	56.00	46.00	-25.62	-
4	2.026	0.21	34.89	-	35.10	-	56.00	46.00	-20.90	-
5	5.534	0.33	25.76	-	26.09	-	60.00	50.00	-33.91	-
6	23.766	0.61	23.42	-	24.03	-	60.00	50.00	-35.97	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

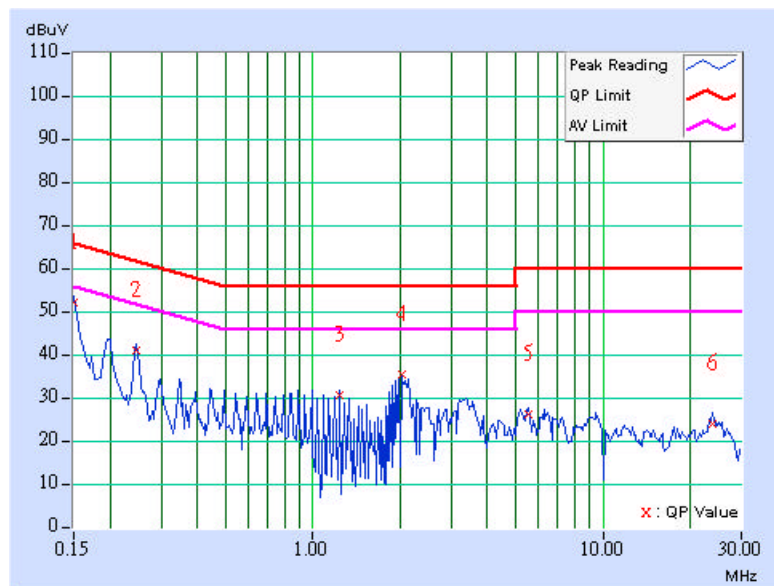

EUT	Client Bridge 3000 Series	MODEL	CB3000
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa	TESTED BY	Scott Yang

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	52.73	-	52.83	-	66.00	56.00	-13.17	-
2	0.248	0.11	43.89	-	44.00	-	61.84	51.84	-17.83	-
3	0.345	0.11	36.79	-	36.90	-	59.07	49.07	-22.17	-
4	2.026	0.21	32.74	-	32.95	-	56.00	46.00	-23.05	-
5	3.559	0.27	29.74	-	30.01	-	56.00	46.00	-25.99	-
6	7.263	0.40	29.91	-	30.31	-	60.00	50.00	-29.69	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

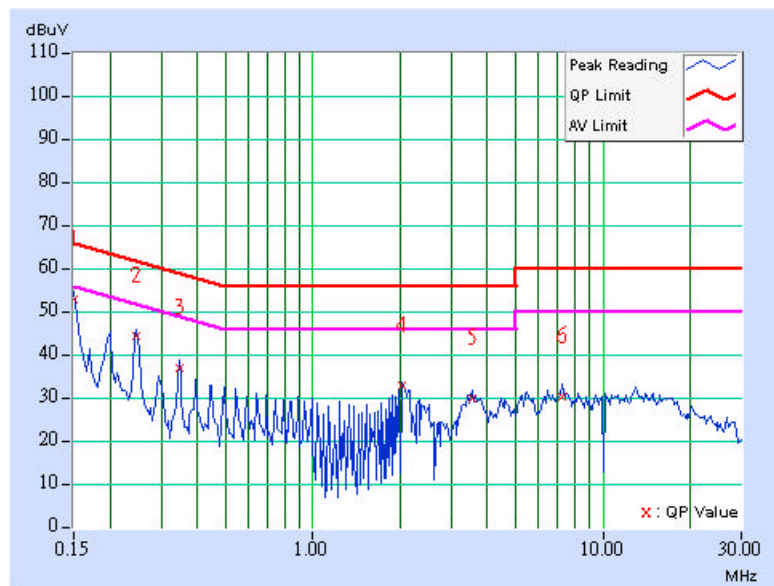

EUT	Client Bridge 3000 Series	MODEL	CB3000
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa	TESTED BY	Scott Yang

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	51.82	-	51.92	-	66.00	56.00	-14.08	-
2	0.198	0.10	41.82	-	41.92	-	63.68	53.68	-21.76	-
3	0.248	0.10	40.58	-	40.68	-	61.84	51.84	-21.15	-
4	1.977	0.21	34.36	-	34.57	-	56.00	46.00	-21.43	-
5	3.410	0.26	28.82	-	29.08	-	56.00	46.00	-26.92	-
6	9.289	0.39	23.91	-	24.30	-	60.00	50.00	-35.70	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

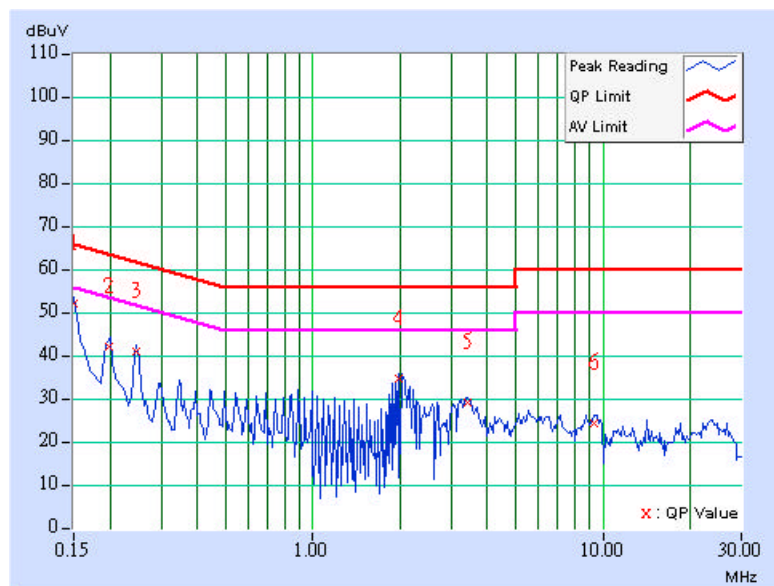

EUT	Client Bridge 3000 Series	MODEL	CB3000
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa	TESTED BY	Scott Yang

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	52.71	-	52.81	-	66.00	56.00	-13.19	-
2	0.248	0.11	43.97	-	44.08	-	61.84	51.84	-17.75	-
3	0.345	0.11	36.61	-	36.72	-	59.07	49.07	-22.35	-
4	2.026	0.21	32.72	-	32.93	-	56.00	46.00	-23.07	-
5	3.656	0.27	29.44	-	29.71	-	56.00	46.00	-26.29	-
6	7.361	0.40	30.00	-	30.40	-	60.00	50.00	-29.60	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

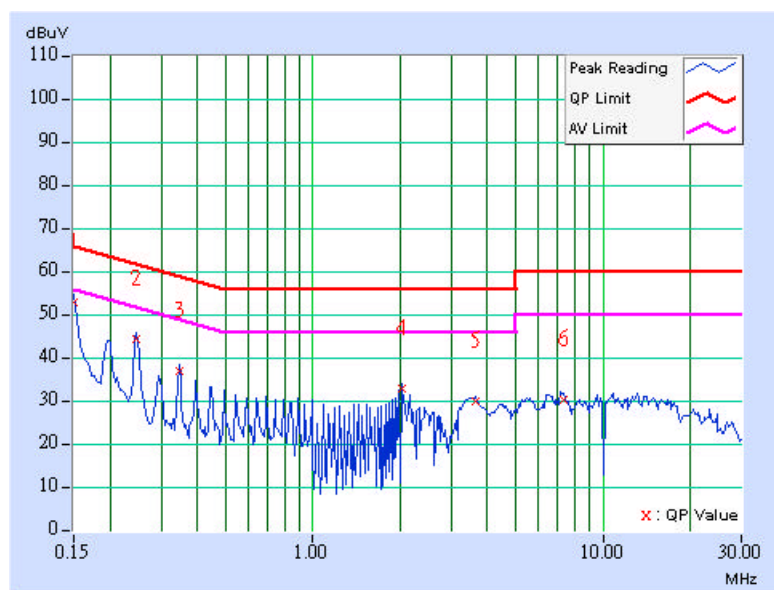

EUT	Client Bridge 3000 Series	MODEL	CB3000
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa	TESTED BY	Scott Yang

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	51.80	-	51.90	-	66.00	56.00	-14.10	-
2	0.199	0.10	41.72	-	41.82	-	63.66	53.66	-21.84	-
3	0.249	0.10	40.20	-	40.30	-	61.79	51.79	-21.49	-
4	2.026	0.21	34.82	-	35.03	-	56.00	46.00	-20.97	-
5	3.310	0.26	28.38	-	28.64	-	56.00	46.00	-27.36	-
6	24.898	0.61	23.19	-	23.80	-	60.00	50.00	-36.20	-

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

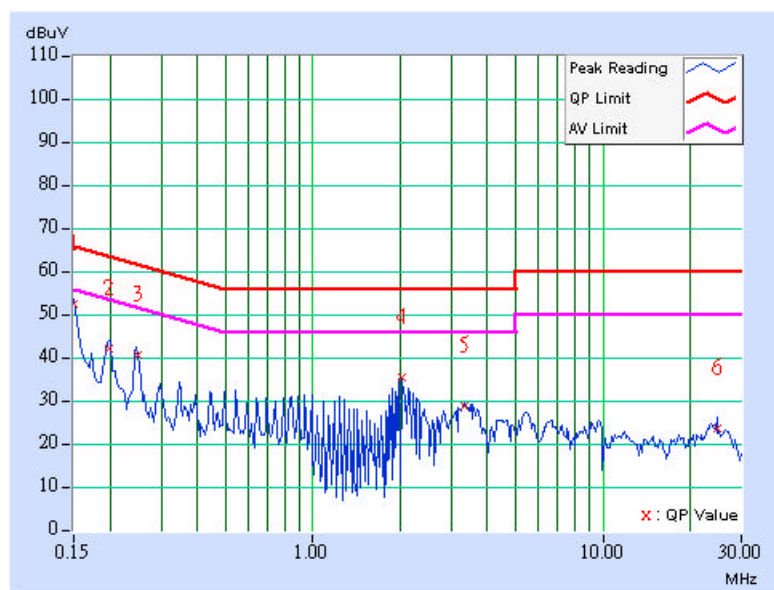

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	Jun. 08, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Jun. 03, 2005
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Jun. 01, 2005
HORN Antenna SCHWARZBECK	9120D	9120D-408	Jan. 17, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Jan. 23, 2006
Preamplifier Agilent	8447D	2944A10633	Nov. 09, 2005
Preamplifier Agilent	8449B	3008A01964	Nov. 06, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218183/4	Jan. 26, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218195/4	Jan. 26, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 2.

3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

4. The VCCI Site Registration No. is R-237.

5. The IC Site Registration No. is IC4924-3.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

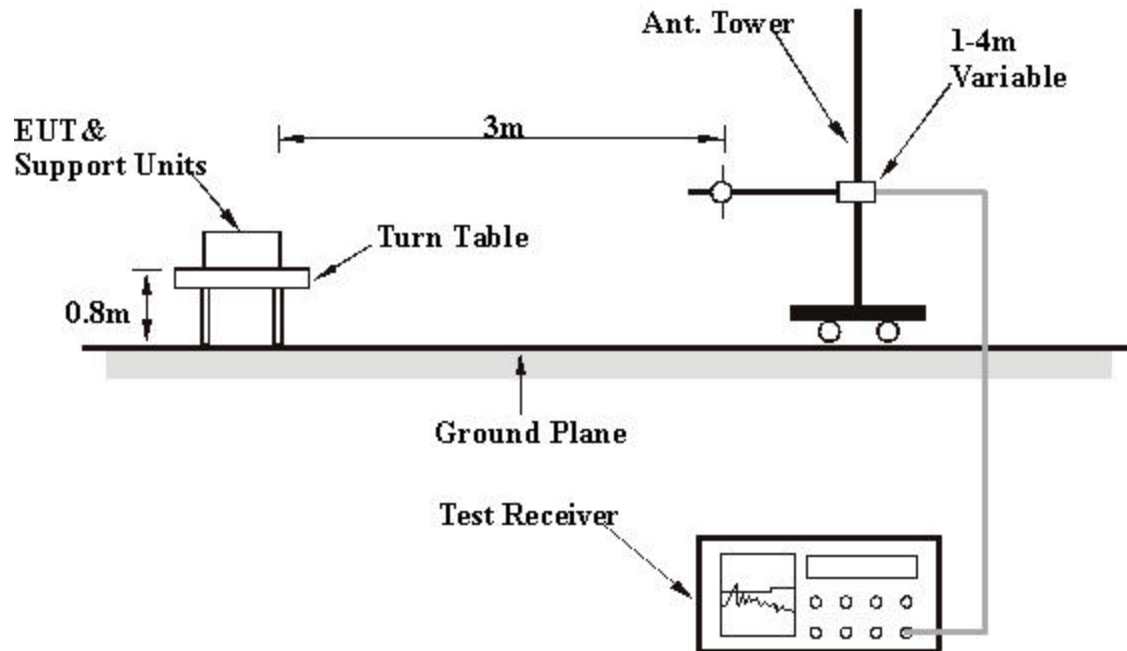

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

Below 1GHz Worst-Case Data

EUT	Client Bridge 3000 Series	MODEL	CB3000
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	214.67	32.29 QP	43.50	-11.21	1.25 H	295	20.12	12.18
2	249.66	38.09 QP	46.00	-7.91	1.25 H	1	24.45	13.64
3	500.42	34.02 QP	46.00	-11.98	1.00 H	19	14.74	19.28
4	630.66	33.86 QP	46.00	-12.14	1.25 H	313	11.81	22.05
5	900.86	35.77 QP	46.00	-10.23	1.25 H	22	9.86	25.91
6	931.96	34.56 QP	46.00	-11.44	1.00 H	298	8.29	26.28

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.16	31.20 QP	40.00	-8.80	1.25 V	58	17.10	14.10
2	125.25	37.44 QP	43.50	-6.06	1.25 V	7	23.71	13.73
3	249.66	34.78 QP	46.00	-11.22	1.00 V	148	21.14	13.64
4	630.66	34.13 QP	46.00	-11.87	1.50 V	7	12.07	22.05
5	875.59	34.12 QP	46.00	-11.88	1.00 V	43	8.66	25.46
6	920.30	39.77 QP	46.00	-6.23	1.25 V	172	13.63	26.14

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

802.11b DSSS modulation

EUT	Client Bridge 3000 Series	MODEL	CB3000
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 60%RH, 991hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	47.31 PK	74.00	-26.69	1.13 H	208	16.43	30.88
2	2360.00	47.33 PK	74.00	-26.67	1.16 H	183	14.93	32.40
3	2386.00	45.98 PK	74.00	-28.02	1.15 H	188	13.48	32.50
4	*2412.00	106.42 PK			1.15 H	188	73.82	32.60
4	*2412.00	97.34 AV			1.15 H	188	64.74	32.60
5	2688.00	46.85 PK	74.00	-27.15	1.00 H	187	13.40	33.45
6	4824.00	50.26 PK	74.00	-23.74	1.14 H	299	11.87	38.39
6	4824.00	43.89 AV	54.00	-10.11	1.14 H	299	5.50	38.39
7	7236.00	55.48 PK	74.00	-18.52	1.36 H	147	11.30	44.18
7	7236.00	44.98 AV	54.00	-9.02	1.36 H	147	0.80	44.18

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

EUT	Client Bridge 3000 Series	MODEL	CB3000
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 60%RH, 991hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	66.69 PK	94.25	-27.56	1.20 V	16	35.81	30.88
1	2016.00	61.46 AV	86.11	-24.65	1.20 V	16	30.58	30.88
2	2360.00	58.74 PK	74.00	-15.26	1.13 V	25	26.34	32.40
2	2360.00	48.93 AV	54.00	-5.07	1.13 V	25	16.53	32.40
3	2386.00	53.81 PK	74.00	-20.19	1.01 V	31	21.31	32.50
3	2386.00	45.67 AV	54.00	-8.33	1.01 V	31	13.17	32.50
4	*2412.00	114.25 PK			1.01 V	31	81.65	32.60
4	*2412.00	106.11 AV			1.01 V	31	73.51	32.60
5	2688.00	51.89 PK	74.00	-22.11	1.00 V	217	18.44	33.45
5	2688.00	47.77 AV	54.00	-6.23	1.00 V	217	14.32	33.45
6	4824.00	53.30 PK	74.00	-20.70	1.01 V	235	14.91	38.39
6	4824.00	45.16 AV	54.00	-8.84	1.01 V	235	6.77	38.39
7	7236.00	56.06 PK	74.00	-17.94	1.00 V	27	11.88	44.18
7	7236.00	46.74 AV	54.00	-7.26	1.00 V	27	2.56	44.18

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

EUT	Client Bridge 3000 Series	MODEL	CB3000
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 60%RH, 991hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	51.38 PK	74.00	-22.62	1.42 H	229	20.50	30.88
1	2016.00	46.21 AV	54.00	-7.79	1.42 H	229	15.33	30.88
2	2360.00	49.21 PK	74.00	-24.79	1.02 H	203	16.81	32.40
2	2360.00	41.26 AV	54.00	-12.74	1.02 H	203	8.86	32.40
3	*2437.00	107.29 PK			1.45 H	174	74.58	32.71
3	*2437.00	98.67 AV			1.45 H	174	65.96	32.71
4	2688.00	47.89 PK	74.00	-26.11	1.14 H	253	14.44	33.45
5	4824.00	48.67 PK	74.00	-25.33	1.02 H	226	10.28	38.39
5	4824.00	45.39 AV	54.00	-8.61	1.02 H	226	7.00	38.39
6	7311.00	54.84 PK	74.00	-19.16	1.15 H	314	10.44	44.40
6	7311.00	42.84 AV	54.00	-11.16	1.15 H	314	-1.56	44.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	67.25 PK	94.87	-27.62	1.13 V	28	36.37	30.88
1	2016.00	62.39 AV	86.51	-24.12	1.13 V	28	31.51	30.88
2	2360.00	59.76 PK	74.00	-14.24	1.05 V	209	27.36	32.40
2	2360.00	50.35 AV	54.00	-3.65	1.05 V	209	17.95	32.40
3	*2437.00	114.87 PK			1.45 V	174	82.16	32.71
3	*2437.00	106.51 AV			1.45 V	174	73.80	32.71
4	2688.00	53.61 PK	74.00	-20.39	1.02 V	22	20.16	33.45
4	2688.00	48.56 AV	54.00	-5.44	1.02 V	22	15.11	33.45
5	4824.00	51.68 PK	74.00	-22.32	1.18 V	165	13.29	38.39
5	4824.00	44.81 AV	54.00	-9.19	1.18 V	165	6.42	38.39
6	7311.00	56.83 PK	74.00	-17.17	1.26 V	20	12.43	44.40
6	7311.00	46.96 AV	54.00	-7.04	1.26 V	20	2.56	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

EUT	Client Bridge 3000 Series	MODEL	CB3000
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 60%RH, 991hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	48.58 PK	74.00	-25.42	1.13 H	258	17.70	30.88
2	2360.00	48.37 PK	74.00	-25.63	1.02 H	254	15.97	32.40
3	*2462.00	106.85 PK			1.36 H	189	74.03	32.82
3	*2462.00	97.23 AV			1.36 H	189	64.41	32.82
4	2483.50	45.18 PK	74.00	-28.82	1.36 H	189	12.27	32.91
5	2688.00	44.89 PK	74.00	-29.11	1.08 H	327	11.44	33.45
6	4924.00	49.38 PK	74.00	-24.62	1.00 H	284	10.67	38.71
6	4924.00	42.87 AV	54.00	-11.13	1.00 H	284	4.16	38.71
7	7386.00	55.86 PK	74.00	-18.14	1.05 H	115	11.29	44.57
7	7386.00	43.84 AV	54.00	-10.16	1.05 H	115	-0.73	44.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	63.72 PK	94.07	-30.35	1.45 V	218	32.84	30.88
1	2016.00	60.65 AV	85.79	-25.14	1.45 V	218	29.77	30.88
2	2360.00	62.54 PK	74.00	-11.46	1.06 V	36	30.14	32.40
2	2360.00	51.75 AV	54.00	-2.25	1.06 V	36	19.35	32.40
3	*2462.00	114.07 PK			1.05 V	37	81.25	32.82
3	*2462.00	105.79 AV			1.05 V	37	72.97	32.82
4	2483.50	52.40 PK	74.00	-21.60	1.05 V	37	19.49	32.91
4	2483.50	44.12 AV	54.00	-9.88	1.05 V	37	11.21	32.91
5	2688.00	50.89 PK	74.00	-23.11	1.00 V	223	17.44	33.45
5	2688.00	47.36 AV	54.00	-6.64	1.00 V	223	13.91	33.45
6	4924.00	53.41 PK	74.00	-20.59	1.14 V	20	14.70	38.71
6	4924.00	46.60 AV	54.00	-7.40	1.14 V	20	7.89	38.71
7	7386.00	56.93 PK	74.00	-17.07	1.00 V	35	12.36	44.57
7	7386.00	47.74 AV	54.00	-6.26	1.00 V	35	3.17	44.57

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

802.11g OFDM modulation

EUT	Client Bridge 3000 Series	MODEL	CB3000
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 60%RH, 991hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	47.92 PK	74.00	-26.08	1.08 H	44	17.04	30.88
1	2016.00	44.18 AV	54.00	-9.82	1.08 H	44	13.30	30.88
2	2360.00	46.21 PK	74.00	-27.79	1.10 H	214	13.81	32.40
3	2390.00	49.76 PK	74.00	-24.24	1.44 H	174	17.25	32.51
3	2390.00	39.45 AV	54.00	-14.55	1.44 H	174	6.94	32.51
4	*2412.00	102.21 PK			1.44 H	174	69.61	32.60
4	*2412.00	91.90 AV			1.44 H	174	59.30	32.60
5	2688.00	43.55 PK	74.00	-30.45	1.01 H	178	10.10	33.45
6	4824.00	47.84 PK	74.00	-26.16	1.13 H	208	9.45	38.39

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	62.57 PK	89.62	-27.05	1.19 V	9	31.69	30.88
1	2016.00	60.09 AV	79.34	-19.25	1.19 V	9	29.21	30.88
2	2360.00	58.77 PK	74.00	-15.23	1.30 V	345	26.37	32.40
2	2360.00	51.91 AV	54.00	-2.09	1.30 V	345	19.51	32.40
3	2390.00	57.17 PK	89.62	-32.45	1.25 V	35	24.66	32.51
3	2390.00	56.89 AV	79.34	-22.45	1.25 V	35	24.38	32.51
4	*2412.00	109.62 PK			1.25 V	35	77.02	32.60
4	*2412.00	99.34 AV			1.25 V	35	66.74	32.60
5	2688.00	49.37 PK	74.00	-24.63	1.38 V	33	15.92	33.45
5	2688.00	44.75 AV	54.00	-9.25	1.38 V	33	11.30	33.45
6	4824.00	48.05 PK	74.00	-25.95	1.18 V	347	9.66	38.39

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

EUT	Client Bridge 3000 Series	MODEL	CB3000
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 60%RH, 991hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	50.82 PK	74.00	-23.18	1.36 H	32	19.94	30.88
1	2016.00	48.72 AV	54.00	-5.28	1.36 H	32	17.84	30.88
2	2360.00	47.92 PK	74.00	-26.08	1.25 H	179	15.52	32.40
3	*2437.00	106.08 PK			1.48 H	175	73.37	32.71
3	*2437.00	97.06 AV			1.48 H	175	64.35	32.71
4	2688.00	47.85 PK	74.00	-26.15	1.02 H	296	14.40	33.45
5	4874.00	48.71 PK	74.00	-25.29	1.05 H	247	10.16	38.55
5	4874.00	36.28 AV	54.00	-17.72	1.05 H	247	-2.27	38.55
6	7311.00	60.51 PK	74.00	-13.49	1.12 H	328	16.11	44.40
6	7311.00	43.28 AV	54.00	-10.72	1.12 H	328	-1.12	44.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	67.31 PK	92.23	-24.92	1.22 V	18	36.43	30.88
1	2016.00	62.08 AV	81.61	-19.53	1.22 V	18	31.20	30.88
2	2360.00	61.98 PK	74.00	-12.02	1.02 V	258	29.58	32.40
2	2360.00	50.76 AV	54.00	-3.24	1.02 V	258	18.36	32.40
3	*2437.00	112.23 PK			1.21 V	24	79.52	32.71
3	*2437.00	101.61 AV			1.21 V	24	68.90	32.71
4	2688.00	52.48 PK	74.00	-21.52	1.02 V	269	19.03	33.45
4	2688.00	48.39 AV	54.00	-5.61	1.02 V	269	14.94	33.45
5	4874.00	51.06 PK	74.00	-22.94	1.00 V	9	12.50	38.55
5	4874.00	38.09 AV	54.00	-15.91	1.00 V	9	-0.47	38.55
6	7311.00	64.06 PK	74.00	-9.94	1.15 V	18	19.66	44.40
6	7311.00	46.11 AV	54.00	-7.89	1.15 V	18	1.71	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

EUT	Client Bridge 3000 Series	MODEL	CB3000
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 60%RH, 991hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	48.31 PK	74.00	-25.69	1.05 H	29	17.43	30.88
2	2360.00	45.98 PK	74.00	-28.02	1.13 H	192	13.58	32.40
3	*2462.00	101.28 PK			1.26 H	182	68.46	32.82
3	*2462.00	91.54 AV			1.26 H	182	58.72	32.82
4	2483.50	49.68 PK	74.00	-24.32	1.26 H	182	16.77	32.91
4	2483.50	39.94 AV	54.00	-14.06	1.26 H	182	7.03	32.91
5	2688.00	43.95 PK	74.00	-30.05	1.02 H	159	10.50	33.45
6	4924.00	47.59 PK	74.00	-26.41	1.13 H	258	8.88	38.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	63.08 PK	88.64	-25.56	1.08 V	25	32.20	30.88
1	2016.00	60.50 AV	78.57	-18.07	1.08 V	25	29.62	30.88
2	2360.00	60.24 PK	74.00	-13.76	1.08 V	27	27.84	32.40
2	2360.00	49.36 AV	54.00	-4.64	1.08 V	27	16.96	32.40
3	*2462.00	108.64 PK			1.02 V	29	75.82	32.82
3	*2462.00	98.57 AV			1.02 V	29	65.75	32.82
4	2483.50	57.04 PK	74.00	-16.96	1.02 V	29	24.13	32.91
4	2483.50	46.97 AV	54.00	-7.03	1.02 V	29	14.06	32.91
5	2688.00	49.36 PK	74.00	-24.64	1.17 V	39	15.91	33.45
5	2688.00	45.16 AV	54.00	-8.84	1.17 V	39	11.71	33.45
6	4924.00	49.20 PK	74.00	-24.80	1.00 V	11	10.49	38.71

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK 30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS modulation


EUT	Client Bridge 3000 Series	MODEL	CB3000
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 53%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	12.02	0.5	PASS
6	2437	11.98	0.5	PASS
11	2462	13.02	0.5	PASS

CH1

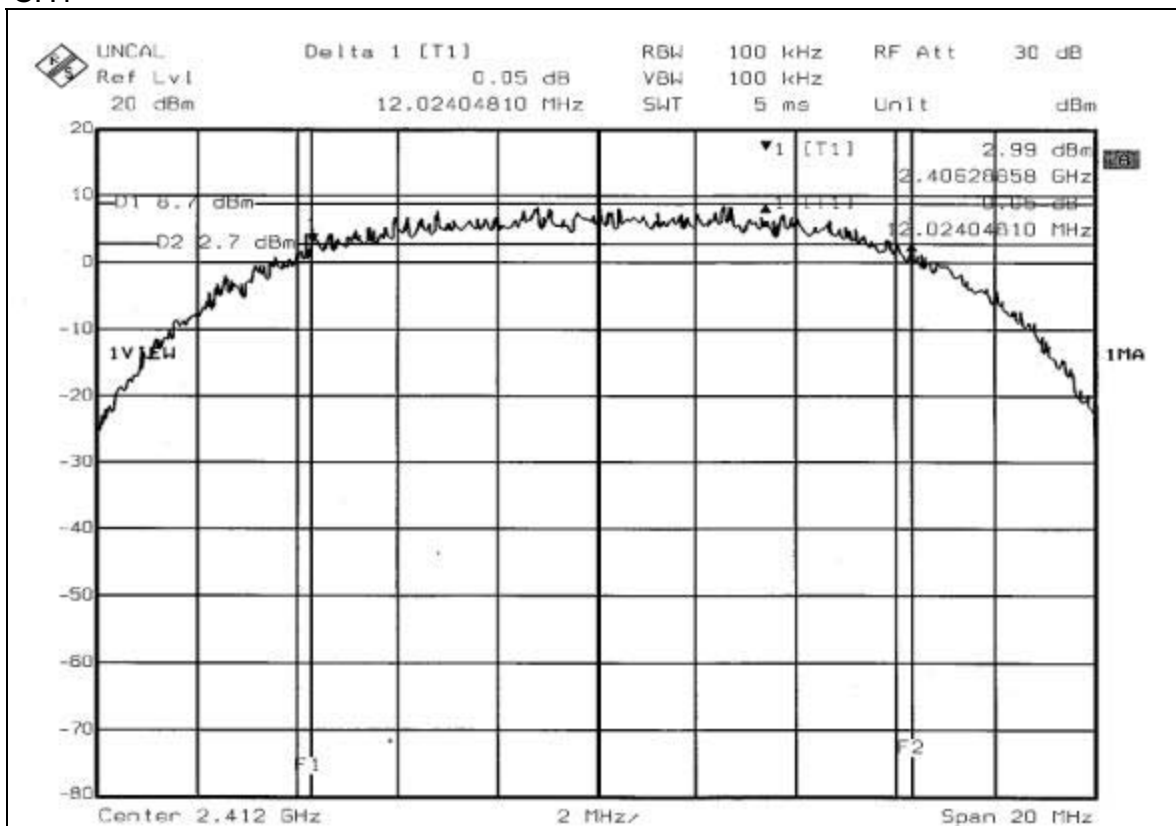

CH6

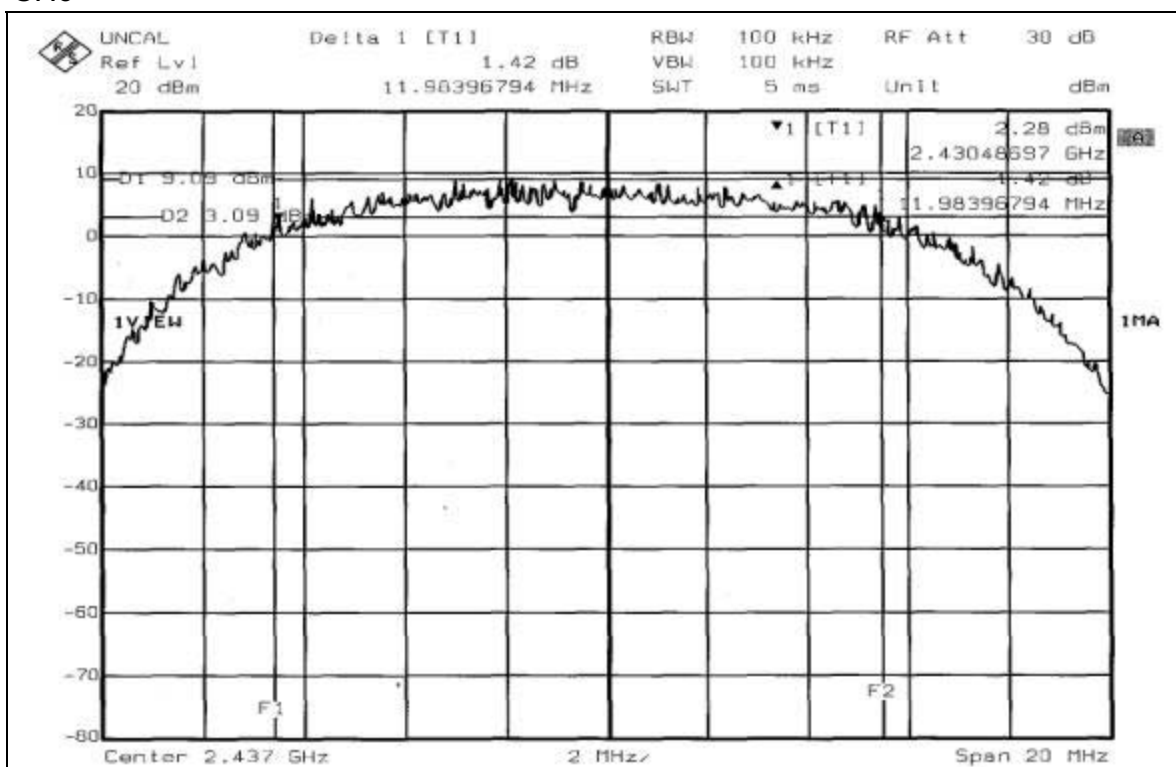

UNCAL Delta 1 [T1] RBW 100 kHz RF Att 30 dB
 Ref Lvl -0.46 dB VBW 100 kHz
 20 dBm 13.02605210 MHz SWT 5 ms Unit dBm

2.50 dBm
 2.45500501 GHz
 2.45 GHz
 13.02605210 MHz

1 [T1]
 1MA


Center 2.452 GHz 2 MHz Span 20 MHz

802.11g OFDM modulation


EUT	Client Bridge 3000 Series	MODEL	CB3000
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 53%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.43	0.5	PASS
6	2437	16.15	0.5	PASS
11	2462	15.79	0.5	PASS


CH1

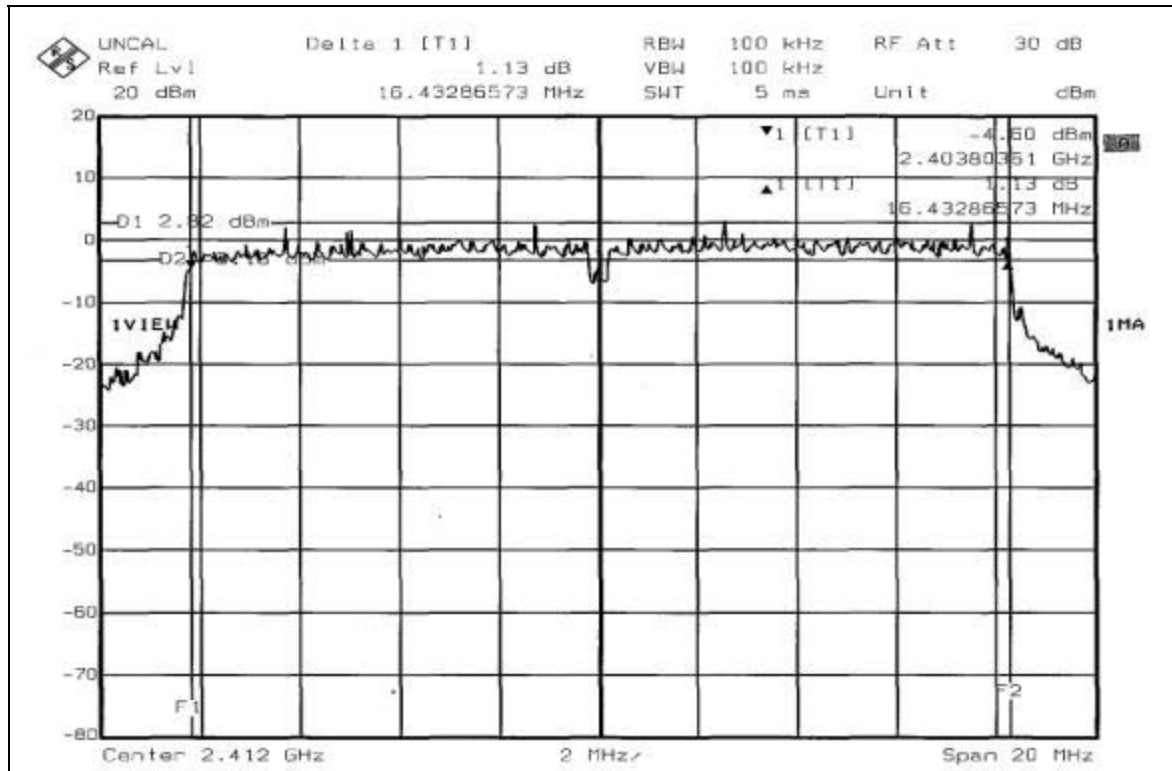

CH6

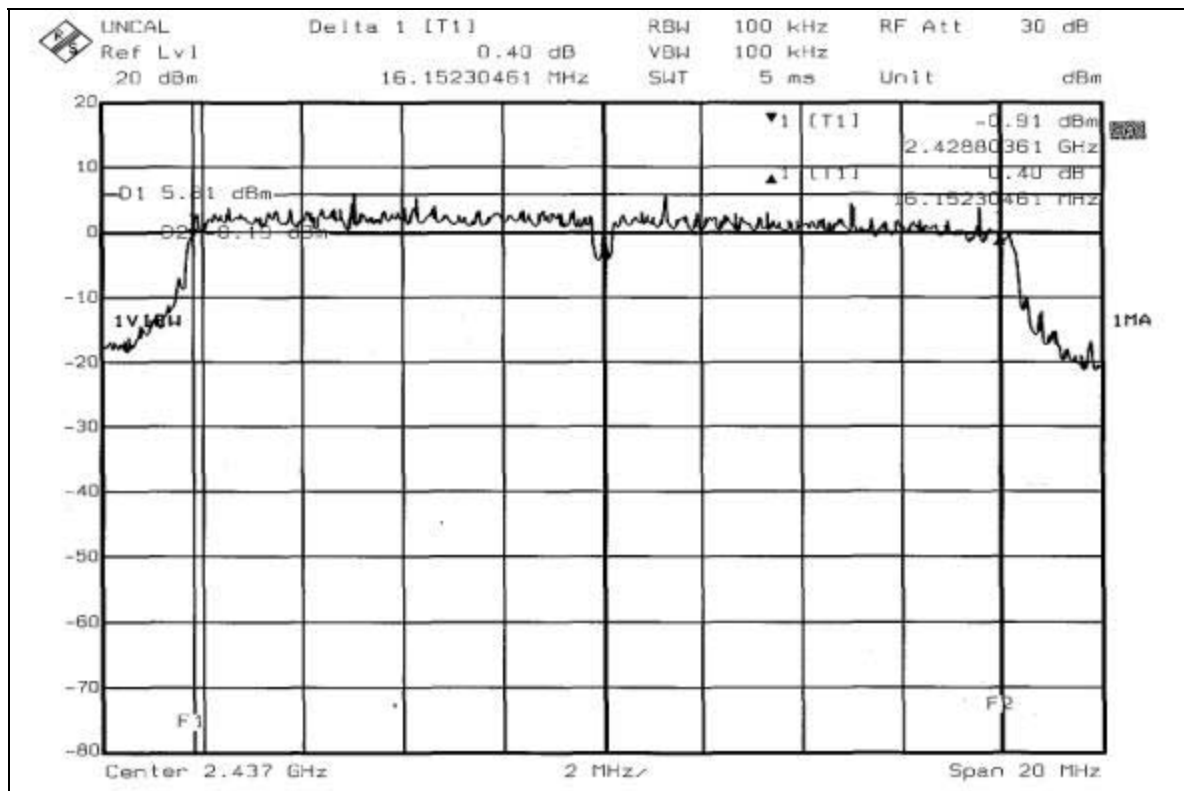

CH11

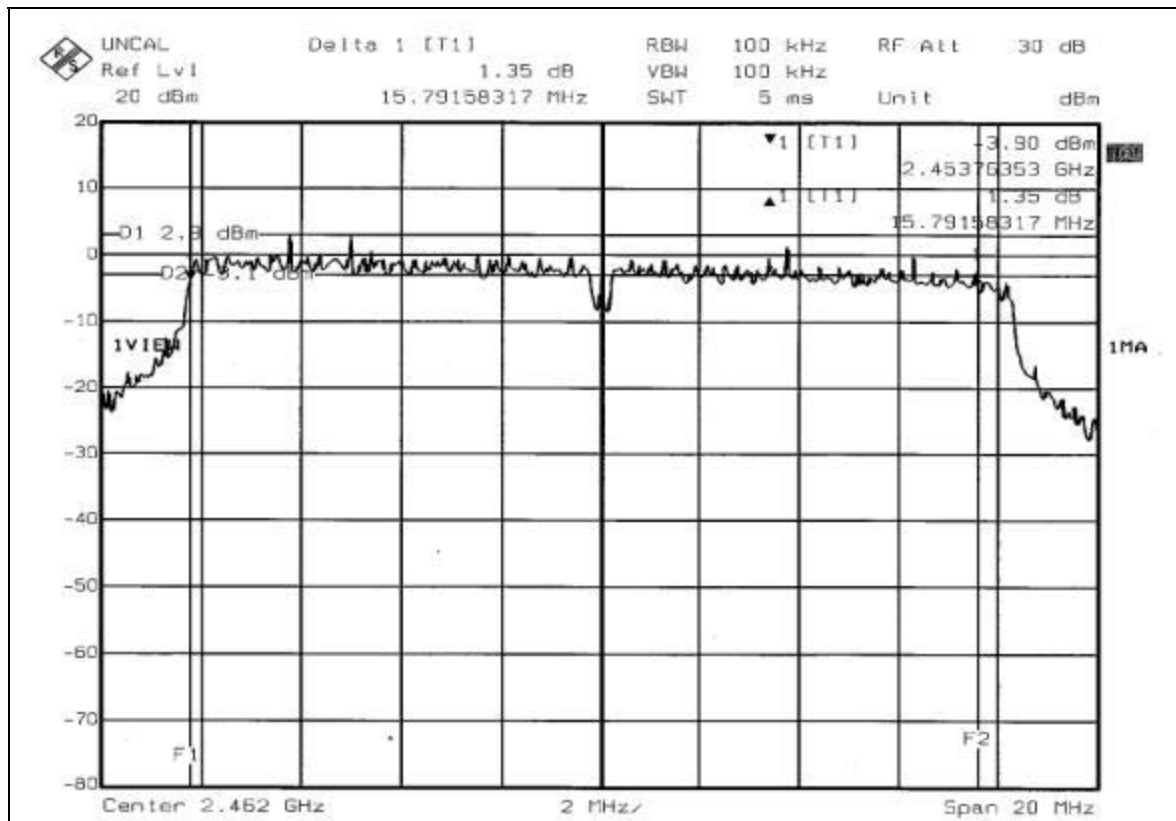

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 06, 2005
TEKTRONIX OSCILLOSCOPE	TDS 1012	C019167	Feb. 01, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

802.11b DSSS modulation

EUT	Client Bridge 3000 Series	MODEL	CB3000
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 53%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	80.353	19.05	30	PASS
6	2437	79.799	19.02	30	PASS
11	2462	80.724	19.07	30	PASS

**802.11g OFDM modulation**

EUT	Client Bridge 3000 Series	MODEL	CB3000
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 53%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	50.350	17.02	30	PASS
6	2437	89.743	19.53	30	PASS
11	2462	45.186	16.55	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6


4.5.7 TEST RESULTS

802.11b DSSS modulation


EUT	Client Bridge 3000 Series	MODEL	CB3000
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 53%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-1.30	8	PASS
6	2437	-1.69	8	PASS
11	2462	-1.37	8	PASS

CH1

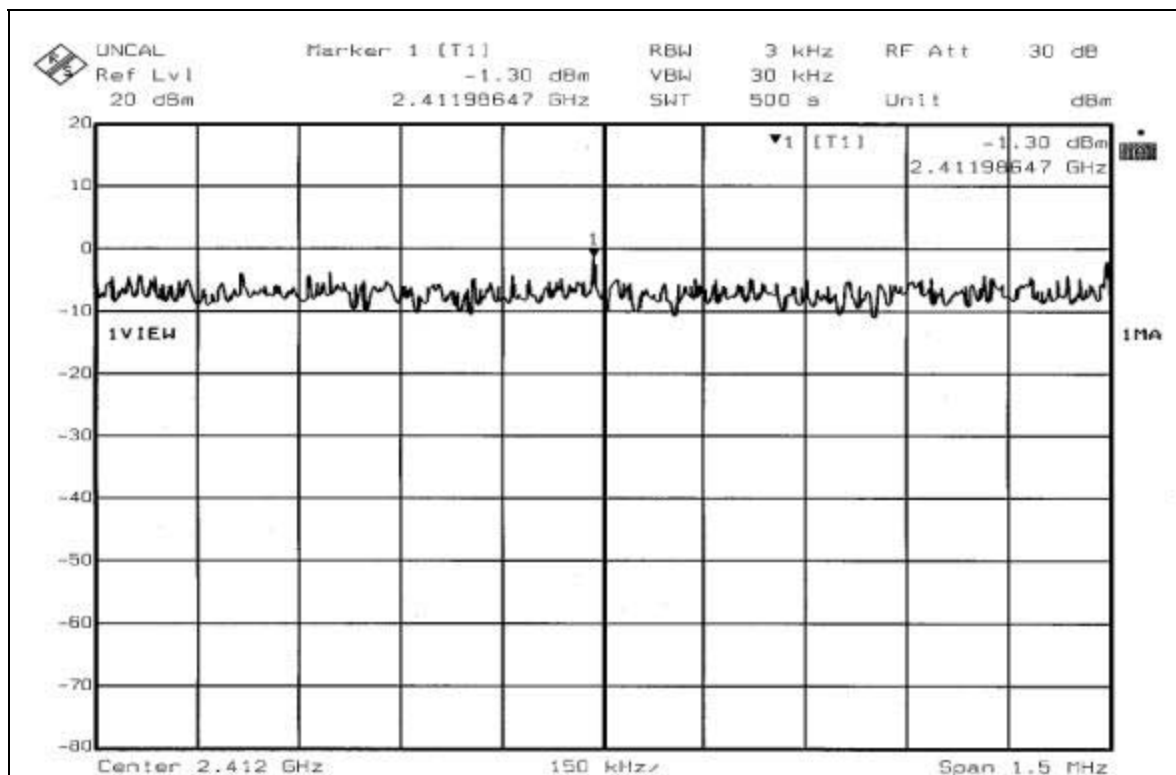


CH6

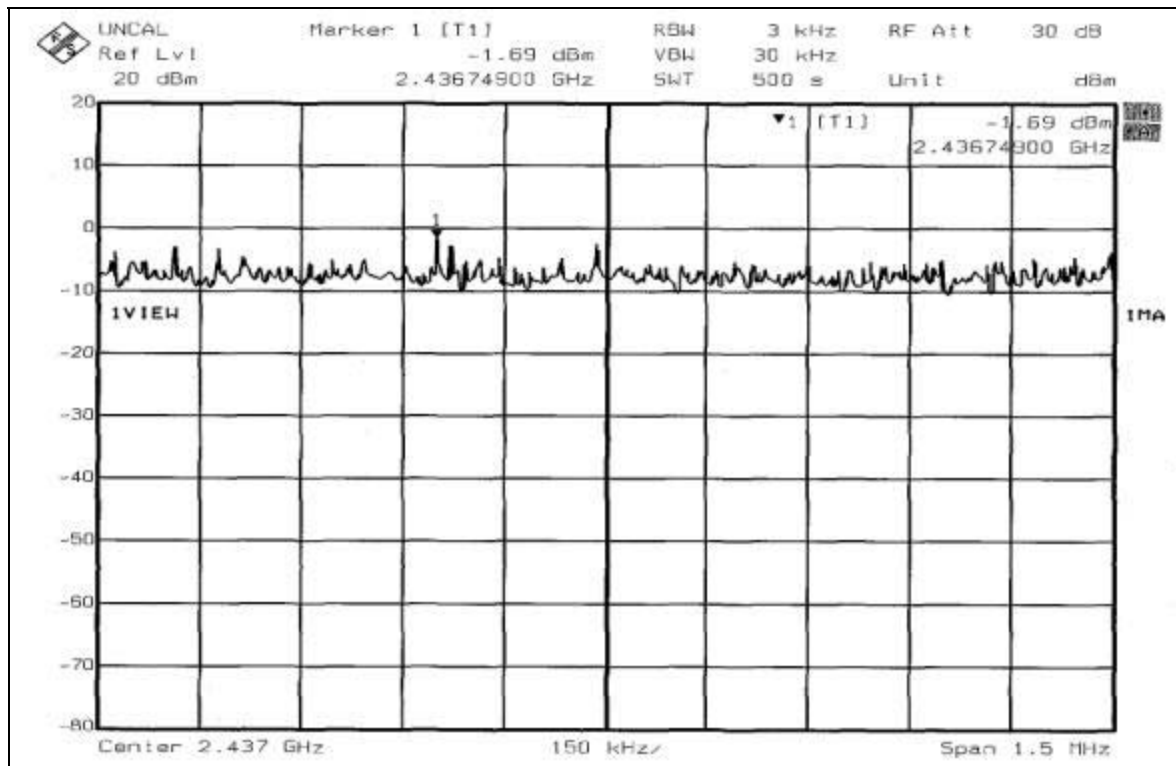



CH11

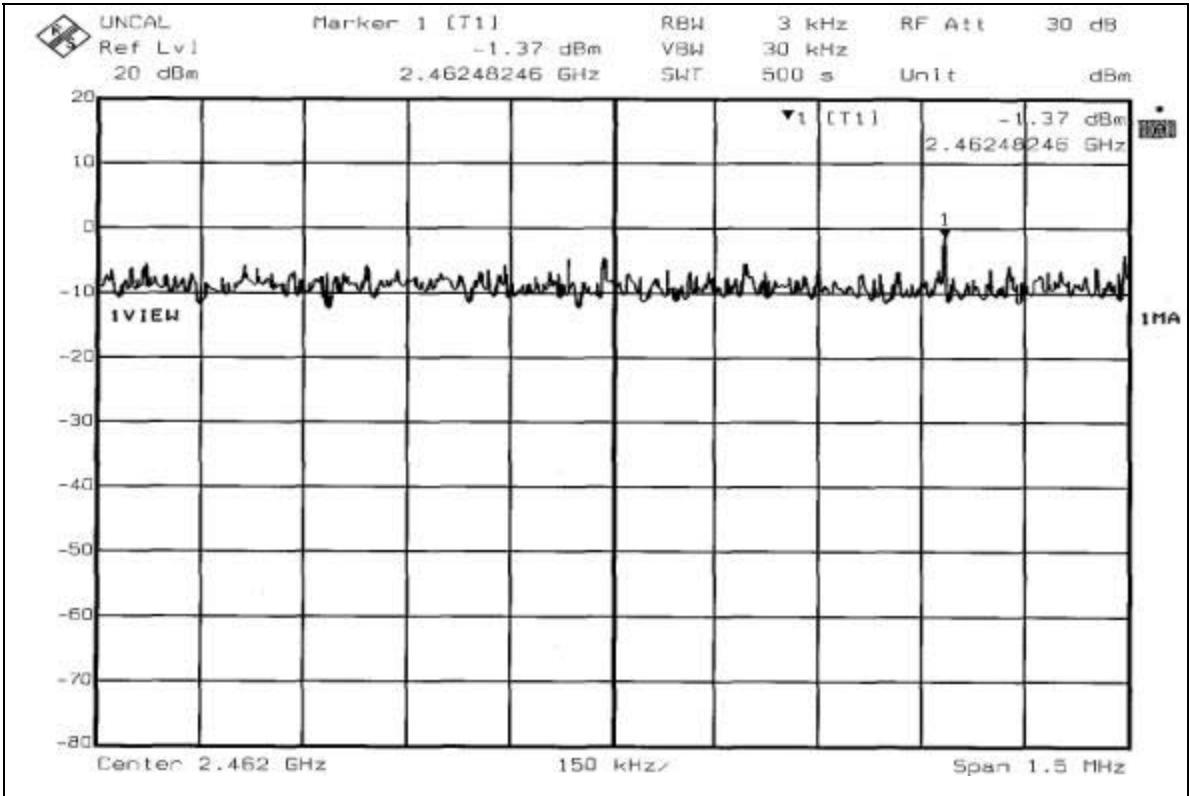


**802.11g OFDM modulation**


EUT	Client Bridge 3000 Series	MODEL	CB3000
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 53%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-9.93	8	PASS
6	2437	-6.77	8	PASS
11	2462	-10.25	8	PASS


CH1

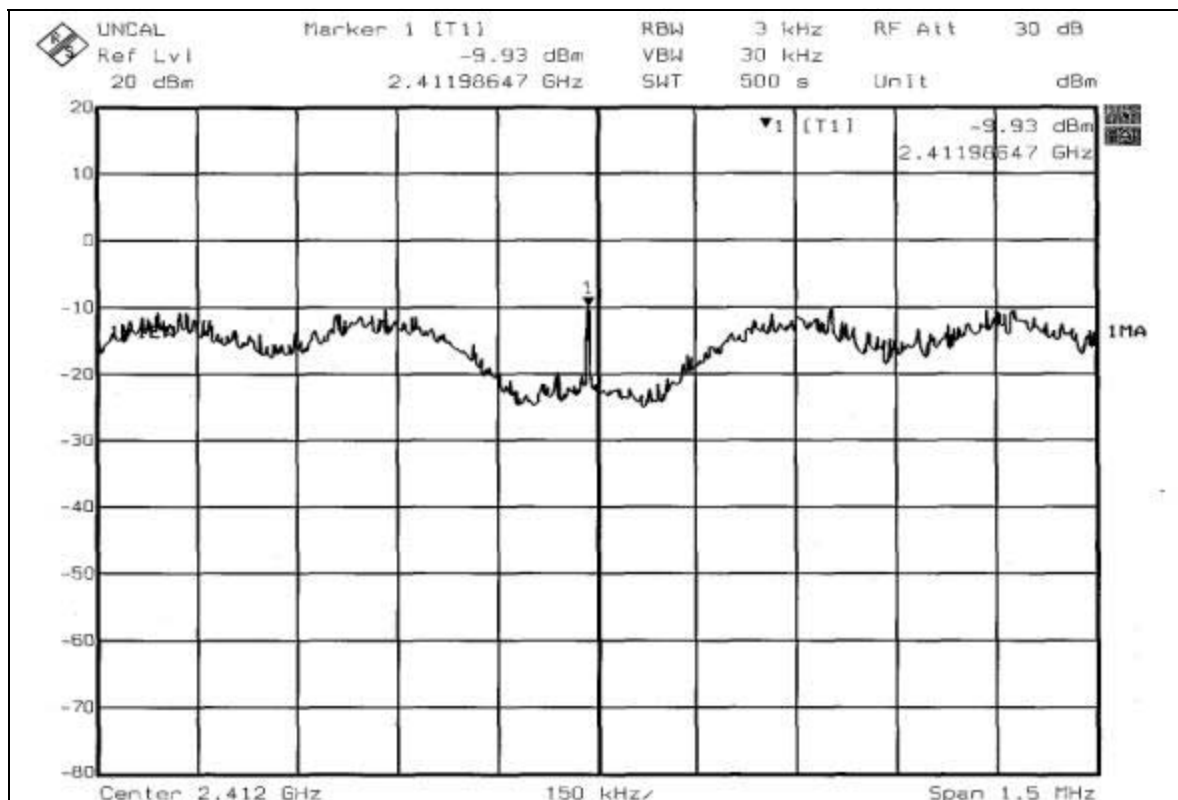

CH6

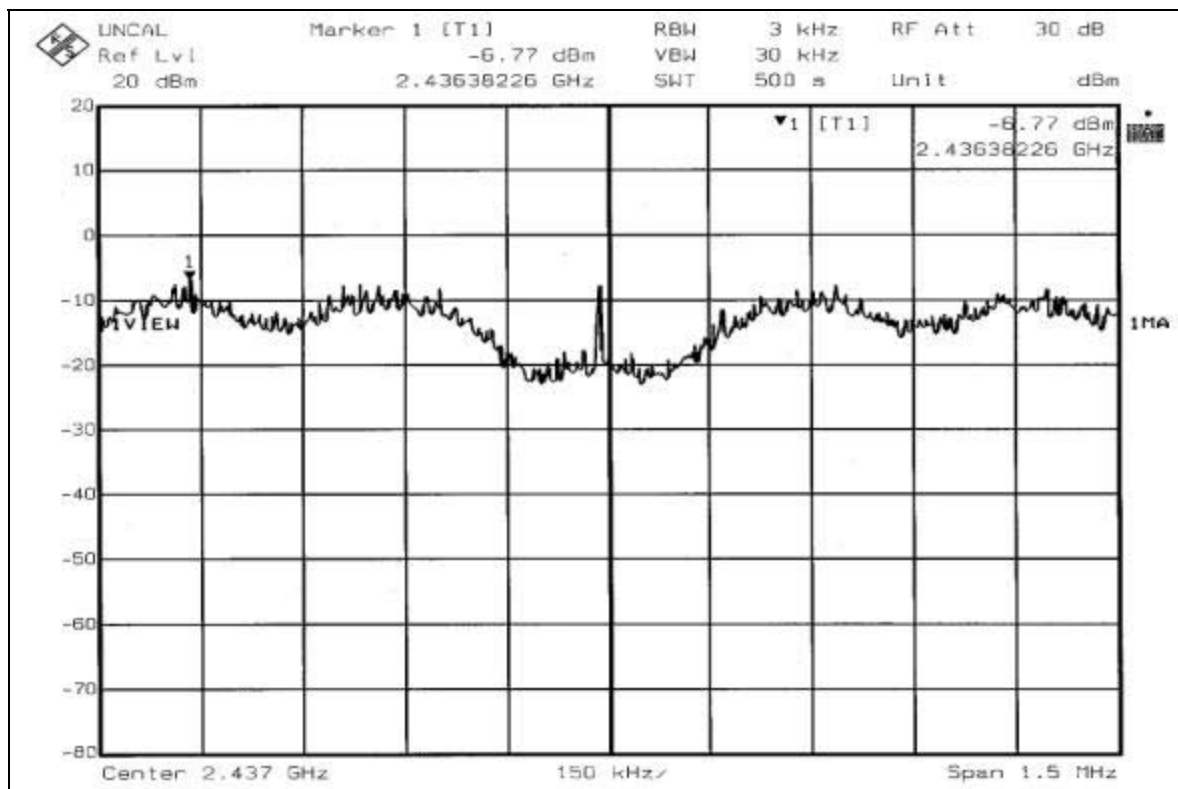

CH11

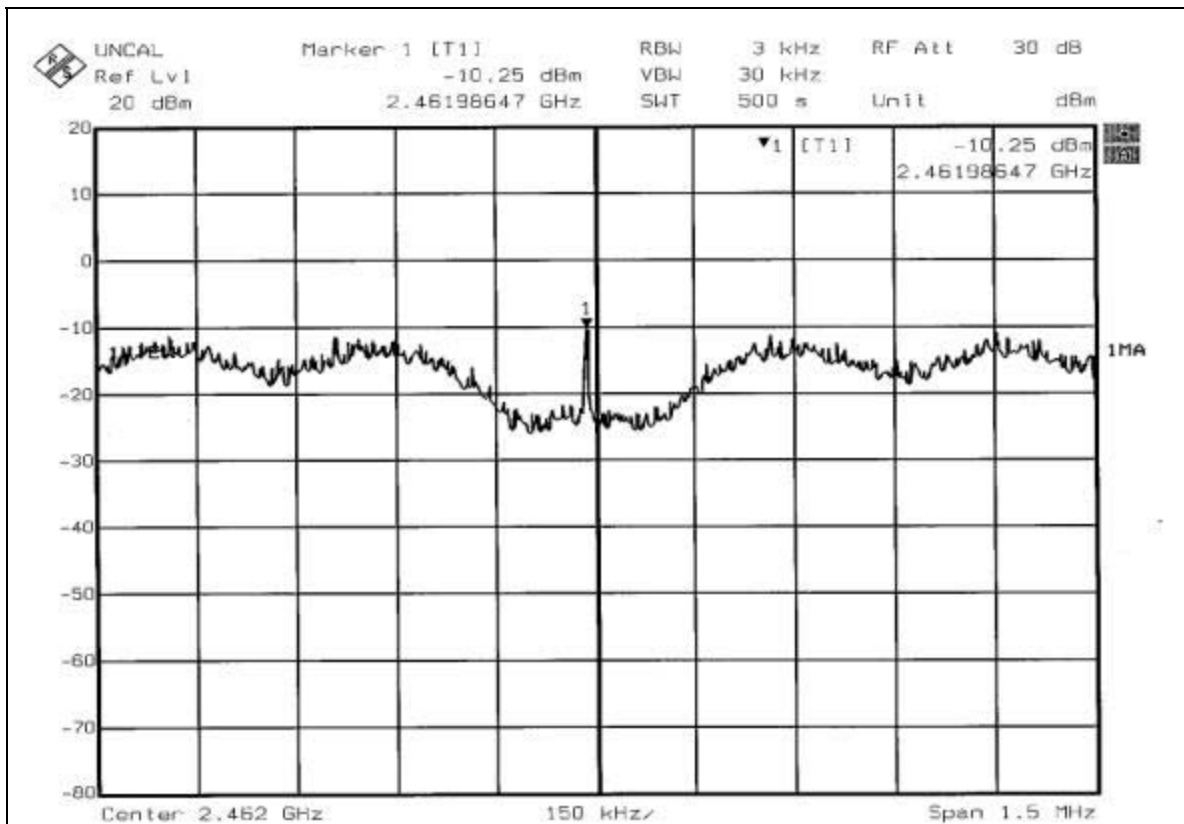

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz ; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6



4.6.6 TEST RESULTS

The spectrum plots are attached on the following 12 images. D2 line indicates the highest level, and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS modulation

NOTE 1: The band edge emission plot on page 59 shows 58.10dBc between carrier maximum power and local maximum emission in restrict band (2.3849GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 114.25dBuV/m (Peak), so the maximum field strength in restrict band is $114.25 - 58.10 = 56.15$ dBuV/m which is under 74dBuV/m limit..

The band edge emission plot of on page 59 shows 59.47dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 106.11dBuV/m (Average), so the maximum field strength in restrict band is $106.11 - 59.47 = 46.64$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on page 60 shows 59.03dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 114.07dBuV/m (Peak), so the maximum field strength in restrict band is $114.07 - 59.03 = 55.04$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 61 shows 61.38dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 105.79dBuV/m (Average), so the maximum field strength in restrict band is $105.79 - 61.38 = 44.41$ dBuV/m which is under 54dBuV/m limit.



**802.11g OFDM modulation**



NOTE 1: The band edge emission plot on page 62 shows 53.07dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 109.62dBuV/m (Peak), so the maximum field strength in restrict band is $109.62 - 53.07 = 56.55$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of on page 62 shows 52.91dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 99.34dBuV/m (Average), so the maximum field strength in restrict band is $99.34 - 52.91 = 46.43$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on page 63 shows 50.87dBc between carrier maximum power and local maximum emission in restrict band (2.4837GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 108.64dBuV/m (Peak), so the maximum field strength in restrict band is $108.64 - 50.87 = 57.77$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on page 64 shows 52.87dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 98.57 dBuV/m (Average), so the maximum field strength in restrict band is $98.57 - 52.87 = 45.70$ dBuV/m which is under 54dBuV/m limit.

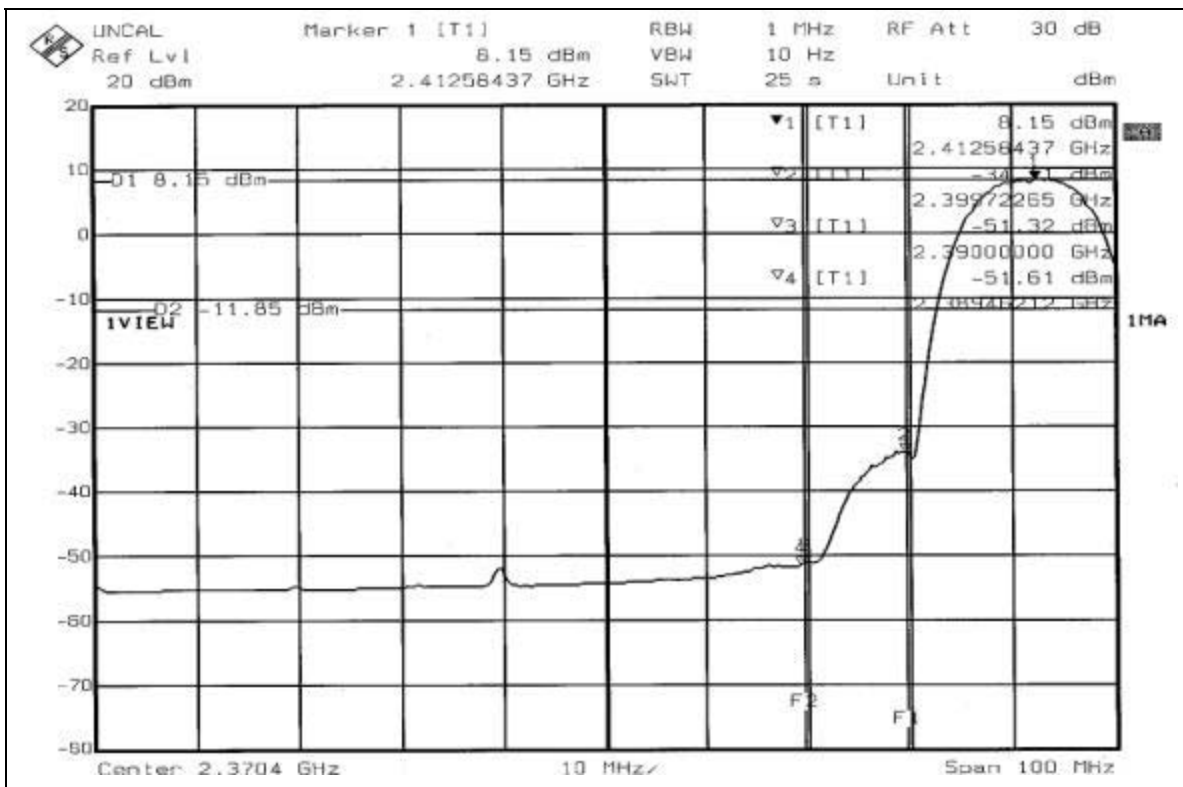
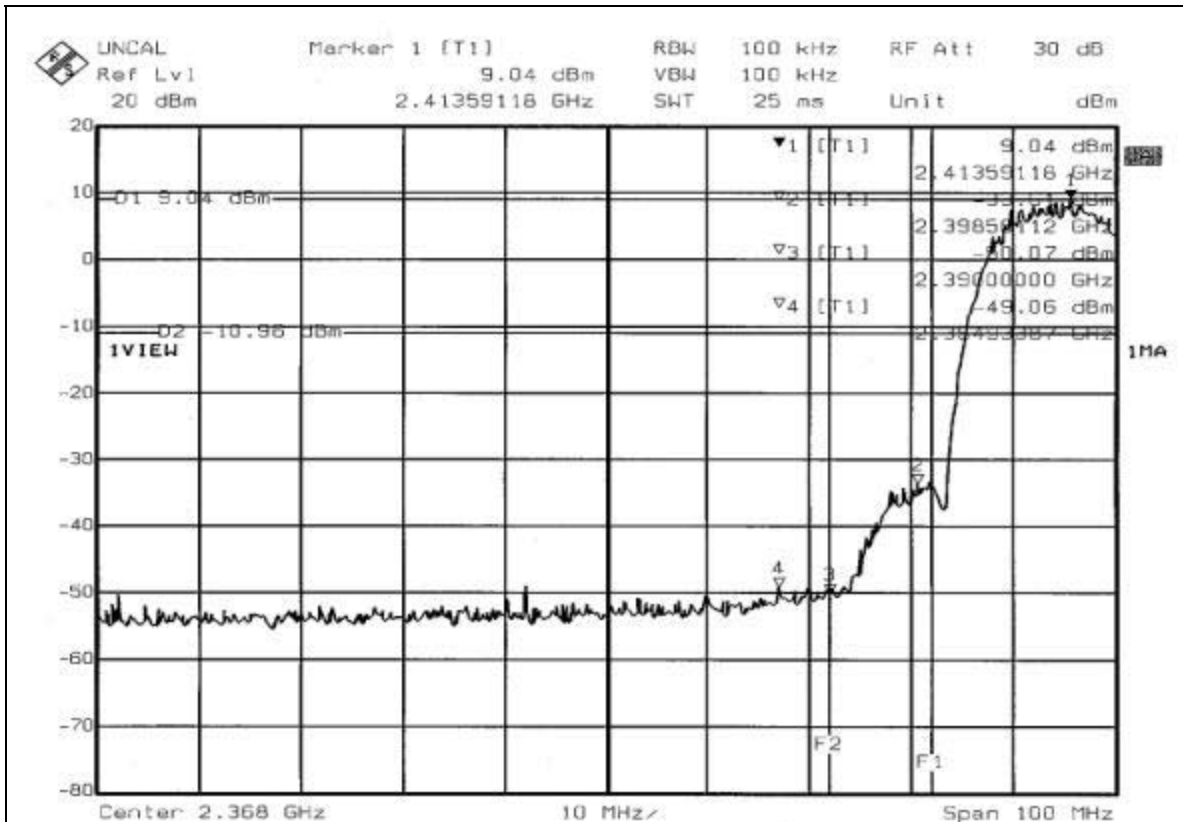
802.11b DSSS modulation

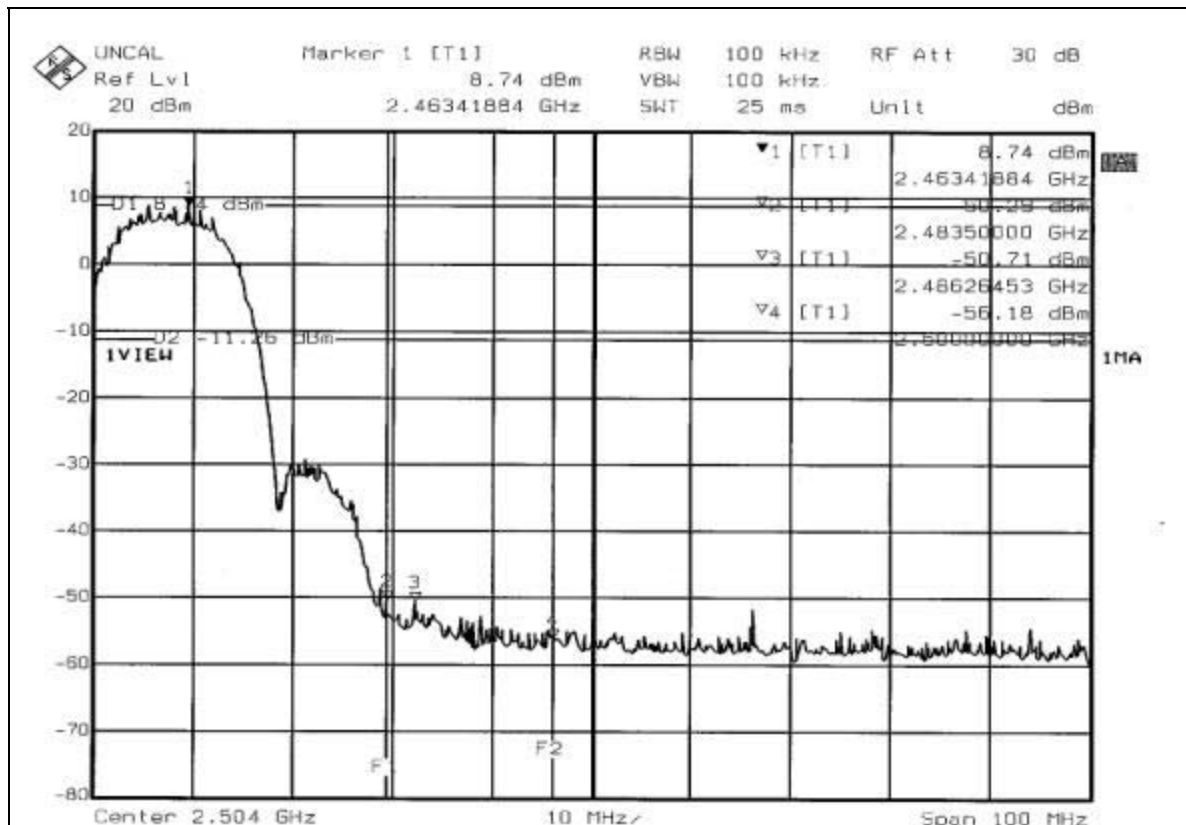
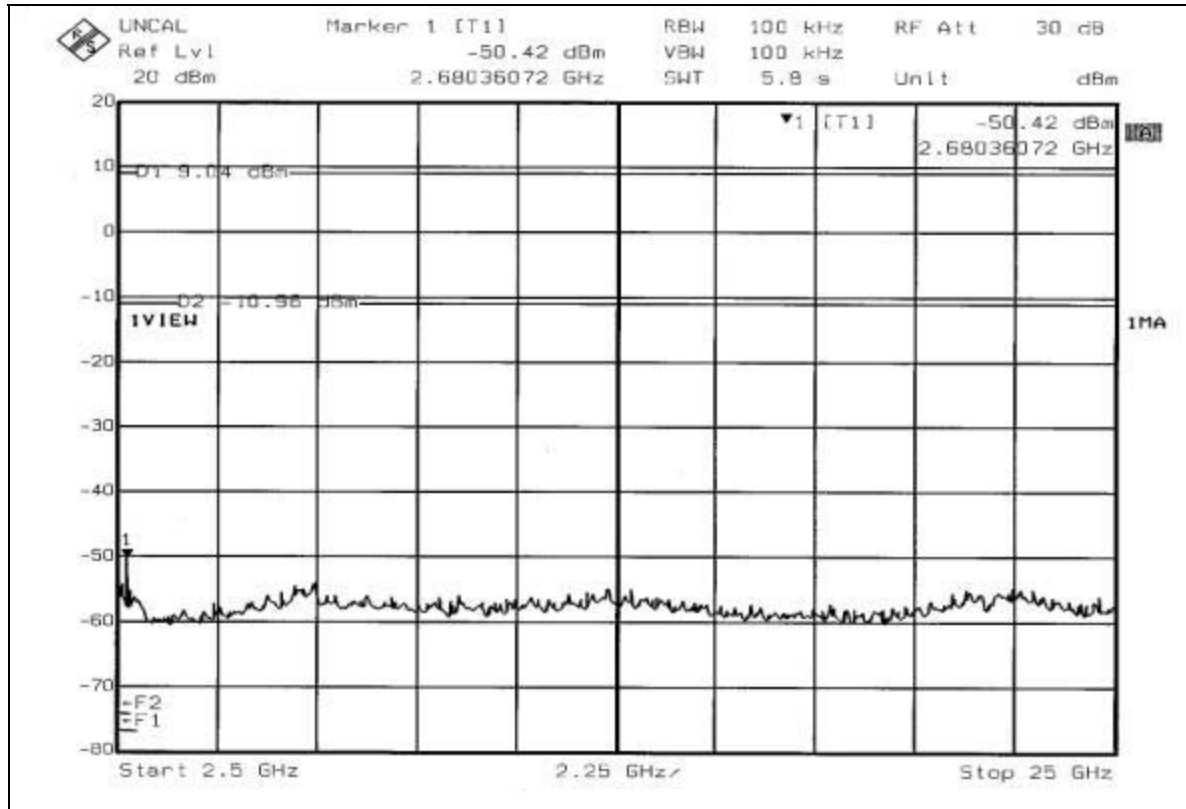


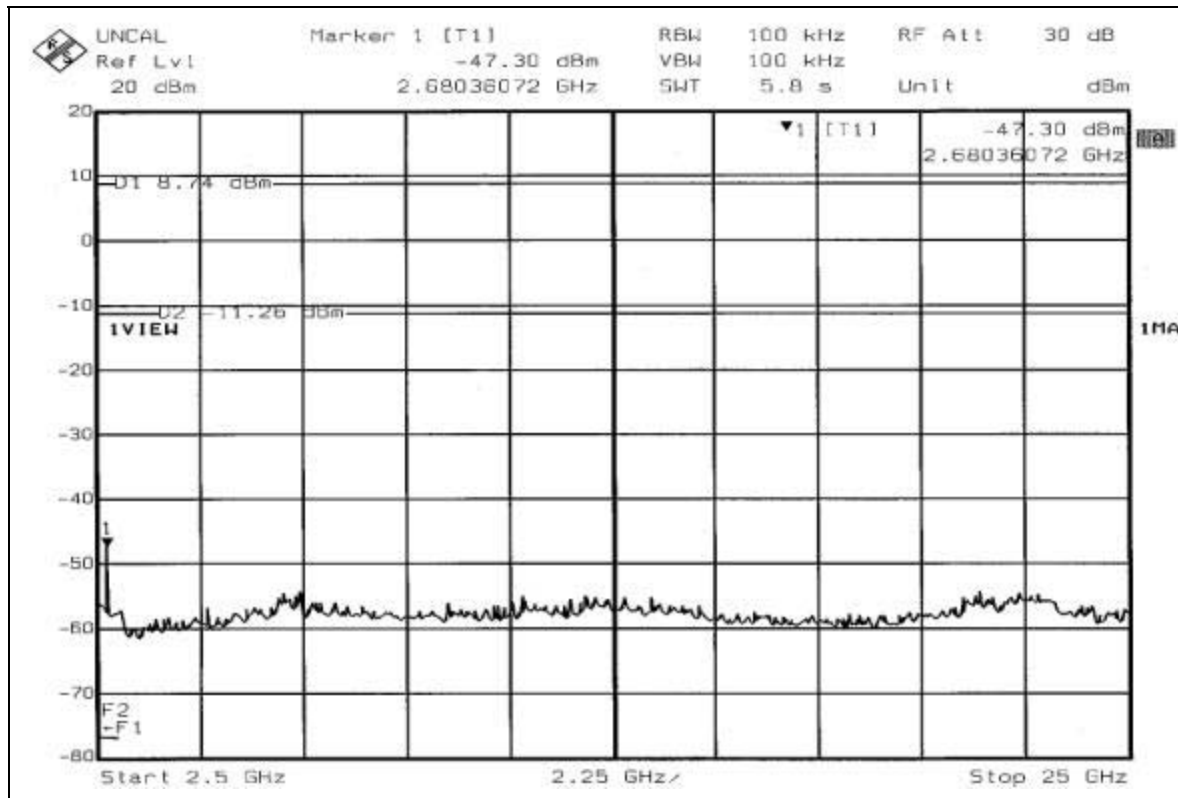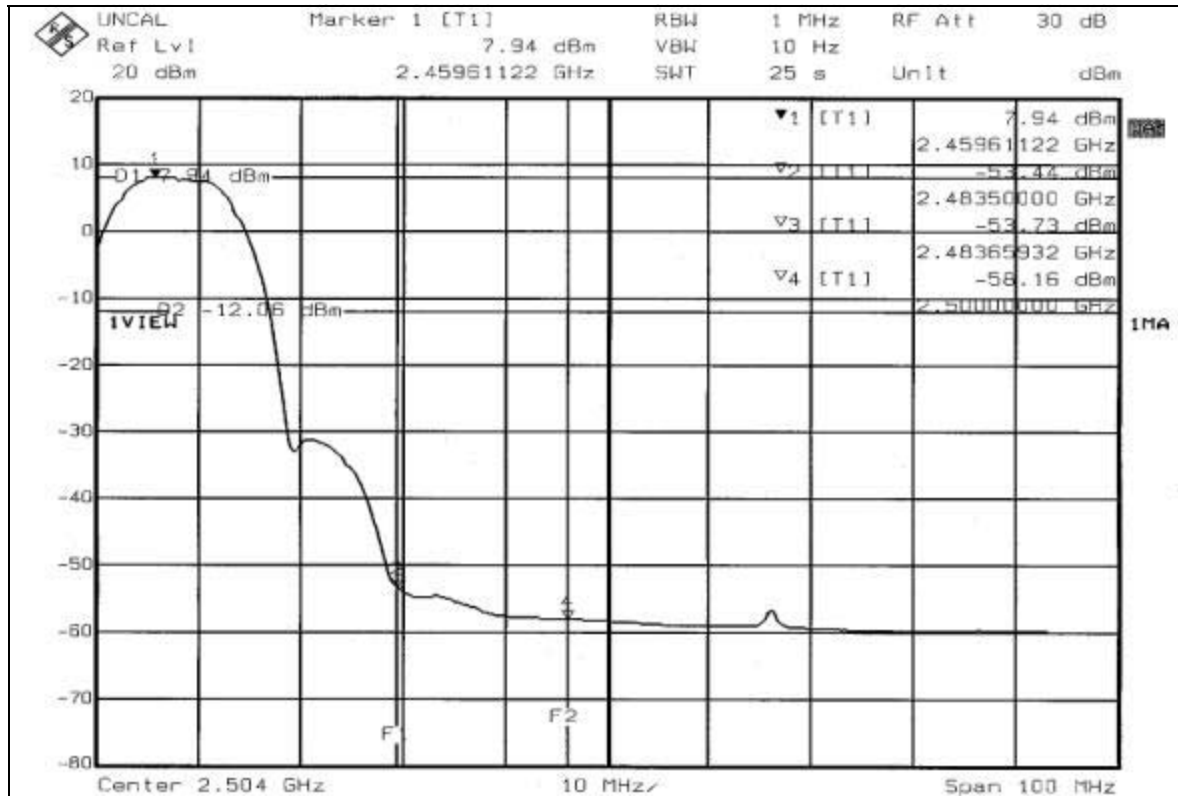

802.11g OFDM modulation

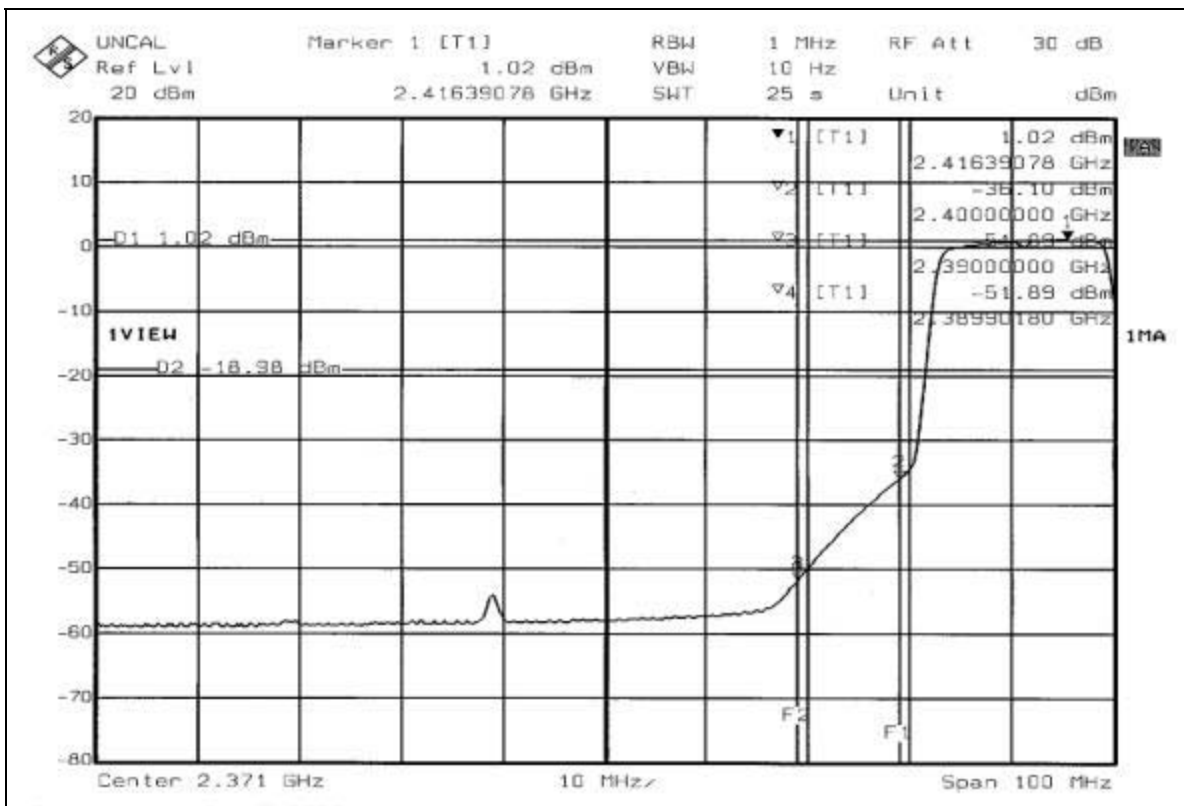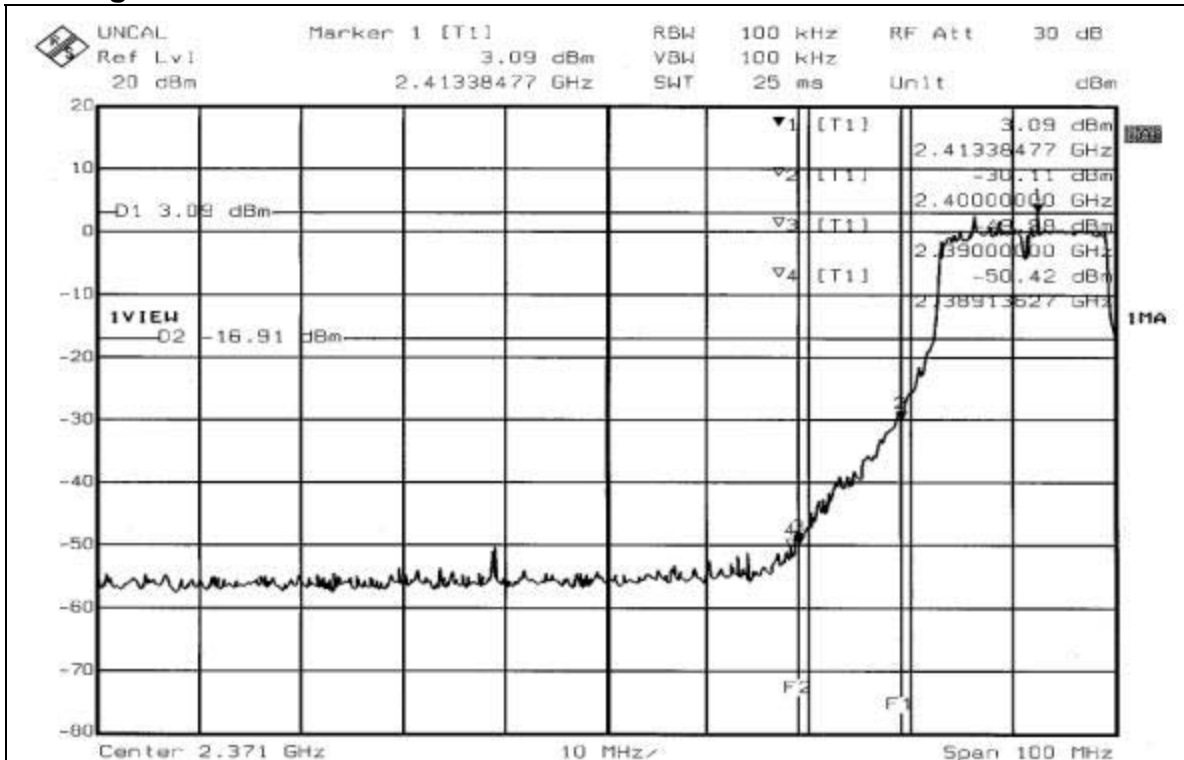

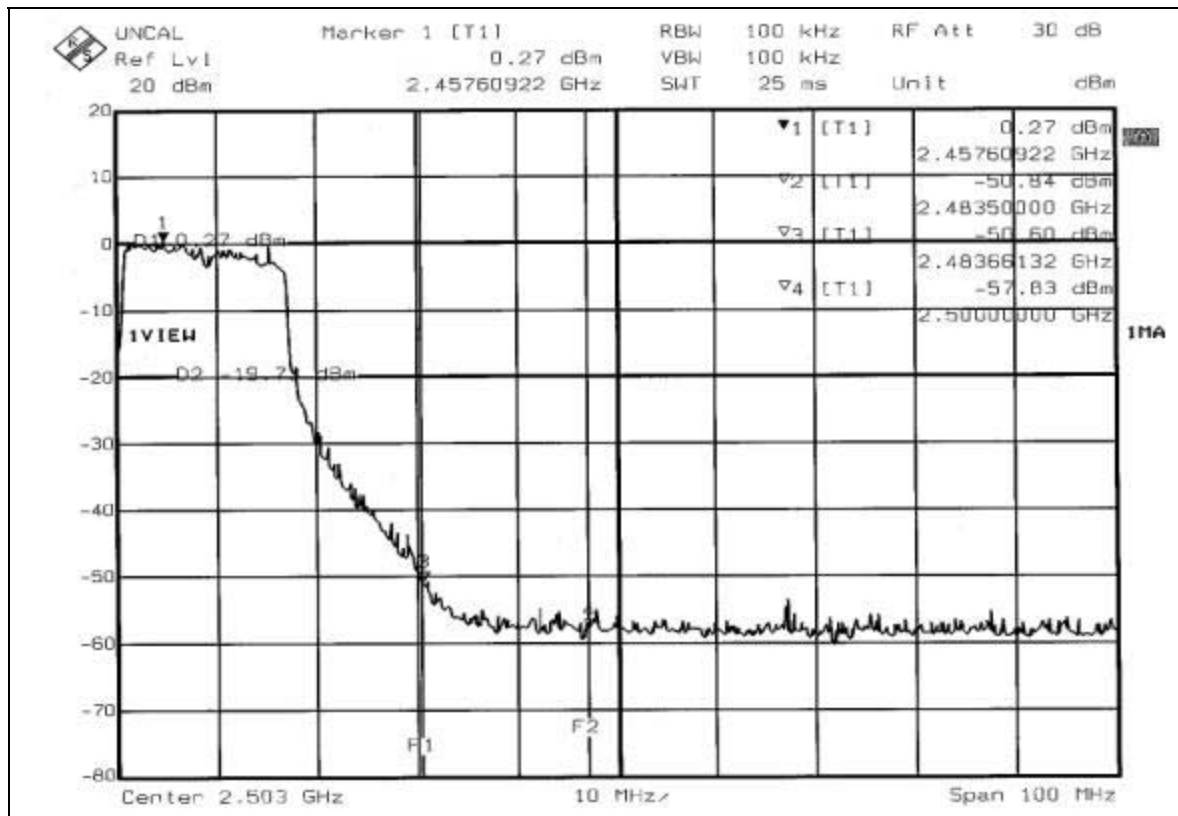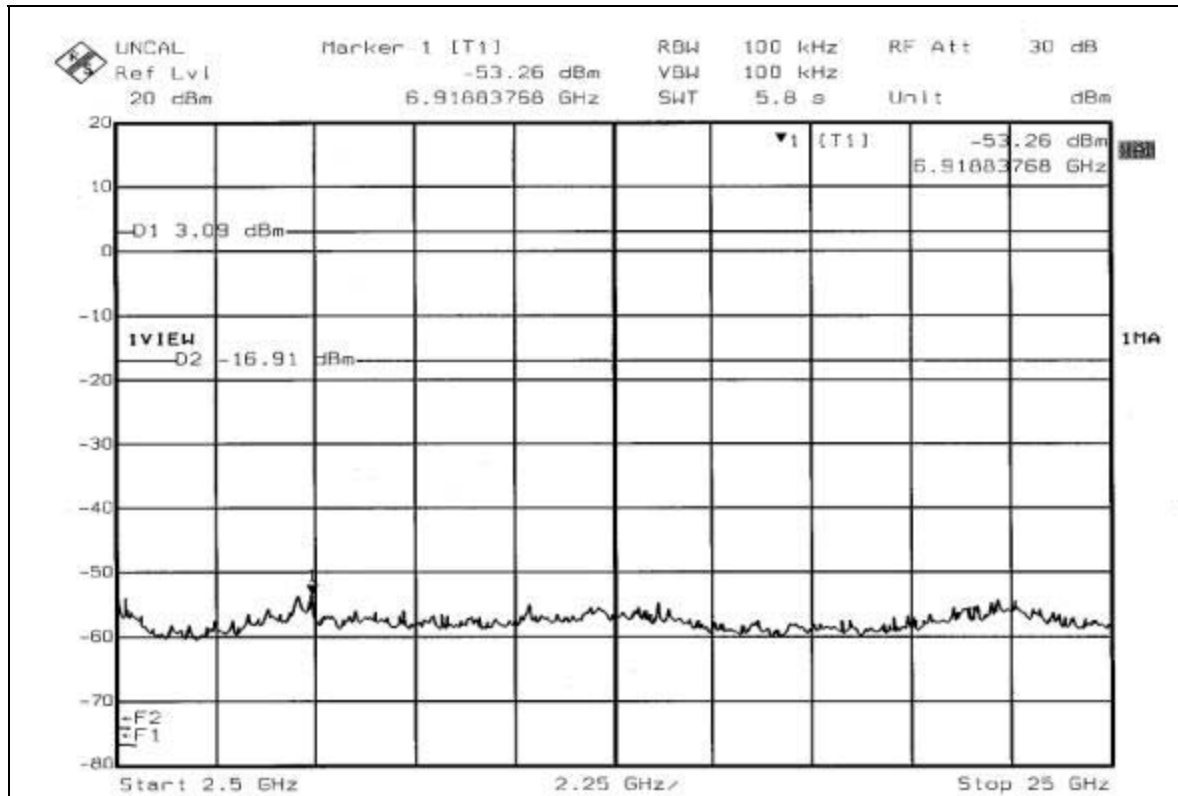

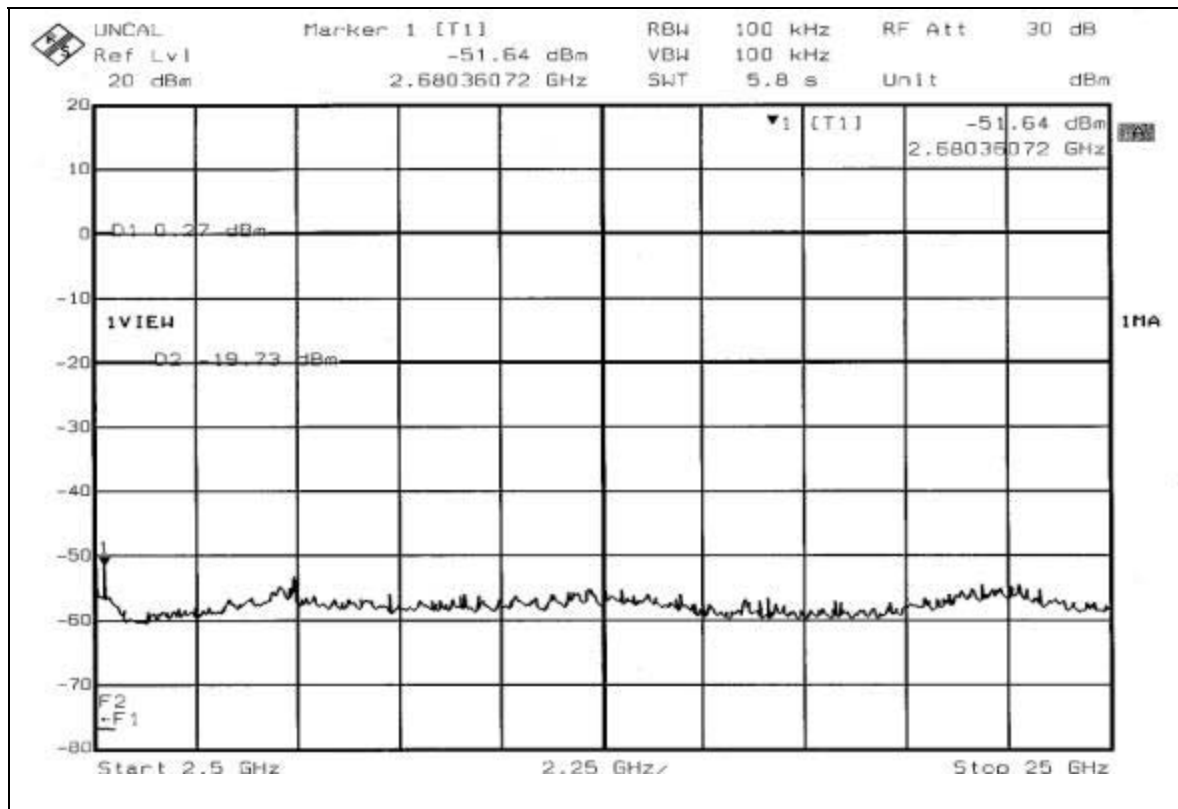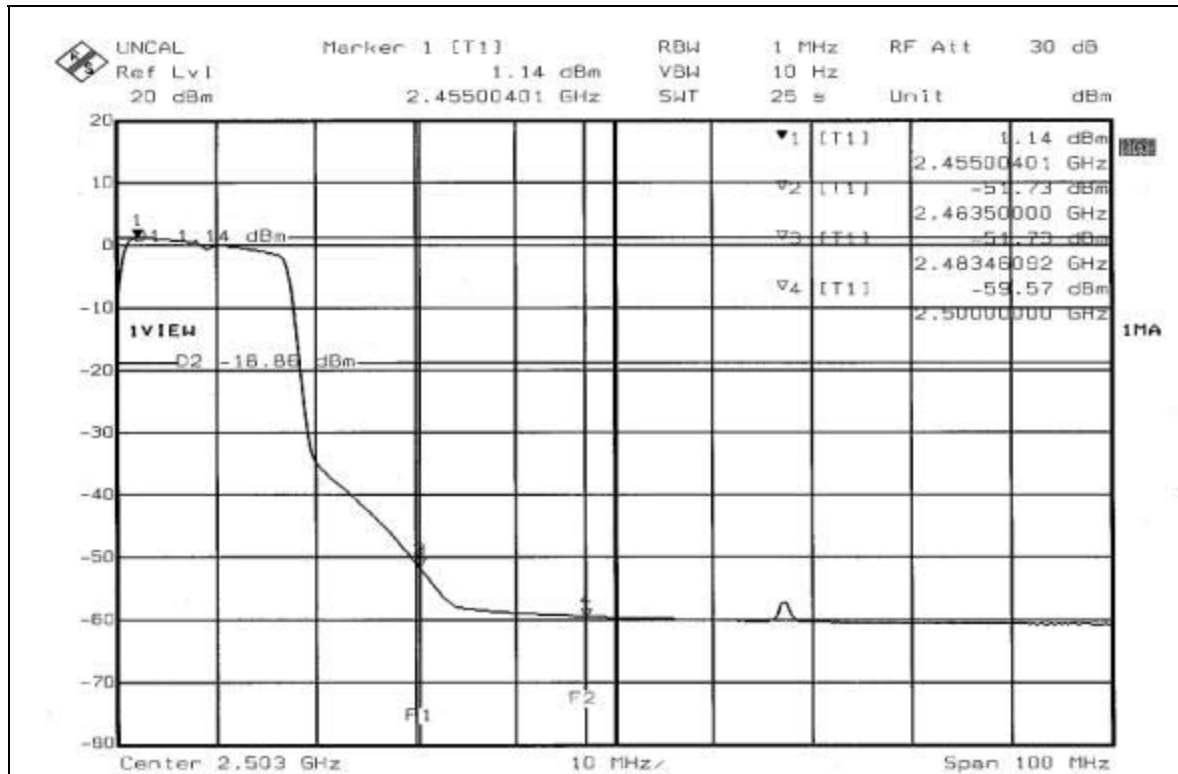

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna with R-SMA connector. The maximum Gain of the antenna is 3dBi.

5. TEST TYPES AND RESULTS (802.11a 5725~5850MHz Band)

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
- The lower limit shall apply at the transition frequencies.
 - The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 - All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 16, 2005
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 09, 2006
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Feb. 15, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 15, 2006
Software ADT	ADT_Conc_V3	NA	NA

- NOTE:**
- The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 - The test was performed in HwaYa Shielded Room 1.
 - The VCCI Site Registration No. is C-2040.




5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) was not recorded.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation

5.1.5 TEST SETUP

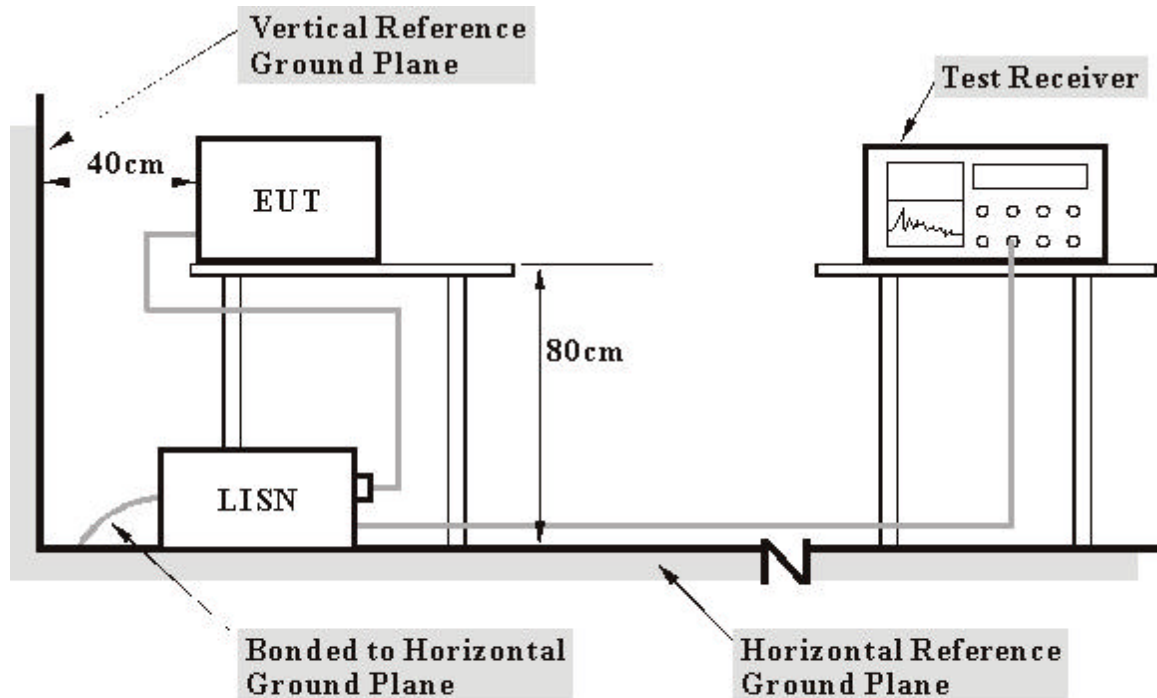

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.1.6 EUT OPERATING CONDITIONS

Same as 4.1.6


5.1.7 TEST RESULTS

Conducted Worst-Case Data

EUT	Client Bridge 3000 Series	MODEL	CB3000
CHANNEL	Channel 3	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	53.07	-	53.17	-	66.00	56.00	-12.83	-
2	0.248	0.11	44.45	-	44.56	-	61.84	51.84	-17.27	-
3	0.345	0.11	36.01	-	36.12	-	59.07	49.07	-22.95	-
4	2.074	0.21	32.46	-	32.67	-	56.00	46.00	-23.33	-
5	7.512	0.40	29.48	-	29.88	-	60.00	50.00	-30.12	-
6	14.922	0.63	28.23	-	28.86	-	60.00	50.00	-31.14	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

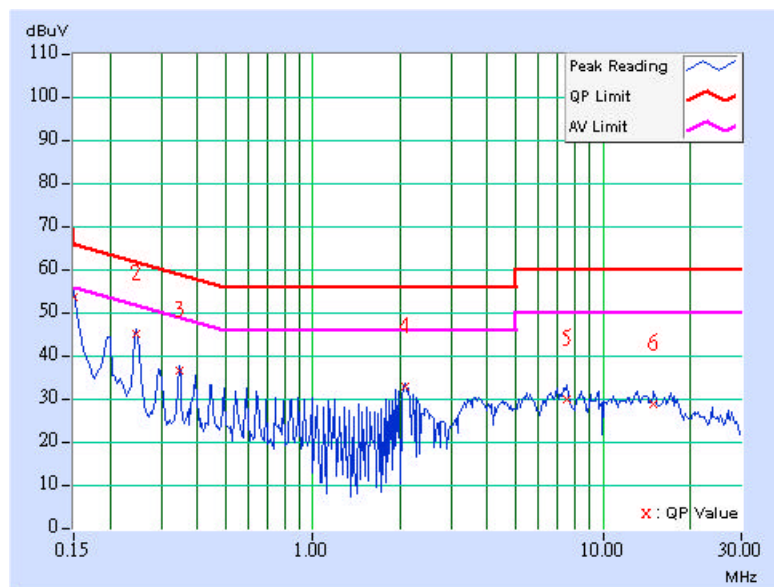

EUT	Client Bridge 3000 Series	MODEL	CB3000
CHANNEL	Channel 3	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	52.25	-	52.35	-	66.00	56.00	-13.65	-
2	0.198	0.10	42.35	-	42.45	-	63.68	53.68	-21.23	-
3	0.248	0.10	41.09	-	41.19	-	61.84	51.84	-20.64	-
4	1.977	0.21	34.85	-	35.06	-	56.00	46.00	-20.94	-
5	3.359	0.26	28.72	-	28.98	-	56.00	46.00	-27.02	-
6	9.586	0.40	23.28	-	23.68	-	60.00	50.00	-36.32	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

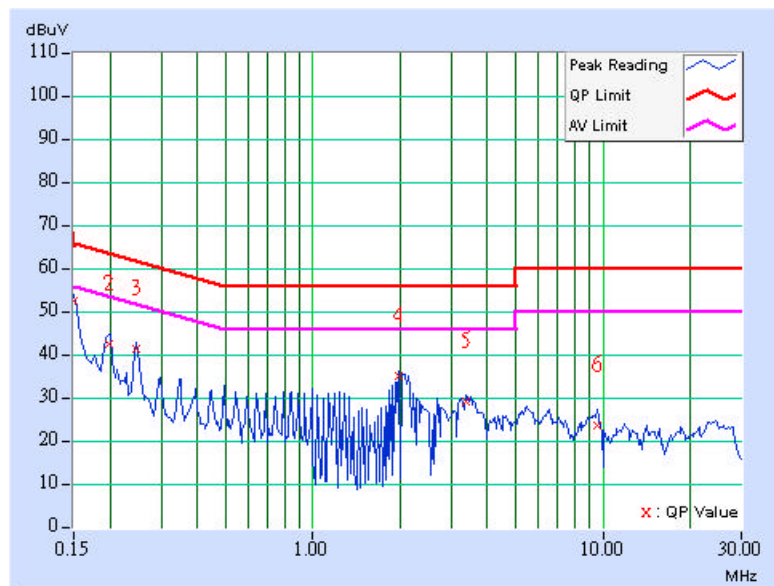

5.2 RADIATED EMISSION MEASUREMENT

5.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

5.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	Jun. 08, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Jun. 03, 2005
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Jun. 01, 2005
HORN Antenna SCHWARZBECK	9120D	9120D-408	Jan. 17, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Jan. 23, 2006
Preamplifier Agilent	8447D	2944A10633	Nov. 09, 2005
Preamplifier Agilent	8449B	3008A01964	Nov. 06, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218183/4	Jan. 26, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218195/4	Jan. 26, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 2.

3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

4. The VCCI Site Registration No. is R-237.

5. The IC Site Registration No. is IC4924-3.



5.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation

5.2.5 TEST SETUP

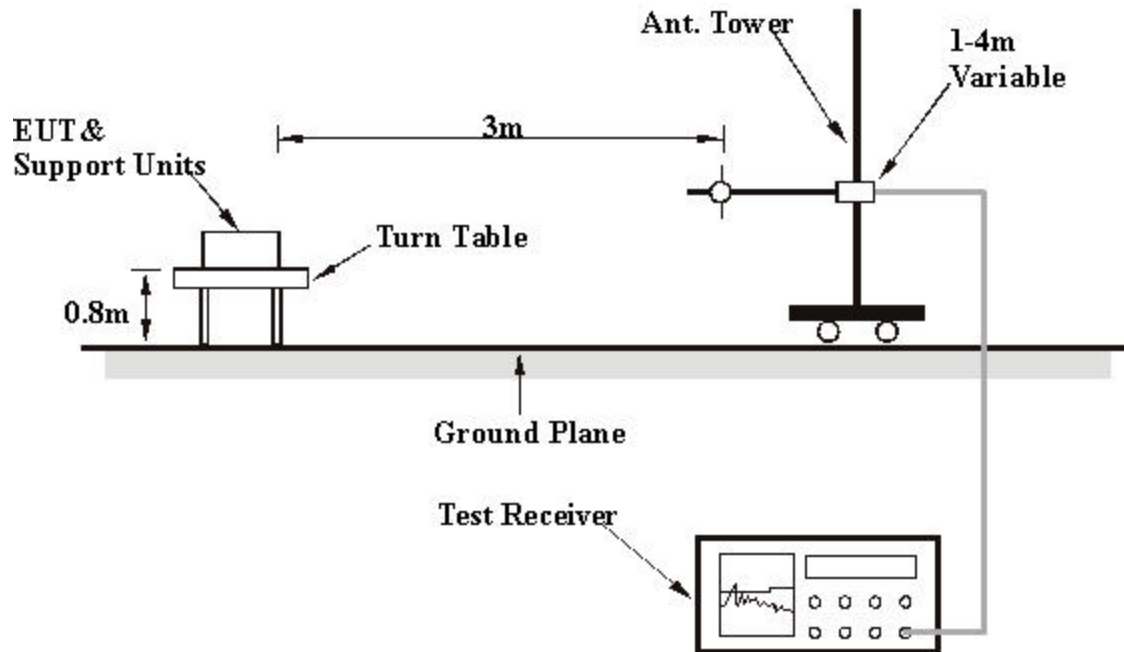

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

5.2.7 TEST RESULTS

Below 1GHz Worst-Case Data

EUT	Client Bridge 3000 Series	MODEL	CB3000
CHANNEL	Channel 3	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	214.67	32.62 QP	43.50	-10.88	1.25 H	295	20.44	12.18
2	249.66	37.74 QP	46.00	-8.26	1.25 H	1	24.10	13.64
3	500.42	34.01 QP	46.00	-11.99	1.00 H	19	14.73	19.28
4	630.66	32.77 QP	46.00	-13.23	1.25 H	313	10.72	22.05
5	900.86	35.23 QP	46.00	-10.77	1.25 H	22	9.32	25.91
6	931.96	34.89 QP	46.00	-11.11	1.00 H	298	8.61	26.28

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.16	30.86 QP	40.00	-9.14	1.25 V	58	16.76	14.10
2	125.25	37.52 QP	43.50	-5.98	1.25 V	7	23.79	13.73
3	249.66	33.54 QP	46.00	-12.46	1.00 V	148	19.90	13.64
4	630.66	34.09 QP	46.00	-11.91	1.50 V	7	12.04	22.05
5	875.59	34.23 QP	46.00	-11.77	1.00 V	43	8.77	25.46
6	920.30	38.65 QP	46.00	-7.35	1.25 V	172	12.51	26.14

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

802.11a OFDM modulation

EUT	Client Bridge 3000 Series	MODEL	CB3000
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 60%RH, 991hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3830.00	45.90 PK	74.00	-28.10	1.36 H	117	10.12	35.78
2	*5745.00	101.64 PK			1.05 H	301	61.83	39.81
2	*5745.00	91.43 AV			1.05 H	301	51.62	39.81
3	#7660.00	54.74 PK	74.00	-19.26	1.03 H	298	9.62	45.12
3	#7660.00	43.36 AV	54.00	-10.64	1.03 H	298	-1.76	45.12
4	#11490.00	60.12 PK	74.00	-13.88	1.03 H	298	10.51	49.61
4	#11490.00	47.77 AV	54.00	-6.23	1.03 H	298	-1.84	49.61
5	17235.00	65.28 PK	81.64	-16.36	1.03 H	298	11.70	53.58

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3883.00	48.89 PK	74.00	-25.11	1.02 V	295	12.95	35.94
2	*5825.00	110.27 PK			1.09 V	44	70.33	39.94
2	*5825.00	100.20 AV			1.09 V	44	60.26	39.94
3	#7766.00	57.63 PK	74.00	-16.37	1.02 V	351	12.21	45.42
3	#7766.00	47.08 AV	54.00	-6.92	1.02 V	351	1.66	45.42
4	#11650.00	63.21 PK	74.00	-10.79	1.14 V	208	13.77	49.45
4	#11650.00	49.83 AV	54.00	-4.17	1.14 V	208	0.38	49.45
5	17475.00	69.54 PK	90.27	-20.73	1.26 V	30	14.38	55.16

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. “*” : Fundamental frequency
 6. “#” The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

EUT	Client Bridge 3000 Series	MODEL	CB3000
CHANNEL	Channel 3	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 60%RH, 991hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3856.00	46.32 PK	74.00	-27.68	1.02 H	227	10.46	35.86
2	*5785.00	101.66 PK			1.02 H	306	61.79	39.87
2	*5785.00	91.79 AV			1.02 H	306	51.92	39.87
3	#7713.00	55.89 PK	74.00	-18.11	1.15 H	259	10.65	45.24
3	#7713.00	44.20 AV	54.00	-9.80	1.15 H	259	-1.04	45.24
4	#11570.00	61.02 PK	74.00	-12.98	1.18 H	206	11.49	49.53
4	#11570.00	47.65 AV	54.00	-6.35	1.18 H	206	-1.88	49.53
5	17355.00	66.58 PK	81.66	-15.08	1.63 H	28	12.24	54.34

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3856.00	49.41 PK	74.00	-24.59	1.36 V	208	13.55	35.86
1	#3856.00	39.58 AV	54.00	-14.42	1.36 V	208	3.72	35.86
2	*5785.00	110.78 PK			1.10 V	40	70.91	39.87
2	*5785.00	100.35 AV			1.10 V	40	60.48	39.87
3	#7713.00	57.19 PK	74.00	-16.81	1.02 V	326	11.95	45.24
3	#7713.00	46.12 AV	54.00	-7.88	1.02 V	326	0.88	45.24
4	#11570.00	62.39 PK	74.00	-11.61	1.12 V	74	12.86	49.53
4	#11570.00	49.48 AV	54.00	-4.52	1.12 V	74	-0.05	49.53
5	17355.00	68.51 PK	90.78	-22.27	1.02 V	286	14.16	54.34

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#" The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

EUT	Client Bridge 3000 Series	MODEL	CB3000
CHANNEL	Channel 5	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 60%RH, 991hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3883.00	46.21 PK	74.00	-27.79	1.32 H	263	10.27	35.94
2	*5825.00	101.43 PK			1.04 H	308	61.49	39.94
2	*5825.00	91.20 AV			1.04 H	308	51.26	39.94
3	#7766.00	55.84 PK	74.00	-18.16	1.02 H	39	10.42	45.42
3	#7766.00	45.95 AV	54.00	-8.05	1.02 H	39	0.53	45.42
4	#11650.00	62.02 PK	74.00	-11.98	1.18 H	258	12.58	49.45
4	#11650.00	48.26 AV	54.00	-5.74	1.18 H	258	-1.19	49.45
5	17475.00	67.48 PK	81.43	-13.95	1.36 H	30	12.32	55.16

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3830.00	47.59 PK	74.00	-26.41	1.18 V	309	11.81	35.78
2	*5745.00	110.48 PK			1.00 V	41	70.67	39.81
2	*5745.00	100.80 AV			1.00 V	41	60.99	39.81
3	#7660.00	55.86 PK	74.00	-18.14	1.01 V	3	10.74	45.12
3	#7660.00	45.01 AV	54.00	-8.99	1.01 V	3	-0.11	45.12
4	#11490.00	62.30 PK	74.00	-11.70	1.00 V	284	12.69	49.61
4	#11490.00	49.41 AV	54.00	-4.59	1.00 V	284	-0.20	49.61
5	17235.00	68.32 PK	90.48	-22.16	1.05 V	218	14.74	53.58

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. “*” : Fundamental frequency
 6. “#” The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

5.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTES: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


5.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

5.3.4 DEVIATION FROM TEST STANDARD

No deviation

5.3.5 TEST SETUP

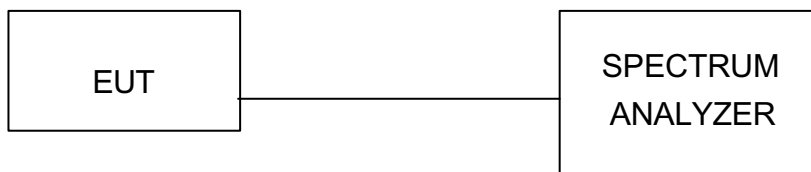

5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


5.3.7 TEST RESULTS

802.11a OFDM modulation


EUT	Client Bridge 3000 Series	MODEL	CB3000
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 52%RH, 991 hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	5745	16.59	0.5	PASS
3	5785	16.59	0.5	PASS
5	5825	16.55	0.5	PASS

CH 1

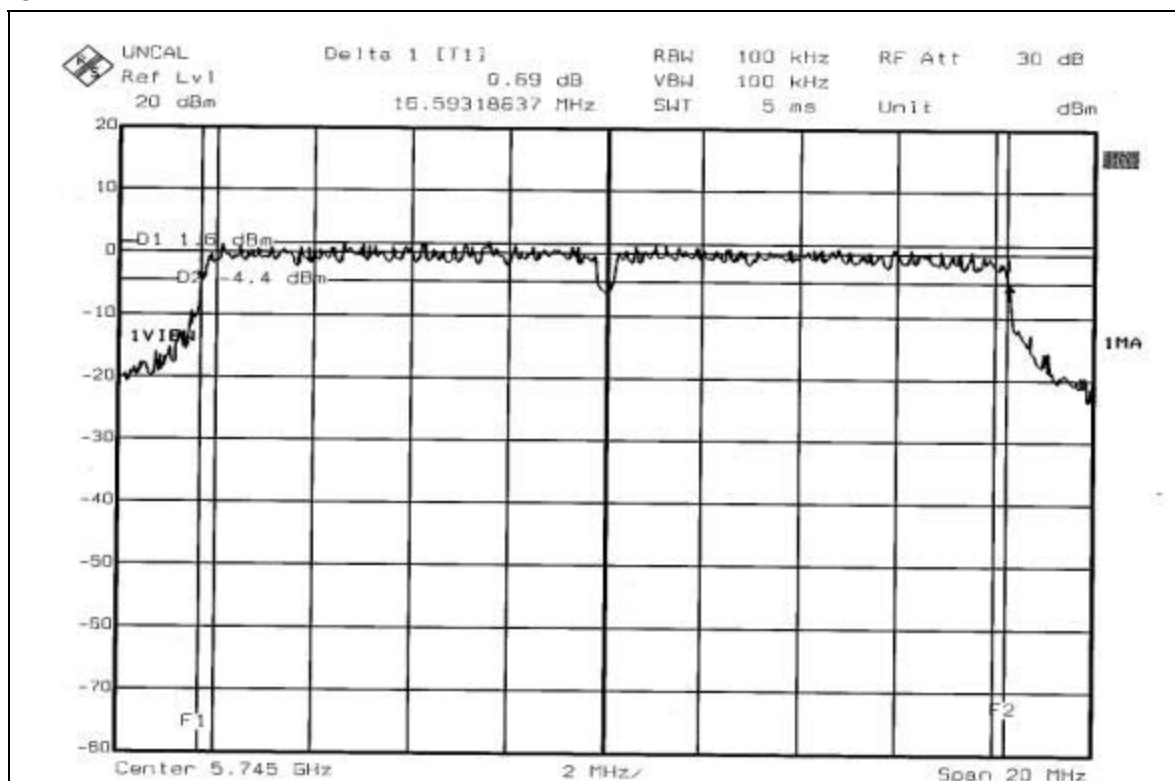


CH 3

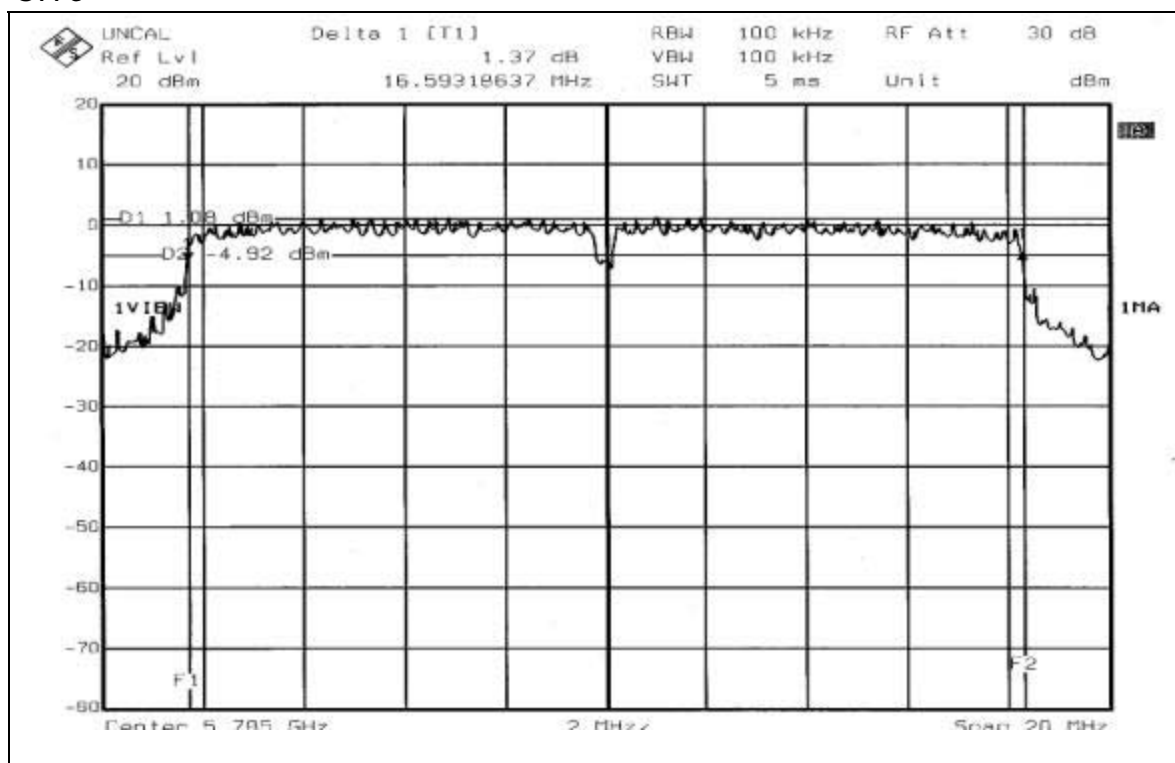



CH 5

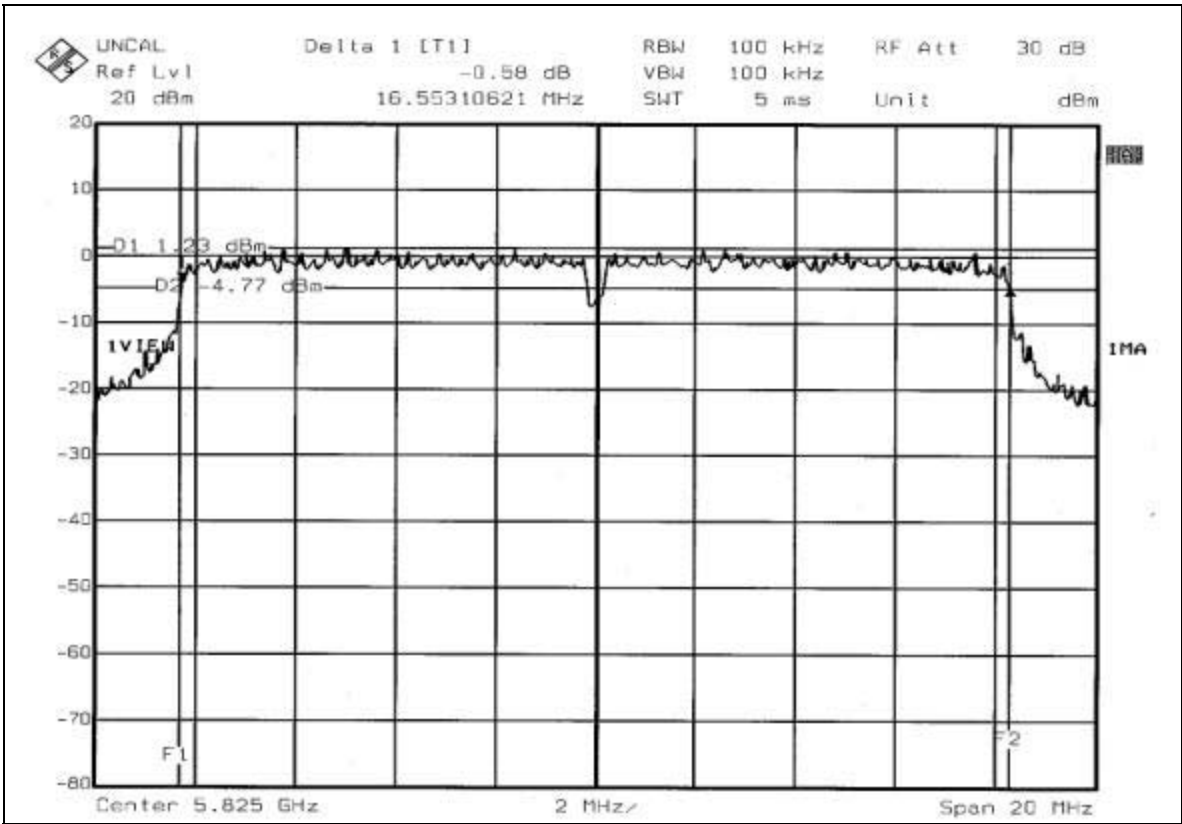

5.4 MAXIMUM PEAK OUTPUT POWER

5.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

5.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 06, 2005
TEKTRONIX OSCILLOSCOPE	TDS 1012	C019167	Feb. 01, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA..

5.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator . The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

5.4.4 DEVIATION FROM TEST STANDARD

No deviation

5.4.5 TEST SETUP



5.4.6 EUT OPERATING CONDITIONS

Same as Item 5.3.6

5.4.7 TEST RESULTS

802.11a OFDM modulation

EUT	Client Bridge 3000 Series	MODEL	CB3000
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 52%RH, 991 hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	5745	79.983	19.03	30	PASS
3	5785	80.353	19.05	30	PASS
5	5825	80.724	19.07	30	PASS

5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTES:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

5.5.4 DEVIATION FROM TEST STANDARD

No deviation

5.5.5 TEST SETUP



5.5.6 EUT OPERATING CONDITION

Same as Item 5.3.6




5.5.7 TEST RESULTS

802.11a OFDM modulation


EUT	Client Bridge 3000 Series	MODEL	CB3000
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 52%RH, 991 hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	5745	-9.16	8	PASS
3	5785	-9.35	8	PASS
5	5825	-9.53	8	PASS


CH1

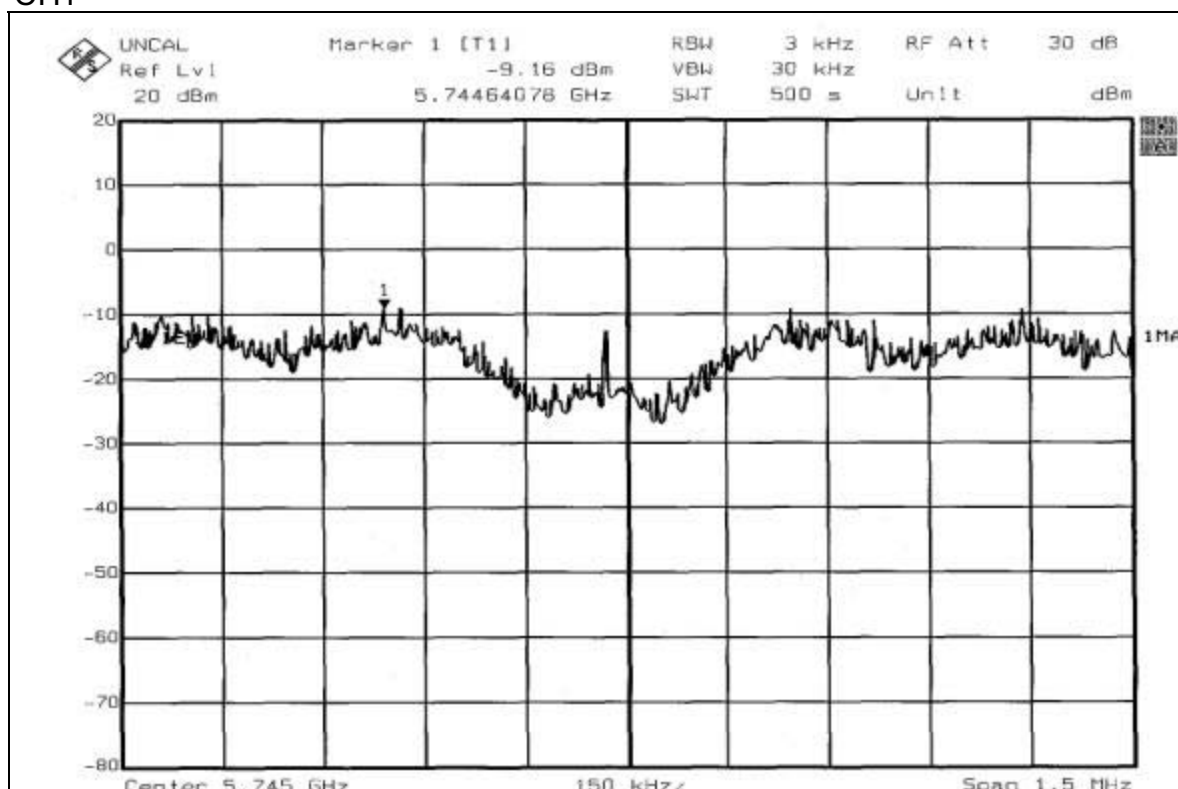

CH3

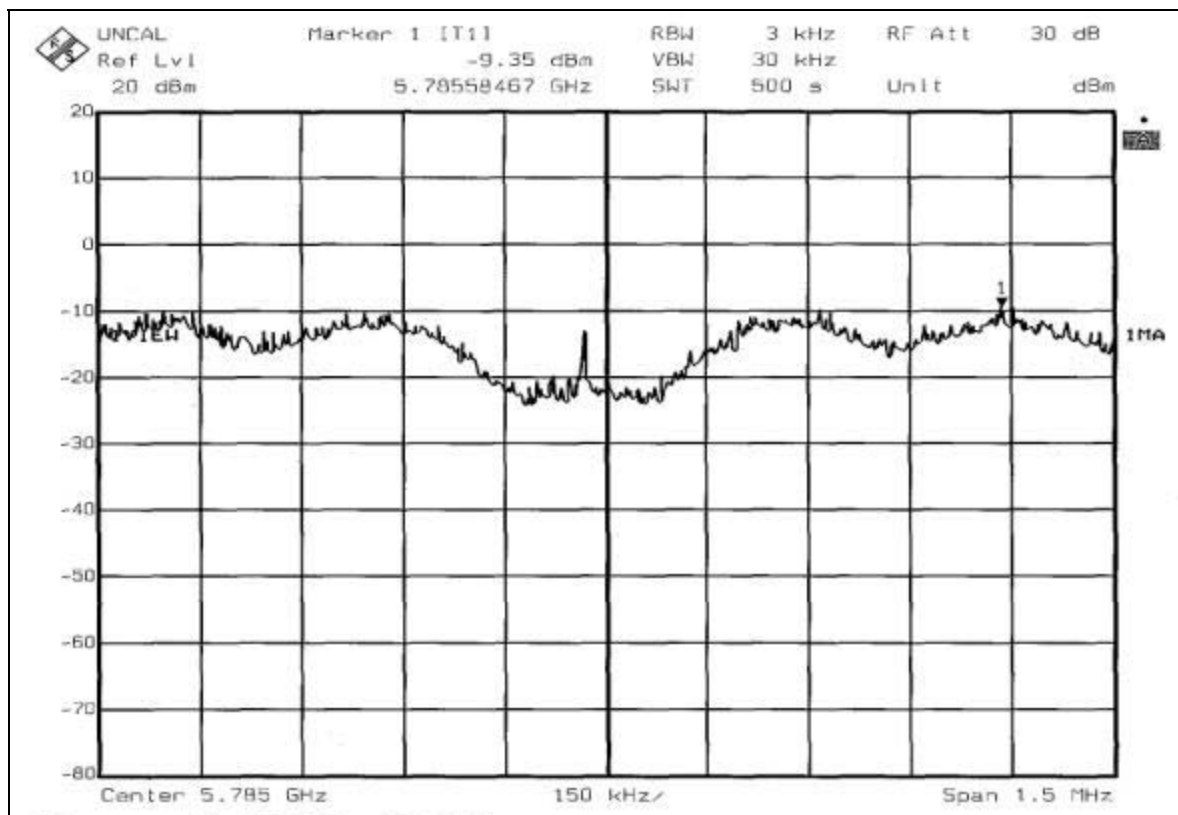

CH5

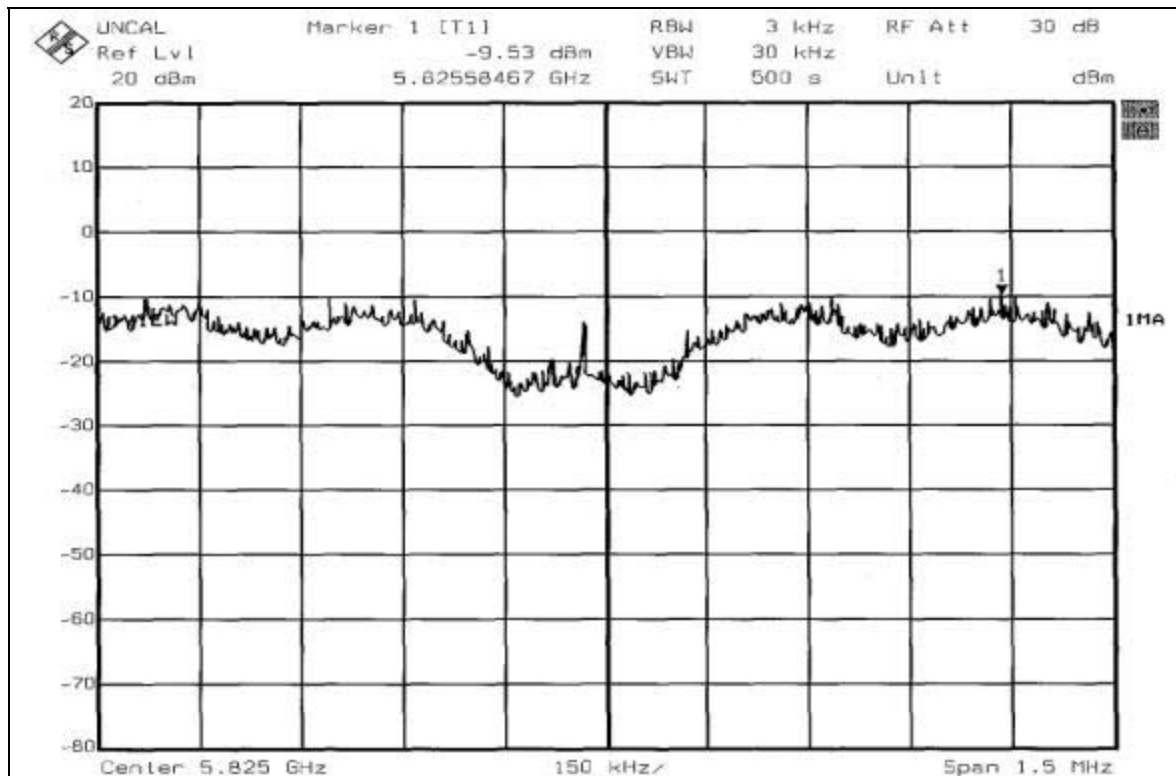

5.6 BAND EDGES MEASUREMENT

5.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTES:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

5.6.4 DEVIATION FROM TEST STANDARD

No deviation





5.6.5 EUT OPERATING CONDITION



Same as Item 5.3.6



5.6.6 TEST RESULTS

The spectrum plots are attached on the following pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).

802.11a OFDM modulation

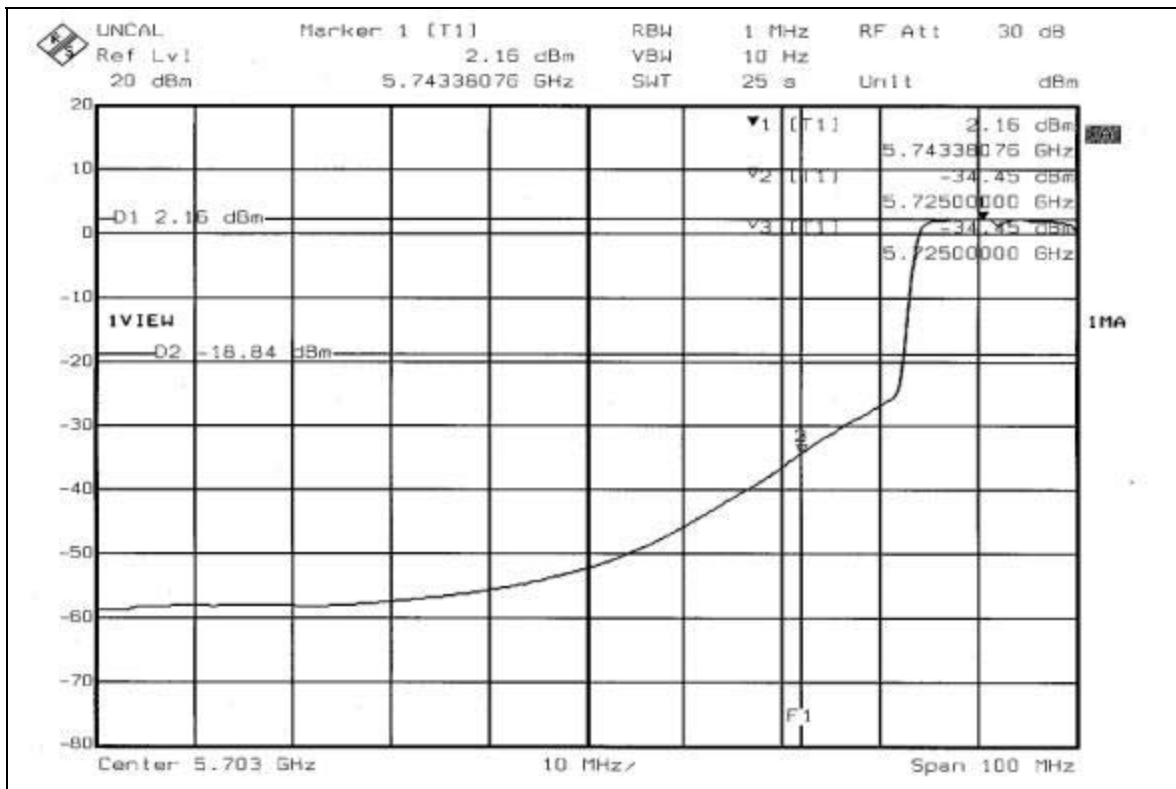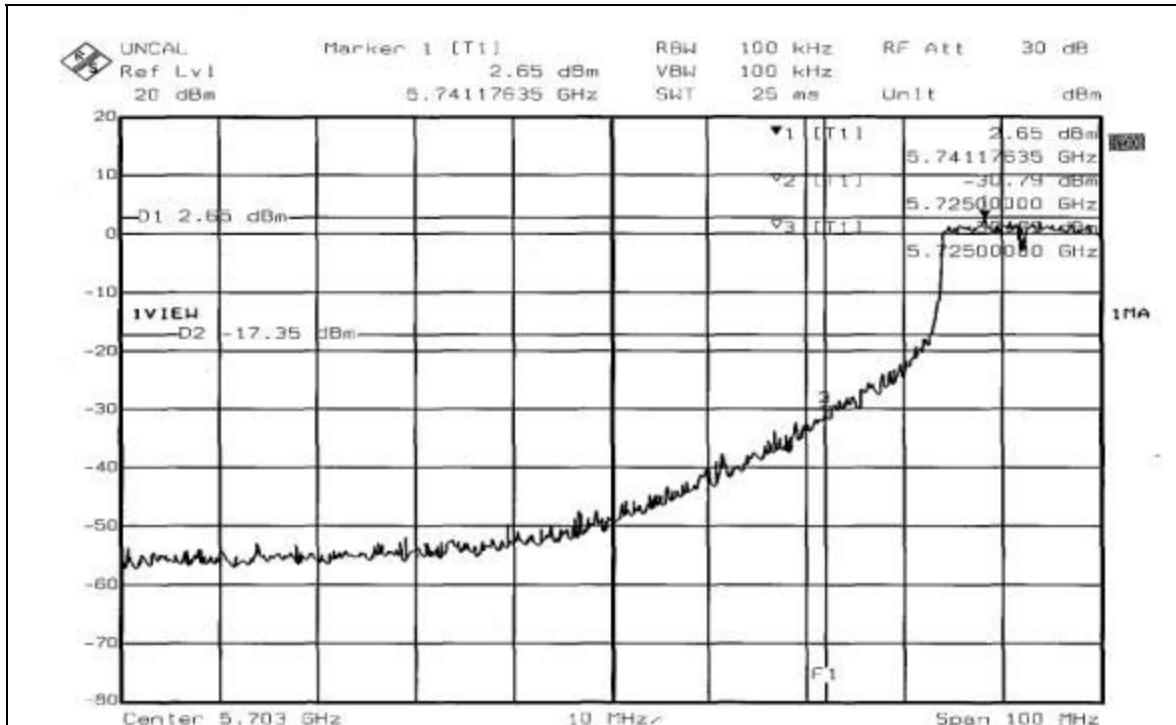

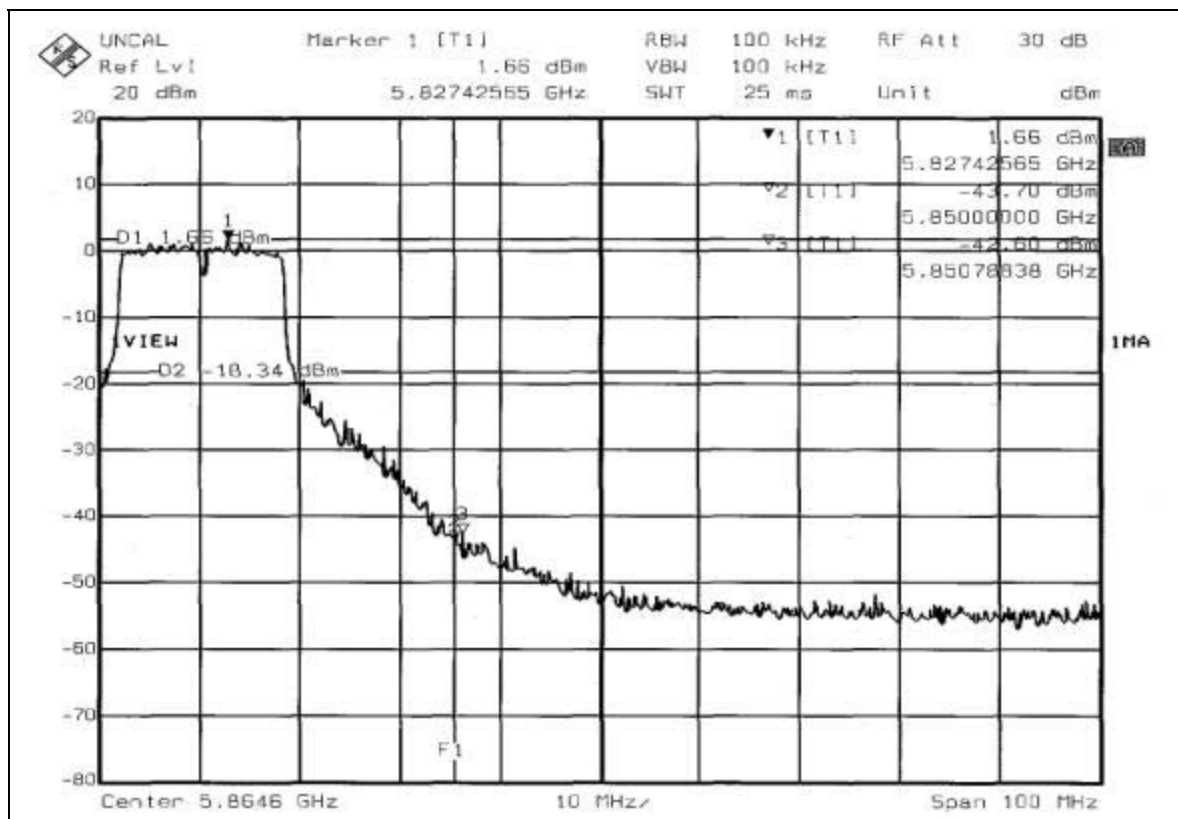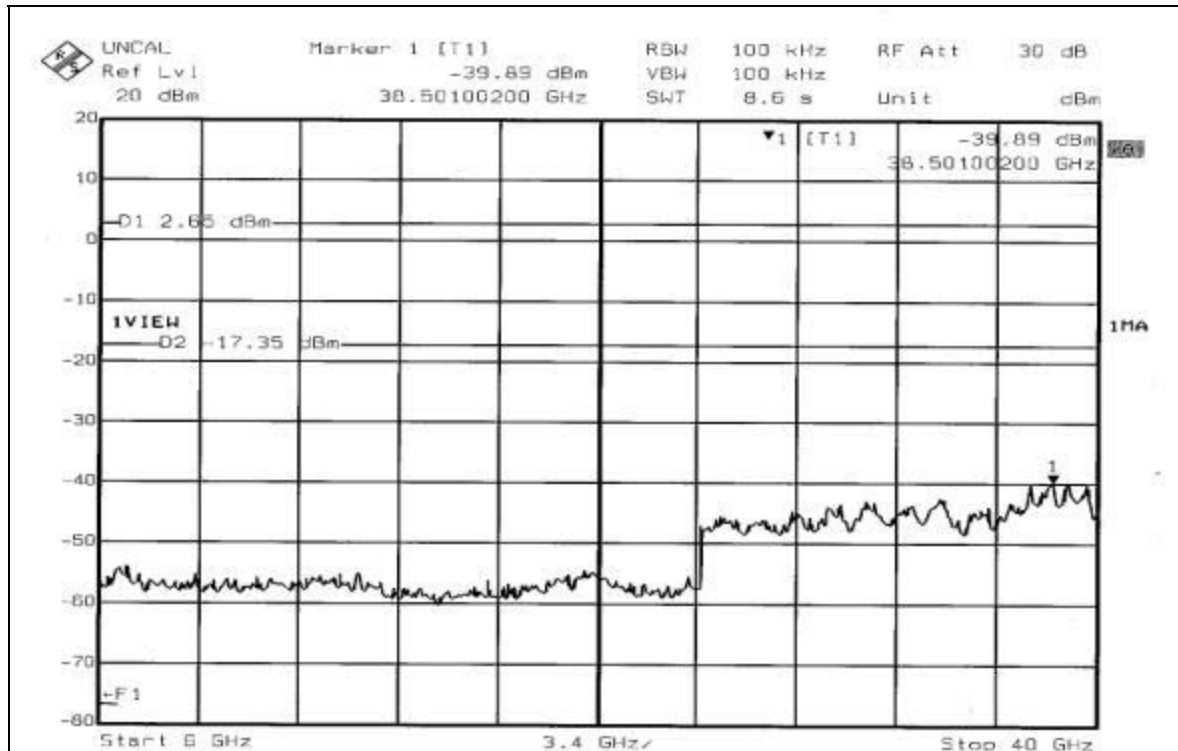

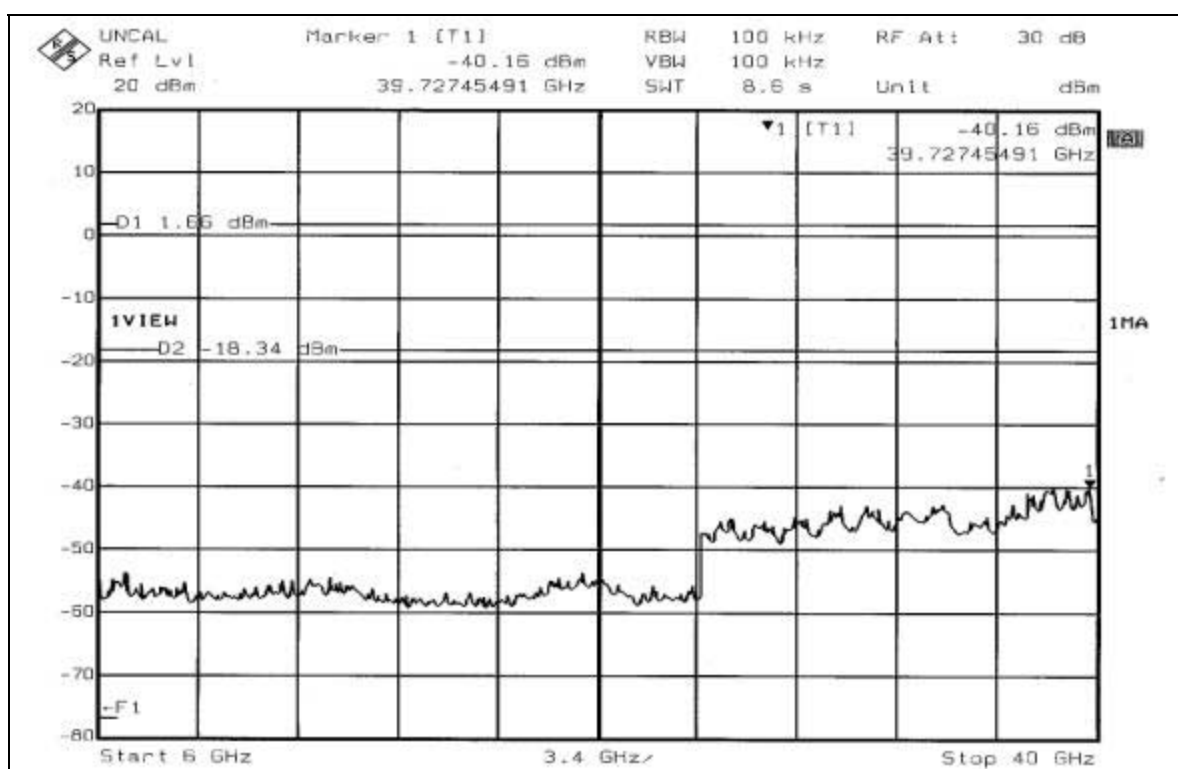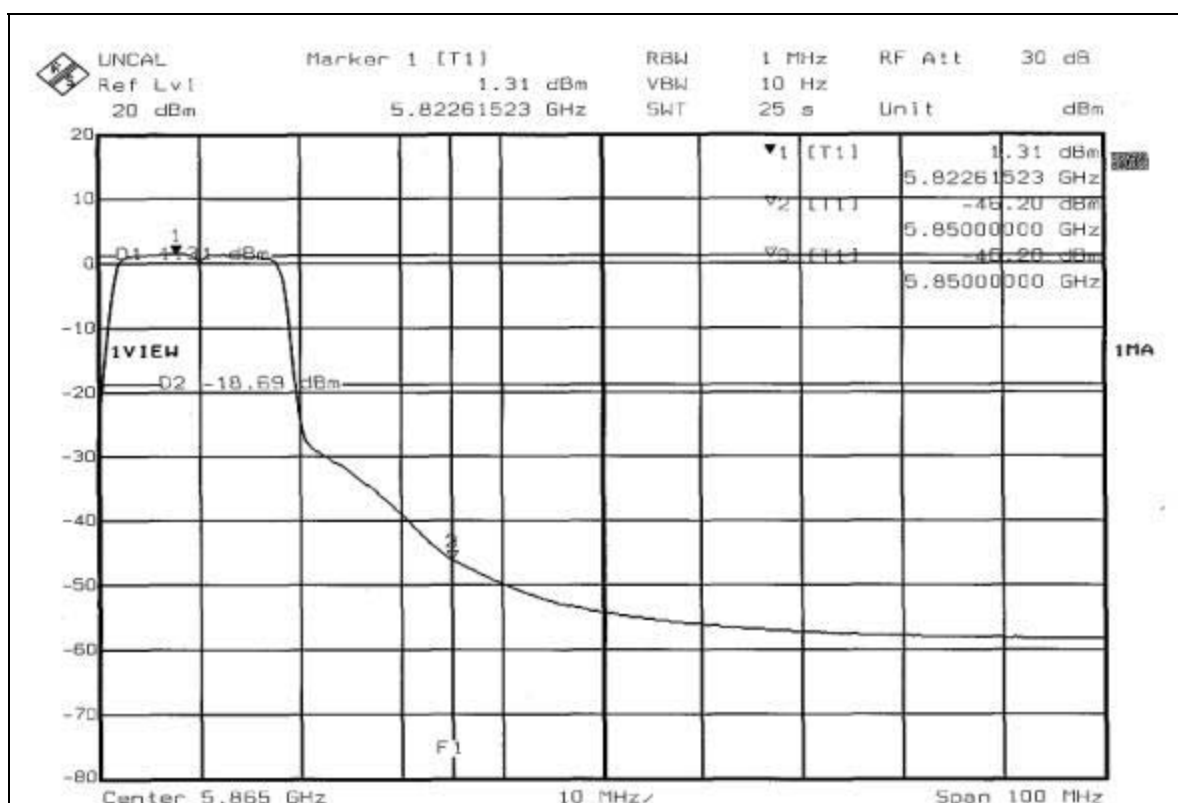



5.7 ANTENNA REQUIREMENT

5.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.7.2 ANTENNA CONNECTED CONSTRUCTION



The antenna used in this product is Dipole antenna with R-SMA antenna connector. The maximum Gain of the antenna is 4dBi.

6. PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

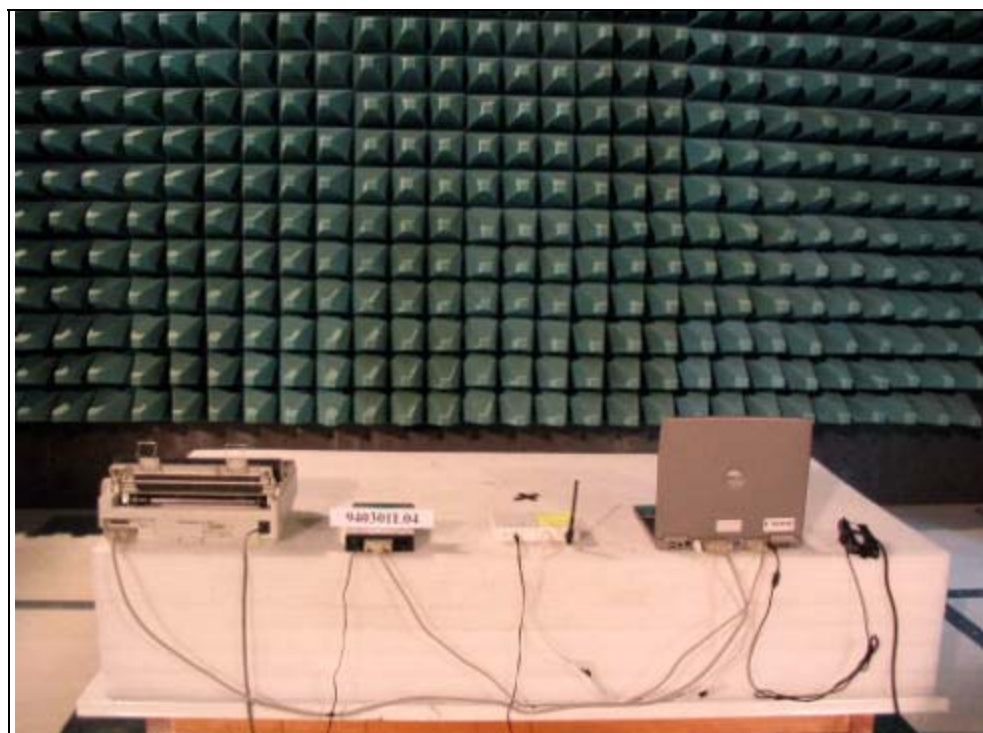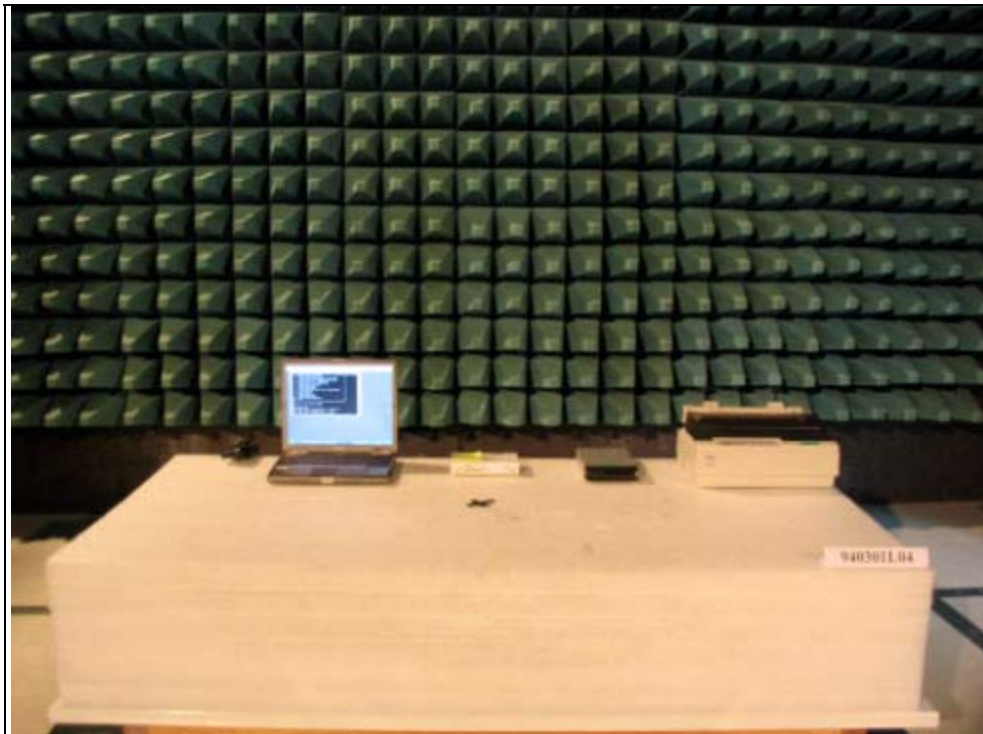

7. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also