

Appendix A.5 Dipole Calibration certificate (D750V3 SN1183)

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client: **Eurofins KCTL (Dymstec)**

Certificate No.: **D750V3-1183_Sep22**

CALIBRATION CERTIFICATE

Object: **D750V3 - SN:1183**

Calibration procedure(s): **QA CAL-05.v1.1
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**


Calibration date: **September 21, 2022**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility, environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (MSTE critical for calibration):

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-22 (No. 217-0352503524)	Apr-23
Power sensor NRP-Z81	SN: 103245	04-Apr-22 (No. 217-03524)	Apr-23
Power sensor NRP-Z81	SN: 103245	04-Apr-22 (No. 217-03525)	Apr-23
Reference 20 dB Attenuator	SN: BH9394 (20k)	04-Apr-22 (No. 217-03527)	Apr-23
Type-N mismatch combination	SN: 310862 / 06327	04-Apr-22 (No. 217-03528)	Apr-23
Reference Probe EX3DV4	SN: 7348	31-Dec-21 (No. EX3-7348_Dec21)	Dec-22
DAE4	SN: 801	31-Aug-22 (No. DAE4-801_Aug22)	Aug-23
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter F4119S	SN: G539512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: J537282783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41093315	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT 06	SN: 102972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-22

	Name	Function	Signature
Calibrated by:	Valen Kasballi	Laboratory Technician	
Approved by:	Sven Kuhn	Technical Manager	

Issued: September 23, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D750V3-1183_Sep22

Page 1 of 6

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zaughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The source is mounted in a touch configuration below the center marking of the flat phantom.
- Return Loss:** This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.7 $\pm$ 6 %	0.90 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	—	—

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.14 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.44 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.53 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	54.3 Ω ~ 1.5 Ω
Return Loss	> 27.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.033 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 21.09.2022

Test Laboratory: SPFAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1183

Communication System: UTD 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.11, 10.11, 10.11) @ 750 MHz; Calibrated: 31.12.2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 31.08.2022
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 S2.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration for Head Tissue/ $P_{in}=250$ mW, $d=15$ mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 58.91 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.24 W/kg

SAR(1 g) = 2.14 W/kg; SAR(10 g) = 1.40 W/kg

Smallest distance from peaks to all points 3 dB below = 18.9 mm

Ratio of SAR at M2 to SAR at M1 = 65.9%

Maximum value of SAR (measured) = 2.87 W/kg

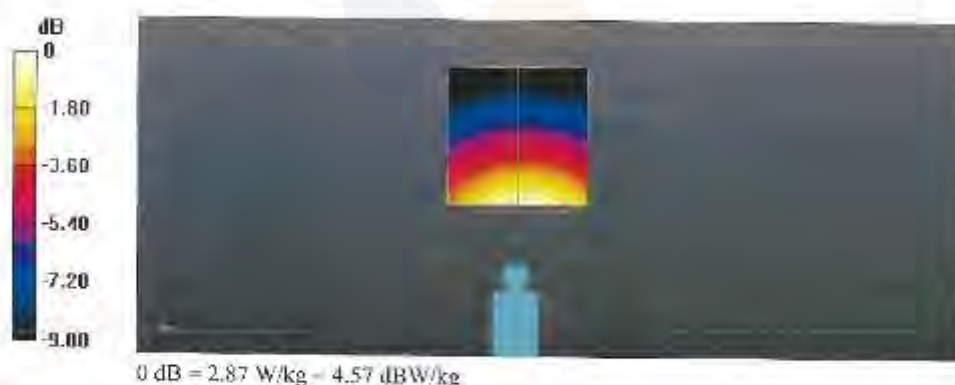

Impedance Measurement Plot for Head TSL



Appendix A.6 Dipole Calibration certificate (D750V3 SN1224)

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di tarature
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Eurofins KCTL (Dymstec)**

Certificate No: **D750V3-1224_Oct22**

CALIBRATION CERTIFICATE

Object: **D750V3 - SN:1224**

Calibration procedure(s): **QA-CAL-05.v1.1**
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz

Calibration date: **October 12, 2022**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility, environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&E critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-22 (No. 217-03525/03524)	Apr-23
Power sensor NRP-Z91	SN: 103244	04-Apr-22 (No. 217-03524)	Apr-23
Power sensor NRP-Z91	SN: 103245	04-Apr-22 (No. 217-03525)	Apr-23
Reference 20 dB Attenuator	SN: 319594 (20dB)	04-Apr-22 (No. 217-03527)	Apr-23
Type-N mismatch combination	SN: 310862 / 08527	04-Apr-22 (No. 217-03528)	Apr-23
Reference Probe EX3DV4	SN: 7348	31-Dec-21 (No. EX3-7348_Dec21)	Dec-22
DAE4	SN: 601	31-Aug-22 (No. DAE4-601_Aug22)	Aug-23

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4413B	SN: 0833512475	30-Oct-14 (in house check Oct-22)	in house check: Oct-24
Power sensor HP 8481A	SN: US57292783	07-Oct-15 (in house check Oct-22)	in house check: Oct-24
Power sensor HP 8481A	SN: MY41083315	07-Oct-15 (in house check Oct-22)	in house check: Oct-24
RF generator R&S SM1-06	SN: 100972	15-Jun-15 (in house check Oct-22)	in house check: Oct-24
Network Analyzer Agilent F8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	in house check: Oct-24

	Name	Function	Signature
Calibrated by:	Jelen Kasitani	Laboratory Technician	
Approved by:	Niels Kuster	Quality Manager	

Issued: October 13, 2022

This calibration certificate shall not be reproduced except in full, without written approval of the laboratory.

Certificate No: **D750V3-1224_Oct22**

Page 1 of 6

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zughauserstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0106**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020,
- KDB 885664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The source is mounted in a touch configuration below the center marking of the flat phantom.
- Return Loss:** This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 3.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.7 ± 6 %	0.90 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	-----	-----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.17 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.55 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.42 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.62 W/kg ± 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.9 Ω - 1.3 j Ω
Return Loss	- 27.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.034 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 12.10.2022

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1224

Communication System: ULD 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEE/IEC/ANST C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.11, 10.11, 10.11) @ 750 MHz; Calibrated: 31.12.2021
- Sensor Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 31.08.2022
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 60.57 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 3.35 W/kg

SAR(1 g) = 2.17 W/kg; SAR(10 g) = 1.42 W/kg


Smallest distance from peaks to all points 3 dB below = 16.8 mm

Ratio of SAR at M2 to SAR at M1 = 64.9%

Maximum value of SAR (measured) = 2.93 W/kg

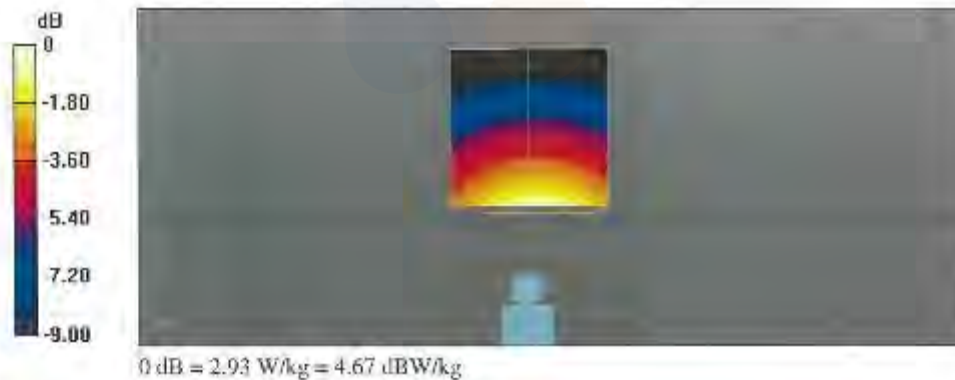

Impedance Measurement Plot for Head TSL

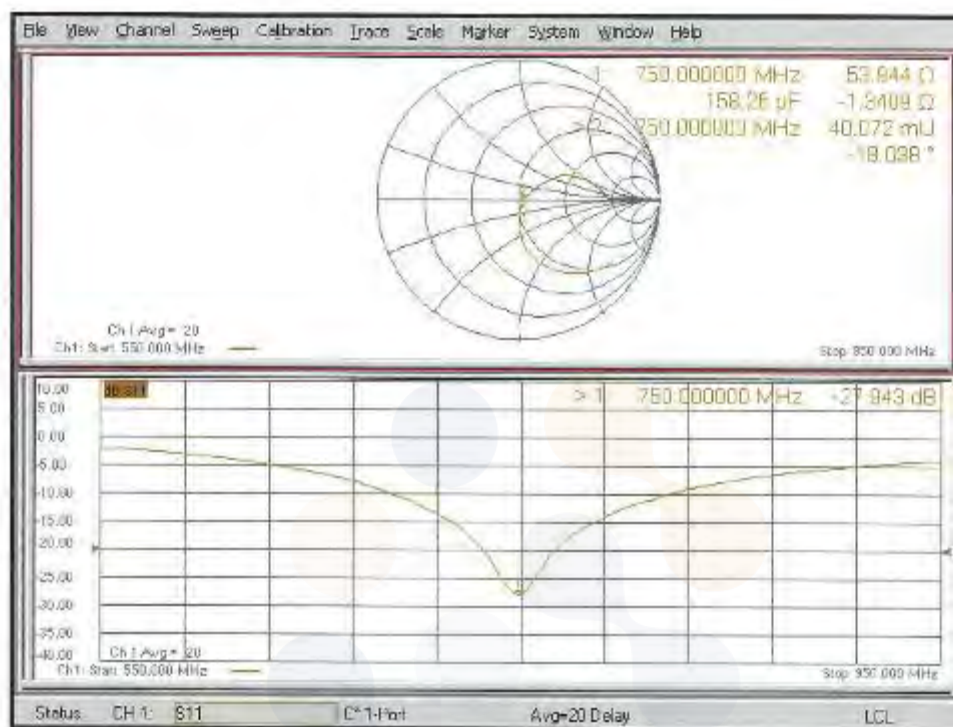

Appendix A.7 Dipole Calibration certificate (D850V2 SN1030)

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS):
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client: **Eurofins KCTL (Dymstec)**

Certificate No: **D850V2-1030 Oct22**

CALIBRATION CERTIFICATE

Object: **D850V2 - SN:1030**

Calibration procedure(s): **QA-CAL-05.v11**
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz

Calibration date: **October 26, 2022**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of this certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 0.1) °C and humidity < 70%.

Calibration Equipment used (MATE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-22 (No. 217-03525/03524)	Apr-23
Power sensor NRP 201	SN: 103244	04-Apr-22 (No. 217-03524)	Apr-23
Power sensor NRP 201	SN: 103245	04-Apr-22 (No. 217-03525)	Apr-23
Reference 20 dB Attenuator	SN: BH9394 (20k)	04-Apr-22 (No. 217-03527)	Apr-23
Type-N mismatch combination	SN: S10902 / 06327	04-Apr-22 (No. 217-03529)	Apr-23
Reference Probe EX3DV4	SN: 7349	31-Dec-21 (No. EX3-7349 Dec21)	Dec-22
DAE4	SN: 601	31-Aug-22 (No. DAE4-601_Aug22)	Aug-23
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: 1838512475	30-Oct-14 (in house check Oct-22)	in house check: Oct-24
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-22)	in house check: Oct-24
Power sensor HP 8481A	SN: MY4103315	07-Oct-15 (in house check Oct-22)	in house check: Oct-24
RF generator R&S SM1-05	SN: 100072	15-Jun-15 (in house check Oct-22)	in house check: Oct-24
Network Analyzer Agilent E8558A	SN: US41060477	31-Mar-14 (in house check Oct-22)	in house check: Oct-24

Calibrated by: **Jason Kasindl** (Name) **Laboratory Technician** (Function)  (Signature)

Approved by: **Stefan Kuhn** (Name) **Technical Manager** (Function)  (Signature)

Issued: October 26, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: **D850V2-1030 Oct22**

Page 1 of 6

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zauggstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models: Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The source is mounted in a touch configuration below the center marking of the flat phantom.
- Return Loss:** This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	850 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.92 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.5 $\pm$ 6 %	0.94 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.59 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	10.1 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.68 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.61 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.7 Ω - j1.6 Ω
Return Loss	-35.6 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.438 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 26.10.2022

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 850 MHz; Type: D850V2; Serial: D850V2 - SN:1030

Communication System: UID 0 - CW; Frequency: 850 MHz

Medium parameters used: $f = 850$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(9.63, 9.63, 9.63) @ 850 MHz; Calibrated: 31.12.2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 31.08.2022
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration for Head Tissue/ $P_{in}=250$ mW, $d=15$ mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 64.08 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 3.94 W/kg

SAR(1 g) = 2.59 W/kg; SAR(10 g) = 1.68 W/kg


Smallest distance from peaks to all points 3 dB below = 17 mm

Ratio of SAR at M2 to SAR at M1 = 65.5%

Maximum value of SAR (measured) = 3.46 W/kg

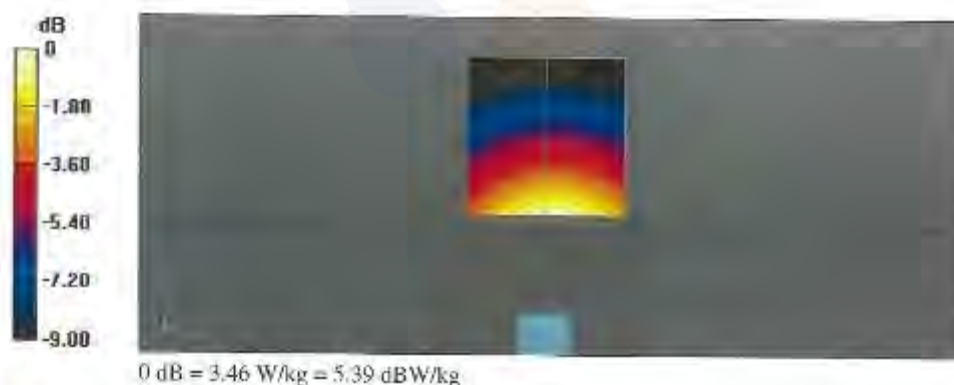

Impedance Measurement Plot for Head TSL

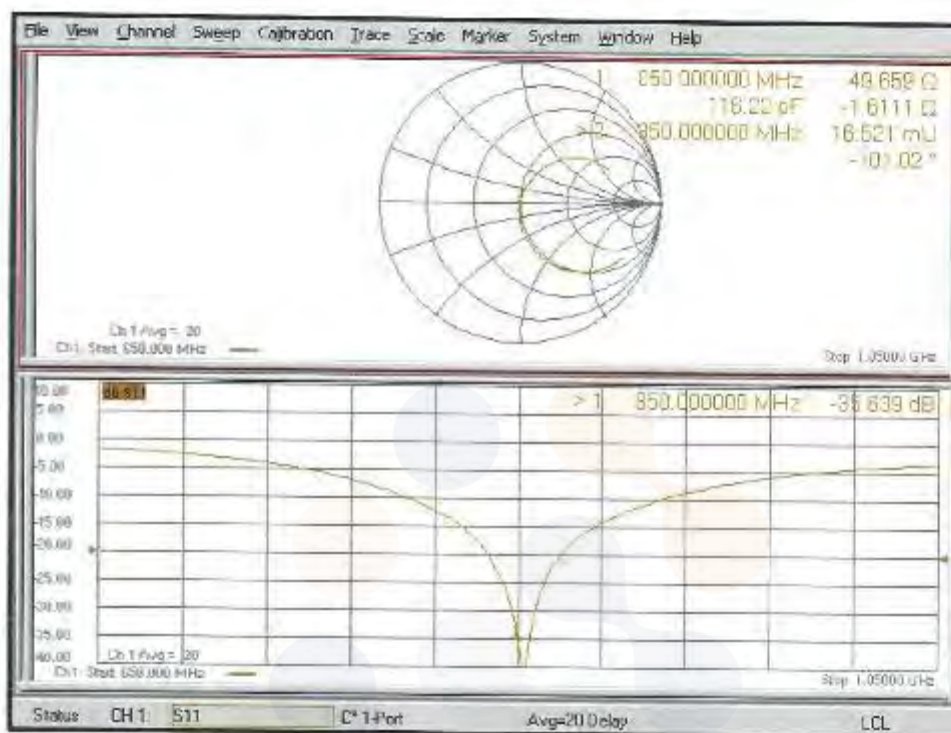

Appendix A.8 Dipole Calibration certificate (D1750V2_SN1195)

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di tarature
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client: **Eurofins KCTL (Dymstec)**

Certificate No: **D1750V2-1195_Oct22**

CALIBRATION CERTIFICATE

Object: **D1750V2 - SN:1195**

Calibration procedure(s): **QA CAL-05.v11
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **October 26, 2022**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TC critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-22 (No. 217-03525/03524)	Apr-23
Power sensor NRP-Z91	SN: 103244	04-Apr-22 (No. 217-03524)	Apr-23
Power sensor NRP-Z91	SN: 103245	04-Apr-22 (No. 217-03525)	Apr-23
Reference 50 dB Attenuator	SN: DH9394 (R0K)	04-Apr-22 (No. 217-03527)	Apr-23
Type-N mismatch combination	SN: 510502 / 06327	04-Apr-22 (No. 217-03528)	Apr-23
Reference Probe EX3DV4	SN: 7349	31-Dec-21 (No. EX3-75/8_Dec21)	Dec-22
DAE4	SN: 601	31-Aug-22 (No. DAE4-601_Aug22)	Aug-23
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: BB39512475	30-Oct-14 (in house check Oct-22)	in house check: Oct-24
Power sensor HP 8481A	SN: U537232783	07-Oct-15 (in house check Oct-22)	in house check: Oct-24
Power sensor HP 8481A	SN: MY41008815	07-Oct-15 (in house check Oct-22)	in house check: Oct-24
RF generator R&S SM1-08	SN: 100172	15-Jun-15 (in house check Oct-22)	in house check: Oct-24
Network Analyzer Agilent e8558A	SN: US41080477	31-Mar-14 (in house check Oct-22)	in house check: Oct-24

Calibrated by: **Jewon Kim** (Name) **Laboratory Technician** (Function)  (Signature)

Approved by: **Sven Kohn** (Name) **Technical Manager** (Function)  (Signature)

Issued: **October 26, 2022**

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: **D1750V2-1195_Oct22**

Page 1 of 6

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The source is mounted in a touch configuration below the center marking of the flat phantom.
- Return Loss:** This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.3 $\pm$ 6 %	1.35 mho/m $\pm$ 6 %
Head TSL temperature change during test	$\leq$ 0.5 °C		

SAR result with Head TSL

SAR averaged over 1 cm ² (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.04 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	35.3 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ² (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	4.79 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.2 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0100)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$48.6 \Omega + 3.2 j\Omega$
Return Loss	-28.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.217 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 26.10.2022

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1195

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.67, 8.67, 8.67) @ 1750 MHz; Calibrated: 31.12.2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 31.08.2022
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 107.3 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 9.04 W/kg; SAR(10 g) = 4.79 W/kg


Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 54.3%

Maximum value of SAR (measured) = 14.1 W/kg

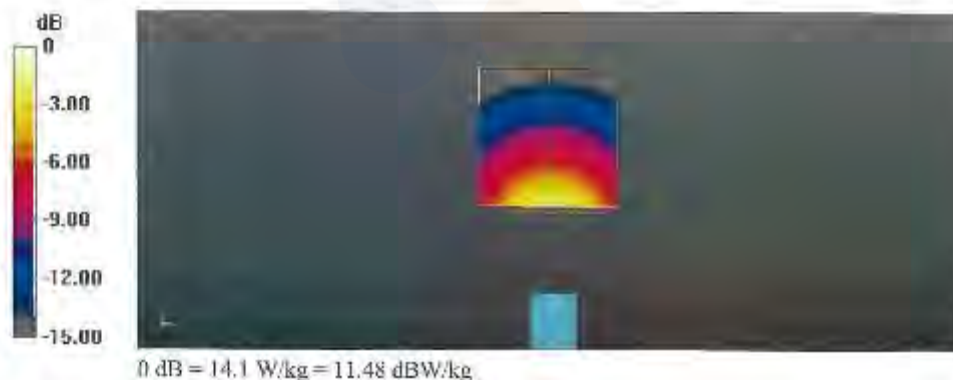

Impedance Measurement Plot for Head TSL

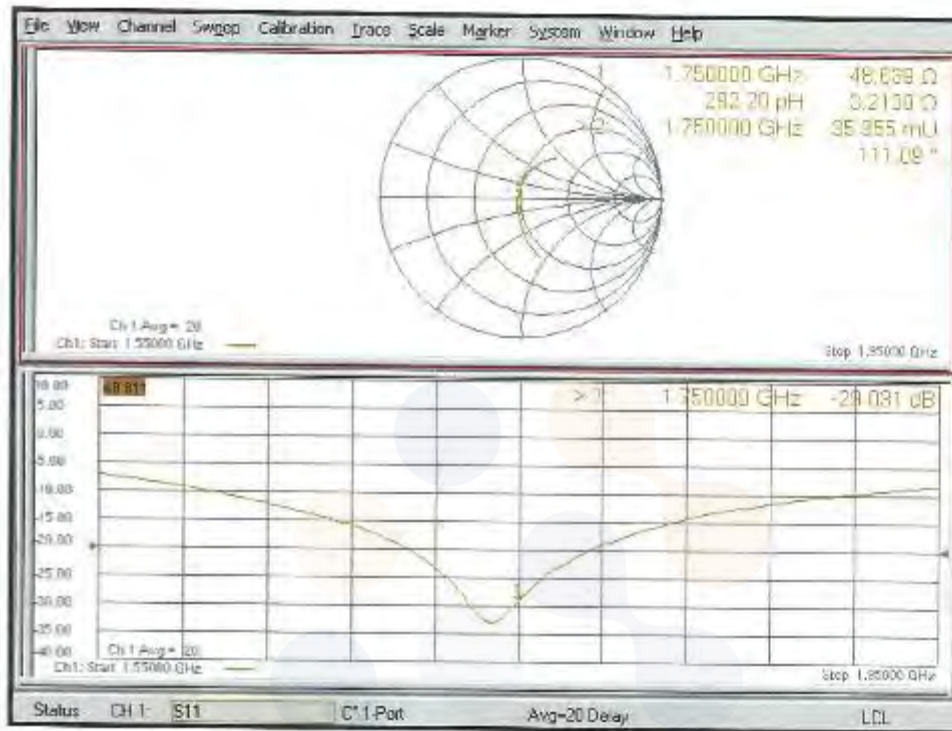

Appendix A.9 Dipole Calibration certificate (D1900V2_SN5d248)

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client: **Eurofins KCTL (Dymstec)**

Certificate No.: **D1900V2-5d248_Oct22**

CALIBRATION CERTIFICATE

Object: **D1900V2 - SN.5d248**

Calibration procedure(s): **QA CAL-05.v11
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **October 20, 2022**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility, environment temperature (22 ± 0.3°C) and humidity < 70%.

Calibration Equipment used (M&TC critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-22 (No. 217-03525/03524)	Apr-23
Power sensor NRP-Z91	SN: 103244	04-Apr-22 (No. 217-03524)	Apr-23
Power sensor NRP-Z91	SN: 103245	04-Apr-22 (No. 217-03525)	Apr-23
Reference 20 dB Attenuator	SN: E-H8034 (20k)	04-Apr-22 (No. 217-03527)	Apr-23
Type-N mismatch combination	SN: 310882 / 06327	04-Apr-22 (No. 217-03578)	Apr-23
Reference Probe EX3DV4	SN: 7349	31-Dec-21 (No. EX3-7349_Dec21)	Dec-22
DAE4	SN: 631	31-Aug-22 (No. DAE4-601_Aug22)	Aug-23
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter C4419B	SN: GR39512475	30-Oct-14 (in house check Oct-22)	In house check: Oct-24
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-22)	In house check: Oct-24
Power sensor HP 8481A	SN: MY41086315	07-Oct-15 (in house check Oct-22)	In house check: Oct-24
RF generator R&S SM1-06	SN: 100872	15-Jun-15 (in house check Oct-22)	In house check: Oct-24
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

Calibrated by:	Name Jason Kissell	Function Laboratory Technician	Signature
Approved by:	Name Sven Kuhn	Technical Manager	

Issued: October 28, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zaughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1525, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1525: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The source is mounted in a touch configuration below the center marking of the flat phantom.
- Return Loss:** This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	38.7 $\pm$ 6 %	1.39 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ² (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.97 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	39.7 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ² (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.18 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	20.7 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.0 Ω + 7.0 $j\Omega$
Return Loss	- 23.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.193 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 20.10.2022

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d248

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/TEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConyF(8.43, 8.43, 8.43) @ 1900 MHz; Calibrated: 31.12.2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 31.08.2022
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 111.4 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 9.97 W/kg; SAR(10 g) = 5.19 W/kg


Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 15.5 W/kg

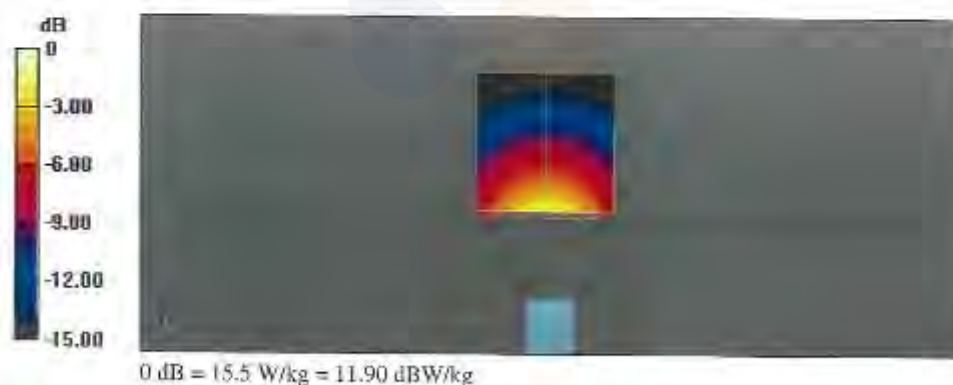

Impedance Measurement Plot for Head TSL

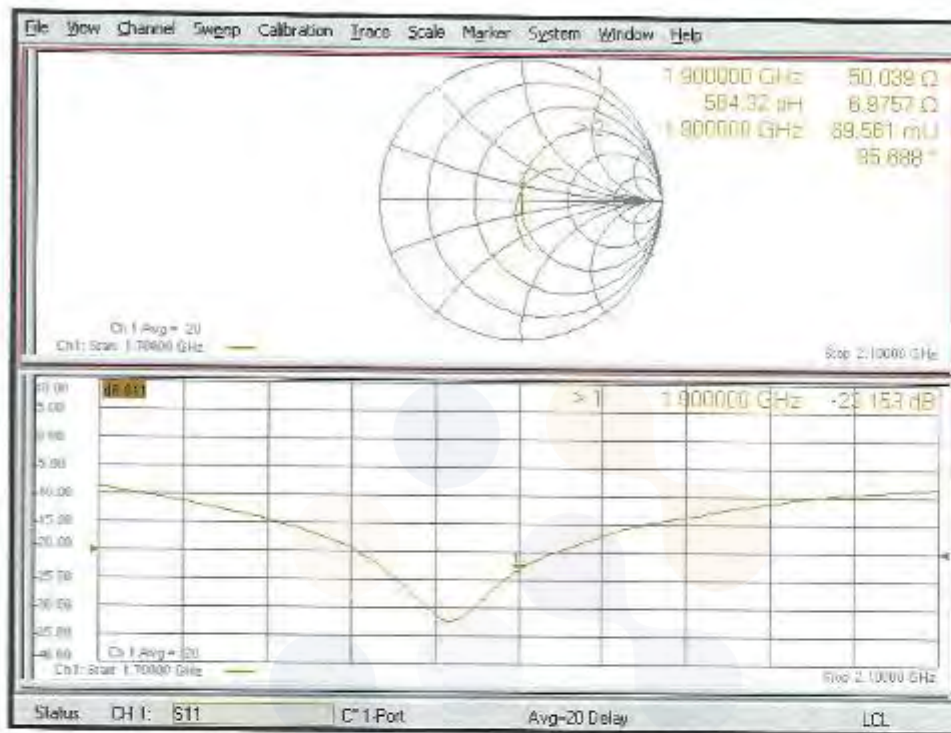

Appendix A.10 Dipole Calibration certificate (D3500V2_SN1146)

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



SCS Schweizerischer Kalibrierdienst
Service suisse d'étalonnage
Servizio svizzero di taratura
SS Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS).
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client: **Eurofins KCTL (Dymstec)**

Certificate No: **D3500V2-1146_Nov22**

CALIBRATION CERTIFICATE

Object: **D3500V2 - SN1146**

Calibration procedure(s): **QA CAL-22.v6**
Calibration Procedure for SAR Validation Sources between 3-10 GHz

Calibration date: **November 1, 2022**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal. Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-22 (No. 217-03525/03524)	Apr-23
Power sensor NRP-Z91	SN: 103244	04-Apr-22 (No. 217-03524)	Apr-23
Power sensor NRP-Z91	SN: 103245	04-Apr-22 (No. 217-03525)	Apr-23
Reference 20 dB Attenuator	SN: BH6994 (20k)	04-Apr-22 (No. 217-03527)	Apr-23
Type-N mismatch combination	SN: 310982 / 06327	04-Apr-22 (No. 217-03528)	Apr-23
Reference Probe EX3DV4	SN: 3503	06-Mar-22 (No. EX3-3503_Mar22)	Mar-23
DAE4	SN: 601	31-Aug-22 (No. DAE4-601_Aug22)	Aug-23
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39E12475	30-Oct-14 (in house check Oct-22)	in house check: Oct-24
Power sensor HP 8481A	SN: US37262763	07-Oct-15 (in house check Oct-22)	in house check: Oct-24
Power sensor HP 8481A	SN: MY41093315	07-Oct-15 (in house check Oct-22)	in house check: Oct-24
RF generator R&S SMT-06	SN: 103972	15-Jun-15 (in house check Oct-22)	in house check: Oct-24
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	in house check: Oct-24

Calibrated by:	Name: Thomas Esler	Function: Laboratory Technician	Signature: 
Approved by:	Name: Sven Koch	Function: Technical Manager	Signature: 

Issued: November 1, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865864, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The source is mounted in a touch configuration below the center marking of the flat phantom.
- Return Loss:** This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	3500 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	37.9	2.91 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.8 $\pm$ 6 %	2.97 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	6.64 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	66.0 W/kg $\pm$ 19.9 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.49 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.8 W/kg $\pm$ 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.7 Ω - 1.0 j Ω
Return Loss	-38.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.135 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 01.11.2022

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 3500 MHz; Type: D3500V2; Serial: D3500V2 - SN:1146

Communication System: UID 0 - CW; Frequency: 3500 MHz

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.97$ S/m; $\epsilon_r = 37.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEB/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(7.91, 7.91, 7.91) @ 3500 MHz; Calibrated: 08.05.2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 31.08.2022
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration for Head Tissue/Pin=100 mW, d=10mm, f=3500MHz/Zoom Scan,

dist=1.4mm (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.80 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 6.64 W/kg; SAR(10 g) = 2.49 W/kg


Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 74.4%

Maximum value of SAR (measured) = 12.5 W/kg

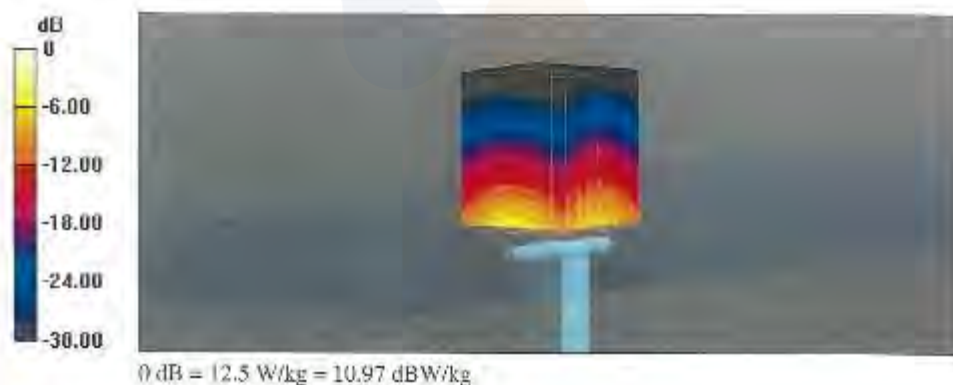

Impedance Measurement Plot for Head TSL

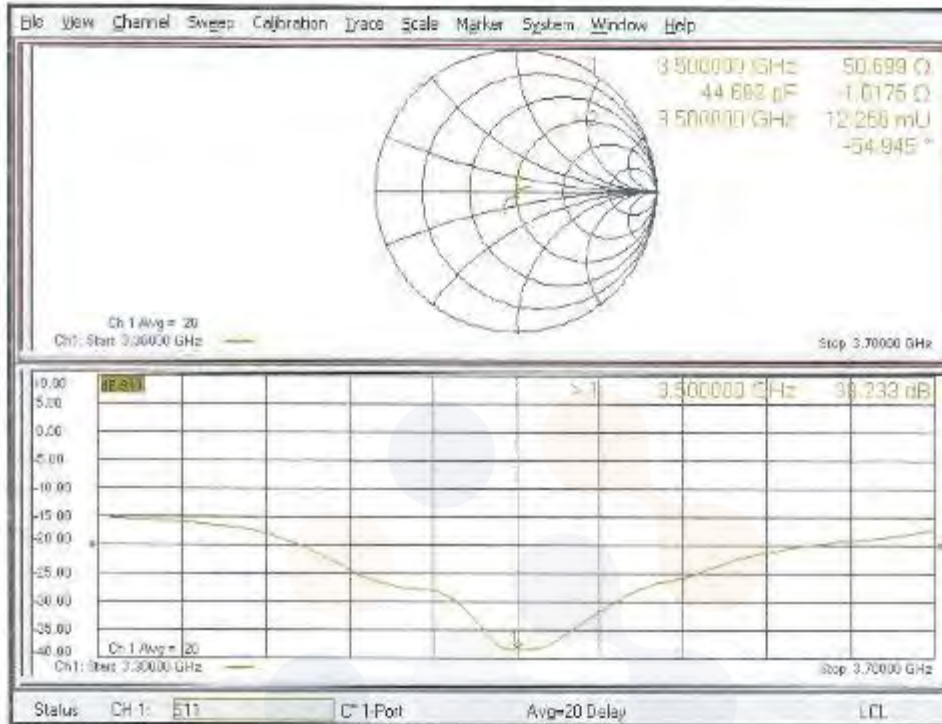

Appendix A.11 Dipole Calibration certificate (D3700V2_SN1027)

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0106**

Client **Eurofins KCTL (Dymstec)**

Certificate No.: **D3700V2-1027_Aug22**

CALIBRATION CERTIFICATE

Object **D3700V2 - SN:1027**

Calibration procedure(s) **QA CAL-22.v6
Calibration Procedure for SAR Validation Sources between 3-10 GHz**

Calibration date: **August 19, 2022**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (MSE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104776	04-Apr-22 (No. 217-03525/03524)	Apr-23
Power sensor NRP-Z91	SN: 103244	04-Apr-22 (No. 217-03524)	Apr-23
Power sensor NRP-Z91	SN: 103046	04-Apr-22 (No. 217-03525)	Apr-23
Reference 20 dB Attenuator	SN: 519394 (20k)	04-Apr-22 (No. 217-03527)	Apr-23
Type-N mismatch combination	SN: 310982 / 03327	04-Apr-22 (No. 217-03528)	Apr-23
Reference Probe EX30V4	SN: 3503	06-Mar-22 (No. EX3-3003_Mar22)	Mar-23
DAC4	SN: 601	02-May-22 (No. DAC4-601_May22)	May-23
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4119B	SN: 08395 (2475)	30-Oct-11 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US31/292/83	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41093315	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SM1106	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41093477	31-Mar-14 (in house check Oct-20)	In house check: Oct-22

Calibrated by: **Jeffrey Katzman** **Jeffrey Katzman** **Laboratory Technician**

Approved by: **Evel Kuhn** **Evel Kuhn** **Technical Manager**

Signature



Issued: August 22, 2022

This calibration certificate shall not be reproduced except in full without written approval of this laboratory.

Certificate No.: **D3700V2-1027_Aug22**

Page 1 of 6

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 13, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The source is mounted in a touch configuration below the center marking of the flat phantom.
- Return Loss:** This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1:

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	3700 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied:

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	37.7	3.12 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.1 $\pm$ 6 %	3.12 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	—	—

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.87 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	66.5 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.48 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.8 W/kg $\pm$ 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, (transformed to feed point)	46.2 Ω $\pm$ 2.7 Ω
Return Loss	- 26.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.131 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore shortcircuited for DC-signals. On some of the dipoles, small and caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 19.08.2022

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 3700 MHz; Type: D3700V2; Serial: D3700V2 - SN:1027

Communication System: UTD-0 - CW; Frequency: 3700 MHz

Medium parameters used: $f = 3700$ MHz; $\sigma = 3.12$ S/m; $\epsilon_r = 37.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(7.73, 7.73, 7.73) @ 3700 MHz; Calibrated: 08.03.2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAT4 Sn601; Calibrated: 02.05.2022
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration for Head Tissue/Pin=100 mW, d=10mm, f=3700MHz/Zoom Scan, dist=1.4mm (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.24 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 19.7 W/kg

SAR(1 g) = 6.87 W/kg; SAR(10 g) = 2.49 W/kg


Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 73.1%

Maximum value of SAR (measured) = 13.5 W/kg

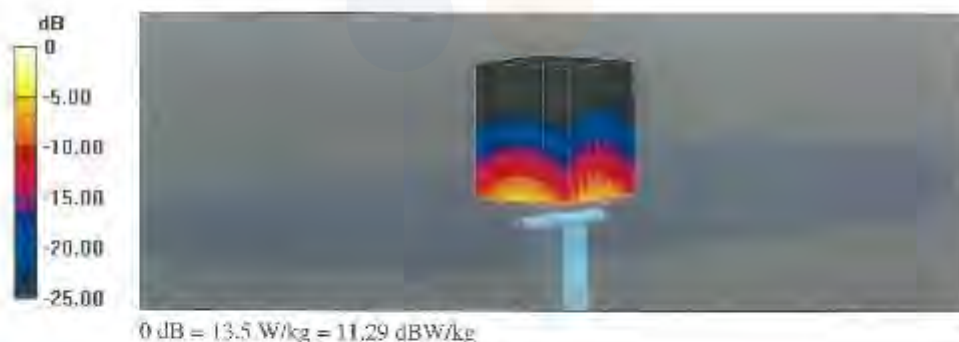

Impedance Measurement Plot for Head TSL

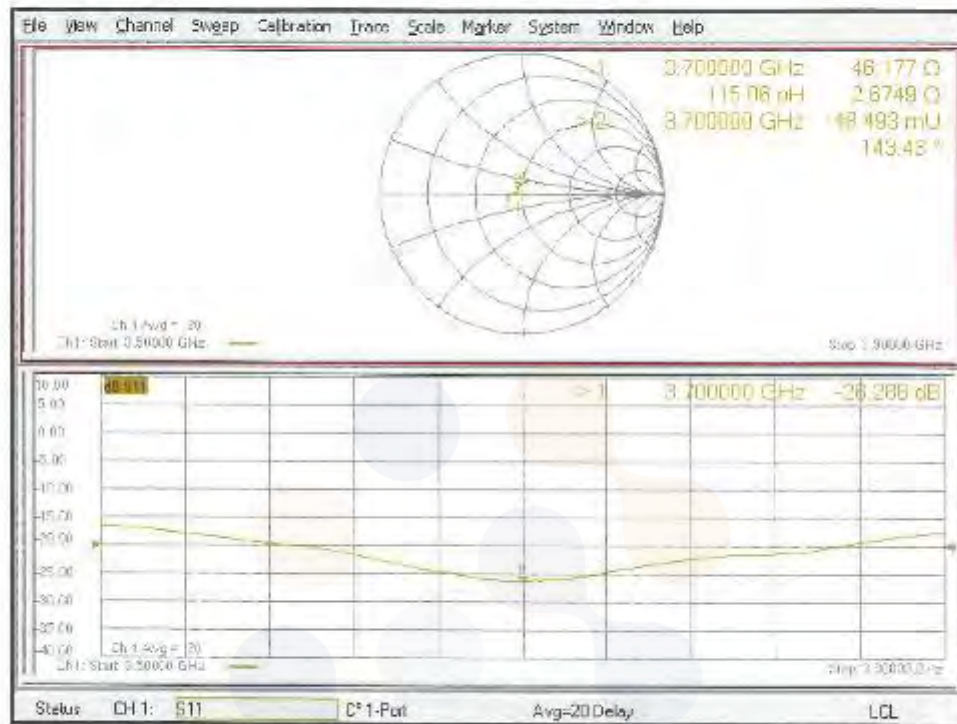

Appendix A.12 Dipole Calibration certificate (D3900V2_SN1037)

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS):
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client: **DI&C**

Certificate No.: **D3900V2-1037_Feb23**

CALIBRATION CERTIFICATE

Object: **D3900V2 - SN:1037**

Calibration procedure(s): **QA CAL-22.v7**
Calibration Procedure for SAR Validation Sources between 3-10 GHz

Calibration date: **February 27, 2023**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 31°C and humidity < 70%).

Calibration Equipment used (M&PE critical for calibration):

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-22 (No. 217-03525/03524)	Apr-23
Power sensor NRP-Z91	SN: 103244	04-Apr-22 (No. 217-03524)	Apr-23
Power sensor NRP-Z91	SN: 103245	04-Apr-22 (No. 217-03525)	Apr-23
Reference 20 dB Attenuator	SN: BH8394 (20k)	04-Apr-22 (No. 217-03527)	Apr-23
Type-N mismatch combination	SN: 313882 / 06327	04-Apr-22 (No. 217-03528)	Apr-23
Reference Probe EX30V4	SN: 3503	08-Mar-22 (No. EX3-3503_Mar22)	Mar-23
DAB4	SN: 601	19-Dec-22 (No. DAB4-601_Dec22)	Dec-23

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4118B	SN: GB39512475	30-Oct-14 (in house check Oct-22)	In house check: Oct-24
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-22)	In house check: Oct-24
Power sensor HP 8481A	SN: MY41093315	07-Oct-15 (in house check Oct-22)	In house check: Oct-24
RF generator R&S GMT-06	SN: 100372	15-Jun-15 (in house check Oct-22)	In house check: Oct-24
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

Calibrated by: **Paulo Pina** Name: **Paulo Pina** Function: **Laboratory Technician** Signature:

Approved by: **Niels Kuster** Name: **Niels Kuster** Quality Manager:

Issued: February 28, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The source is mounted in a touch configuration below the center marking of the flat phantom.
- Return Loss:** This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	$dx, dy = 4.0 \text{ mm}$, $dz = 1.4 \text{ mm}$	Graded Ratio = 1.4 (Z direction)
Frequency	3900 MHz $\pm 1 \text{ MHz}$ 4100 MHz $\pm 1 \text{ MHz}$	

Head TSL parameters at 3900 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	37.5	3.32 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	38.0 $\pm$ 6 %	3.26 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL at 3900 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	6.89 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	69.3 W/kg $\pm$ 19.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.41 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.2 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 4100 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	37.2	3.53 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.6 $\pm$ 6 %	3.45 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL at 4100 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	6.70 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	67.4 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.4 W/kg $\pm$ 19.5 % (k=2)

Body TSL parameters at 3900 MHz

The following parameters and calculations were applied:

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	50.8	3.78 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	51.0 ± 6 %	3.82 mho/m ± 8 %
Body TSL temperature change during test	< 0.5 °C	—	—

SAR result with Body TSL at 3900 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	6.46 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	65.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.25 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.5 W/kg ± 19.5 % (k=2)

Body TSL parameters at 4100 MHz

The following parameters and calculations were applied:

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	50.5	4.01 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	50.7 ± 6 %	3.86 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	—	—

SAR result with Body TSL at 4100 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	6.39 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	64.2 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.20 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.1 W/kg ± 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 3900 MHz

Impedance, transformed to feed point	47.4 Ω - 7.2 j Ω
Return Loss	-22.1 dB

Antenna Parameters with Head TSL at 4100 MHz

Impedance, transformed to feed point	59.5 Ω - 3.8 j Ω
Return Loss	-20.6 dB

Antenna Parameters with Body TSL at 3900 MHz

Impedance, transformed to feed point	48.2 Ω - 4.8 j Ω
Return Loss	-25.8 dB

Antenna Parameters with Body TSL at 4100 MHz

Impedance, transformed to feed point	61.0 Ω - 0.4 j Ω
Return Loss	-20.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.096 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

(Date: 27.02.2023)

Test Laboratory: SPEAG, Zürich, Switzerland

DUT: Dipole 3900 MHz; Type: D3900V2; Serial: D3900V2 - SN:1037

Communication System: UTD 0 - CW; Frequency: 3900 MHz, Frequency: 4100 MHz

Medium parameters used: $f = 3900$ MHz; $\sigma = 3.26$ S/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³

Medium parameters used: $f = 4100$ MHz; $\sigma = 3.45$ S/m; $\epsilon_r = 37.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(7.39, 7.39, 7.39) @ 3900 MHz, ConvF(7.26, 7.26, 7.26) @ 4100 MHz; Calibrated: 08.03.2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 19.12.2022
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 100
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration for Head Tissue/Pin=100 mW, d=10mm, f=3900MHz/Zoom Scan,

dist=1.4mm (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 69.60 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 19.4 W/kg

SAR(1 g) = 6.89 W/kg; SAR(10 g) = 2.41 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 74.7%

Maximum value of SAR (measured) = 13.4 W/kg

Dipole Calibration for Head Tissue/Pin=100 mW, d=10mm, f=4100MHz/Zoom Scan,

dist=1.4mm (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.39 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 19.0 W/kg

SAR(1 g) = 6.70 W/kg; SAR(10 g) = 2.33 W/kg


Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 74.1%

Maximum value of SAR (measured) = 13.2 W/kg

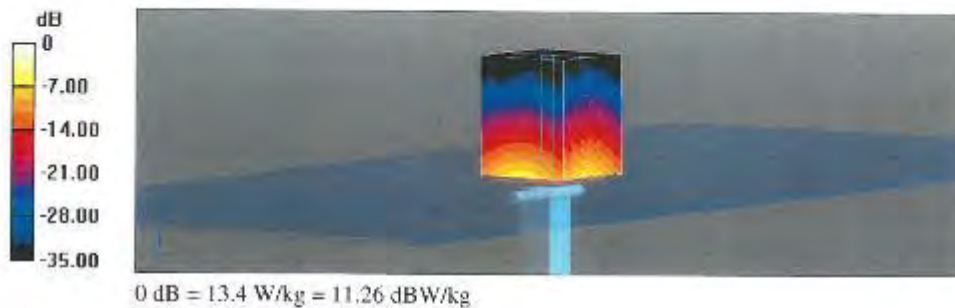

Impedance Measurement Plot for Head TSL

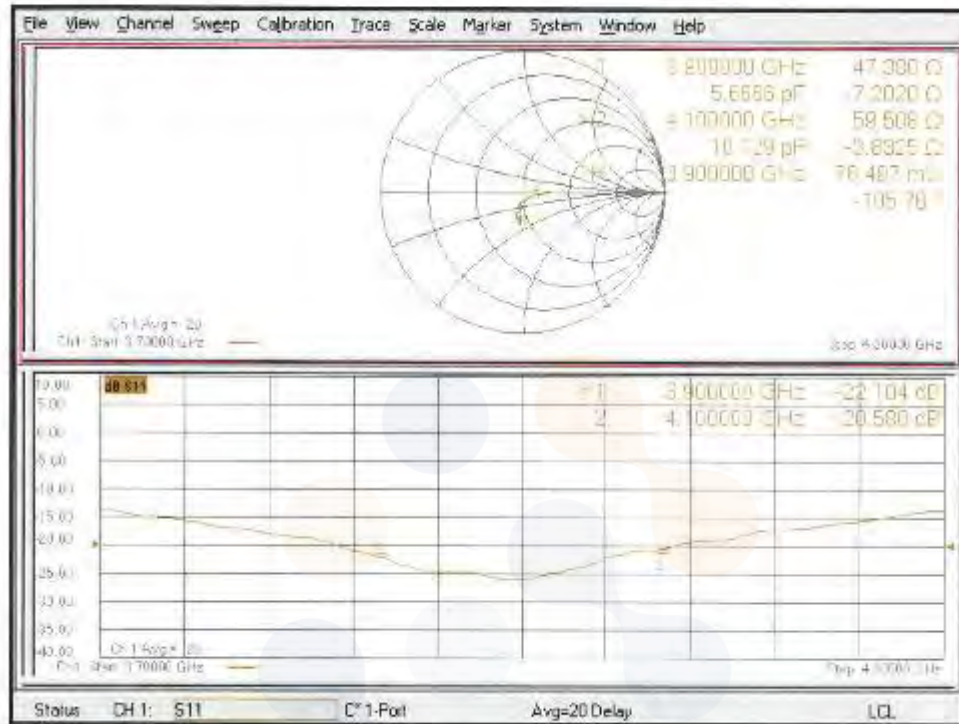

DASY5 Validation Report for Body TSL

Date: 27.02.2023

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 3900 MHz; Type: D3900V2; Serial: D3900V2 - SN:1037

Communication System: UTD 0 - CW; Frequency: 3900 MHz; Frequency: 4100 MHz

Medium parameters used: $f = 3900$ MHz; $\sigma = 3.62$ S/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³

Medium parameters used: $f = 4100$ MHz; $\sigma = 3.86$ S/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(7.18, 7.18, 7.18) @ 3900 MHz; ConvF(6.88, 6.88, 6.88) @ 4100 MHz; Calibrated: 08.03.2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sa601; Calibrated: 19.12.2022
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 10002
- DASY52: 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration for Body Tissue/ $P_{in}=100$ mW, $d=10$ mm, $f=3900$ MHz/Zoom Scan, $dist=1.4$ mm

(8x8x8)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 62.30 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 18.4 W/kg

SAR(1 g) = 6.46 W/kg; SAR(10 g) = 2.25 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 74.3%

Maximum value of SAR (measured) = 12.8 W/kg

Dipole Calibration for Body Tissue/ $P_{in}=100$ mW, $d=10$ mm, $f=4100$ MHz/Zoom Scan, $dist=1.4$ mm

(8x8x8)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 60.42 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 19.0 W/kg

SAR(1 g) = 6.39 W/kg; SAR(10 g) = 2.20 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm


Ratio of SAR at M2 to SAR at M1 = 73%

Maximum value of SAR (measured) = 12.9 W/kg


Eurofins KCTL Co.,Ltd.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR23-SPF0030-B
Page (477) of (515)

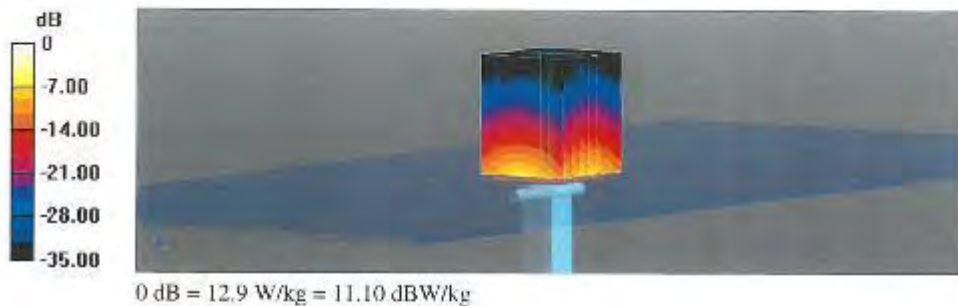

Impedance Measurement Plot for Body TSL

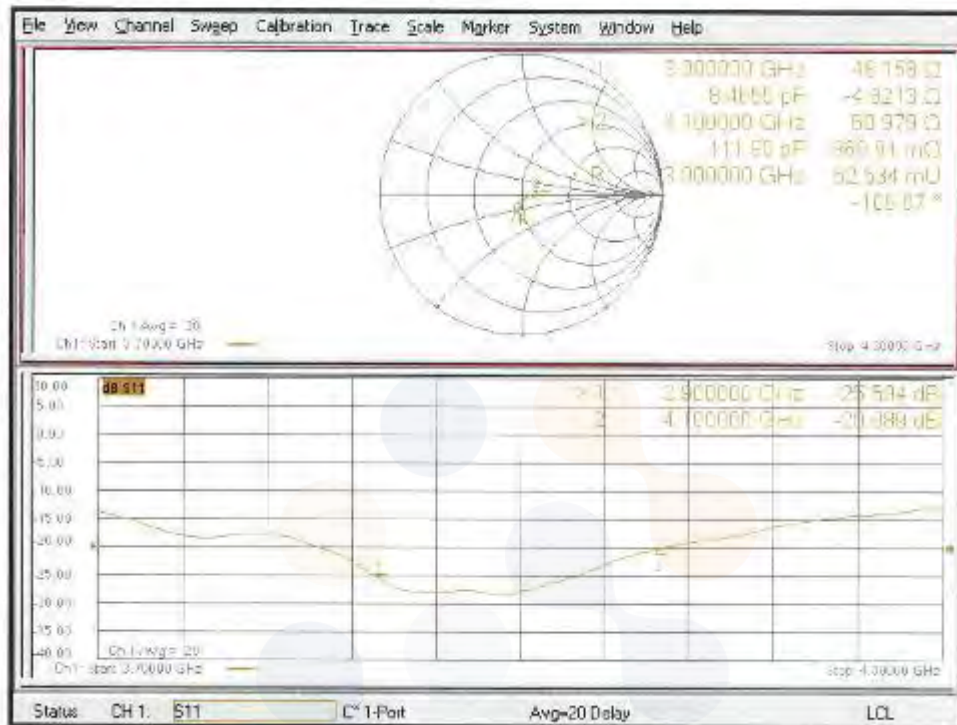

Appendix B. SAR Tissue Specification

The brain mixtures consist of a viscous gel using hydrox-ethyl cellulose(HEC) gelling agent and saline solution. Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue.

Frequency (MHz)	750 ~ 835		1 750		1 900		2 450		5 200 ~ 5 800	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Ingredient	% by weight									
Water	40.29	51.97	53.00	68.00	55.00	70.50	72.00	73.00	65.52	80.00
Salt (NaCl)	1.38	0.93	0.40	0.20	0.35	0.30	0.10	0.10	0	0
Sugar	57.90	47.00	0	0	0	0	0	0	0	0
HEC	0.24	0	0	0	0	0	0	0	0	0
Bactericide	0.19	0.10	0	0	0	0	0	0	0	0
Triton X-100	0	0	0	0	0	0	20.00	0	17.24	0
DGBE	0	0	46.60	31.80	44.65	29.20	0	26.90	0	0
Diethylene glycol hexyl ether	0	0	0	0	0	0	7.90	0	17.24	0
Polysorbate (Tween) 80	0	0	0	0	0	0	0	0	0	20.00
Tissue parameter target by C. Gabriel and G. Harts grove.										
Salt: 99 % Pure Sodium Chloride					Sucrose: 98 % Pure Sucrose					
Water: De-ionized, 16 M resistivity					HEC: Hydroxyethyl Cellulose					
DGBE: 99 % Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy) ethanol]										
Triton X-100(ultra-pure): Polyethylene glycol mono[4-(1,1,3,3-tetramethylbutyl)phenyl] ether										

Appendix C. LTE CA RF Conducted Power

C.1 LTE Intra Uplink Carrier Aggregation

LTE Intra-Band Contiguous Carrier Aggregation

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC.

UL CA power measurements were performed for each antennas at with QPSK modulation based on the worst-case standalone SAR.

The UL CA mode power measurements represent the total power across both carriers. Measurements were made for all supported PCC bandwidths using the channel/RB combination resulting in the highest standalone output power at the least MPR (0 dB). SCCs were set to use configurations similar to the PCC to establish conservative or worst case equivalent SAR test conditions (highest maximum power with MPR of 0 dB).

The standalone power measurement is the power for the PCC in the non-CA mode (i.e. single carrier power). In all cases the UL CA power is less than or equal to the standalone power, which is in accordance with the tune-up limits in table below.

According to November 2017 TCB workshop, Uplink CA SAR Test Guidance as follows:

- a) When the maximum output for UL CA is $\leq$ standalone LTE mode (without CA)
 - PCC is configured according to the highest standalone SAR configuration tested
 - SCC and subsequent CCs are configured according to procedures used for power measurement and parameters (BW, RB etc.) similar to that used for the PCC
- b) When the Reported SAR for UL CA configuration, described above, is > 1.2 W/kg, UL CA SAR is also required for all required test channels(PCC based)
- c) UL CA SAR is also required for standalone SAR configurations > 1.2 W/kg when they are scaled to the UL CA power level

LTE UL CA 2C Measured Results

Combination	PCC						SCC 1						Power	
	BW [MHz]	(UL) Ch.	(UL) Freq. [MHz]	Mod.	(UL) RB Size	(UL) RB Offset	BW [MHz]	(UL) Ch.	(UL) Freq. [MHz]	Mod.	(UL) RB Size	(UL) RB Offset	LTE Tx. Power with UL CA Enabled (PCC+SCC) (dBm)	LTE Single Carrier Tx Power (dBm)
CA_2C	20	18700	1860.0	QPSK	1	99	20	18898	1879.8	QPSK	1	0	23.51	23.54
CA_2C	20	18700	1860.0	QPSK	50	24	20	18898	1879.8	QPSK	50	0	16.41	16.66
CA_2C	20	19100	1900.0	QPSK	50	24	20	18902	1880.2	QPSK	50	50	13.67	13.70

LTE UL CA 5B Measured Results

Combination	PCC						SCC 1						Power	
	BW [MHz]	(UL) Ch.	(UL) Freq. [MHz]	Mod.	(UL) RB Size	(UL) RB Offset	BW [MHz]	(UL) Ch.	(UL) Freq. [MHz]	Mod.	(UL) RB Size	(UL) RB Offset	LTE Tx. Power with UL CA Enabled (PCC+SCC) (dBm)	LTE Single Carrier Tx Power (dBm)
CA_5B	10	20525	836.5	QPSK	1	0	5	20453	829.3	QPSK	1	24	23.63	23.64
CA_5B	10	20525	836.5	QPSK	50	0	5	20453	829.3	QPSK	25	0	21.72	21.89
CA_5B	10	20525	836.5	QPSK	25	25	5	20597	843.7	QPSK	12	0	20.20	19.96

LTE UL CA 66B Measured Results

Combination	PCC						SCC 1						Power	
	BW [MHz]	(UL) Ch.	(UL) Freq. [MHz]	Mod.	(UL) RB Size	(UL) RB Offset	BW [MHz]	(UL) Ch.	(UL) Freq. [MHz]	Mod.	(UL) RB Size	(UL) RB Offset	LTE Tx. Power with UL CA Enabled (PCC+SCC) (dBm)	LTE Single Carrier Tx Power (dBm)
CA_66B	15	132322	1745.0	QPSK	1	0	5	132229	1735.7	QPSK	1	24	23.61	23.62
CA_66B	15	132322	1745.0	QPSK	1	0	5	132229	1735.7	QPSK	1	24	14.34	14.76
CA_66B	15	132597	1772.5	QPSK	1	0	5	132504	1763.2	QPSK	1	24	13.81	13.78

LTE UL CA 66C Measured Results

Combination	PCC						SCC 1						Power	
	BW [MHz]	(UL) Ch.	(UL) Freq. [MHz]	Mod.	(UL) RB Size	(UL) RB Offset	BW [MHz]	(UL) Ch.	(UL) Freq. [MHz]	Mod.	(UL) RB Size	(UL) RB Offset	LTE Tx. Power with UL CA Enabled (PCC+SCC) (dBm)	LTE Single Carrier Tx Power (dBm)
CA_66C	20	132322	1745.0	QPSK	1	0	20	132124	1725.2	QPSK	1	99	23.55	23.60
CA_66C	20	132322	1745.0	QPSK	50	50	20	132520	1764.8	QPSK	50	0	14.38	14.66
CA_66C	20	132572	1770.0	QPSK	1	0	20	132374	1750.2	QPSK	1	99	13.72	13.78

C.2 LTE Inter Uplink Carrier Aggregation

LTE Inter-Band Uplink Carrier Aggregation –Interim Procedures

According to October 2018 TCB workshop, Uplink CA SAR test Guidance as follows;

- 1) If the single uplink 1 -g SAR values for each band are both less than 0.8 W/kg and the algebraic summation of the 1-g SAR values are less than 1.45 W/kg no additional measurements need to be performed.
- 2) If one of the single uplink 1 -g SAR values is greater than 0.8 W/kg, instead of algebraically summing the 1-g SAR values, sum up the SAR distributions, similar to the enlarged zoom scan (volume scan) procedures found in FCC KDB Publication 865664 D01.
- 3) If the algebraic sum of the 1-g SAR values is > 1.45 W/kg additional measurements may have to be made.

Combination	RF Exposure Condition	Band/Antenna		Worst Standalone SAR				UL CA [W/kg] (Worst Algebraic Summation)
		PCC	SCC	Maximum Tune-up Power (dBm)		Reported SAR (W/kg)		
				PCC	SCC	PCC	SCC	
CA_2A-4A	Notebook mode	B2 / Ant.0	B4(66) / Ant.2	18.0	16.0	1.199	0.436	1.635
	Tablet			15.0	15.0	0.936	0.869	1.805
CA_2A-4A	Notebook mode	B4(66) / Ant.2	B2 / Ant.0	16.0	18.0	0.436	1.199	1.635
	Tablet			15.0	15.0	0.869	0.936	1.805
CA_2A-5A	Notebook mode	B5 / Ant.0	B2 / Ant.2	23.0	24.0	1.015	0.499	1.514
	Tablet			21.0	15.0	1.270	0.465	1.735
CA_2A-12A	Notebook mode	B12 / Ant.0	B2 / Ant.2	21.0	24.0	0.560	0.499	1.059
	Tablet			16.0	15.0	0.424	0.465	0.889
CA_2A-66A	Notebook mode	B2 / Ant.0	B66 / Ant.2	18.0	16.0	1.199	0.436	1.635
	Tablet			15.0	15.0	0.936	0.869	1.805
CA_2A-66A	Notebook mode	B66 / Ant.2	B2 / Ant.0	16.0	18.0	0.436	1.199	1.635
	Tablet			15.0	15.0	0.869	0.936	1.805
CA_4A-12A	Notebook mode	B12 / Ant.0	B4(66) / Ant.2	21.0	16.0	0.560	0.436	0.996
	Tablet			16.0	15.0	0.424	0.869	1.293
CA_4A-5A	Notebook mode	B5 / Ant.0	B4(66) / Ant.2	23.0	16.0	1.015	0.436	1.451
	Tablet			21.0	15.0	1.270	0.869	2.139
CA_5A-66A	Notebook mode	B5 / Ant.0	B66 / Ant.2	23.0	16.0	1.015	0.436	1.451
	Tablet			21.0	15.0	1.270	0.869	2.139
CA_12A-66A	Notebook mode	B12 / Ant.0	B66 / Ant.2	21.0	16.0	0.560	0.436	0.996
	Tablet			16.0	15.0	0.424	0.869	1.293

Note: When the sum of SAR-1g is greater than the SAR limit (SAR1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR. (Section 13.5)

C.3 LTE Downlink Carrier Aggregation

The tables below show the supported frequency bands of the device for DL Inter-band and DL Intra-band combinations.

Power measurements were performed on the channel with the highest maximum output power from Tune-up Procedure.

In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the subset in each row with the largest combination of frequency bands and CCs

Index	2CC	Restriction	Completely Covered by Measurement Superset	Reverse
2CC #1	CA_2A-2A	N/A	3CC #1	N/A
2CC #2	CA_2C	N/A	3CC #20	N/A
2CC #3	CA_2A-4A	N/A	3CC #7	Yes
2CC #4	CA_2A-5A	N/A	3CC #11	Yes
2CC #5	CA_2A-12A	N/A	3CC #13	Yes
2CC #6	CA_2A-14A	N/A	3CC #15	Yes
2CC #7	CA_2A-29A	B29 SCC Only	3CC #16	N/A
2CC #8	CA_2A-66A	N/A	3CC #17	Yes
2CC #9	CA_4A-4A	N/A	3CC #25	N/A
2CC #10	CA_4A-5A	N/A	3CC #27	Yes
2CC #11	CA_4A-12A	N/A	3CC #24	Yes
2CC #12	CA_4A-29A	B29 SCC Only	3CC #26	N/A
2CC #13	CA_5A-5A	N/A	3CC #29	N/A
2CC #14	CA_5B	N/A	3CC #12	N/A
2CC #15	CA_5A-66A	N/A	3CC #29	Yes
2CC #16	CA_12A-12A	N/A	3CC #13	N/A
2CC #17	CA_12A-66A	N/A	3CC #34	Yes
2CC #18	CA_14A-66A	N/A	3CC #36	Yes
2CC #19	CA_66A-66A	N/A	3CC #37	N/A
2CC #20	CA_66B	N/A	3CC #31	N/A
2CC #21	CA_66C	N/A	3CC #32	N/A

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0030-B Page (484) of (515)	 
---	--	---

Index	3CC	Restriction	Completely Covered by Measurement Superset	Reverse
3CC #1	CA_2A-2A-12A	N/A	4CC #1	Yes
3CC #2	CA_2A-2A-14A	N/A	4CC #3	Yes
3CC #3	CA_2A-2A-29A	B29 Only SCC	4CC #4	Yes
3CC #4	CA_2A-2A-4A	N/A	4CC #5	Yes
3CC #5	CA_2A-2A-5A	N/A	4CC #8	Yes
3CC #6	CA_2A-2A-66A	N/A	4CC #10	Yes
3CC #7	CA_2A-4A-12A	N/A	4CC #5	Yes
3CC #8	CA_2A-4A-29A	B29 Only SCC	No	Yes
3CC #9	CA_2A-4A-4A	N/A	4CC #6	Yes
3CC #10	CA_2A-4A-5A	N/A	4CC #7	Yes
3CC #11	CA_2A-5A-66A	N/A	No	Yes
3CC #12	CA_2A-5B	N/A	4CC #9	Yes
3CC #13	CA_2A-12A-12A	N/A	4CC #1	Yes
3CC #14	CA_2A-12A-66A	N/A	4CC #2	Yes
3CC #15	CA_2A-14A-66A	N/A	4CC #3	Yes
3CC #16	CA_2A-29A-66A	B29 Only SCC	4CC #4	Yes
3CC #17	CA_2A-66A-66A	N/A	4CC #10	Yes
3CC #18	CA_2A-66B	N/A	4CC #11	Yes
3CC #19	CA_2A-66C	N/A	4CC #12	Yes
3CC #20	CA_2C-12A	N/A	No	Yes
3CC #21	CA_2C-29A	B29 Only SCC	No	No
3CC #22	CA_2C-5A	N/A	No	Yes
3CC #23	CA_2C-66A	N/A	4CC #28	Yes
3CC #24	CA_4A-12A-12A	N/A	4CC #29	Yes
3CC #25	CA_4A-4A-12A	N/A	4CC #29	Yes
3CC #26	CA_4A-4A-29A	B29 Only SCC	No	No
3CC #27	CA_4A-4A-5A	N/A	4CC #14	Yes
3CC #28	CA_4A-5B	N/A	4CC #15	Yes
3CC #29	CA_5A-5A-66A	N/A	4CC #31	Yes
3CC #30	CA_5A-66A-66A	N/A	4CC #31	Yes
3CC #31	CA_5A-66B	N/A	4CC #32	Yes
3CC #32	CA_5A-66C	N/A	4CC #18	Yes
3CC #33	CA_5B-66A	N/A	4CC #19	Yes
3CC #34	CA_12A-66A-66A	N/A	4CC #20	Yes
3CC #35	CA_12A-66C	N/A	4CC #21	Yes
3CC #36	CA_14A-66A-66A	N/A	4CC #22	Yes
3CC #37	CA_66A-66A-66A	N/A	4CC #24	Yes
3CC #38	CA_66A-66B	N/A	4CC #25	Yes
3CC #39	CA_66A-66C	N/A	4CC #26	Yes
3CC #40	CA_66D	N/A	4CC #27	N/A
3CC #41	CA_29A-66A-66A	B29 Only SCC	4CC #23	Yes

Index	4CC	Restriction	Completely Covered by Measurement Superset	Reverse
4CC #1	CA_2A-2A-12A-12A	N/A	No	Yes
4CC #2	CA_2A-2A-12A-66A	N/A	5CC #1	Yes
4CC #3	CA_2A-2A-14A-66A	N/A	No	Yes
4CC #4	CA_2A-2A-29A-66A	B29 Only SCC	5CC #3	Yes
4CC #5	CA_2A-2A-4A-12A	N/A	No	Yes
4CC #6	CA_2A-2A-4A-4A	N/A	No	Yes
4CC #7	CA_2A-2A-4A-5A	N/A	No	Yes
4CC #8	CA_2A-2A-5A-66A	N/A	5CC #4	Yes
4CC #9	CA_2A-2A-5B	N/A	5CC #7	Yes
4CC #10	CA_2A-2A-66A-66A	N/A	No	Yes
4CC #11	CA_2A-2A-66B	N/A	No	Yes
4CC #12	CA_2A-2A-66C	N/A	No	Yes
4CC #13	CA_2A-4A-4A-12A	N/A	No	Yes
4CC #14	CA_2A-4A-4A-5A	N/A	No	Yes
4CC #15	CA_2A-4A-5B	N/A	No	Yes
4CC #16	CA_2A-5A-66A-66A	N/A	5CC #4	Yes
4CC #17	CA_2A-5A-66B	N/A	5CC #5	Yes
4CC #18	CA_2A-5A-66C	N/A	5CC #6	Yes
4CC #19	CA_2A-5B-66A	N/A	5CC #7	Yes
4CC #20	CA_2A-12A-66A-66A	N/A	5CC #1	No
4CC #21	CA_2A-12A-66C	N/A	No	No
4CC #22	CA_2A-14A-66A-66A	N/A	5CC #2	No
4CC #23	CA_2A-29A-66A-66A	B29 Only SCC	5CC #3	No
4CC #24	CA_2A-66A-66A-66A	N/A	No	No
4CC #25	CA_2A-66A-66B	N/A	5CC #8	No
4CC #26	CA_2A-66A-66C	N/A	5CC #9	No
4CC #27	CA_2A-66D	N/A	No	No
4CC #28	CA_2C-66A-66A	N/A	No	No
4CC #29	CA_4A-4A-12A-12A	N/A	No	No
4CC #30	CA_4A-4A-5B	N/A	No	No
4CC #31	CA_5A-5A-66A-66A	N/A	No	No
4CC #32	CA_5A-5A-66B	N/A	No	No
4CC #33	CA_5A-5A-66C	N/A	No	No
4CC #34	CA_5A-66A-66B	N/A	No	No
4CC #35	CA_5A-66A-66C	N/A	No	No
4CC #36	CA_5A-66D	N/A	No	No
4CC #37	CA_5B-66A-66A	N/A	5CC #10	No
4CC #38	CA_5B-66B	N/A	5CC #11	No
4CC #39	CA_5B-66C	N/A	5CC #12	No
4CC #40	CA_14A-66A-66A-66A	N/A	No	No

Index	5CC	Restriction	Completely Covered by Measurement Superset	Reverse
5CC #1	CA_2A-2A-12A-66A-66A	N/A	No	Yes
5CC #2	CA_2A-2A-14A-66A-66A	N/A	No	Yes
5CC #3	CA_2A-2A-29A-66A-66A	B29 Only SCC	No	Yes
5CC #4	CA_2A-2A-5A-66A-66A	N/A	No	Yes
5CC #5	CA_2A-2A-5A-66B	N/A	No	Yes
5CC #6	CA_2A-2A-5A-66C	N/A	No	Yes
5CC #7	CA_2A-2A-5B-66A	N/A	No	Yes
5CC #8	CA_2A-2A-66A-66B	N/A	No	Yes
5CC #9	CA_2A-2A-66A-66C	N/A	No	Yes
5CC #10	CA_2A-5B-66A-66A	N/A	No	Yes
5CC #11	CA_2A-5B-66B	N/A	No	Yes
5CC #12	CA_2A-5B-66C	N/A	No	Yes
5CC #13	CA_5B-66A-66B	N/A	No	Yes
5CC #14	CA_5B-66A-66C	N/A	No	Yes

Note: Only yellow highlight cells need power measurement according to LTE DL CA SAR test Exclusion in TCB workshop (April 2018).

In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the CA configuration with the largest aggregated DL CA BW in each frequency band, independently for contiguous and non-contiguous CA; however, if the same frequency band is used for both contiguous and non-contiguous CA, power measurement was performed using the configuration with the largest aggregated BW and maximum output power among contiguous and non-contiguous CA.

C.3.1 Downlink Carrier Aggregation RF Conducted Powers

C.3.1.1 LTE Band 2 as PCC

Combination	PCC								SCC 1				SCC 2				SCC 3				SCC 4				Power		
	Band	BW [MHz]	(UL) Ch.	(UL) Freq.	Mod.	(UL) RB Size	(UL) RB	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	LTE Tx. Power with DL CA	LTE Single Carrier Tx
CA_2A-4A-29A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B4	20	2175	2132.5	B29	10	9715	722.5	N/A								23.77	23.79
CA_2A-5A-66A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B5	10	2525	881.5	B66	20	66786	2145.0	N/A								23.75	23.79
CA_2C-12A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	898	1959.8	B12	10	5095	737.5	N/A								23.70	23.79
CA_2C-29A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	898	1959.8	B29	10	9715	722.5	N/A								23.71	23.79
CA_2C-5A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	898	1959.8	B5	10	2525	881.5	N/A								23.68	23.79
CA_2A-2A-12A-12A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B12	5	5095	737.5	B12	5	5143	742.3	N/A				23.66	23.79
CA_2A-2A-14A-66A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B14	10	5330	763.0	B66	20	66786	2145.0	N/A				23.70	23.79
CA_2A-2A-4A-12A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B4	20	2175	2132.5	B12	10	5095	737.5	N/A				23.65	23.79
CA_2A-2A-4A-4A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B4	20	2050	2120.0	B4	20	2300	2145.0	N/A				23.65	23.79
CA_2A-2A-4A-5A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B4	20	2175	2132.5	B5	10	2525	881.5	N/A				23.61	23.79
CA_2A-2A-66A-66A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B66	20	66786	2145.0	B66	20	67036	2170.0	N/A				23.71	23.79
CA_2A-2A-66B	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B66	15	66786	2145.0	B66	5	66879	2154.3	N/A				23.65	23.79
CA_2A-2A-66C	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B66	20	66786	2145.0	B66	20	66984	2164.8	N/A				23.66	23.79
CA_2A-4A-4A-12A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B4	20	2050	2120.0	B4	20	2300	2145.0	B12	10	5095	737.5	N/A				23.71	23.79
CA_2A-4A-4A-5A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B4	20	2050	2120.0	B4	20	2300	2145.0	B5	10	2525	881.5	N/A				23.65	23.79
CA_2A-4A-5B	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B4	20	2050	2120.0	B5	10	2525	881.5	B5	5	2453	874.3	N/A				23.66	23.79
CA_2A-12A-66C	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B12	10	5095	737.5	B66	20	66786	2145.0	B66	20	66984	2164.8	N/A				23.79	23.79
CA_2A-66A-66A-66A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B66	20	66786	2145.0	B66	20	66536	2120.0	B66	20	67036	2170.0	N/A				23.54	23.79
CA_2A-66D	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B66	20	66786	2145.0	B66	20	66588	2125.2	B66	20	66984	2164.8	N/A				23.58	23.79
CA_2C-66A-66A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	898	1959.8	B66	20	66786	2145.0	B66	20	66536	2120.0	N/A				23.61	23.79
CA_2A-2A-12A-66A-66A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B12	10	5095	737.5	B66	20	66786	2145.0	B66	20	67036	2170.0	23.66	23.79
CA_2A-2A-14A-66A-66A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B14	10	5330	763.0	B66	20	66786	2145.0	B66	20	67036	2170.0	23.70	23.79
CA_2A-2A-29A-66A-66A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B29	10	9715	722.5	B66	20	66786	2145.0	B66	20	67036	2170.0	23.64	23.79
CA_2A-2A-5A-66A-66A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B5	10	2525	881.5	B66	20	66786	2145.0	B66	20	67036	2170.0	23.61	23.79
CA_2A-2A-5A-66B	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B5	10	2525	881.5	B66	15	66786	2145.0	B66	5	66879	2154.3	23.70	23.79
CA_2A-2A-5A-66C	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B5	10	2525	881.5	B66	20	66786	2145.0	B66	20	66984	2164.8	23.68	23.79
CA_2A-2A-5B-66A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B5	10	2525	881.5	B5	5	2453	874.3	B66	20	66786	2145.0	23.66	23.79
CA_2A-2A-66A-66B	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B66	20	66536	2120.0	B66	15	67061	2172.5	B66	5	66968	2163.2	23.64	23.79
CA_2A-2A-66A-66C	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B66	20	66536	2120.0	B66	20	67036	2170.0	B66	20	66838	2150.2	23.67	23.79
CA_2A-5B-66A-66A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B5	10	2525	881.5	B5	5	2453	874.3	B66	20	66786	2145.0	B66	20	67036	2170.0	23.68	23.79
CA_2A-5B-66B	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B5	10	2525	881.5	B5	5	2453	874.3	B66	15	66786	2145.0	B66	5	66879	2154.3	23.69	23.79
CA_2A-5B-66C	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B5	10	2525	881.5	B5	5	2453	874.3	B66	20	66786	2145.0	B66	20	66984	2164.8	23.64	23.79

C.3.1.2 LTE Band 4 as PCC

Combination	PCC								SCC 1				SCC 2				SCC 3				SCC 4				Power		
	Band	BW [MHz]	(UL) Ch.	(UL) Freq.	Mod.	(UL) RB Size	(UL) RB	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	LTE Tx. Power with DL CA	LTE Single Carrier Tx
CA_2A-4A-29A	B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	B2	20	900	1960.0	B29	10	9715	722.5	N/A								23.71	23.73
CA_4A-4A-29A	B4	20	20050	1720.0	QPSK	1	0	2050	2120.0	B4	20	2300	2145.0	B29	10	9715	722.5	N/A								23.45	23.59
CA_2A-2A-4A-12A	B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	B2	20	900	1960.0	B2	20	1100	1980.0	B12	10	5095	737.5	N/A				23.70	23.73
CA_2A-2A-4A-4A	B4	20	20050	1720.0	QPSK	1	0	2050	2120.0	B4	20	2300	2145.0	B2	20	900	1960.0	B2	20	1100	1980.0	N/A				23.43	23.59
CA_2A-2A-4A-5A	B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	B2	20	900	1960.0	B2	20	1100	1980.0	B5	10	2525	881.5	N/A				23.66	23.73
CA_2A-4A-4A-12A	B4	20	20050	1720.0	QPSK	1	0	2050	2120.0	B4	20	2300	2145.0	B2	20	900	1960.0	B12	10	5095	737.5	N/A				23.45	23.59
CA_2A-4A-4A-5A	B4	20	20050	1720.0	QPSK	1	0	2050	2120.0	B4	20	2300	2145.0	B2	20	900	1960.0	B5	10	2525	881.5	N/A				23.44	23.59
CA_2A-4A-5B	B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	B2	20	900	1960.0	B5	10	2525	881.5	B5	5	2453	874.3	N/A				23.62	23.73
CA_4A-4A-12A-12A	B4	20	20050	1720.0	QPSK	1	0	2050	2120.0	B4	20	2300	2145.0	B12	5	5095	737.5	B12	5	5143	742.3	N/A				23.50	23.59
CA_4A-4A-5B	B4	20	20050	1720.0	QPSK	1	0	2050	2120.0	B4	20	2300	2145.0	B5	10	2525	881.5	B5	5	2453	874.3	N/A				23.51	23.59



C.3.1.3 LTE Band 5 as PCC

Combination	PCC								SCC 1				SCC 2				SCC 3				SCC 4				Power		
	Band	BW [MHz]	(UL) Ch.	(UL) Freq.	Mod.	(UL) RB Size	(UL) RB	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	LTE Tx. Power with DL CA	LTE Single Carrier Tx
CA_2A-5A-66A	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B2	20	900	1960.0	B66	20	66786	2145.0	N/A								23.80	23.86
CA_2C-5A	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B2	20	900	1960.0	B2	20	1098	1979.8	N/A								23.81	23.86
CA_2A-2A-4A-5A	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B2	20	900	1960.0	B2	20	1100	1980.0	B4	20	2175	2132.5	N/A				23.77	23.86
CA_2A-4A-4A-5A	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B2	20	900	1960.0	B4	20	2050	2120.0	B4	20	2300	2145.0	N/A				23.70	23.86
CA_2A-4A-5B	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B5	5	2453	874.3	B2	20	1100	1980.0	B4	20	2175	2132.5	N/A				23.75	23.86
CA_4A-4A-5B	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B5	5	2453	874.3	B4	20	2050	2120.0	B4	20	2300	2145.0	N/A				23.77	23.86
CA_5A-5A-66A-66A	B5	10	20450	829.0	QPSK	1	0	2450	874.0	B5	10	2600	889.0	B66	20	66786	2145.0	B66	20	67036	2170.0	N/A				23.66	23.72
CA_5A-5A-66B	B5	10	20450	829.0	QPSK	1	0	2450	874.0	B5	10	2600	889.0	B66	15	66786	2145.0	B66	5	66879	2154.3	N/A				23.60	23.72
CA_5A-5A-66C	B5	10	20450	829.0	QPSK	1	0	2450	874.0	B5	10	2600	889.0	B66	20	66786	2145.0	B66	20	66984	2164.8	N/A				23.61	23.72
CA_5A-66A-66B	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B66	20	66536	2120.0	B66	15	67061	2172.5	B66	5	66968	2163.2	N/A				23.68	23.86
CA_5A-66A-66C	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B66	20	66536	2120.0	B66	20	67036	2170.0	B66	20	66838	2150.2	N/A				23.69	23.86
CA_5A-66D	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B66	20	66786	2145.0	B66	20	66588	2125.2	B66	20	66984	2164.8	N/A				23.77	23.86
CA_2A-2A-5A-66A-66A	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B2	20	900	1960.0	B2	20	1100	1980.0	B66	20	66786	2145.0	B66	20	67036	2170.0	23.75	23.86
CA_2A-2A-5A-66B	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B2	20	900	1960.0	B2	20	1100	1980.0	B66	15	66786	2145.0	B66	5	66879	2154.3	23.79	23.86
CA_2A-2A-5A-66C	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B2	20	900	1960.0	B2	20	1100	1980.0	B66	20	66786	2145.0	B66	20	66984	2164.8	23.74	23.86
CA_2A-2A-5B-66A	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B5	5	2453	874.3	B2	20	900	1960.0	B2	20	1100	1980.0	B66	20	66786	2145.0	23.72	23.86
CA_2A-5B-66A-66A	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B5	5	2453	874.3	B2	20	900	1960.0	B66	20	66786	2145.0	B66	20	67036	2170.0	23.70	23.86
CA_2A-5B-66B	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B5	5	2453	874.3	B2	20	900	1960.0	B66	15	67061	2172.5	B66	5	66968	2163.2	23.75	23.86
CA_2A-5B-66C	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B5	5	2453	874.3	B2	20	900	1960.0	B66	20	67036	2170.0	B66	20	66838	2150.2	23.77	23.86
CA_5B-66A-66B	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B5	5	2453	874.3	B66	20	66536	2120.0	B66	15	67061	2172.5	B66	5	66968	2163.2	23.74	23.86
CA_5B-66A-66C	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B5	5	2453	874.3	B66	20	66536	2120.0	B66	20	67036	2170.0	B66	20	66838	2150.2	23.71	23.86

C.3.1.4 LTE Band 12 as PCC

Combination	PCC								SCC 1				SCC 2				SCC 3				SCC 4				Power		
	Band	BW [MHz]	(UL) Ch.	(UL) Freq.	Mod.	(UL) RB Size	(UL) RB	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	LTE Tx. Power with DL CA	LTE Single Carrier Tx
CA_2C-12A	B12	10	23095	707.5	QPSK	1	0	5095	737.5	B2	20	900	1960.0	B2	20	1098	1979.8	N/A						23.80	23.87		
CA_2A-2A-12A-12A	B12	5	23035	701.5	QPSK	1	12	5035	731.5	B12	5	5155	743.5	B2	20	900	1960.0	B2	20	1100	1980.0	N/A				23.81	23.88
CA_2A-2A-4A-12A	B12	10	23095	707.5	QPSK	1	0	5095	737.5	B2	20	900	1960.0	B2	20	1100	1980.0	B4	20	2175	2132.5	N/A				23.82	23.87
CA_2A-4A-4A-12A	B12	10	23095	707.5	QPSK	1	0	5095	737.5	B2	20	900	1960.0	B4	20	2050	2120.0	B4	20	2300	2145.0	N/A				23.79	23.87
CA_2A-12A-66C	B12	10	23095	707.5	QPSK	1	0	5095	737.5	B2	20	900	1960.0	B66	20	66786	2145.0	B66	20	66984	2164.8	N/A				23.82	23.87
CA_4A-4A-12A-12A	B12	5	23035	701.5	QPSK	1	12	5035	731.5	B12	5	5155	743.5	B4	20	2050	2120.0	B4	20	2300	2145.0	N/A				23.80	23.88
CA_2A-2A-12A-66A-66A	B12	10	23095	707.5	QPSK	1	0	5095	737.5	B2	20	900	1960.0	B2	20	1100	1980.0	B66	20	66786	2145.0	B66	20	67036	2170.0	23.81	23.87

C.3.1.5 LTE Band 14 as PCC

Combination	PCC								SCC 1				SCC 2				SCC 3				SCC 4				Power		
	Band	BW [MHz]	(UL) Ch.	(UL) Freq.	Mod.	(UL) RB Size	(UL) RB	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	LTE Tx. Power with DL CA	LTE Single Carrier Tx
CA_2A-2A-14A-66A	B14	10	23330	793.0	QPSK	1	0	5330	763.0	B2	20	900	1960.0	B2	20	1100	1980.0	B66	20	66786	2145.0	N/A				23.88	23.93
CA_14A-66A-66A-66A	B14	10	23330	793.0	QPSK	1	0	5330	763.0	B66	20	66786	2145.0	B66	20	66536	2120.0	B66	20	67036	2170.0	N/A				23.85	23.93
CA_2A-2A-14A-66A-66A	B14	10	23330	793.0	QPSK	1	0	5330	763.0	B2	20	900	1960.0	B2	20	1100	1980.0	B66	20	66786	2145.0	B66	20	66536	2120.0	23.87	23.93

C.3.1.6 LTE Band 66 as PCC

Combination	PCC								SCC 1				SCC 2				SCC 3				SCC 4				Power		
	Band	BW [MHz]	(UL) Ch.	(UL) Freq.	Mod.	(UL) RB Size	(UL) RB	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	LTE Tx. Power with DL CA	LTE Single Carrier Tx
CA_2A-5A-66A	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B2	20	900	1960.0	B5	10	2525	881.5	N/A				N/A				23.50	23.64
CA_2A-2A-14A-66A	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B2	20	900	1960.0	B2	20	1100	1980.0	B14	10	5330	763.0	N/A				23.55	23.64
CA_2A-2A-66A-66A	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B2	20	900	1960.0	B2	20	1100	1980.0	N/A				23.61	23.64
CA_2A-2A-66B	B66	15	132597	1772.5	QPSK	1	74	67061	2172.5	B66	5	66968	2163.2	B2	20	900	1960.0	B2	20	1100	1980.0	N/A				23.58	23.81
CA_2A-2A-66C	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66838	2150.2	B2	20	900	1960.0	B2	20	1100	1980.0	N/A				23.60	23.64
CA_2A-12A-66C	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66838	2150.2	B2	20	900	1960.0	B12	10	5095	737.5	N/A				23.57	23.64
CA_2A-66A-66A-66A	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66786	2145.0	B66	20	66536	2120.0	B2	20	900	1960.0	N/A				23.58	23.64
CA_2A-66D	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66838	2150.2	B66	20	66640	2130.4	B2	20	900	1960.0	N/A				23.54	23.64
CA_2C-66A-66A	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B2	20	900	1960.0	B2	20	1098	1979.8	N/A				23.54	23.64
CA_5A-5A-66A-66A	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B5	10	2450	874.0	B5	10	2600	889.0	N/A				23.58	23.64
CA_5A-5A-66B	B66	15	132597	1772.5	QPSK	1	74	67061	2172.5	B66	5	66968	2163.2	B5	10	2450	874.0	B5	10	2600	889.0	N/A				23.77	23.81
CA_5A-5A-66C	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66838	2150.2	B5	10	2450	874.0	B5	10	2600	889.0	N/A				23.58	23.64
CA_5A-66A-66B	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	15	66511	2117.5	B66	5	66604	2126.8	B5	10	2600	889.0	N/A				23.59	23.64
CA_5A-66A-66C	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B66	20	66734	2139.8	B5	10	2600	889.0	N/A				23.54	23.64
CA_5A-66D	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66838	2150.2	B66	20	66640	2130.4	B5	10	2600	889.0	N/A				23.57	23.64
CA_14A-66A-66A-66A	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66786	2145.0	B66	20	66536	2120.0	B14	10	5330	763.0	N/A				23.58	23.64
CA_2A-2A-12A-66A-66A	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B2	20	900	1960.0	B2	20	1100	1980.0	B12	10	5095	737.5	23.59	23.64
CA_2A-2A-14A-66A-66A	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B2	20	900	1960.0	B2	20	1100	1980.0	B14	10	5330	763.0	23.50	23.64
CA_2A-2A-29A-66A-66A	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B2	20	900	1960.0	B2	20	1100	1980.0	B29	10	9715	722.5	23.51	23.64
CA_2A-2A-5A-66A-66A	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B2	20	900	1960.0	B2	20	1100	1980.0	B5	10	2600	889.0	23.52	23.64
CA_2A-2A-5A-66B	B66	15	132597	1772.5	QPSK	1	74	67061	2172.5	B66	5	66968	2163.2	B2	20	900	1960.0	B2	20	1100	1980.0	B5	10	2600	889.0	23.77	23.81
CA_2A-2A-5A-66C	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66838	2150.2	B2	20	900	1960.0	B2	20	1100	1980.0	B5	10	2600	889.0	23.58	23.64
CA_2A-2A-5B-66A	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B2	20	900	1960.0	B2	20	1100	1980.0	B5	10	2450	874.0	B5	10	2549	883.9	23.54	23.64
CA_2A-2A-66A-66B	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	15	66511	2117.5	B66	5	66604	2126.8	B2	20	900	1960.0	B2	20	1100	1980.0	23.56	23.64
CA_2A-2A-66A-66C	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B66	20	66734	2139.8	B2	20	900	1960.0	B2	20	1100	1980.0	23.54	23.64
CA_2A-5B-66A-66A	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B2	20	900	1960.0	B5	10	2525	881.5	B5	5	2453	874.3	23.49	23.64
CA_2A-5B-66B	B66	15	132597	1772.5	QPSK	1	74	67061	2172.5	B66	5	66968	2163.2	B2	20	900	1960.0	B5	10	2525	881.5	B5	5	2453	874.3	23.69	23.81
CA_2A-5B-66C	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66838	2150.2	B2	20	900	1960.0	B5	10	2525	881.5	B5	5	2453	874.3	23.54	23.64
CA_5B-66A-66B	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	15	66511	2117.5	B66	5	66604	2126.8	B5	10	2525	881.5	B5	5	2453	874.3	23.58	23.64
CA_5B-66A-66C	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B66	20	66734	2139.8	B5	10	2525	881.5	B5	5	2453	874.3	23.52	23.64

C.4 LTE Downlink Carrier Aggregation with 4X4 MIMO

This device supports downlink 4x4 MIMO operations for some LTE bands.

Uplink transmission is limited to a single output stream. When carrier aggregation was applicable, the general test selection and setup procedures described in Appendix C.1 were applied.

According to LTE Test conditions in TCB workshop(May, 2017), SAR is excluded for LTE downlink 4x4 MIMO operation when uplink output with DL MIMO does not exceed highest uplink output power configuration without DL MIMO by more than a 1/4 dB. And for DL MIMO with carrier aggregation, the same SAR test exclusion procedure is considered.

Index	2CC	Restriction	Completely Covered by Measurement Superset	Reverse
2CC #1	CA_[2A]-[2A]	N/A	3CC #1	N/A
2CC #2	CA_[2C]	N/A	3CC #20	N/A
2CC #3	CA_[2A]-[4A]	N/A	3CC #7	Yes
2CC #4	CA_[2A]-5A	N/A	3CC #11	Yes
2CC #5	CA_[2A]-12A	N/A	3CC #13	Yes
2CC #6	CA_[2A]-14A	N/A	3CC #15	Yes
2CC #7	CA_[2A]-29A	B29 SCC Only	3CC #16	N/A
2CC #8	CA_[2A]-[66A]	N/A	3CC #17	Yes
2CC #9	CA_[4A]-[4A]	N/A	3CC #25	N/A
2CC #10	CA_[4A]-5A	N/A	3CC #27	Yes
2CC #11	CA_[4A]-12A	N/A	3CC #24	Yes
2CC #12	CA_[4A]-29A	B29 SCC Only	3CC #26	N/A
2CC #13	CA_5A-[66A]	N/A	3CC #29	Yes
2CC #14	CA_12A-[66A]	N/A	3CC #34	Yes
2CC #15	CA_14A-[66A]	N/A	3CC #36	Yes
2CC #16	CA_[66A]-[66A]	N/A	3CC #37	N/A
2CC #17	CA_[66B]	N/A	3CC #31	N/A
2CC #18	CA_[66C]	N/A	3CC #32	N/A

Index	3CC	Restriction	Completely Covered by Measurement Superset	Reverse
3CC #1	CA_[2A]-[2A]-12A	N/A	4CC #1	Yes
3CC #2	CA_[2A]-[2A]-14A	N/A	4CC #3	Yes
3CC #3	CA_[2A]-[2A]-29A	B29 Only SCC	4CC #4	Yes
3CC #4	CA_[2A]-[2A]-[4A]	N/A	4CC #5	Yes
3CC #5	CA_[2A]-[2A]-5A	N/A	4CC #8	Yes
3CC #6	CA_[2A]-[2A]-[66A]	N/A	4CC #10	Yes
3CC #7	CA_[2A]-[4A]-12A	N/A	4CC #5	Yes
3CC #8	CA_[2A]-[4A]-29A	B29 Only SCC	No	Yes
3CC #9	CA_[2A]-[4A]-[4A]	N/A	4CC #6	Yes
3CC #10	CA_[2A]-[4A]-5A	N/A	4CC #7	Yes
3CC #11	CA_[2A]-5A-[66A]	N/A	No	Yes
3CC #12	CA_[2A]-5B	N/A	4CC #9	Yes
3CC #13	CA_[2A]-12A-12A	N/A	4CC #1	Yes
3CC #14	CA_[2A]-12A-[66A]	N/A	4CC #2	Yes
3CC #15	CA_[2A]-14A-[66A]	N/A	4CC #3	Yes
3CC #16	CA_[2A]-29A-[66A]	B29 Only SCC	4CC #4	Yes
3CC #17	CA_[2A]-[66A]-[66A]	N/A	4CC #10	Yes
3CC #18	CA_[2A]-[66B]	N/A	4CC #11	Yes
3CC #19	CA_[2A]-[66C]	N/A	4CC #12	Yes
3CC #20	CA_[2C]-12A	N/A	No	Yes
3CC #21	CA_[2C]-29A	B29 Only SCC	No	Yes
3CC #22	CA_[2C]-5A	N/A	No	Yes
3CC #23	CA_[2C]-[66A]	N/A	4CC #28	Yes
3CC #24	CA_[4A]-12A-12A	N/A	4CC #29	Yes
3CC #25	CA_[4A]-[4A]-12A	N/A	4CC #29	Yes
3CC #26	CA_[4A]-[4A]-29A	B29 Only SCC	No	Yes
3CC #27	CA_[4A]-[4A]-5A	N/A	4CC #14	Yes
3CC #28	CA_[4A]-5B	N/A	4CC #15	Yes
3CC #29	CA_5A-5A-[66A]	N/A	4CC #31	Yes
3CC #30	CA_5A-[66A]-[66A]	N/A	4CC #31	Yes
3CC #31	CA_5A-[66B]	N/A	4CC #32	Yes
3CC #32	CA_5A-[66C]	N/A	4CC #18	Yes
3CC #33	CA_5B-[66A]	N/A	4CC #19	Yes
3CC #34	CA_12A-[66A]-[66A]	N/A	4CC #20	Yes
3CC #35	CA_12A-[66C]	N/A	4CC #21	Yes
3CC #36	CA_14A-[66A]-[66A]	N/A	4CC #22	Yes
3CC #37	CA_[66A]-[66A]-[66A]	N/A	4CC #24	Yes
3CC #38	CA_[66A]-[66B]	N/A	4CC #25	Yes
3CC #39	CA_[66A]-[66C]	N/A	4CC #26	Yes
3CC #40	CA_[66D]	N/A	4CC #27	N/A
3CC #41	CA_29A-[66A]-[66A]	B29 Only SCC	4CC #23	Yes

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0030-B Page (493) of (515)	 
---	--	---

Index	4CC	Restriction	Completely Covered by Measurement Superset	Reverse
4CC #1	CA_[2A]-[2A]-12A-12A	N/A	No	Yes
4CC #2	CA_[2A]-[2A]-12A-[66A]	N/A	5CC #1	Yes
4CC #3	CA_[2A]-[2A]-14A-[66A]	N/A	No	Yes
4CC #4	CA_[2A]-[2A]-29A-[66A]	B29 Only SCC	5CC #3	Yes
4CC #5	CA_[2A]-[2A]-[4A]-12A	N/A	No	Yes
4CC #6	CA_[2A]-[2A]-[4A]-[4A]	N/A	No	Yes
4CC #7	CA_[2A]-[2A]-[4A]-5A	N/A	No	Yes
4CC #8	CA_[2A]-[2A]-5A-[66A]	N/A	5CC #4	Yes
4CC #9	CA_[2A]-[2A]-5B	N/A	5CC #7	Yes
4CC #10	CA_[2A]-[2A]-[66A]-[66A]	N/A	No	Yes
4CC #11	CA_[2A]-[2A]-[66B]	N/A	No	Yes
4CC #12	CA_[2A]-[2A]-[66C]	N/A	No	Yes
4CC #13	CA_[2A]-[4A]-[4A]-12A	N/A	No	Yes
4CC #14	CA_[2A]-[4A]-[4A]-5A	N/A	No	Yes
4CC #15	CA_[2A]-[4A]-5B	N/A	No	Yes
4CC #16	CA_[2A]-5A-[66A]-[66A]	N/A	5CC #4	Yes
4CC #17	CA_[2A]-5A-[66B]	N/A	5CC #5	Yes
4CC #18	CA_[2A]-5A-[66C]	N/A	5CC #6	Yes
4CC #19	CA_[2A]-5B-[66A]	N/A	5CC #7	Yes
4CC #20	CA_[2A]-12A-[66A]-[66A]	N/A	5CC #1	No
4CC #21	CA_[2A]-12A-[66C]	N/A	No	No
4CC #22	CA_[2A]-14A-[66A]-[66A]	N/A	5CC #2	No
4CC #23	CA_[2A]-29A-[66A]-[66A]	B29 Only SCC	5CC #3	No
4CC #24	CA_[2A]-[66A]-[66A]-66A	N/A	No	No
4CC #25	CA_2A-[66A]-[66A]-[66A]	N/A	No	No
4CC #26	CA_[2A]-[66A]-[66B]	N/A	5CC #8	No
4CC #27	CA_[2A]-[66A]-[66C]	N/A	5CC #9	No
4CC #28	CA_[2A]-[66D]	N/A	No	No
4CC #29	CA_[2C]-[66A]-[66A]	N/A	No	No
4CC #30	CA_[4A]-[4A]-12A-12A	N/A	No	No
4CC #31	CA_[4A]-[4A]-5B	N/A	No	No
4CC #32	CA_5A-5A-[66A]-[66A]	N/A	No	No
4CC #33	CA_5A-5A-[66B]	N/A	No	No
4CC #34	CA_5A-5A-[66C]	N/A	No	No
4CC #35	CA_5A-[66A]-[66B]	N/A	No	No
4CC #36	CA_5A-[66A]-[66C]	N/A	No	No
4CC #37	CA_5A-[66D]	N/A	No	No
4CC #38	CA_5B-[66A]-[66A]	N/A	5CC #10	No
4CC #39	CA_5B-[66B]	N/A	5CC #11	No
4CC #40	CA_5B-[66C]	N/A	5CC #12	No
4CC #41	CA_14A-[66A]-[66A]-[66A]	N/A	No	No

Index	5CC	Restriction	Completely Covered by Measurement Superset	Reverse
5CC #1	CA_[2A]-[2A]-12A-[66A]-66A	N/A	No	Yes
5CC #2	CA_2A-[2A]-12A-[66A]-[66A]	N/A	No	Yes
5CC #3	CA_[2A]-[2A]-14A-[66A]-66A	N/A	No	Yes
5CC #4	CA_2A-[2A]-14A-[66A]-[66A]	N/A	No	Yes
5CC #5	CA_[2A]-[2A]-29A-[66A]-66A	B29 Only SCC	No	Yes
5CC #6	CA_2A-[2A]-29A-[66A]-[66A]	B29 Only SCC	No	Yes
5CC #7	CA_[2A]-[2A]-5A-[66A]-66A	N/A	No	Yes
5CC #8	CA_2A-[2A]-5A-[66A]-[66A]	N/A	No	Yes
5CC #9	CA_[2A]-[2A]-5A-66B	N/A	No	Yes
5CC #10	CA_2A-[2A]-5A-[66B]	N/A	No	Yes
5CC #11	CA_[2A]-[2A]-5A-66C	N/A	No	Yes
5CC #12	CA_2A-[2A]-5A-[66C]	N/A	No	Yes
5CC #13	CA_[2A]-[2A]-5B-[66A]	N/A	No	Yes
5CC #14	CA_[2A]-[2A]-[66A]-66B	N/A	No	Yes
5CC #15	CA_2A-[2A]-66A-[66B]	N/A	No	Yes
5CC #16	CA_[2A]-[2A]-[66A]-66C	N/A	No	Yes
5CC #17	CA_2A-[2A]-66A-[66C]	N/A	No	Yes
5CC #18	CA_[2A]-5B-[66A]-[66A]	N/A	No	Yes
5CC #19	CA_[2A]-5B-[66B]	N/A	No	Yes
5CC #20	CA_[2A]-5B-[66C]	N/A	No	Yes
5CC #21	CA_5B-[66A]-[66B]	N/A	No	Yes
5CC #22	CA_5B-[66A]-[66C]	N/A	No	Yes

Note: "[]" is 4X4 MIMO Configuration.

C.4.1 Downlink Carrier Aggregation RF Conducted Powers

C.4.1.1 LTE 4X4 MIMO DL Standalone Powers

LTE Band	BW [MHz]	Ch.	Freq. [MHz]	Mod.	RB Size	RB Offset	4X4 DL MIMO Tx. Power (dBm)	Single Antenna Tx Power (dBm)
2	20	18700	1860.0	QPSK	1	49	23.71	23.79
4	20	20175	1732.5	QPSK	1	0	23.66	23.73
66	20	132572	1770.0	QPSK	1	0	23.55	23.64



C.4.1.2 LTE Band 2 as PCC

Combination	PCC									SCC 1				SCC 2				SCC 3				SCC 4				Power	
	Band	BW [MHz]	(UL) Ch.	(UL) Freq.	Mod.	(UL) RB Size	(UL) RB	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	LTE Tx. Power with DL CA	LTE Single Carrier Tx
CA_[2A]-[4A]-29A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B4	20	2175	2132.5	B29	10	9715	722.5	N/A								23.77	23.79
CA_[2A]-5A-[66A]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B5	10	2525	881.5	B66	20	66786	2145.0	N/A								23.70	23.79
CA_[2C]-12A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	898	1959.8	B12	10	5095	737.5	N/A								23.58	23.79
CA_[2C]-29A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	898	1959.8	B29	10	9715	722.5	N/A								23.66	23.79
CA_[2C]-5A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	898	1959.8	B5	10	2525	881.5	N/A								23.69	23.79
CA_[2A]-[2A]-12A-12A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B12	5	5095	737.5	B12	5	5143	742.3	N/A				23.71	23.79
CA_[2A]-[2A]-14A-[66A]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B14	10	5330	763.0	B66	20	66786	2145.0	N/A				23.66	23.79
CA_[2A]-[2A]-[4A]-12A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B4	20	2175	2132.5	B12	10	5095	737.5	N/A				23.62	23.79
CA_[2A]-[2A]-[4A]-[4A]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B4	20	2050	2120.0	B4	20	2300	2145.0	N/A				23.72	23.79
CA_[2A]-[2A]-[4A]-5A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B4	20	2175	2132.5	B5	10	2525	881.5	N/A				23.70	23.79
CA_[2A]-[2A]-[66A]-[66A]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B66	20	66786	2145.0	B66	20	67036	2170.0	N/A				23.72	23.79
CA_[2A]-[2A]-[66B]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B66	15	66786	2145.0	B66	5	66879	2154.3	N/A				23.74	23.79
CA_[2A]-[2A]-[66C]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B66	20	66786	2145.0	B66	20	66984	2164.8	N/A				23.70	23.79
CA_[2A]-[4A]-[4A]-12A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B4	20	2050	2120.0	B4	20	2300	2145.0	B12	10	5095	737.5	N/A				23.68	23.79
CA_[2A]-[4A]-[4A]-5A	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B4	20	2050	2120.0	B4	20	2300	2145.0	B5	10	2525	881.5	N/A				23.66	23.79
CA_[2A]-[4A]-5B	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B4	20	2050	2120.0	B5	10	2450	874.0	B5	10	2549	883.9	N/A				23.70	23.79
CA_[2A]-12A-[66C]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B12	10	5095	737.5	B66	20	66786	2145.0	B66	20	66984	2164.8	N/A				23.72	23.79
CA_[2A]-[66A]-[66A]-[66A]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B66	20	66786	2145.0	B66	20	66536	2120.0	B66	20	67036	2170.0	N/A				23.77	23.79
CA_[2A]-[66A]-[66A]-[66A]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B66	20	66786	2145.0	B66	20	66536	2120.0	B66	20	67036	2170.0	N/A				23.74	23.79
CA_[2A]-[66D]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B66	20	66786	2145.0	B66	20	66588	2125.2	B66	20	66984	2164.8	N/A				23.72	23.79
CA_[2C]-[66A]-[66A]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	898	1959.8	B66	20	66786	2145.0	B66	20	66536	2120.0	N/A				23.70	23.79
CA_[2A]-[2A]-12A-[66A]-[66A]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B12	10	5095	737.5	B66	20	66786	2145.0	B66	20	67036	2170.0	23.74	23.79
CA_[2A]-[2A]-12A-[66A]-[66A]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B12	10	5095	737.5	B66	20	66786	2145.0	B66	20	67036	2170.0	23.68	23.79
CA_[2A]-[2A]-14A-[66A]-[66A]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B14	10	5330	763.0	B66	20	66786	2145.0	B66	20	67036	2170.0	23.70	23.79
CA_[2A]-[2A]-14A-[66A]-[66A]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B14	10	5330	763.0	B66	20	66786	2145.0	B66	20	67036	2170.0	23.72	23.79
CA_[2A]-[2A]-29A-[66A]-[66A]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B29	10	9715	722.5	B66	20	66786	2145.0	B66	20	67036	2170.0	23.74	23.79
CA_[2A]-[2A]-29A-[66A]-[66A]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B29	10	9715	722.5	B66	20	66786	2145.0	B66	20	67036	2170.0	23.70	23.79
CA_[2A]-[2A]-5A-[66A]-[66A]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B5	10	2525	881.5	B66	20	66786	2145.0	B66	20	67036	2170.0	23.65	23.79
CA_[2A]-[2A]-5A-[66A]-[66A]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B5	10	2525	881.5	B66	20	66786	2145.0	B66	20	67036	2170.0	23.68	23.79
CA_[2A]-[2A]-5A-[66B]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B5	10	2525	881.5	B66	15	66786	2145.0	B66	5	66879	2154.3	23.66	23.79
CA_[2A]-[2A]-5A-[66B]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B5	10	2525	881.5	B66	15	66786	2145.0	B66	5	66879	2154.3	23.69	23.79
CA_[2A]-[2A]-5A-[66C]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B5	10	2525	881.5	B66	20	66786	2145.0	B66	20	66984	2164.8	23.69	23.79
CA_[2A]-[2A]-5A-[66C]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B5	10	2525	881.5	B66	20	66786	2145.0	B66	20	66984	2164.8	23.70	23.79
CA_[2A]-[2A]-5B-[66A]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B5	10	2525	881.5	B5	5	2597	888.7	B66	20	66786	2145.0	23.70	23.79
CA_[2A]-[2A]-[66A]-[66B]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B66	20	66536	2120.0	B66	15	67061	2172.5	B66	5	66968	2163.2	23.71	23.79
CA_[2A]-[2A]-[66A]-[66B]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B66	20	66536	2120.0	B66	15	67061	2172.5	B66	5	66968	2163.2	23.64	23.79
CA_[2A]-[2A]-[66A]-[66C]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B66	20	66536	2120.0	B66	20	67036	2170.0	B66	20	66838	2150.2	23.70	23.79
CA_[2A]-[2A]-[66A]-[66C]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B2	20	1100	1980.0	B66	20	66536	2120.0	B66	20	67036	2170.0	B66	20	66838	2150.2	23.65	23.79
CA_[2A]-5B-[66A]-[66A]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B5	10	2525	881.5	B5	5	2597	888.7	B66	20	66786	2145.0	B66	20	67036	2170.0	23.68	23.79
CA_[2A]-5B-[66B]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B5	10	2450	874.0	B5	10	2549	883.9	B66	15	66786	2145.0	B66	5	66879	2154.3	23.71	23.79
CA_[2A]-5B-[66C]	B2	20	18700	1860.0	QPSK	1	49	700	1940.0	B5	10	2450	874.0	B5	10	2549	883.9	B66	20	66786	2145.0	B66	20	66984	2164.8	23.66	23.79

C.4.1.2 LTE Band 4 as PCC

Combination	PCC								SCC 1				SCC 2				SCC 3				SCC 4				Power		
	Band	BW [MHz]	(UL) Ch.	(UL) Freq.	Mod.	(UL) RB Size	(UL) RB	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	LTE Tx. Power with DL CA	LTE Single Carrier Tx
CA_[2A]-[4A]-29A	B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	B2	20	900	1960.0	B29	10	9715	722.5	N/A								23.71	23.73
CA_[4A]-[4A]-29A	B4	20	20050	1720.0	QPSK	1	0	2050	2120.0	B4	20	2300	2145.0	B29	10	9715	722.5	N/A								23.52	23.59
CA_[2A]-[2A]-[4A]-12A	B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	B2	20	900	1960.0	B2	20	1100	1980.0	B12	10	5095	737.5	N/A				23.68	23.73
CA_[2A]-[2A]-[4A]-[4A]	B4	20	20050	1720.0	QPSK	1	0	2050	2120.0	B4	20	2300	2145.0	B2	20	900	1960.0	B2	20	1100	1980.0	N/A				23.54	23.59
CA_[2A]-[2A]-[4A]-5A	B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	B2	20	900	1960.0	B2	20	1100	1980.0	B5	10	2525	881.5	N/A				23.68	23.73
CA_[2A]-[4A]-[4A]-12A	B4	20	20050	1720.0	QPSK	1	0	2050	2120.0	B4	20	2300	2145.0	B2	20	900	1960.0	B12	10	5095	737.5	N/A				23.52	23.59
CA_[2A]-[4A]-[4A]-5A	B4	20	20050	1720.0	QPSK	1	0	2050	2120.0	B4	20	2300	2145.0	B2	20	900	1960.0	B5	10	2525	881.5	N/A				23.50	23.59
CA_[2A]-[4A]-5B	B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	B2	20	900	1960.0	B5	10	2525	881.5	B5	5	2597	888.7	N/A				23.66	23.73
CA_[4A]-[4A]-12A-12A	B4	20	20050	1720.0	QPSK	1	0	2050	2120.0	B4	20	2300	2145.0	B12	5	5095	737.5	B12	5	5143	742.3	N/A				23.51	23.59
CA_[4A]-[4A]-5B	B4	20	20050	1720.0	QPSK	1	0	2050	2120.0	B4	20	2300	2145.0	B5	10	2525	881.5	B5	5	2597	888.7	N/A				23.54	23.59



C.4.1.3 LTE Band 5 as PCC

Combination	PCC								SCC 1				SCC 2				SCC 3				SCC 4				Power		
	Band	BW [MHz]	(UL) Ch.	(UL) Freq.	Mod.	(UL) RB Size	(UL) RB	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	LTE Tx. Power with DL CA	LTE Single Carrier Tx
CA_[2A]-5A-[66A]	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B2	20	900	1960.0	B66	20	66786	2145.0	N/A								23.71	23.86
CA_[2C]-5A	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B2	20	900	1960.0	B2	20	1098	1979.8	N/A								23.77	23.86
CA_[2A]-[2A]-[4A]-5A	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B2	20	900	1960.0	B2	20	1100	1980.0	B4	20	2175	2132.5	N/A				23.80	23.86
CA_[2A]-[4A]-[4A]-5A	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B2	20	900	1960.0	B4	20	2050	2120.0	B4	20	2300	2145.0	N/A				23.75	23.86
CA_[2A]-[4A]-5B	B5	10	20450	829.0	QPSK	1	0	2450	874.0	B5	10	2549	883.9	B2	20	1100	1980.0	B4	20	2175	2132.5	N/A				23.66	23.72
CA_[4A]-[4A]-5B	B5	10	20450	829.0	QPSK	1	0	2450	874.0	B5	10	2549	883.9	B4	20	2050	2120.0	B4	20	2300	2145.0	N/A				23.65	23.72
CA_5A-5A-[66A]-[66A]	B5	10	20450	829.0	QPSK	1	0	2450	874.0	B5	10	2600	889.0	B66	20	66786	2145.0	B66	20	67036	2170.0	N/A				23.64	23.72
CA_5A-5A-[66B]	B5	10	20450	829.0	QPSK	1	0	2450	874.0	B5	10	2600	889.0	B66	15	66786	2145.0	B66	5	66879	2154.3	N/A				23.59	23.72
CA_5A-5A-[66C]	B5	10	20450	829.0	QPSK	1	0	2450	874.0	B5	10	2600	889.0	B66	20	66786	2145.0	B66	20	66984	2164.8	N/A				23.60	23.72
CA_5A-[66A]-[66B]	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B66	20	66536	2120.0	B66	15	67061	2172.5	B66	5	66968	2163.2	N/A				23.71	23.86
CA_5A-[66A]-[66C]	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B66	20	66536	2120.0	B66	20	67036	2170.0	B66	20	66838	2150.2	N/A				23.80	23.86
CA_5A-[66D]	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B66	20	66786	2145.0	B66	20	66588	2125.2	B66	20	66984	2164.8	N/A				23.79	23.86
CA_[2A]-[2A]-5A-[66A]-66A	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B2	20	900	1960.0	B2	20	1100	1980.0	B66	20	66786	2145.0	B66	20	67036	2170.0	23.77	23.86
CA_[2A]-[2A]-5A-[66A]-[66A]	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B2	20	900	1960.0	B2	20	1100	1980.0	B66	20	66786	2145.0	B66	20	67036	2170.0	23.75	23.86
CA_[2A]-[2A]-5A-66B	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B2	20	900	1960.0	B2	20	1100	1980.0	B66	15	66786	2145.0	B66	5	66879	2154.3	23.70	23.86
CA_2A-[2A]-5A-[66B]	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B2	20	900	1960.0	B2	20	1100	1980.0	B66	15	66786	2145.0	B66	5	66879	2154.3	23.65	23.86
CA_[2A]-[2A]-5A-66C	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B2	20	900	1960.0	B2	20	1100	1980.0	B66	20	66786	2145.0	B66	20	66984	2164.8	23.71	23.86
CA_2A-[2A]-5A-[66C]	B5	10	20525	836.5	QPSK	1	25	2525	881.5	B2	20	900	1960.0	B2	20	1100	1980.0	B66	20	66786	2145.0	B66	20	66984	2164.8	23.77	23.86
CA_[2A]-[2A]-5B-[66A]	B5	10	20450	829.0	QPSK	1	0	2450	874.0	B5	10	2549	883.9	B2	20	900	1960.0	B2	20	1100	1980.0	B66	20	66786	2145.0	23.65	23.72
CA_[2A]-5B-[66A]-[66A]	B5	10	20450	829.0	QPSK	1	0	2450	874.0	B5	10	2549	883.9	B2	20	900	1960.0	B66	20	66786	2145.0	B66	20	67036	2170.0	23.60	23.72
CA_[2A]-5B-[66B]	B5	10	20450	829.0	QPSK	1	0	2450	874.0	B5	10	2549	883.9	B2	20	900	1960.0	B66	15	67061	2172.5	B66	5	66968	2163.2	23.62	23.72
CA_[2A]-5B-[66C]	B5	10	20450	829.0	QPSK	1	0	2450	874.0	B5	10	2549	883.9	B2	20	900	1960.0	B66	20	67036	2170.0	B66	20	66838	2150.2	23.60	23.72
CA_5B-[66A]-[66B]	B5	10	20450	829.0	QPSK	1	0	2450	874.0	B5	10	2549	883.9	B66	20	66536	2120.0	B66	15	67061	2172.5	B66	5	66968	2163.2	23.66	23.72
CA_5B-[66A]-[66C]	B5	10	20450	829.0	QPSK	1	0	2450	874.0	B5	10	2549	883.9	B66	20	66536	2120.0	B66	20	67036	2170.0	B66	20	66838	2150.2	23.67	23.72

C.4.1.4 LTE Band 12 as PCC

Combination	PCC								SCC 1				SCC 2				SCC 3				SCC 4				Power		
	Band	BW [MHz]	(UL) Ch.	(UL) Freq.	Mod.	(UL) RB Size	(UL) RB	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	LTE Tx. Power with DL CA	LTE Single Carrier Tx
CA_[2C]-12A	B12	10	23095	707.5	QPSK	1	0	5095	737.5	B2	20	900	1960.0	B2	20	1098	1979.8	N/A								23.85	23.87
CA_[2A]-[2A]-12A-12A	B12	5	23035	701.5	QPSK	1	12	5035	731.5	B12	5	5155	743.5	B2	20	900	1960.0	B2	20	1100	1980.0	N/A				23.79	23.88
CA_[2A]-[2A]-[4A]-12A	B12	10	23095	707.5	QPSK	1	0	5095	737.5	B2	20	900	1960.0	B2	20	1100	1980.0	B4	20	2175	2132.5	N/A				23.80	23.87
CA_[2A]-[4A]-[4A]-12A	B12	10	23095	707.5	QPSK	1	0	5095	737.5	B2	20	900	1960.0	B4	20	2050	2120.0	B4	20	2300	2145.0	N/A				23.81	23.87
CA_[2A]-12A-[66C]	B12	10	23095	707.5	QPSK	1	0	5095	737.5	B2	20	900	1960.0	B66	20	66786	2145.0	B66	20	66984	2164.8	N/A				23.79	23.87
CA_[4A]-[4A]-12A-12A	B12	5	23035	701.5	QPSK	1	12	5035	731.5	B12	5	5155	743.5	B4	20	2050	2120.0	B4	20	2300	2145.0	N/A				23.82	23.88
CA_[2A]-[2A]-12A-[66A]-66A	B12	10	23095	707.5	QPSK	1	0	5095	737.5	B2	20	900	1960.0	B2	20	1100	1980.0	B66	20	66786	2145.0	B66	20	67036	2170.0	23.79	23.87

C.4.1.5 LTE Band 14 as PCC

Combination	PCC								SCC 1				SCC 2				SCC 3				SCC 4				Power		
	Band	BW [MHz]	(UL) Ch.	(UL) Freq. [MHz]	Mod.	(UL) RB Size	(UL) RB Offset	(DL) Ch.	(DL) Freq. [MHz]	Band	BW [MHz]	(DL) Ch.	(DL) Freq. [MHz]	Band	BW [MHz]	(DL) Ch.	(DL) Freq. [MHz]	Band	BW [MHz]	(DL) Ch.	(DL) Freq. [MHz]	Band	BW [MHz]	(DL) Ch.	(DL) Freq. [MHz]	LTE Tx. Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_[2A]-[2A]-14A-[66A]	B14	10	23330	793.0	QPSK	1	0	5330	763.0	B2	20	900	1960.0	B2	20	1100	1980.0	B66	20	66786	2145.0	N/A				23.90	23.93
CA_14A-[66A]-[66A]-[66A]	B14	10	23330	793.0	QPSK	1	0	5330	763.0	B66	20	66786	2145.0	B66	20	66536	2120.0	B66	20	67036	2170.0	N/A				23.91	23.93
CA_[2A]-[2A]-14A-[66A]- 66A	B14	10	23330	793.0	QPSK	1	0	5330	763.0	B2	20	900	1960.0	B2	20	1100	1980.0	B66	20	66786	2145.0	B66	20	66536	2120.0	23.85	23.93
CA_2A-[2A]-14A-[66A]- [66A]	B14	10	23330	793.0	QPSK	1	0	5330	763.0	B2	20	900	1960.0	B2	20	1100	1980.0	B66	20	66786	2145.0	B66	20	66536	2120.0	23.88	23.93



C.4.1.6 LTE Band 66 as PCC

Combination	PCC								SCC 1				SCC 2				SCC 3				SCC 4				Power		
	Band	BW [MHz]	(UL) Ch.	(UL) Freq.	Mod.	(UL) RB Size	(UL) RB	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	Band	BW [MHz]	(DL) Ch.	(DL) Freq.	LTE Tx. Power with DL CA	LTE Single Carrier Tx
CA_[2A]-5A-[66A]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B2	20	900	1960.0	B5	10	2525	881.5	N/A								23.55	23.64
CA_[2A]-[2A]-14A-[66A]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B2	20	900	1960.0	B2	20	1100	1980.0	B14	10	5330	763.0	N/A				23.54	23.64
CA_[2A]-[2A]-[66A]-[66A]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B2	20	900	1960.0	B2	20	1100	1980.0	N/A				23.61	23.64
CA_[2A]-[2A]-[66B]	B66	15	132597	1772.5	QPSK	1	74	67061	2172.5	B66	5	66968	2163.2	B2	20	900	1960.0	B2	20	1100	1980.0	N/A				23.75	23.81
CA_[2A]-[2A]-[66C]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66838	2150.2	B2	20	900	1960.0	B2	20	1100	1980.0	N/A				23.59	23.64
CA_[2A]-12A-[66C]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66838	2150.2	B2	20	900	1960.0	B12	10	5095	737.5	N/A				23.61	23.64
CA_[2A]-[66A]-[66A]-66A	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66786	2145.0	B66	20	66536	2120.0	B2	20	900	1960.0	N/A				23.57	23.64
CA_2A-[66A]-[66A]-[66A]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66786	2145.0	B66	20	66536	2120.0	B2	20	900	1960.0	N/A				23.55	23.64
CA_[2A]-[66D]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66838	2150.2	B66	20	66640	2130.4	B2	20	900	1960.0	N/A				23.59	23.64
CA_[2C]-[66A]-[66A]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B2	20	900	1960.0	B2	20	1098	1979.8	N/A				23.57	23.64
CA_5A-5A-[66A]-[66A]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B5	10	2450	874.0	B5	10	2600	889.0	N/A				23.55	23.64
CA_5A-5A-[66B]	B66	15	132597	1772.5	QPSK	1	74	67061	2172.5	B66	5	66968	2163.2	B5	10	2450	874.0	B5	10	2600	889.0	N/A				23.70	23.81
CA_5A-5A-[66C]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66838	2150.2	B5	10	2450	874.0	B5	10	2600	889.0	N/A				23.58	23.64
CA_5A-[66A]-[66B]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	15	66511	2117.5	B66	5	66604	2126.8	B5	10	2600	889.0	N/A				23.55	23.64
CA_5A-[66A]-[66C]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B66	20	66734	2139.8	B5	10	2600	889.0	N/A				23.54	23.64
CA_5A-[66D]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66838	2150.2	B66	20	66640	2130.4	B5	10	2600	889.0	N/A				23.50	23.64
CA_14A-[66A]-[66A]-[66A]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66786	2145.0	B66	20	66536	2120.0	B14	10	5330	763.0	N/A				23.49	23.64
CA_[2A]-[2A]-12A-[66A]-66A	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B2	20	900	1960.0	B2	20	1100	1980.0	B12	10	5095	737.5	23.51	23.64
CA_2A-[2A]-12A-[66A]-[66A]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B2	20	900	1960.0	B2	20	1100	1980.0	B12	10	5095	737.5	23.55	23.64
CA_[2A]-[2A]-14A-[66A]-66A	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B2	20	900	1960.0	B2	20	1100	1980.0	B14	10	5330	763.0	23.58	23.64
CA_2A-[2A]-14A-[66A]-[66A]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B2	20	900	1960.0	B2	20	1100	1980.0	B14	10	5330	763.0	23.54	23.64
CA_[2A]-[2A]-29A-[66A]-66A	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B2	20	900	1960.0	B2	20	1100	1980.0	B29	10	9715	722.5	23.52	23.64
CA_2A-[2A]-29A-[66A]-[66A]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B2	20	900	1960.0	B2	20	1100	1980.0	B29	10	9715	722.5	23.55	23.64
CA_[2A]-[2A]-5A-[66A]-66A	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B2	20	900	1960.0	B2	20	1100	1980.0	B5	10	2600	889.0	23.54	23.64
CA_2A-[2A]-5A-[66A]-[66A]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B2	20	900	1960.0	B2	20	1100	1980.0	B5	10	2600	889.0	23.59	23.64
CA_[2A]-[2A]-5A-66B	B66	15	132597	1772.5	QPSK	1	74	67061	2172.5	B66	5	66968	2163.2	B2	20	900	1960.0	B2	20	1100	1980.0	B5	10	2600	889.0	23.70	23.81
CA_2A-[2A]-5A-[66B]	B66	15	132597	1772.5	QPSK	1	74	67061	2172.5	B66	5	66968	2163.2	B2	20	900	1960.0	B2	20	1100	1980.0	B5	10	2600	889.0	23.71	23.81
CA_[2A]-[2A]-5A-66C	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66838	2150.2	B2	20	900	1960.0	B2	20	1100	1980.0	B5	10	2600	889.0	23.57	23.64
CA_2A-[2A]-5A-[66C]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66838	2150.2	B2	20	900	1960.0	B2	20	1100	1980.0	B5	10	2600	889.0	23.60	23.64
CA_[2A]-[2A]-5B-[66A]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B2	20	900	1960.0	B2	20	1100	1980.0	B5	10	2450	874.0	B5	10	2549	883.9	23.59	23.64
CA_[2A]-[2A]-[66A]-66B	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	15	66511	2117.5	B66	5	66604	2126.8	B2	20	900	1960.0	B2	20	1100	1980.0	23.54	23.64
CA_2A-[2A]-66A-[66B]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	15	66511	2117.5	B66	5	66604	2126.8	B2	20	900	1960.0	B2	20	1100	1980.0	23.50	23.64
CA_[2A]-[2A]-[66A]-66C	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B66	20	66734	2139.8	B2	20	900	1960.0	B2	20	1100	1980.0	23.50	23.64
CA_2A-[2A]-66A-[66C]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B66	20	66734	2139.8	B2	20	900	1960.0	B2	20	1100	1980.0	23.55	23.64
CA_[2A]-5B-[66A]-[66A]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B2	20	900	1960.0	B5	10	2450	874.0	B5	10	2549	883.9	23.58	23.64
CA_[2A]-5B-[66B]	B66	15	132597	1772.5	QPSK	1	74	67061	2172.5	B66	5	66968	2163.2	B2	20	900	1960.0	B5	10	2450	874.0	B5	10	2549	883.9	23.69	23.81
CA_[2A]-5B-[66C]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66838	2150.2	B2	20	900	1960.0	B5	10	2450	874.0	B5	10	2549	883.9	23.54	23.64
CA_5B-[66A]-[66B]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	15	66511	2117.5	B66	5	66604	2126.8	B5	10	2450	874.0	B5	10	2549	883.9	23.59	23.64
CA_5B-[66A]-[66C]	B66	20	132572	1770.0	QPSK	1	0	67036	2170.0	B66	20	66536	2120.0	B66	20	66734	2139.8	B5	10	2450	874.0	B5	10	2549	883.9	23.60	23.64

Appendix D. Power Reduction Verification


Proximity Sensor Triggering Distance (KDB 616217 §6.2)

Rear of the DUT was placed directly below the flat phantom. The DUT was moved toward the phantom in accordance with the steps outlined in KDB 616217 §6.2 to determine the trigger distance for enabling power reduction. The DUT was moved away from the phantom to determine the trigger distance for resuming full power.

The DUT featured a visual indicator on its display that showed the status of the proximity sensor (Triggered or not triggered). This was used to determine the status of the sensor during the proximity sensor assessment as monitoring the output power directly was not practical without affecting the measurement.

It was confirmed separately that the output power was altered according to the proximity sensor status indication. This was achieved by observing the proximity sensor status at the same time as monitoring the conducted power contains both the full and reduced conducted power measurements.



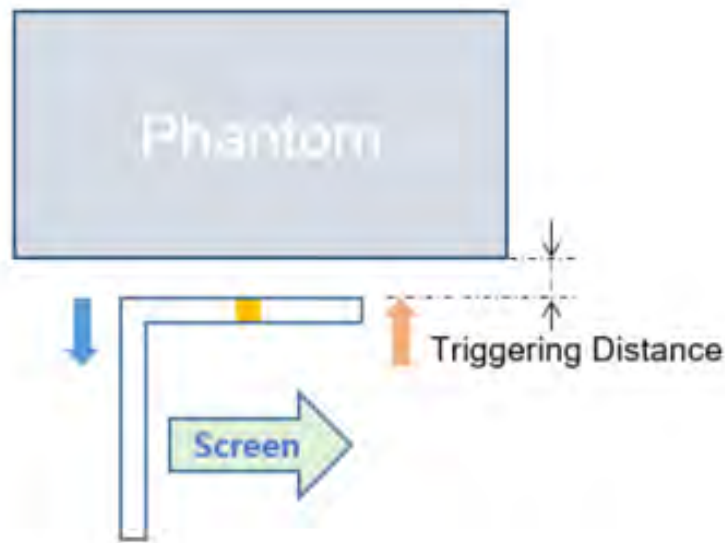

LEGEND

- Direction of DUT travel for determination of power reduction triggering point
- Direction of DUT travel for determination of full power resumption triggering point

Resulting test positions for SAR measurements

Tissue simulating liquid	Band	Trigger distance – Rear		
		Moving toward phantom	Moving from phantom	Worst case distance for SAR
750 Head	LTE Band 12	13 mm	13 mm	12 mm
	LTE Band 14			
850 Head	WCDMA Band 5	13 mm	13 mm	12 mm
	LTE Band 5			
	5G NR n5			
1750 Head	WCDMA Band 4	13 mm	13 mm	12 mm
	LTE Band 4 Ant.0			
	LTE Band 4 Ant.2			
	LTE Band 66 Ant.0			
	LTE Band 66 Ant.2			
	5G NR n66 Ant.0			
	5G NR n66 Ant.2			
1900 Head	WCDMA Band 2	13 mm	13 mm	12 mm
	LTE Band 2 Ant.0			
	LTE Band 2 Ant.2			
	5G NR n2 Ant.0			
	5G NR n2 Ant.2			
3500 Head	5G NR n77 DoD	13 mm	13 mm	12 mm
3700 Head	5G NR n77	13 mm	13 mm	12 mm

Proximity Sensor Triggering Distance Measurement Results – Rear Side

DUT Moving Toward (Trigger) to the Phantom

Distance to DUT Output Power (dBm)										
Distance (mm)	18	17	16	15	14	13	12	11	10	9
WCDMA Band 2	23.46	23.49	23.42	23.42	23.40	17.07	16.98	17.04	16.97	17.07
WCDMA Band 4	23.59	23.62	23.56	23.62	23.56	14.94	14.93	14.95	14.92	14.91
WCDMA Band 5	23.52	23.56	23.55	23.58	23.56	22.06	22.03	22.09	22.11	22.09
LTE Band 2 Ant.0	23.76	23.75	23.78	23.72	23.73	16.67	16.70	16.63	16.66	16.72
LTE Band 2 Ant.2	22.82	22.88	22.88	22.85	22.89	16.75	16.70	16.75	16.79	16.76
LTE Band 4 Ant.0	23.71	23.77	23.69	23.70	23.77	14.71	14.77	14.74	14.71	14.76
LTE Band 4 Ant.2	22.73	22.79	22.76	22.80	22.83	14.91	14.98	14.97	14.88	14.96
LTE Band 5	23.87	23.89	23.90	23.92	23.90	21.93	21.95	21.89	21.91	21.89
LTE Band 12	23.88	23.85	23.90	23.83	23.82	19.91	19.88	19.86	19.91	19.85
LTE Band 14	23.94	23.96	23.96	23.94	23.91	21.29	21.26	21.19	21.26	21.22
LTE Band 66 Ant.0	23.61	23.65	23.59	23.68	23.61	14.79	14.70	14.71	14.69	14.77
LTE Band 66 Ant.2	22.88	22.85	22.86	22.84	22.92	15.01	14.99	14.93	14.97	14.95
5G NR n2 Ant.0	23.98	23.95	23.90	23.96	23.89	16.70	16.78	16.73	16.76	16.74
5G NR n2 Ant.2	23.75	23.74	23.73	23.76	23.77	16.79	16.82	16.75	16.82	16.77
5G NR n5	24.56	24.51	24.59	24.56	24.59	22.62	22.57	22.61	22.62	22.62
5G NR n66 Ant.0	24.01	24.01	24.02	24.01	23.98	14.94	14.97	14.92	14.90	14.95
5G NR n66 Ant.2	23.85	23.85	23.87	23.87	23.93	15.04	14.95	15.03	14.97	15.03
5G NR n77 DoD	24.83	24.76	24.77	24.78	24.75	11.30	11.23	11.22	11.29	11.28
5G NR n77	24.66	24.72	24.73	24.69	24.72	11.10	11.14	11.08	11.11	11.14


DUT Moving Away (Release) from the Phantom

Distance to DUT Output Power (dBm)										
Distance (mm)	9	10	11	12	13	14	15	16	17	18
WCDMA Band 2	17.03	17.02	17.02	17.00	16.99	23.43	23.40	23.41	23.44	23.41
WCDMA Band 4	14.88	14.94	14.97	14.90	14.87	23.66	23.60	23.60	23.64	23.63
WCDMA Band 5	22.07	22.05	22.07	22.04	22.11	23.53	23.55	23.57	23.55	23.54
LTE Band 2 Ant.0	16.63	16.66	16.66	16.64	16.63	23.80	23.74	23.81	23.77	23.76
LTE Band 2 Ant.2	16.73	16.74	16.77	16.70	16.74	22.83	22.89	22.82	22.81	22.88
LTE Band 4 Ant.0	14.69	14.69	14.68	14.75	14.69	23.69	23.70	23.77	23.78	23.72
LTE Band 4 Ant.2	14.98	14.97	14.91	14.94	14.97	22.80	22.81	22.76	22.83	22.73
LTE Band 5	21.95	21.90	21.94	21.94	21.98	23.91	23.92	23.86	23.82	23.91
LTE Band 12	19.86	19.83	19.86	19.84	19.83	23.89	23.88	23.81	23.82	23.89
LTE Band 14	21.27	21.29	21.21	21.23	21.23	23.90	23.95	23.95	23.97	23.91
LTE Band 66 Ant.0	14.73	14.78	14.79	14.76	14.77	23.62	23.60	23.68	23.62	23.66
LTE Band 66 Ant.2	15.01	14.94	15.00	14.92	14.93	22.88	22.86	22.85	22.88	22.86
5G NR n2 Ant.0	16.71	16.71	16.79	16.73	16.75	23.88	23.90	23.96	23.91	23.90
5G NR n2 Ant.2	16.76	16.80	16.82	16.77	16.83	23.71	23.77	23.79	23.73	23.73
5G NR n5	22.58	22.52	22.60	22.58	22.61	24.51	24.54	24.51	24.56	24.58
5G NR n66 Ant.0	14.96	14.92	14.92	14.93	14.89	24.00	23.98	24.02	23.96	23.99
5G NR n66 Ant.2	14.97	14.97	15.02	15.03	15.05	23.91	23.92	23.90	23.93	23.85
5G NR n77 DoD	11.22	11.25	11.29	11.23	11.26	24.78	24.73	24.79	24.78	24.83
5G NR n77	11.17	11.18	11.10	11.14	11.15	24.74	24.75	24.71	24.75	24.74

Hall Effect and Gravity Sensor Guidance (Nov. 2019 TCB Workshop Notes)

The Power verification was performed according to the following procedure:

- Step 1)** With the lid is in closed mode (0 degrees), open the screen in 10 degree steps until laptop mode or tablet mode is obtained.
- Step 2)** Lower the screen 5 degrees. Closed mode should be reobtained. If not keep lowering in 5 degree steps.
- Step 3)** Open the screen in 1 degree steps until laptop mode or tablet mode is reobtained. Continue opening the screen in 1 degree steps until at least 5 degrees past where laptop mode or tablet mode (90 degree) was obtained.
- Step 4)** Then continue opening the screen in 10 degree steps until tablet mode or laptop mode is obtained.
- Step 5)** Power measurements should be taken at each step.

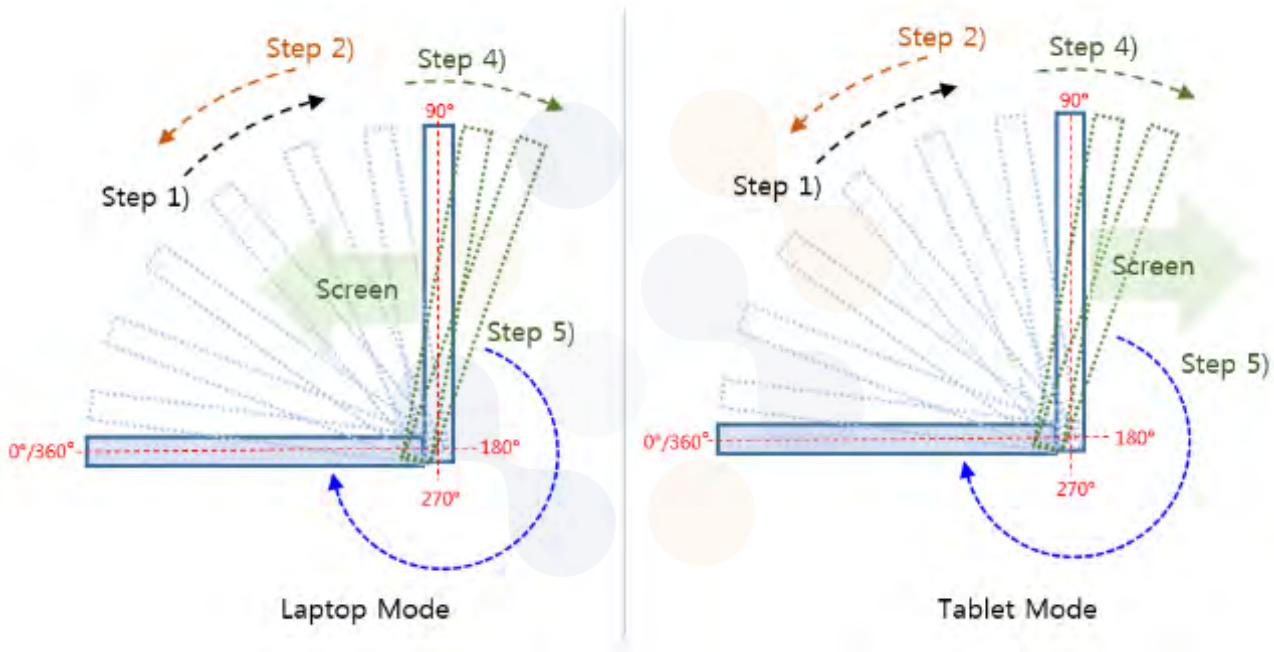

Laptop Mode																				
Degrees	Band	WCDMA Band2	WCDMA Band4	WCDMA Band5	LTEBand2 Ant0	LTEBand2 Ant2	LTEBand4 Ant0	LTEBand4 Ant2	LTEBand5	LTEBand12	LTEBand14	LTEBand66 Ant0	LTEBand66 Ant2	5G NR n2 Ant.0	5G NR n2 Ant.0	5G NR n5 Ant.0	5G NR n2 Ant.0	5G NR n2 Ant.0	5G NR n77 DoD	5G NR n77
	Mode	RVC				QPSK								DFT-s-OFDM QPSK						
Step 1) With the lid is in closed mode (0 degrees), open the screen in 10 degree steps until laptop mode is obtained.																				
0	Notebook	Closed Mode																		
10																				
20																				
30																				
40		23.50	23.55	23.47	23.82	22.84	23.75	22.84	23.91	23.90	24.01	23.59	22.87	23.89	23.72	24.54	23.97	23.85	24.76	24.70
50		23.38	23.58	23.53	23.74	22.81	23.79	22.74	23.85	23.82	23.86	23.68	22.85	23.84	23.70	24.52	24.05	23.95	24.79	24.79
60		23.39	23.61	23.58	23.80	22.90	23.79	22.73	23.83	23.92	24.01	23.64	22.91	23.97	23.78	24.59	23.99	23.92	24.74	24.76
70		23.39	23.67	23.49	23.71	22.92	23.80	22.82	23.79	23.83	23.92	23.64	22.98	23.93	23.78	24.49	24.06	23.88	24.82	24.76
80		23.46	23.68	23.50	23.86	22.83	23.74	22.74	23.83	23.92	23.93	23.69	22.87	23.95	23.72	24.47	24.00	23.96	24.83	24.73
90		23.48	23.56	23.52	23.77	22.87	23.69	22.75	23.94	23.86	24.01	23.71	22.90	23.87	23.79	24.49	24.01	23.94	24.85	24.73
100		23.38	23.67	23.60	23.77	22.76	23.69	22.73	23.82	23.87	23.93	23.67	22.82	23.96	23.77	24.57	24.00	23.90	24.81	24.73
110		23.40	23.54	23.54	23.77	22.78	23.81	22.77	23.81	23.91	23.96	23.67	22.90	23.90	23.73	24.60	24.03	23.85	24.70	24.71
120		23.50	23.55	23.54	23.84	22.86	23.66	22.84	23.78	23.94	24.01	23.67	22.95	23.99	23.81	24.55	23.94	23.98	24.80	24.67
130		23.48	23.65	23.63	23.84	22.90	23.69	22.80	23.86	23.82	23.92	23.62	22.87	23.96	23.68	24.51	24.03	23.84	24.82	24.69
140		23.46	23.64	23.48	23.72	22.77	23.67	22.75	23.93	23.86	23.85	23.60	22.92	23.99	23.81	24.49	23.90	23.96	24.82	24.78
150		23.42	23.68	23.63	23.78	22.83	23.81	22.74	23.83	23.84	23.88	23.64	22.98	23.91	23.83	24.55	23.97	23.88	24.71	24.78
160		23.42	23.55	23.57	23.78	22.91	23.69	22.71	23.94	23.90	23.99	23.71	22.89	23.96	23.80	24.46	24.04	23.97	24.69	24.68
170		23.43	23.59	23.54	23.85	22.87	23.67	22.74	23.83	23.90	24.00	23.62	22.94	23.95	23.69	24.46	23.93	23.85	24.73	24.80
180		23.44	23.55	23.56	23.72	22.87	23.69	22.71	23.89	23.83	23.93	23.59	22.88	23.92	23.68	24.54	23.90	23.85	24.79	24.69
190	Tablet	13.87	13.82	20.12	13.76	14.09	13.71	13.81	19.93	15.06	19.15	13.75	14.15	13.70	13.80	20.59	14.03	13.98	6.21	6.09
Step 2) Lower the screen 5 degrees. Closed mode should be reobtained. If not keep lowering in 5 degree steps.																				
190	Tablet	13.85	13.76	20.02	13.63	14.22	13.73	13.87	20.04	14.90	19.14	13.74	14.22	13.90	13.89	20.69	14.13	13.98	6.32	5.95
185		13.93	13.92	20.06	13.64	14.14	13.81	13.85	19.89	14.98	19.14	13.85	14.19	13.80	13.92	20.71	14.02	14.11	6.25	5.99
180		13.92	13.75	20.04	13.80	14.22	13.67	13.85	19.91	15.04	19.14	13.91	14.11	13.74	13.93	20.57	14.13	14.05	6.20	6.14
175		13.94	13.83	20.02	13.73	14.14	13.76	13.78	19.97	14.95	19.17	13.77	14.20	13.84	13.91	20.71	13.94	14.05	6.26	6.03
170	Notebook	23.45	23.52	23.49	23.93	22.87	23.68	22.78	23.87	23.84	24.08	23.51	22.89	24.01	23.82	24.47	24.04	23.85	24.87	24.73
165-40	Notebook	23.51	23.58	23.50	23.86	22.78	23.76	22.86	23.86	23.93	24.01	23.58	22.97	23.92	23.72	24.55	24.05	23.86	24.79	24.74
35-0		Closed Mode																		
Step 3) Continue opening the screen in 1 degree steps until at least 5 degrees past where laptop mode was obtained.																				
0~39	Notebook	Closed Mode																		
40~189		23.51	23.67	23.51	23.72	22.77	23.68	22.86	23.92	23.89	23.98	23.65	22.92	23.93	23.78	24.56	23.98	23.97	24.84	24.81
190	Tablet	13.83	13.94	20.11	13.81	14.17	13.76	13.90	19.98	15.04	19.26	13.73	14.00	13.82	13.76	20.52	14.11	13.96	6.28	6.19
191		13.93	13.95	20.17	13.73	14.12	13.68	13.91	20.03	14.94	19.16	13.77	14.06	13.67	13.75	20.60	14.03	14.00	6.27	6.08
192		13.94	13.94	20.15	13.83	14.12	13.67	13.84	19.93	15.03	19.24	13.70	14.10	13.67	13.72	20.65	13.96	14.08	6.25	6.17
193		13.83	13.91	20.09	13.83	14.16	13.82	13.88	19.98	14.90	19.30	13.75	14.15	13.73	13.87	20.55	14.01	14.03	6.13	6.19
194		13.81	13.87	20.05	13.75	14.10	13.75	13.84	19.94	14.93	19.27	13.73	14.13	13.81	13.73	20.63	14.11	13.97	6.14	6.10
195		13.84	13.84	20.03	13.76	14.09	13.74	13.94	20.03	14.98	19.16	13.72	14.03	13.78	13.74	20.54	14.09	14.07	6.27	6.07
Step 4) Then continue opening the screen in 10 degree steps until tablet mode is obtained.																				
200	Tablet	13.95	13.85	20.06	13.80	14.16	13.80	13.83	19.96	15.01	19.28	13.74	14.10	13.81	13.87	20.57	14.00	14.03	6.25	6.07
210		13.93	13.93	20.14	13.82	14.11	13.70	13.80	19.95	14.93	19.22	13.71	14.07	13.83	13.77	20.67	14.08	13.96	6.25	6.18
220		13.82	13.86	20.12	13.82	14.05	13.75	13.89	20.04	14.93	19.19	13.77	14.12	13.81	13.72	20.68	14.02	14.02	6.25	6.12
230		13.84	13.88	20.18	13.80	14.14	13.73	13.91	19.99	14.91	19.15	13.75	14.03	13.69	13.82	20.68	14.12	13.97	6.21	6.18
240		13.96	13.95	20.08	13.69	14.05	13.69	13.94	19.99	14.97	19.31	13.85	14.03	13.69	13.80	20.67	14.08	14.03	6.29	6.07
250		13.85	13.88	20.05	13.67	14.16	13.78	13.84	20.07	15.00	19.27	13.73	14.07	13.78	13.79	20.66	14.08	13.96	6.16	6.09
260		13.87	13.96	20.06	13.69	14.14	13.80	13.92	20.06	14.95	19.24	13.72	14.00	13.76	13.78	20.56	14.09	14.04	6.22	6.17
270		13.83	13.85	20.06	13.81	14.09	13.83	13.95	20.05	15.01	19.26	13.79	14.09	13.77	13.86	20.53	14.12	14.00	6.27	6.07
280		13.84	13.82	20.10	13.82	14.10	13.68	13.92	19.94	14.95	19.20	13.82	14.15	13.75	13.74	20.59	14.00	14.02	6.22	6.18
290		13.85	13.95	20.09	13.69	14.21	13.73	13.90	20.02	14.97	19.17	13.70	14.01	13.76	13.77	20.59	14.10	13.92	6.21	6.17
300		13.92	13.81	20.19	13.81	14.13	13.68	13.87	19.98	14.91	19.27	13.85	14.00	13.74	13.79	20.54	14.04	13.92	6.19	6.13
310		13.92	13.94	20.19	13.68	14.18	13.69	13.91	19.92	15.00	19.30	13.79	14.00	13.76	13.76	20.63	13.97	13.95	6.20	6.14
320		13.94	13.84	20.17	13.77	14.09	13.79	13.89	20.01	15.05	19.26	13.83	14.05	13.70	13.73	20.55	14.00	13.93	6.26	6.21
330		13.83	13.84	20.15	13.71	14.16	13.78	13.80	20.05	14.92	19.23	13.86	14.09	13.76	13.72	20.62	13.99	14.08	6.13	6.07
340		13.89	13.82	20.06	13.69	14.14	13.82	13.88	19.97	14.94	19.23	13.72	14.03	13.79	13.82	20.68	14.07	14.03	6.22	6.05
350		13.93	13.89	20.15	13.76	14.09	13.71	13.95	19.94	14.99	19.29	13.83	14.13	13.79	13.75	20.62	14.06	14.00	6.19	6.07
360		13.92	13.86	20.05	13.77	14.10	13.77	13.87	19.85	15.06	19.20	13.80	14.21	13.75	13.69	20.68	13.97	14.07	6.14	6.11

TabletMode																				
Degrees	Band	WCDMA Band2	WCDMA Band4	WCDMA Band5	LTEBand2 Ant0	LTEBand2 Ant2	LTEBand4 Ant0	LTEBand4 Ant2	LTEBand5	LTEBand12	LTEBand14	LTEBand6 Ant0	LTEBand6 Ant2	5G NR n2 Ant.0	5G NR n2 Ant.0	5G NR n5	5G NR n2 Ant.0	5G NR n2 Ant.0	5G NR n77 DoD	5G NR n77
	Mode	RVC			QPSK									DFT-OFDMQPSK						
Step 1) With the lid is in closed mode (0 degrees), open the screen in 10 degree steps until laptop mode is obtained.																				
0	Tablet	1386	1382	2007	1374	1417	1371	1382	1993	1504	1916	1377	1411	1376	1382	2067	1410	1401	615	612
10		1393	1382	2018	1376	1409	1370	1387	2004	1506	1929	1379	1400	1368	1373	2056	1407	1397	620	607
20		1392	1381	2010	1383	1405	1382	1393	2008	1498	1917	1378	1406	1367	1380	2068	1412	1403	621	617
30		1384	1397	2015	1380	1417	1371	1382	2000	1495	1927	1383	1412	1368	1381	2055	1412	1397	622	607
40		1381	1388	2013	1373	1409	1378	1382	1995	1503	1923	1386	1410	1380	1381	2066	1404	1408	620	614
50		1389	1391	2003	1368	1405	1380	1381	1994	1502	1921	1374	1413	1372	1376	2064	1399	1406	622	614
60		1391	1393	2019	1381	1411	1371	1394	1993	1499	1928	1378	1410	1374	1379	2058	1412	1398	628	615
70		1393	1393	2006	1367	1410	1378	1388	2007	1499	1927	1380	1416	1367	1385	2060	1398	1396	624	610
80		1387	1389	2007	1374	1411	1379	1389	2001	1490	1915	1373	1401	1373	1373	2056	1400	1399	623	608
90		1391	1383	2014	1380	1412	1368	1384	1992	1498	1915	1374	1405	1367	1375	2059	1404	1401	629	618
100		1380	1389	2004	1376	1408	1370	1383	2005	1495	1923	1378	1410	1378	1386	2068	1410	1406	625	608
110		1385	1384	2008	1372	1417	1376	1392	1996	1498	1918	1377	1412	1379	1378	2067	1400	1392	625	610
120		1382	1385	2008	1377	1410	1375	1396	1992	1492	1918	1371	1402	1371	1377	2063	1405	1397	629	609
130		1380	1391	2013	1370	1413	1381	1394	2003	1492	1927	1380	1407	1382	1377	2065	1407	1406	615	607
140		1387	1382	2019	1374	1407	1367	1380	2001	1494	1924	1386	1414	1367	1380	2054	1401	1399	615	610
150		1396	1390	2012	1379	1406	1377	1380	2000	1494	1930	1378	1410	1377	1381	2061	1401	1392	624	609
160		1392	1382	2002	1385	1415	1377	1373	1993	1484	1930	1372	1414	1372	1382	2063	1409	1389	621	618
170		1406	1397	2007	1371	1409	1370	1386	2007	1485	1927	1385	1407	1376	1383	2060	1408	1402	621	617
180	1400	1380	2004	1381	1415	1383	1379	2002	1494	1924	1368	1405	1377	1371	2067	1406	1393	628	614	
190	Notebook	2339	2354	2361	2384	2287	2380	2287	2389	2383	2400	2370	2289	2393	2384	2448	2393	2393	2476	2467
Step 2) Lower the screen 5 degrees. Closed mode should be reobtained. If not keep lowering in 5 degree steps.																				
190	Notebook	2340	2366	2357	2387	2292	2365	2280	2385	2392	2389	2371	2287	2387	2372	2460	2394	2388	2471	2472
185		2335	2375	2360	2385	2300	2370	2274	2395	2384	2392	2377	2294	2378	2379	2465	2394	2396	2477	2463
180		2347	2358	2347	2380	2302	2371	2278	2393	2383	2395	2381	2297	2384	2381	2464	2403	2388	2477	2480
175		2330	2363	2359	2390	2289	2371	2281	2381	2397	2389	2380	2297	2387	2382	2463	2391	2394	2476	2478
170-0	Tablet	1391	1395	2016	1371	1415	1377	1382	1997	1493	1931	1375	1414	1373	1378	2056	1400	1393	629	620
Step 3) Continue opening the screen in 1 degree steps until at least 5 degrees past where laptop mode was obtained.																				
0~188	Tablet	1384	1396	2003	1370	1408	1374	1384	1997	1491	1917	1379	1401	1371	1383	2061	1398	1394	617	611
189		1396	1382	2008	1375	1419	1378	1390	2007	1491	1916	1375	1415	1369	1388	2065	1402	1399	629	607
190	Notebook	2347	2369	2353	2381	2286	2375	2274	2380	2381	2391	2357	2289	2396	2373	2454	2402	2383	2480	2469
191		2344	2357	2361	2381	2276	2379	2286	2394	2390	2385	2363	2287	2396	2368	2451	2401	2382	2469	2474
192		2337	2362	2359	2374	2286	2374	2286	2387	2379	2385	2366	2286	2395	2369	2451	2394	2388	2484	2478
193		2352	2364	2361	2380	2292	2366	2277	2379	2394	2394	2371	2284	2398	2383	2457	2392	2397	2476	2470
194		2341	2369	2362	2375	2285	2380	2271	2391	2388	2391	2372	2297	2387	2375	2455	2404	2387	2479	2474
195		2348	2365	2358	2372	2283	2365	2271	2380	2384	2394	2363	2283	2388	2371	2449	2394	2383	2469	2479
196		2349	2366	2351	2372	2279	2371	2278	2382	2393	2391	2357	2287	2399	2378	2457	2397	2389	2484	2477
200	Notebook	2346	2361	2354	2377	2282	2370	2274	2392	2389	2391	2360	2292	2388	2370	2450	2397	2387	2479	2476
210		2345	2356	2354	2382	2291	2370	2287	2390	2387	2393	2359	2297	2385	2374	2450	2406	2389	2469	2476
220		2349	2366	2353	2372	2290	2378	2284	2380	2383	2391	2364	2288	2385	2380	2452	2399	2397	2480	2468
230		2352	2359	2358	2373	2291	2368	2278	2379	2395	2401	2367	2289	2389	2378	2461	2390	2391	2484	2468
240		2337	2368	2362	2385	2279	2371	2287	2392	2395	2399	2361	2296	2392	2374	2445	2395	2391	2476	2467
255		2340	2367	2350	2372	2278	2378	2275	2381	2387	2395	2359	2298	2396	2380	2446	2402	2391	2480	2471
260		2353	2357	2353	2375	2276	2376	2274	2378	2388	2400	2358	2297	2392	2368	2446	2405	2396	2469	2472
270		2352	2357	2361	2385	2289	2375	2280	2380	2388	2401	2358	2290	2398	2377	2461	2397	2392	2469	2474
280		2342	2367	2347	2376	2282	2379	2281	2386	2385	2393	2356	2284	2400	2376	2452	2391	2389	2470	2469
290		2341	2363	2354	2379	2289	2375	2287	2392	2390	2395	2369	2286	2384	2371	2448	2404	2392	2471	2468
300		2348	2364	2357	2378	2292	2376	2287	2391	2379	2385	2365	2296	2395	2375	2446	2401	2383	2473	2480
310		2351	2358	2363	2377	2288	2376	2287	2388	2392	2385	2359	2283	2385	2371	2459	2392	2392	2484	2476
320		2347	2366	2357	2376	2289	2380	2280	2380	2394	2401	2363	2287	2397	2372	2461	2405	2395	2472	2474
330		Closed Mode																		
340																				
350																				
360																				