



802.11ax-HE40 Power Spectral Density - Ant 1


Channel 38 (5190MHz)

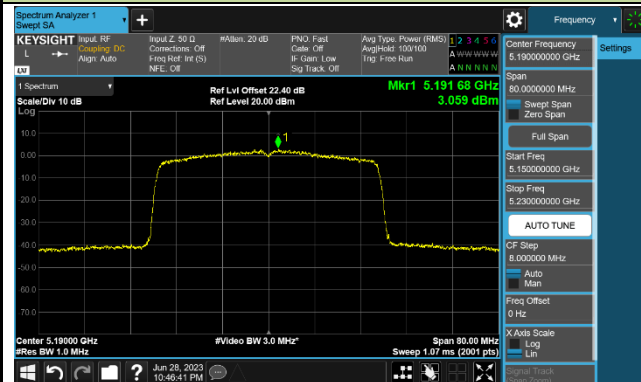


Channel 46 (5230MHz)

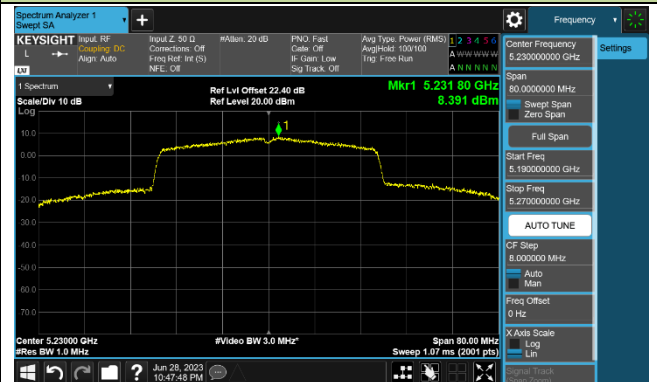


Channel 54 (5270MHz)

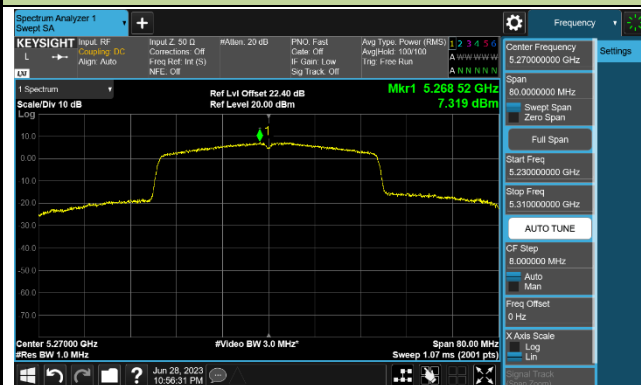


Channel 62 (5310MHz)

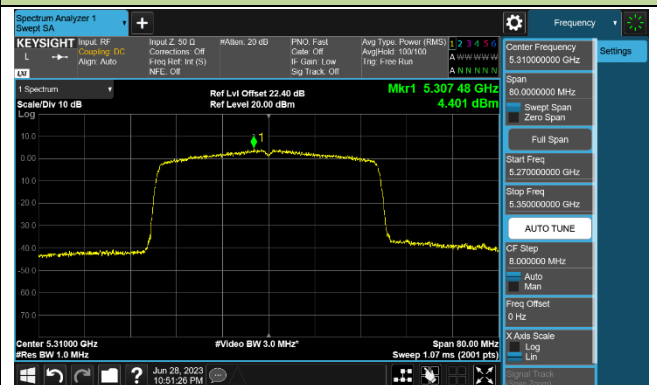

Channel 102 (5510MHz)

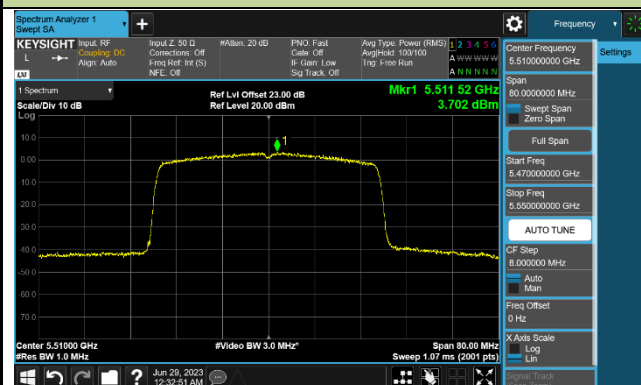


Channel 110 (5550MHz)

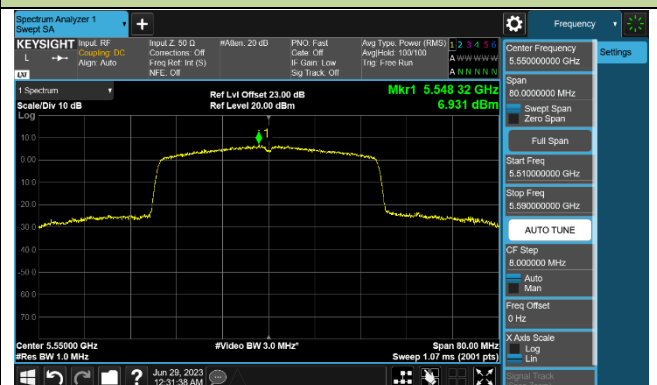


Channel 134 (5670MHz)




Channel 142 (5710MHz)

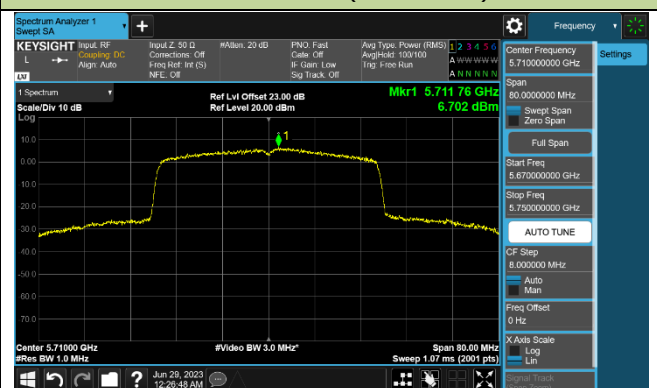

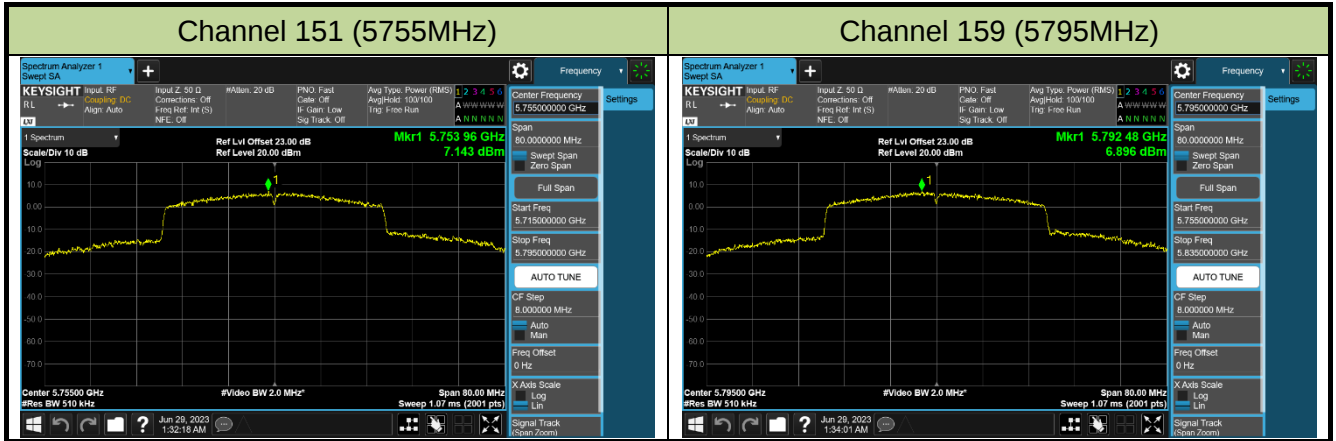


802.11ax-HE80 Power Spectral Density - Ant 1


Channel 42 (5210MHz)

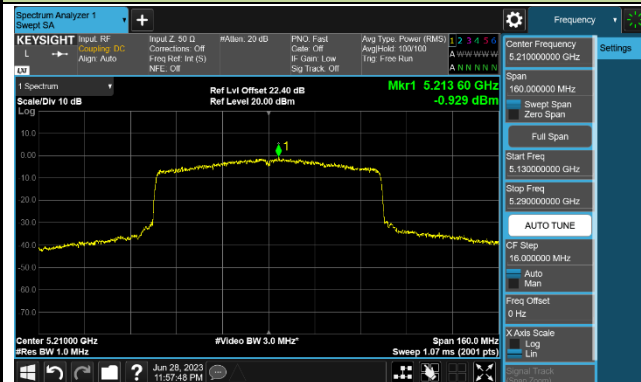


Channel 58 (5290MHz)

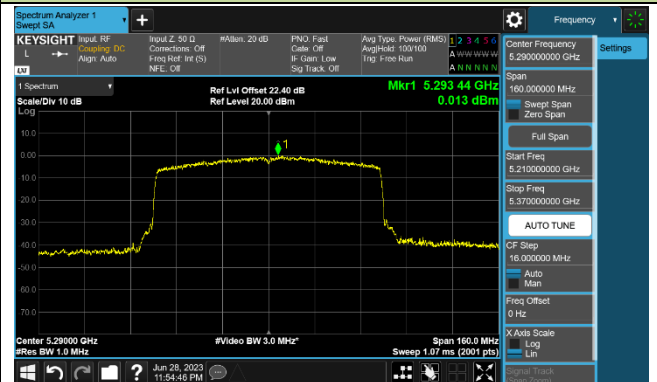

Channel 106 (5530MHz)

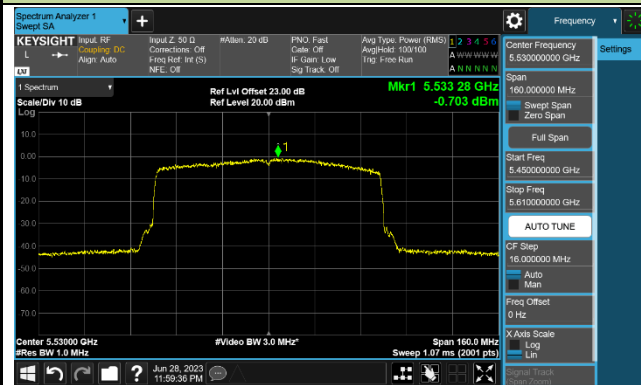


Channel 122 (5610MHz)

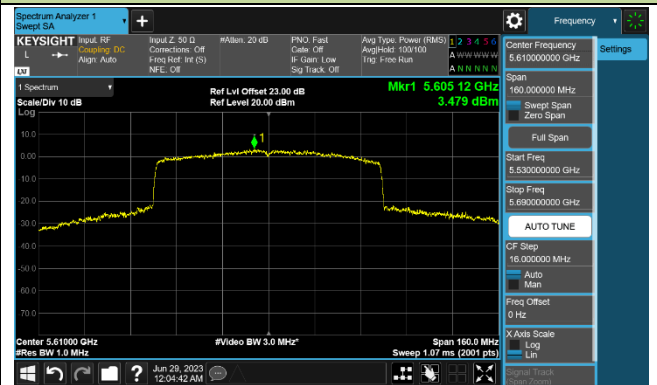

Channel 138 (5690MHz)



Channel 155 (5775MHz)

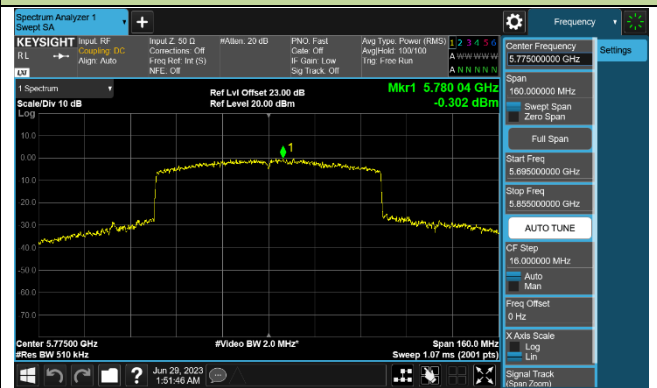

7.7. Frequency Stability Measurement

7.7.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.7.2. Test Setting

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.7.3. Test Setup

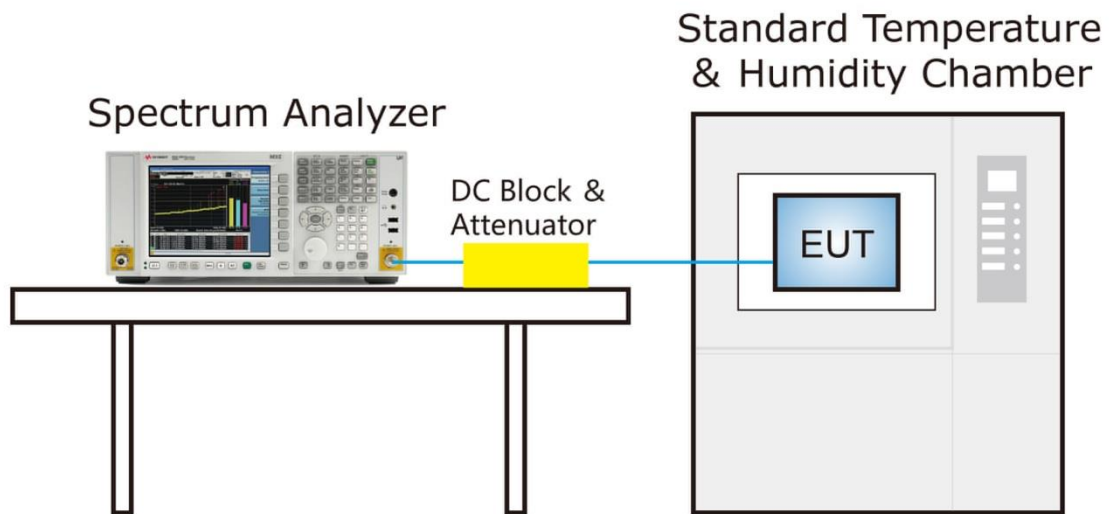

7.7.4. Test Result

Grantee ensure that the product meets e-CFR Title 47 section 15.407(g) and KDB 789033 D02v02r01 frequency stability such that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.8. Radiated Spurious Emission Measurement

7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

7.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
>1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.8.4. Test Setup

Below 1GHz Test Setup:

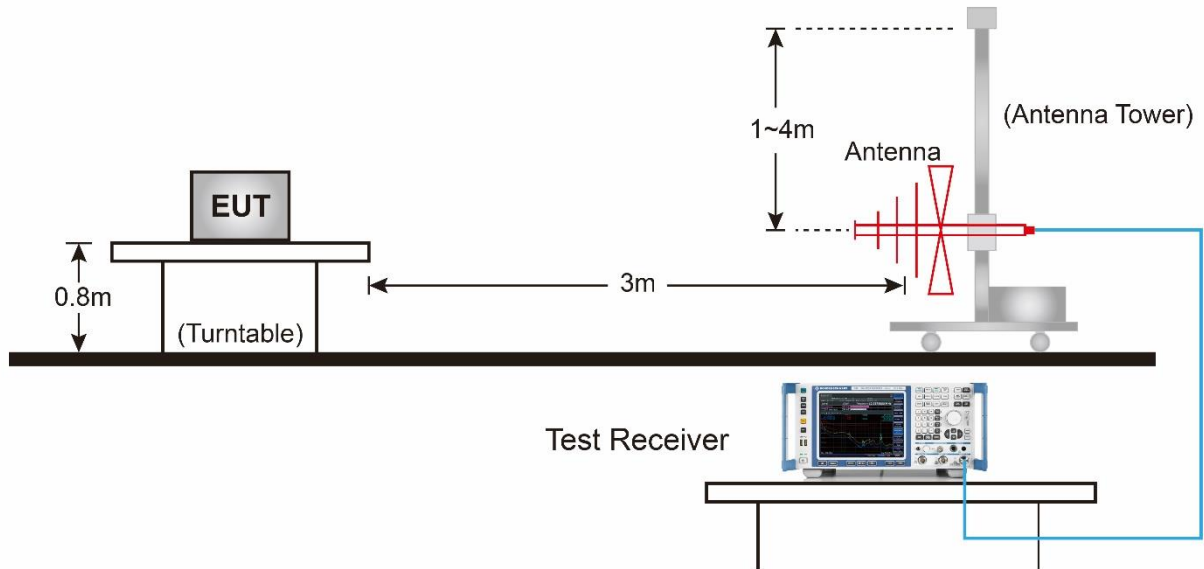


Above 1GHz Test Setup:

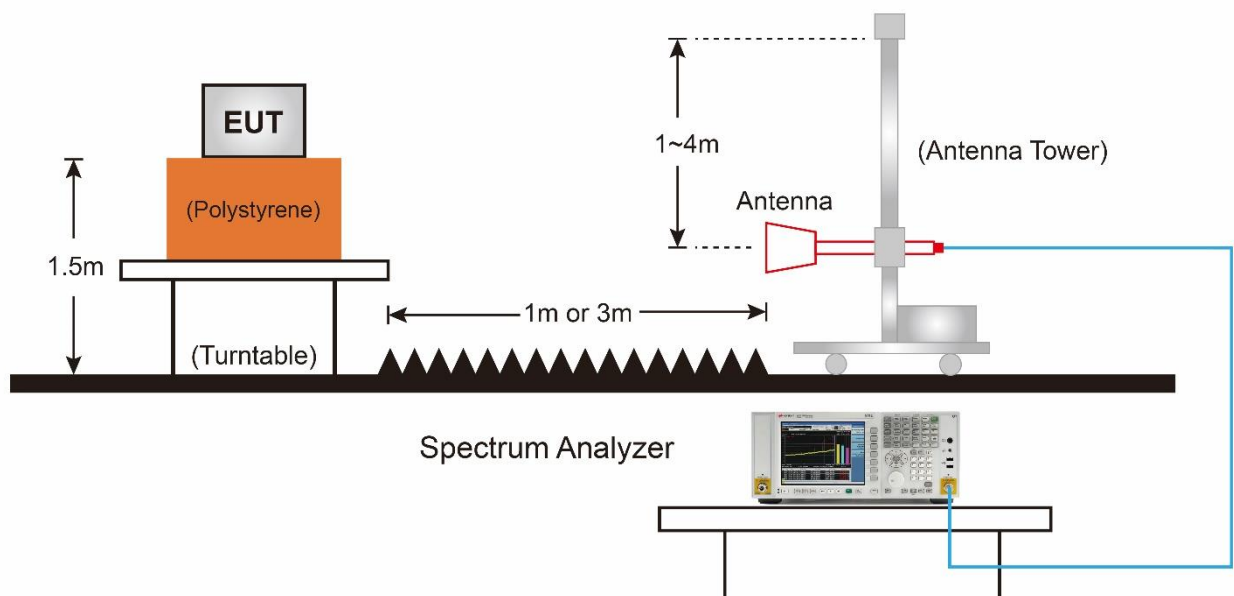

7.8.5. Test Result

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-20
Factor	VULB 9162	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band1_TX_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

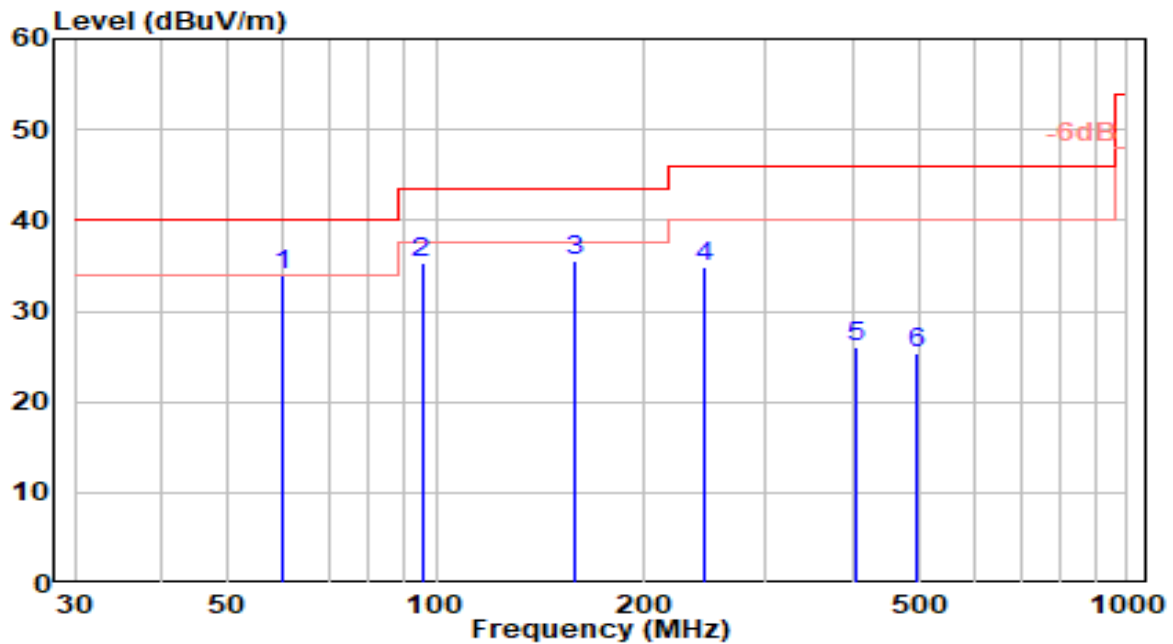


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	60.010	14.82	19.10	33.92	-6.08	40.00	200	320	QP
2		95.350	17.67	17.62	35.28	-8.22	43.50	100	38	QP
3		159.400	20.07	15.46	35.53	-7.97	43.50	200	154	QP
4		244.310	15.27	19.63	34.90	-11.10	46.00	150	316	QP
5		404.530	2.86	23.12	25.98	-20.02	46.00	150	327	QP
6		496.430	0.49	24.81	25.30	-20.70	46.00	100	35	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-20
Factor	VULB 9162	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band1_TX_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

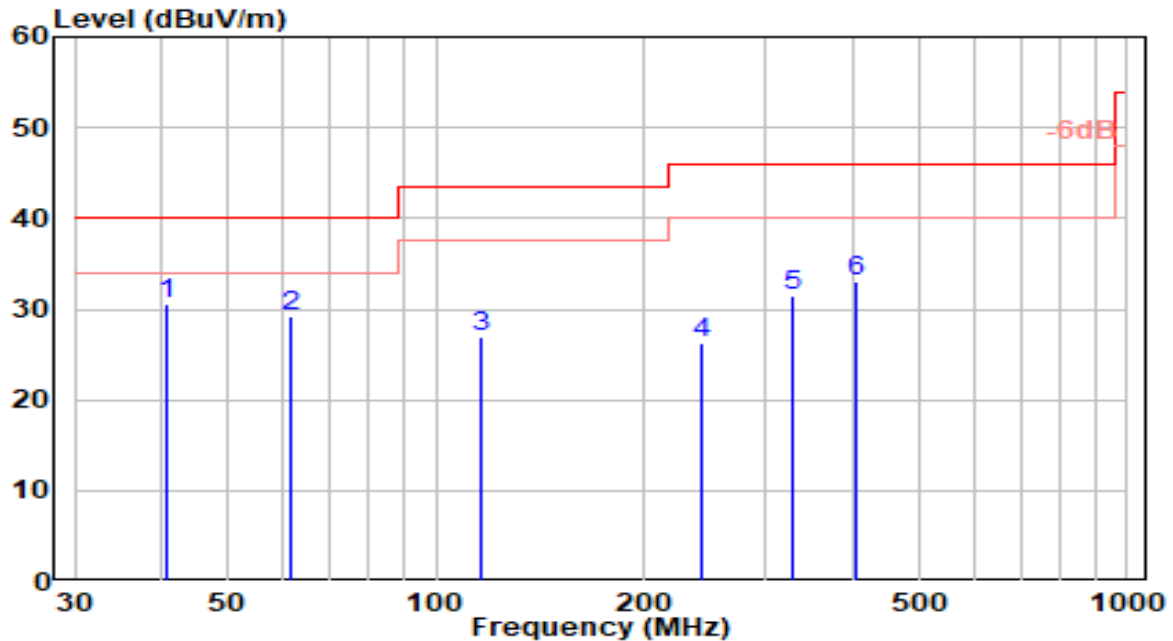


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	40.640	11.18	19.43	30.61	-9.39	40.00	150	42	QP
2		61.690	10.69	18.50	29.19	-10.81	40.00	150	42	QP
3		115.880	9.66	17.22	26.88	-16.62	43.50	200	87	QP
4		242.350	6.82	19.55	26.37	-19.63	46.00	200	326	QP
5		329.230	9.97	21.56	31.53	-14.47	46.00	100	144	QP
6		405.850	9.89	23.13	33.03	-12.97	46.00	200	130	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

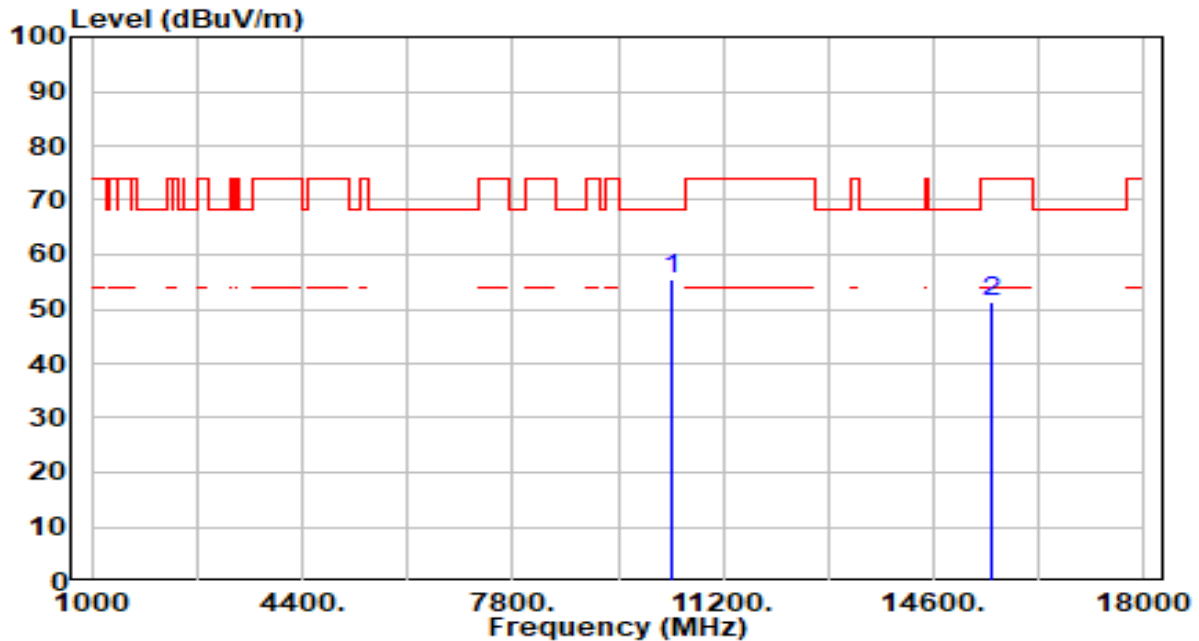


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	52.51	2.81	55.32	-12.88	68.20	100	359	Peak
2		15540.000	46.87	4.52	51.39	-22.61	74.00	132	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

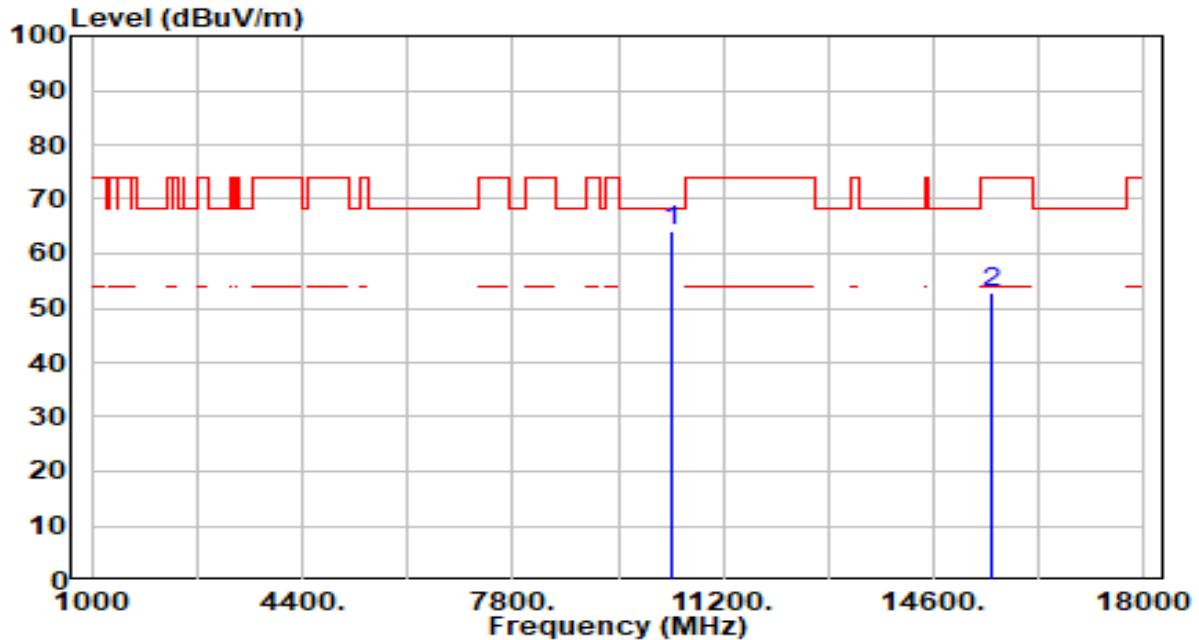


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	61.34	2.81	64.15	-4.05	68.20	200	85	Peak
2		15540.000	48.27	4.52	52.79	-21.21	74.00	200	253	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

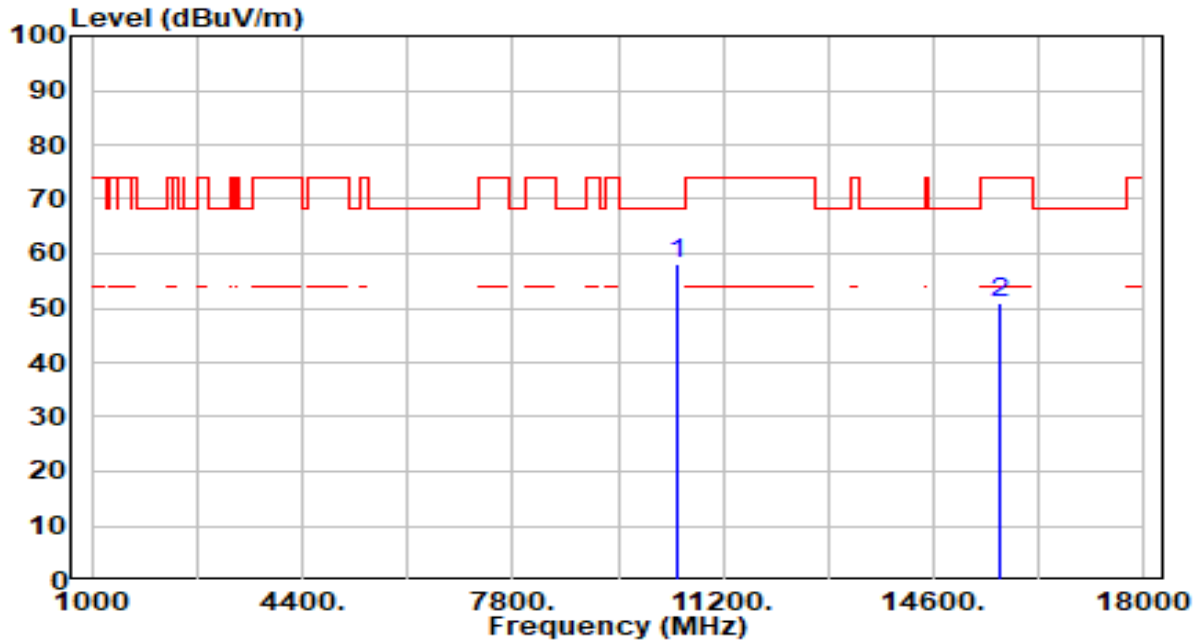


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	55.34	2.72	58.06	-10.14	68.20	100	0	Peak
2		15660.000	46.37	4.67	51.05	-22.95	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

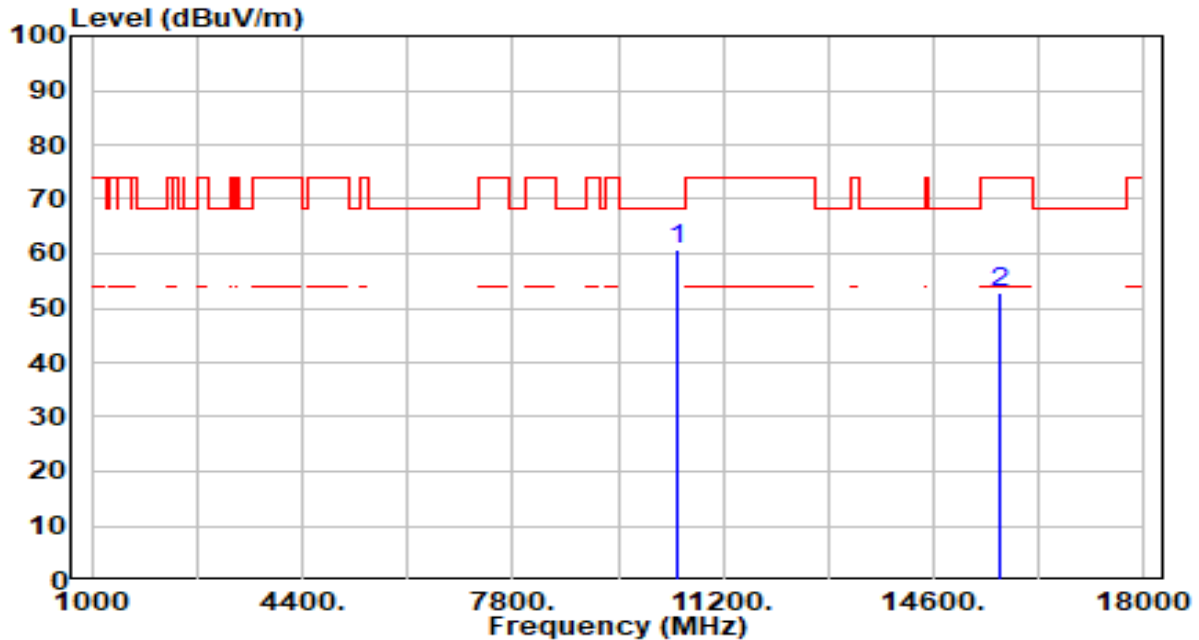


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	58.12	2.72	60.84	-7.36	68.20	200	84	Peak
2		15660.000	48.28	4.67	52.95	-21.05	74.00	200	256	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

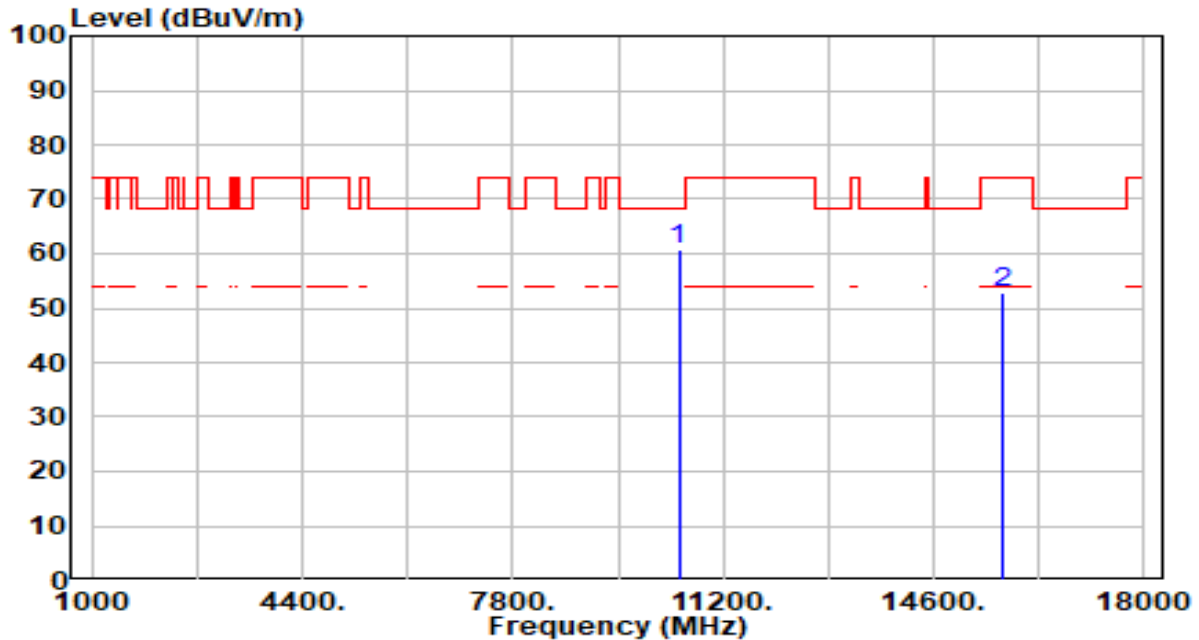


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	58.01	2.68	60.68	-7.52	68.20	100	0	Peak
2		15720.000	48.15	4.84	52.99	-21.01	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

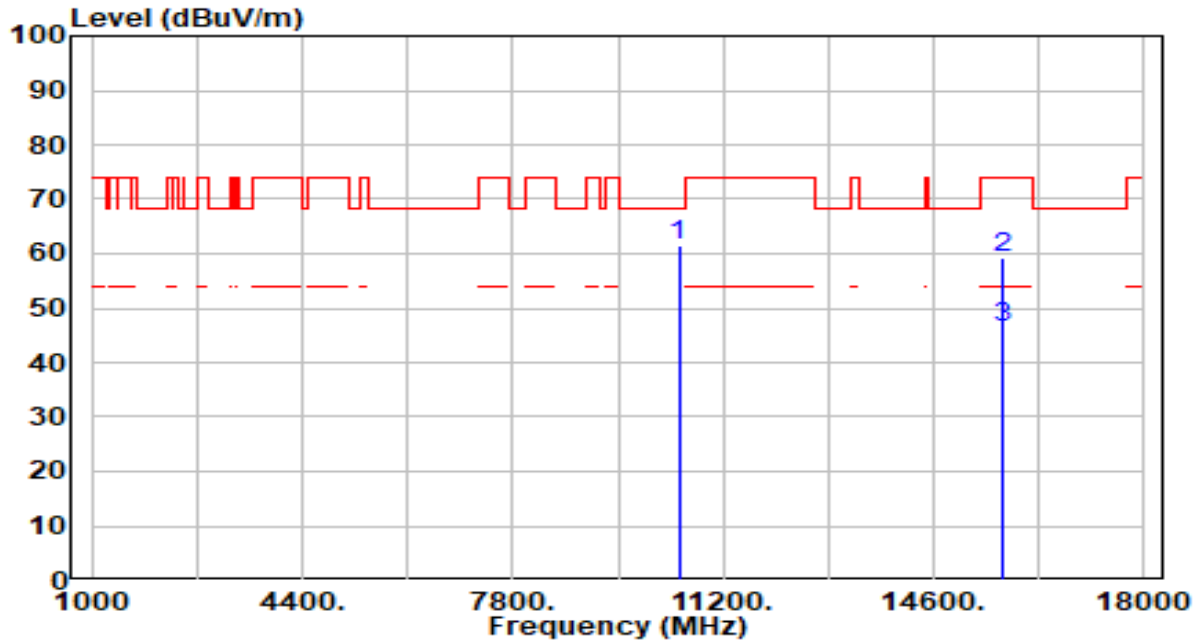


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	58.97	2.68	61.65	-6.55	68.20	200	81	Peak
2		15720.000	54.59	4.84	59.43	-14.57	74.00	177	96	Peak
3	*	15720.000	41.67	4.84	46.51	-7.49	54.00	177	96	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

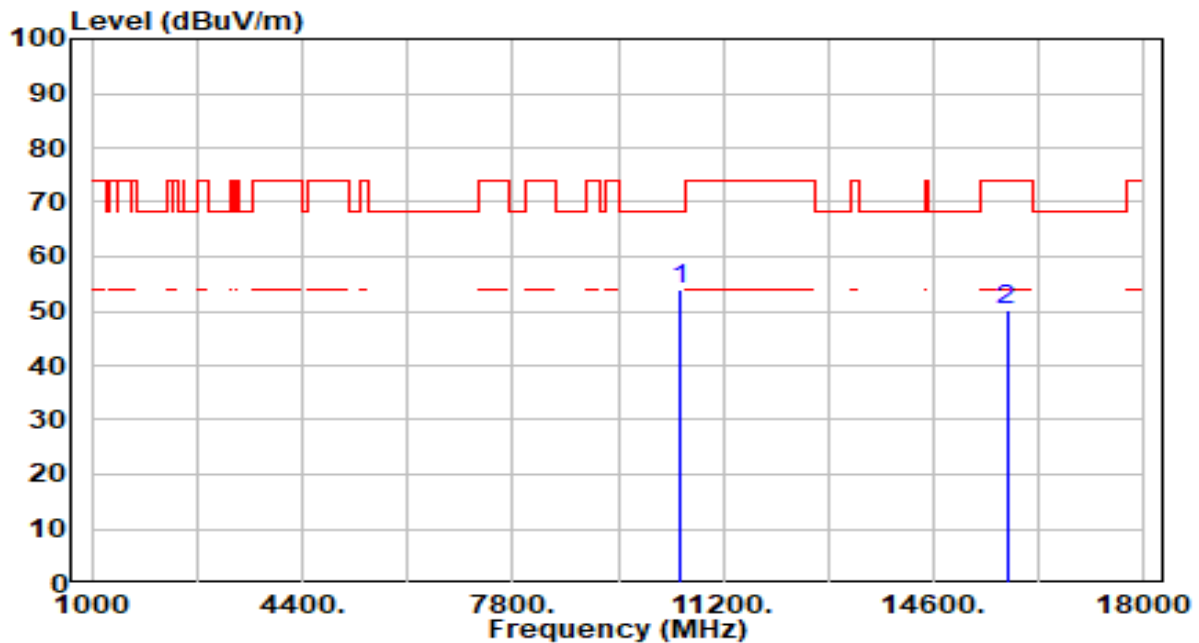


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	51.41	2.64	54.05	-14.15	68.20	100	359	Peak
2		15780.000	45.00	5.00	50.00	-24.00	74.00	100	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

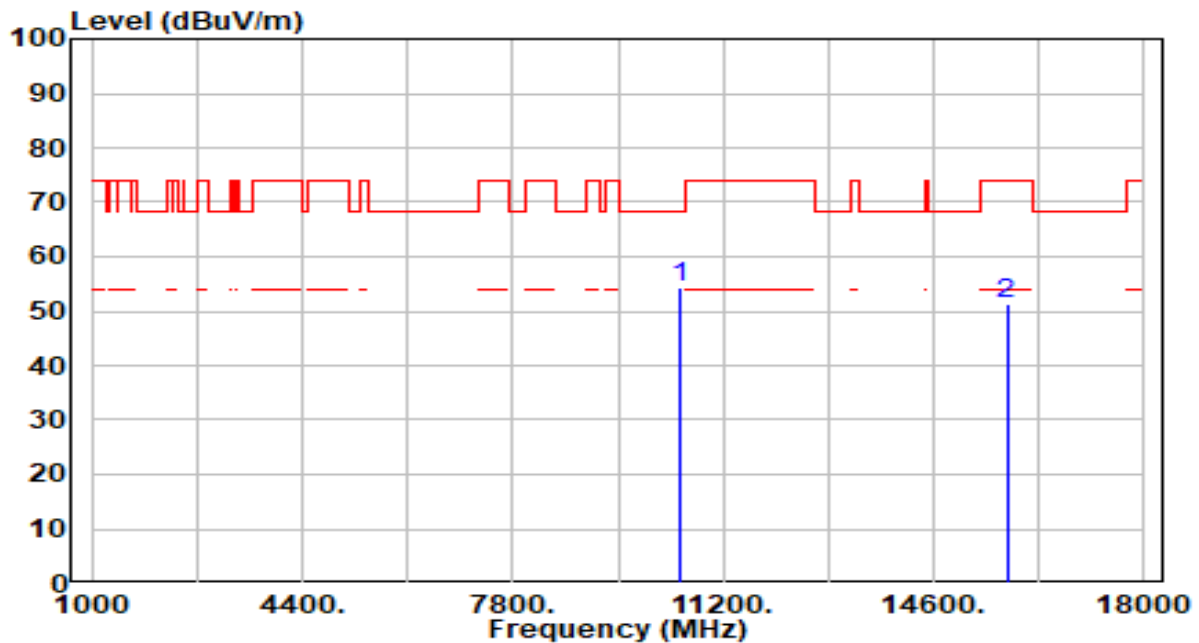


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	51.73	2.64	54.38	-13.82	68.20	200	78	Peak
2		15780.000	46.16	5.00	51.15	-22.85	74.00	200	244	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

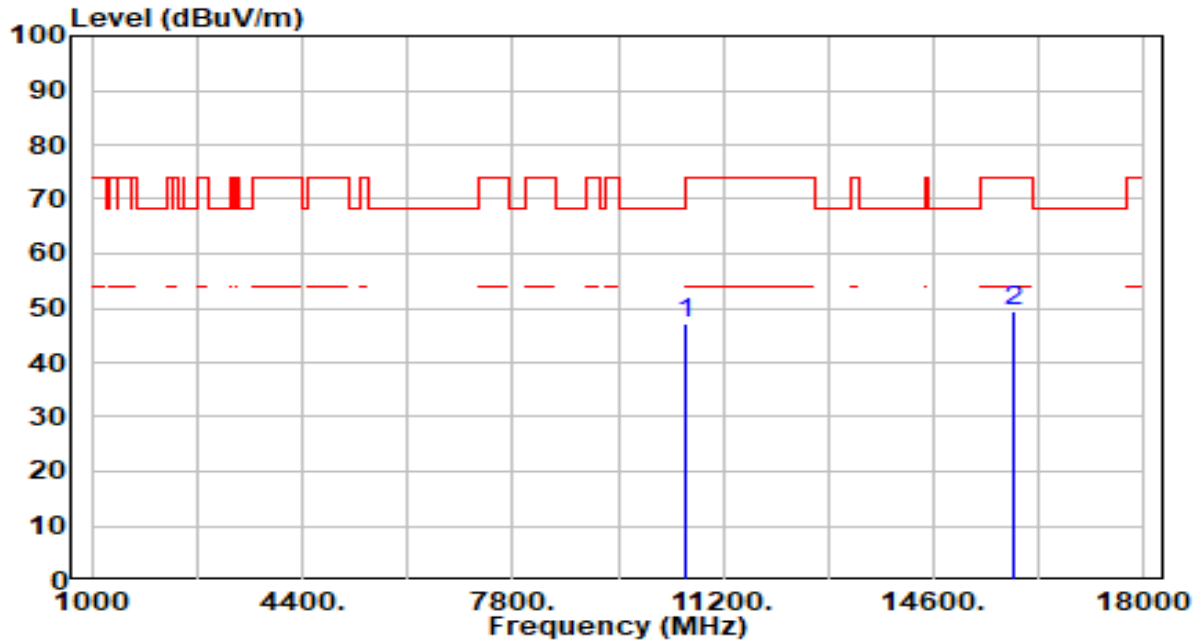


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	44.64	2.60	47.25	-20.95	68.20	100	0	Peak
2		15900.000	44.19	5.13	49.31	-24.69	74.00	100	301	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

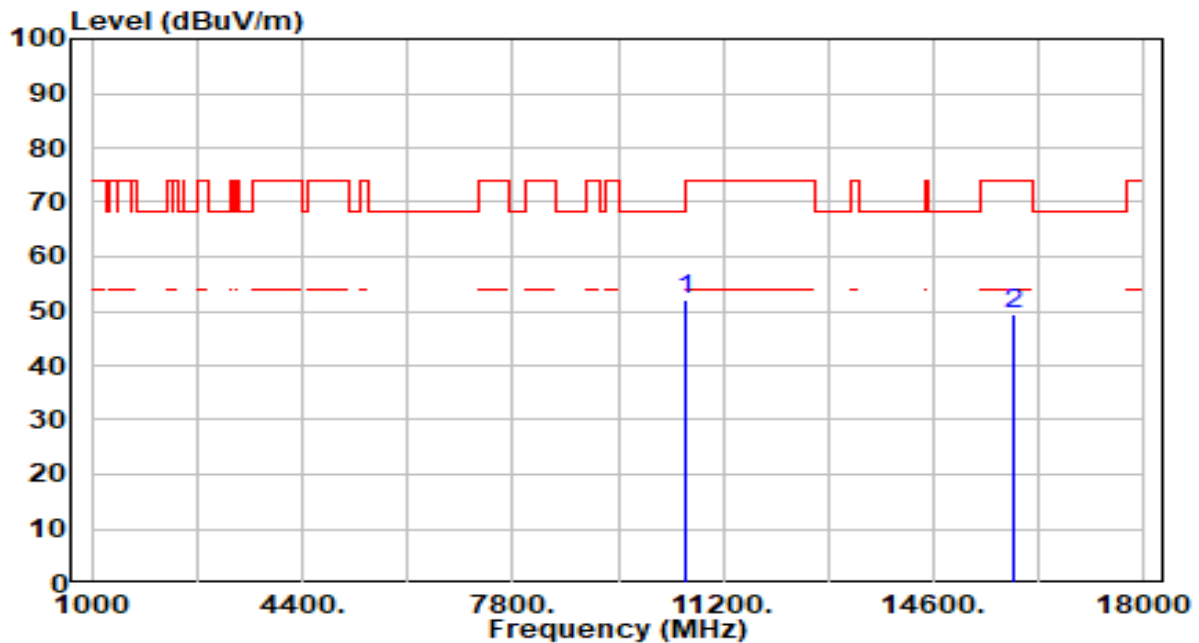


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	49.49	2.60	52.10	-16.10	68.20	200	81	Peak
2		15900.000	44.41	5.13	49.53	-24.47	74.00	200	247	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

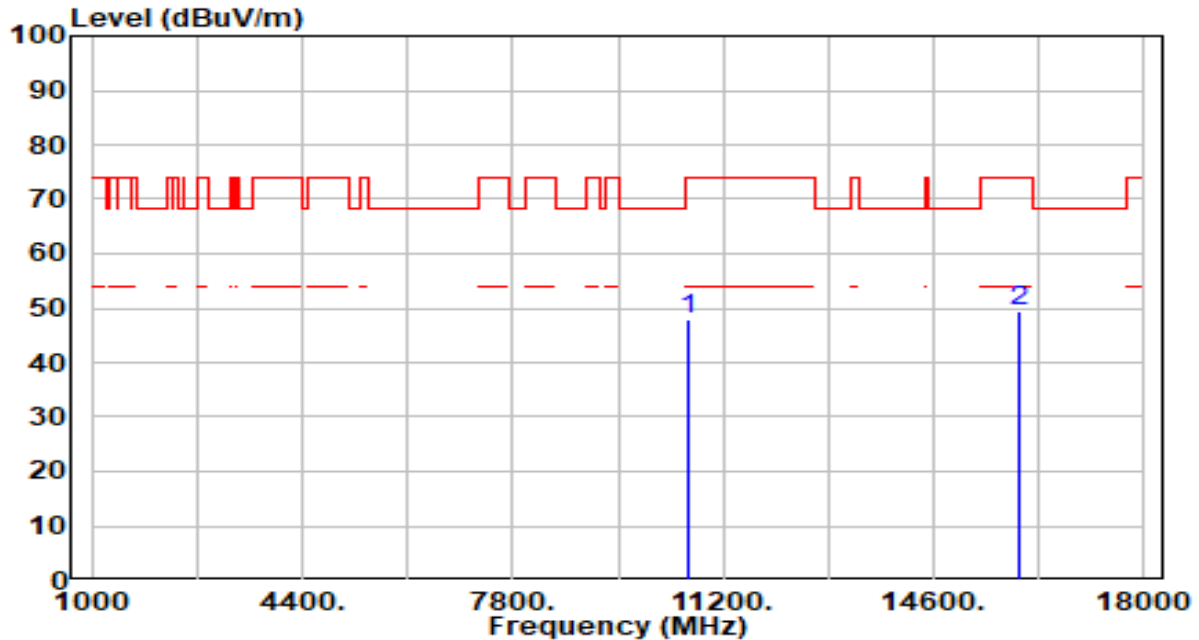


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	45.29	2.62	47.91	-26.09	74.00	100	357	Peak
2	*	15960.000	44.43	5.17	49.60	-24.40	74.00	100	176	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

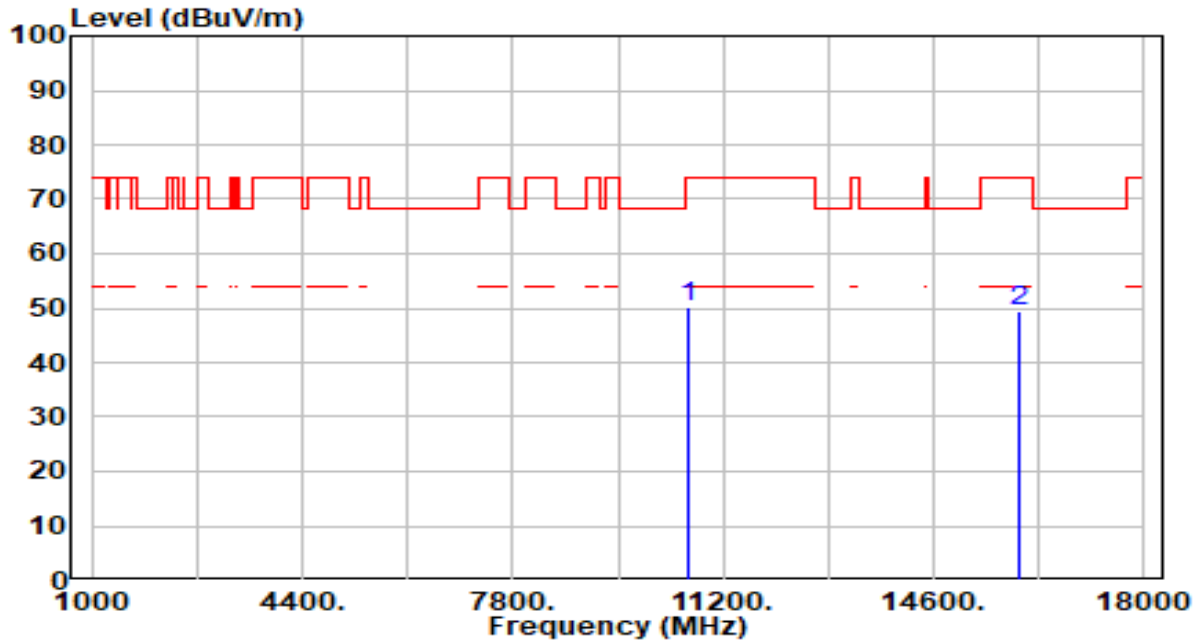


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10640.000	47.39	2.62	50.01	-23.99	74.00	200	294	Peak
2		15960.000	44.09	5.17	49.26	-24.74	74.00	200	97	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

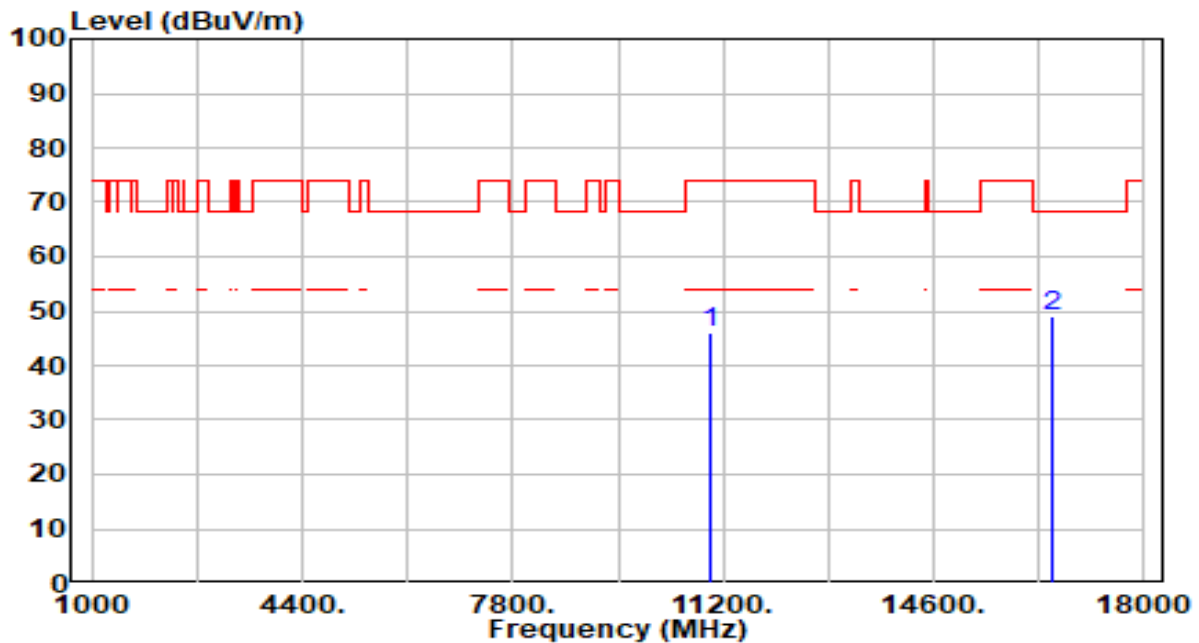


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	43.26	2.60	45.86	-28.14	74.00	100	331	Peak
2	*	16500.000	44.33	4.63	48.96	-19.24	68.20	100	23	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

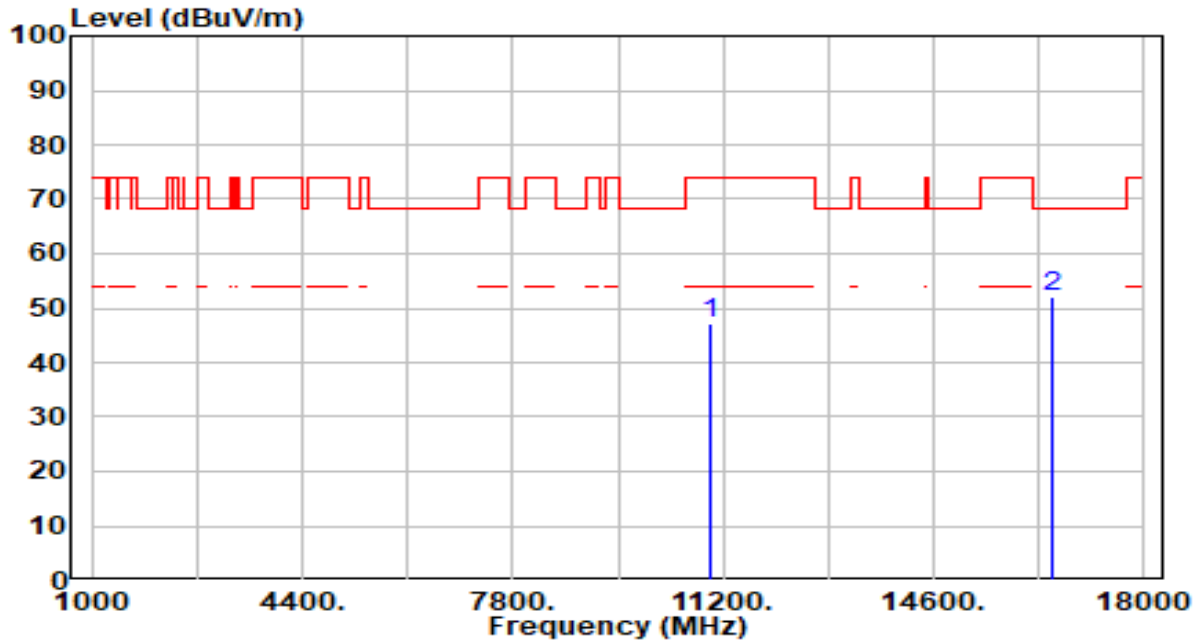


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	44.53	2.60	47.13	-26.87	74.00	200	74	Peak
2	*	16500.000	47.30	4.63	51.93	-16.27	68.20	200	232	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

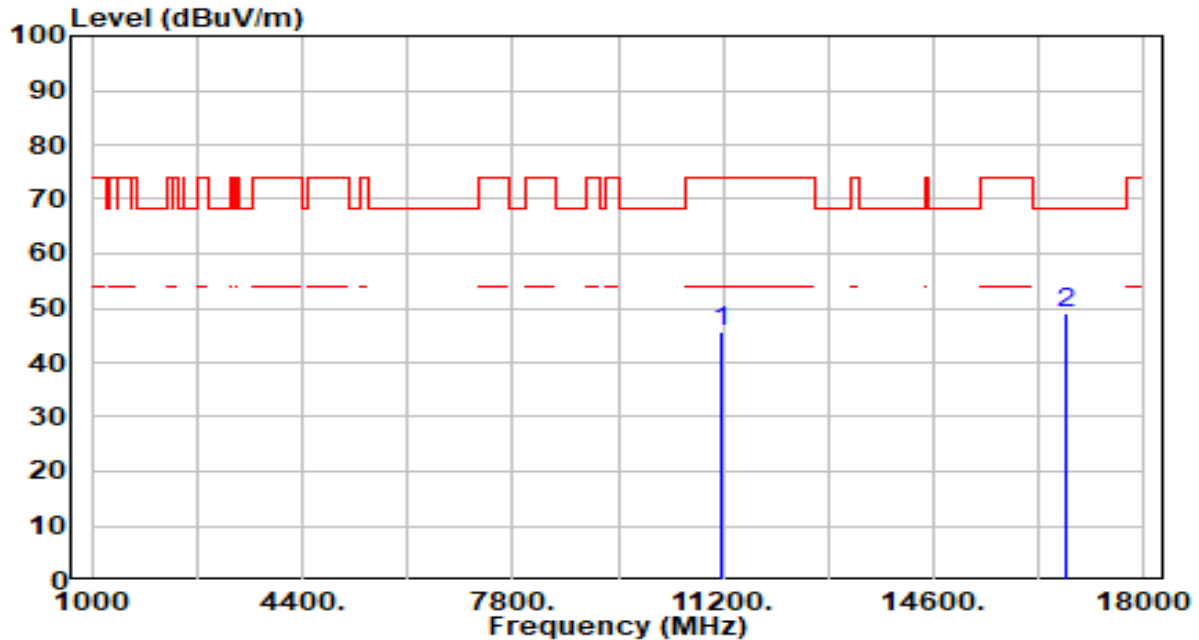


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	42.74	3.07	45.81	-28.19	74.00	100	239	Peak
2	*	16740.000	44.36	4.66	49.02	-19.18	68.20	100	74	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

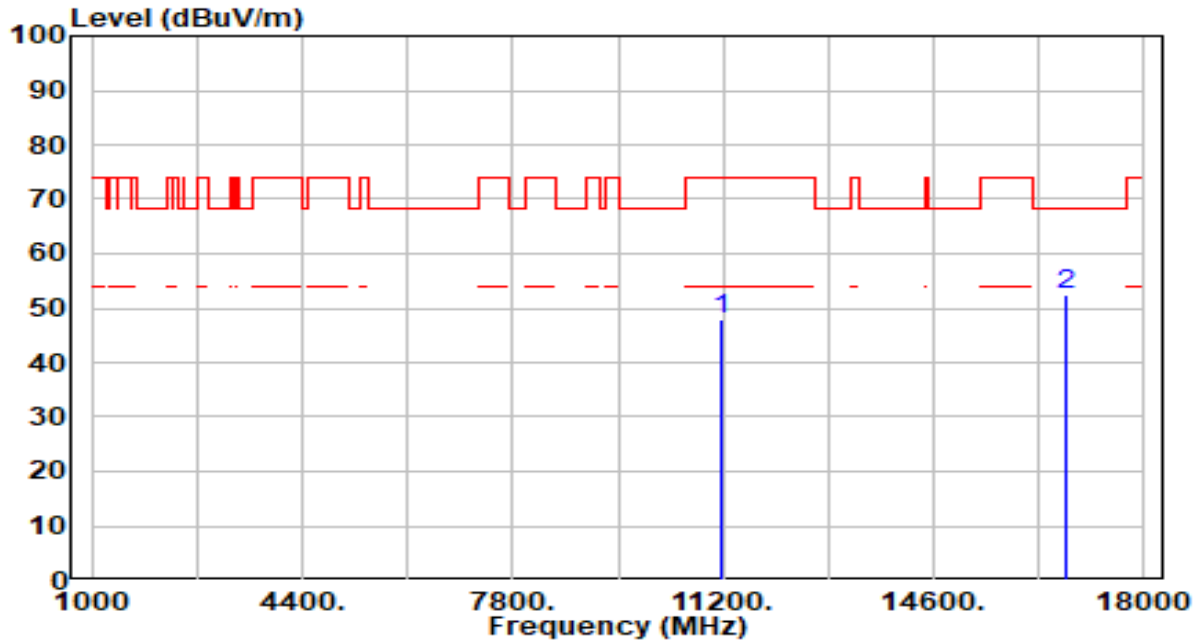


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	44.81	3.07	47.88	-26.12	74.00	200	244	Peak
2	*	16740.000	47.83	4.66	52.49	-15.71	68.20	200	232	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

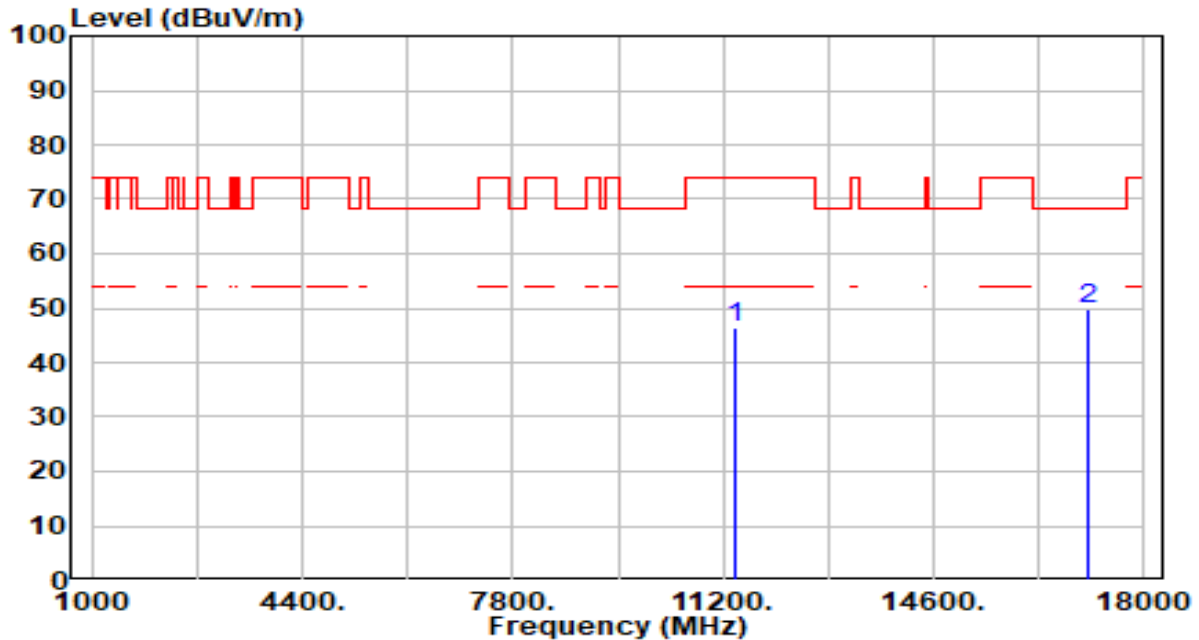


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	42.77	3.48	46.25	-27.75	74.00	100	278	Peak
2	*	17100.000	45.08	4.79	49.87	-18.33	68.20	100	219	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

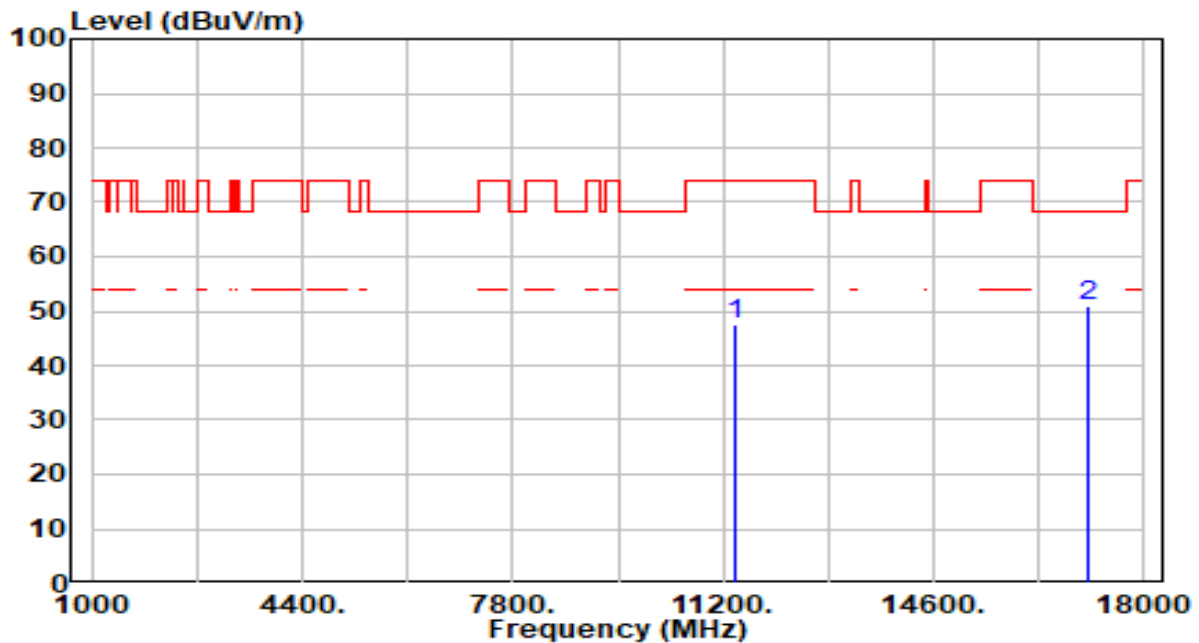


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	44.15	3.48	47.63	-26.37	74.00	200	231	Peak
2	*	17100.000	46.32	4.79	51.12	-17.08	68.20	200	338	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

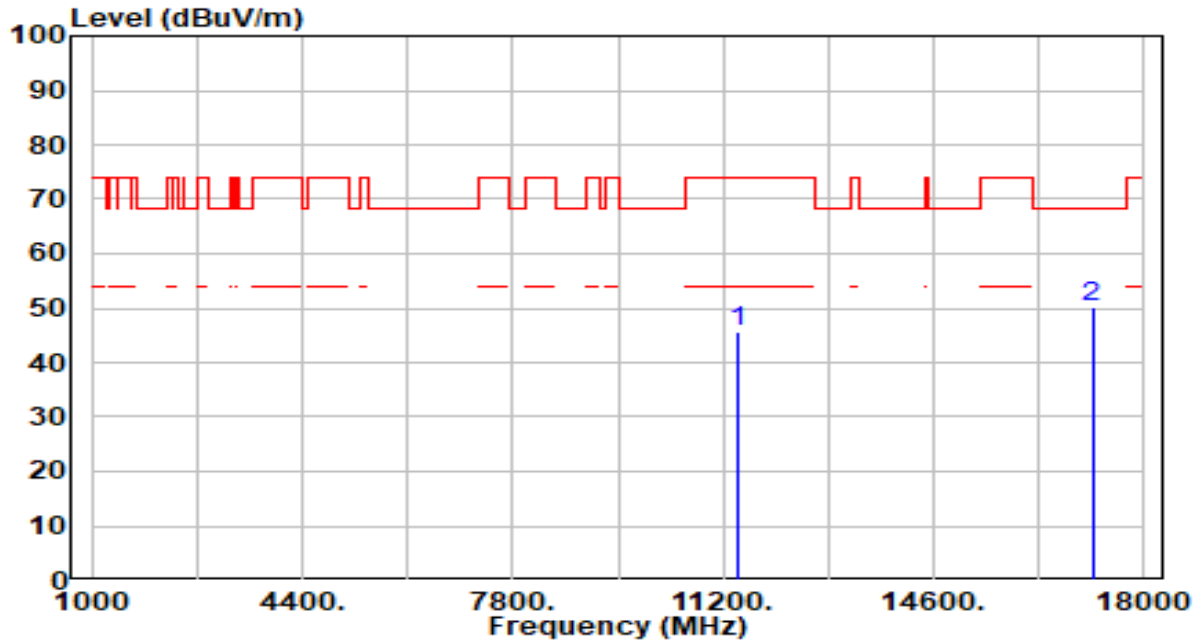


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	42.24	3.52	45.76	-28.24	74.00	100	200	Peak
2	*	17160.000	45.43	4.66	50.09	-18.11	68.20	100	46	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

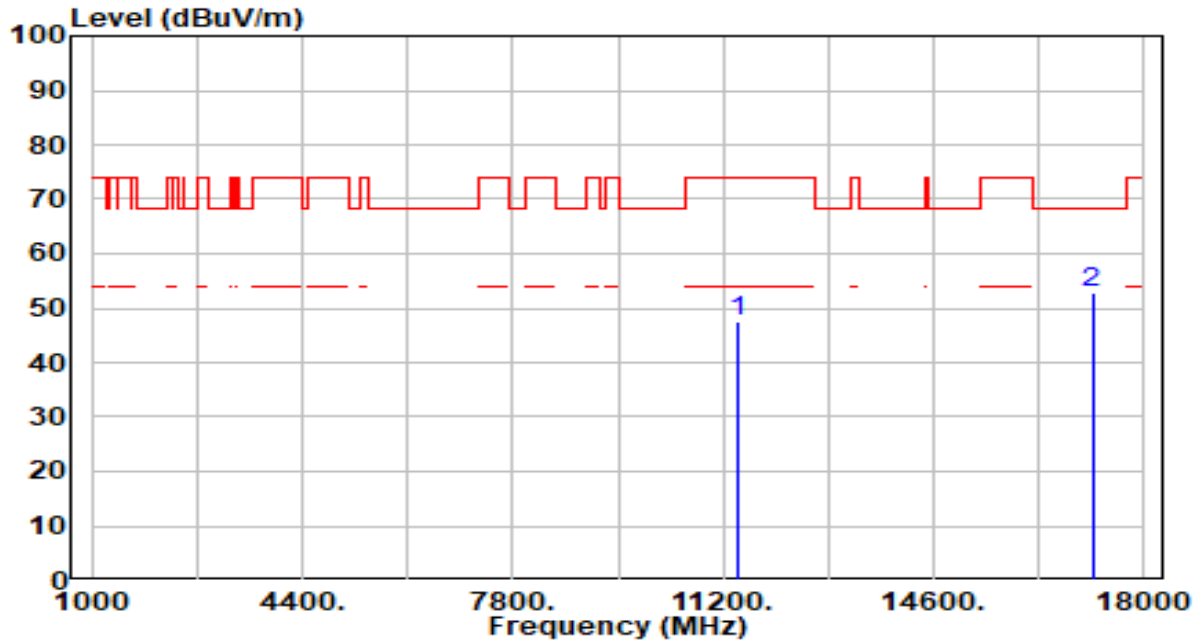


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	43.94	3.52	47.46	-26.54	74.00	200	244	Peak
2	*	17160.000	48.36	4.66	53.02	-15.18	68.20	200	228	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

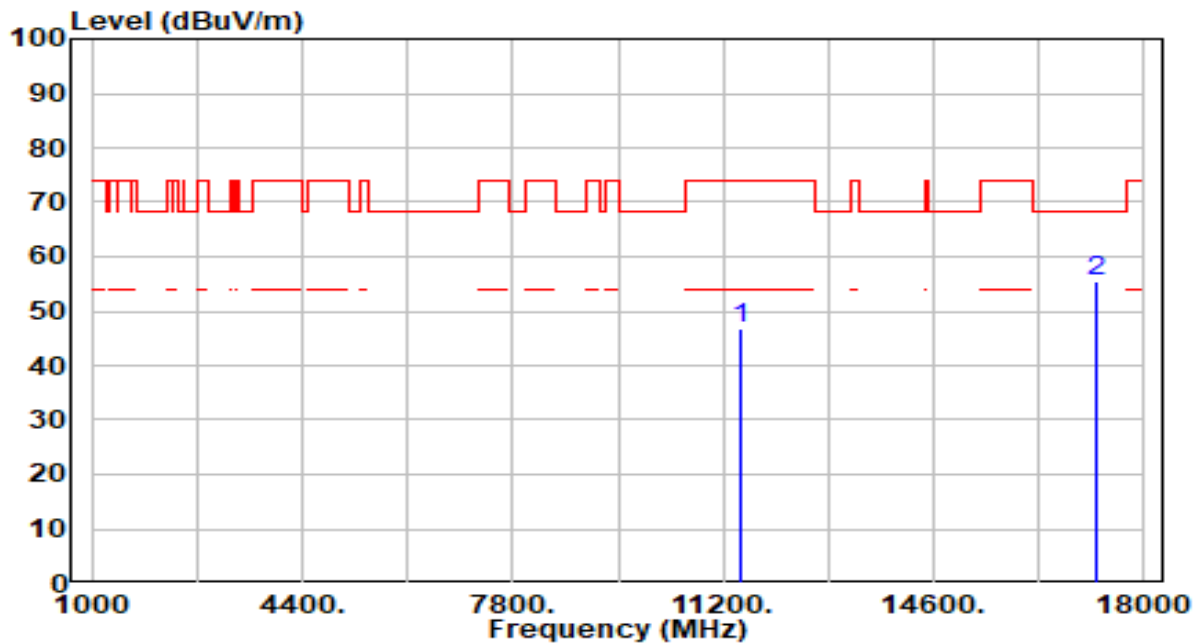


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	43.41	3.57	46.97	-27.03	74.00	100	41	Peak
2	*	17235.000	51.10	4.45	55.55	-12.65	68.20	100	222	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

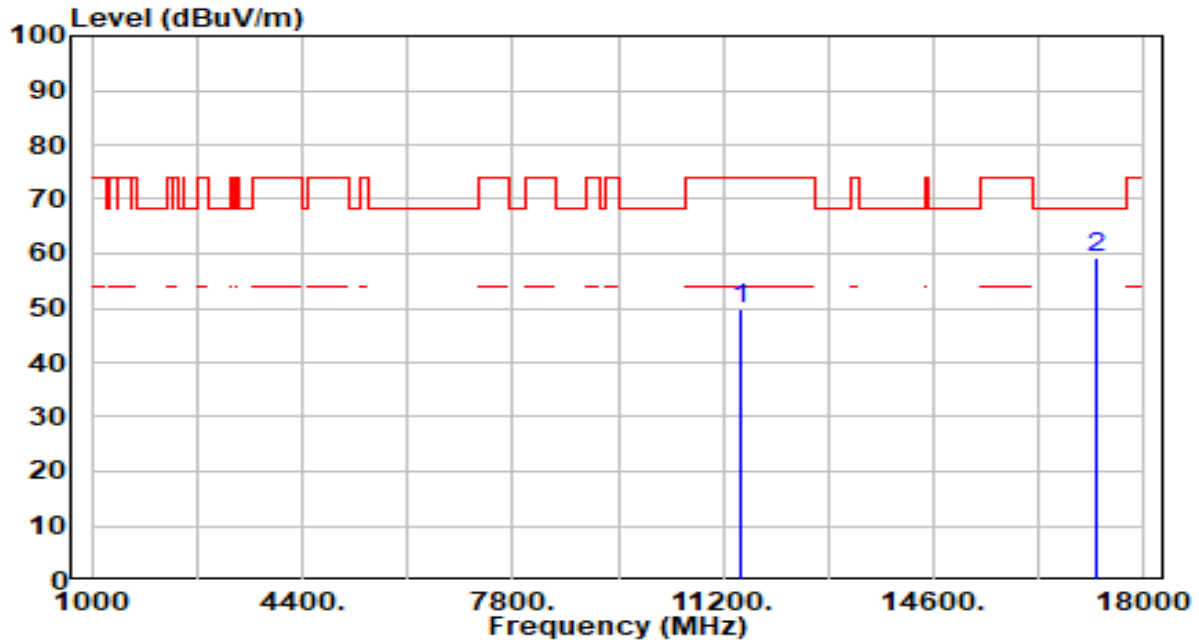


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	46.40	3.57	49.97	-24.03	74.00	200	236	Peak
2	*	17235.000	54.84	4.45	59.30	-8.90	68.20	200	338	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

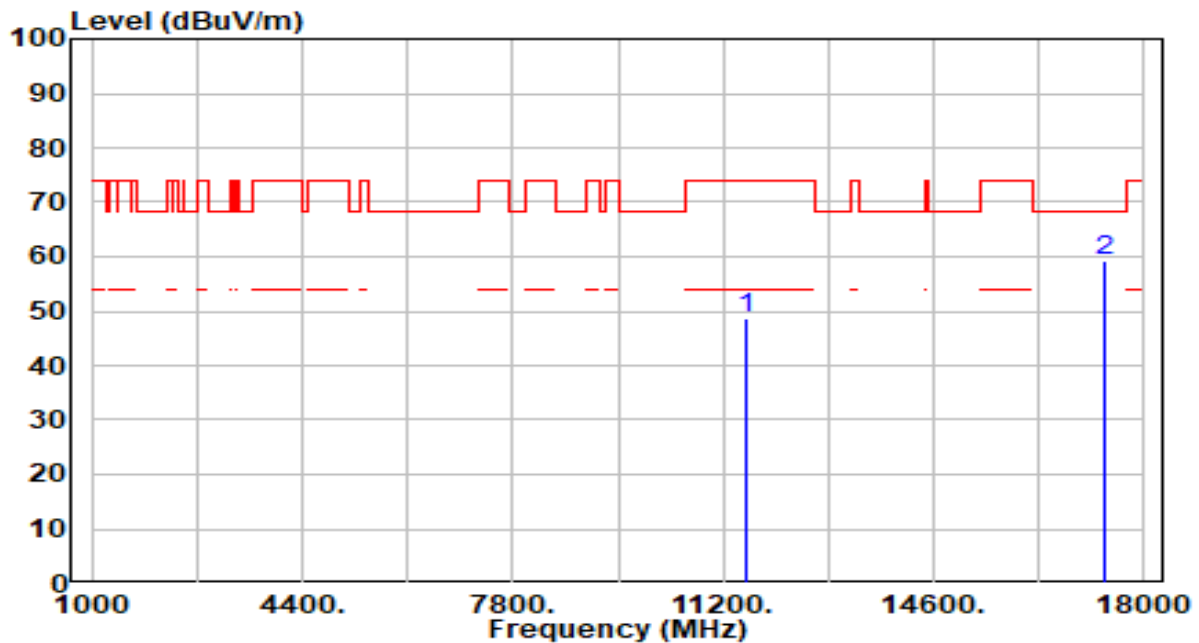


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	45.18	3.65	48.83	-25.17	74.00	100	328	Peak
2	*	17355.000	55.30	4.06	59.36	-8.84	68.20	100	222	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

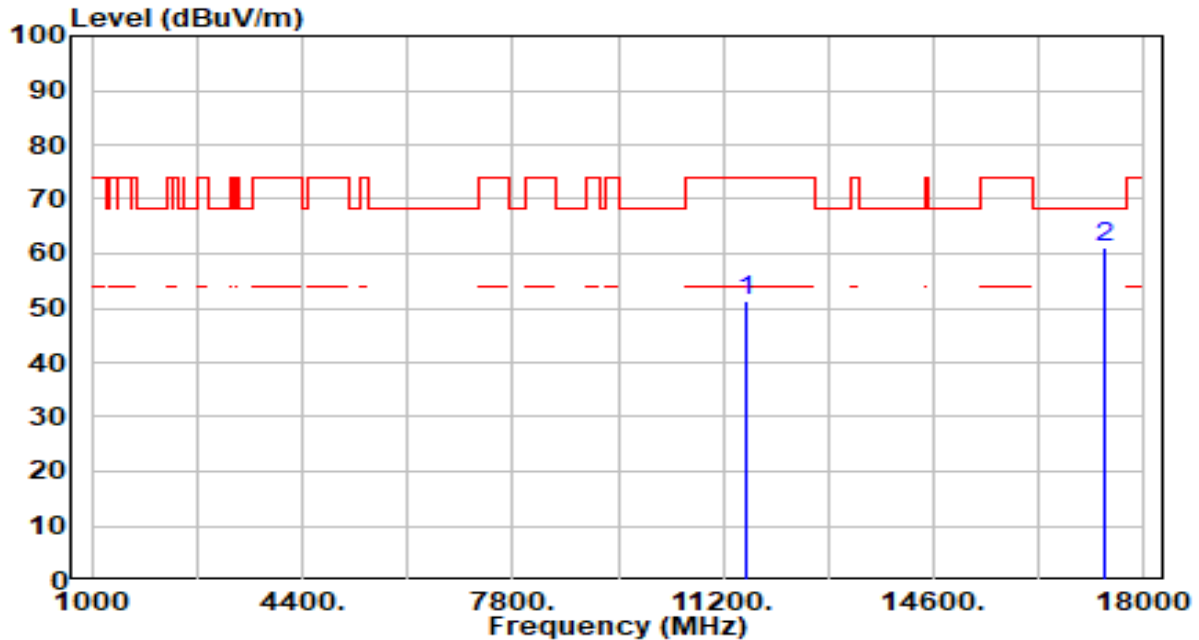


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	47.79	3.65	51.44	-22.56	74.00	200	243	Peak
2	*	17355.000	57.03	4.06	61.09	-7.11	68.20	200	334	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

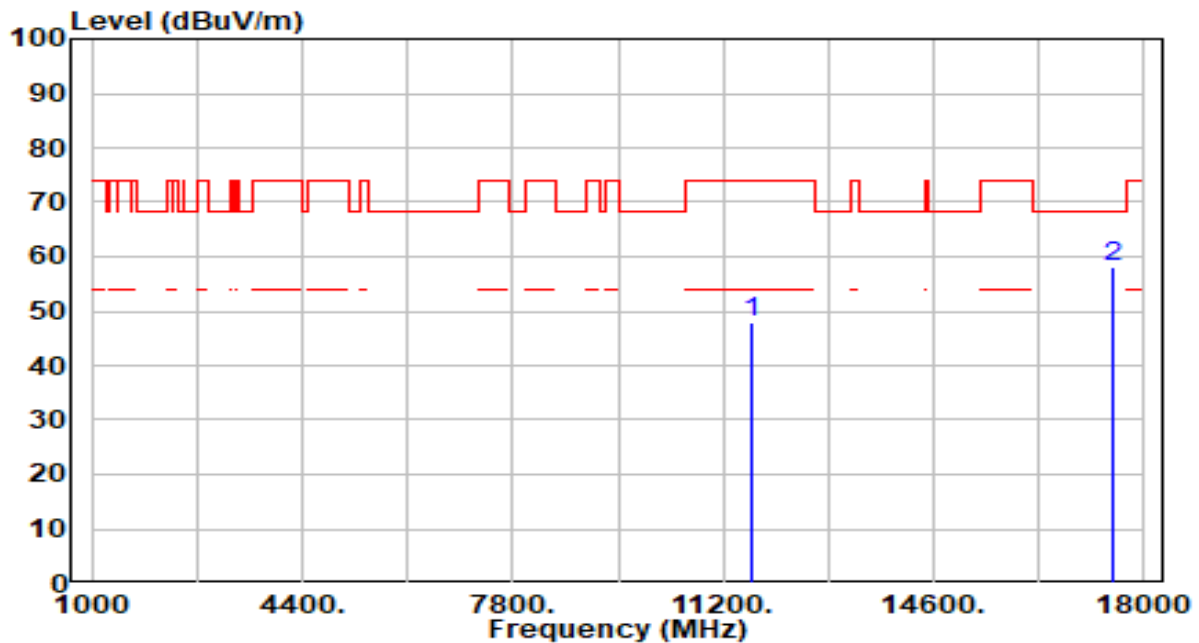


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	44.36	3.66	48.02	-25.98	74.00	100	327	Peak
2	*	17475.000	54.35	3.89	58.24	-9.96	68.20	100	222	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

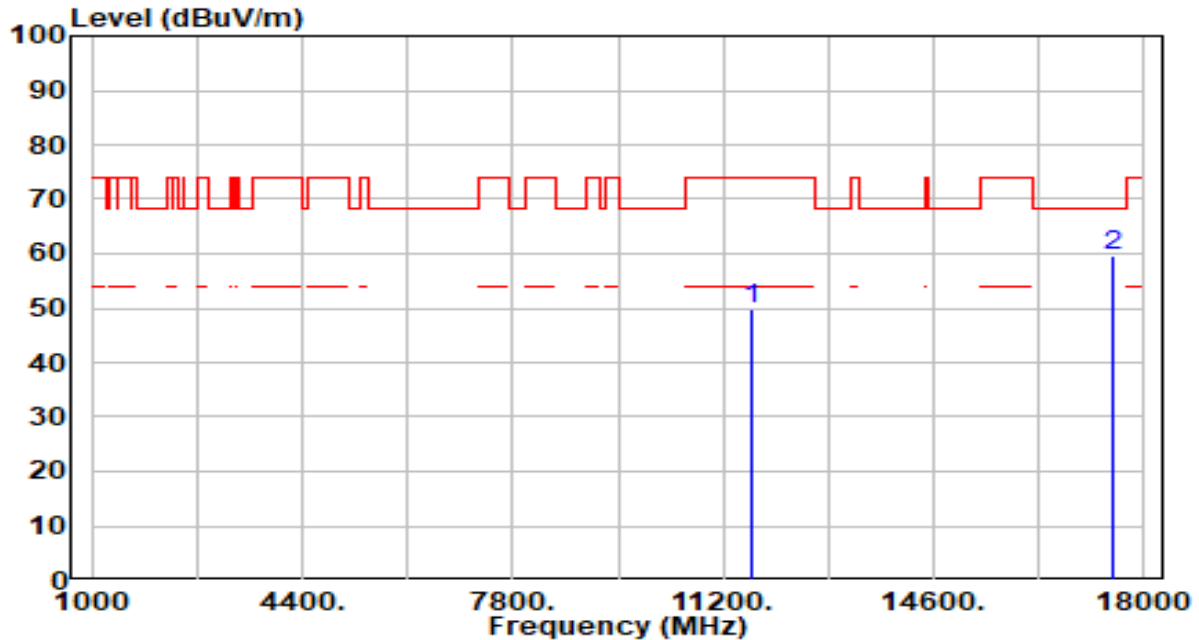


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	46.27	3.66	49.94	-24.06	74.00	200	256	Peak
2	*	17475.000	55.79	3.89	59.68	-8.52	68.20	200	338	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

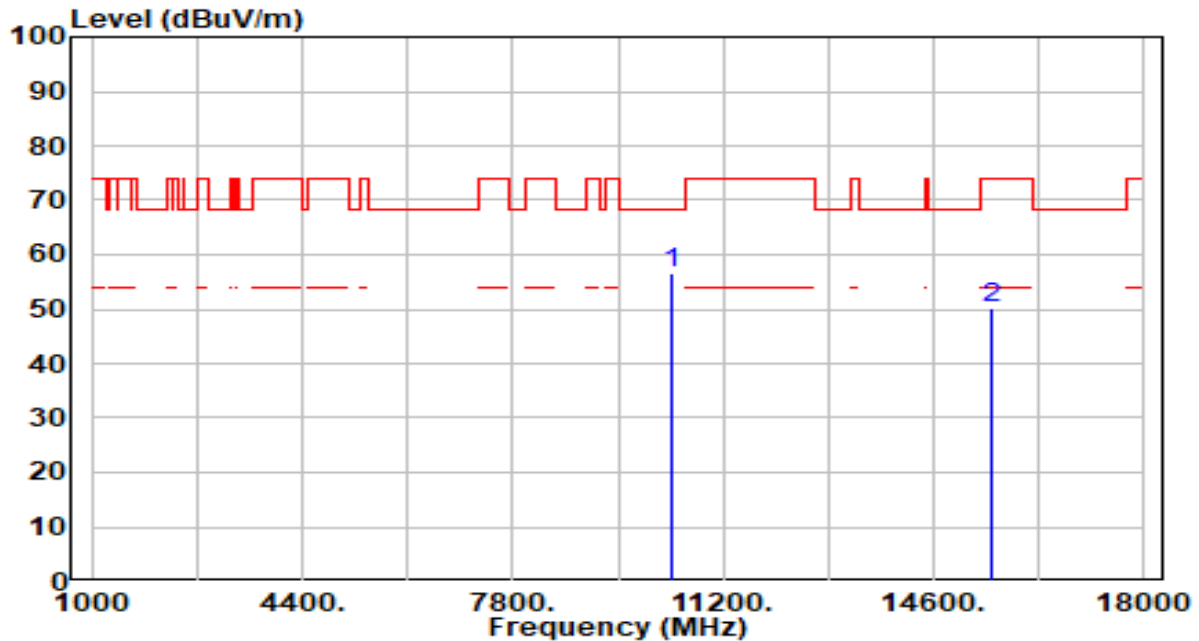


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	53.61	2.81	56.42	-11.78	68.20	100	359	Peak
2		15540.000	45.58	4.52	50.10	-23.90	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

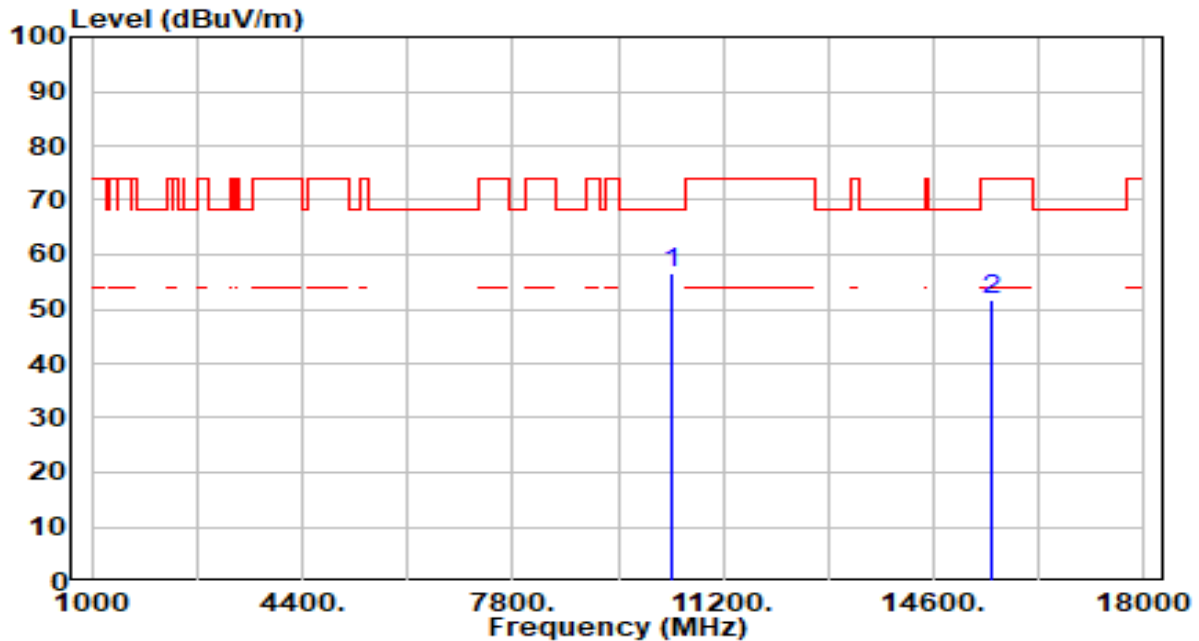


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	53.69	2.81	56.50	-11.70	68.20	200	81	Peak
2		15540.000	47.34	4.52	51.86	-22.14	74.00	200	251	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

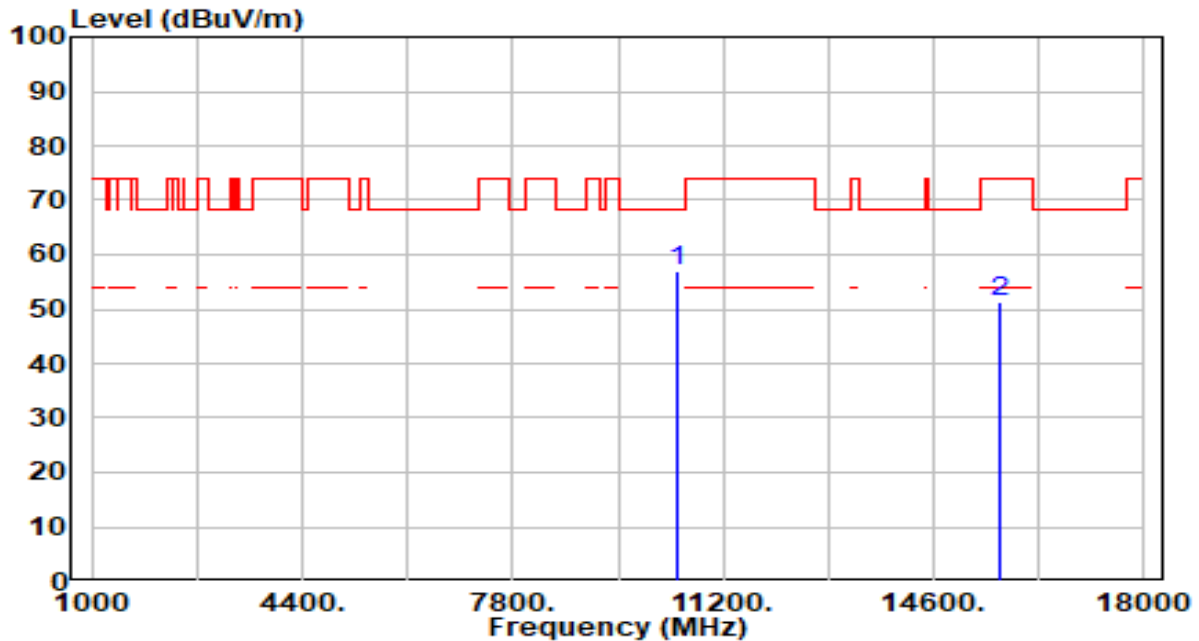


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	54.36	2.72	57.09	-11.11	68.20	100	358	Peak
2		15660.000	46.62	4.67	51.29	-22.71	74.00	100	3	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

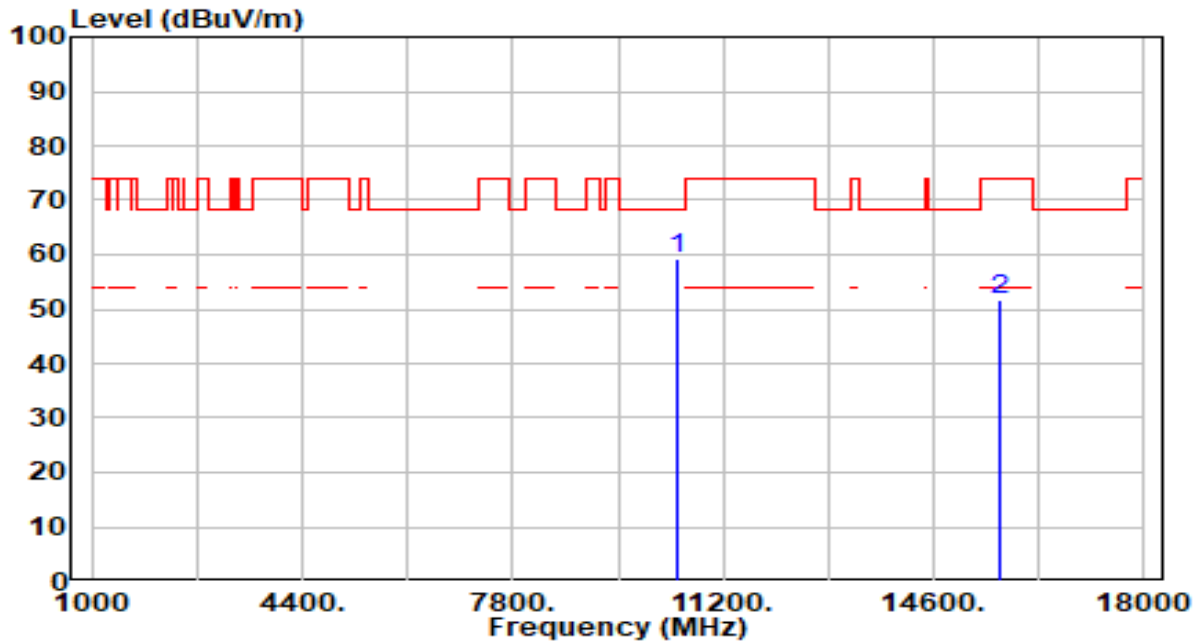


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	56.55	2.72	59.27	-8.93	68.20	200	79	Peak
2		15660.000	47.12	4.67	51.80	-22.20	74.00	200	268	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

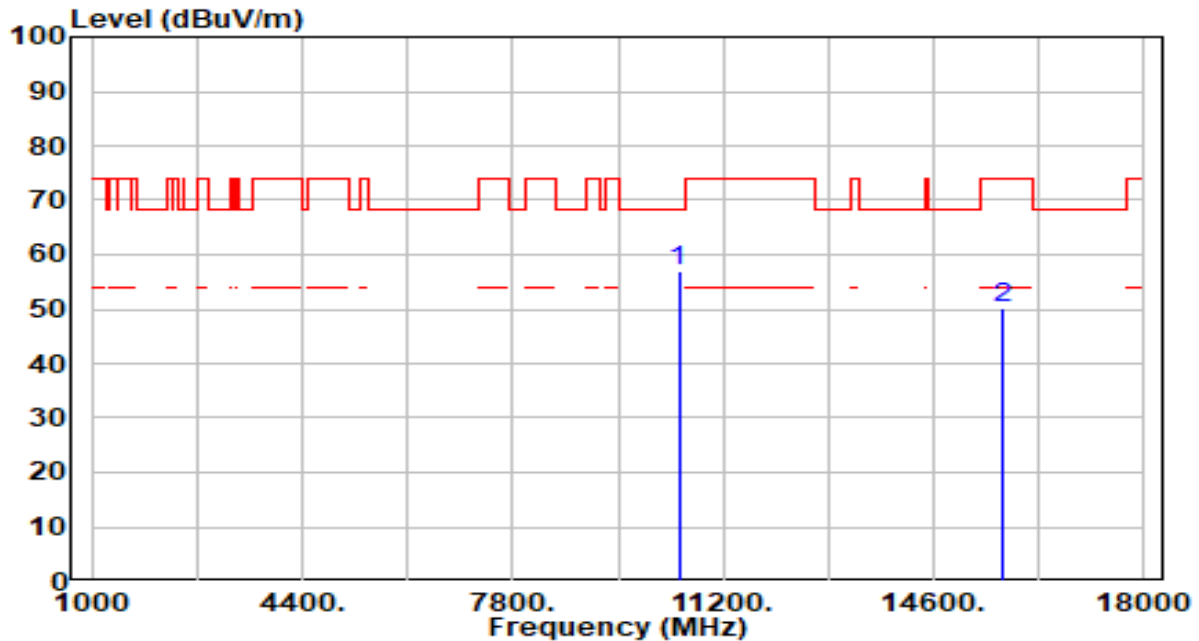


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	54.36	2.68	57.03	-11.17	68.20	100	0	Peak
2		15720.000	45.43	4.84	50.27	-23.73	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

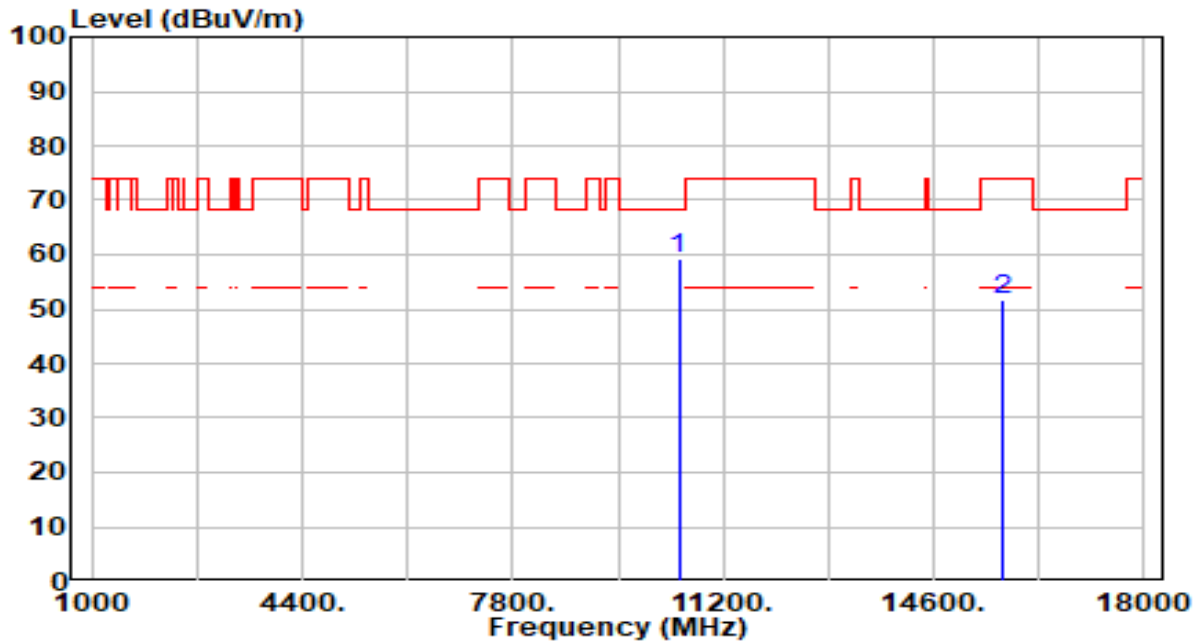


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	56.51	2.68	59.18	-9.02	68.20	200	77	Peak
2		15720.000	47.05	4.84	51.88	-22.12	74.00	200	297	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

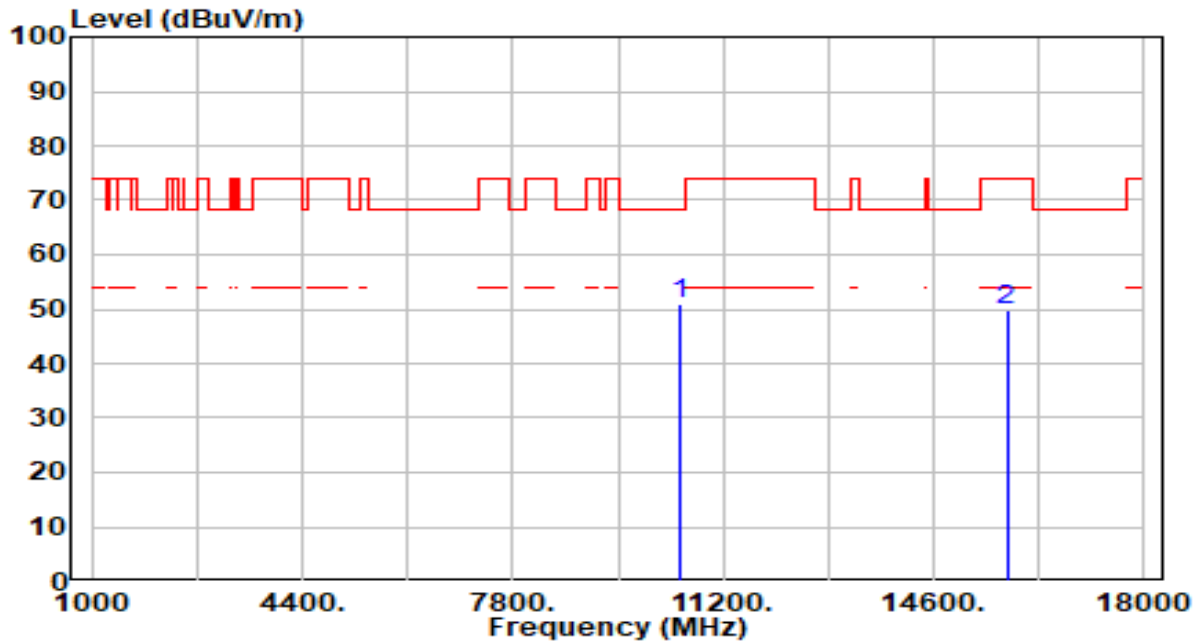


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	48.39	2.64	51.03	-17.17	68.20	100	0	Peak
2		15780.000	44.72	5.00	49.71	-24.29	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

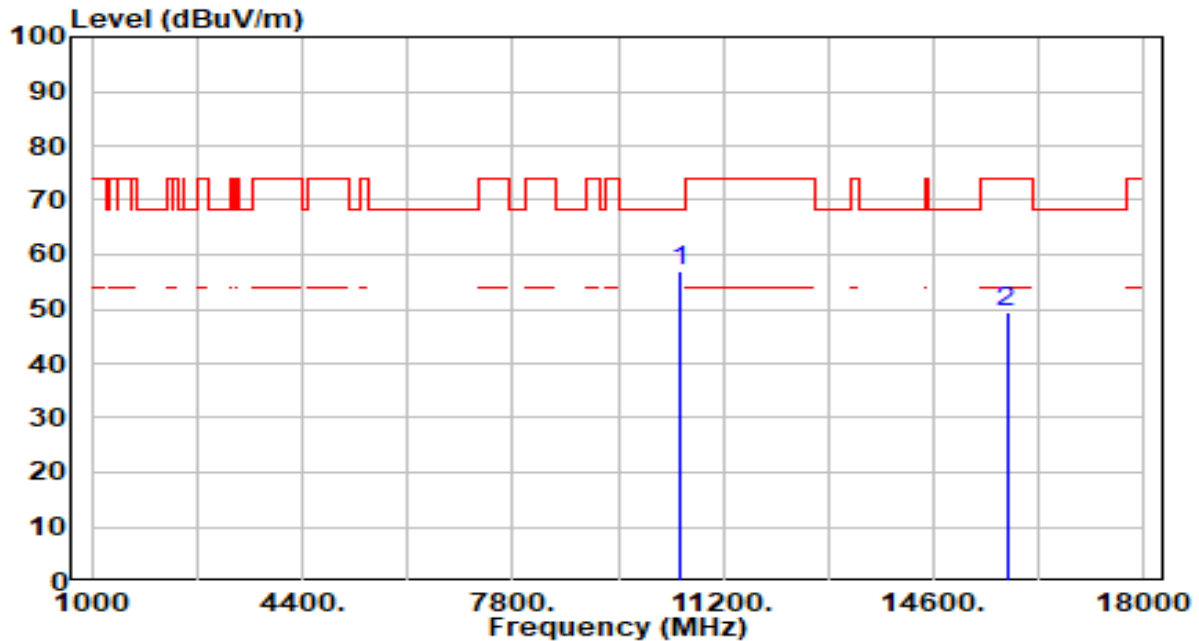


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	54.22	2.64	56.86	-11.34	68.20	200	84	Peak
2		15780.000	44.30	5.00	49.30	-24.70	74.00	200	293	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

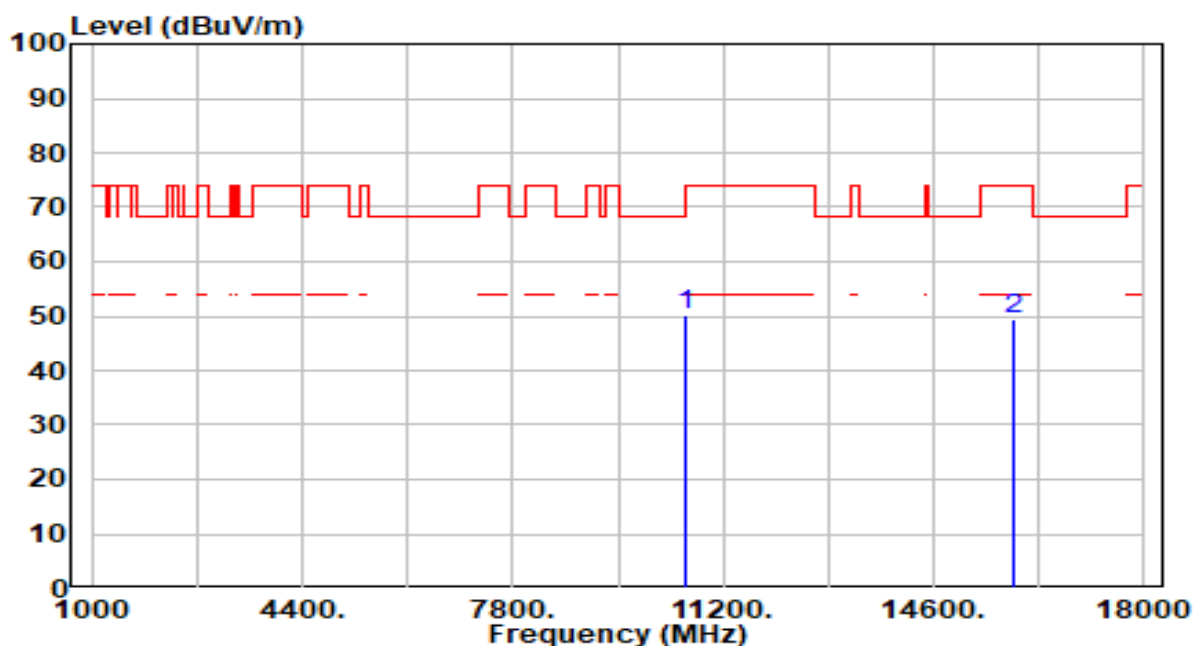


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	47.75	2.60	50.36	-17.84	68.20	100	358	Peak
2		15900.000	44.44	5.13	49.57	-24.43	74.00	100	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

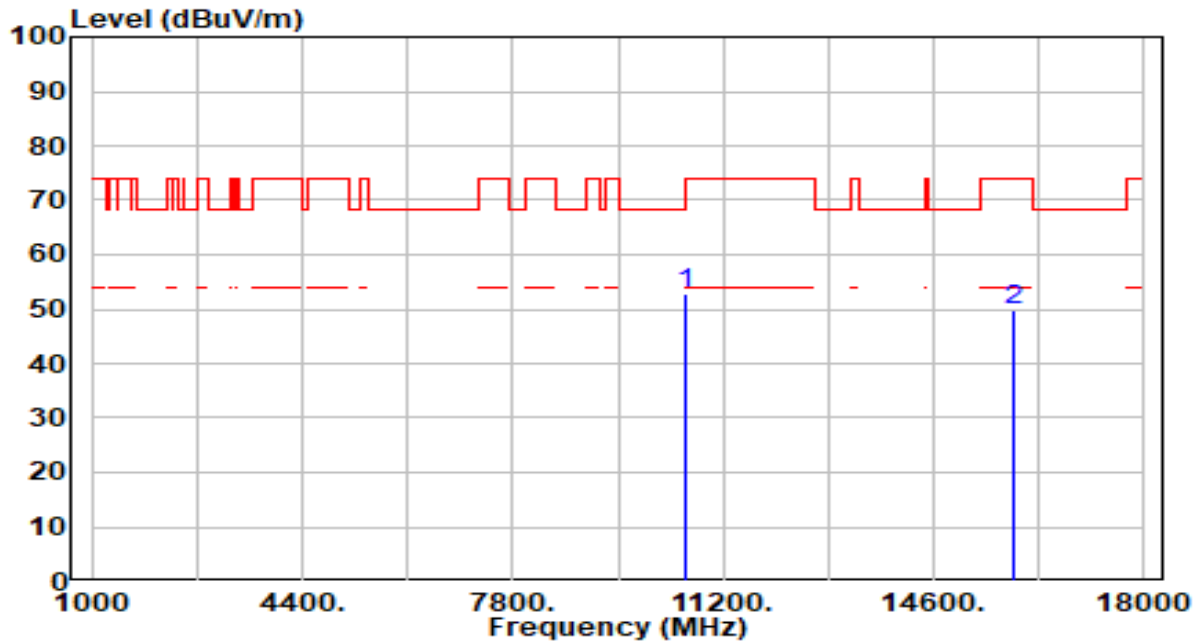


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	50.21	2.60	52.81	-15.39	68.20	200	85	Peak
2		15900.000	44.50	5.13	49.63	-24.37	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

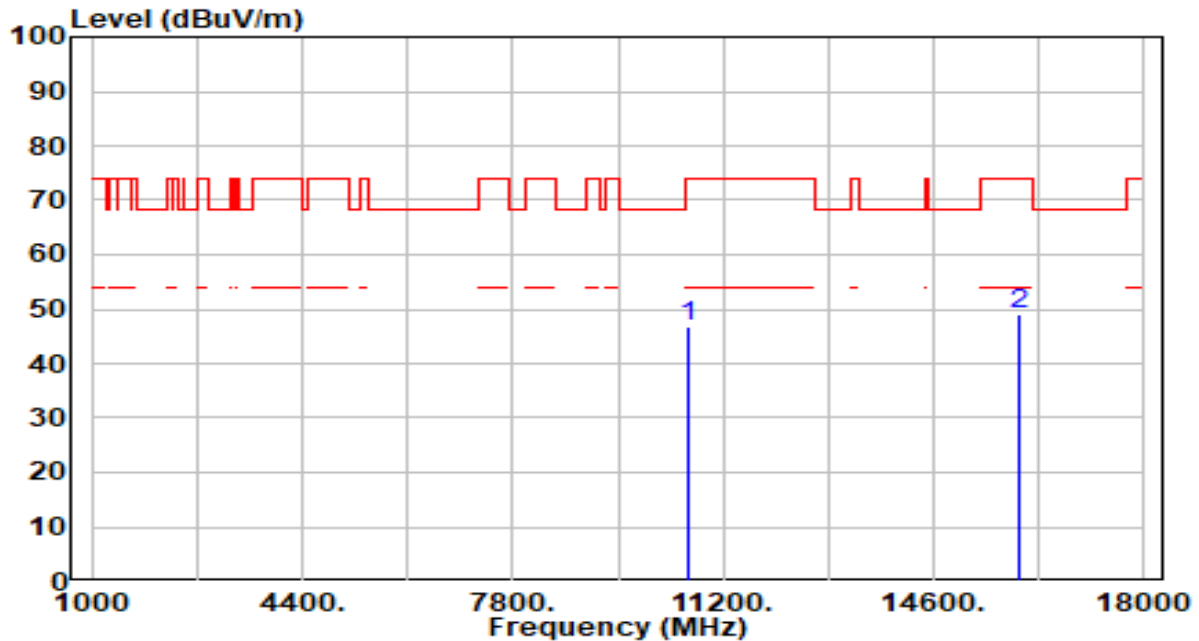


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	44.17	2.62	46.79	-27.21	74.00	100	310	Peak
2	* 15960.000	44.02	5.17	49.19	-24.81	74.00	100	321	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

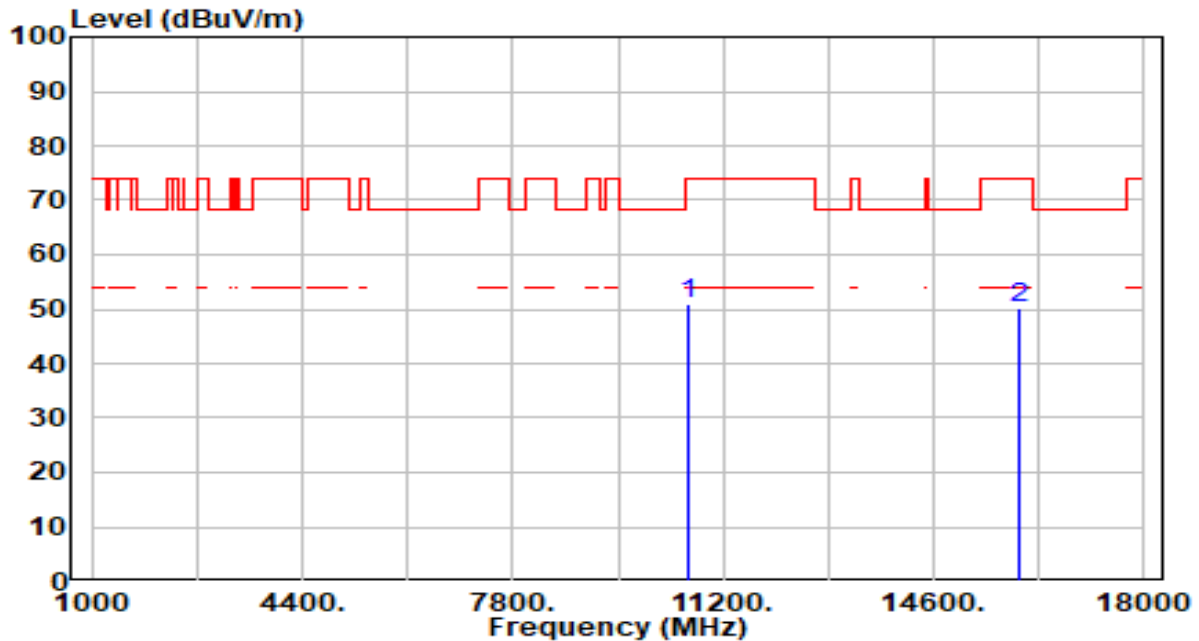


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10640.000	48.46	2.62	51.08	-22.92	74.00	200	77	Peak
2		15960.000	44.89	5.17	50.06	-23.94	74.00	200	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

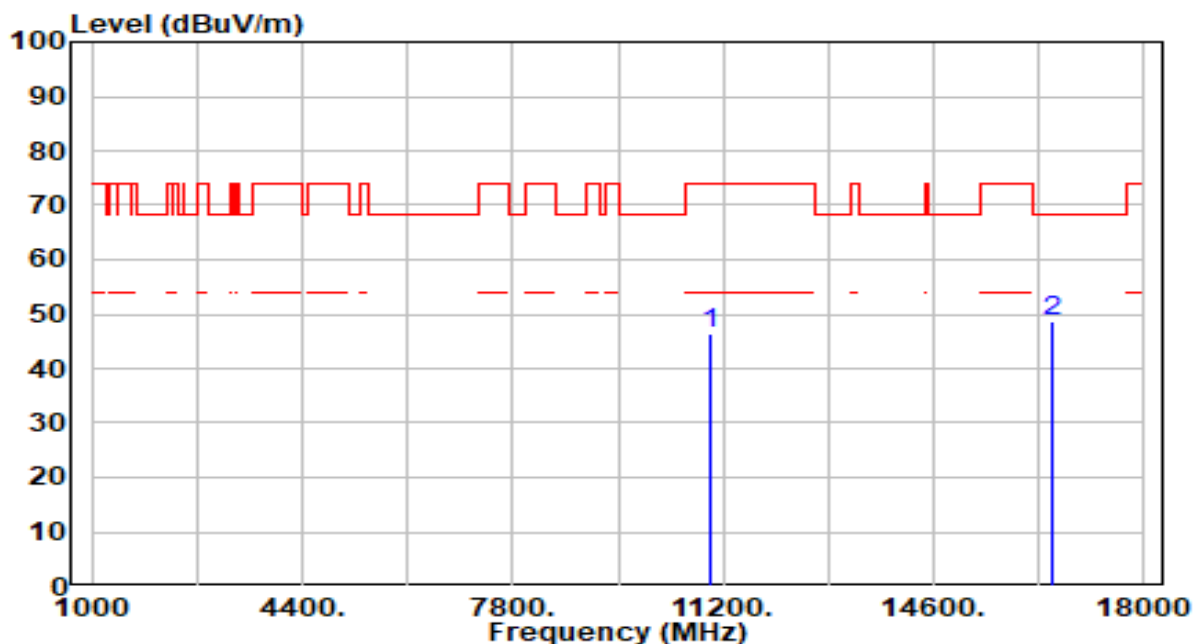


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	43.68	2.60	46.28	-27.72	74.00	100	211	Peak
2	* 16500.000	43.89	4.63	48.52	-19.68	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

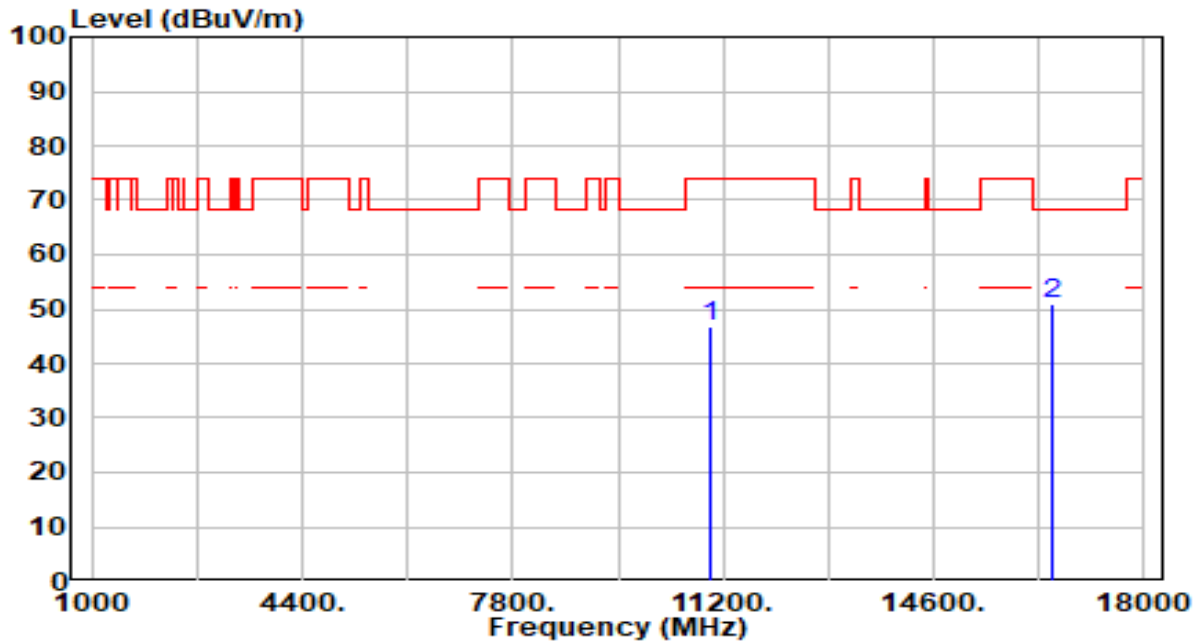


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	44.09	2.60	46.69	-27.31	74.00	200	47	Peak
2	* 16500.000	46.29	4.63	50.92	-17.28	68.20	200	244	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

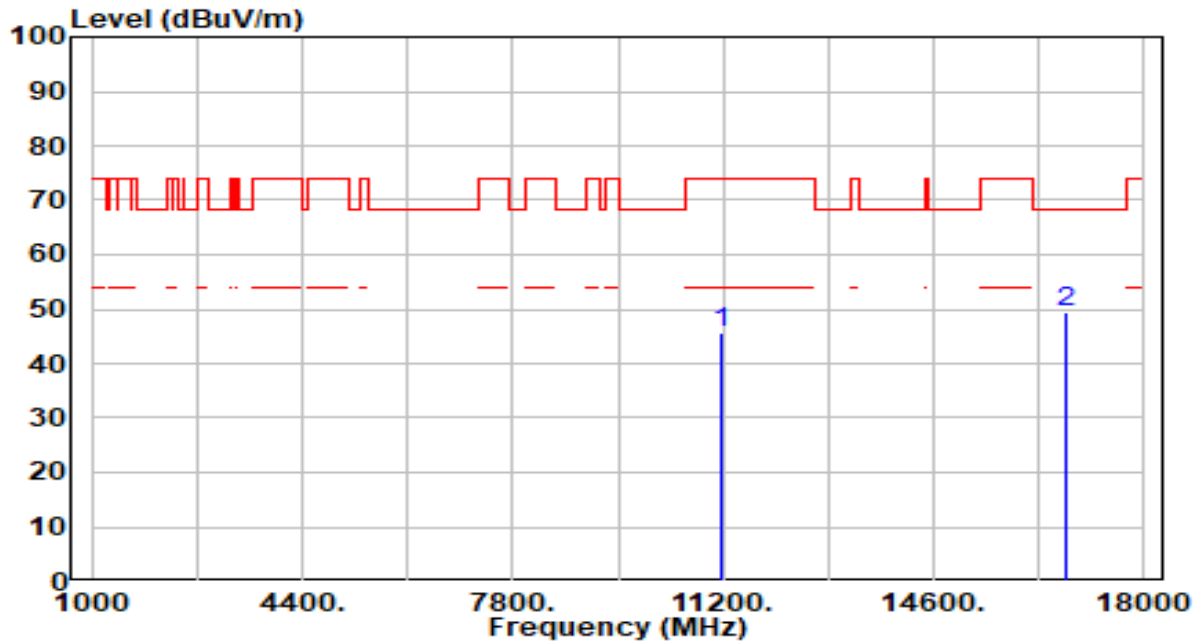


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	42.46	3.07	45.53	-28.47	74.00	100	204	Peak
2	* 16740.000	44.77	4.66	49.43	-18.77	68.20	100	227	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

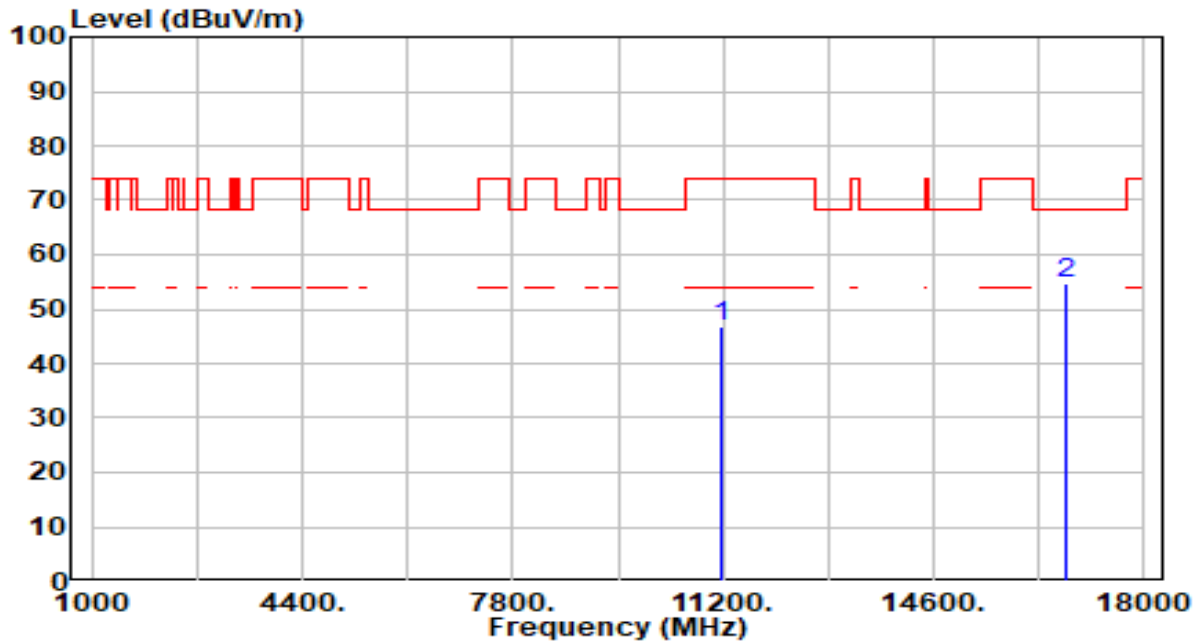


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	43.88	3.07	46.96	-27.04	74.00	200	232	Peak
2	* 16740.000	49.99	4.66	54.65	-13.55	68.20	200	232	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

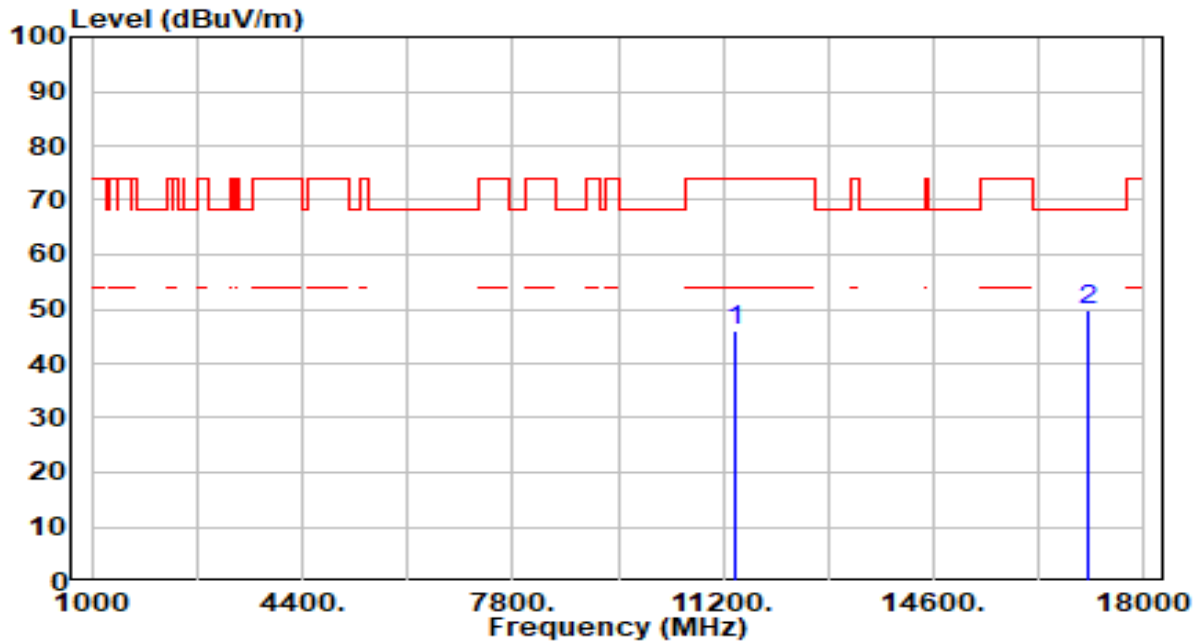


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	42.59	3.48	46.07	-27.93	74.00	100	42	Peak
2	*	17100.000	45.02	4.79	49.81	-18.39	68.20	100	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

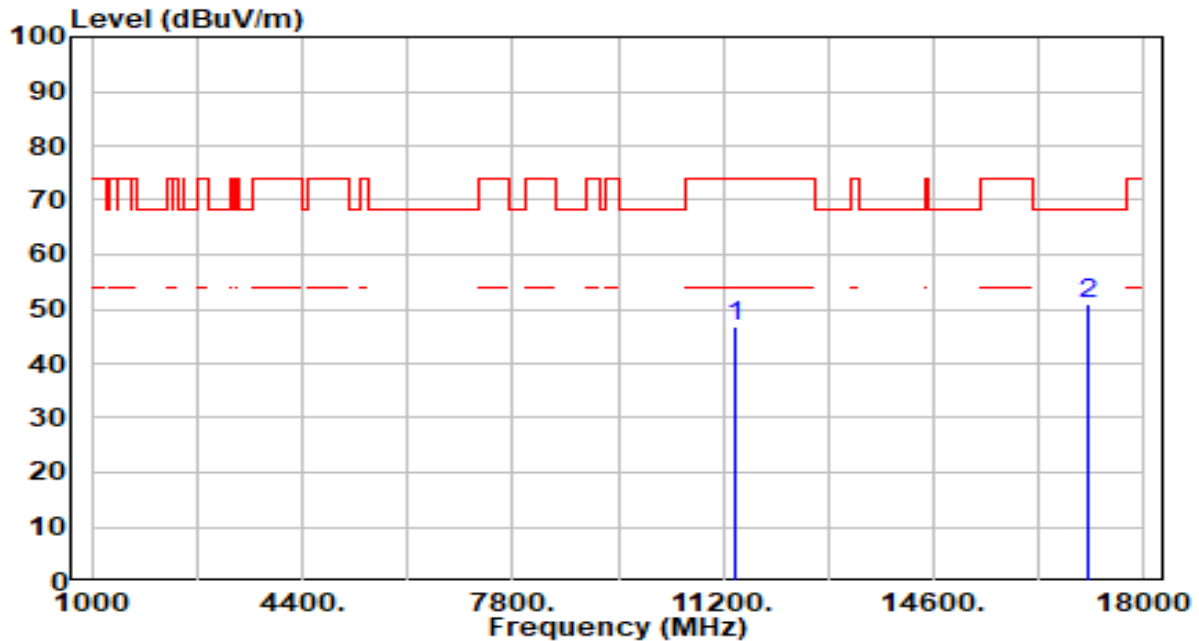


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	43.26	3.48	46.74	-27.26	74.00	200	69	Peak
2	* 17100.000	46.14	4.79	50.94	-17.26	68.20	200	46	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

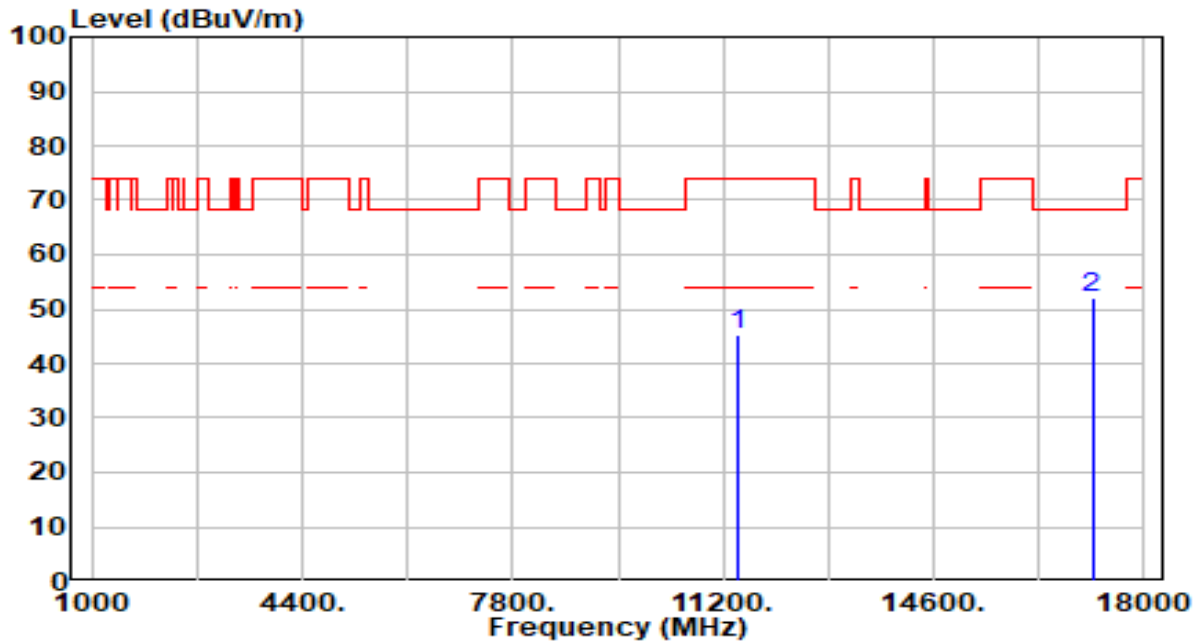


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	41.86	3.52	45.38	-28.62	74.00	100	326	Peak
2	* 17160.000	47.25	4.66	51.91	-16.29	68.20	100	330	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

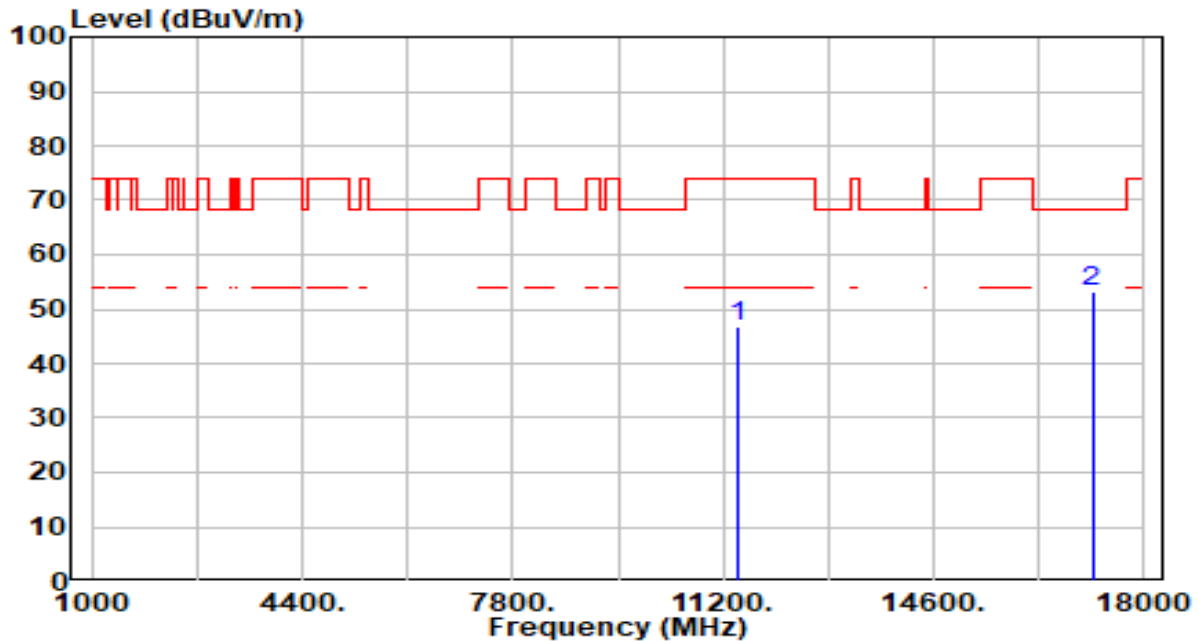


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	43.39	3.52	46.91	-27.09	74.00	200	254	Peak
2	* 17160.000	48.73	4.66	53.39	-14.81	68.20	200	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

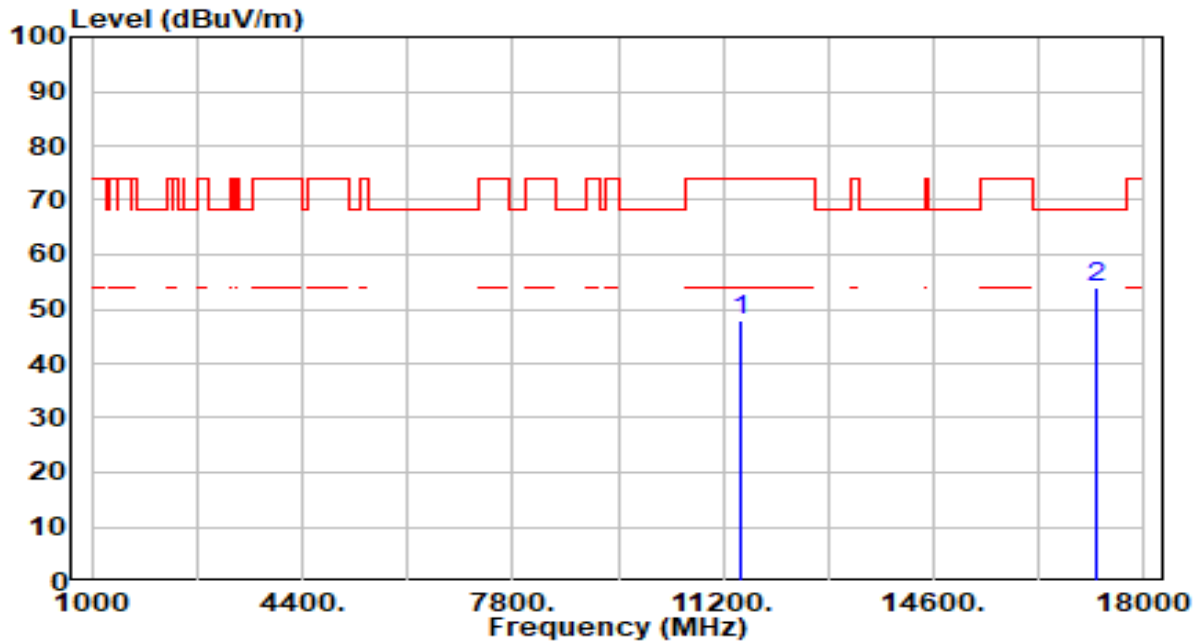


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	44.52	3.57	48.09	-25.91	74.00	100	34	Peak
2	* 17235.000	49.44	4.45	53.89	-14.31	68.20	100	224	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

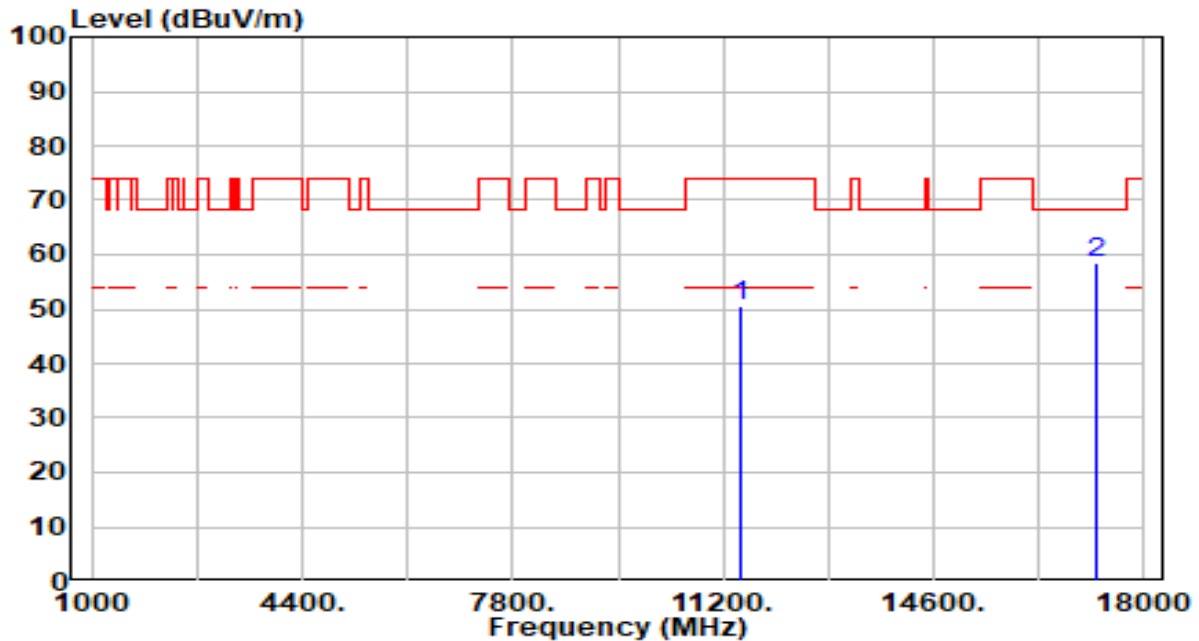


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	46.97	3.57	50.53	-23.47	74.00	200	247	Peak
2	* 17235.000	53.96	4.45	58.41	-9.79	68.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

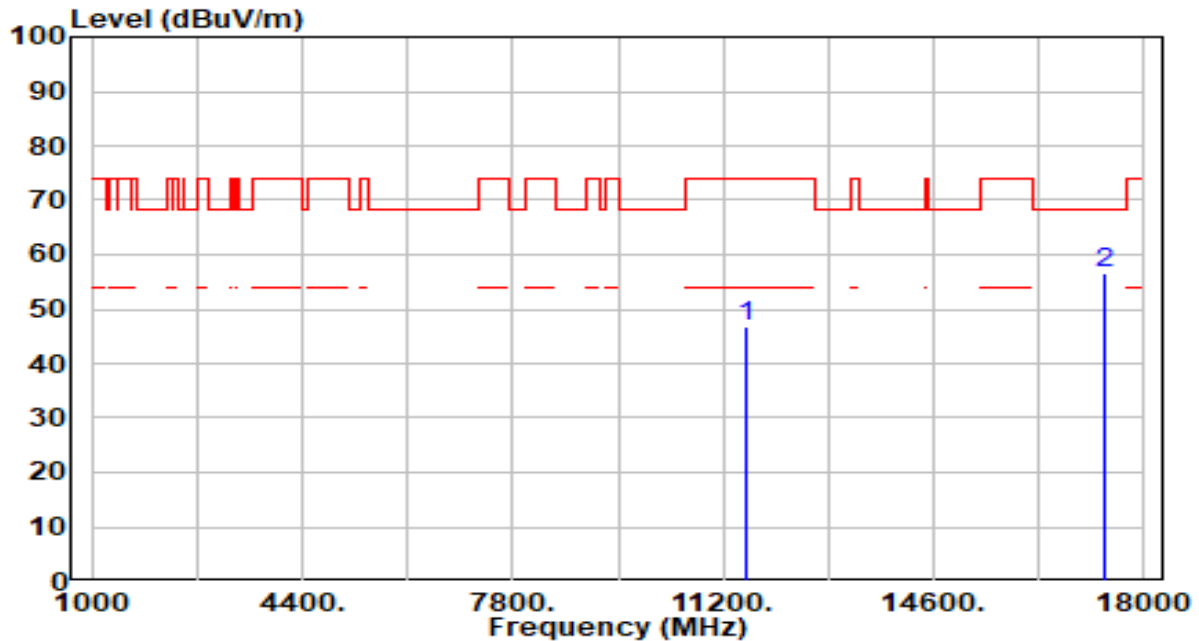


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	43.29	3.65	46.94	-27.06	74.00	100	82	Peak
2	* 17355.000	52.38	4.06	56.44	-11.76	68.20	100	220	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

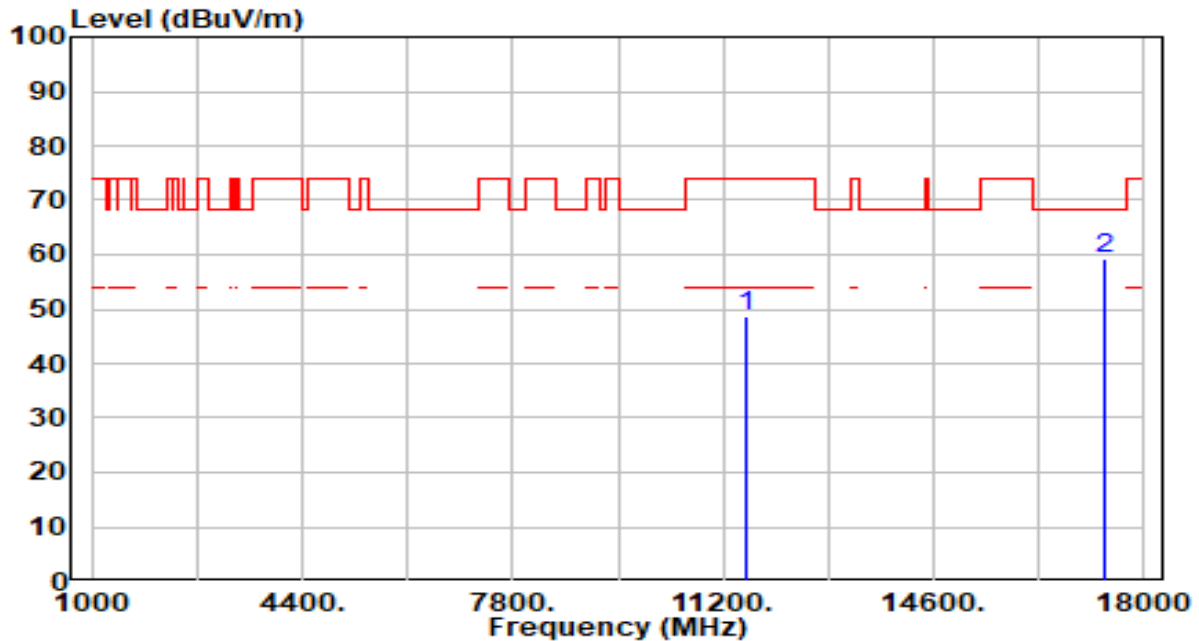


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	45.16	3.65	48.81	-25.19	74.00	200	236	Peak
2	* 17355.000	55.16	4.06	59.22	-8.98	68.20	200	142	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

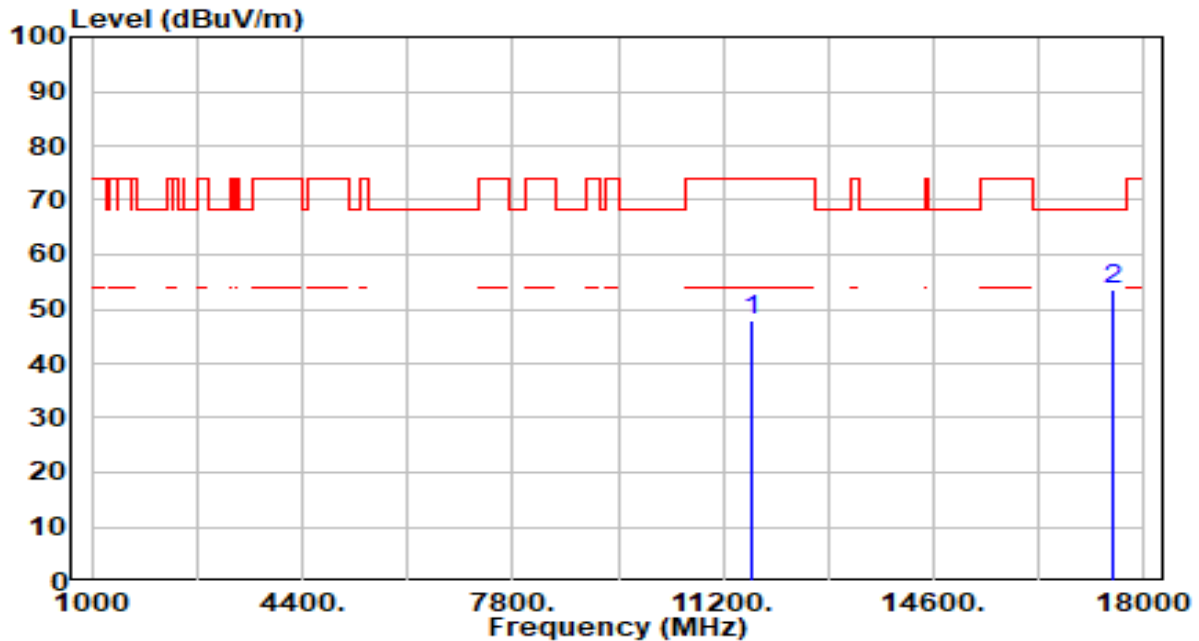


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	44.12	3.66	47.78	-26.22	74.00	100	325	Peak
2	* 17475.000	49.65	3.89	53.54	-14.66	68.20	100	224	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

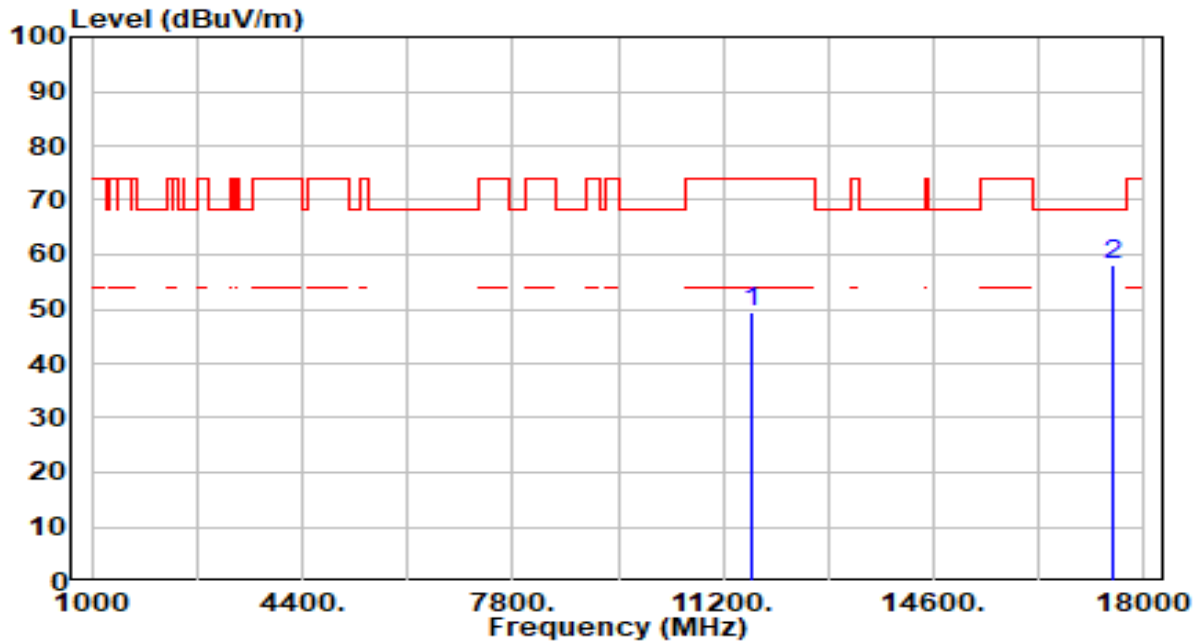


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	45.75	3.66	49.41	-24.59	74.00	200	240	Peak
2	* 17475.000	54.16	3.89	58.06	-10.14	68.20	200	231	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

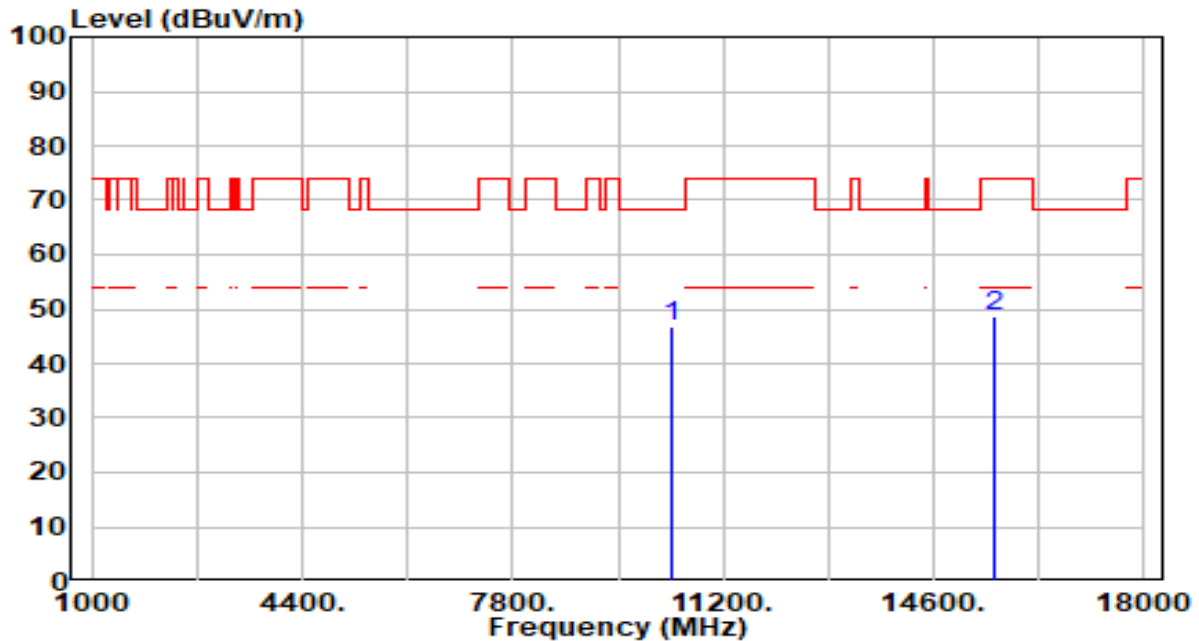


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	43.85	2.79	46.64	-21.56	68.20	100	46	Peak
2		15570.000	44.34	4.52	48.86	-25.14	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

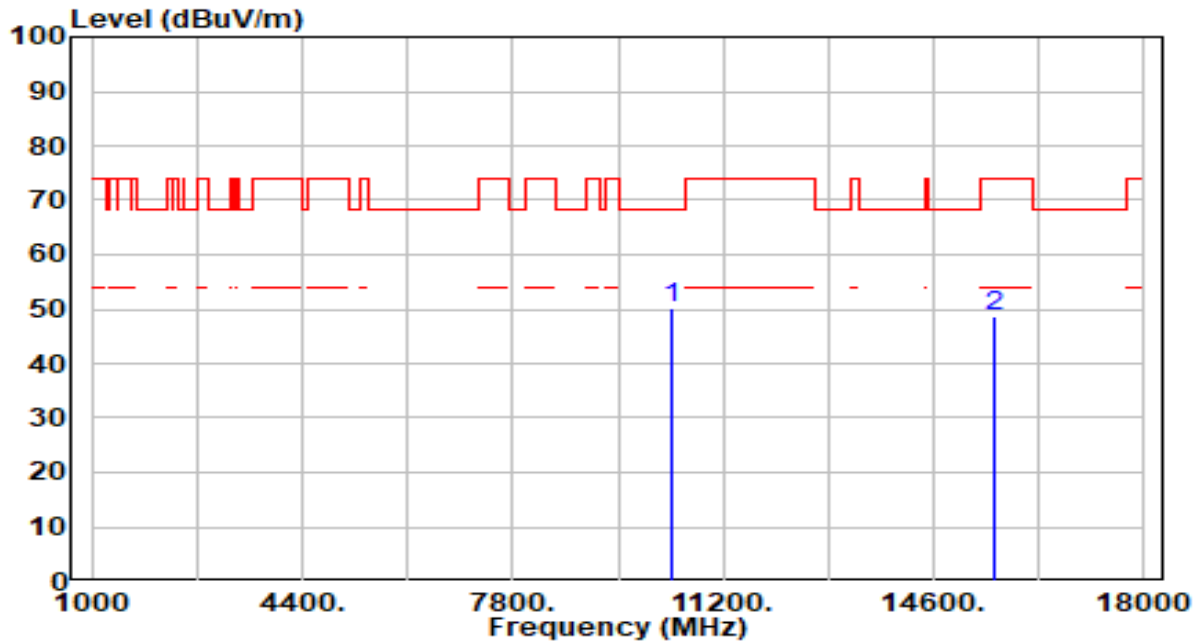


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	47.51	2.79	50.29	-17.91	68.20	200	77	Peak
2		15570.000	44.34	4.52	48.85	-25.15	74.00	200	294	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	AC 120V/60Hz

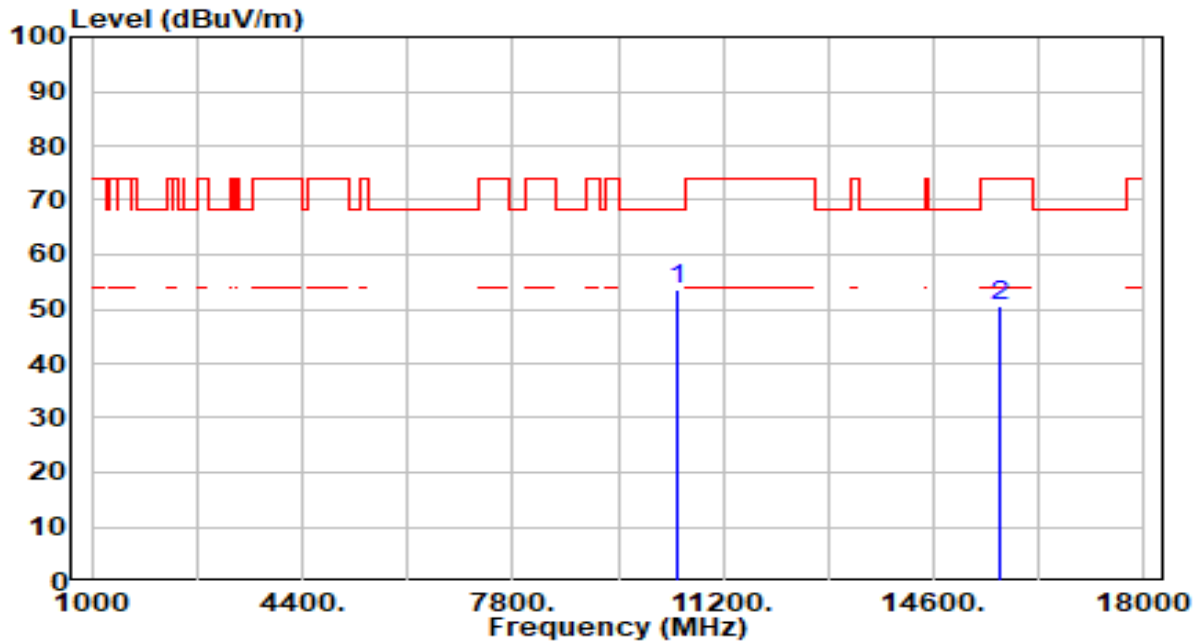


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	50.87	2.70	53.57	-14.63	68.20	100	359	Peak
2		15690.000	45.66	4.75	50.41	-23.59	74.00	100	293	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	AC 120V/60Hz

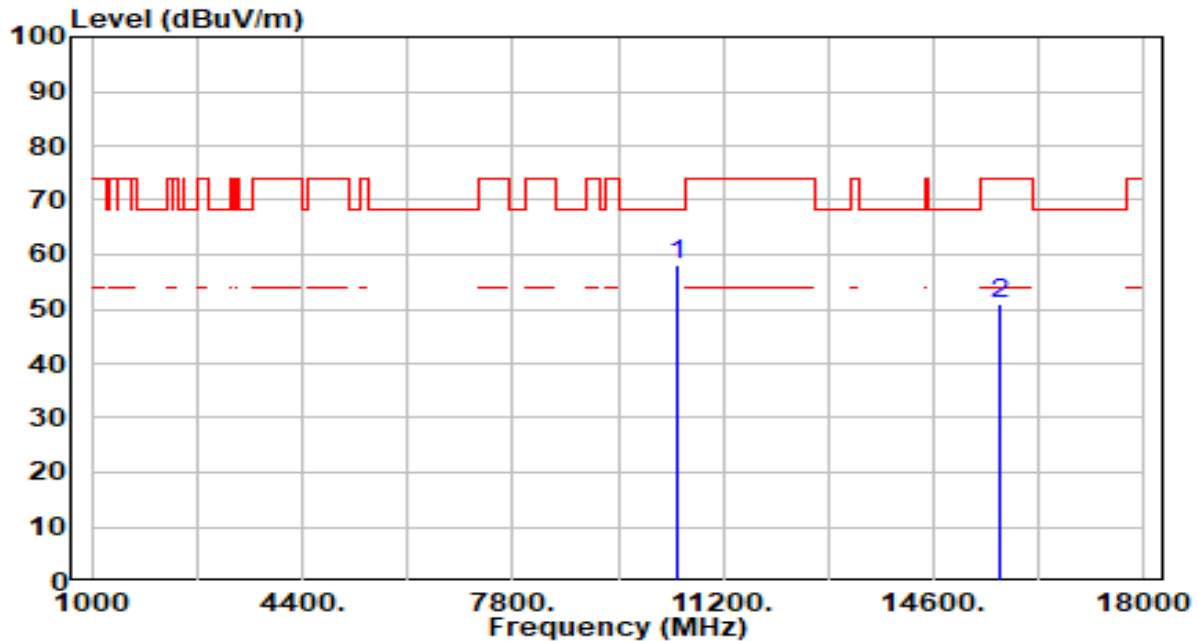


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	55.56	2.70	58.26	-9.94	68.20	200	79	Peak
2		15690.000	46.31	4.75	51.07	-22.93	74.00	200	94	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	AC 120V/60Hz

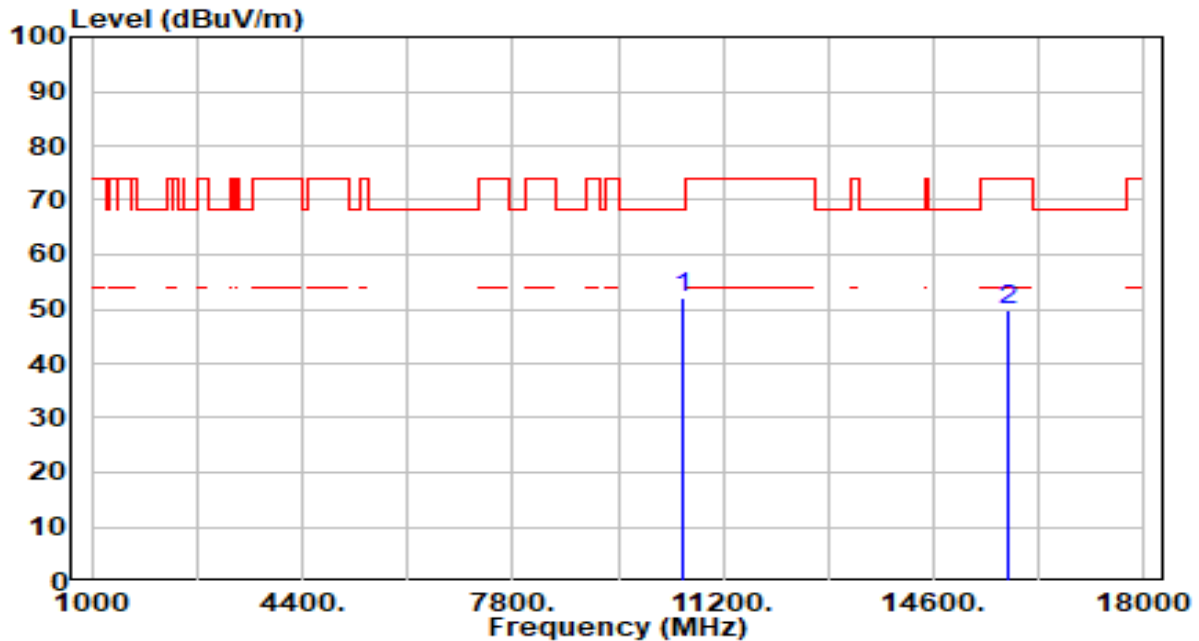


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	49.45	2.63	52.08	-16.12	68.20	100	356	Peak
2		15810.000	44.71	5.06	49.78	-24.22	74.00	100	273	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	AC 120V/60Hz

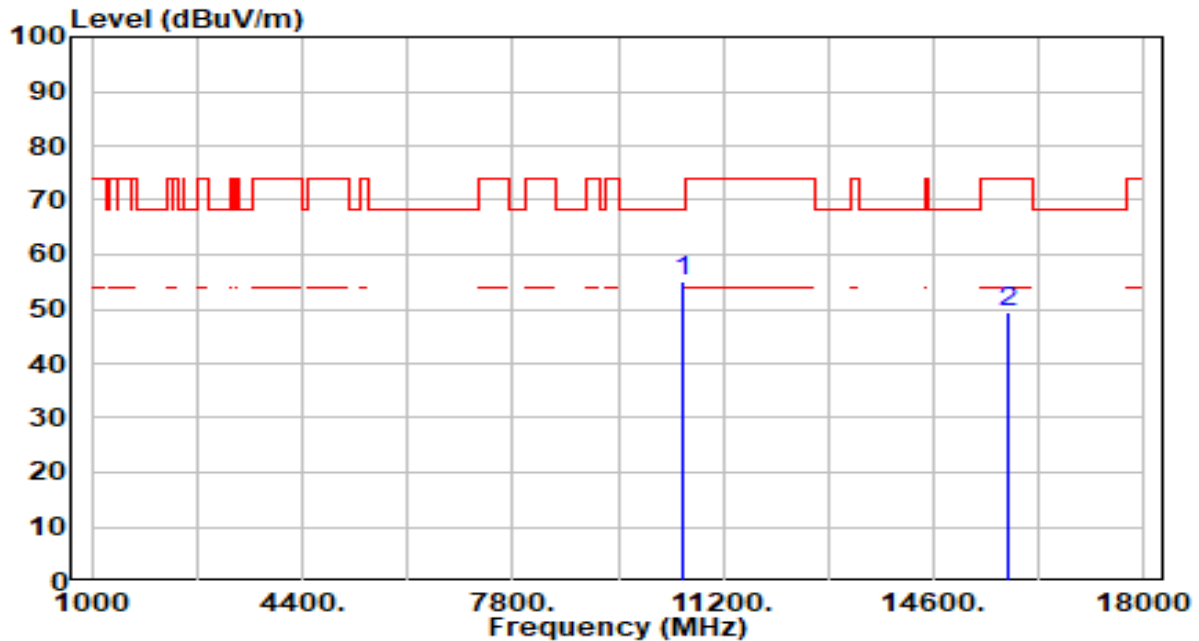


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	52.29	2.63	54.93	-13.27	68.20	200	78	Peak
2		15810.000	44.38	5.06	49.44	-24.56	74.00	200	251	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

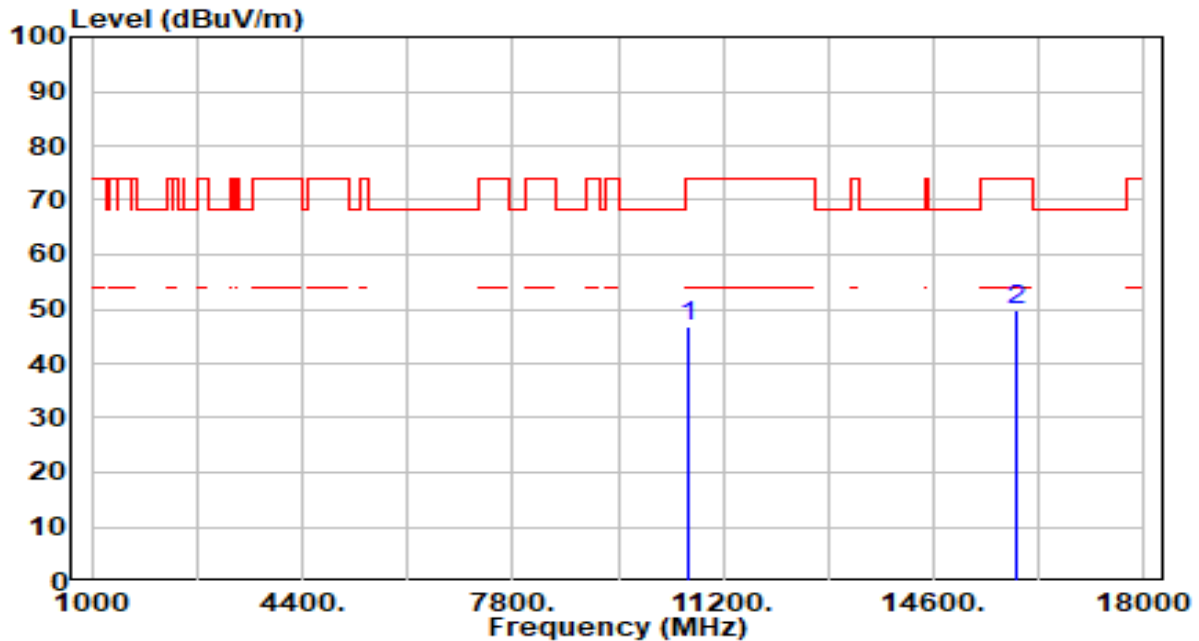


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	44.04	2.61	46.65	-27.35	74.00	100	304	Peak
2	* 15930.000	44.64	5.15	49.79	-24.21	74.00	100	183	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

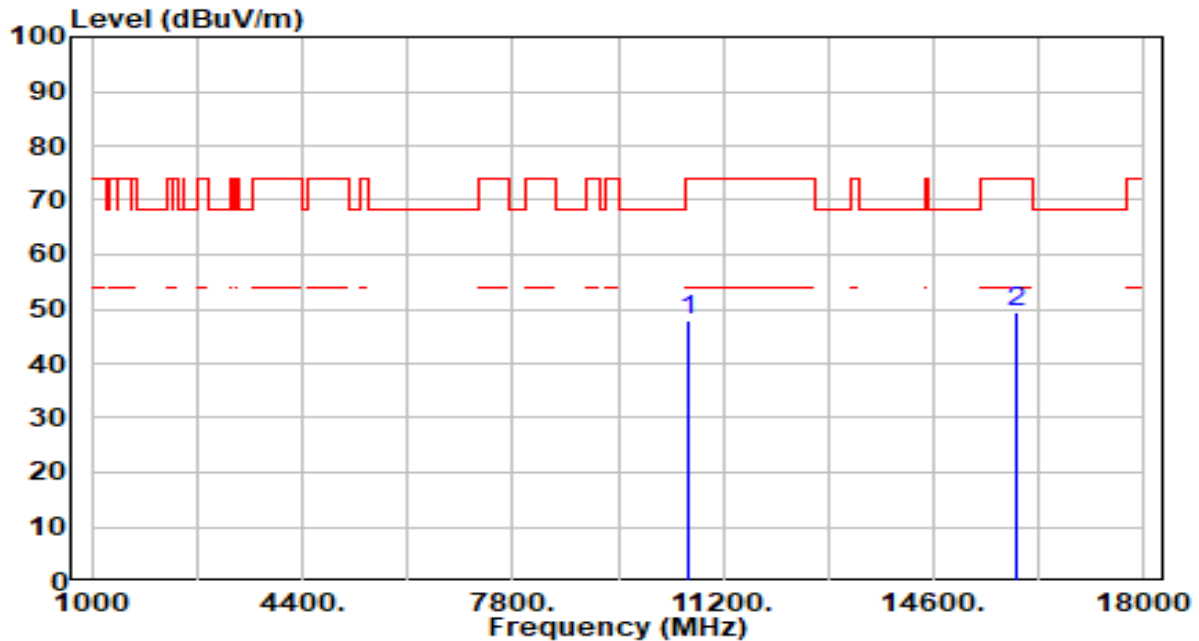


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	45.37	2.61	47.98	-26.02	74.00	200	299	Peak
2	* 15930.000	44.31	5.15	49.45	-24.55	74.00	200	283	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

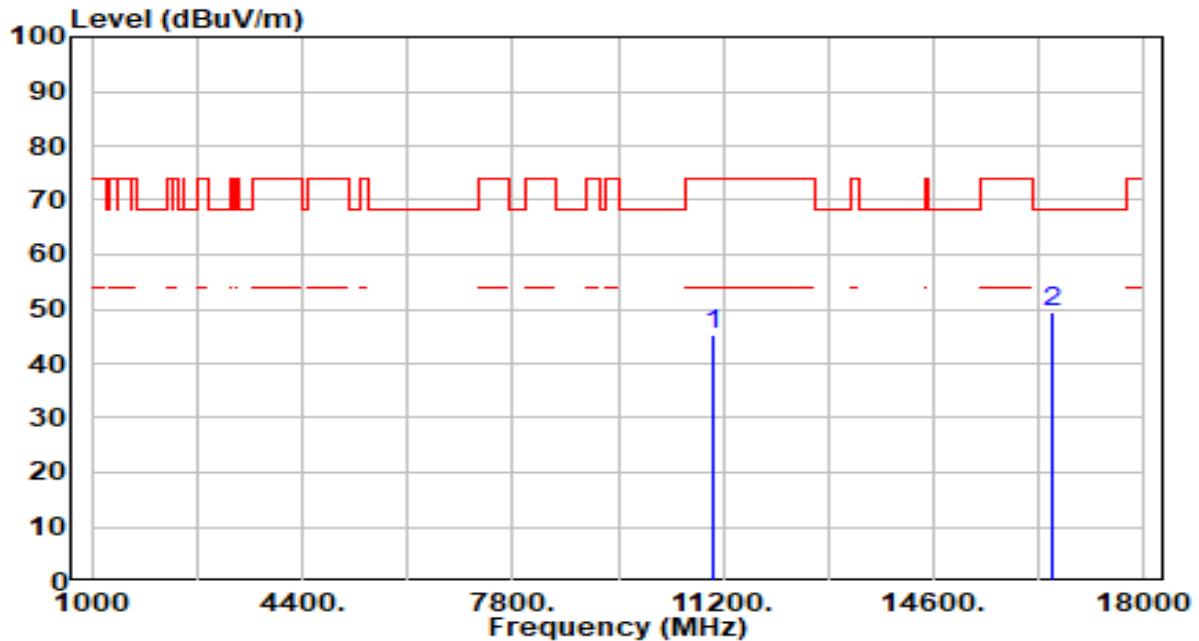


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	42.81	2.66	45.47	-28.53	74.00	100	211	Peak
2	*	16530.000	44.77	4.63	49.39	-18.81	68.20	100	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

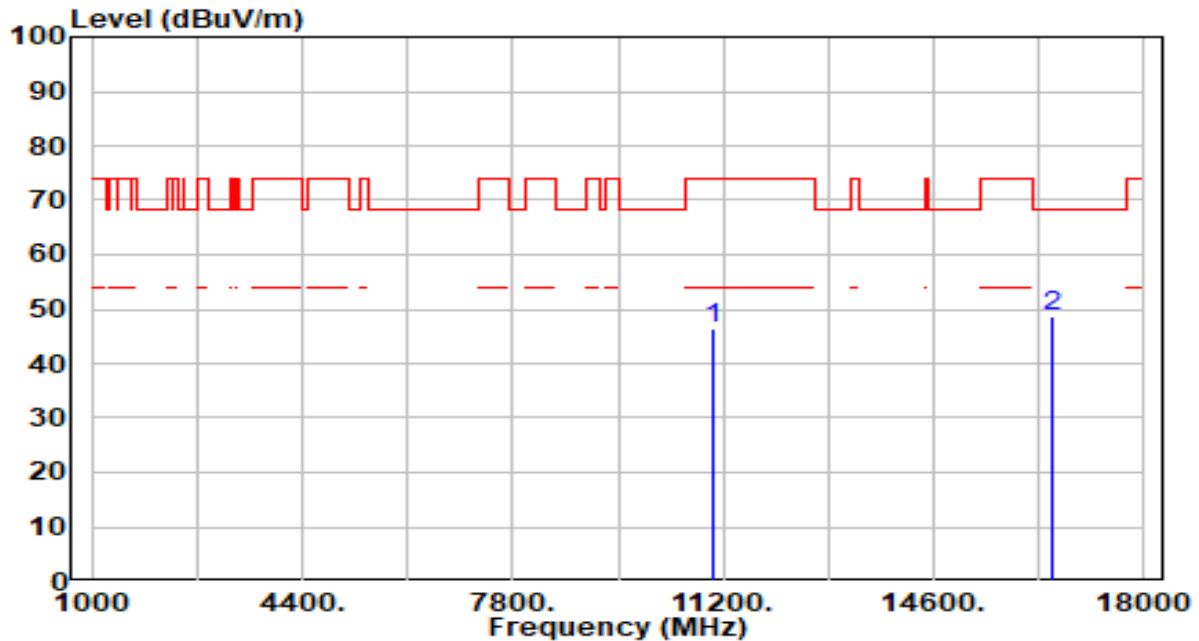


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	43.59	2.66	46.25	-27.75	74.00	200	319	Peak
2	*	16530.000	44.17	4.63	48.79	-19.41	68.20	200	52	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	AC 120V/60Hz

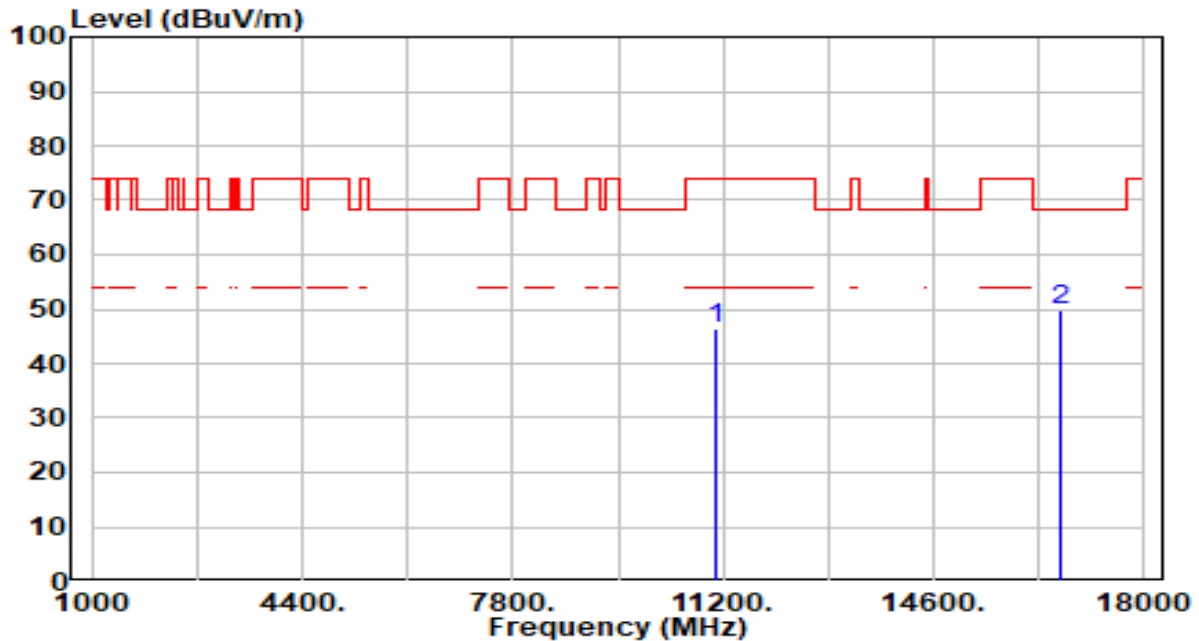


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	43.53	2.90	46.43	-27.57	74.00	100	14	Peak
2	* 16650.000	45.08	4.63	49.71	-18.49	68.20	100	14	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	AC 120V/60Hz

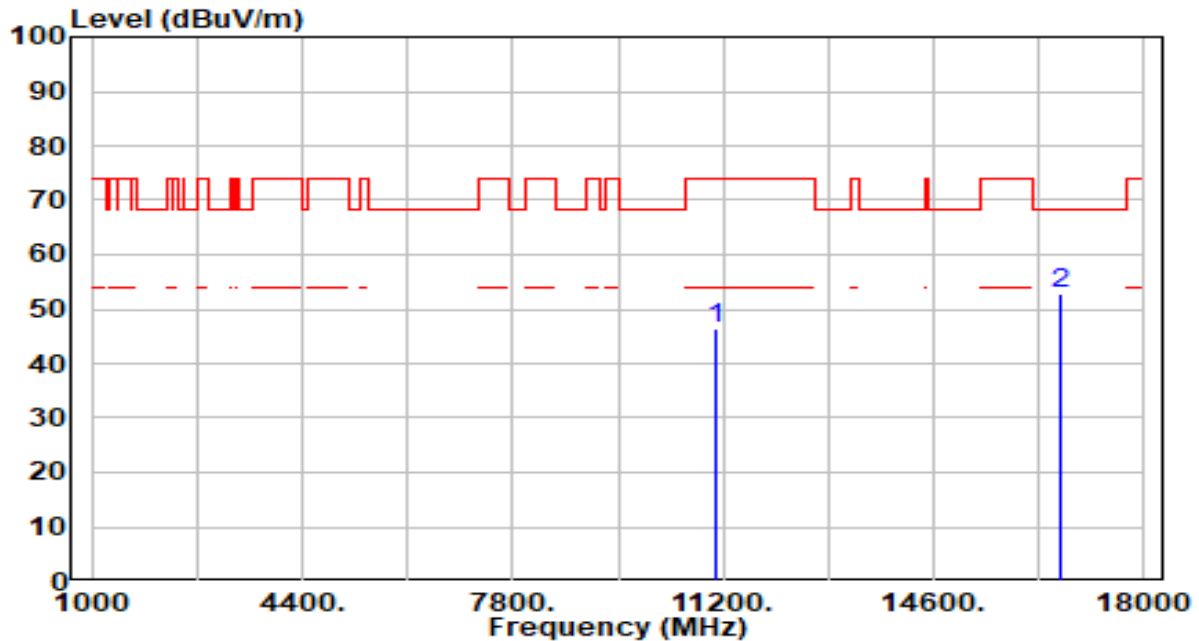


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	43.68	2.90	46.58	-27.42	74.00	200	247	Peak
2	* 16650.000	48.13	4.63	52.76	-15.44	68.20	200	243	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

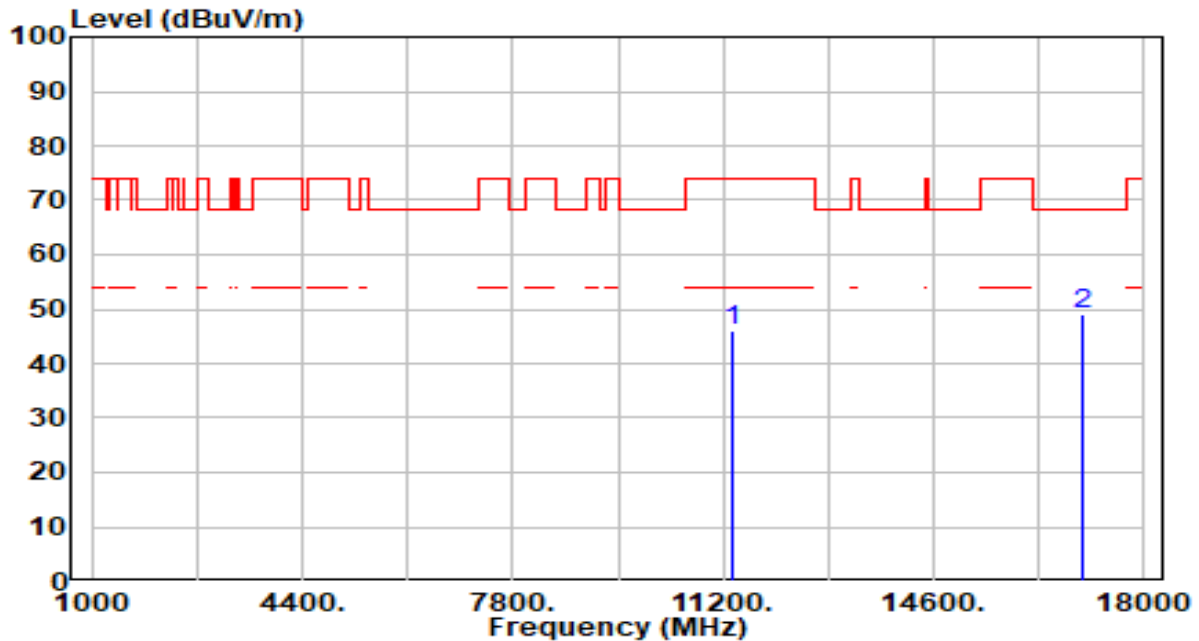


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	42.71	3.39	46.10	-27.90	74.00	100	360	Peak
2	* 17010.000	44.21	5.00	49.20	-19.00	68.20	100	125	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

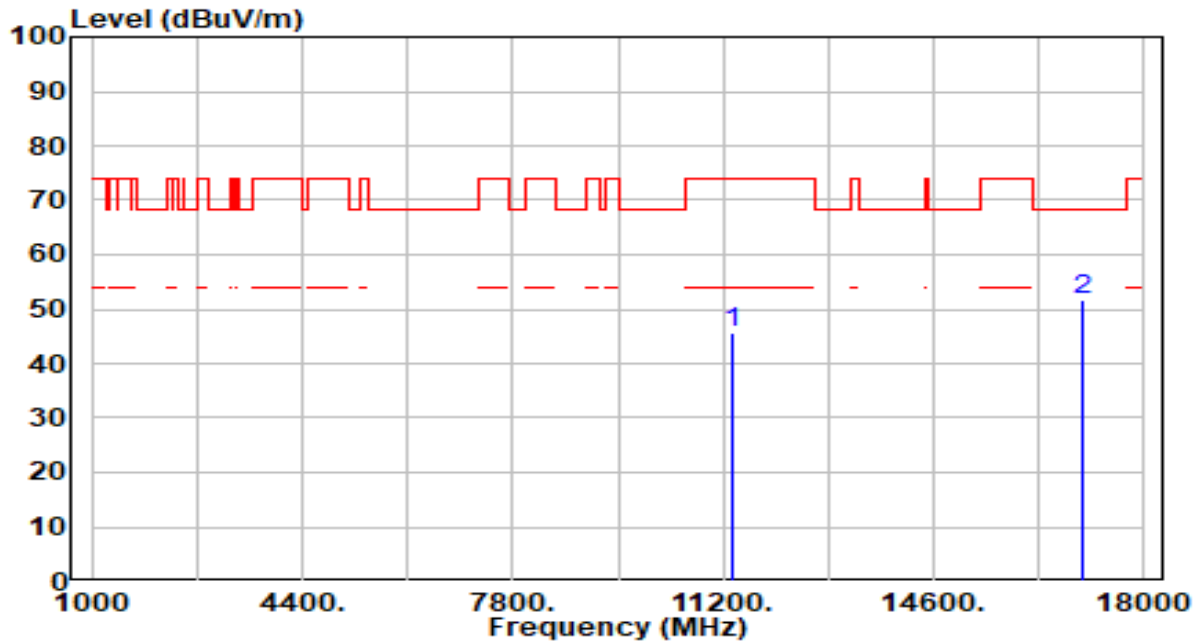


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	42.14	3.39	45.53	-28.47	74.00	200	360	Peak
2	* 17010.000	46.65	5.00	51.65	-16.55	68.20	200	337	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

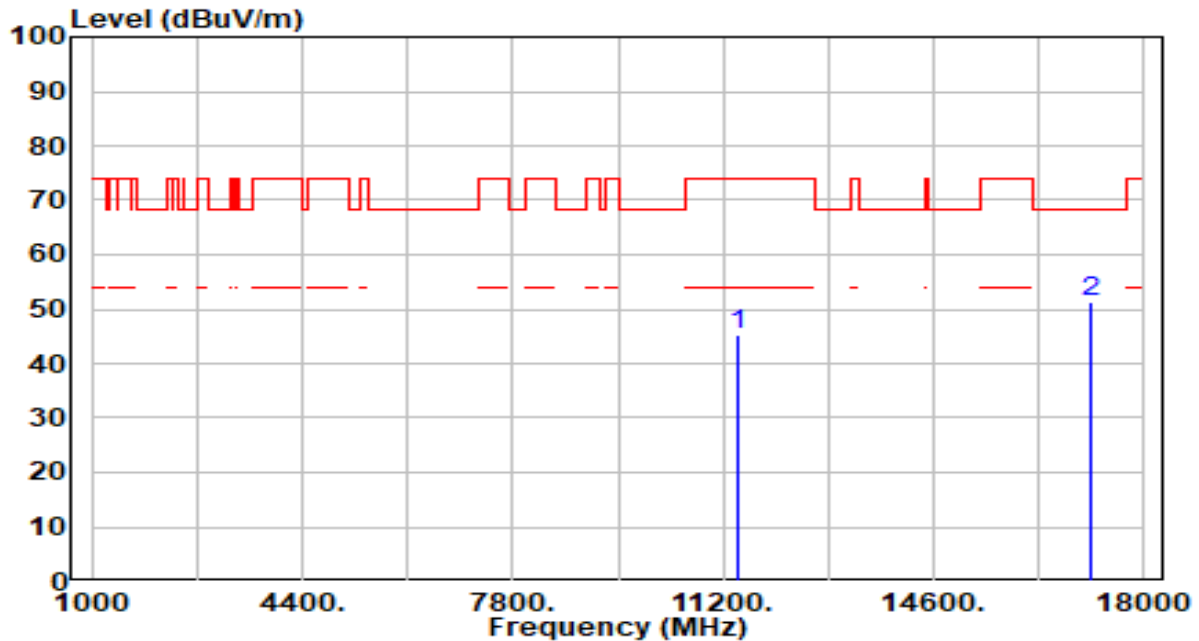


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	41.80	3.50	45.30	-28.70	74.00	100	332	Peak
2	* 17130.000	46.50	4.72	51.22	-16.98	68.20	100	223	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

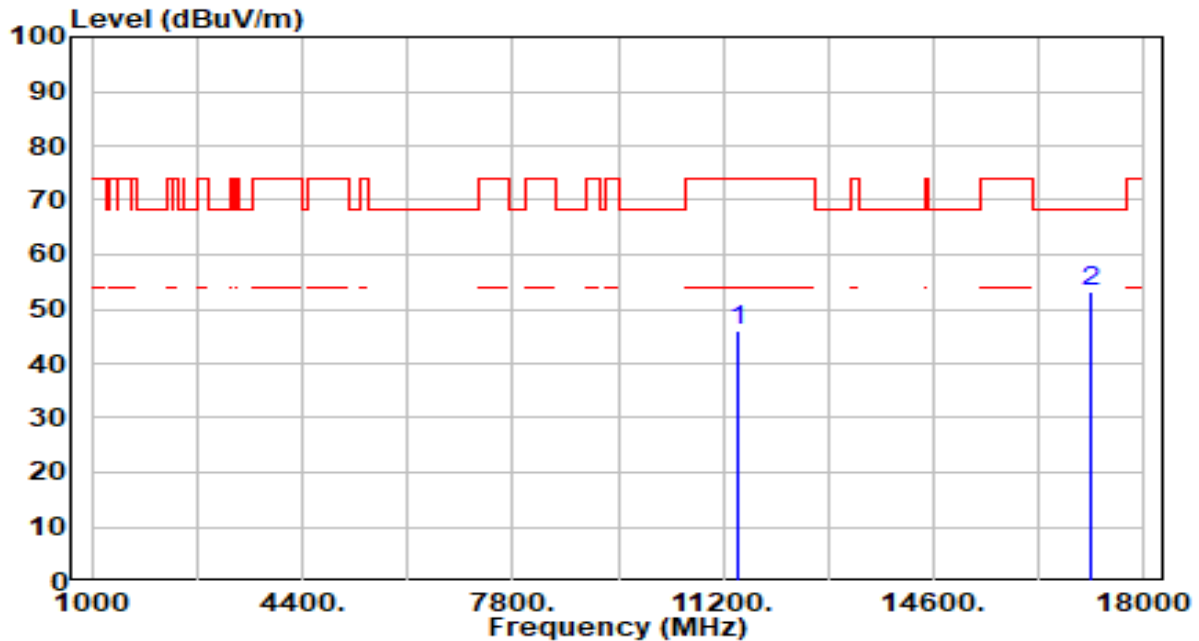


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	42.39	3.50	45.89	-28.11	74.00	200	12	Peak
2	* 17130.000	48.32	4.72	53.04	-15.16	68.20	200	228	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

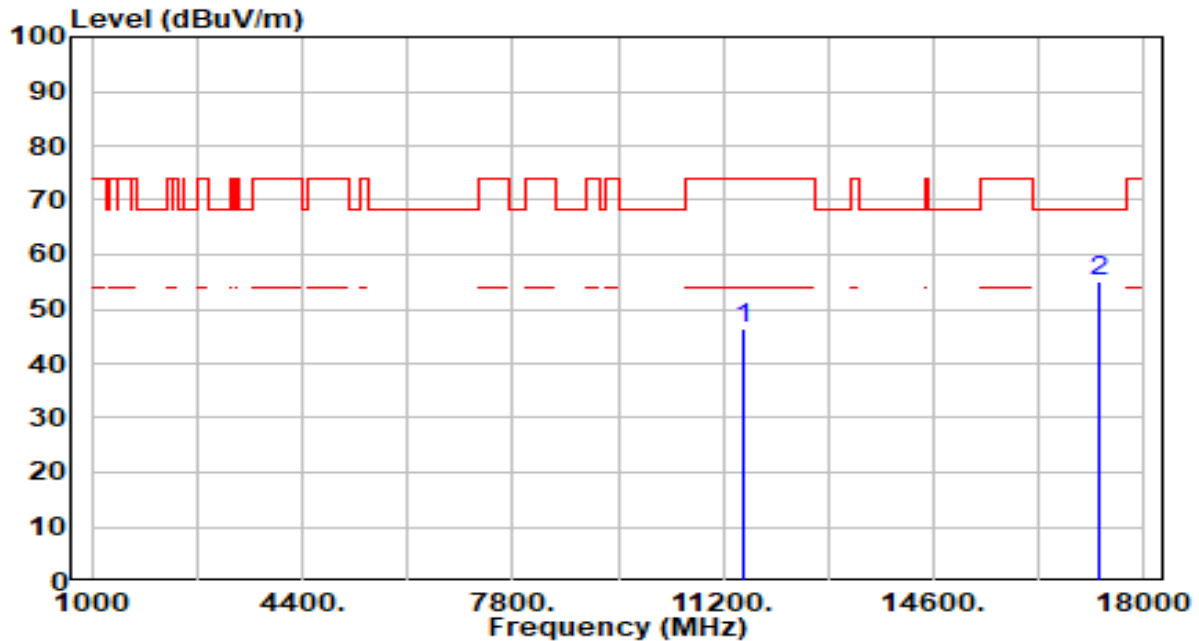


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	42.81	3.59	46.40	-27.60	74.00	100	38	Peak
2	* 17265.000	50.65	4.35	55.00	-13.20	68.20	100	329	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

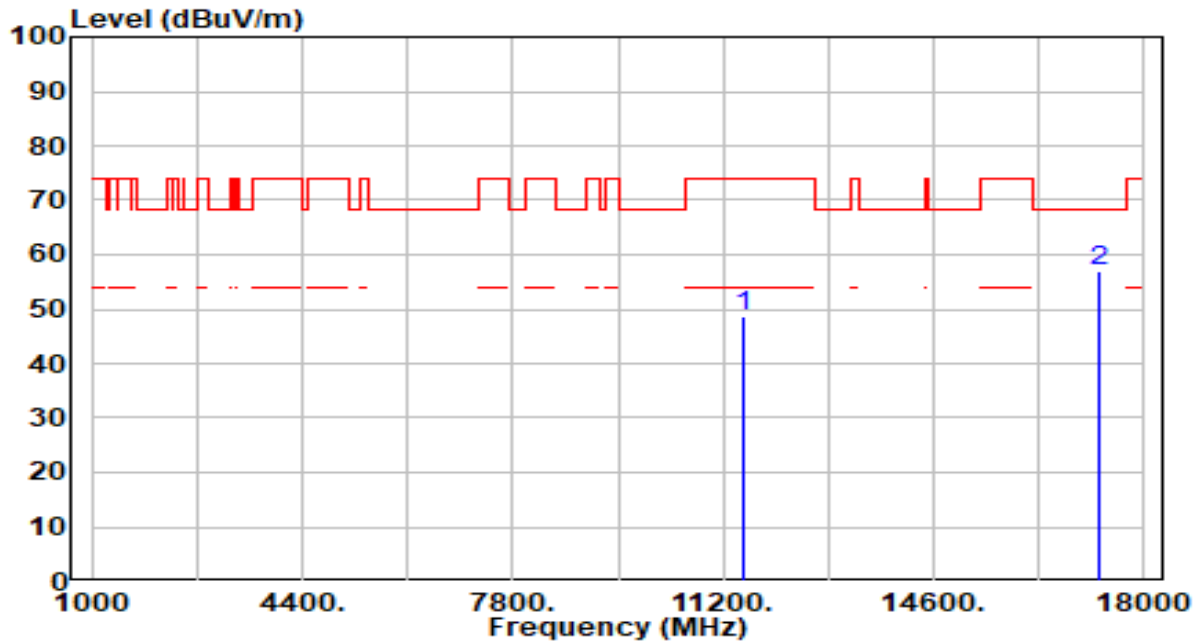


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	45.09	3.59	48.67	-25.33	74.00	200	119	Peak
2	* 17265.000	52.72	4.35	57.08	-11.12	68.20	200	333	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

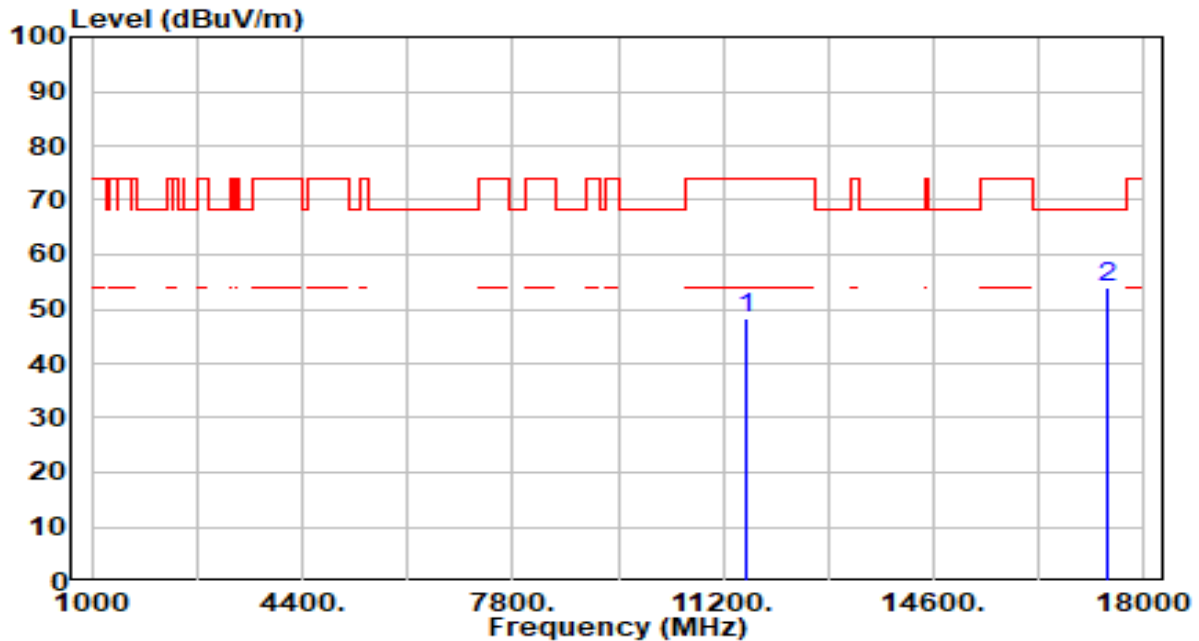


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	44.79	3.67	48.46	-25.54	74.00	100	328	Peak
2	* 17385.000	50.01	3.96	53.98	-14.22	68.20	100	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

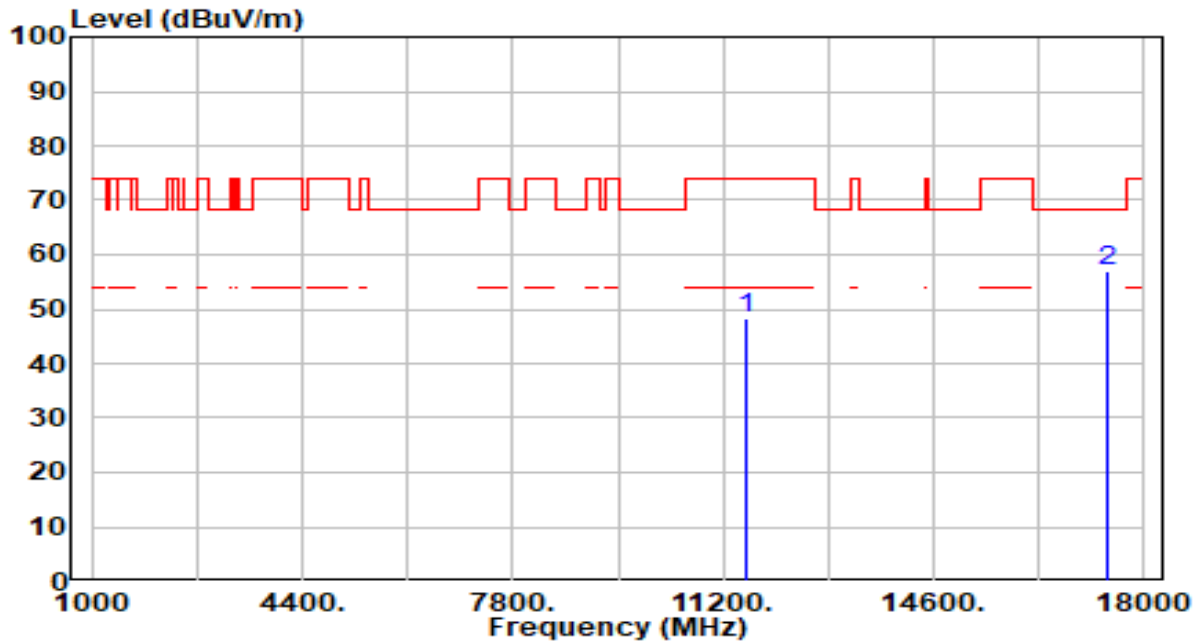


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	44.64	3.67	48.31	-25.69	74.00	200	232	Peak
2	*	17385.000	52.97	3.96	56.93	-11.27	68.20	200	153	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

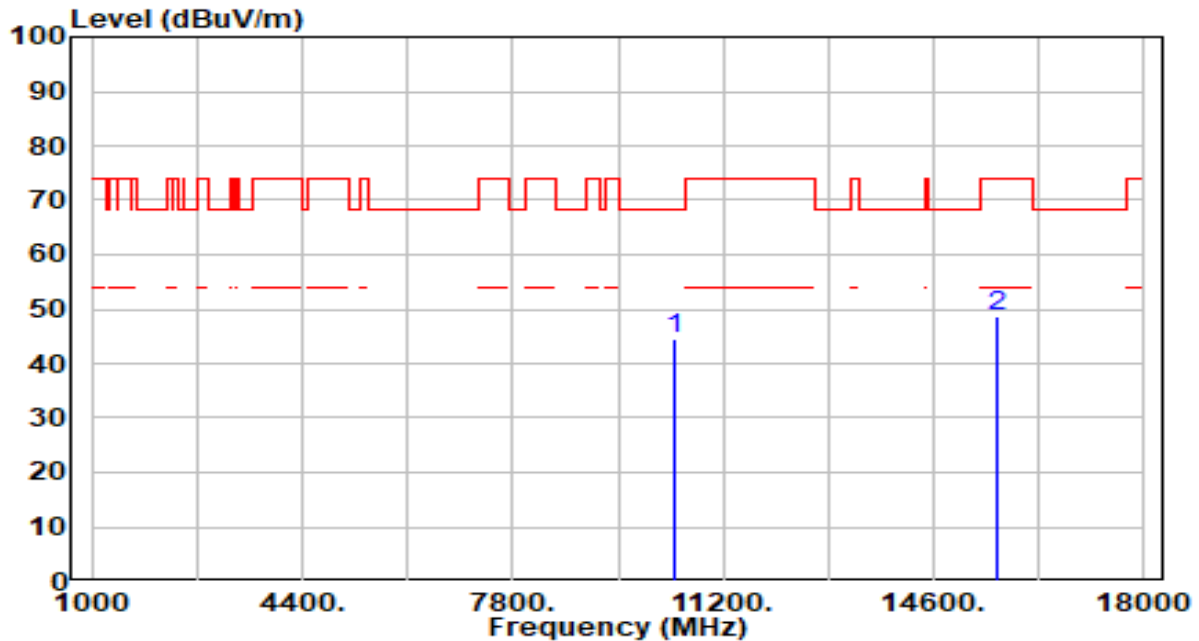


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	41.80	2.74	44.55	-23.65	68.20	100	187	Peak
2		15630.000	43.95	4.59	48.54	-25.46	74.00	100	108	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

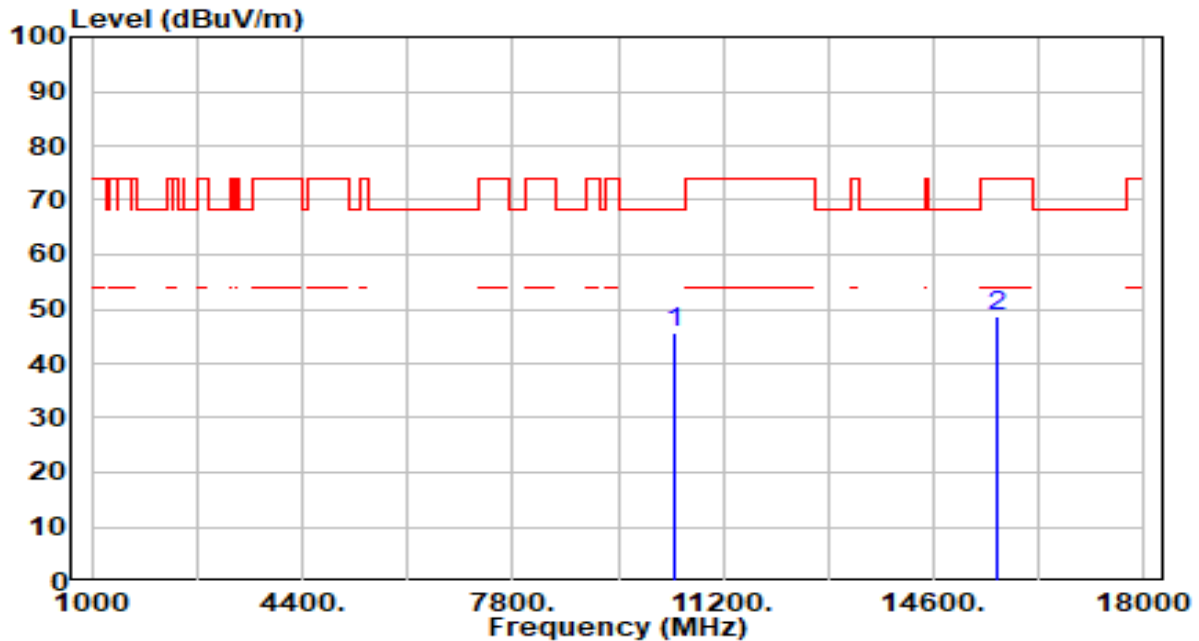


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	42.83	2.74	45.58	-22.62	68.20	200	86	Peak
2		15630.000	43.93	4.59	48.52	-25.48	74.00	200	294	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

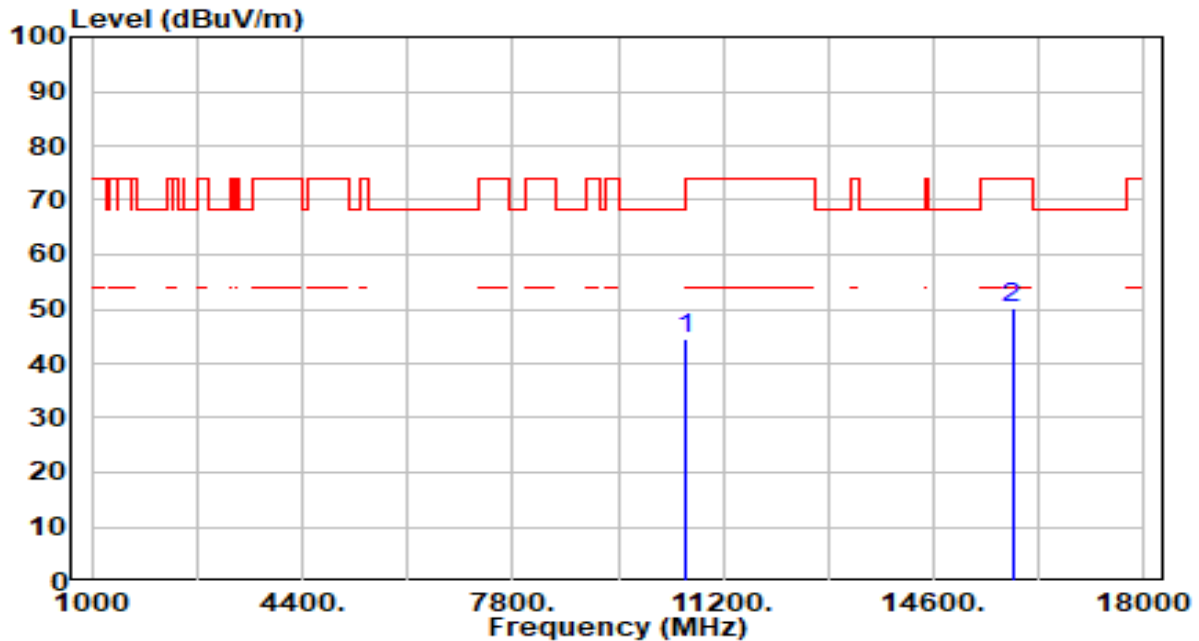


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	42.05	2.61	44.66	-23.54	68.20	100	312	Peak
2		15870.000	45.06	5.11	50.17	-23.83	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

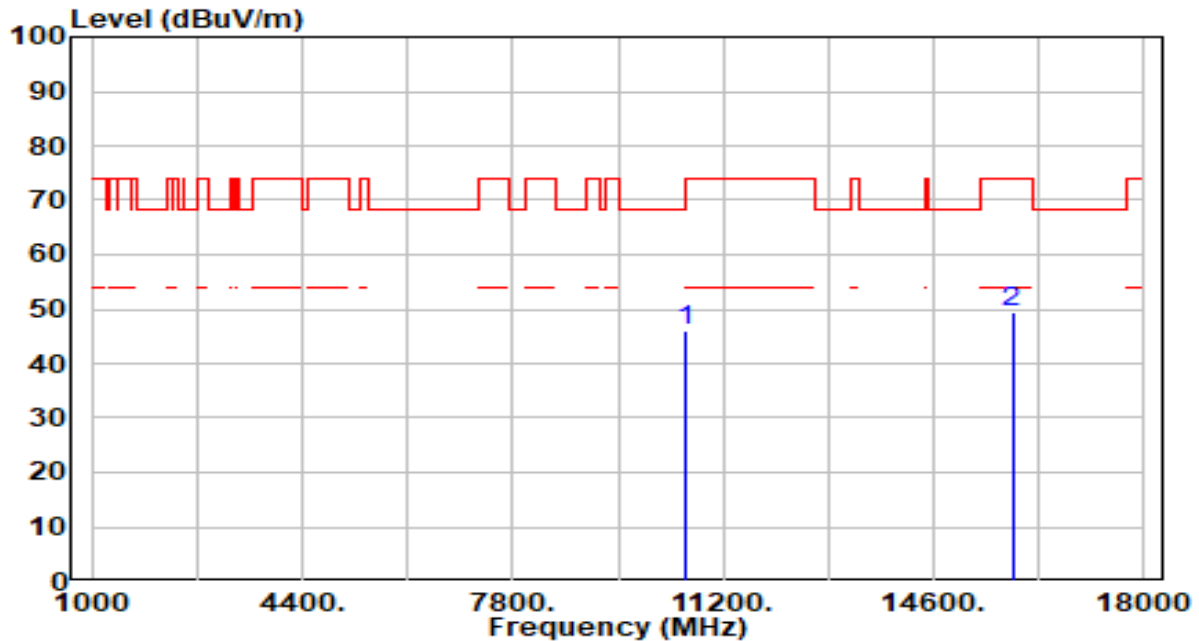


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	43.59	2.61	46.20	-22.00	68.20	200	287	Peak
2		15870.000	44.32	5.11	49.43	-24.57	74.00	200	291	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

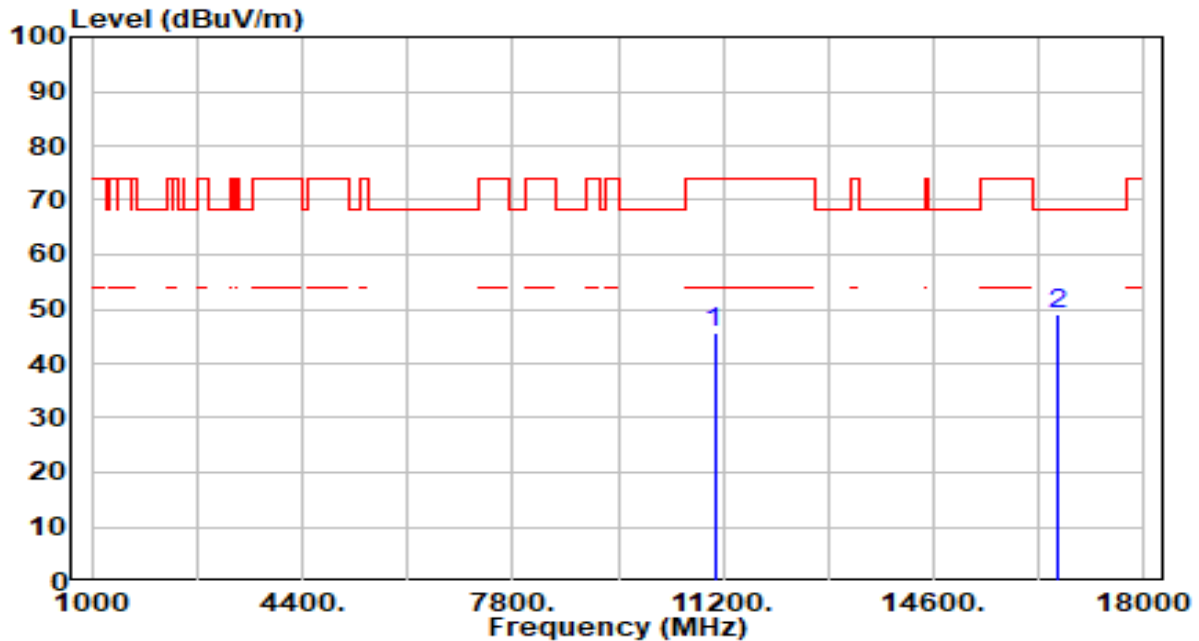


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	42.83	2.78	45.61	-28.39	74.00	100	94	Peak
2	* 16590.000	44.53	4.62	49.14	-19.06	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

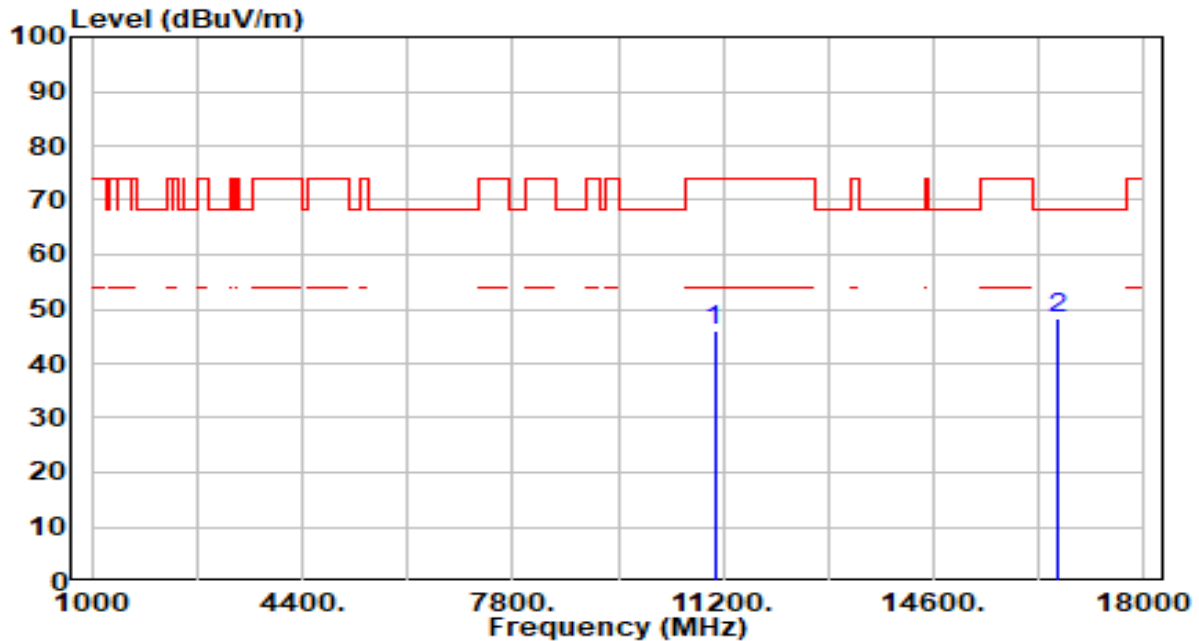


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	43.07	2.78	45.85	-28.15	74.00	200	227	Peak
2	*	16590.000	43.86	4.62	48.48	-19.72	68.20	200	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

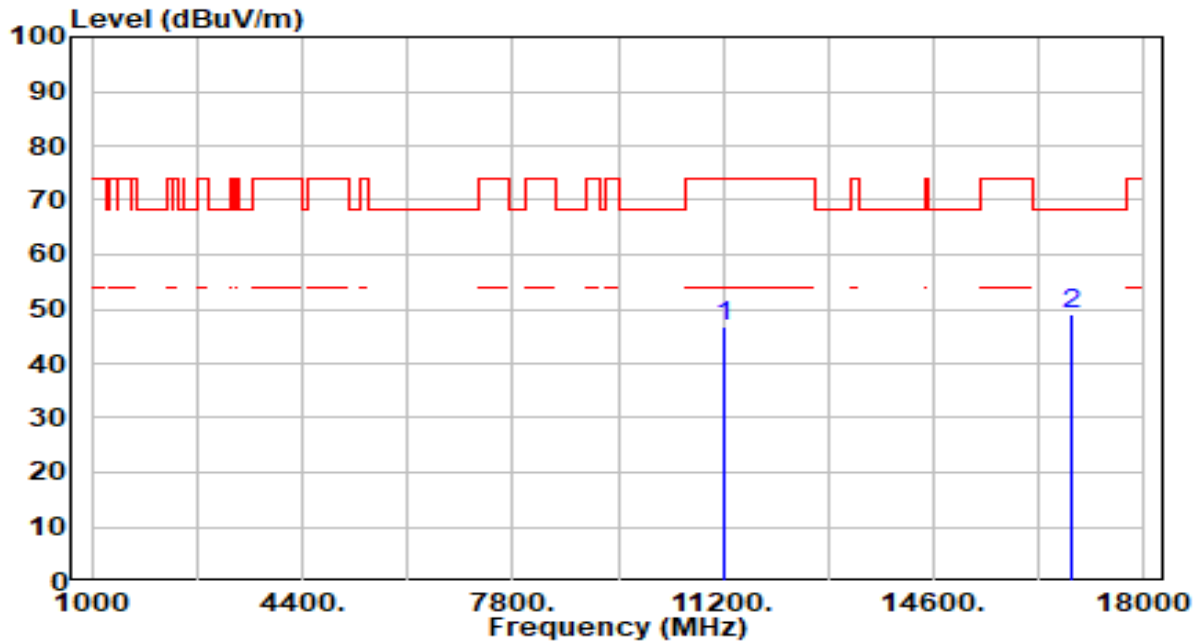


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	43.46	3.22	46.68	-27.32	74.00	100	38	Peak
2	* 16830.000	44.57	4.61	49.19	-19.01	68.20	100	133	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

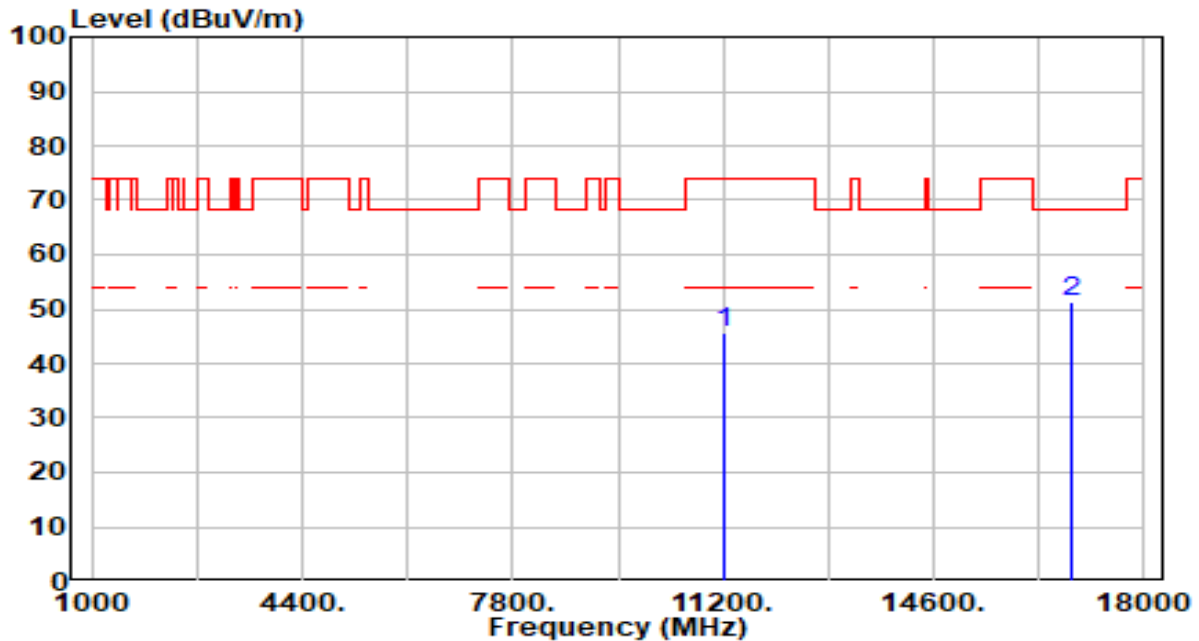


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	42.46	3.22	45.68	-28.32	74.00	200	75	Peak
2	*	16830.000	46.79	4.61	51.40	-16.80	68.20	200	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

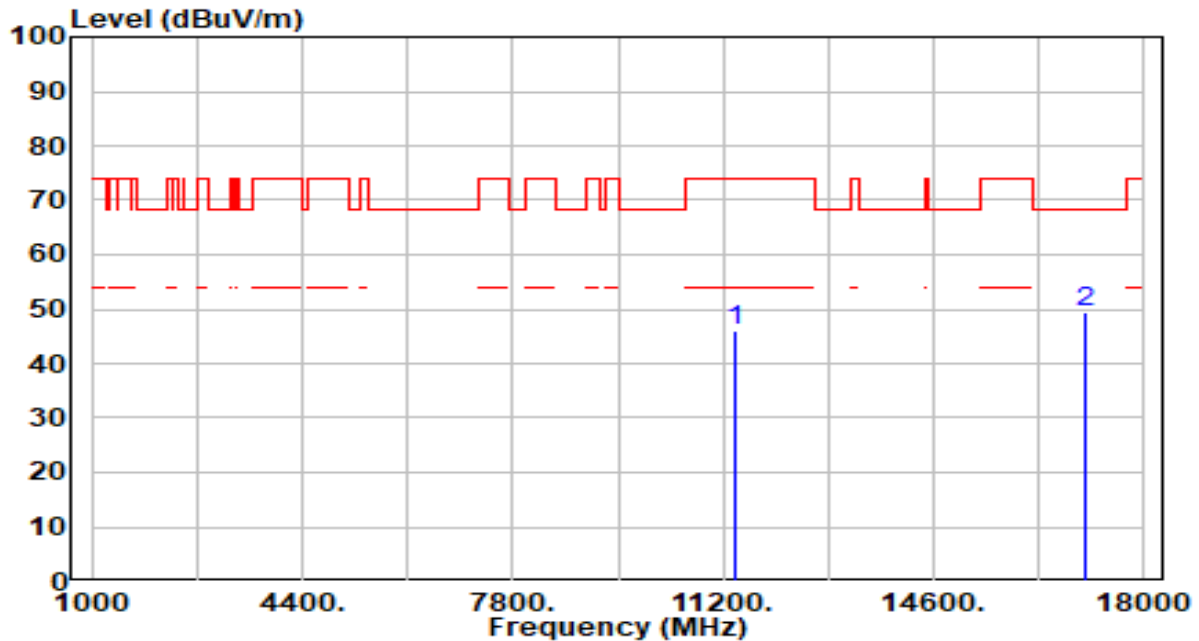


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	42.44	3.45	45.89	-28.11	74.00	100	191	Peak
2	*	17070.000	44.63	4.86	49.49	-18.71	68.20	100	26	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

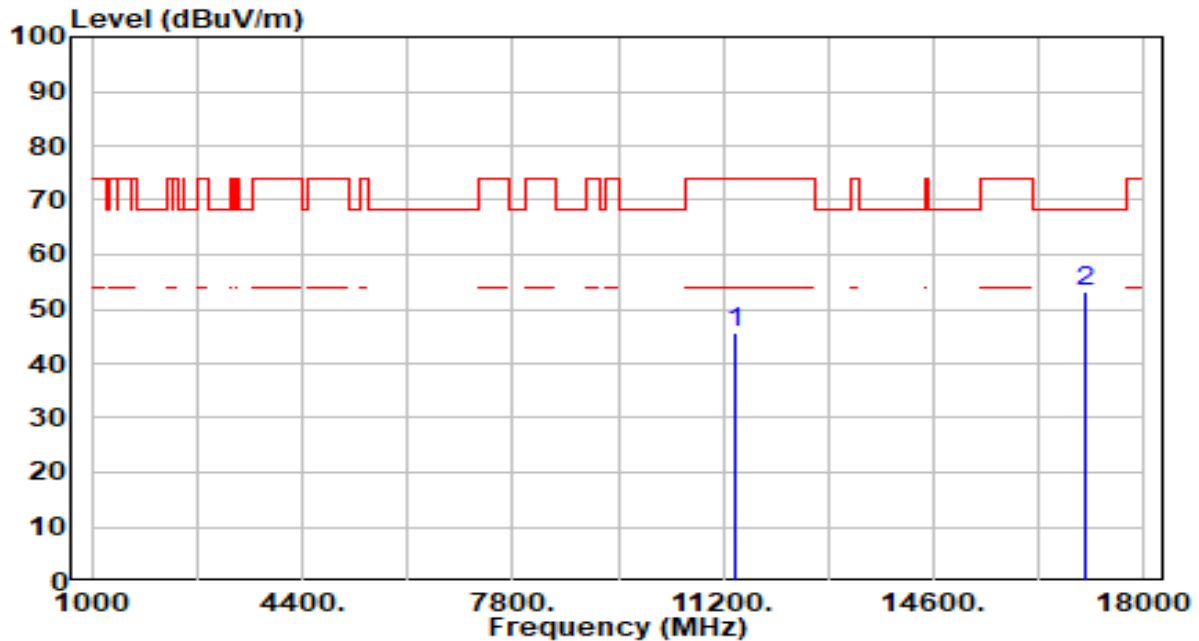


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	42.15	3.45	45.60	-28.40	74.00	200	150	Peak
2	* 17070.000	48.29	4.86	53.15	-15.05	68.20	200	338	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

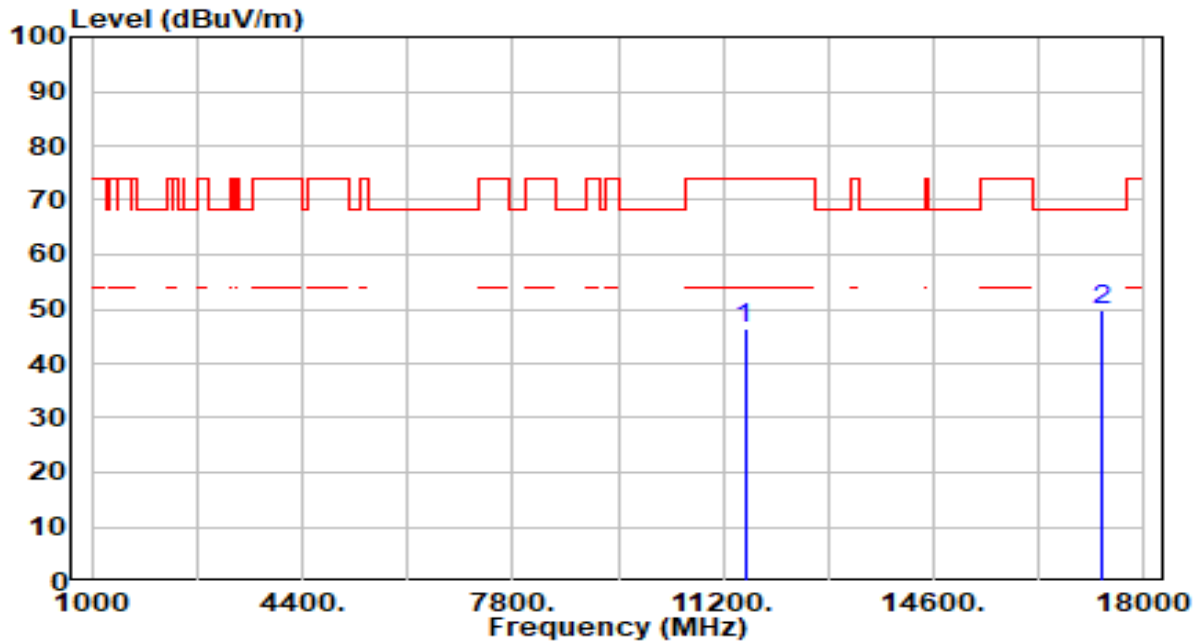


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	42.81	3.63	46.44	-27.56	74.00	100	0	Peak
2	* 17325.000	45.59	4.16	49.74	-18.46	68.20	100	334	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

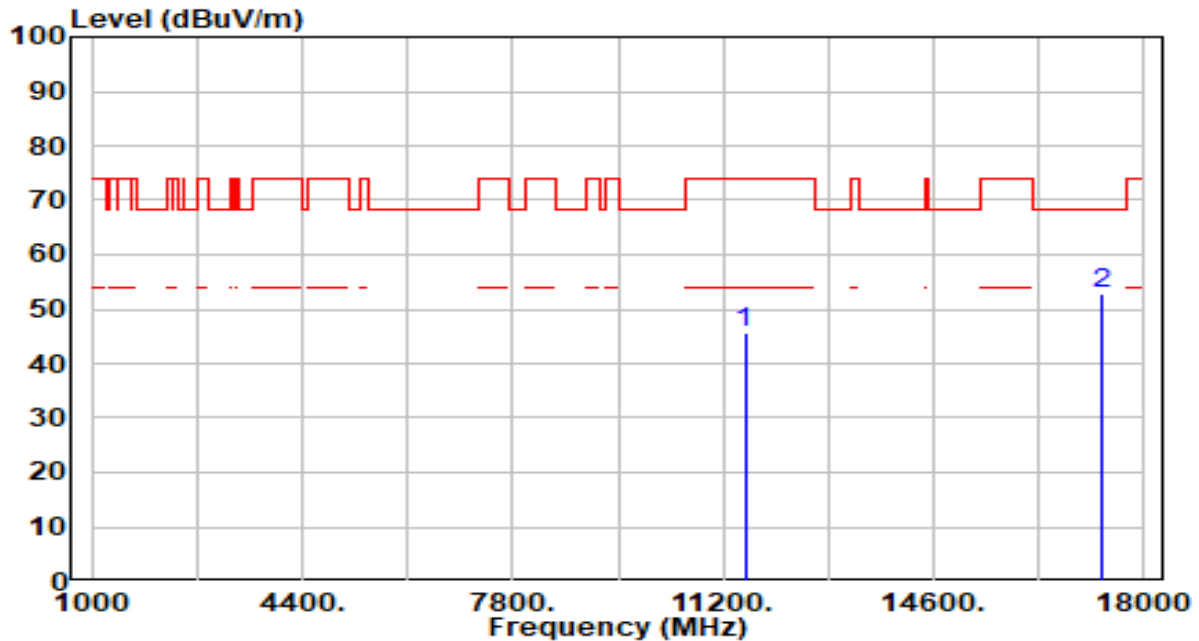


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	42.19	3.63	45.82	-28.18	74.00	200	105	Peak
2	* 17325.000	48.71	4.16	52.87	-15.33	68.20	200	266	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

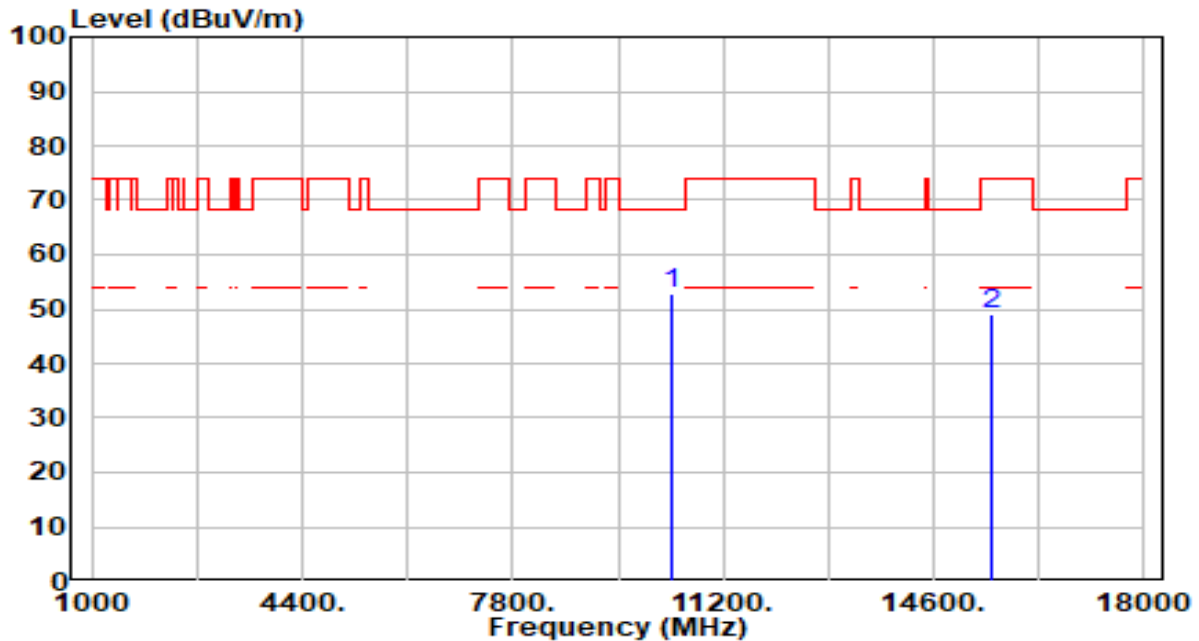


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	50.19	2.81	53.00	-15.20	68.20	100	0	Peak
2		15540.000	44.68	4.52	49.20	-24.80	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

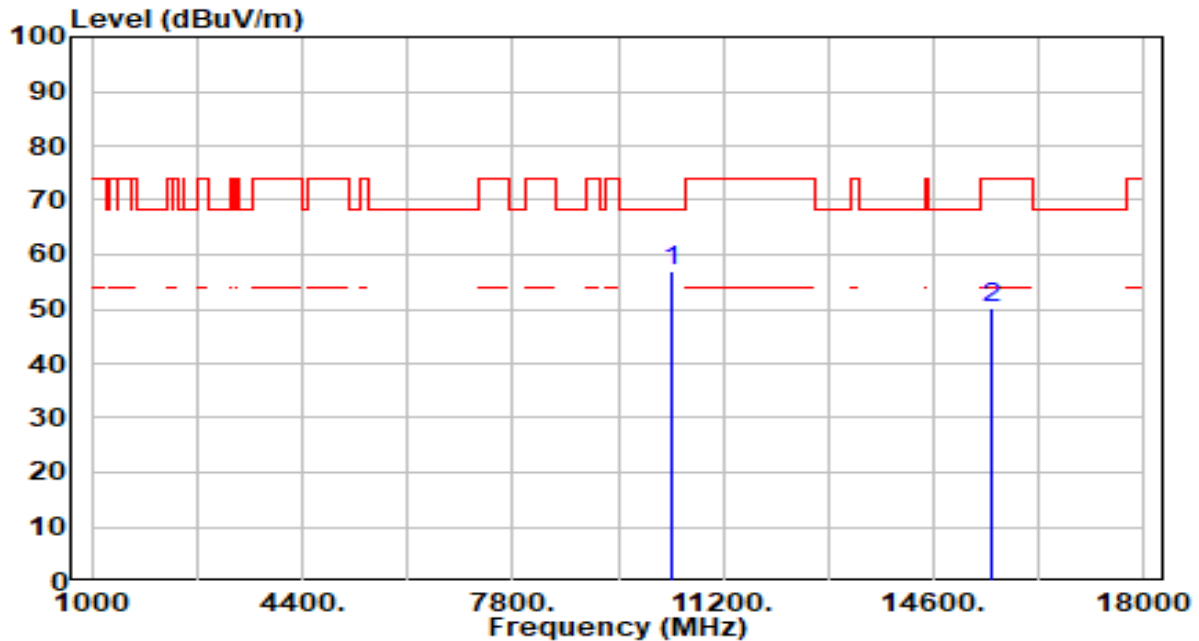


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	54.31	2.81	57.12	-11.08	68.20	200	80	Peak
2		15540.000	45.74	4.52	50.26	-23.74	74.00	200	299	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

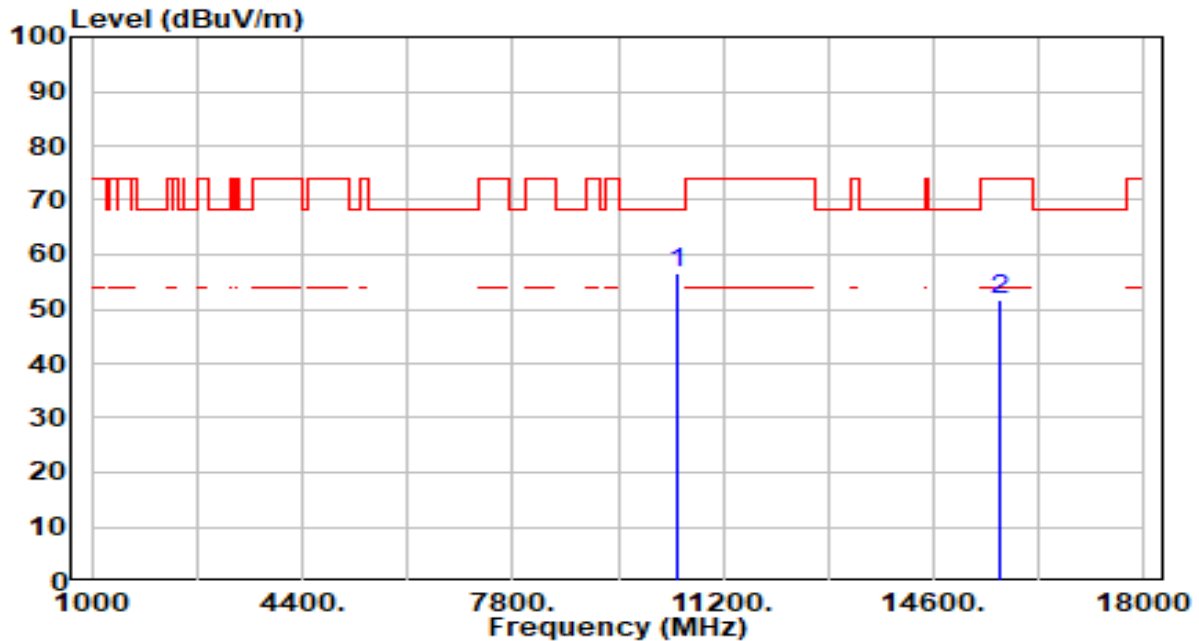


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	53.87	2.72	56.59	-11.61	68.20	100	359	Peak
2		15660.000	46.97	4.67	51.64	-22.36	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

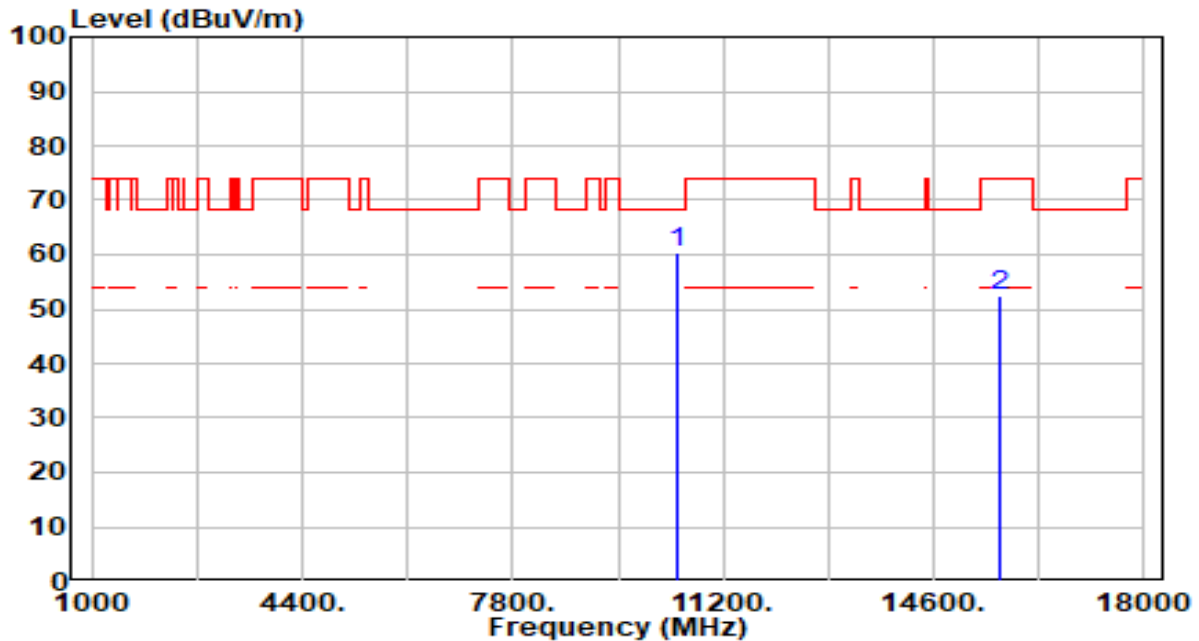


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	57.82	2.72	60.54	-7.66	68.20	200	82	Peak
2		15660.000	47.92	4.67	52.59	-21.41	74.00	200	295	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

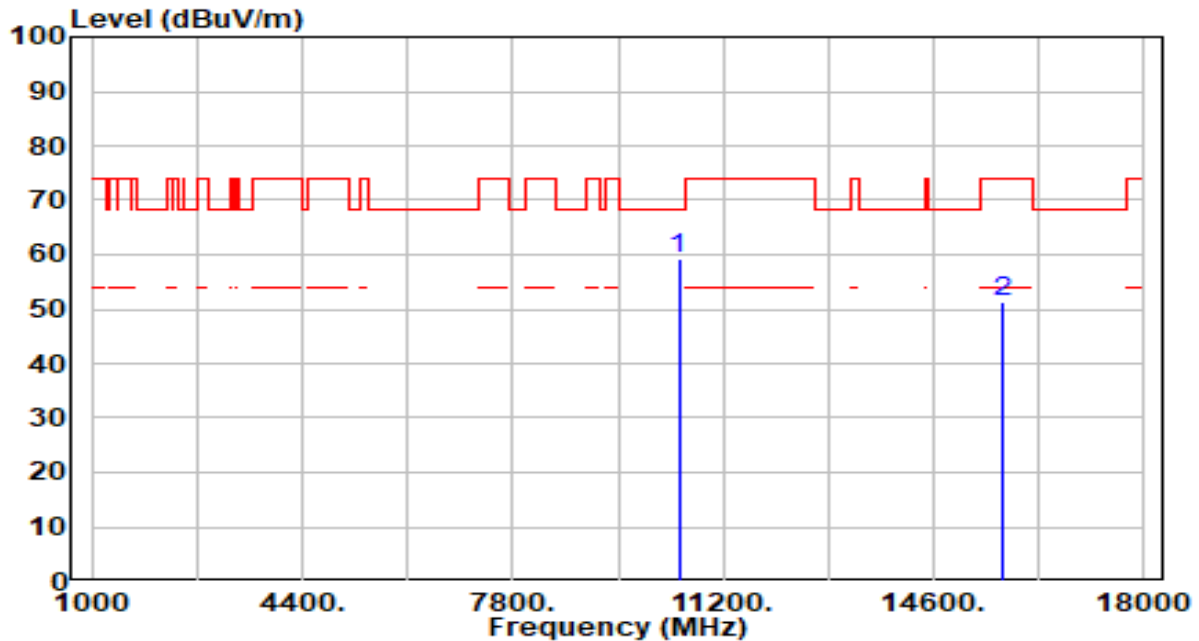


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	56.44	2.68	59.12	-9.08	68.20	100	360	Peak
2		15720.000	46.31	4.84	51.15	-22.85	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

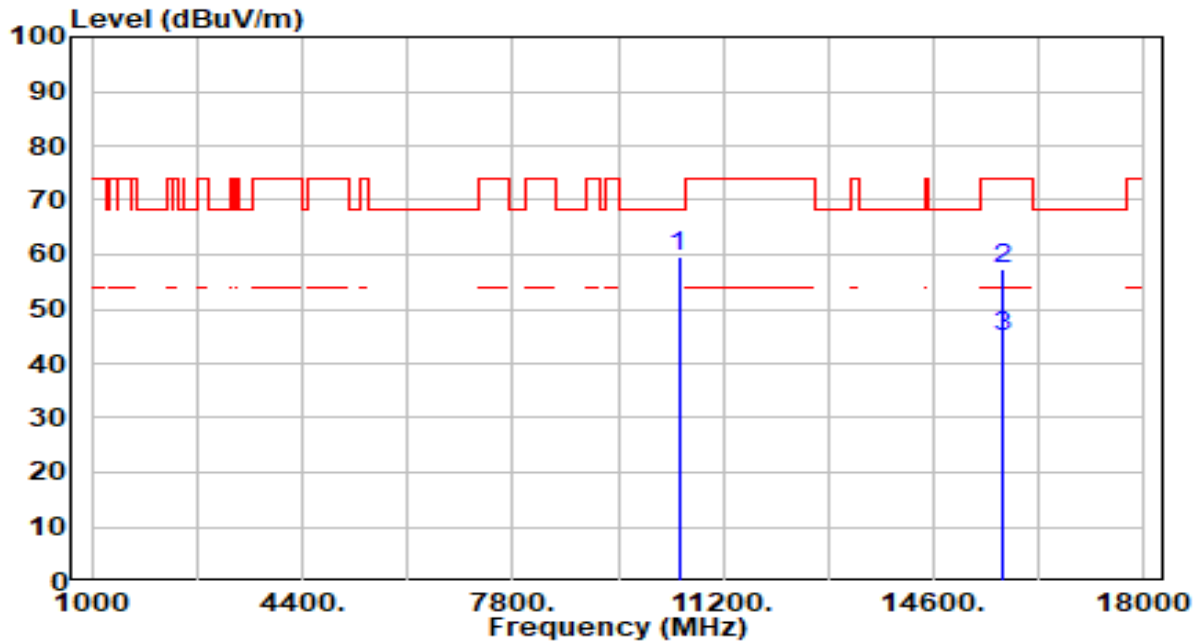


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	56.85	2.68	59.53	-8.67	68.20	200	82	Peak
2		15720.000	52.45	4.84	57.29	-16.71	74.00	170	299	Peak
3	*	15720.000	40.13	4.84	44.97	-9.03	54.00	170	299	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

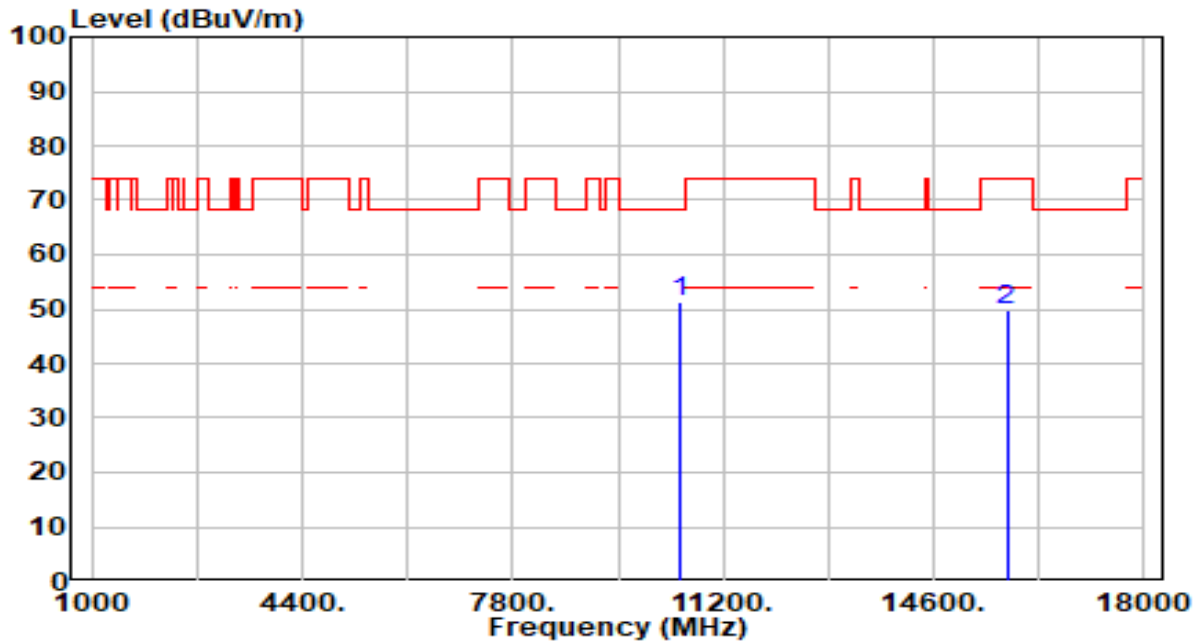


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	48.82	2.64	51.47	-16.73	68.20	100	3	Peak
2		15780.000	44.90	5.00	49.90	-24.10	74.00	100	249	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

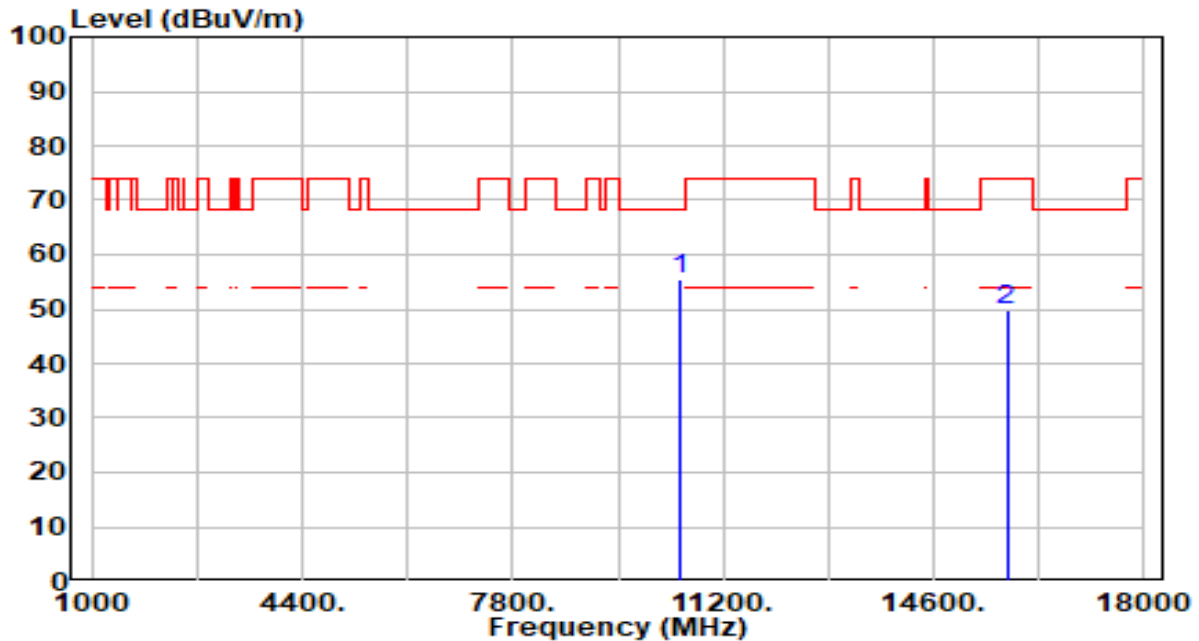


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	52.72	2.64	55.36	-12.84	68.20	200	83	Peak
2		15780.000	44.82	5.00	49.81	-24.19	74.00	200	299	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

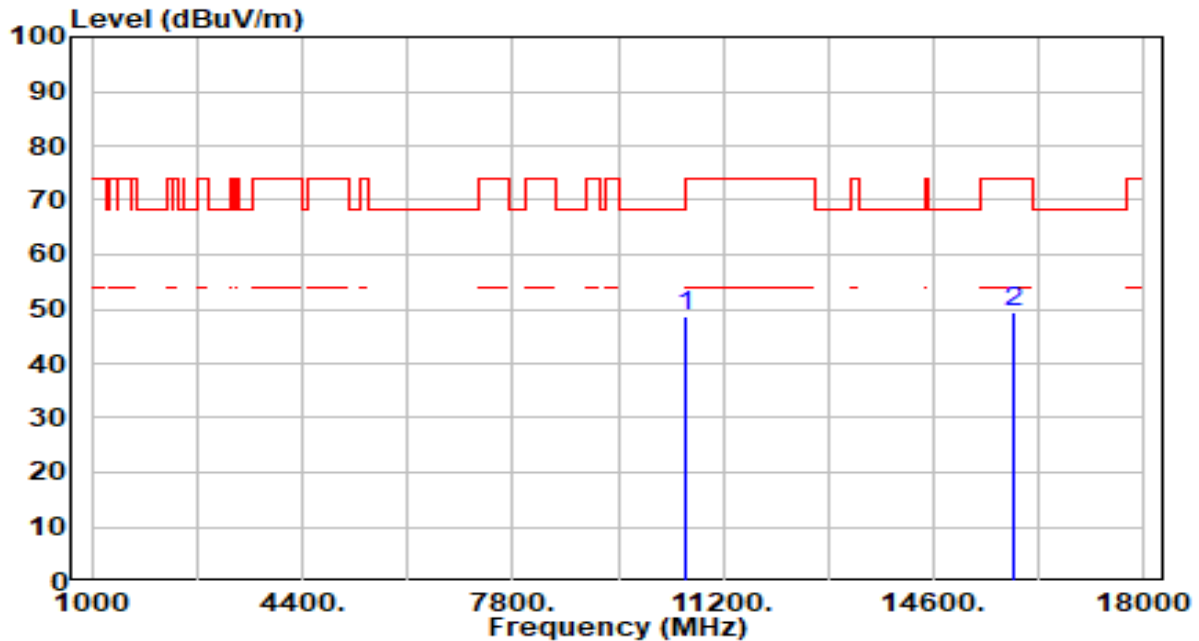


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	46.22	2.60	48.83	-19.37	68.20	100	360	Peak
2		15900.000	44.34	5.13	49.47	-24.53	74.00	100	112	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

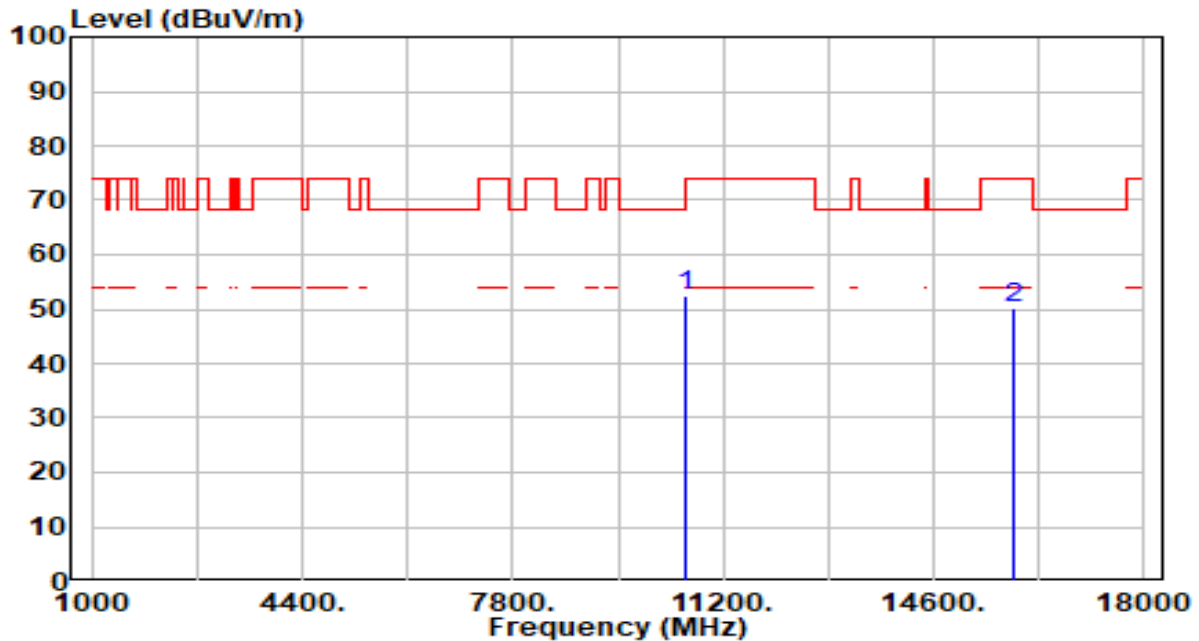


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	49.92	2.60	52.52	-15.68	68.20	200	80	Peak
2		15900.000	45.14	5.13	50.27	-23.73	74.00	200	341	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

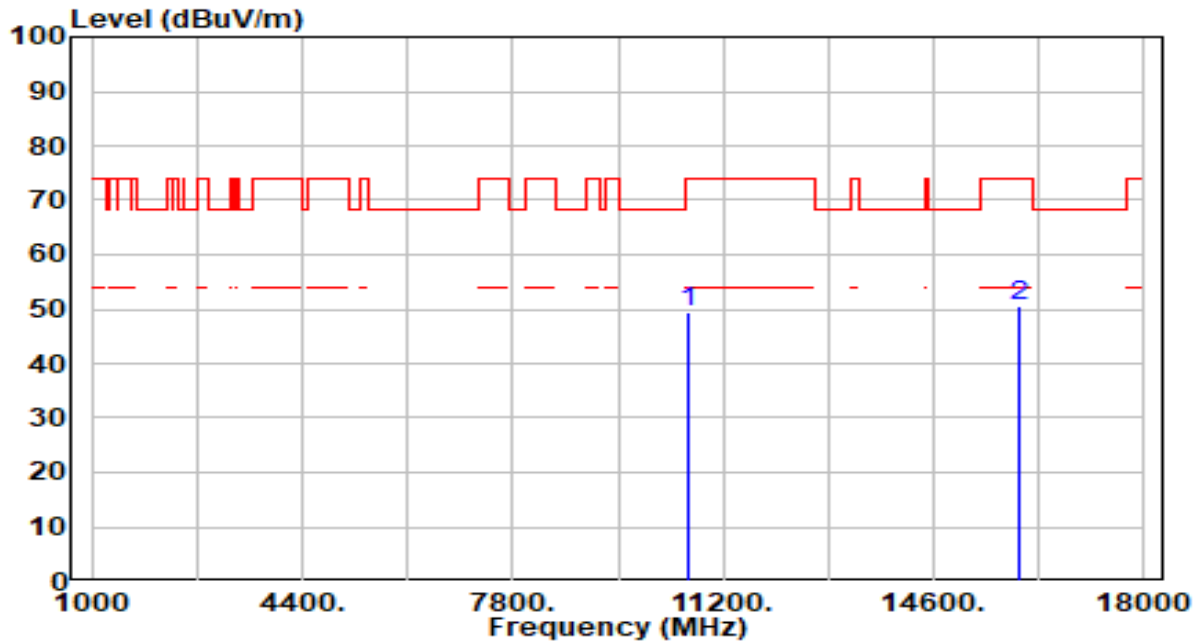


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	46.98	2.62	49.60	-24.40	74.00	100	359	Peak
2	*	15960.000	45.22	5.17	50.39	-23.61	74.00	100	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

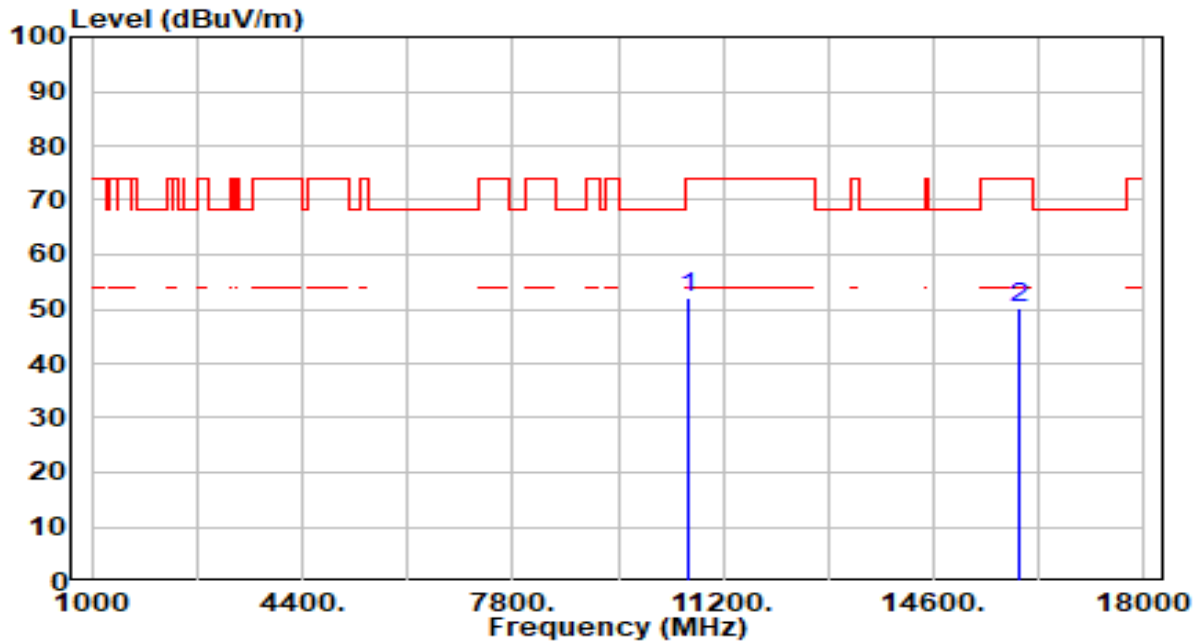


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10640.000	49.34	2.62	51.96	-22.04	74.00	200	304	Peak
2		15960.000	45.17	5.17	50.34	-23.66	74.00	200	33	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

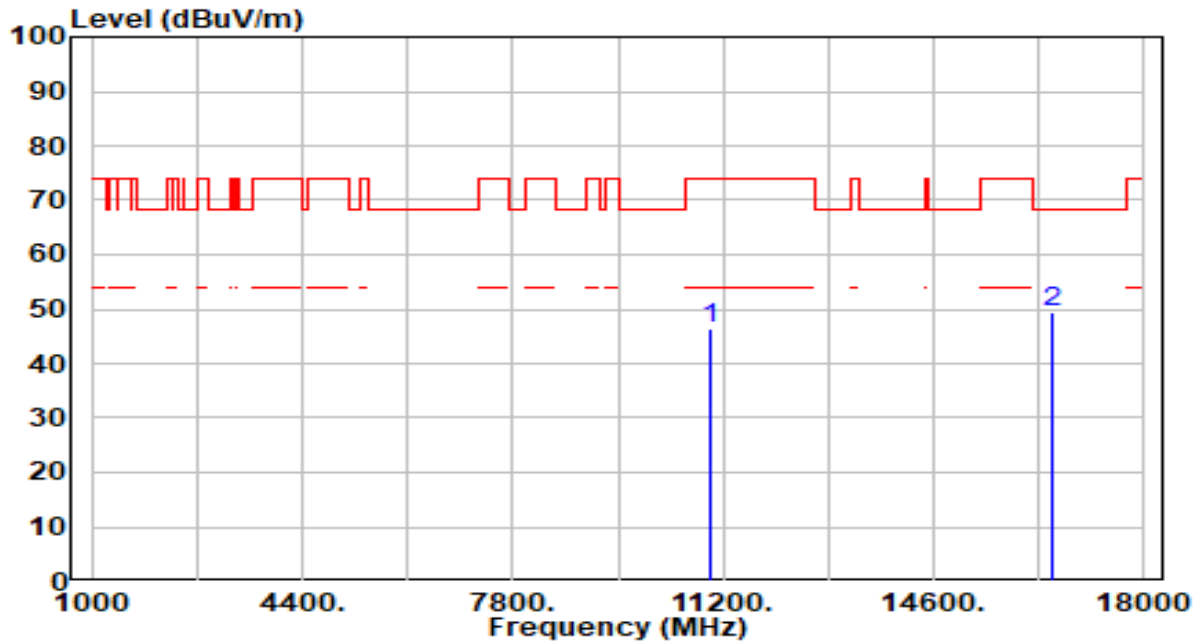


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	43.80	2.60	46.40	-27.60	74.00	100	159	Peak
2	*	16500.000	44.76	4.63	49.39	-18.81	68.20	100	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

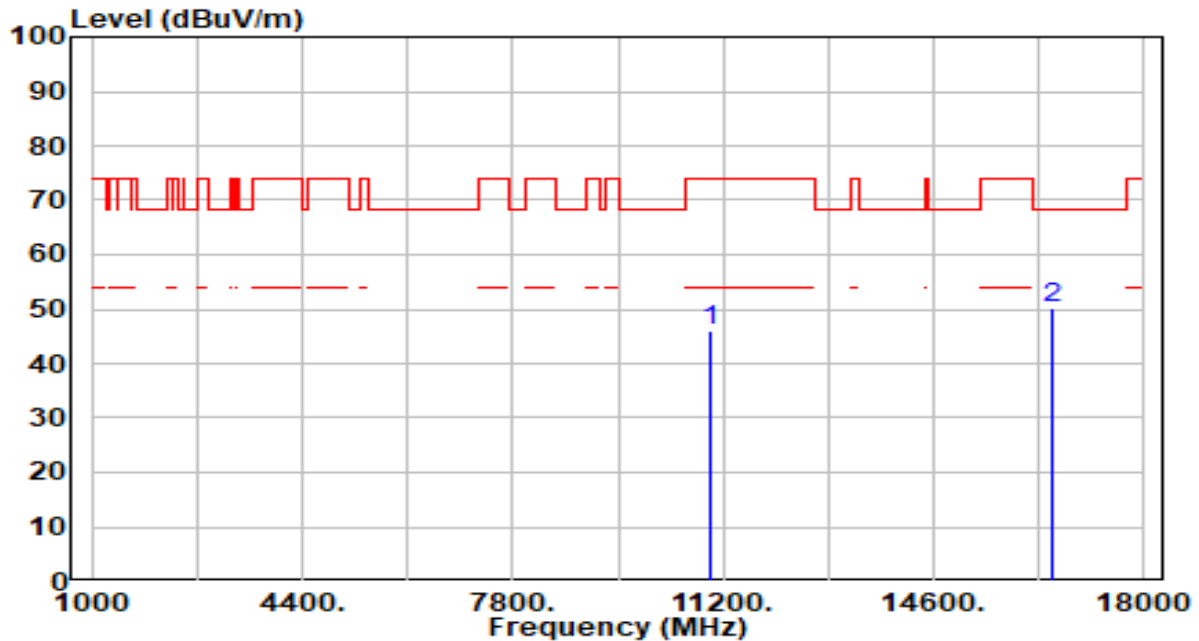


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	43.42	2.60	46.02	-27.98	74.00	200	84	Peak
2	* 16500.000	45.49	4.63	50.12	-18.08	68.20	200	237	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

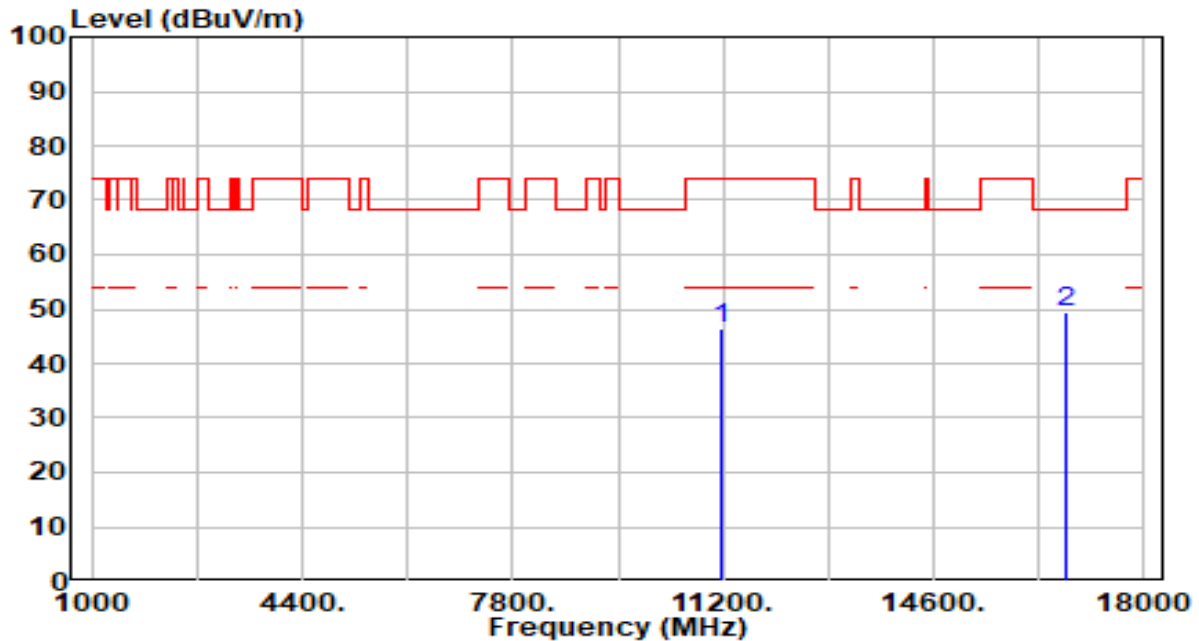


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	43.45	3.07	46.53	-27.47	74.00	100	52	Peak
2	* 16740.000	44.77	4.66	49.43	-18.77	68.20	100	24	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

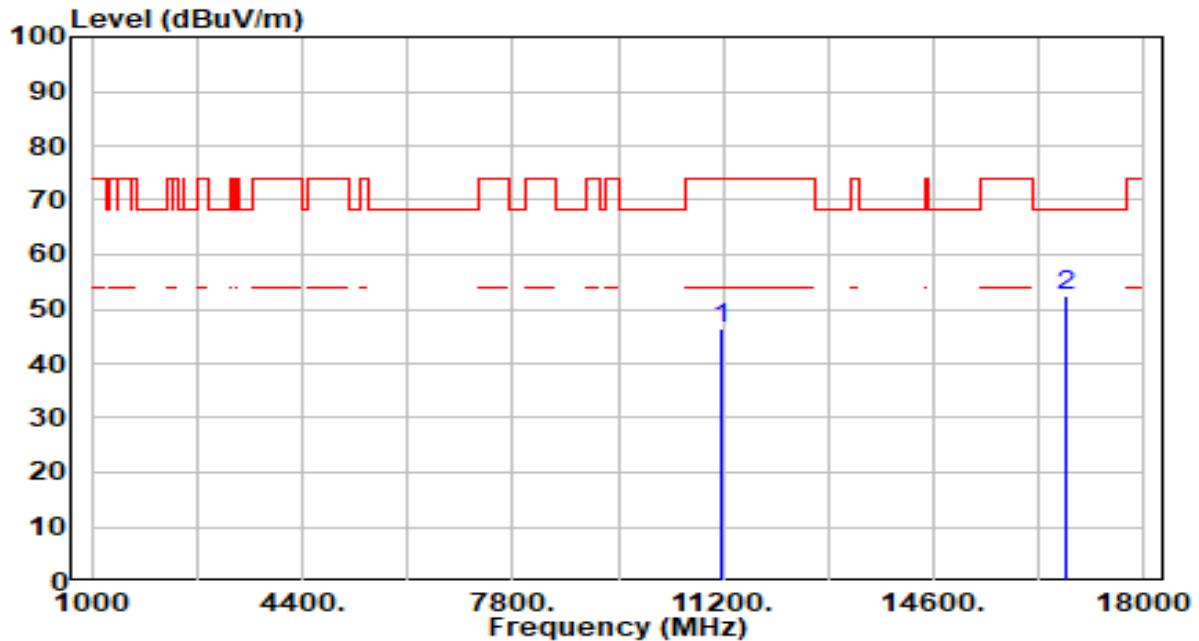


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	43.34	3.07	46.41	-27.59	74.00	200	90	Peak
2	*	16740.000	47.85	4.66	52.51	-15.69	68.20	200	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

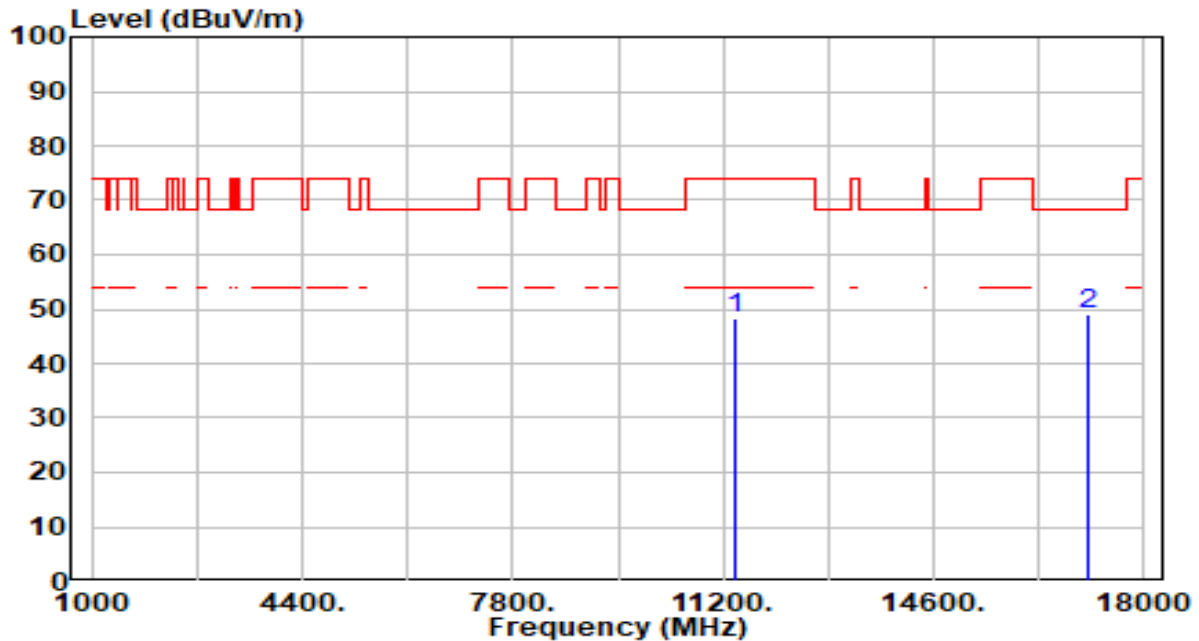


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	44.94	3.48	48.42	-25.58	74.00	100	222	Peak
2	* 17100.000	44.18	4.79	48.97	-19.23	68.20	100	238	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

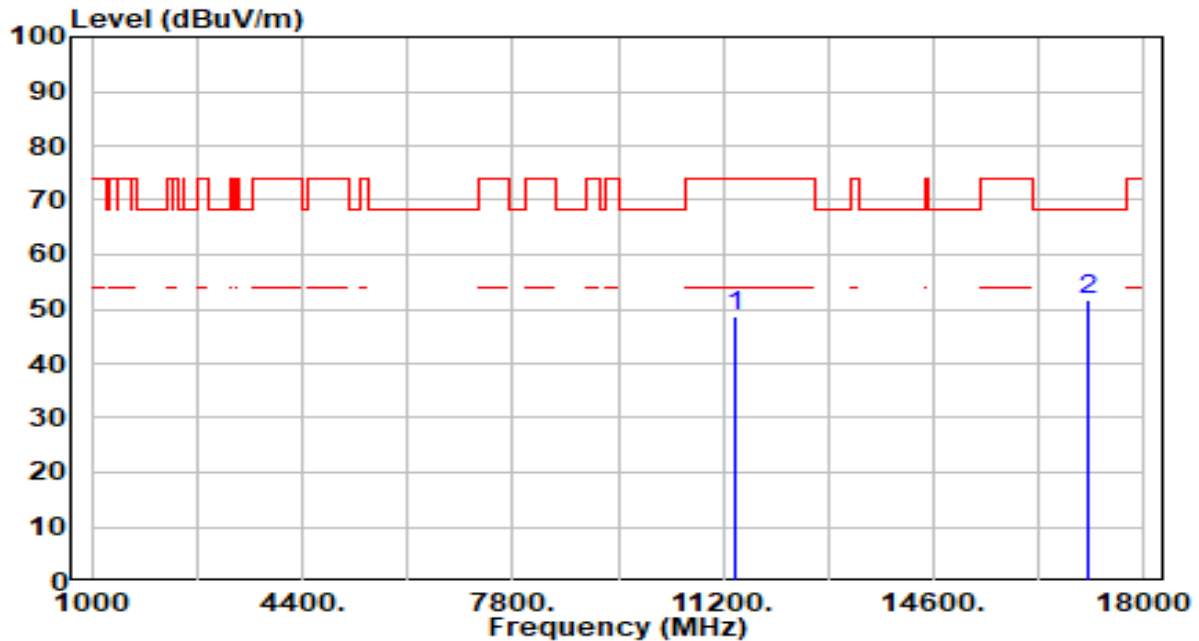


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	45.10	3.48	48.58	-25.42	74.00	200	244	Peak
2	* 17100.000	46.72	4.79	51.51	-16.69	68.20	200	289	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

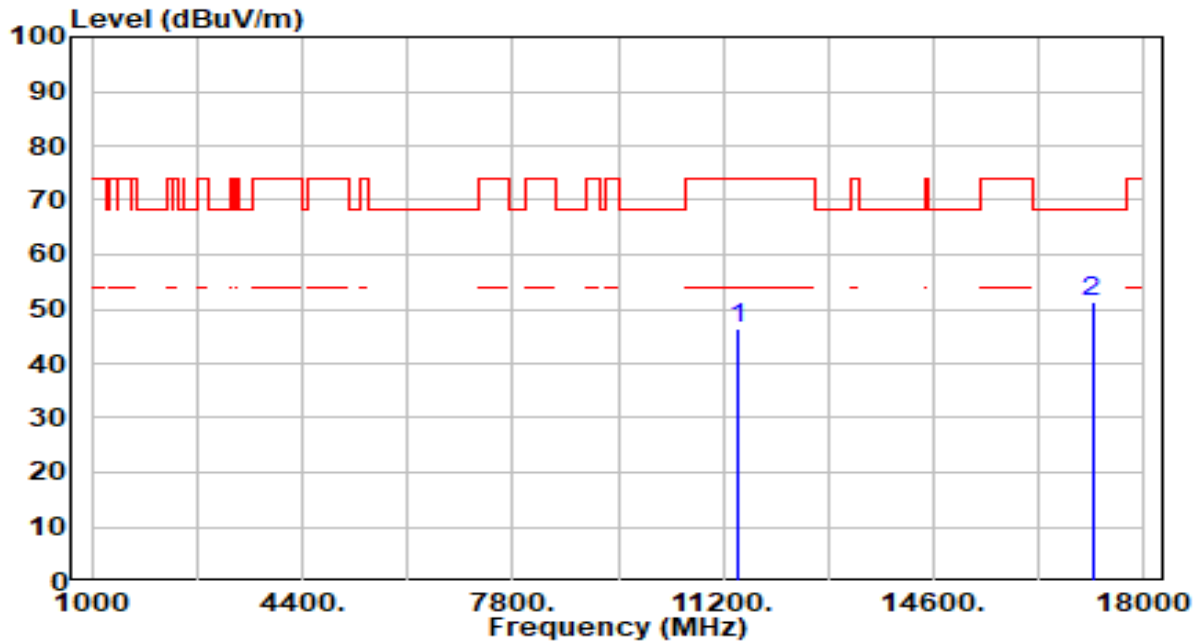


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	42.76	3.52	46.28	-27.72	74.00	100	219	Peak
2	* 17160.000	46.83	4.66	51.49	-16.71	68.20	100	343	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

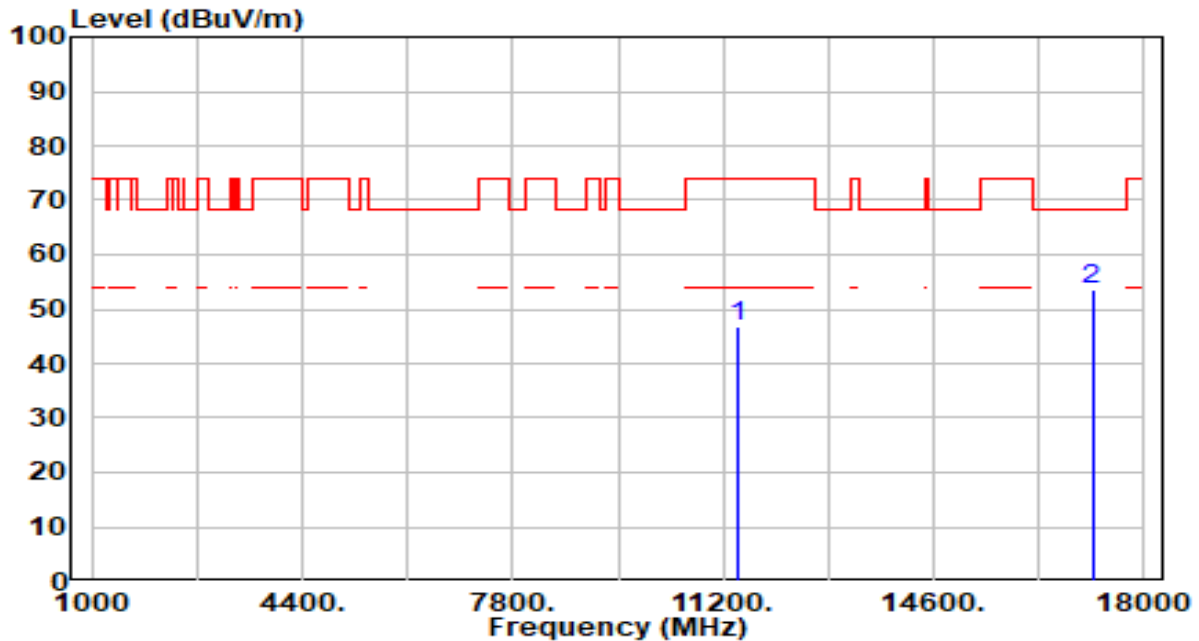


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	43.21	3.52	46.73	-27.27	74.00	200	24	Peak
2	* 17160.000	48.93	4.66	53.58	-14.62	68.20	200	233	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

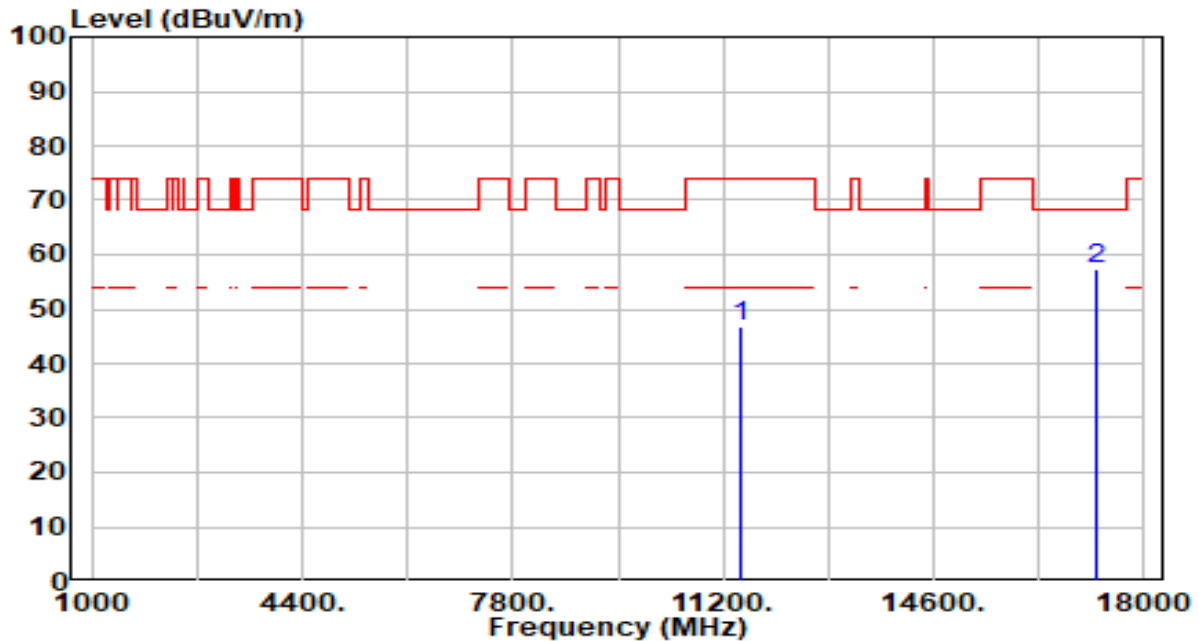


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	43.38	3.57	46.94	-27.06	74.00	100	360	Peak
2	*	17235.000	52.84	4.45	57.29	-10.91	68.20	100	344	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

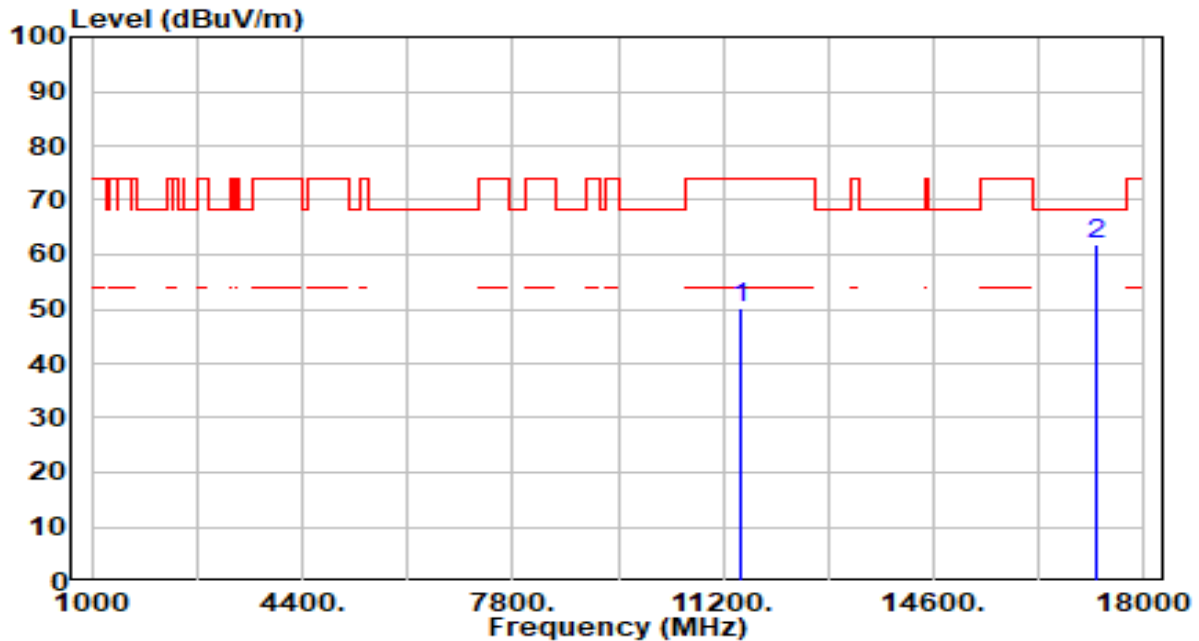


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	46.45	3.57	50.01	-23.99	74.00	200	245	Peak
2	* 17235.000	57.46	4.45	61.91	-6.29	68.20	200	357	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

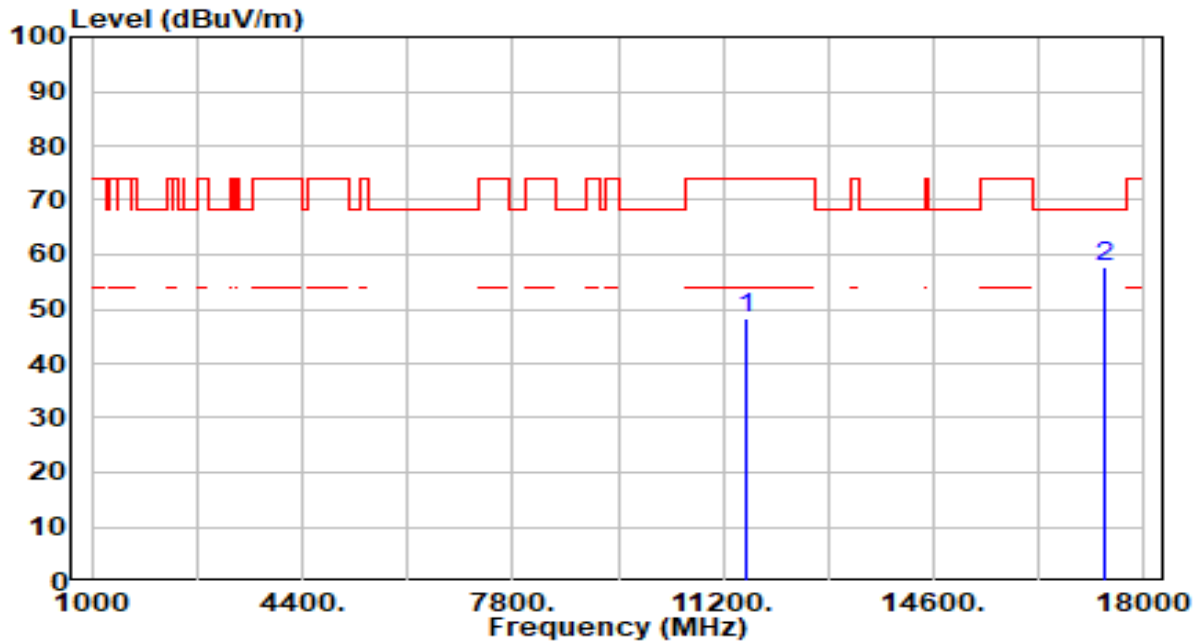


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	44.70	3.65	48.35	-25.65	74.00	100	326	Peak
2	* 17355.000	53.59	4.06	57.65	-10.55	68.20	100	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

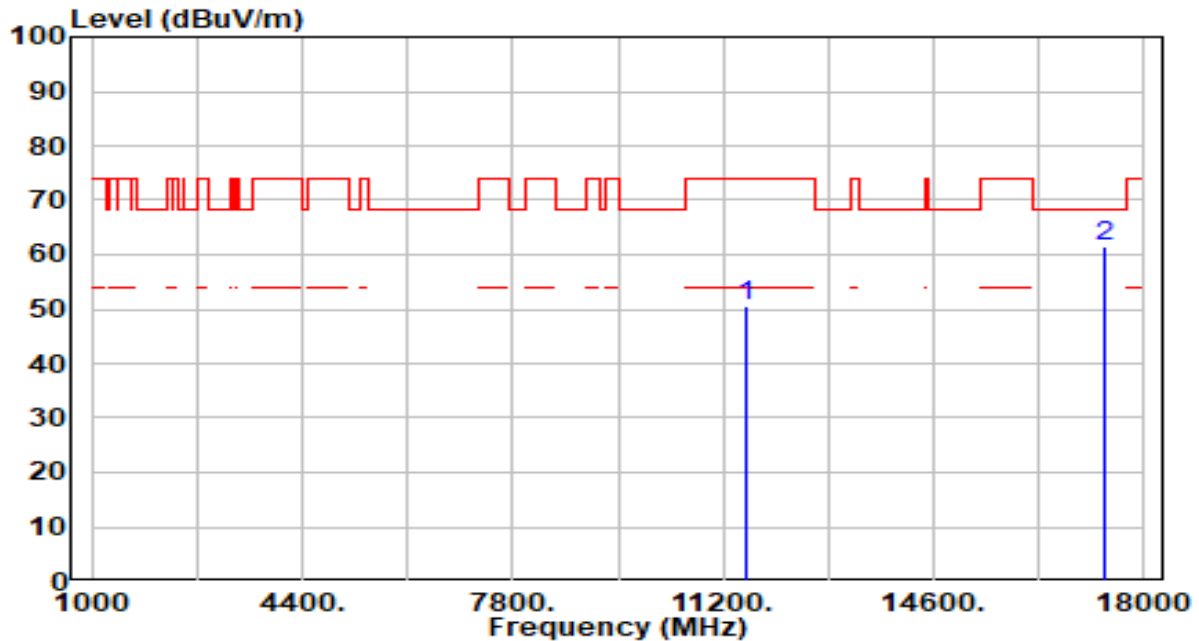


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	46.84	3.65	50.49	-23.51	74.00	200	245	Peak
2	* 17355.000	57.49	4.06	61.55	-6.65	68.20	200	66	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

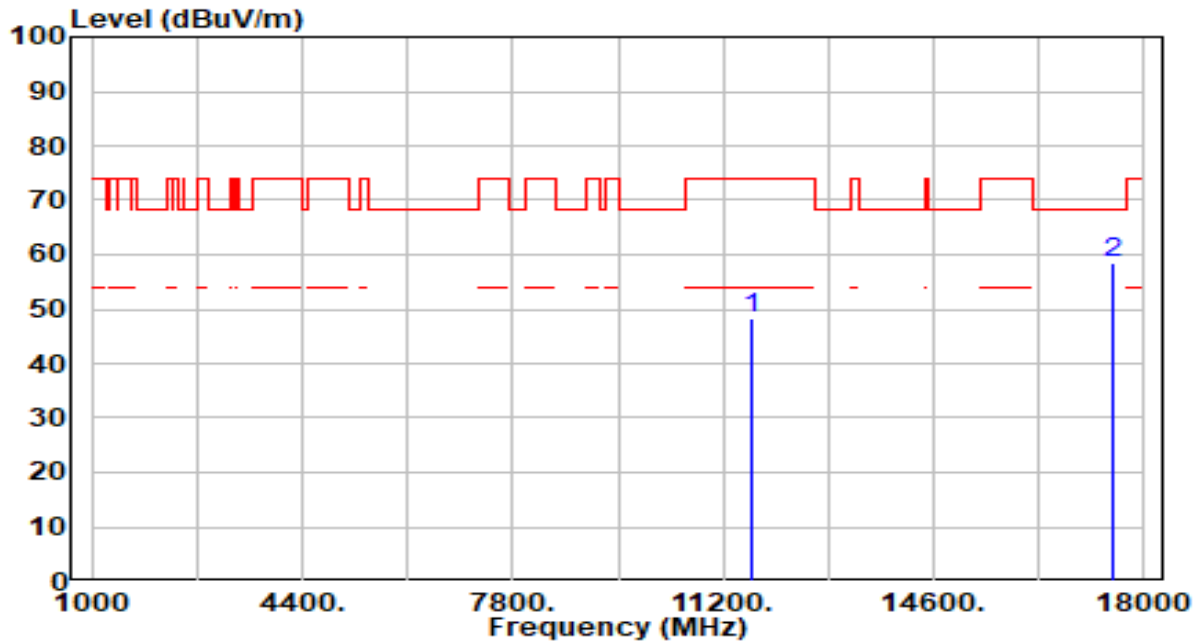


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	44.81	3.66	48.47	-25.53	74.00	100	332	Peak
2	* 17475.000	54.48	3.89	58.37	-9.83	68.20	100	224	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

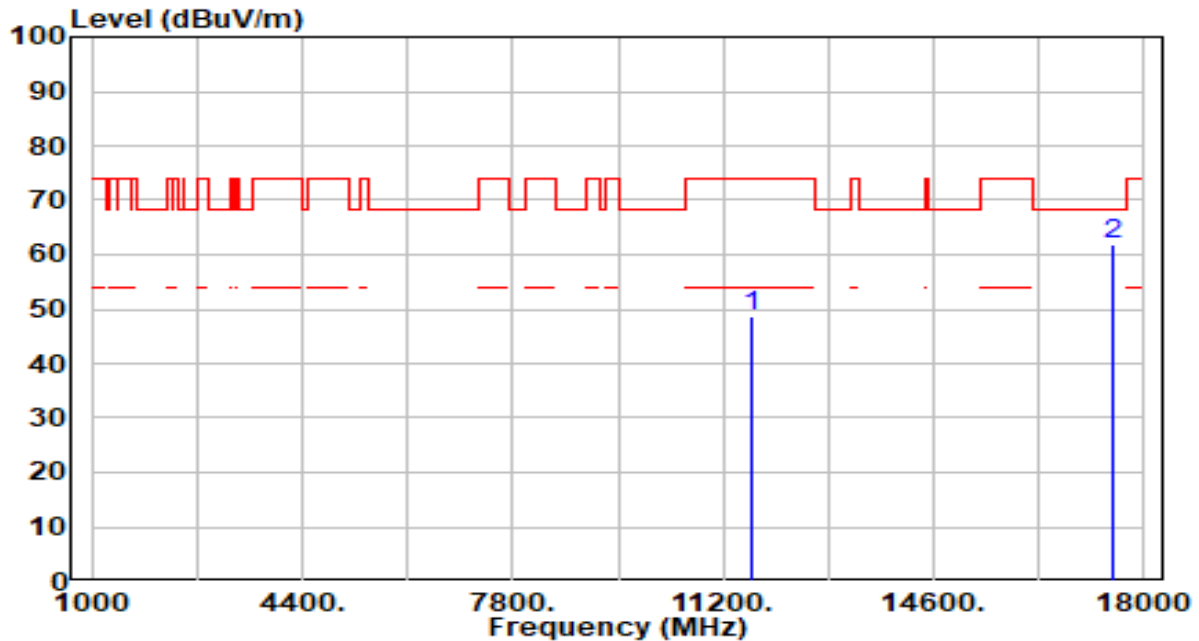


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	45.05	3.66	48.71	-25.29	74.00	200	260	Peak
2	* 17475.000	57.96	3.89	61.85	-6.35	68.20	200	31	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

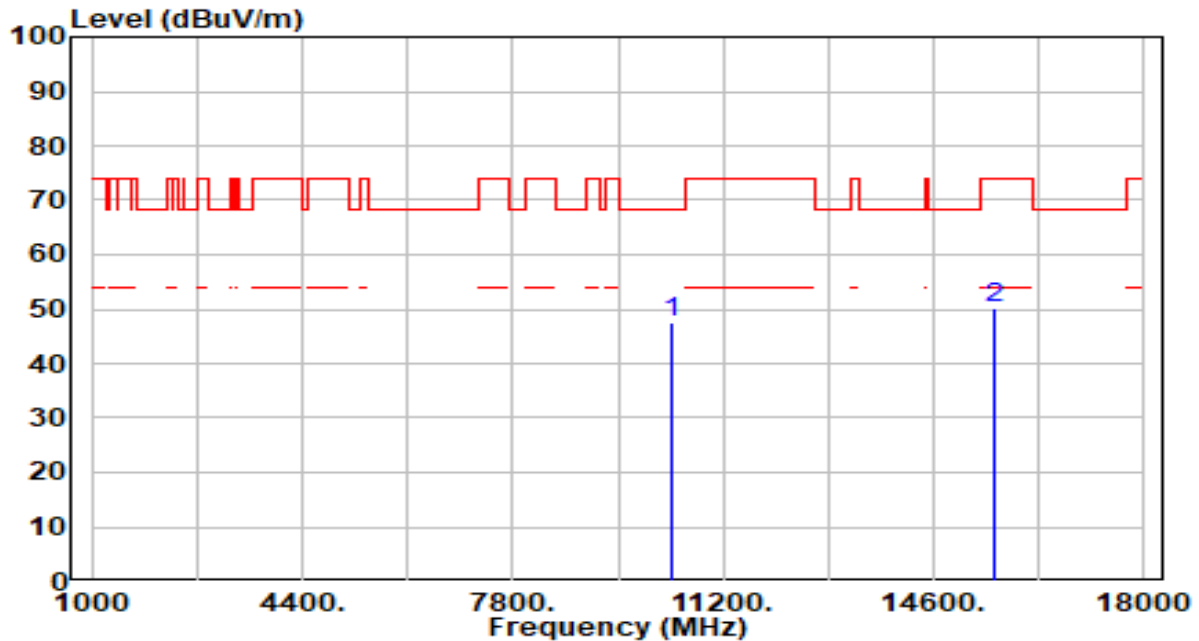


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	44.82	2.79	47.61	-20.59	68.20	100	0	Peak
2		15570.000	45.53	4.52	50.04	-23.96	74.00	100	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

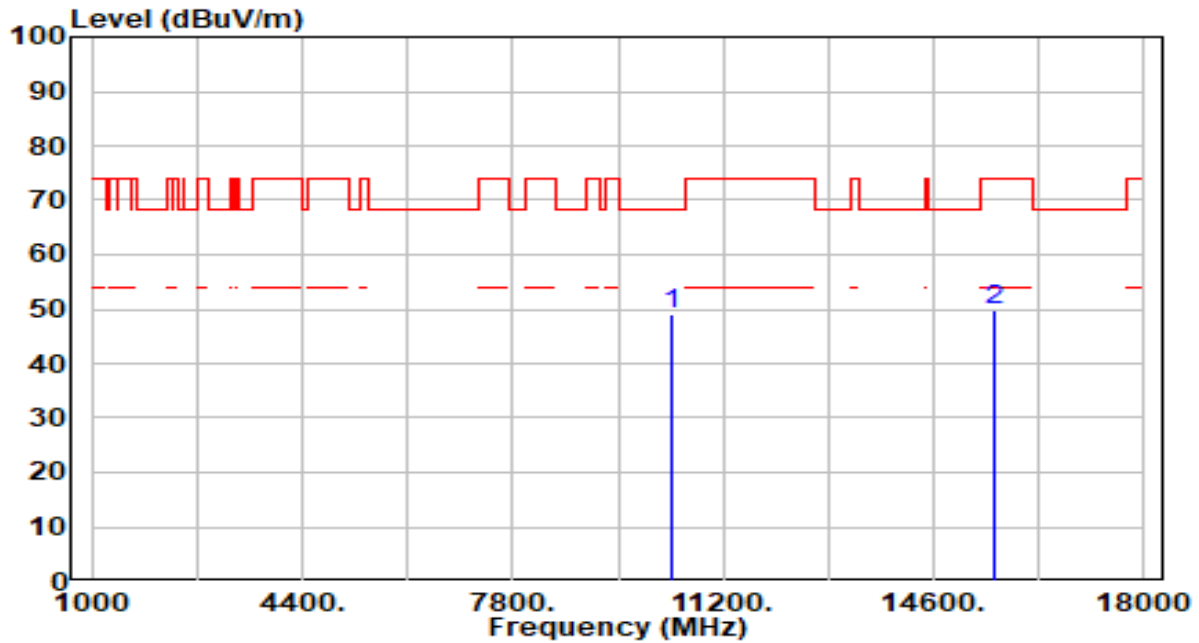


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	46.38	2.79	49.16	-19.04	68.20	200	81	Peak
2		15570.000	45.31	4.52	49.83	-24.17	74.00	200	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	AC 120V/60Hz

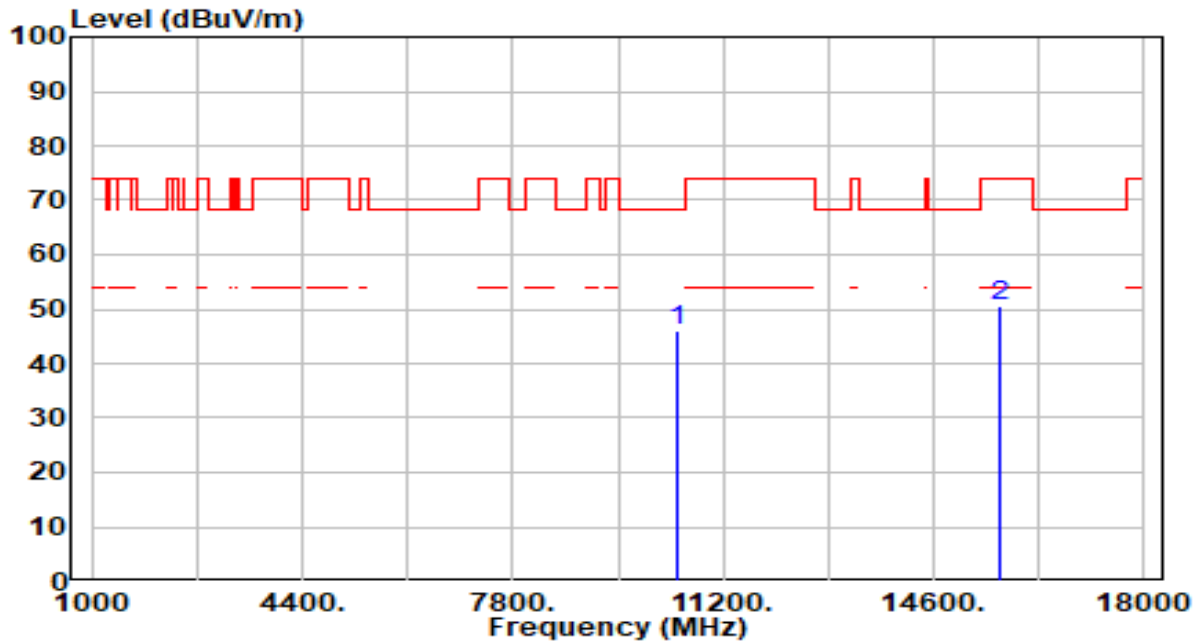


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	43.20	2.70	45.90	-22.30	68.20	100	220	Peak
2		15690.000	45.70	4.75	50.46	-23.54	74.00	100	76	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	AC 120V/60Hz

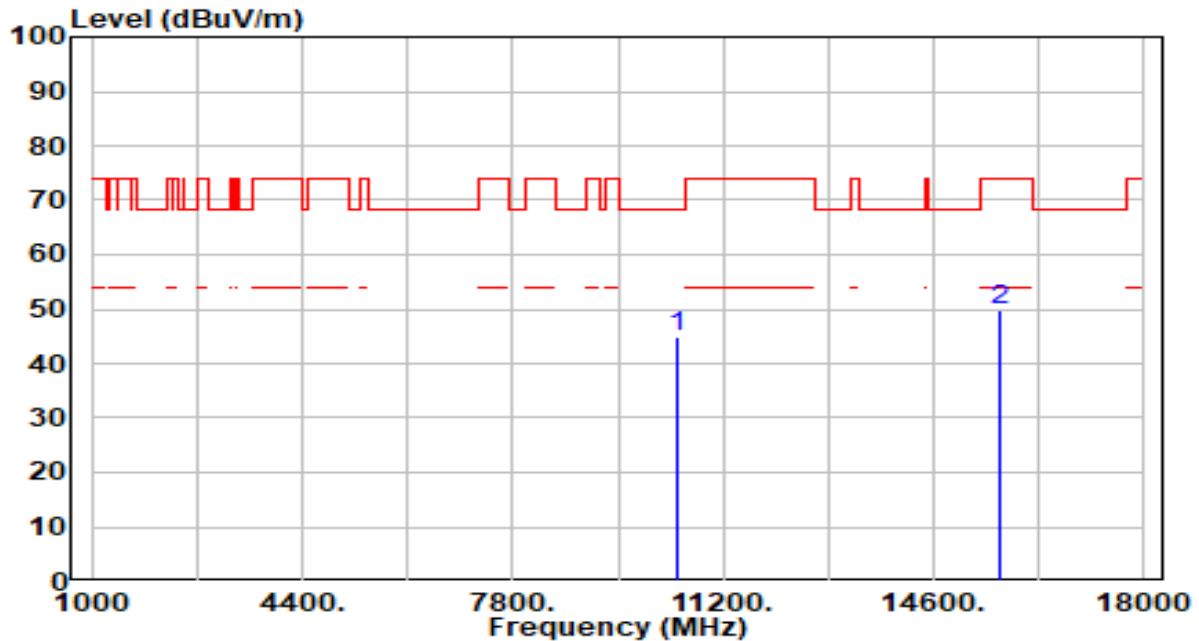


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	42.35	2.70	45.05	-23.15	68.20	200	12	Peak
2		15690.000	45.10	4.75	49.85	-24.15	74.00	200	44	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	AC 120V/60Hz

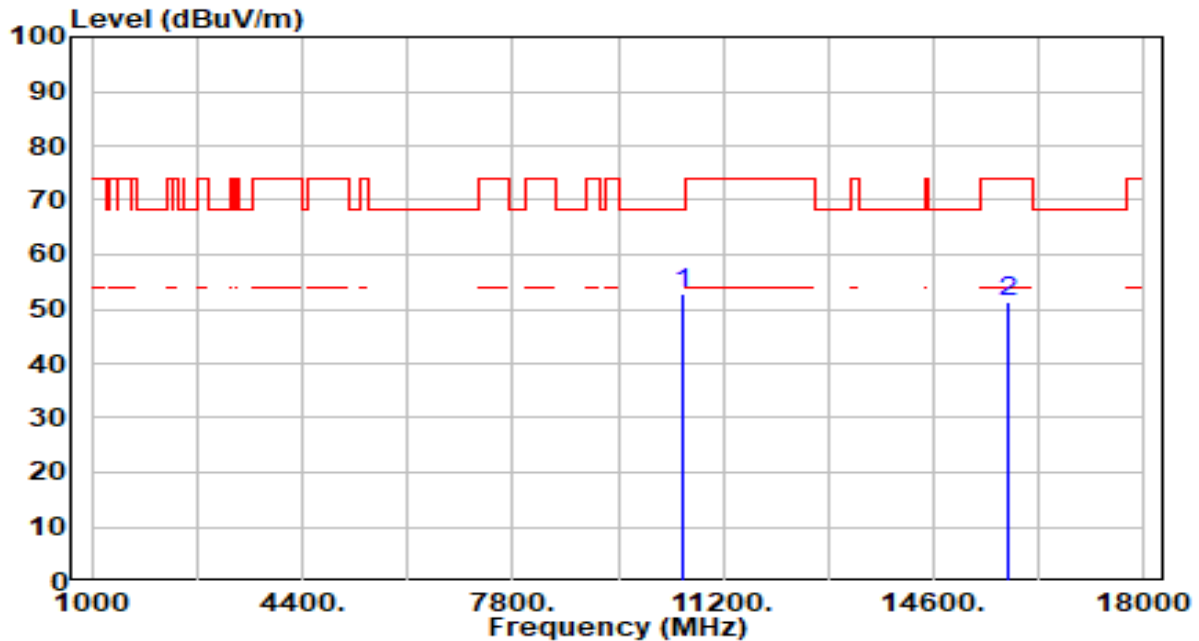


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	50.05	2.63	52.68	-15.52	68.20	100	19	Peak
2		15810.000	46.29	5.06	51.35	-22.65	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	AC 120V/60Hz

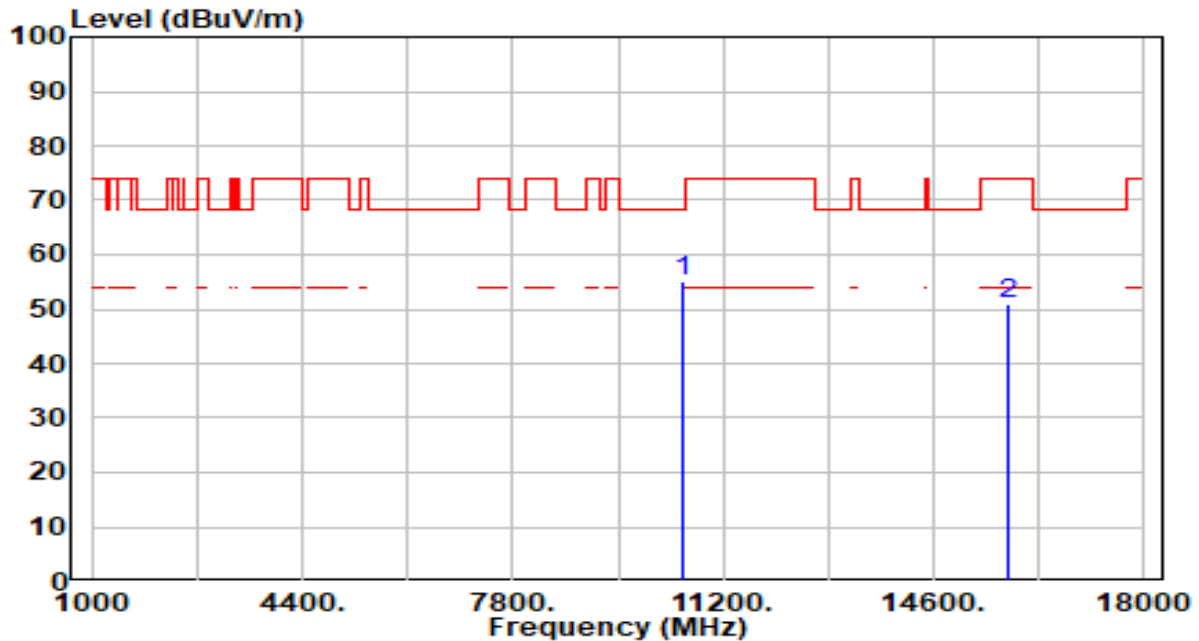


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	52.53	2.63	55.17	-13.03	68.20	200	85	Peak
2		15810.000	45.84	5.06	50.90	-23.10	74.00	200	317	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

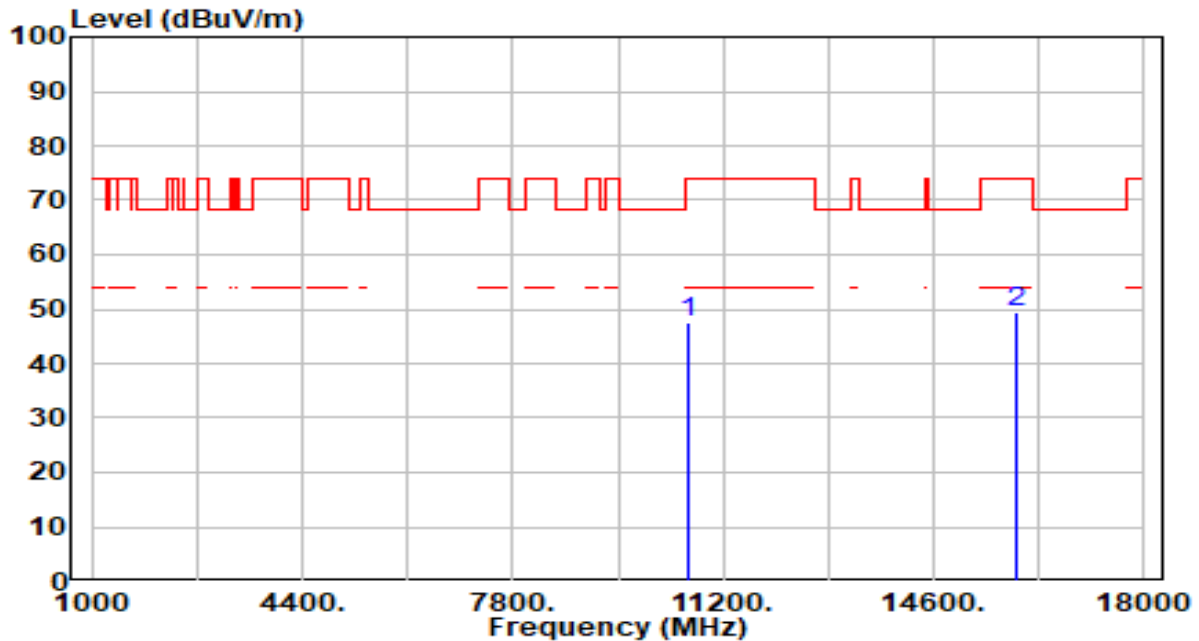


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10620.000	44.94	2.61	47.55	-26.45	74.00	100	337	Peak
2	*	15930.000	44.10	5.15	49.25	-24.75	74.00	100	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

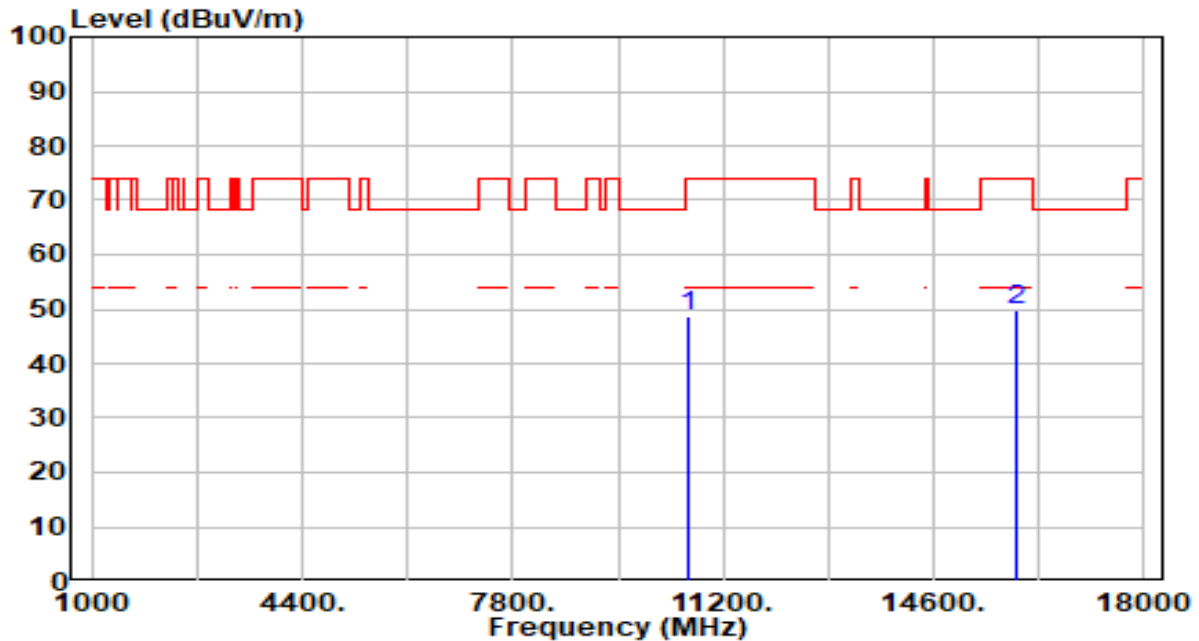


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10620.000	46.09	2.61	48.70	-25.30	74.00	200	72	Peak
2	*	15930.000	44.81	5.15	49.96	-24.04	74.00	200	68	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

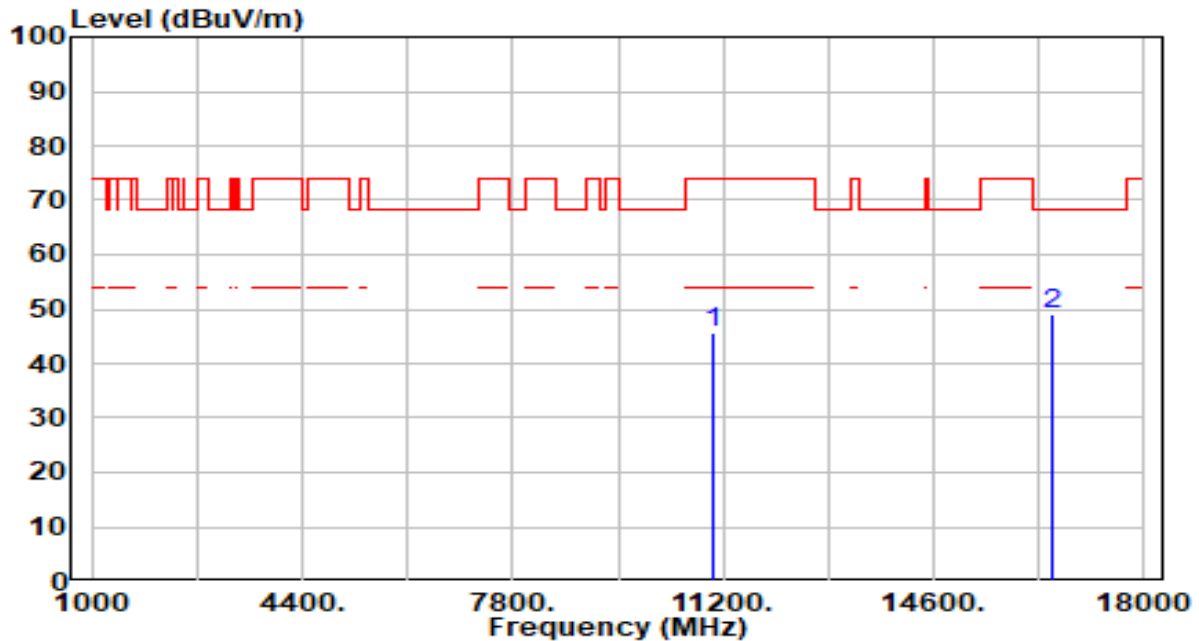


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	43.13	2.66	45.79	-28.21	74.00	100	271	Peak
2	* 16530.000	44.54	4.63	49.17	-19.03	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

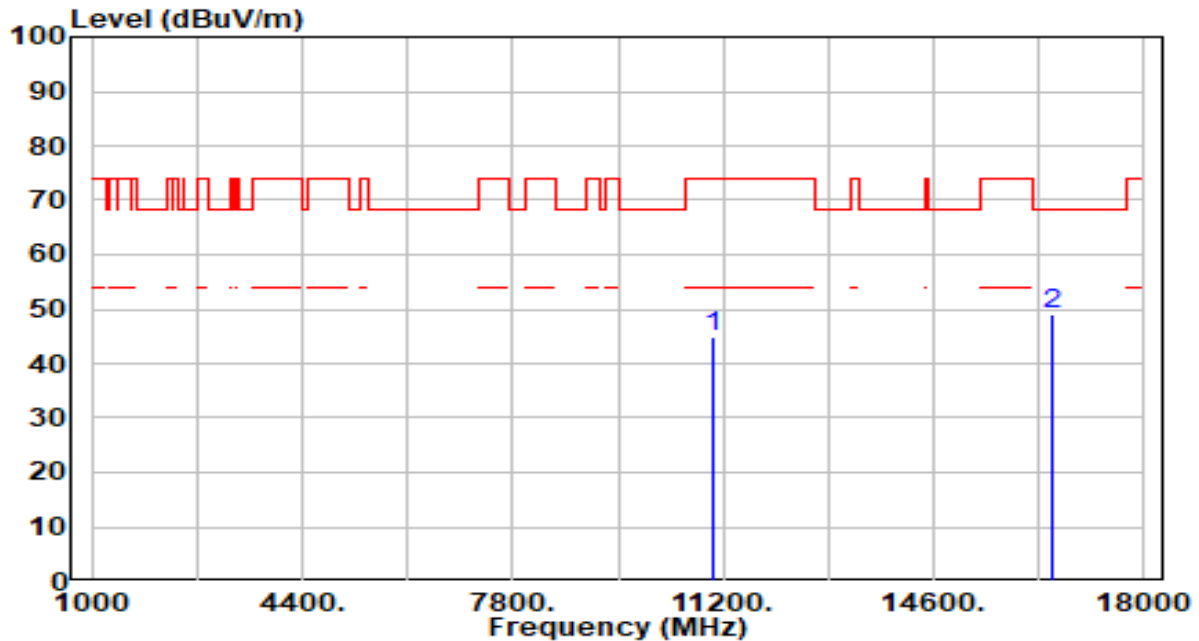


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	42.36	2.66	45.01	-28.99	74.00	200	360	Peak
2	* 16530.000	44.57	4.63	49.20	-19.00	68.20	200	70	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	AC 120V/60Hz

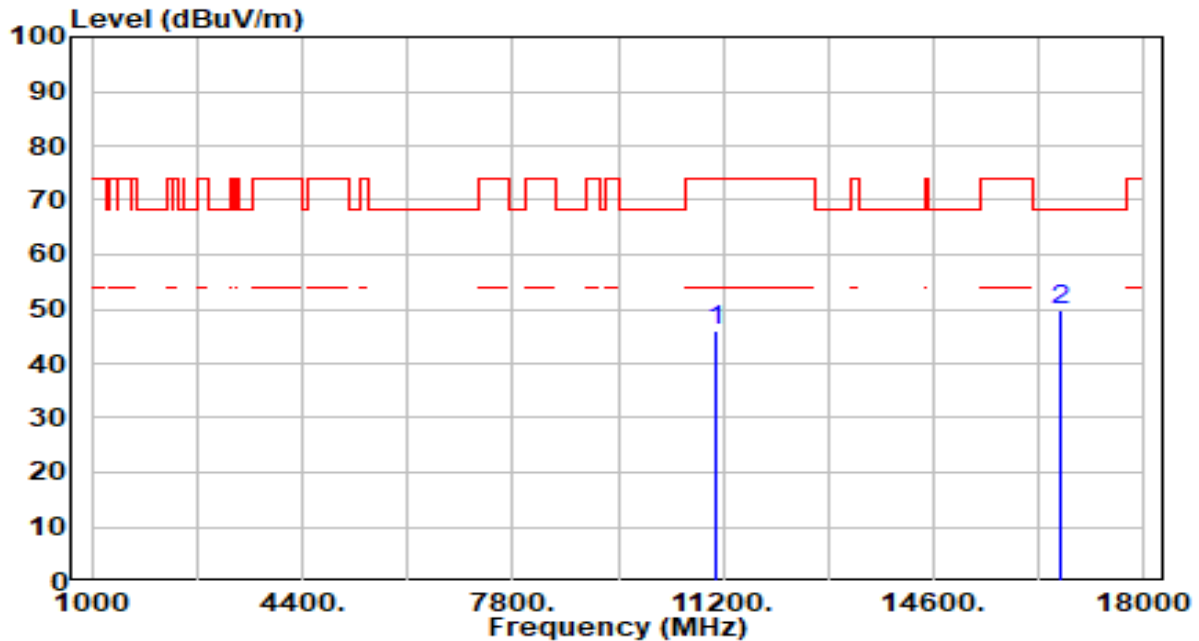


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	43.27	2.90	46.17	-27.83	74.00	100	334	Peak
2	* 16650.000	45.15	4.63	49.79	-18.41	68.20	100	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	AC 120V/60Hz

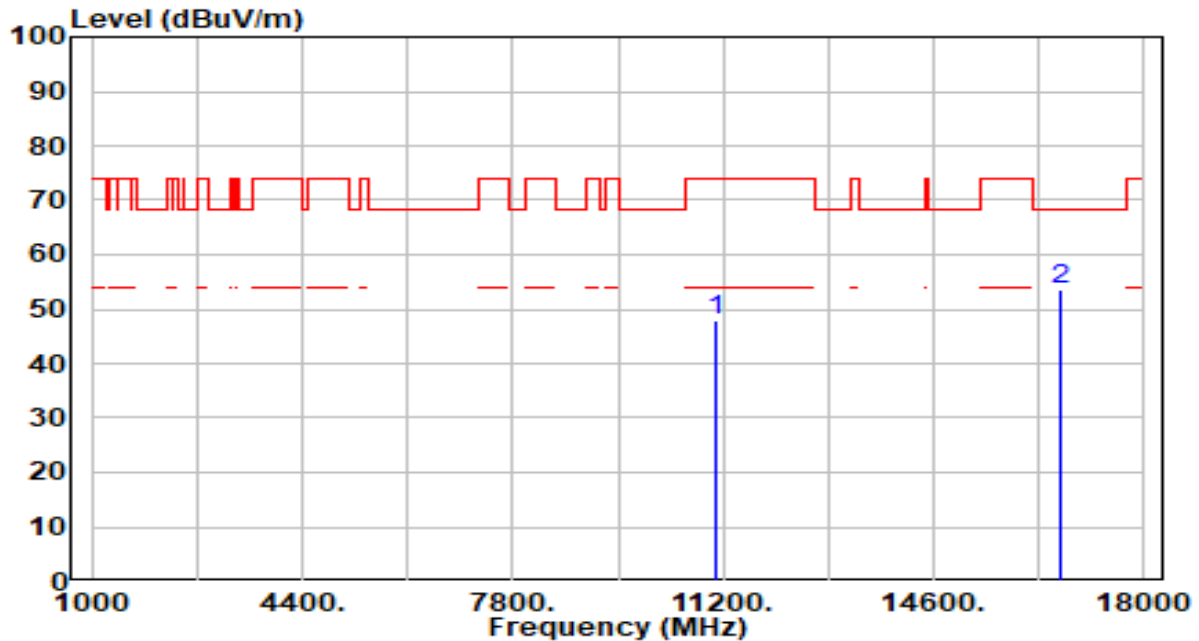


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	45.14	2.90	48.04	-25.96	74.00	200	317	Peak
2	* 16650.000	48.98	4.63	53.61	-14.59	68.20	200	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

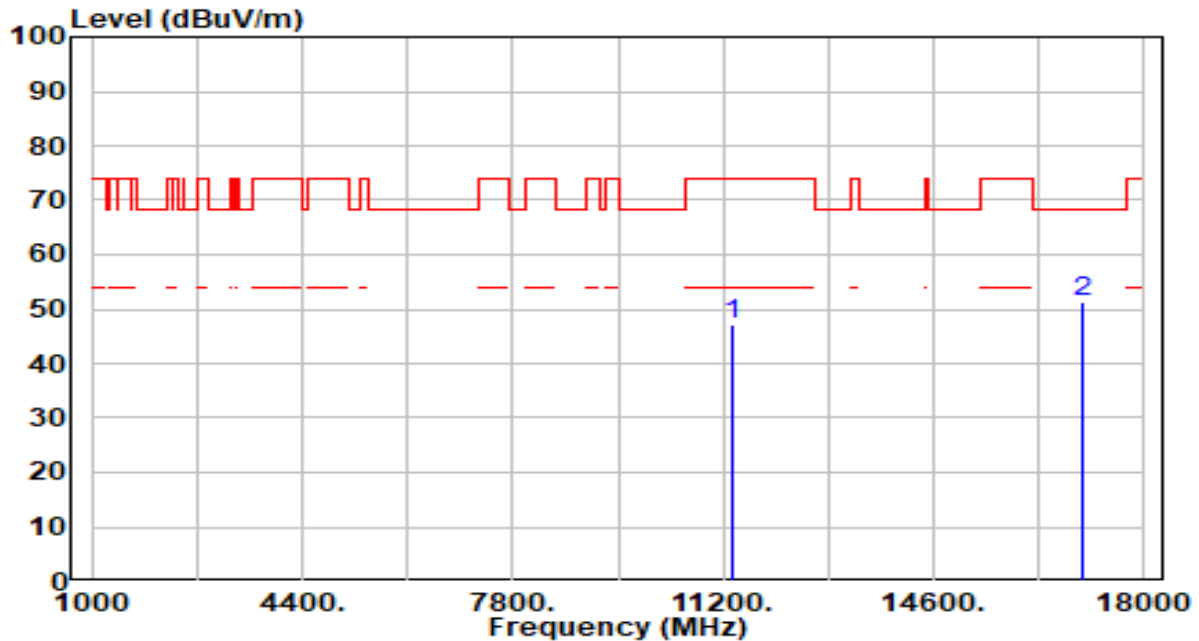


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	43.93	3.39	47.32	-26.68	74.00	100	287	Peak
2	*	17010.000	46.45	5.00	51.45	-16.75	68.20	100	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

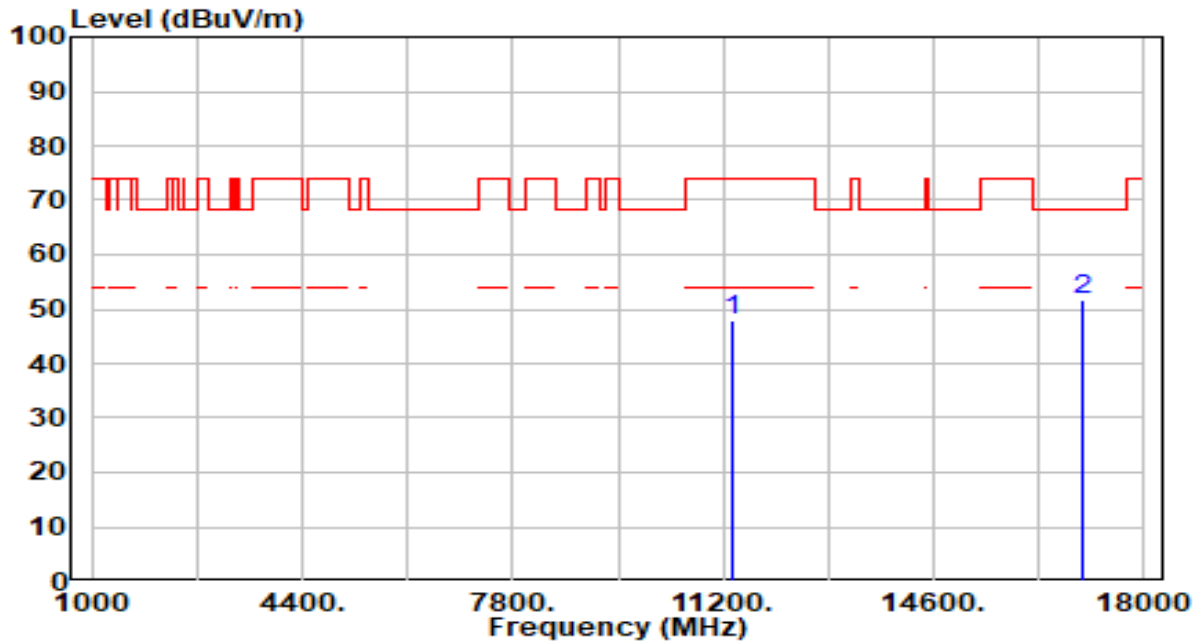


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	44.45	3.39	47.84	-26.16	74.00	200	248	Peak
2	*	17010.000	46.79	5.00	51.78	-16.42	68.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

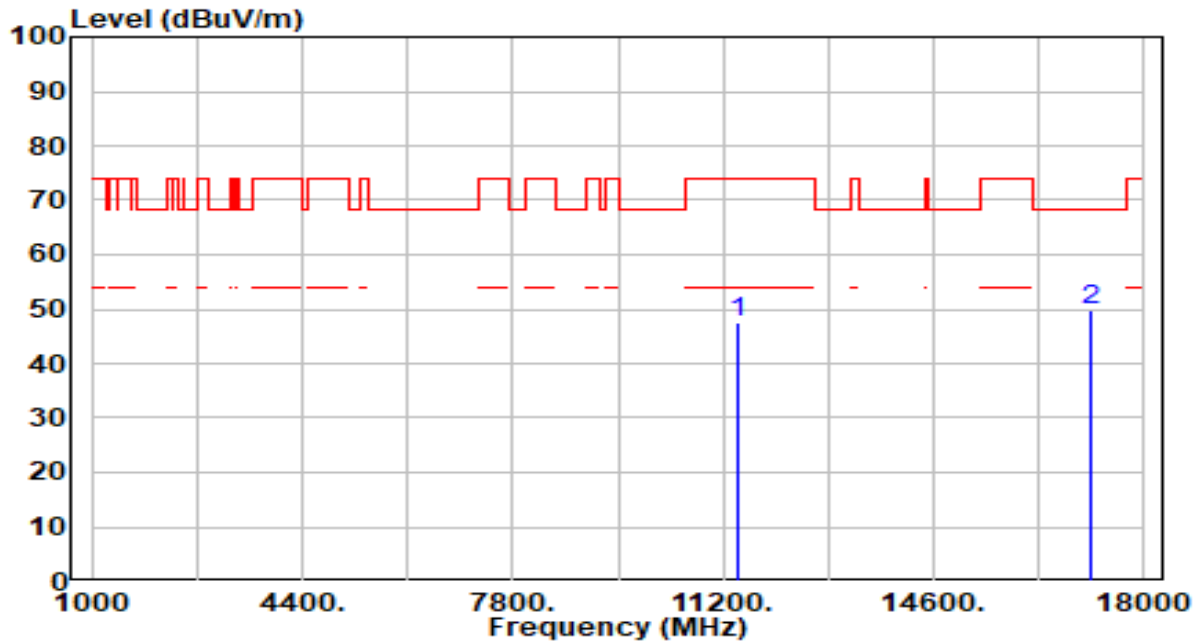


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	43.87	3.50	47.37	-26.63	74.00	100	91	Peak
2	* 17130.000	45.08	4.72	49.81	-18.39	68.20	100	344	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

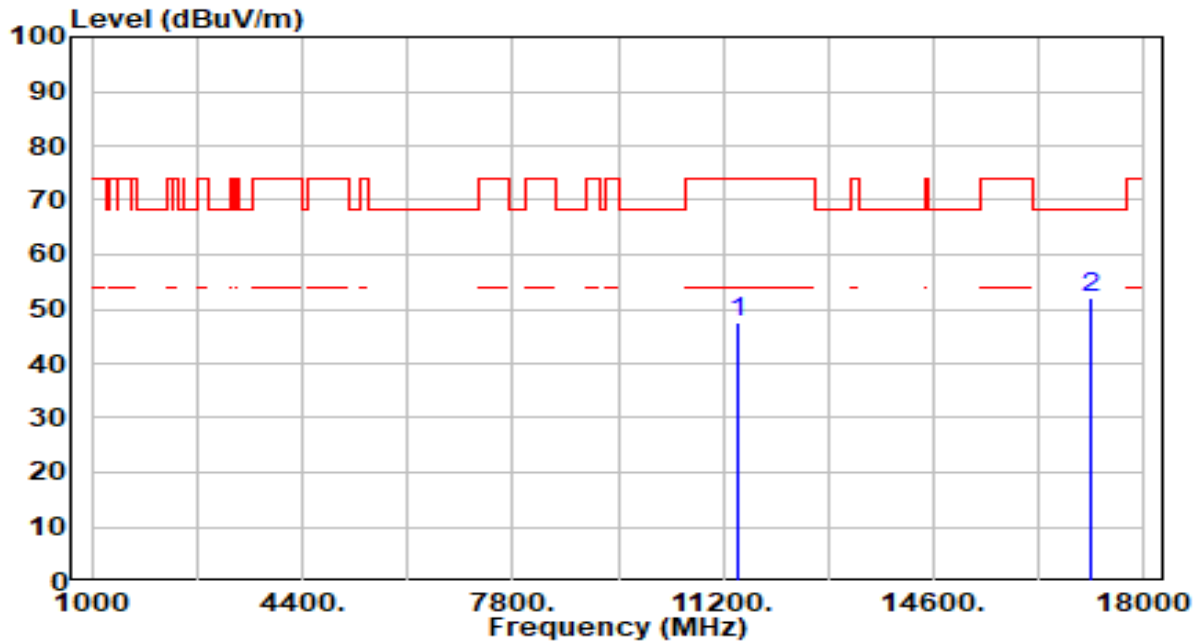


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	43.91	3.50	47.41	-26.59	74.00	200	250	Peak
2	*	17130.000	47.23	4.72	51.96	-16.24	68.20	200	357	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

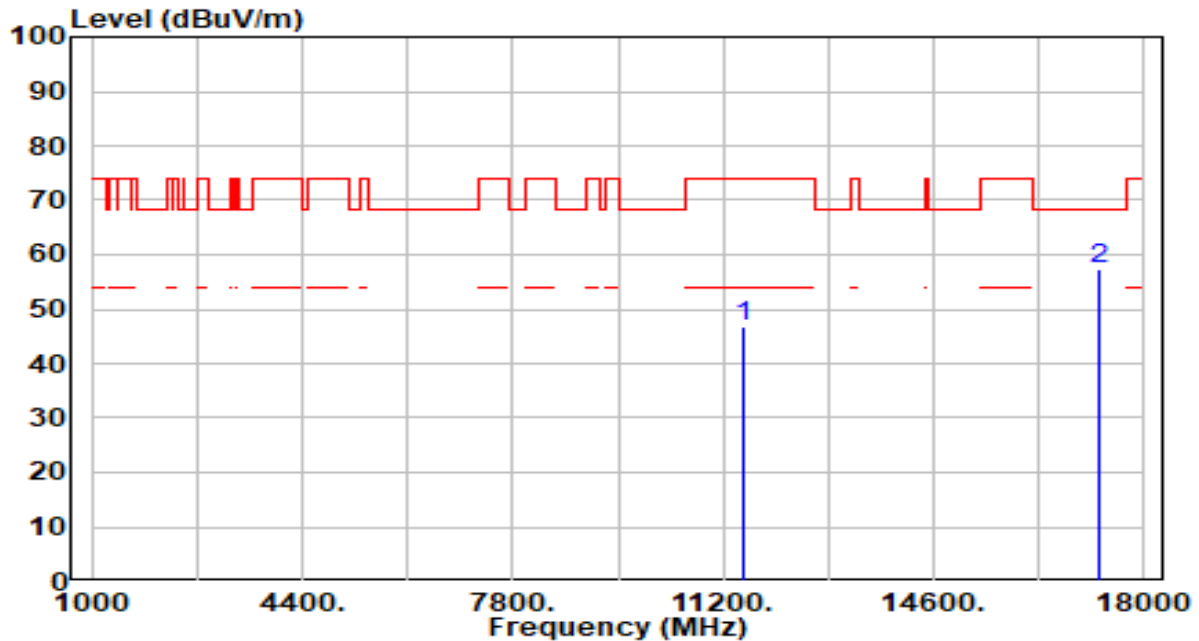


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	43.10	3.59	46.69	-27.31	74.00	100	0	Peak
2	* 17265.000	52.92	4.35	57.27	-10.93	68.20	100	343	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

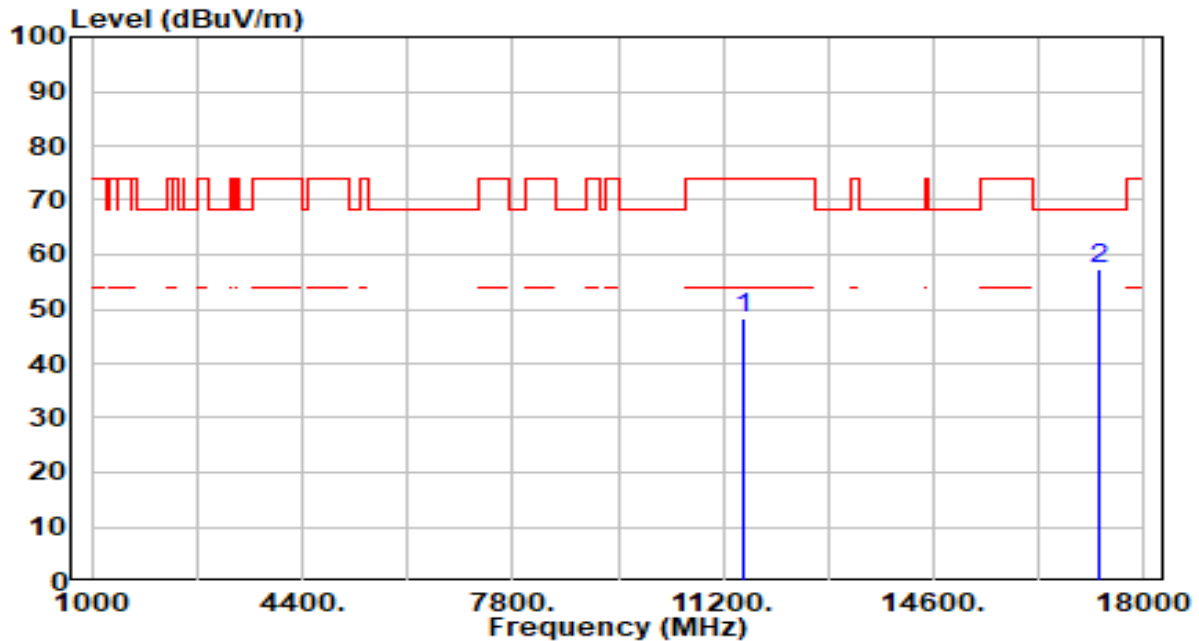


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	44.57	3.59	48.16	-25.85	74.00	200	244	Peak
2	* 17265.000	53.14	4.35	57.50	-10.70	68.20	200	356	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

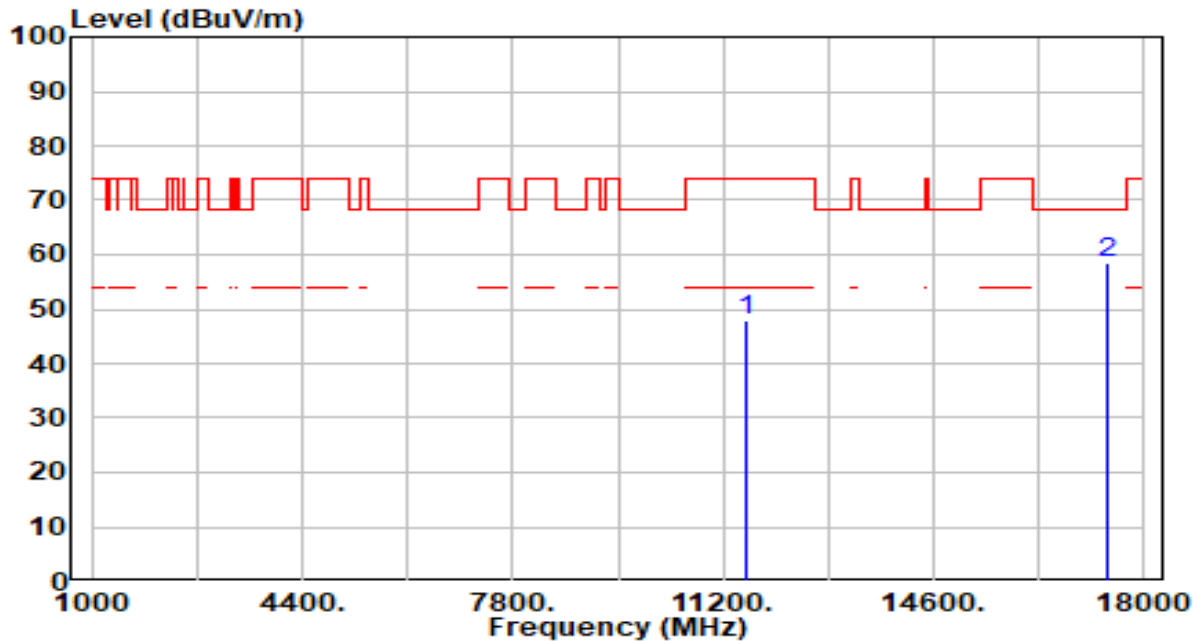


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	44.23	3.67	47.91	-26.09	74.00	100	83	Peak
2	* 17385.000	54.58	3.96	58.54	-9.66	68.20	100	223	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

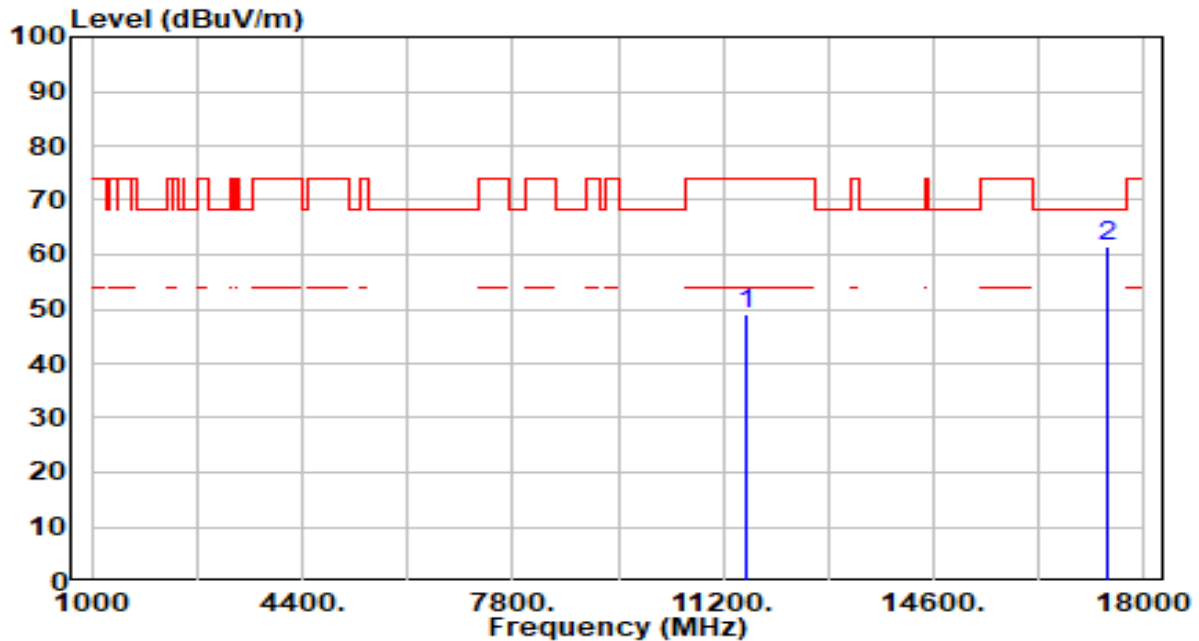


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	45.34	3.67	49.01	-24.99	74.00	200	245	Peak
2	* 17385.000	57.64	3.96	61.60	-6.60	68.20	200	353	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

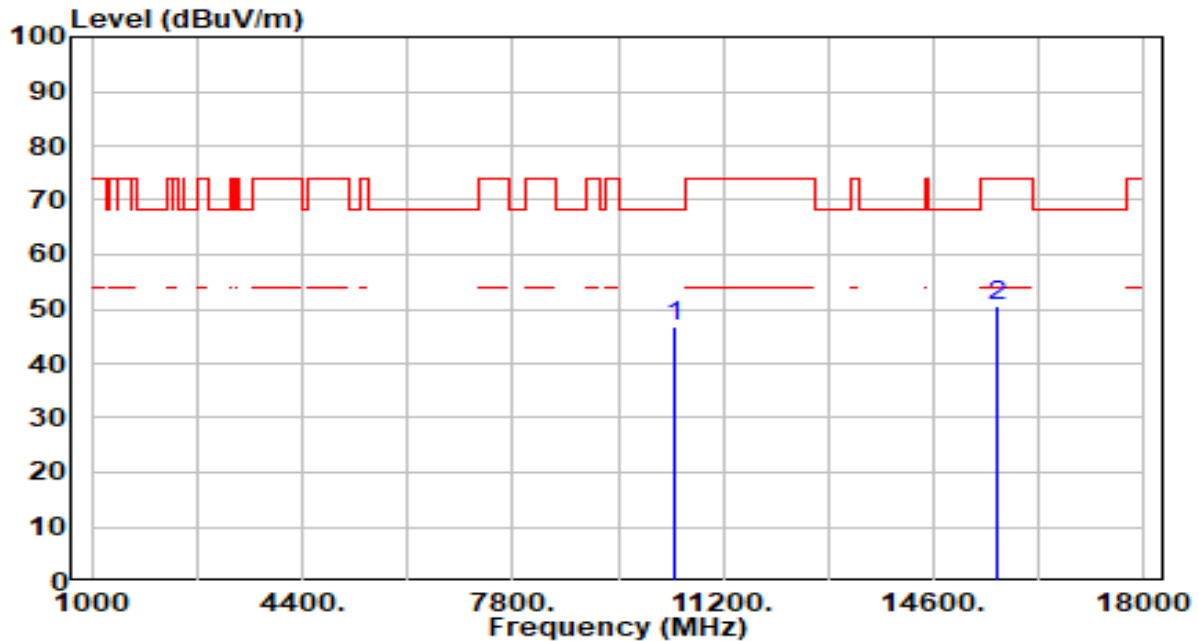


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	43.90	2.74	46.65	-21.55	68.20	100	16	Peak
2		15630.000	45.96	4.59	50.55	-23.45	74.00	100	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

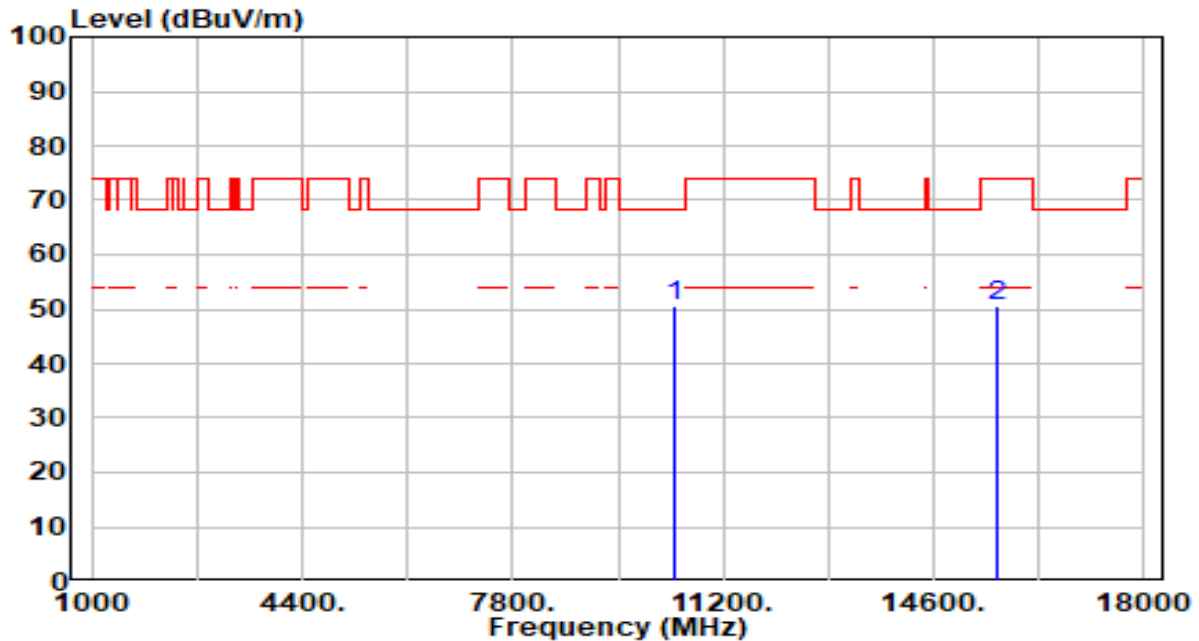


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	47.69	2.74	50.43	-17.77	68.20	200	77	Peak
2		15630.000	45.79	4.59	50.38	-23.62	74.00	200	156	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

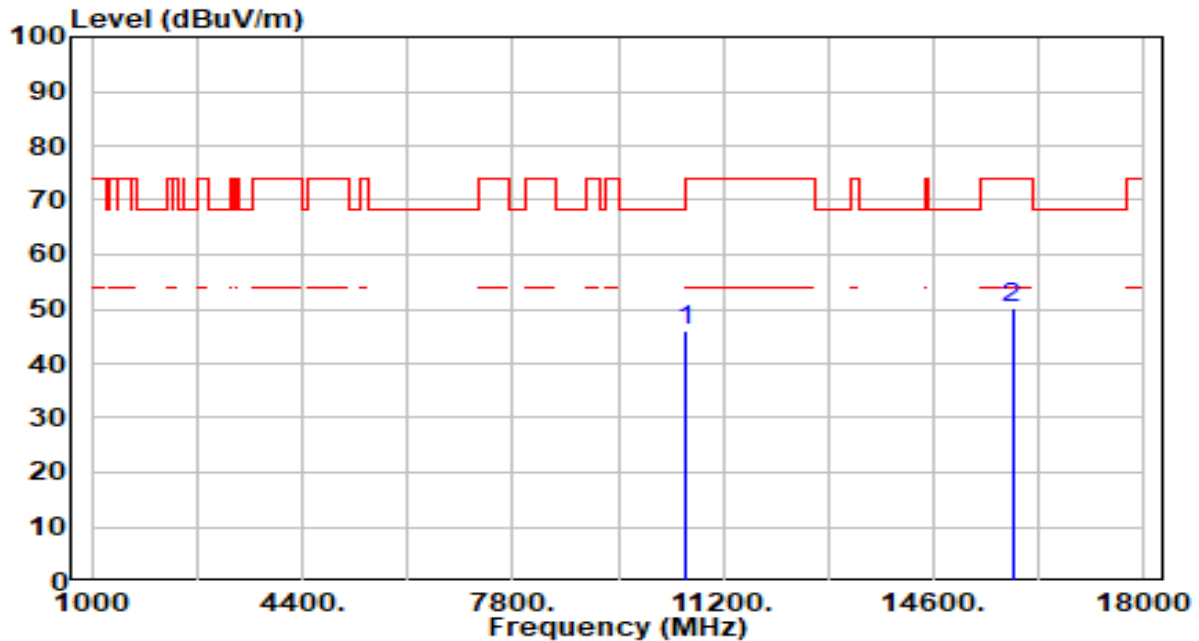


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	43.55	2.61	46.16	-22.04	68.20	100	163	Peak
2		15870.000	44.92	5.11	50.02	-23.98	74.00	100	187	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

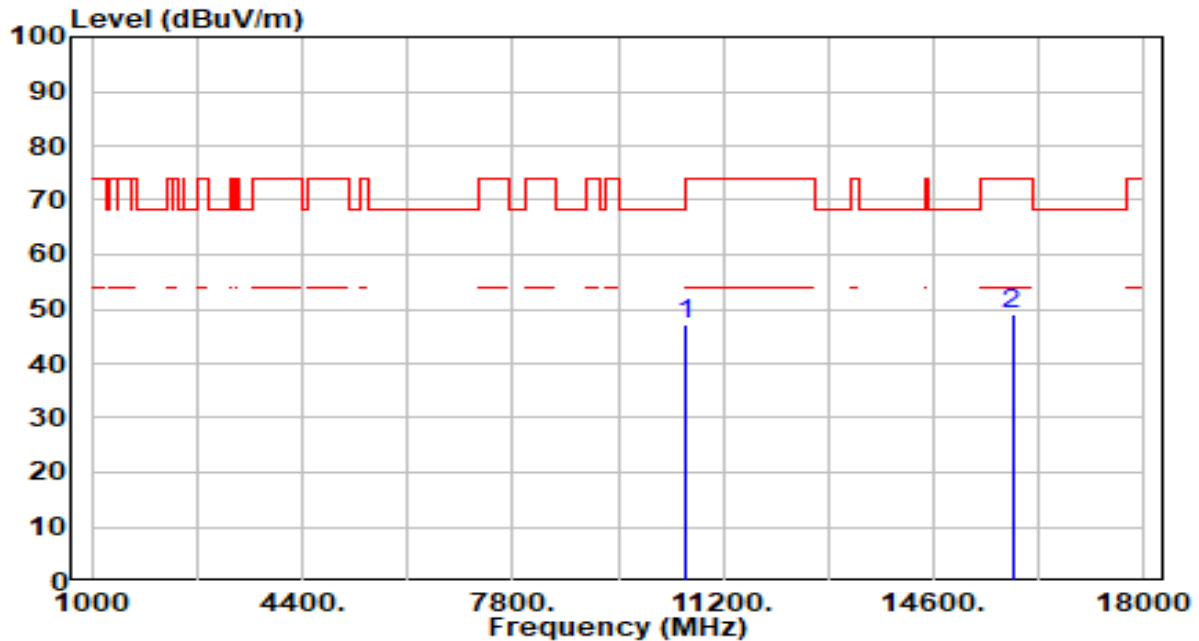


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	44.53	2.61	47.15	-21.05	68.20	200	276	Peak
2		15870.000	43.99	5.11	49.09	-24.91	74.00	200	348	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

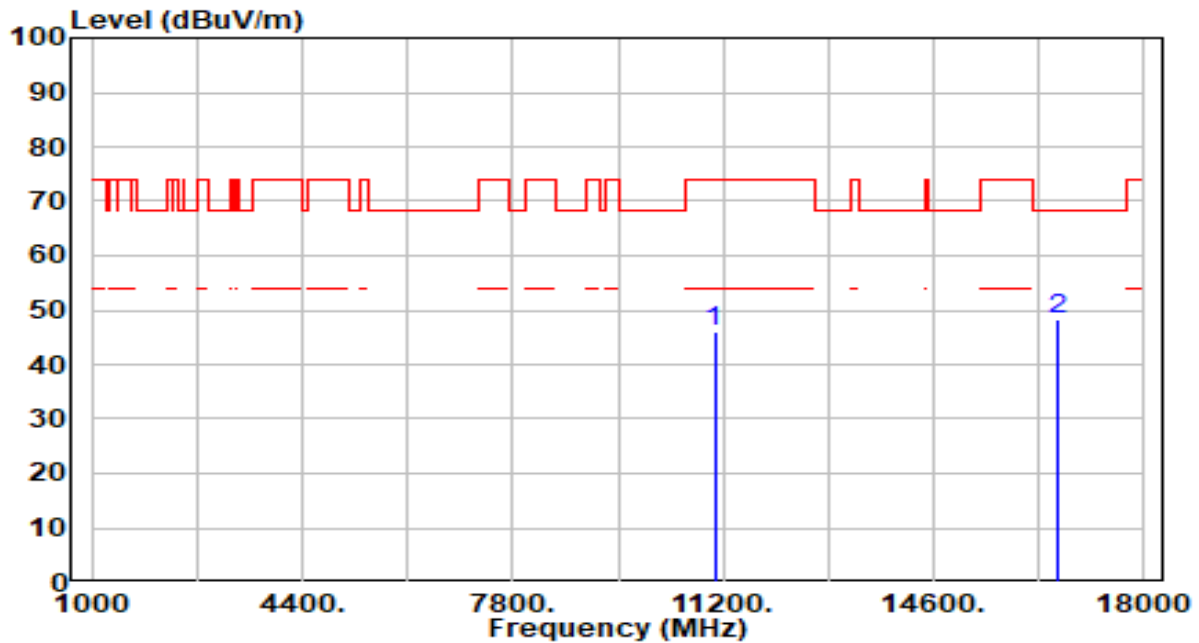


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	43.13	2.78	45.91	-28.09	74.00	100	336	Peak
2	*	16590.000	43.69	4.62	48.30	-19.90	68.20	100	204	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

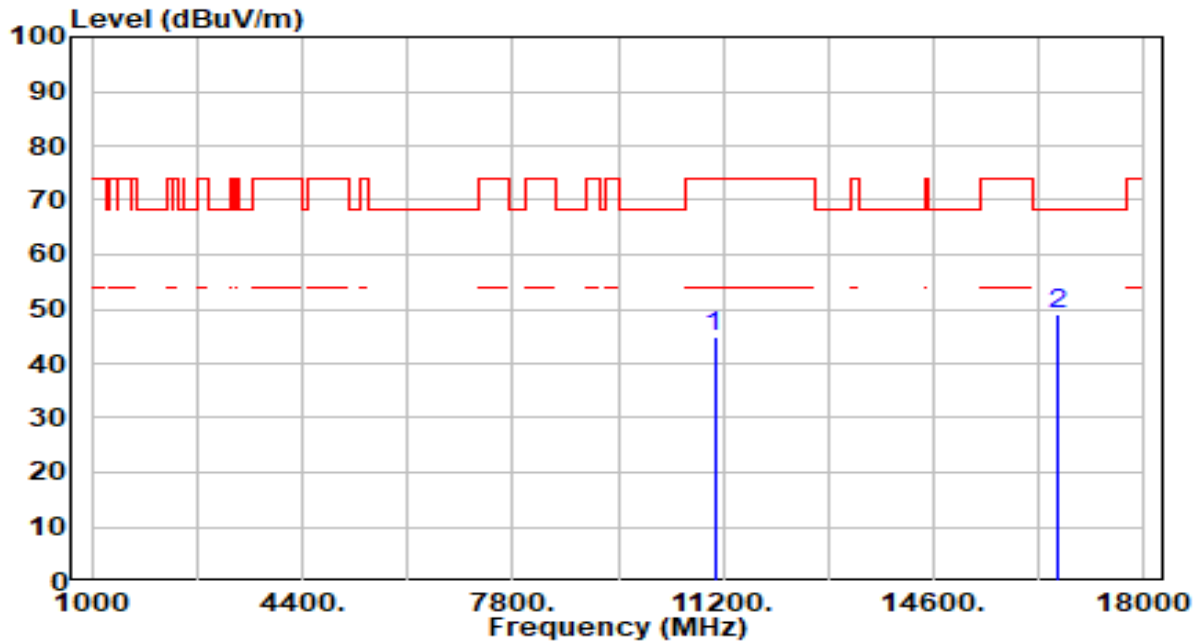


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	42.29	2.78	45.07	-28.93	74.00	200	82	Peak
2	* 16590.000	44.40	4.62	49.01	-19.19	68.20	200	269	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

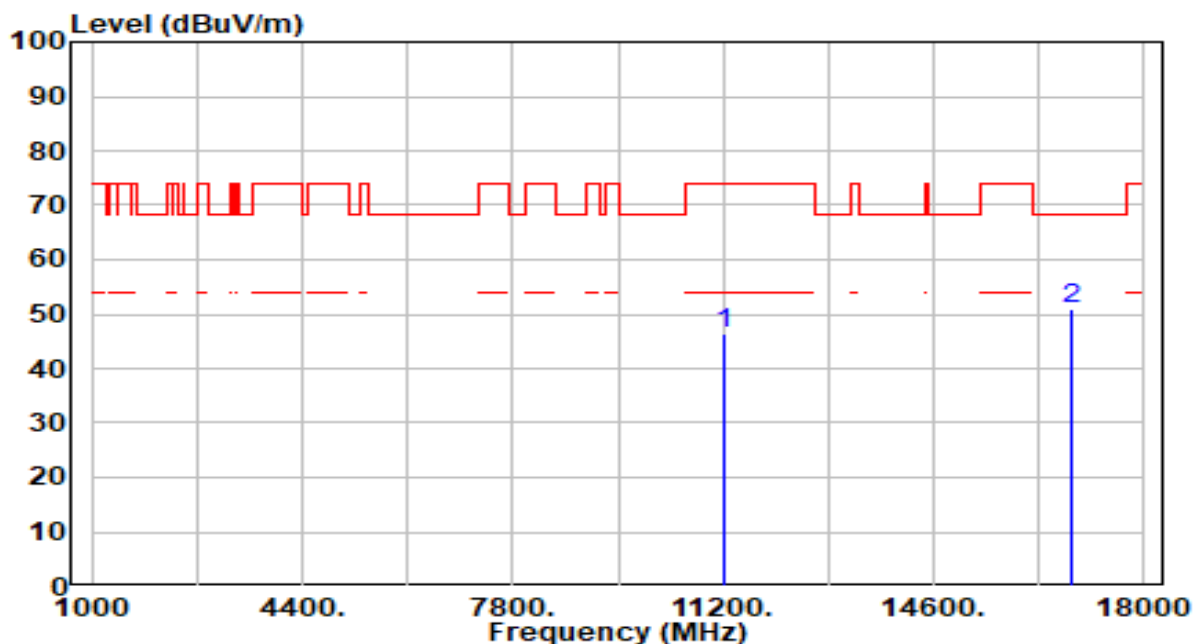


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	43.13	3.22	46.35	-27.65	74.00	100	35	Peak
2	*	16830.000	46.32	4.61	50.93	-17.27	68.20	100	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

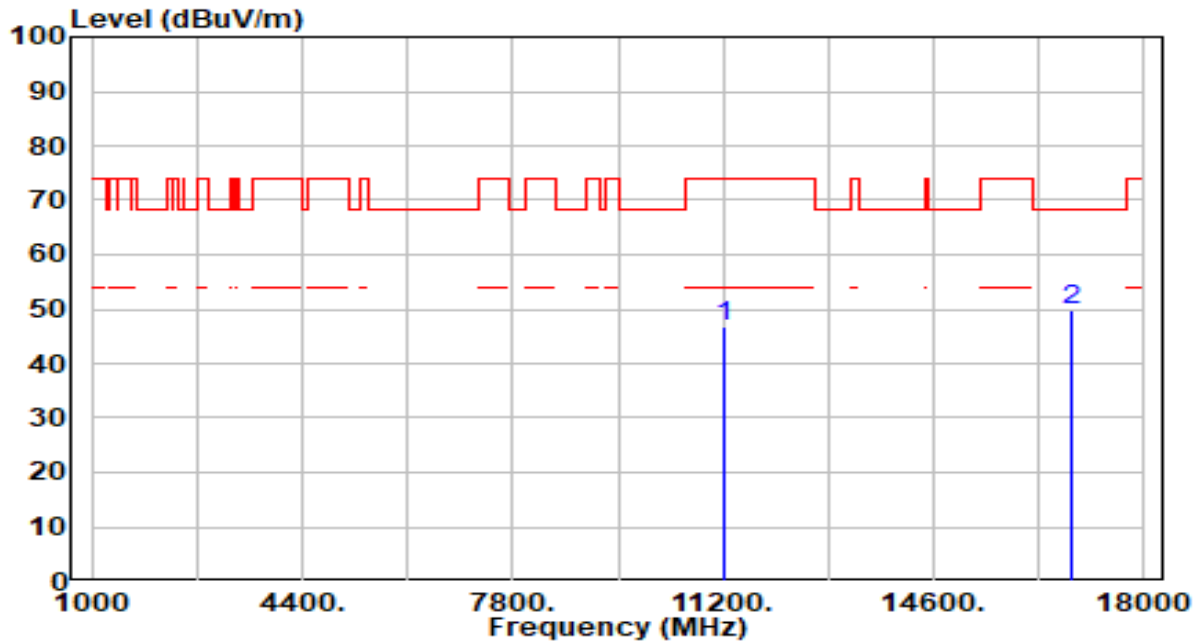


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	43.50	3.22	46.72	-27.28	74.00	200	305	Peak
2	* 16830.000	45.30	4.61	49.92	-18.28	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

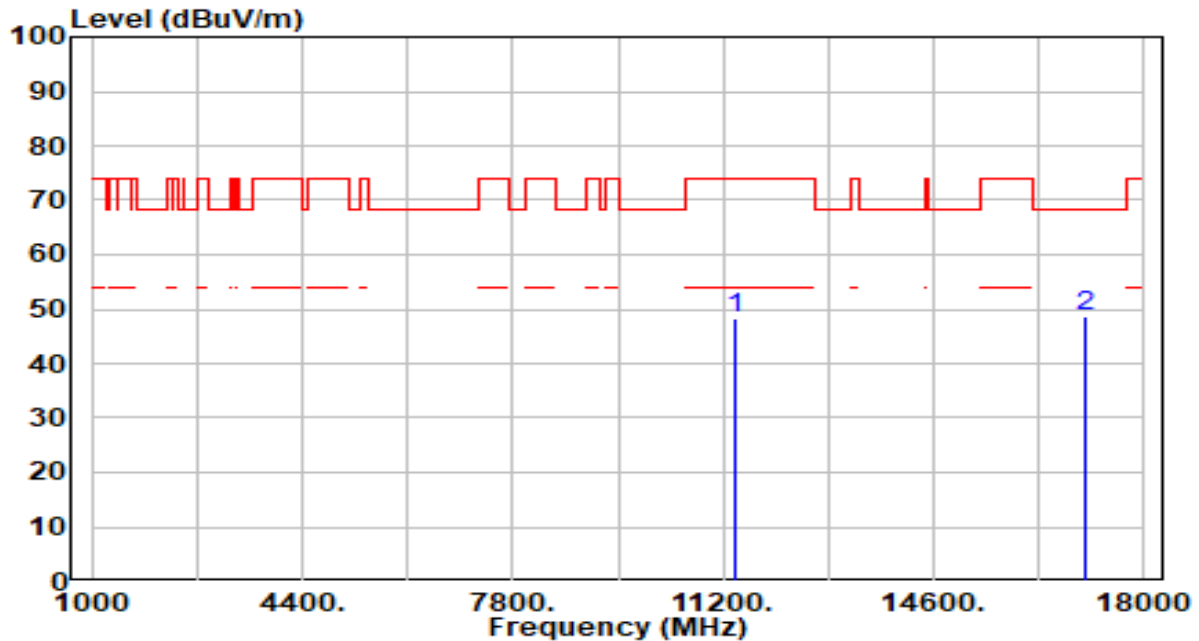


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	44.78	3.45	48.23	-25.77	74.00	100	107	Peak
2	*	17070.000	43.98	4.86	48.84	-19.36	68.20	100	27	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

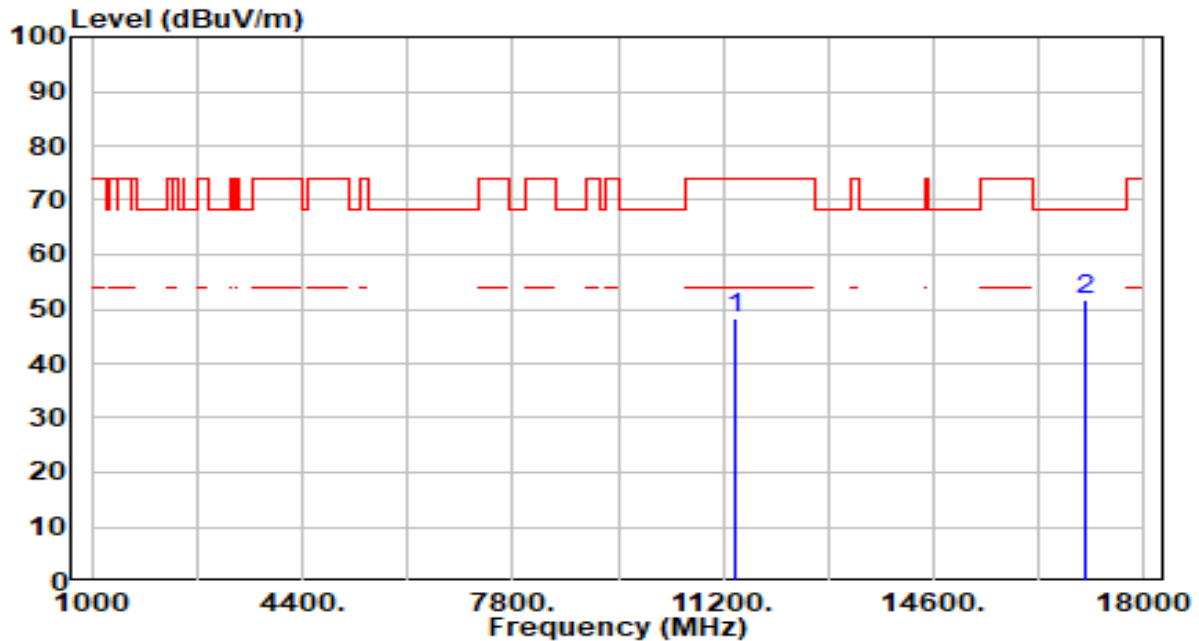


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	44.77	3.45	48.22	-25.78	74.00	200	116	Peak
2	* 17070.000	46.89	4.86	51.75	-16.45	68.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

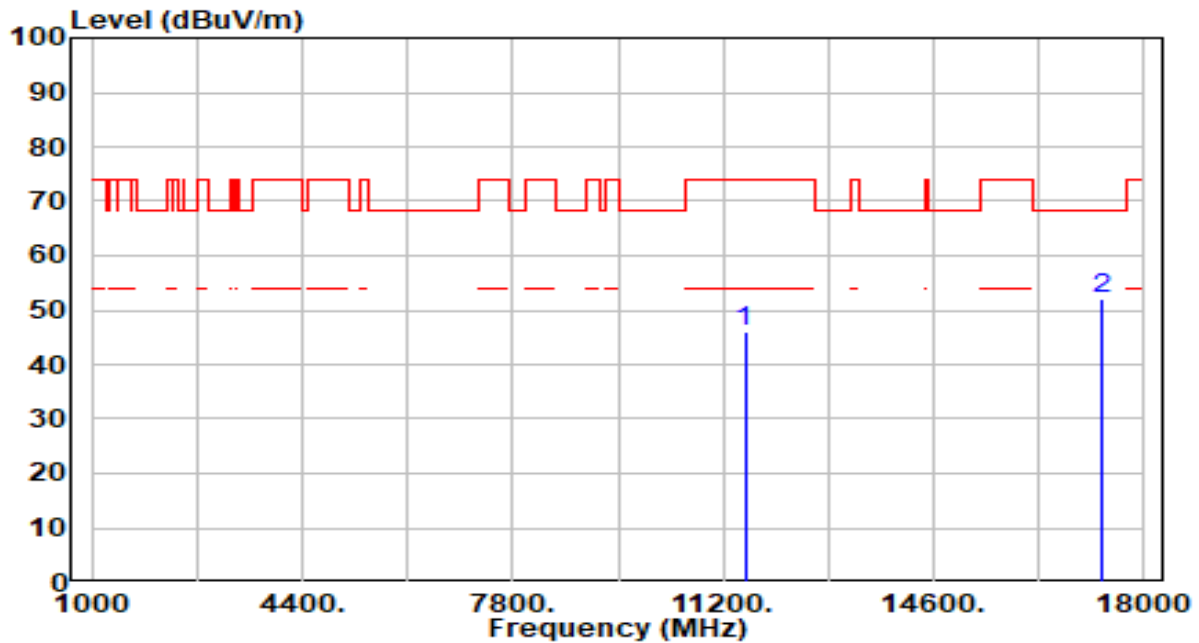


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	42.56	3.63	46.19	-27.81	74.00	100	239	Peak
2	*	17325.000	48.02	4.16	52.17	-16.03	68.20	100	342	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

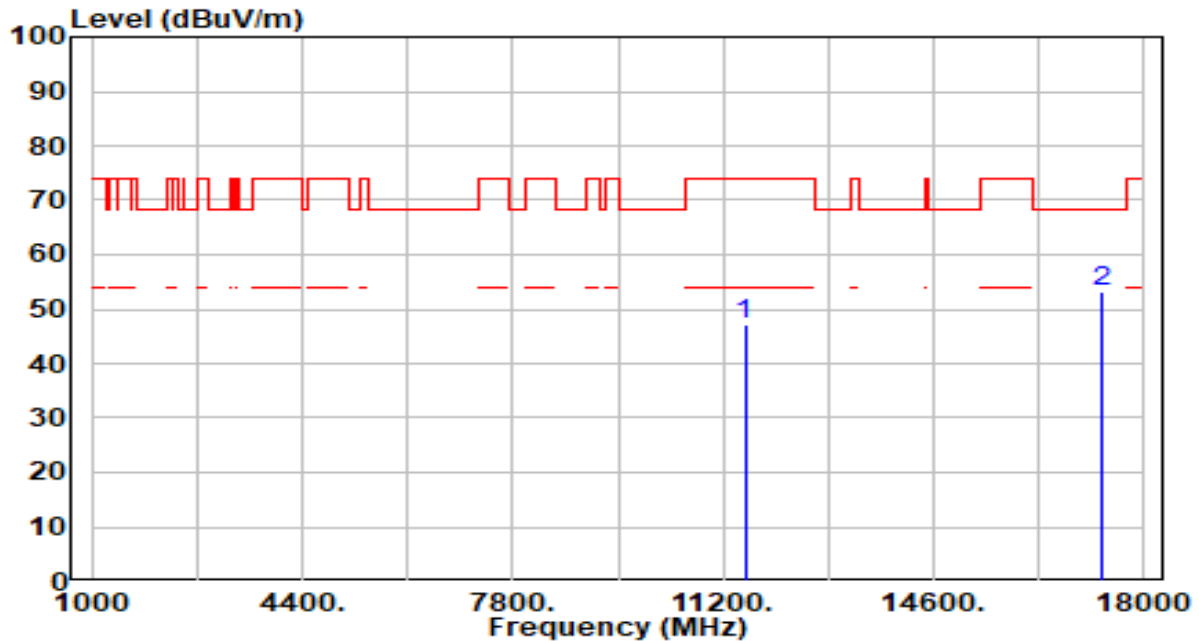


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	43.45	3.63	47.08	-26.92	74.00	200	165	Peak
2	*	17325.000	49.03	4.16	53.19	-15.01	68.20	200	39	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-29
Factor	BBHA 9170	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

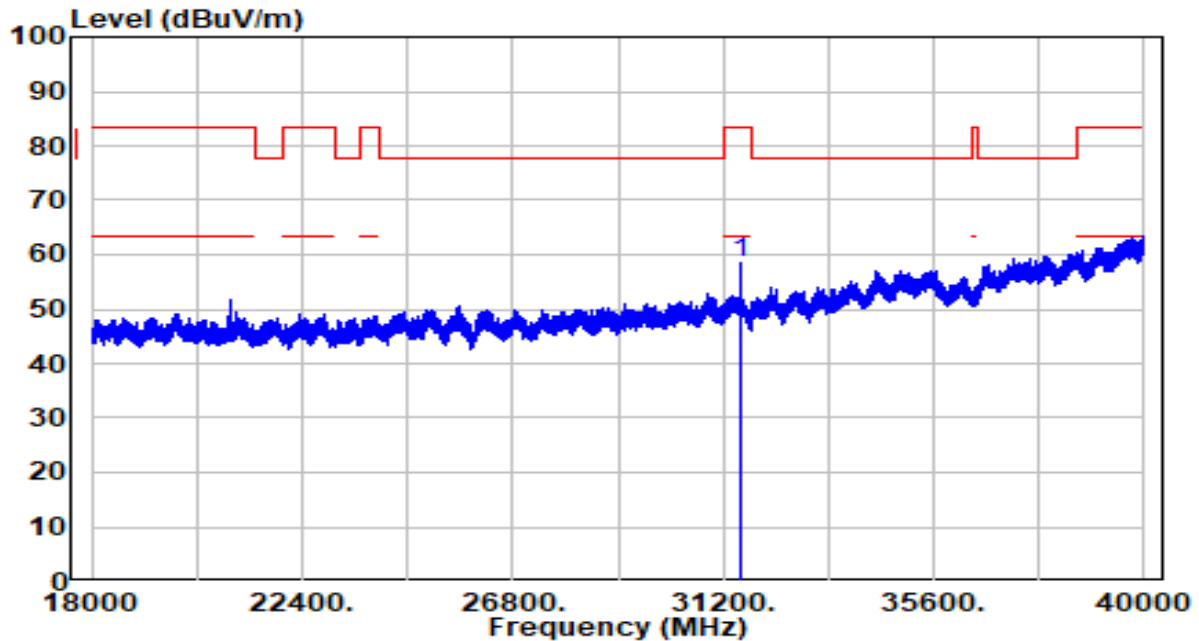


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	31567.810	40.31	18.01	58.31	-25.19	83.50	150	342	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-29
Factor	BBHA 9170	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

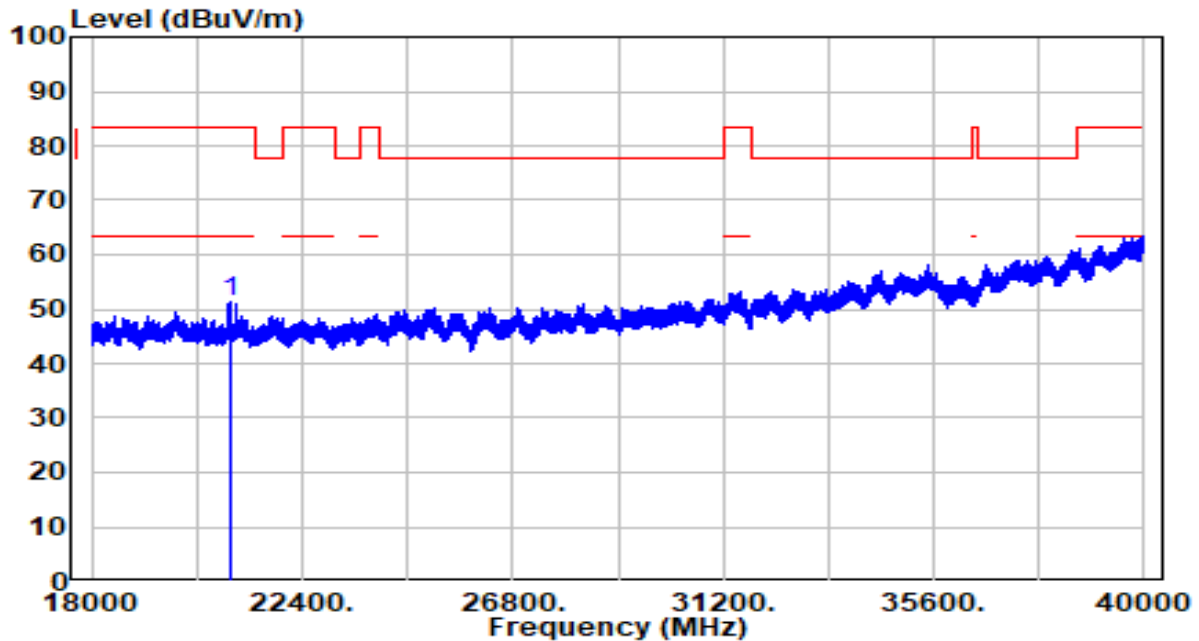

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	20879.940	40.36	10.84	51.20	-32.30	83.50	150	279	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. Radiated Restricted Band Edge Measurement

7.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310 - 2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge

increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

KDB 789033 D02v02r01- Section G


7.9.3. Test Setting

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW $\leq \text{RBW}/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$.
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

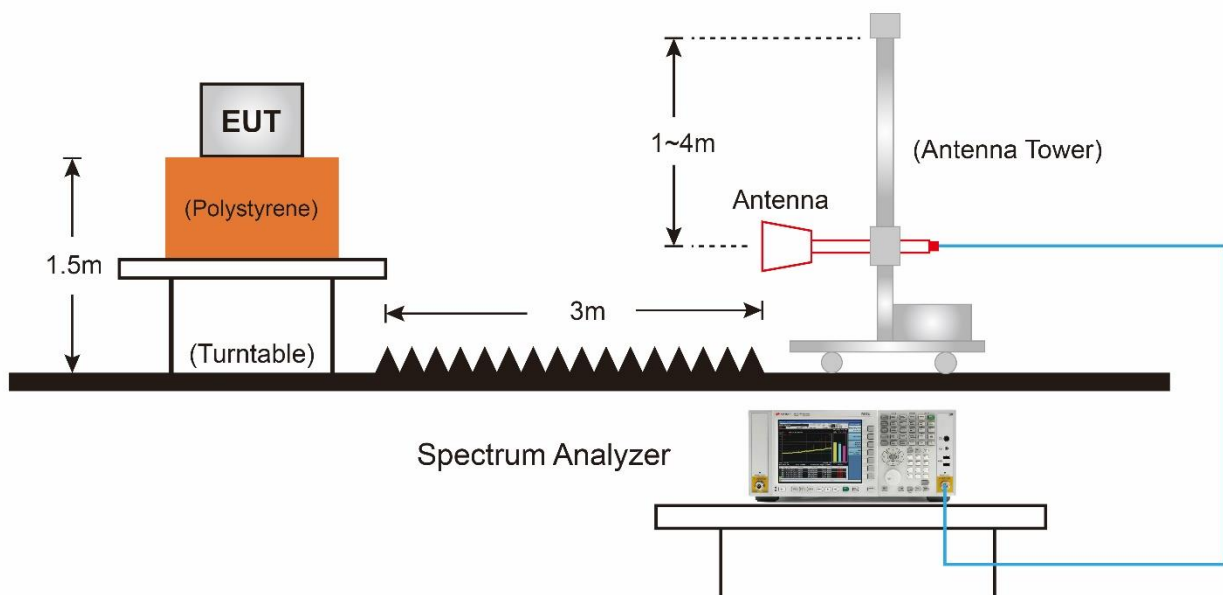7.9.4. Test Setup

7.9.5. Test Result

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

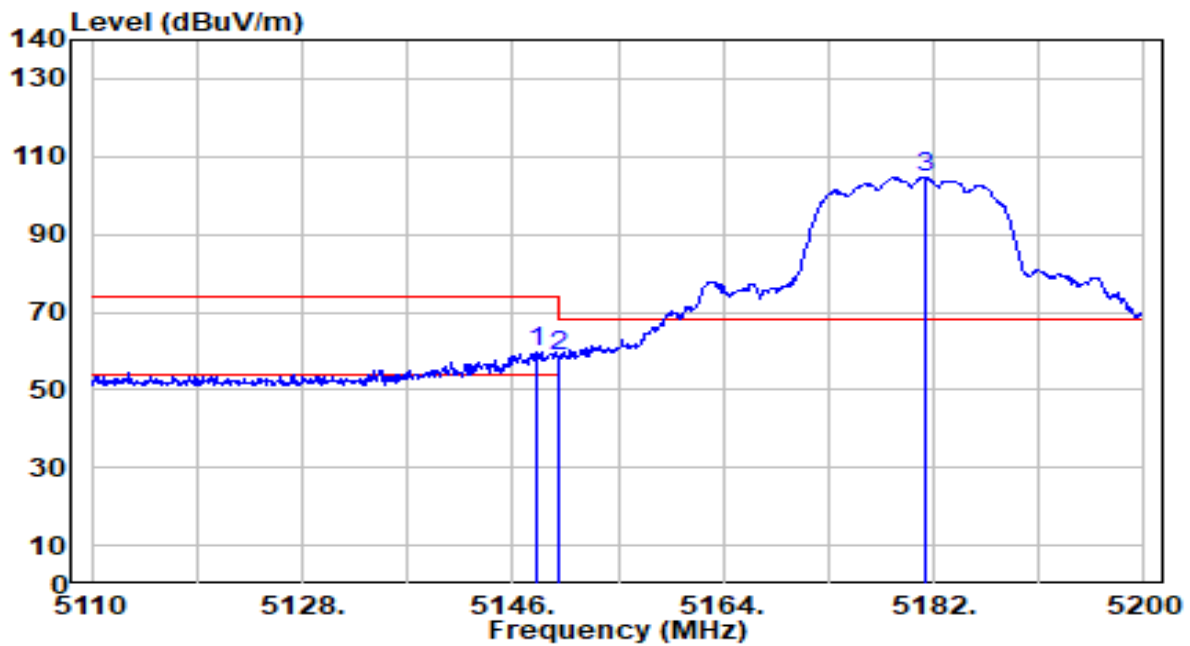


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.980	60.34	-0.72	59.62	-14.38	74.00	100	349	Peak
2		5150.000	59.35	-0.72	58.63	-15.37	74.00	100	349	Peak
3		5181.190	105.56	-0.73	104.82	N/A	N/A	100	349	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

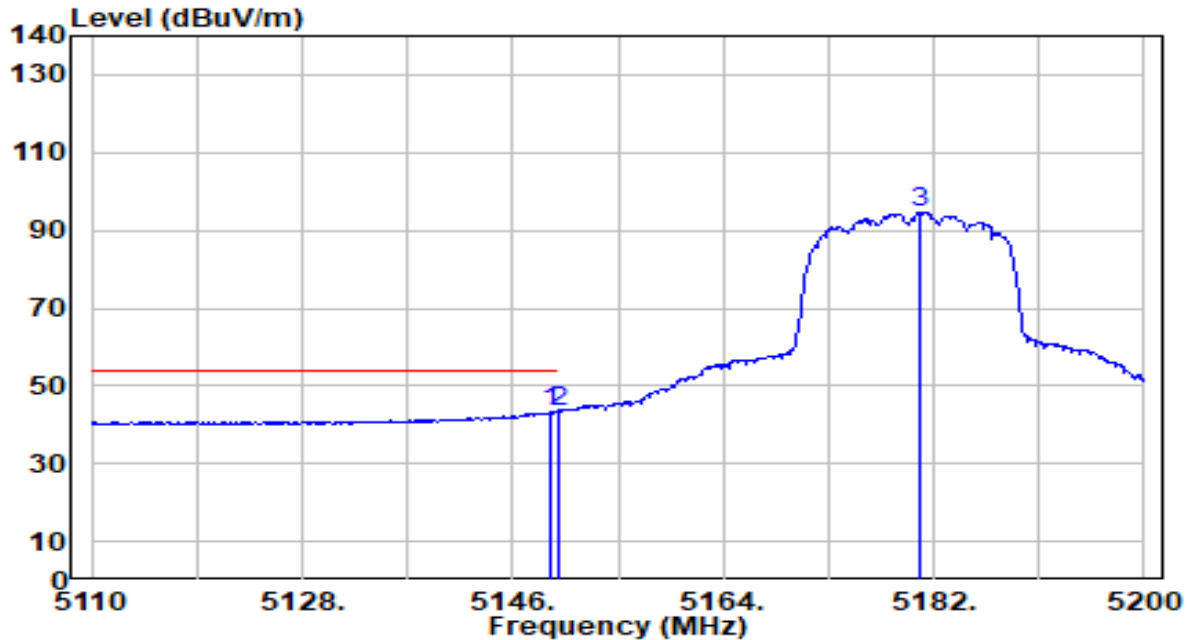


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.150	44.00	-0.72	43.28	-10.72	54.00	100	349	Average
2	*	5150.000	44.24	-0.72	43.52	-10.48	54.00	100	349	Average
3		5180.920	95.37	-0.73	94.64	N/A	N/A	100	349	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

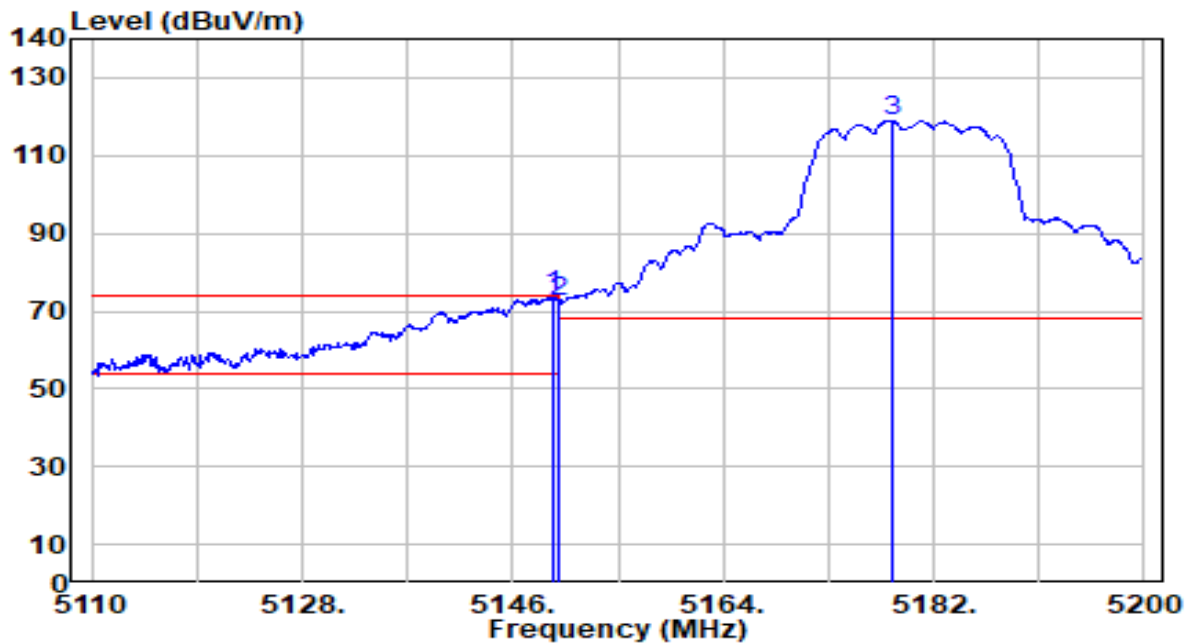


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.420	74.52	-0.72	73.80	-0.20	74.00	144	5	Peak
2		5150.000	72.90	-0.72	72.18	-1.82	74.00	144	5	Peak
3		5178.400	119.58	-0.73	118.85	N/A	N/A	144	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

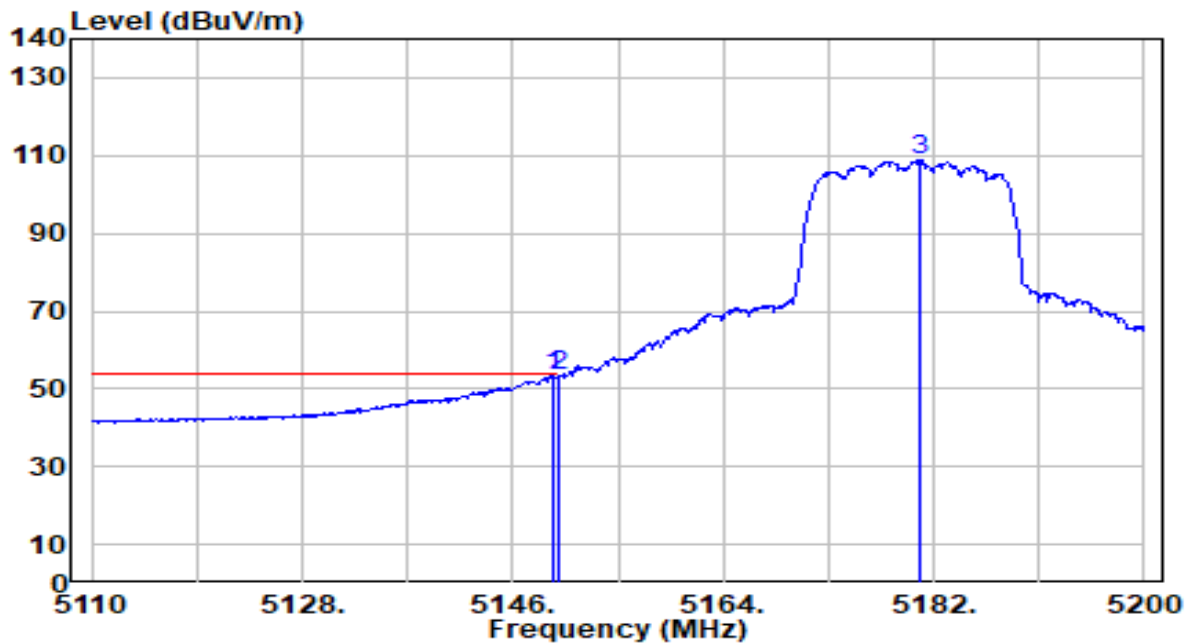


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.420	53.99	-0.72	53.27	-0.73	54.00	144	5	Average
2		5150.000	53.95	-0.72	53.23	-0.77	54.00	144	5	Average
3		5180.740	109.53	-0.73	108.80	N/A	N/A	144	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

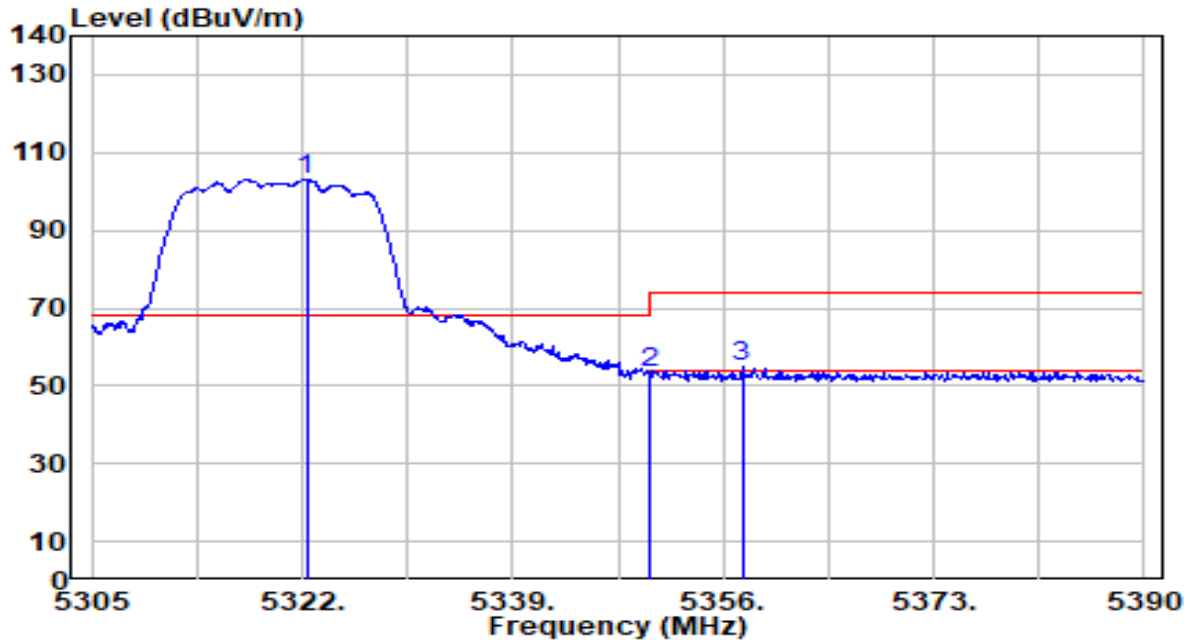


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.340	104.03	-0.93	103.10	N/A	N/A	130	0	Peak
2	5350.000	54.09	-0.97	53.11	-20.89	74.00	130	0	Peak
3	* 5357.530	56.02	-0.98	55.04	-18.96	74.00	130	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

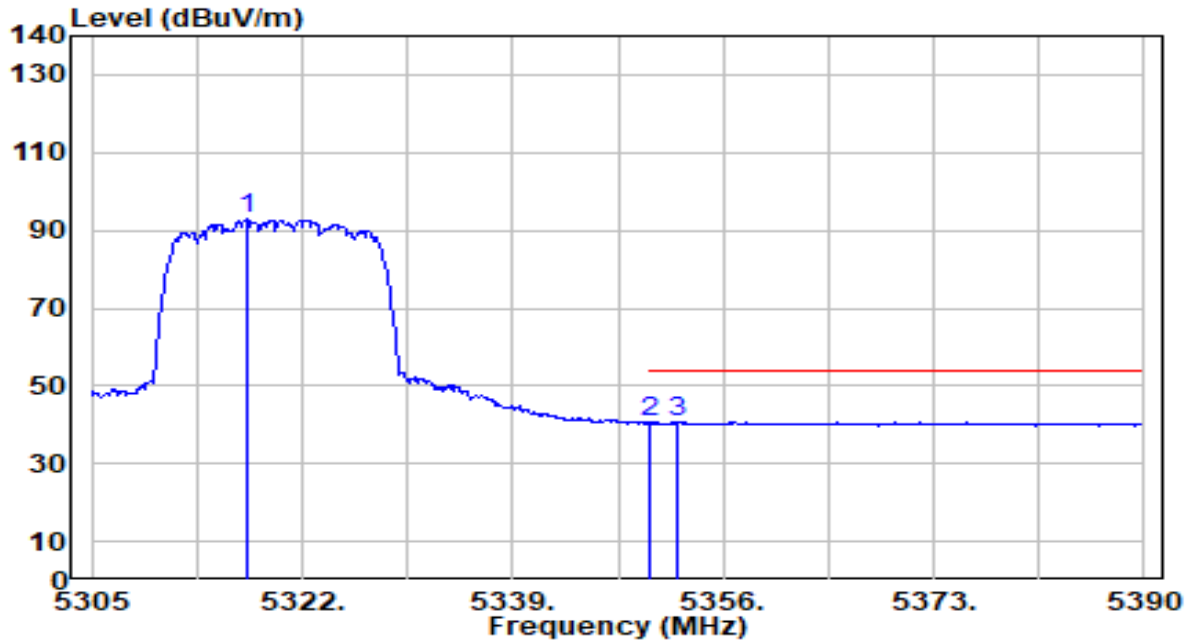


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.580	93.66	-0.92	92.73	N/A	N/A	130	0	Average
2	5350.000	41.54	-0.97	40.57	-13.43	54.00	130	0	Average
3	* 5352.260	41.57	-0.98	40.60	-13.40	54.00	130	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

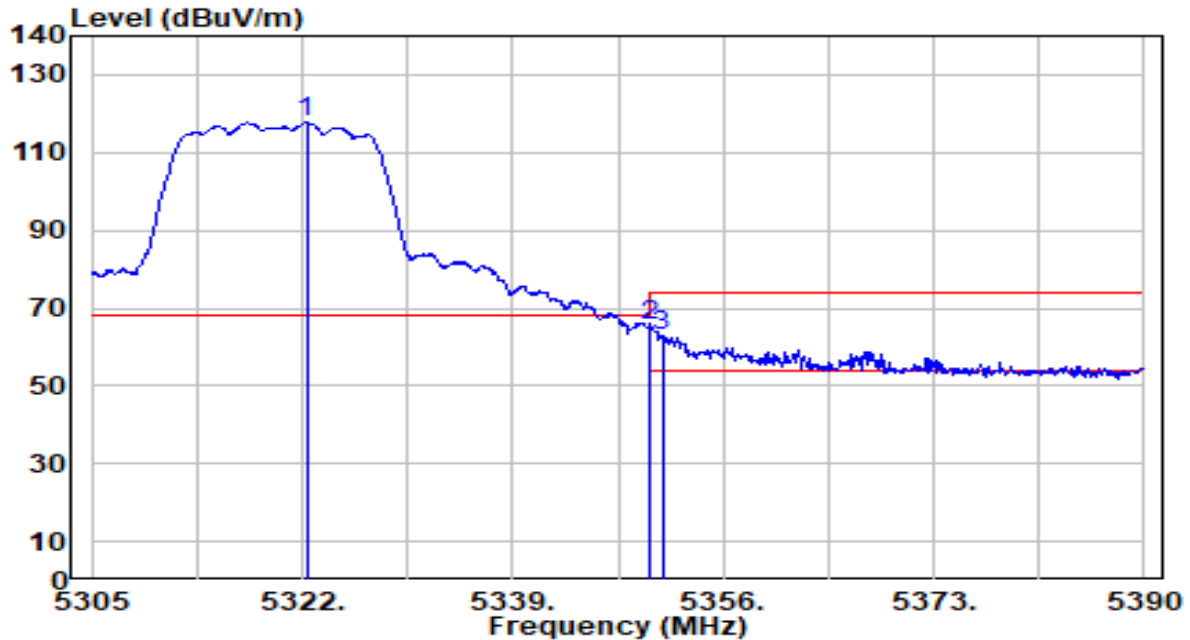


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5322.340	118.59	-0.93	117.66	N/A	N/A	160	360	Peak
2	*	5350.000	66.67	-0.97	65.70	-8.30	74.00	160	360	Peak
3		5351.070	63.75	-0.97	62.78	-11.22	74.00	160	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

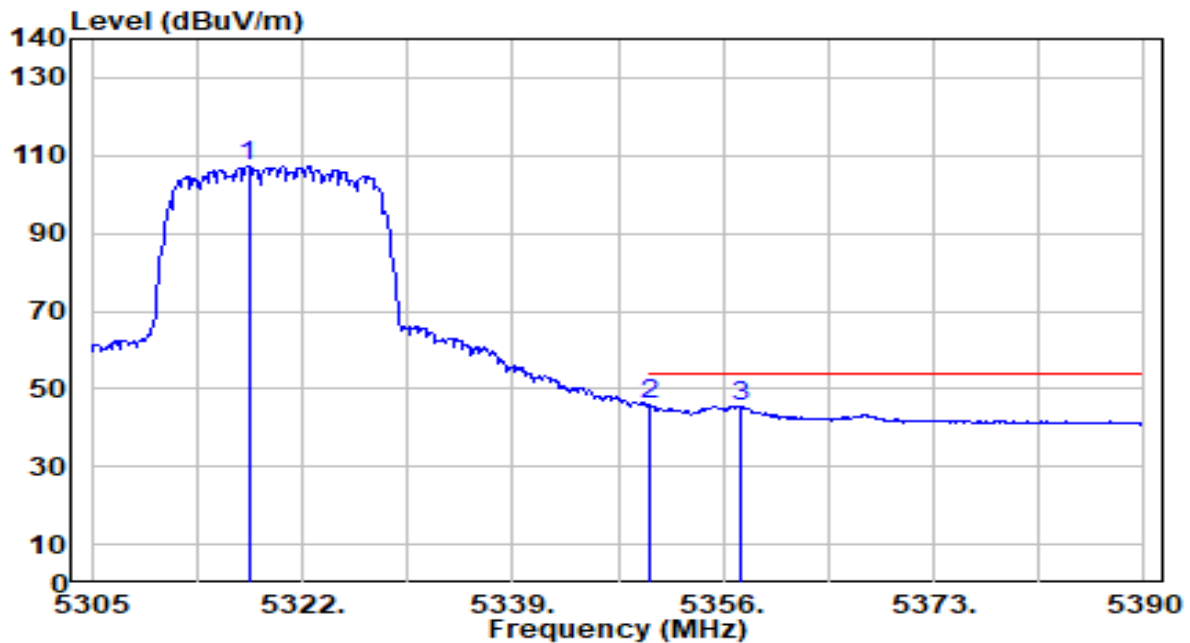


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5317.665	108.33	-0.92	107.41	N/A	N/A	160	360	Average
2	*	5350.000	46.75	-0.97	45.78	-8.22	54.00	160	360	Average
3		5357.360	46.51	-0.98	45.53	-8.47	54.00	160	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

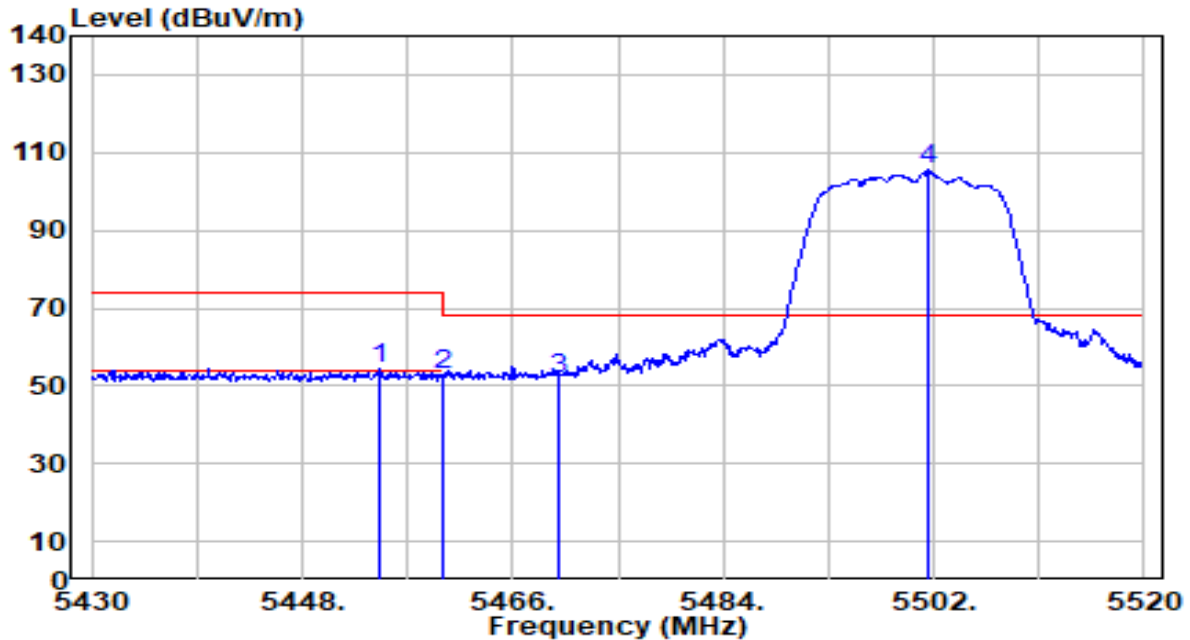


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.660	55.47	-0.89	54.59	-19.41	74.00	115	245	Peak
2	5460.000	53.90	-0.87	53.03	-20.97	74.00	115	245	Peak
3	* 5470.000	52.84	-0.84	52.00	-16.20	68.20	115	245	Peak
4	5501.460	106.15	-0.75	105.41	N/A	N/A	115	245	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

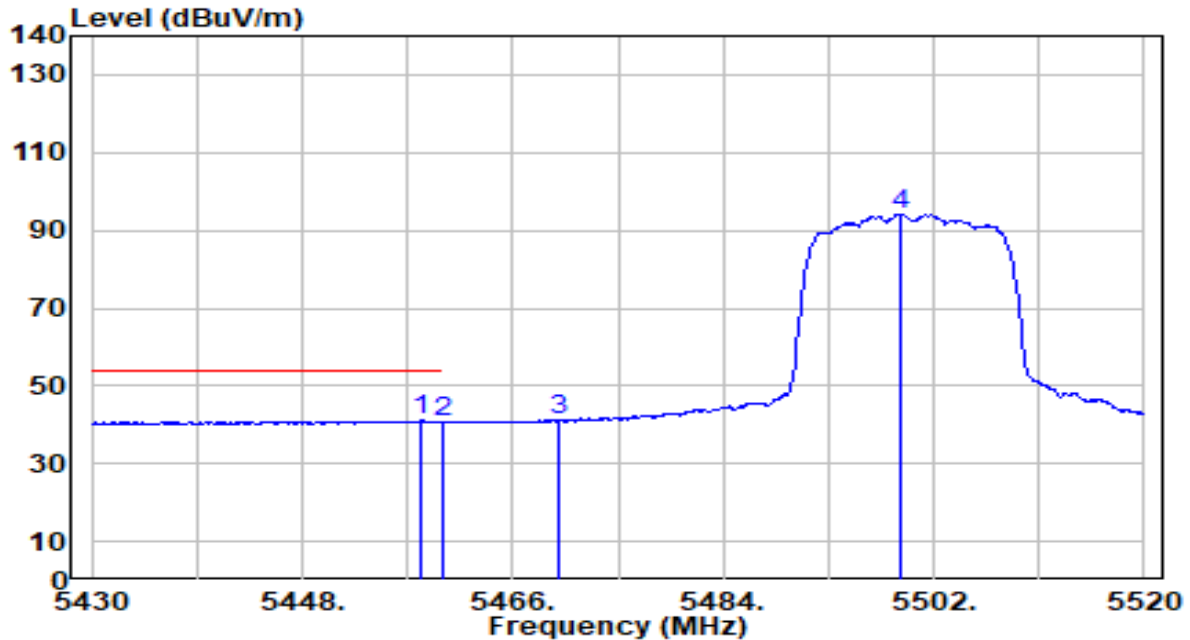


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.260	41.88	-0.87	41.01	-12.99	54.00	115	245	Average
2		5460.000	41.42	-0.87	40.55	-13.45	54.00	115	245	Average
3		5470.000	42.02	-0.84	41.18	N/A	N/A	115	245	Average
4		5499.120	95.00	-0.75	94.25	N/A	N/A	115	245	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

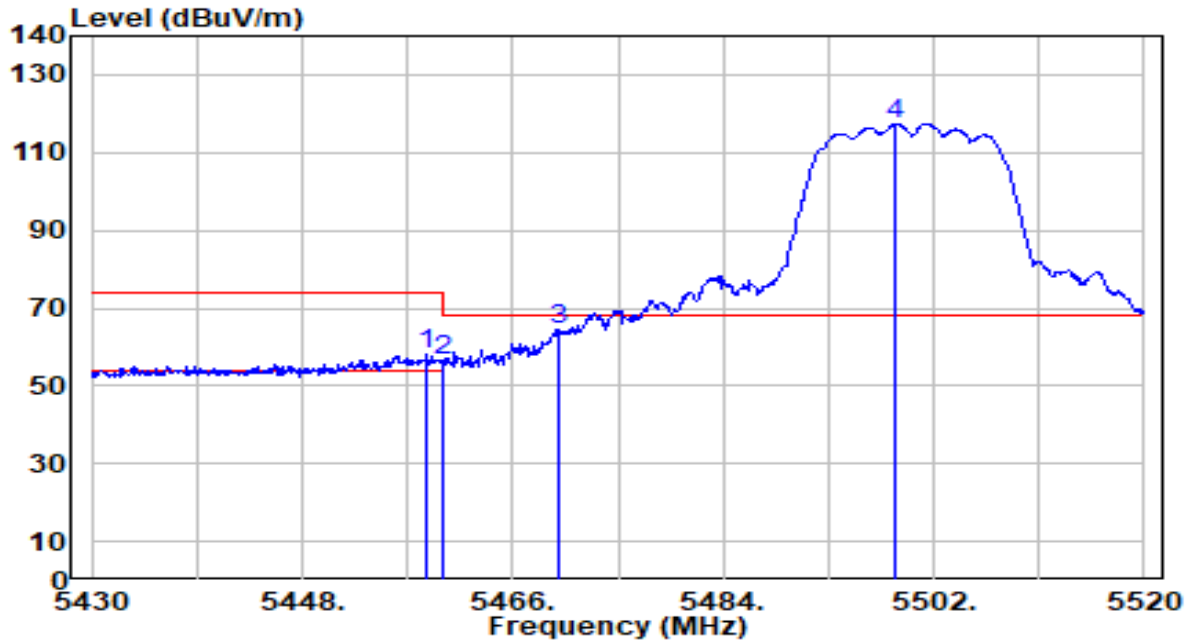


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.620	58.76	-0.87	57.89	-16.11	74.00	168	5	Peak
2	5460.000	57.31	-0.87	56.44	-17.56	74.00	168	5	Peak
3	* 5470.000	65.23	-0.84	64.39	-3.81	68.20	168	5	Peak
4	5498.760	118.23	-0.75	117.48	N/A	N/A	168	5	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

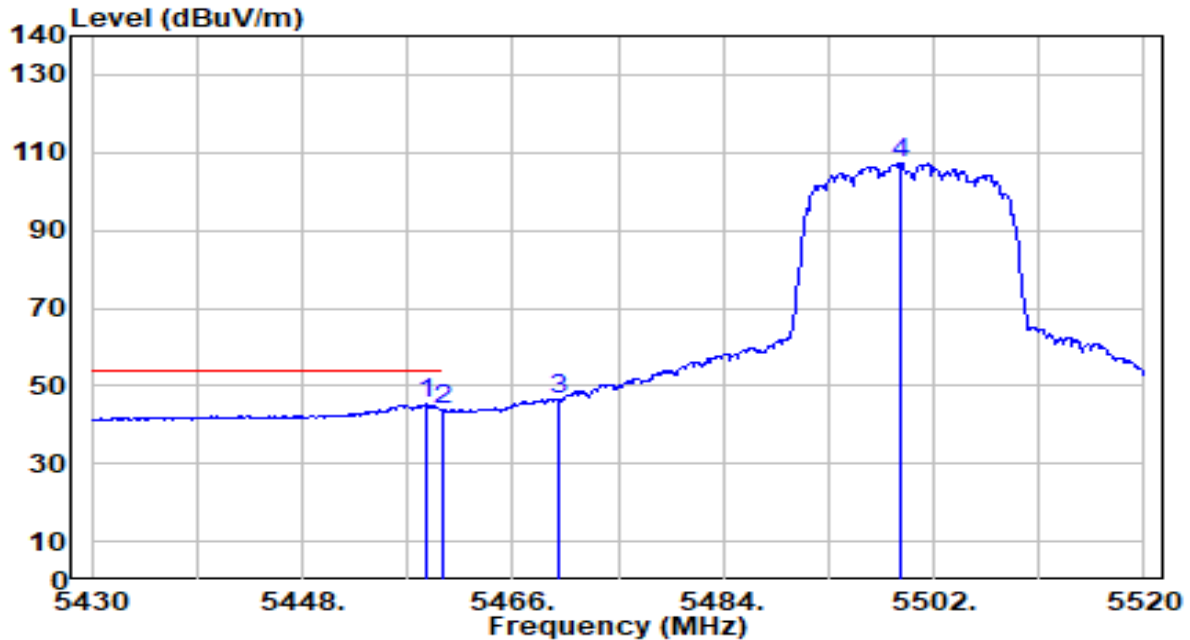


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.620	46.30	-0.87	45.43	-8.57	54.00	168	5	Average
2		5460.000	44.69	-0.87	43.82	-10.18	54.00	168	5	Average
3		5470.000	47.42	-0.84	46.58	N/A	N/A	168	5	Average
4		5499.210	107.98	-0.75	107.23	N/A	N/A	168	5	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

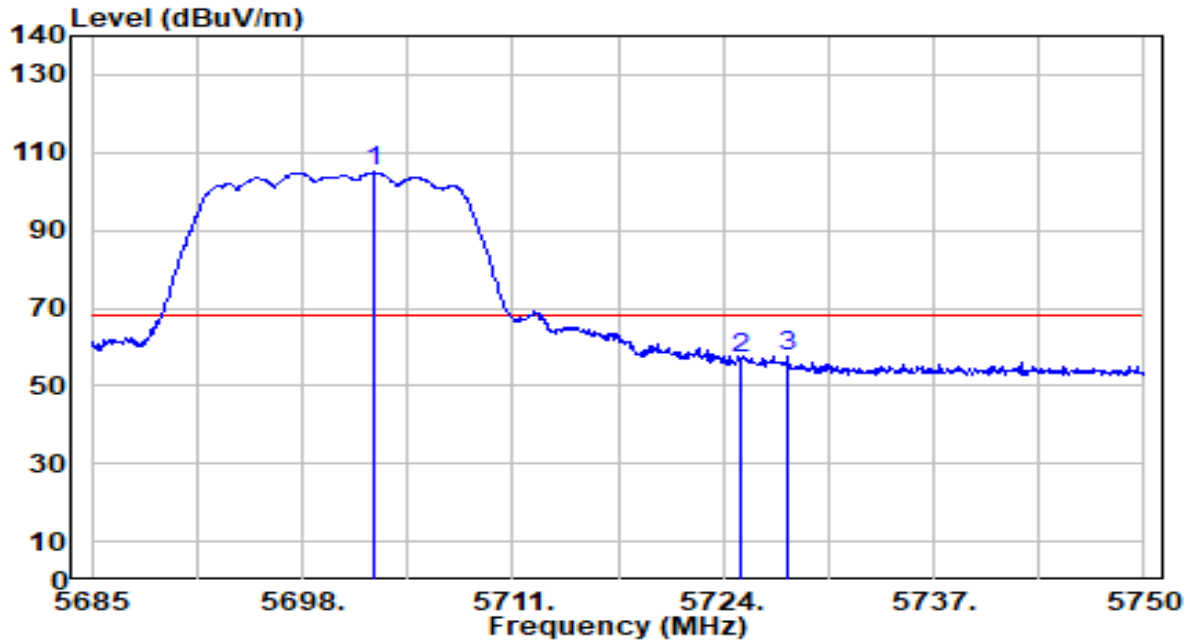


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5702.355	104.77	0.11	104.88	N/A	N/A	159	360	Peak
2	5725.000	56.85	0.23	57.08	-11.12	68.20	159	360	Peak
3	* 5727.965	57.29	0.24	57.53	-10.67	68.20	159	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

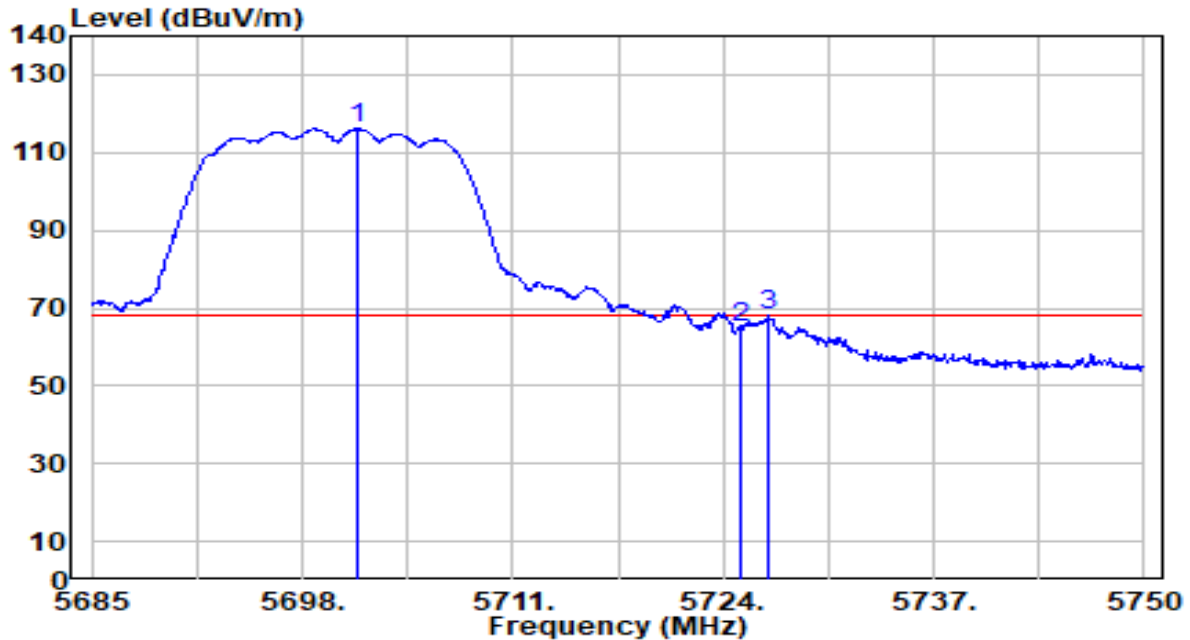


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5701.380	116.08	0.11	116.18	N/A	N/A	193	8	Peak
2		5725.000	64.51	0.23	64.74	-3.46	68.20	193	8	Peak
3		5726.795	67.75	0.24	67.99	-0.21	68.20	193	8	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

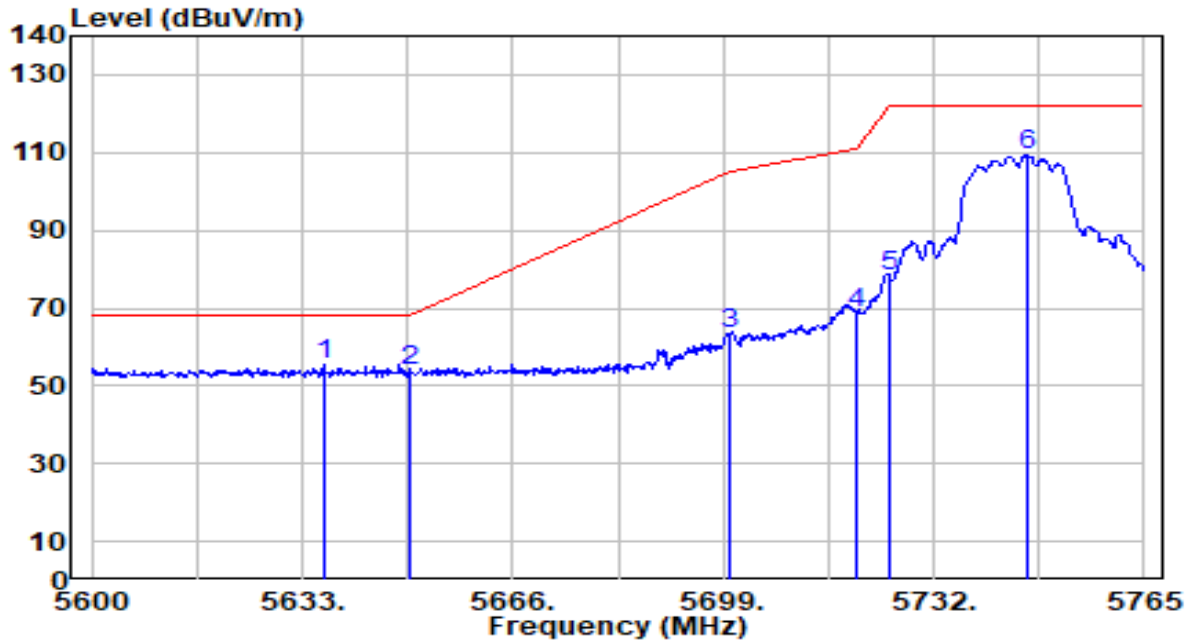


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.465	55.68	-0.23	55.45	-12.75	68.20	195	349	Peak
2		5650.000	54.26	-0.16	54.10	-14.10	68.20	195	349	Peak
3		5700.000	63.24	0.10	63.34	-41.86	105.20	195	349	Peak
4		5720.000	68.39	0.20	68.60	-42.20	110.80	195	349	Peak
5		5725.000	78.07	0.23	78.30	-43.90	122.20	195	349	Peak
6		5746.520	108.96	0.34	109.31	N/A	N/A	195	349	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

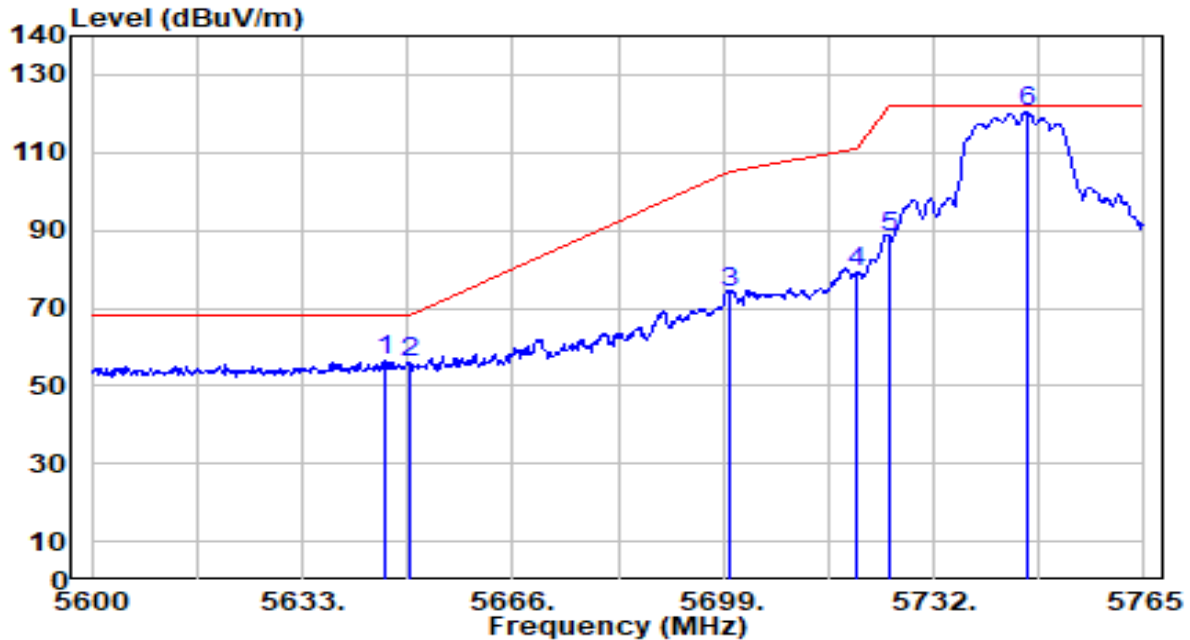


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.035	56.50	-0.18	56.32	-11.88	68.20	200	7	Peak
2		5650.000	56.24	-0.16	56.08	-12.12	68.20	200	7	Peak
3		5700.000	73.90	0.10	74.00	-31.20	105.20	200	7	Peak
4		5720.000	78.91	0.20	79.11	-31.69	110.80	200	7	Peak
5		5725.000	88.07	0.23	88.30	-33.90	122.20	200	7	Peak
6		5746.520	119.99	0.34	120.33	N/A	N/A	200	7	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

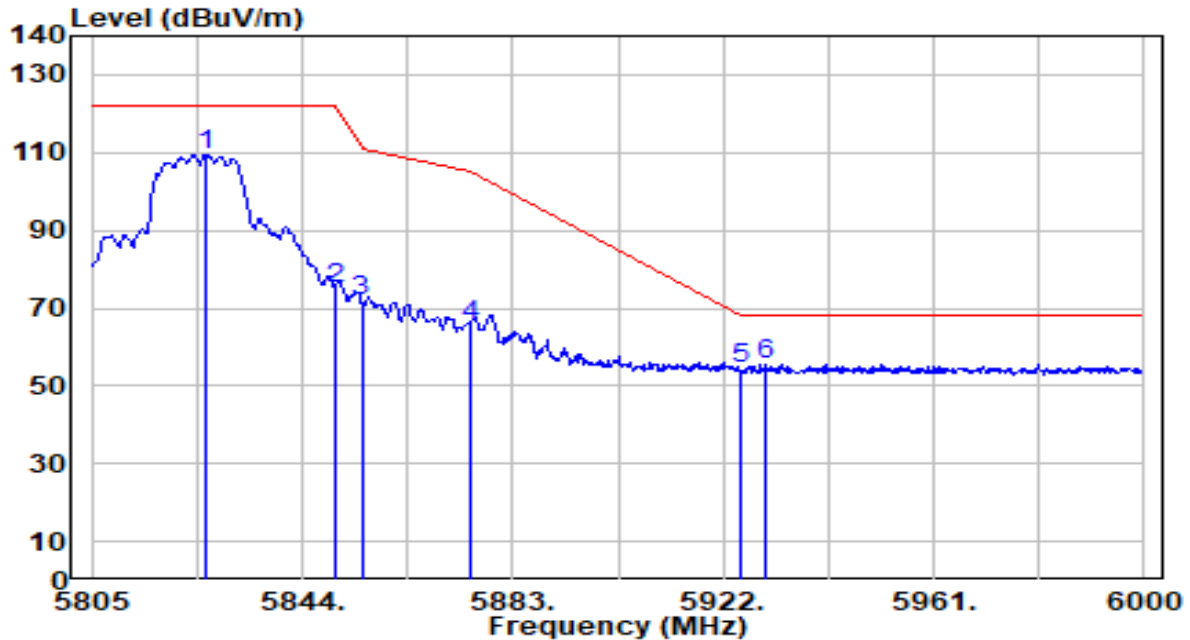


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.255	108.99	0.60	109.59	N/A	N/A	192	348	Peak
2	5850.000	74.27	0.58	74.86	-47.34	122.20	192	348	Peak
3	5855.000	71.15	0.58	71.73	-39.07	110.80	192	348	Peak
4	5875.000	64.72	0.57	65.29	-39.91	105.20	192	348	Peak
5	5925.000	53.75	0.53	54.28	-13.92	68.20	192	348	Peak
6	* 5929.605	55.16	0.52	55.68	-12.52	68.20	192	348	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

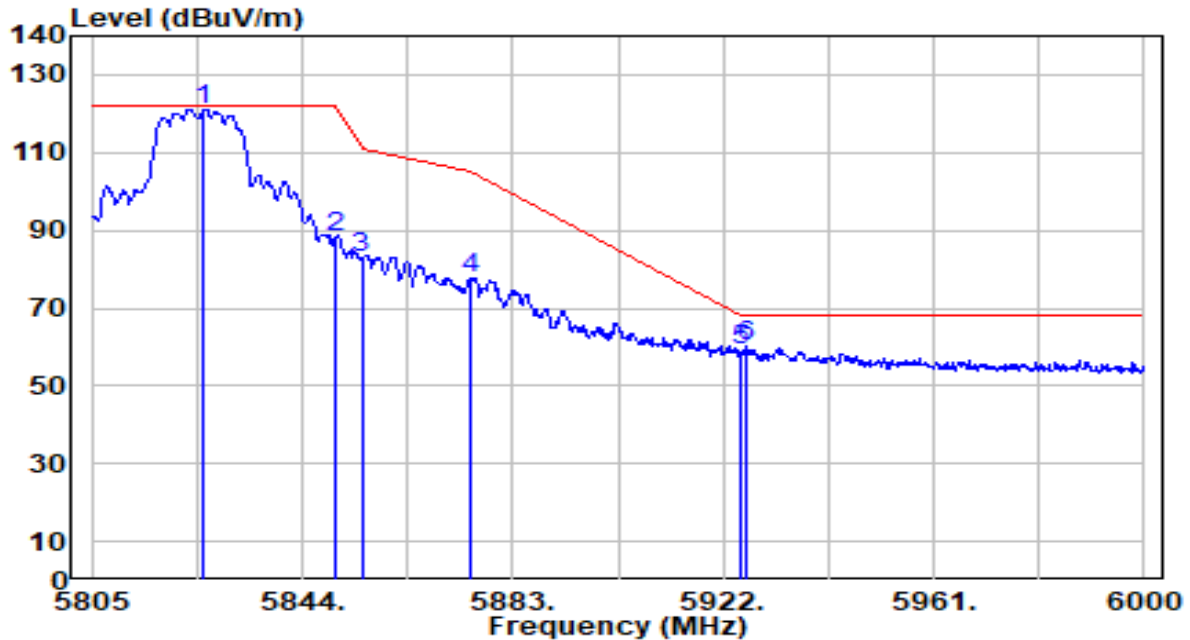


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5825.865	120.45	0.60	121.06	N/A	N/A	218	360	Peak
2	5850.000	87.39	0.58	87.98	-34.22	122.20	218	360	Peak
3	5855.000	82.17	0.58	82.75	-28.05	110.80	218	360	Peak
4	5875.000	76.90	0.57	77.47	-27.73	105.20	218	360	Peak
5	5925.000	58.71	0.53	59.24	-8.96	68.20	218	360	Peak
6	* 5926.290	59.59	0.53	60.12	-8.08	68.20	218	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

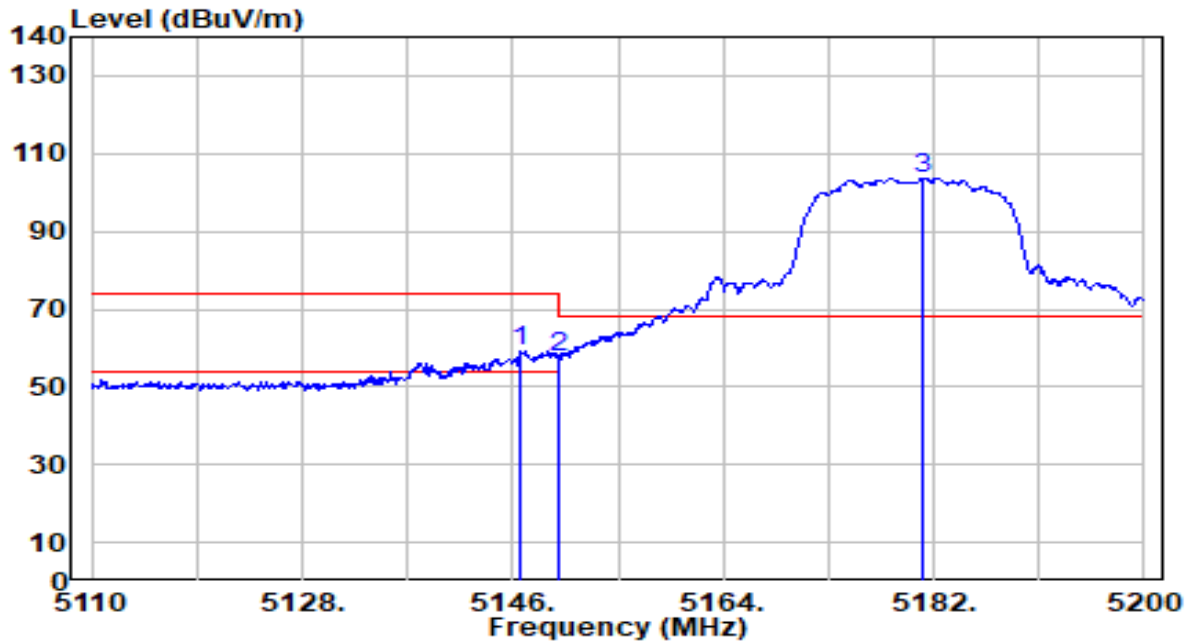


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.720	59.85	-0.72	59.14	-14.86	74.00	100	252	Peak
2		5150.000	58.42	-0.72	57.71	-16.29	74.00	100	252	Peak
3		5181.100	104.44	-0.73	103.70	N/A	N/A	100	252	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

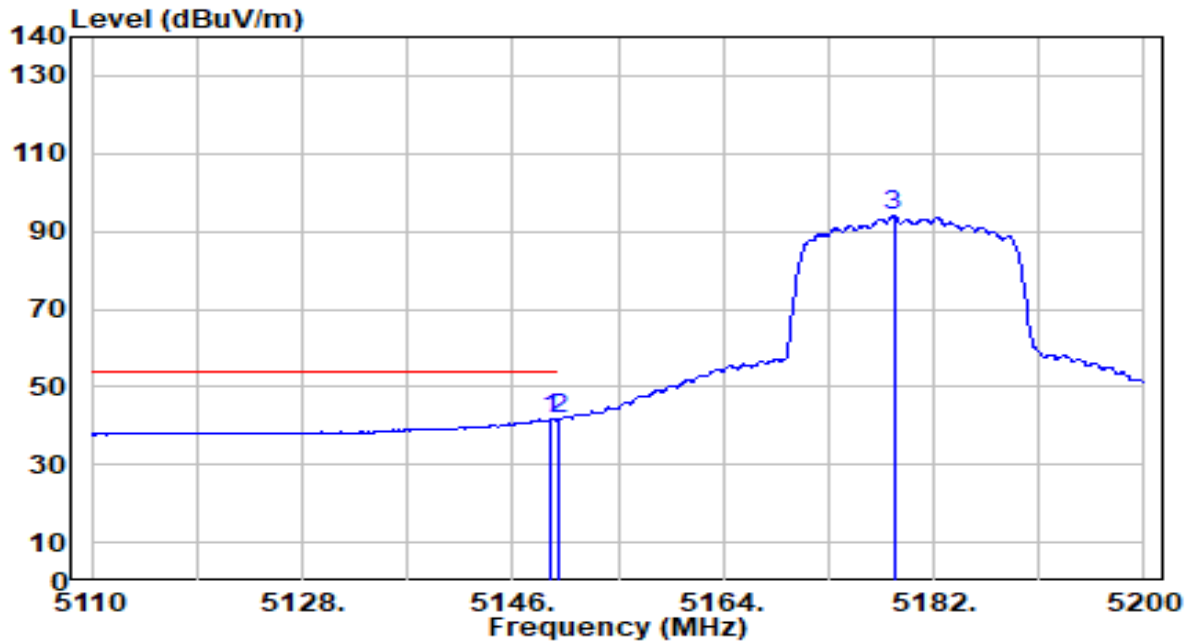


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.240	42.68	-0.72	41.96	-12.04	54.00	100	252	Average
2		5150.000	42.59	-0.72	41.88	-12.12	54.00	100	252	Average
3		5178.580	94.58	-0.73	93.85	N/A	N/A	100	252	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

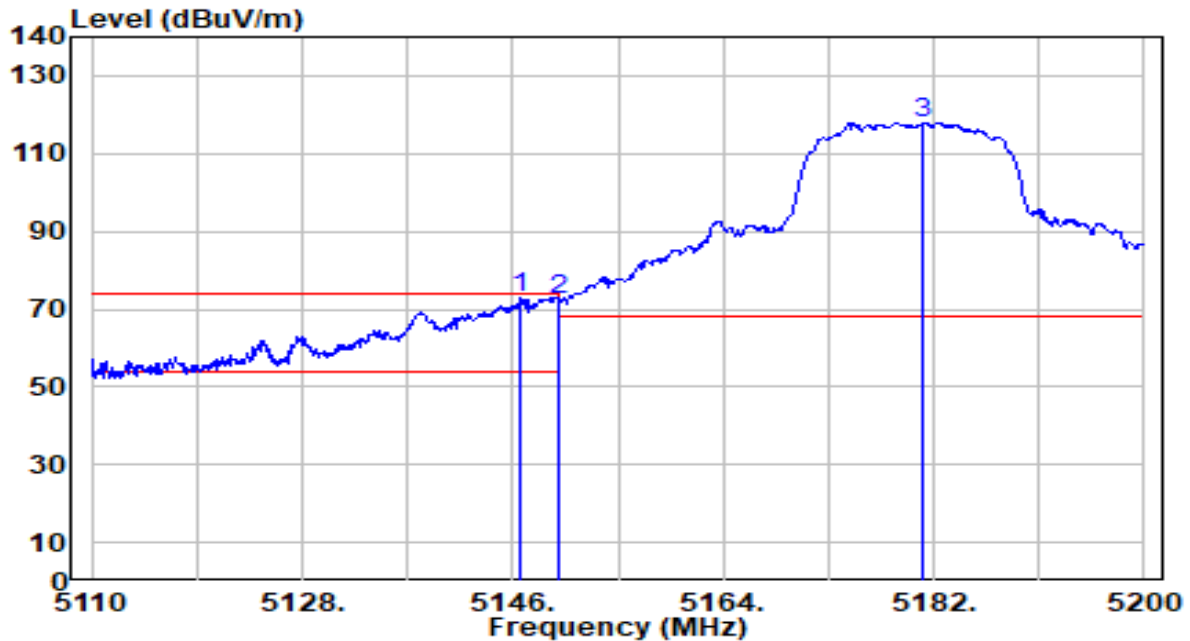


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.720	73.43	-0.72	72.71	-1.29	74.00	150	4	Peak
2		5150.000	73.15	-0.72	72.43	-1.57	74.00	150	4	Peak
3		5181.100	118.78	-0.73	118.04	N/A	N/A	150	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

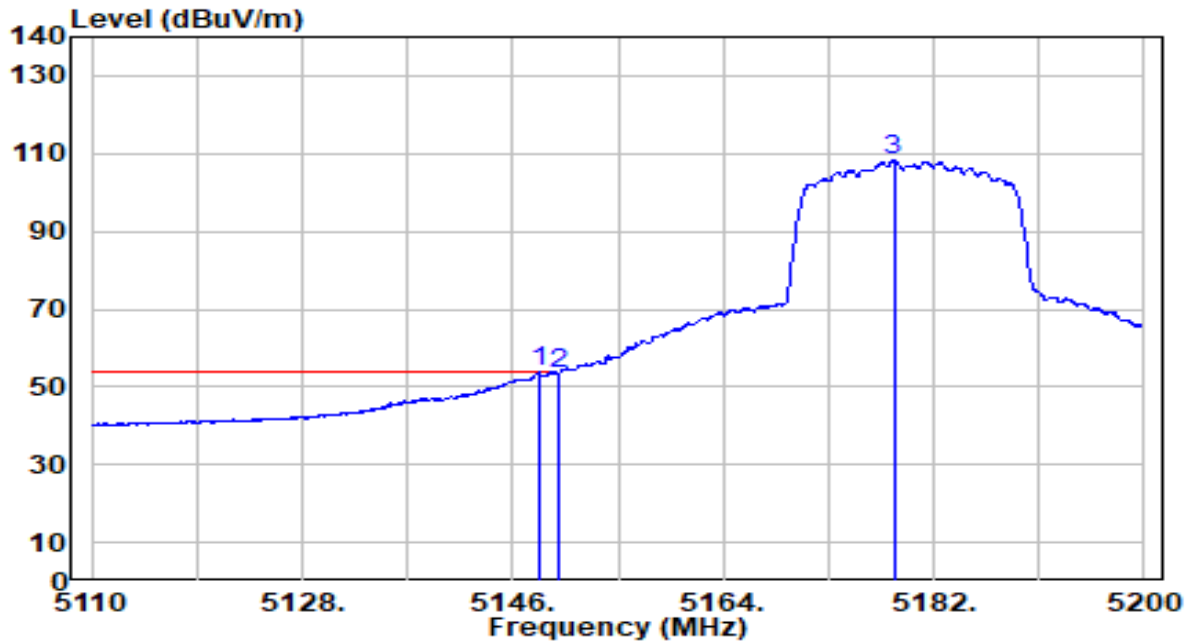


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.340	54.53	-0.72	53.81	-0.19	54.00	150	4	Average
2		5150.000	54.21	-0.72	53.49	-0.51	54.00	150	4	Average
3		5178.580	108.84	-0.73	108.11	N/A	N/A	150	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

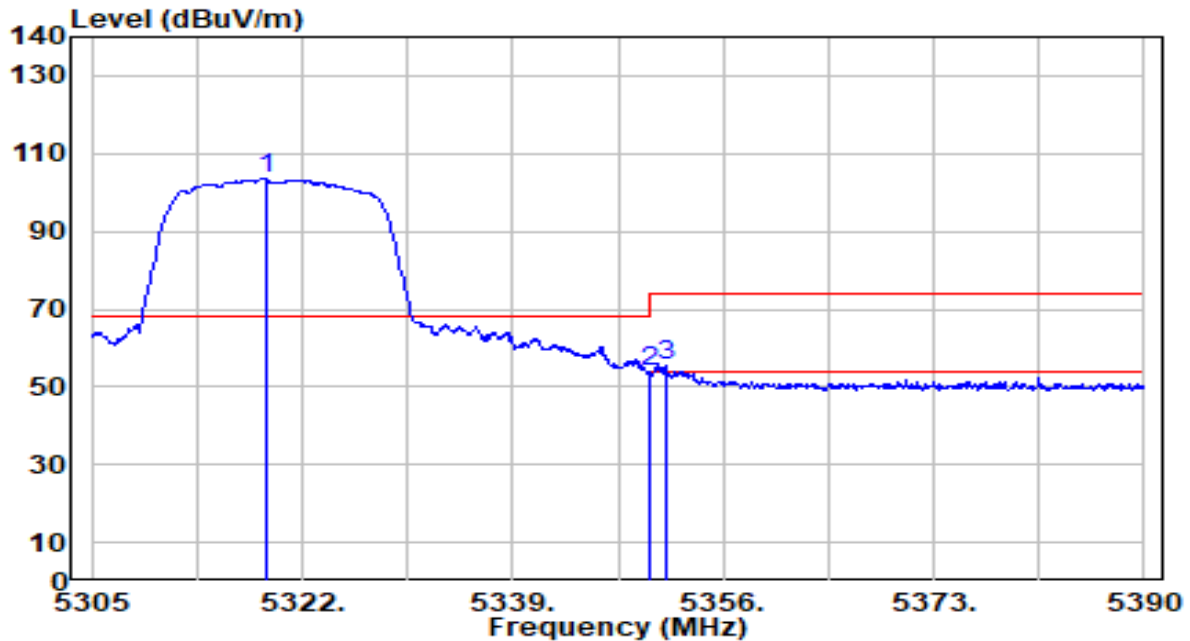


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.025	104.73	-0.92	103.81	N/A	N/A	140	246	Peak
2	5350.000	54.66	-0.97	53.69	-20.31	74.00	140	246	Peak
3	* 5351.410	56.20	-0.97	55.23	-18.77	74.00	140	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

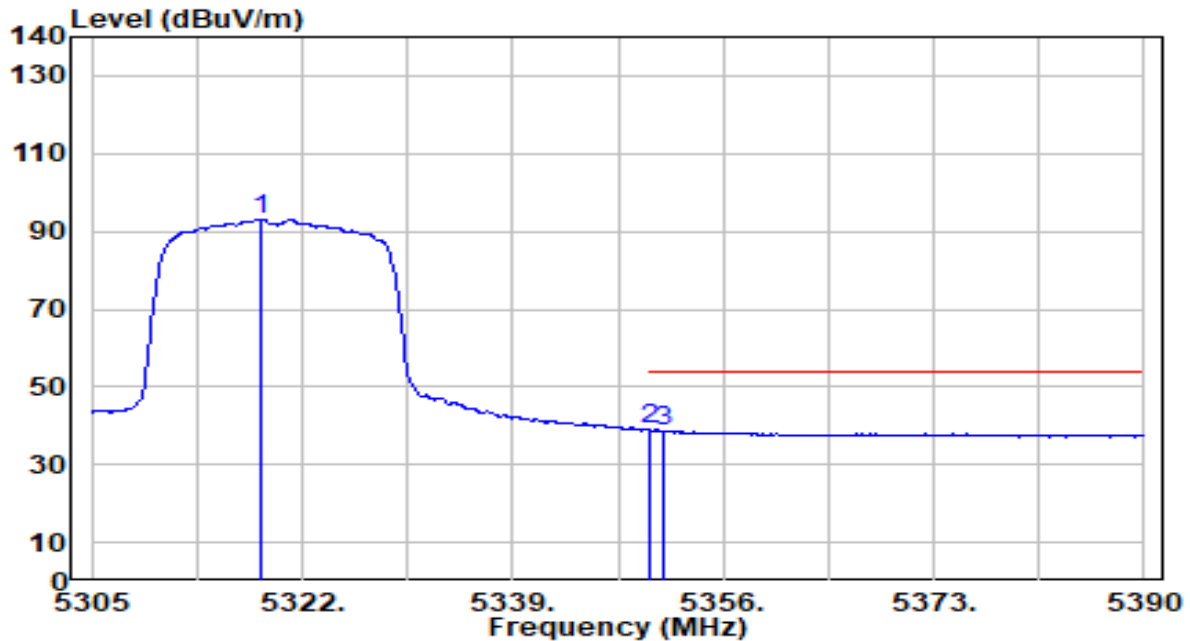


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5318.600	94.16	-0.92	93.23	N/A	N/A	140	246	Average
2	*	5350.000	39.96	-0.97	38.98	-15.02	54.00	140	246	Average
3		5351.155	39.66	-0.97	38.69	-15.31	54.00	140	246	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

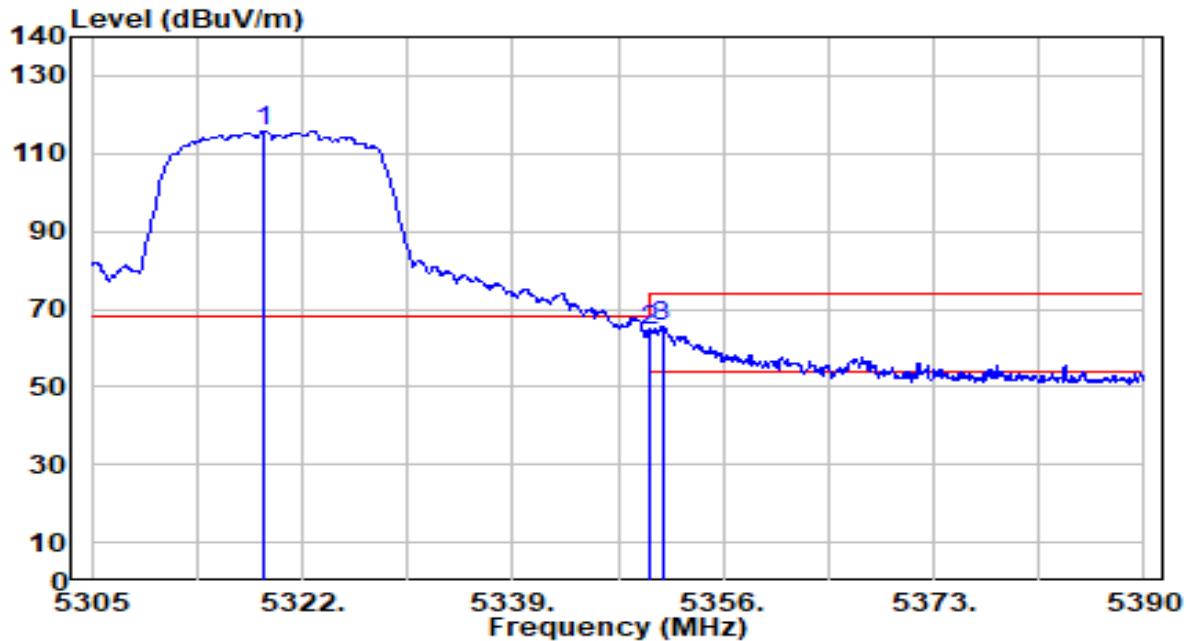


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.940	116.88	-0.92	115.96	N/A	N/A	174	8	Peak
2	5350.000	65.44	-0.97	64.47	-9.53	74.00	174	8	Peak
3	* 5351.070	66.45	-0.97	65.48	-8.52	74.00	174	8	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

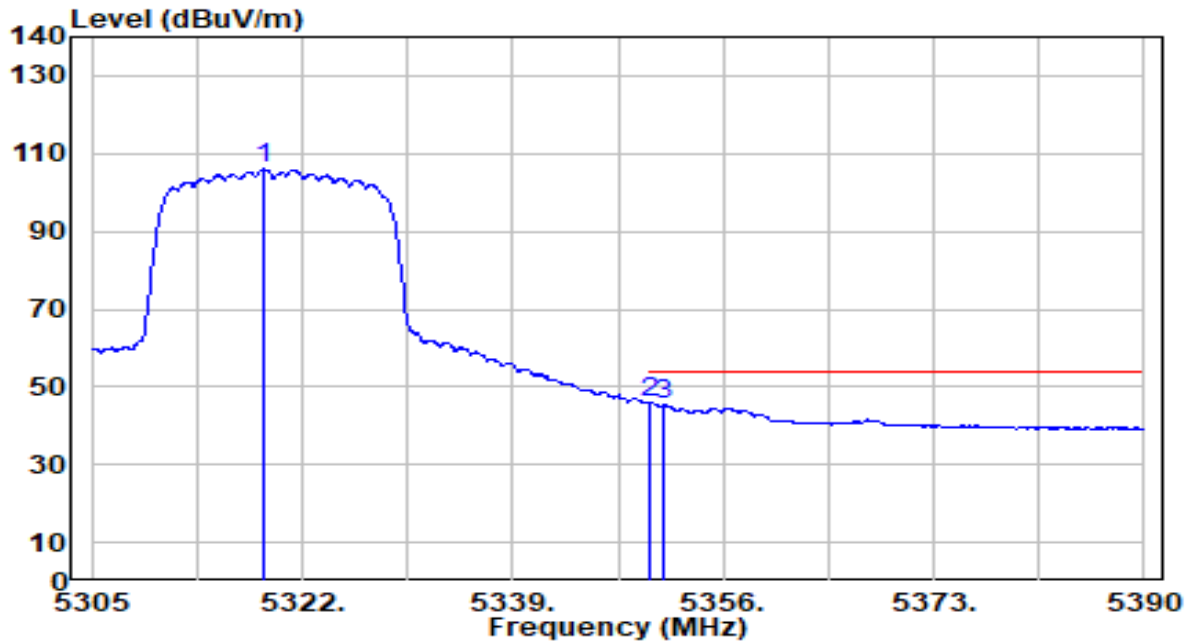


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5318.855	106.89	-0.92	105.96	N/A	N/A	174	8	Average
2	*	5350.000	46.94	-0.97	45.97	-8.03	54.00	174	8	Average
3		5351.240	46.40	-0.97	45.43	-8.57	54.00	174	8	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

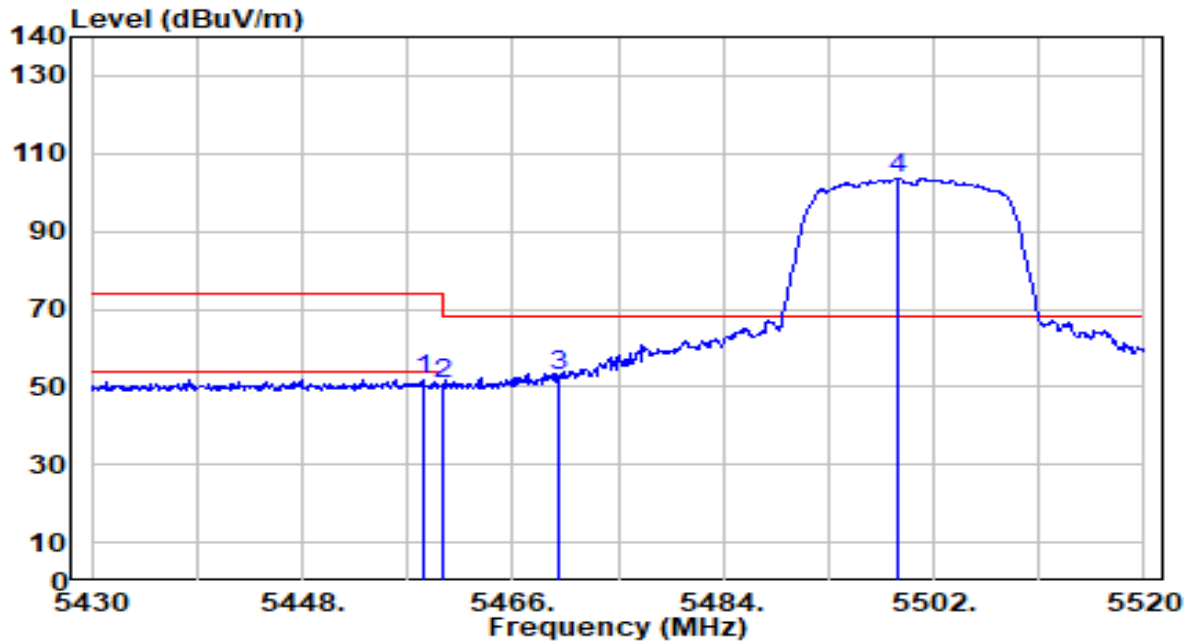


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.350	52.52	-0.87	51.64	-22.36	74.00	106	254	Peak
2	5460.000	51.39	-0.87	50.52	-23.48	74.00	106	254	Peak
3	* 5470.000	53.83	-0.84	52.99	-15.21	68.20	106	254	Peak
4	5498.940	104.55	-0.75	103.80	N/A	N/A	106	254	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

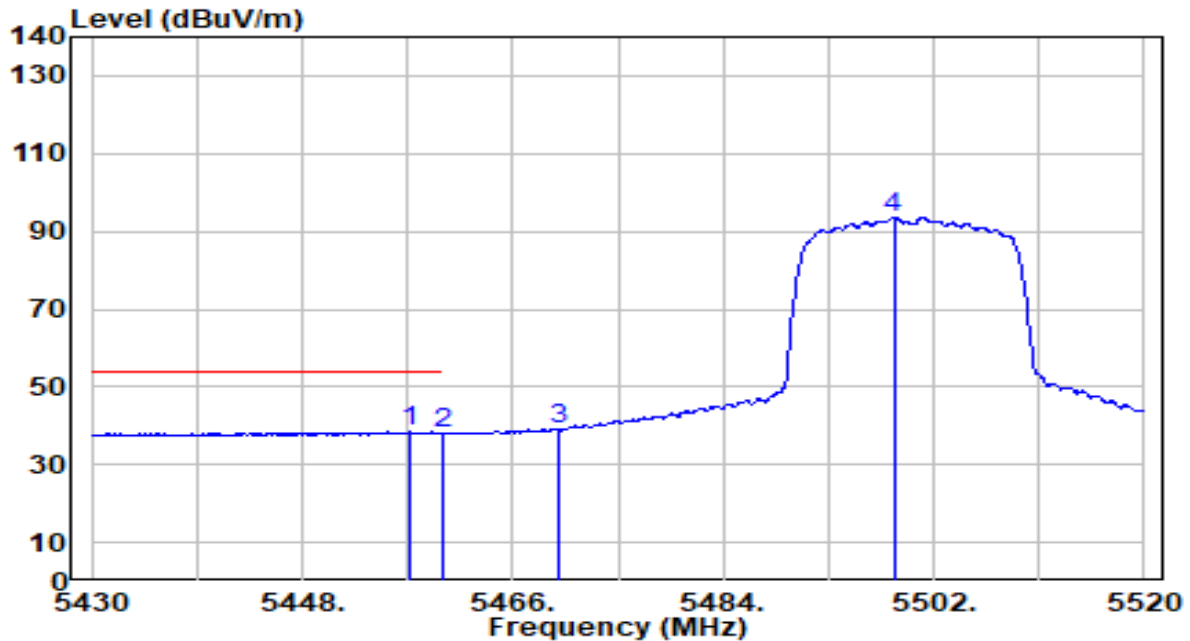


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.270	39.31	-0.88	38.43	-15.57	54.00	106	254	Average
2		5460.000	39.16	-0.87	38.29	-15.71	54.00	106	254	Average
3		5470.000	39.74	-0.84	38.90	N/A	N/A	106	254	Average
4		5498.580	94.30	-0.75	93.55	N/A	N/A	106	254	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

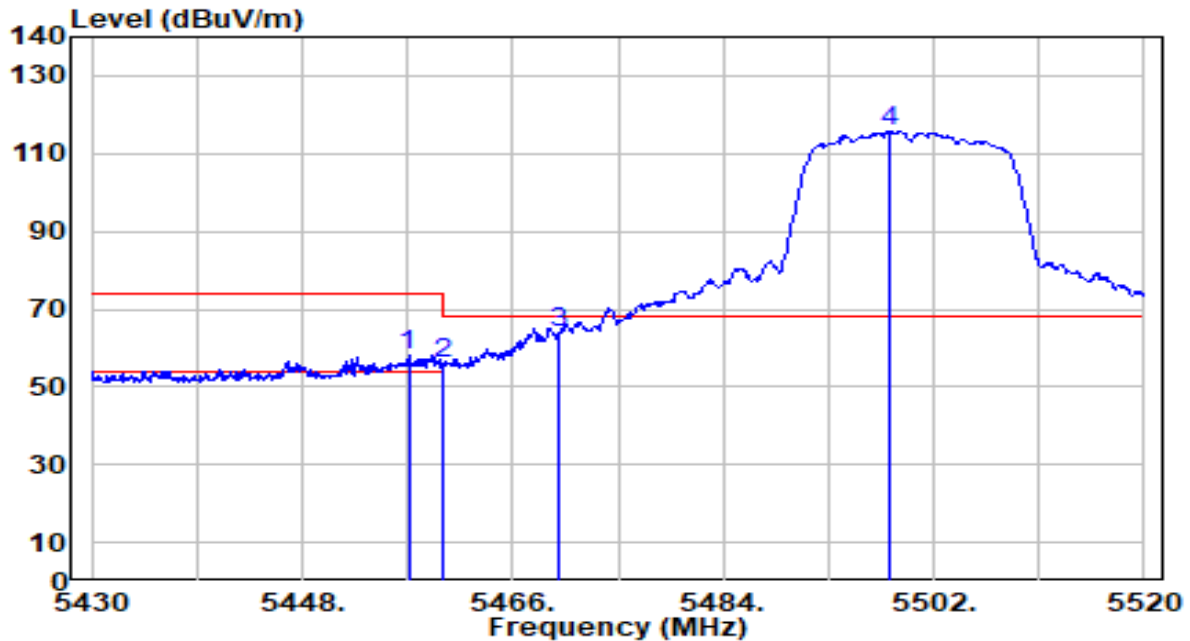


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.090	58.80	-0.88	57.93	-16.07	74.00	175	10	Peak
2	5460.000	56.77	-0.87	55.90	-18.10	74.00	175	10	Peak
3	* 5470.000	64.83	-0.84	63.99	-4.21	68.20	175	10	Peak
4	5498.220	116.39	-0.76	115.63	N/A	N/A	175	10	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

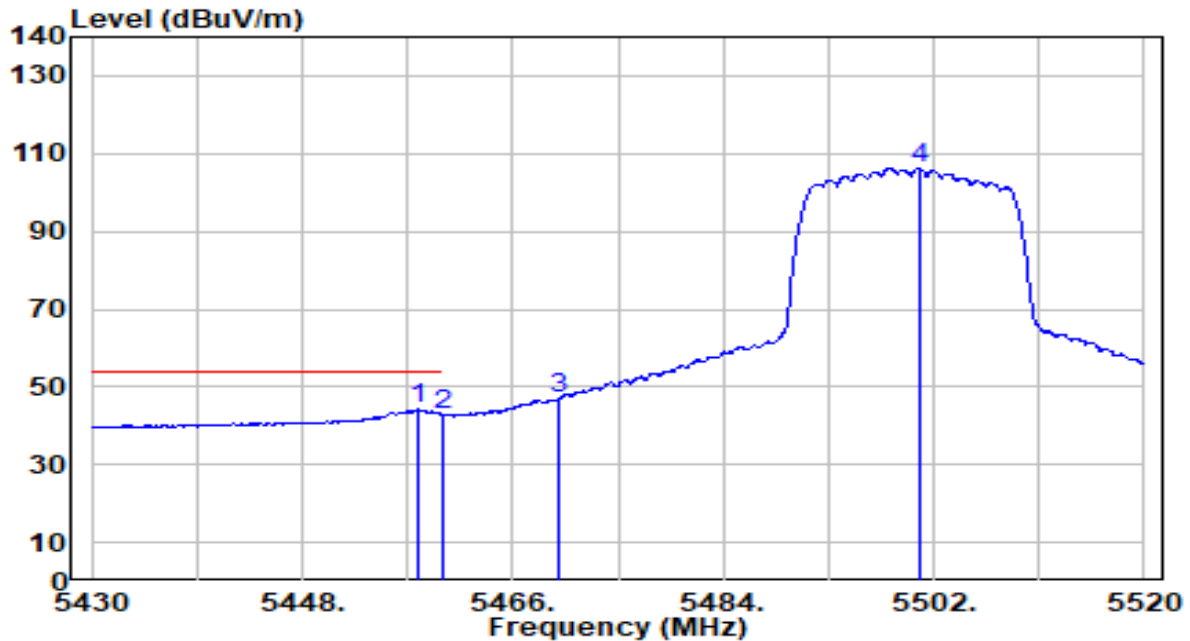


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.900	45.00	-0.88	44.13	-9.87	54.00	175	10	Average
2		5460.000	43.68	-0.87	42.81	-11.19	54.00	175	10	Average
3		5470.000	47.65	-0.84	46.81	N/A	N/A	175	10	Average
4		5500.740	107.11	-0.75	106.37	N/A	N/A	175	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

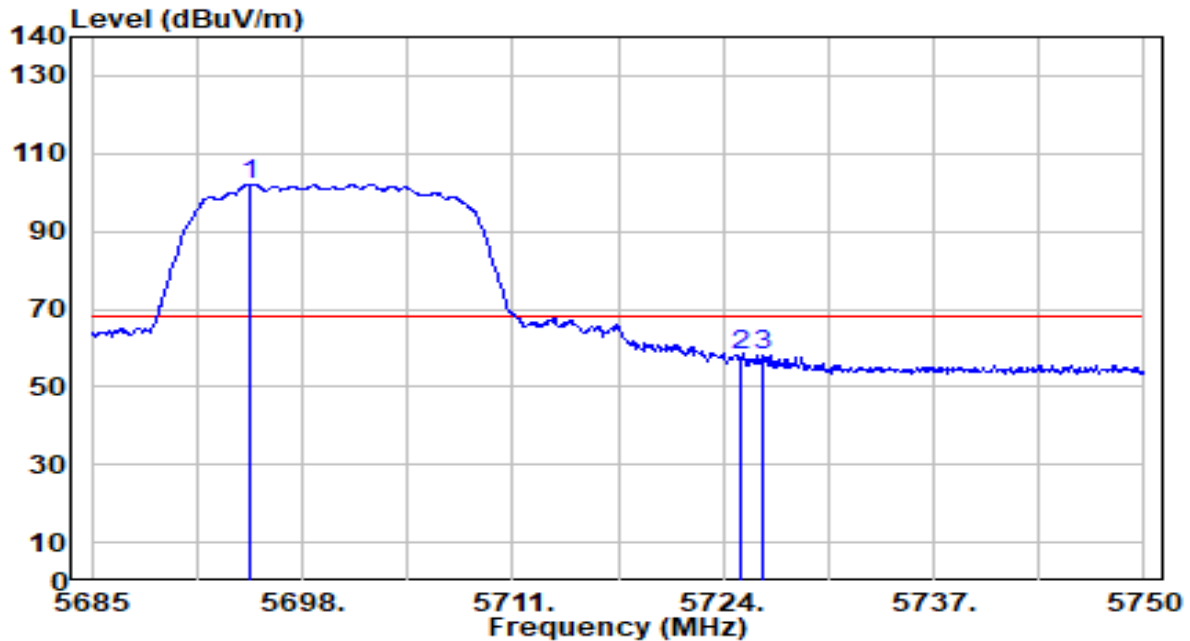


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5694.815	102.12	0.07	102.19	N/A	N/A	210	355	Peak
2	5725.000	57.66	0.23	57.89	-10.31	68.20	210	355	Peak
3	* 5726.405	57.94	0.24	58.18	-10.02	68.20	210	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

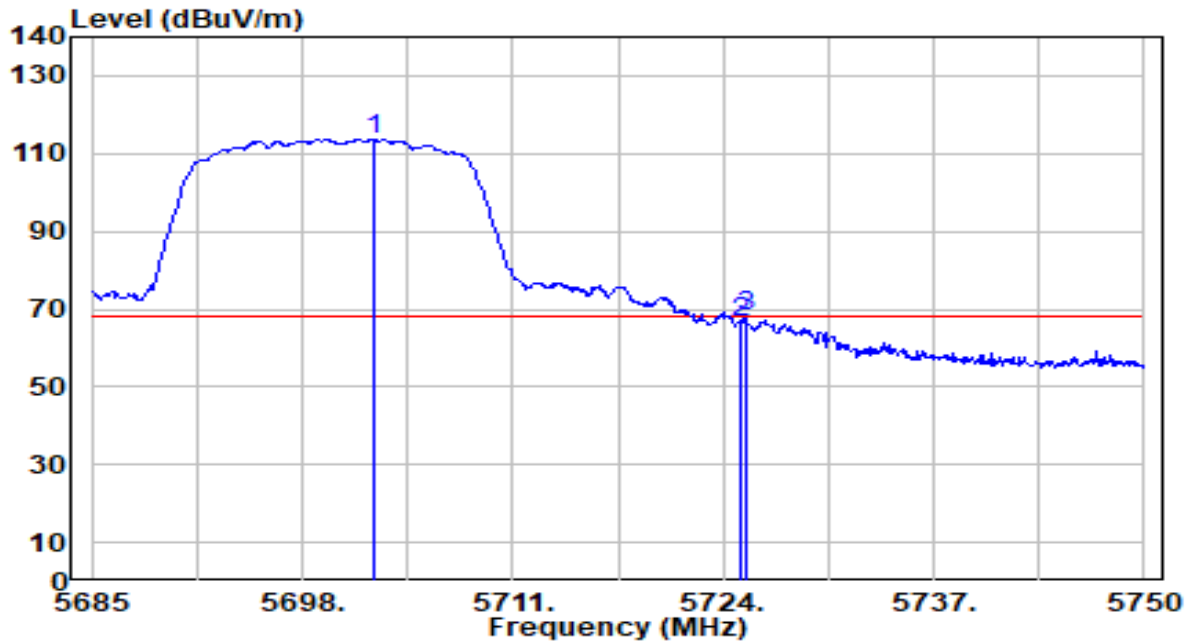


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5702.355	113.48	0.11	113.59	N/A	N/A	200	360	Peak
2	5725.000	66.59	0.23	66.82	-1.38	68.20	200	360	Peak
3	* 5725.430	67.77	0.23	68.00	-0.20	68.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

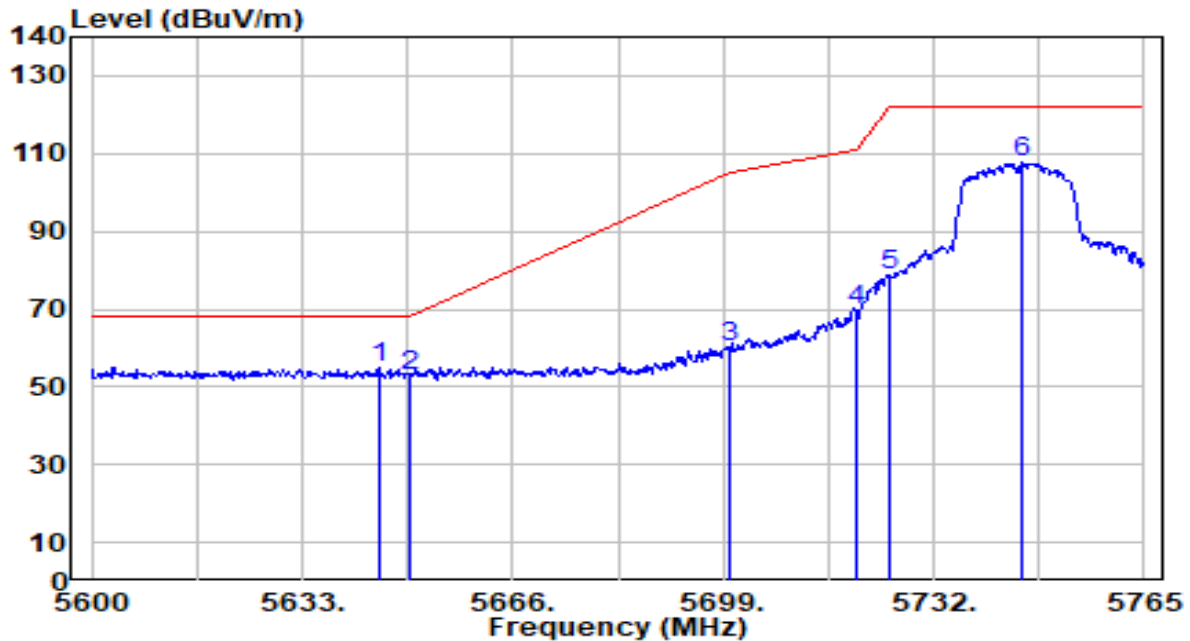


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.045	55.13	-0.19	54.94	-13.26	68.20	195	349	Peak
2		5650.000	53.03	-0.16	52.87	-15.33	68.20	195	349	Peak
3		5700.000	59.93	0.10	60.02	-45.18	105.20	195	349	Peak
4		5720.000	69.32	0.20	69.52	-41.28	110.80	195	349	Peak
5		5725.000	78.27	0.23	78.50	-43.70	122.20	195	349	Peak
6		5745.860	107.30	0.34	107.64	N/A	N/A	195	349	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

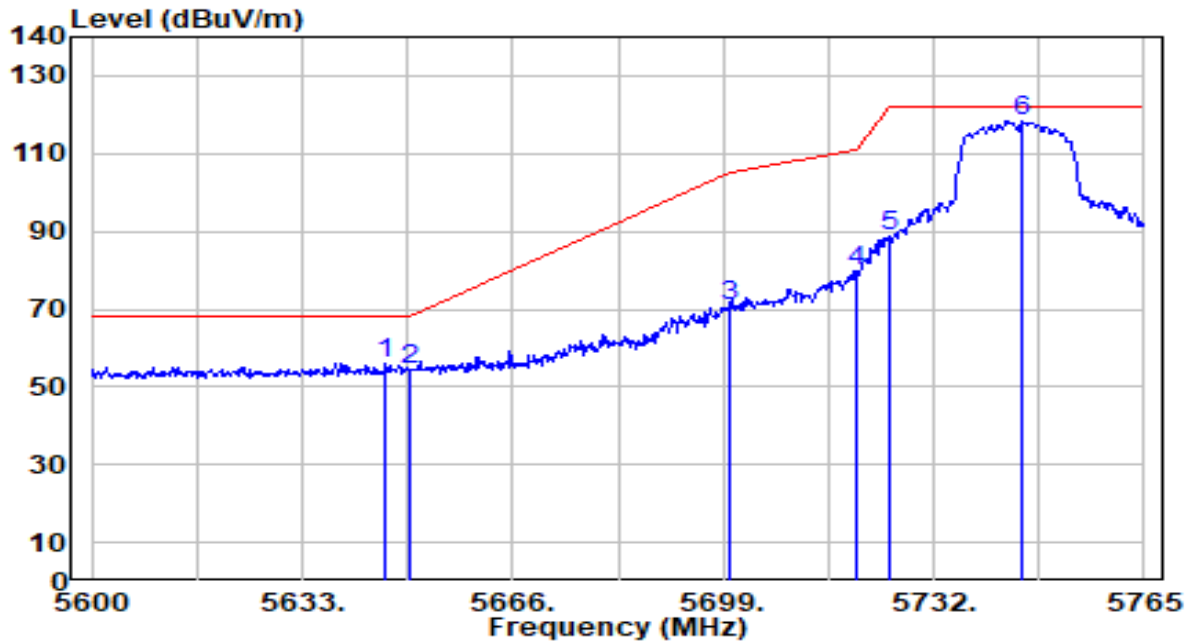


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.035	56.17	-0.18	55.99	-12.21	68.20	200	8	Peak
2		5650.000	54.71	-0.16	54.55	-13.65	68.20	200	8	Peak
3		5700.000	70.74	0.10	70.84	-34.36	105.20	200	8	Peak
4		5720.000	79.66	0.20	79.86	-30.94	110.80	200	8	Peak
5		5725.000	88.69	0.23	88.92	-33.28	122.20	200	8	Peak
6		5746.025	118.03	0.34	118.37	N/A	N/A	200	8	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

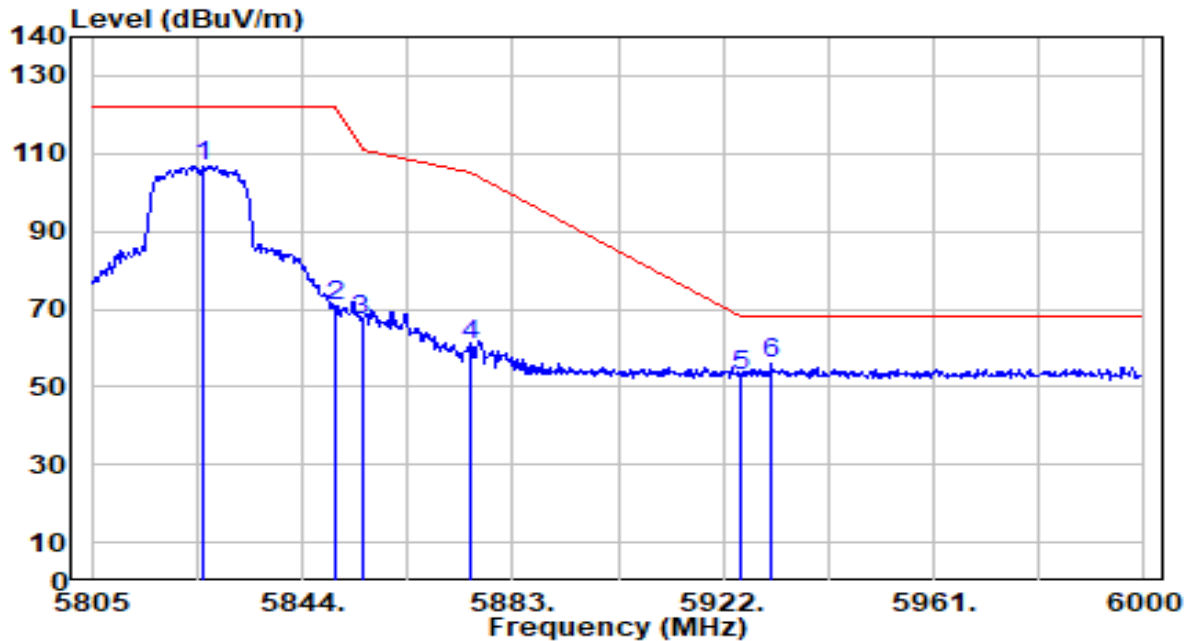


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5825.670	106.16	0.60	106.76	N/A	N/A	192	348	Peak
2	5850.000	70.21	0.58	70.79	-51.41	122.20	192	348	Peak
3	5855.000	66.30	0.58	66.88	-43.92	110.80	192	348	Peak
4	5875.000	60.23	0.57	60.80	-44.40	105.20	192	348	Peak
5	5925.000	52.43	0.53	52.96	-15.24	68.20	192	348	Peak
6	* 5930.970	55.22	0.52	55.75	-12.45	68.20	192	348	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

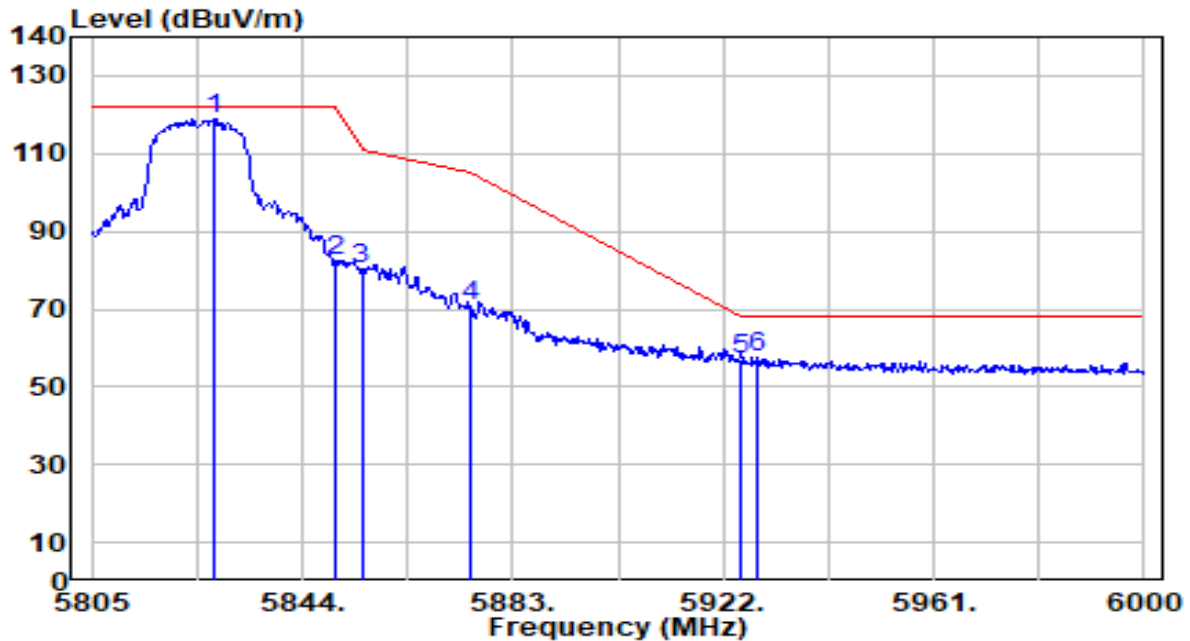


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5827.815	118.43	0.60	119.03	N/A	N/A	221	356	Peak
2	5850.000	81.61	0.58	82.19	-40.01	122.20	221	356	Peak
3	5855.000	79.87	0.58	80.45	-30.35	110.80	221	356	Peak
4	5875.000	70.19	0.57	70.76	-34.44	105.20	221	356	Peak
5	5925.000	56.55	0.53	57.08	-11.12	68.20	221	356	Peak
6	* 5928.240	57.22	0.52	57.75	-10.45	68.20	221	356	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

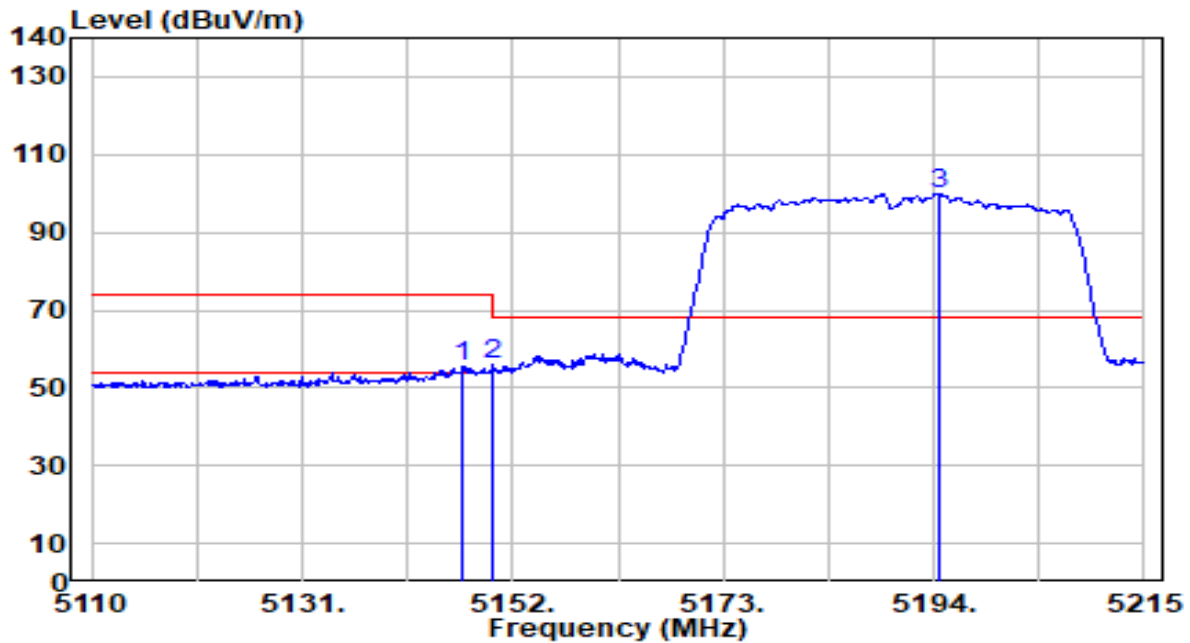


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5147.065	56.20	-0.72	55.48	-18.52	74.00	141	255	Peak
2	*	5150.000	56.74	-0.72	56.03	-17.97	74.00	141	255	Peak
3		5194.525	100.80	-0.74	100.06	N/A	N/A	141	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

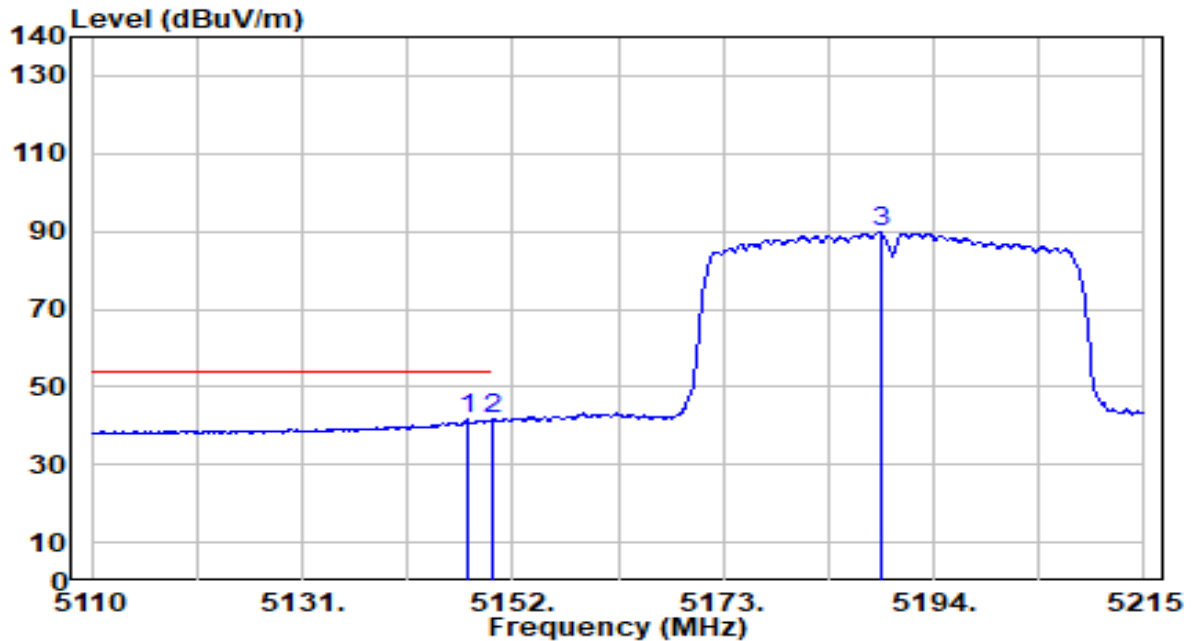


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5147.485	42.20	-0.72	41.49	-12.51	54.00	141	255	Average
2	*	5150.000	42.45	-0.72	41.73	-12.27	54.00	141	255	Average
3		5188.645	90.38	-0.74	89.64	N/A	N/A	141	255	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

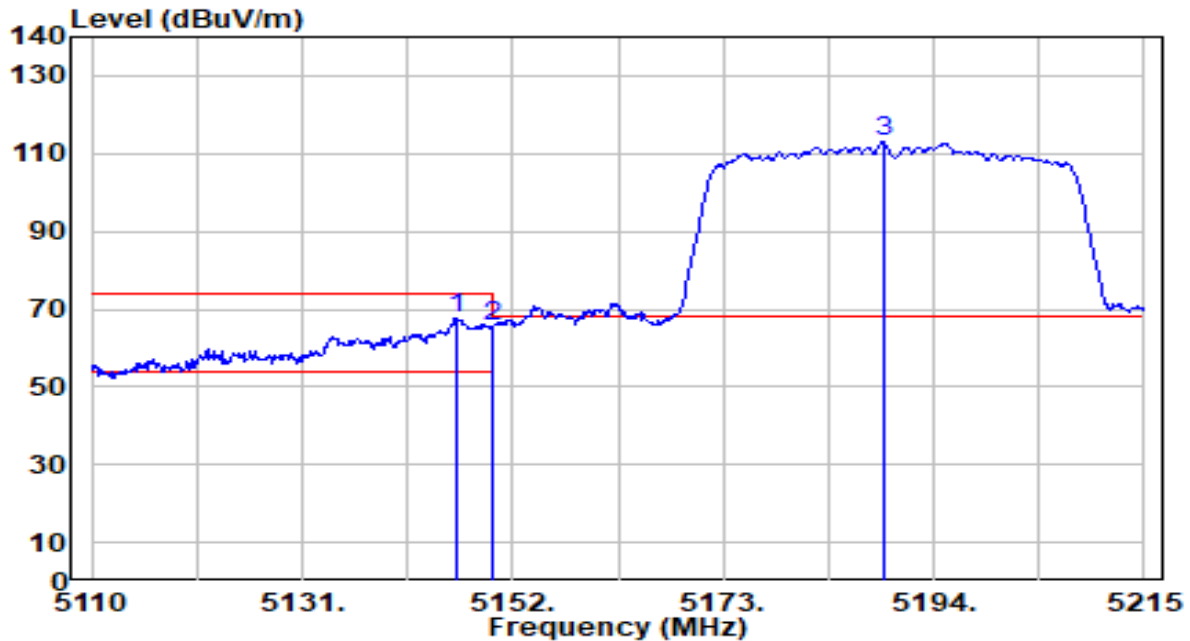


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.435	68.13	-0.72	67.41	-6.59	74.00	148	2	Peak
2		5150.000	66.03	-0.72	65.31	-8.69	74.00	148	2	Peak
3		5188.960	113.64	-0.74	112.90	N/A	N/A	148	2	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

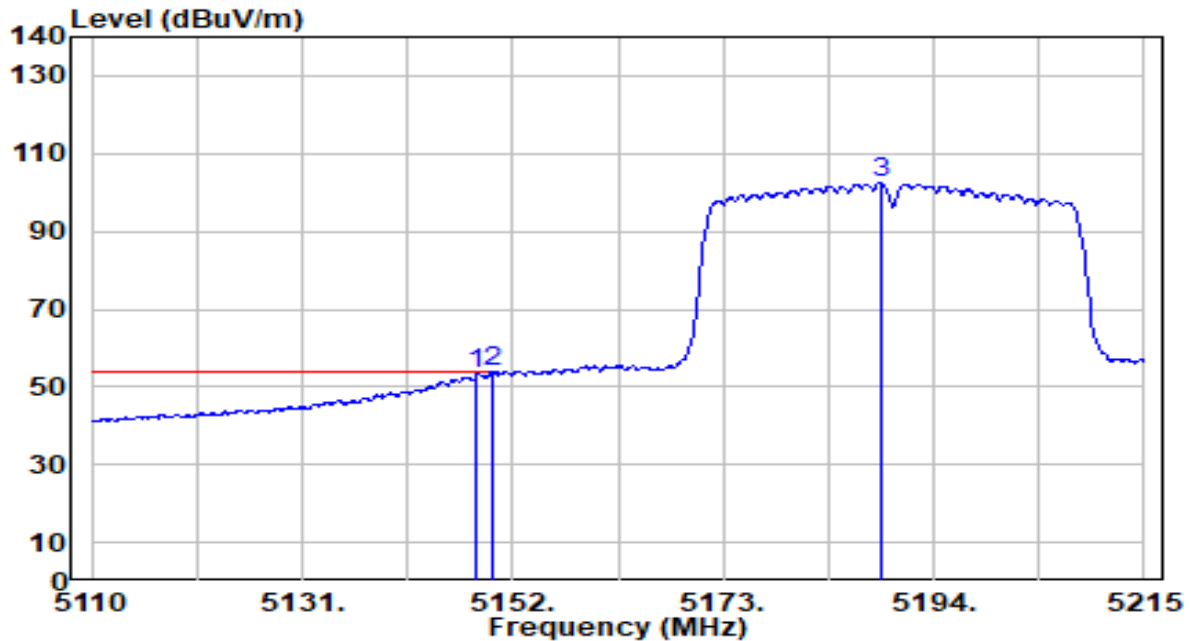


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5148.430	53.90	-0.72	53.18	-0.82	54.00	148	2	Average
2	*	5150.000	54.61	-0.72	53.89	-0.11	54.00	148	2	Average
3		5188.645	103.19	-0.74	102.45	N/A	N/A	148	2	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

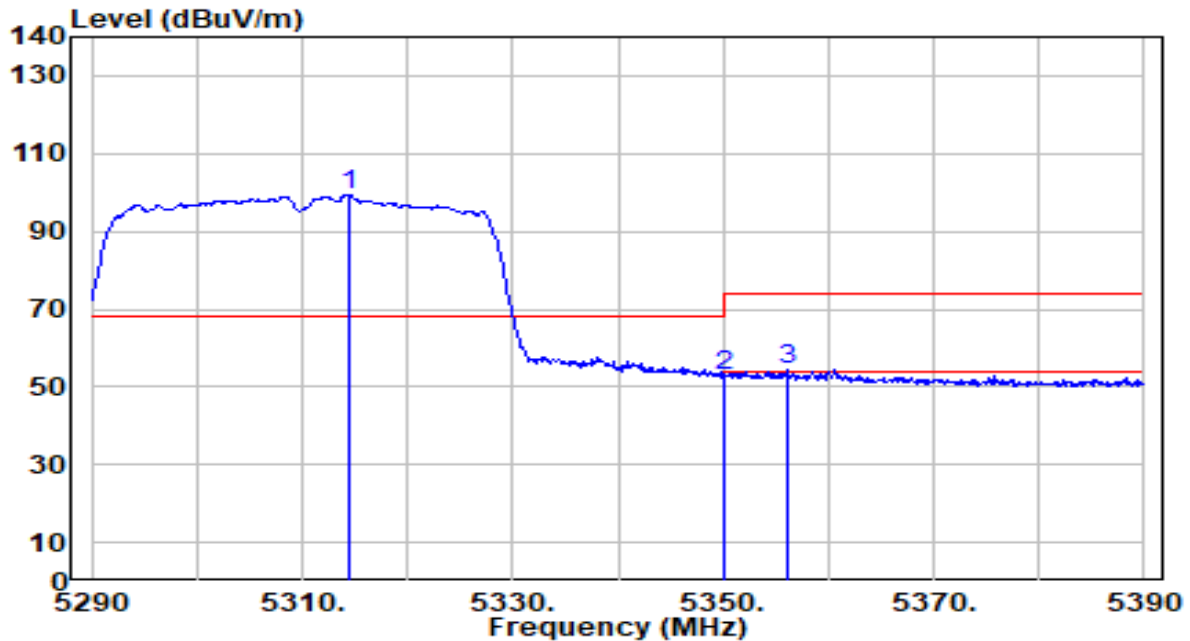


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.400	100.37	-0.92	99.45	N/A	N/A	100	253	Peak
2	5350.000	54.04	-0.97	53.07	-20.93	74.00	100	253	Peak
3	* 5356.100	55.20	-0.98	54.21	-19.79	74.00	100	253	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

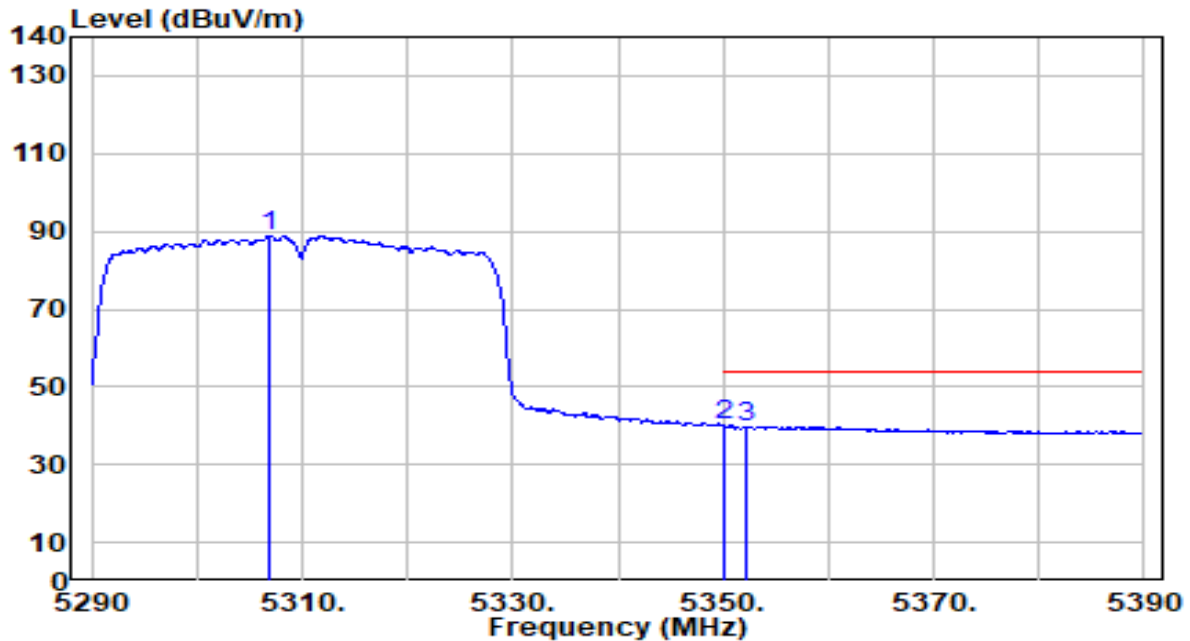


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5306.900	89.78	-0.91	88.87	N/A	N/A	100	253	Average
2	*	5350.000	40.88	-0.97	39.91	-14.09	54.00	100	253	Average
3		5352.300	40.80	-0.98	39.83	-14.17	54.00	100	253	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

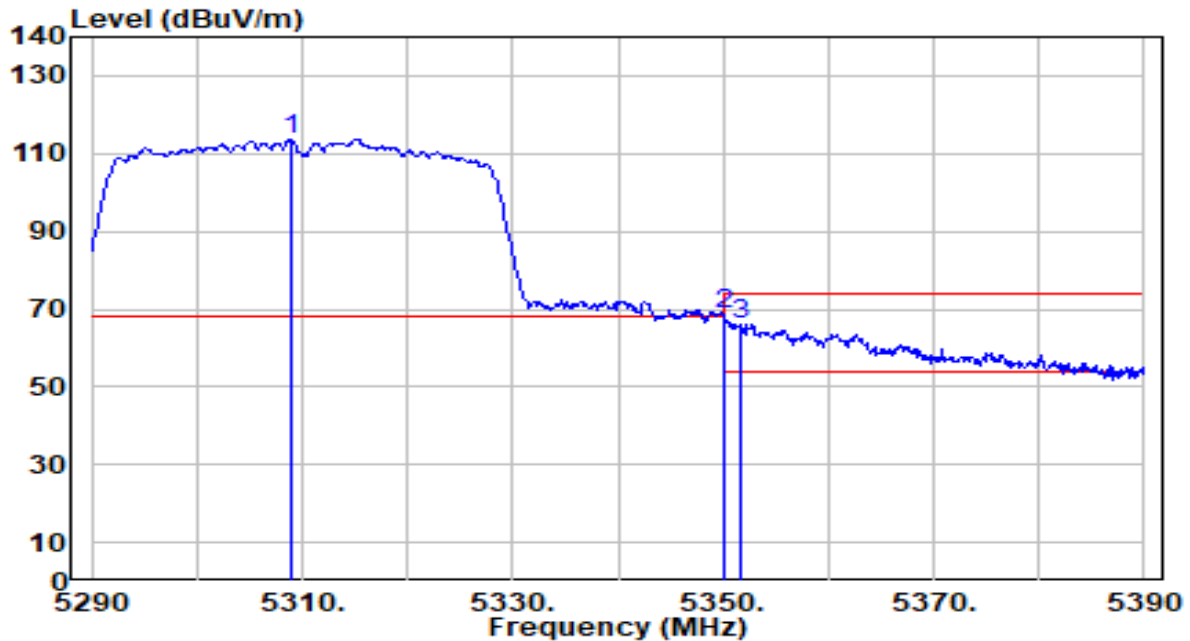


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5308.900	114.65	-0.91	113.74	N/A	N/A	179	6	Peak
2	*	5350.000	69.56	-0.97	68.59	-5.41	74.00	179	6	Peak
3		5351.700	66.95	-0.97	65.97	-8.03	74.00	179	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

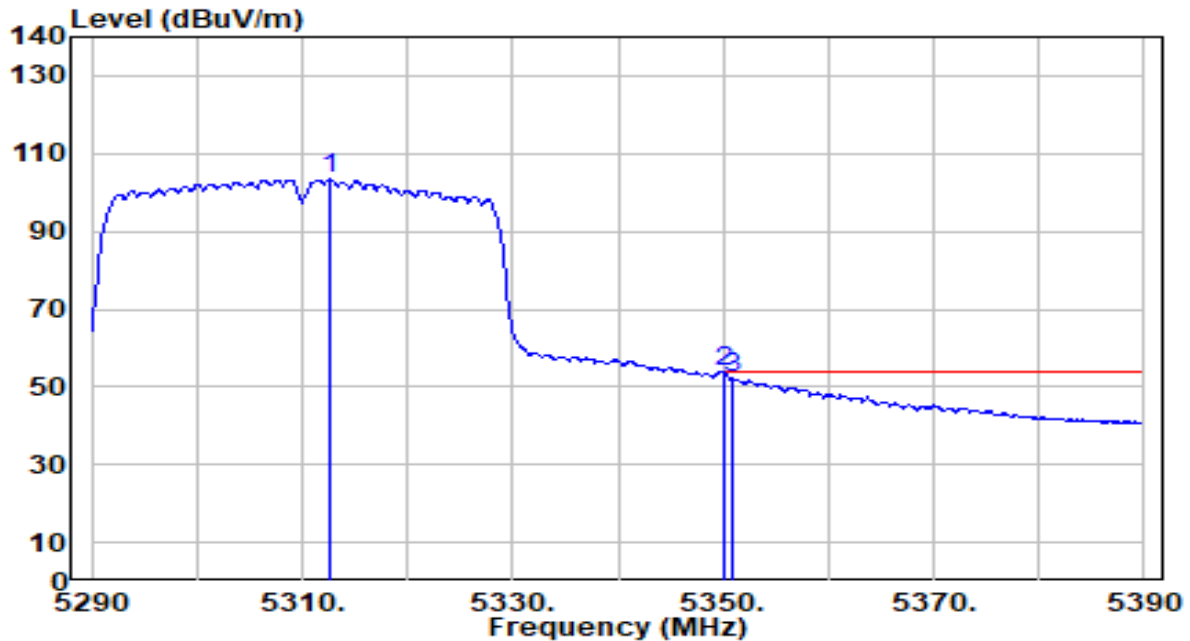


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5312.700	104.27	-0.92	103.36	N/A	N/A	179	6	Average
2	*	5350.000	54.84	-0.97	53.86	-0.14	54.00	179	6	Average
3		5351.000	53.17	-0.97	52.20	-1.80	54.00	179	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

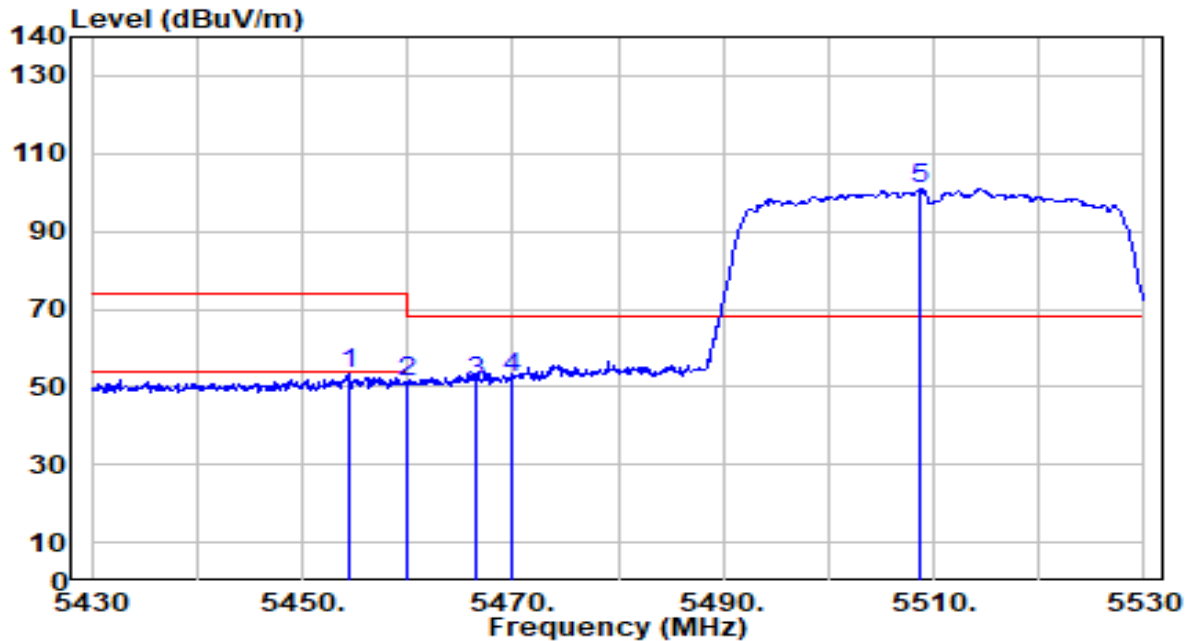


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.400	54.09	-0.89	53.20	-20.80	74.00	115	255	Peak
2	5460.000	52.20	-0.87	51.33	-22.67	74.00	115	255	Peak
3	5466.400	52.30	-0.85	51.45	-16.75	68.20	115	255	Peak
4	* 5470.000	53.22	-0.84	52.38	-15.82	68.20	115	255	Peak
5	5508.800	101.59	-0.72	100.87	N/A	N/A	115	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

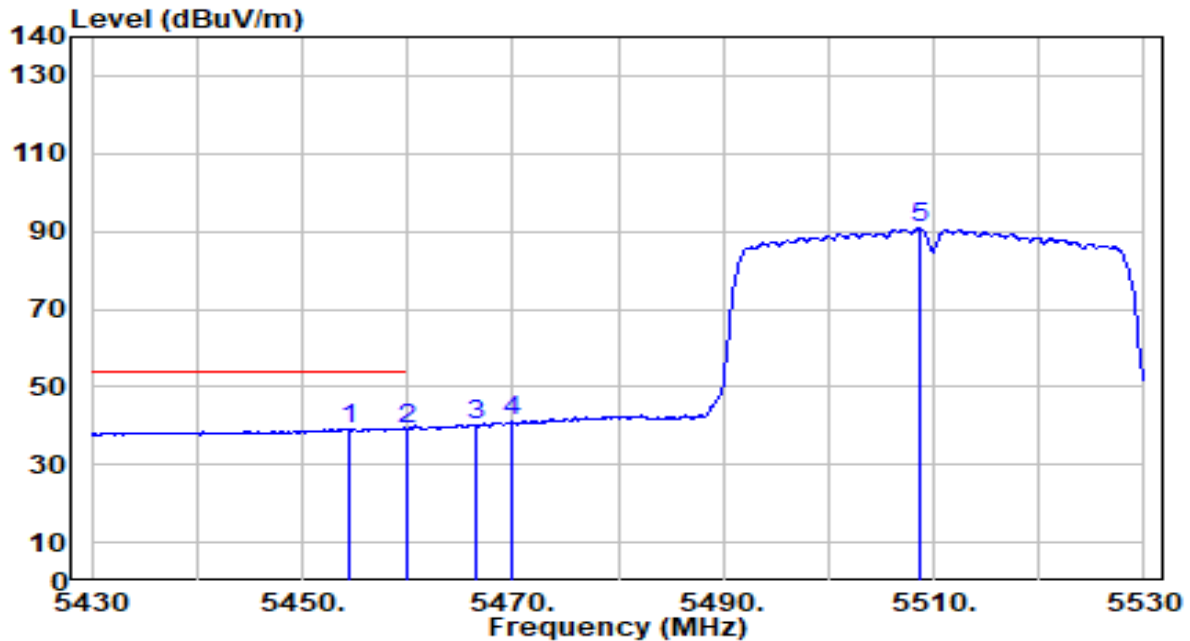


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5454.400	40.21	-0.89	39.33	-14.67	54.00	115	255	Average
2	*	5460.000	40.22	-0.87	39.35	-14.65	54.00	115	255	Average
3		5466.400	40.99	-0.85	40.14	N/A	N/A	115	255	Average
4		5470.000	41.82	-0.84	40.98	N/A	N/A	115	255	Average
5		5508.600	91.39	-0.72	90.66	N/A	N/A	115	255	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

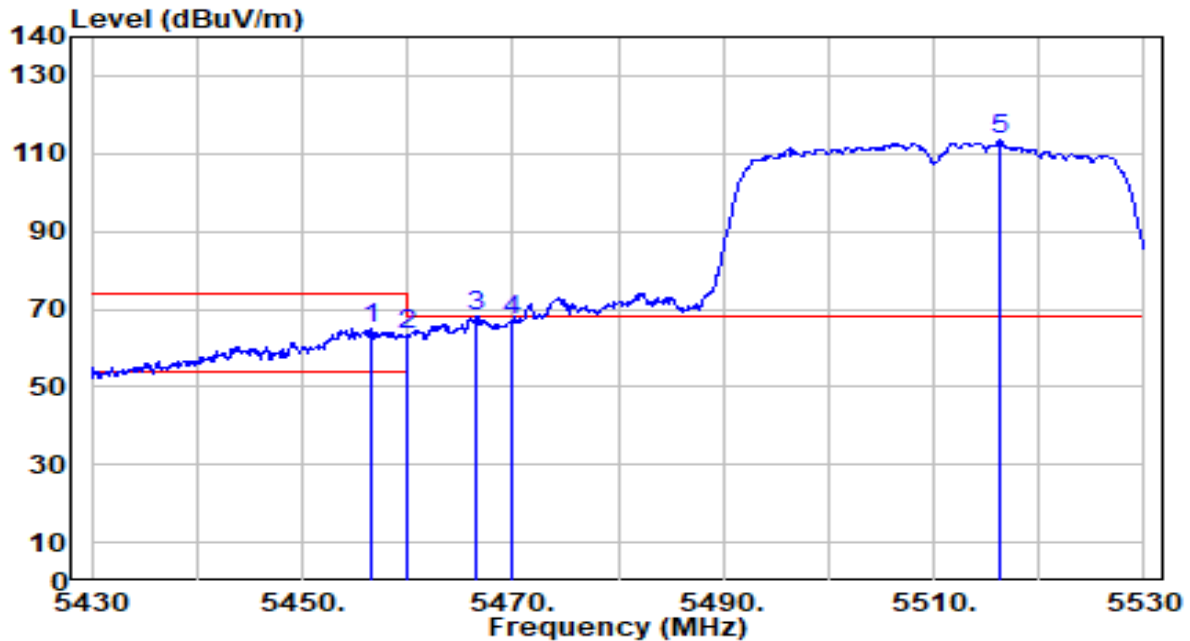


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.600	66.05	-0.88	65.17	-8.83	74.00	180	8	Peak
2	5460.000	64.03	-0.87	63.16	-10.84	74.00	180	8	Peak
3	* 5466.400	68.87	-0.85	68.02	-0.18	68.20	180	8	Peak
4	5470.000	67.70	-0.84	66.86	-1.34	68.20	180	8	Peak
5	5516.300	114.05	-0.70	113.35	N/A	N/A	180	8	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

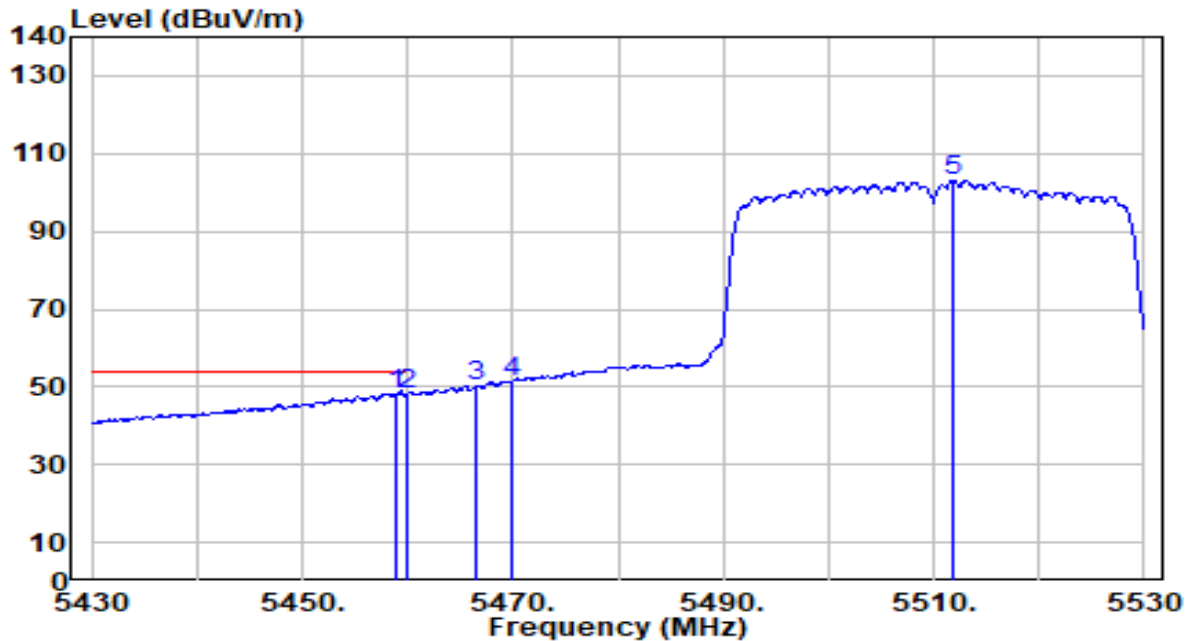


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.900	49.21	-0.87	48.34	-5.66	54.00	180	8	Average
2		5460.000	48.97	-0.87	48.10	-5.90	54.00	180	8	Average
3		5466.400	51.06	-0.85	50.21	N/A	N/A	180	8	Average
4		5470.000	52.32	-0.84	51.48	N/A	N/A	180	8	Average
5		5511.800	103.81	-0.71	103.10	N/A	N/A	180	8	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

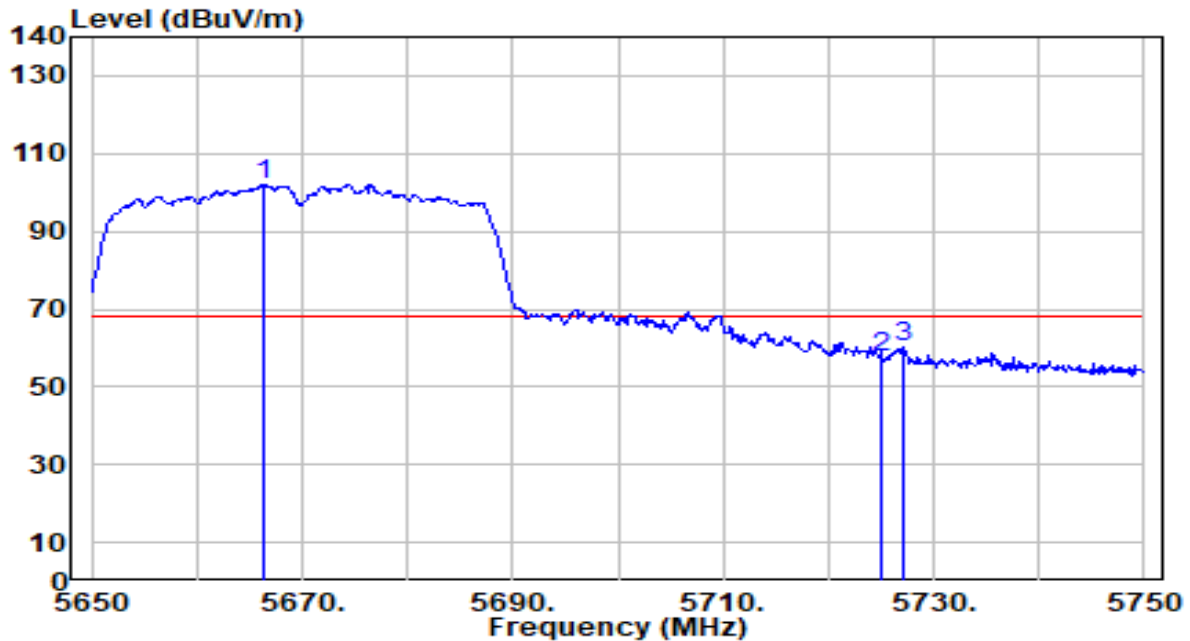


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5666.400	102.06	-0.08	101.98	N/A	N/A	191	348	Peak
2	5725.000	57.24	0.23	57.47	-10.73	68.20	191	348	Peak
3	* 5727.000	59.89	0.24	60.13	-8.07	68.20	191	348	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

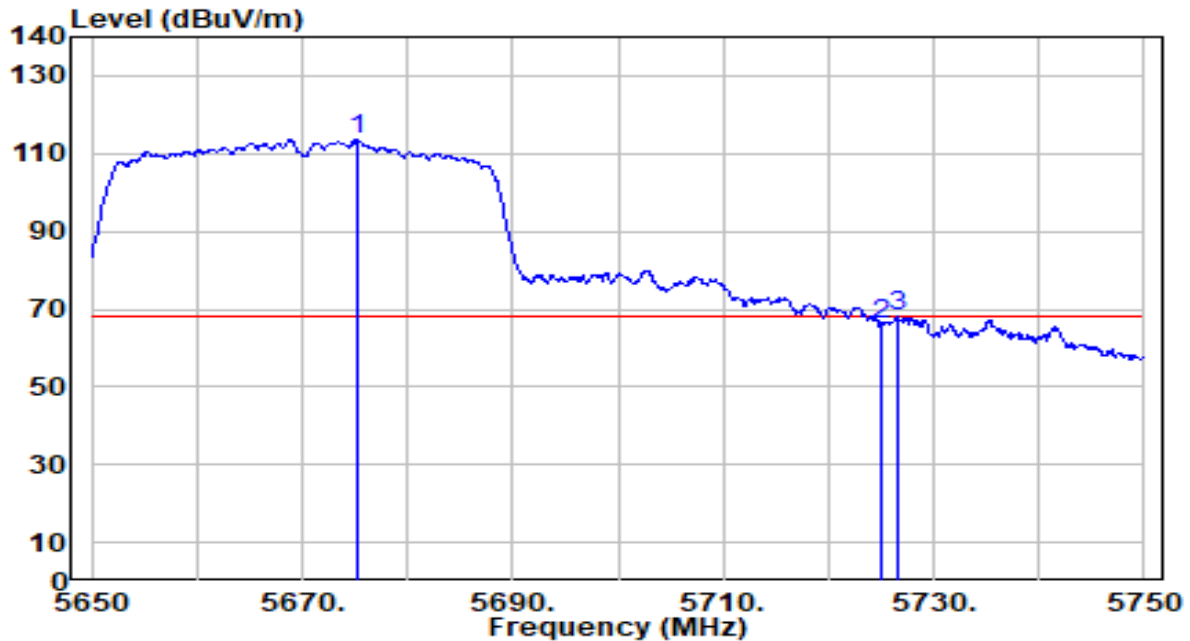


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5675.200	113.48	-0.03	113.45	N/A	N/A	219	360	Peak
2	5725.000	65.97	0.23	66.20	-2.00	68.20	219	360	Peak
3	* 5726.500	67.70	0.24	67.93	-0.27	68.20	219	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

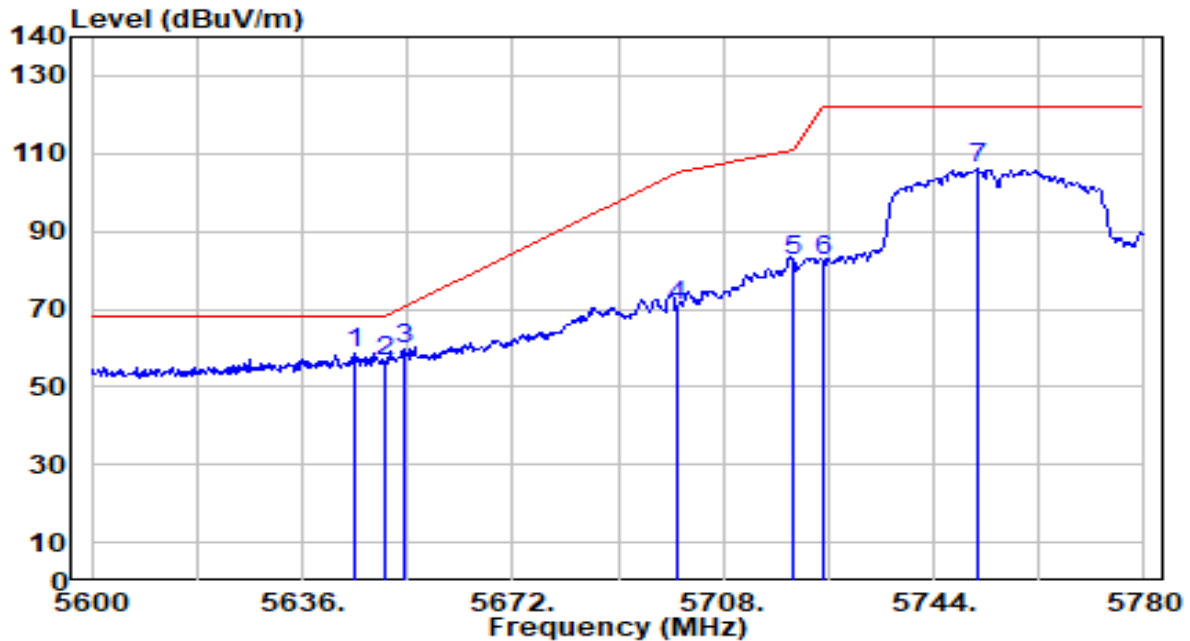


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.000	58.96	-0.19	58.77	-9.43	68.20	197	350	Peak
2		5650.000	56.64	-0.16	56.48	-11.72	68.20	197	350	Peak
3		5653.460	60.05	-0.15	59.90	-10.86	70.76	197	350	Peak
4		5700.000	70.73	0.10	70.83	-34.37	105.20	197	350	Peak
5		5720.000	82.06	0.20	82.27	-28.53	110.80	197	350	Peak
6		5725.000	82.39	0.23	82.62	-39.58	122.20	197	350	Peak
7		5751.560	105.67	0.37	106.04	N/A	N/A	197	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

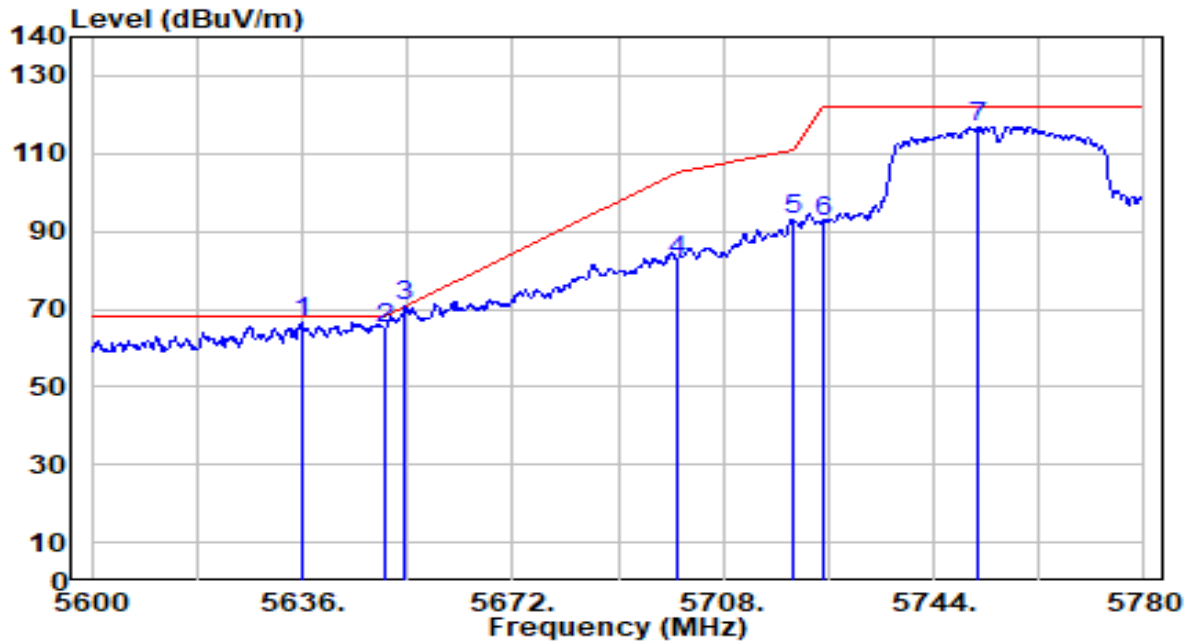


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5635.820	66.87	-0.24	66.63	-1.57	68.20	213	360	Peak
2	5650.000	65.38	-0.16	65.22	-2.98	68.20	213	360	Peak
3	* 5653.460	70.73	-0.15	70.58	-0.18	70.76	213	360	Peak
4	5700.000	82.15	0.10	82.25	-22.95	105.20	213	360	Peak
5	5720.000	92.65	0.20	92.85	-17.95	110.80	213	360	Peak
6	5725.000	92.41	0.23	92.64	-29.56	122.20	213	360	Peak
7	5751.560	116.62	0.37	116.98	N/A	N/A	213	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

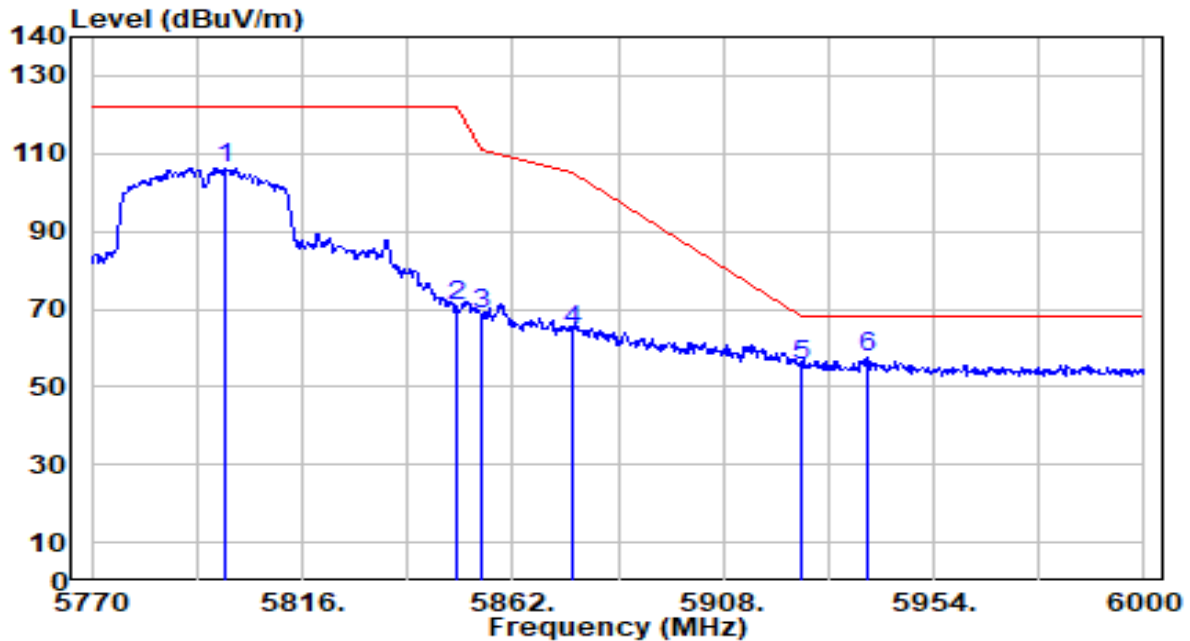


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5799.210	105.60	0.62	106.22	N/A	N/A	193	350	Peak
2	5850.000	70.00	0.58	70.58	-51.62	122.20	193	350	Peak
3	5855.000	68.15	0.58	68.73	-42.07	110.80	193	350	Peak
4	5875.000	63.66	0.57	64.22	-40.98	105.20	193	350	Peak
5	5925.000	55.05	0.53	55.58	-12.62	68.20	193	350	Peak
6	* 5939.280	56.87	0.52	57.38	-10.82	68.20	193	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

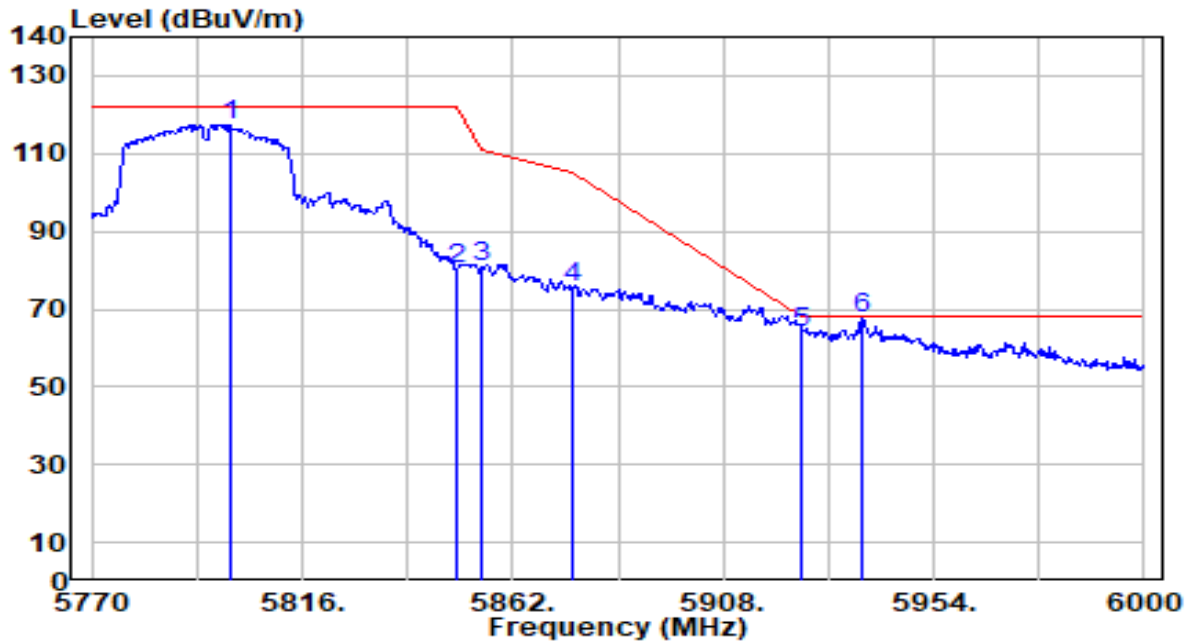


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5800.130	116.87	0.62	117.49	N/A	N/A	200	360	Peak
2	5850.000	79.76	0.58	80.34	-41.86	122.20	200	360	Peak
3	5855.000	80.28	0.58	80.86	-29.94	110.80	200	360	Peak
4	5875.000	75.07	0.57	75.63	-29.57	105.20	200	360	Peak
5	5925.000	63.62	0.53	64.14	-4.06	68.20	200	360	Peak
6	* 5938.590	67.03	0.52	67.54	-0.66	68.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

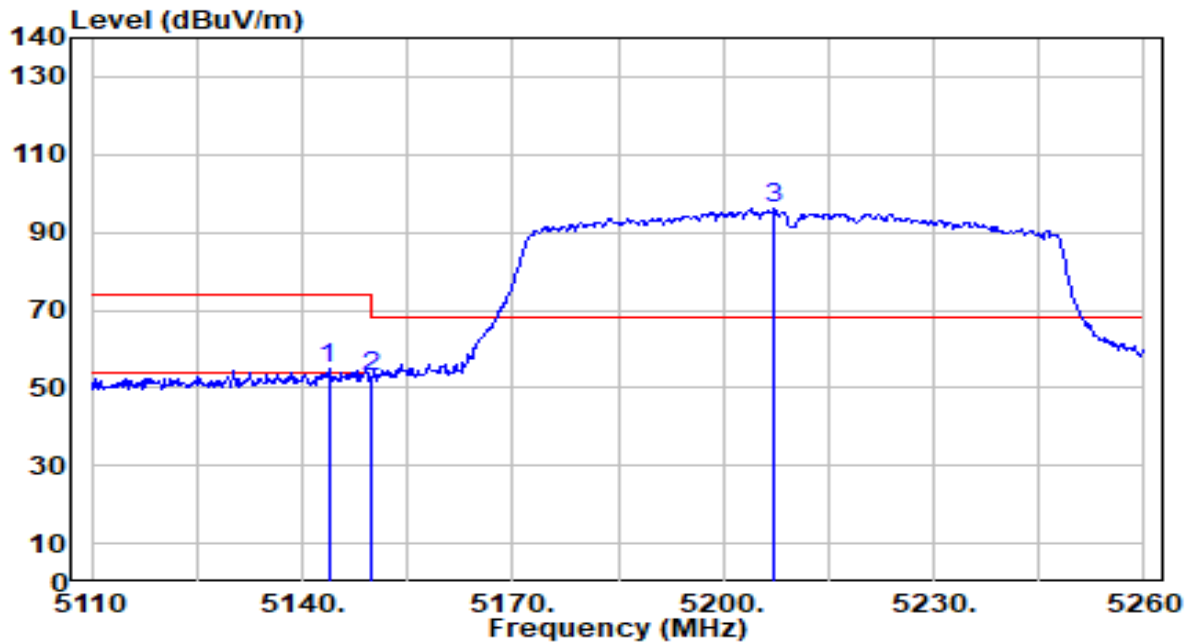


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.750	55.46	-0.71	54.74	-19.26	74.00	142	256	Peak
2		5150.000	53.77	-0.72	53.06	-20.94	74.00	142	256	Peak
3		5207.200	96.73	-0.75	95.98	N/A	N/A	142	256	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

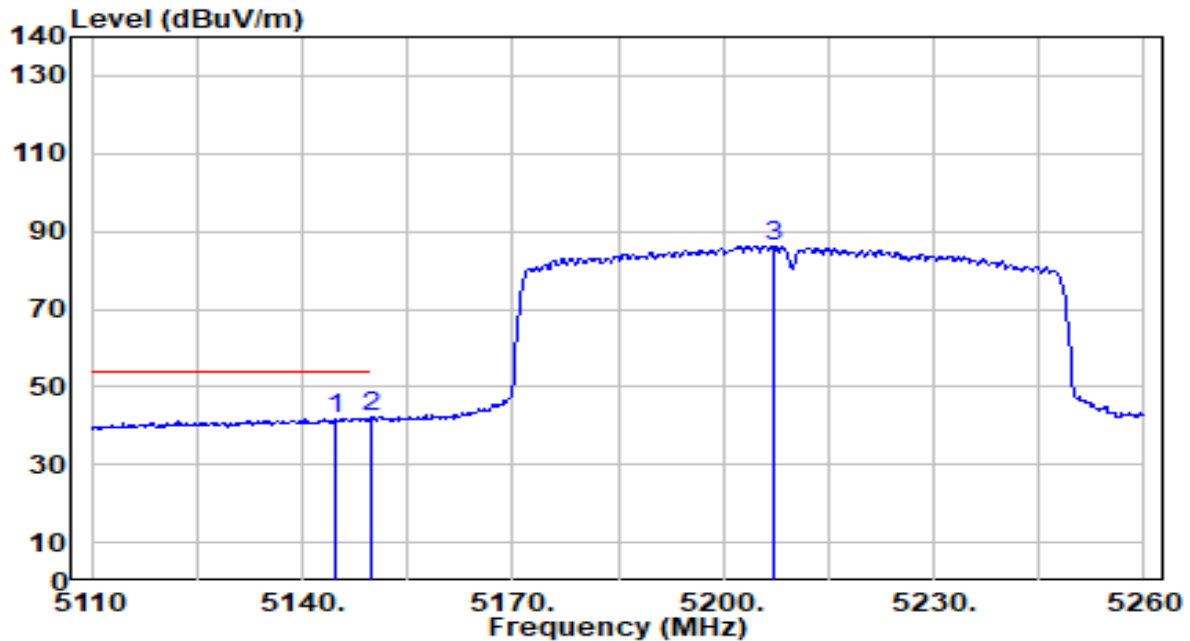


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5144.650	42.46	-0.72	41.74	-12.26	54.00	142	256	Average
2	*	5150.000	42.74	-0.72	42.02	-11.98	54.00	142	256	Average
3		5207.200	86.96	-0.75	86.20	N/A	N/A	142	256	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

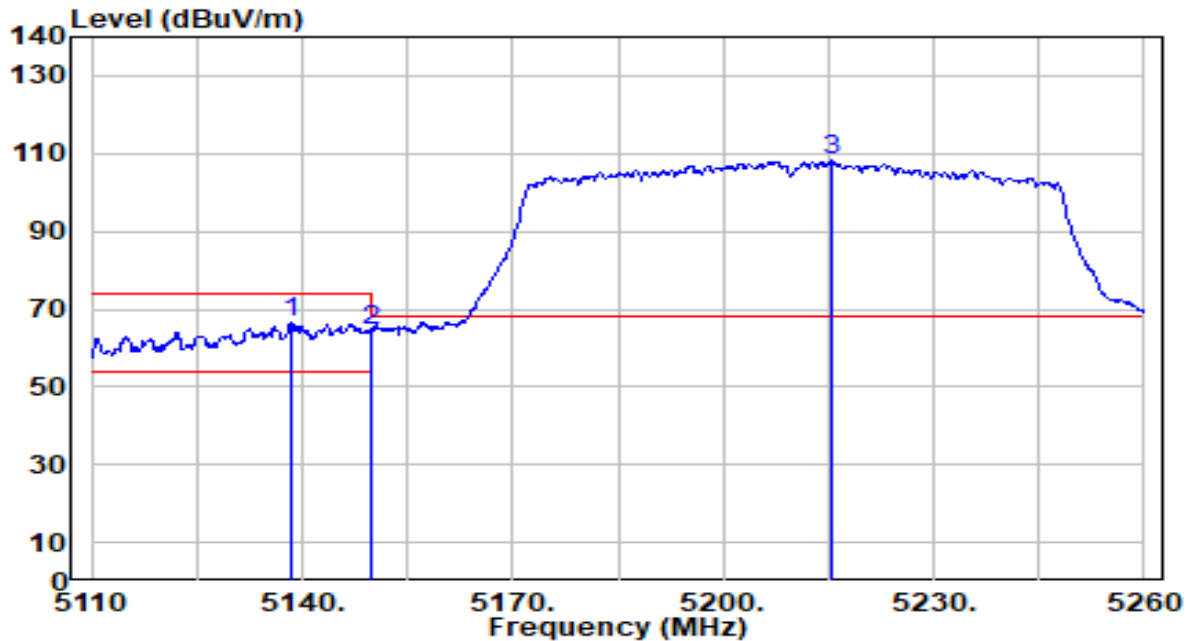


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5138.350	67.31	-0.71	66.60	-7.40	74.00	141	6	Peak
2		5150.000	65.11	-0.72	64.40	-9.60	74.00	141	6	Peak
3		5215.450	108.95	-0.77	108.18	N/A	N/A	141	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

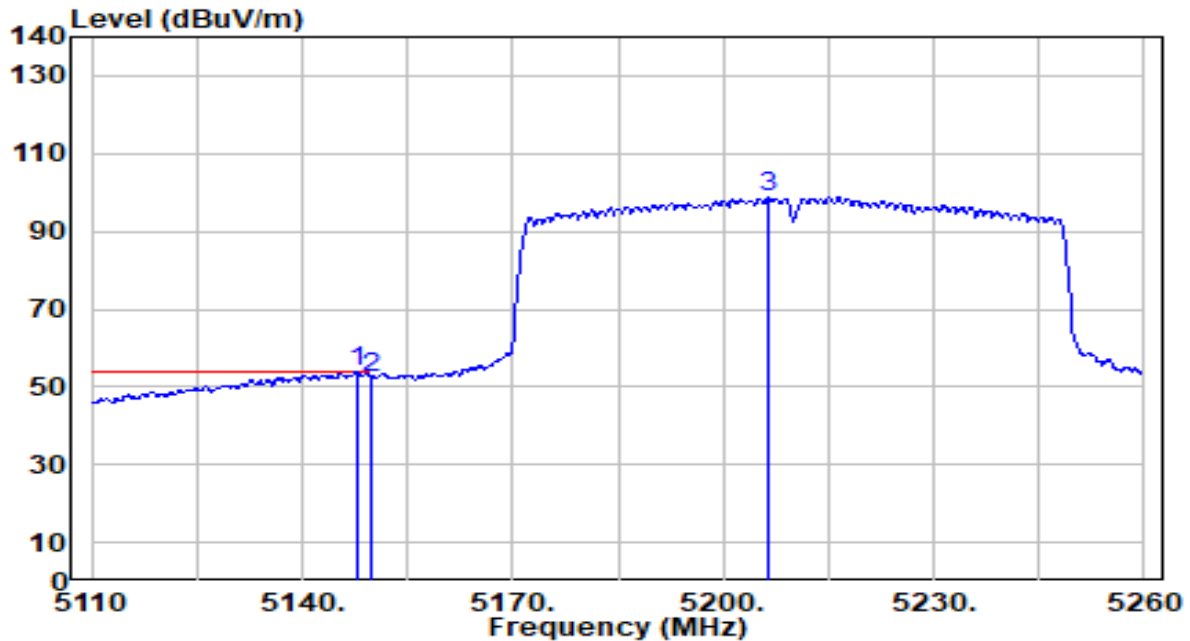


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.950	54.59	-0.72	53.87	-0.13	54.00	141	6	Average
2		5150.000	53.27	-0.72	52.55	-1.45	54.00	141	6	Average
3		5206.450	99.44	-0.75	98.69	N/A	N/A	141	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

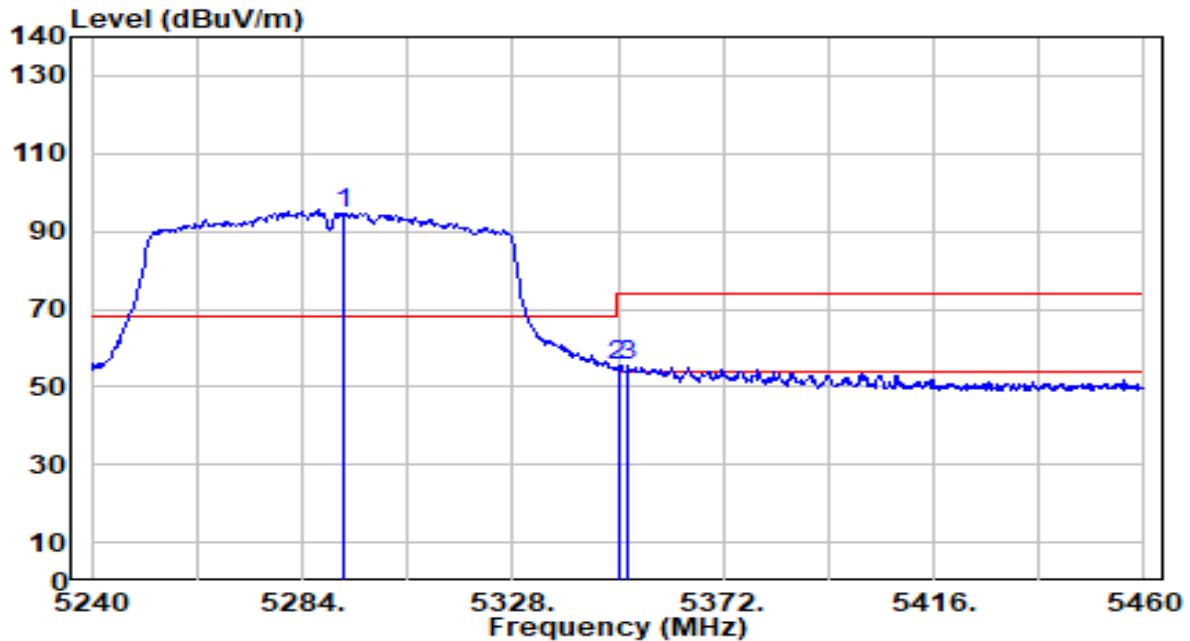


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5292.800	95.64	-0.89	94.76	N/A	N/A	100	254	Peak
2	5350.000	56.21	-0.97	55.23	-18.77	74.00	100	254	Peak
3	* 5352.200	56.32	-0.98	55.35	-18.65	74.00	100	254	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

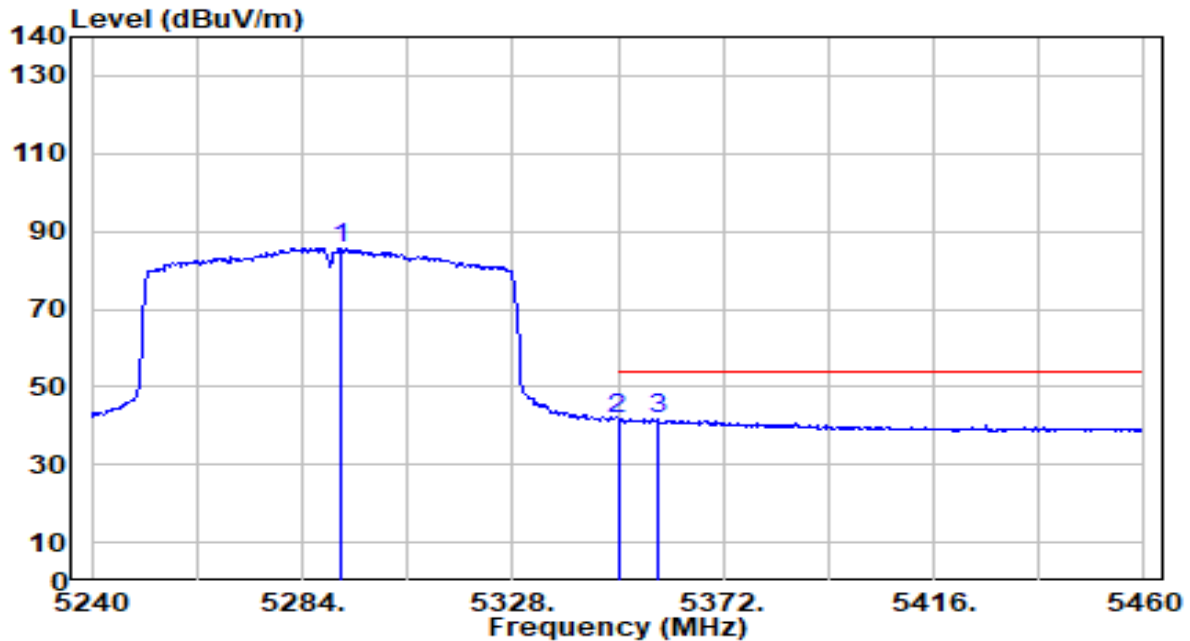


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5292.140	86.39	-0.88	85.51	N/A	N/A	100	254	Average
2	5350.000	42.64	-0.97	41.67	-12.33	54.00	100	254	Average
3	* 5358.360	42.88	-0.98	41.89	-12.11	54.00	100	254	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

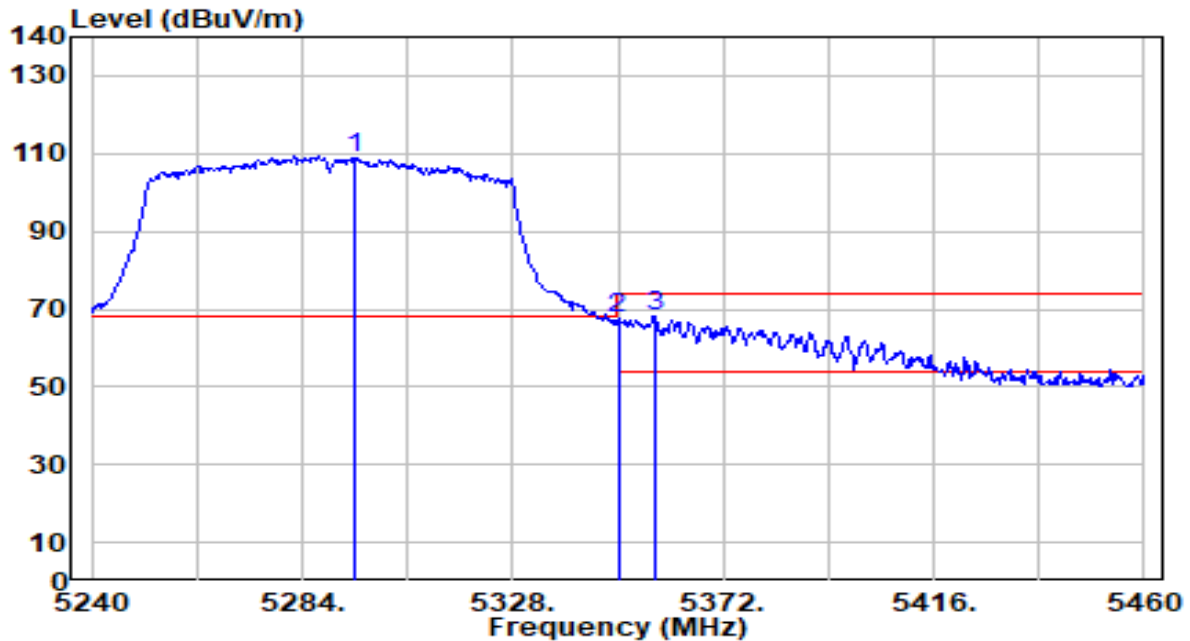


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5294.780	109.87	-0.89	108.98	N/A	N/A	170	40	Peak
2	5350.000	68.39	-0.97	67.42	-6.58	74.00	170	40	Peak
3	* 5357.700	69.14	-0.98	68.15	-5.85	74.00	170	40	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

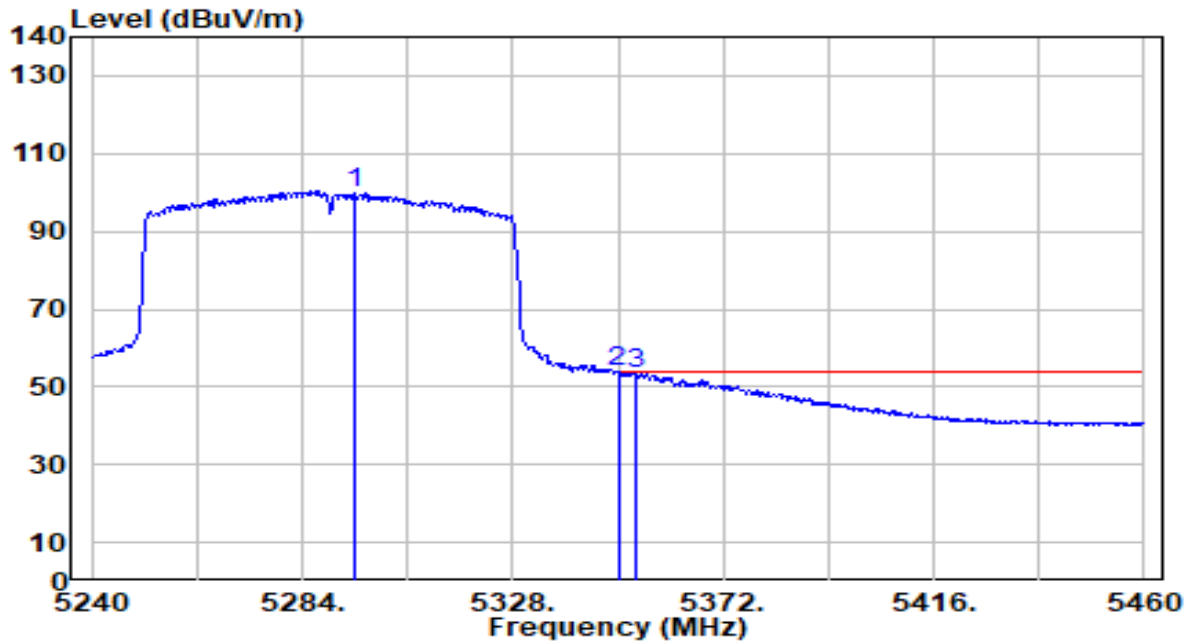


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5295.000	100.76	-0.89	99.87	N/A	N/A	170	40	Average
2	*	5350.000	54.86	-0.97	53.88	-0.12	54.00	170	40	Average
3		5353.740	54.48	-0.98	53.50	-0.50	54.00	170	40	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

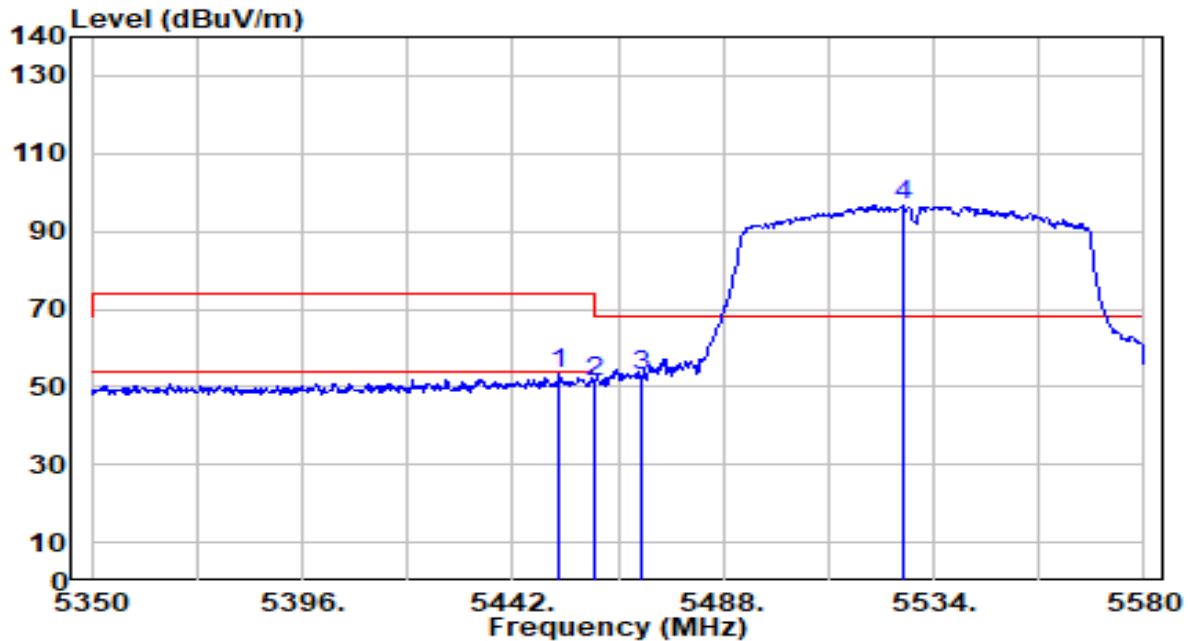


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.120	54.27	-0.89	53.38	-20.62	74.00	112	254	Peak
2	5460.000	52.13	-0.87	51.26	-22.74	74.00	112	254	Peak
3	* 5470.000	53.49	-0.84	52.65	-15.55	68.20	112	254	Peak
4	5527.330	97.47	-0.66	96.81	N/A	N/A	112	254	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

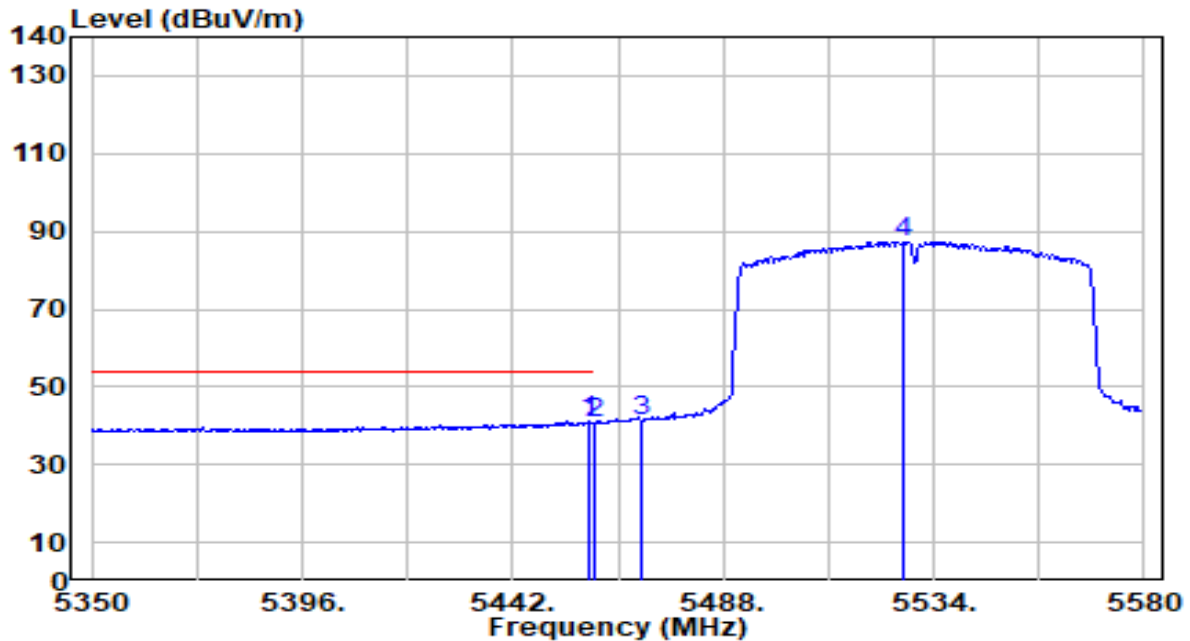


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.560	41.85	-0.87	40.97	-13.03	54.00	112	254	Average
2		5460.000	41.55	-0.87	40.68	-13.32	54.00	112	254	Average
3		5470.000	42.23	-0.84	41.39	N/A	N/A	112	254	Average
4		5527.330	88.04	-0.66	87.38	N/A	N/A	112	254	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

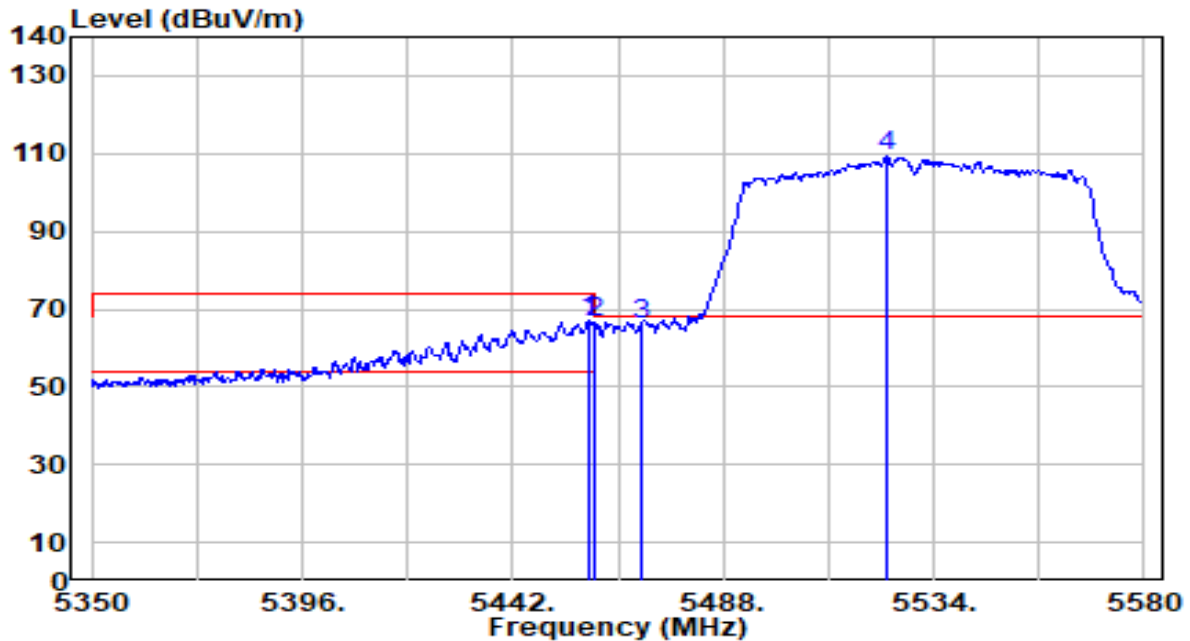


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.560	68.04	-0.87	67.17	-6.83	74.00	165	5	Peak
2	5460.000	67.26	-0.87	66.39	-7.61	74.00	165	5	Peak
3	* 5470.000	66.76	-0.84	65.92	-2.28	68.20	165	5	Peak
4	5523.880	110.03	-0.67	109.36	N/A	N/A	165	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

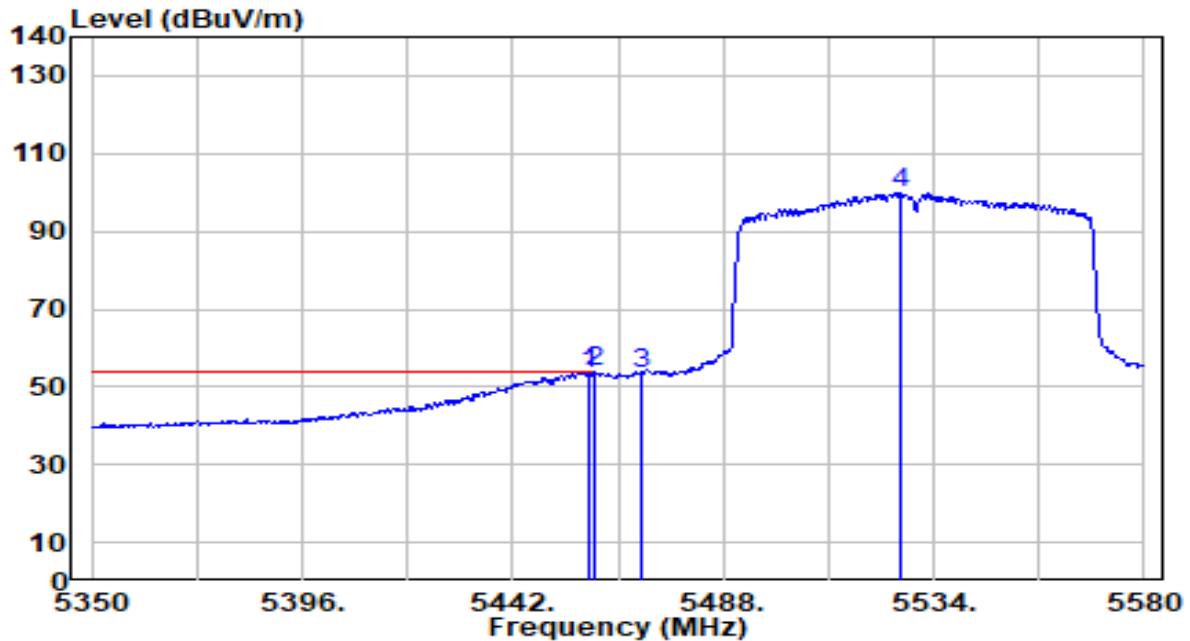


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5458.560	54.40	-0.87	53.53	-0.47	54.00	165	5	Average
2	*	5460.000	54.73	-0.87	53.86	-0.14	54.00	165	5	Average
3		5470.000	54.28	-0.84	53.44	N/A	N/A	165	5	Average
4		5526.640	100.68	-0.66	100.02	N/A	N/A	165	5	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

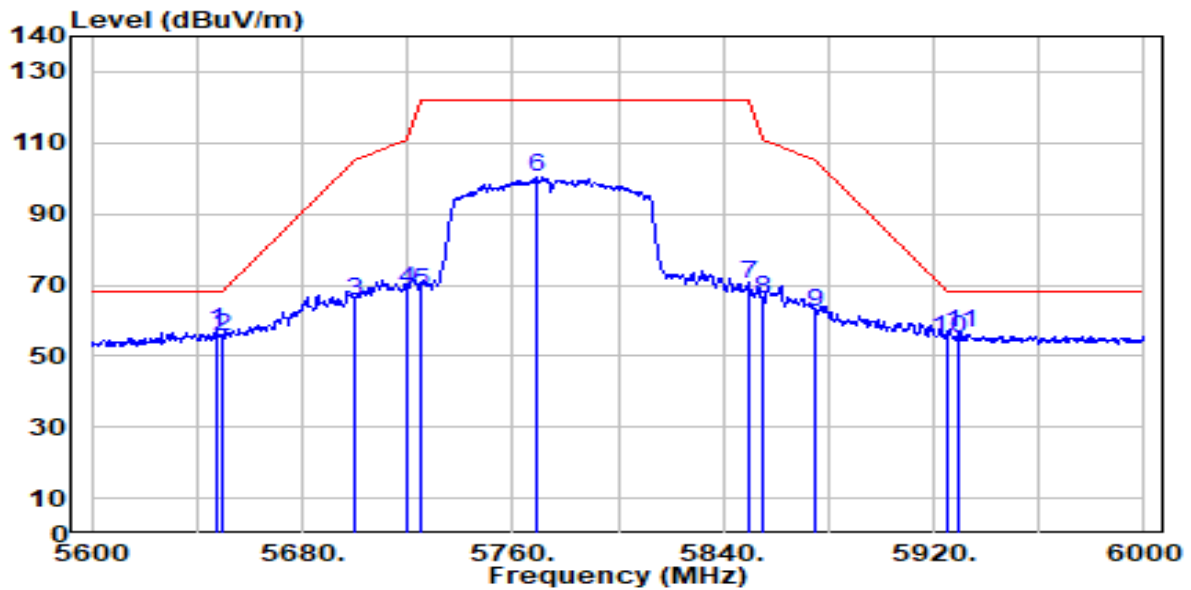


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.600	57.47	-0.18	57.30	-10.90	68.20	195	350	Peak
2		5650.000	55.88	-0.16	55.72	-12.48	68.20	195	350	Peak
3		5700.000	65.59	0.10	65.69	-39.51	105.20	195	350	Peak
4		5720.000	68.71	0.20	68.91	-41.89	110.80	195	350	Peak
5		5725.000	68.18	0.23	68.41	-53.79	122.20	195	350	Peak
6		5768.800	100.13	0.46	100.59	N/A	N/A	195	350	Peak
7		5850.000	69.66	0.58	70.24	-51.96	122.20	195	350	Peak
8		5855.000	65.46	0.58	66.04	-44.76	110.80	195	350	Peak
9		5875.000	61.77	0.57	62.34	-42.86	105.20	195	350	Peak
10		5925.000	54.35	0.53	54.88	-13.32	68.20	195	350	Peak
11		5929.600	56.24	0.52	56.76	-11.44	68.20	195	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

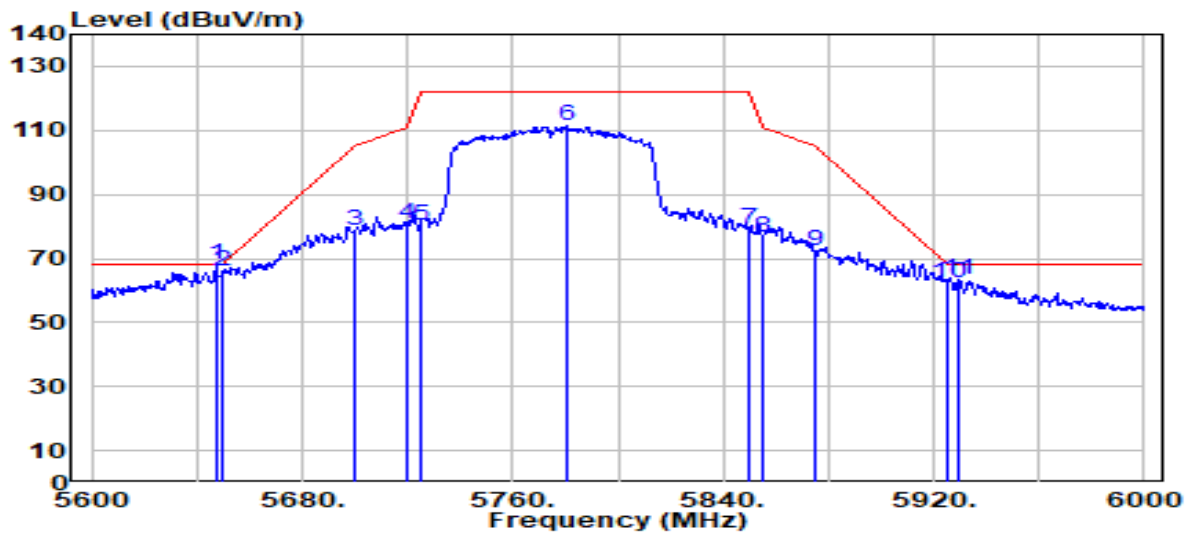


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.200	68.15	-0.18	67.97	-0.23	68.20	200	360	Peak
2		5650.000	66.16	-0.16	66.00	-2.20	68.20	200	360	Peak
3		5700.000	78.80	0.10	78.90	-26.30	105.20	200	360	Peak
4		5720.000	80.57	0.20	80.77	-30.03	110.80	200	360	Peak
5		5725.000	79.84	0.23	80.06	-42.14	122.20	200	360	Peak
6		5780.400	110.69	0.52	111.21	N/A	N/A	200	360	Peak
7		5850.000	78.60	0.58	79.18	-43.02	122.20	200	360	Peak
8		5855.000	76.20	0.58	76.78	-34.02	110.80	200	360	Peak
9		5875.000	72.02	0.57	72.58	-32.62	105.20	200	360	Peak
10		5925.000	61.86	0.53	62.39	-5.81	68.20	200	360	Peak
11		5929.200	62.82	0.52	63.34	-4.86	68.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

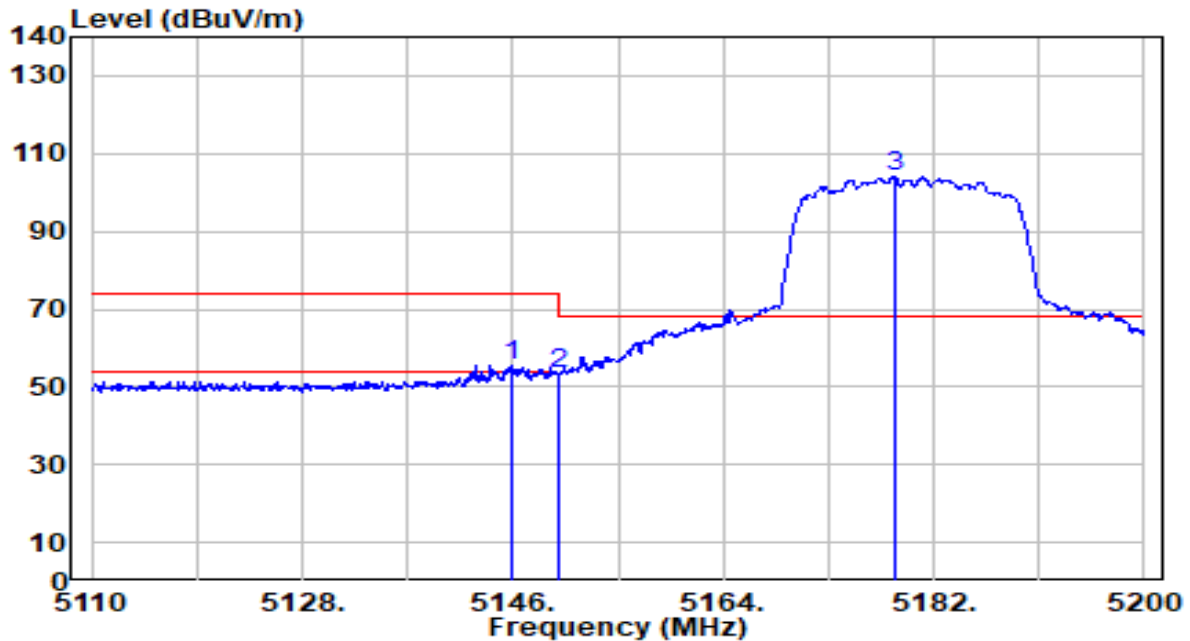


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.000	56.06	-0.72	55.34	-18.66	74.00	100	252	Peak
2		5150.000	53.98	-0.72	53.26	-20.74	74.00	100	252	Peak
3		5178.670	104.62	-0.73	103.89	N/A	N/A	100	252	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

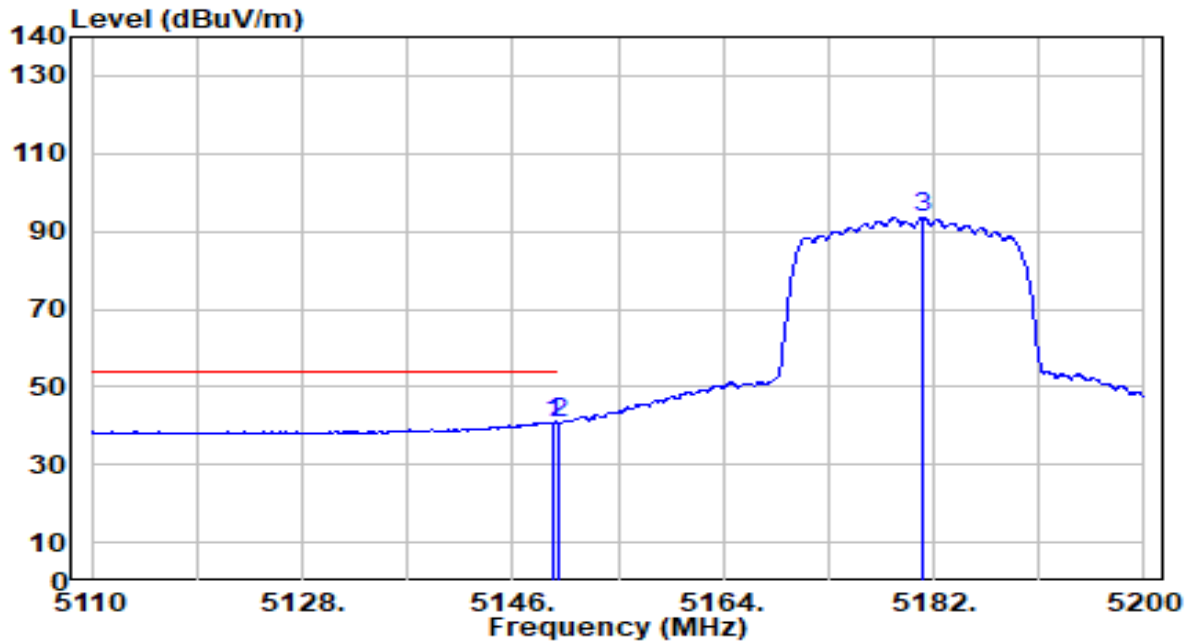


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.420	41.66	-0.72	40.94	-13.06	54.00	100	252	Average
2		5150.000	41.39	-0.72	40.67	-13.33	54.00	100	252	Average
3		5181.010	94.32	-0.73	93.59	N/A	N/A	100	252	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

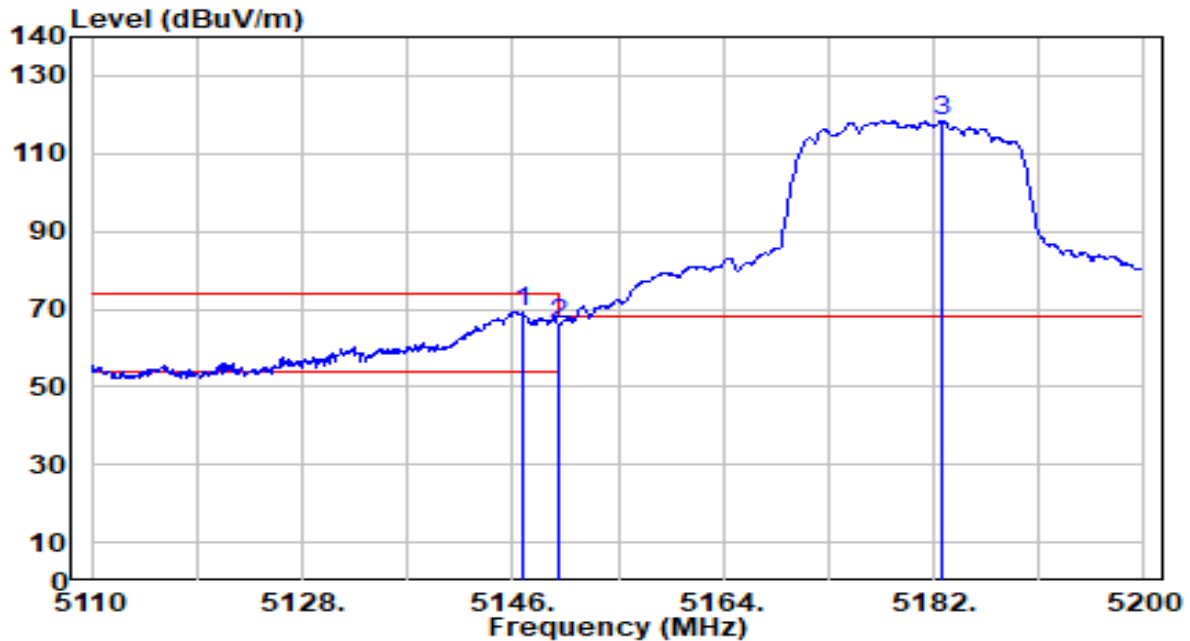


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.810	70.11	-0.72	69.40	-4.60	74.00	150	4	Peak
2		5150.000	67.00	-0.72	66.28	-7.72	74.00	150	4	Peak
3		5182.630	119.28	-0.73	118.55	N/A	N/A	150	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

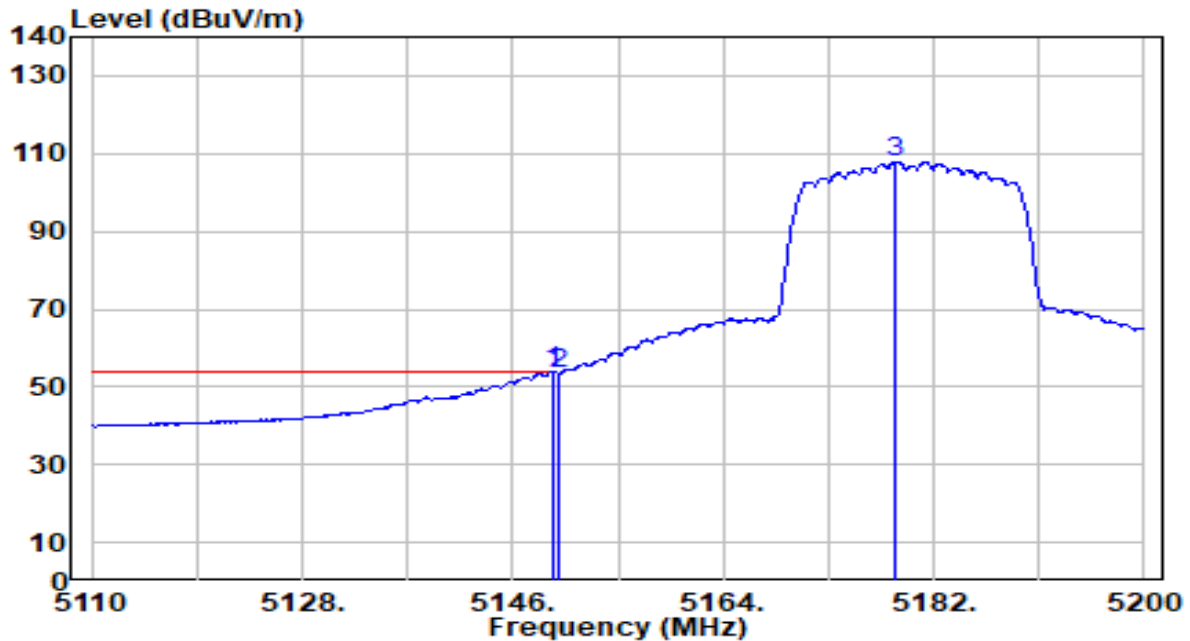


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.420	54.53	-0.72	53.81	-0.19	54.00	150	4	Average
2		5150.000	54.00	-0.72	53.28	-0.72	54.00	150	4	Average
3		5178.760	108.57	-0.73	107.84	N/A	N/A	150	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

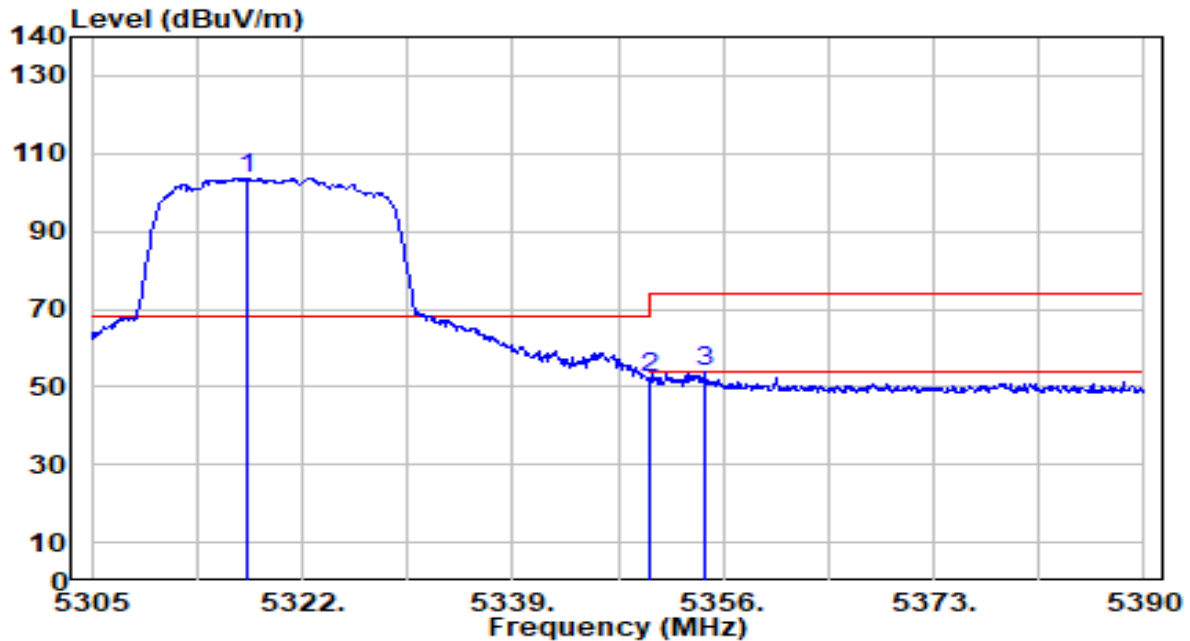


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.495	104.46	-0.92	103.54	N/A	N/A	140	245	Peak
2	5350.000	53.26	-0.97	52.29	-21.71	74.00	140	245	Peak
3	* 5354.470	55.11	-0.98	54.13	-19.87	74.00	140	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

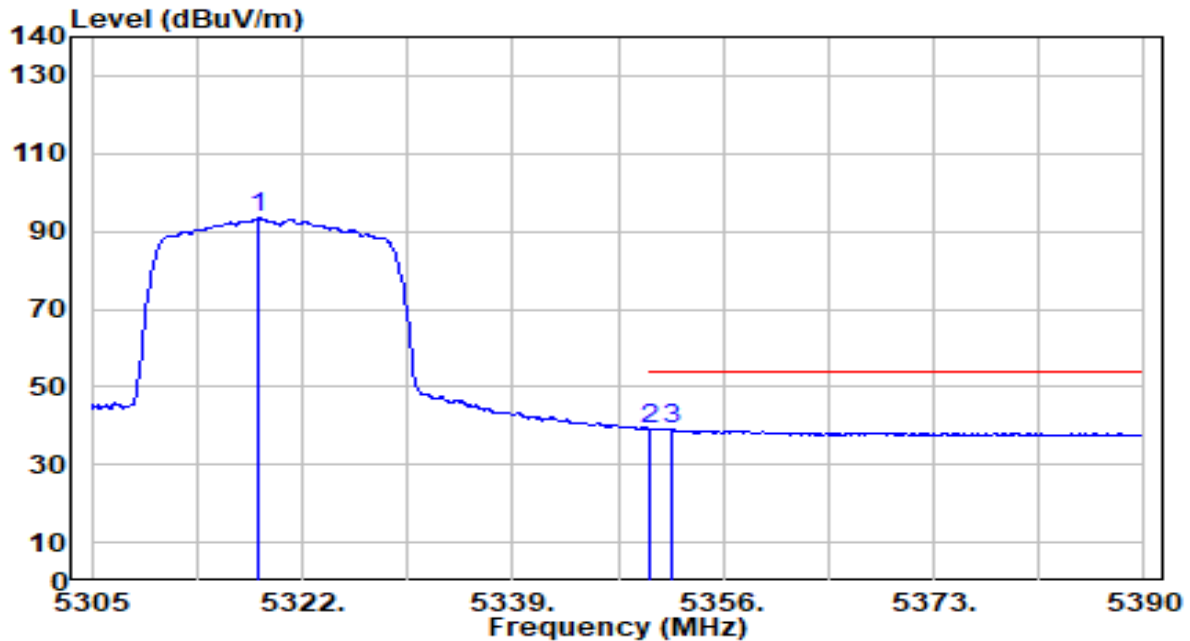


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5318.515	94.28	-0.92	93.36	N/A	N/A	140	245	Average
2	*	5350.000	40.30	-0.97	39.33	-14.67	54.00	140	245	Average
3		5351.750	40.24	-0.97	39.26	-14.74	54.00	140	245	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

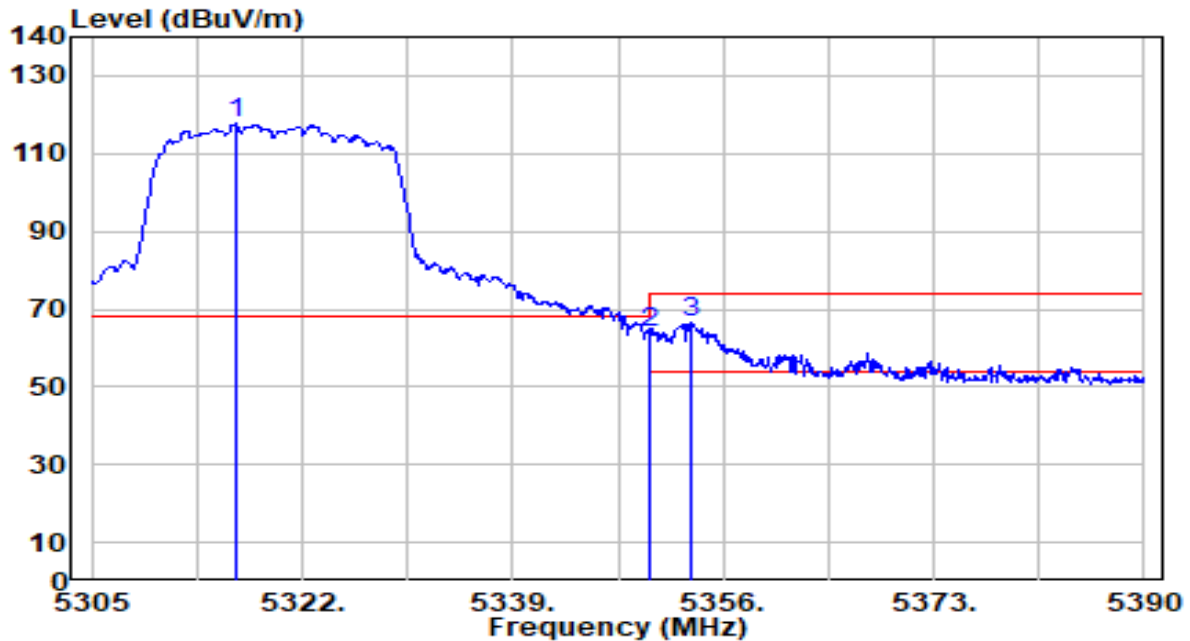


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5316.560	118.55	-0.92	117.63	N/A	N/A	176	9	Peak
2	5350.000	65.07	-0.97	64.10	-9.90	74.00	176	9	Peak
3	* 5353.450	67.53	-0.98	66.56	-7.44	74.00	176	9	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

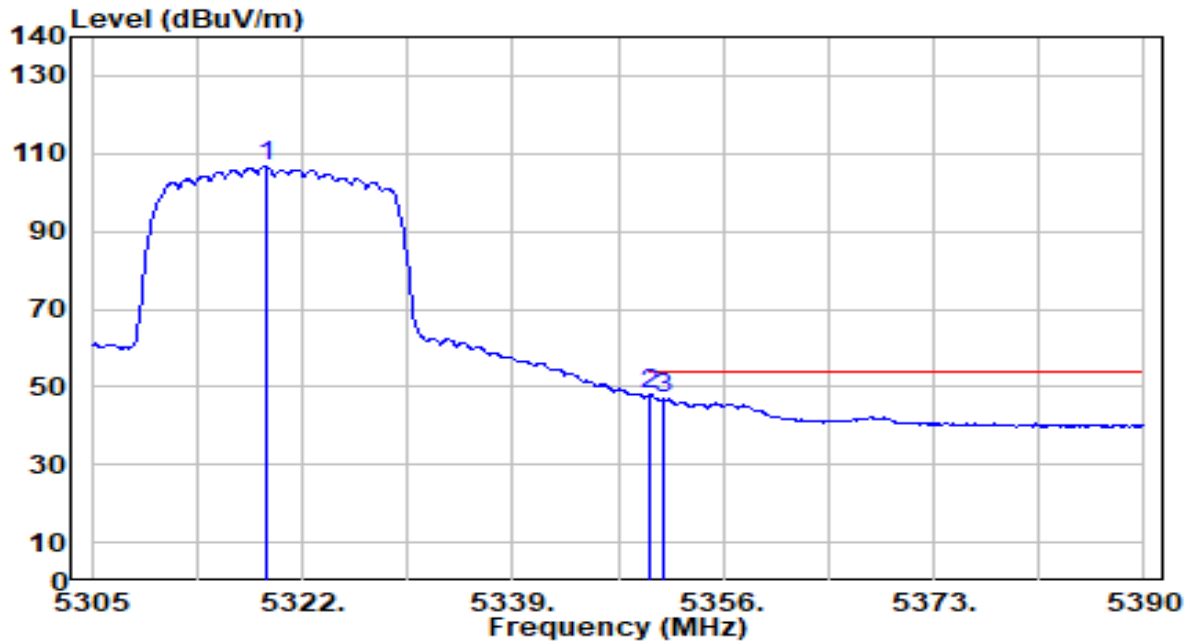


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5319.025	107.63	-0.92	106.70	N/A	N/A	176	9	Average
2	*	5350.000	48.85	-0.97	47.87	-6.13	54.00	176	9	Average
3		5351.155	47.92	-0.97	46.95	-7.05	54.00	176	9	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

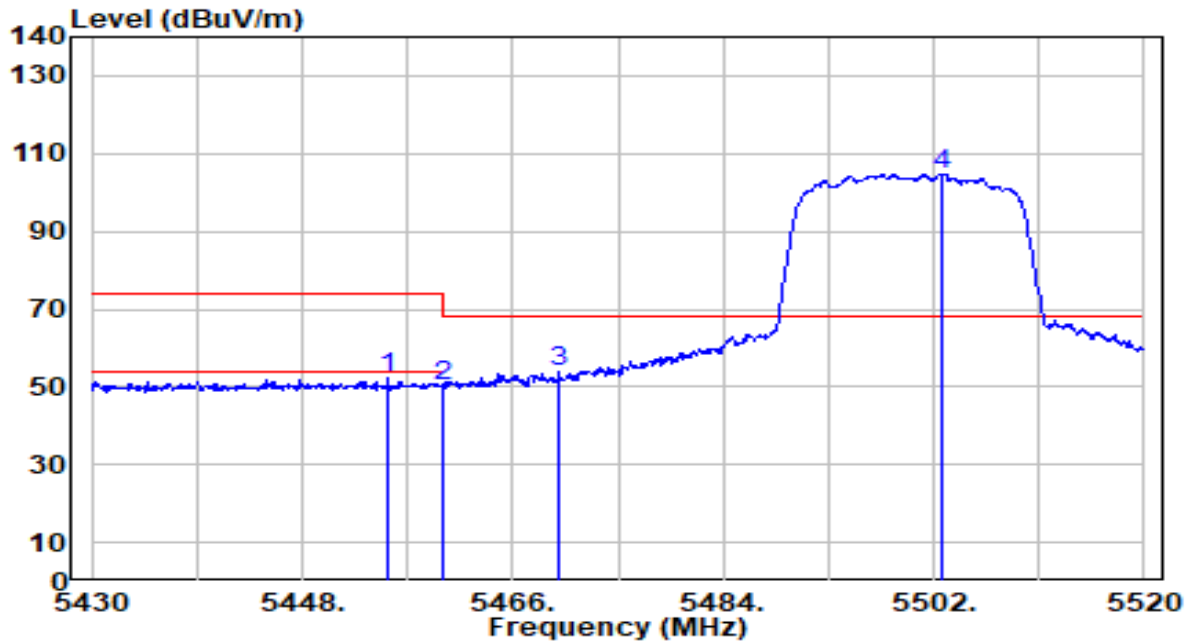


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.380	53.05	-0.88	52.17	-21.83	74.00	106	255	Peak
2	5460.000	50.84	-0.87	49.97	-24.03	74.00	106	255	Peak
3	* 5470.000	54.82	-0.84	53.98	-14.22	68.20	106	255	Peak
4	5502.810	105.54	-0.74	104.80	N/A	N/A	106	255	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

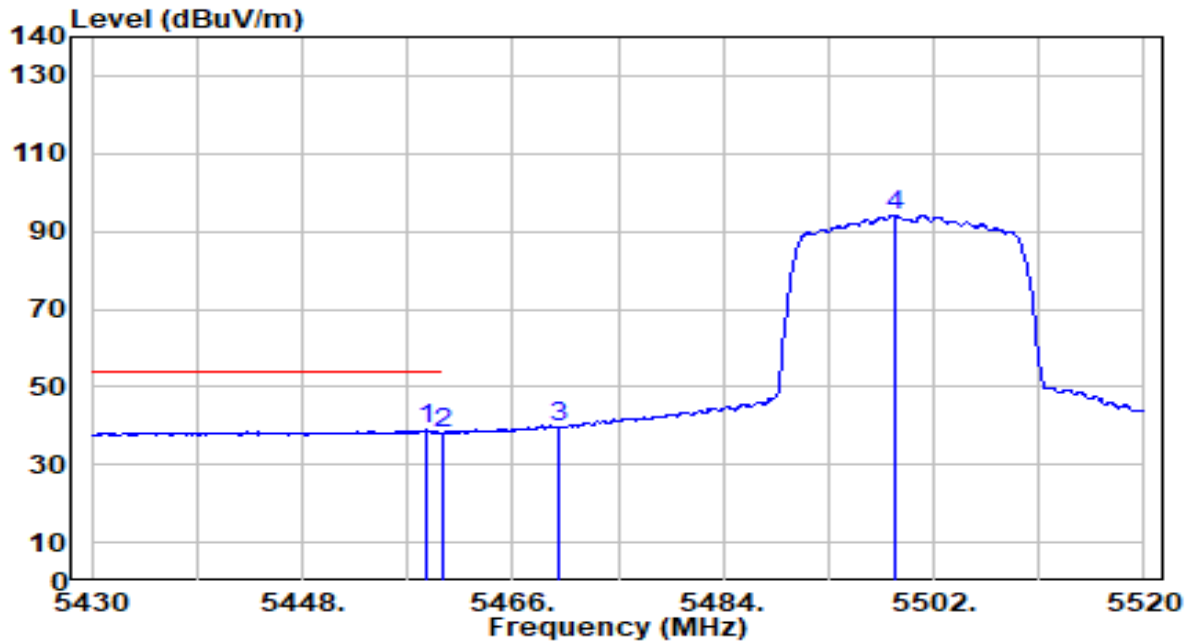


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.530	39.73	-0.87	38.85	-15.15	54.00	106	255	Average
2		5460.000	39.00	-0.87	38.13	-15.87	54.00	106	255	Average
3		5470.000	40.22	-0.84	39.38	N/A	N/A	106	255	Average
4		5498.760	95.01	-0.75	94.26	N/A	N/A	106	255	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

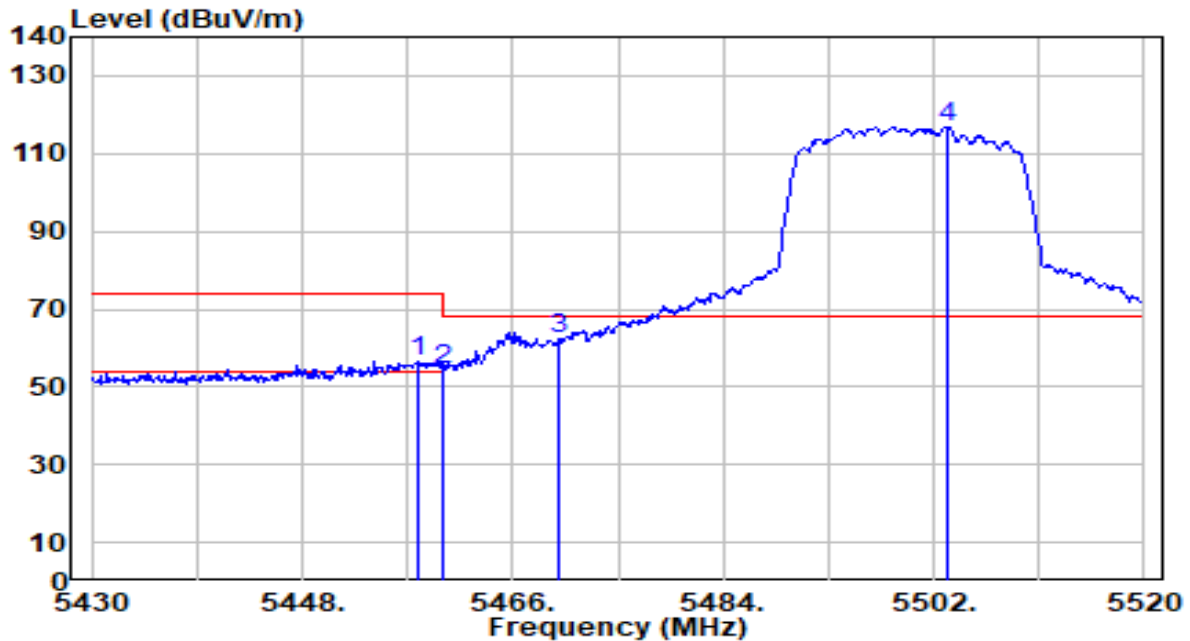


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.900	57.50	-0.88	56.62	-17.38	74.00	174	10	Peak
2	5460.000	55.16	-0.87	54.29	-19.71	74.00	174	10	Peak
3	* 5470.000	62.92	-0.84	62.08	-6.12	68.20	174	10	Peak
4	5503.260	117.69	-0.74	116.95	N/A	N/A	174	10	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

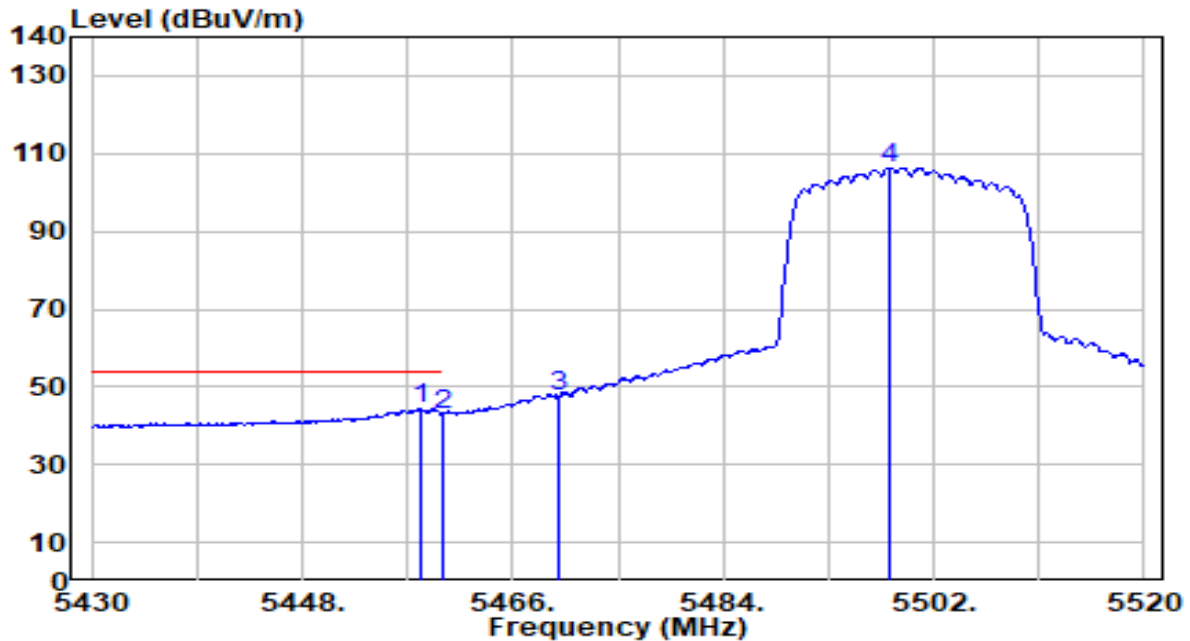


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.170	45.20	-0.87	44.32	-9.68	54.00	174	10	Average
2		5460.000	43.85	-0.87	42.98	-11.02	54.00	174	10	Average
3		5470.000	48.28	-0.84	47.44	N/A	N/A	174	10	Average
4		5498.130	107.06	-0.76	106.31	N/A	N/A	174	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

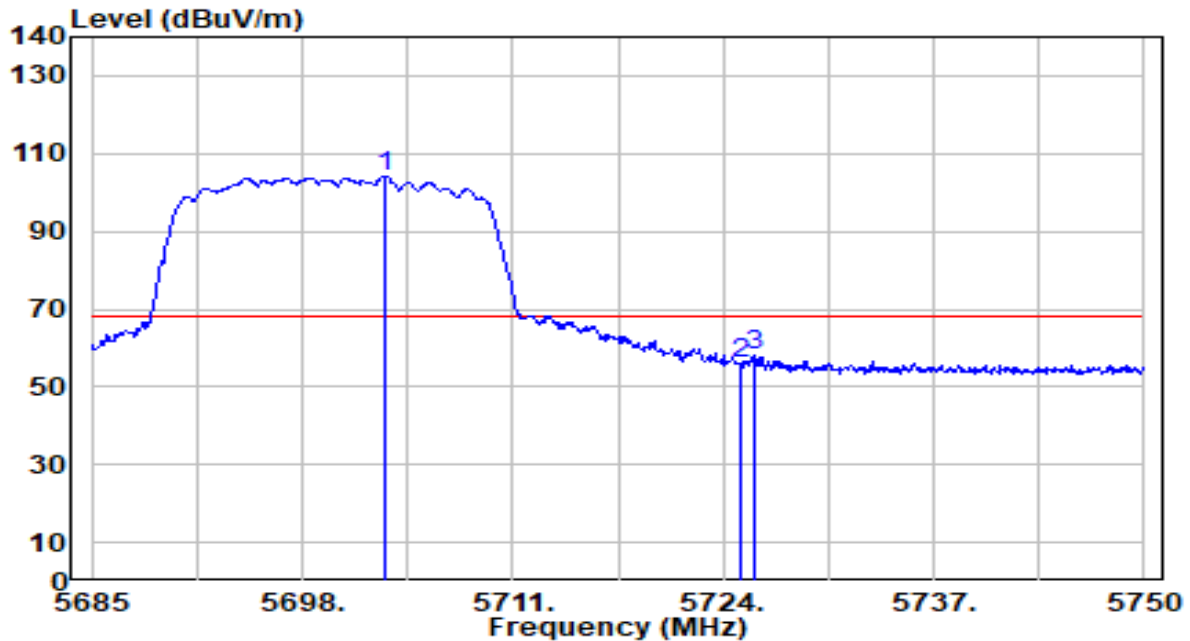


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5703.070	104.17	0.11	104.29	N/A	N/A	191	348	Peak
2	5725.000	55.91	0.23	56.14	-12.06	68.20	191	348	Peak
3	* 5725.950	58.12	0.23	58.35	-9.85	68.20	191	348	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

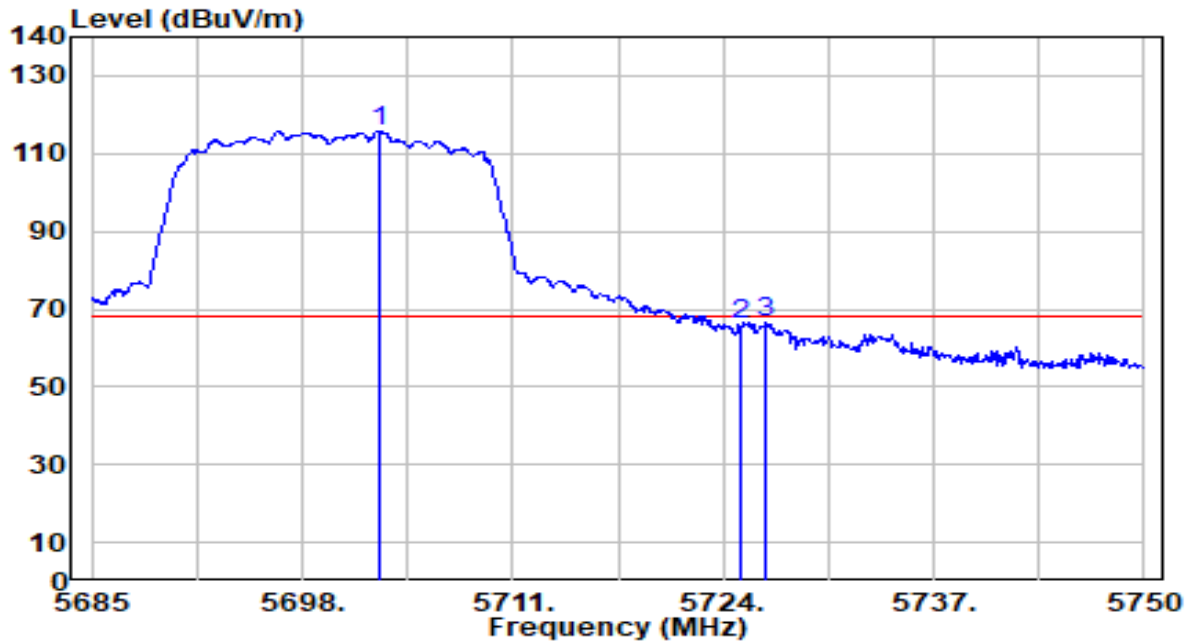


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5702.810	115.74	0.11	115.86	N/A	N/A	209	360	Peak
2	5725.000	65.98	0.23	66.21	-1.99	68.20	209	360	Peak
3	* 5726.600	66.54	0.24	66.78	-1.42	68.20	209	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

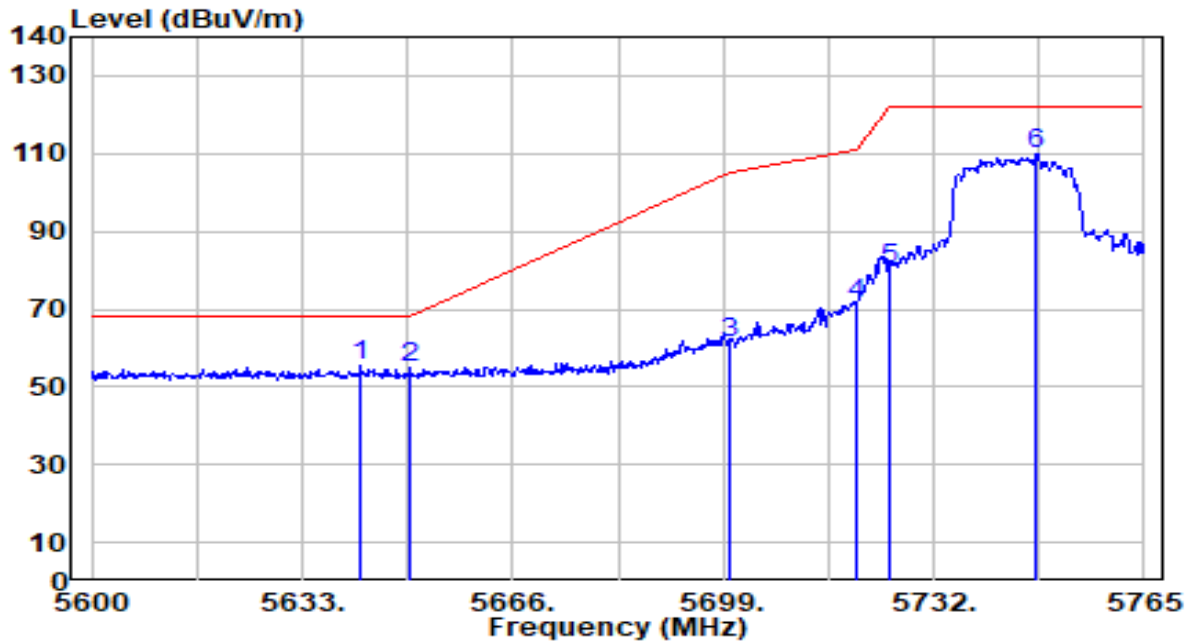


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5642.075	55.49	-0.21	55.28	-12.92	68.20	186	348	Peak
2		5650.000	55.13	-0.16	54.97	-13.23	68.20	186	348	Peak
3		5700.000	61.15	0.10	61.25	-43.95	105.20	186	348	Peak
4		5720.000	71.16	0.20	71.37	-39.43	110.80	186	348	Peak
5		5725.000	80.33	0.23	80.56	-41.64	122.20	186	348	Peak
6		5748.170	109.77	0.35	110.12	N/A	N/A	186	348	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

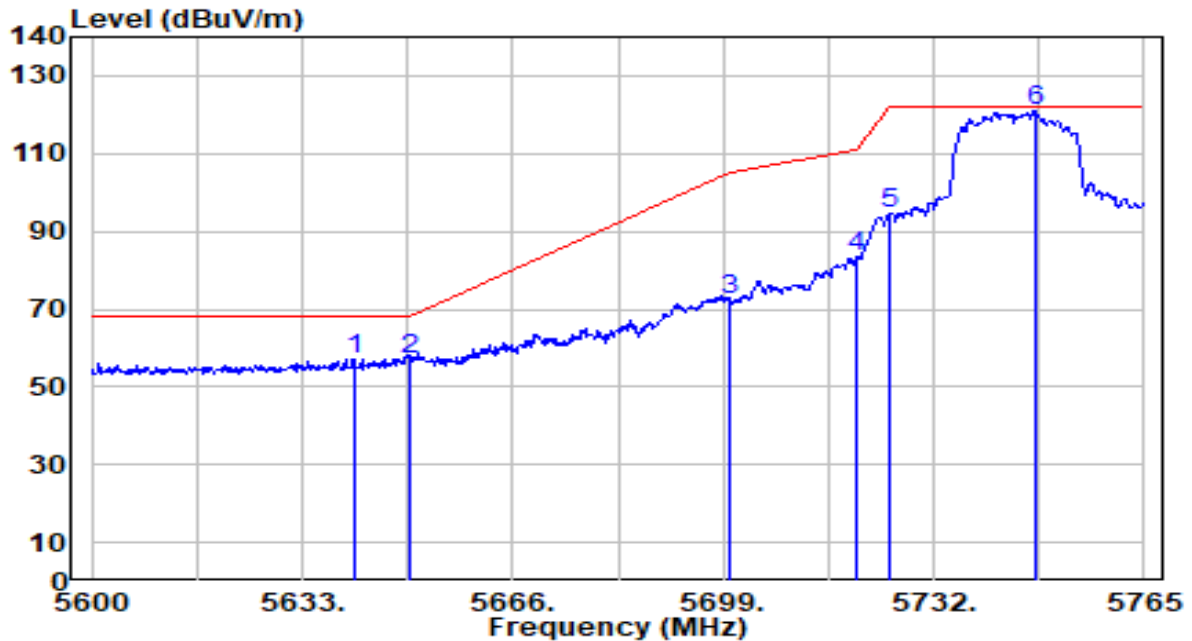


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5641.085	57.53	-0.21	57.32	-10.88	68.20	200	360	Peak
2		5650.000	57.06	-0.16	56.89	-11.31	68.20	200	360	Peak
3		5700.000	72.44	0.10	72.54	-32.66	105.20	200	360	Peak
4		5720.000	83.17	0.20	83.38	-27.42	110.80	200	360	Peak
5		5725.000	94.35	0.23	94.58	-27.62	122.20	200	360	Peak
6		5747.840	120.52	0.35	120.87	N/A	N/A	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

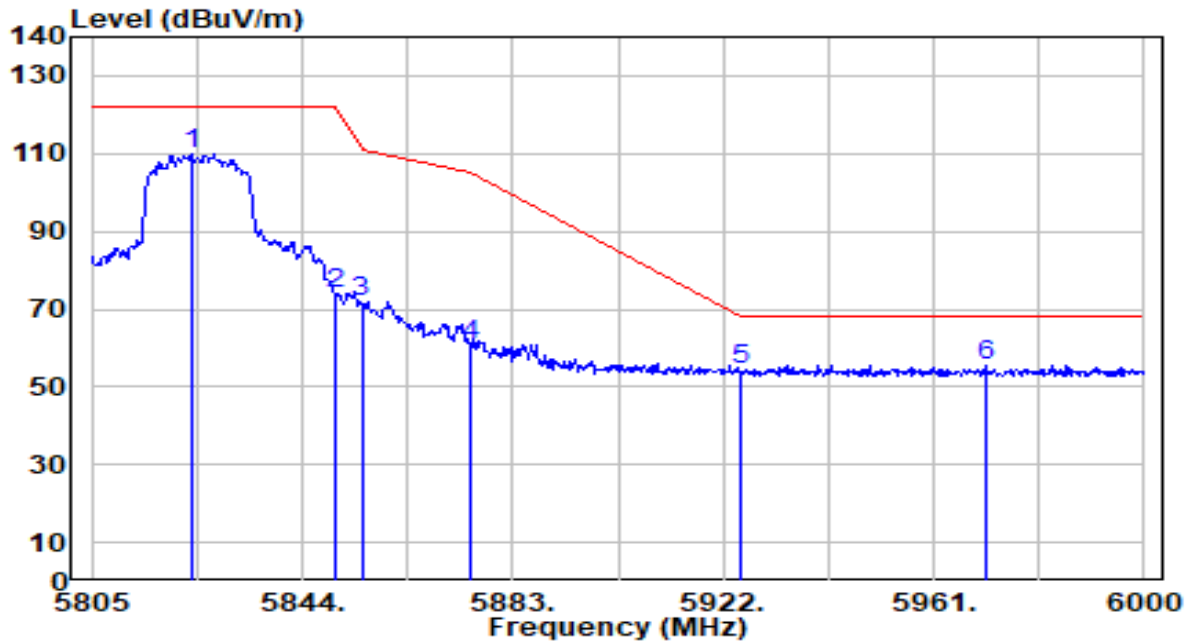


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5823.525	109.39	0.60	110.00	N/A	N/A	192	354	Peak
2	5850.000	73.61	0.58	74.19	-48.01	122.20	192	354	Peak
3	5855.000	71.35	0.58	71.93	-38.87	110.80	192	354	Peak
4	5875.000	59.93	0.57	60.50	-44.70	105.20	192	354	Peak
5	5925.000	53.87	0.53	54.40	-13.80	68.20	192	354	Peak
6	* 5970.750	55.16	0.49	55.65	-12.55	68.20	192	354	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

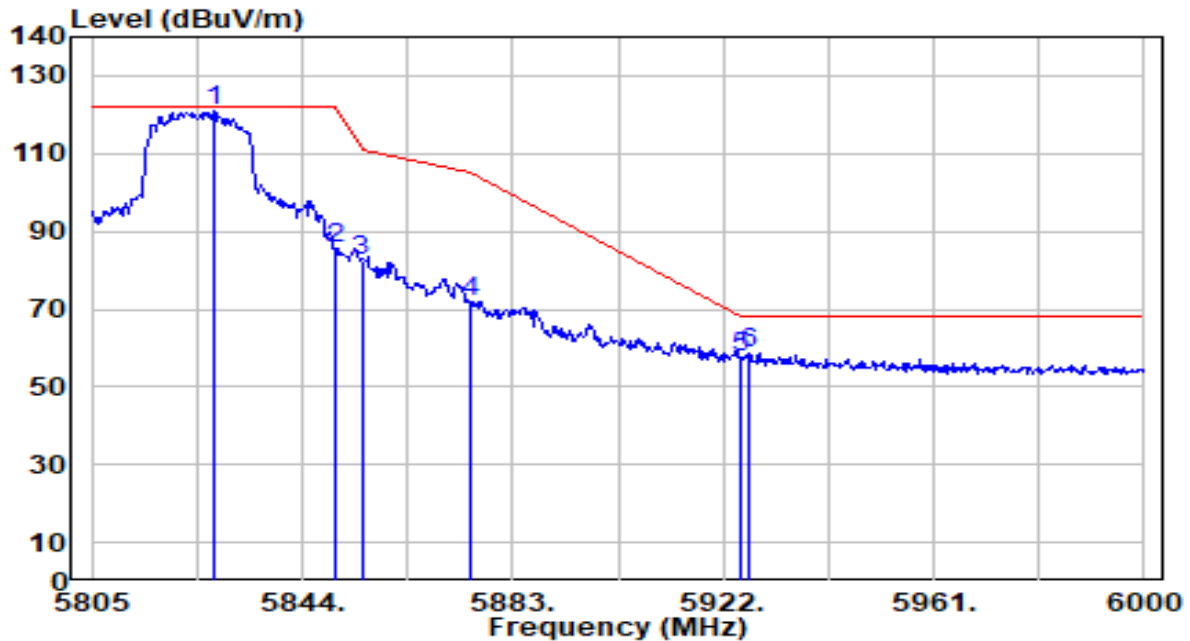


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5827.620	120.63	0.60	121.23	N/A	N/A	214	357	Peak
2	5850.000	85.13	0.58	85.71	-36.49	122.20	214	357	Peak
3	5855.000	81.92	0.58	82.50	-28.30	110.80	214	357	Peak
4	5875.000	71.14	0.57	71.70	-33.50	105.20	214	357	Peak
5	5925.000	56.83	0.53	57.36	-10.84	68.20	214	357	Peak
6	* 5926.875	57.91	0.53	58.44	-9.76	68.20	214	357	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

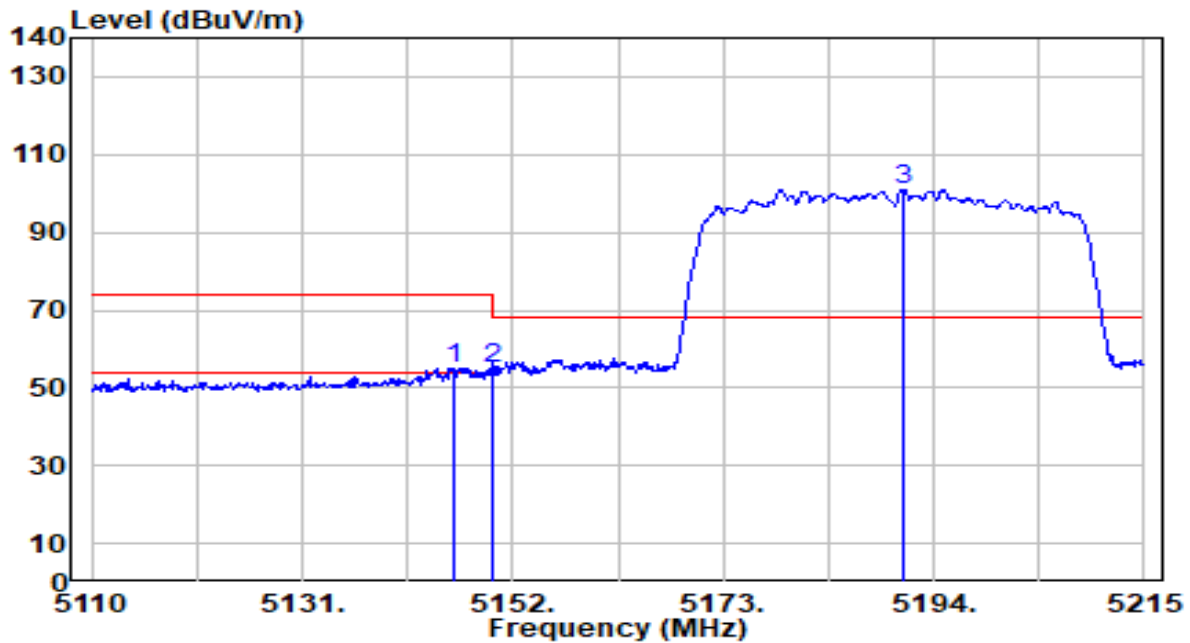


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.225	55.91	-0.72	55.20	-18.80	74.00	141	255	Peak
2		5150.000	55.40	-0.72	54.68	-19.32	74.00	141	255	Peak
3		5190.955	101.65	-0.74	100.91	N/A	N/A	141	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

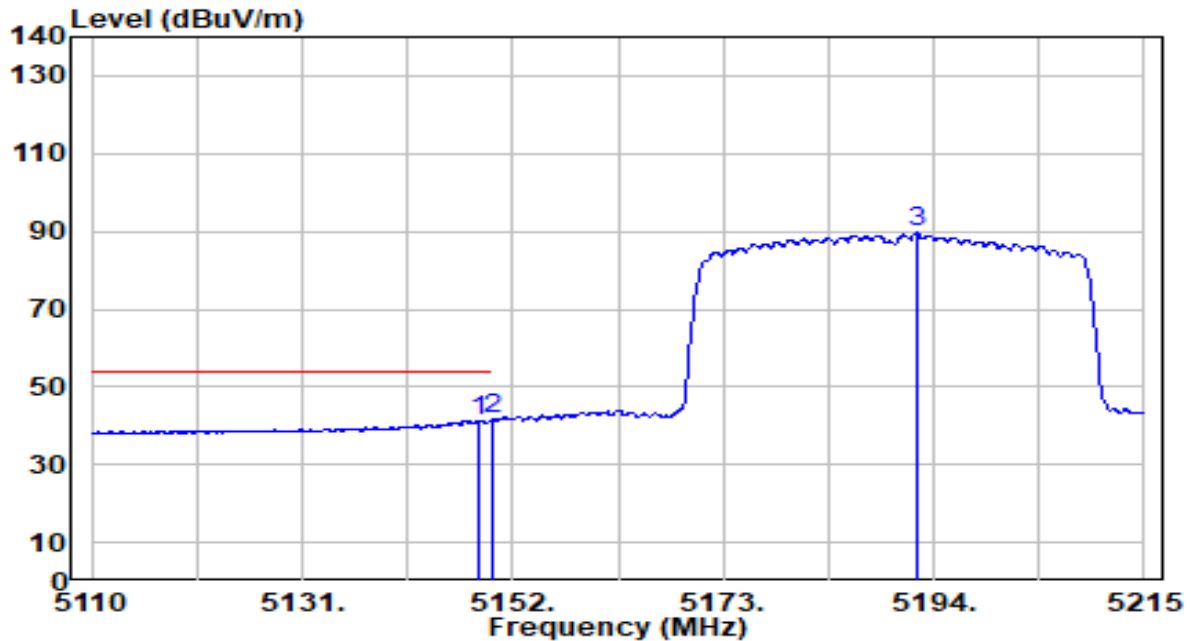


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5148.535	42.18	-0.72	41.46	-12.54	54.00	141	255	Average
2	*	5150.000	42.39	-0.72	41.67	-12.33	54.00	141	255	Average
3		5192.320	90.33	-0.74	89.59	N/A	N/A	141	255	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

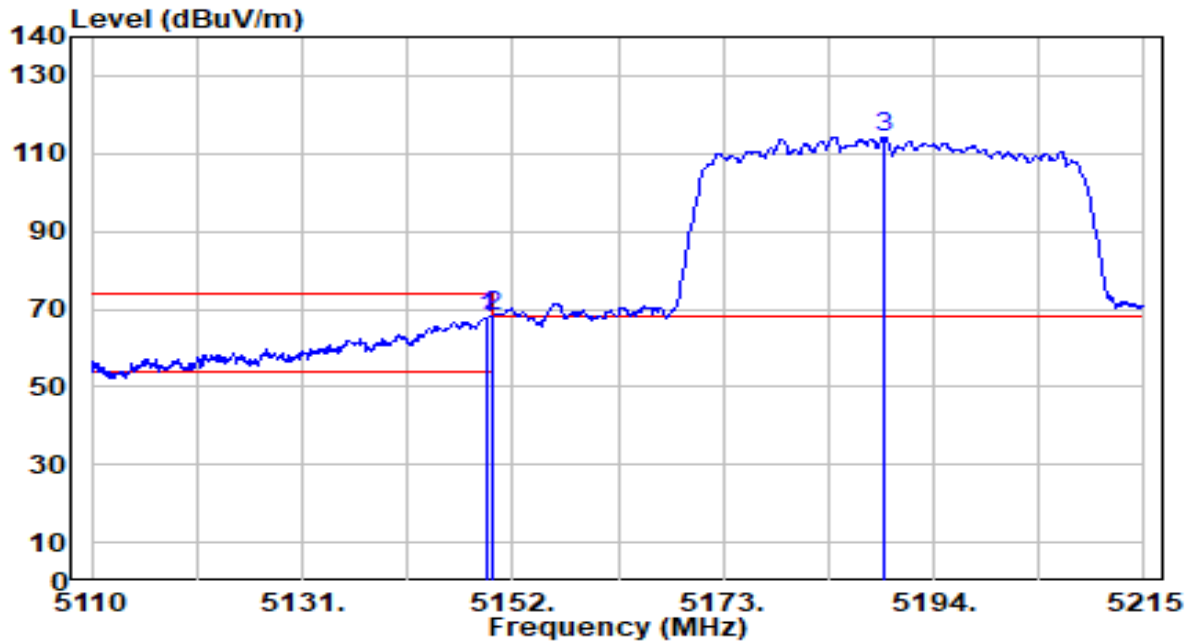


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.375	68.60	-0.72	67.88	-6.12	74.00	147	9	Peak
2	*	5150.000	68.74	-0.72	68.02	-5.98	74.00	147	9	Peak
3		5189.065	115.01	-0.74	114.27	N/A	N/A	147	9	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

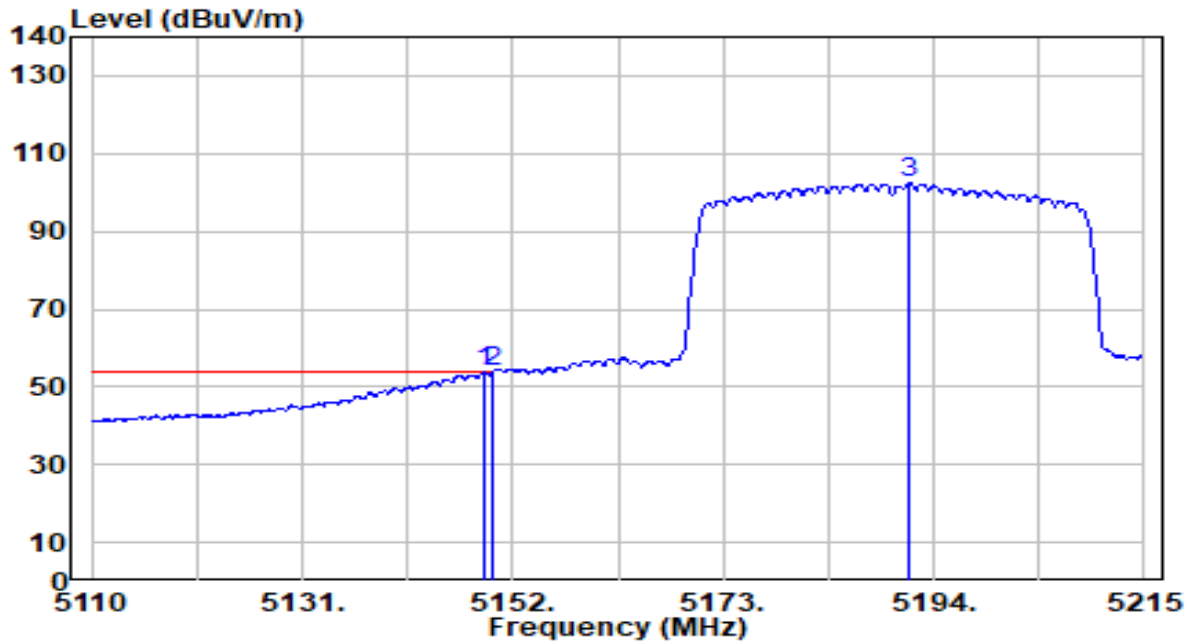


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.165	54.39	-0.72	53.67	-0.33	54.00	147	9	Average
2	*	5150.000	54.62	-0.72	53.90	-0.10	54.00	147	9	Average
3		5191.585	103.17	-0.74	102.43	N/A	N/A	147	9	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

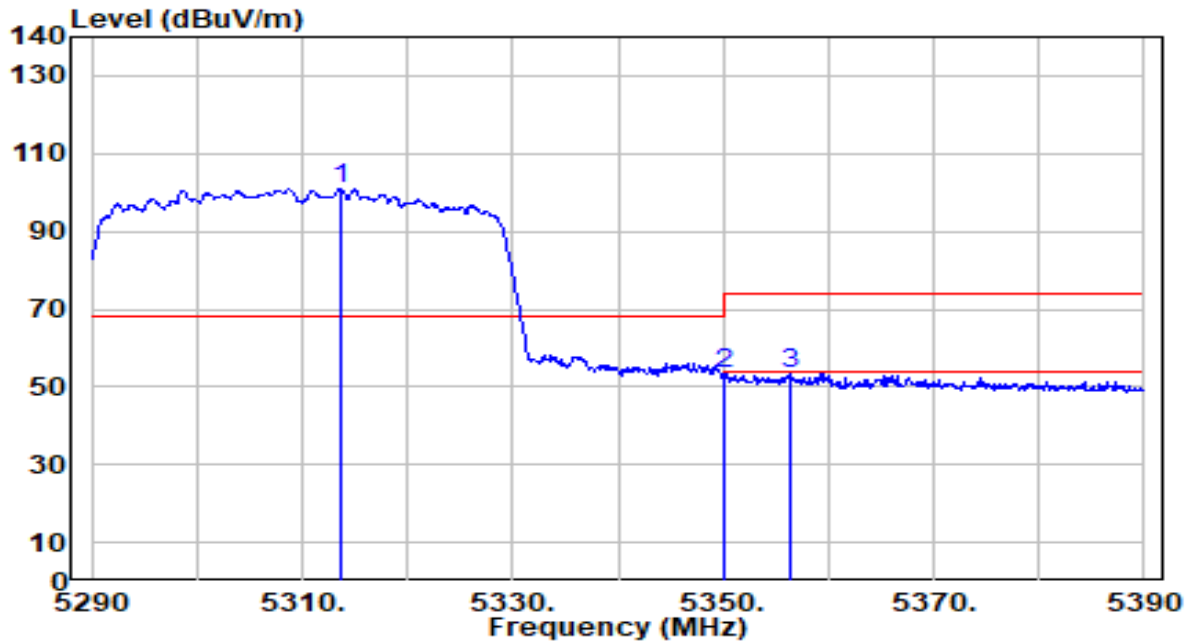


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.600	101.78	-0.92	100.87	N/A	N/A	140	245	Peak
2	5350.000	54.39	-0.97	53.42	-20.58	74.00	140	245	Peak
3	* 5356.300	54.60	-0.98	53.61	-20.39	74.00	140	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

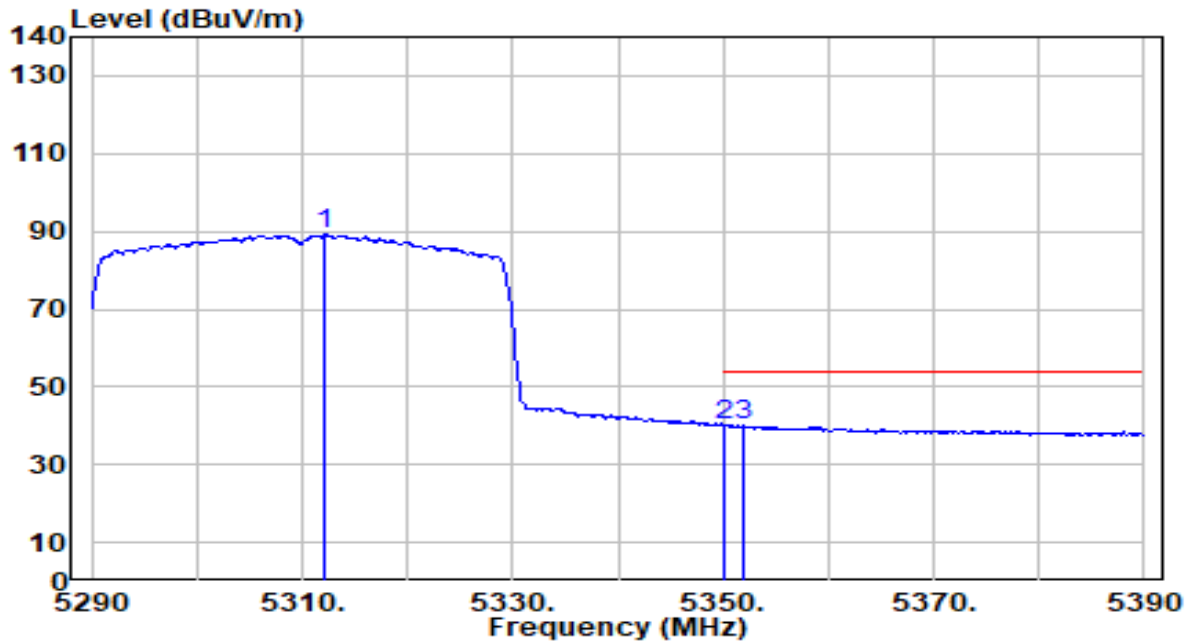


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.200	90.00	-0.91	89.09	N/A	N/A	140	245	Average
2	5350.000	41.08	-0.97	40.11	-13.89	54.00	140	245	Average
3	* 5351.900	41.14	-0.97	40.17	-13.83	54.00	140	245	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

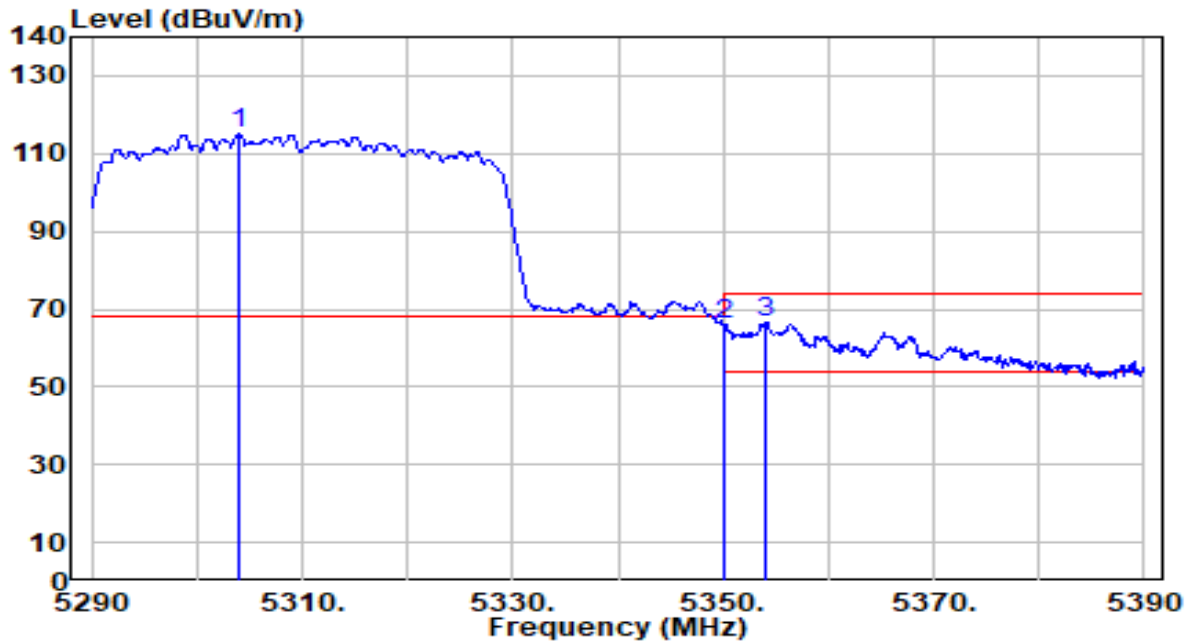


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5304.000	115.91	-0.90	115.01	N/A	N/A	178	6	Peak
2	5350.000	67.05	-0.97	66.08	-7.92	74.00	178	6	Peak
3	* 5353.900	67.43	-0.98	66.46	-7.54	74.00	178	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

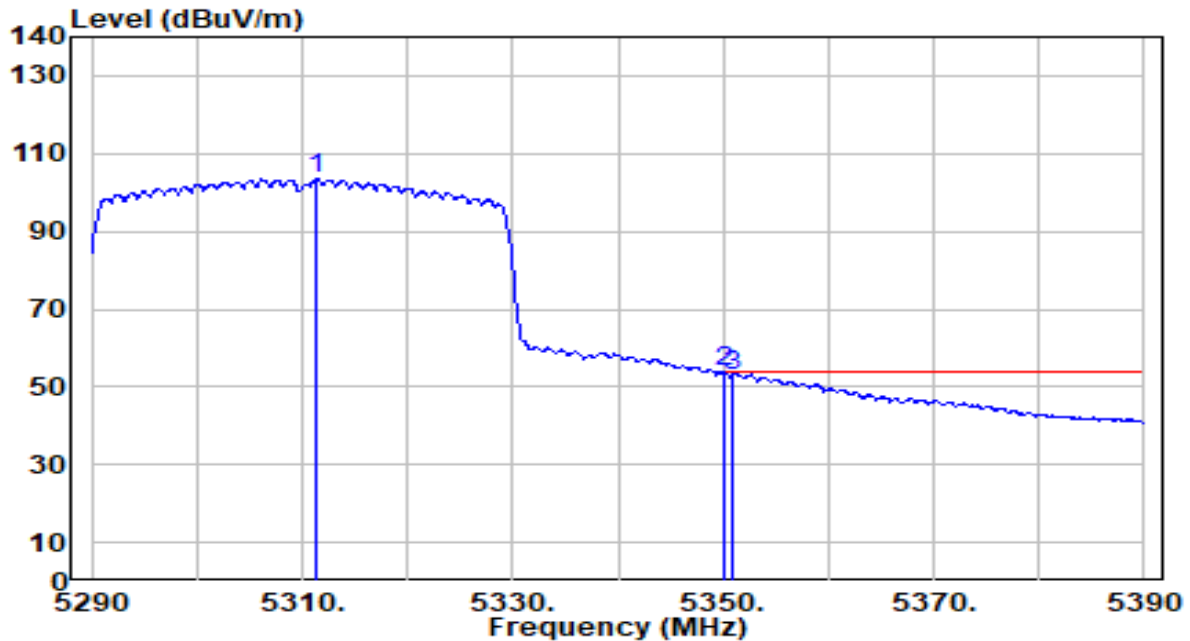


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5311.400	104.27	-0.91	103.36	N/A	N/A	178	6	Average
2	*	5350.000	54.80	-0.97	53.83	-0.17	54.00	178	6	Average
3		5351.000	54.03	-0.97	53.05	-0.95	54.00	178	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

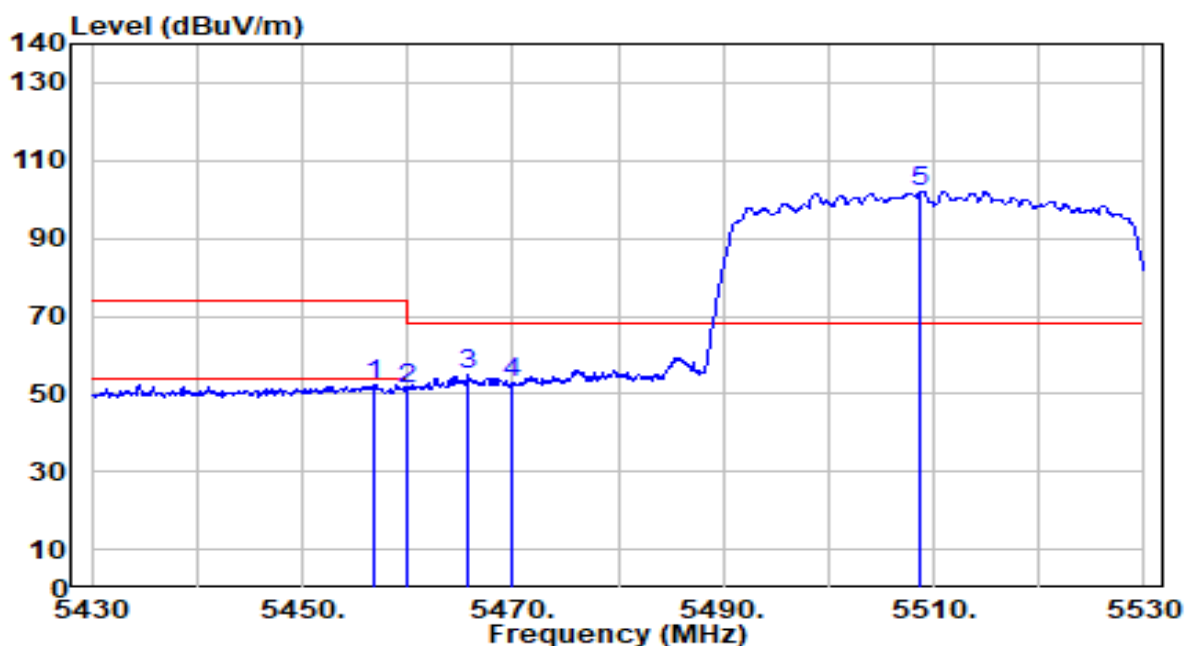


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.700	53.40	-0.88	52.52	-21.48	74.00	114	255	Peak
2	5460.000	52.14	-0.87	51.27	-22.73	74.00	114	255	Peak
3	* 5465.800	55.53	-0.85	54.68	-13.52	68.20	114	255	Peak
4	5470.000	53.65	-0.84	52.81	-15.39	68.20	114	255	Peak
5	5508.800	102.90	-0.72	102.18	N/A	N/A	114	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

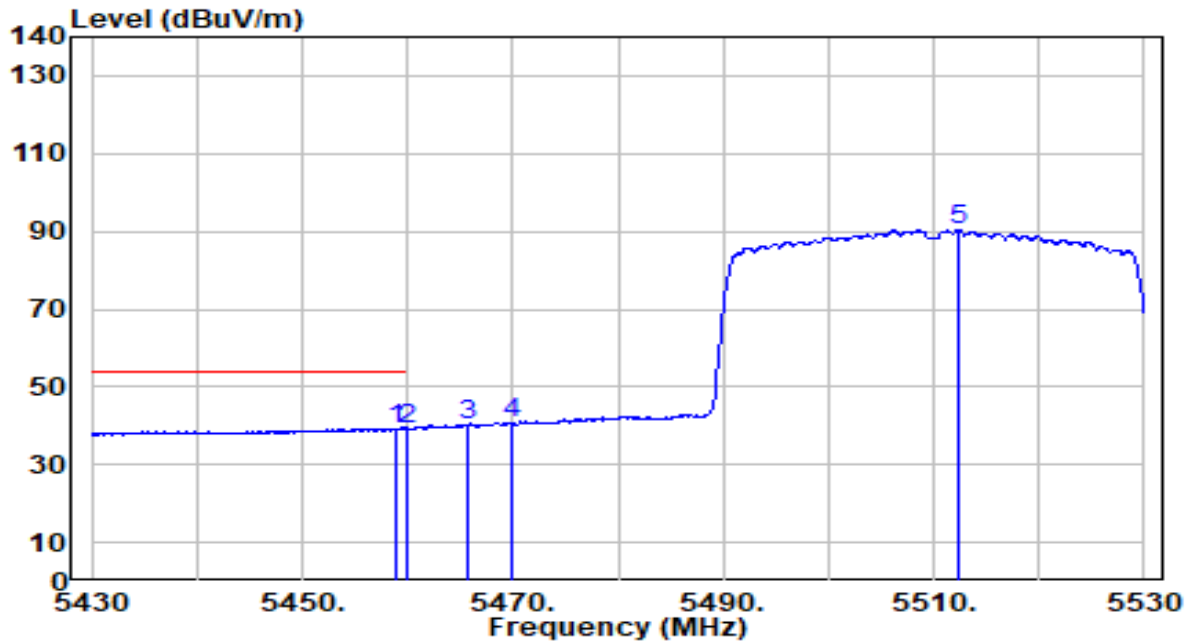


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.800	40.15	-0.87	39.28	-14.72	54.00	114	255	Average
2		5460.000	40.13	-0.87	39.26	-14.74	54.00	114	255	Average
3		5465.800	40.89	-0.85	40.04	N/A	N/A	114	255	Average
4		5470.000	41.61	-0.84	40.77	N/A	N/A	114	255	Average
5		5512.300	91.11	-0.71	90.40	N/A	N/A	114	255	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

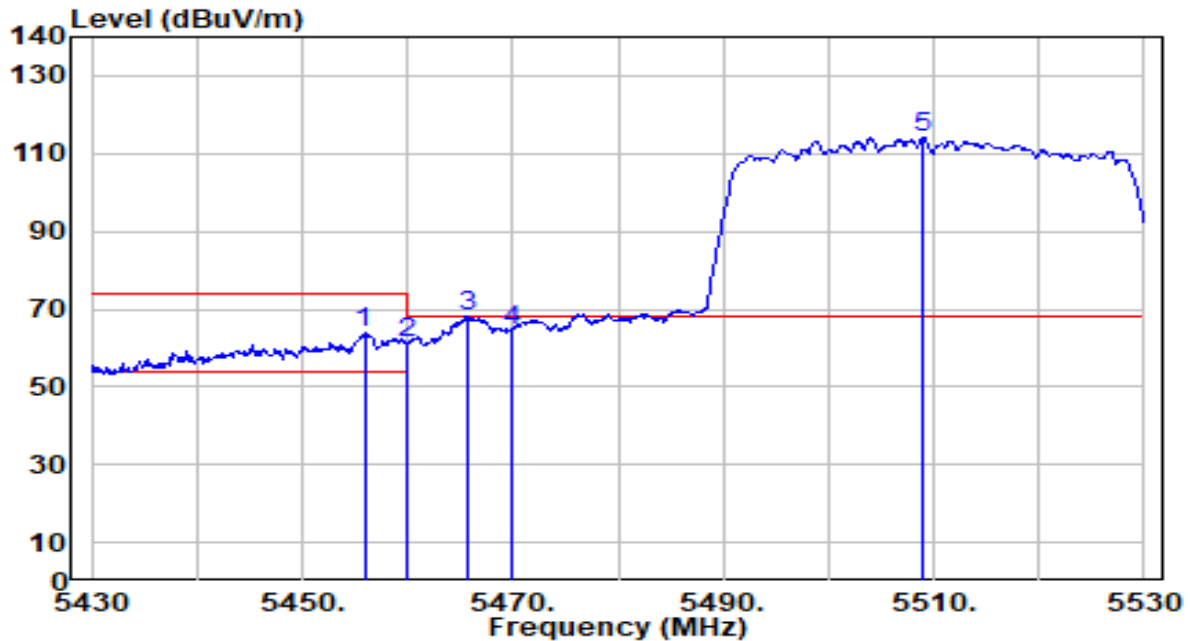


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.900	64.60	-0.88	63.72	-10.28	74.00	180	5	Peak
2	5460.000	61.97	-0.87	61.10	-12.90	74.00	180	5	Peak
3	* 5465.800	68.93	-0.85	68.07	-0.13	68.20	180	5	Peak
4	5470.000	65.40	-0.84	64.56	-3.64	68.20	180	5	Peak
5	5509.000	114.71	-0.72	113.99	N/A	N/A	180	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

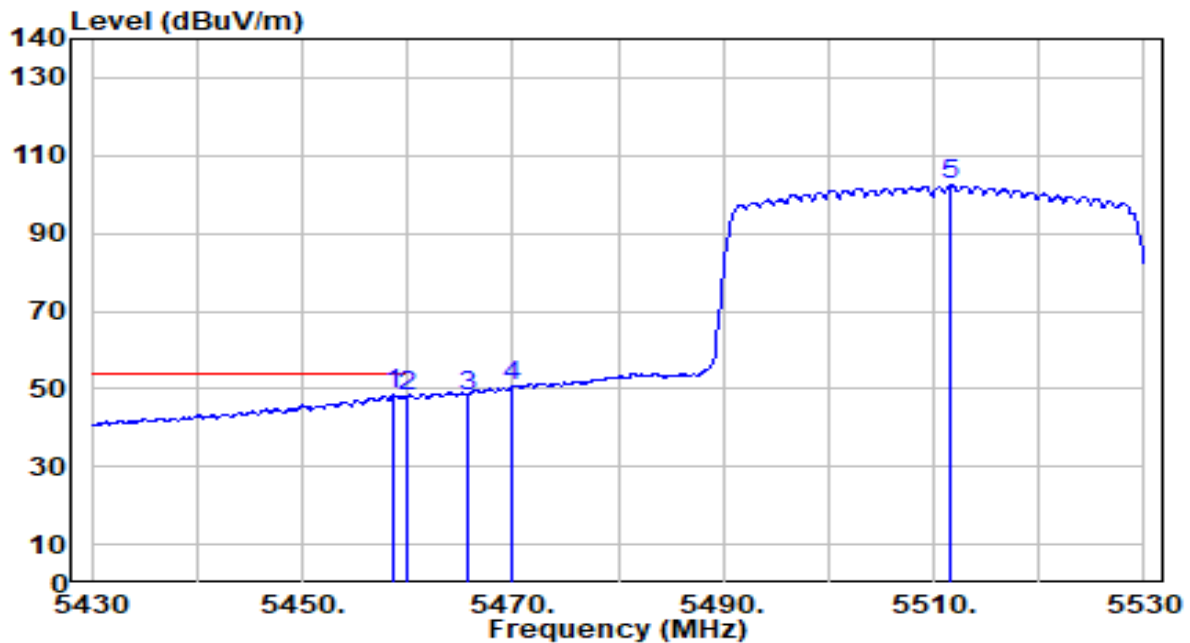


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.700	49.21	-0.87	48.34	-5.66	54.00	180	5	Average
2		5460.000	49.14	-0.87	48.27	-5.73	54.00	180	5	Average
3		5465.800	49.16	-0.85	48.31	N/A	N/A	180	5	Average
4		5470.000	51.59	-0.84	50.75	N/A	N/A	180	5	Average
5		5511.600	103.15	-0.71	102.44	N/A	N/A	180	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

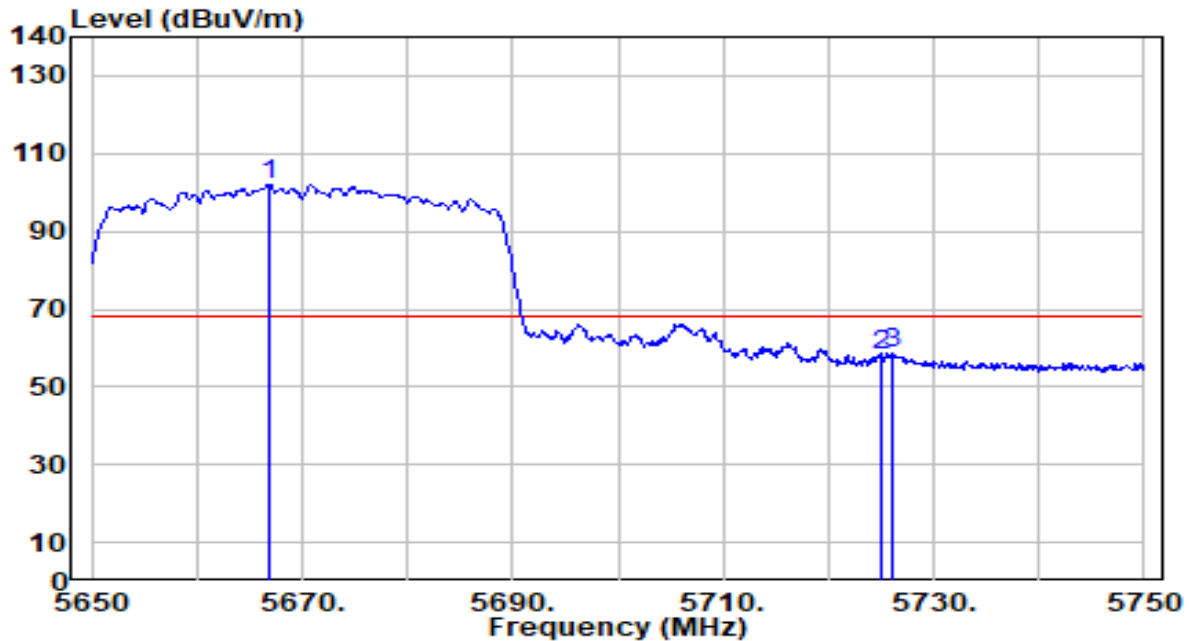


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5666.800	101.99	-0.08	101.92	N/A	N/A	191	348	Peak
2	5725.000	57.94	0.23	58.17	-10.03	68.20	191	348	Peak
3	* 5726.000	58.19	0.23	58.42	-9.78	68.20	191	348	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

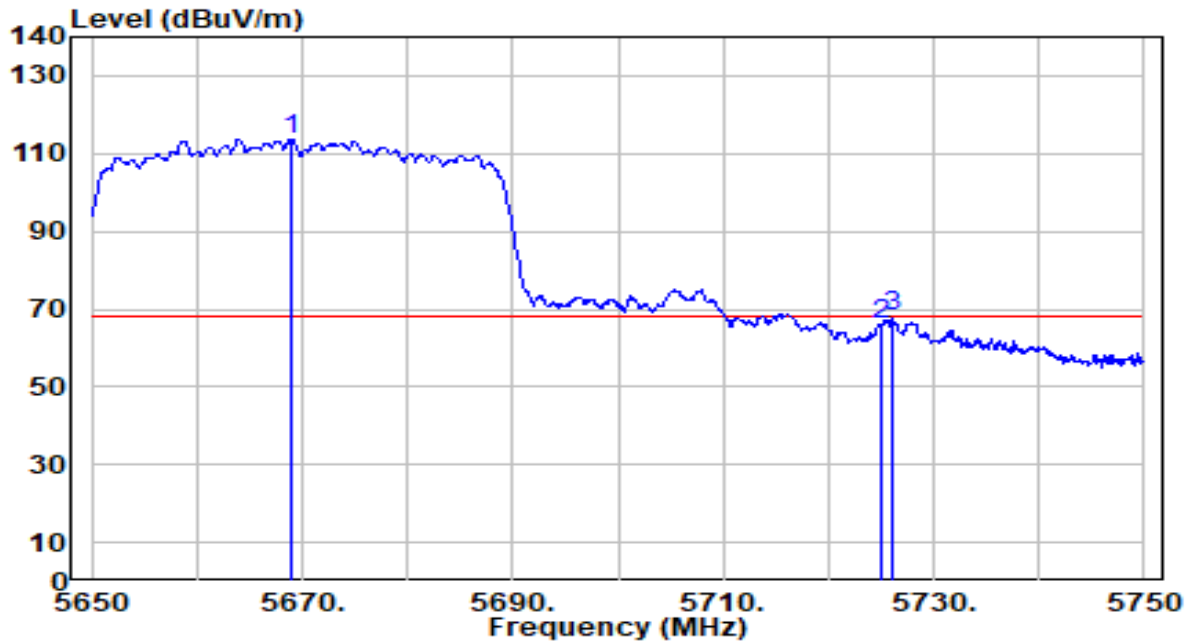


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5668.900	113.79	-0.06	113.72	N/A	N/A	218	360	Peak
2	5725.000	65.73	0.23	65.96	-2.24	68.20	218	360	Peak
3	* 5726.000	67.80	0.23	68.03	-0.17	68.20	218	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

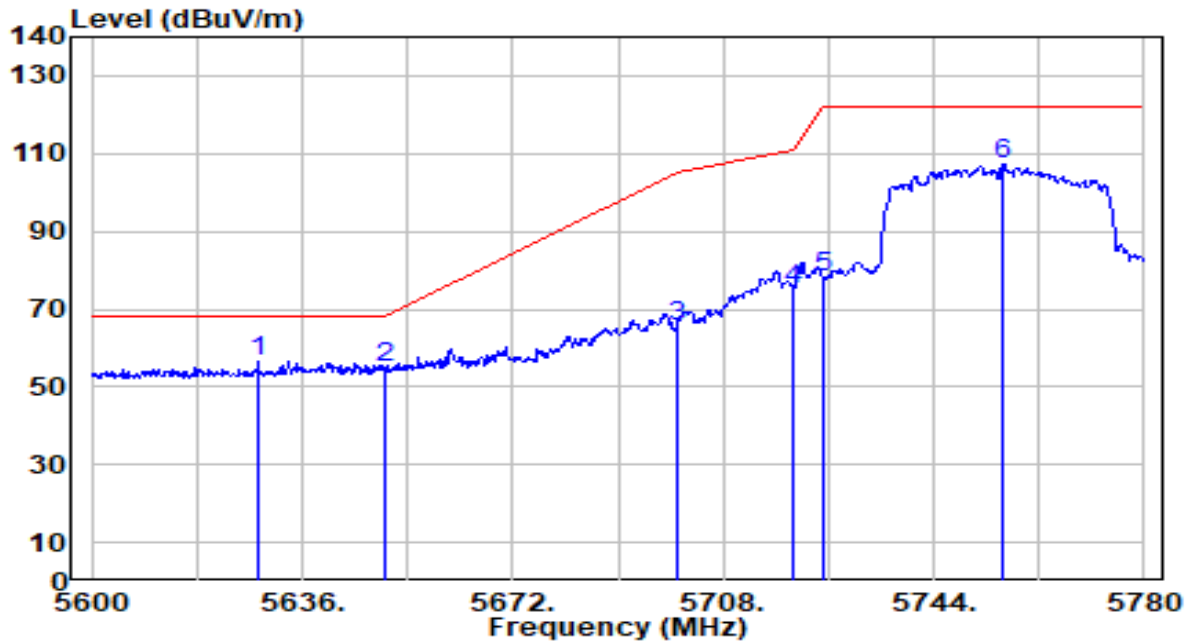


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5628.440	56.88	-0.28	56.60	-11.60	68.20	196	348	Peak
2		5650.000	55.01	-0.16	54.85	-13.35	68.20	196	348	Peak
3		5700.000	65.49	0.10	65.58	-39.62	105.20	196	348	Peak
4		5720.000	74.95	0.20	75.15	-35.65	110.80	196	348	Peak
5		5725.000	78.09	0.23	78.32	-43.88	122.20	196	348	Peak
6		5755.880	106.84	0.39	107.23	N/A	N/A	196	348	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

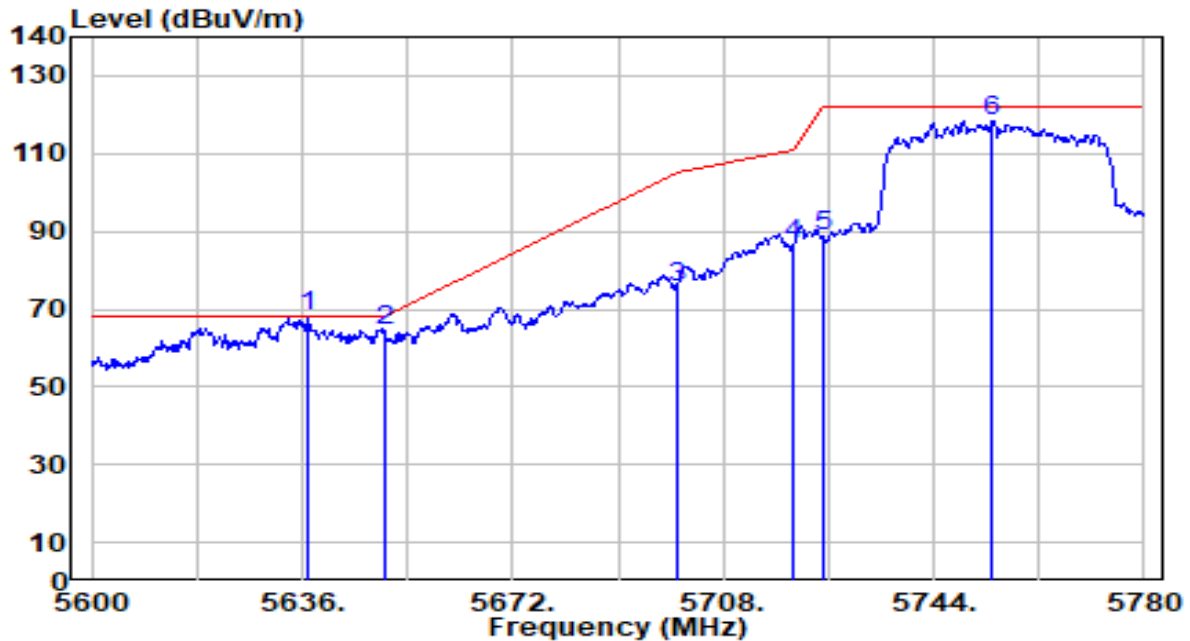


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5637.080	68.19	-0.23	67.96	-0.24	68.20	218	360	Peak
2		5650.000	64.73	-0.16	64.56	-3.64	68.20	218	360	Peak
3		5700.000	75.69	0.10	75.79	-29.41	105.20	218	360	Peak
4		5720.000	86.25	0.20	86.45	-24.35	110.80	218	360	Peak
5		5725.000	88.31	0.23	88.54	-33.66	122.20	218	360	Peak
6		5754.080	118.15	0.38	118.54	N/A	N/A	218	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

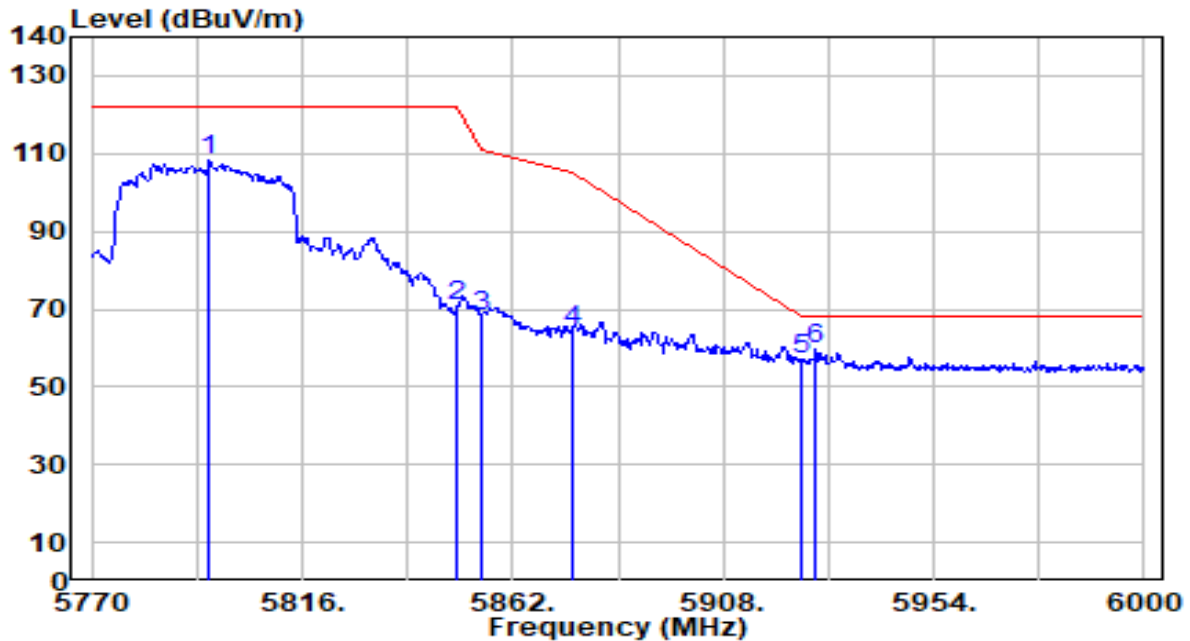


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5795.760	107.47	0.60	108.07	N/A	N/A	192	350	Peak
2	5850.000	70.17	0.58	70.76	-51.44	122.20	192	350	Peak
3	5855.000	67.70	0.58	68.28	-42.52	110.80	192	350	Peak
4	5875.000	63.87	0.57	64.43	-40.77	105.20	192	350	Peak
5	5925.000	56.40	0.53	56.93	-11.27	68.20	192	350	Peak
6	* 5928.240	58.99	0.52	59.52	-8.68	68.20	192	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

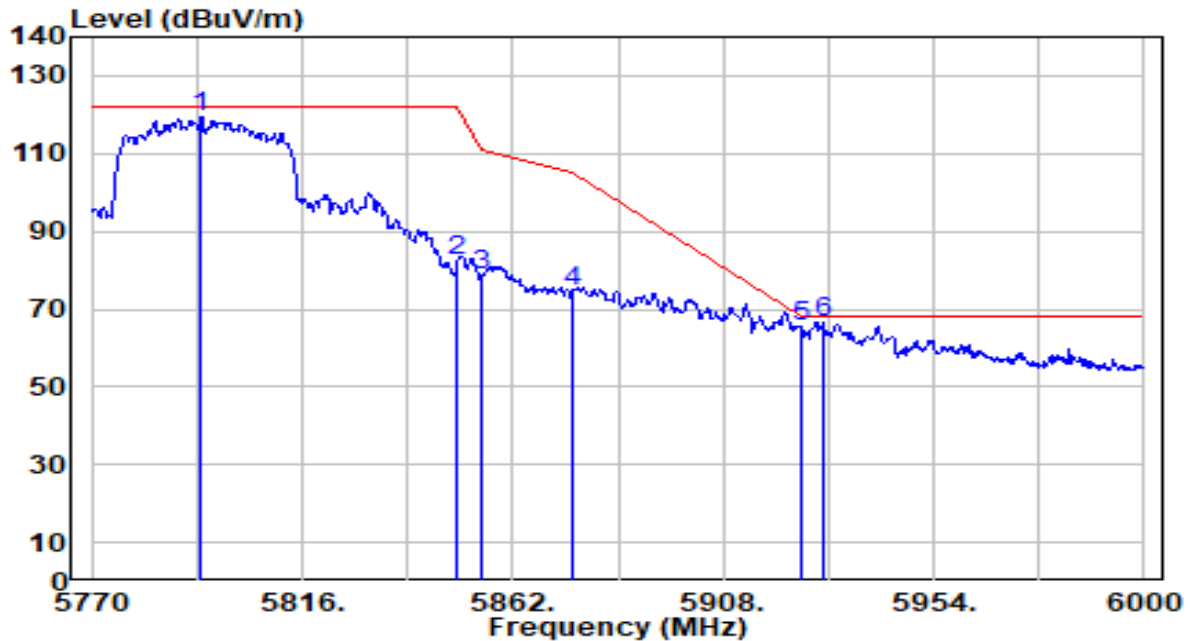


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5793.920	118.91	0.59	119.50	N/A	N/A	200	360	Peak
2	5850.000	81.85	0.58	82.44	-39.76	122.20	200	360	Peak
3	5855.000	77.98	0.58	78.56	-32.24	110.80	200	360	Peak
4	5875.000	74.13	0.57	74.70	-30.50	105.20	200	360	Peak
5	5925.000	65.12	0.53	65.65	-2.55	68.20	200	360	Peak
6	* 5929.620	65.95	0.52	66.47	-1.73	68.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

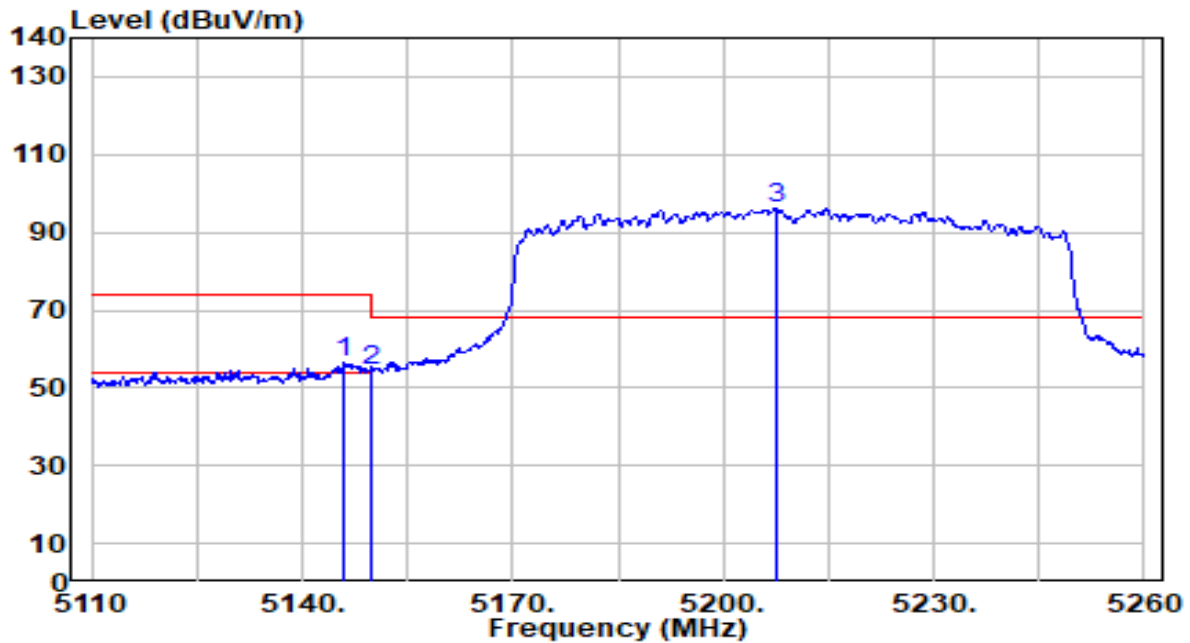


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.000	57.11	-0.72	56.39	-17.61	74.00	142	255	Peak
2		5150.000	55.20	-0.72	54.49	-19.51	74.00	142	255	Peak
3		5207.500	96.76	-0.76	96.00	N/A	N/A	142	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

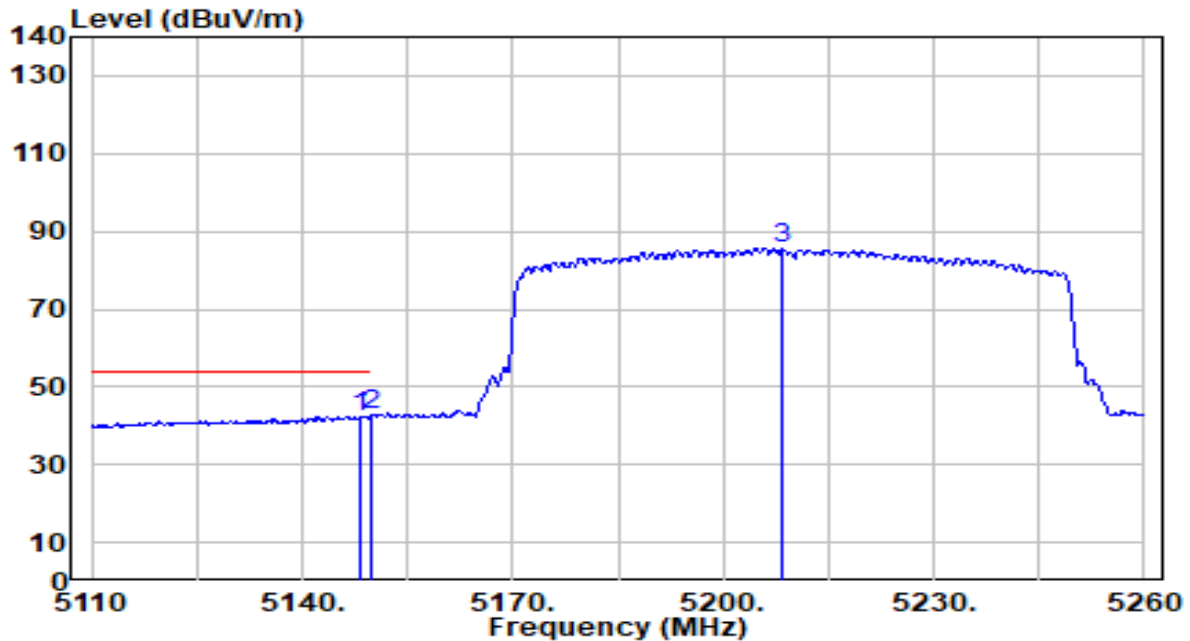


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5148.400	43.17	-0.72	42.45	-11.55	54.00	142	255	Average
2	*	5150.000	43.52	-0.72	42.80	-11.20	54.00	142	255	Average
3		5208.400	86.38	-0.76	85.62	N/A	N/A	142	255	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

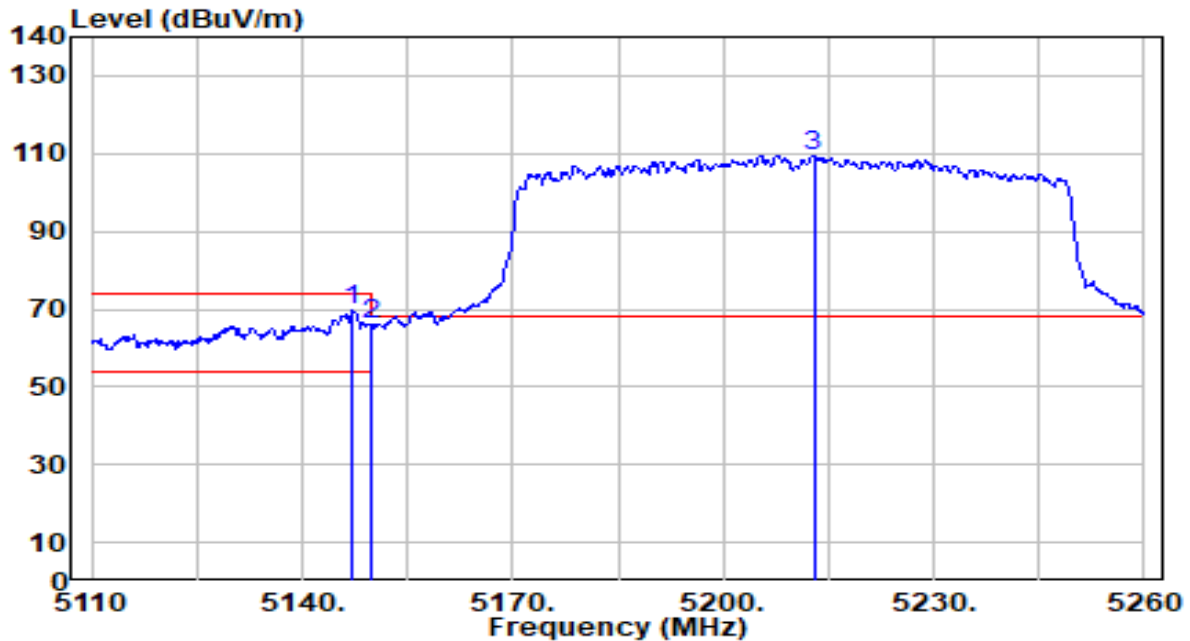


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.050	70.24	-0.72	69.53	-4.47	74.00	142	6	Peak
2		5150.000	66.85	-0.72	66.13	-7.87	74.00	142	6	Peak
3		5212.900	110.22	-0.76	109.46	N/A	N/A	142	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-06-27
Factor	DRH18-E	Temp. / Humidity	20°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

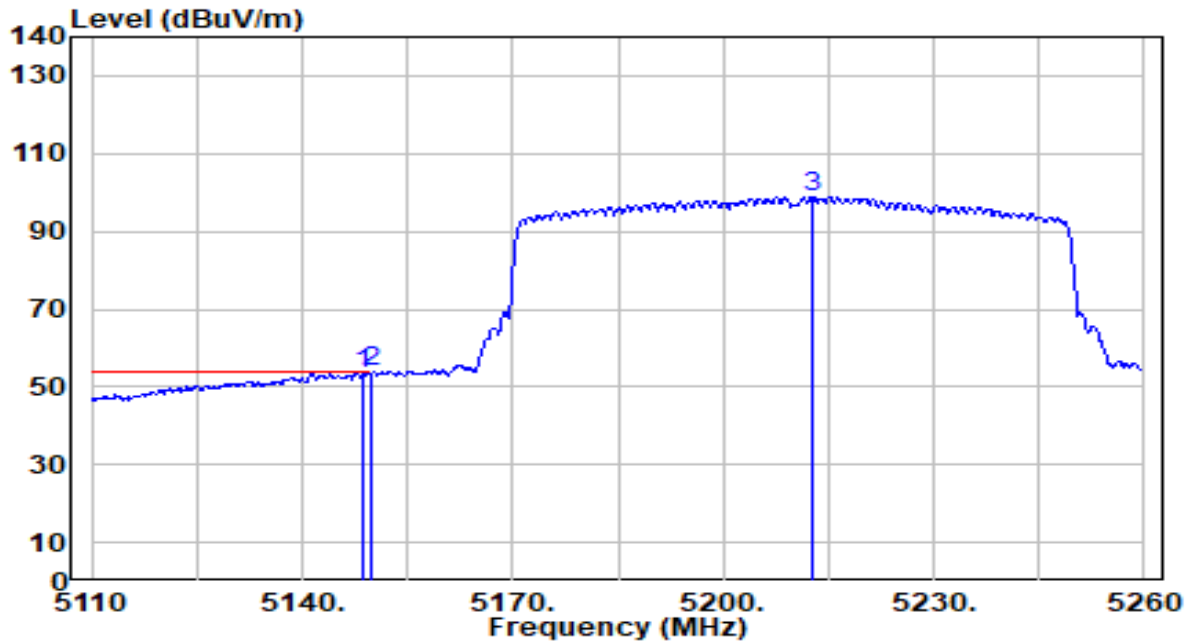

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5148.700	54.10	-0.72	53.38	-0.62	54.00	142	6	Average
2	*	5150.000	54.59	-0.72	53.87	-0.13	54.00	142	6	Average
3		5212.600	99.65	-0.76	98.89	N/A	N/A	142	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10.AC Conducted Emissions Measurement


7.10.1.Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.10.2.Test Setup

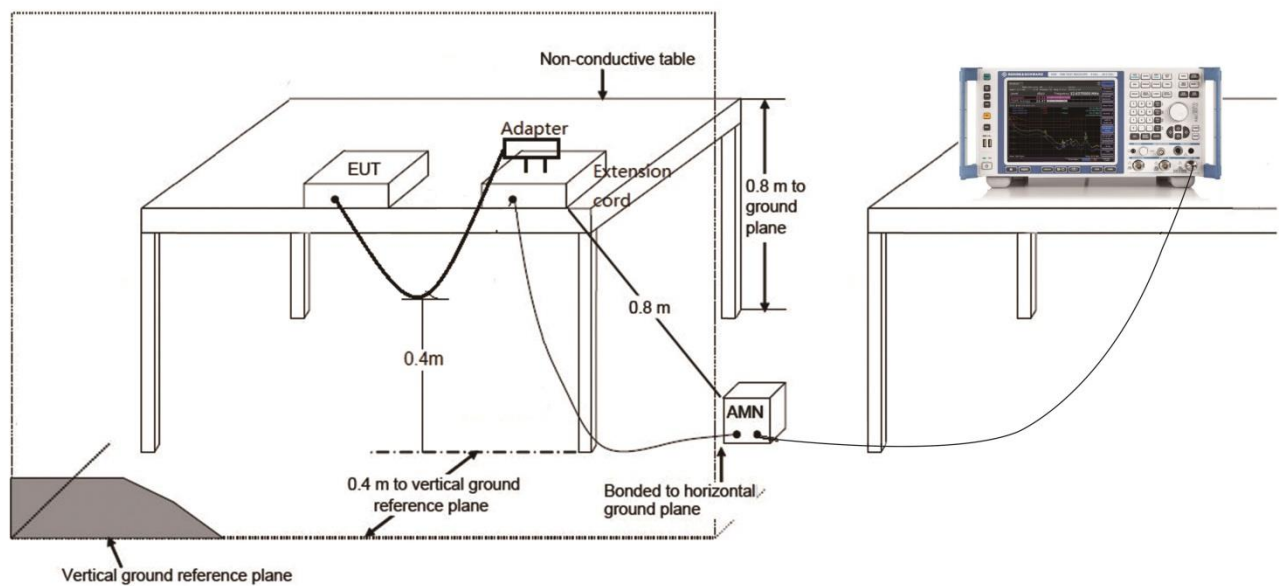

7.10.3.Test Result

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-07-05
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.6°C /52%
Polarity	Line1	Site / Test Engineer	SR2 / Bob
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

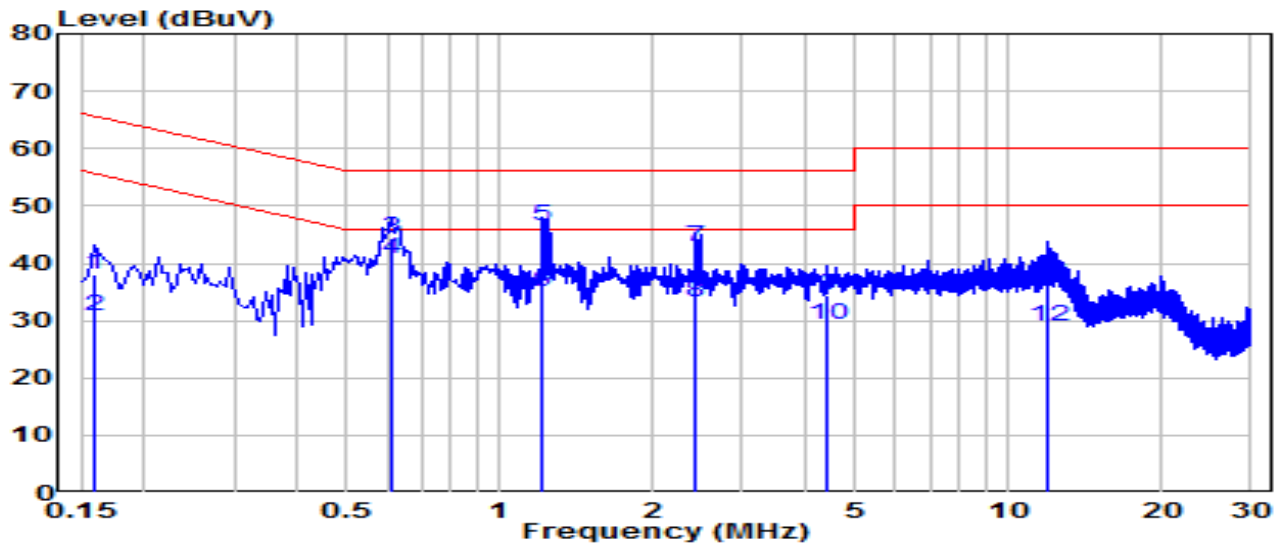


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.159	28.39	9.62	38.01	-27.51	65.52	QP
2	0.159	21.32	9.62	30.94	-24.58	55.52	Average
3	* 0.609	34.84	9.65	44.49	-11.51	56.00	QP
4	* 0.609	31.22	9.65	40.87	-5.13	46.00	Average
5	1.216	36.92	9.67	46.60	-9.40	56.00	QP
6	1.216	25.37	9.67	35.04	-10.96	46.00	Average
7	2.436	33.29	9.70	42.99	-13.01	56.00	QP
8	2.436	23.53	9.70	33.23	-12.77	46.00	Average
9	4.393	24.57	9.74	34.30	-21.70	56.00	QP
10	4.393	19.58	9.74	29.32	-16.68	46.00	Average
11	11.997	26.50	9.87	36.38	-23.62	60.00	QP
12	11.997	19.17	9.87	29.04	-20.96	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-07-05
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.6°C /52%
Polarity	Neutral	Site / Test Engineer	SR2 / Bob
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

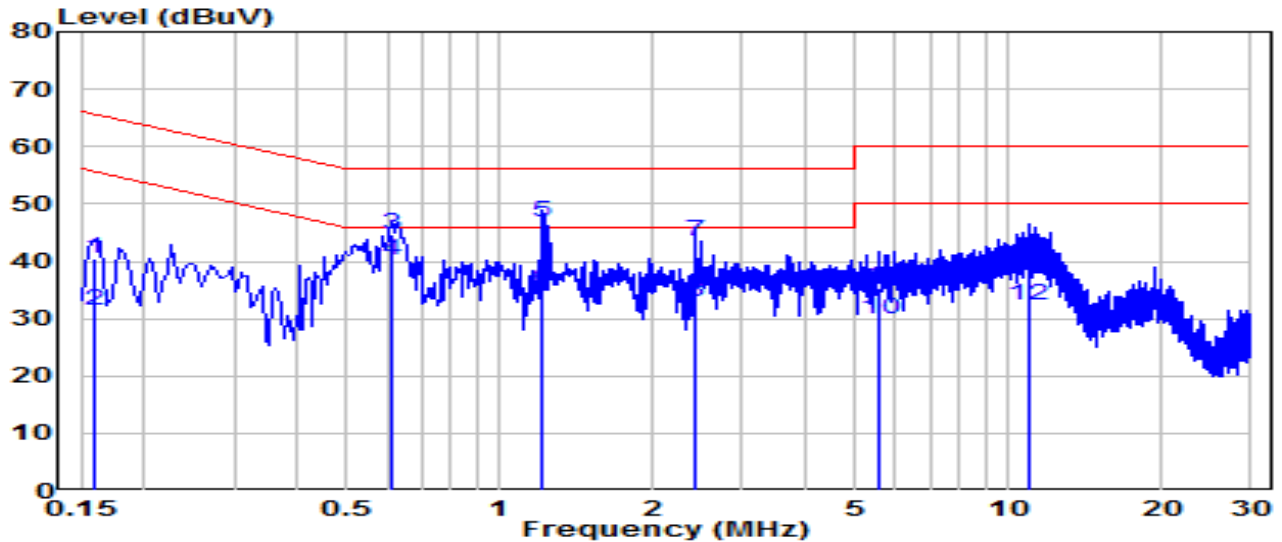


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.159	30.86	9.62	40.49	-25.03	65.52	QP
2	0.159	21.67	9.62	31.29	-24.23	55.52	Average
3	* 0.613	35.12	9.65	44.77	-11.23	56.00	QP
4	* 0.613	30.63	9.65	40.28	-5.72	46.00	Average
5	1.216	37.15	9.67	46.83	-9.17	56.00	QP
6	1.216	25.43	9.67	35.10	-10.90	46.00	Average
7	2.436	33.62	9.70	43.32	-12.68	56.00	QP
8	2.436	23.16	9.70	32.86	-13.14	46.00	Average
9	5.590	25.44	9.76	35.20	-24.80	60.00	QP
10	5.590	20.00	9.76	29.76	-20.24	50.00	Average
11	10.917	29.76	9.88	39.64	-20.36	60.00	QP
12	10.917	22.44	9.88	32.32	-17.68	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-07-05
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.6°C /52%
Polarity	Line1	Site / Test Engineer	SR2 / Bob
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 240V/60Hz

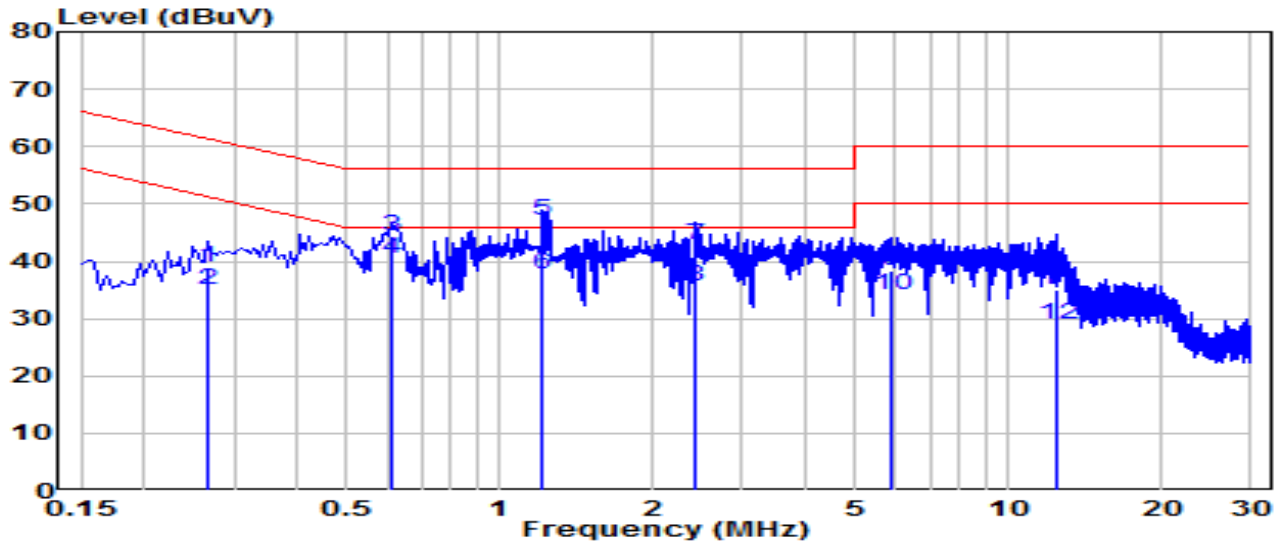


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.267	29.30	9.63	38.93	-22.28	61.21	QP
2	0.267	25.46	9.63	35.09	-16.12	51.21	Average
3	* 0.613	34.81	9.65	44.45	-11.55	56.00	QP
4	* 0.613	30.89	9.65	40.54	-5.46	46.00	Average
5	1.216	37.36	9.67	47.03	-8.97	56.00	QP
6	1.216	27.96	9.67	37.63	-8.37	46.00	Average
7	2.436	33.10	9.70	42.80	-13.20	56.00	QP
8	2.436	25.88	9.70	35.58	-10.42	46.00	Average
9	5.887	28.68	9.77	38.45	-21.55	60.00	QP
10	5.887	24.28	9.77	34.05	-15.95	50.00	Average
11	12.425	25.14	9.87	35.01	-24.99	60.00	QP
12	12.425	19.23	9.87	29.10	-20.90	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2023-07-05
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.6°C /52%
Polarity	Neutral	Site / Test Engineer	SR2 / Bob
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 240V/60Hz

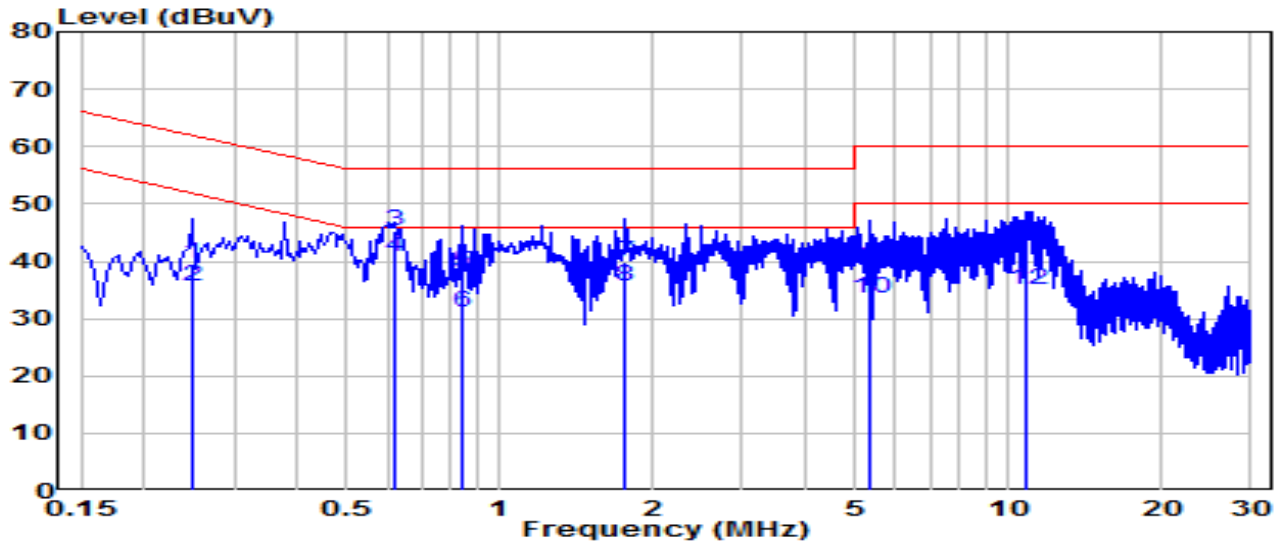

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.249	30.04	9.63	39.66	-22.13	61.79	QP
2	0.249	25.99	9.63	35.62	-16.17	51.79	Average
3	* 0.622	35.71	9.65	45.36	-10.64	56.00	QP
4	* 0.622	31.00	9.65	40.65	-5.35	46.00	Average
5	0.847	28.27	9.66	37.93	-18.07	56.00	QP
6	0.847	21.49	9.66	31.15	-14.85	46.00	Average
7	1.752	30.20	9.69	39.89	-16.11	56.00	QP
8	1.752	26.01	9.69	35.69	-10.31	46.00	Average
9	5.347	29.16	9.76	38.91	-21.09	60.00	QP
10	5.347	23.88	9.76	33.64	-16.36	50.00	Average
11	10.877	32.89	9.88	42.77	-17.23	60.00	QP
12	10.877	25.23	9.88	35.11	-14.89	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2306TW0114-UT” file.

Appendix B : EUT Photograph

Refer to “2306TW0114-UE” file.

Appendix C : Internal Photograph

Refer to “2306TW0114-UI” file.

_____ The End _____