

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
4168.000000	42.0	1000.0	1000.000	H	-13.5	32.0	74.0
6272.000000	43.1	1000.0	1000.000	H	-9.5	31.0	74.0
9158.000000	46.7	1000.0	1000.000	H	-5.9	27.4	74.0
11043.000000	46.9	1000.0	1000.000	H	-5.2	27.1	74.0
13673.000000	50.1	1000.0	1000.000	H	-2.8	23.9	74.0
17560.000000	53.9	1000.0	1000.000	H	2.6	20.1	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
4168.000000	28.7	1000.0	1000.000	H	-13.5	25.3	54.0
6272.000000	30.2	1000.0	1000.000	H	-9.5	23.8	54.0
9158.000000	33.6	1000.0	1000.000	H	-5.9	20.4	54.0
11043.000000	33.9	1000.0	1000.000	H	-5.2	20.1	54.0
13673.000000	36.6	1000.0	1000.000	H	-2.8	17.5	54.0
17560.000000	40.1	1000.0	1000.000	H	2.6	13.9	54.0

Tested by: *Cesare Gao*
202401128

Reviewed by: *Jacky Chen*
20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	SWFT eScooter
Identification:	SWFT-XPRP-BLK
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BT-EDR-L
Climate Condition:	22 °C, 53 %, 101 kPa
Test Voltage/ Freq:	
Receipt No:	170386300
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency Range:	1GHz-18GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_ERE011-A02-07_1GHz-18GHz_With PreAMP EXT& Notch filter

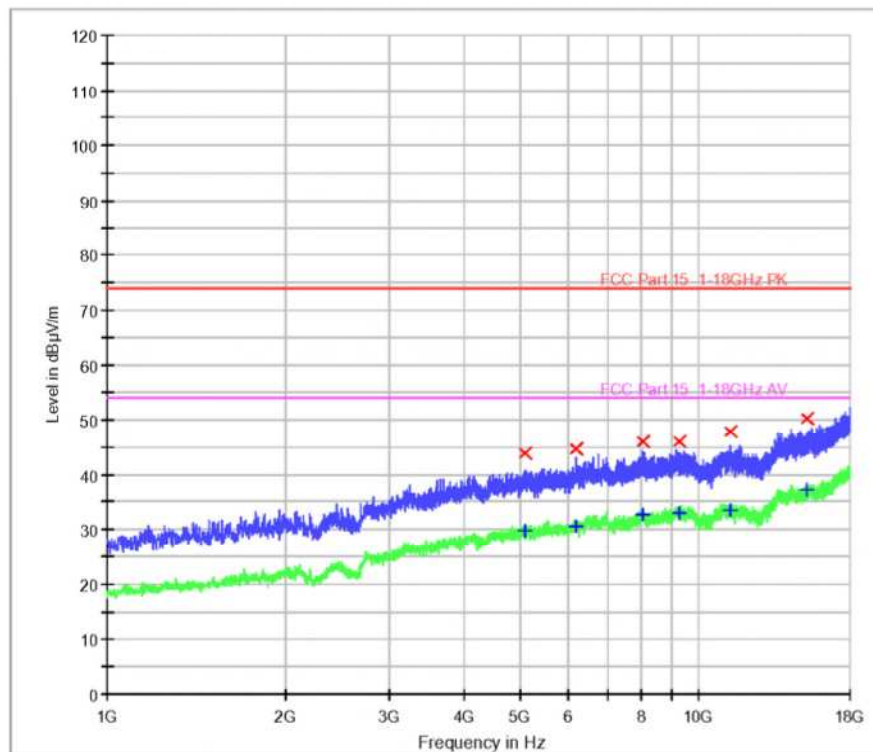

Tested by: *Cesare Qiao*
202401128

Reviewed by: *Jacky Chen*
20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
5063.000000	43.9	1000.0	1000.000	V	-11.4	30.1	74.0
6204.000000	44.7	1000.0	1000.000	V	-9.7	29.3	74.0
8034.000000	46.1	1000.0	1000.000	V	-7.6	27.9	74.0
9292.000000	46.0	1000.0	1000.000	V	-6.0	28.0	74.0
11279.000000	47.9	1000.0	1000.000	V	-5.2	26.1	74.0
15208.000000	50.2	1000.0	1000.000	V	-2.1	23.8	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
5063.000000	29.7	1000.0	1000.000	V	-11.4	24.3	54.0
6204.000000	30.6	1000.0	1000.000	V	-9.7	23.4	54.0
8034.000000	32.8	1000.0	1000.000	V	-7.6	21.2	54.0
9292.000000	33.0	1000.0	1000.000	V	-6.0	21.0	54.0
11279.000000	33.6	1000.0	1000.000	V	-5.2	20.4	54.0
15208.000000	37.2	1000.0	1000.000	V	-2.1	16.9	54.0

Tested by: *Cesare Qiao* Reviewed by: *Jacky Chen*
202401128 20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	SWFT eScooter
Identification:	SWFT-XPRP-BLK
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BT-EDR-M
Climate Condition:	22 °C, 53 %, 101 kPa
Test Voltage/ Freq:	
Receipt No:	170386300
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1	
Frequency Range:	1GHz-18GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_ERE011-A02-07_1GHz-18GHz_With PreAMP EXT& Notch filter

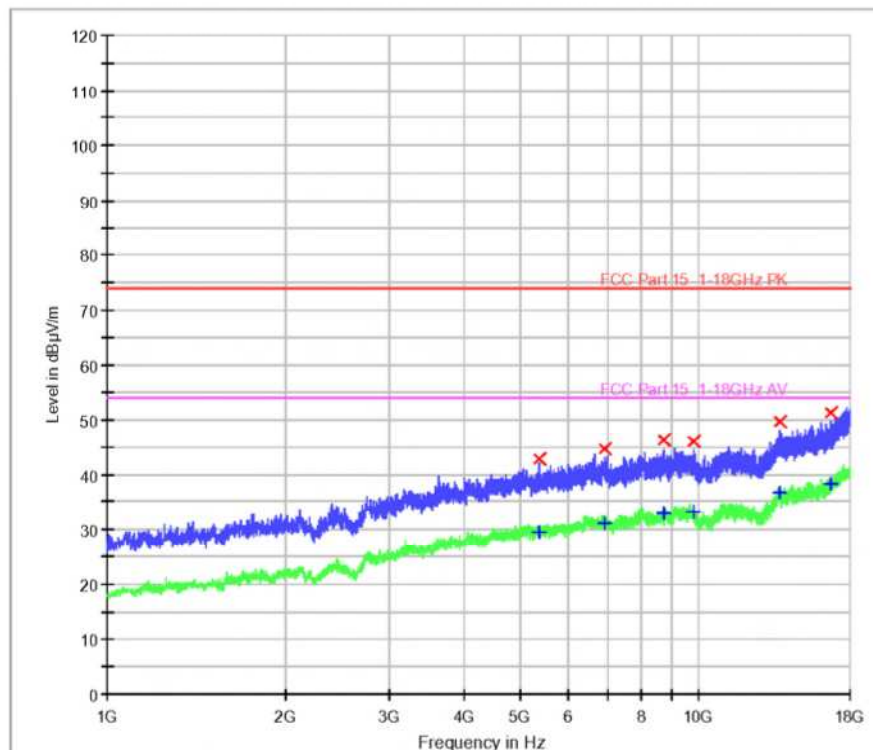

Tested by: *Cesare Qiao*
202401128

Reviewed by: *Jacky Chen*
20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
5356.000000	42.8	1000.0	1000.000	H	-11.1	31.2	74.0
6933.000000	44.6	1000.0	1000.000	H	-9.0	29.4	74.0
8686.000000	46.4	1000.0	1000.000	H	-6.6	27.6	74.0
9785.000000	46.1	1000.0	1000.000	H	-6.4	27.9	74.0
13703.000000	49.9	1000.0	1000.000	H	-2.9	24.2	74.0
16706.000000	51.5	1000.0	1000.000	H	0.7	22.5	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
5356.000000	29.6	1000.0	1000.000	H	-11.1	24.4	54.0
6933.000000	31.1	1000.0	1000.000	H	-9.0	22.9	54.0
8686.000000	33.0	1000.0	1000.000	H	-6.6	21.1	54.0
9785.000000	33.2	1000.0	1000.000	H	-6.4	20.9	54.0
13703.000000	36.7	1000.0	1000.000	H	-2.9	17.3	54.0
16706.000000	38.3	1000.0	1000.000	H	0.7	15.7	54.0

Tested by: *Cesare Qiao*
202401128

Reviewed by: *Jacky Chen*
20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	SWFT eScooter
Identification:	SWFT-XPRP-BLK
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BT-EDR-M
Climate Condition:	22 °C, 53 %, 101 kPa
Test Voltage/ Freq:	
Receipt No:	170386300
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency Range:	1GHz-18GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_ERE011-A02-07_1GHz-18GHz_With PreAMP EXT& Notch filter

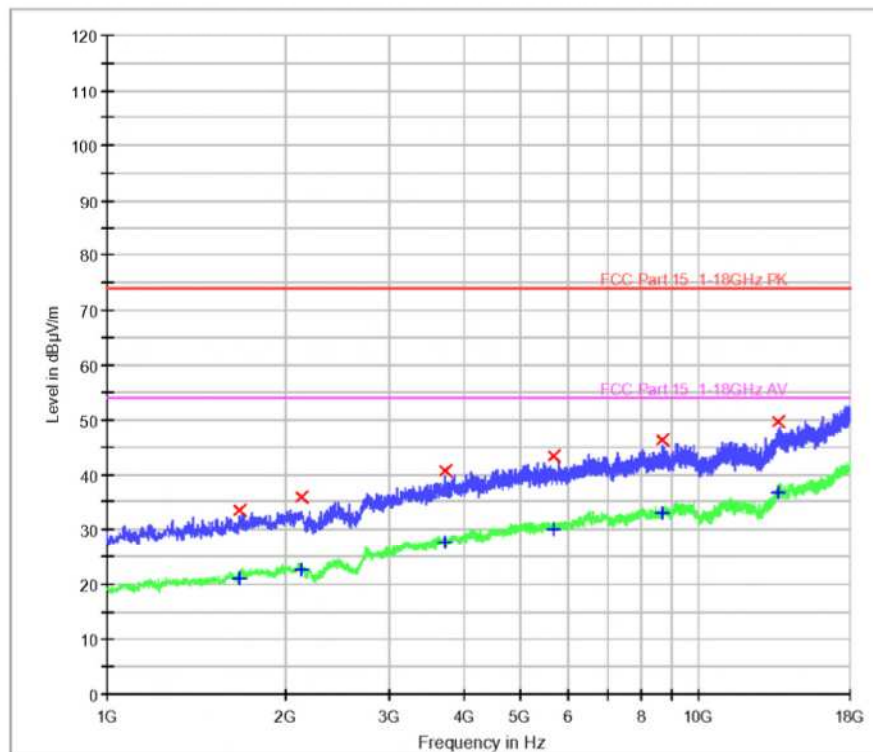

Tested by: *Cesare Qiao*
202401128

Reviewed by: *Jacky Chen*
20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
1676.000000	33.6	1000.0	1000.000	V	-22.4	40.4	74.0
2130.000000	35.9	1000.0	1000.000	V	-20.7	38.1	74.0
3724.000000	40.6	1000.0	1000.000	V	-14.7	33.4	74.0
5690.000000	43.3	1000.0	1000.000	V	-10.7	30.7	74.0
8661.000000	46.4	1000.0	1000.000	V	-6.7	27.6	74.0
13650.000000	49.8	1000.0	1000.000	V	-2.8	24.2	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
1676.000000	20.9	1000.0	1000.000	V	-22.4	33.1	54.0
2130.000000	22.5	1000.0	1000.000	V	-20.7	31.5	54.0
3724.000000	27.6	1000.0	1000.000	V	-14.7	26.4	54.0
5690.000000	30.1	1000.0	1000.000	V	-10.7	23.9	54.0
8661.000000	32.9	1000.0	1000.000	V	-6.7	21.1	54.0
13650.000000	36.6	1000.0	1000.000	V	-2.8	17.4	54.0

Tested by: *Cesare Qiao*
202401128

Reviewed by: *Jacky Chen*
20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	SWFT eScooter
Identification:	SWFT-XPRP-BLK
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BT-BDR-H
Climate Condition:	22 °C, 53 %, 101 kPa
Test Voltage/ Freq:	
Receipt No:	170386300
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

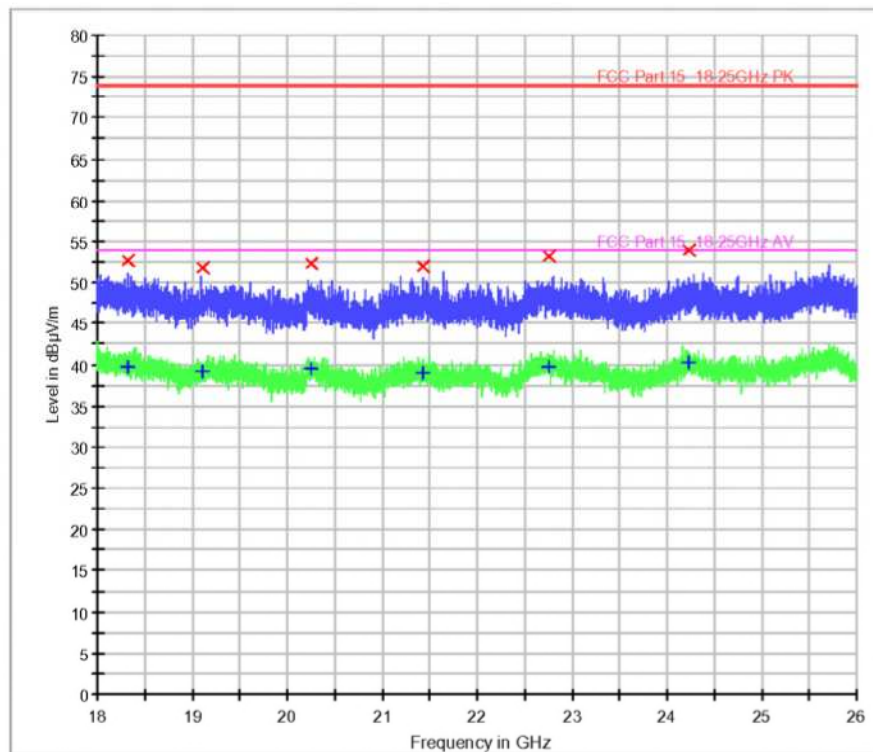

Tested by:	Cesare Qiao	Reviewed by:	Jacky Chen
	202401128		20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
18324.000000	52.6	1000.0	1000.000	H	6.6	21.4	74.0
19110.000000	51.9	1000.0	1000.000	H	6.6	22.1	74.0
20260.000000	52.4	1000.0	1000.000	H	6.1	21.6	74.0
21427.000000	52.0	1000.0	1000.000	H	5.8	22.0	74.0
22760.000000	53.2	1000.0	1000.000	H	6.1	20.8	74.0
24240.000000	53.9	1000.0	1000.000	H	5.8	20.1	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
18324.000000	39.7	1000.0	1000.000	H	6.6	14.3	54.0
19110.000000	39.1	1000.0	1000.000	H	6.6	14.9	54.0
20260.000000	39.5	1000.0	1000.000	H	6.1	14.5	54.0
21427.000000	39.1	1000.0	1000.000	H	5.8	14.9	54.0
22760.000000	39.7	1000.0	1000.000	H	6.1	14.3	54.0
24240.000000	40.3	1000.0	1000.000	H	5.8	13.7	54.0

Tested by: *Cesare Qiao*
202401128

Reviewed by: *Jacky Chen*
20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	SWFT eScooter
Identification:	SWFT-XPRP-BLK
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BT-BDR-H
Climate Condition:	22 °C, 53 %, 101 kPa
Test Voltage/ Freq:	
Receipt No:	170386300
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

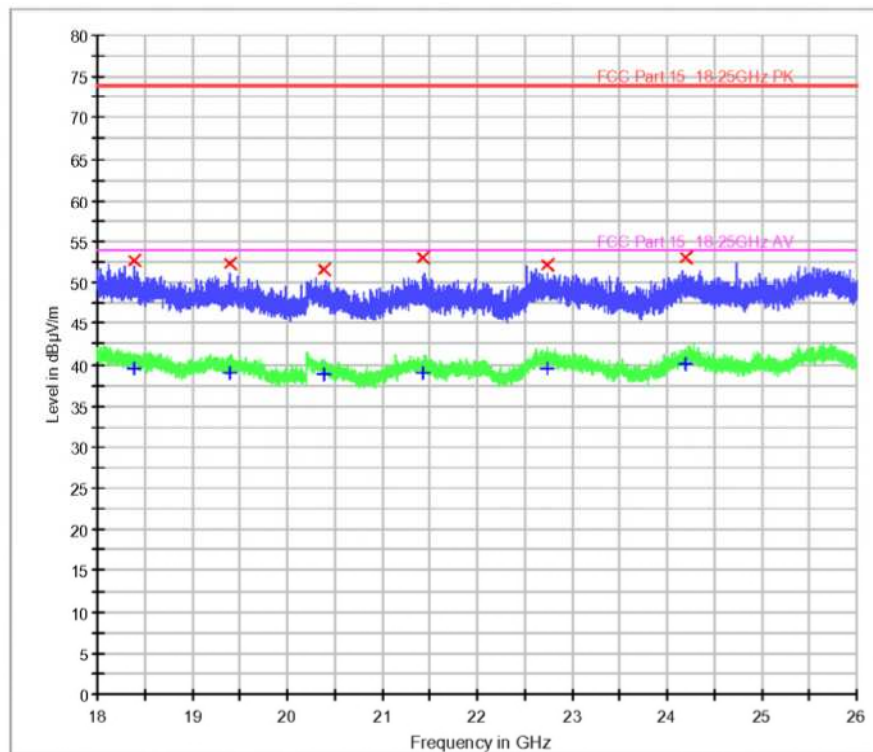

Tested by:	Cesare Qiao	Reviewed by:	Jacky Chen
	202401128		20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
18380.000000	52.7	1000.0	1000.000	V	6.6	21.3	74.0
19394.000000	52.4	1000.0	1000.000	V	6.5	21.7	74.0
20388.000000	51.6	1000.0	1000.000	V	6.1	22.4	74.0
21424.000000	53.0	1000.0	1000.000	V	5.8	21.0	74.0
22741.000000	52.2	1000.0	1000.000	V	6.1	21.8	74.0
24201.000000	53.0	1000.0	1000.000	V	5.8	21.0	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
18380.000000	39.6	1000.0	1000.000	V	6.6	14.4	54.0
19394.000000	39.0	1000.0	1000.000	V	6.5	15.0	54.0
20388.000000	38.9	1000.0	1000.000	V	6.1	15.1	54.0
21424.000000	39.0	1000.0	1000.000	V	5.8	15.1	54.0
22741.000000	39.5	1000.0	1000.000	V	6.1	14.5	54.0
24201.000000	40.1	1000.0	1000.000	V	5.8	13.9	54.0

Tested by: *Cesare Qiao*
202401128

Reviewed by: *Jacky Chen*
20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	SWFT eScooter
Identification:	SWFT-XPRP-BLK
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BT-BDR-L
Climate Condition:	22 °C, 53 %, 101 kPa
Test Voltage/ Freq:	
Receipt No:	170386300
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

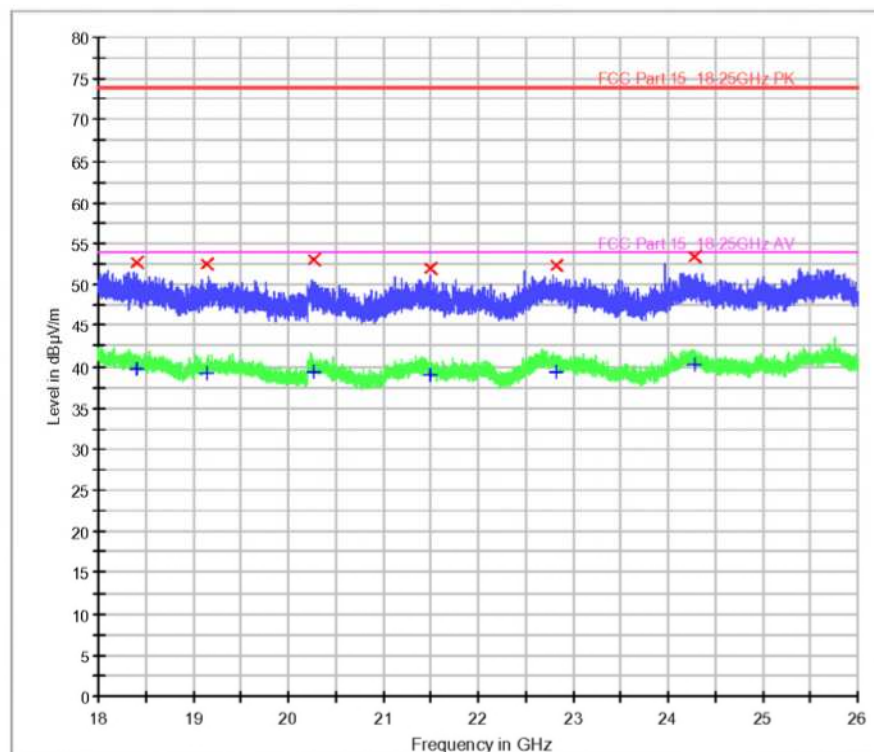

Tested by:	<i>Cesare Qiao</i>	Reviewed by:	<i>Jacky Chen</i>
	202401128		20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
18405.000000	52.8	1000.0	1000.000	H	6.6	21.2	74.0
19151.000000	52.4	1000.0	1000.000	H	6.6	21.6	74.0
20265.000000	53.1	1000.0	1000.000	H	6.1	21.0	74.0
21491.000000	52.1	1000.0	1000.000	H	5.8	21.9	74.0
22825.000000	52.3	1000.0	1000.000	H	6.1	21.7	74.0
24285.000000	53.3	1000.0	1000.000	H	5.8	20.7	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
18405.000000	39.8	1000.0	1000.000	H	6.6	14.3	54.0
19151.000000	39.2	1000.0	1000.000	H	6.6	14.8	54.0
20265.000000	39.4	1000.0	1000.000	H	6.1	14.6	54.0
21491.000000	38.9	1000.0	1000.000	H	5.8	15.1	54.0
22825.000000	39.5	1000.0	1000.000	H	6.1	14.6	54.0
24285.000000	40.2	1000.0	1000.000	H	5.8	13.8	54.0

Tested by: *Cesare Qiao*
202401128

Reviewed by: *Jacky Chen*
20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	SWFT eScooter
Identification:	SWFT-XPRP-BLK
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BT-BDR-L
Climate Condition:	22 °C, 53 %, 101 kPa
Test Voltage/ Freq:	
Receipt No:	170386300
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

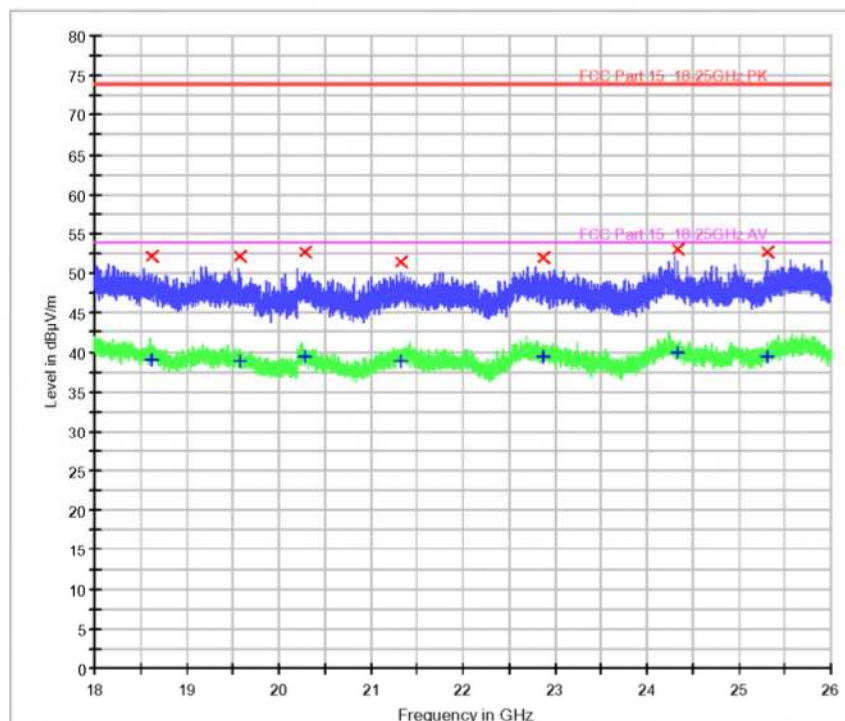

Tested by:	Cesare Qiao	Reviewed by:	Jacky Chen
	202401128		20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
18629.000000	52.2	1000.0	1000.000	V	6.6	21.8	74.0
19576.000000	52.1	1000.0	1000.000	V	6.4	21.9	74.0
20278.000000	52.7	1000.0	1000.000	V	6.1	21.3	74.0
21325.000000	51.5	1000.0	1000.000	V	5.7	22.5	74.0
22875.000000	52.0	1000.0	1000.000	V	6.1	22.0	74.0
24334.000000	53.1	1000.0	1000.000	V	5.9	20.9	74.0
25309.000000	52.7	1000.0	1000.000	V	6.1	21.3	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
18629.000000	39.0	1000.0	1000.000	V	6.6	15.0	54.0
19576.000000	38.8	1000.0	1000.000	V	6.4	15.2	54.0
20278.000000	39.4	1000.0	1000.000	V	6.1	14.7	54.0
21325.000000	38.9	1000.0	1000.000	V	5.7	15.1	54.0
22875.000000	39.4	1000.0	1000.000	V	6.1	14.6	54.0
24334.000000	39.9	1000.0	1000.000	V	5.9	14.1	54.0
25309.000000	39.3	1000.0	1000.000	V	6.1	14.7	54.0

Tested by: *Cesare Qiao* Reviewed by: *Jacky Chen*
202401128 20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	SWFT eScooter
Identification:	SWFT-XPRP-BLK
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BT-BDR-M
Climate Condition:	22 °C, 53 %, 101 kPa
Test Voltage/ Freq:	
Receipt No:	170386300
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

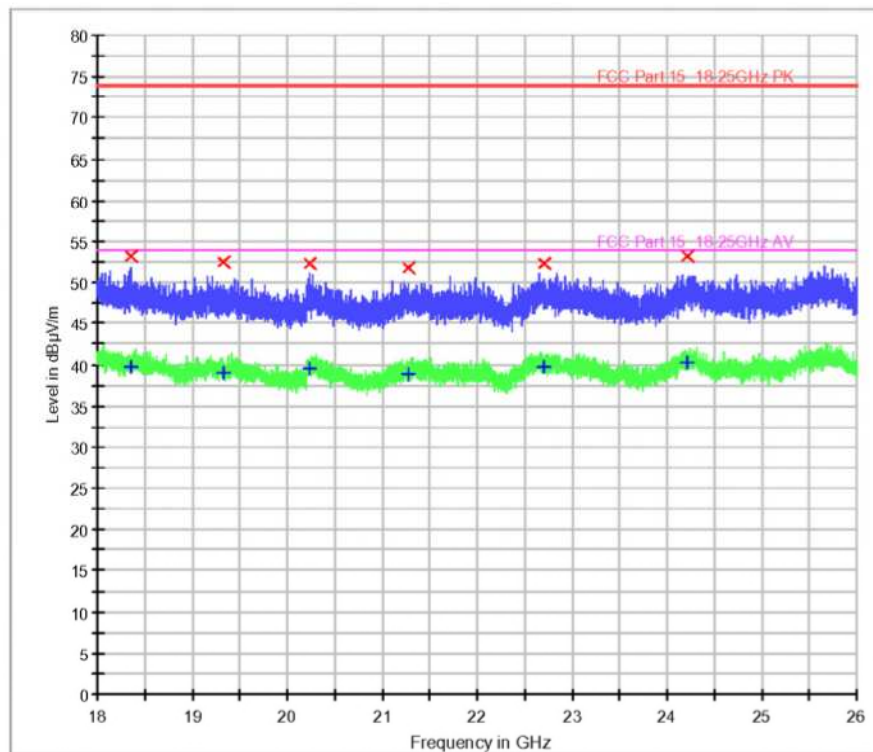

Tested by: *Cesare Qiao*
202401128

Reviewed by: *Jacky Chen*
20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
18349.000000	53.2	1000.0	1000.000	H	6.6	20.8	74.0
19331.000000	52.4	1000.0	1000.000	H	6.5	21.6	74.0
20234.000000	52.4	1000.0	1000.000	H	6.1	21.7	74.0
21271.000000	51.8	1000.0	1000.000	H	5.7	22.2	74.0
22714.000000	52.4	1000.0	1000.000	H	6.2	21.6	74.0
24222.000000	53.3	1000.0	1000.000	H	5.8	20.7	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
18349.000000	39.7	1000.0	1000.000	H	6.6	14.3	54.0
19331.000000	39.1	1000.0	1000.000	H	6.5	15.0	54.0
20234.000000	39.6	1000.0	1000.000	H	6.1	14.4	54.0
21271.000000	38.9	1000.0	1000.000	H	5.7	15.1	54.0
22714.000000	39.7	1000.0	1000.000	H	6.2	14.3	54.0
24222.000000	40.2	1000.0	1000.000	H	5.8	13.8	54.0

Tested by: *Cesare Qiao*
202401128

Reviewed by: *Jacky Chen*
20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	SWFT eScooter
Identification:	SWFT-XPRP-BLK
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BT-BDR-M
Climate Condition:	22 °C, 53 %, 101 kPa
Test Voltage/ Freq:	
Receipt No:	170386300
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

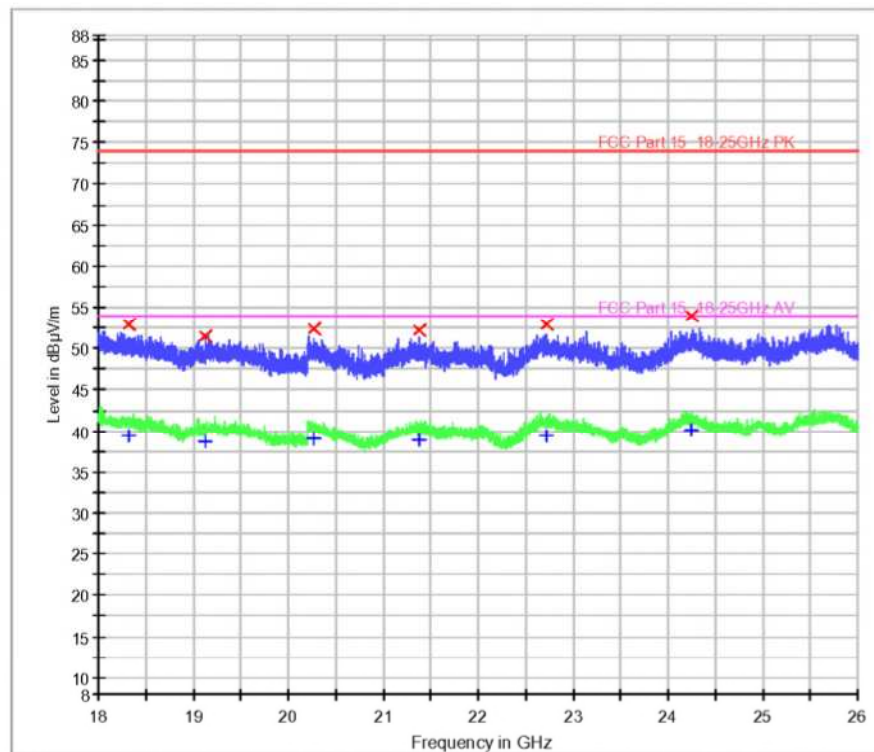

Tested by: *Cesare Qiao*
202401128

Reviewed by: *Jacky Chen*
20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
18325.000000	52.8	1000.0	1000.000	V	6.6	21.2	74.0
19123.000000	51.5	1000.0	1000.000	V	6.6	22.5	74.0
20267.000000	52.4	1000.0	1000.000	V	6.1	21.6	74.0
21375.000000	52.2	1000.0	1000.000	V	5.7	21.8	74.0
22722.000000	52.9	1000.0	1000.000	V	6.1	21.2	74.0
24252.000000	53.9	1000.0	1000.000	V	5.8	20.1	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
18325.000000	39.5	1000.0	1000.000	V	6.6	14.5	54.0
19123.000000	38.7	1000.0	1000.000	V	6.6	15.3	54.0
20267.000000	39.1	1000.0	1000.000	V	6.1	14.9	54.0
21375.000000	38.9	1000.0	1000.000	V	5.7	15.1	54.0
22722.000000	39.3	1000.0	1000.000	V	6.1	14.7	54.0
24252.000000	40.1	1000.0	1000.000	V	5.8	13.9	54.0

Tested by: *Cesare Qiao*
202401128

Reviewed by: *Jacky Chen*
20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	SWFT eScooter
Identification:	SWFT-XPRP-BLK
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission TX
Operation Mode:	BT-EDR-H
Climate Condition:	22 °C, 53 %, 101 kPa
Test Voltage/ Freq:	
Receipt No:	170386300
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

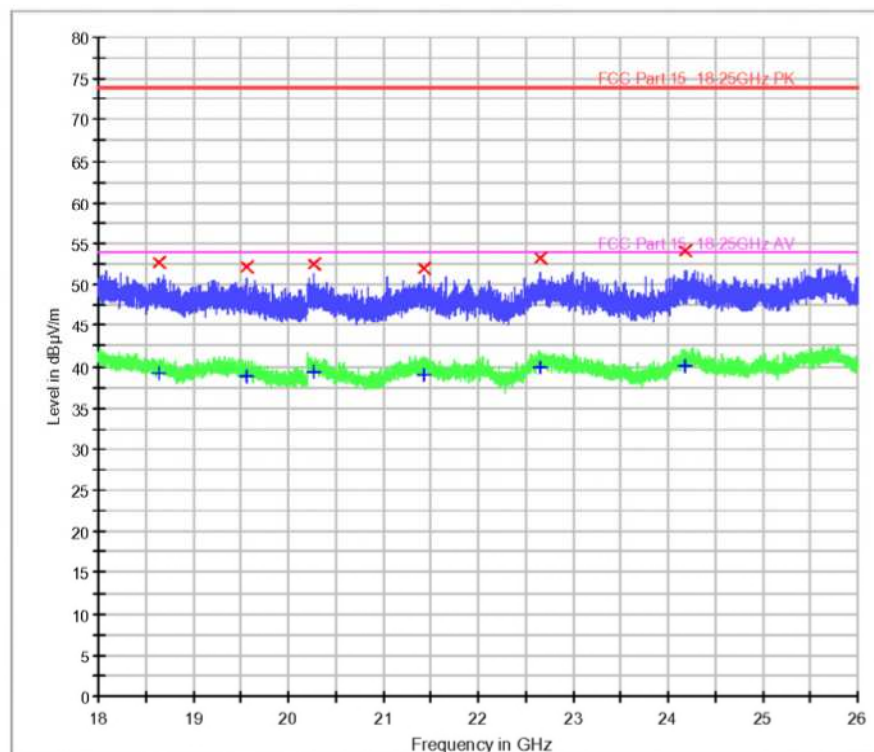

Tested by:	Cesare Qiao	Reviewed by:	Jacky Chen
	202401128		20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
18645.000000	52.8	1000.0	1000.000	H	6.6	21.2	74.0
19569.000000	52.1	1000.0	1000.000	H	6.4	21.9	74.0
20269.000000	52.5	1000.0	1000.000	H	6.1	21.5	74.0
21423.000000	52.1	1000.0	1000.000	H	5.8	22.0	74.0
22657.000000	53.2	1000.0	1000.000	H	6.2	20.8	74.0
24182.000000	54.2	1000.0	1000.000	H	5.8	19.8	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
18645.000000	39.1	1000.0	1000.000	H	6.6	34.9	74.0
19569.000000	38.9	1000.0	1000.000	H	6.4	35.2	74.0
20269.000000	39.4	1000.0	1000.000	H	6.1	34.6	74.0
21423.000000	39.1	1000.0	1000.000	H	5.8	34.9	74.0
22657.000000	39.9	1000.0	1000.000	H	6.2	34.1	74.0
24182.000000	40.1	1000.0	1000.000	H	5.8	33.9	74.0

Tested by: *Cesare Qiao*
202401128

Reviewed by: *Jacky Chen*
20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	SWFT eScooter
Identification:	SWFT-XPRP-BLK
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BT-EDR-H
Climate Condition:	22 °C, 53 %, 101 kPa
Test Voltage/ Freq:	
Receipt No:	170386300
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

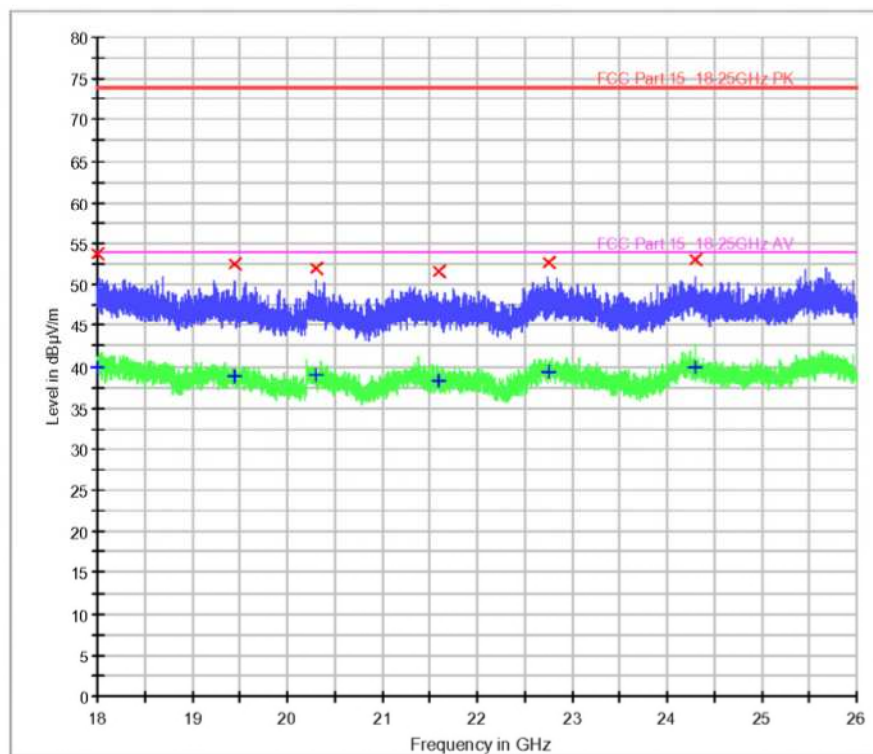

Tested by:	Cesare Qiao	Reviewed by:	Jacky Chen
	202401128		20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
18000.000000	53.8	1000.0	1000.000	V	6.6	20.3	74.0
19437.000000	52.5	1000.0	1000.000	V	6.4	21.5	74.0
20306.000000	52.1	1000.0	1000.000	V	6.1	22.0	74.0
21590.000000	51.6	1000.0	1000.000	V	5.8	22.4	74.0
22763.000000	52.7	1000.0	1000.000	V	6.1	21.3	74.0
24309.000000	53.1	1000.0	1000.000	V	5.9	20.9	74.0

Limit and Margin AV

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
18000.000000	53.8	1000.0	1000.000	V	6.6	14.0	54.0
19437.000000	52.5	1000.0	1000.000	V	6.4	15.2	54.0
20306.000000	52.1	1000.0	1000.000	V	6.1	14.9	54.0
21590.000000	51.6	1000.0	1000.000	V	5.8	15.7	54.0
22763.000000	52.7	1000.0	1000.000	V	6.1	14.6	54.0
24309.000000	53.1	1000.0	1000.000	V	5.9	14.2	54.0

Tested by: *Cesare Qiao*
202401128

Reviewed by: *Jacky Chen*
20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	SWFT eScooter
Identification:	SWFT-XPRP-BLK
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BT-EDR-L
Climate Condition:	22 °C, 53 %, 101 kPa
Test Voltage/ Freq:	
Receipt No:	170386300
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

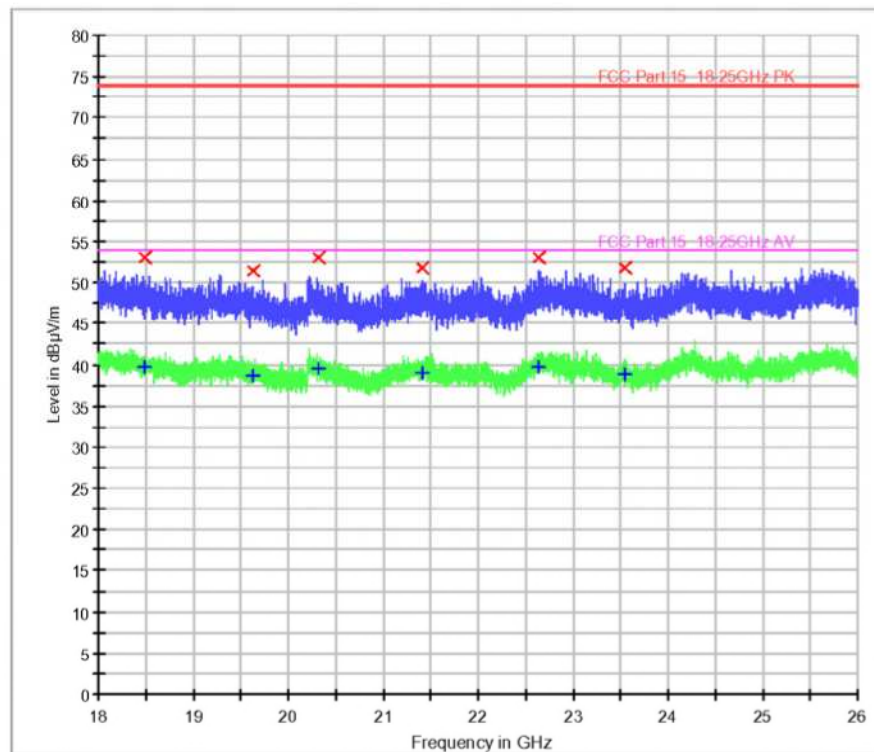

Tested by: *Cesare Qiao*
202401128

Reviewed by: *Jacky Chen*
20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
18485.000000	53.0	1000.0	1000.000	H	6.5	21.0	74.0
19632.000000	51.4	1000.0	1000.000	H	6.3	22.6	74.0
20314.000000	53.0	1000.0	1000.000	H	6.1	21.0	74.0
21404.000000	51.8	1000.0	1000.000	H	5.8	22.3	74.0
22632.000000	53.0	1000.0	1000.000	H	6.2	21.0	74.0
23551.000000	51.9	1000.0	1000.000	H	5.7	22.1	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
18485.000000	39.7	1000.0	1000.000	H	6.5	14.3	54.0
19632.000000	38.6	1000.0	1000.000	H	6.3	15.4	54.0
20314.000000	39.5	1000.0	1000.000	H	6.1	14.5	54.0
21404.000000	39.0	1000.0	1000.000	H	5.8	15.1	54.0
22632.000000	39.8	1000.0	1000.000	H	6.2	14.2	54.0
23551.000000	38.9	1000.0	1000.000	H	5.7	15.1	54.0

Tested by: *Cesare Qiao*
202401128

Reviewed by: *Jacky Chen*
20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	SWFT eScooter
Identification:	SWFT-XPRP-BLK
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BT-EDR-L
Climate Condition:	22 °C, 53 %, 101 kPa
Test Voltage/ Freq:	
Receipt No:	170386300
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

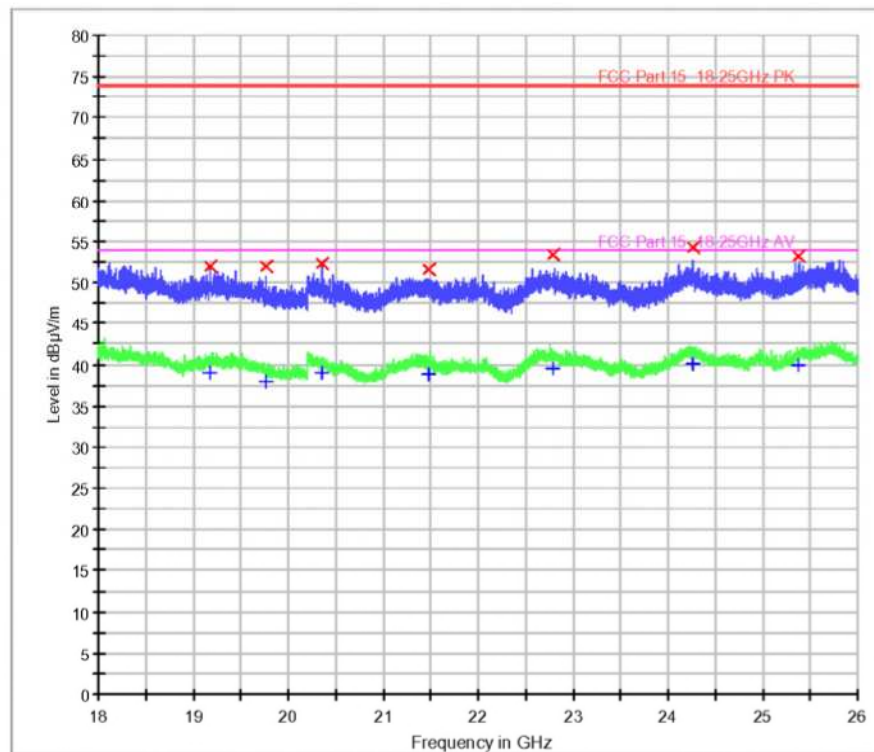

Tested by: *Cesare Qiao*
202401128

Reviewed by: *Jacky Chen*
20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
19170.000000	52.0	1000.0	1000.000	V	6.6	22.0	74.0
19771.000000	52.0	1000.0	1000.000	V	6.3	22.0	74.0
20350.000000	52.3	1000.0	1000.000	V	6.1	21.7	74.0
21484.000000	51.7	1000.0	1000.000	V	5.8	22.3	74.0
22794.000000	53.4	1000.0	1000.000	V	6.1	20.6	74.0
24273.000000	54.3	1000.0	1000.000	V	5.8	19.7	74.0
25384.000000	53.2	1000.0	1000.000	V	6.1	20.8	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
19170.000000	39.1	1000.0	1000.000	V	6.6	14.9	54.0
19771.000000	37.9	1000.0	1000.000	V	6.3	16.1	54.0
20350.000000	39.0	1000.0	1000.000	V	6.1	15.0	54.0
21484.000000	38.8	1000.0	1000.000	V	5.8	15.2	54.0
22794.000000	39.6	1000.0	1000.000	V	6.1	14.4	54.0
24273.000000	40.0	1000.0	1000.000	V	5.8	14.0	54.0
25384.000000	39.8	1000.0	1000.000	V	6.1	14.2	54.0

Tested by: *Cesare Qiao*
202401128

Reviewed by: *Jacky Chen*
20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	SWFT eScooter
Identification:	SWFT-XPRP-BLK
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BT-EDR-M
Climate Condition:	22 °C, 53 %, 101 kPa
Test Voltage/ Freq:	
Receipt No:	170386300
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

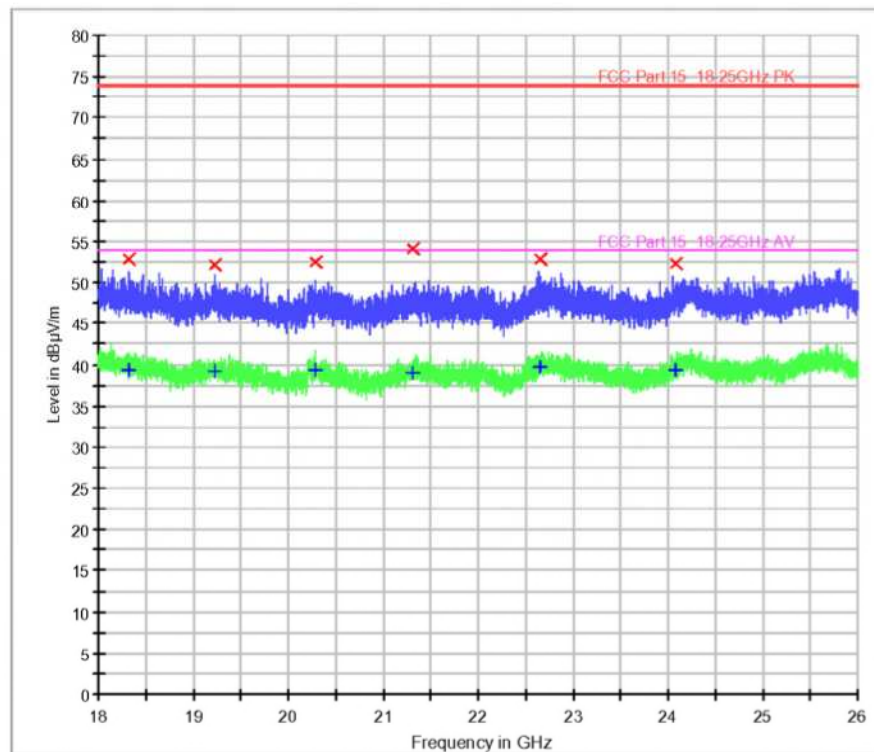

Tested by:	Cesare Qiao	Reviewed by:	Jacky Chen
	202401128		20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
18314.000000	52.8	1000.0	1000.000	H	6.6	21.2	74.0
19233.000000	52.2	1000.0	1000.000	H	6.5	21.9	74.0
20282.000000	52.5	1000.0	1000.000	H	6.1	21.5	74.0
21318.000000	54.1	1000.0	1000.000	H	5.7	19.9	74.0
22649.000000	52.8	1000.0	1000.000	H	6.2	21.2	74.0
22649.000000	52.8	1000.0	1000.000	H	6.2	21.2	74.0
24076.000000	52.3	1000.0	1000.000	H	5.8	21.7	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
18314.000000	39.5	1000.0	1000.000	H	6.6	14.5	54.0
19233.000000	39.3	1000.0	1000.000	H	6.5	14.8	54.0
20282.000000	39.4	1000.0	1000.000	H	6.1	14.6	54.0
21318.000000	39.1	1000.0	1000.000	H	5.7	14.9	54.0
22649.000000	39.7	1000.0	1000.000	H	6.2	14.3	54.0
22649.000000	39.7	1000.0	1000.000	H	6.2	14.3	54.0
24076.000000	39.4	1000.0	1000.000	H	5.8	14.6	54.0

Tested by: *Cesare Qiao*
202401128

Reviewed by: *Jacky Chen*
20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	SWFT eScooter
Identification:	SWFT-XPRP-BLK
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BT-EDR-M
Climate Condition:	22 °C, 53 %, 101 kPa
Test Voltage/ Freq:	
Receipt No:	170386300
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

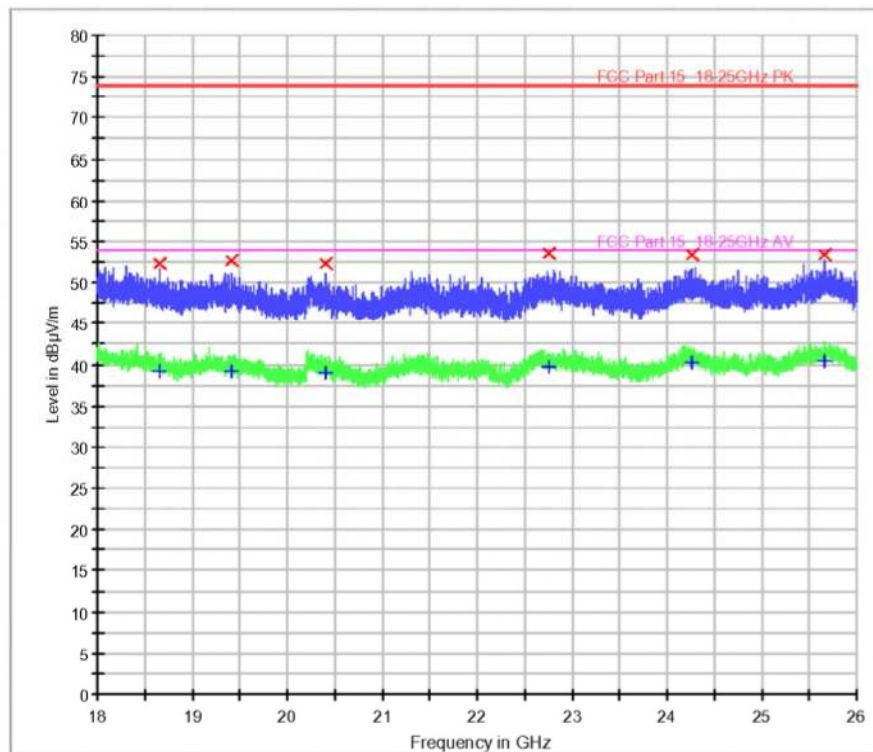

Tested by:	<i>Cesare Biao</i>	Reviewed by:	<i>Jacky Chen</i>
	202401128		20241129

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
18653.000000	52.4	1000.0	1000.000	V	6.6	21.6	74.0
19420.000000	52.8	1000.0	1000.000	V	6.4	21.3	74.0
20400.000000	52.3	1000.0	1000.000	V	6.1	21.7	74.0
22764.000000	53.6	1000.0	1000.000	V	6.1	20.4	74.0
24262.000000	53.4	1000.0	1000.000	V	5.8	20.6	74.0
25663.000000	53.4	1000.0	1000.000	V	6.0	20.6	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
18653.000000	39.2	1000.0	1000.000	V	6.6	14.8	54.0
19420.000000	39.2	1000.0	1000.000	V	6.4	14.8	54.0
20400.000000	39.0	1000.0	1000.000	V	6.1	15.0	54.0
22764.000000	39.7	1000.0	1000.000	V	6.1	14.3	54.0
24262.000000	40.3	1000.0	1000.000	V	5.8	13.7	54.0
25663.000000	40.4	1000.0	1000.000	V	6.0	13.6	54.0

Tested by: *Cesare Biao* Reviewed by: *Jody Chen*
202401128 20241129

Appendix A.9: Test Results of Emissions in Restricted Bands


Test Result

Test Mode	Antenna	Ch Name	Frequency [MHz]	Detect or	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
DH5	Ant1	Low	2402	Peak	2390.000	-39.9	≤-21.20	55.30	≤74	PASS
DH5	Ant1	Low	2402	Peak	2310.000	-38.7	≤-21.20	56.50	≤74	PASS
DH5	Ant1	Low	2402	Peak	2327.510	-37.71	≤-21.20	57.49	≤74	PASS
DH5	Ant1	Low	2402	AV	2390.000	-52.03	≤-41.20	43.17	≤54	PASS
DH5	Ant1	Low	2402	AV	2310.000	-51.39	≤-41.20	43.81	≤54	PASS
DH5	Ant1	Low	2402	AV	2312.600	-51.15	≤-41.20	44.05	≤54	PASS
DH5	Ant1	High	2480	Peak	2483.500	-38.21	≤-21.20	56.99	≤74	PASS
DH5	Ant1	High	2480	Peak	2500.000	-40.29	≤-21.20	54.91	≤74	PASS
DH5	Ant1	High	2480	Peak	2483.600	-38.34	≤-21.20	56.86	≤74	PASS
DH5	Ant1	High	2480	AV	2483.500	-45.95	≤-41.20	49.25	≤54	PASS
DH5	Ant1	High	2480	AV	2500.000	-52.06	≤-41.20	43.14	≤54	PASS
DH5	Ant1	High	2480	AV	2483.600	-47.43	≤-41.20	47.77	≤54	PASS
DH5	Ant1	Low	Hop 2402	Peak	2390.000	-39.64	≤-21.20	55.56	≤74	PASS
DH5	Ant1	Low	Hop 2402	Peak	2310.000	-38.95	≤-21.20	56.25	≤74	PASS
DH5	Ant1	Low	Hop 2402	Peak	2329.610	-38.24	≤-21.20	56.96	≤74	PASS
DH5	Ant1	High	Hop 2480	Peak	2483.500	-40.28	≤-21.20	54.92	≤74	PASS
DH5	Ant1	High	Hop 2480	Peak	2500.000	-40.25	≤-21.20	54.95	≤74	PASS
DH5	Ant1	High	Hop 2480	Peak	2488.240	-38.93	≤-21.20	56.27	≤74	PASS
2DH5	Ant1	Low	2402	Peak	2390.000	-40.58	≤-21.20	54.62	≤74	PASS
2DH5	Ant1	Low	2402	Peak	2310.000	-39.66	≤-21.20	55.54	≤74	PASS
2DH5	Ant1	Low	2402	Peak	2335.700	-37.66	≤-21.20	57.54	≤74	PASS
2DH5	Ant1	Low	2402	AV	2390.000	-52	≤-41.20	43.20	≤54	PASS
2DH5	Ant1	Low	2402	AV	2310.000	-51.25	≤-41.20	43.95	≤54	PASS
2DH5	Ant1	Low	2402	AV	2325.200	-51.09	≤-41.20	44.11	≤54	PASS
2DH5	Ant1	High	2480	Peak	2483.500	-38.55	≤-21.20	56.65	≤74	PASS
2DH5	Ant1	High	2480	Peak	2500.000	-40.39	≤-21.20	54.81	≤74	PASS
2DH5	Ant1	High	2480	Peak	2486.480	-38.45	≤-21.20	56.75	≤74	PASS
2DH5	Ant1	High	2480	AV	2483.500	-46.18	≤-41.20	49.02	≤54	PASS
2DH5	Ant1	High	2480	AV	2500.000	-52.09	≤-41.20	43.11	≤54	PASS
2DH5	Ant1	High	2480	AV	2483.600	-47.63	≤-41.20	47.57	≤54	PASS
2DH5	Ant1	Low	Hop 2402	Peak	2390.000	-40.05	≤-21.20	55.15	≤74	PASS
2DH5	Ant1	Low	Hop 2402	Peak	2310.000	-39.21	≤-21.20	55.99	≤74	PASS
2DH5	Ant1	Low	Hop 2402	Peak	2311.760	-37.74	≤-21.20	57.46	≤74	PASS
2DH5	Ant1	High	Hop 2480	Peak	2483.500	-40.14	≤-21.20	55.06	≤74	PASS
2DH5	Ant1	High	Hop 2480	Peak	2500.000	-40.28	≤-21.20	54.92	≤74	PASS
2DH5	Ant1	High	Hop 2480	Peak	2488.240	-39.31	≤-21.20	55.89	≤74	PASS
3DH5	Ant1	Low	2402	Peak	2390.000	-40.34	≤-21.20	54.86	≤74	PASS
3DH5	Ant1	Low	2402	Peak	2310.000	-39.9	≤-21.20	55.30	≤74	PASS
3DH5	Ant1	Low	2402	Peak	2350.400	-37.85	≤-21.20	57.35	≤74	PASS
3DH5	Ant1	Low	2402	AV	2390.000	-52.1	≤-41.20	43.10	≤54	PASS
3DH5	Ant1	Low	2402	AV	2310.000	-51.44	≤-41.20	43.76	≤54	PASS
3DH5	Ant1	Low	2402	AV	2324.360	-51.24	≤-41.20	43.96	≤54	PASS
3DH5	Ant1	High	2480	Peak	2483.500	-38.23	≤-21.20	56.97	≤74	PASS
3DH5	Ant1	High	2480	Peak	2500.000	-39.97	≤-21.20	55.23	≤74	PASS
3DH5	Ant1	High	2480	Peak	2497.680	-38.75	≤-21.20	56.45	≤74	PASS
3DH5	Ant1	High	2480	AV	2483.500	-46.24	≤-41.20	48.96	≤54	PASS
3DH5	Ant1	High	2480	AV	2500.000	-52.03	≤-41.20	43.17	≤54	PASS
3DH5	Ant1	High	2480	AV	2483.600	-47.6	≤-41.20	47.60	≤54	PASS
3DH5	Ant1	Low	Hop 2402	Peak	2390.000	-40.08	≤-21.20	55.12	≤74	PASS
3DH5	Ant1	Low	Hop 2402	Peak	2310.000	-39.74	≤-21.20	55.46	≤74	PASS
3DH5	Ant1	Low	Hop 2402	Peak	2348.090	-37.93	≤-21.20	57.27	≤74	PASS
3DH5	Ant1	High	Hop 2480	Peak	2483.500	-40.36	≤-21.20	54.84	≤74	PASS
3DH5	Ant1	High	Hop 2480	Peak	2500.000	-39.97	≤-21.20	55.23	≤74	PASS
3DH5	Ant1	High	Hop 2480	Peak	2492.400	-38.81	≤-21.20	56.39	≤74	PASS

Note:


- The Antenna Gain is compensated in the graph.
- The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

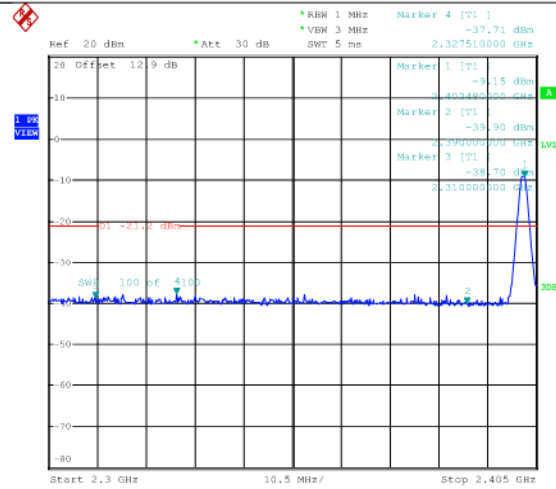


001-EIRP-L
Date: 10.SEP.2024 19:34:38

DH5-Ant1-2402-PASS

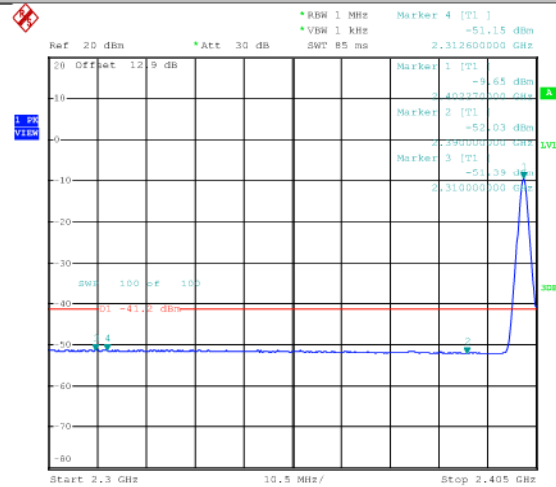


001-EIRP-L
Date: 10.SEP.2024 19:34:56

DH5-Ant1-2402-PASS

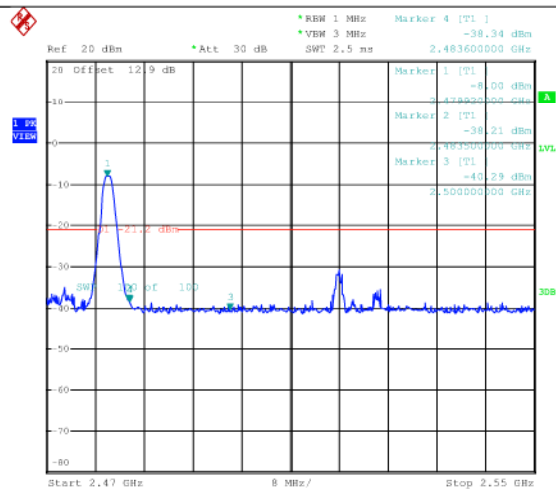


001-EIRP-L
Date: 10.SEP.2024 19:42:35

DH5-Ant1-2480-PASS

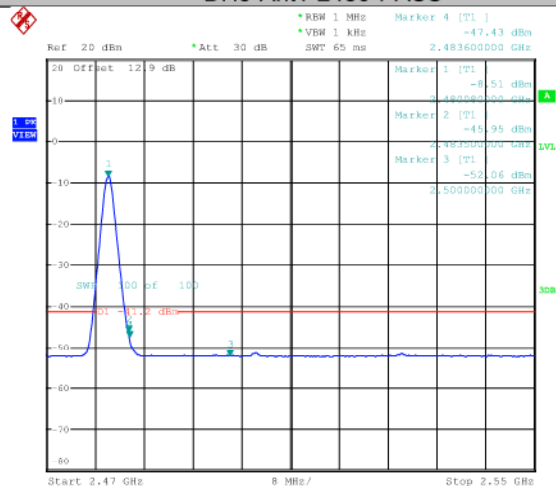


001-EIRP-L
Date: 10.SEP.2024 19:42:52

DH5-Ant1-2480-PASS

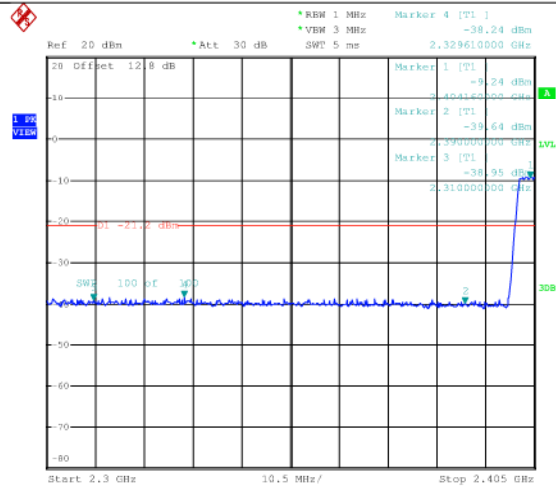


001-EIRP-L
Date: 10.SEP.2024 20:11:21

DH5-Ant1-Hop_2402-PASS

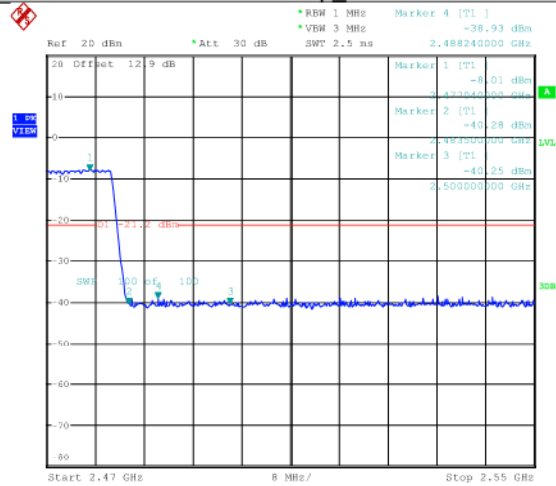


001-EIRP-L
Date: 10.SEP.2024 20:18:06

DH5-Ant1-Hop_2480-PASS

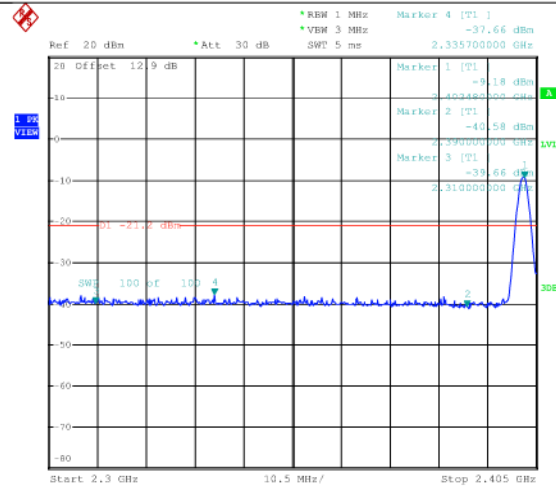


001-EIRP-L
Date: 10.SEP.2024 19:47:03

2DH5-Ant1-2402-PASS

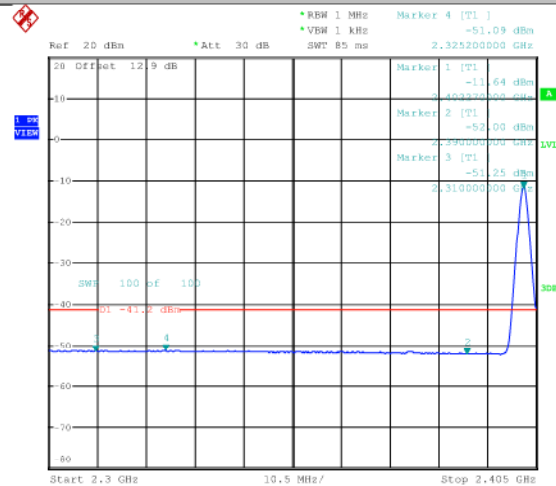


001-EIRP-L
Date: 10.SEP.2024 19:47:21

2DH5-Ant1-2402-PASS

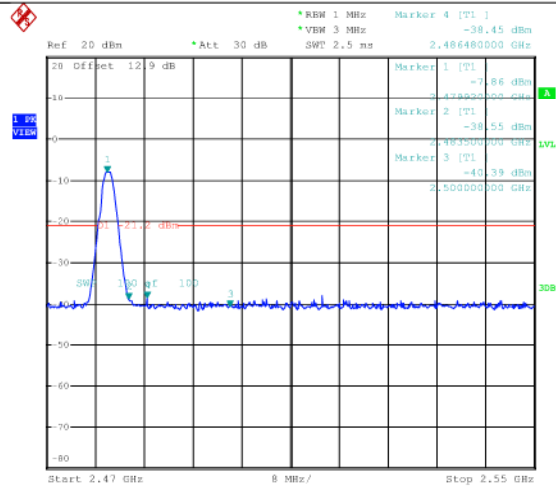


001-EIRP-L
Date: 10.SEP.2024 19:54:58

2DH5-Ant1-2480-PASS

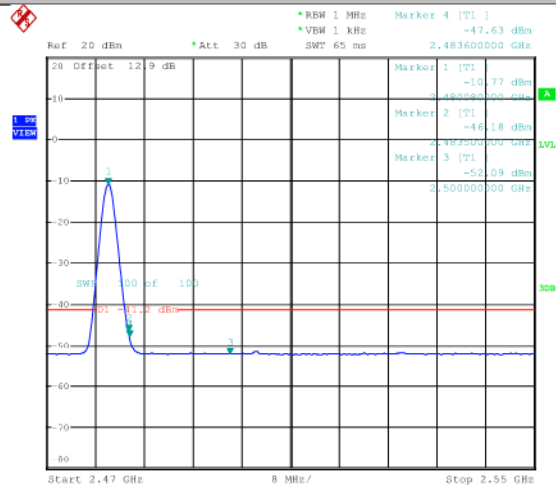


001-EIRP-L
Date: 10.SEP.2024 19:55:15

2DH5-Ant1-2480-PASS

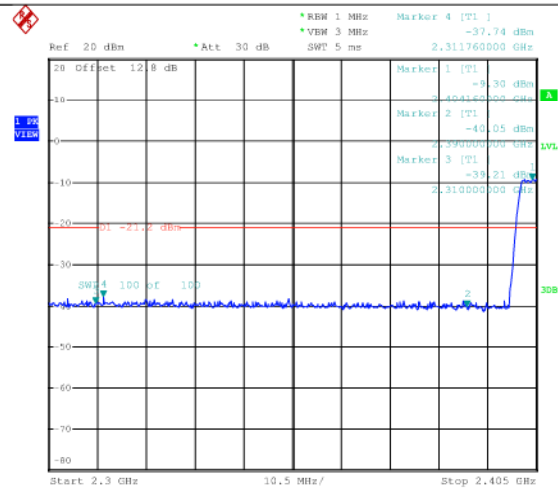


001-EIRP-L
Date: 10.SEP.2024 20:19:33

2DH5-Ant1-Hop_2402-PASS

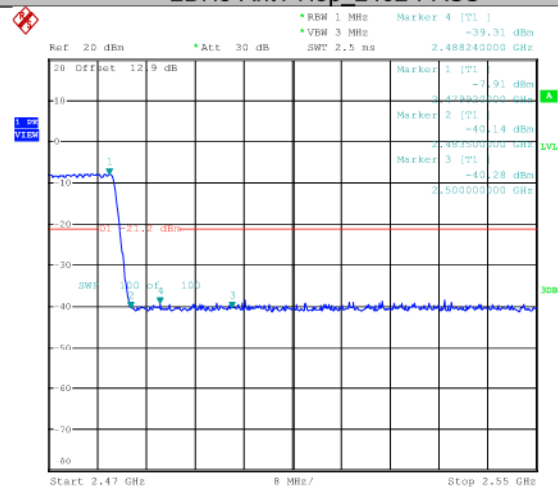


001-EIRP-L
Date: 10.SEP.2024 20:25:11

2DH5-Ant1-Hop_2480-PASS

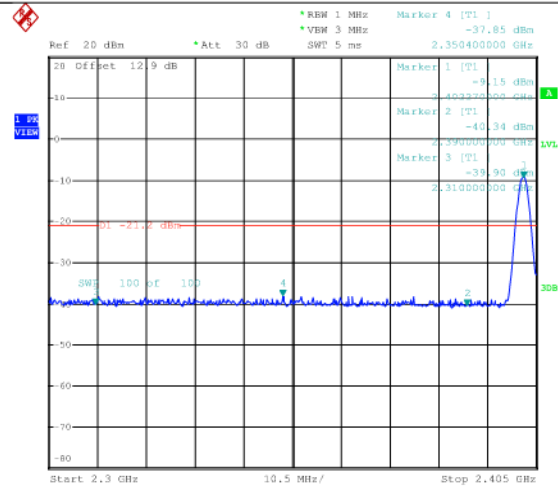


001-EIRP-L
Date: 10.SEP.2024 20:00:18

3DH5-Ant1-2402-PASS

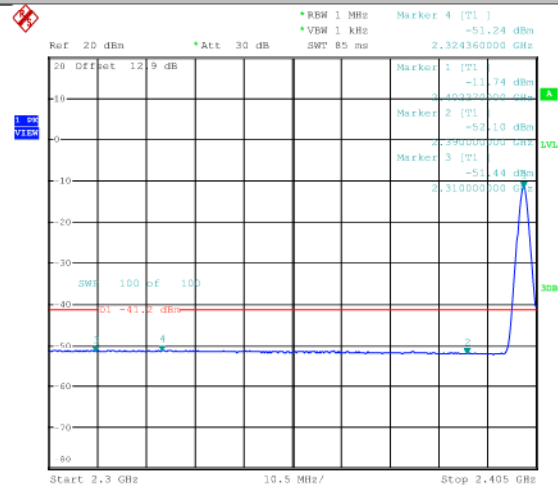


001-EIRP-L
Date: 10.SEP.2024 20:00:35

3DH5-Ant1-2402-PASS

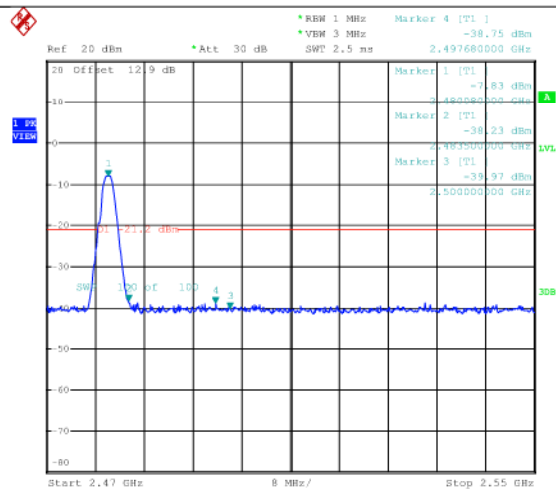


001-EIRP-L
Date: 10.SEP.2024 20:07:23

3DH5-Ant1-2480-PASS

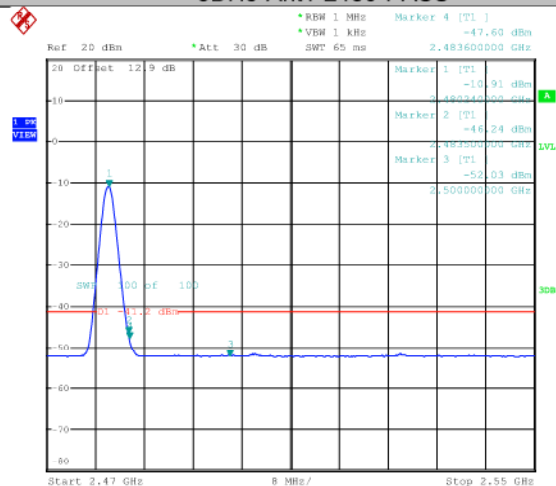


001-EIRP-L
Date: 10.SEP.2024 20:07:39

3DH5-Ant1-2480-PASS

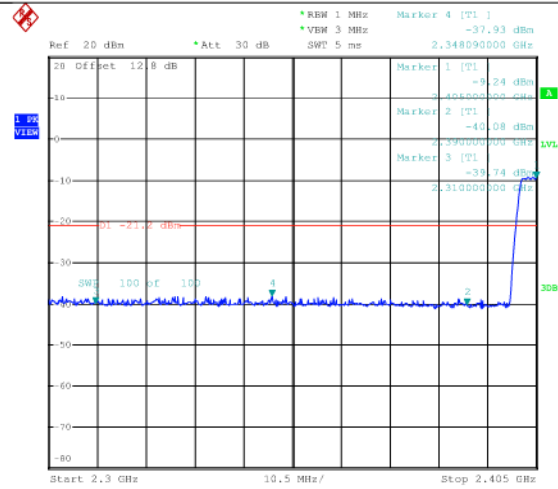

001-EIRP-L
Date: 10.SEP.2024 20:26:34

3DH5-Ant1-Hop_2402-PASS

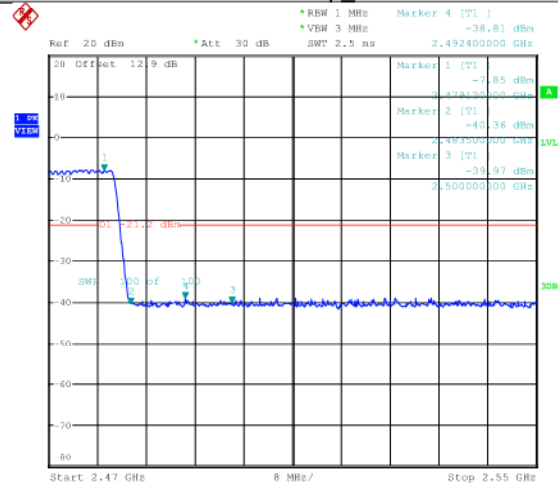

001-EIRP-L
Date: 10.SEP.2024 20:33:06

3DH5-Ant1-Hop_2480-PASS