

FCC TEST REPORT FOR CERTIFICATION

On Behalf of

GUANGDONG ROULE ELECTRONICS CO., LTD.

WiFi Remote Video Doorbell

Model Number: RL-IP02C

Additional Model: RL-IP02C-1; RL-IP02B; RL-IP02B-1

FCC ID: YI6RL-IP02

Prepared for : GUANGDONG ROULE ELECTRONICS CO., LTD.

Address : No. 12, Pingdong 3rd Road, Nanping Industry Community,
Zhuhai City, GuangDong, 519060 ,China.

Prepared By : EST Technology Co., Ltd.

Address : San Tun Management Zone, Houjie District, Dongguan, China

Tel: +86-769-83081888

Fax: +86-769-83081878

Report Number : ESTE-R1610031

Date of Test : September20~ October 13, 2016






Date of Report : October 17, 2016



TABLE OF CONTENTS

	Page
Test Report Declaration	
1. GENERAL PRODUCT INFORMATION	4
1.1. Product Function	4
1.2. Description of Device (EUT)	4
1.3. Measurement uncertainty	4
1.4. Difference between Model Numbers	4
1.5. Independent Operation Modes	4
2. TEST SITES	5
2.1. Description of Standards and Results	5
2.2. List of Test and Measurement Instruments	6
3. TEST SET-UP AND OPERATION MODES	7
3.1. Principle of Configuration Selection	7
3.2. Block Diagram of Test Set-up	7
3.3. Test Operation Mode and Test Software	7
3.4. Special Accessories and Auxiliary Equipment	7
3.5. Countermeasures to Achieve EMC Compliance	7
4. EMISSION TEST RESULTS	8
4.1. Conducted Emissions	8
4.2. Radiated emissions	14
4.3. 20dB Occupied Bandwidth	22
4.4. Deactivation time	24
4.5. antenna requirement	26
5. AVG FACTOR	27
6. PHOTOGRAPHS OF TEST SET-UP	29
7. PHOTO OF EUT	31

EST Technology Co., Ltd.

Applicant:	GUANGDONG ROULE ELECTRONICS CO., LTD.		
Address:	No. 12, Pingdong 3rd Road, Nanping Industry Community, Zhuhai City, Guangdong, 519060, China.		
Manufacturer:	GUANGDONG ROULE ELECTRONICS CO., LTD.		
Address:	No. 12, Pingdong 3rd Road, Nanping Industry Community, Zhuhai City, Guangdong, 519060, China.		
E.U.T:	WiFi Remote Video Doorbell		
Model Number:	RL-IP02C		
Additional Model:	RL-IP02C-1; RL-IP02B; RL-IP02B-1 Note: The four models have the same technical construction including circuit diagram, PCB Layout, components and component layout, all electrical construction and mechanical construction, except the different model name and the exterior.		
Power Supply:	DC 12V From Adapter Input AC 100-240V 50/60Hz		
Test Voltage:	DC 12V From Adapter Input AC 120V/60Hz DC 12V From Adapter Input AC 240V/60Hz		
Trade Name:		Operating Frequency:	433.92MHz
Date of Receipt:	September 20, 2016	Date of Test:	September 20~ October 13, 2016
Test Specification:	FCC Rules and Regulations Part 15 Subpart C:2016 ANSI C63.10:2013		
Test Result:	The equipment under test was found to be compliance with the requirements of the standards applied.		
		 Issue Date: October 17, 2016	
Tested by:	Reviewed by:	Approved by:	
			
Ada / Assistant	Tony / Engineer	Iceman Hu / Manager	
Other Aspects:			
None.			
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products, It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. GENERAL PRODUCT INFORMATION

1.1. Product Function

The EUT is used to transmit control command only. The operation frequency is 433.92MHz. Press the button on remote transmitter. Please refer to the user's manual for the details.

1.2. Description of Device (EUT)

E.U.T. : WiFi Remote Video Doorbell
Model No. : RL-IP02C
Operating Frequency : 433.92MHz
Number of Channels : 1 Channels
Type of Modulation : FSK
Antenna and Gain : Integral antenna, 0 dBi Gain.

1.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.54dB
Uncertainty for Radiation Emission test (30MHz-1GHz)	3.62 dB
Uncertainty for Radiation Emission test (1GHz to 18GHz)	4.86 dB
Uncertainty for radio frequency	7×10-8
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.4. Difference between Model Numbers

None

1.5. Independent Operation Modes

The basic operation modes are: TX mode

2. TEST SITES

2.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

No.	Item	Specification	Results
1	Conducted emissions	FCC Part15.207	PASS
2	Radiated emissions	FCC Part 15.231(b)	PASS
3	20dB Occupied Bandwidth	FCC Part 15.231(c)	PASS
4	Deactivate time	FCC Part 15.231(a) (1)	PASS
5	antenna requirement	FCC Part 15.203	PASS

2.2. List of Test and Measurement Instruments

2.2.1. For radiated emission test(30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESVS10	100004	June 25,16	1 Year
Spectrum Analyzer	Agilent	E4411B	MY50140697	June 25,16	1 Year
Bilog Antenna	Teseq	CBL 6111D	27090	June 28,15	3 Year
Signal Amplifier	Agilent	310N	187037	June 25,16	1 Year

2.2.2. For radiated emission test(above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA9120D 1002	June 28,15	3 Year
Signal Amplifier	SCHWARZBECK	BBV9718	9718-212	June 25,16	1 Year
Spectrum Analyzer	Agilent	E4408B	MY44211139	June 25,16	1 Year

2.2.3. For 20dB Occupied Bandwidth test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer	Agilent	E4408B	MY44211139	June 25,16	1 Year

2.2.4. For Deactivate time test


Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer	Agilent	E4408B	MY44211139	June 25,16	1 Year

3. TEST SET-UP AND OPERATION MODES

3.1. Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its highest possible radiated level. The test modes were adapted accordingly in reference to the Operating Instructions.

3.2. Block Diagram of Test Set-up

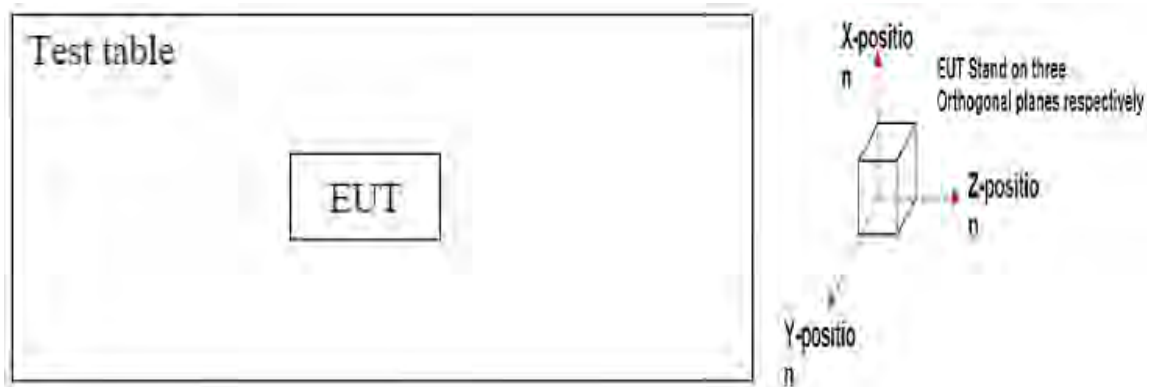

(EUT: Wireless Remote Control)

Note: We test X-axis, Y-axis, and Z-axis,. The Y-axis is the worst mode, so only the worst mode test data was included in the report.

3.3. Test Operation Mode and Test Software

Refer to clause 1.5

3.4. Special Accessories and Auxiliary Equipment

None.

3.5. Countermeasures to Achieve EMC Compliance

None.

4. EMISSION TEST RESULTS

4.1. Conducted Emissions

4.1.1. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.


4.1.2. Test procedure

The EUT was placed on a non-metallic table, 80 cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS30) is set at 10kHz.


The frequency range from 150kHz to 30MHz is checked.

4.1.3. Test Setup Diagram

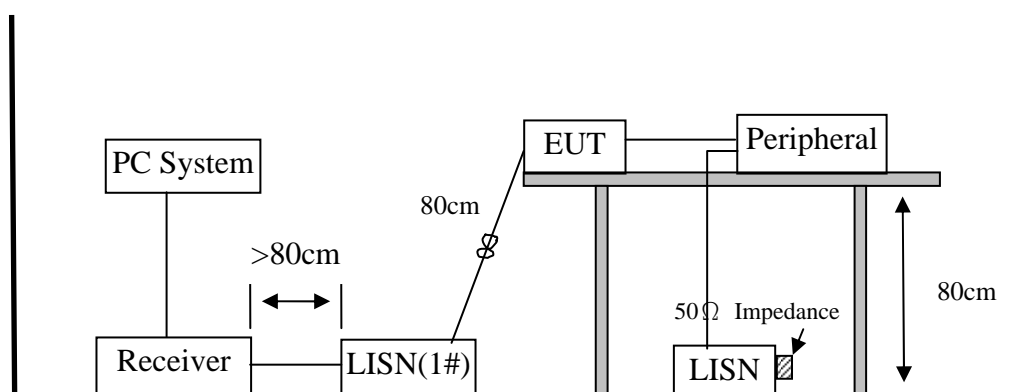


4.1.4. Test result

Pass.

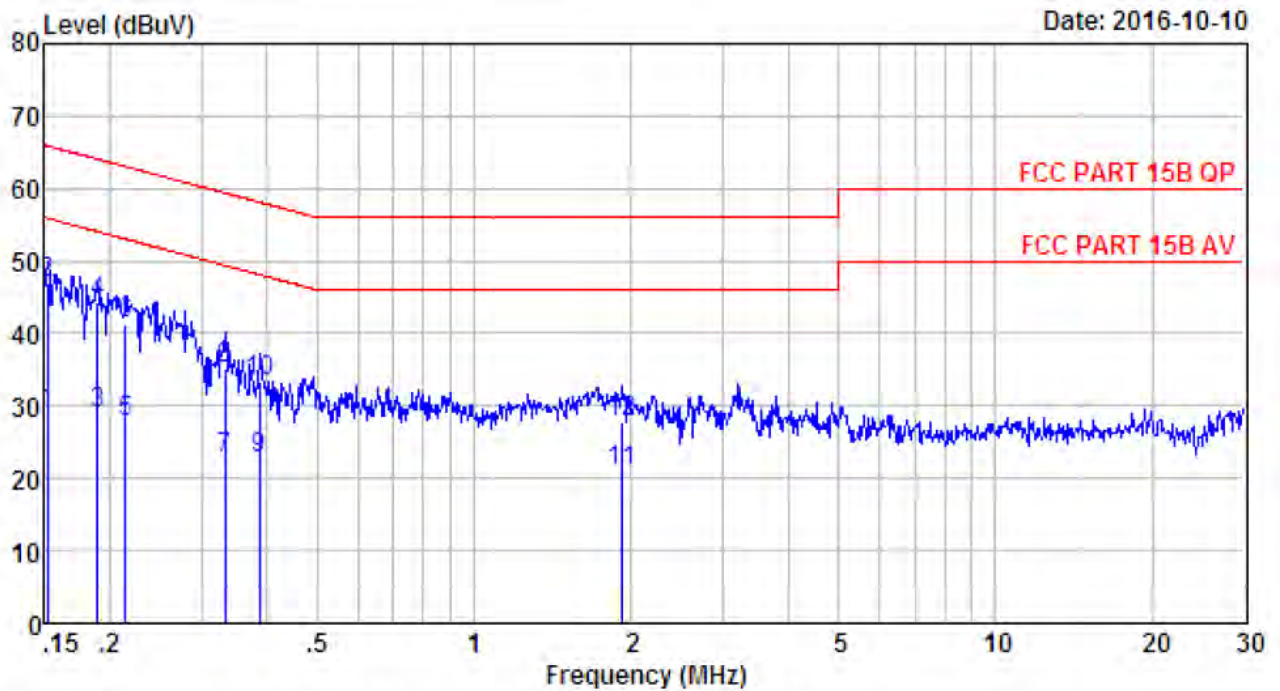


Site no : 844 Shield Room Data no. : 197
 Env. / Ins. : Temp:25.3'C Humi:58% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : Tony
 EUT : WiFi Remote Video Doorbell
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : RL-IP02C
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	9.61	9.81	9.37	28.79	55.91	27.12	Average
2	0.15	9.61	9.81	27.48	46.90	65.91	19.01	QP
3	0.19	9.61	9.80	9.61	29.02	54.06	25.04	Average
4	0.19	9.61	9.80	24.78	44.19	64.06	19.87	QP
5	0.21	9.61	9.80	8.42	27.83	53.05	25.22	Average
6	0.21	9.61	9.80	21.81	41.22	63.05	21.83	QP
7	0.33	9.61	9.83	3.36	22.80	49.40	26.60	Average
8	0.33	9.61	9.83	15.59	35.03	59.40	24.37	Peak
9	0.39	9.61	9.82	3.45	22.88	48.12	25.24	Average
10	0.39	9.61	9.82	13.88	33.31	58.12	24.81	QP
11	1.93	9.61	9.83	1.60	21.04	46.00	24.96	Average
12	1.93	9.61	9.83	8.26	27.70	56.00	28.30	Peak

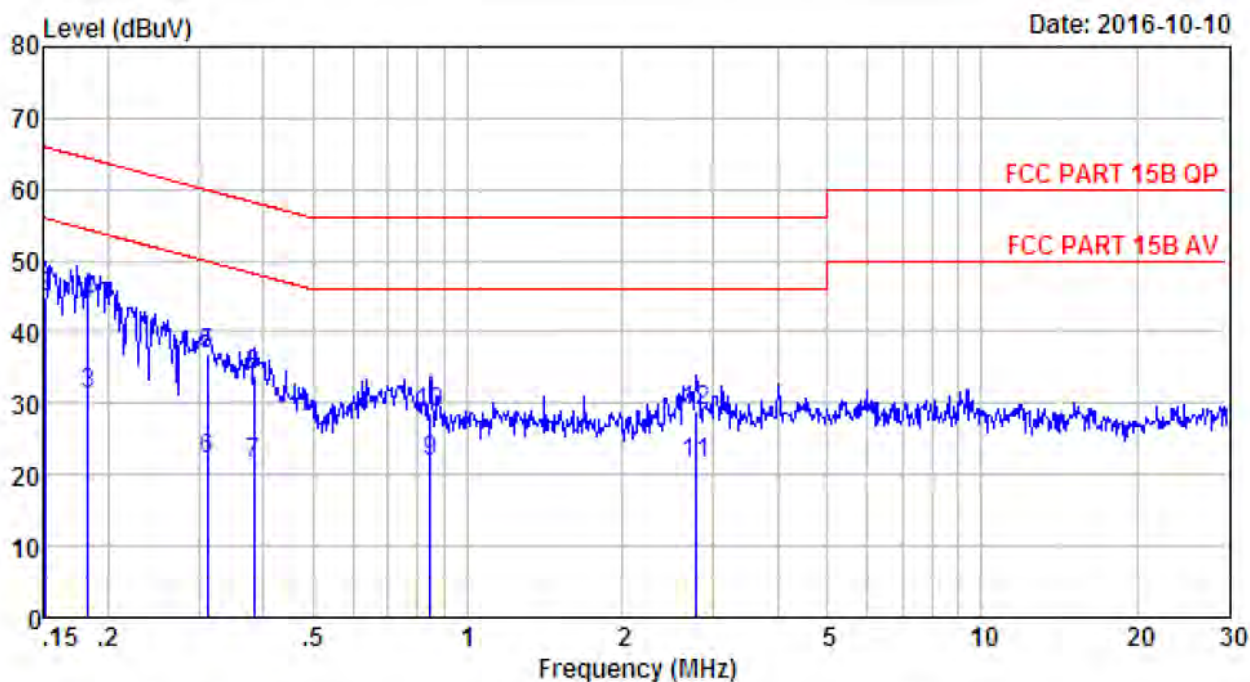


Site no : 844 Shield Room Data no. : 199
 Env. / Ins. : Temp:25.3'C Humi:58% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Tony
 EUT : WiFi Remote Video Doorbell
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : RL-IP02C
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	9.46	9.81	11.45	30.72	56.00	25.28	Average
2	0.15	9.46	9.81	25.67	44.94	66.00	21.06	QP
3	0.18	9.56	9.80	11.97	31.33	54.37	23.04	Average
4	0.18	9.56	9.80	24.65	44.01	64.37	20.36	QP
5	0.31	9.60	9.83	17.42	36.85	49.93	13.08	Average
6	0.31	9.60	9.83	2.56	22.01	49.93	27.92	Average
7	0.38	9.59	9.82	2.08	21.49	48.21	26.72	Average
8	0.38	9.59	9.82	14.51	33.92	58.21	24.29	QP
9	0.84	9.62	9.82	2.51	21.95	46.00	24.05	Average
10	0.84	9.62	9.82	9.11	28.55	56.00	27.45	QP
11	2.78	9.63	9.83	2.12	21.58	46.00	24.42	Average
12	2.78	9.63	9.83	9.50	28.96	56.00	27.04	QP

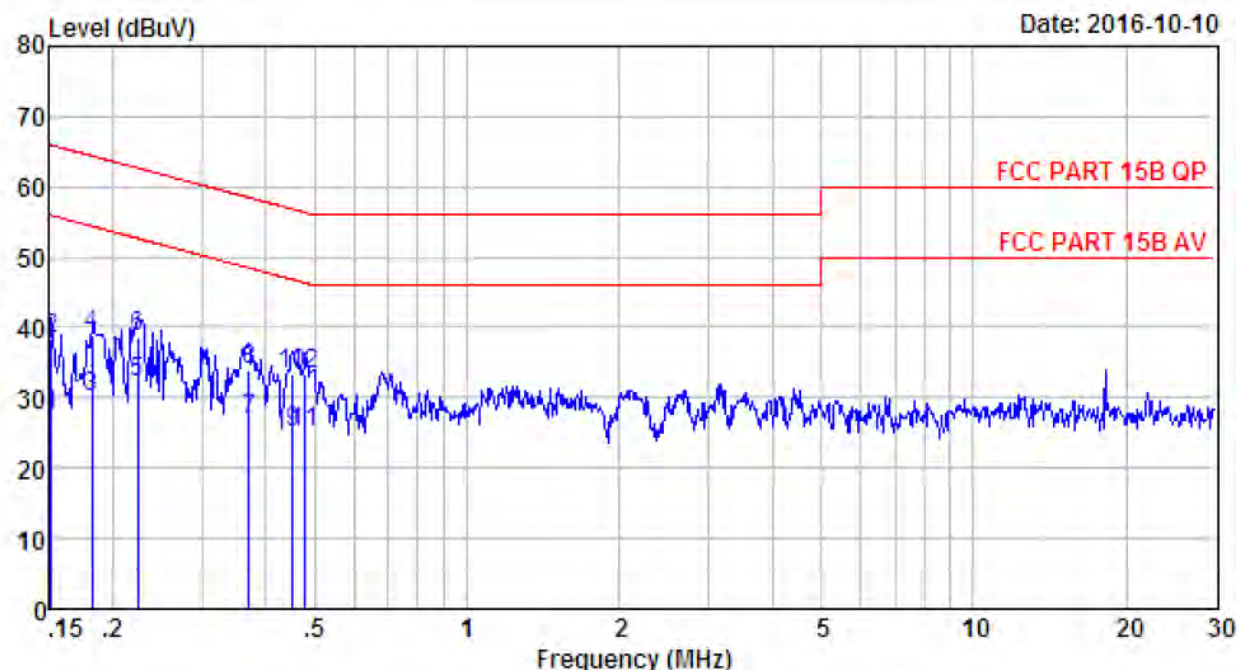

Site no : 844 Shield Room Data no. : 193
 Env. / Ins. : Temp:25.3'C Humi:58% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : Tony
 EUT : WiFi Remote Video Doorbell
 Power : DC 12V From Adapter Input AC 240V/60Hz
 M/N : RL-IP02C
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	9.61	9.81	8.10	27.52	55.96	28.44	Average
2	0.15	9.61	9.81	19.00	38.42	65.96	27.54	QP
3	0.18	9.61	9.80	10.67	30.08	54.42	24.34	Average
4	0.18	9.61	9.80	19.54	38.95	64.42	25.47	QP
5	0.22	9.61	9.80	12.85	32.26	52.70	20.44	Average
6	0.22	9.61	9.80	19.17	38.58	62.70	24.12	QP
7	0.37	9.61	9.82	7.53	26.96	48.47	21.51	Average
8	0.37	9.61	9.82	14.45	33.88	58.47	24.59	QP
9	0.45	9.61	9.81	5.68	25.10	46.85	21.75	Average
10	0.45	9.61	9.81	14.05	33.47	56.85	23.38	QP
11	0.48	9.61	9.81	5.77	25.19	46.36	21.17	Average
12	0.48	9.61	9.81	13.93	33.35	56.36	23.01	QP

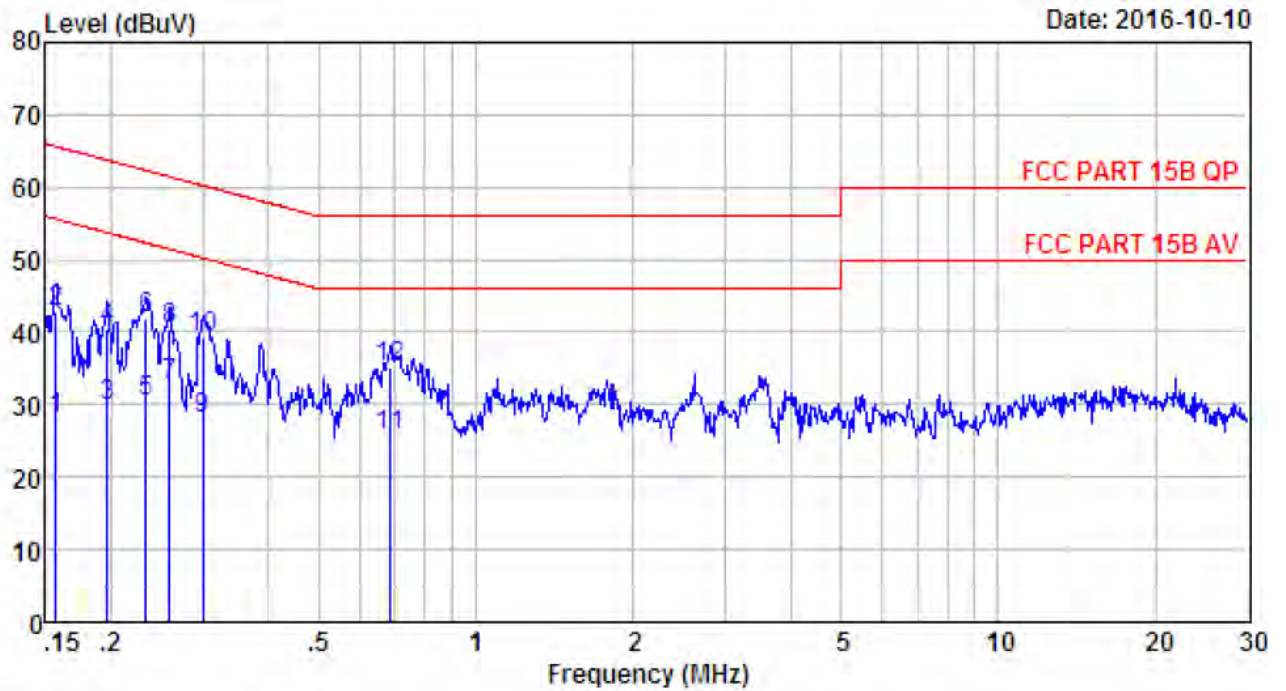

Site no : 844 Shield Room Data no. : 195
 Env. / Ins. : Temp:25.3'C Humi:58% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Tony
 EUT : WiFi Remote Video Doorbell
 Power : DC 12V From Adapter Input AC 240V/60Hz
 M/N : RL-IP02C
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.16	9.48	9.81	8.72	28.01	55.65	27.64	Average
2	0.16	9.48	9.81	23.44	42.73	65.65	22.92	QP
3	0.20	9.59	9.80	10.54	29.93	53.76	23.83	Average
4	0.20	9.59	9.80	20.96	40.35	63.76	23.41	QP
5	0.23	9.60	9.80	11.03	30.43	52.35	21.92	Average
6	0.23	9.60	9.80	22.38	41.78	62.35	20.57	QP
7	0.26	9.60	9.82	13.33	32.75	51.47	18.72	Average
8	0.26	9.60	9.82	21.07	40.49	61.47	20.98	QP
9	0.30	9.60	9.83	8.72	28.15	50.24	22.09	Average
10	0.30	9.60	9.83	19.89	39.32	60.24	20.92	QP
11	0.69	9.63	9.81	6.31	25.75	46.00	20.25	Average
12	0.69	9.63	9.81	15.66	35.10	56.00	20.90	QP

4.2. Radiated emissions

4.2.1. Applied Standard

According to 15.231(b), the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

Fundamental Frequencies (MHz)	Field strength of Fundamental (uV/meter at 3m)	Unwanted emissions (uV/meter at 3m)
40.66-40.70	2250	225
70-130	1250(470nW)	125
130-174	1250 to 3750**	125 to 375**
174-260	3750(4.2uW)	375
260-470	3750 to 12500**	375 to 1250**
Above470	12500(47uW)	1250

**Linear interpolation with frequency F in MHz

For the band 130-174MHz: Field strength= $56.81818(F)-6136.3636$

For the band 260-470MHz: Field strength= $41.6667(F)-7083.3333$

The maximum permitted unwanted emissions level is 20dB below the maximum permitted fundamental level

The field strength of spurious emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209 as following:

Frequencies (MHz)	Field strength uV/meter	Measurement distance (meters)
0.009-0.490	$2400/F(\text{kHz})$	300
0.490-1.705	$24000/F(\text{kHz})$	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

According to 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2. Test procedure

The EUT was placed on a turn table which was 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on a antenna tower. At the frequency band of 30MHz to 1GHz, The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 to 4 m for horizontal and vertical polarizations. The broadband antenna (calibrated by dipole antenna) was used as a receiving antenna. At the frequency band of 1GHz to 5GHz, The measuring antenna moved from 1 to 4 m for horizontal and vertical polarization. The horn antenna was used as a receiving antenna.

The resolution bandwidth and video bandwidth of the test receiver was 120 KHz and 300KHz for Quasi-peak detection at frequency below 1GHz.


The resolution bandwidth and video bandwidth of the test receiver was 1MHz and 1MHz for Peak detection at frequency above 1GHz.

The EUT position(X.-axis, Y-axis, Z-axis) were checked and worse case was happened in Y-axis position. So Y-axis position was chose for find measurement.


The EUT was tested in Chamber Site.

4.2.3. Test Setup Diagram

For frequency range: 30MHz-1000MHz

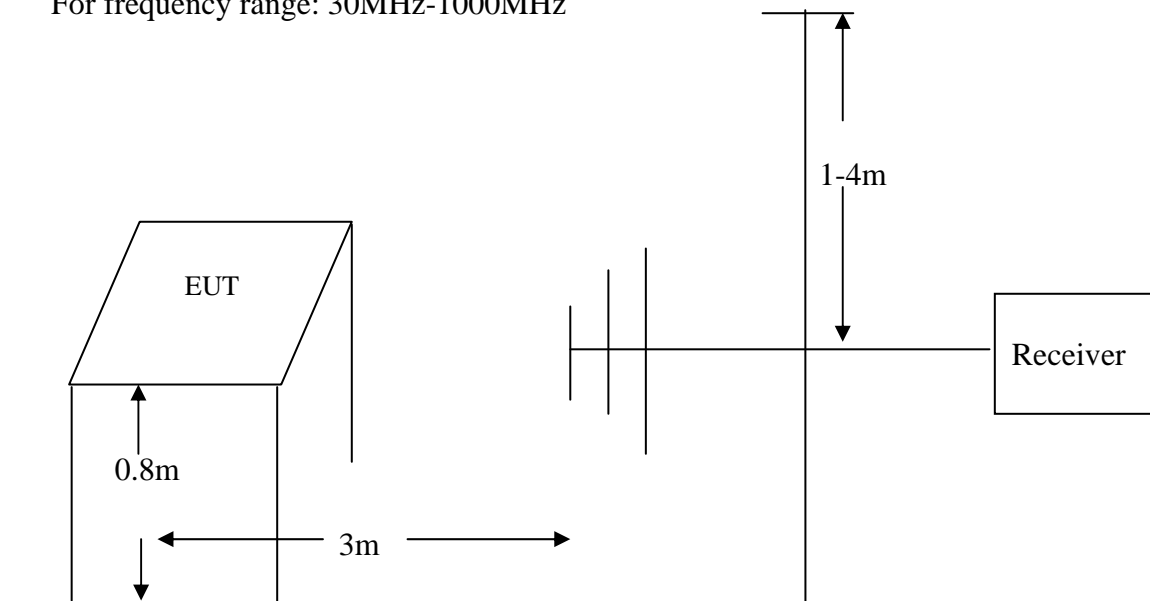


For frequency range: 1 GHz -5GHz

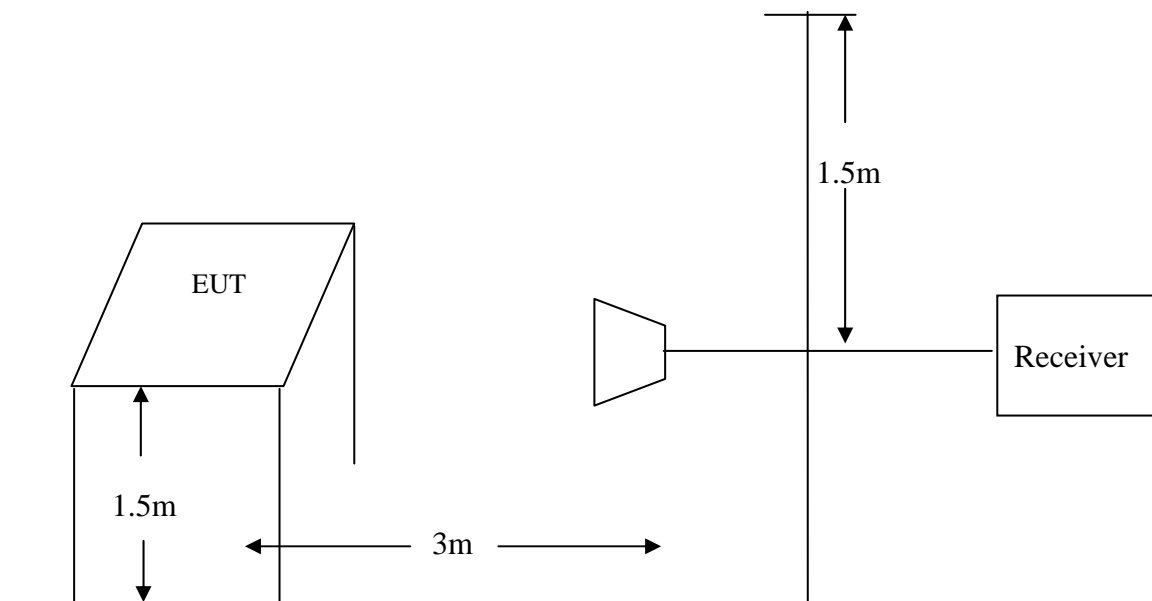

4.2.4. Test result


Pass.

Test Data (worst mode: Y-axis)

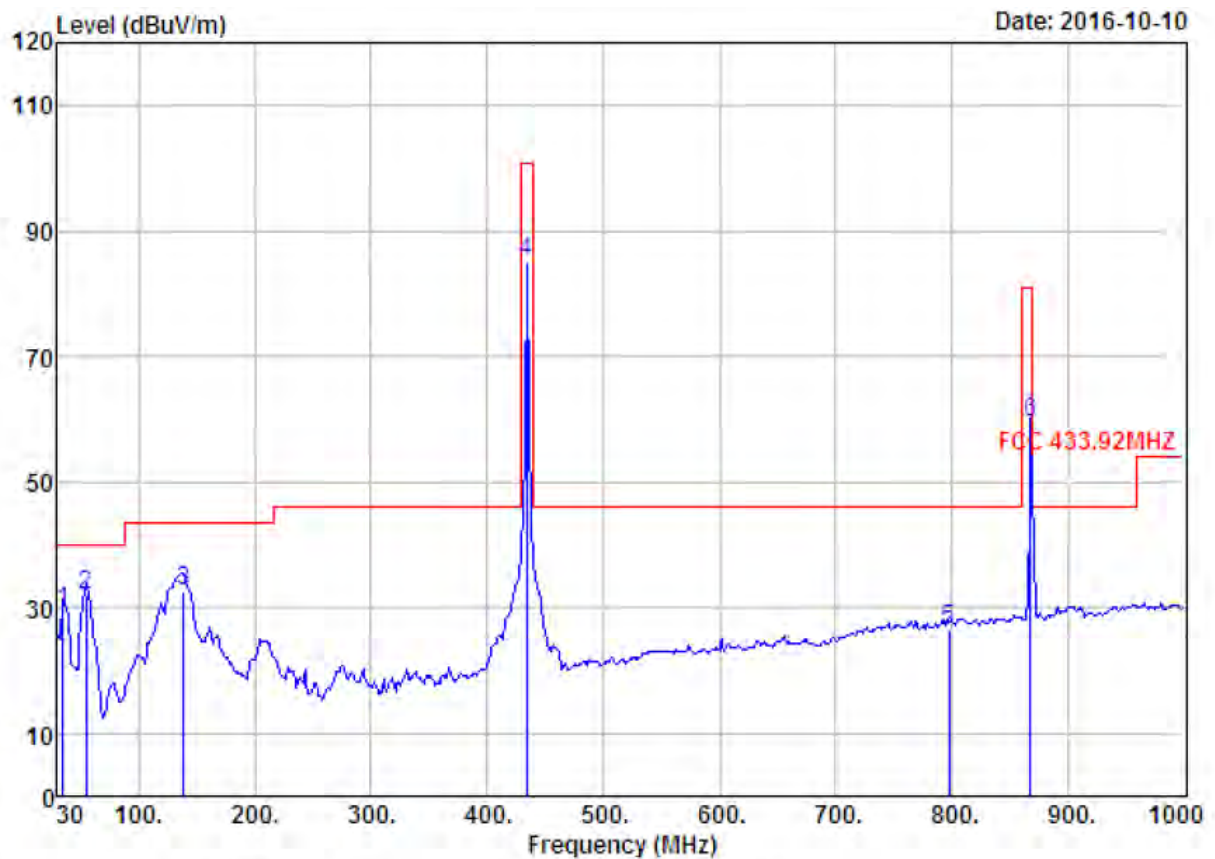

Site no. : 1# 966 chamber Data no. : 324
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC 433.92MHZ
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUI : WiFi Remote Video Doorbell
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : RL-IP02C
 Test Mode : TX 433.92MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	34.85	15.55	0.72	44.34	29.44	40.00	10.56	QP
2	54.25	5.82	0.93	56.41	31.96	40.00	8.04	QP
3	138.64	11.42	1.54	50.71	32.64	43.50	10.86	QP
4	433.92	16.13	2.79	97.14	84.99	100.83	15.84	Peak
5	798.24	22.03	3.92	30.72	26.44	46.00	19.56	QP
6	867.84	22.85	3.83	63.32	59.39	80.83	21.44	Peak

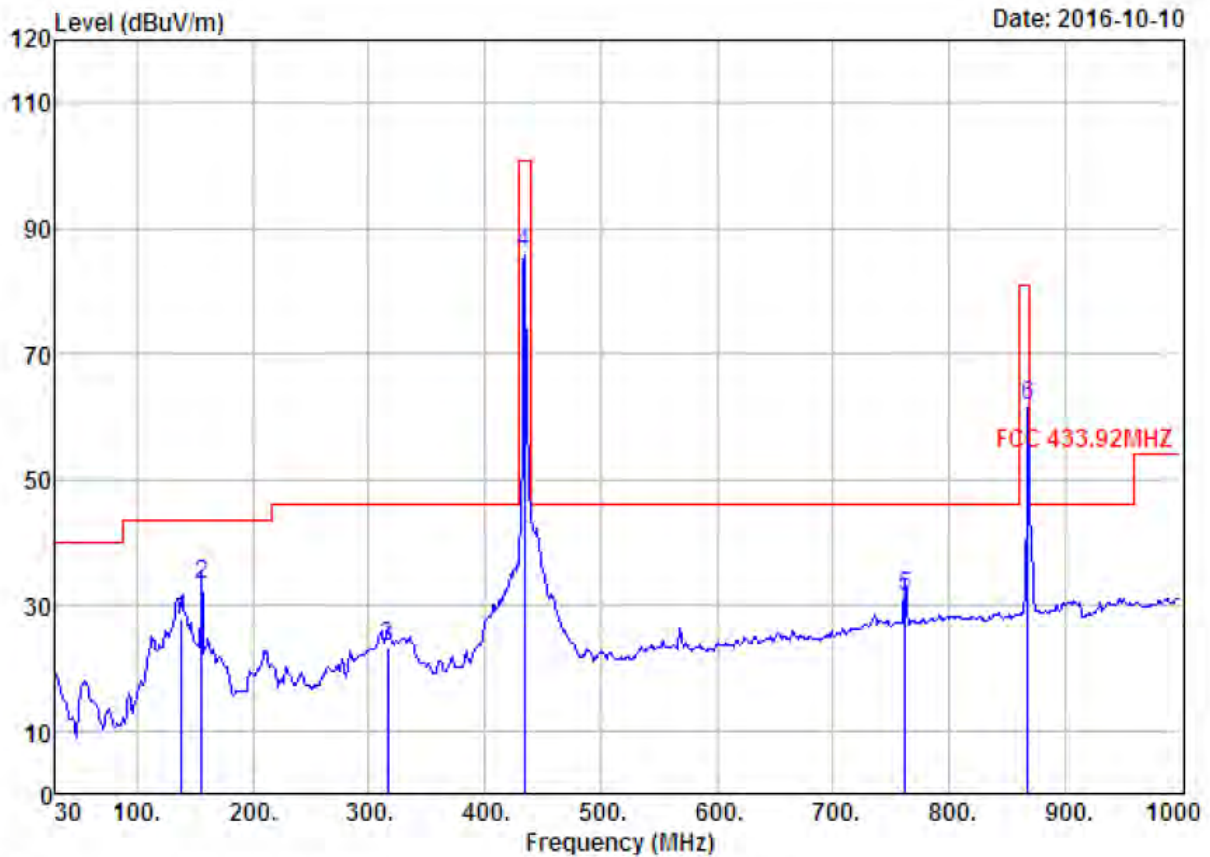

Site no. : 1# 966 chamber Data no. : 325
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC 433.92MHZ
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : WiFi Remote Video Doorbell
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : RL-IP02C
 Test Mode : TX 433.92MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	138.64	11.42	1.54	46.06	27.99	43.50	15.51	QP
2	156.10	10.61	1.67	52.16	33.44	43.50	10.06	QP
3	316.15	13.42	2.41	38.50	23.48	46.00	22.52	QP
4	433.92	16.13	2.79	98.21	86.06	100.83	14.77	Peak
5	762.35	22.04	3.92	36.28	31.34	46.00	14.66	QP
6	867.84	22.85	3.83	65.80	61.87	80.83	18.96	Peak

Site no. : 1# 966 chamber Data no. : 209
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15(1-6G) PK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : WiFi Remote Video Doorbell
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : RL-IP02C
 Test Mode : TX 433.92MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1300.00	25.02	3.99	34.87	65.57	59.71	74.00	14.29	Peak
2	1740.00	24.82	5.26	35.24	59.12	53.96	74.00	20.04	Peak
3	2175.00	27.68	6.38	34.92	56.20	55.34	74.00	18.66	Peak
4	2450.00	27.59	6.67	34.85	58.30	57.71	74.00	16.29	Peak
5	3040.00	28.28	9.03	36.96	51.33	51.68	74.00	22.32	Peak
6	4510.00	30.64	10.42	35.64	40.31	45.73	74.00	28.27	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 chamber Data no. : 210
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15(1-6G) PK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : WiFi Remote Video Doorbell
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : RL-IP02C
 Test Mode : TX 433.92MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1300.00	25.02	3.99	34.87	62.49	56.63	74.00	17.37	Peak
2	1740.00	24.82	5.26	35.24	61.68	56.52	74.00	17.48	Peak
3	2175.00	27.68	6.38	34.92	58.40	57.54	74.00	16.46	Peak
4	2425.00	27.60	6.66	34.74	55.58	55.10	74.00	18.90	Peak
5	2460.00	27.58	6.69	34.98	54.56	53.85	74.00	20.15	Peak
6	4510.00	30.64	10.42	35.64	40.91	46.33	74.00	27.67	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official
 limit are not reported.

Fundamental and Harmonics Average Result						
Frequency MHz	Peak Level (dBμV/m)	Avg factor. (dBμV/m) (see Section 5)	Average Level (dBμV/m)	Limit (dBμV/m) (average)	Over Limits dB	Polarity
433.92	86.06	-8.302	77.76	80.83	3.07	H
867.84	61.87	-8.302	53.57	60.83	7.26	H
1300.00	56.63	-8.302	48.33	54.00	5.67	H
1740.00	56.52	-8.302	48.22	54.00	5.78	H
2175.00	57.54	-8.302	49.24	54.00	4.76	H
2425.00	55.10	-8.302	46.80	54.00	7.20	H
2460.00	53.85	-8.302	45.55	54.00	8.45	H
4510.00	46.91	-8.302	38.61	54.00	15.39	H
433.92	84.99	-8.302	76.69	80.83	4.14	V
867.84	59.39	-8.302	51.09	60.83	9.74	V
1300.00	59.71	-8.302	51.41	54.00	2.59	V
1740.00	53.96	-8.302	45.66	54.00	8.34	V
2175.00	55.34	-8.302	47.04	54.00	6.96	V
2450.00	57.71	-8.302	49.41	54.00	4.59	V
3040.00	51.68	-8.302	43.38	54.00	10.62	V
4510.00	45.73	-8.302	37.43	54.00	16.57	V

Remark: The worst emission was detected at **433.92MHz** with corrected signal level of **77.14dBμV/m**(Limit is **80.80 dBμV/m**) when the antenna was at **Horizontal** polarization and at **1.70m** high and the turn table was at **120°** .

Remark: The worst emission was detected at **1300MHz** with corrected signal level of **51.41dBμV/m** (Limit is **54.00dBμV/m**) when the antenna was at **Vertical** polarization and at **1.1m** high and the turn table was at **125°** .

Remark:

1. Emission Level = Antenna Factor + Cable Loss + Reading
2. Peak Limit=Average Limit+20dB
3. Average Level= Peak Level+ Avg factor.

4.3. 20dB Occupied Bandwidth

4.3.1. Applied Standard

According to 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

4.3.2. Test procedure


Step 1: The EUT was placed on a table which is 0.8m above ground plane.

Step 2: EUT was set to transmit continuously.

Step 3: Set SA Center Frequency = fundamental frequency , RBW=100kHz,VBW=100kHz

Step 4: Set SA trace max hold, then view.

4.3.3. Test Setup Diagram

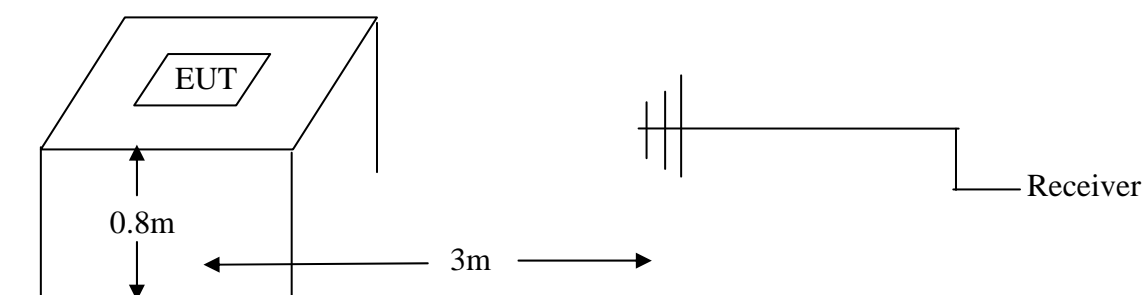

4.3.4. Test Result

Pass.


Test Data

EUT	: WiFi Remote Video Doorbell	Temperature:	25.4°C
Model No.	: RL-IP02C	Humidity	: 55%
Test Mode	: TX mode	Test Engineer	: Tony

Fundamental frequency (MHz)	Bandwidth Measurement (kHz)	Limit (kHz)	Result
433.92MHz	416.395	1084.8	PASS

Note: Limit= Fundamental frequency \times 0.25% = $433.92 \times 0.25\%$ = 1084.8kHz

The test plots as following:

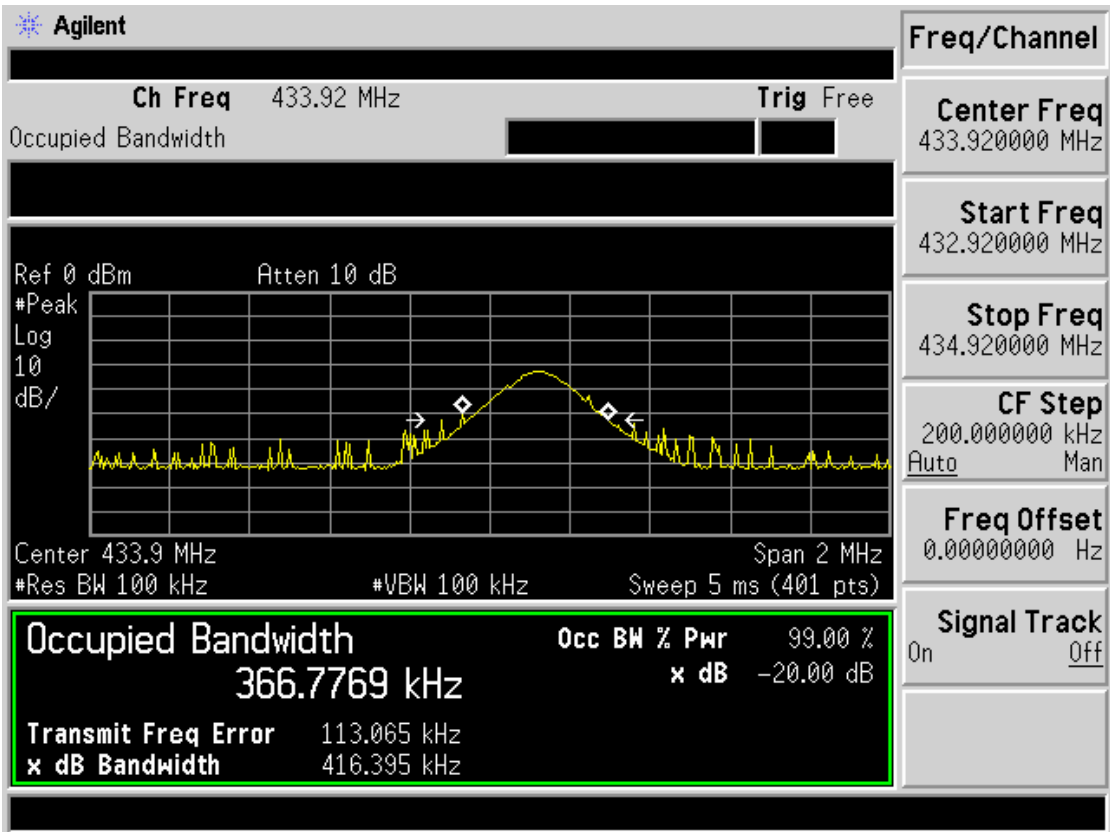

4.4. Deactivation time

4.4.1. Applied Standard

According to 15.231(a) (1), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released. A transmitter activated automatically shall cease transmission within 5 seconds after activation.

4.4.2. Test procedure

Step 1: The EUT was placed on a table which is 0.8m above ground plane.

Step 2: Set EUT as normal operation.

Step 3: Set SA Center Frequency = fundamental frequency , RBW=100kHz,VBW=100kHz

Step 4: Set SA trace max hold, then view.

4.4.3. Test Setup Diagram

Refer to clause 4.3.3

4.4.4. Test Result


Pass.

Test Data

EUT	: WiFi Remote Video Doorbell	Temperature:	25.4°C
Model No.	: RL-IP02C	Humidity	: 55%
Test Mode	: TX mode	Test Engineer	: Tony

Fundamental frequency (MHz)	Transmission time (s)	Limit (s)	Result
433.92MHz	2.3s	5s	PASS

The test plots as following:


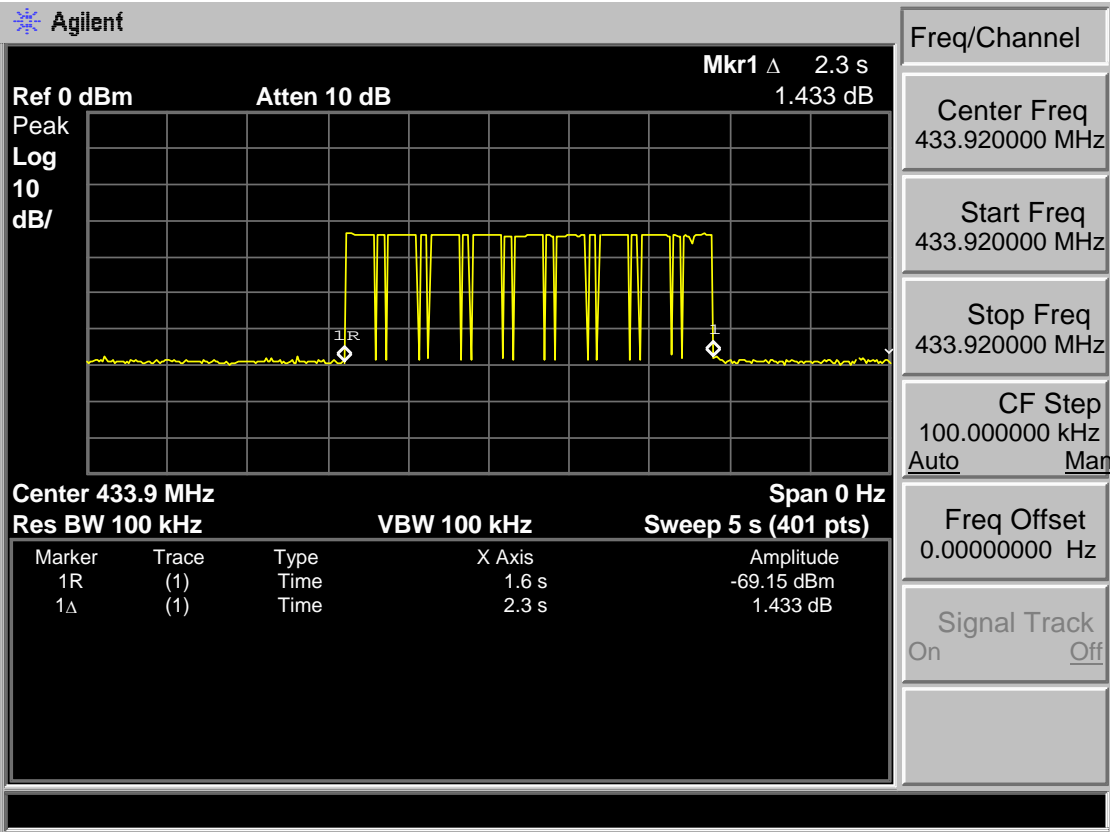



4.5. antenna requirement

4.5.1 .15.203 requirement:for intentional device,according to 15.203:an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

4.5.2. the EUT antenna is Integral antenna .It comply with the standard requirement

5. AVG FACTOR

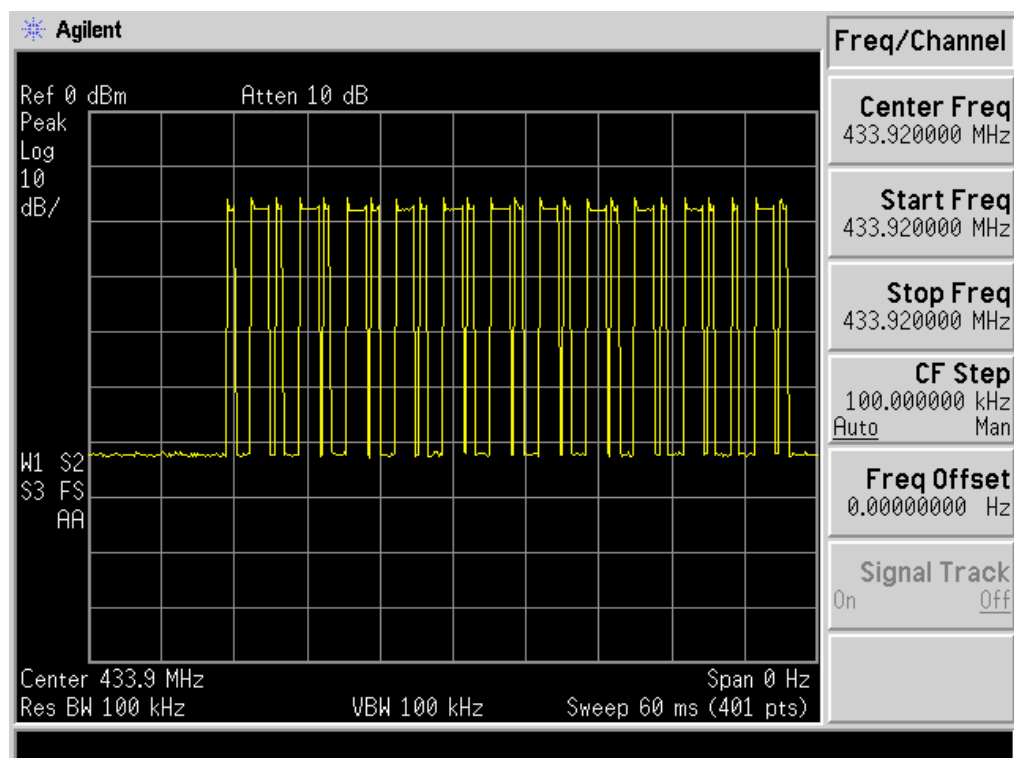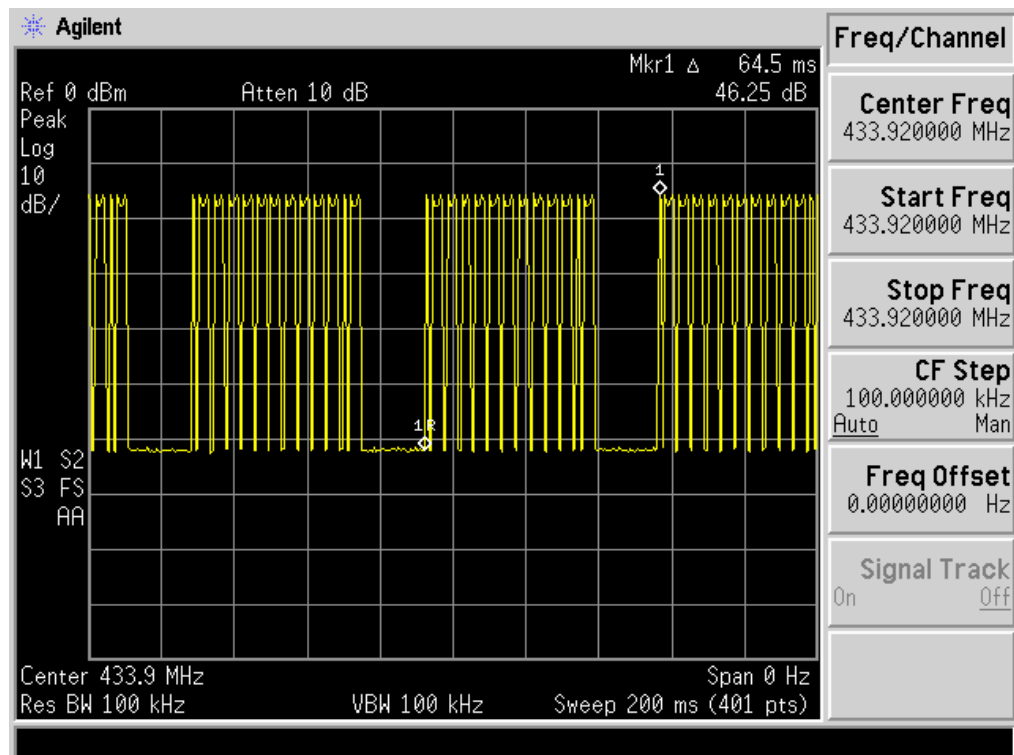

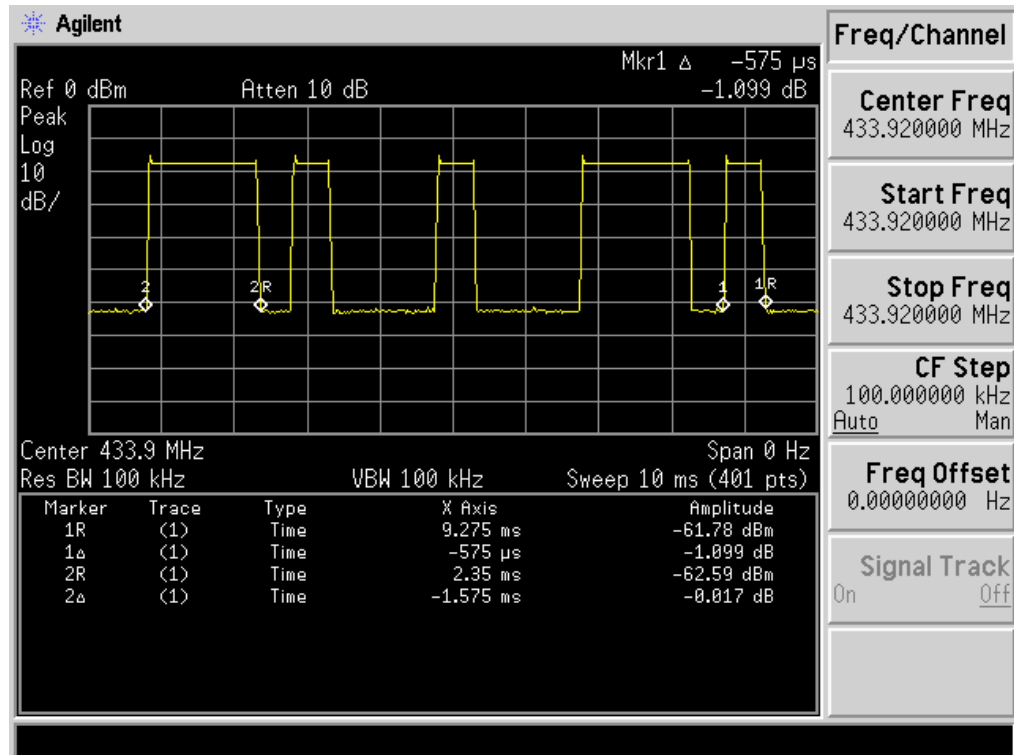


Duty cycle= T ontime / T period= $(0.575 \times 13) + (1.575 \times 11) / 64.5 \text{ ms} = 0.38450$
 Avg factor = $20 \times \log(\text{Duty cycle}) = 20 \times \log(0.38450) = -8.302$


Note: PW=0.575ms, $2/0.575=3.478$. RBW=100kHz > 3.478. So PDCF has not evaluated.

6. PHOTOGRAPHS OF TEST SET-UP

Conducted Test

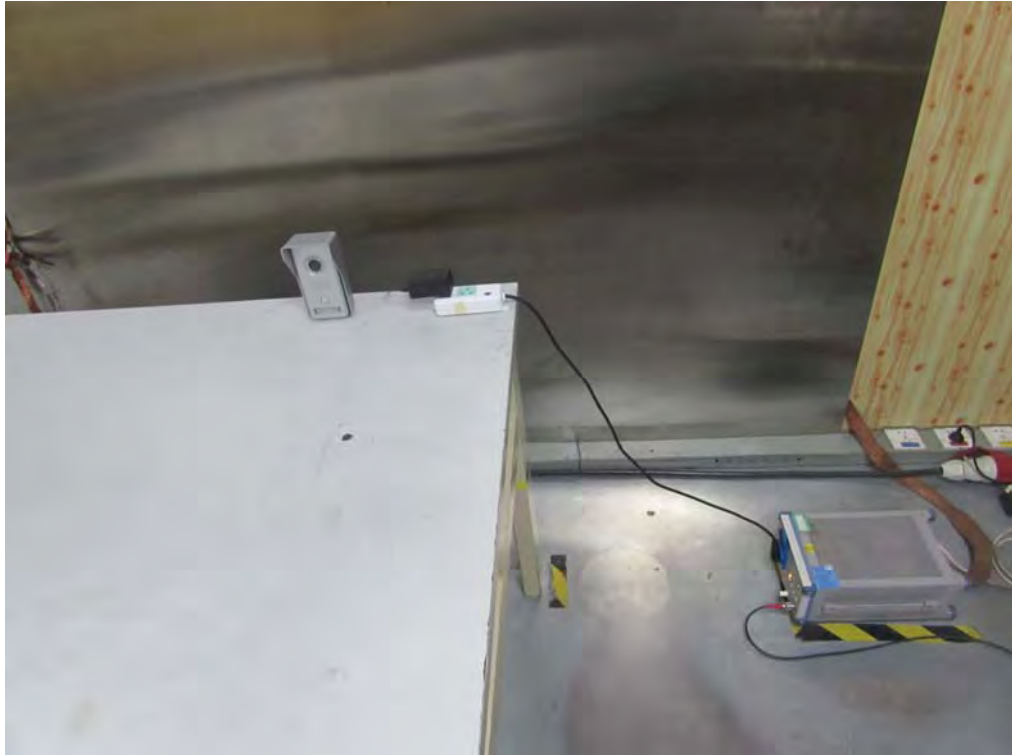

Radiated Test (30-1000 MHz)

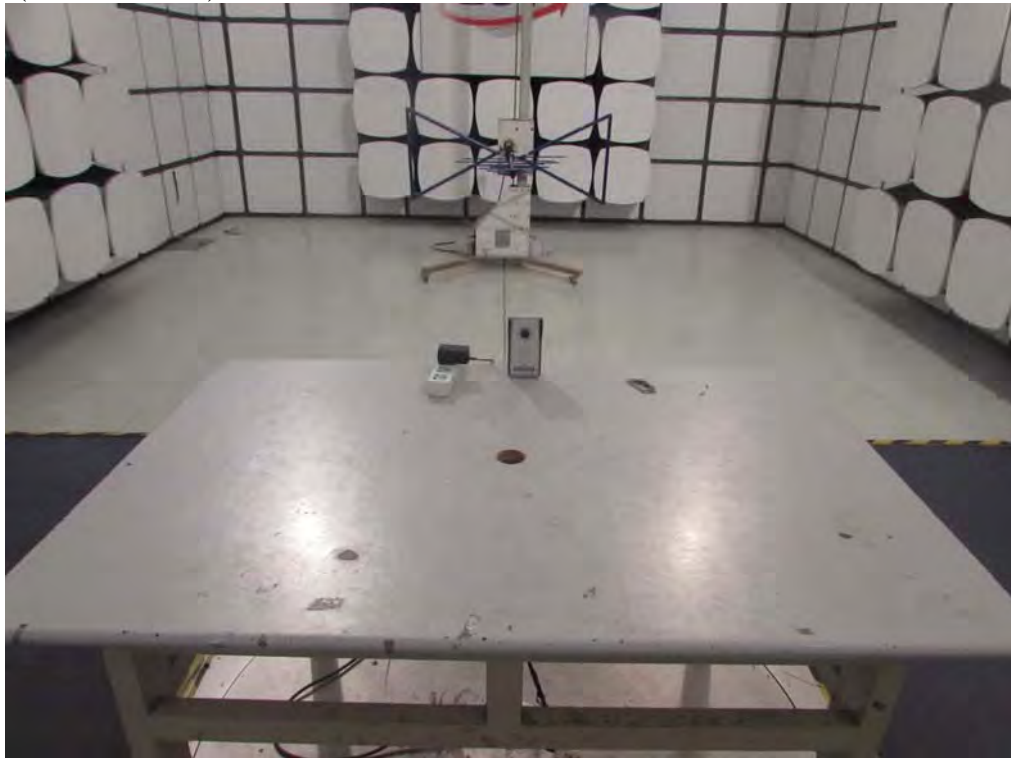


Radiated Test (Above 1GHz)





7. PHOTO OF EUT

External Photos



M/N: RL-IP02C

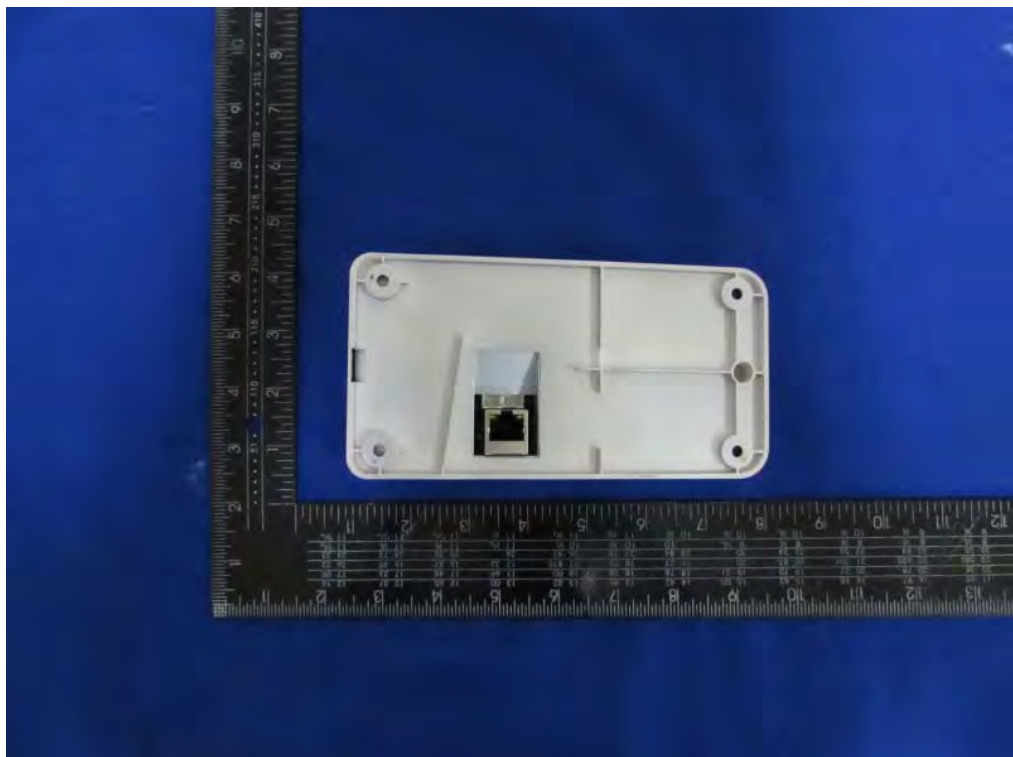

External Photos
M/N: RL-IP02C

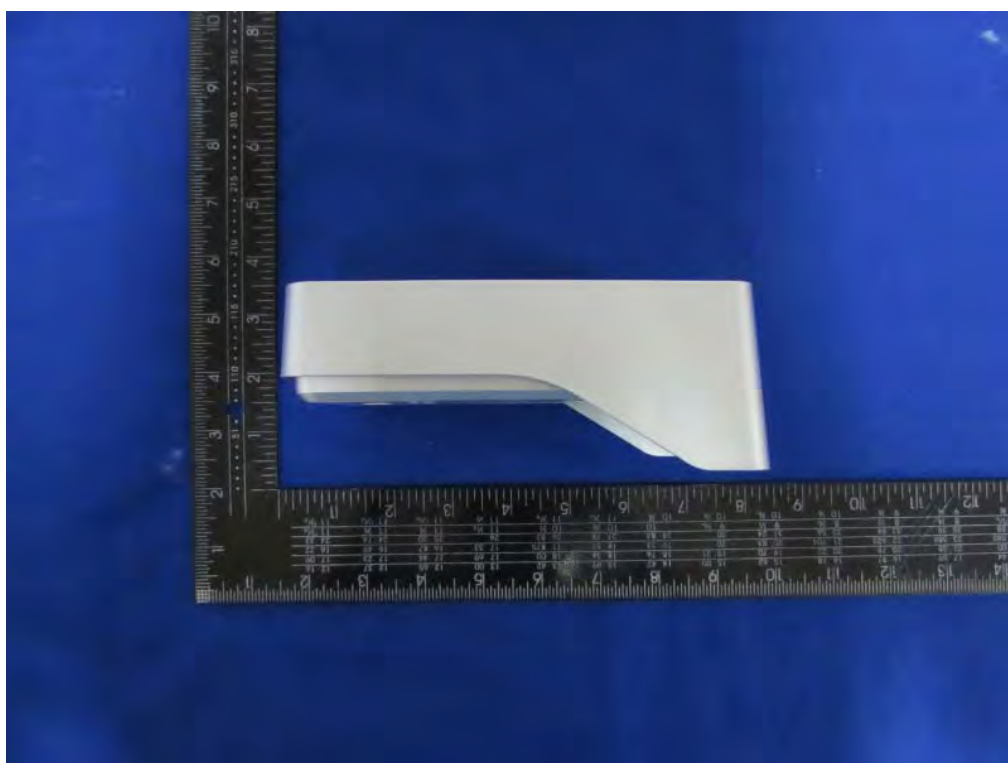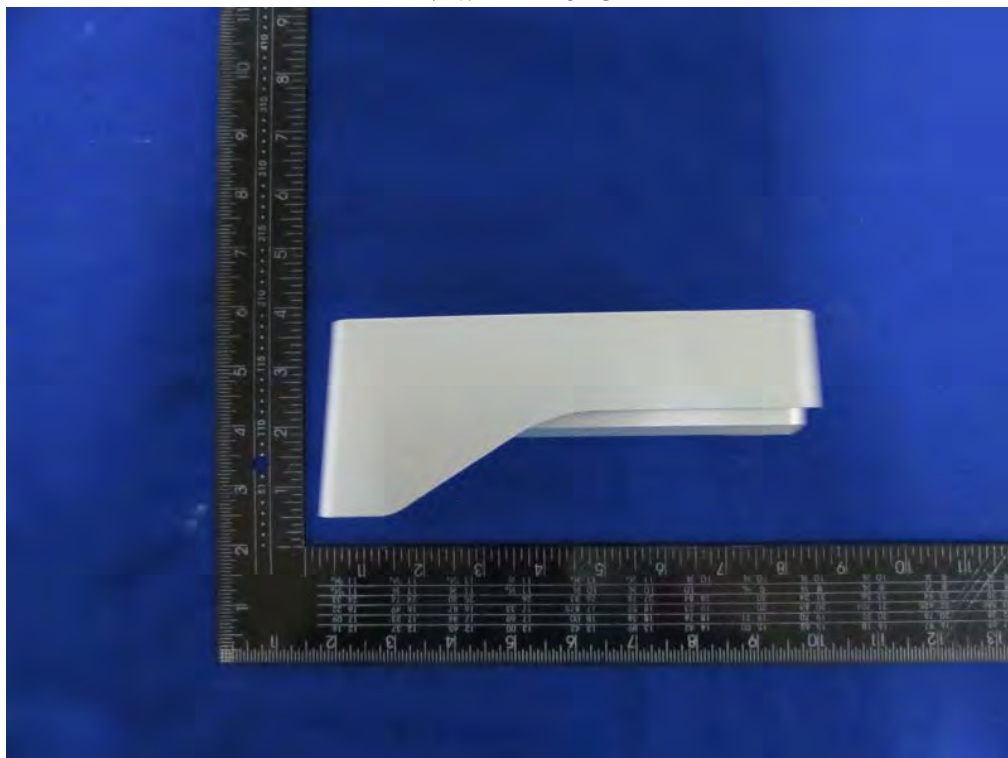

External Photos
M/N: RL-IP02C

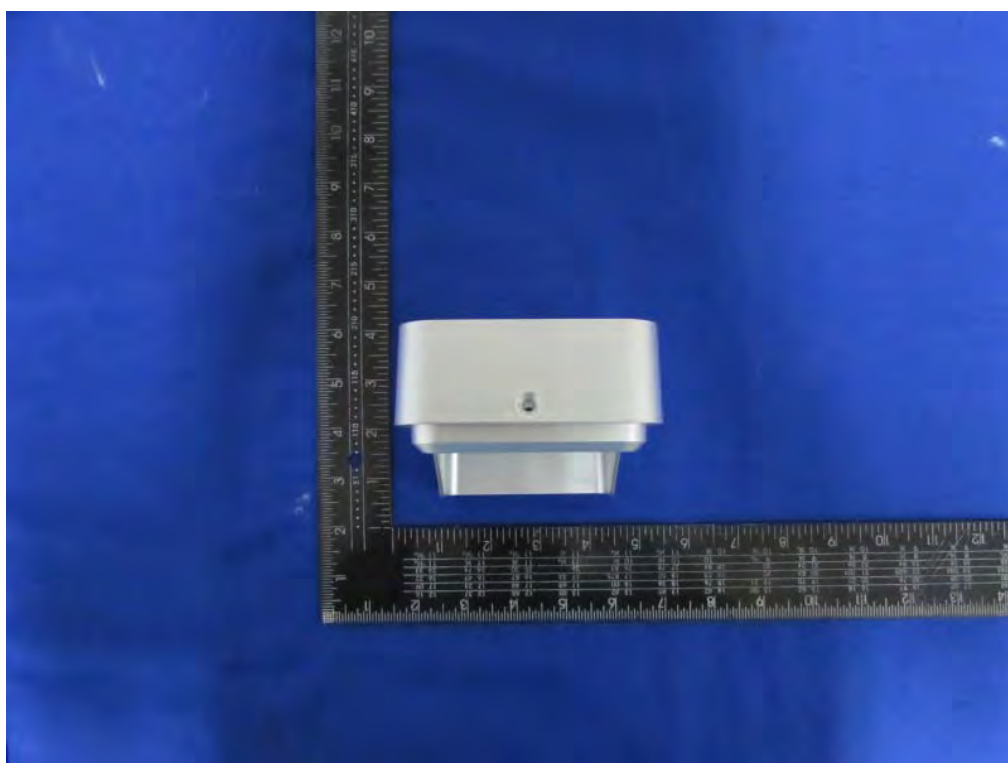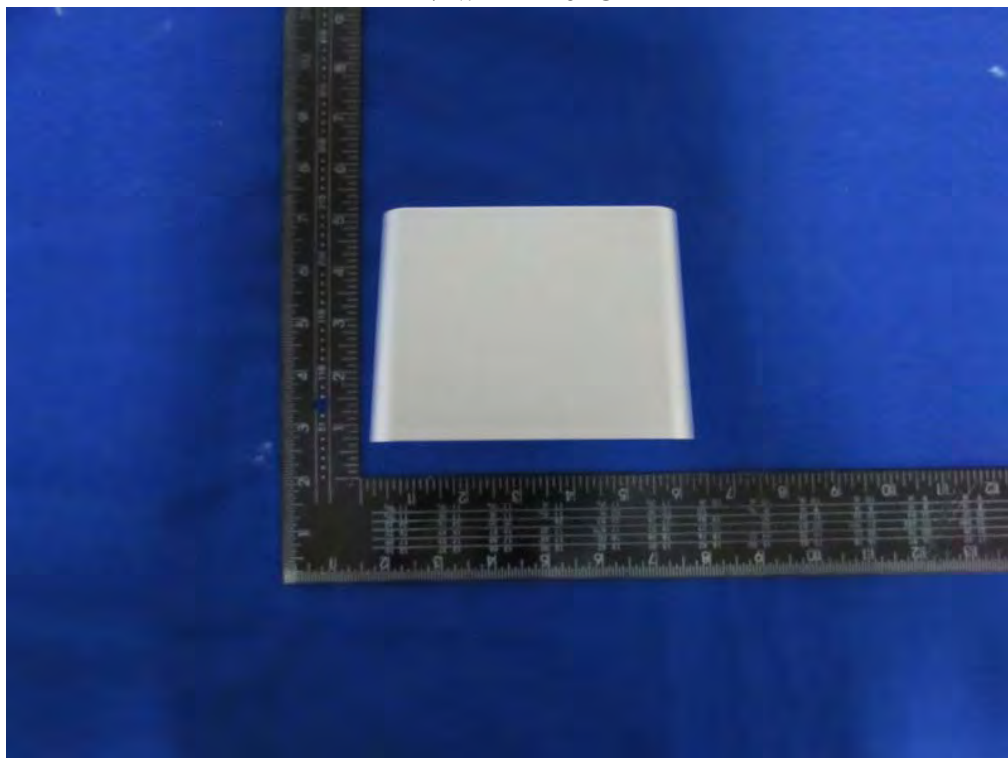

External Photos
M/N: RL-IP02C



External Photos
M/N: RL-IP02C



External Photos
M/N: RL-IP02C




Internal Photos
M/N: RL-IP02C




Wifi
Antenna





Internal Photos M/N: RL-IP02C

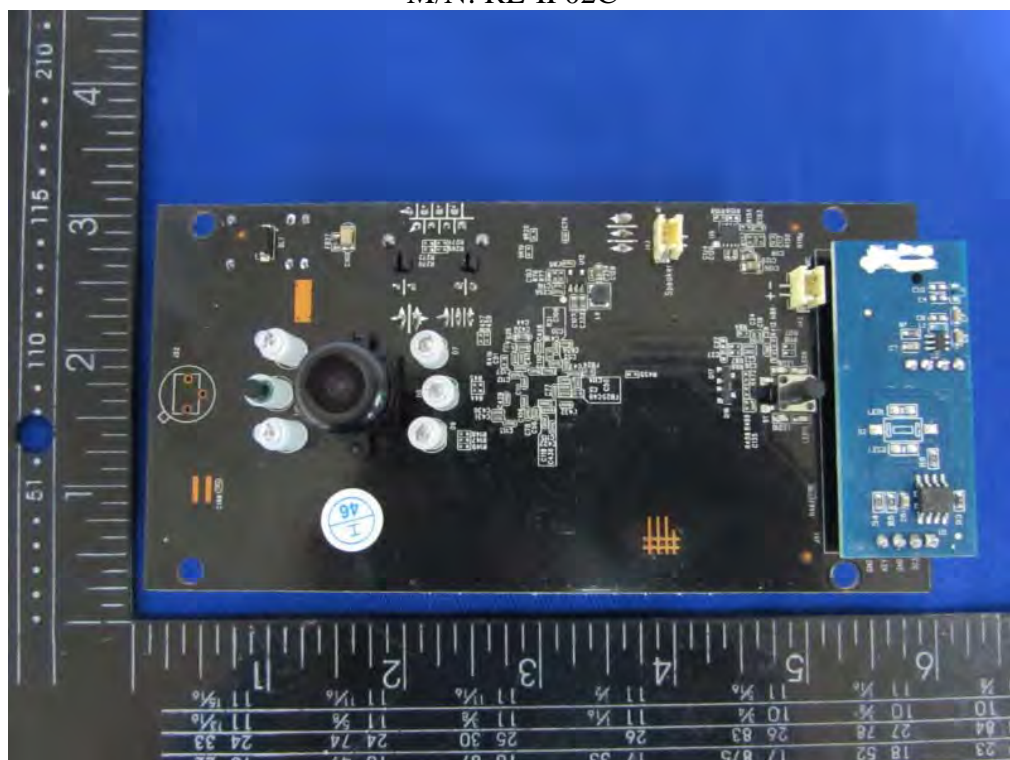

Internal Photos
M/N: RL-IP02C

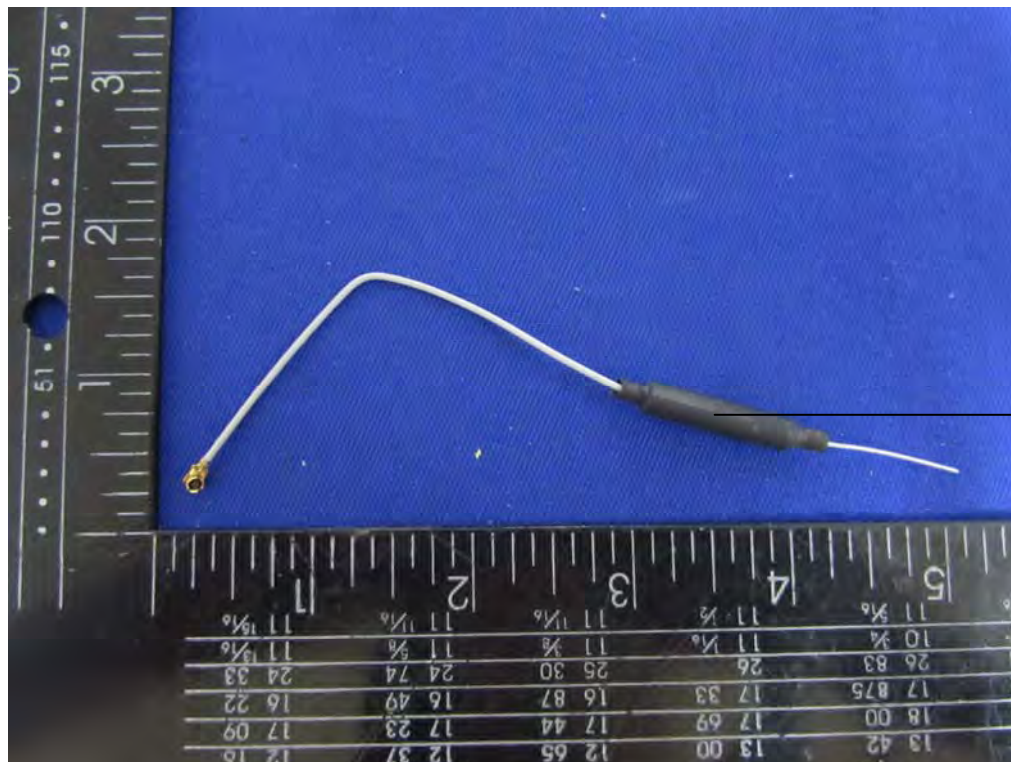

M/N: RL-IP02C

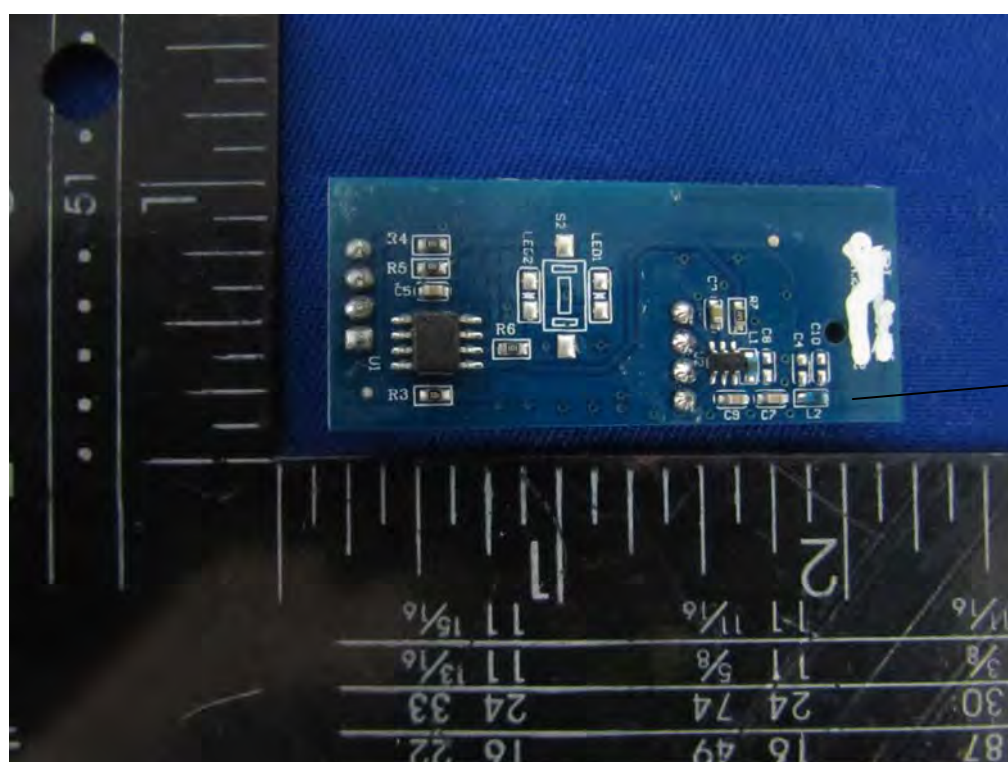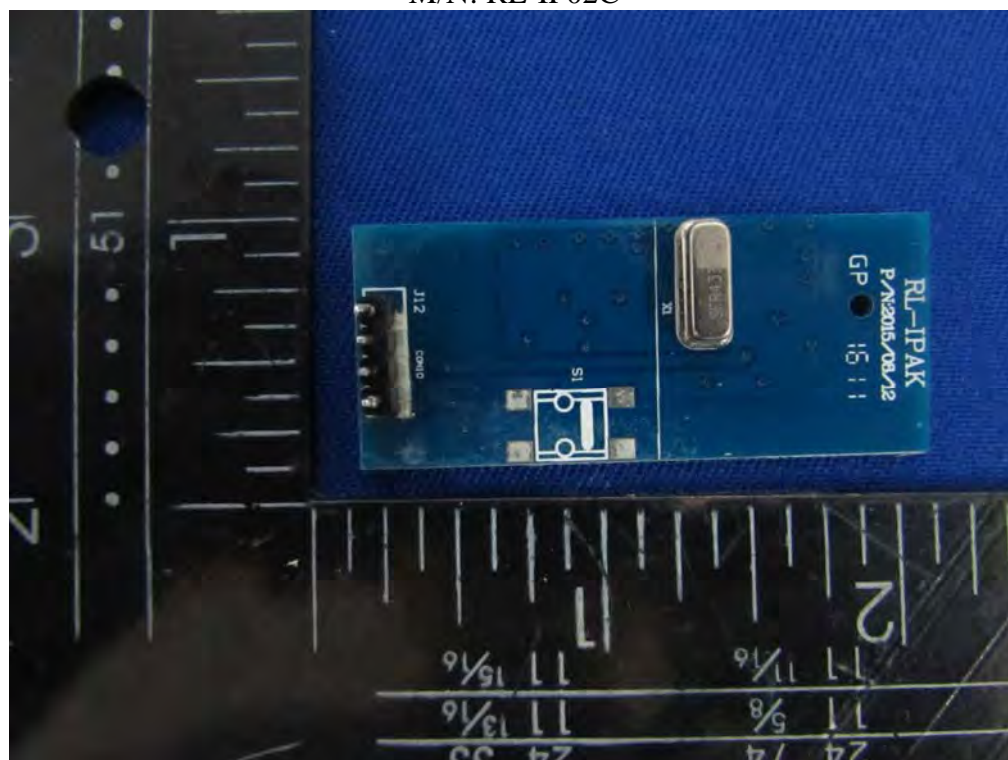

433.92
Antenna

Adapter Photos

