ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

CLASS II PERMISSIVE CHANGE TEST REPORT

Applicant:	silex technology, Inc. 2-3-1Hikaridai, Seika-cho, Soraku-gun, Kyoto 619-0237, Japan
Product Name:	SX-PCEAC2
Brand Name:	silex technology, inc.
Model No.:	SX-PCEAC2
Model Difference:	N/A
Report Number:	ER/2017/C0084-02
FCC ID:	N6C-SXPCEAC2
FCC Rule Part:	§15.247, Cat: DTS
Issue Date:	Oct. 12, 2020
Date of Test:	Jul. 01, 2020 ~ Aug. 14, 2020
Date of EUT Received:	Jul. 01, 2020

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Central RF Lab The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.
The test results of this report relate only to the tested sample identified in this report.

Approved By: _____

Jim Chang / Manager

Testing Laboratory
3702

Revision History

Report Number	Revision	Description	Issue Date	Remark
ER/2017/C0084-01	Rev.00	Original.	Aug. 24, 2020	Revised By: Tiffany Kao
ER/2017/C0084-02	Rev.01	Updated typo on page 1	Oct. 12, 2020	Revised By: Tiffany Kao

Note:

1、Disclaimer

Antenna information is provided by the applicant, test results of this report are applicable to the sample EUT received.

2、Addendum to the original test report

This test report is an addendum to the original test report **ER/2017/C0084-01,** EUTs represent the original test report and this test report are assessed as identical in hardware and software, measurement results in the original report are fully leveraged in this test report without further verification test.

Table of Contents

1 GENERAL INFORMATION

1.1 Product description

Product Name:	SX-PCEAC2
Brand Name:	silex technology, inc.
Model No.:	SX-PCEAC2
Model Difference:	N/A
Software version:	N/A
Hardware version:	N/A
Power Supply:	DC 3.3V

Wi-Fi 802.11	Frequency Range	Channels	Rated Power (dBm)	Modulation Technology
b	2412-2462	11	16.00	DSSS,
Modulation type:	CCK, DQPSK, DBPSK for DSSS			
Transistion Rate	802.11 b: 1/2/5.5/11 Mbps			

Class II Permissive Change

Scope:	The test report covers the peak output power & radiated emissions requirements of the standards referenced in the report to allow power degradation to be included in this authorization.
CIIPC:	To decrease the output power of WLAN 2.4GHz b mode without hardware change to this certified module under FCC ID: N6C-SXPCEAC2

1.2 Antenna Designation

Antenna Type	Supplier	Antenna Part No.	Freq.	Peak Antenna Gain (dBi)	Worst Antenna Gain
PCB antenna	Unictron	H2B1PC1A1C(AA258)	2.4GHz	2.58	V
		H2B1PD1A1C(AA222)		2.48	
ROD antenna	STAF	1019-013A		2.1	
	Sansei Denki	ANTDC-108A0		2.0	
		ANTDC-108B0		2.0	
		ANTDP-027A0		1.5	
		ANTDP-039A0		1.5	

Note: Pre-scanned was done on the above 7 antennas, the H2B1PC1A1C(AA258) results higher emission at 2.4GHz. Therefore, the completed set of measurement was done on the antenna to be presented on this test report.

1.3 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247
FCC KDB 558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10:2013

1.4 Test Facility

SGS Taiwan Ltd. Central RF Lab (TAF code 3702)
No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803

FCC Designation number: TW0027

1.5 Special Accessories

There are no special accessories used while test was conducted.

1.6 Equipment Modifications

There was no modification incorporated into the EUT.

2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Conducted Test (RF)

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

2.3.3 Radiated Emissions

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

2.4.1 Radiated Emission Test Sites For Measurements From 9 kHz To 30 MHz

Radiated emission below 30MHz is measured in a 9m*9m*6m semi-anechoic chamber, the measurements correspond to those obtained at an open-field test site.
There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

2.4.2 For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

2.5 Configuration of Tested System

Fig. 2-1 Radiated Emission & Conducted (Antenna Port)

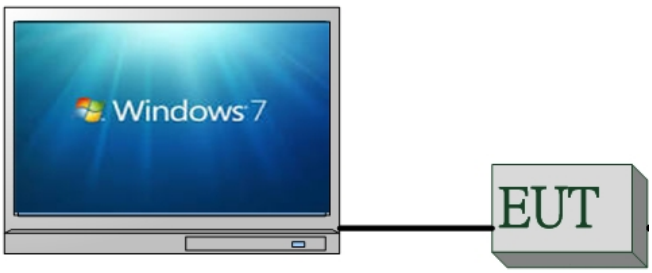

Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1	WLAN Test Software	N/A	N/A	N/A	N/A	N/A
2	Notebook	HP	6570b	N/A	N/A	N/A

3 SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.247(b) (3)	Peak Output Power	Compliant
§15.205 §15.209 §15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant

4 DESCRIPTION OF TEST MODES

4.1 Operated in 2400 ~ 2483.5MHz Band

13 channels are provided for 802.11bM.

CHANNEL	FREQUENCY (MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

4.2 The Worst Test Modes and Channel Details

1. The EUT has been tested under operating condition.
2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
3. Investigation has been done on all the possible configurations for searching the worst case.

The gevin UE is pre-scanned among below modes.

Modulation	Transmission Chain				Single Transmission Spatial	Multiple Transmission Spatial
☒ 802.11 b	☒ Ch0	☒ Ch1	☐ Ch2	☐ Ch3	☐ 1TX	☒ 2TX

4. Therefore, below summary is the modes of test configuration that yield the highest reading and generate the highest emission chosen to carry out the relevantly mandatory test items.

4.3 Radiated Emission Test:

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT
RADIATED EMISSION TEST (BELOW 1 GHz)					
802.11b	1 to 11	6	OFDM	6	2TX
RADIATED EMISSION TEST (ABOVE 1 GHz)					
802.11b	1 to 11	1, 6, 11	DSSS	1	2TX

Note:
The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11b/g/n WLAN Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

4.4 Antenna Port Conducted Mesurement:

CONDUCTED TEST					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT
802.11b	1 to 11	1, 6, 11	DSSS	1	2TX

5 MEASUREMENT UNCERTAINTY

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 0.84 dB
6dB Bandwidth	+/- 51.33 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Peak Power Density	+/- 1.3 dB
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission Measurement Uncertainty	
Polarization: Vertical	9kHz~30MHz: +-2.3dB
	30MHz - 180MHz: +/- 3.37dB
	180MHz -417MHz: +/- 3.19dB
	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB
Polarization: Horizontal	9kHz~30MHz: +-2.3dB
	30MHz - 167MHz: +/- 4.22dB
	167MHz -500MHz: +/- 3.44dB
	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

Note:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

6 PEAK OUTPUT POWER MEASUREMENT

6.1 Standard Applicable

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.

If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

Note:

As per FCC KDB 662911 D01

Unequal antenna gains, with equal transmit powers. For antenna gains given by G1, G2, …, GN dBi.

(i) If transmit signals are correlated, then Directional gain

$=10 \log[(10^{G1/20} + 10^{G2/20} + \ldots + 10^{GN/20})^2 / N_{ANT}]$ dBi

[Note the “20”s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

The antenna gain is not grater than 6 dBi. Therefore, reduction of power is not required.

6.2 Measurement Equipment Used

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power Sensor	Agilent	U2021X	MY53480015	04/22/2020	04/21/2021
Power Sensor	Agilent	U2021X	MY53480018	04/22/2020	04/21/2021
Power Sensor	Agilent	U2021X	MY53480009	04/22/2020	04/21/2021
DC Power Supply	Agilent	E3640A	MY40005907	10/22/2019	10/21/2020
Attenuator	Mini-Circuit	BW-S10W2+	2	01/02/2020	01/01/2021

6.3 Test Set-up

Power Meter:

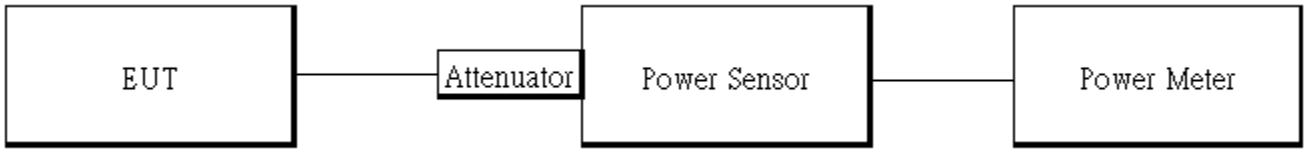

6.4 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

   Power Meter:

   It is used as the auxiliary test equipment to conduct the output power measurement.
4. Record the max. Reading as observed from Spectrum or Power Meter.

**** Note: The duty cycle factor is compensated to obtain the maximum value of measurement in average.***

6.5 Measurement Result

802.11b Ch0					
CH	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT
1	2412	1	13.67	30.00	PASS
6	2437	1	13.25	30.00	PASS
11	2462	1	12.71	30.00	PASS
802.11b Ch0					
CH	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT
1	2412	1	11.21	30.00	PASS
6	2437	1	10.61	30.00	PASS
11	2462	1	10.09	30.00	PASS

802.11b Ch1					
CH	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT
1	2412	1	13.65	30.00	PASS
6	2437	1	13.04	30.00	PASS
11	2462	1	12.21	30.00	PASS
802.11b Ch1					
CH	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT
1	2412	1	11.08	30.00	PASS
6	2437	1	10.57	30.00	PASS
11	2462	1	9.63	30.00	PASS

802.11b_2TX							
CH	Freq. (MHz)	Data Rate	Peak Output Power (dBm)		Total Peak Output Power (dBm)	Limit (dBm)	RESULT
			CH 0	CH 1			
1	2412	1	13.21	12.75	16.00	30.00	PASS
6	2437	1	12.71	12.48	15.61	30.00	PASS
11	2462	1	12.29	11.91	15.11	30.00	PASS
802.11b_2TX							
CH	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)		Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT
			CH 0	CH 1			
1	2412	1	10.75	10.31	13.58	30.00	PASS
6	2437	1	9.93	9.91	12.97	30.00	PASS
11	2462	1	9.85	9.30	12.63	30.00	PASS

7 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

7.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBμV/m) = 20 log Emission level (μV/m)

7.2 Measurement Equipment Used:

966 Chamber					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUMBER**	**LAST CAL.**	**CAL DUE.**
Horn Antenna	Schwarzbeck	BBHA9170	184	12/25/2019	12/24/2020
Horn Antenna	Schwarzbeck	BBHA9120D	1441	08/20/2019	08/19/2020
Bi-log Antenna	SCHWAZBECK	VULB9168	378	08/06/2020	08/05/2021
Loop Antenna	ETS.LINDGREN	6502	148045	10/15/2019	10/14/2020
3m Site NSA	SGS	966 chamber	N/A	01/02/2020	01/01/2021
PXA Spectrum Analyzer	Agilent	N9030A	MY53120760	04/21/2020	04/20/2021
EMI Test Receiver	R&S	ESCI 7	100759	07/13/2020	07/12/2021
Pre-Amplifier	EMC Instruments	EMC184045B	980135	01/02/2020	01/01/2021
Pre-Amplifier	HP	8447D	2944A09469	01/02/2020	01/01/2021
Attenuator	Mini-Circuit	BW-S10W2+	4	01/02/2020	01/01/2021
Filter 2400-2483.5 MHz	EWT	EWT-14-0166	M1	01/02/2020	01/01/2021
High Pass Filter	WI	WHKX4.0/18G-10SS	22	01/02/2020	01/01/2021
Coaxial Cable	Huber Suhner	succoflex 102	MY2622/2	01/02/2020	01/01/2021
Coaxial Cable	Huber Suhner	succoflex 104A	800086/4a	01/02/2020	01/01/2021
Coaxial Cable	Huber Suhner	EMC 104-SM-SM-2000	160123	01/02/2020	01/01/2021
Test Software	audix	e3	Ver. 6.11-20180413	N.C.R	N.C.R

NOTE: N.C.R refers to Not Calibrated Required.

7.3 Test SET-UP

(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

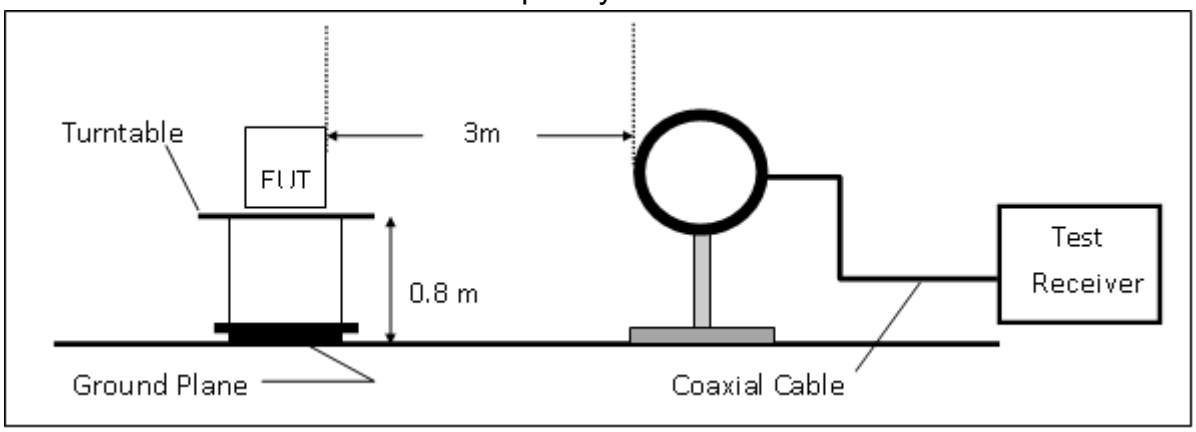

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

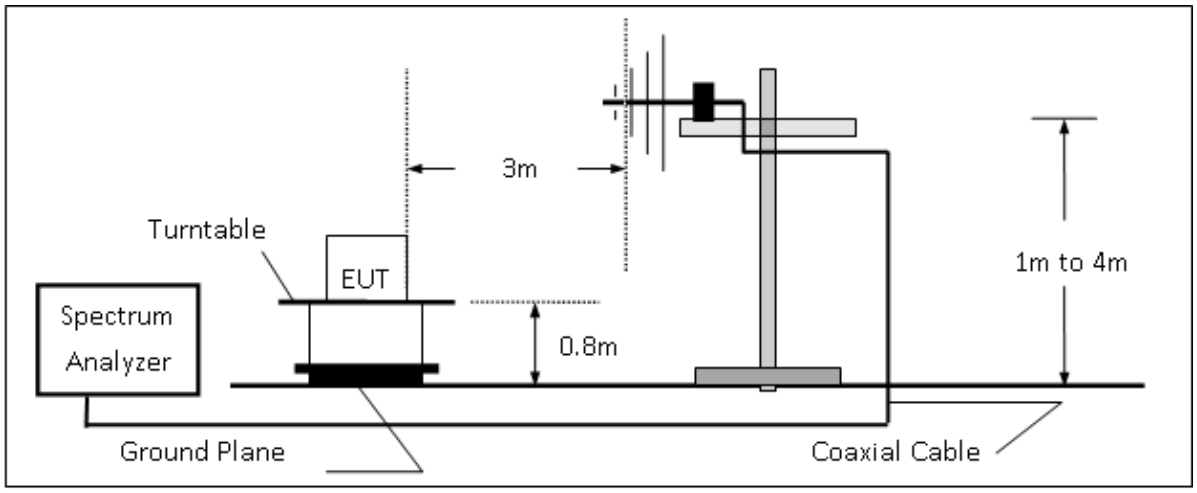

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

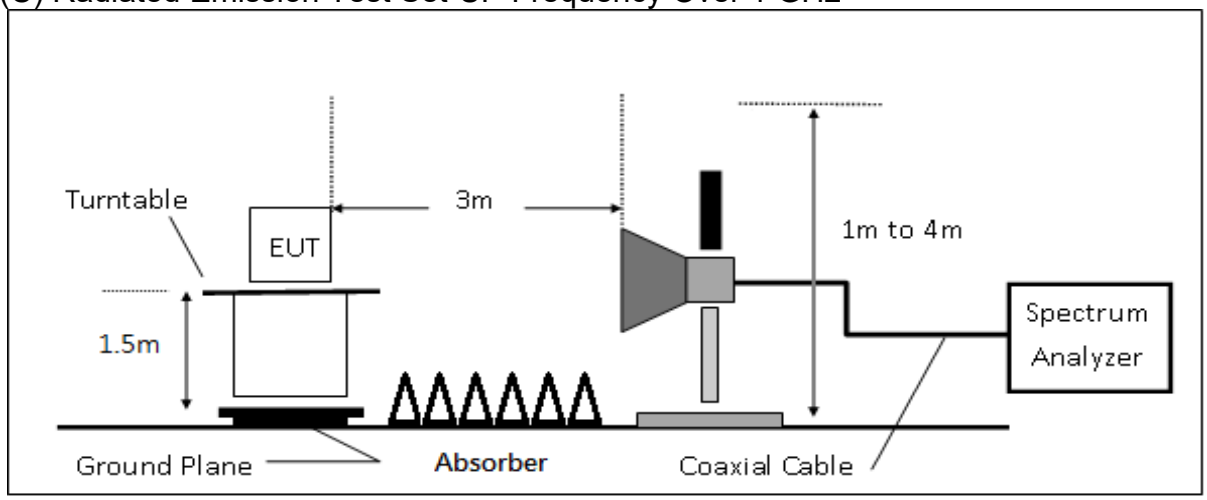

7.4 Measurement Procedure

1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
5. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
6. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
7. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
8. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
9. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
10. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
11. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
12. Repeat above procedures until all default test channel measured were complete.

7.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL – AG$$

Where *FS = Field Strength* *CL = Cable Attenuation Factor (Cable Loss)*

RA = Reading Amplitude *AG = Amplifier Gain*

AF = Antenna Factor

*The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)*

Actual FS(dBμV/m) = SPA. Reading level(dBμV) + Factor(dB)

Factor(dB) = Antenna Factor(dBμV/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

7.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per RSS-GEN §6.13.2 was not reported.

7.7 Measurement Result

Note:

1. *Refer to next page spectrum analyzer data chart and tabular data sheets.*
2. *Measurements are completed at peak and average level, the mark of average is the highest emission in restricted bands*

7.7.1 Radiated Band Edge Measurement Result

Report Number	:ER-2017-C0084-01	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2020-08-12
Test Frequency	:2412 MHz	Temp./Humi.	:24.8/61
Test Mode	:Bandedge CH Low	Antenna Pol.	:VERTICAL
EUT Pol	:E2 Plane	Engineer	:Nick

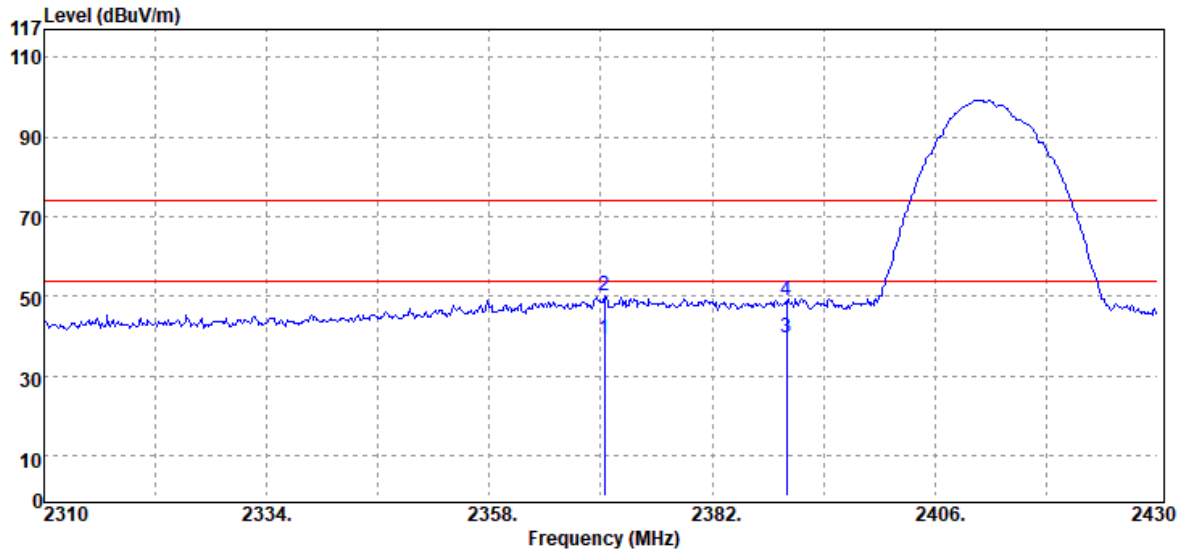

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2370.36	Average	38.11	0.96	39.07	54.00	-14.93
2370.36	Peak	49.28	0.96	50.24	74.00	-23.76
2390.00	Average	38.71	0.92	39.63	54.00	-14.37
2390.00	Peak	48.25	0.92	49.17	74.00	-24.83

Report Number	:ER-2017-C0084-01	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2020-08-12
Test Frequency	:2412 MHz	Temp./Humi.	:24.8/61
Test Mode	:Bandedge CH Low	Antenna Pol.	:HORIZONTAL
EUT Pol	:E2 Plane	Engineer	:Nick

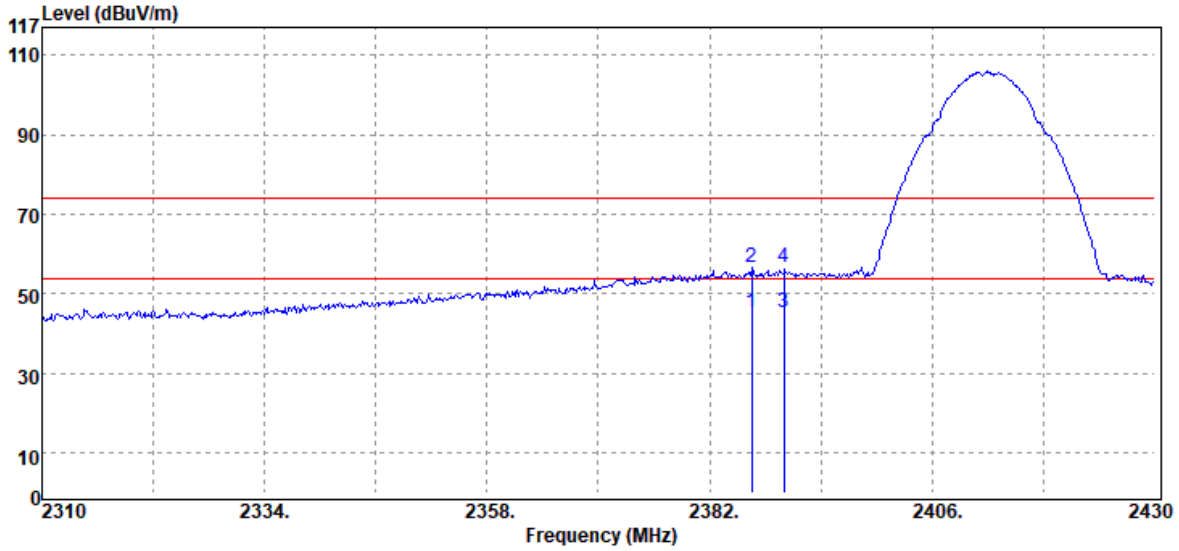

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2386.56	Average	44.30	0.92	45.22	54.00	-8.78
2386.56	Peak	55.80	0.92	56.72	74.00	-17.28
2390.00	Average	44.49	0.92	45.41	54.00	-8.59
2390.00	Peak	55.68	0.92	56.60	74.00	-17.40

Report Number	:ER-2017-C0084-01	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2020-08-12
Test Frequency	:2462 MHz	Temp./Humi.	:24.8/61
Test Mode	:Bandedge CH High	Antenna Pol.	:VERTICAL
EUT Pol	:E2 Plane	Engineer	:Nick

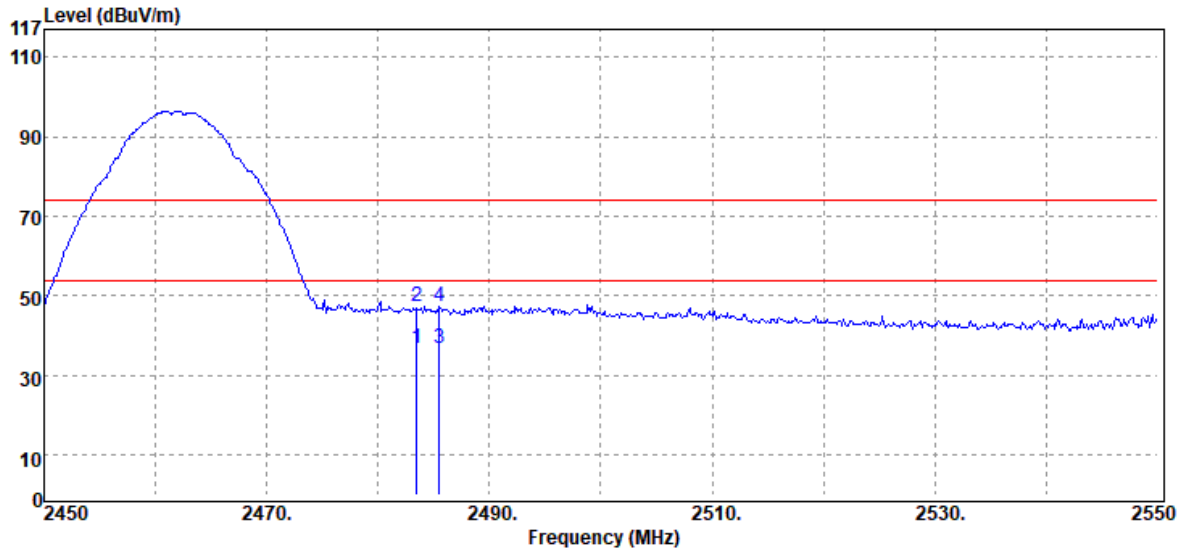

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	36.35	0.67	37.02	54.00	-16.98
2483.50	Peak	46.66	0.67	47.33	74.00	-26.67
2485.50	Average	36.11	0.66	36.77	54.00	-17.23
2485.50	Peak	46.86	0.66	47.52	74.00	-26.48

Report Number	:ER-2017-C0084-01	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2020-08-12
Test Frequency	:2462 MHz	Temp./Humi.	:24.8/61
Test Mode	:Bandedge CH High	Antenna Pol.	:HORIZONTAL
EUT Pol	:E2 Plane	Engineer	:Nick

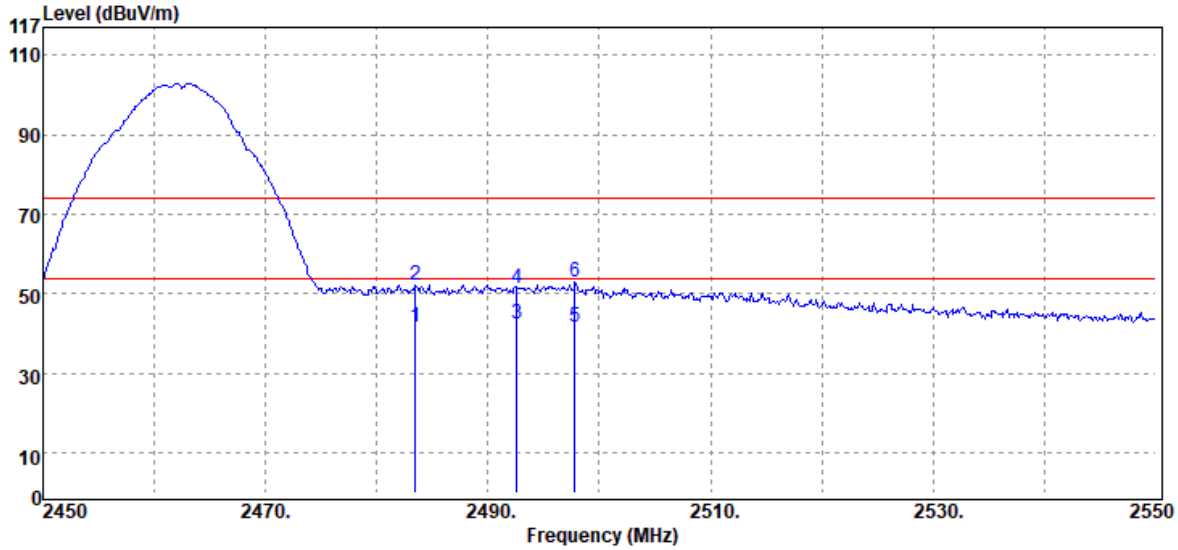

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	41.15	0.67	41.82	54.00	-12.18
2483.50	Peak	51.72	0.67	52.39	74.00	-21.61
2492.60	Average	41.92	0.63	42.55	54.00	-11.45
2492.60	Peak	50.87	0.63	51.50	74.00	-22.50
2497.80	Average	41.14	0.61	41.75	54.00	-12.25
2497.80	Peak	52.58	0.61	53.19	74.00	-20.81

7.7.2 Below 1GHz Worst-Case Emission:

Report Number	:ER-2017-C0084-01	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2020-08-12
Test Frequency	:2437 MHz	Temp./Humi.	:24.8/61
Test Mode	:Tx CH Mid	Antenna Pol.	:VERTICAL
EUT Pol	:E2 Plane	Engineer	:Nick

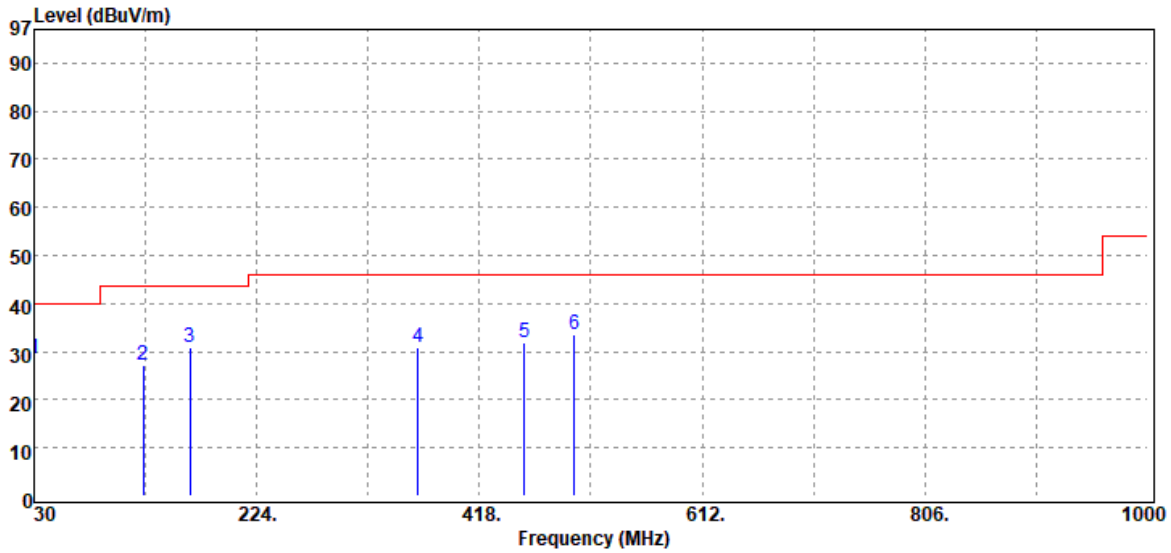

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
30.00	Peak	37.33	-8.72	28.61	40.00	-11.39
125.06	Peak	36.51	-9.19	27.32	43.50	-16.18
165.80	Peak	38.29	-7.50	30.79	43.50	-12.71
364.65	Peak	35.63	-4.76	30.87	46.00	-15.13
456.80	Peak	34.31	-2.39	31.92	46.00	-14.08
500.45	Peak	36.58	-2.92	33.66	46.00	-12.34

Report Number	:ER-2017-C0084-01	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2020-08-12
Test Frequency	:2437 MHz	Temp./Humi.	:24.8/61
Test Mode	:Tx CH Mid	Antenna Pol.	:HORIZONTAL
EUT Pol	:E2 Plane	Engineer	:Nick

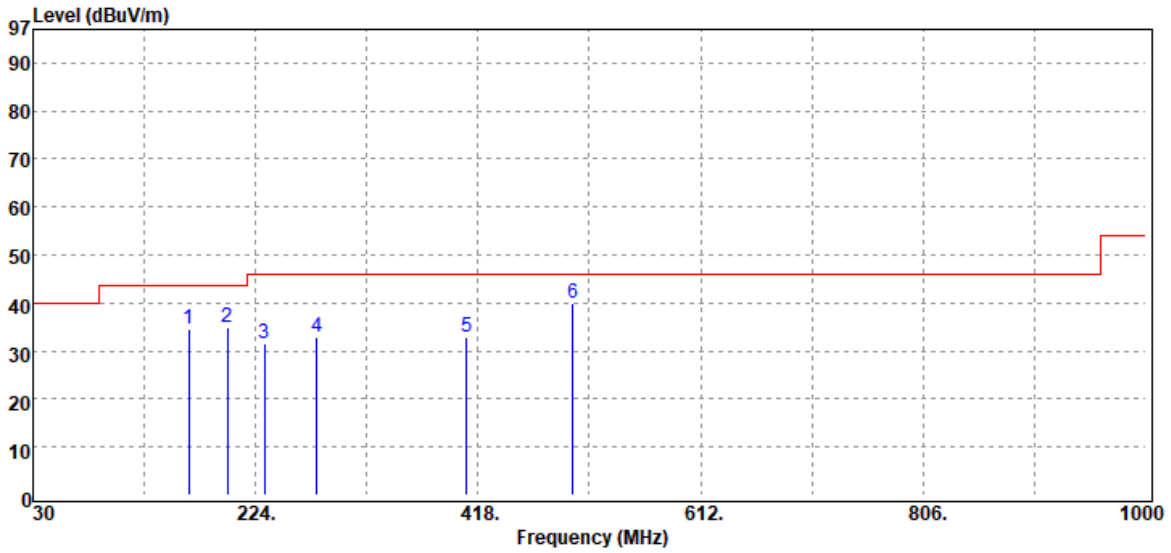

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
165.80	Peak	42.19	-7.50	34.69	43.50	-8.81
199.75	Peak	44.46	-9.64	34.82	43.50	-8.68
231.76	Peak	40.37	-8.82	31.55	46.00	-14.45
277.35	Peak	39.73	-6.70	33.03	46.00	-12.97
408.30	Peak	37.25	-4.41	32.84	46.00	-13.16
500.45	Peak	42.98	-2.92	40.06	46.00	-5.94

7.7.3 Above 1GHz Emission:

Report Number	:ER-2017-C0084-01	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2020-08-12
Test Frequency	:2412 MHz	Temp./Humi.	:24.8/61
Test Mode	:Tx CH Low	Antenna Pol.	:VERTICAL
EUT Pol	:E2 Plane	Engineer	:Nick

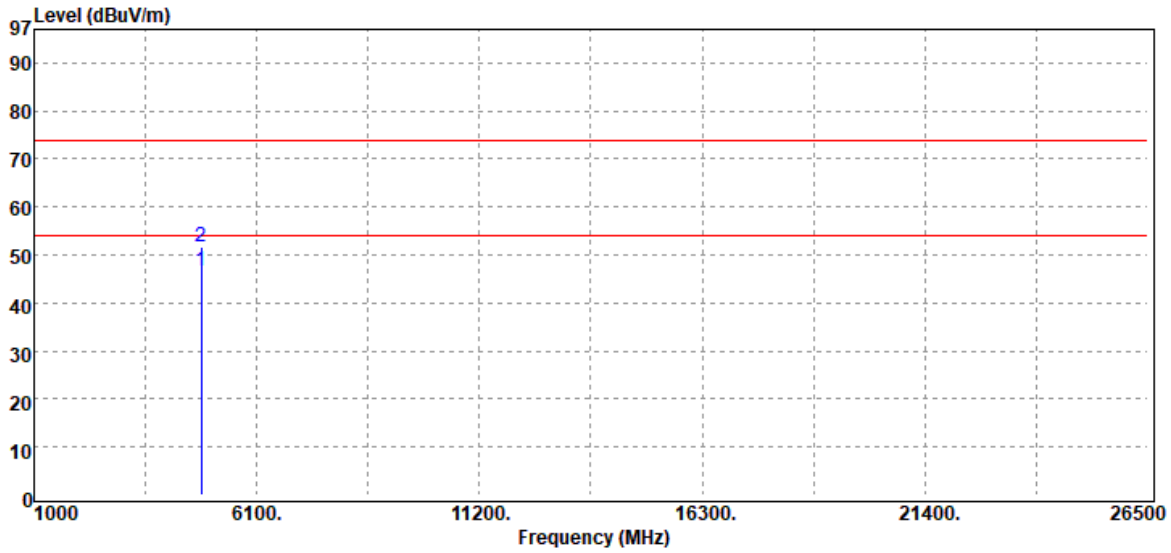

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	39.62	7.13	46.75	54.00	-7.25
4824.00	Peak	44.45	7.13	51.58	74.00	-22.42

Report Number	:ER-2017-C0084-01	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2020-08-12
Test Frequency	:2412 MHz	Temp./Humi.	:24.8/61
Test Mode	:Tx CH Low	Antenna Pol.	:HORIZONTAL
EUT Pol	:E2 Plane	Engineer	:Nick

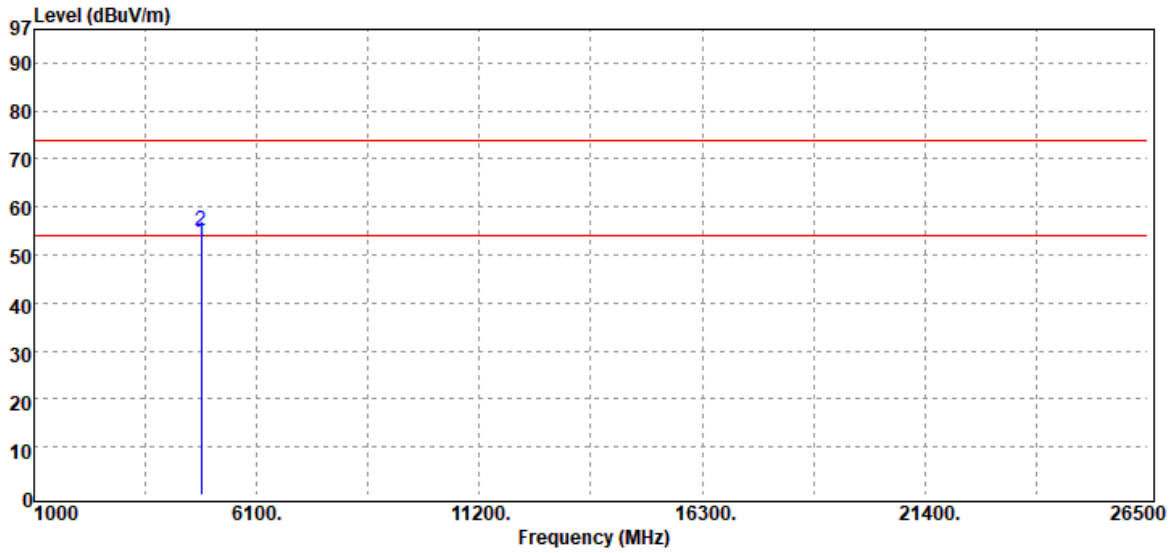

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	45.66	7.13	52.79	54.00	-1.21
4824.00	Peak	48.04	7.13	55.17	74.00	-18.83

Report Number	:ER-2017-C0084-01	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2020-08-12
Test Frequency	:2437 MHz	Temp./Humi.	:24.8/61
Test Mode	:Tx CH Mid	Antenna Pol.	:VERTICAL
EUT Pol	:E2 Plane	Engineer	:Nick

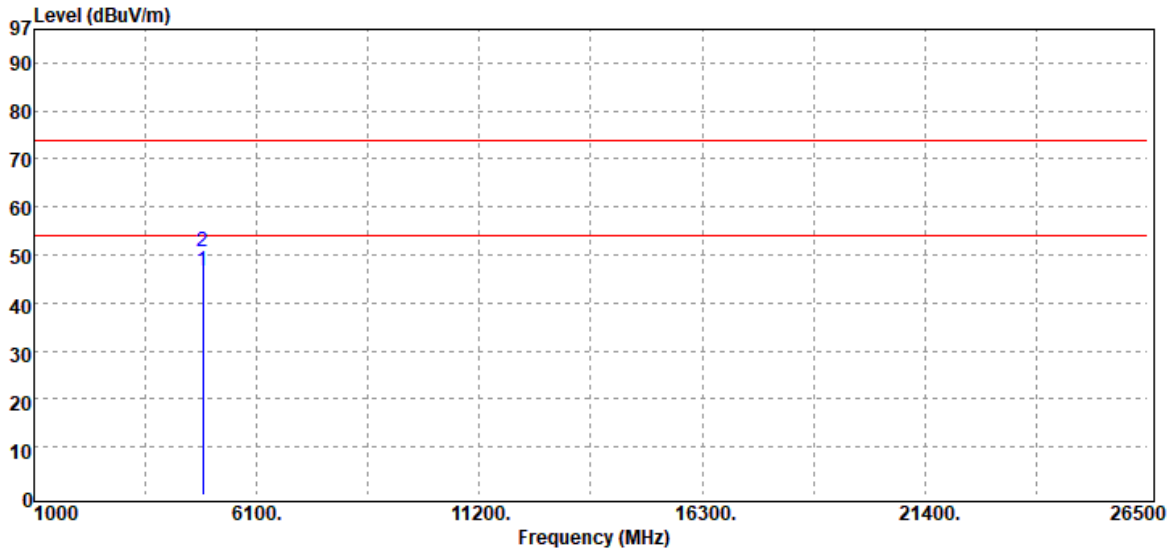

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	39.11	7.51	46.62	54.00	-7.38
4874.00	Peak	43.08	7.51	50.59	74.00	-23.41

Report Number	:ER-2017-C0084-01	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2020-08-12
Test Frequency	:2437 MHz	Temp./Humi.	:24.8/61
Test Mode	:Tx CH Mid	Antenna Pol.	:HORIZONTAL
EUT Pol	:E2 Plane	Engineer	:Nick

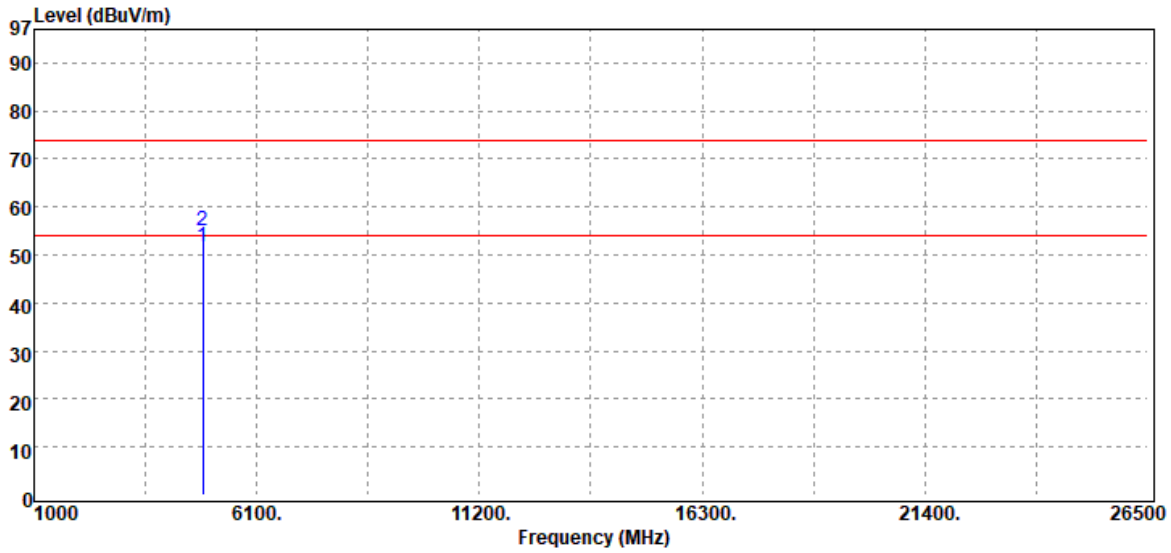

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	44.29	7.51	51.80	54.00	-2.20
4874.00	Peak	47.61	7.51	55.12	74.00	-18.88

Report Number	:ER-2017-C0084-01	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2020-08-12
Test Frequency	:2462 MHz	Temp./Humi.	:24.8/61
Test Mode	:Tx CH High	Antenna Pol.	:VERTICAL
EUT Pol	:E2 Plane	Engineer	:Nick

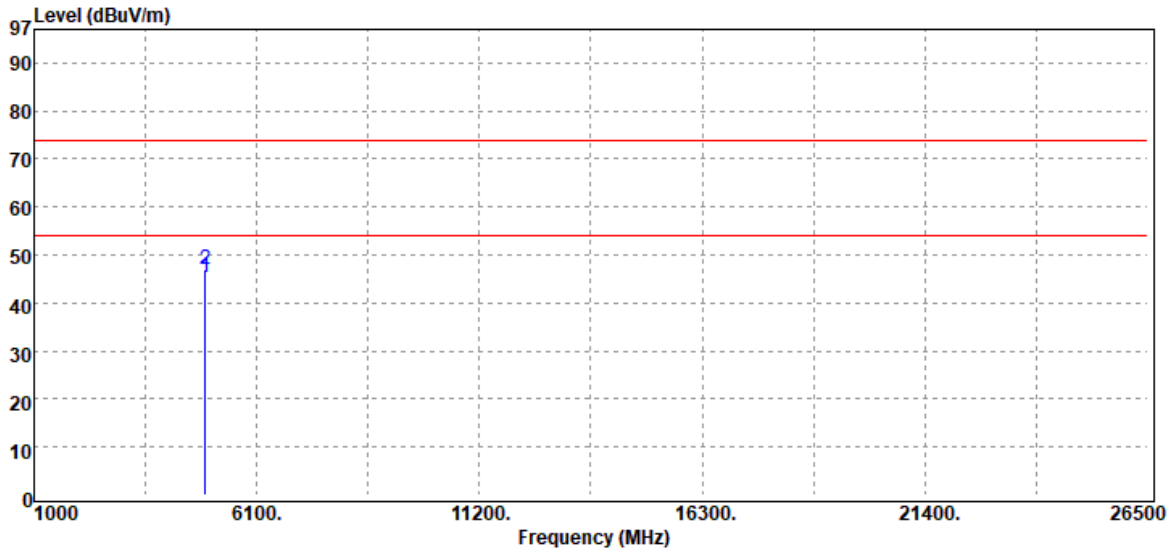

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	37.54	7.84	45.38	54.00	-8.62
4924.00	Peak	39.27	7.84	47.11	74.00	-26.89

Report Number	:ER-2017-C0084-01	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2020-08-12
Test Frequency	:2462 MHz	Temp./Humi.	:24.8/61
Test Mode	:Tx CH High	Antenna Pol.	:HORIZONTAL
EUT Pol	:E2 Plane	Engineer	:Nick

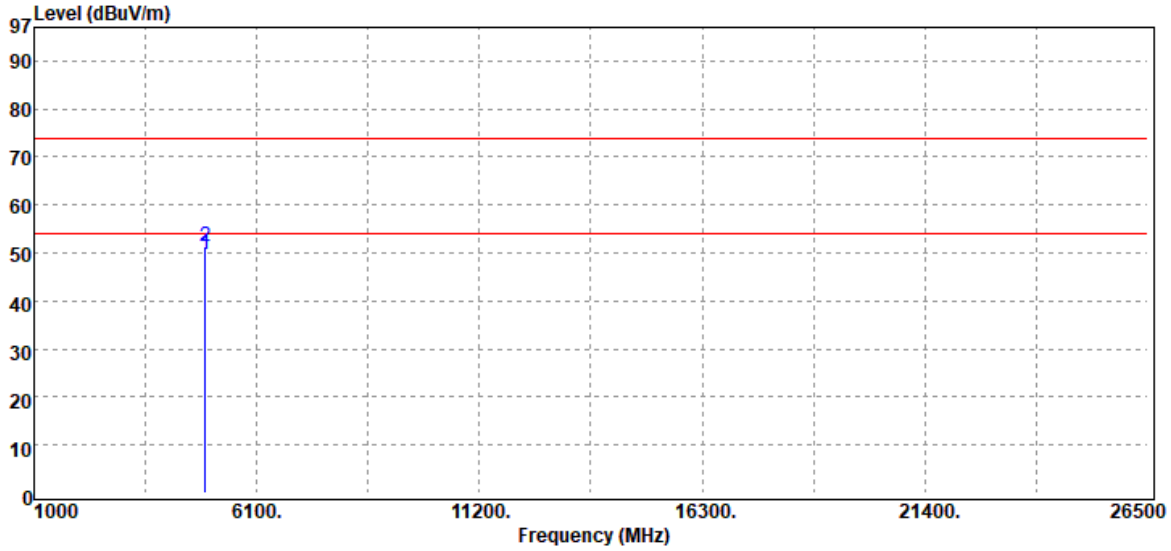

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	41.96	7.84	49.80	54.00	-4.20
4924.00	Peak	43.45	7.84	51.29	74.00	-22.71

8 ANTENNA REQUIREMENT

8.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

8.2 Antenna Connected Construction

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.