

GolfJoy Spica 3 Product manual product composition

Sensors



Power adapter




parvicostellae



Calibrate the rod

Pole head stickers

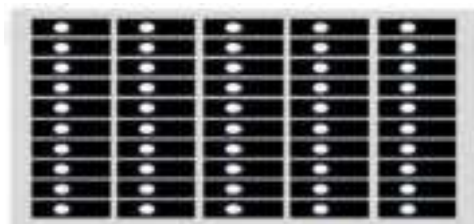

product presentation



Sensors

Color: grey (grey
on the front and
white on the back)

Size: 99*163*340
cm

Weight: 3 kg

Material: (outer shell

PC+TPU) Battery:

nominal capacity 12.8

Ah

Charging time: 3h (90%), 4.5h
(100%), driving range: 6h-7h

Connection mode: wifi, Ethernet

1. Power button

Power on: Click (1s) to power on
Shut down: Click (1s) to shut down

2. Power input port:

Charge using the DC terminal of the power adapter.

3. Ethernet interface:

Use it when connecting the client to hit the ball (one end of the network cable is connected to the sensor network port, and the other end is connected to the computer network port); use it when upgrading the version (one end of the network cable is connected to the sensor network port, and the other end is connected to the external network port).

4. Charging indicator light:

When the power adapter is plugged in for charging, the charging indicator light is red and the indicator light is off when the power adapter is removed

5. Status indicator light:

During startup: The blue light flashes

Power on: Blue light is on

Ball detected: Green light on

6. LCD display:

adapter:

Input: 100–240 VAC, 50/60 Hz,

2.5A output: 24V/3.75A, 90 W

MAX

parvicostellae

Super category 6 gigabit shielded network cable (m


usage mode

● Sensor

orientation

positioning: sensor

area size:

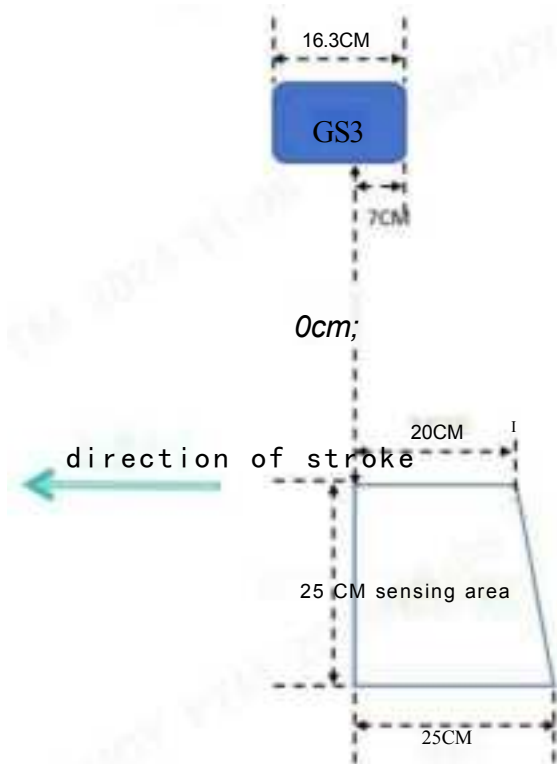

Right-hand mode

● Connect to the APP in one way:

APP name: golfjoy_ space 2

- 1. STA (forwarded through router):** The phone or tablet connects to the router via wifi, and the sensor device connects via wifi

Connect to the router.



● Connection APP usage

mode 2: APP name:

golfjoy_space2

AP (hotspot connection): The sensor acts as a hotspot, and the phone or tablet connects directly to the wifi.




● How to connect the client:

Client version: GolfJoy V 2.1.0.0[GRS series sensor type selection]



Paddle head sticker method:

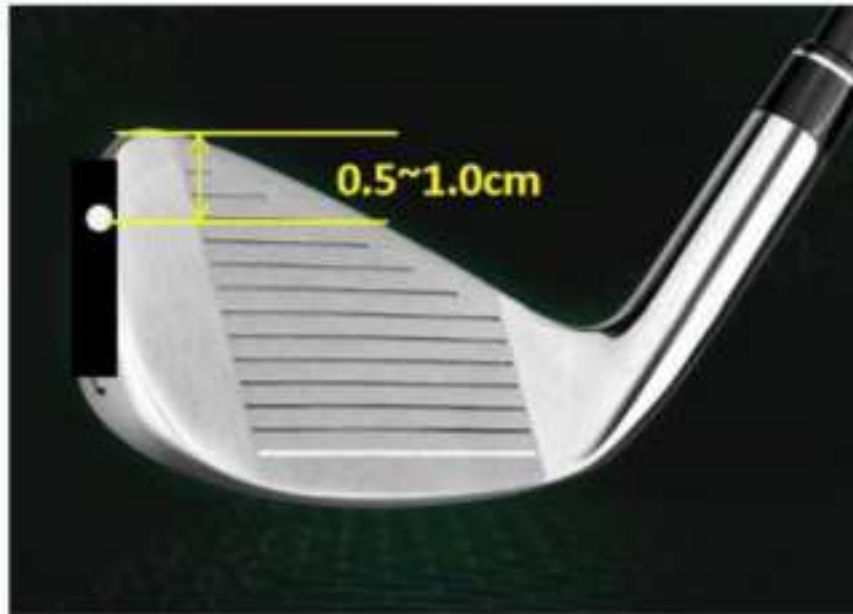

On data output

Flight distance, ball speed, take-off Angle, backspin, sidespin
(total spin, axis of rotation), club speed, ball striking efficiency,
attack Angle, clubhead trajectory

About version upgrades

On energy conservation

Sleep mode: 2 min

FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful

interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

This projector complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This device should be installed and operated with a minimum distance of 20cm between the radiator and user body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

FCC WARNING: This equipment may generate or use radio frequency energy. Changes or modifications to this equipment may cause harmful interference unless the modifications are expressly approved in the

instruction manual. The user could lose the authority to operate this equipment if an unauthorized change or modification is made.

This remote has been evaluated to meet general RF exposure requirement.

This remote can be used in portable exposure condition without restriction.

ISED Statement

-English: This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause

interference, and (2) This device must accept any interference, including interference that may cause

undesired operation of the device.

The digital apparatus complies with Canadian CAN ICES-3(B)/NMB-3(B).

-French: Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'

appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouilla

ge radioélectrique subi, même si le

brouillage est susceptible d'empêcher le

fonctionnement. L'appareil numérique du commerce conforme canadien peut-3(b)/nmb-3(b).

This device meets the exemption from the routine evaluation

limits in section 2.5 of RSS 102 and compliance with RSS 102 RF exposure, users can obtain Canada

n

information on RF exposure and compliance.

Cet appareil est conforme à l'exemption des limites d'évaluation courante dans la section 2.5 du CNR

-102 et conformité avec

RSS 102 de l'exposition aux RF, les utilisateurs peuvent obtenir des données canadiennes sur l'expositi

on aux champs RF et la

conformité .

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment.

Cet équipement est conforme aux limites d'exposition aux rayonnements du Canada établies pour un environnement non contrôlé .

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement doit être installé et utilisé à une distance minimale de 20 cm entre le radiateur et votre corps