

承 認 書

SPECIFICATION FOR APPROVAL

客 戶:
CUSTOMER: Dongguan Haohui electronic technology Co., LTD

客 戶 料 號:
CUST P/N:

豪 輝 料 號:
FINE P/N: G50 双槽-6.5UH 单线圈 0.08*105P*10TS

產 品 型 號:
DESC: Φ50MMX5.0MMX0.8MM PC40 材质

日 期:
DATE: 2023/4/15

版 本:
Version: A.0.05

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
黃燕銘	周文韜	周文韜	

Dongguan Haohui electronic technology Co., LTD

Factory address: Sukeng village, Changping Town, Dongguan City

TEL: 0769-36820766

FAX: 0769-84526500


E-mail: 281749556@qq.com

版本變更履歷

Version Change History


SPECIFICATION

產 品 型 號: DESC	Φ20.5x40-6.5uH-0.08x105-10mm-	版本 Rev: A.0	客戶 CUST:	XXX	
			客戶料號 CUST P/N:		
(mm)			A	40.0±1.5	

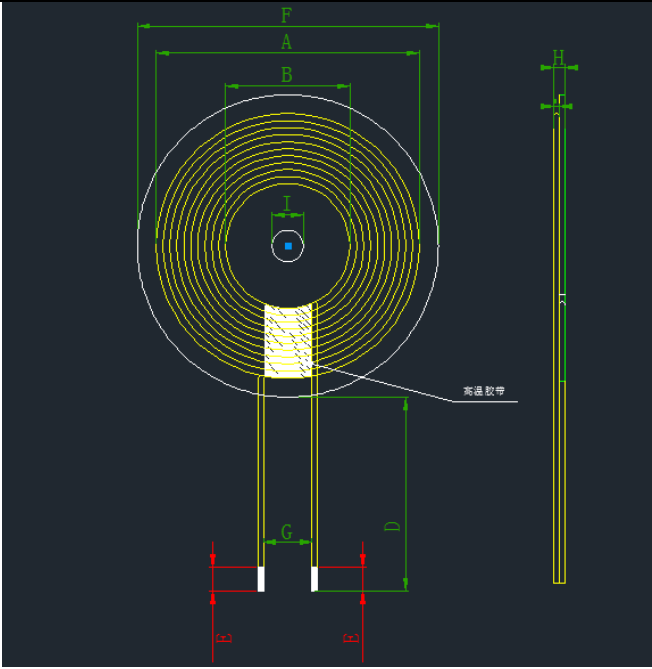

B	20.5±0.5
C	1.25 Max
D	10±2
E	4±2
F	49±1
G	10.0 ref
H	2.2 Max
I	5.3 ref

二、原理图 SCHEMATIC DIAGRAM:

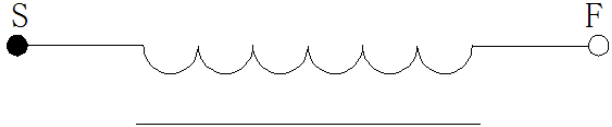

注：
1.交叉出线；
2.出线位置缠 8mm(ref)宽度高温胶纸 1-2Ts；
3.线圈贴圆形硬磁片带槽，磁片尺 49±1mm,内孔 5.3mm,厚度为 0.95±0.2mm。

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	丝包线 0.08*105P	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10 ℃, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.8uH ±20%单独线圈	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.5uH ±10%加磁片	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤50mΩ		LCZ METER 502B

拟制/日期 PREPARED BY/DATE	审核/日期 CHECKED BY/DATE
陈小英 2023/4/15	周文韬 2023/4/16