



TEST REPORT NO: RU1063/4785  
COPY NO: .....  
ISSUE NO: 1  
FCC ID: NEO50-0606Series

**REPORT ON THE CERTIFICATION TESTING OF A  
Aerial Facilities Limited  
5 CHANNEL UHF Signal Enhancer  
WITH RESPECT TO  
THE FCC RULES CFR 47, PART 90 Subpart I  
PRIVATE LAND MOBLIE REPEATER.**

TEST DATE: 1<sup>st</sup> August – 10<sup>th</sup> September 2003

TESTED BY: ..... J CHARTERS  
APPROVED BY: ..... P GREEN  
PRODUCT MANAGER  
EMC  
DATE: .....

Distribution:

- Copy Nos:
1. Aerial Facilities Limited
  2. TCB: TRL Compliance Services Limited
  3. TRL EMC

THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE

**TRL COMPLIANCE SERVICES LTD EMC DIVISION**

LONG GREEN FORTHAMPTON GLOUCESTER GL19 4QH UNITED KINGDOM  
TELEPHONE +44 (0)1684 833818 FAX +44 (0)1684 833858  
E-MAIL [test@trlcompliance.com](mailto:test@trlcompliance.com) [www.trlcompliance.com](http://www.trlcompliance.com)



FS 21805

## CONTENTS

	PAGE
CERTIFICATE OF CONFORMITY & COMPLIANCE	3
APPLICANT'S SUMMARY	4
EQUIPMENT TEST CONDITIONS	5
TESTS REQUIRED	5
TEST RESULTS	6-65

	ANNEX
PHOTOGRAPHS	A
PHOTOGRAPH No. 1: Test setup	
PHOTOGRAPH No. 2: Test setup	
APPLICANT'S SUBMISSION OF DOCUMENTATION LIST	B

### Notes:

- |    |   |     |                                     |
|----|---|-----|-------------------------------------|
| 1. | Component failure during test   | YES | <input type="checkbox"/>            |
|    |   | NO  | <input checked="" type="checkbox"/> |
| 2. | If Yes, details of failure:   |     |                                     |
| 3. | The facilities used for the testing of the product contain in this report are FCC Listed. |     |                                     |



## CERTIFICATE OF CONFORMITY & COMPLIANCE

FCC IDENTITY: NEO50-0606Series

PURPOSE OF TEST: CERTIFICATION

TEST SPECIFICATION: FCC RULES CFR 47, Part 90 Subpart I

TEST RESULT: Compliant to Specification

EQUIPMENT UNDER TEST: 5 CHANNEL UHF Signal Enhancer

EQUIPMENT TYPE: Private Land Mobile Repeater

MAXIMUM GAIN: +98.03dBm

MAXIMUM INPUT: -77.0dBm

MAXIMUM OUTPUT: +23.0dBm

ANTENNA TYPE: Not applicable

CHANNEL SPACING: 12.5kHz

Channel No.	Uplink	Downlink
1	453.300MHz	458.300MHz
2	453.600MHz	458.600MHz
3	453.500MHz	458.500MHz
4	453.200MHz	458.200MHz
5	453.750MHz	458.750MHz

FREQUENCY GENERATION: N/A

MODULATION TYPE: F3E

POWER SOURCE(s): 24Vdc

TEST DATE(s): 1<sup>st</sup> August – 10<sup>th</sup> September 2003

ORDER No(s): 19800

APPLICANT: Aerial Facilities Limited

ADDRESS: Aerial House  
Latimer Park, Latimer  
Chesham  
Buckinghamshire  
HP5 1TU  
United Kingdom

TESTED BY: \_\_\_\_\_ J CHARTERS

APPROVED BY: \_\_\_\_\_ P GREEN  
PRODUCT  
MANAGER EMC

## APPLICANT'S SUMMARY

EQUIPMENT UNDER TEST (EUT):	5 CHANNEL UHF Signal Enhancer
EQUIPMENT TYPE:	50-0606063
PURPOSE OF TEST:	CERTIFICATION
TEST SPECIFICATION(s):	FCC RULES CFR 47, Part 90 Subpart I
TEST RESULT:	COMPLIANT      Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
APPLICANT'S CATEGORY:	MANUFACTURER <input checked="" type="checkbox"/> IMPORTER <input type="checkbox"/> DISTRIBUTOR <input type="checkbox"/> TEST HOUSE <input type="checkbox"/> AGENT <input type="checkbox"/>
APPLICANT'S ORDER No(s):	19801
APPLICANT'S CONTACT PERSON(s):	Mr Peter Bradfield
E-mail address:	Peterb@aerial.co.uk
APPLICANT:	Aerial Facilities Limited
ADDRESS:	Aerial House Latimer Park, Latimer Chesham Buckinghamshire HP5 1TU United Kingdom
TEL:	+44 (0)1494777020
FAX:	+44 (0)149477020
MANUFACTURER:	Aerial Facilities Limited
EUT(s) COUNTRY OF ORIGIN:	United Kingdom
TEST LABORATORY:	TRL EMC
UKAS ACCREDITATION No:	0728
TEST DATE(s)	1 <sup>st</sup> August – 10 <sup>th</sup> September 2003
TEST REPORT No:	RU1063/4785

### EQUIPMENT TEST / EXAMINATIONS REQUIRED

1.	<b>TEST/EXAMINATION</b>	<b>RULE PART</b>	<b>APPLICABILITY</b>	<b>RESULT</b>
	RF Power Output	90.205	Yes	Complies
	Audio Frequency Response	TIA EIA-603.3.2.6	N/A	N/A
	Audio Low-Pass Filter Response	TIA EIA-603.3.2.6	N/A	N/A
	Modulation Limiting	TIA EIA-603.3.2.6	N/A	N/A
	Occupied Bandwidth	90.210	Yes	Complies
	Spurious Emissions at Antenna Terminals	90.210	Yes	Complies
	Field Strength of Spurious Emissions	90.210	Yes	Complies
	Frequency Stability	90.213	N/A(note 1)	N/A
	Transient behaviour	90.214	N/A(note 2)	N/A

**Notes:**

1 The EUT does not contain modulation circuitry, therefore the test was not performed.

2 The EUT is not a keyed carrier system, therefore the test was not performed.


2. Product Use: Private Land Mobile Repeater
3. Emission Designator: F3E
4. Temperatures: Ambient (Tnom) 24°C
5. Supply Voltages: Vnom 24Vac
- Note: Vnom voltages are as stated above unless otherwise shown on the test report page
6. Equipment Category: Single channel ☐  
Two channel ☐  
Multi-channel ☒
7. Channel spacing: Narrowband ☒ 12.5kHz  
Wideband ☐
8. Test Location TRL Compliance Services  
Up Holland ☒  
Long Green ☐
9. Modifications made during test program No modifications were performed.

## COMPLIANCE TESTS

### AMPLIFIER GAIN – CONDUCTED – PART 2.1046 – UPLINK

Ambient temperature = 27°C  
 Relative humidity = 45%  
 Supply voltage = 24Vdc  
 Channel number = See test results

Radio Laboratory

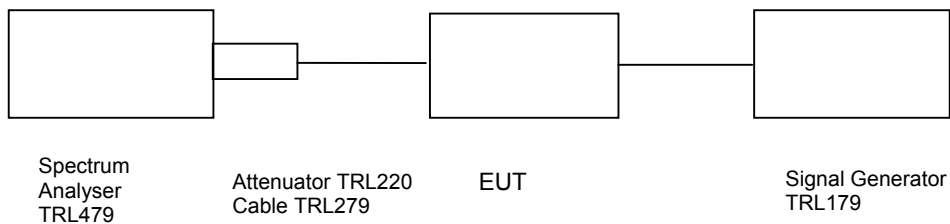

Frequency MHz	Signal Generator input level dBm	Cable & Attenuator loss dB	Level at Spectrum Analyser dBm	Gain dB	Gain after 20dB input level increase dBm
453.20	-73.4	26.72	-3.5	96.66	96.66
453.50	-73.4	26.72	-3.5	96.66	96.66
453.75	-73.4	26.72	-3.4	96.75	96.75

#### Notes:


1. The level of the signal generator takes into consideration the loss from the cable.
2. The signal generator input was increased by 20dBs and the level of the output signal remeasured

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	<b>X</b>
ATTENUATOR	BIRD	8304-300-N	N/A	220	<b>X</b>
CABLE	ROSENBERGER	MICRO COAX	N/A	279	<b>X</b>
SIGNAL GENERATOR	MARCON	2042	119388/080	179	<b>X</b>

## AMPLIFIER INTERMODULATION SPURIOUS EMISSIONS – CONDUCTED – PART 2.1053– UPLINK

Ambient temperature = 27°C  
Relative humidity = 45%  
Supply voltage = 24Vdc


Radio Laboratory

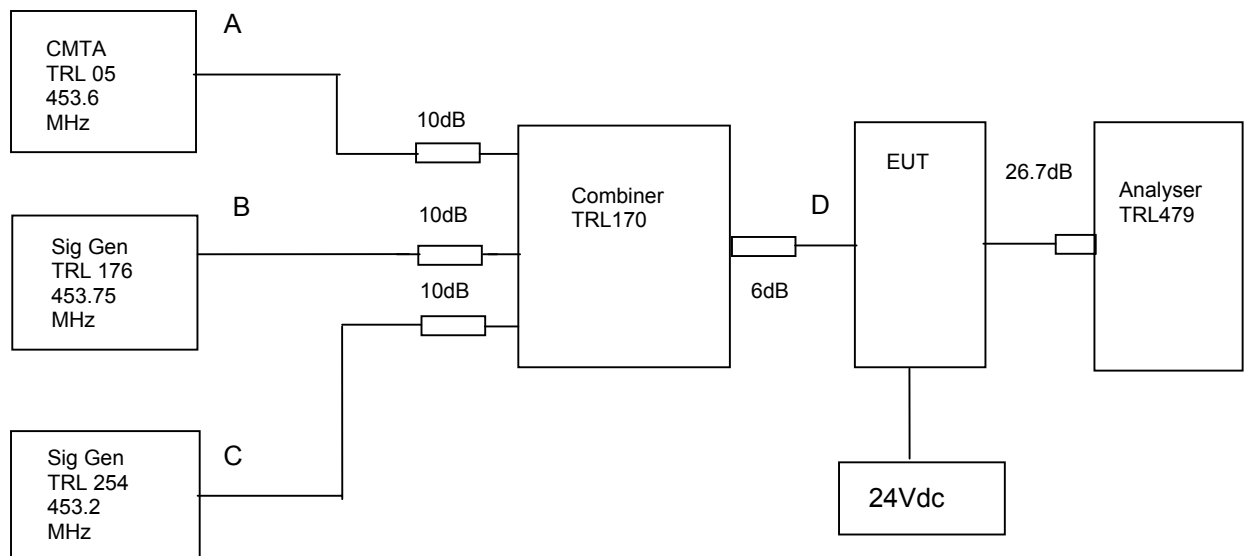

The Intermodulation and spurious products were measured with the amplifier operating at maximum gain. A three tone test was conducted using the equipment as above. The input power level was adjusted so the level at point D was the maximum input of -73.4dBm. The cable and attenuator loss between the EUT and the spectrum analyser was 26.7 dB.

Sweep data is shown on the next page:


# Intermodulaion Inband

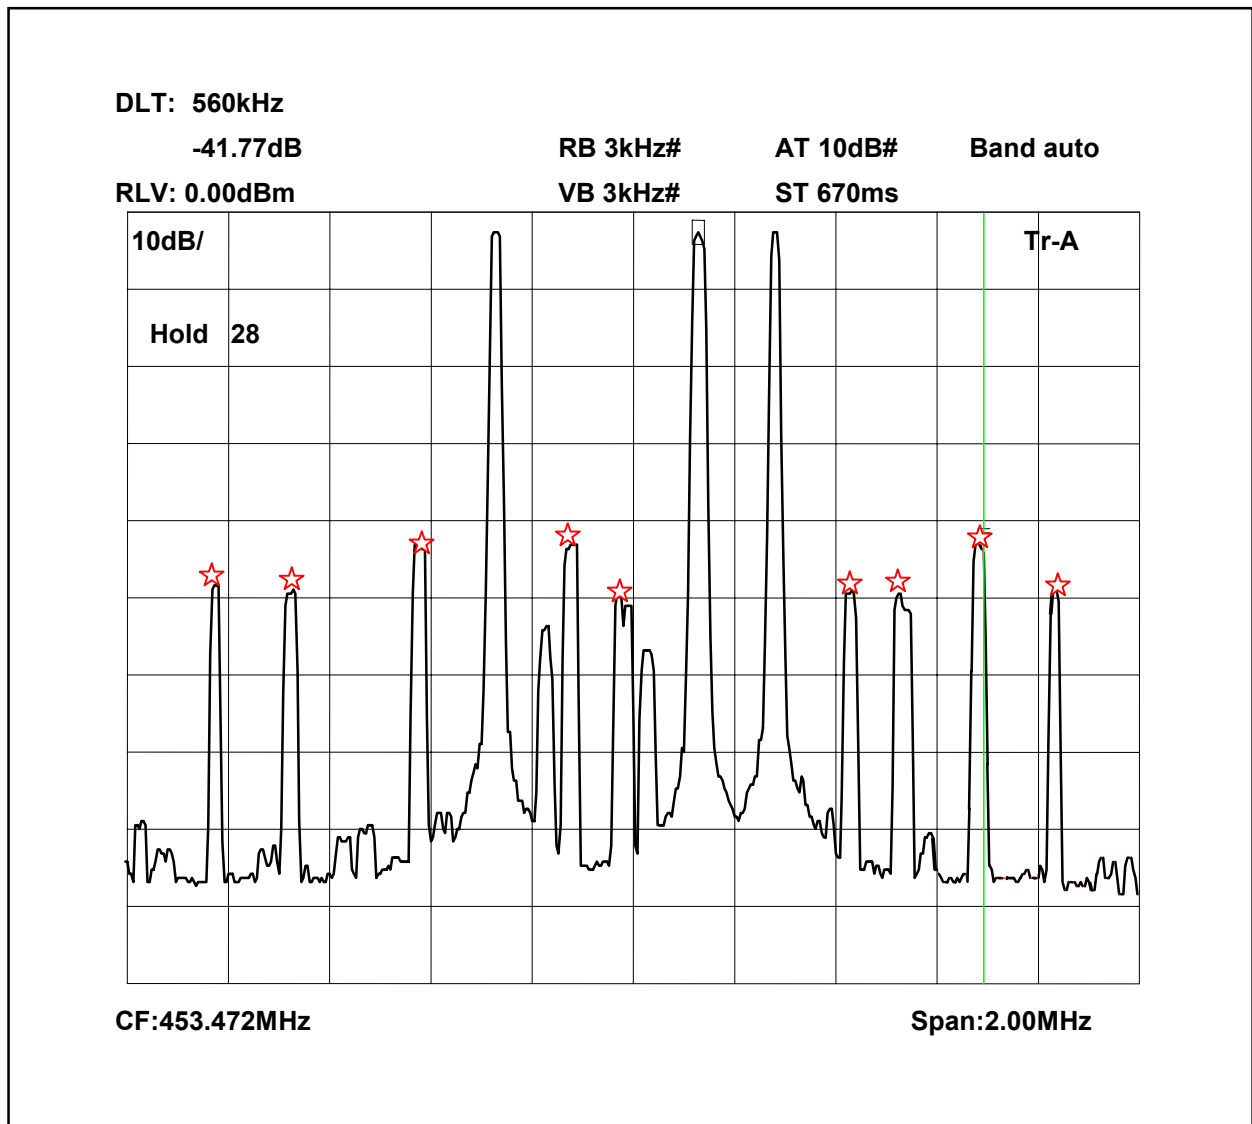

The above plot shows that all products (designated by★) are at least 40dB below the fundamentals.



# Intermodulation Wideband

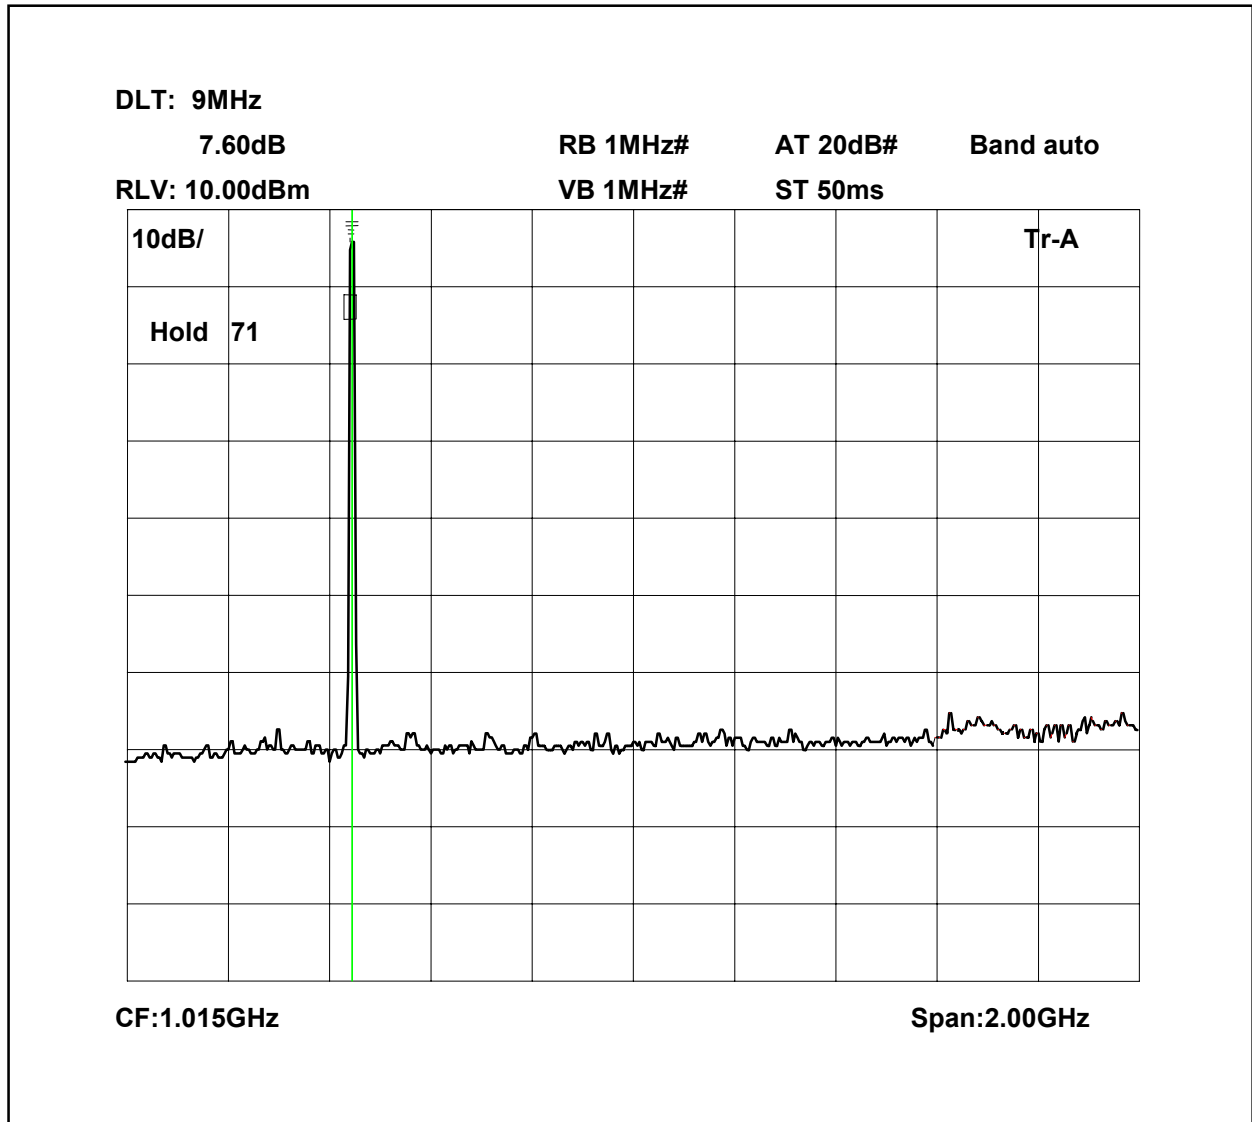

The above plot shows that there are no products outside the bands.


Test equipment used for intermodulation test

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	<b>X</b>
SIGNAL GENERATOR	MARCON	2042	119562/02	254	<b>X</b>
CMTA	ROHDE & SCHWARZ	CMTA52	894715/033	05	<b>X</b>
SIGNAL GENERATOR	MARCON	2042	119388/080	179	<b>X</b>
COMBINER	ELCOM	RC-4-50	N/A	170	<b>X</b>

## TRANSMITTER TESTS

### AMPLIFIER MODULATED CHANNEL TEST – CONDUCTED – Part 2.1049– UPLINK

Ambient temperature	=	24°C	Radio Laboratory
Relative humidity	=	46%	
Supply voltage	=	24Vdc	
Channel number	=	See test results	

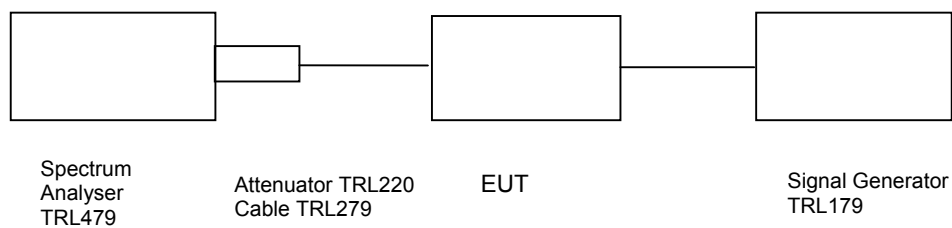

This test was performed to show that the amplifier does not alter the input signal in any way. The input signal was set to the maximum input level (-73.4dBm) and modulated with a 2500Hz tone. The plots show the signal measured at the signal generator and the signal measured at the output of the EUT.

Note: The cables and attenuators had the following losses.


1. Cable TRL279 and attenuator TRL220 26.7dB
2. Cable between signal generator and EUT 0.4dB

MKR: 453.20032MHz  
-86.68dBm RB 1kHz# AT 10dB# Band auto  
RLV:-32.00dBm VB 1kHz# ST 120ms

10dB/ Hold 53 Tr-A

CF:453.20000MHz Span:40.0kHz

453.2MHz Signal Generator and EUT deviation set to 5kHz

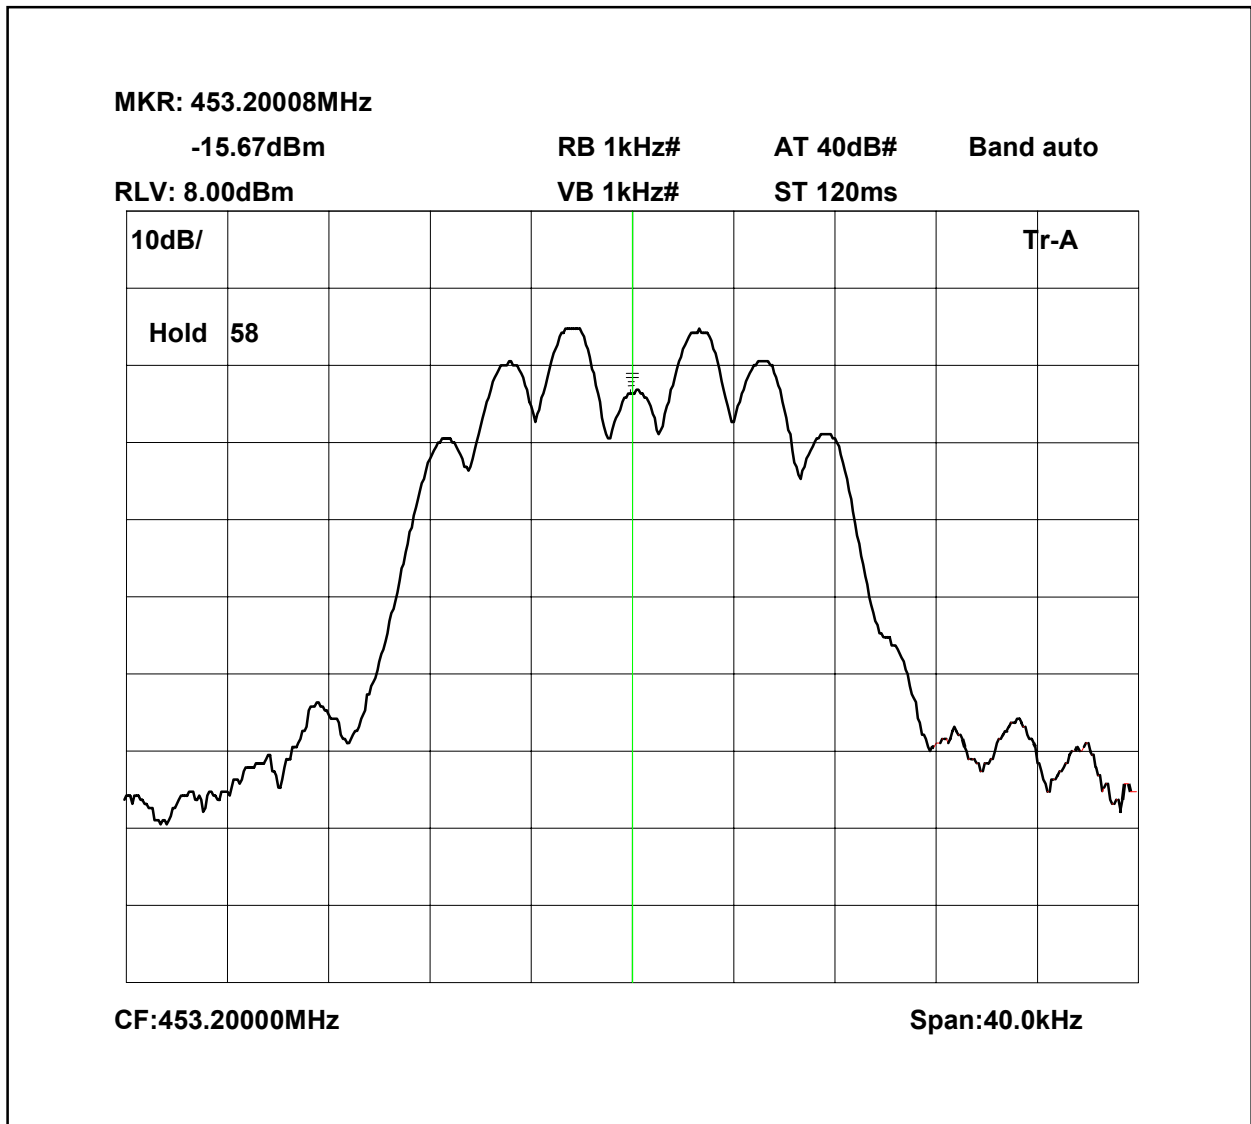

The above plots depicting the output waveshape show no measurable distortion visible. When compared to the input signal.

MR: 453.50032MHz

-86.08dBm RB 1kHz# AT 10dB# Band auto

RLV:-32.00dBm VB 1kHz# ST 120ms

10dB/ Tr-A

Hold 73

CF:453.50000MHz Span:40.0kHz

MR: 453.50008MHz  
-15.38dBm  
RB 1kHz#  
AT 40dB#  
Band auto  
RLV: 8.00dBm  
VB 1kHz#  
ST 120ms

10dB/

Hold 43


Tr-A

CF:453.50000MHz

Span:40.0kHz

Page 15 of 70

453.75MHz Signal Generator deviation set to 5kHz

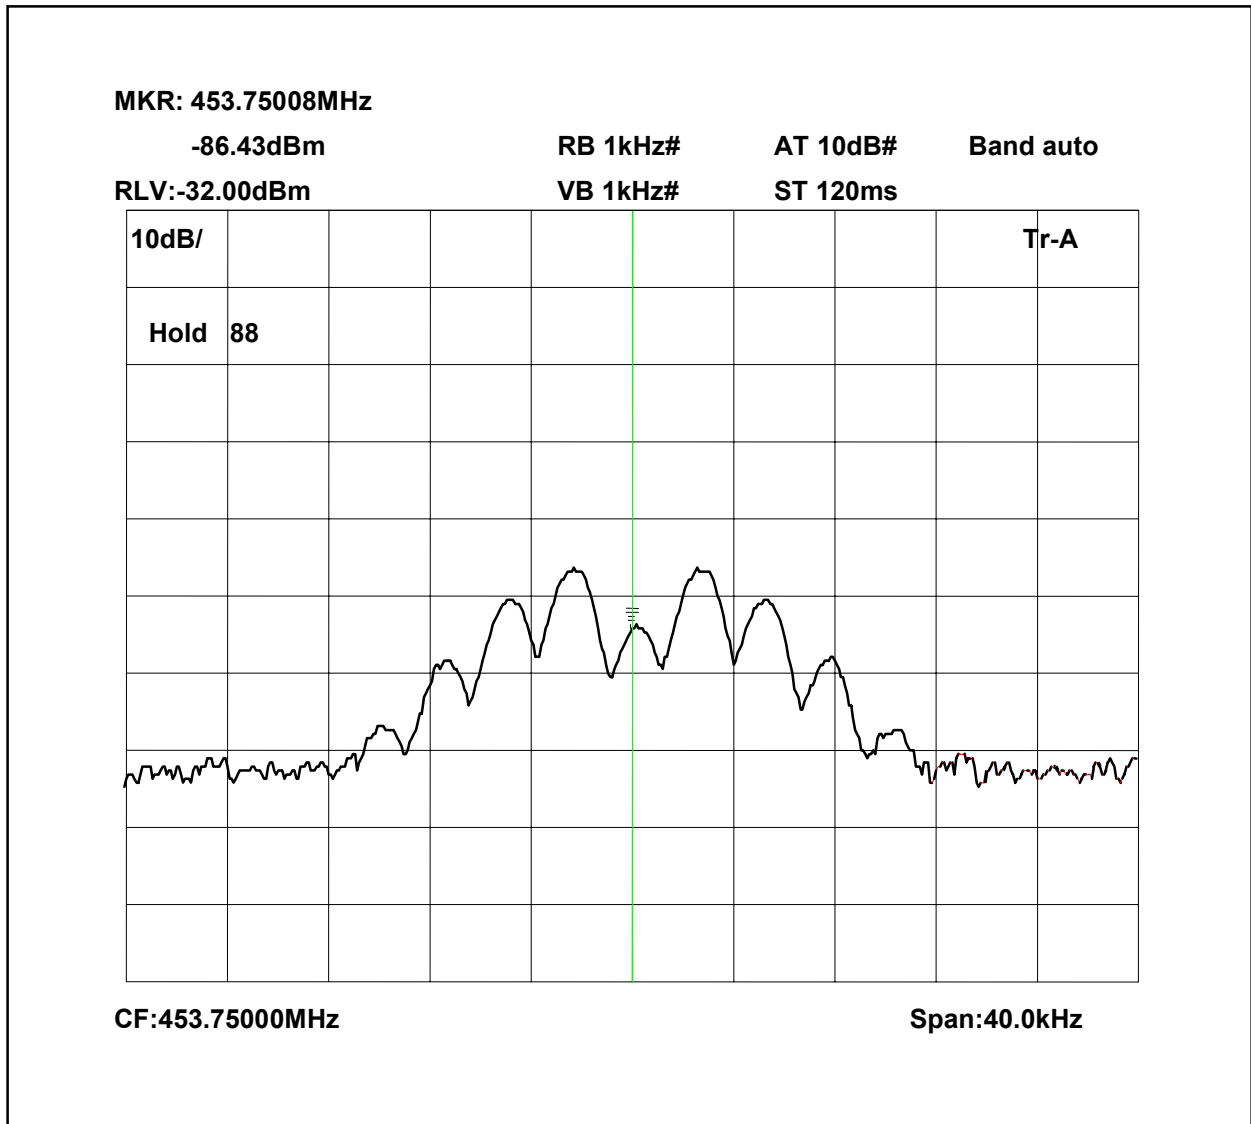



MR: 453.75008MHz  
-15.57dBm  
RB 1kHz#  
AT 40dB#  
Band auto  
RLV: 8.00dBm  
VB 1kHz#  
ST 120ms

10dB/

Hold 57

Tr-A

CF:453.7500MHz

Span:40.0kHz

The test equipment used for the Transmitter Modulated Channel tests is shown overleaf:


TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	<b>X</b>
ATTENUATOR	BIRD	8304-300-N	N/A	220	<b>X</b>
CABLE	ROSENBERGER	MICRO COAX	N/A	279	<b>X</b>
SIGNAL GENERATOR	MARCON	2042	119388/080	179	<b>X</b>

## TRANSMITTER TESTS

### AMPLIFIER SPURIOUS EMISSIONS – CONDUCTED – Part 2.1051– UPLINK

Ambient temperature = 24°C  
 Relative humidity = 46%  
 Supply voltage = 24Vdc

Radio Laboratory  
 Test Signal = F3E

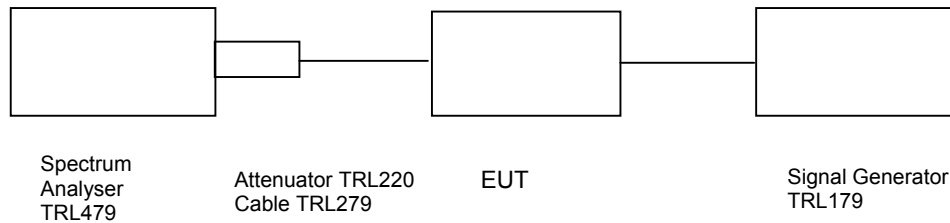

The test was set up as per the diagram. The level at the input was adjusted to compensate for the loss of the interconnecting cable. The unit was tested operating at maximum power and on three test frequencies.

The Spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more than 250% of the authorised bandwidth


At least  $43 + 10 \log P_{dB}$

$$(10 \log P_{\text{watts}}) - (43 + 10 \log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$$

The test equipment used for the Transmitter Conducted Emissions:

TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	<b>X</b>
ATTENUATOR	BIRD	8304-300-N	N/A	220	<b>X</b>
CABLE	ROSENBERGER	MICRO COAX	N/A	279	<b>X</b>
SIGNAL GENERATOR	MARCON	2042	119388/080	179	<b>X</b>

Conducted emissions 453.2MHz 0 - 3GHz

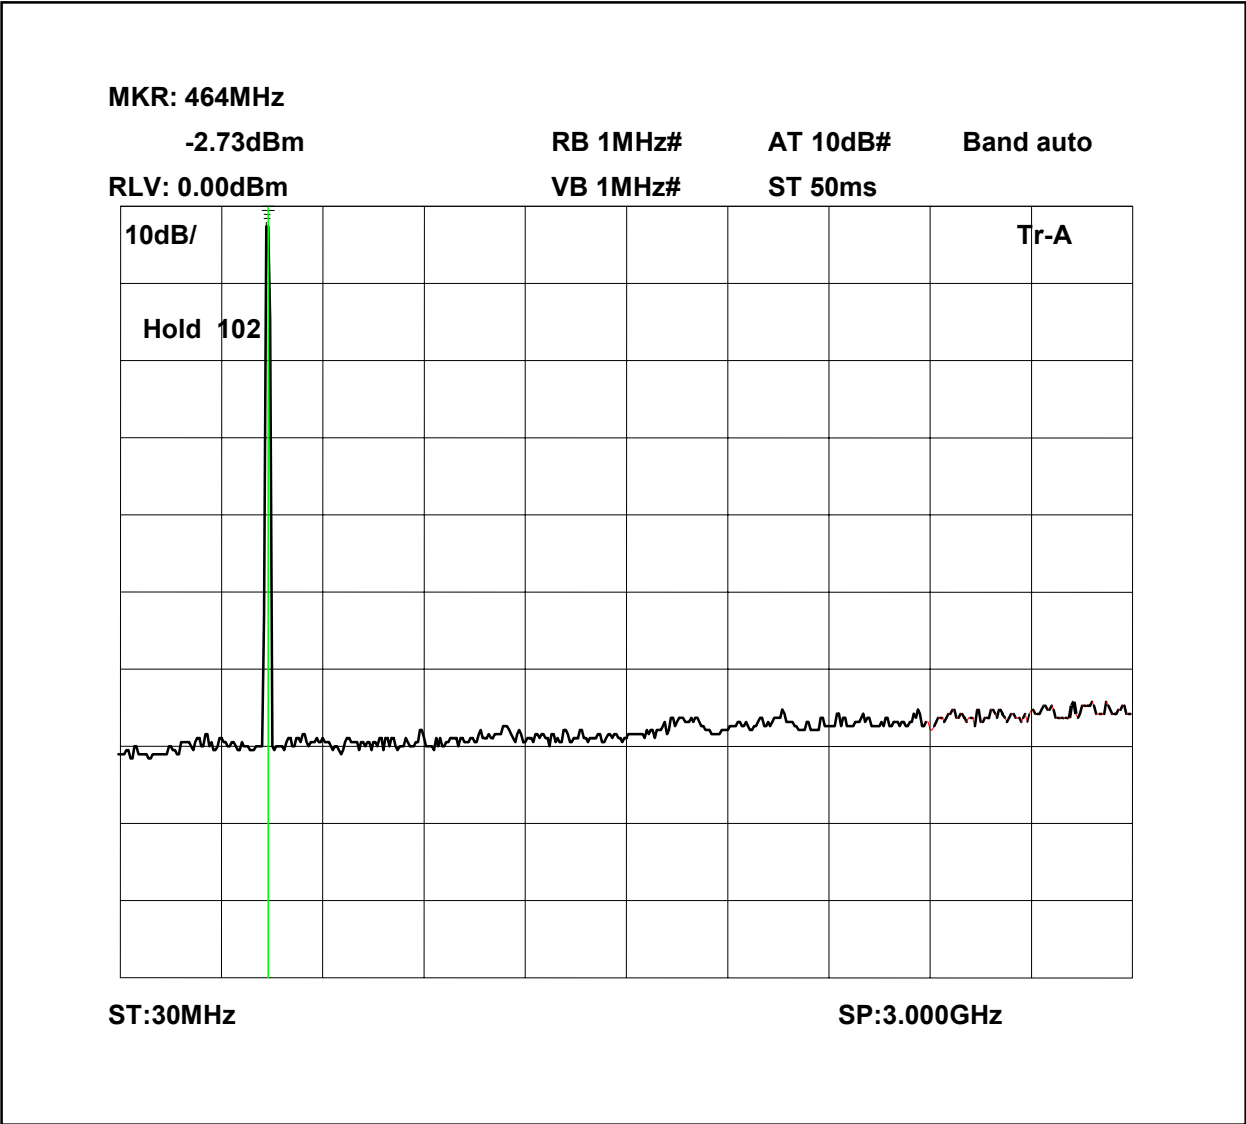


MR: 2.936GHz  
-63.96dBm RB 1MHz# AT 10dB# Band auto  
RLV:-20.00dBm VB 1MHz# ST 50ms

5dB/ Hold 37 Tr-A

ST:2.900GHz SP:5.900GHz

Conducted emissions 453.5MHz 0 - 3GHz

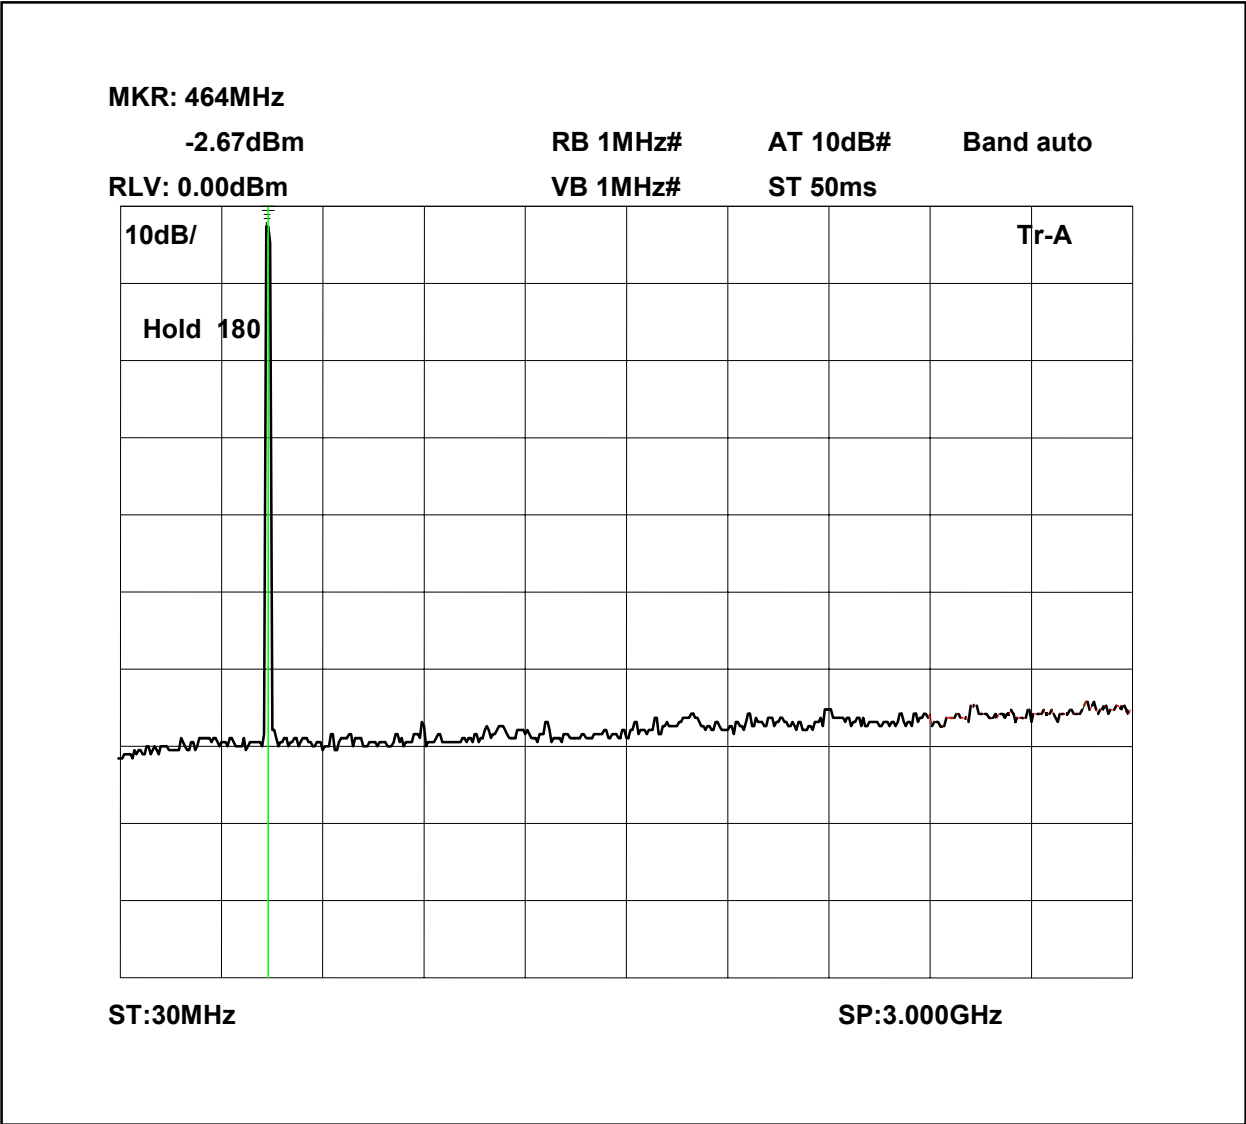

MR: 2.936GHz  
-64.36dBm  
RB 1MHz#  
AT 10dB#  
Band auto

RLV:-20.00dBm  
VB 1MHz#  
ST 50ms

5dB/

Hold 51

Tr-A

ST:2.900GHz  
SP:5.900GHz

MR: 464MHz  
-2.85dBm  
RB 1MHz#  
AT 10dB#  
Band auto  
RLV: 0.00dBm  
VB 1MHz#  
ST 50ms

10dB/

Hold 274

Tr-A

ST:30MHz

SP:3.000GHz



MKR: 2.936GHz  
-64.70dBm  
RB 1MHz#  
AT 10dB#  
Band auto

RLV:-20.00dBm  
VB 1MHz#  
ST 50ms

5dB/

Hold 29

Tr-A


ST:2.900GHz  
SP:5.900GHz

## TRANSMITTER TESTS

### AMPLIFIER SPURIOUS EMISSIONS – RADIATED – Part 2.1053– UPLINK

Ambient temperature = 25°C  
Relative humidity = 50%  
Conditions = OATS  
Supply voltage = 24Vdc  
Supply Frequency = N/A

Test Signal = F3E

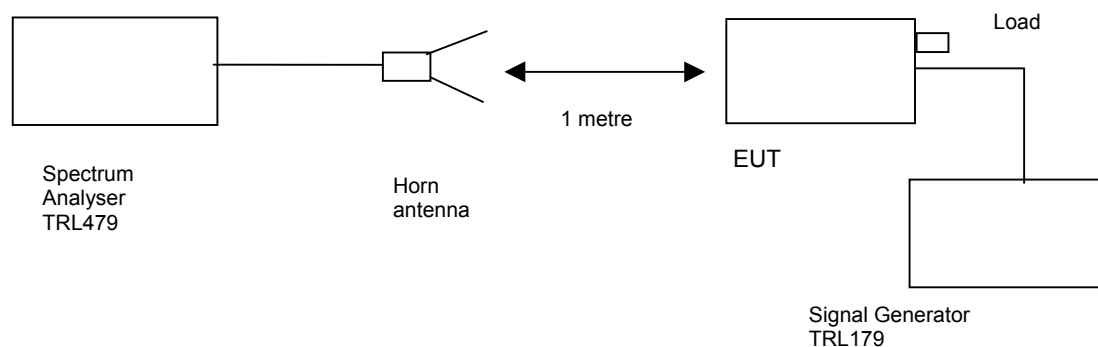

The test was set up as per the diagram. The level at the input was adjusted to compensate for the loss of the interconnecting cable. The unit was tested operating maximum power on three test frequencies with a 50 ohm load on the output. The unit was also tested with the signal generator replaced by another 50ohm load.

The Spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more that 250% of the authorised bandwidth

At least  $43 + 10 \log \text{ PdB}$


$$(10\log P_{\text{watts}}) - (43 + 10\log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$$

MKR: 1.152GHz  
-76.44dBm  
RB 100kHz#  
AT 10dB#  
Band auto  
RLV:-10.00dBm  
VB 100kHz#  
ST 10s#

10dB/  
Hold 8  
Tr-A  
ST:0Hz  
SP:3.000GHz


Page 27 of 70

Radiated emissions 453.2MHz 2.9-10GHz

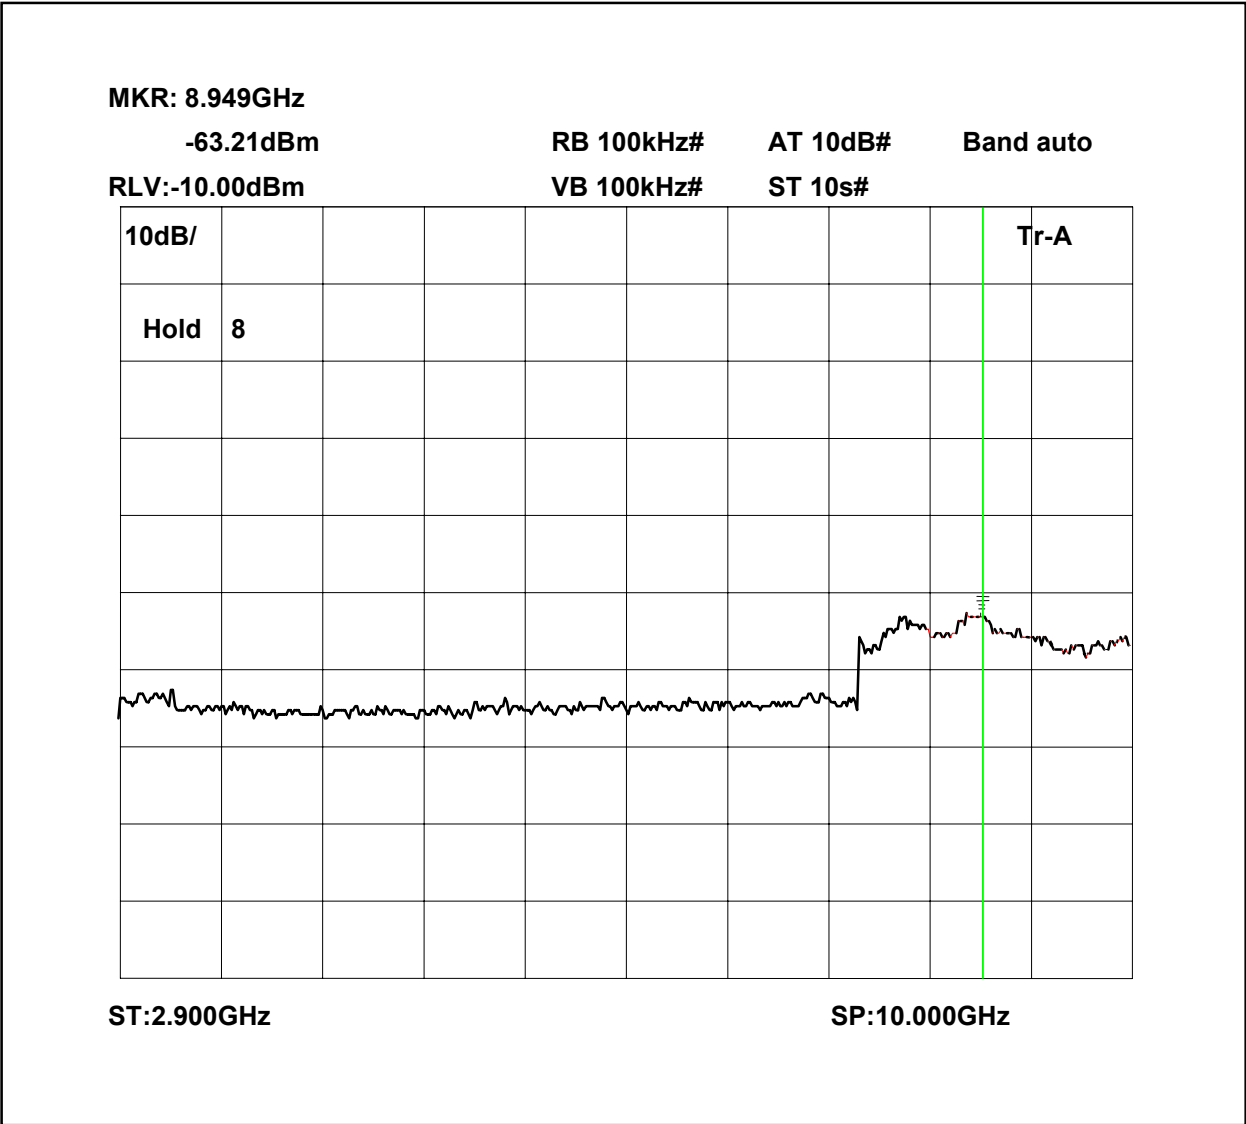

The above test results show that there were no emissions within 20dBs of the –13dBm limit.

Radiated emissions 453.5MHz 0-3GHz

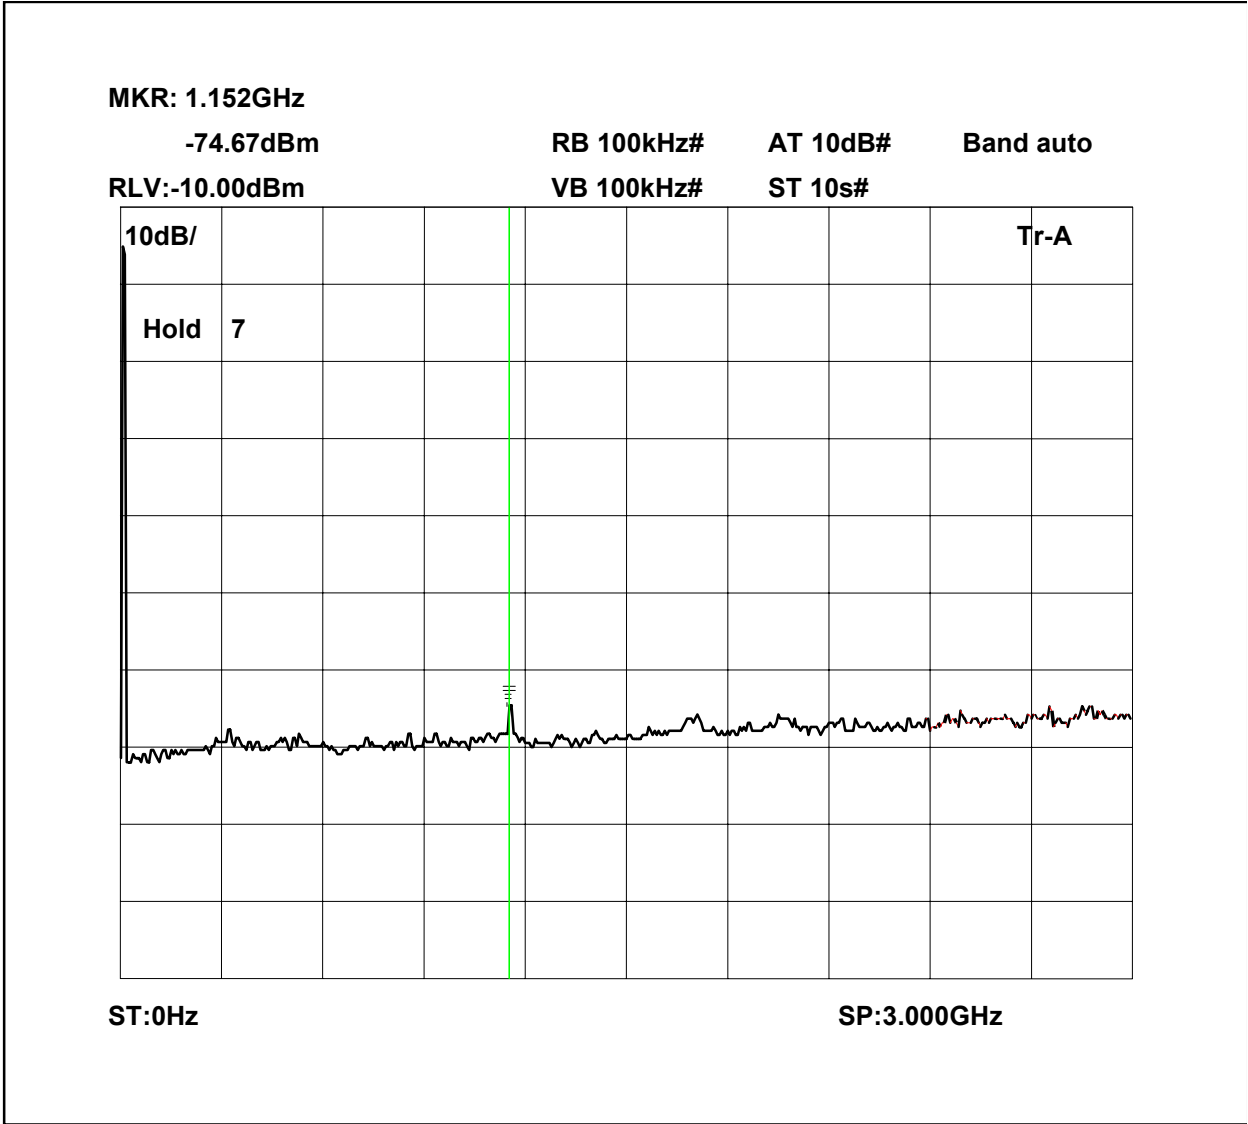

The above test results show that there were no emissions within 20dBs of the –13dBm limit.

MKR: 8.949GHz  
-63.20dBm  
RB 100kHz#  
AT 10dB#  
Band auto

RLV:-10.00dBm  
VB 100kHz#  
ST 10s#


10dB/  
Hold 11

Tr-A

ST:2.900GHz  
SP:10.000GHz

RF335 iss02

Radiated emissions 453.75MHz 0-3GHz

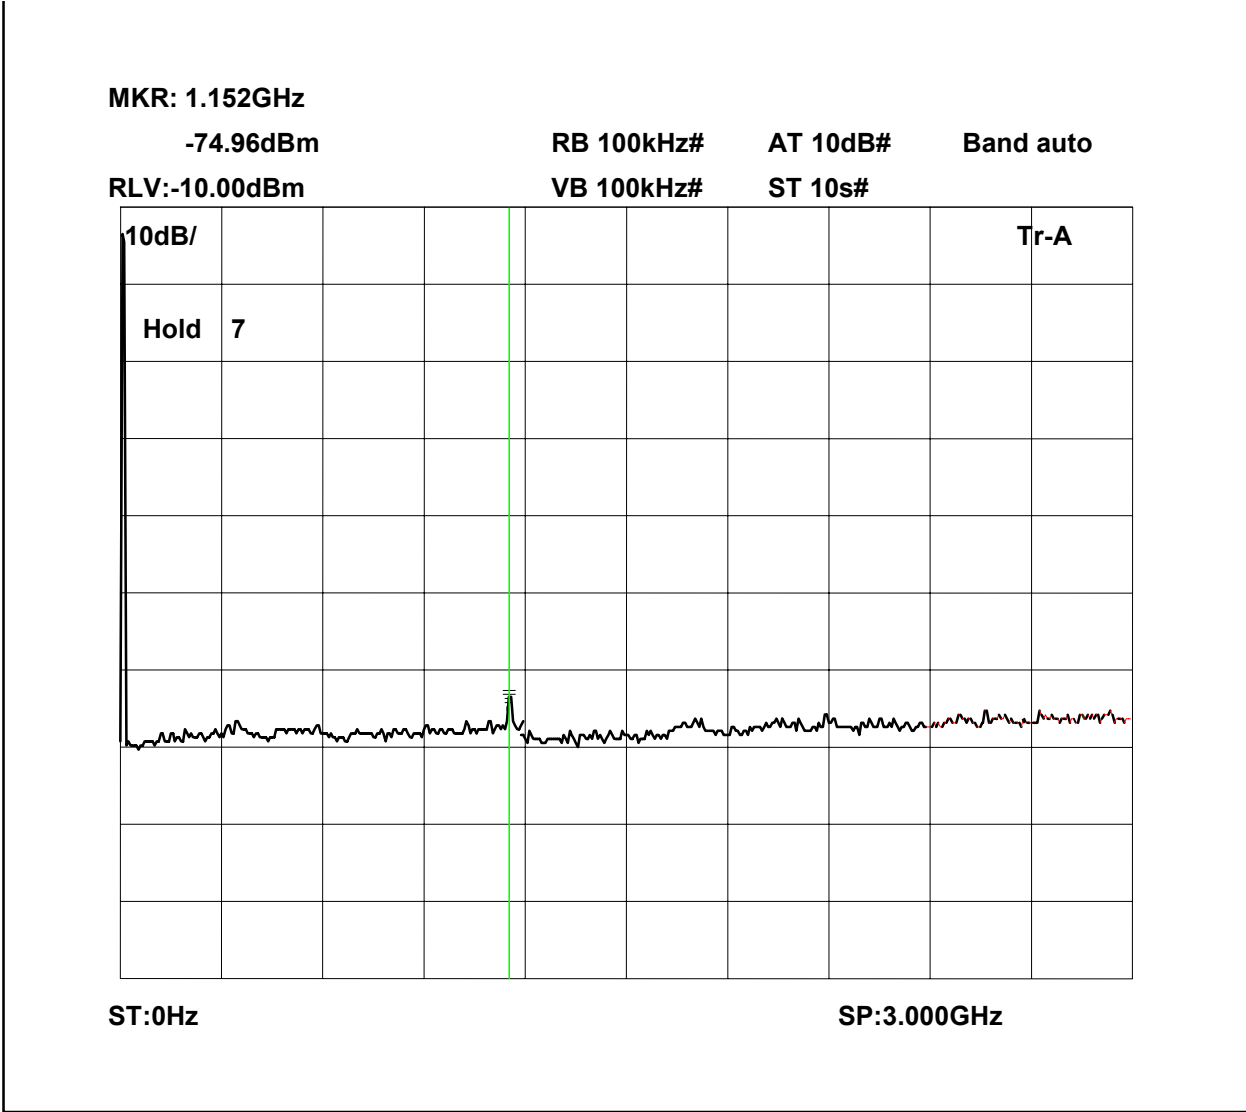

The above test results show that there were no emissions within 20dBs of the –13dBm limit.

MR: 8.949GHz  
-64.01dBm  
RB 100kHz#  
AT 10dB#  
Band auto  
RLV:-10.00dBm  
VB 100kHz#  
ST 10s#

10dB/  
Hold 11


Tr-A

ST:2.900GHz  
SP:10.000GHz

RF335 iss02




Radiated emissions no input signal 0-3GHz

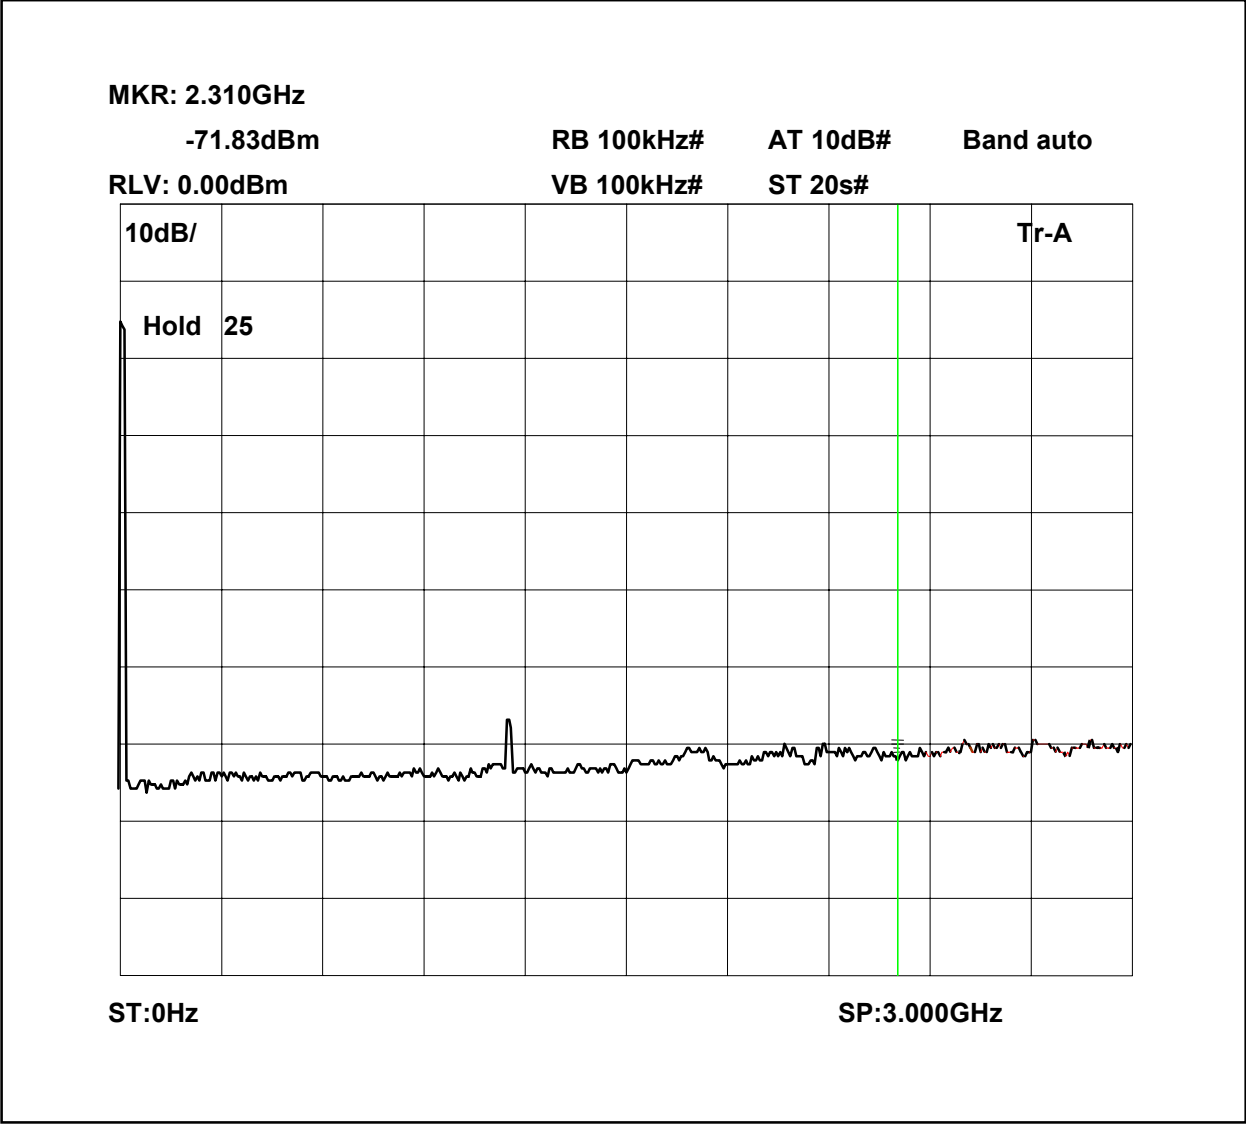

The above test results show that there were no emissions within 20dBs of the –13dBm limit.

Radiated emissions no input signal 2.9-10GHz

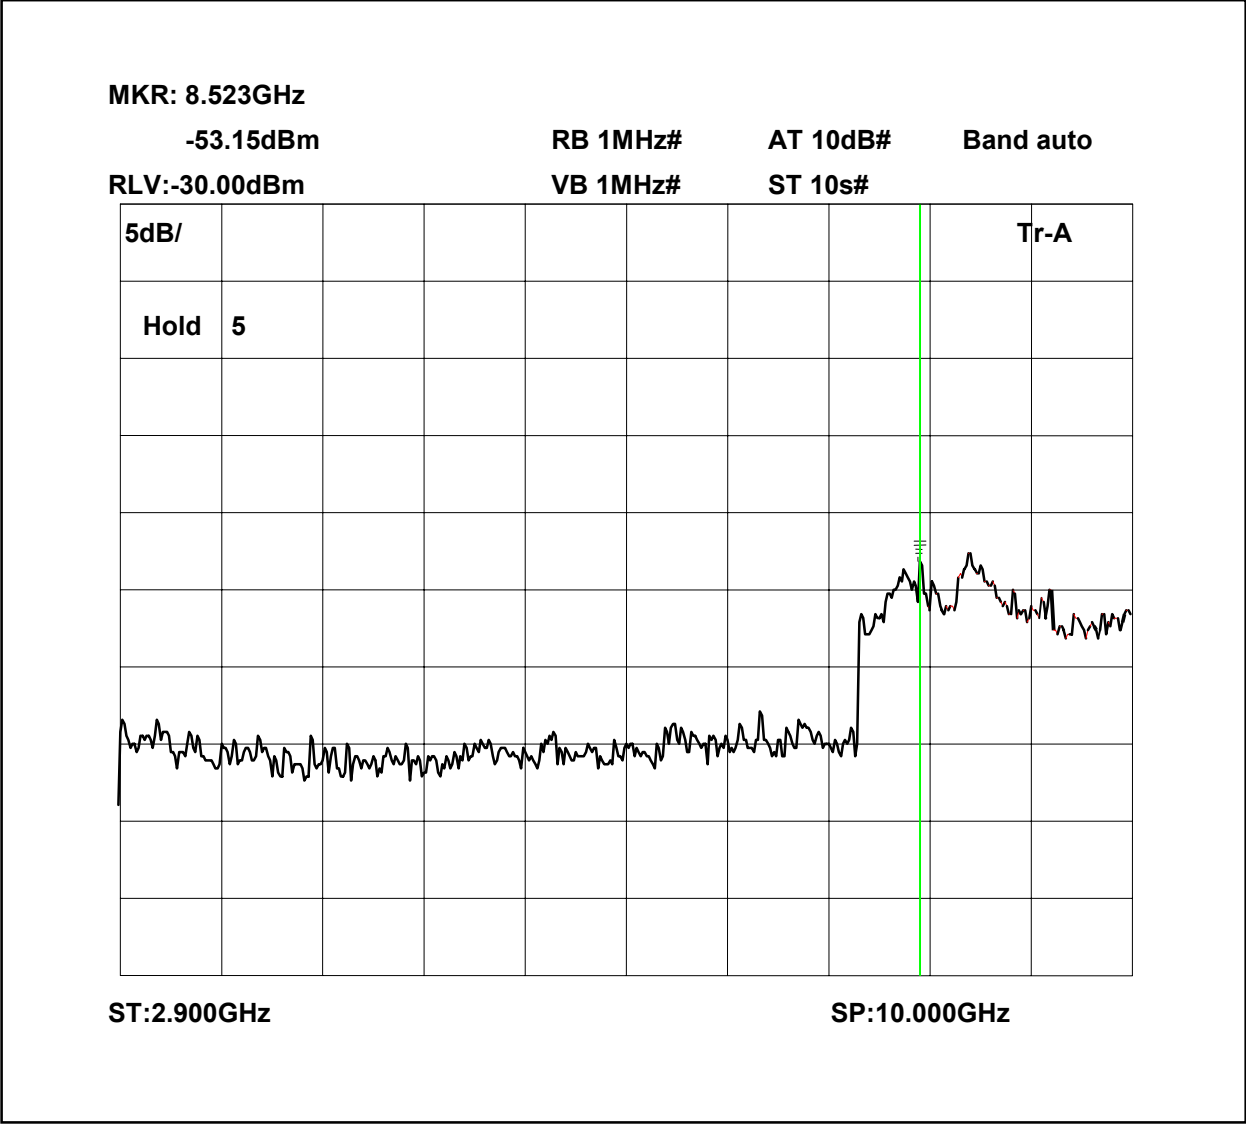

The above test results show that there were no emissions within 20dBs of the –13dBm limit.


The test equipment used for the Transmitter Spurious Emissions:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	<b>X</b>
HORN	EMCO	3115	9010-3581	139	<b>X</b>
ATTENUATOR	BIRD	8304-300-N	N/A	220	<b>X</b>
CABLE	ROSENBERGER	MICRO COAX	N/A	279	<b>X</b>
SIGNAL GENERATOR	MARCON	2042	119388/080	179	<b>X</b>

## AMPLIFIER GAIN – CONDUCTED – PART 2.1046 – DOWNLINK

Ambient temperature = 24°C  
 Relative humidity = 43%  
 Supply voltage = 24Vdc  
 Channel number = See test results

Radio Laboratory

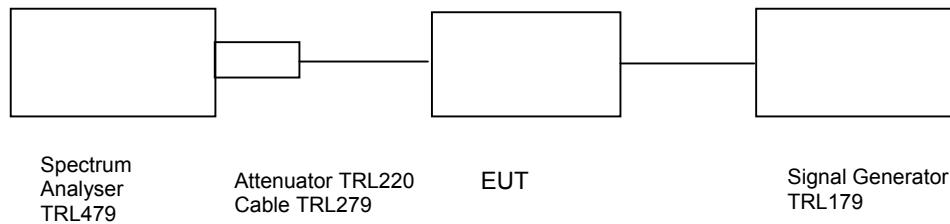

Frequency MHz	Signal Generator input level dBm	Cable & Attenuator loss dB	Level at Spectrum Analyser dBm	Gain dB	Gain after 20dB input level increase dBm
458.2	-77.0	26.5	-5.87	97.63	97.63
458.5	-77.0	26.5	-5.49	98.01	98.01
458.75	-77.0	26.5	-5.54	98.25	98.25

### Notes:


1. The level of the signal generator takes into consideration the loss from the cable.
2. The signal generator input was increased by 20dBs and the level of the output signal remeasured

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	<b>X</b>
ATTENUATOR	BIRD	8304-200	N/A	103	<b>X</b>
ATTENUATOR	BIRD	8304-300-N	N/A	220	<b>X</b>
CABLE	ROSENBERGER	MICRO COAX	N/A	279	<b>X</b>
SIGNAL GENERATOR	MARCON	2042	119388/080	179	<b>X</b>

## AMPLIFIER INTERMODULATION SPURIOUS EMISSIONS – CONDUCTED – PART 2.1053– DOWNLINK

Ambient temperature = 26°C  
 Relative humidity = 40%  
 Supply voltage = 24Vdc


Radio Laboratory

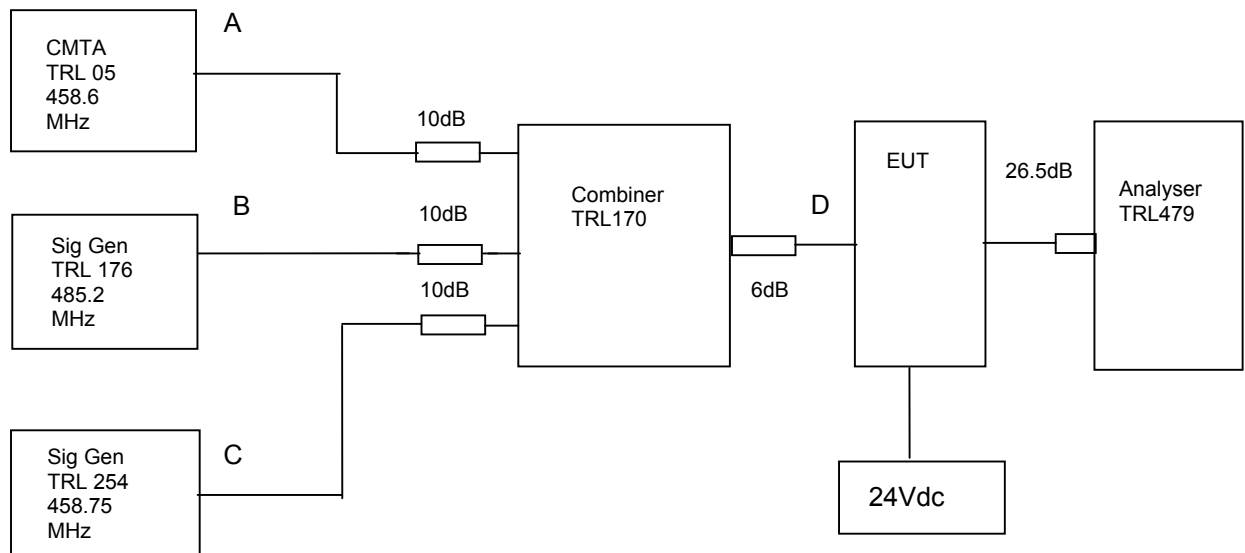

The Intermodulation and spurious products were measured with the amplifier operating at maximum gain. A three tone test was conducted using the equipment as above. The input power level was adjusted so the level at point D was the maximum input of -77.0dBm. The cable and attenuators loss between the EUT and the spectrum analyser was 26.5 dB.


Sweep data is shown on the next page:

Intermodulaion Inband

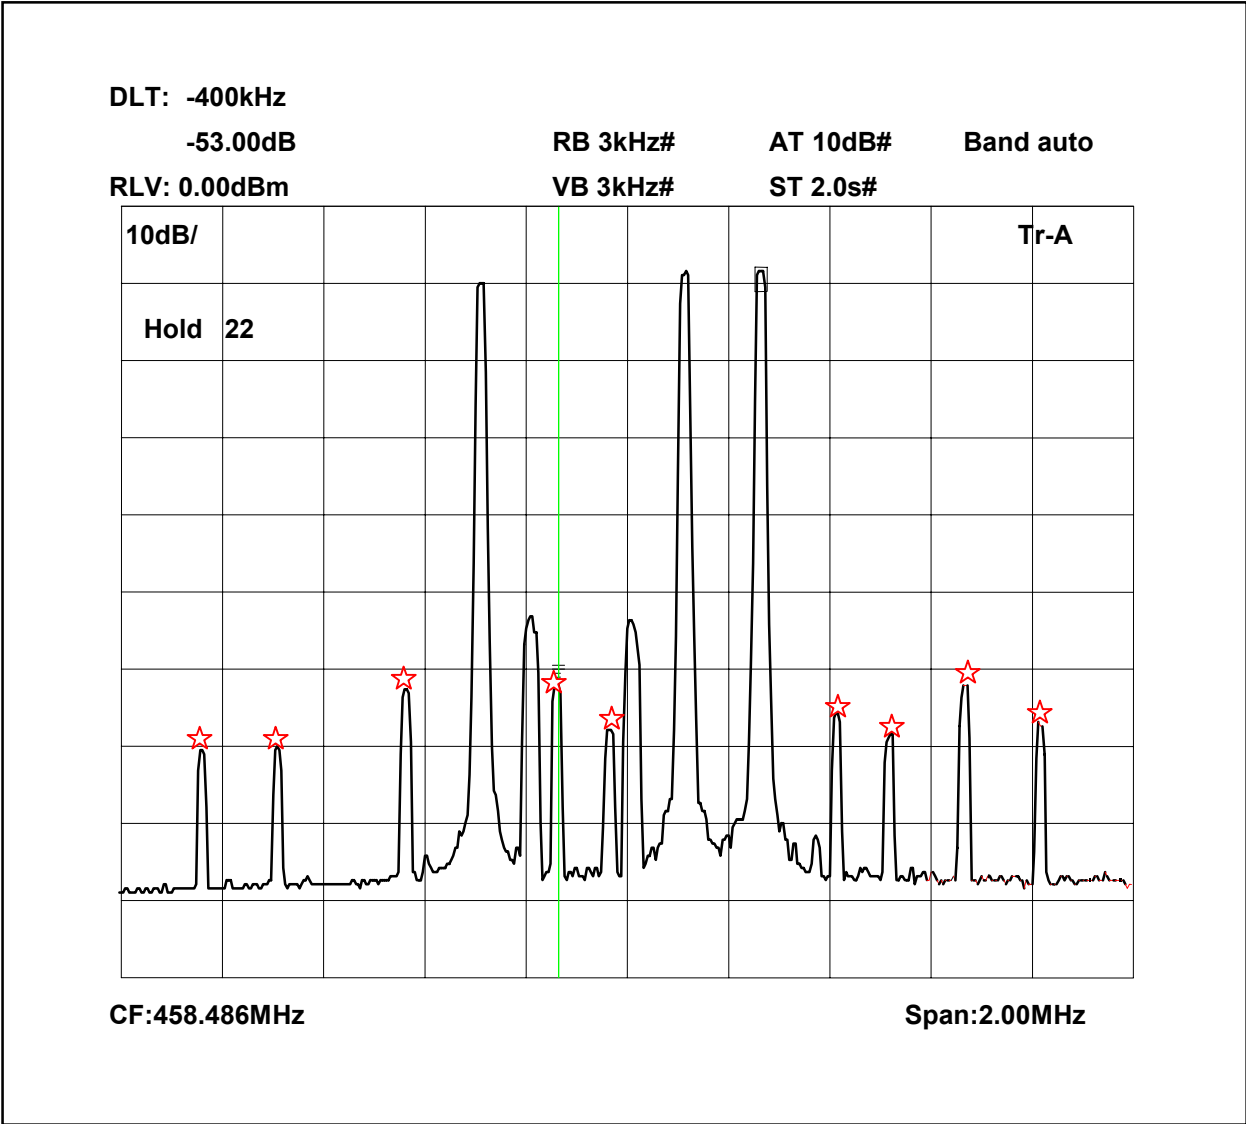

The above plot shows that all products (designated by★ ) are at least 50dB below the fundamentals.

# Intermodulation Wideband

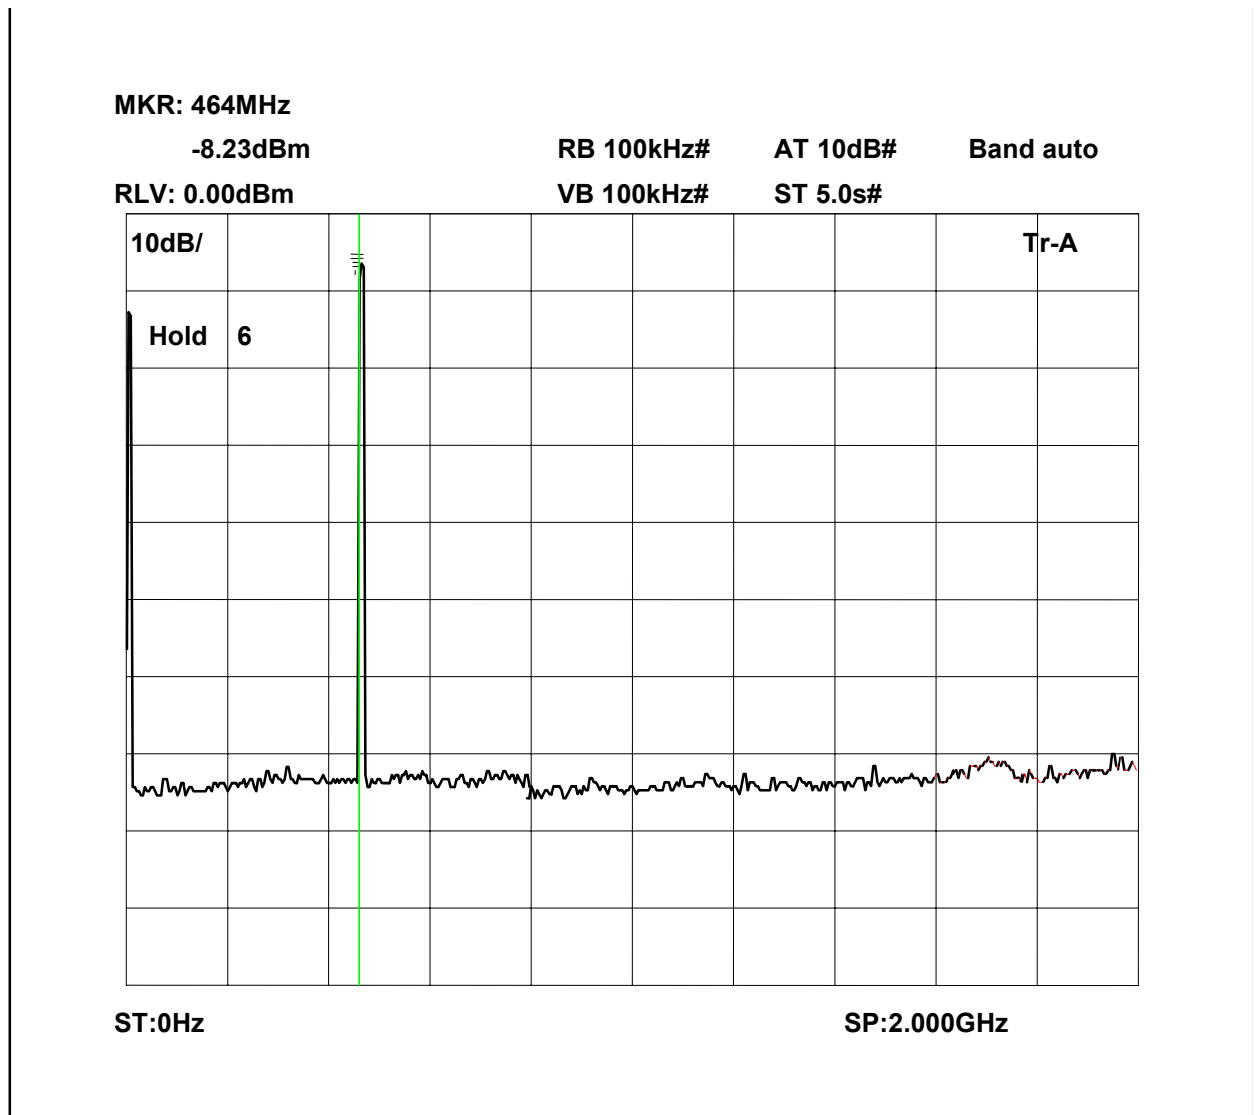

The above plot shows that there are no products outside the bands.

Test equipment used for intermodulation test


TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	<b>X</b>
SIGNAL GENERATOR	MARCON	2042	119562/02	254	<b>X</b>
CMTA	ROHDE & SCHWARZ	CMTA52	894715/033	05	<b>X</b>
SIGNAL GENERATOR	MARCON	2042	119388/080	179	<b>X</b>
COMBINER	ELCOM	RC-4-50	N/A	170	<b>x</b>



## TRANSMITTER TESTS

### AMPLIFIER MODULATED CHANNEL TEST – CONDUCTED – Part 2.1049– DOWNLINK

Ambient temperature	=	24°C	Radio Laboratory
Relative humidity	=	43%	
Supply voltage	=	24Vdc	
Channel number	=	See test results	

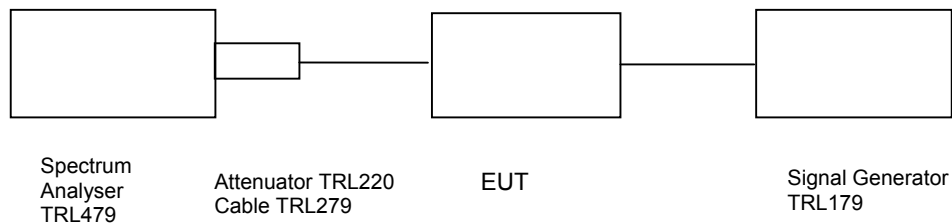


This test was performed to show that the amplifier does not alter the input signal in any way. The input signal was set to the maximum input level (-77.0dBm) and modulated with a 2500Hz tone. The plots show the signal measured at the signal generator and the signal measured at the output of the EUT.


Note: The cables and attenuators had the following losses.

1. Cable TRL279 and attenuators TRL220 = 26.5dB
2. Cable between signal generator and EUT = 0.4dB

Page 42 of 70

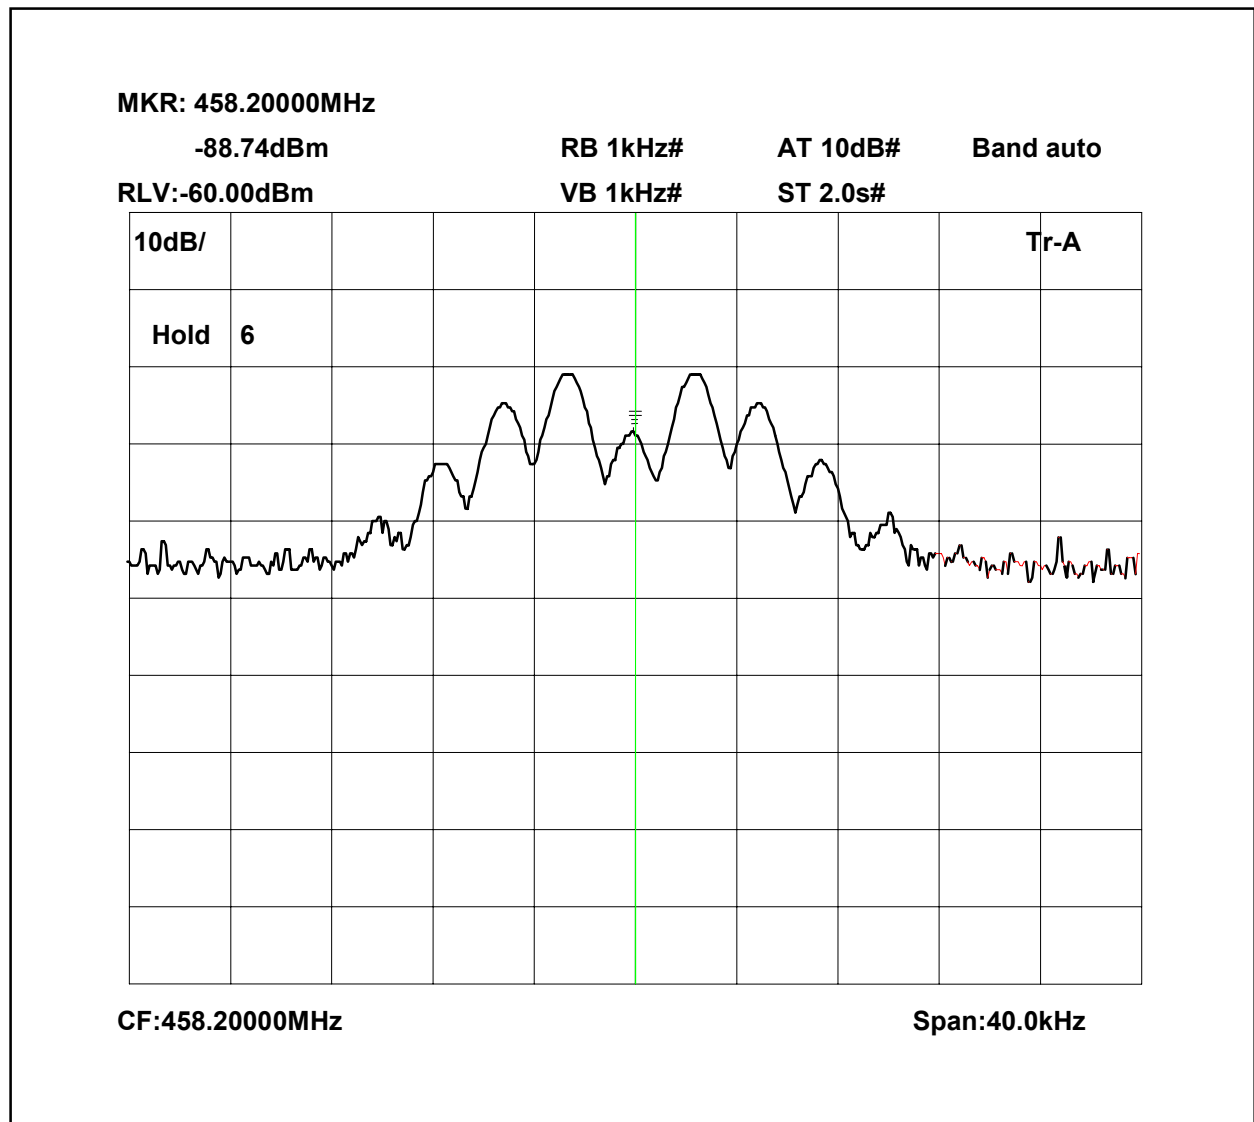


458.2MHz Signal Generator and EUT deviation set to 5kHz

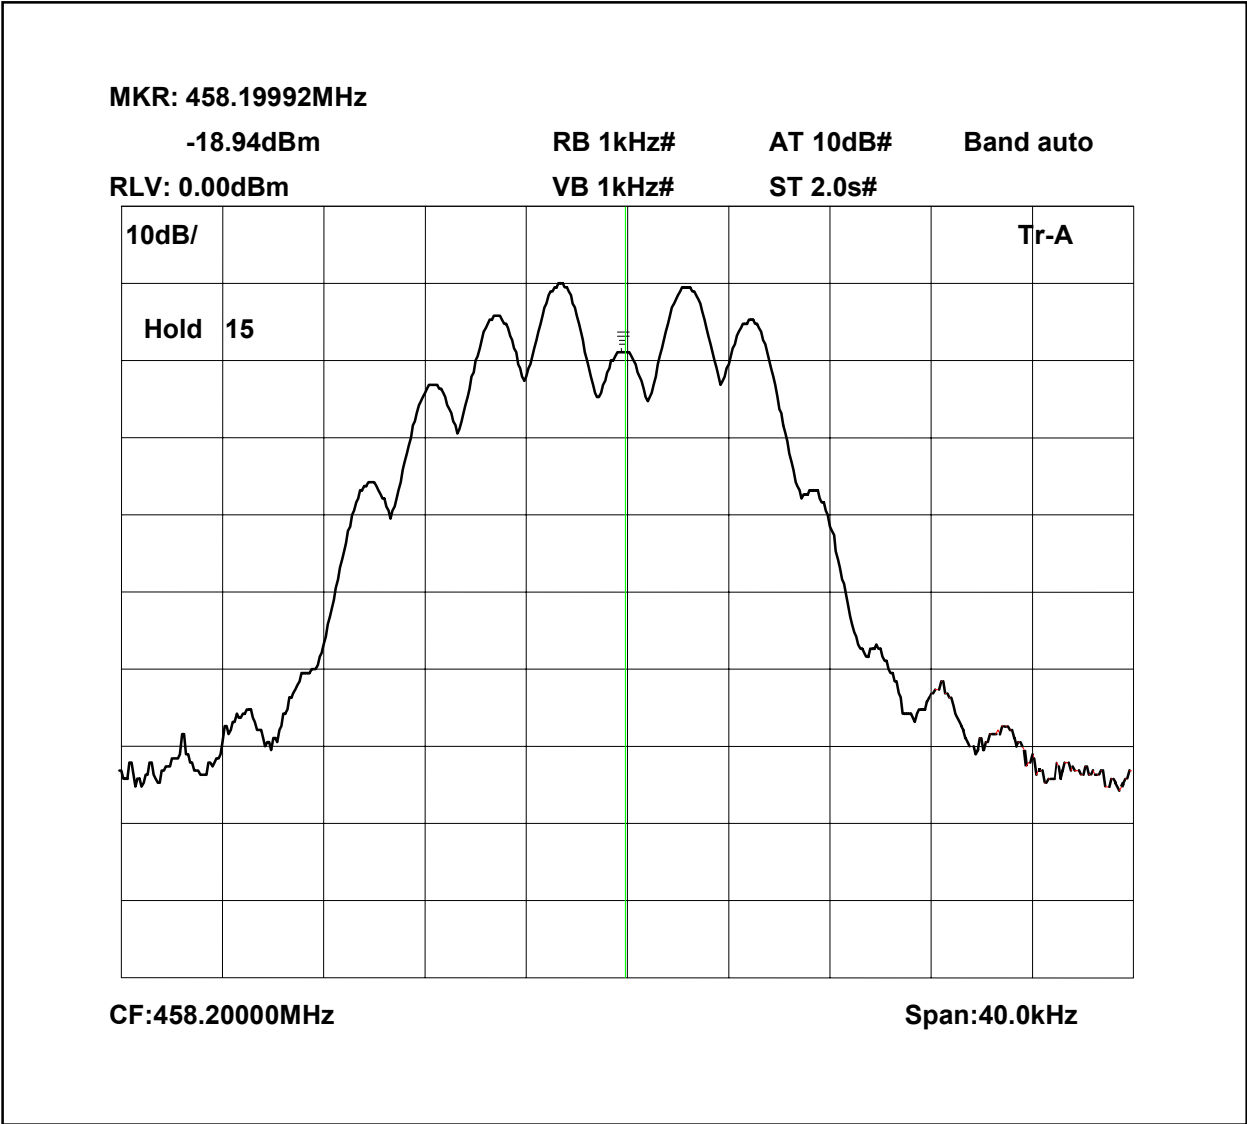


The above plots depicting the output waveshape show no measurable distortion visible. When compared to the input signal.

RF335 iss02




458.5MHz Signal Generator and amplifier deviation set to 5kHz

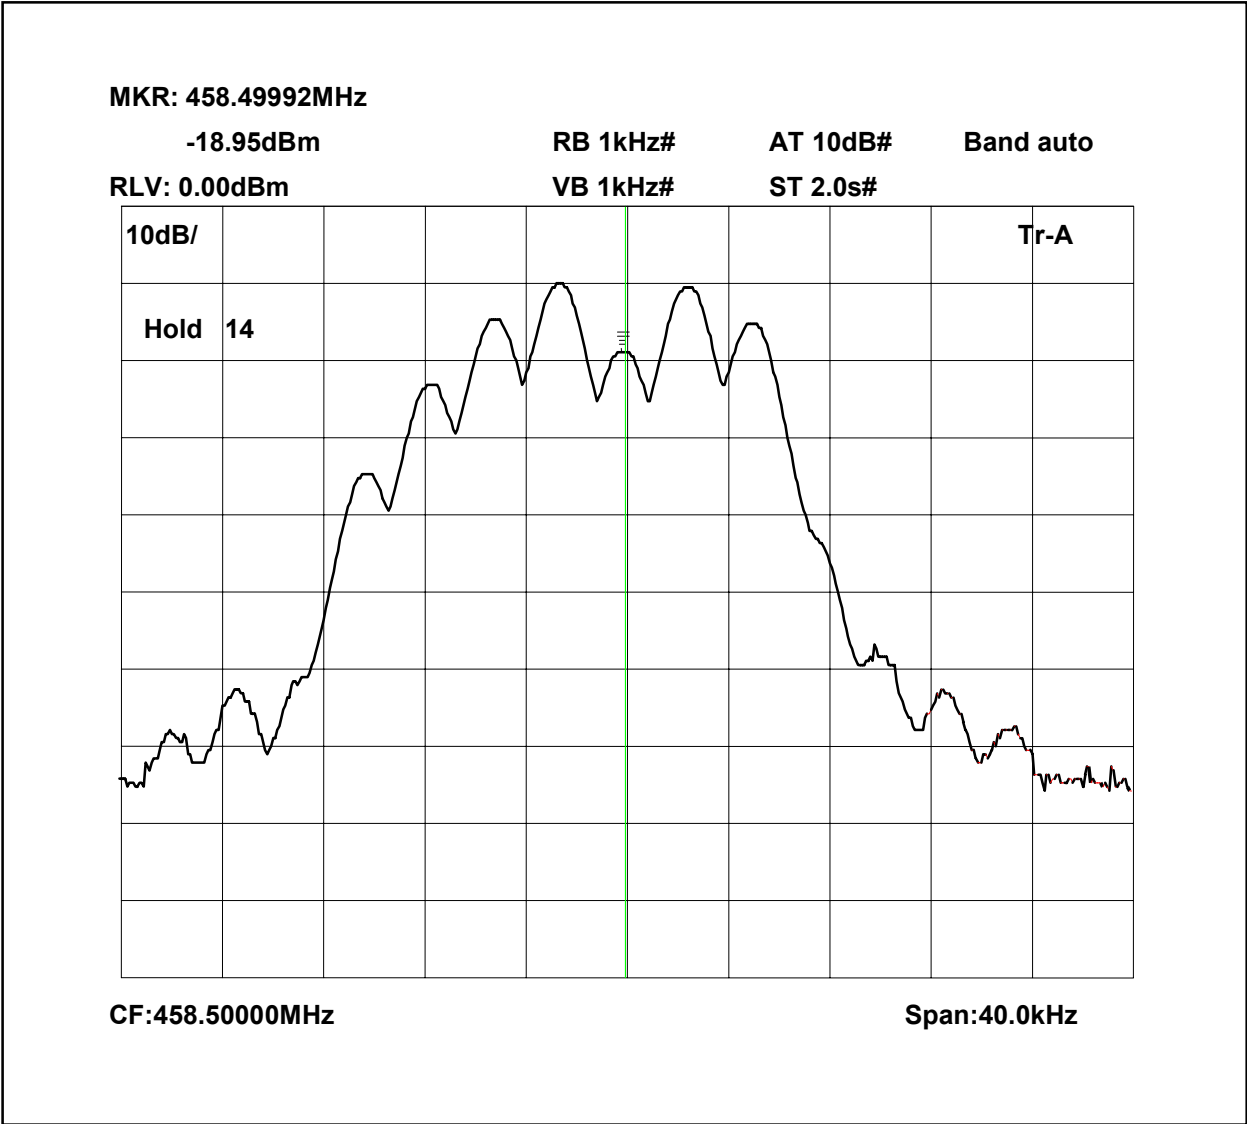


The above plots depicting the output waveshape show no measurable distortion visible. When compared to the input signal.

458.75MHz Signal Generator deviation set to 5kHz

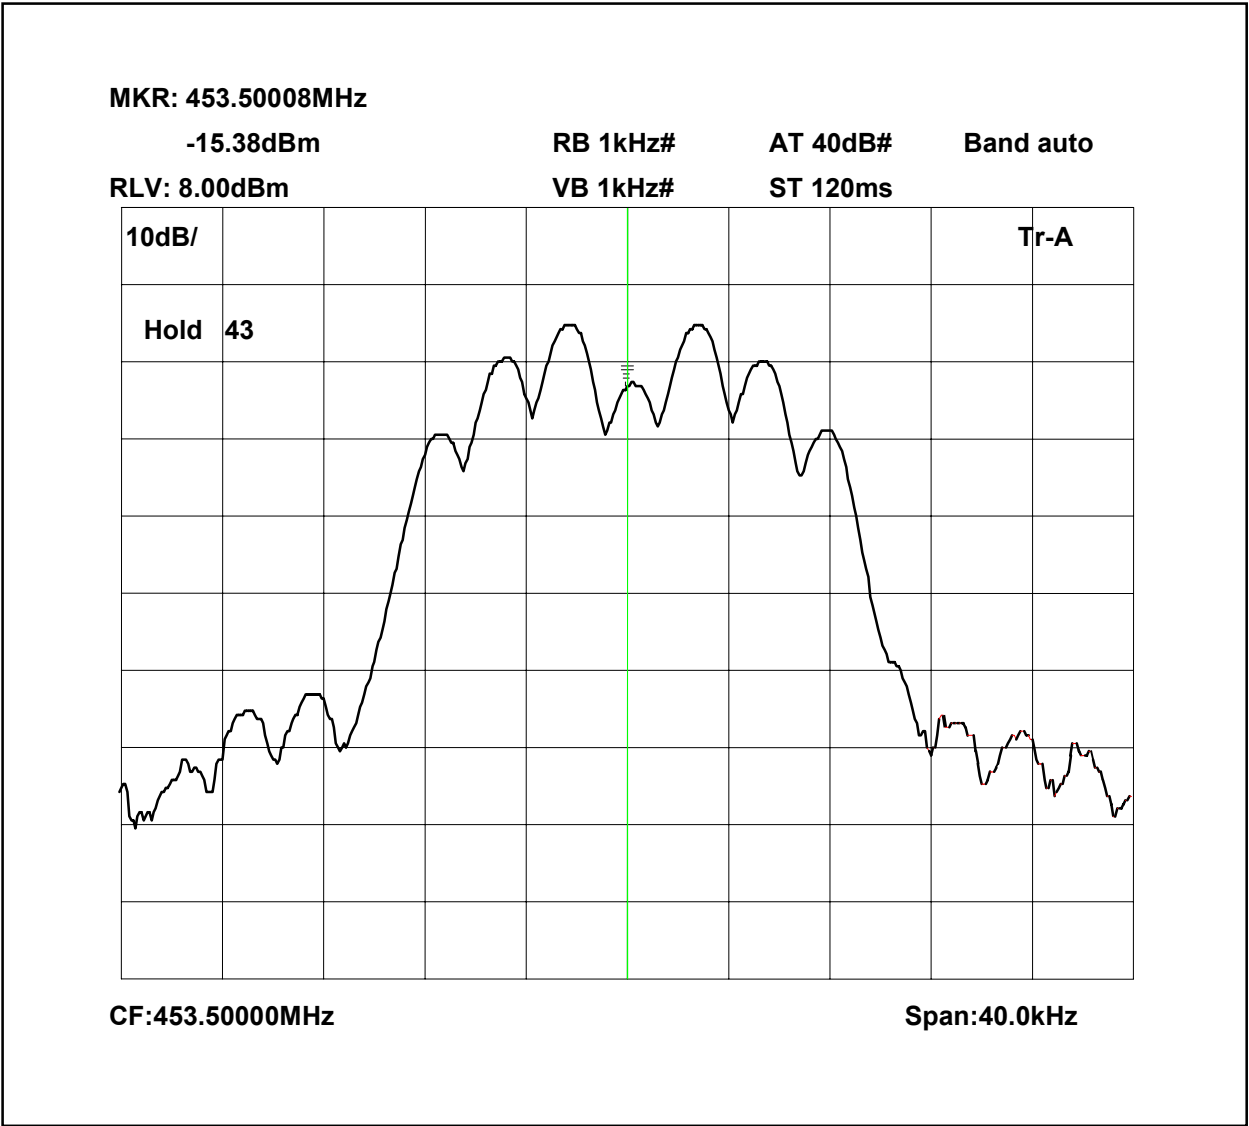

458.75MHz Signal Generator deviation set to 5kHz

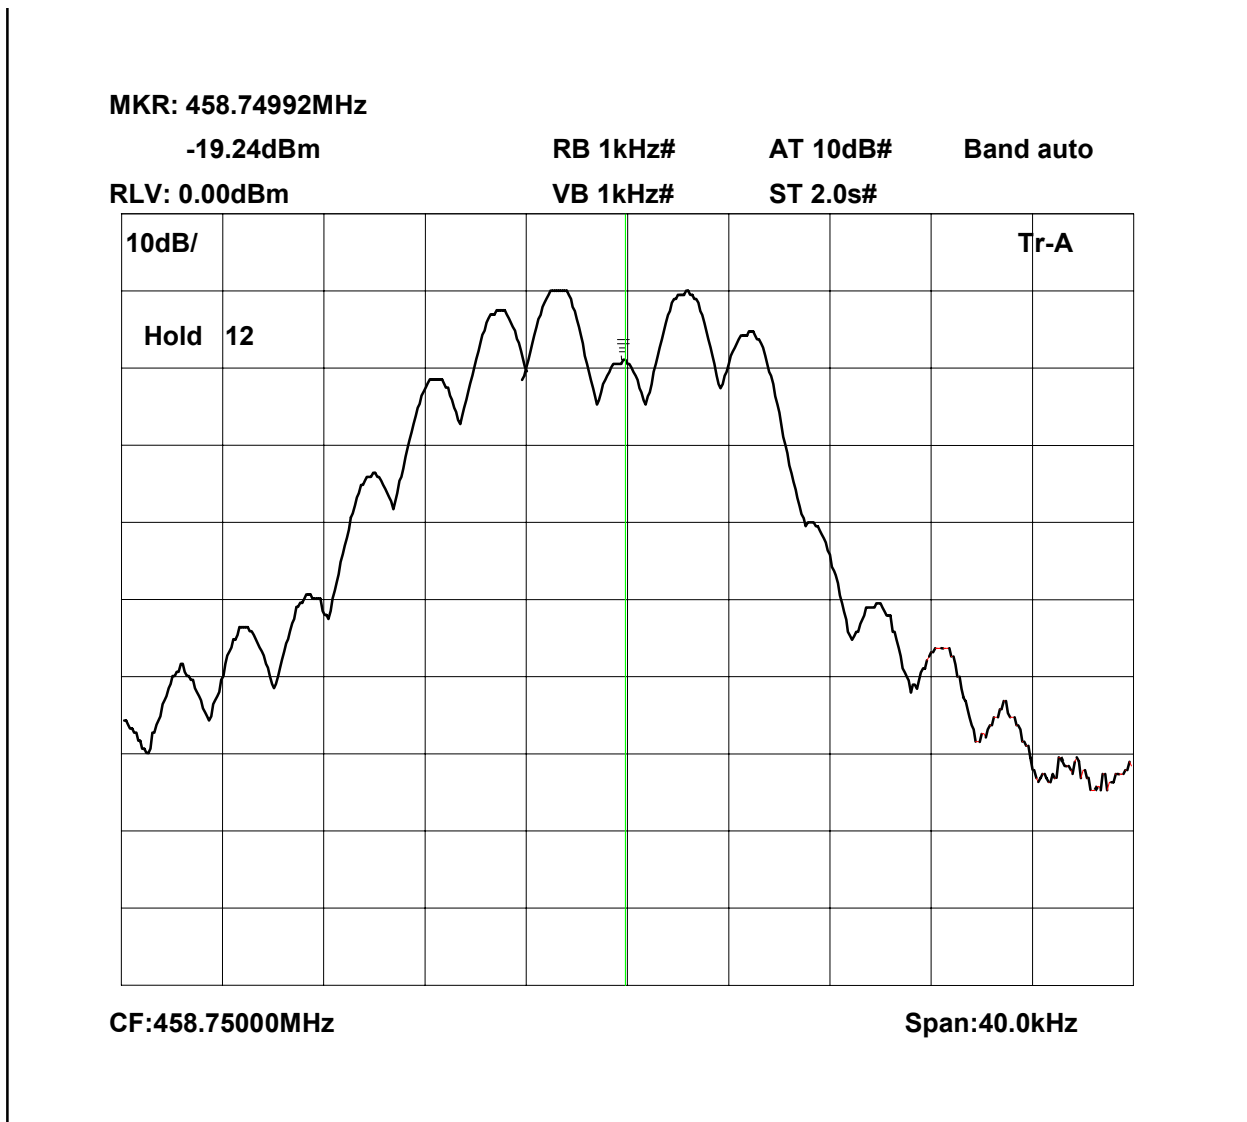

The above plots depicting the output waveshape show no measurable distortion visible. When compared to the input signal.

The test equipment used for the Transmitter modulated channel tests is shown overleaf:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	<b>X</b>
ATTENUATOR	BIRD	8304-200	N/A	103	
ATTENUATOR	BIRD	8304-300-N	N/A	220	<b>X</b>
CABLE	ROSENBERGER	MICRO COAX	N/A	279	<b>X</b>
SIGNAL GENERATOR	MARCON	2042	119388/080	179	<b>X</b>




## TRANSMITTER TESTS

### AMPLIFIER SPURIOUS EMISSIONS – CONDUCTED – Part 2.1051– DOWNLINK

Ambient temperature = 24°C  
 Relative humidity = 43%  
 Supply voltage = 24Vdc

Radio Laboratory  
 Test Signal = F3E

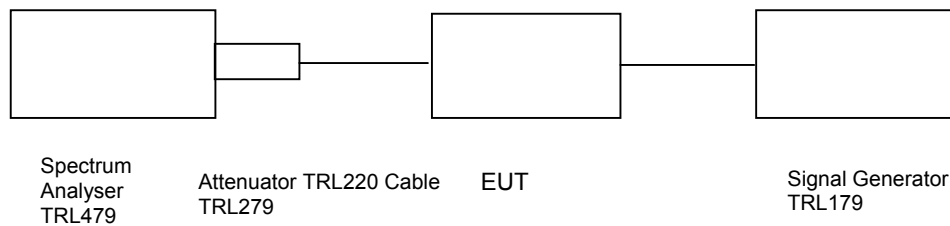

The test was set up as per the diagram. The level at the input was adjusted to compensate for the loss of the interconnecting cable. The unit was tested operating at maximum power and on three test frequencies.

The Spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more that 250% of the authorised bandwidth


At least 43 + 10 log PdB

$$(10\log P_{\text{watts}}) - (43 + 10\log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$$


The test equipment used for the Transmitter Conducted Emissions:

TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	<b>X</b>
ATTENUATOR	BIRD	8304-200	N/A	103	
ATTENUATOR	BIRD	8304-300-N	N/A	220	<b>X</b>
CABLE	ROSENBERGER	MICRO COAX	N/A	279	<b>X</b>
SIGNAL GENERATOR	MARCON	2042	119388/080	179	<b>X</b>


Conducted emissions 458.2MHz 0-3GHz

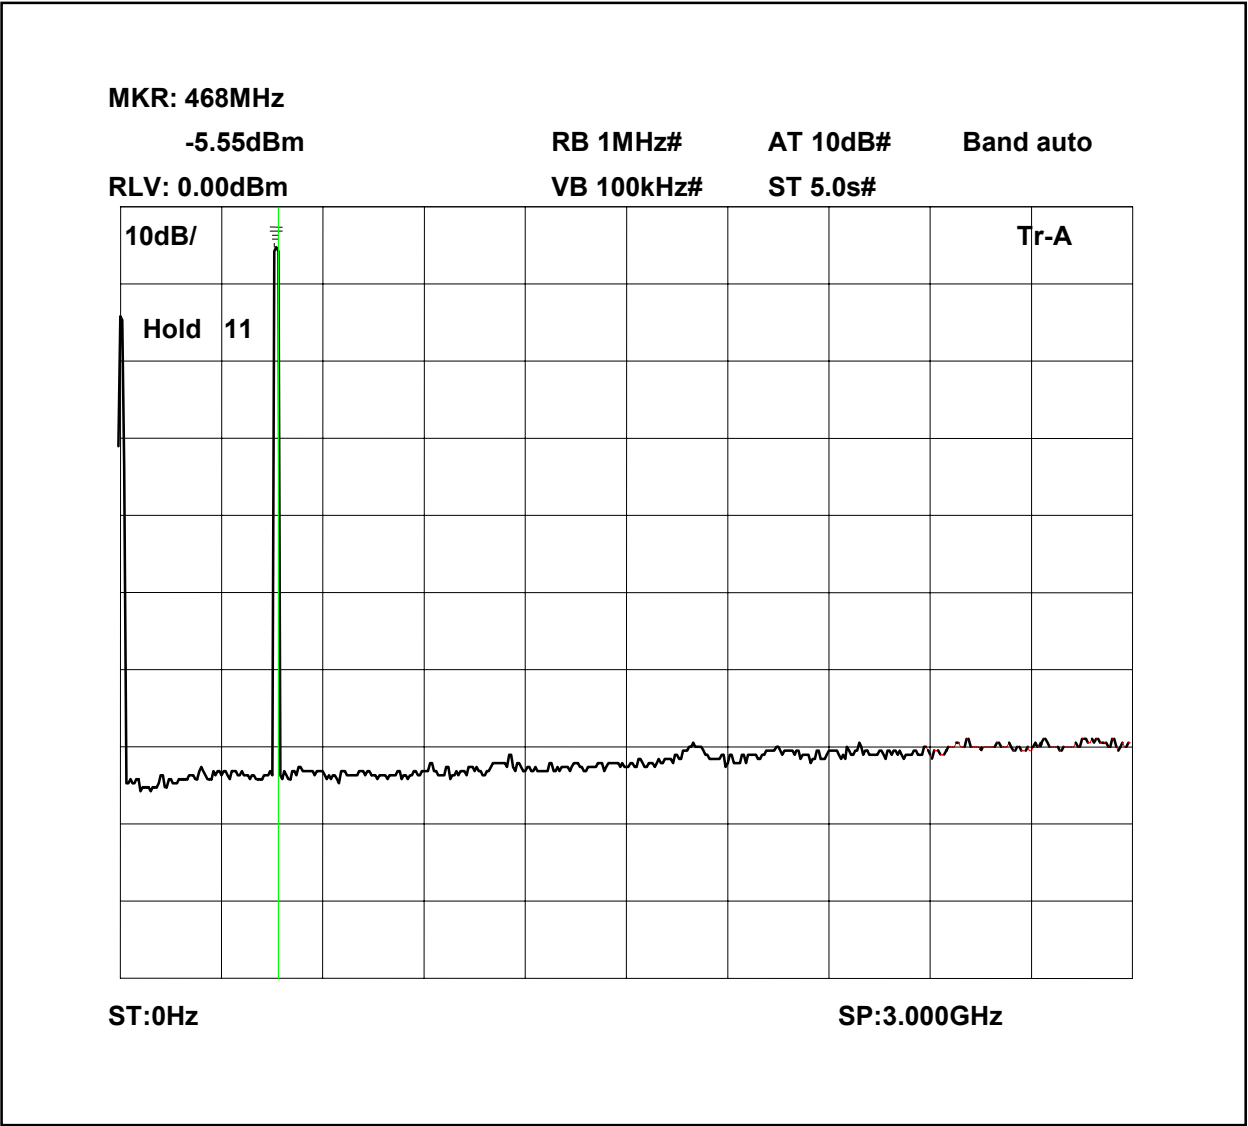


Conducted emissions 458.2MHz 2.9-10GHz

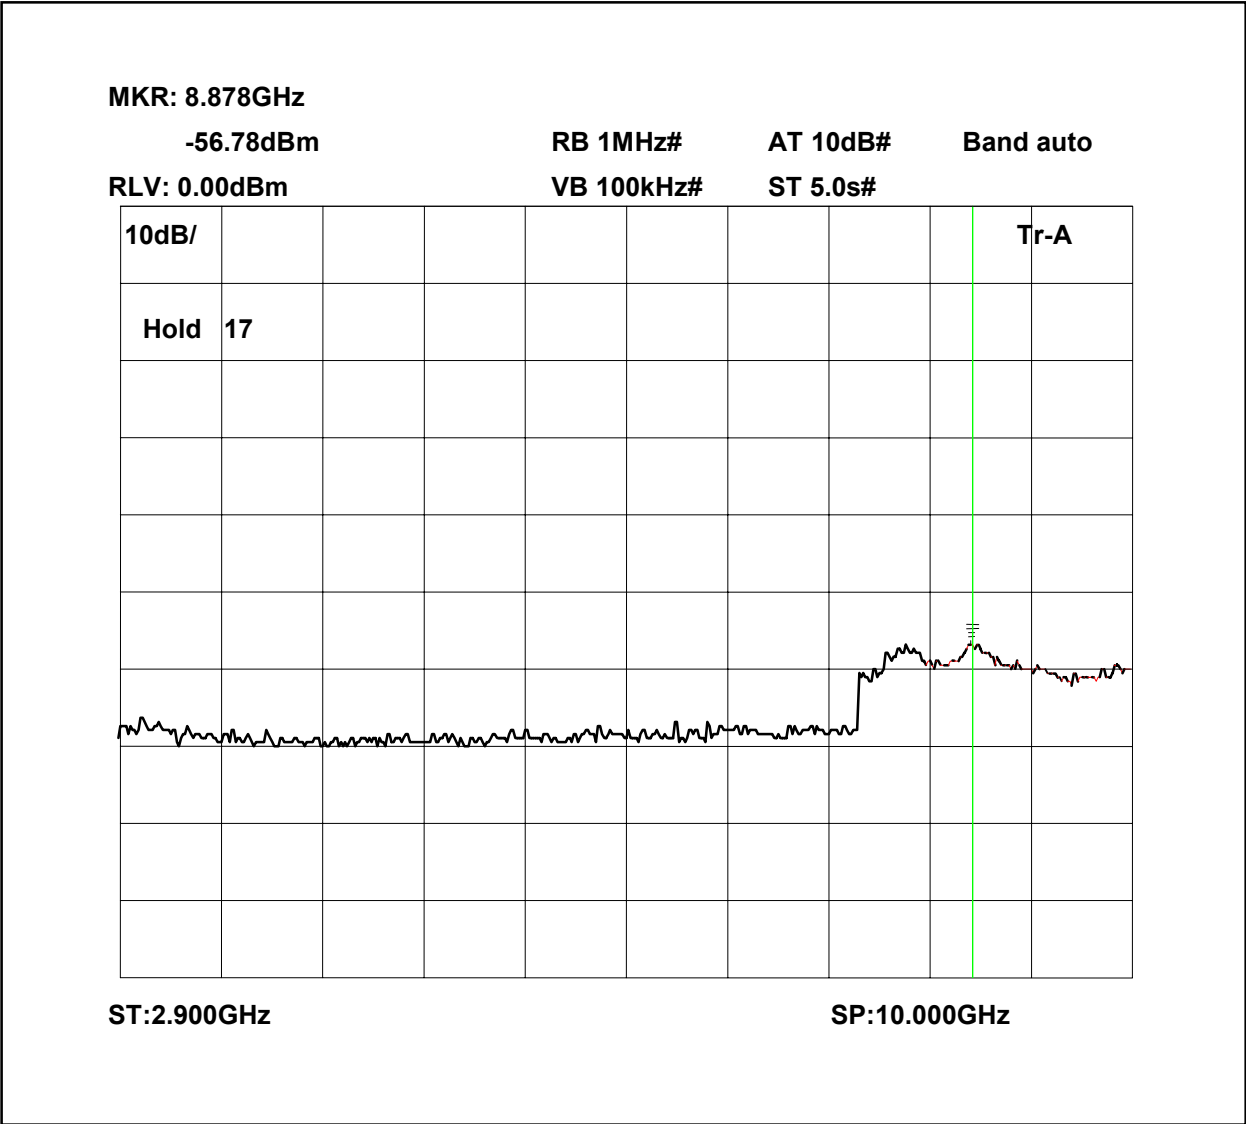


Conducted emissions 458.5MHz 0-3GHz

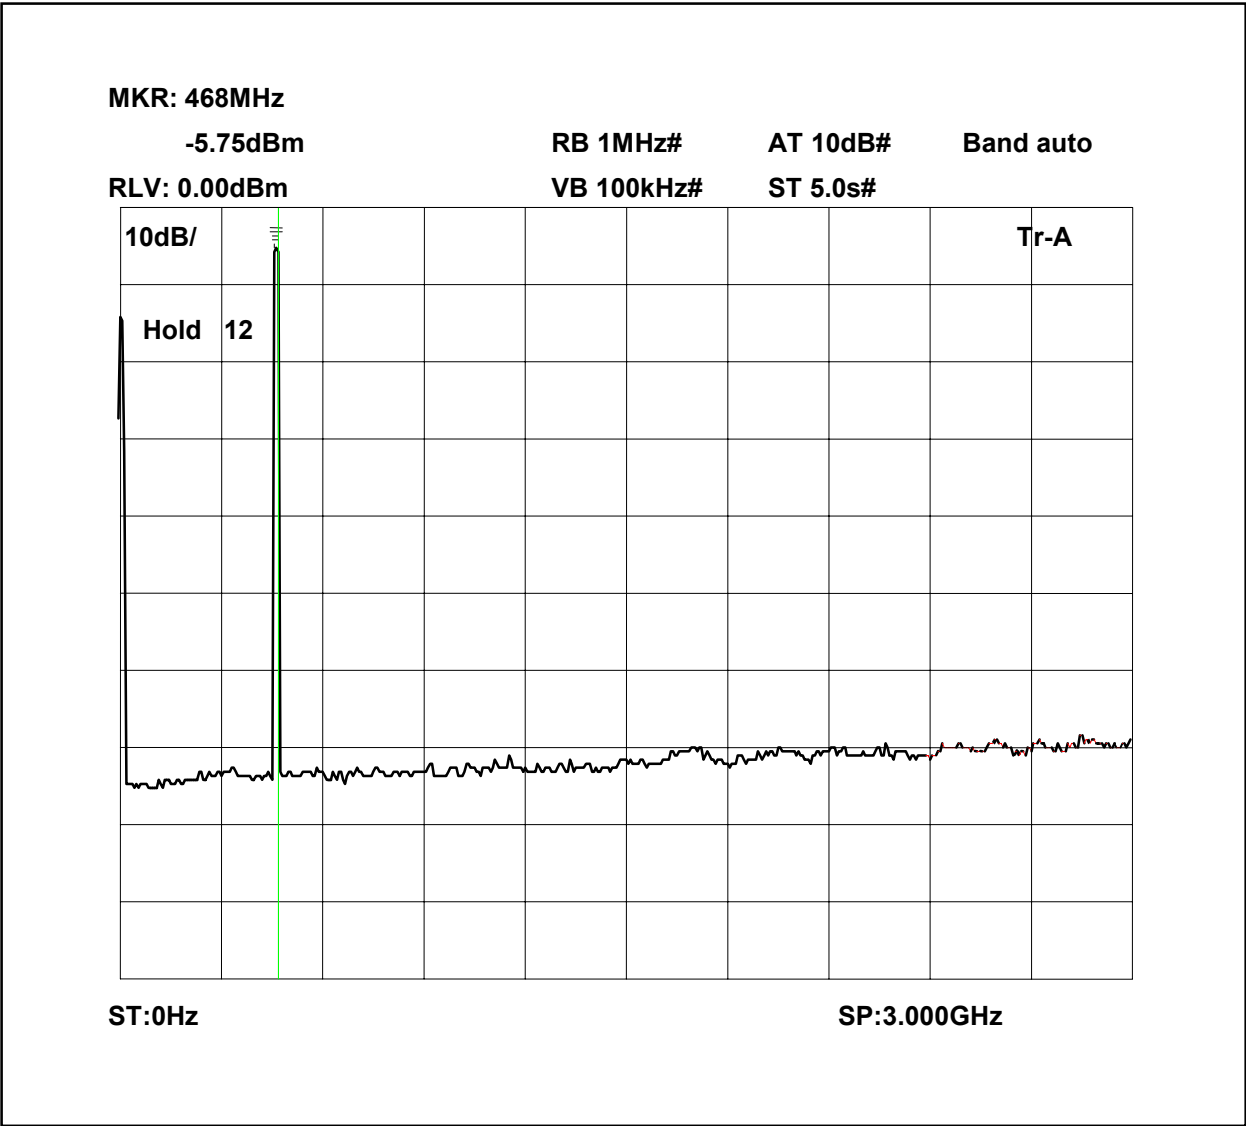


Conducted emissions 458.5MHz 2.9-10GHz

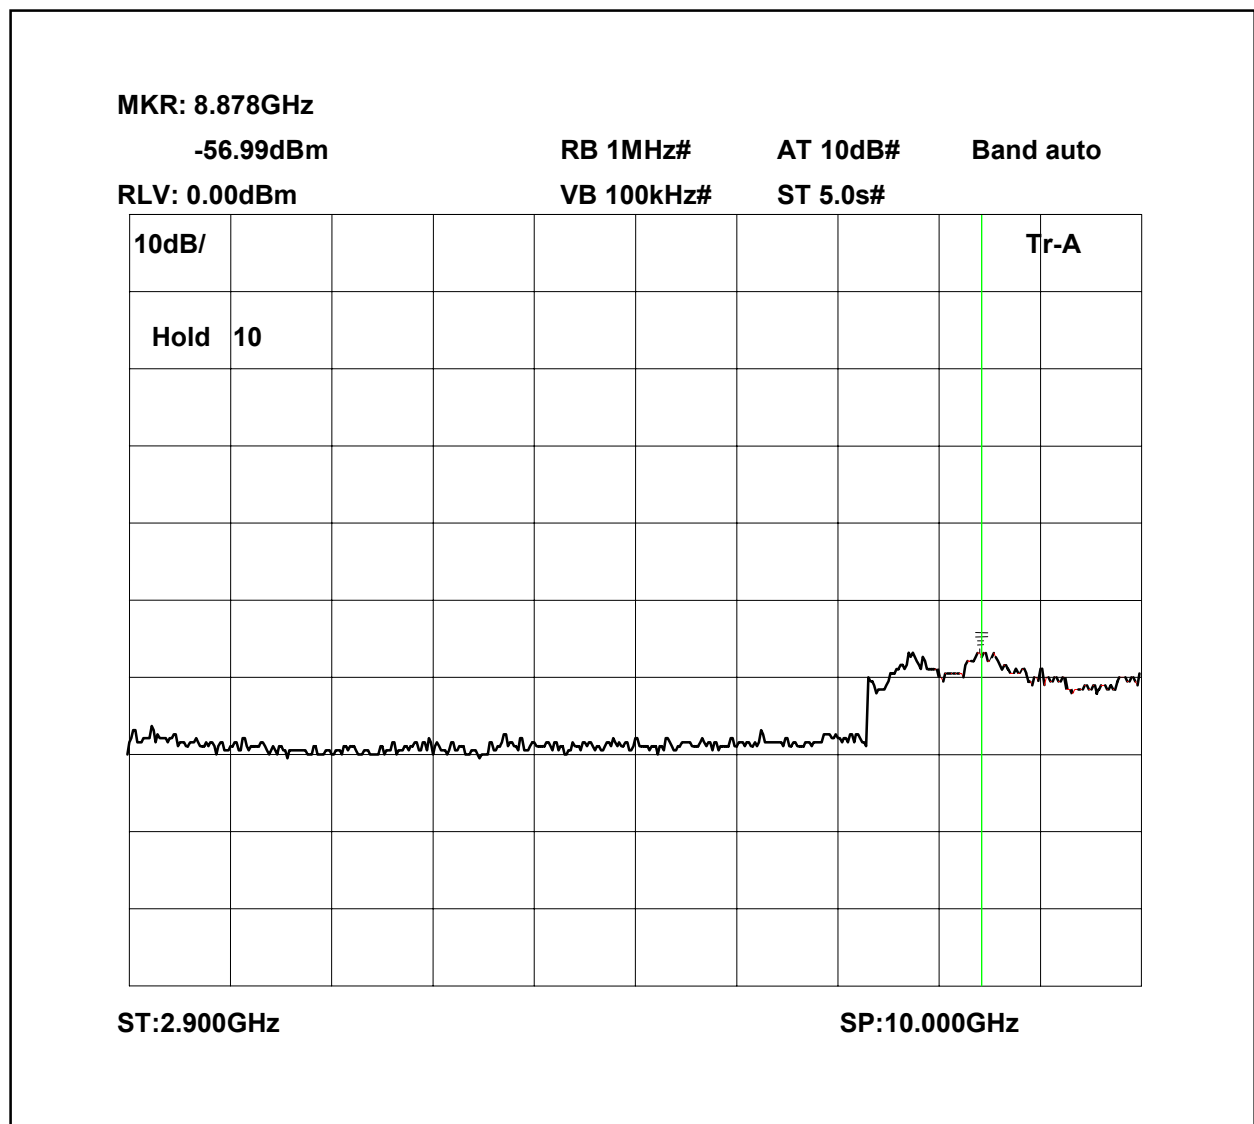

Conducted emissions 458.75MHz 0-3GHz

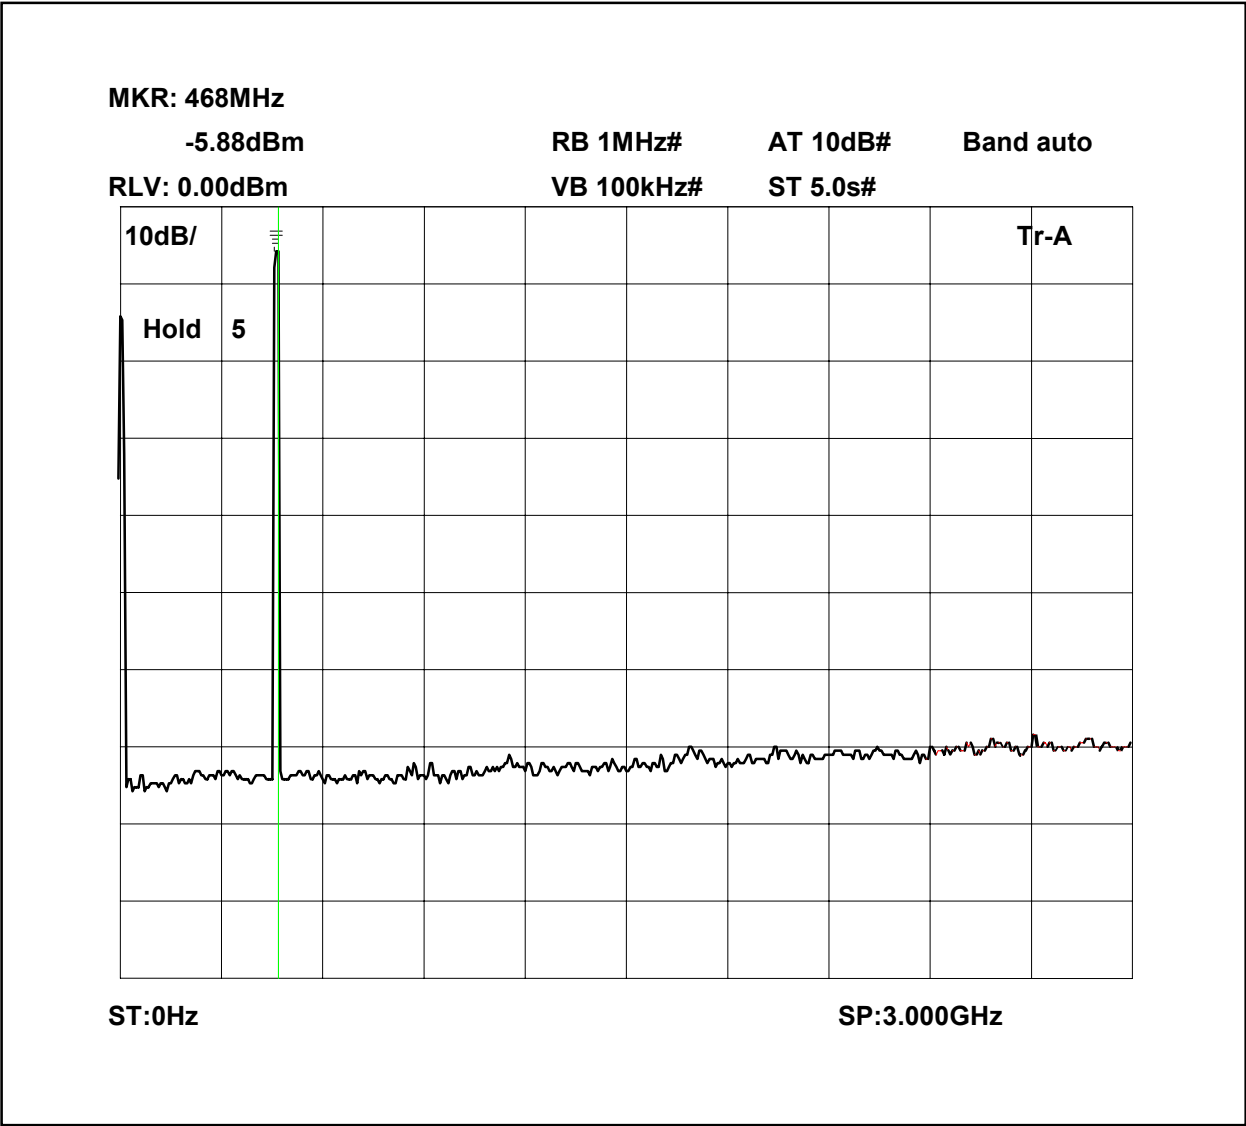

Conducted emissions 458.75MHz 2.9-10GHz

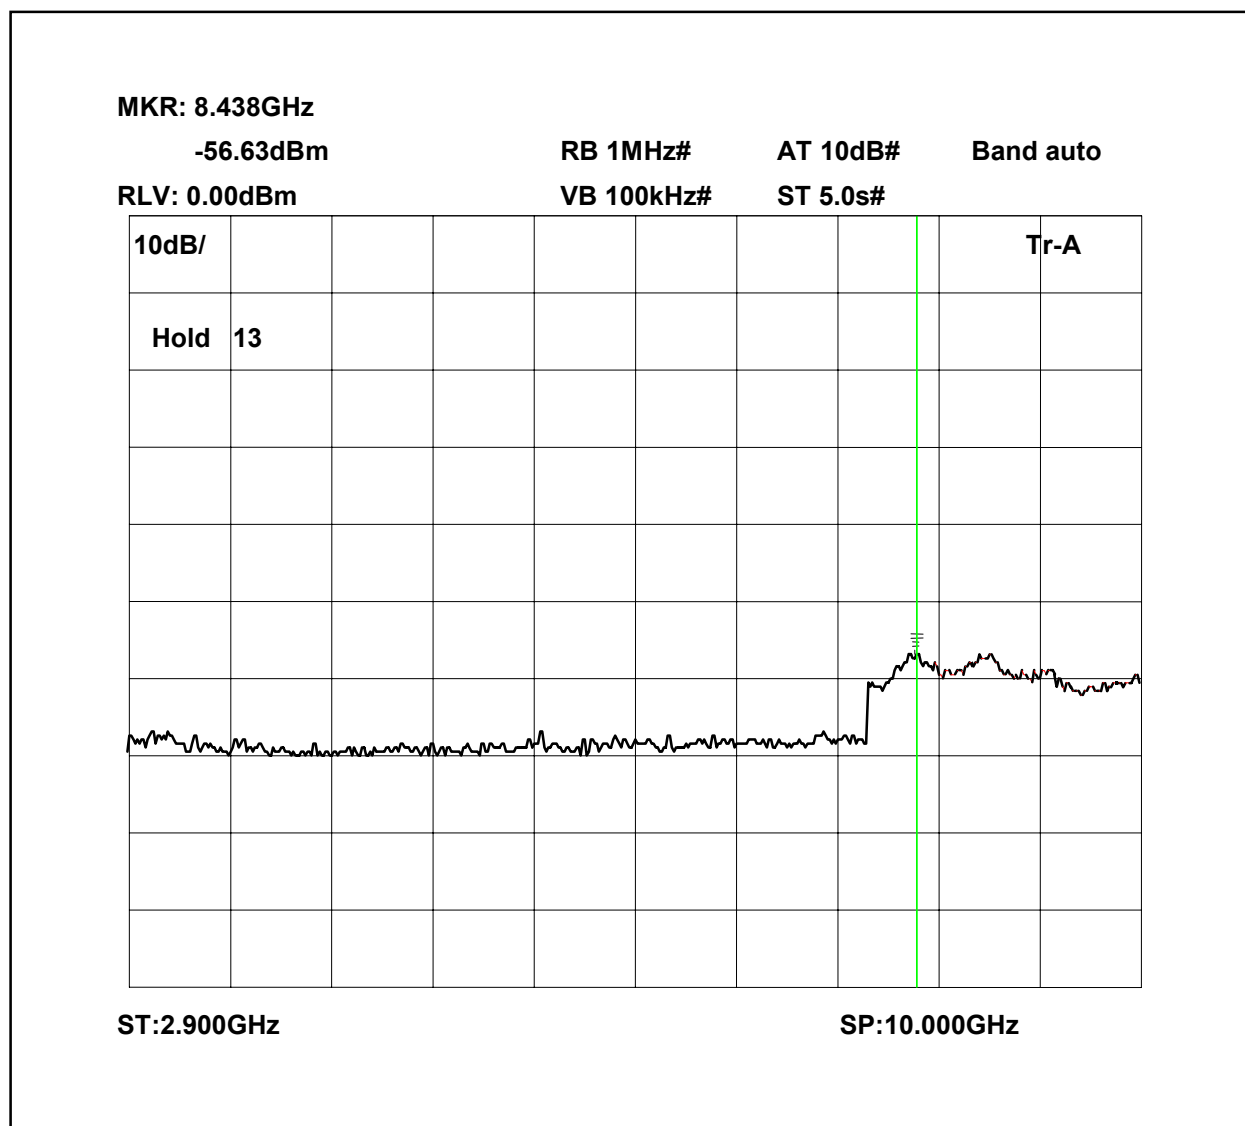


## TRANSMITTER TESTS

### AMPLIFIER SPURIOUS EMISSIONS – RADIATED – Part 2.1053– DOWNLINK

Ambient temperature = 24°C  
Relative humidity = 43%  
Conditions = OATS  
Supply voltage = 24Vdc  
Supply Frequency = N/A

Test Signal = F3E

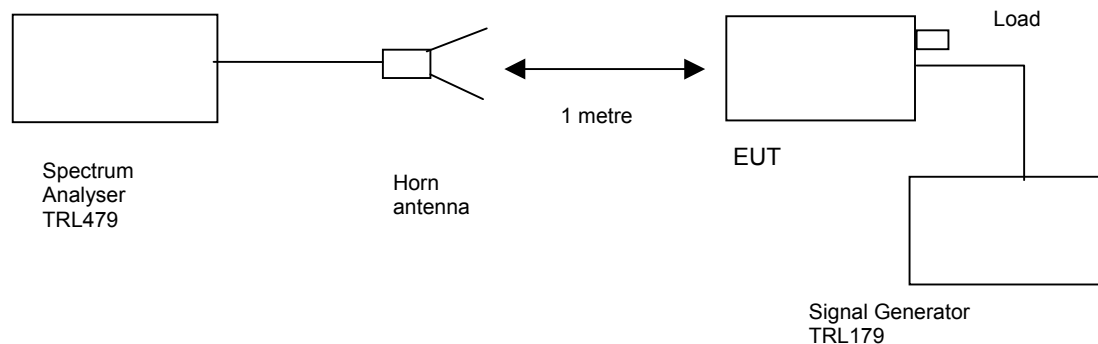

The test was set up as per the diagram. The level at the input was adjusted to compensate for the loss of the interconnecting cable. The unit was tested operating maximum power on three test frequencies with a 50 ohm load on the output. The unit was also tested with the signal generator replaced by another 50ohm load.

The Spurious limit was calculated as follows:


On any frequency removed from the assigned frequency by more that 250% of the authorised bandwidth

At least  $43 + 10 \log P_{dB}$

$$(10\log P_{\text{watts}}) - (43 + 10\log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$$



Radiated emissions 458.2MHz 0-3GHz

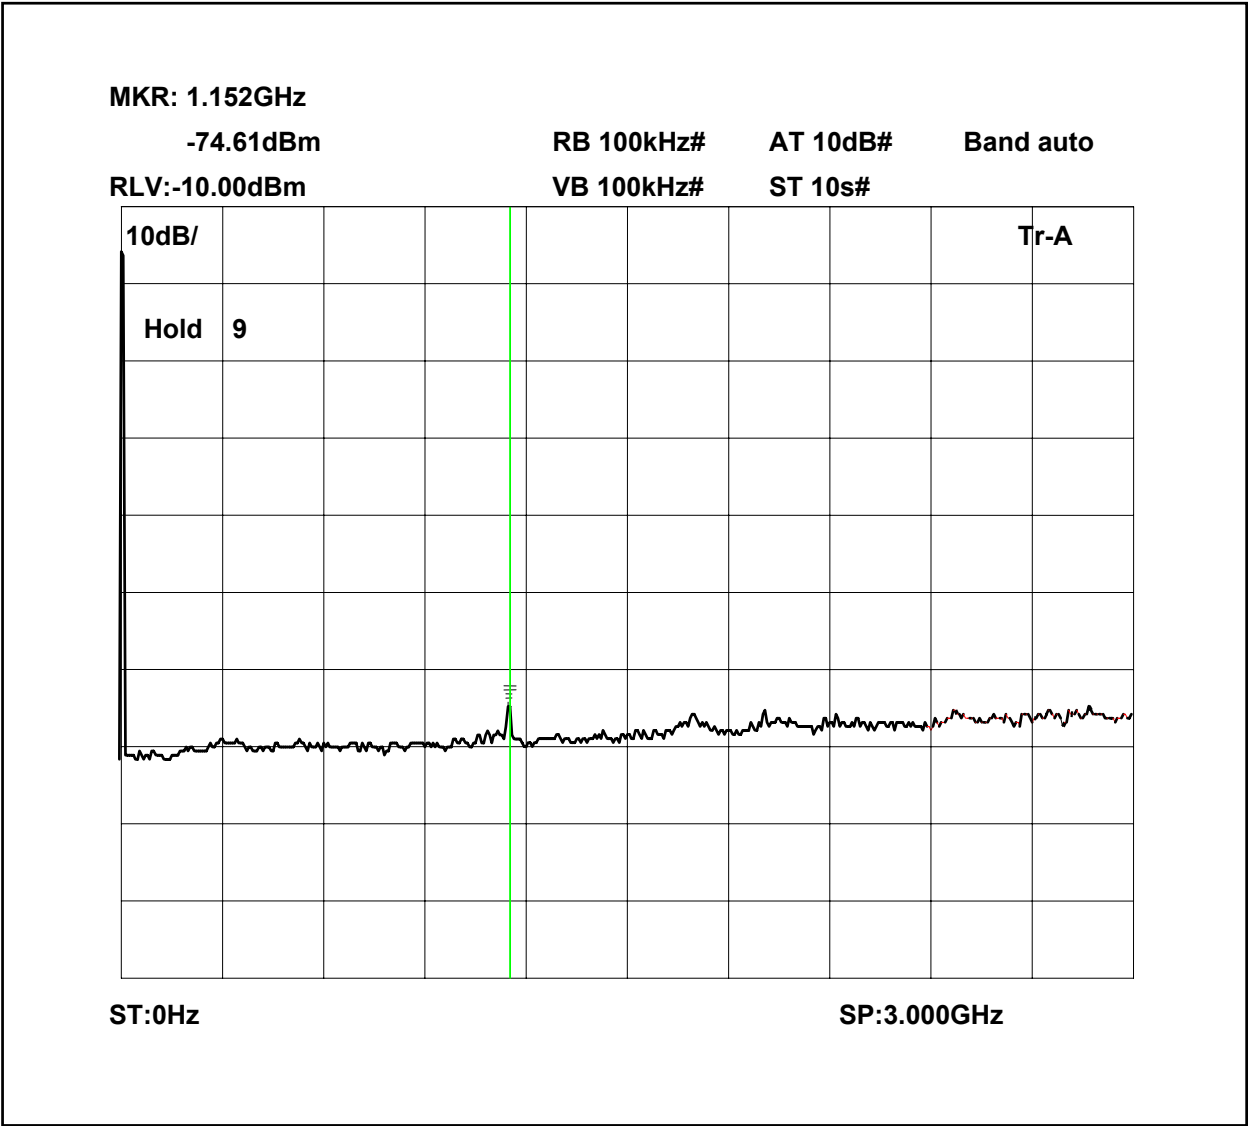

The above test results show that there were no emissions within 20dBs of the –13dBm limit.

**MKR: 8.949GHz**  
**-64.00dBm**      **RB 100kHz#**      **AT 10dB#**      **Band auto**  
**RLV:-10.00dBm**      **VB 100kHz#**      **ST 10s#**

**10dB/**      **Tr-A**  
**Hold 10**


**ST:2.900GHz**      **SP:10.000GHz**

RF335 iss02

RU1063/4785


Page 58 of 70

Radiated emissions 458.5MHz 0-3GHz

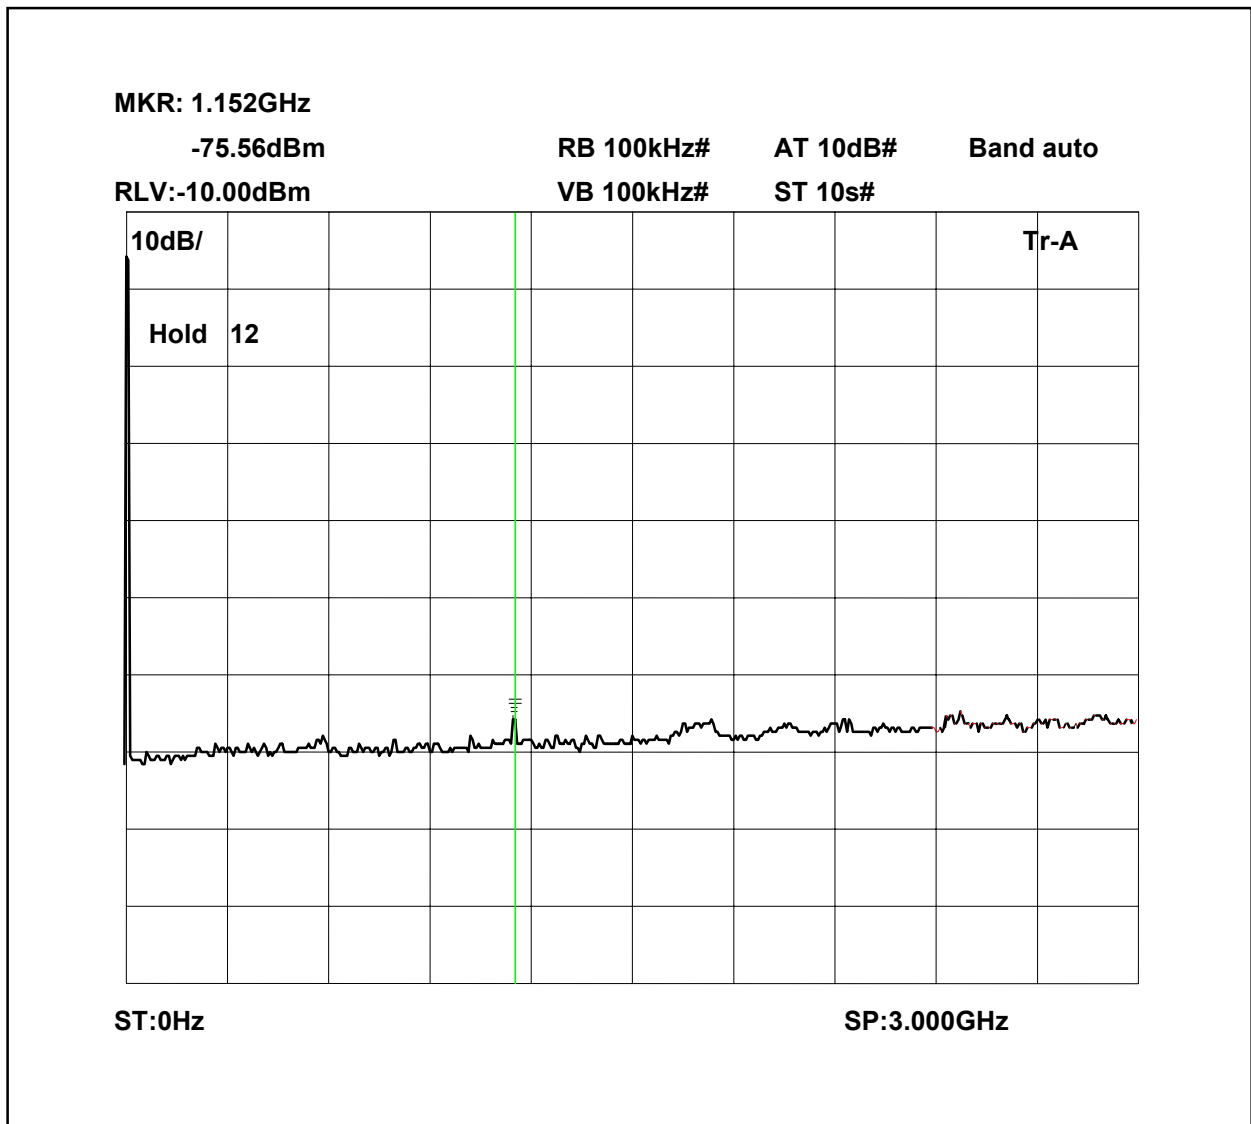


The above test results show that there were no emissions within 20dBs of the  $-13\text{dBm}$  limit.

Radiated emissions 458.5MHz 2.9-10GHz

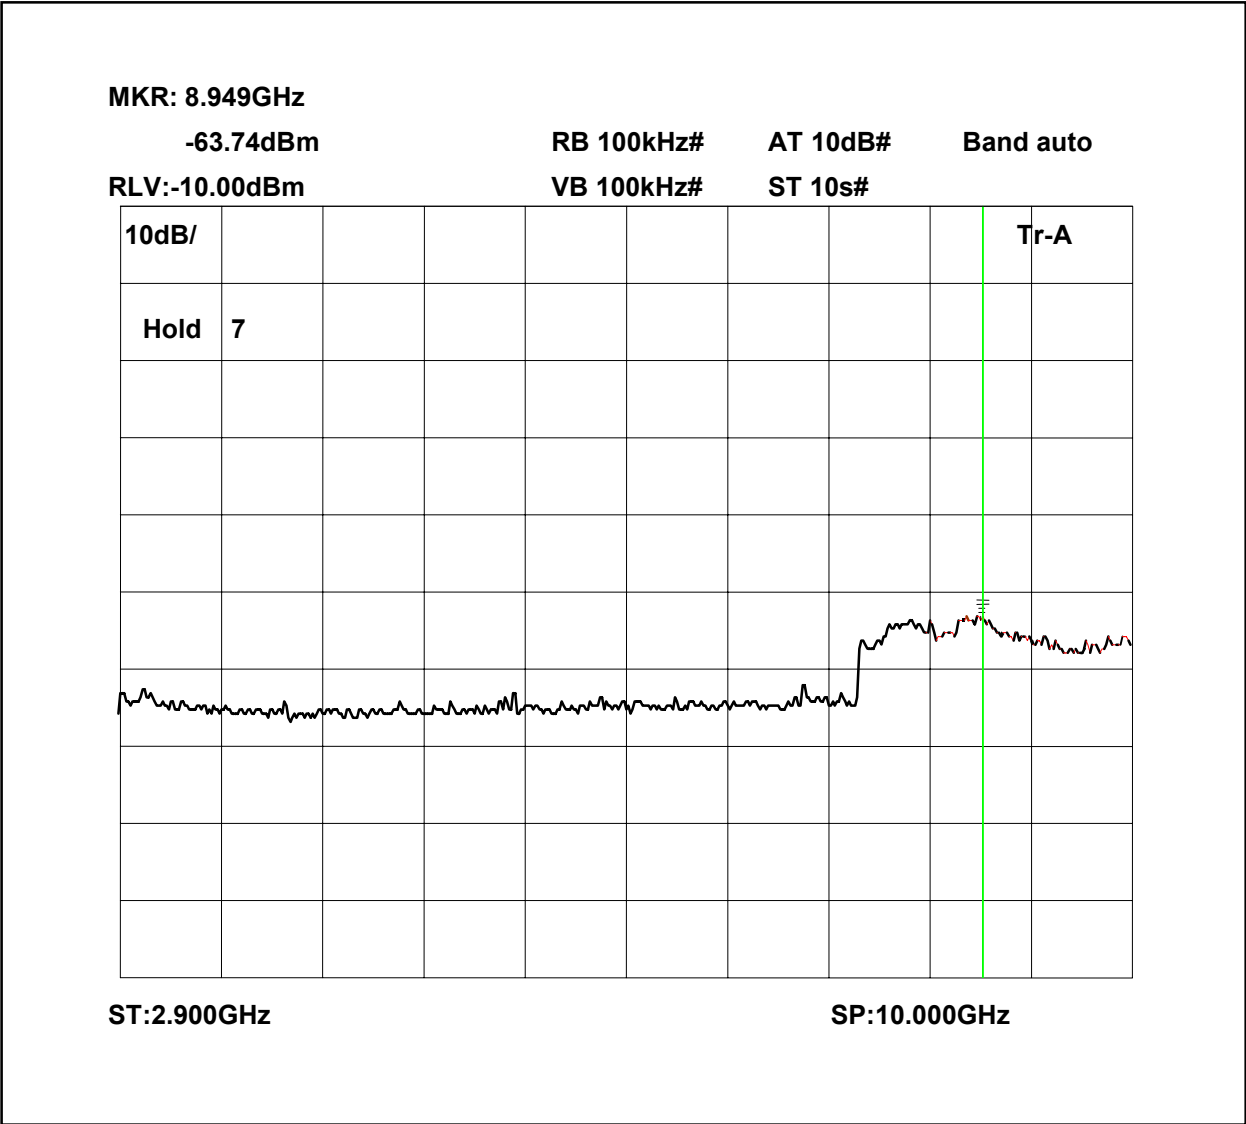


The above test results show that there were no emissions within 20dBs of the –13dBm limit.

Radiated emissions 458.75MHz 0-3GHz

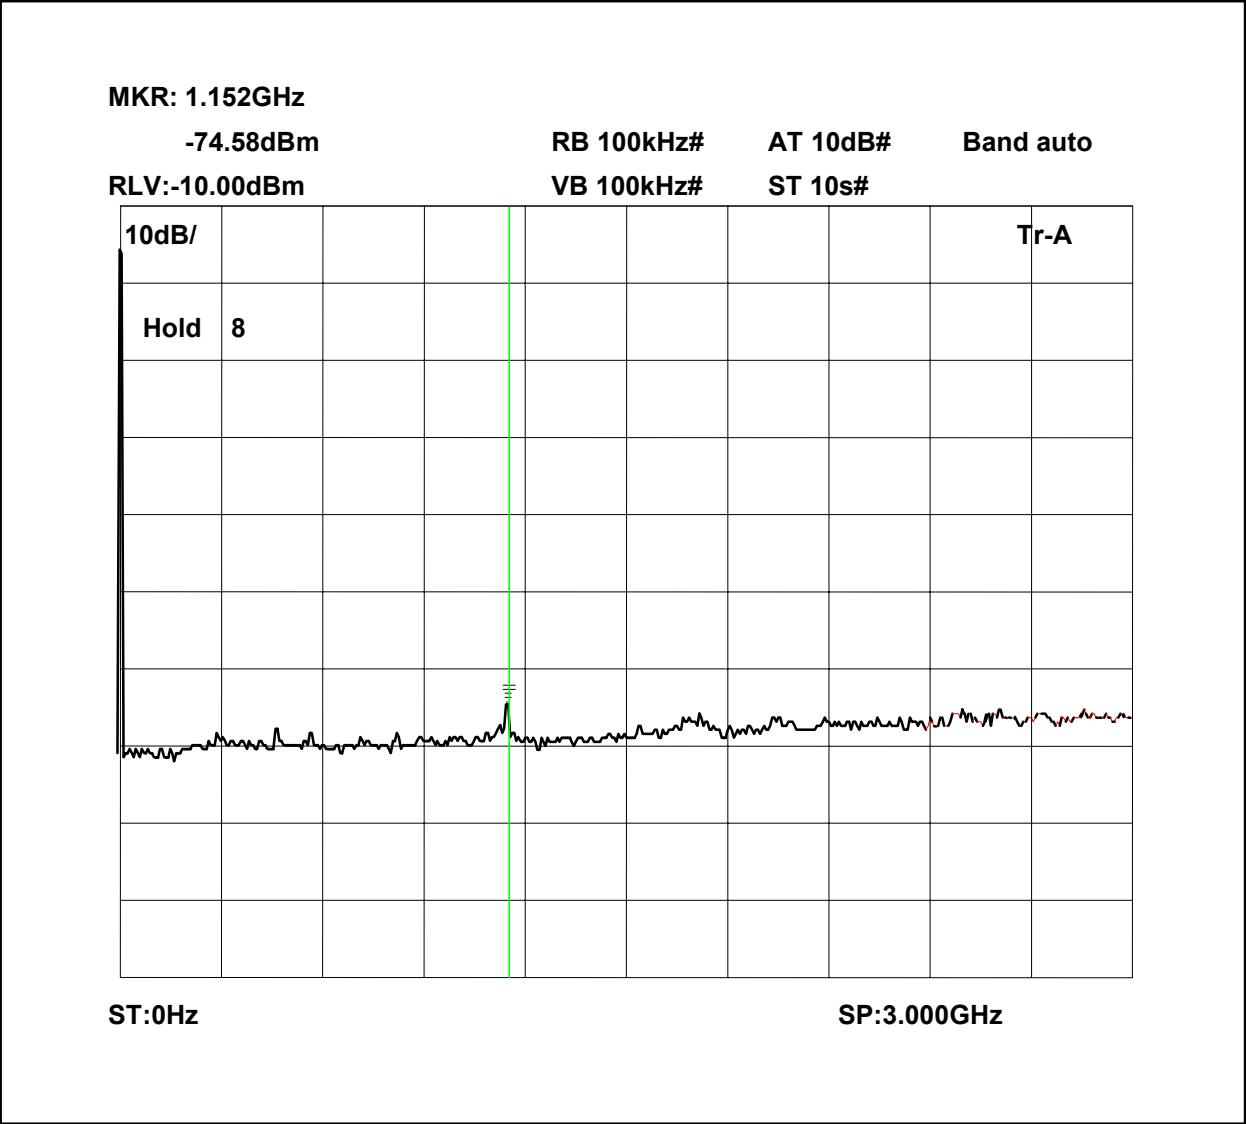


The above test results show that there were no emissions within 20dBs of the –13dBm limit.

Radiated emissions 458.75MHz 2.9-10GHz

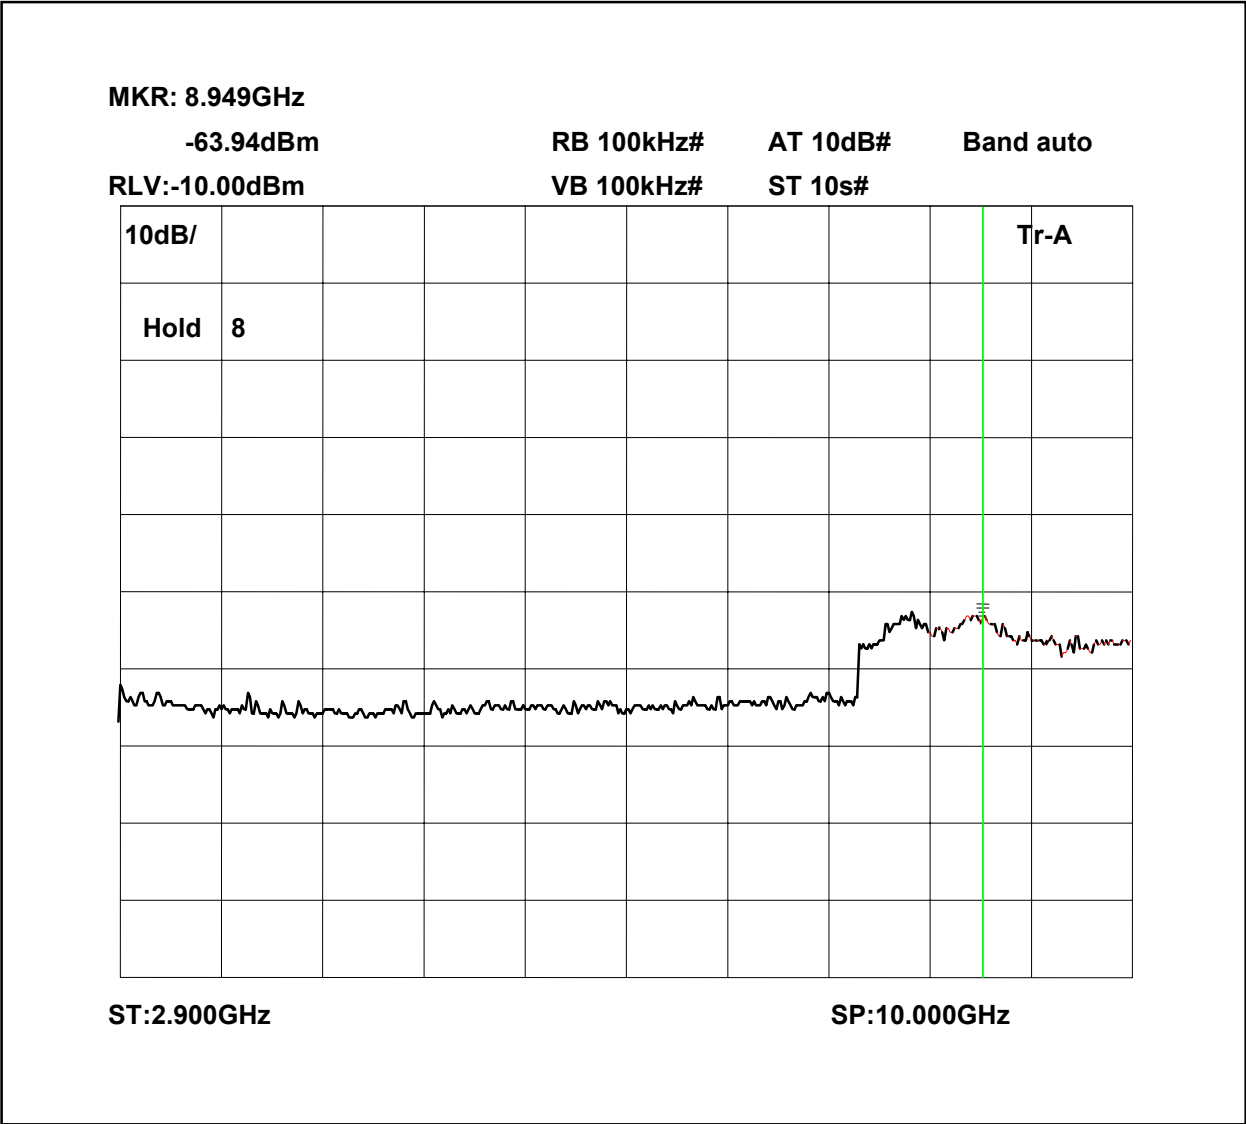


Radiated emissions no input signal 0-3GHz

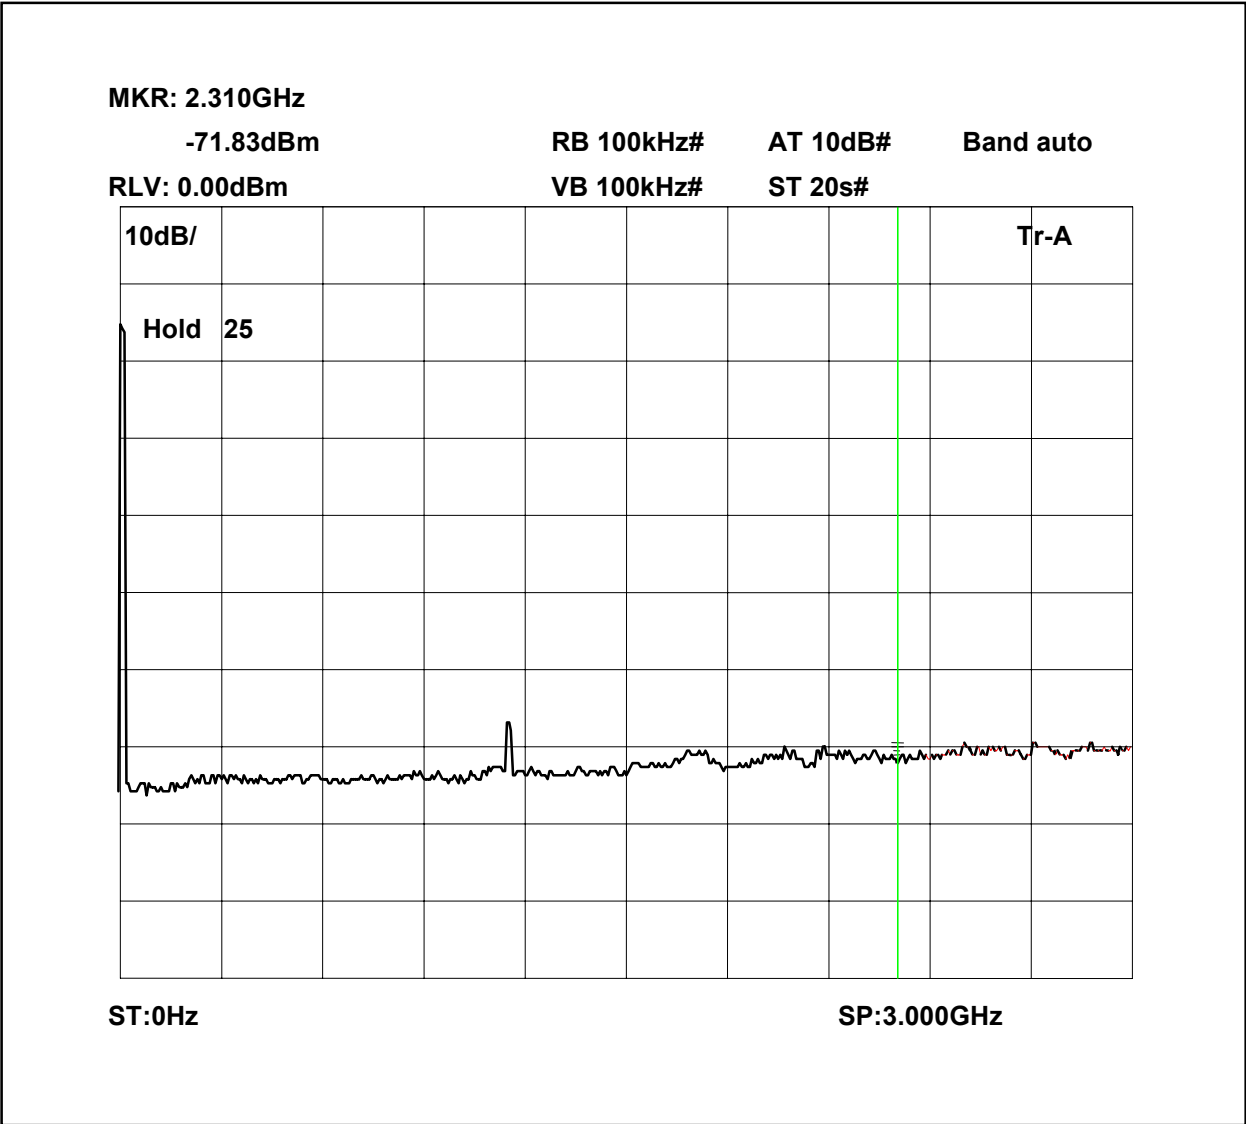

The above test results show that there were no emissions within 20dBs of the –13dBm limit.

Radiated emissions no input signal 2.9-10GHz

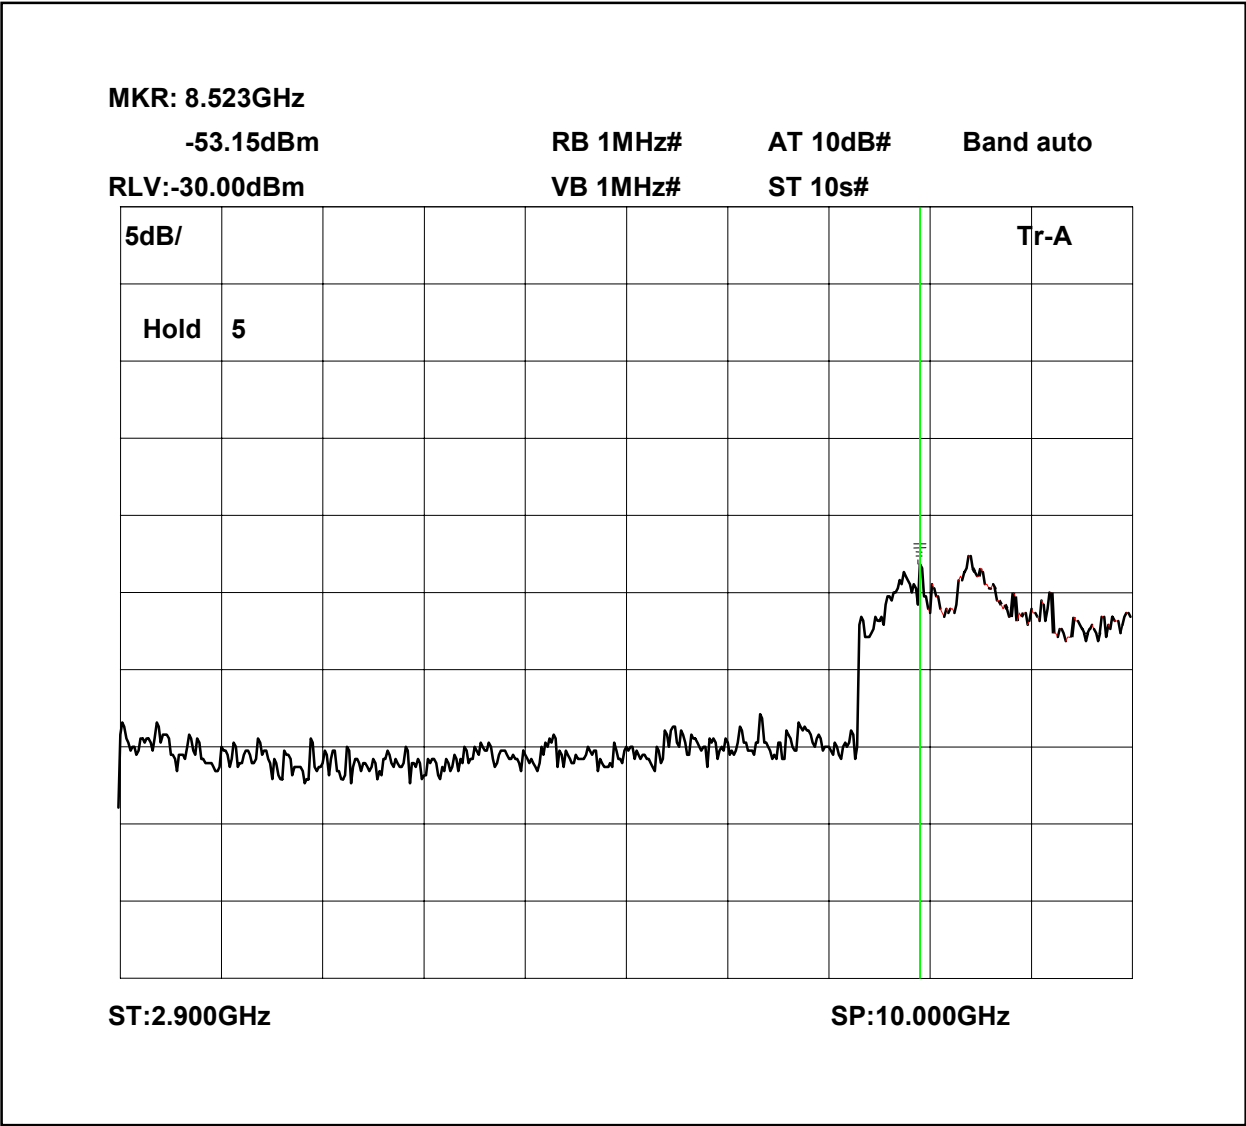

The above test results show that there were no emissions within 20dBs of the –13dBm limit.



The test equipment used for the Transmitter Spurious Emissions:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	<b>X</b>
HORN	EMCO	3115	9010-3581	139	<b>X</b>
ATTENUATOR	BIRD	8304-300-N	N/A	220	<b>X</b>
ATTENUATOR	BIRD	8308-100	N/A	112	<b>X</b>
CABLE	ROSENBERGER	MICRO COAX	N/A	279	<b>X</b>
SIGNAL GENERATOR	MARCON	2042	119388/080	179	<b>X</b>

**ANNEX A**  
**PHOTOGRAPHS**





**ANNEX B**

**APPLICANT'S SUBMISSION OF DOCUMENTATION LIST**

## APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

a.	TCB	-	APPLICATION	<input checked="" type="checkbox"/>
		-	FEE	<input checked="" type="checkbox"/>
b.	AGENT'S LETTER OF AUTHORISATION	-		<input checked="" type="checkbox"/>
c.	MODEL(s) vs IDENTITY	-		<input type="checkbox"/>
d.	ALTERNATIVE TRADE NAME DECLARATION(s)	-		<input type="checkbox"/>
e.	LABELLING	-	PHOTOGRAPHS	<input type="checkbox"/>
		-	DECLARATION	<input type="checkbox"/>
		-	DRAWINGS	<input type="checkbox"/>
f.	TECHNICAL DESCRIPTION	-		<input checked="" type="checkbox"/>
g.	BLOCK DIAGRAMS	-	Tx	<input checked="" type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
h.	CIRCUIT DIAGRAMS	-	Tx	<input type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
i.	COMPONENT LOCATION	-	Tx	<input type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
j.	PCB TRACK LAYOUT	-	Tx	<input type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
k.	BILL OF MATERIALS	-	Tx	<input type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
l.	USER INSTALLATION / OPERATING INSTRUCTIONS	-		<input checked="" type="checkbox"/>