

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-17

Tested By:

Gen Liu

EUT:

Multi-Channel Soundbar with wireless subwoofer

Model Number:

BAR 1000MK2

Test Mode:

TX ANT2 11B 2412MHz

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.5°C;Humi:65.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Bar1000\FCC ABOVE1G 2.4GWIFI\27

Memo:

Power Setting:17

Test Graph

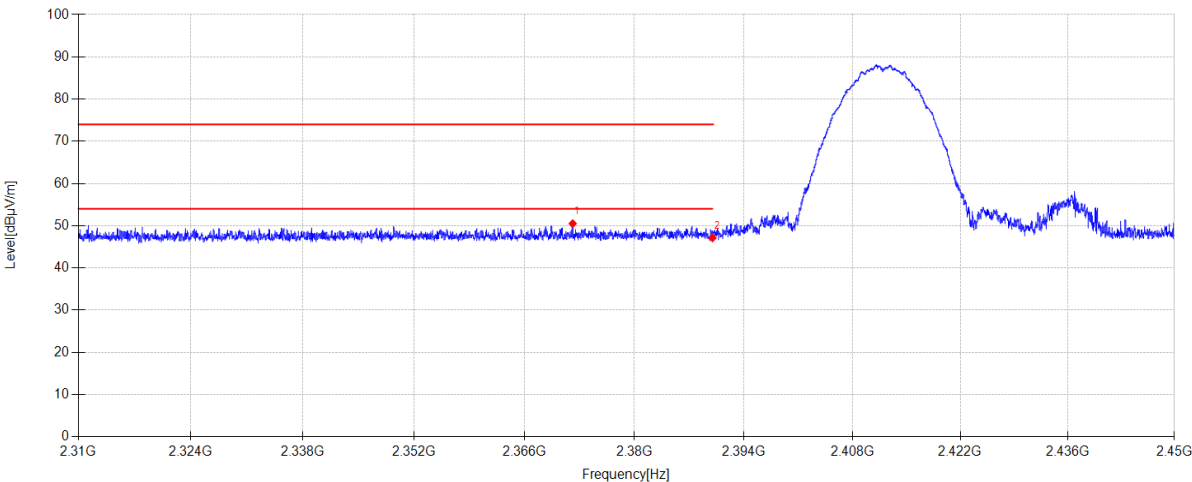

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2372.132	19.75	27.19	3.56	0.00	50.50	74.00	23.50	PK	Horizontal
2	2390.000	16.30	27.26	3.57	0.00	47.13	74.00	26.87	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-17

Tested By:

Gen Liu

EUT:

Multi-Channel Soundbar with wireless subwoofer

Model Number:

BAR 1000MK2

Test Mode:

TX ANT2 11B 2412MHz

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.5°C;Humi:65.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Bar1000\FCC ABOVE1G 2.4GWIFI\28

Memo:

Power Setting:17

Test Graph

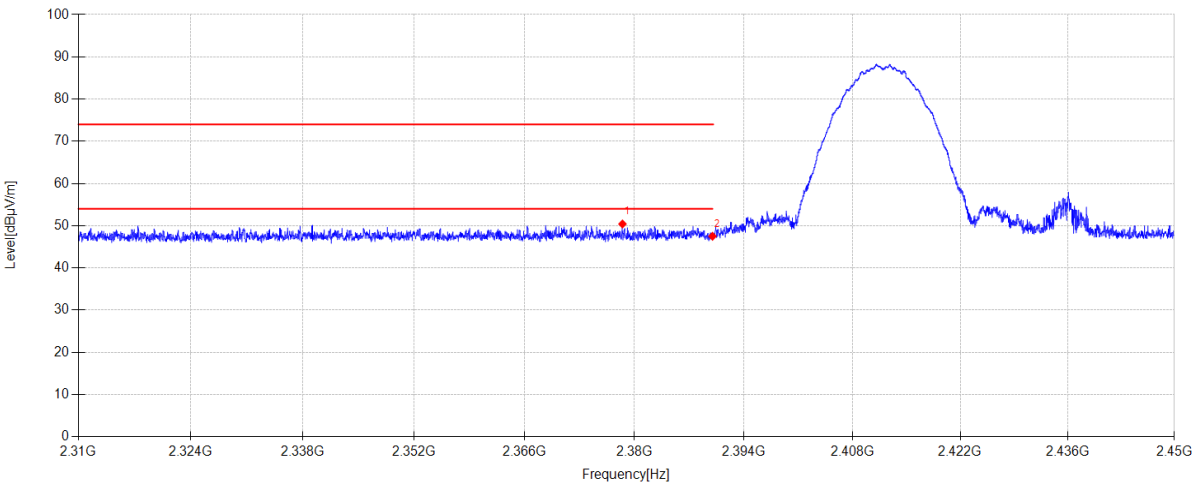

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2378.474	19.65	27.21	3.56	0.00	50.42	74.00	23.58	PK	Vertical
2	2390.000	16.67	27.26	3.57	0.00	47.50	74.00	26.50	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-17

Tested By:

Gen Liu

EUT:

Multi-Channel Soundbar with wireless subwoofer

Model Number:

BAR 1000MK2

Test Mode:

TX ANT2 11B 2462MHz

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.5°C;Humi:65.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Bar1000\FCC ABOVE1G 2.4GWIFI\29

Memo:

Power Setting:17

Test Graph

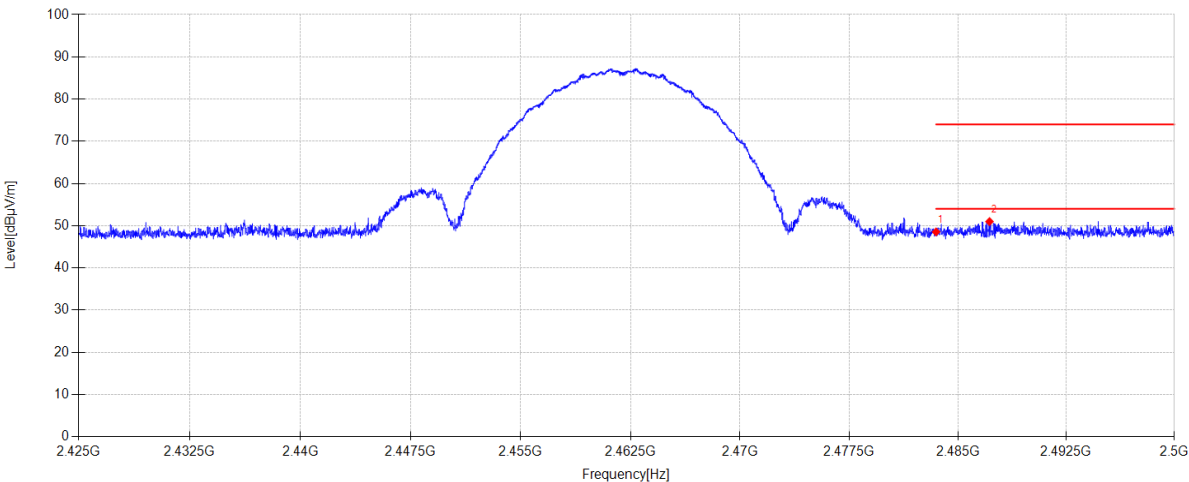

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	17.39	27.53	3.62	0.00	48.54	74.00	25.46	PK	Horizontal
2	2487.190	19.82	27.55	3.62	0.00	50.99	74.00	23.01	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-17

Tested By:

Gen Liu

EUT:

Multi-Channel Soundbar with wireless subwoofer

Model Number:

BAR 1000MK2

Test Mode:

TX ANT2 11B 2462MHz

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.5°C;Humi:65.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Bar1000\FCC ABOVE1G 2.4GWIFI\30

Memo:

Power Setting:17

Test Graph

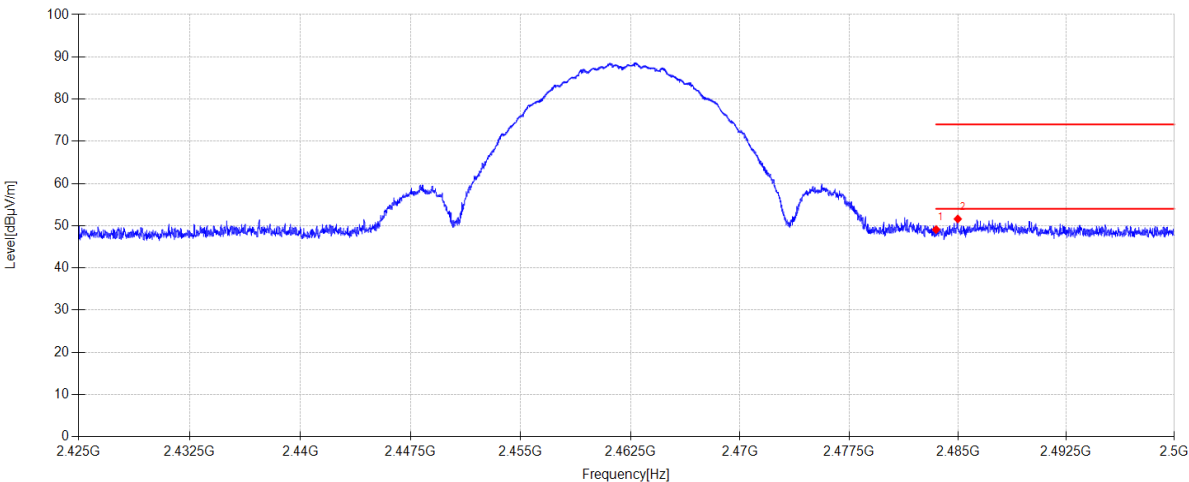

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	17.95	27.53	3.62	0.00	49.10	74.00	24.90	PK	Vertical
2	2485.000	20.44	27.54	3.62	0.00	51.60	74.00	22.40	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-17

Tested By:

Gen Liu

EUT:

Multi-Channel Soundbar with wireless subwoofer

Model Number:

BAR 1000MK2

Test Mode:

TX ANT2 11G 2462MHz

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.5°C;Humi:65.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Bar1000\FCC ABOVE1G 2.4GWIFI\31

Memo:

Power Setting:16

Test Graph

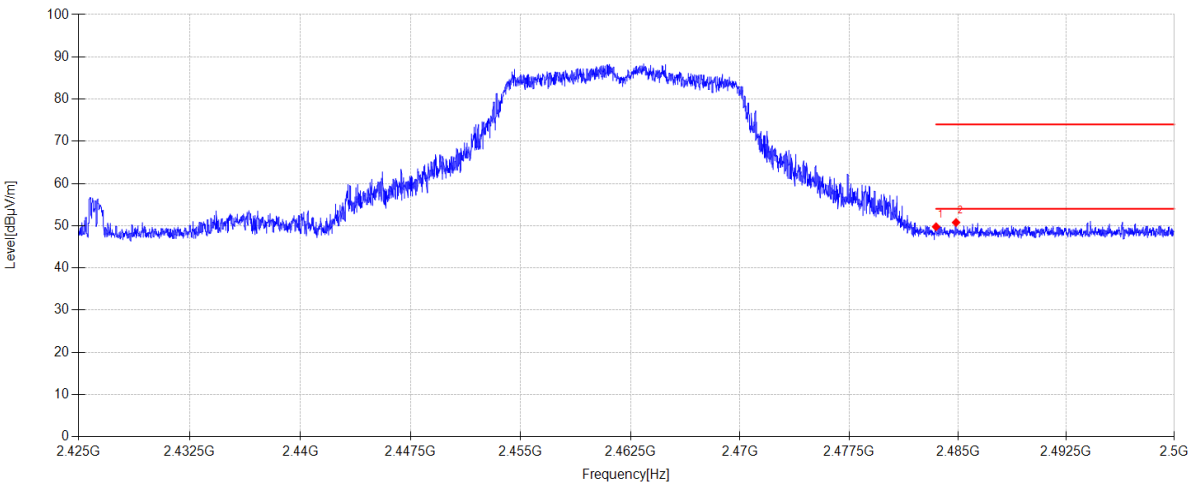

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.61	27.53	3.62	0.00	49.76	74.00	24.24	PK	Horizontal
2	2484.880	19.61	27.54	3.62	0.00	50.77	74.00	23.23	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-17

Tested By:

Gen Liu

EUT:

Multi-Channel Soundbar with wireless subwoofer

Model Number:

BAR 1000MK2

Test Mode:

TX ANT2 11G 2462MHz

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.5°C;Humi:65.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Bar1000\FCC ABOVE1G 2.4GWIFI\32

Memo:

Power Setting:16

Test Graph

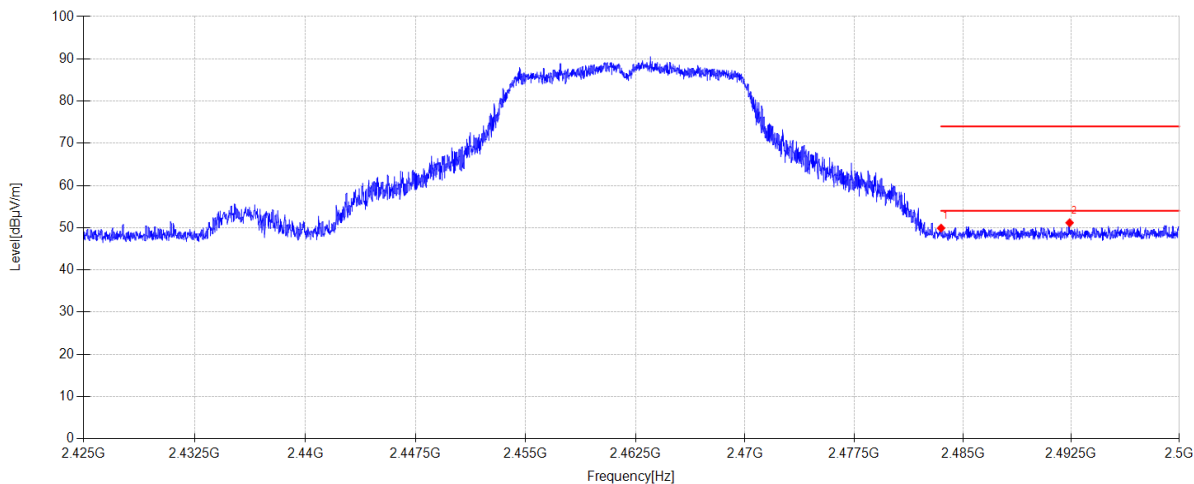

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.76	27.53	3.62	0.00	49.91	74.00	24.09	PK	Vertical
2	2492.388	19.97	27.57	3.63	0.00	51.17	74.00	22.83	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-17

Tested By:

Gen Liu

EUT:

Multi-Channel Soundbar with wireless subwoofer

Model Number:

BAR 1000MK2

Test Mode:

TX ANT2 11G 2412MHz

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.5°C;Humi:65.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Bar1000\FCC ABOVE1G 2.4GWIFI\33

Memo:

Power Setting:16

Test Graph

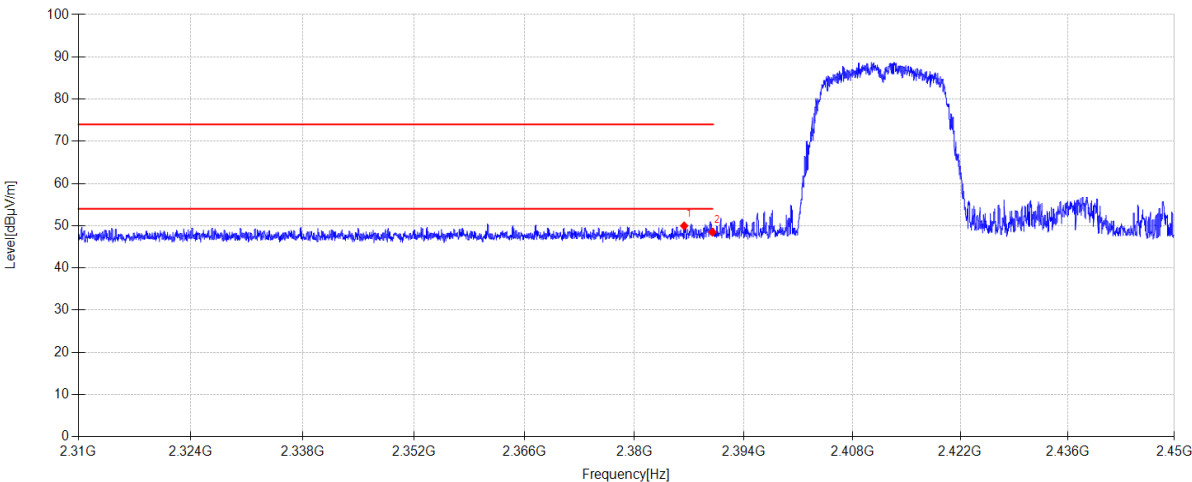

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.370	19.15	27.25	3.57	0.00	49.97	74.00	24.03	PK	Horizontal
2	2390.000	17.65	27.26	3.57	0.00	48.48	74.00	25.52	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-17

Tested By:

Gen Liu

EUT:

Multi-Channel Soundbar with wireless subwoofer

Model Number:

BAR 1000MK2

Test Mode:

TX ANT2 11G 2412MHz

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.5°C;Humi:65.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Bar1000\FCC ABOVE1G 2.4GWIFI\34

Memo:

Power Setting:16

Test Graph

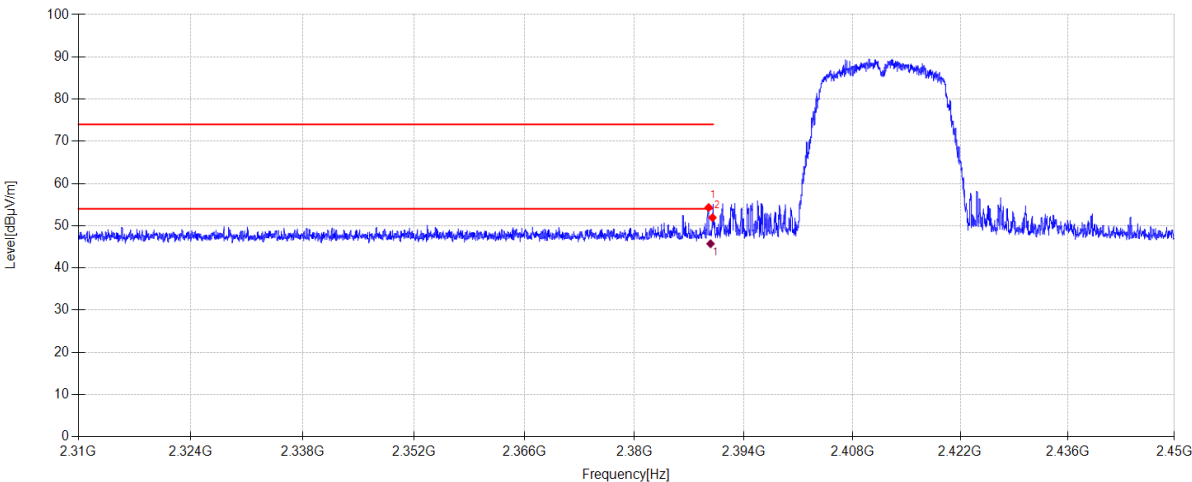

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.506	23.49	27.26	3.57	0.00	54.32	74.00	19.68	PK	Vertical
2	2390.000	21.09	27.26	3.57	0.00	51.92	74.00	22.08	PK	Vertical

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2389.750	14.90	27.26	3.57	45.73	54.00	8.27	AV	Vertical	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-18

Tested By:

Gen Liu

EUT:

Multi-Channel Soundbar with wireless subwoofer

Model Number:

BAR 1000MK2

Test Mode:

TX MIMO 11AX40 2422MHz

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.5°C;Humi:65.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Bar1000\FCC ABOVE1G 2.4GWIFI\35

Memo:

Power Setting:14

Test Graph

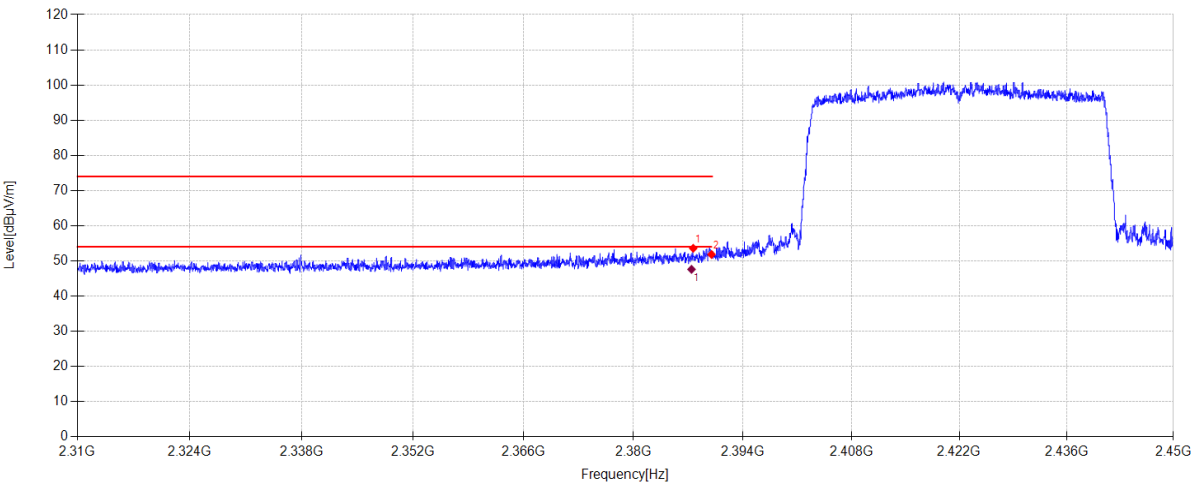

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.658	22.76	27.25	3.57	0.00	53.58	74.00	20.42	PK	Horizontal
2	2390.000	21.00	27.26	3.57	0.00	51.83	74.00	22.17	PK	Horizontal

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2387.442	16.78	27.25	3.57	47.60	54.00	6.40	AV	Horizontal	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-18

Tested By:

Gen Liu

EUT:

Multi-Channel Soundbar with wireless subwoofer

Model Number:

BAR 1000MK2

Test Mode:

TX MIMO 11AX40 2422MHz

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.5°C;Humi:65.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Bar1000\FCC ABOVE1G 2.4GWIFI\36

Memo:

Power Setting:14

Test Graph

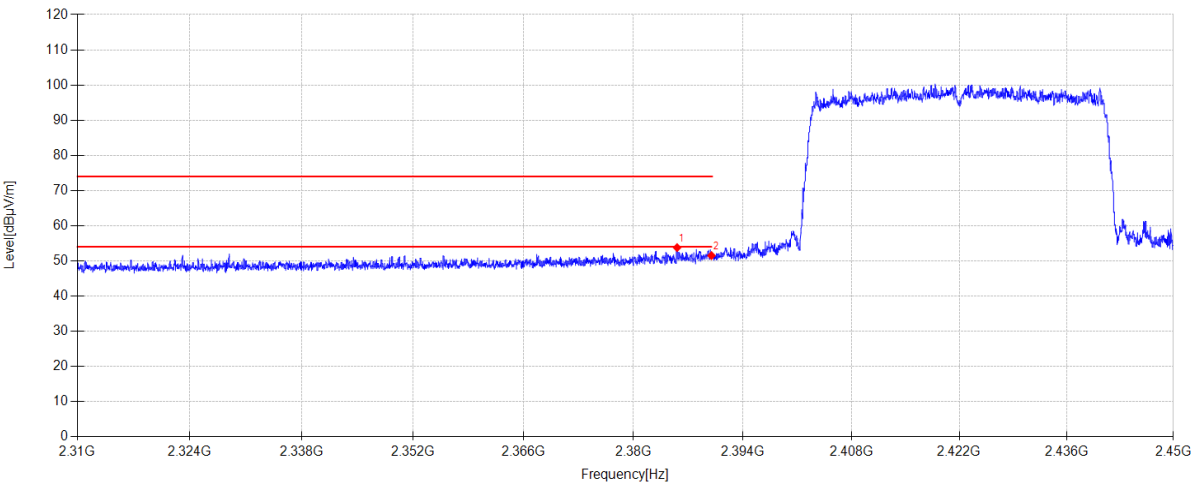

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2385.586	22.97	27.24	3.57	0.00	53.78	74.00	20.22	PK	Vertical
2	2390.000	20.68	27.26	3.57	0.00	51.51	74.00	22.49	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-18

Tested By:

Gen Liu

EUT:

Multi-Channel Soundbar with wireless subwoofer

Model Number:

BAR 1000MK2

Test Mode:

TX MIMO 11AX40 2452MHz

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.5°C;Humi:65.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Bar1000\FCC ABOVE1G 2.4GWIFI\37

Memo:

Power Setting:14

Test Graph

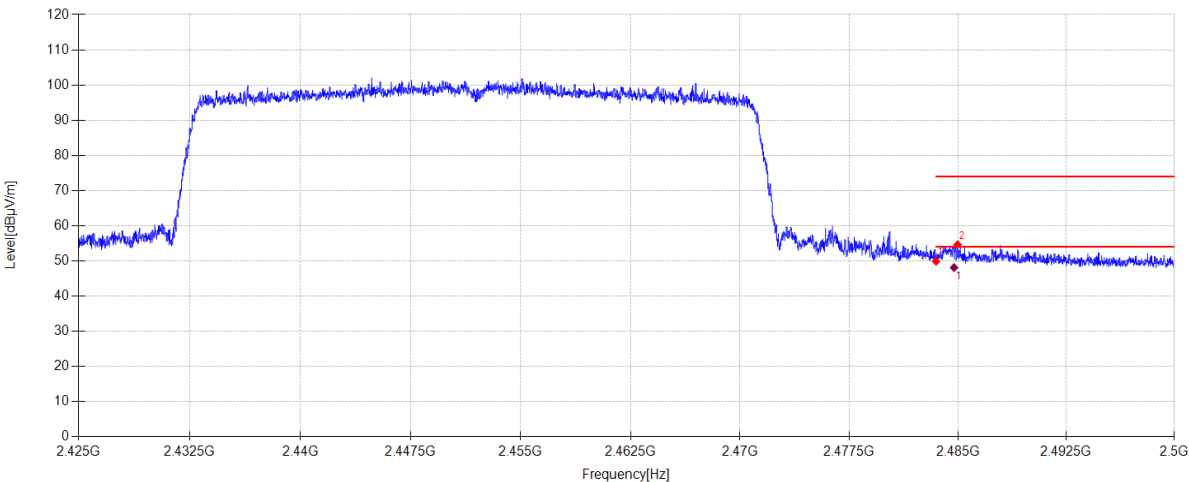

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.74	27.53	3.62	0.00	49.89	74.00	24.11	PK	Horizontal
2	2484.985	23.44	27.54	3.62	0.00	54.60	74.00	19.40	PK	Horizontal

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2484.737	16.94	27.54	3.62	48.10	54.00	5.90	AV	Horizontal	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-18

Tested By:

Gen Liu

EUT:

Multi-Channel Soundbar with wireless subwoofer

Model Number:

BAR 1000MK2

Test Mode:

TX MIMO 11AX40 2452MHz

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.5°C;Humi:65.2%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Bar1000\FCC ABOVE1G 2.4GWIFI\38

Memo:

Power Setting:14

Test Graph

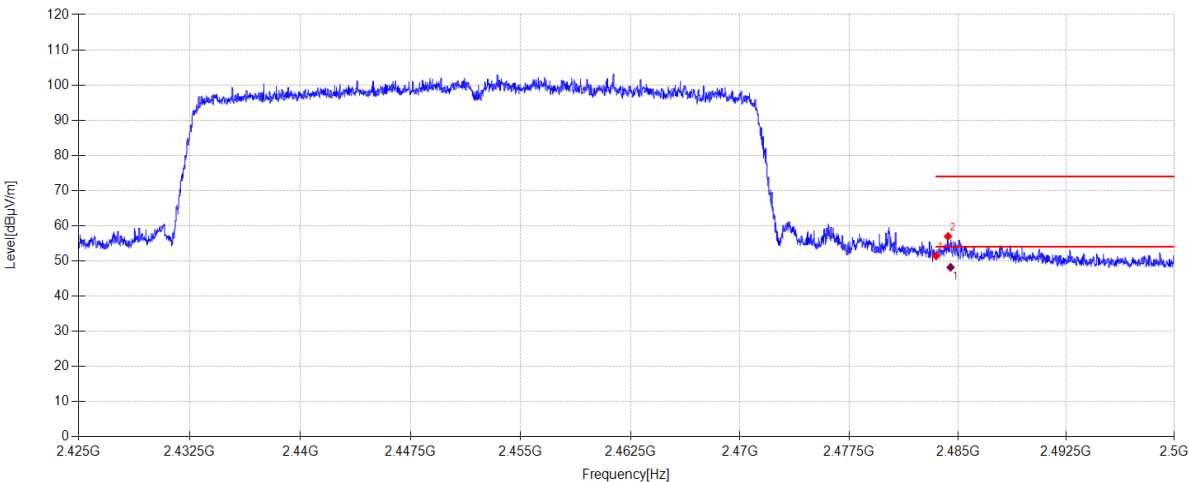

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	20.28	27.53	3.62	0.00	51.43	74.00	22.57	PK	Vertical
2	2484.325	25.81	27.54	3.62	0.00	56.97	74.00	17.03	PK	Vertical

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2484.503	17.01	27.54	3.62	48.17	54.00	5.83	AV	Vertical	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

14.Power Line Conducted Emissions

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Δ-shaped artificial power network	SCHWARZBEC K	PVDC 8301	DDT-ZC03939	2025/03/31
RF Cable	Yuhu Technology	Z806-NJ-NJ-6M	DDT-ZC02004	2025/07/08
Two Line V-Network	R&S	ENV216	DDT-ZC02059	2025/07/08
Pulse Limiter	SCHWARZBEC K	VTSD 9561	DDT-ZC02128	2025/07/08
EMI Test Receiver	R&S	ESCI/E3	DDT-ZC01297	2025/07/08
Two Line V-Network	R&S	ENV216	DDT-ZC02056	2025/07/08
Conducted Radiated Software	Audix	E3	DDT-ZC00562	/
Three-phase artificial power network	SCHWARZBEC K	NSLK 8163	DDT-ZC01572	2025/07/08

14.2. Block diagram of test setup

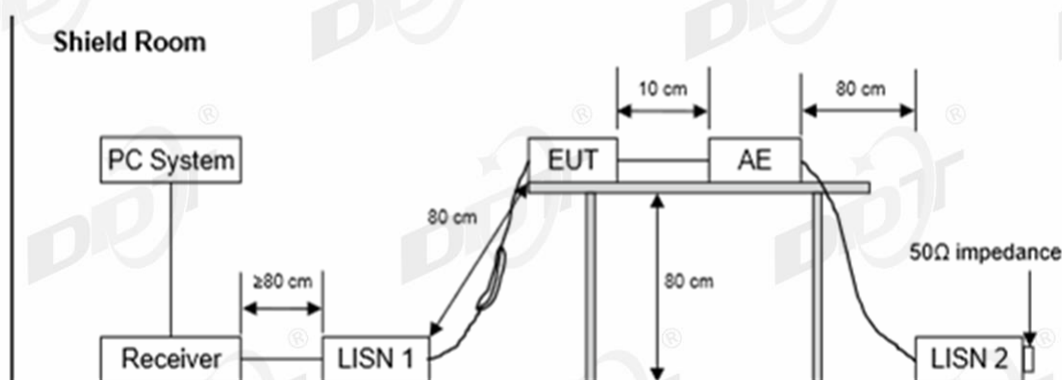

14.3. Limits

Frequency	Quasi-Peak Level dB(uV)	Average Level dB(uV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

14.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

14.6. Test result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means Peak detection; “----” means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

14.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site

Test Date

EUT

Power Supply

Condition

Memo

: DDT 6# Shield Room

: 2025-01-08

: Multi-Channel Soundbar with wireless subwoofer

: AC 120V/60Hz

: Temp:21.9°C,Humi:52.5%

:

D:\2024 Report Date\Q24111522-2E\250108 CE.EM6

Tested By

Model Number

Test Mode

LISN


: Gen liu

: BAR 1000MK2

: 2.4G WiFi Mode

: 2024 ENV216 3#/LINE

Data: 26

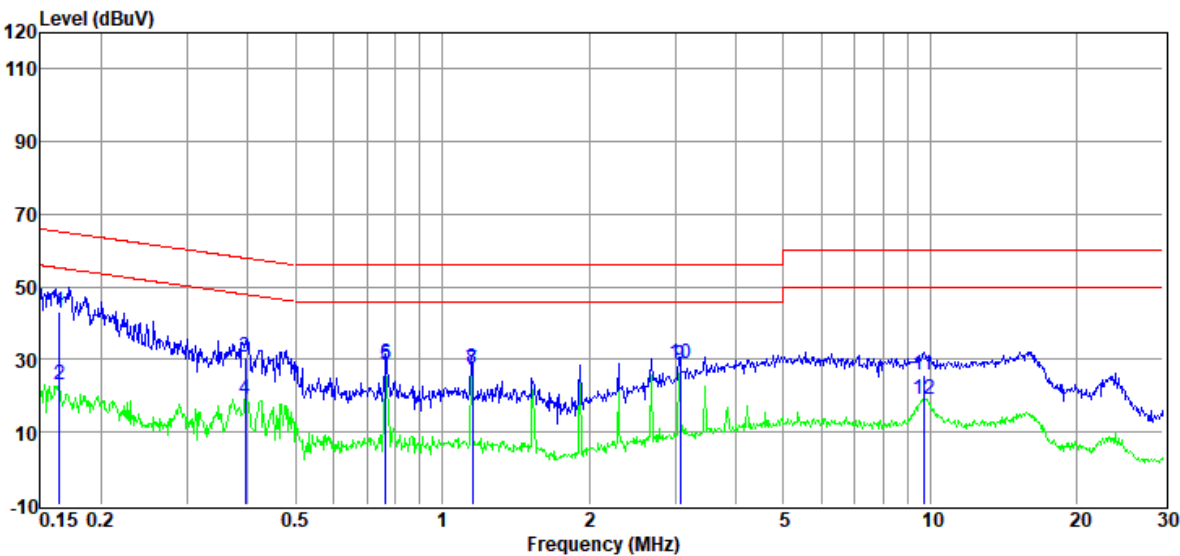

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.16	23.36	9.78	0.07	9.83	43.04	65.25	-22.21	QP	LINE
2	0.16	3.20	9.78	0.07	9.83	22.88	55.25	-32.37	Average	LINE
3	0.40	11.11	9.77	0.09	9.83	30.80	57.95	-27.15	QP	LINE
4	0.40	-0.71	9.77	0.09	9.83	18.98	47.95	-28.97	Average	LINE
5	0.77	8.85	9.75	0.06	9.84	28.50	56.00	-27.50	QP	LINE
6	0.77	9.33	9.75	0.06	9.84	28.98	46.00	-17.02	Average	LINE
7	1.15	7.43	9.74	0.12	9.84	27.13	56.00	-28.87	QP	LINE
8	1.15	7.82	9.74	0.12	9.84	27.52	46.00	-18.48	Average	LINE
9	3.07	8.49	9.76	0.11	9.84	28.20	56.00	-27.80	QP	LINE
10	3.07	8.98	9.76	0.11	9.84	28.69	46.00	-17.31	Average	LINE
11	9.71	5.94	9.83	0.21	9.88	25.86	60.00	-34.14	QP	LINE
12	9.71	-1.01	9.83	0.21	9.88	18.91	50.00	-31.09	Average	LINE

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site

: DDT 6# Shield Room

Test Date

: 2025-01-08

EUT

: Multi-Channel Soundbar with wireless sub

Power Supply

: AC 120V/60Hz

Condition

: Temp:21.9°C,Humi:52.5%

Memo

:

D:\2024 Report Date\Q24111522-2E\250108 CE.EM6

Tested By

: Gen liu

Model Number

: BAR 1000MK2


Test Mode

: 2.4G WiFi Mode

LISN

: 2024 ENV216 3#/NEUTRAL

Data: 28

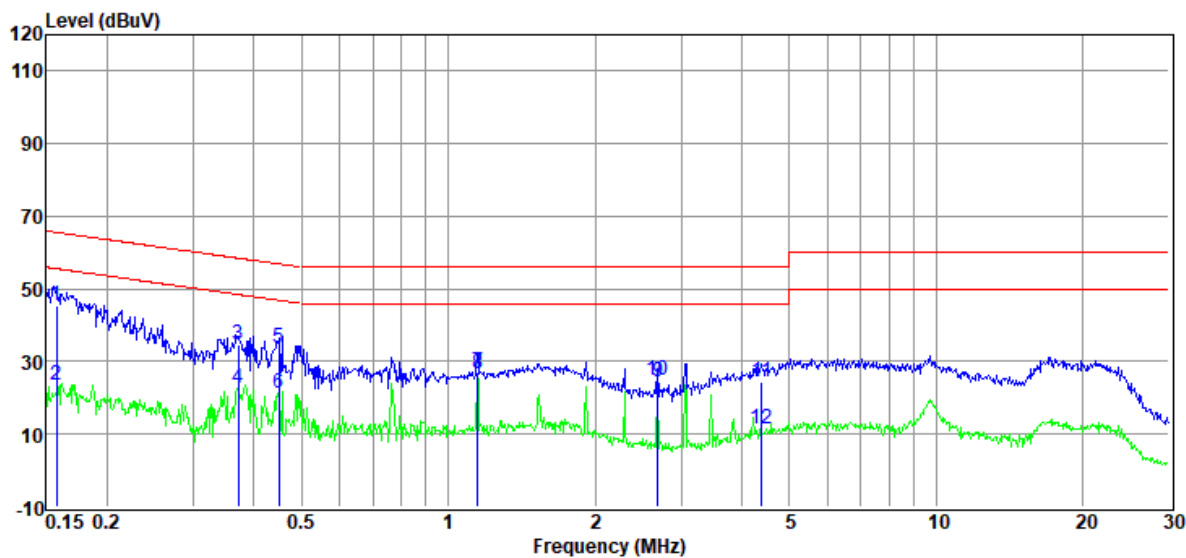

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.16	25.77	9.78	0.07	9.83	45.45	65.60	-20.15	QP	NEUTRAL
2	0.16	4.04	9.78	0.07	9.83	23.72	55.60	-31.88	Average	NEUTRAL
3	0.37	15.10	9.76	0.08	9.83	34.77	58.47	-23.70	QP	NEUTRAL
4	0.37	3.14	9.76	0.08	9.83	22.81	48.47	-25.66	Average	NEUTRAL
5	0.45	14.30	9.77	0.10	9.83	34.00	56.89	-22.89	QP	NEUTRAL
6	0.45	1.76	9.77	0.10	9.83	21.46	46.89	-25.43	Average	NEUTRAL
7	1.15	7.43	9.76	0.12	9.84	27.15	56.00	-28.85	QP	NEUTRAL
8	1.15	7.02	9.76	0.12	9.84	26.74	46.00	-19.26	Average	NEUTRAL
9	2.69	4.83	9.77	0.11	9.84	24.55	56.00	-31.45	QP	NEUTRAL
10	2.69	5.24	9.77	0.11	9.84	24.96	46.00	-21.04	Average	NEUTRAL
11	4.38	4.53	9.79	0.10	9.85	24.27	56.00	-31.73	QP	NEUTRAL
12	4.38	-8.21	9.79	0.10	9.85	11.53	46.00	-34.47	Average	NEUTRAL

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

16. Photos of the EUT

Please refer to DDT-Q24111522-1E appendix I

-----End Report-----