

**CFR 47 FCC PART 15 SUBPART C
ISED RSS-210 ISSUE 11**

CERTIFICATION TEST REPORT

For

Remote Control (Transmitter)

MODEL NUMBER: 54521-T, 54522-T

**FCC ID: 2BNVS-54521
IC:33530-54521**

REPORT NUMBER: 4791641695-3-RF-1

ISSUE DATE: April 25, 2025

Prepared for

Helms-Man Industrial Co., Ltd.

**Flat A & B, 3/F., High Win Factory Bldg., 47 Hoi Yuen Road, Kwun Tong, Kowloon,
Hong Kong.**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-
Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881
Fax: +86 769 33244054
Website: www.ul.com**

Revision History

| Rev. | Issue Date | Revisions | Revised By |
|------|----------------|---------------|------------|
| V0 | April 25, 2025 | Initial Issue | |

| Summary of Test Results | | | |
|---|---|---|--------------|
| Clause | Test Items | FCC Rules | Test Results |
| 1 | Transmitter Timeout | CFR 47 FCC §15.231 (a) (1) ISED RSS-210 Annex A.1.2 | Pass |
| 2 | 20 dB Bandwidth and 99 % Occupied Bandwidth | CFR 47 FCC §15.231 (c) ISED RSS-210 Annex A.1.4 | Pass |
| 3 | Radiated Emission | CFR 47 FCC §15.231 (b)(e) CFR 47 FCC §15.205 and §15.209 RSS-210 Annex A.1.3 RSS-GEN Clause 8.9 RSS-GEN Clause 8.10 | Pass |
| 4 | AC Power Line Conducted Emission | ANSI C63.10-2013, Clause 6.2 | NA |
| 5 | Antenna Requirement | CFR 47 FCC §15.203 ISED RSS-Gen Clause 6.3 | Pass |
| <p>Note 1: This test report is only published to and used by the applicant, and it is not for evidence purpose in China.</p> <p>Note 2: The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C and ISED RSS-210 ISSUE 11> when <Accuracy Method> decision rule is applied.</p> <p>N/A: In this whole report not applicable.</p> | | | |

TABLE OF CONTENTS

| | |
|--|-----------|
| 1. ATTESTATION OF TEST RESULTS | 5 |
| 2. TEST METHODOLOGY | 7 |
| 3. FACILITIES AND ACCREDITATION | 7 |
| 4. CALIBRATION AND UNCERTAINTY | 8 |
| 4.1. MEASURING INSTRUMENT CALIBRATION | 8 |
| 4.2. MEASUREMENT UNCERTAINTY..... | 8 |
| 5. EQUIPMENT UNDER TEST | 9 |
| 5.1. DESCRIPTION OF EUT | 9 |
| 5.2. MAXIMUM FIELD STRENGTH..... | 9 |
| 5.3. DESCRIPTION OF AVAILABLE ANTENNAS..... | 9 |
| 5.4. TEST ENVIRONMENT | 10 |
| 5.5. DESCRIPTION OF TEST SETUP | 11 |
| 5.6. MEASURING INSTRUMENT AND SOFTWARE USED | 12 |
| 6. ANTENNA PORT TEST RESULTS | 13 |
| 6.1. ON TIME AND DUTY CYCLE..... | 13 |
| 6.2. TRANSMITTER TIMEOUT | 16 |
| 6.3. 20 dB BANDWIDTH AND 99 % OCCUPIED BANDWIDTH | 19 |
| 6.4. RADIATED TEST RESULTS | 22 |
| 6.4.1. FIELD STRENGTH OF INTENTIONAL EMISSIONS | 29 |
| 6.4.2. SPURIOUS EMISSIONS BELOW 1 GHz AND ABOVE 30 MHz | 31 |
| 6.4.3. SPURIOUS EMISSIONS ABOVE 1 GHz | 33 |
| 6.4.4. SPURIOUS EMISSIONS BELOW 30 MHz..... | 35 |
| 7. ANTENNA REQUIREMENTS..... | 38 |

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Helms-Man Industrial Co., Ltd.
Address: Flat A & B, 3/F., High Win Factory Bldg., 47 Hoi Yuen Road, Kwun Tong, Kowloon, Hong Kong.

Manufacturer Information

Company Name: HELMS-MAN (HUI YANG) ELECTRIC LTD
Address: XINXU HUIYANG, Guangdong, 516223 China

Factory Information


Company Name: HELMS-MAN (HUI YANG) ELECTRIC LTD
Address: XINXU HUIYANG, Guangdong, 516223 China

EUT Information

EUT Name: Remote Control (Transmitter)
Model: 54521-T
Series Model: 54522-T
Model difference: All are the same except for colour
Brand name: LEMAX
Sample Received Date: February 17, 2025
Sample Status: Normal
Sample ID: 8174331
Date of Tested: February 17, 2025~ April 25, 2025

| APPLICABLE STANDARDS | |
|------------------------------|--------------|
| STANDARD | TEST RESULTS |
| ISED RSS-210 Issue 11 | PASS |
| ISED RSS-GEN Issue 5 | PASS |
| CFR 47 FCC PART 15 SUBPART C | PASS |


Prepared By:



Fanny Huang

Engineer Project Associate

Checked By:



Kebo Zhang

Senior Project Engineer

Approved By:



Stephen Guo

Operations Manager

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 414788 D01 Radiated Test Site v01r01, FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, RSS-210 Issue 11 and RSS-GEN Issue 5.

3. FACILITIES AND ACCREDITATION

| | |
|---------------------------|--|
| Accreditation Certificate | <p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with Industry Canada. The Company Number is 21320.</p> <p>The test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> |
|---------------------------|--|

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Test Item | Uncertainty |
|---|-------------------------|
| Conduction emission | 3.62 dB |
| Radiation Emission test (include Fundamental emission) (9 kHz-30 MHz) | 2.2 dB |
| Radiation Emission test (include Fundamental emission) (30 MHz-1 GHz) | 4.00 dB |
| Radiation Emission test (1 GHz to 26GHz) (include Fundamental emission) | 5.78 dB (1 GHz-18 GHz) |
| | 5.23 dB (18 GHz-26 GHz) |
| Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. | |

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

| | |
|-------------------|------------------------------------|
| EUT Name: | Remote Control (Transmitter) |
| Model: | 54521-T |
| Series Model: | 54522-T |
| Model difference: | All are the same except for colour |
| Modulation | FSK |
| Power Supply | 3.0 Vdc |
| Center Frequency | 433.92 MHz |

5.2. MAXIMUM FIELD STRENGTH

| Frequency (MHz) | Maximum Peak Field Strength (dB μ V/m) |
|-----------------|--|
| 433.92 | 78.33 |

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

| Frequency (MHz) | Antenna Type | Antenna Gain (dBi) |
|-----------------|------------------|--------------------|
| 433.92 | PCB loop antenna | 2 |

Note: The value of the antenna gain was declared by customer.

5.4. TEST ENVIRONMENT

| Environment Parameter | Selected Values During Tests | |
|-----------------------|------------------------------|------------|
| Relative Humidity | 55 ~ 70 % | |
| Atmospheric Pressure: | 101 kPa | |
| Temperature | TN | 23 ~ 28 °C |
| Voltage: | VL | / |
| | VN | DC 3 V |
| | VH | / |

Note: VL= Lower Extreme Test Voltage

VN= Nominal Voltage

VH= Upper Extreme Test Voltage

TN= Normal Temperature

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

| Item | Equipment | Brand Name | Model Name | P/N |
|------|-----------|------------|------------|-----|
| / | / | / | / | / |

I/O CABLES

| Cable No | Port | Connector Type | Cable Type | Cable Length(m) | Remarks |
|----------|------|----------------|------------|-----------------|---------|
| / | / | / | / | / | / |


ACCESSORY

| Item | Accessory | Brand Name | Model Name | Description |
|------|-----------|------------|------------|-------------|
| / | / | / | / | / |

SETUP DIAGRAM FOR TEST

The test sample can be into a transmission mode through the power on.
A fully charged battery was used during the testing process.

Setup Diagram For Tests



Note: We have pre-test all modes and buttons, only the worst data recorded in the report.

5.6. MEASURING INSTRUMENT AND SOFTWARE USED

| Radiated Emissions | | | | | |
|--------------------------------------|--------------|------------|---------------|---------------|--------------|
| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Due Date |
| MXE EMI Receiver | KESIGHT | N9038A | MY56400036 | Sep.28, 2024 | Sep.27, 2025 |
| Hybrid Log Periodic Antenna | TDK | HLP-3003C | 130960 | June 28, 2024 | June.27 2027 |
| Preamplifier | HP | 8447D | 2944A09099 | Sep.28, 2024 | Sep.27, 2025 |
| EMI Measurement Receiver | R&S | ESR26 | 101377 | Sep.28, 2024 | Sep.27, 2025 |
| Horn Antenna | TDK | HRN-0118 | 130939 | Apr.29, 2022 | Apr.28, 2025 |
| Preamplifier | TDK | PA-02-0118 | TRS-305-00067 | Sep.28, 2024 | Sep.27, 2025 |
| Horn Antenna | Schwarzbeck | BBHA9170 | 697 | Jun 30, 2024 | Jun 29, 2027 |
| Preamplifier | TDK | PA-02-2 | TRS-307-00003 | Sep.28, 2024 | Sep.27, 2025 |
| Loop antenna | Schwarzbeck | 1519B | 00008 | Dec.09, 2024 | Dec.08, 2027 |
| Software | | | | | |
| Description | | | Manufacturer | Name | Version |
| Test Software for Radiated Emissions | | | Farad | EZ-EMC | Ver. UL-3A1 |

| Other instruments | | | | | | |
|-------------------------------------|-------------------|--------------|-----------|------------|--------------|--------------|
| Used | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
| <input checked="" type="checkbox"/> | Spectrum Analyzer | Keysight | N9030A | MY55410512 | Sep.28, 2024 | Sep.27, 2025 |

6. ANTENNA PORT TEST RESULTS

6.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

| | |
|-------------------|-------------------------|
| FCC Reference: | CFR 47 §15.35(c) |
| Test Method Used: | ANSI C63.10 Section 7.5 |

TEST SETUP

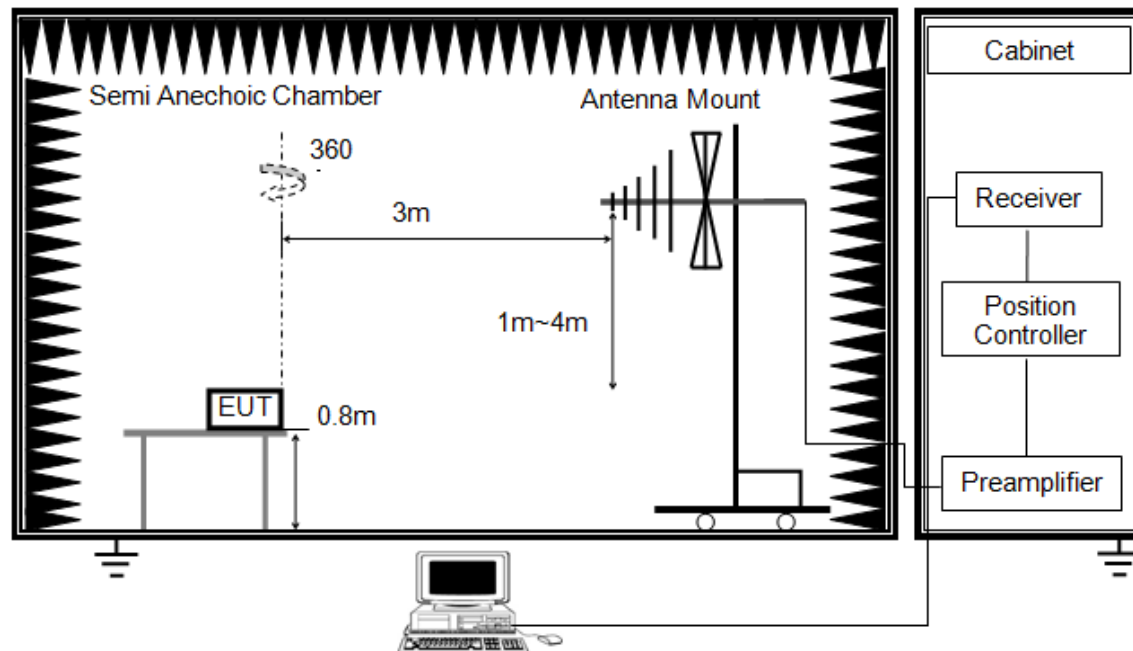

- Set RBW of spectrum analyzer to 3 MHz and VBW to 3 MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is at least a 100 ms.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.

TEST ENVIRONMENT

| | | | |
|---------------------|---------|-------------------|--------|
| Temperature | 23.8 °C | Relative Humidity | 55 % |
| Atmosphere Pressure | 101 kPa | Test Voltage | DC 3 V |

RESULTS

| Ton1 times (ms) | Numbers of appear | Ton2 times (ms) | Numbers of appear | Total on times (ms) | Period (ms) | Duty Cycle (Linear) | Duty Cycle Correction Factor |
|-----------------|-------------------|-----------------|-------------------|---------------------|-------------|---------------------|------------------------------|
| 0.42 | 19 | 1.14 | 6 | 14.82 | 50.34 | 0.2944 | -10.62 |

Note: Duty Cycle Correction Factor=20log(x).

Where: x is Duty Cycle


Total on times = Ton1* Numbers of appear + Ton2 * Numbers of appear

This test result is the maximum operating duty cycle of the sample modulated by the customer.

Period



Ton 1/ Ton 2

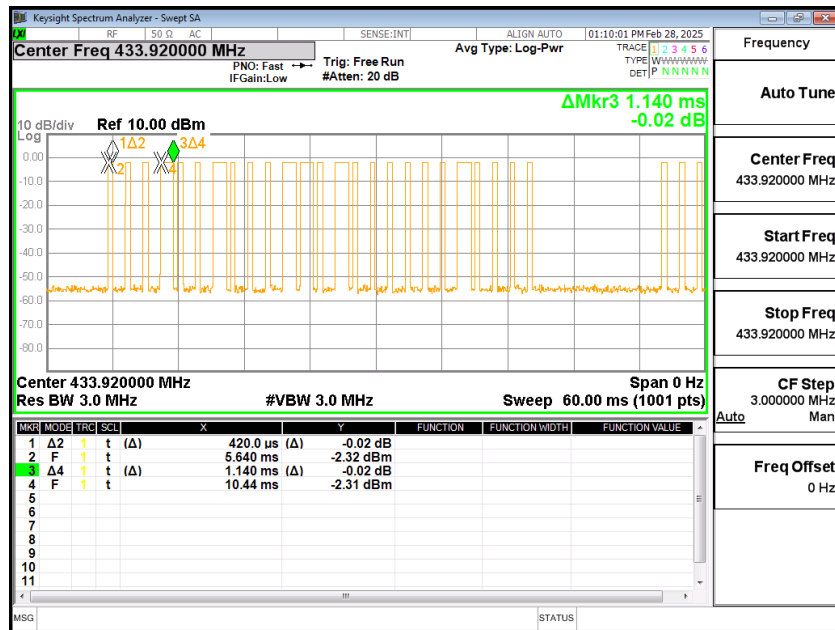


6.2. TRANSMITTER TIMEOUT

TEST PROCEDURE

| | |
|-------------------|---|
| Rule Reference: | CFR 47 FCC §15.231(a) (1) |
| Test Method Used: | The EUT transmitter was activated and monitored using a spectrum analyser for a period of 10 seconds. |

TEST SETUP

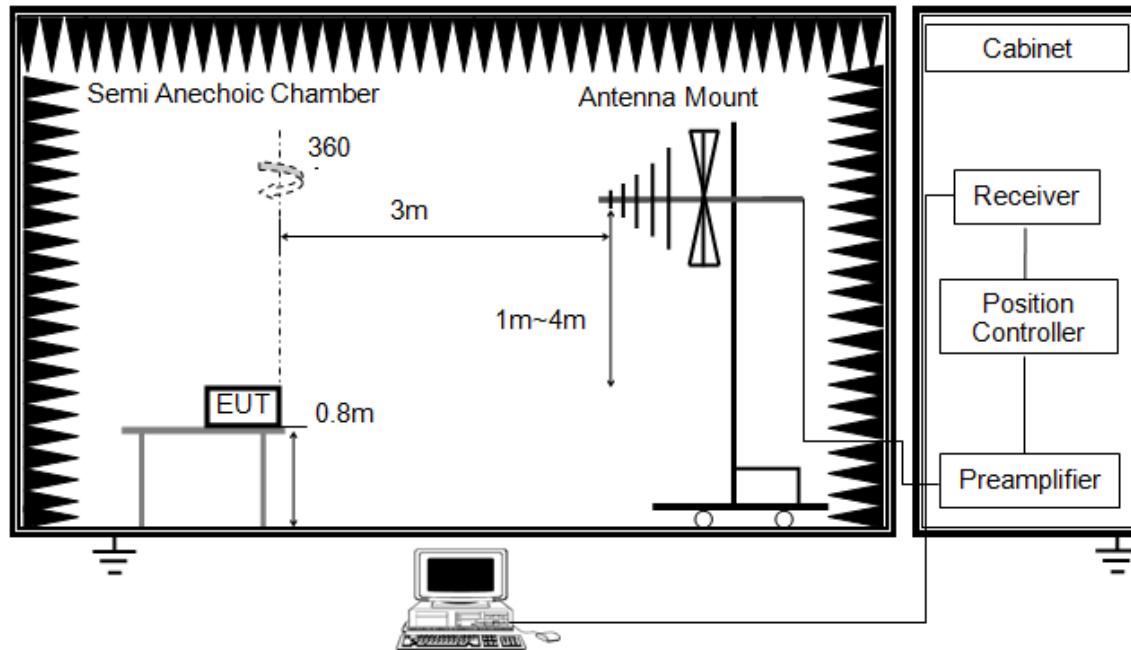

For CFR 47 Part 15.231(a):

- a. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.
- b. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- c. Set Sweep Time to 10 s.
- d. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- e. Measure the maximum time duration of one single pulse.

LIMITS

CFR 47 §15.231(a):


A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

TEST ENVIRONMENT

| | | | |
|---------------------|---------|-------------------|--------|
| Temperature | 23.8 °C | Relative Humidity | 55 % |
| Atmosphere Pressure | 101 kPa | Test Voltage | DC 3 V |

RESULTS

| Manually transmitting mode | | |
|-----------------------------|-----------------|--------|
| Deactivation Time (seconds) | Limit (seconds) | Result |
| 0.31 | 5.000 | PASS |

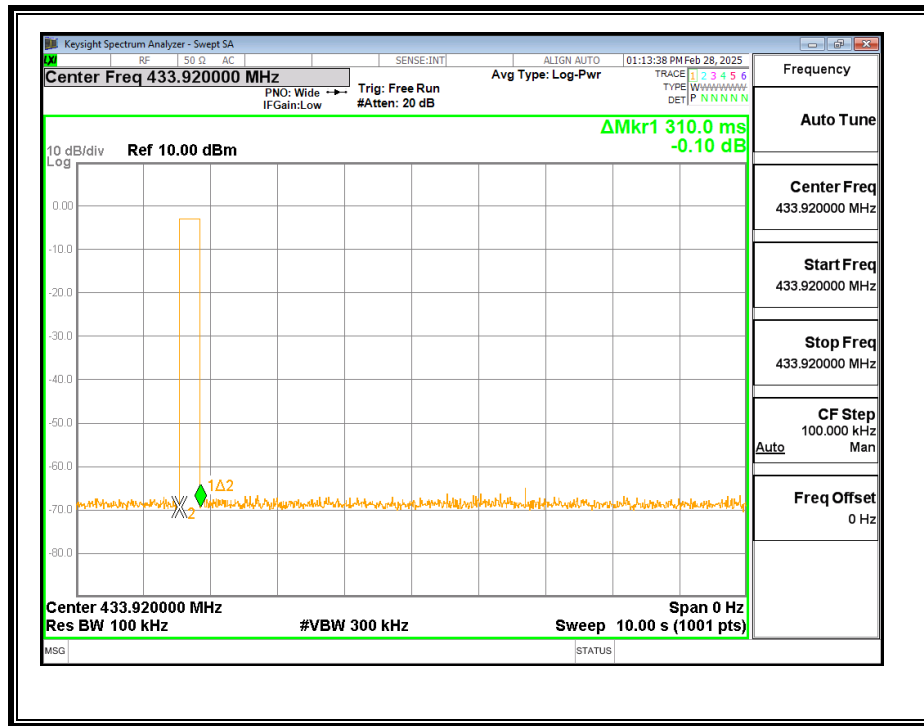

6.3. 20 dB BANDWIDTH AND 99 % OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC §15.231 (c).


The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5 % of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

So, the limit calculated as: $0.0025 * 433.92 \text{ MHz} = 1.0848 \text{ MHz}$

TEST PROCEDURE

| | |
|-------------------|---------------------------|
| FCC Reference: | CFR 47 Part 15.231(c) |
| Test Method Used: | ANSI C63.10 Section 6.9.2 |

TEST SETUP

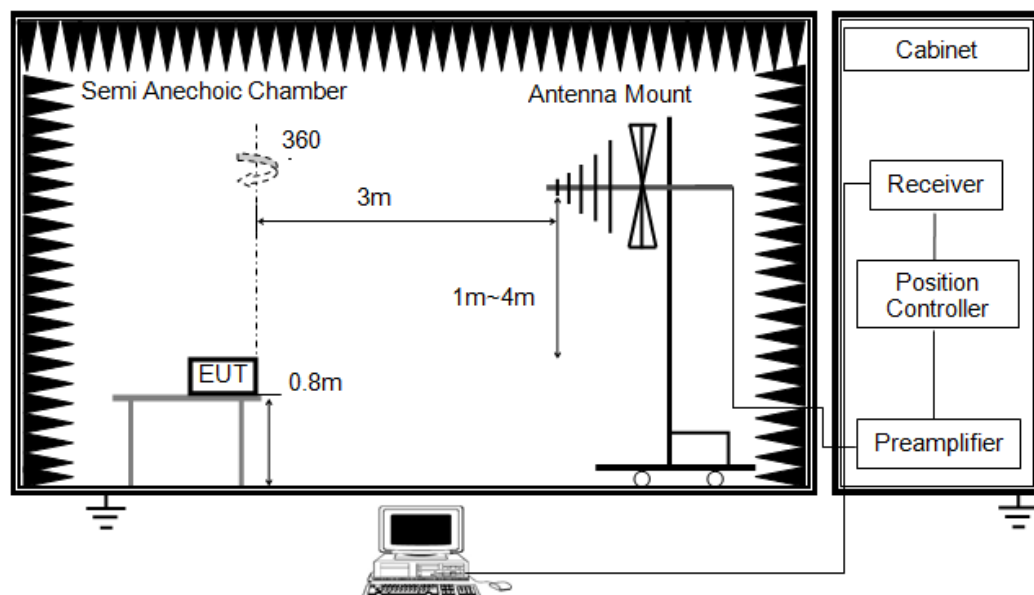


1. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower
4. Set the spectrum analyzer in the following setting as:
RBW shall be in the range of 1% to 5% of the OBW, VBW shall be above three times RBW.

TEST ENVIRONMENT

| | | | |
|---------------------|---------|-------------------|--------|
| Temperature | 23.8 °C | Relative Humidity | 55 % |
| Atmosphere Pressure | 101 kPa | Test Voltage | DC 3 V |

RESULTS

| 20 dB Bandwidth (kHz) | 99 % Occupied Bandwidth (kHz) | Limit (MHz) | Result |
|-----------------------|-------------------------------|-------------|--------|
| 7.861 | 17.538 | 1.0848 | Pass |

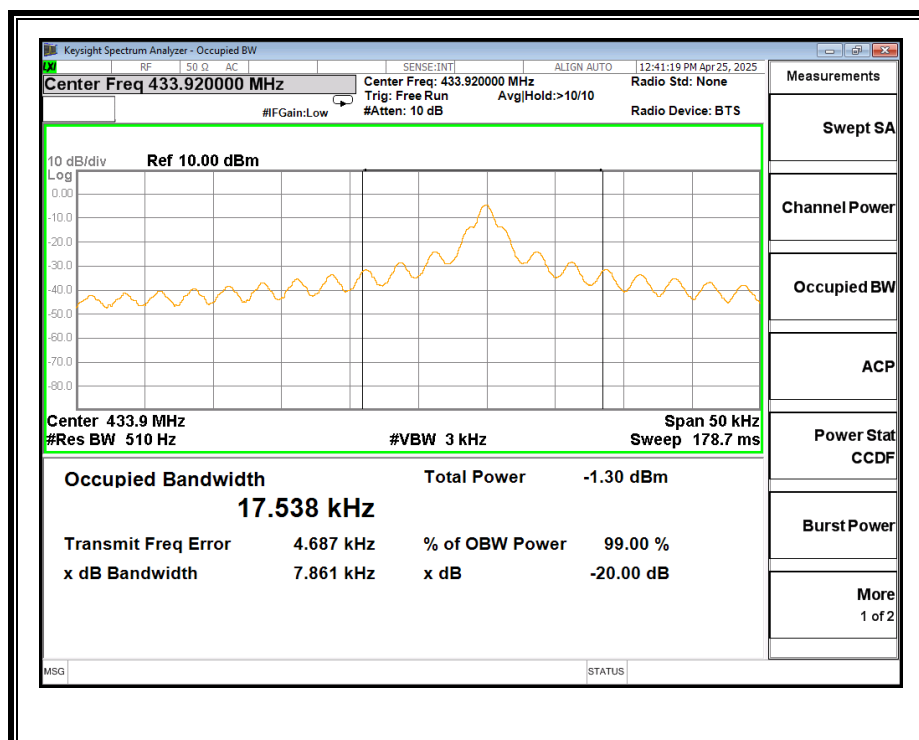

6.4. RADIATED TEST RESULTS

LIMITS

CFR 47 FCC §15.231 (b)(e)

CFR 47 FCC §15.205 and §15.209

1. In addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

| Fundamental frequency (MHz) | Field strength of fundamental (microvolts/meter) | Field strength of spurious emissions (microvolts/meter) |
|-----------------------------|--|---|
| 40.66-40.70 | 2,250 | 225 |
| 70-130 | 1,250 | 125 |
| 130-174 | ¹ 1,250 to 3,750 | ¹ 125 to 375 |
| 174-260 | 3,750 | 375 |
| 260-470 | ¹ 3,750 to 12,500 | ¹ 375 to 1,250 |
| Above 470 | 12,500 | 1,250 |

Note:

1. To obtain the average limit at the test frequency the values given in the table of FCC part 15.231(b) have to be linear interpolated and then converted to dBμV/m. The limit at 260 MHz is 3750 μV/m and at 470 MHz it is 12500 μV/m. Limit at 433.92 MHz is calculated as shown in ANSI C63.10 Section 7.6.2:

Limit [μV/m] = Limlower + ΔF [(Limupper – Limlower) / (fupper – flower)]
where ΔF = fc – flower = 433.92 – 260 = 173.92

Limit = 3750 + 173.92 * [(12500 – 3750) / (470 -260)]
= 3750 + 173.92 * [8750 / 210]
= 10996.7 μV/m

dBμV/m = 20 * log (μV/m)
= 20 * log (10996.7)

Average Limit at 433.92 MHz = 80.8 dBμV/m

2. If the average limit is specified for the EUT, the peak limit is 20 dB above the average limit as specified in FCC 15.35 (b)

2. Please refer to CFR 47 FCC part 15.231(e)

| Fundamental frequency (MHz) | Field strength of fundamental (microvolts/meter) | Field strength of spurious emission (microvolts/meter) |
|-----------------------------|--|--|
| 40.66-40.70 | 1,000 | 100 |
| 70-130 | 500 | 50 |
| 130-174 | 500 to 1,500 ¹ | 50 to 150 ¹ |
| 174-260 | 1,500 | 150 |
| 260-470 | 1,500 to 5,000 ¹ | 150 to 500 ¹ |
| Above 470 | 5,000 | 500 |

Note:

1. To obtain the average limit at the test frequency the values given in the table of FCC part 15.231(b) have to be linear interpolated and then converted to dBμV/m. The limit at 260 MHz is 3750 μV/m and at 470 MHz it is 12500 μV/m. Limit at 433.92 MHz is calculated as shown in ANSI C63.10 Section 7.6.2:

Limit [μV/m] = Limlower + ΔF [(Limupper – Limlower) / (fupper – flower)]
where ΔF = fc – flower = 433.92 – 260 = 173.92

Limit = 1500 + 173.92 * [(5000 – 1500) / (470 -260)]
= 1500 + 173.92 * [3500 / 210]
= 4398.7 μV/m

dBμV/m = 20 * log (μV/m)
= 20 * log (4398.7)

Average Limit at 433.92 MHz = 72.87 dBμV/m

If the average limit is specified for the EUT, the peak limit is 20 dB above the average limit as specified in FCC 15.35 (b)

3. Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100** | 3 |
| 88-216 | 150** | 3 |
| 216-960 | 200** | 3 |
| Above 960 | 500 | 3 |

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

4. Radiation Disturbance Test Limit for FCC (Class B) (9 kHz-1 GHz)

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(kHz) | 300 |
| 0.490~1.705 | 24000/F(kHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| 960~1000 | 500 | 3 |

Note: (1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

Note: (2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

Restricted bands of operation


| MHz | MHz | MHz | GHz |
|--------------------------|---------------------|---------------|------------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| ¹ 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (²) |
| 13.36-13.41 | | | |

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30 MHz

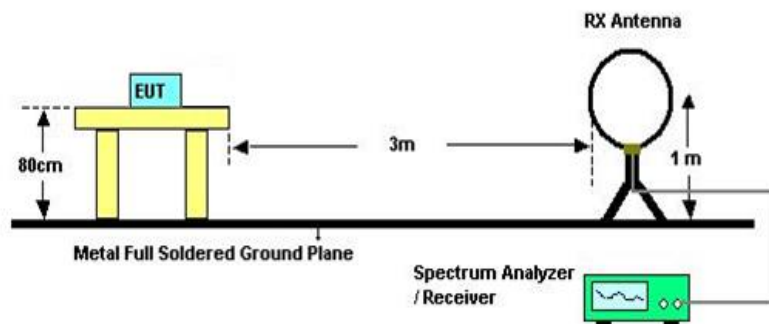


The setting of the spectrum analyser

| | |
|-------|--|
| RBW | 200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz) |
| VBW | 200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz) |
| Sweep | Auto |
| Trace | Max hold |

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω ; For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same

Below 1 GHz

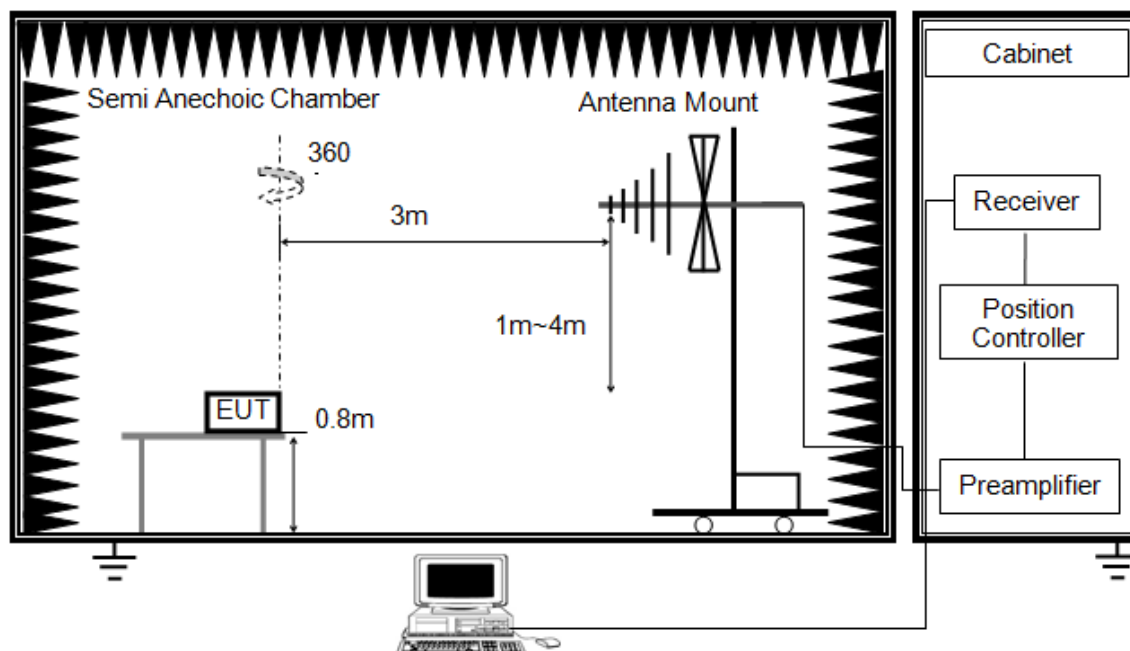


The setting of the spectrum analyser

| | |
|----------|----------|
| RBW | 120 kHz |
| VBW | 300 kHz |
| Sweep | Auto |
| Detector | Peak/QP |
| Trace | Max hold |

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
7. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

Above 1 GHz

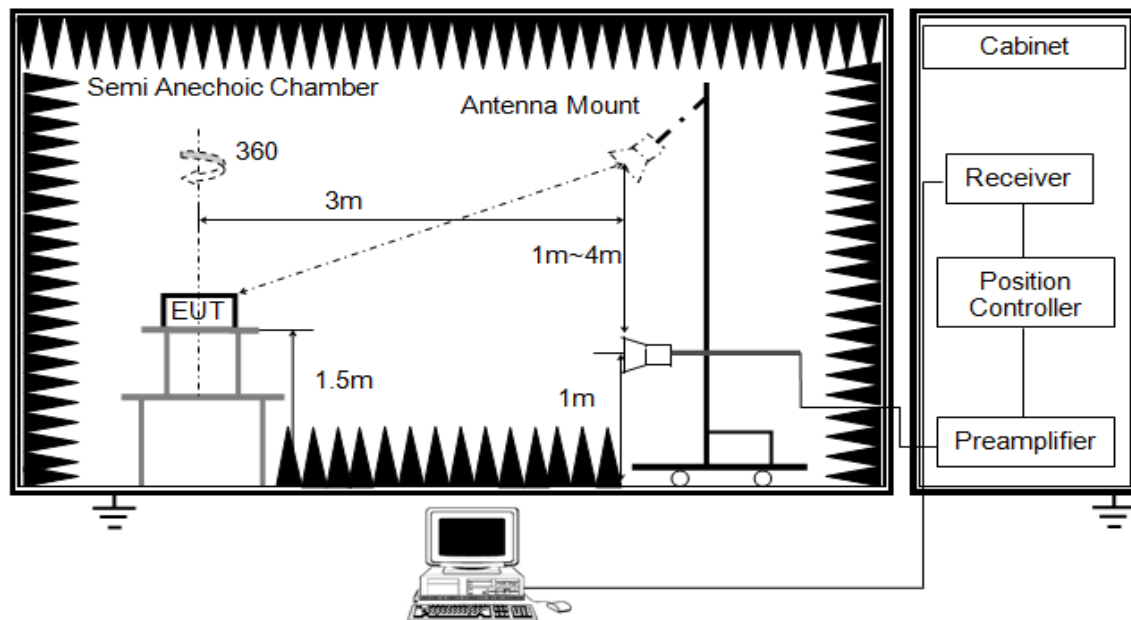


The setting of the spectrum analyser

| | |
|----------|--------------------------------|
| RBW | 1 MHz |
| VBW | PEAK: 3 MHz AVG: see note 6 |
| Sweep | Auto |
| Detector | Peak |
| Trace | Max hold |

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements. Where necessary, average emission are determined by applying the Duty Cycle Correction Factor to the peak measurements. For the Duty Cycle and Correction Factor please refer to clause 6.1. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

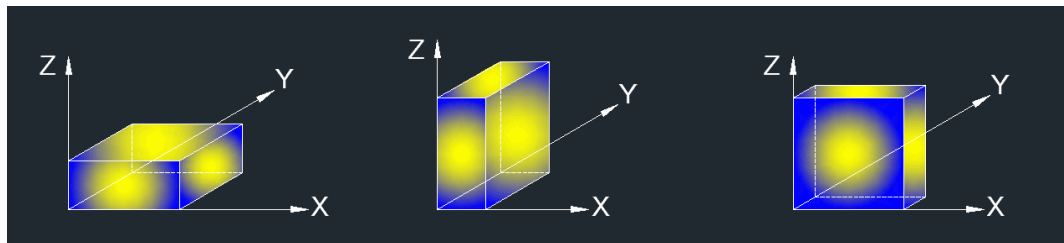

Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.


TEST ENVIRONMENT

| Radiated Emissions - Below 1 GHz | | Radiated Emissions - Above 1 GHz | |
|----------------------------------|---------|----------------------------------|---------|
| Temperature: | 22.3 °C | Temperature: | 24.3 °C |
| Humidity: | 59 % | Humidity: | 61 % |
| Atmosphere Pressure | 101 kPa | Atmosphere Pressure | 101 kPa |
| Test Voltage | DC 3 V | Test Voltage | DC 3 V |

RESULTS

6.4.1. FIELD STRENGTH OF INTENTIONAL EMISSIONS

FIELD STRENGTH OF INTENTIONAL EMISSIONS (HORIZONTAL)

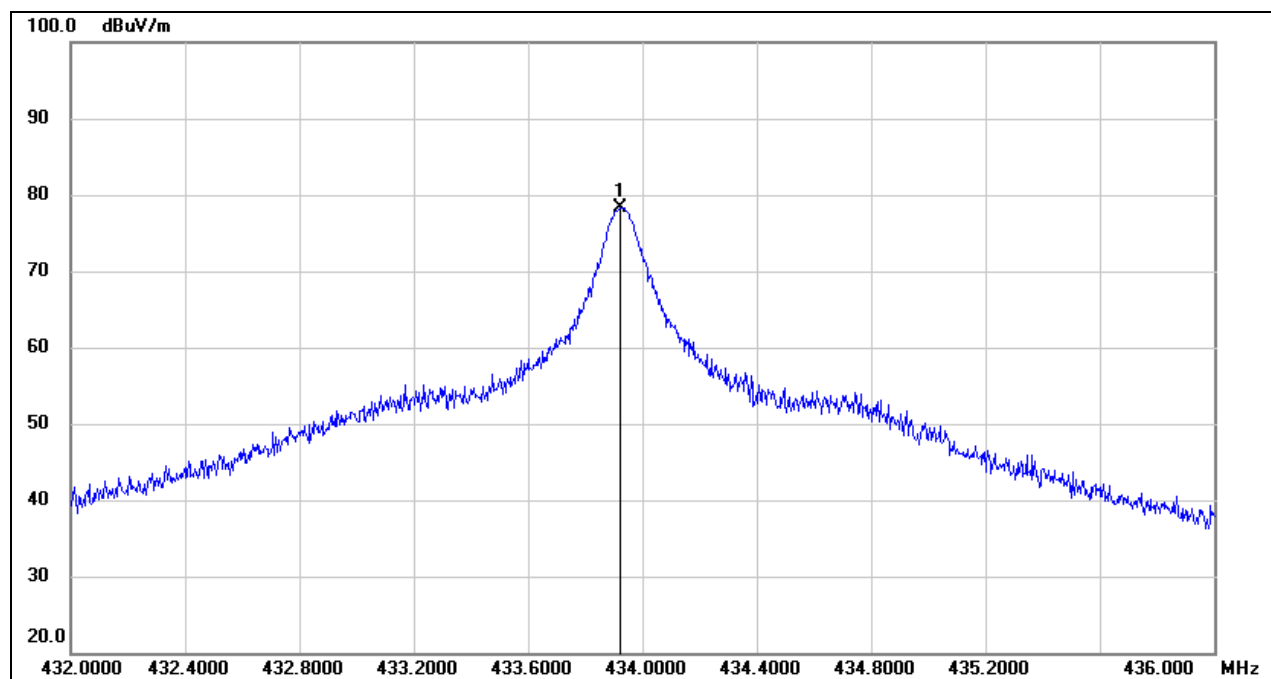


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 433.9239 | 86.97 | -8.64 | 78.33 | 100.80 | -22.47 | peak |
| / | / | / | / | 67.71 | 80.8 | -13.09 | AVG |

Note: 1. Result Level = Read Level + Correct Factor.

2. Peak: Peak detector.

3. Average Result = Peak Result + Duty Correction Factor.

FIELD STRENGTH OF INTENTIONAL EMISSIONS (VERTICAL)

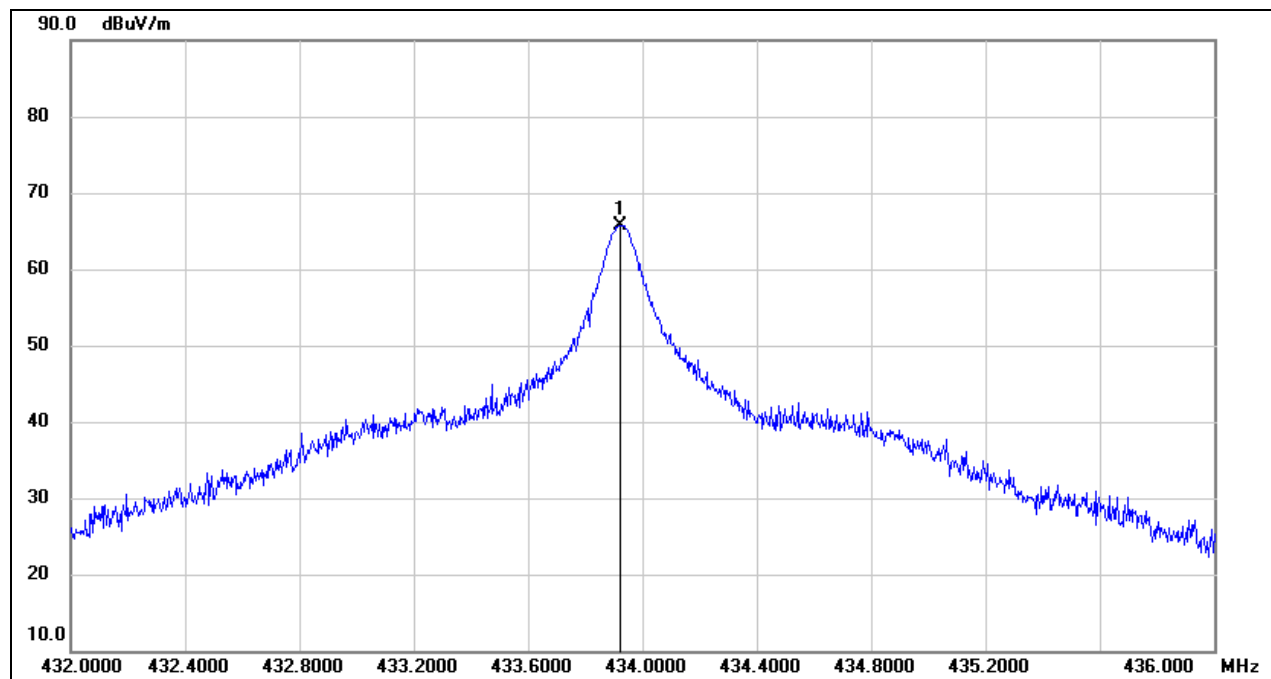

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 433.9240 | 74.37 | -8.64 | 65.73 | 100.80 | -35.07 | peak |
| / | / | / | / | 55.11 | 80.8 | -25.69 | AVG |


Note: 1. Result Level = Read Level + Correct Factor.

2. Peak: Peak detector.

3. Average Result = Peak Result + Duty Correction Factor.

6.4.2. SPURIOUS EMISSIONS BELOW 1 GHz AND ABOVE 30 MHz

SPURIOUS EMISSIONS (HORIZONTAL)

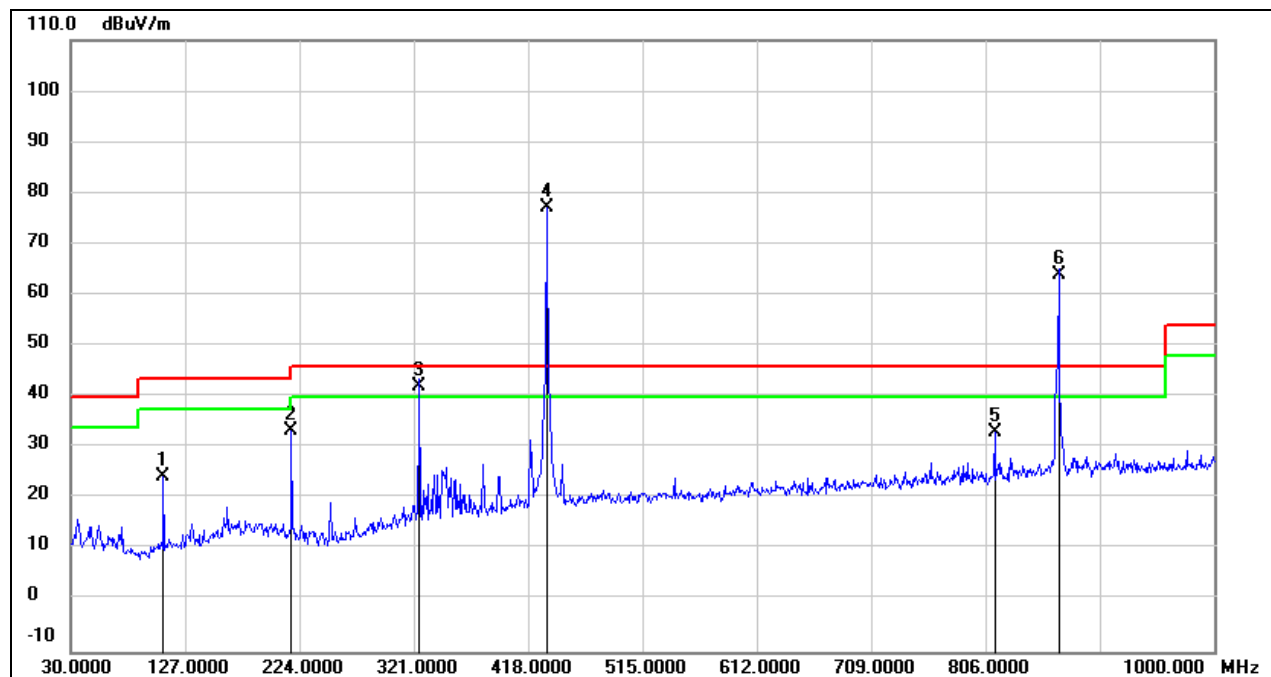

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1 | 108.5700 | 39.82 | -15.50 | 24.32 | 43.50 | -19.18 | QP |
| 2 | 217.2100 | 46.37 | -13.01 | 33.36 | 46.00 | -12.64 | QP |
| 3 | 325.8500 | 52.59 | -10.49 | 42.10 | 46.00 | -3.90 | QP |
| 4 | 433.5200 | 85.80 | -8.66 | 77.14 | / | / | fundamental |
| 5 | 813.7600 | 35.40 | -2.28 | 33.12 | 46.00 | -12.88 | QP |
| 6 | 868.0800 | 65.01 | -0.91 | 64.10 | 80.80 | -16.70 | PEAK |
| / | / | / | / | 53.48 | 60.80 | -7.32 | AVG |

Note: 1. Result Level = Read Level + Correct Factor.


2. Peak: Peak detector.

3. Average Result = Peak Result + Duty Correction Factor.

4. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

5. Mark 4 is the fundamental frequency and mark 6 is the 2nd harmonics.

FIELD STRENGTH HARMONICS AND SPURIOUS EMISSIONS (VERTICAL)

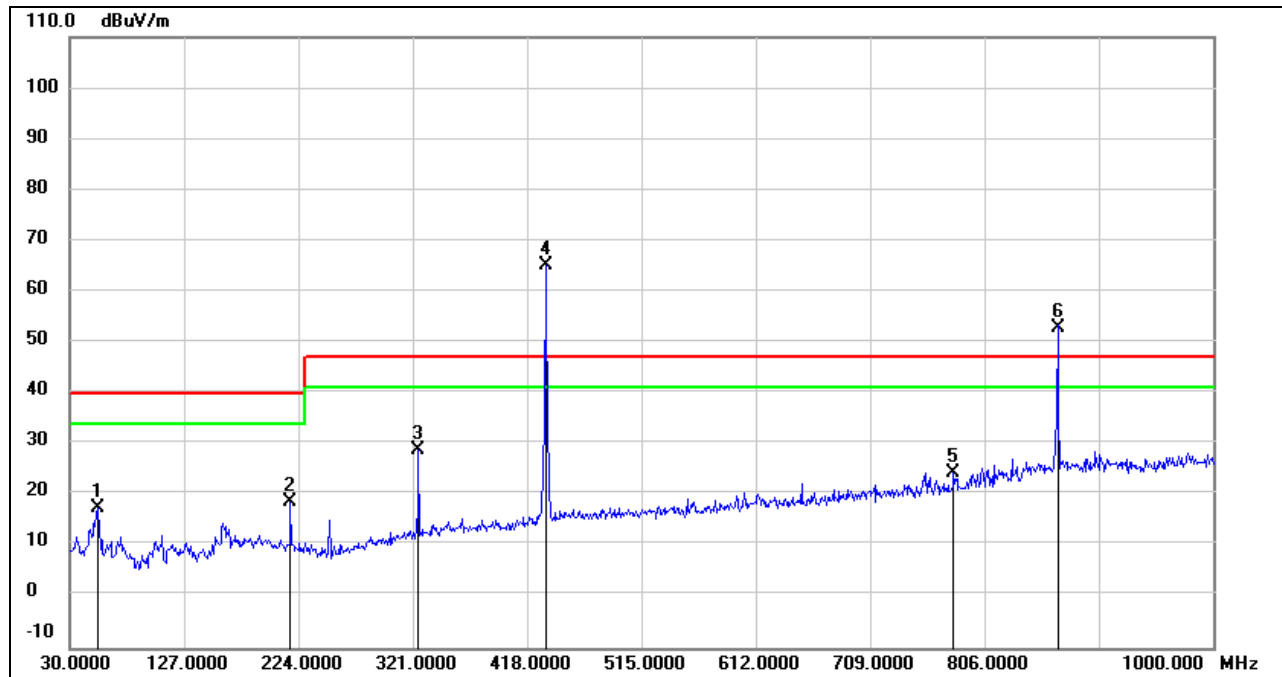


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1 | 53.2800 | 32.56 | -15.04 | 17.52 | 40.00 | -22.48 | QP |
| 2 | 217.2100 | 31.68 | -13.01 | 18.67 | 40.00 | -21.33 | QP |
| 3 | 325.8500 | 39.29 | -10.49 | 28.80 | 47.00 | -18.20 | QP |
| 4 | 433.5200 | 73.77 | -8.66 | 65.11 | / | / | fundamental |
| 5 | 779.8100 | 27.25 | -2.94 | 24.31 | 47.00 | -22.69 | QP |
| 6 | 868.0800 | 53.83 | -0.91 | 52.92 | 80.8 | -27.88 | PEAK |
| / | / | / | / | 42.30 | 60.8 | -18.50 | AVG |

Note: 1. Result Level = Read Level + Correct Factor.
2. Peak: Peak detector.
3. Average Result = Peak Result + Duty Correction Factor.
4. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
5. Mark 5 is the fundamental frequency.

6.4.3. SPURIOUS EMISSIONS ABOVE 1 GHz

HARMONICS AND SPURIOUS EMISSIONS (HORIZONTAL)

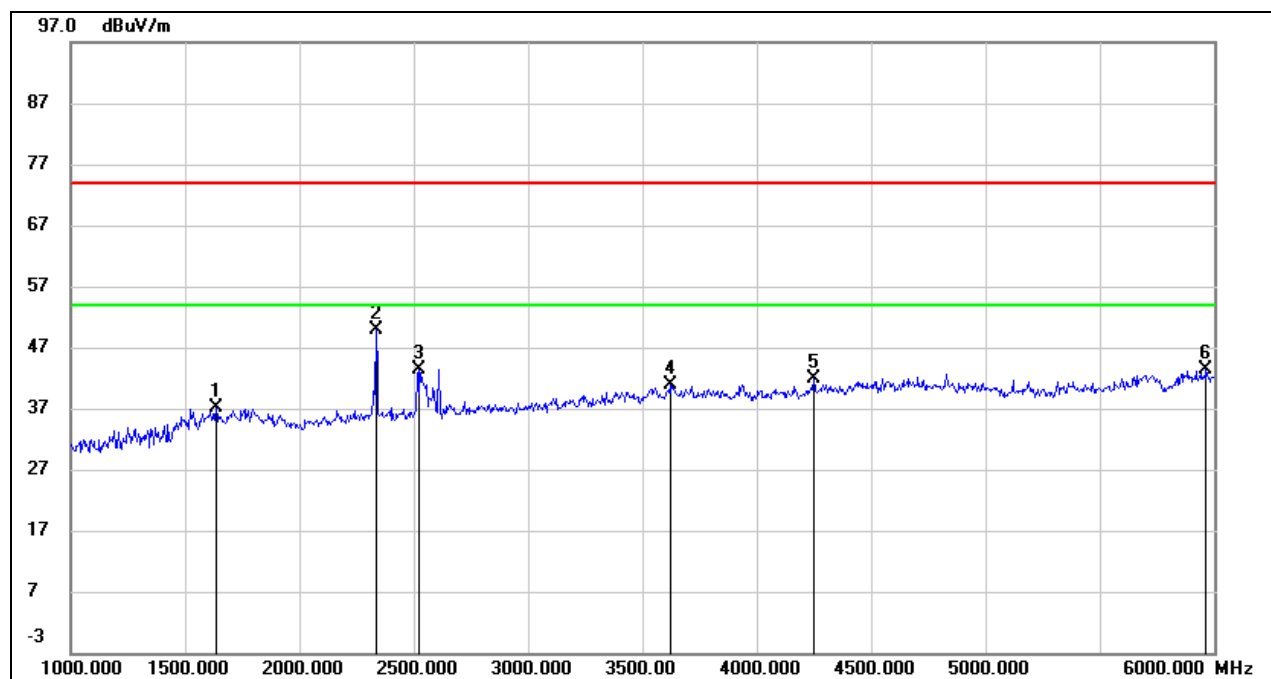

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 1635.000 | 47.25 | -10.17 | 37.08 | 74.00 | -36.92 | peak |
| 2 | 2335.000 | 58.55 | -8.75 | 49.80 | 74.00 | -24.20 | peak |
| 3 | 2520.000 | 51.42 | -8.07 | 43.35 | 74.00 | -30.65 | peak |
| 4 | 3620.000 | 44.05 | -3.27 | 40.78 | 74.00 | -33.22 | peak |
| 5 | 4250.000 | 44.00 | -2.20 | 41.80 | 74.00 | -32.20 | peak |
| 6 | 5965.000 | 40.91 | 2.47 | 43.38 | 74.00 | -30.62 | peak |

Note: 1. Result Level = Read Level + Correct Factor.


2. Peak: Peak detector.

3. Average Result = Peak Result + Duty Correction Factor.

4. The average limit for harmonics out of the restrict bands are 60.8 dBuV/m, the average limit in the restrict bands is 54 dBuV/m.

5. If peak result complies with average limit, the average result is deemed to comply with average limit.

HARMONICS AND SPURIOUS EMISSIONS (VERTICAL)

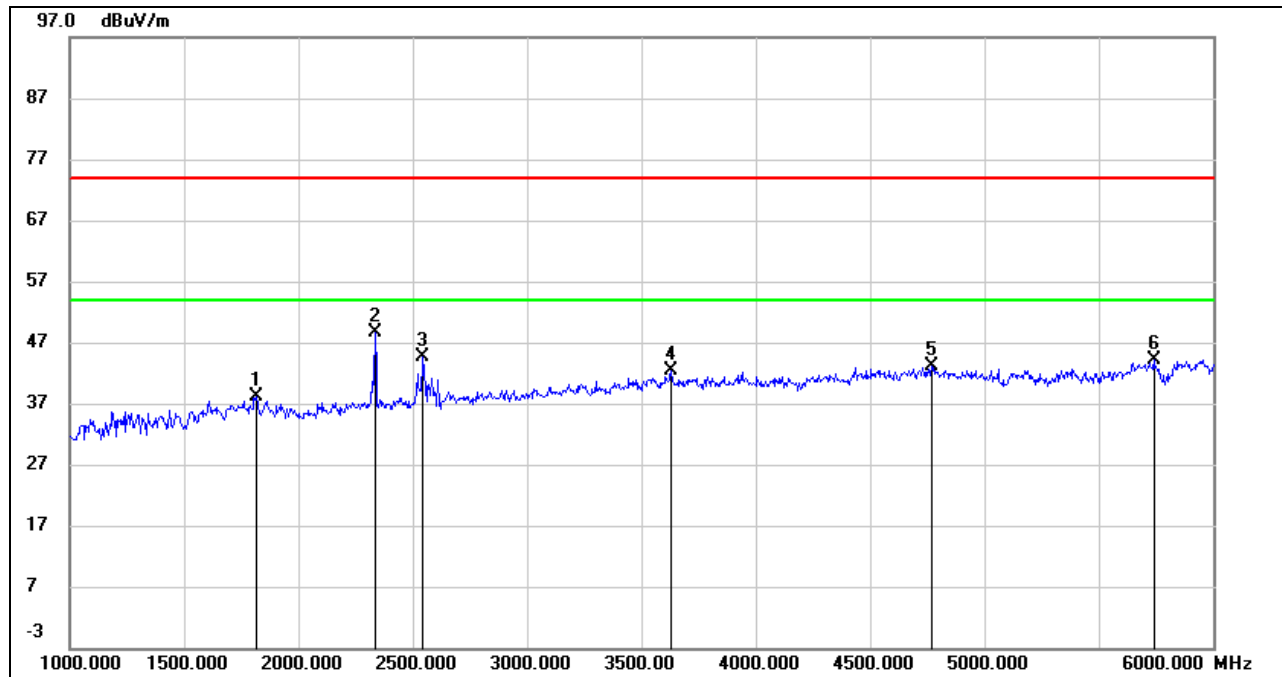

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 1815.000 | 47.04 | -8.96 | 38.08 | 74.00 | -35.92 | peak |
| 2 | 2335.000 | 56.50 | -7.92 | 48.58 | 74.00 | -25.42 | peak |
| 3 | 2545.000 | 51.66 | -7.13 | 44.53 | 74.00 | -29.47 | peak |
| 4 | 3630.000 | 44.68 | -2.26 | 42.42 | 74.00 | -31.58 | peak |
| 5 | 4770.000 | 42.79 | 0.24 | 43.03 | 74.00 | -30.97 | peak |
| 6 | 5740.000 | 41.13 | 2.95 | 44.08 | 74.00 | -29.92 | peak |

Note: 1. Result Level = Read Level + Correct Factor.

2. Peak: Peak detector.

3. Average Result = Peak Result + Duty Correction Factor.


4. The average limit for harmonics out of the restrict bands are 60.8 dBuV/m, the average limit in the restrict bands is 54 dBuV/m.

5. If peak result complies with average limit, the average result is deemed to comply with average limit.

6.4.4. SPURIOUS EMISSIONS BELOW 30 MHz

SPURIOUS EMISSIONS (LOOP ANTENNA FACE ON TO THE EUT)

0.09 kHz ~ 150 kHz

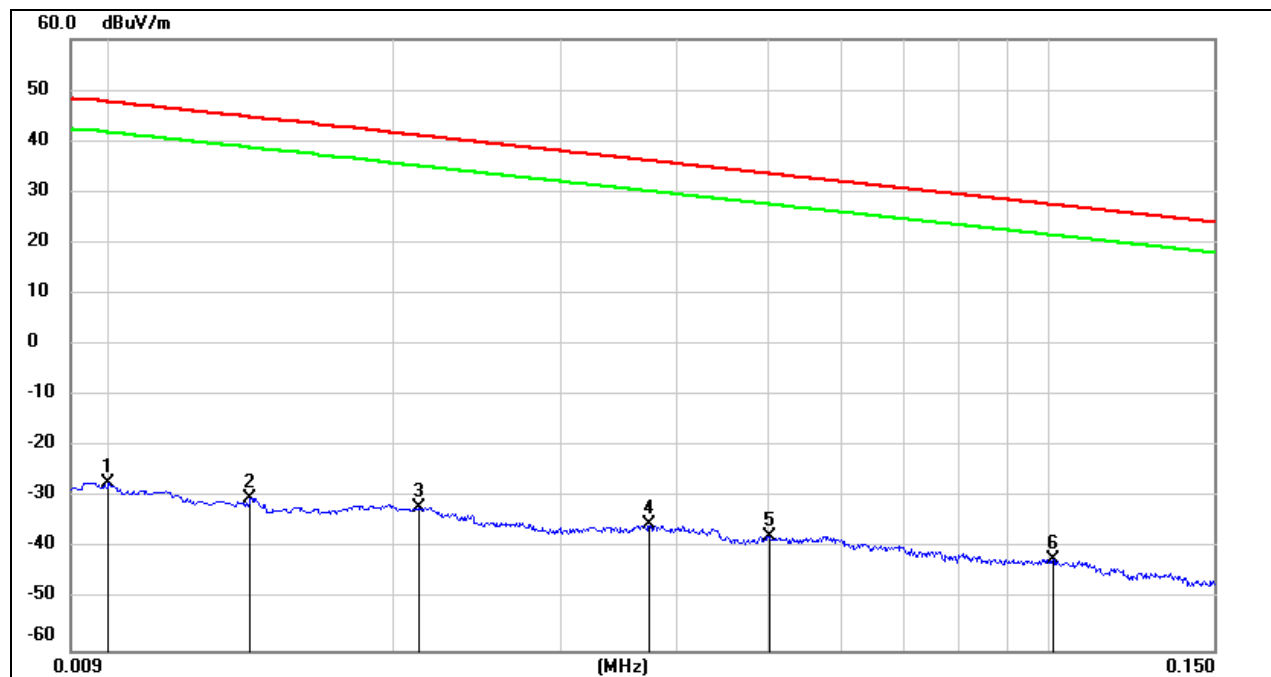


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | FCC Result (dBuV/m) | FCC Limit (dBuV/m) | ISED Result (dBuA/m) | ISED Limit (dBuA/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|---------------------------|-----------------------|----------------------------|---------------------------|----------------|--------|
| 1 | 0.0100 | 74.22 | -101.40 | -27.18 | 47.60 | -78.68 | -3.90 | -74.78 | peak |
| 2 | 0.0140 | 71.25 | -101.38 | -30.13 | 44.68 | -81.63 | -6.82 | -74.81 | peak |
| 3 | 0.0212 | 69.54 | -101.35 | -31.81 | 41.07 | -83.31 | -10.43 | -72.88 | peak |
| 4 | 0.0374 | 66.02 | -101.42 | -35.40 | 36.14 | -86.90 | -15.36 | -71.54 | peak |
| 5 | 0.0502 | 63.96 | -101.48 | -37.52 | 33.59 | -89.02 | -17.91 | -71.11 | peak |
| 6 | 0.1008 | 59.69 | -101.80 | -42.11 | 27.53 | -93.61 | -23.97 | -69.64 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

150 kHz ~ 490 kHz

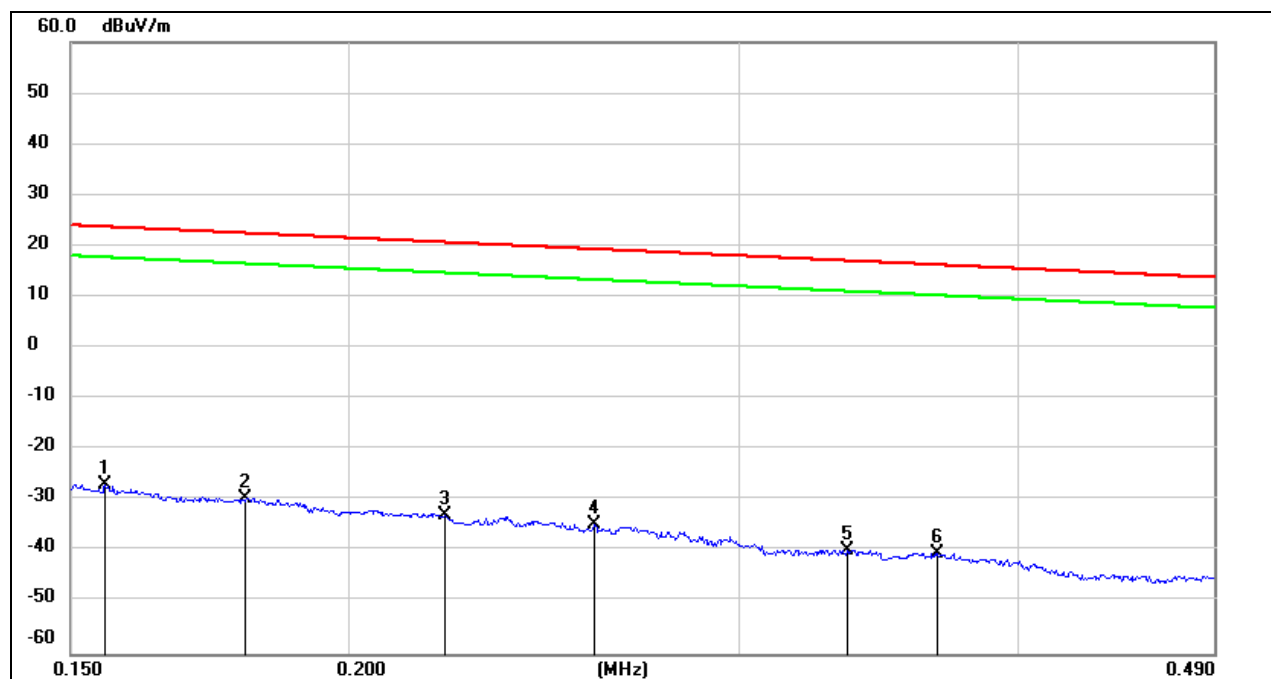


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | FCC Result (dBuV/m) | FCC Limit (dBuV/m) | ISED Result (dBuA/m) | ISED Limit (dBuA/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|---------------------------|-----------------------|----------------------------|---------------------------|----------------|--------|
| 1 | 0.1554 | 74.77 | -101.65 | -26.88 | 23.77 | -78.38 | -27.73 | -50.65 | peak |
| 2 | 0.1800 | 72.12 | -101.68 | -29.56 | 22.50 | -81.06 | -29.00 | -52.06 | peak |
| 3 | 0.2210 | 68.84 | -101.75 | -32.91 | 20.71 | -84.41 | -30.79 | -53.62 | peak |
| 4 | 0.2580 | 67.17 | -101.81 | -34.64 | 19.37 | -86.14 | -32.13 | -54.01 | peak |
| 5 | 0.3351 | 62.19 | -101.89 | -39.70 | 17.10 | -91.20 | -34.40 | -56.80 | peak |
| 6 | 0.3679 | 61.73 | -101.93 | -40.20 | 16.29 | -91.70 | -35.21 | -56.49 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

490 kHz ~ 30 MHz

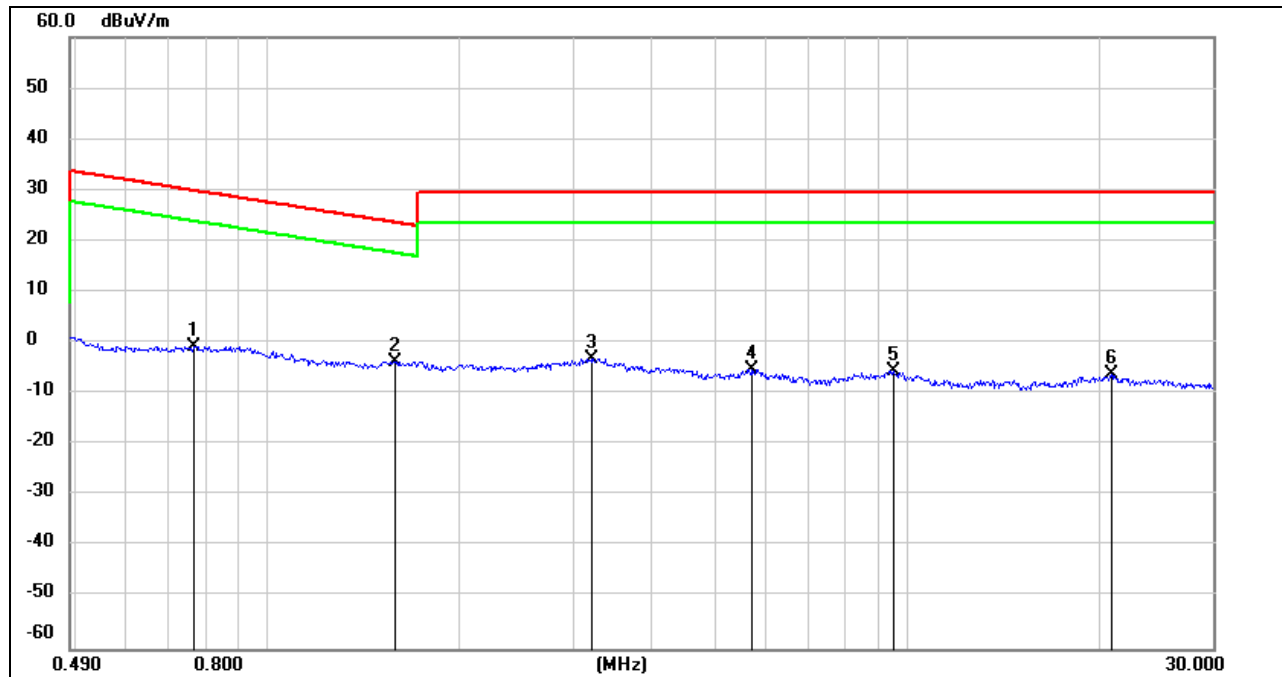

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | FCC Result (dBuV/m) | FCC Limit (dBuV/m) | ISED Result (dBuA/m) | ISED Limit (dBuA/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|---------------------------|-----------------------|----------------------------|---------------------------|----------------|--------|
| 1 | 0.7641 | 61.42 | -62.12 | -0.70 | 29.94 | -52.20 | -21.56 | -30.64 | peak |
| 2 | 1.5826 | 58.38 | -62.01 | -3.63 | 23.61 | -55.13 | -27.89 | -27.24 | peak |
| 3 | 3.2048 | 58.52 | -61.53 | -3.01 | 29.54 | -54.51 | -21.96 | -32.55 | peak |
| 4 | 5.7145 | 56.17 | -61.39 | -5.22 | 29.54 | -56.72 | -21.96 | -34.76 | peak |
| 5 | 9.4905 | 55.44 | -60.87 | -5.43 | 29.54 | -56.93 | -21.96 | -34.97 | peak |
| 6 | 20.8810 | 54.48 | -60.77 | -6.29 | 29.54 | -57.79 | -21.96 | -35.83 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the modes had been tested, only the worst data was recorded in the report.

7. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

RESULTS

Complies

END OF REPORT