



# FCC DFS TEST REPORT

Applicant : Ubiquiti Inc.

---

Address : 685 Third Avenue, New York, New York 10017,  
USA

---

Equipment : Magic PoE

---

Model No. : UACC-M-PoE

---

Trade Name : UBIQUITI

---

FCC ID : SWX-UAMP

---

## I HEREBY CERTIFY THAT :

The sample was received on Jun. 17, 2022 and the testing was completed on Jul. 29, 2022 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





## CONTENTS

|       |                                                                           |    |
|-------|---------------------------------------------------------------------------|----|
| 1.    | Summary of Test Procedure and Test Results .....                          | 4  |
| 1.1.  | Applicable Standards .....                                                | 4  |
| 2.    | Test Configuration of Equipment under Test .....                          | 5  |
| 2.1.  | Feature of Equipment under Test.....                                      | 5  |
| 2.2.  | Description of Test System.....                                           | 6  |
| 2.3.  | General Information of Test.....                                          | 7  |
| 2.4.  | Measurement Uncertainty .....                                             | 7  |
| 3.    | Test Equipment and Ancillaries Used for Tests .....                       | 8  |
| 4.    | Antenna Requirements .....                                                | 9  |
| 4.1.  | Standard Applicable .....                                                 | 9  |
| 4.2.  | Antenna Construction and Directional Gain.....                            | 9  |
| 5.    | Dynamic Frequency Selection .....                                         | 10 |
| 5.1.  | List of Measurement and Examinations .....                                | 10 |
| 5.2.  | Test Setup .....                                                          | 12 |
| 5.3.  | DFS Detection Threshold .....                                             | 14 |
| 5.4.  | Channel Availability Check Time .....                                     | 17 |
| 5.5.  | Radar Burst at the Beginning of the Channel Availability Check Time ..... | 18 |
| 5.6.  | Radar Burst at the End of the Channel Availability Check Time .....       | 19 |
| 5.7.  | U-NII Detection Bandwidth .....                                           | 20 |
| 5.8.  | Statistical Performance Check .....                                       | 21 |
| 5.9.  | In-Service Monitoring .....                                               | 22 |
| 5.10. | Non-Occupancy Period .....                                                | 24 |
| 5.11. | EUT Setup Photos .....                                                    | 26 |



### History of this test report

| Report No.       | Issued Date   | Description |
|------------------|---------------|-------------|
| 22060120-TRFCC05 | Aug. 02, 2022 | Original    |
|                  |               |             |
|                  |               |             |
|                  |               |             |
|                  |               |             |
|                  |               |             |
|                  |               |             |
|                  |               |             |
|                  |               |             |
|                  |               |             |
|                  |               |             |
|                  |               |             |
|                  |               |             |
|                  |               |             |



## 1. Summary of Test Procedure and Test Results

### 1.1. Applicable Standards

**ANSI C63.10:2013**

**FCC Rules and Regulations Part 15 Subpart E §15.407**

**KDB 789033**

**KDB 905462**

| FCC Rule | Description of Test         | Result |
|----------|-----------------------------|--------|
| 15.407   | Dynamic Frequency Selection | PASS   |

\*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.



## 2. Test Configuration of Equipment under Test

### 2.1. Feature of Equipment under Test

|                           |                                                                                                                                                                                                                                                                                    |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operation Frequency Range | BLE: 2400-2483.5MHz<br>802.11b/g/n: 2400-2483.5MHz<br>802.11a/n/ac: 5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5875MHz                                                                                                                                                         |
| Center Frequency Range    | BLE: 2402MHz-2480MHz<br>802.11b/g/n: 2412MHz-2462MHz<br>802.11a/n/ac: 5180-5240MHz, 5260-5320MHz, 5500-5700MHz, 5745-5825MHz                                                                                                                                                       |
| Modulation Type           | BLE: GFSK<br>WLAN:<br>2.4GHz:<br>802.11b: CCK, DQPSK, DBPSK<br>802.11g/n: BPSK, QPSK, 16QAM, 64QAM<br>5GHz:<br>802.11a/n: BPSK, QPSK, 16QAM, 64QAM<br>802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM                                                                                   |
| Modulation Technology     | DSSS, OFDM, DTS                                                                                                                                                                                                                                                                    |
| Data Rate                 | BLE:<br>GFSK: 1Mbps<br>WLAN:<br>2.4GHz:<br>802.11b: 1, 2, 5.5, 11Mbps<br>802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps<br>802.11n: MCS0 – MCS15, HT20/40<br>5GHz:<br>802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps<br>802.11n: MCS0 – MCS15, HT20/40<br>802.11ac: MCS0 – MCS9, VHT20/40/80 |
| Antenna Type              | For BLE:<br>PIFA Antenna<br>For WLAN:<br>Dipole Antenna                                                                                                                                                                                                                            |
| Antenna Gain              | For BLE:<br>2400-2483.5MHz: ANT C: -1.00dBi<br>For WLAN:<br>2400-2483.5MHz: ANT A: 3.50dBi, ANT B: 3.50dBi<br>5150-5850MHz: ANT A: 5.00dBi, ANT B: 5.00dBi                                                                                                                         |
| Power Cord                | Brand: SHEN ZHEN GOSPELL DIGITAL TECHNOLOGY CO.,LTD<br>Model: CH-331C+CH-706                                                                                                                                                                                                       |

Note:

1. EUT support TPC Function.
2. WLAN 2.4G and WLAN 5G can simultaneously transmission.
3. EUT support Client Mode without radar detection.
4. EUT FW: 6.2.9.13788
5. For more details, please refer to the User's manual of the EUT.



## 2.2. Description of Test System

| DFS          |                 |                |             |                        |            |
|--------------|-----------------|----------------|-------------|------------------------|------------|
| Equipment    | Brand           | Model          | Length/Type | Power cord/Length/Type | FCC ID     |
| Notebook     | DELL            | Latitude E5470 | N/A         | Adapter / 1.8m / NS    | N/A        |
| UDM Pro SE   | UBIQUITI        | UDM Pro SE     | N/A         | Adapter / 1.8m / NS    | N/A        |
| U6 Pro       | UBIQUITI        | U6 Pro         | N/A         | N/A                    | SWX-U6PROR |
| RJ45 Cable*3 | TE CONNECTIVITY | CAT5E          | 1.2m / NS   | N/A                    | N/A        |



### 2.3. General Information of Test

|                               |                                                                                                                                                                                            |                                                                                                                                                                      |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Site                     | <b>Cerpass Technology Corporation Test Laboratory</b><br>Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.)<br>Tel:+886-3-3226-888<br>Fax:+886-3-3226-881 |                                                                                                                                                                      |
|                               | FCC                                                                                                                                                                                        | TW1439, TW1079                                                                                                                                                       |
|                               | IC                                                                                                                                                                                         | 4934E-1, 4934E-2                                                                                                                                                     |
|                               | VCCI                                                                                                                                                                                       | T-2205 for Telecommunication test<br>C-4663 for Conducted emission test<br>R-4218 for Radiated emission test<br>G-10812, G-10813 for radiated disturbance above 1GHz |
| Frequency Range Investigated: | Conducted: from 150kHz to 30 MHz<br>Radiation: from 30 MHz to 40,000MHz                                                                                                                    |                                                                                                                                                                      |
| Test Distance:                | The test distance of radiated emission from antenna to EUT is 3 M.                                                                                                                         |                                                                                                                                                                      |

| Test Item | Test Site  | Test period           | Environmental Conditions | Tested By |
|-----------|------------|-----------------------|--------------------------|-----------|
| DFS       | RFDFS01-NK | 2022/07/06~2022/07/29 | 25~26°C /<br>50~54%      | Dian Chen |

### 2.4. Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

| Measurement Item                  | Uncertainty |
|-----------------------------------|-------------|
| Channel Move Time                 | ±4.0%       |
| Channel Closing Transmission Time | ±2.5%       |
| Threshold                         | ±2.1dB      |



### 3. Test Equipment and Ancillaries Used for Tests

| Test Item                      | RF Conducted |           |            |                  |            |
|--------------------------------|--------------|-----------|------------|------------------|------------|
| Test Site                      | RFCON01-NK   |           |            |                  |            |
| Instrument                     | Manufacturer | Model No  | Serial No  | Calibration Date | Valid Date |
| CAX Signal Analyzer            | KEYSIGHT     | N9000B    | MY57100291 | 2021/11/17       | 2022/11/16 |
| MXG MW Analog Signal Generator | KEYSIGHT     | N5183A    | MY50142931 | 2022/05/26       | 2023/05/27 |
| N7607C Signal Studio           | KEYSIGHT     | v1.5.5.0  | NA         | NA               | NA         |
| InServiceMonitorUtility        | Theda        | v10.0.0.0 | NA         | NA               | NA         |



## 4. Antenna Requirements

### 4.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 4.2. Antenna Construction and Directional Gain

|              |                                              |
|--------------|----------------------------------------------|
| Antenna Type | Dipole Antenna                               |
| Antenna Gain | 5250-5725MHz: ANT A: 5.00dBi, ANT B: 5.00dBi |



## 5. Dynamic Frequency Selection

### 5.1. List of Measurement and Examinations

#### EUT Applicability of DFS requirements and Frequency Range

| Operation Mode                 |    | Operating Frequency Range |                                                   |
|--------------------------------|----|---------------------------|---------------------------------------------------|
|                                |    | 5250-5350MHz              | 5470-5725MHz<br>(5600MHz-5650MHz will be disable) |
| Master                         | -- | --                        | --                                                |
| Client without radar detection | √  | √                         | √                                                 |
| Client with radar detection    | -- | --                        | --                                                |

#### DEVICES WITH RADAR DETECTION

| MAXIMUM TRANSMIT POWER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | VALUE (SEE Note 1 and 2) |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| ≥ 200 milliwatt                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | -64 dBm                  |
| EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                      | -62 dBm                  |
| EIRP < 200 milliwatt that do not meet the power spectral density requirement                                                                                                                                                                                                                                                                                                                                                                                                                                      | -64 dBm                  |
| <p>Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.</p> <p>Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p>Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911</p> |                          |

**Table1: Applicability of DFS requirements prior to use of a channel**

| REQUIREMENT<br>RADAR            | OPERATIONAL MODE |                                      |                                   |
|---------------------------------|------------------|--------------------------------------|-----------------------------------|
|                                 | MASTER           | CLIENT WITHOUT<br>RADAR<br>DETECTION | CLIENT WITH<br>RADAR<br>DETECTION |
| Non-Occupancy Period            | V                | Not required                         | V                                 |
| DFS Detection Threshold         | V                | Not required                         | V                                 |
| Channel Availability Check Time | V                | Not required                         | Not required                      |
| U-NII Detection Bandwidth       | V                | Not required                         | V                                 |

**Table2: Applicability of DFS requirements during normal operation**

| REQUIREMENT<br>RADAR              | OPERATIONAL MODE |                                      |                                   |
|-----------------------------------|------------------|--------------------------------------|-----------------------------------|
|                                   | MASTER           | CLIENT WITHOUT<br>RADAR<br>DETECTION | CLIENT WITH<br>RADAR<br>DETECTION |
| DFS Detection Threshold           | V                | Not required                         | V                                 |
| Channel Closing Transmission Time | V                | V                                    | V                                 |
| Channel Move Time                 | V                | V                                    | V                                 |
| U-NII Detection Bandwidth         | V                | Not required                         | V                                 |

|                                                                   |                                       |                                                      |
|-------------------------------------------------------------------|---------------------------------------|------------------------------------------------------|
| Additional requirements for devices with multiple bandwidth modes | Master or Client with radar detection | Client without radar detection                       |
| U-NII Detection Bandwidth and Statistical Performance Check       | All BW modes must be tested           | Not required                                         |
| Channel Move Time and Channel Closing Transmission Time           | Test using widest BW mode available   | Test using the widest BW mode available for the link |
| All other                                                         | Any single BW mode                    | Not required                                         |

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.



## 5.2. Test Setup

### Setup for Master with injection at the Master

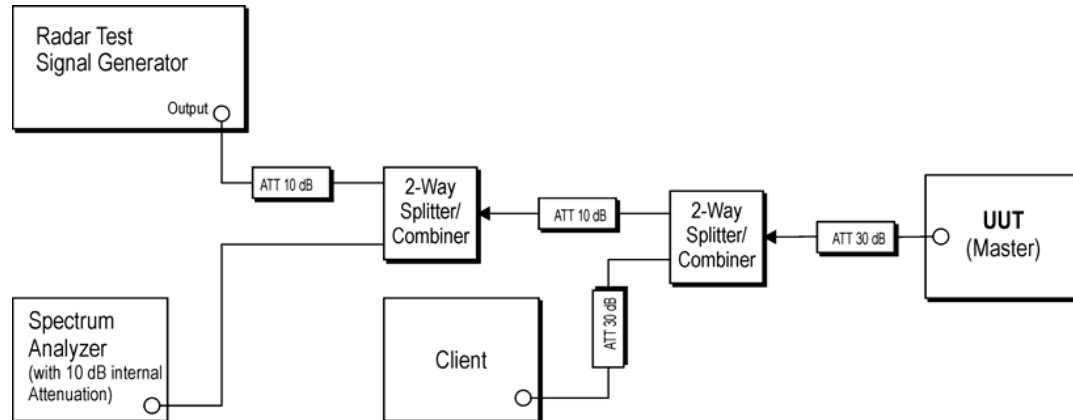


Figure 1: Example Conducted Setup where UUT is a Master and Radar Test Waveforms are injected into the Master

### Setup for Client with injection at the Master

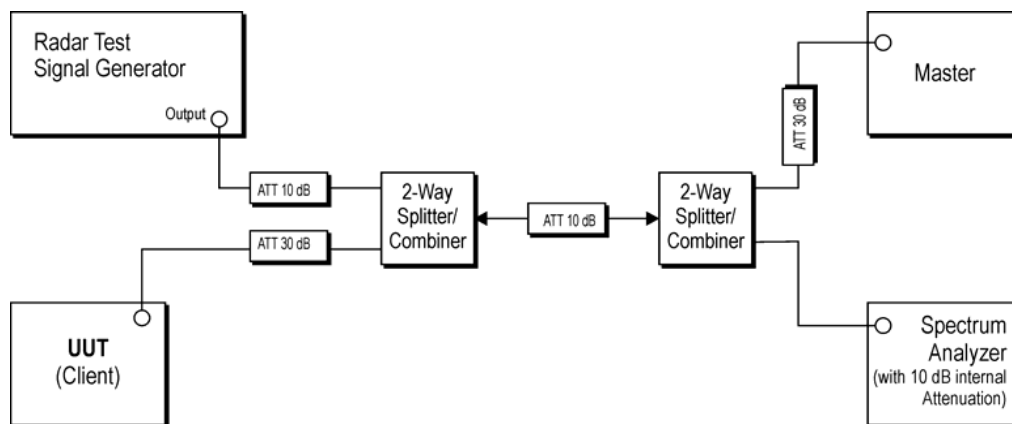


Figure 2: Example Conducted Setup where UUT is a Client and Radar Test Waveforms are injected into the Master



### Setup for Client with injection at the Client

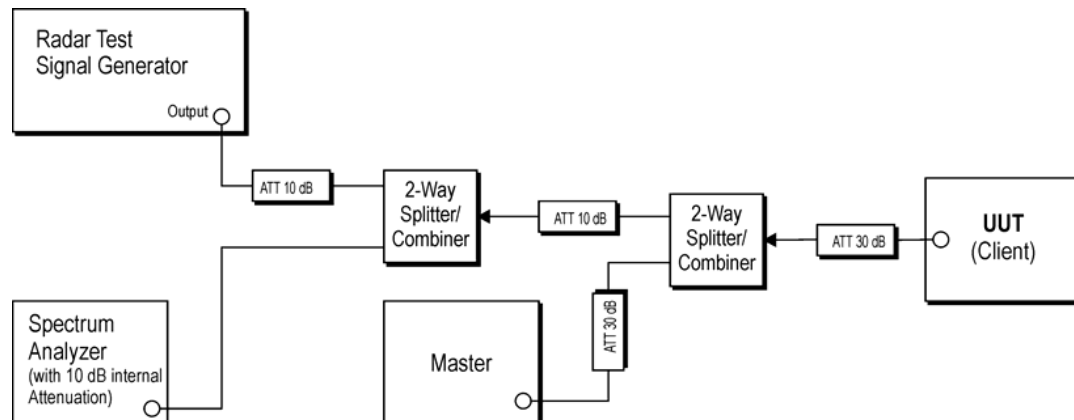


Figure 3: Example Conducted Setup where UUT is a Client and Radar Test Waveforms are injected into the Client



### 5.3. DFS Detection Threshold

DFS Detection Threshold is the level used by the DFS mechanism to detect radar interference.

#### 5.3.1. Test Limit

Limits Clause 4.7.2.1.2

DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

| MAXIMUM TRANSMIT POWER                                                          | VALUE (SEE Note 1 and 2) |
|---------------------------------------------------------------------------------|--------------------------|
| $\geq 200$ milliwatt                                                            | -64 dBm                  |
| EIRP < 200 milliwatt and<br>power spectral density < 10 dBm/MHz                 | -62 dBm                  |
| EIRP < 200 milliwatt that do not meet the<br>power spectral density requirement | -64 dBm                  |

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.


Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911

|                    |                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Max. output power  | Band: 5250MHz-5350MHz<br>802.11a: 20.48dBm<br>802.11n HT20: 20.65dBm<br>802.11n HT40: 23.14dBm<br>802.11ac VHT20: 20.67dBm<br>802.11ac VHT40: 23.16dBm<br>802.11ac VHT80: 21.80dBm<br><br>Band: 5470MHz-5725MHz<br>802.11a: 20.07dBm<br>802.11n HT20: 20.26dBm<br>802.11n HT40: 22.77dBm<br>802.11ac VHT20: 20.32dBm<br>802.11ac VHT40: 23.85dBm<br>802.11ac VHT80: 24.79dBm |
| Antenna gain (Max) | 5250-5350MHz: ANT A: 5.00dBi, ANT B: 5.00dBi<br>5470-5725MHz: ANT A: 5.00dBi, ANT B: 5.00dBi                                                                                                                                                                                                                                                                                 |




### 5.3.2. Test Result of DFS Detection Threshold


Radar Type 0 Calibration Plot

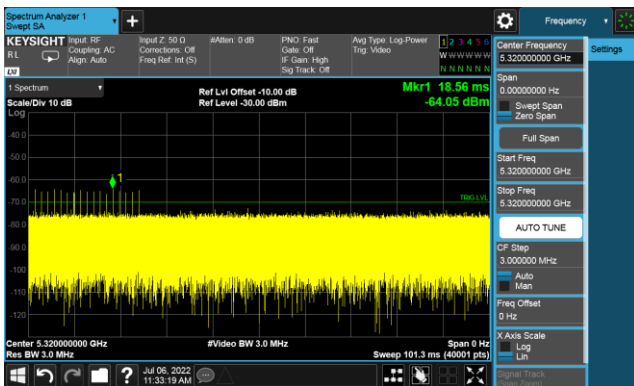


Radar Type 3 Calibration Plot

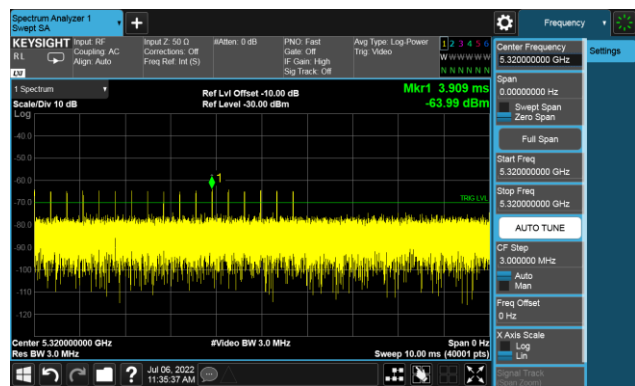


Radar Type 1 Calibration Plot

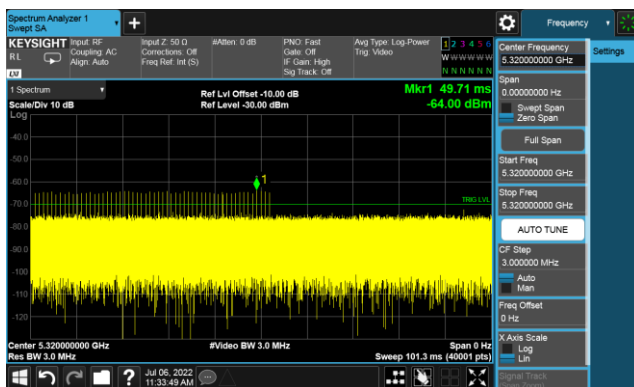


Radar Type 4 Calibration Plot

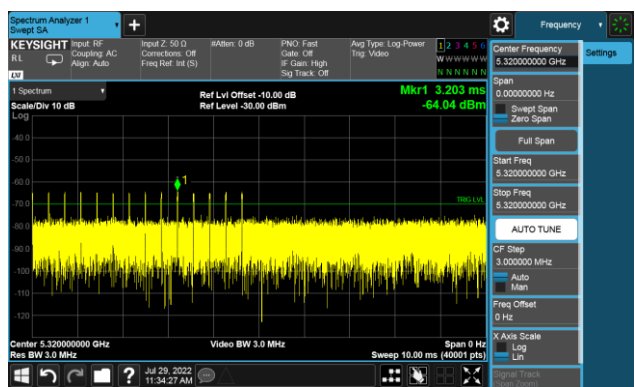

Radar Type 2 Calibration Plot

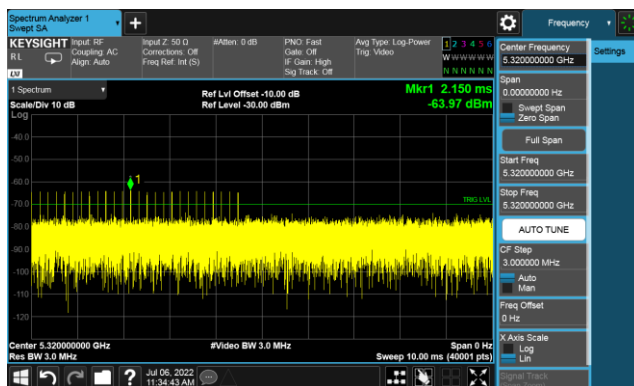


Radar Type 5 Calibration Plot

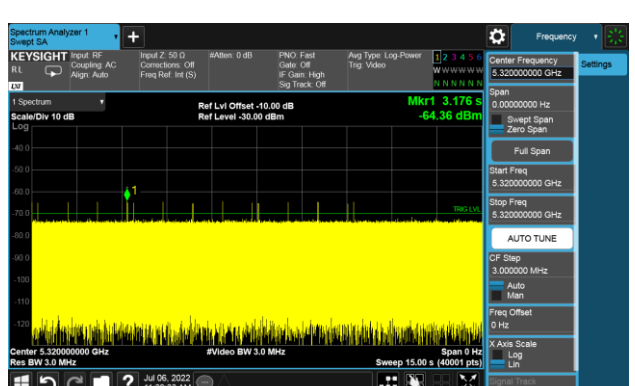



### Radar Type 6 Calibration Plot

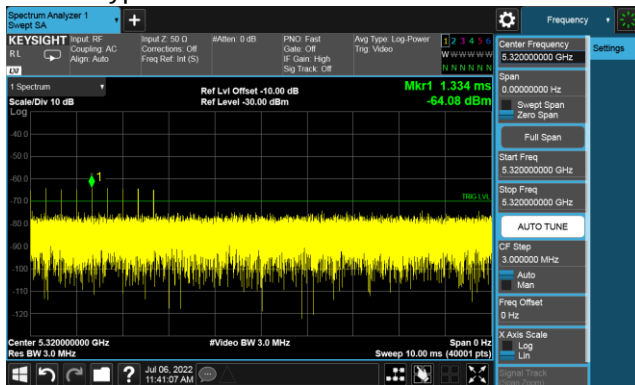

**5.4. Channel Availability Check Time**

The Channel Availability Check is defined as the mechanism by which an RLAN device checks a channel for the presence of radar signals.

There shall be no transmissions by the device within the channel being checked during this process. If no radars have been detected, the channel becomes an Available Channel valid for a period of time.

The RLAN shall only start transmissions on Available Channels.

At power-up, the RLAN is assumed to have no Available Channels.

**5.4.1. Test Limit**

Limits Clause 4.7.2.1.2

Table D.2: DFS requirement values

| Parameter                  | Value |
|----------------------------|-------|
| Channel Availability Check | > 60s |

**5.4.2. Test Result of Channel Availability Check**

Not required



## 5.5. Radar Burst at the Beginning of the Channel Availability Check Time

The steps below define the procedure to verify successful radar detection on the test Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB occurs at the beginning of the Channel Availability Check Time. This is illustrated in **Figure 15**.

- The Radar Waveform generator and UUT are connected using the applicable test setup described in the sections on configuration for Conducted Tests or Radiated Tests and the power of the UUT is switched off.
- The UUT is powered on at  $T_0$ .  $T_1$  denotes the instant when the UUT has completed its power-up sequence ( $T_{\text{power\_up}}$ ). The Channel Availability Check Time commences on Chr at instant  $T_1$  and will end no sooner than  $T_1 + T_{\text{ch\_avail\_check}}$ .
- A single Burst of one of the Short Pulse Radar Types 0-4 will commence within a 6 second window starting at  $T_1$ . An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- Visual indication or measured results on the UUT of successful detection of the radar Burst will be recorded and reported. Observation of Chr for UUT emissions will continue for 2.5 minutes after the radar Burst has been generated.
- Verify that during the 2.5 minute measurement window no UUT transmissions occurred on Chr. The Channel Availability Check results will be recorded.

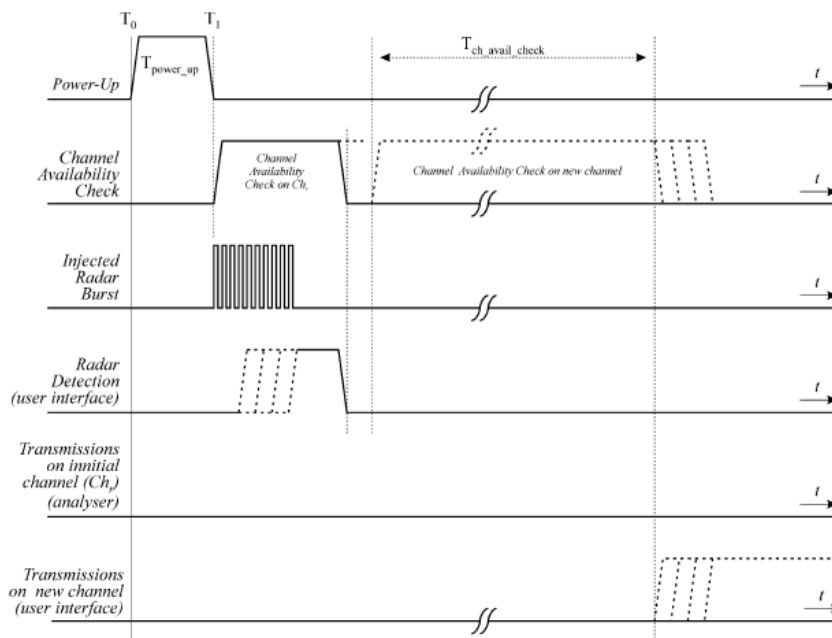


Figure 15: Example of timing for radar testing at the beginning of the Channel Availability Check Time

### 5.5.1. Test Result of radar burst at the beginning of the Channel Availability Check Time

Not required



## 5.6. Radar Burst at the End of the Channel Availability Check Time

The steps below define the procedure to verify successful radar detection on the test Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1dB occurs at the end of the Channel Availability Check Time. This is illustrated in **Figure 16**.

- The Radar Waveform generator and UUT are connected using the applicable test setup described in the sections for Conducted Tests or Radiated Tests and the power of the UUT is switched off.
- The UUT is powered on at  $T_0$ .  $T_1$  denotes the instant when the UUT has completed its power-up sequence ( $T_{\text{power\_up}}$ ). The Channel Availability Check Time commences on Chr at instant  $T_1$  and will end no sooner than  $T_1 + T_{\text{ch\_avail\_check}}$ .
- A single Burst of one of the Short Pulse Radar Types 0-4 will commence within a 6 second window starting at  $T_1 + 54$  seconds. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- Visual indication or measured results on the UUT of successful detection of the radar Burst will be recorded and reported. Observation of Chr for UUT emissions will continue for 2.5 minutes after the radar Burst has been generated.
- Verify that during the 2.5 minute measurement window no UUT transmissions occurred on Chr. The Channel Availability Check results will be recorded.

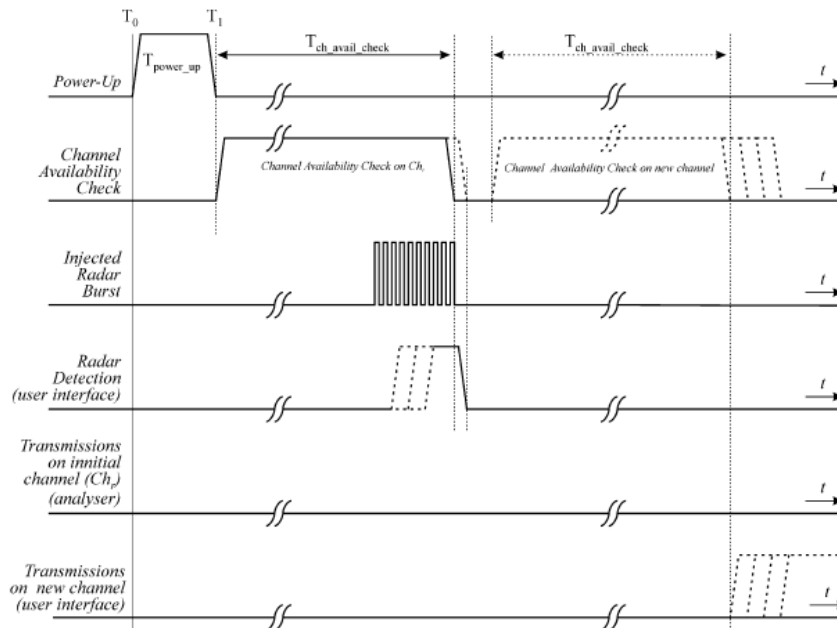


Figure 16: Example of timing for radar testing towards the end of the Channel Availability Check Time

### 5.6.1. Test Result of radar burst at the end of the Channel Availability Check Time

Not required



## 5.7. U-NII Detection Bandwidth

|                                                                                                                                                                                                                                                                                                                                                       |                                       |                                |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|--------------------------------|
| Additional requirements for devices with multiple bandwidth modes                                                                                                                                                                                                                                                                                     | Master or Client with radar detection | Client without radar detection |
| U-NII Detection Bandwidth and Statistical Performance Check                                                                                                                                                                                                                                                                                           | All BW modes must be tested           | Not required                   |
| Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency. |                                       |                                |

### 5.7.1. Test Limit

Limits Clause 4.7.2.1.2 Table D.2: DFS requirement values

| Parameter                                                                                                                                                                                                            | Value                                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
| U-NII Detection Bandwidth                                                                                                                                                                                            | Minimum 100% of the U-NII 99% transmission |
| Note : During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic. |                                            |

### 5.7.2. Test Result of U-NII Detection Bandwidth

Not required



## 5.8. Statistical Performance Check

The UUT will select channel by random mode and remember this channel when detect radar signal, so that will select unused channel by random mode.

### 5.8.1. Test Result of Uniform Spreading

Not required



## 5.9. In-Service Monitoring

The In-Service Monitoring is defined as the process by which an RLAN monitors the Operating Channel for the presence of radar signals.

| Additional requirements for devices with multiple bandwidth modes                                                                                                                                                                                                                                                                                     | Master or Client with radar detection | Client without radar detection                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|------------------------------------------------------|
| U-NII Detection Bandwidth and Statistical Performance Check                                                                                                                                                                                                                                                                                           | All BW modes must be tested           | Not required                                         |
| Channel Move Time and Channel Closing Transmission Time                                                                                                                                                                                                                                                                                               | Test using widest BW mode available   | Test using the widest BW mode available for the link |
| All other                                                                                                                                                                                                                                                                                                                                             | Any single BW mode                    | Not required                                         |
| Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency. |                                       |                                                      |

### 5.9.1. Test Limit

| Parameter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Value                                                                                                    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| Channel Move Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | < 10 s (See Note 1)                                                                                      |
| Channel Closing Transmission Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | < 200 ms+ an aggregate of 60 milliseconds over remaining 10 second period.<br>(See Notes 1 and Notes 2.) |
| Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.<br>Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. |                                                                                                          |

#### Limits Clause 4.7.2.2.2

The In-Service Monitoring shall be used to continuously monitor an Operating Channel.


The In-Service-Monitoring shall start immediately after the RLAN has started transmissions on an Operating Channel.



### 5.9.2. Test Result of In-Service Monitoring


|                                   | Value     | Limit   |
|-----------------------------------|-----------|---------|
| Channel Move Time                 | 0.5951851 | <10 s   |
| Channel Closing Transmission Time | 15.5996   | < 60 ms |

Modulation Type:802.11ac VHT80, ch58@5320MHz

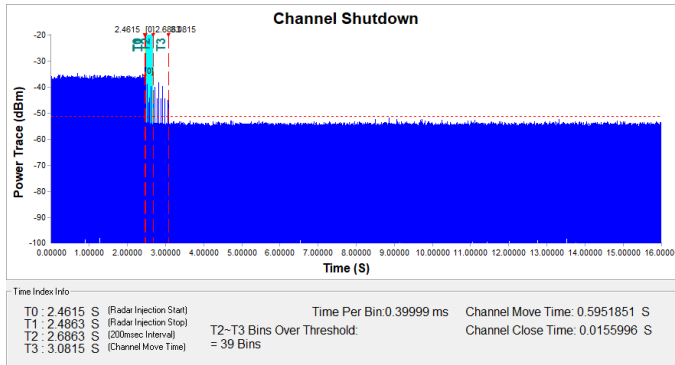

|                                   | Value     | Limit   |
|-----------------------------------|-----------|---------|
| Channel Move Time                 | 0.4527887 | <10 s   |
| Channel Closing Transmission Time | 2.3999    | < 60 ms |

Modulation Type:802.11ac VHT80, ch106@5500MHz

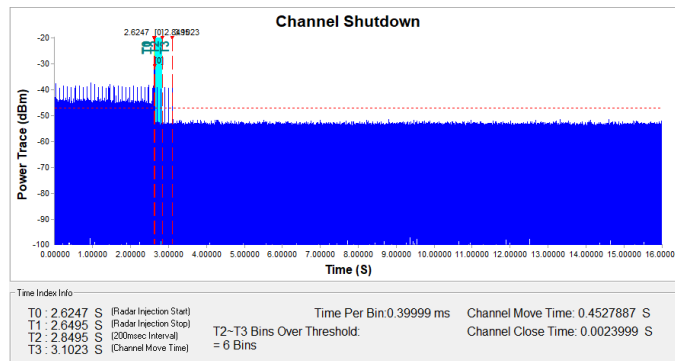



## 5.10. Non-Occupancy Period

The Channel Shutdown is defined as the process initiated by the RLAN device immediately after a radar signal has been detected on an Operating Channel.

The master device shall instruct all associated slave devices to stop transmitting on this channel, which they shall do within the Channel Move Time.

Slave devices with a Radar Interference Detection function, shall stop their own transmissions within the Channel Move Time.

The aggregate duration of all transmissions of the RLAN device on this channel during the Channel Move Time shall be limited to the Channel Closing Transmission Time. The aggregate duration of all transmissions shall not include quiet periods in between transmissions.

### 5.10.1. Test Limit


| Radar Test Signal | Master (min) | Client (min) |
|-------------------|--------------|--------------|
| 0                 | > 30         | > 30         |

### 5.10.2. Channel Loading


A link is established between the AP. Use Iperf ver.2.0.9 Software to simulate data transfer is streamed to generate WLAN traffic.

Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater. For example, channel loading can be estimated by setting the spectrum analyzer for zero span and approximate the Time On/ (Time On + Off Time). This can be done with any appropriate channel BW and modulation type

Modulation Type:802.11ac VHT80  
Time On/ (Time On + Off Time) =17.27%

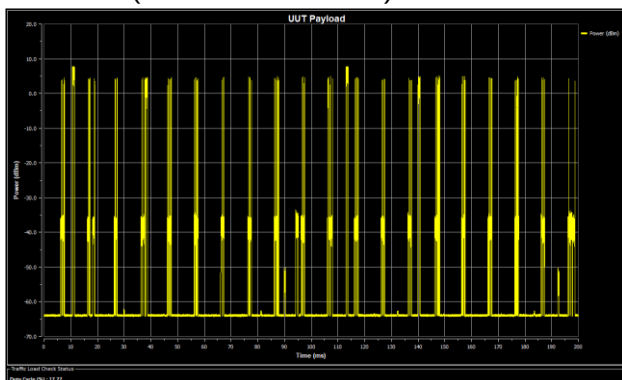


Modulation Type:802.11ac VHT80  
Time On/ (Time On + Off Time) =17.46%

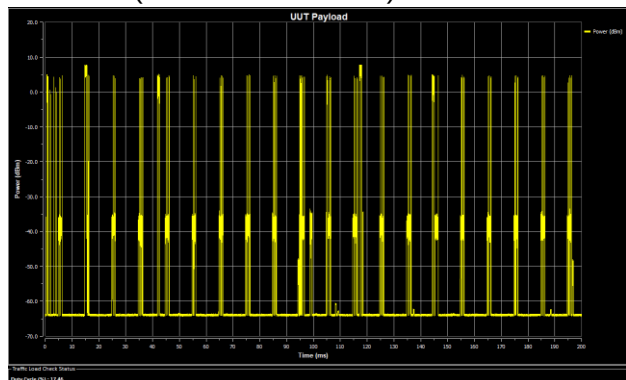




### 5.10.3. Test Result of Non-Occupancy Period

Modulation Type:802.11ac VHT80, ch58@5320MHz

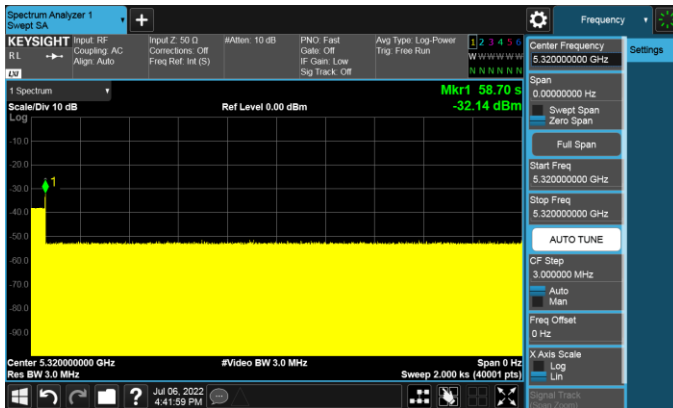

Modulation Type:802.11ac VHT80, ch106@5500MHz

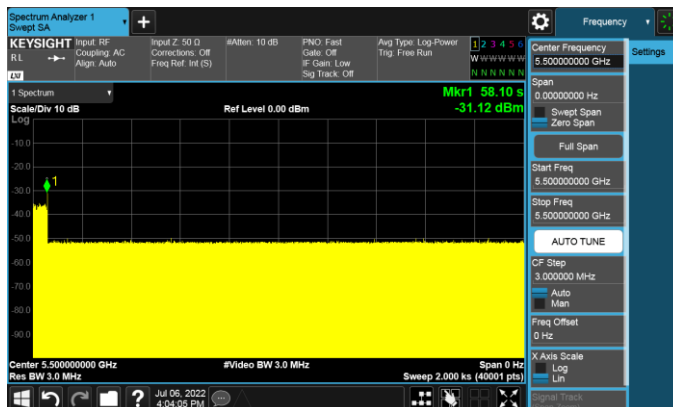

-----THE END OF REPORT-----