



REPORT No. : SZ17090204W03

TEST REPORT

APPLICANT : Shenzhen Renqing Excellent Investment Co.,Ltd

PRODUCT NAME : Mudée Bluetooth Earphone
Mudée Bluetooth Earphone(Magnetic)
Mudée Bluetooth Earphone with Charging Dock

MODEL NAME : RAU0573, RAU0592, RAU0593

BRAND NAME : ROCK, rock space, ROCK Lava

FCC ID : 2ALT3-RQZY0802

STANDARD(S) : 47 CFR Part 15 Subpart C

TEST DATE : 2017-11-01 to 2017-11-10

ISSUE DATE : 2017-12-06

Tested by:

Su Hang
Su Hang (Test Engineer)

Approved by:

Andy Yeh
Andy Yeh (Technical Director)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	4
1.1. Manufacturer and Factory Information	4
1.2. Equipment Under Test (EUT) Description	4
1.3. Test Standards and Results	6
1.4. Environmental Conditions	6
2. 47 CFR Part 15C Requirements	7
2.1. Antenna requirement	7
2.2. Number of Hopping Frequency	7
2.3. Peak Output Power	11
2.4. 20dB Bandwidth	13
2.5. Carried Frequency Separation	20
2.6. Time of Occupancy (Dwell time)	23
2.7. Conducted Spurious Emissions	36
2.8. Restricted Frequency Bands	49
2.9. Conducted Emission	58
2.10. Radiated Emission	62
Annex A Test Uncertainty	75
Annex B Testing Laboratory Information	76



REPORT No. : SZ17090204W03

Change History		
Issue	Date	Reason for change
1.0	2017-11-16	First edition
2.0	2017-12-06	Second edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Shenzhen Renqing Excellent Investment Co.,Ltd
Applicant Address:	3/F,Block A7 Nanshan iPark,NO.1001 Xueyuan Road,Nanshan District,Shenzhen
Manufacturer:	Dongguan Kailai Electronic Co.,Ltd.
Manufacturer Address:	Workshop 1,No.36,Industrial Road, Shahukou, Block 2, Changping Park, East Industrial Zone, Dongguan City, Guangdong Province, China

1.2. Equipment Under Test (EUT) Description

Product Name:	Mudee Bluetooth Earphone Mudee Bluetooth Earphone(Magnetic) Mudee Bluetooth Earphone with Charging Dock
Serial No:	(N/A, marked #1 by test site)
Hardware Version:	V1.0
Software Version:	V1.0
Modulation Type:	Bluetooth: FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))
Operating Frequency Range:	The frequency range used is 2402MHz – 2480MHz (79 channels, at intervals of 1MHz); The frequency block is 2400MHz to 2483.5MHz.
Bluetooth Version:	Bluetooth 4.2 (BR+ EDR)
Antenna Type:	Ceramic Antenna
Antenna Gain:	0 dBi

Note 1: The EUT contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).



Note 2: According to the certificate holder, Shenzhen Renqing Excellent Investment Co.,Ltd, declare that the Mudée Bluetooth Earphone RAU0573, Mudée Bluetooth Earphone(Magnetic) RAU0592 and Mudée Bluetooth Earphone with Charging Dock RAU0593 are accordant in both hardware platform and software.

Followings are the highlighted items which are same between these products

1. The number of PCB used in the product.
2. All PCB layout.
3. Bluetooth module.
4. Power supply mode
5. Operating voltage

The detail difference between these products, application is as below:

1. The appearance are different
2. The color of plastic enclosure has been changed.

Note 3: The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT into the test mode, and then use MT8852B base station to control the EUT continuous transmission.

Note 4: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	PASS
2	15.247(a)	Number of Hopping Frequency	Nov 10, 2017	Su Hang	PASS
3	15.247(b)	Peak Output Power	Nov 10, 2017	Su Hang	PASS
4	15.247(a)	20dB Bandwidth	Nov 10, 2017	Su Hang	PASS
5	15.247(a)	Carrier Frequency Separation	Nov 10, 2017	Su Hang	PASS
6	15.247(a)	Time of Occupancy (Dwell time)	Nov 10, 2017	Su Hang	PASS
7	15.247(d)	Conducted Spurious Emission	Nov 09&10, 2017	Su Hang	PASS
8	15.247(d)	Restricted Frequency Bands	Nov 02, 2017	Wang Dalong	PASS
9	15.209, 15.247(d)	Radiated Emission	Nov 02, 2017	Wang Dalong	PASS
10	15.207	Conducted Emission	Nov 02, 2017	Wang Dalong	PASS

Note: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013.

1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


2.2. Number of Hopping Frequency

2.2.1. Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.2.2. Test Description

A. Test Setup:

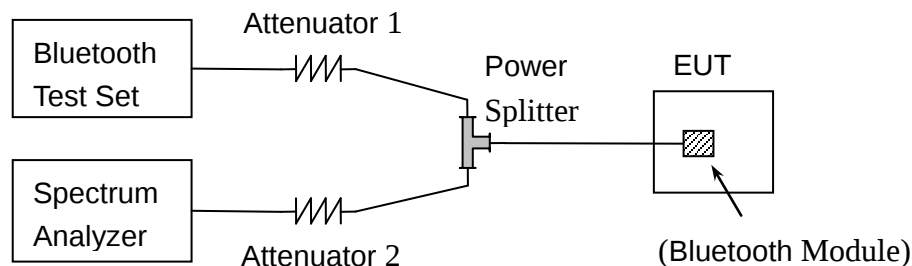

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

**B. Equipments List:**

Please reference ANNEX A(1.5).

2.2.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

2.2.4. Test Result


The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.

A. Test Verdict:



Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Refer to Plot	Verdict
GFSK	2400 - 2483.5	79	15	Plot A	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	Plot B	PASS
8-DPSK	2400 - 2483.5	79	15	Plot C	PASS



B. Test Plots:

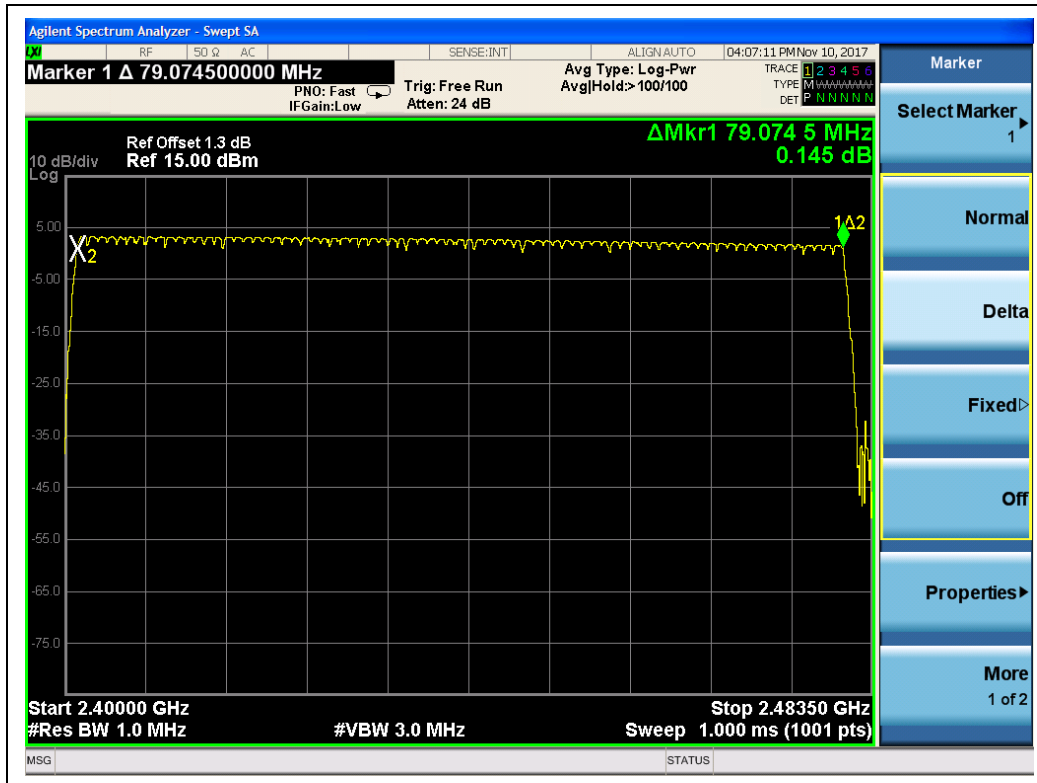

(Plot A: GFSK)

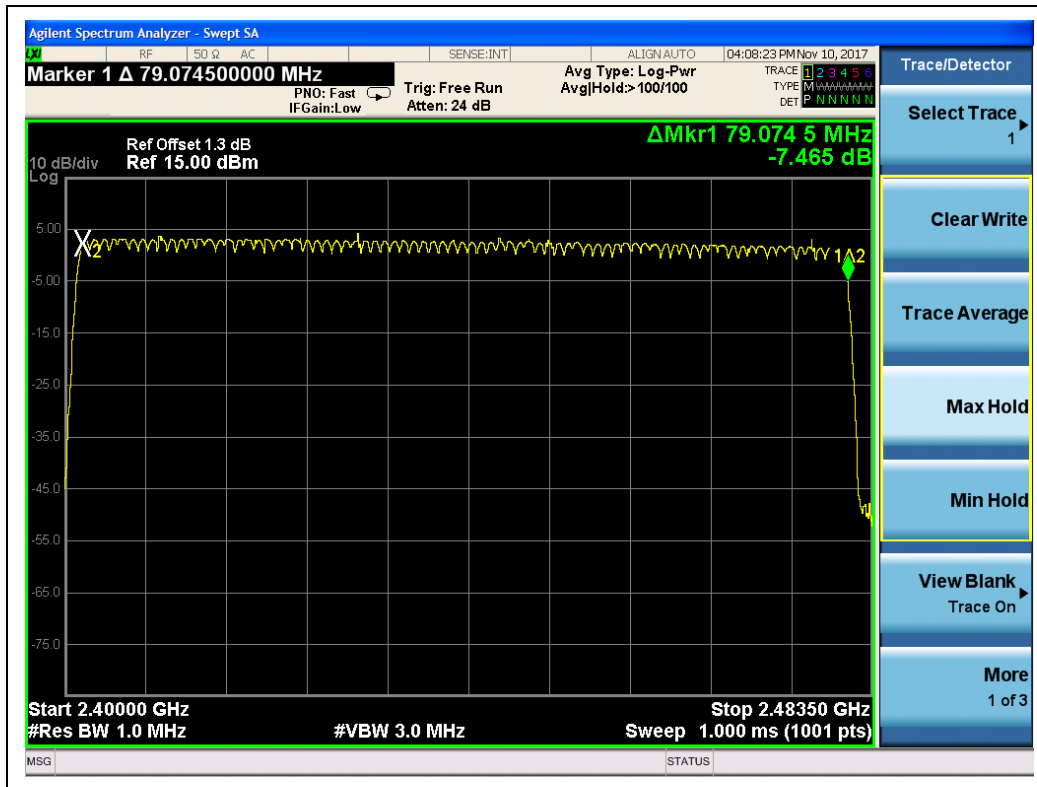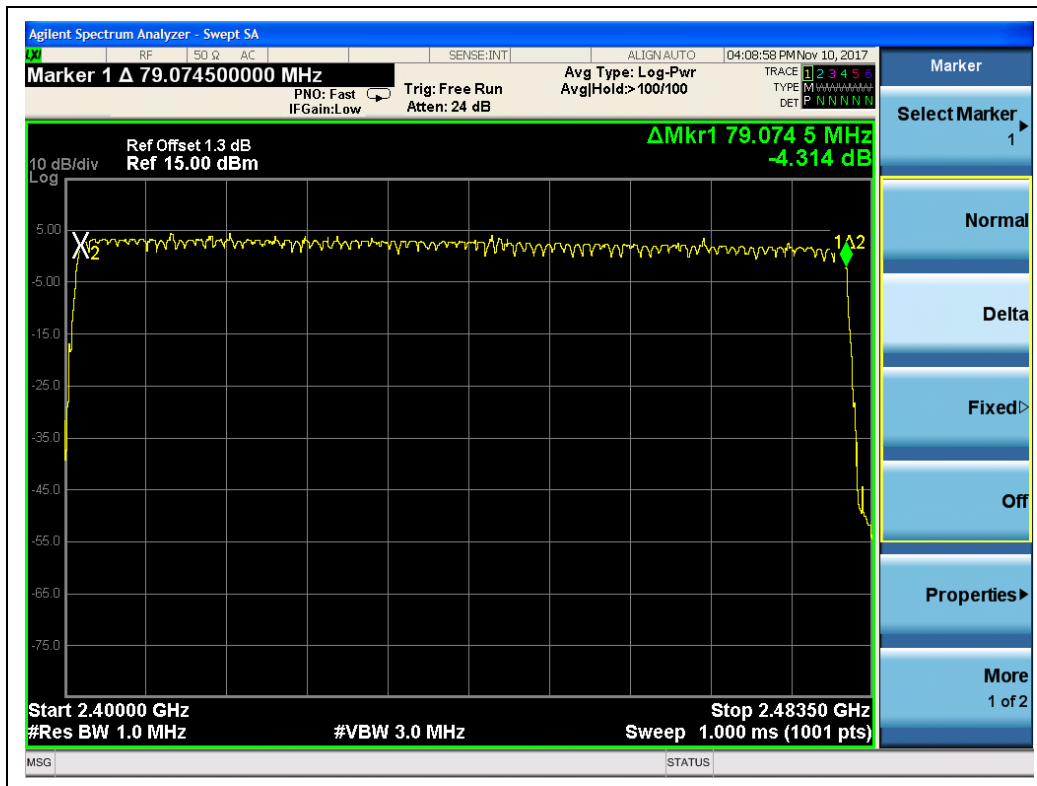
(Plot B: $\pi/4$ -DQPSK)


(Plot C: 8- DPSK)


2.3. Peak Output Power

2.3.1. Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.3.2. Test Description

A. Test Setup:

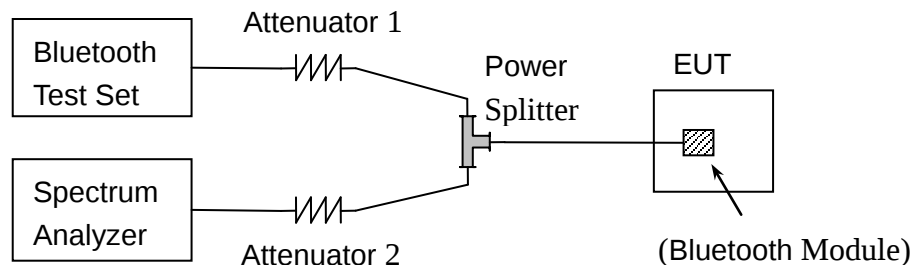

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.3.3. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the module. The lowest, middle and highest channel were tested by USB Wideband Power Sensor.

**2.3.3.1 GFSK Mode****A. Test Verdict:**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	-0.57	0.00088	30	1	PASS
39	2441	-1.53	0.00070			PASS
78	2480	-2.50	0.00056			PASS

2.3.3.2 $\pi/4$ -DQPSK Mode**B. Test Verdict:**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	1.17	0.00131	20.97	0.125	PASS
39	2441	0.38	0.00109			PASS
78	2480	-0.78	0.00084			PASS

2.3.3.3 8-DPSK Mode**C. Test Verdict:**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	1.11	0.00129	20.97	0.125	PASS
39	2441	0.23	0.00105			PASS
78	2480	-0.63	0.00086			PASS


2.4. 20dB Bandwidth

2.4.1. Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.4.2. Test Description

A. Test Setup:

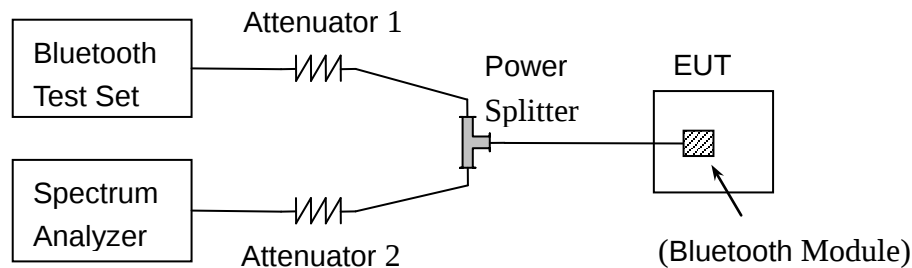

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.4.3. Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold



2.4.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.

2.4.4.1 GFSK Mode

A. Test Verdict:



The maximum 20dB bandwidth measured is 0.7685 MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	0.7685	Plot A
39	2441	0.7659	Plot B
78	2480	0.7633	Plot C

B. Test Plots:



(Plot A: Channel = 2402 @ GFSK)





2.4.4.2 $\pi/4$ -DQPSK Mode

A. Test Verdict:

The maximum 20dB bandwidth measured is 1.157 MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.157	Plot D
39	2441	1.157	Plot E
78	2480	1.156	Plot F

B. Test Plots:



(Plot D: Channel = 2402 @ $\pi/4$ -DQPSK)

(Plot E: Channel = 2441 @ $\pi/4$ -DQPSK)(Plot F: Channel = 2480 @ $\pi/4$ -DQPSK)



2.4.4.3 8-DPSK Mode

A. Test Verdict:

The maximum 20dB bandwidth measured is 1.148 MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.148	Plot G
39	2441	1.148	Plot H
78	2480	1.148	Plot I

B. Test Plots:



(Plot G: Channel = 2402 @ 8-DPSK)



(Plot H: Channel = 2441 @ 8-DPSK)



(Plot I: Channel = 2480 @ 8-DPSK)


2.5. Carried Frequency Separation

2.5.1. Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.5.2. Test Description

A. Test Setup:

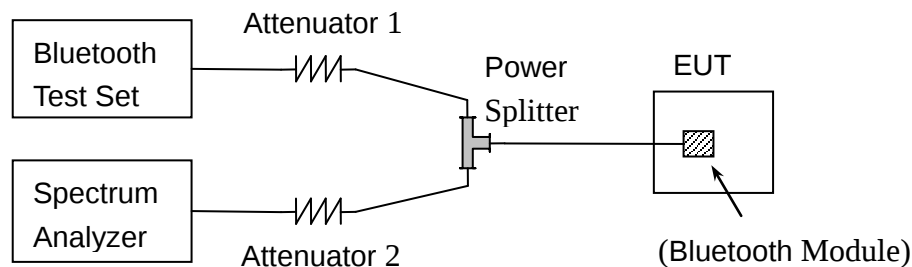

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.5.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak


Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

2.5.4. Test Result

The Bluetooth Module operates at hopping-on test mode. For any adjacent channels (e.g. the channel 39 and 40 as showed in the Plot A), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (refer to section 2.4.4), whichever is greater. So, the verdict is PASSING

Test Mode	Measured Channel Numbers	Carried Frequency Separation	Refer to Plot	20dB bandwidth (MHz)	Min. Limit	Verdict
GFSK	39 and 40	1.002	Plot A	0.7633	two-thirds of the 20dB bandwidth	PASS
$\pi/4$ -DQPSK	39 and 40	1.002	Plot B	1.156		PASS
8-DPSK	39 and 40	1.002	Plot C	1.148		PASS

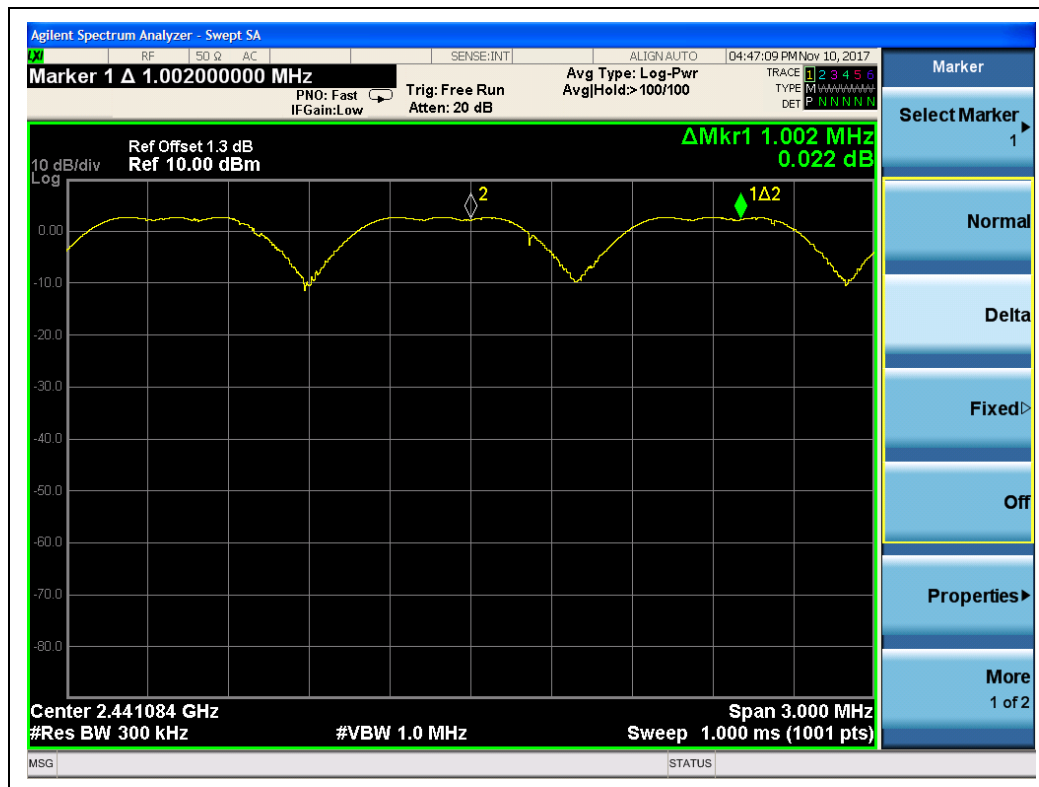

(Plot A: GFSK)


(Plot B: $\pi/4$ -DQPSK)


(Plot C: 8-DPSK)


2.6. Time of Occupancy (Dwell time)

2.6.1. Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.6.2. Test Description

A. Test Setup:

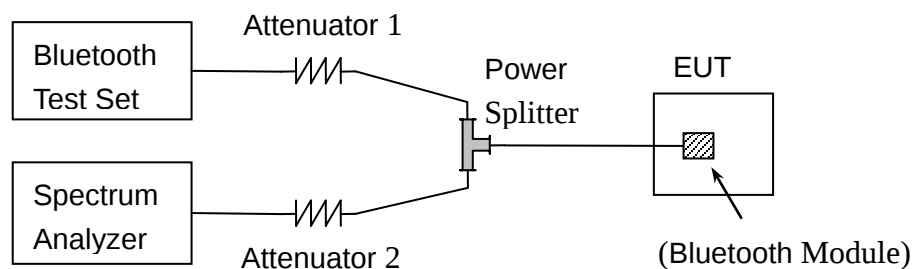

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.6.3. Test Procedure

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence. The average time of occupancy in the specified 31.6 second period (79 channel * 0.4 s) is equal to $10 * (\# \text{ of pulses in 3.16 s}) * \text{pulse width}$.




2.6.4. Test Result


2.6.4.1 GFSK Mode

A. Test Verdict:


DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Average Time of Occupancy in 3.16 seconds (sec)	Average Time of Occupancy in 31.6 seconds (sec)	Limit (sec)	Verdict
DH1	0.40	14	0.00560	0.0560	0.4	PASS
DH3	1.66	14	0.02324	0.2324		PASS
DH5	2.90	8	0.02320	0.2320		PASS

B. Test Plots:

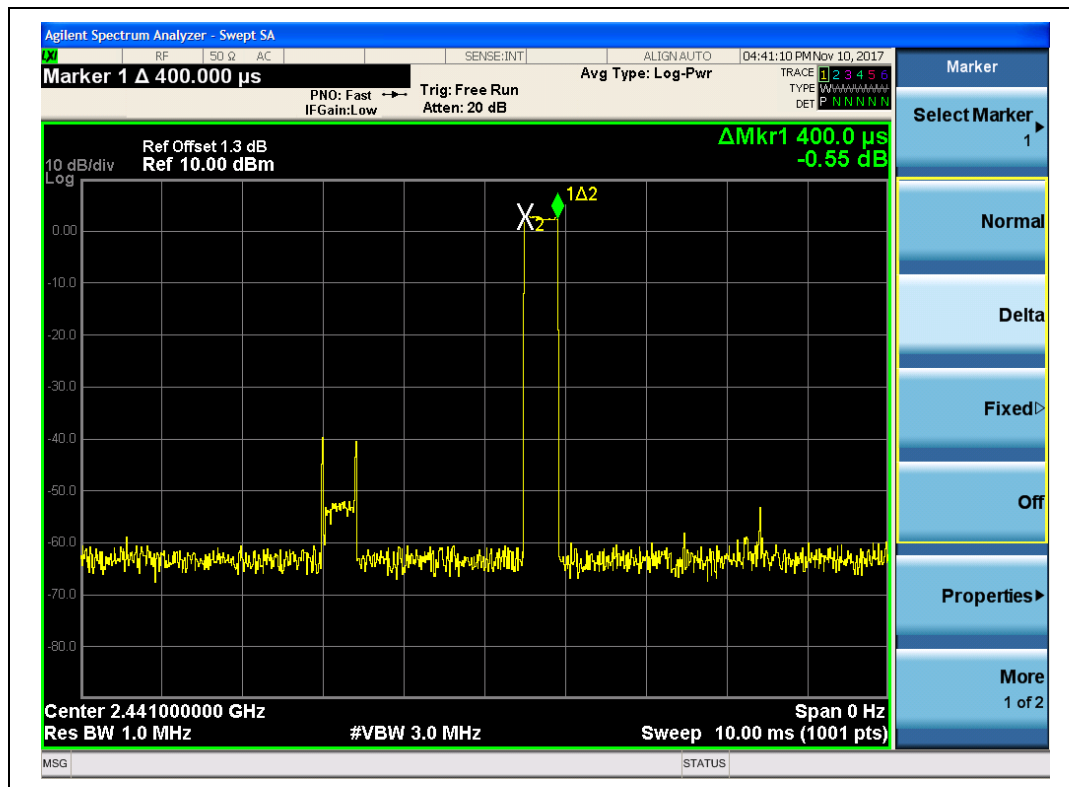


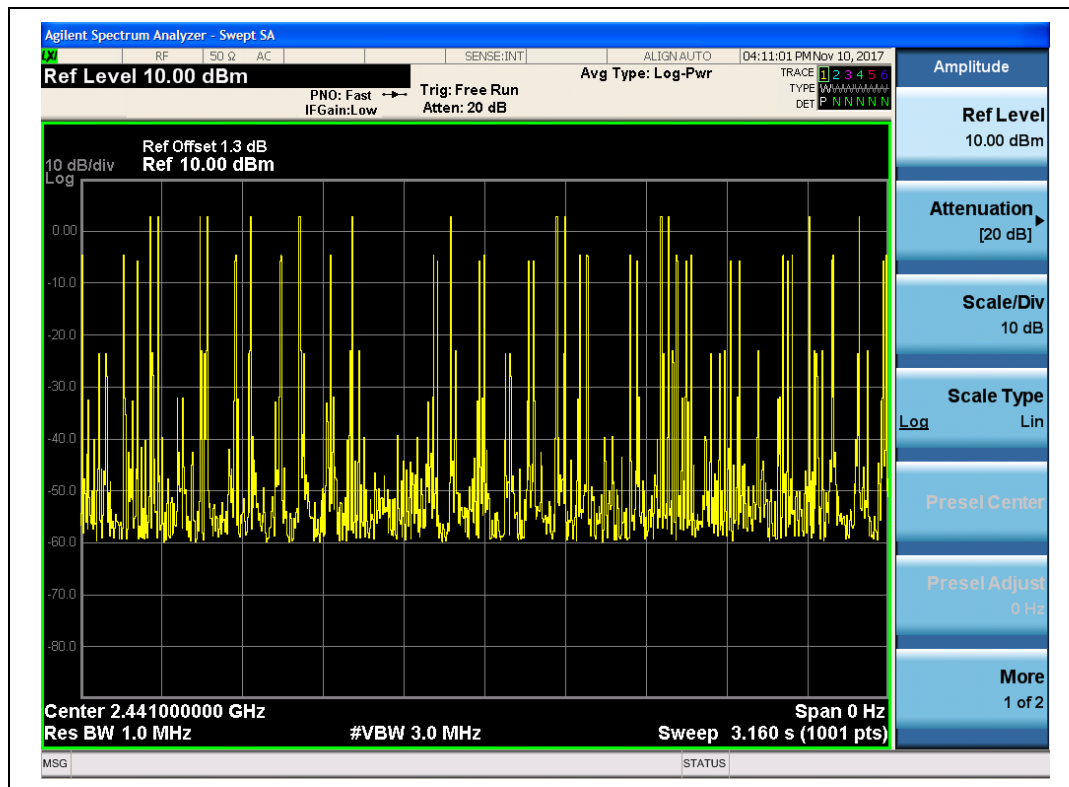

(Plot A: DH1 @ GFSK)

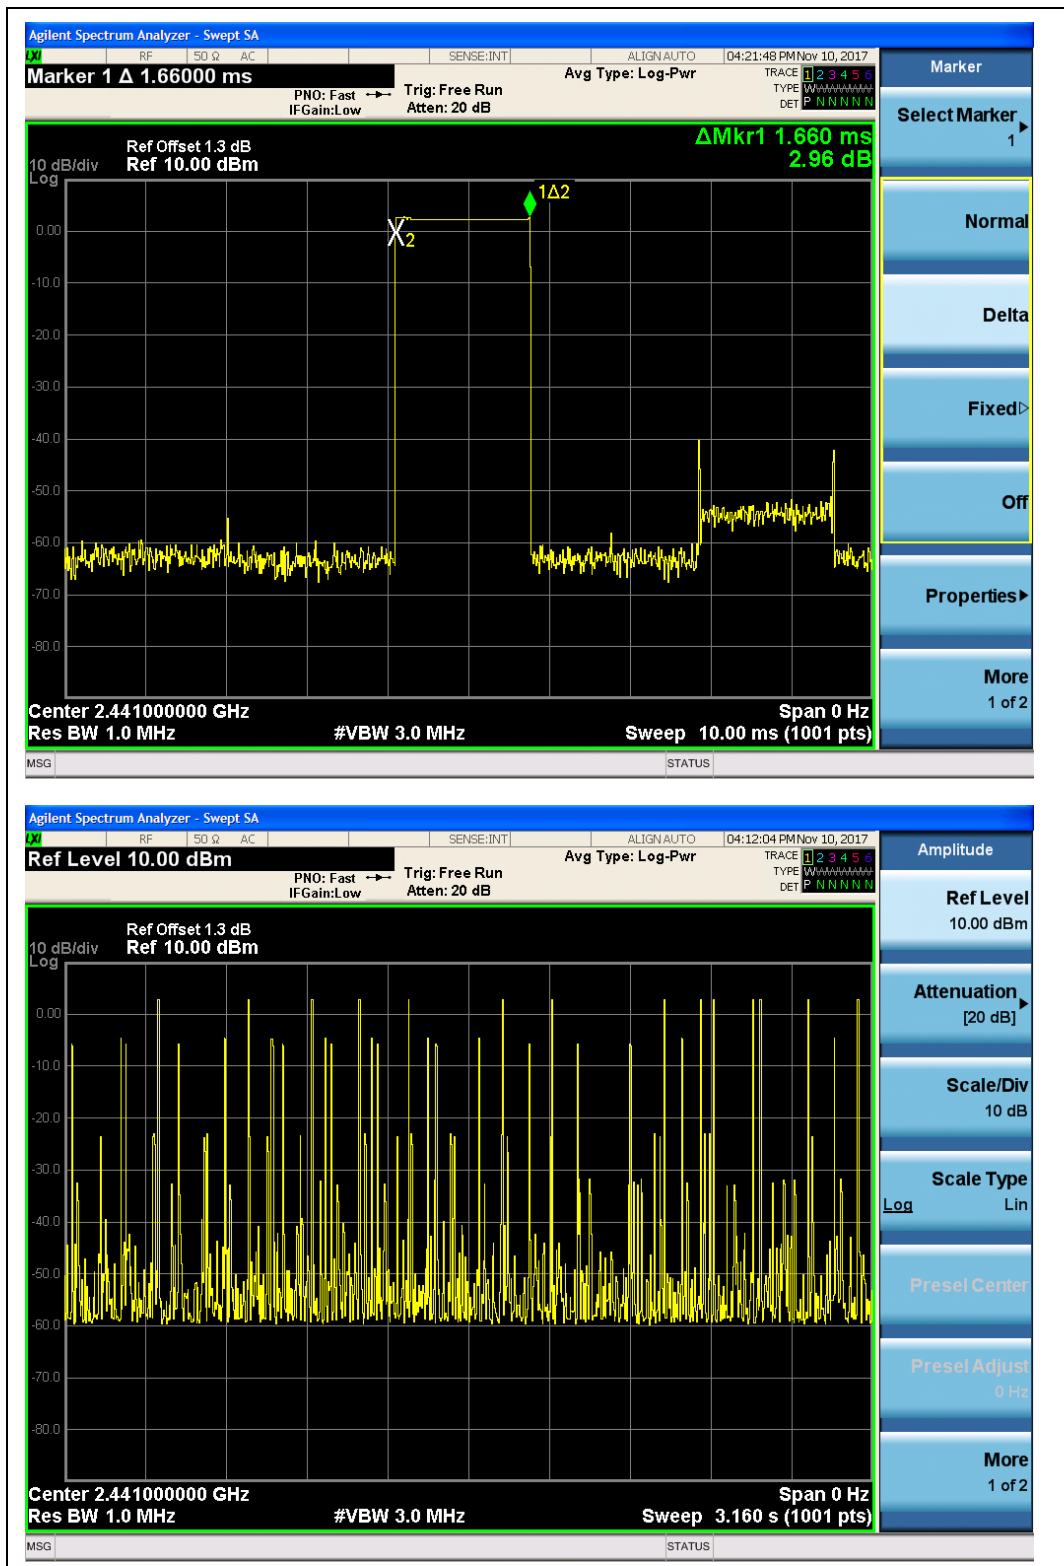

(Plot B: DH3 @ GFSK)

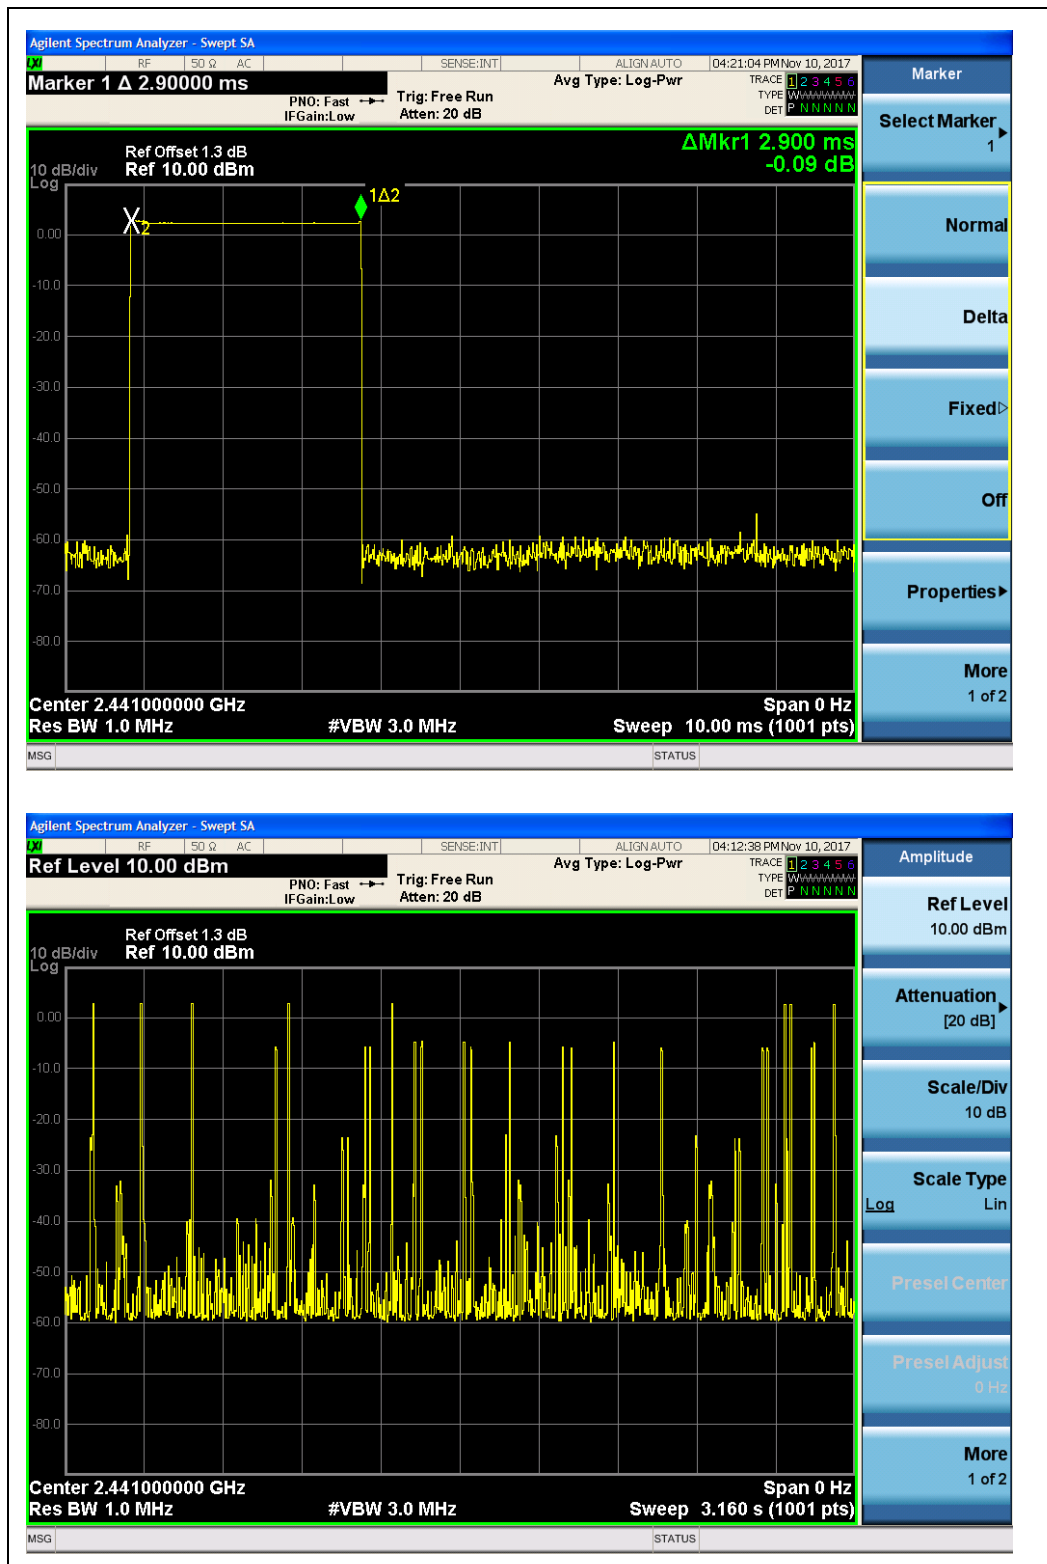

(Plot C: DH5 @ GFSK)





2.6.4.2 $\pi/4$ -DQPSK Mode


A. Test Verdict:


DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Average Time of Occupancy in 3.16 seconds (sec)	Average Time of Occupancy in 31.6 seconds (sec)	Limit (sec)	Verdict
DH1	0.42	13	0.00546	0.0546	0.4	PASS
DH3	1.66	10	0.01660	0.1660		PASS
DH5	2.91	8	0.02328	0.2328		PASS

B. Test Plots:

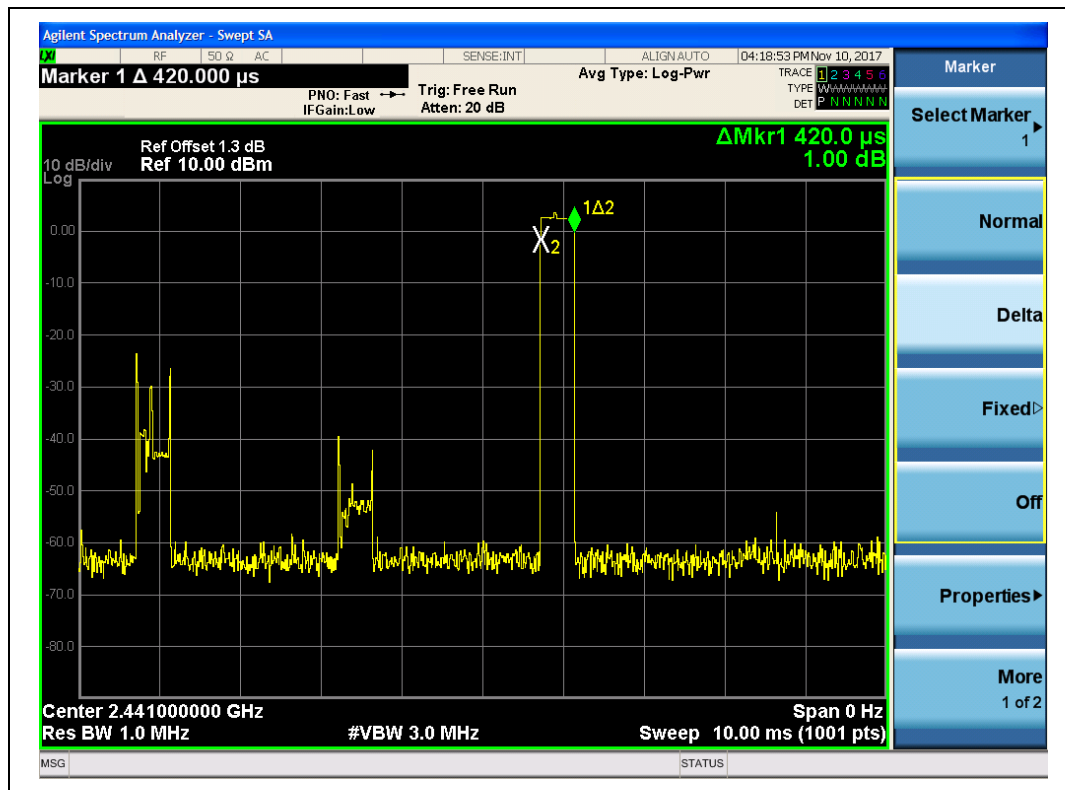

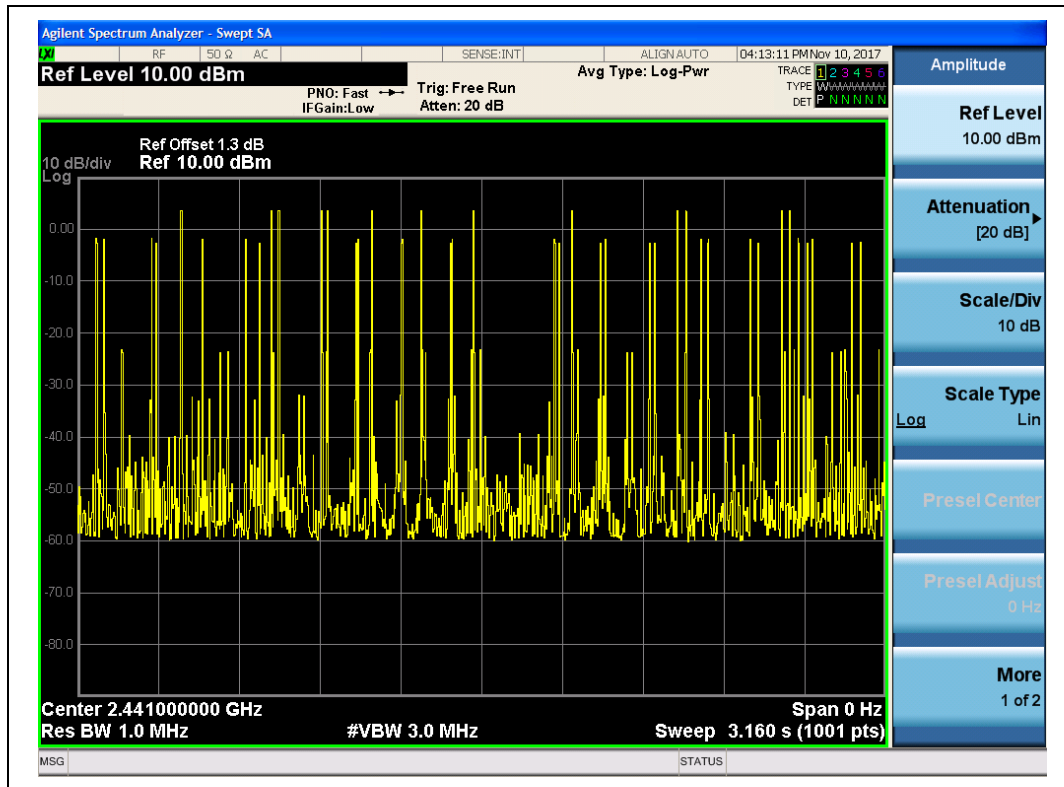(Plot D: DH1 @ $\pi/4$ -DQPSK)

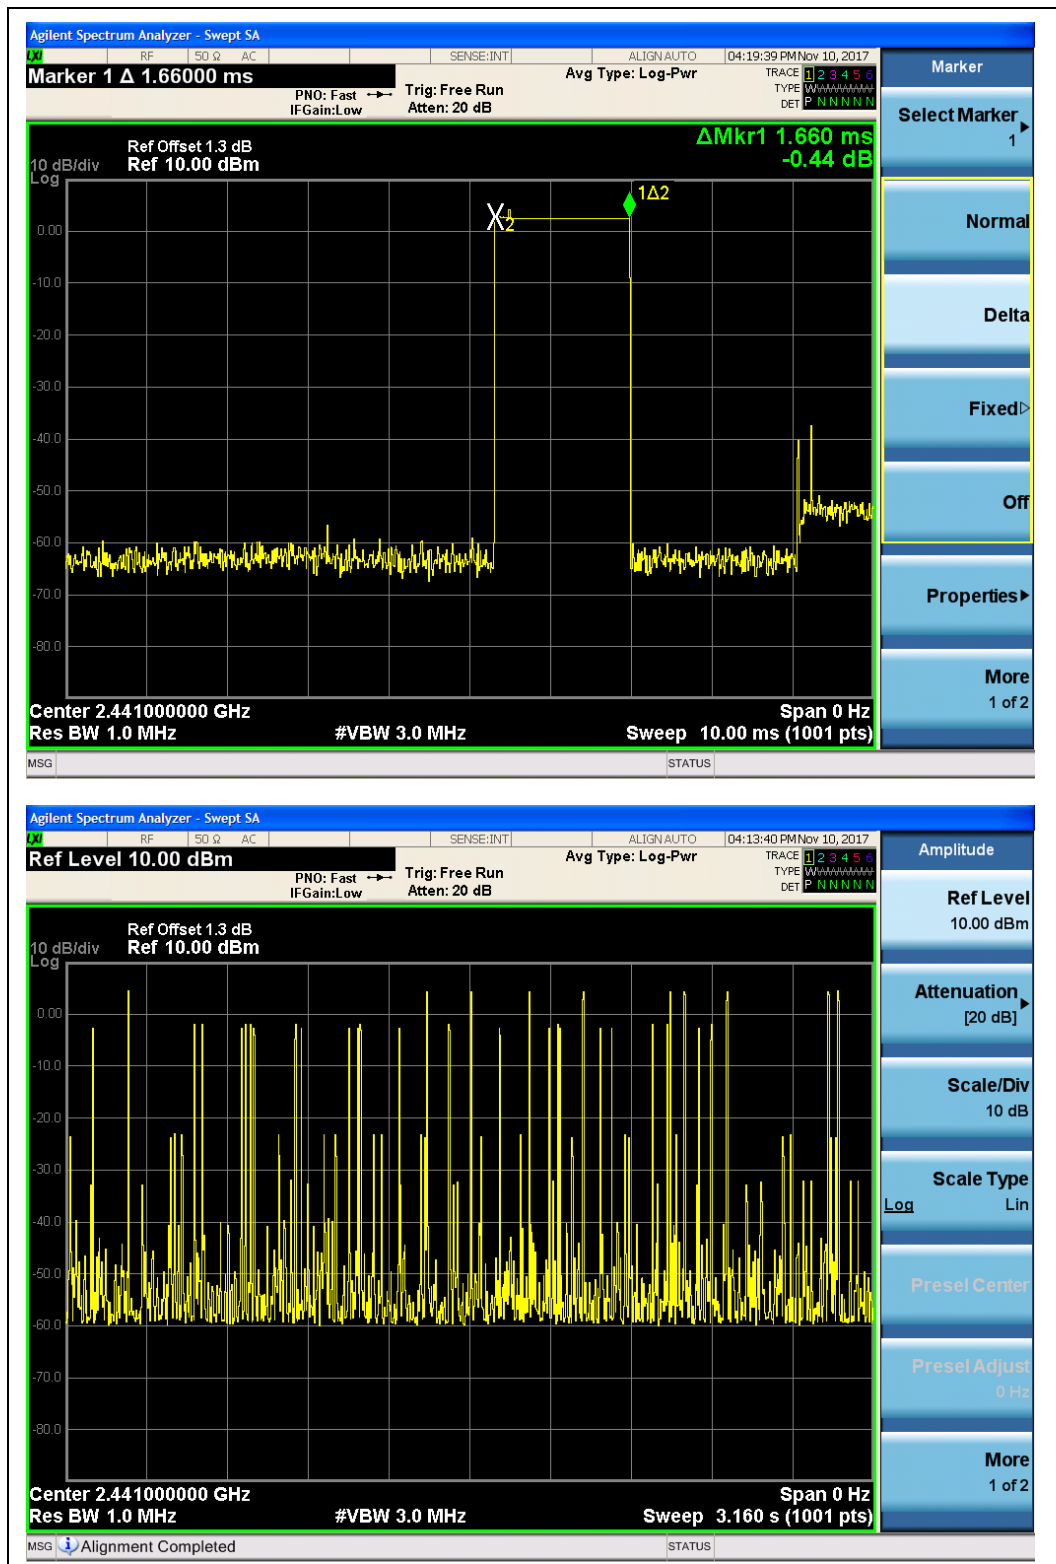(Plot E: DH3 @ $\pi/4$ -DQPSK)

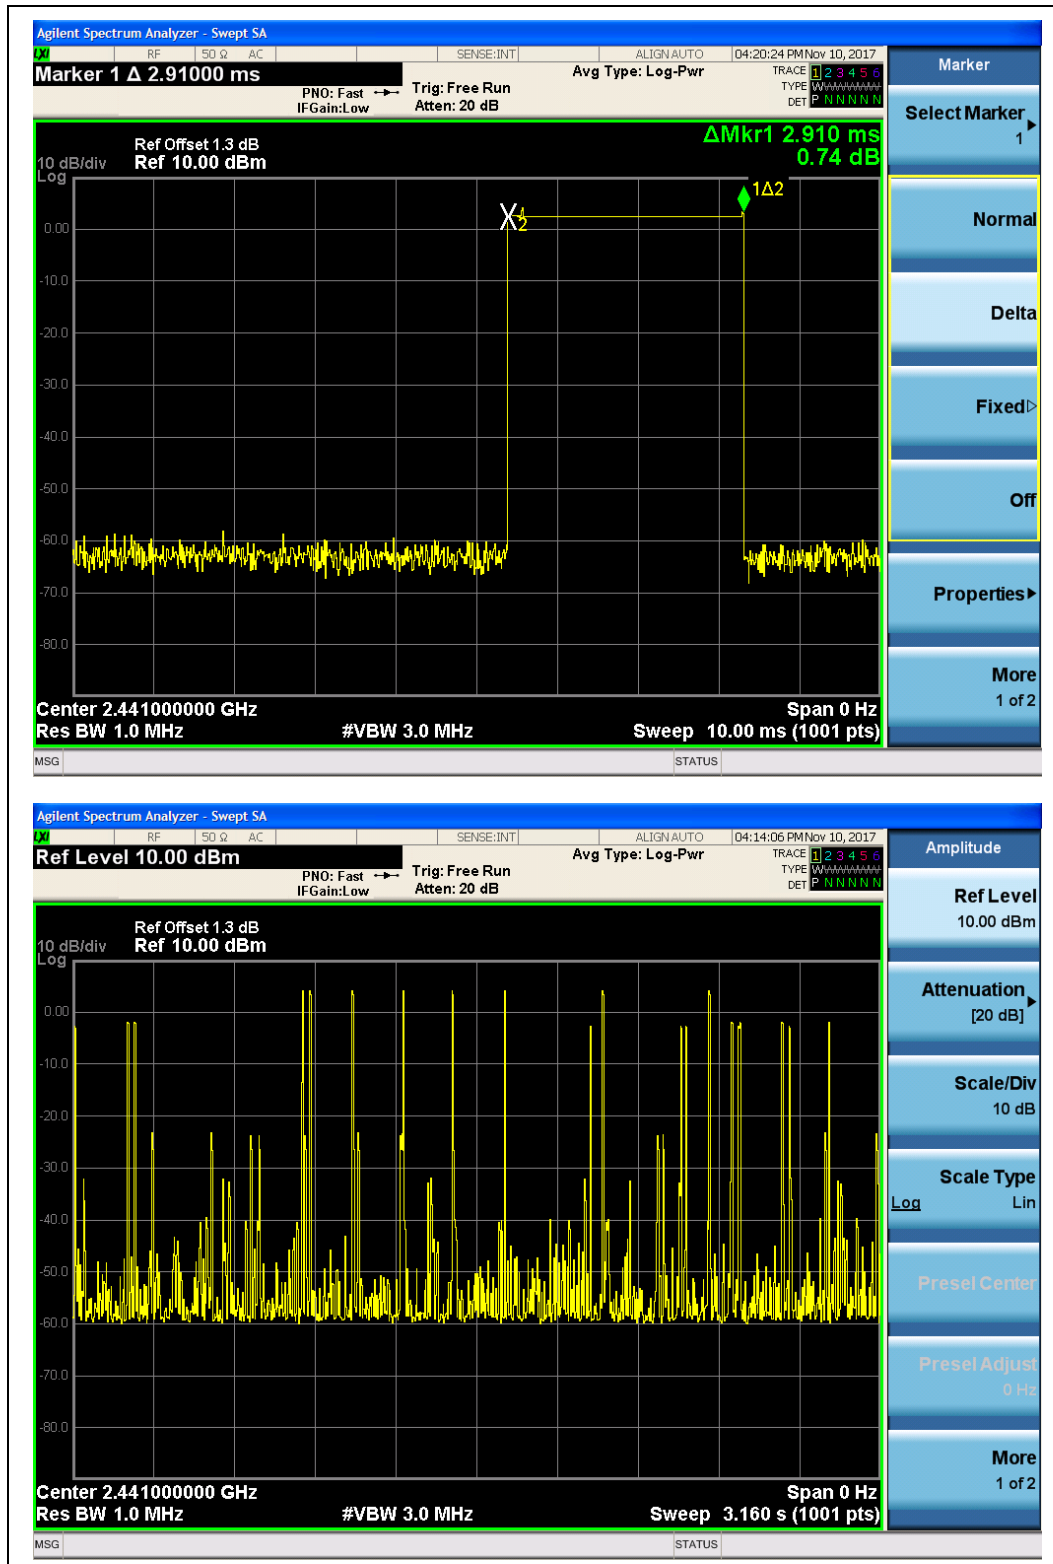
(Plot F: DH5 @ $\pi/4$ -DQPSK)





2.6.4.3 8-DPSK mode

A. Test Verdict:


DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Average Time of Occupancy in 3.16 seconds (sec)	Average Time of Occupancy in 31.6 seconds (sec)	Limit (sec)	Verdict
DH1	0.40	13	0.00520	0.0520	0.4	PASS
DH3	1.67	17	0.02839	0.2839		PASS
DH5	2.92	8	0.02336	0.2336		PASS

B. Test Plots:

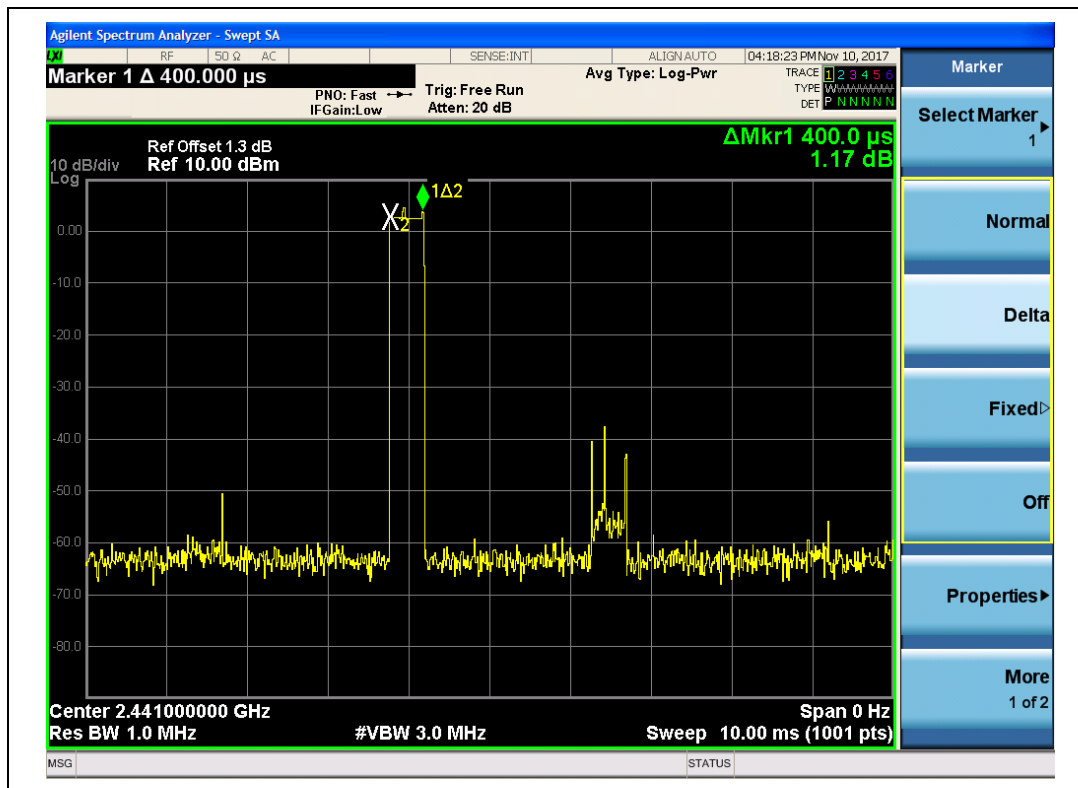


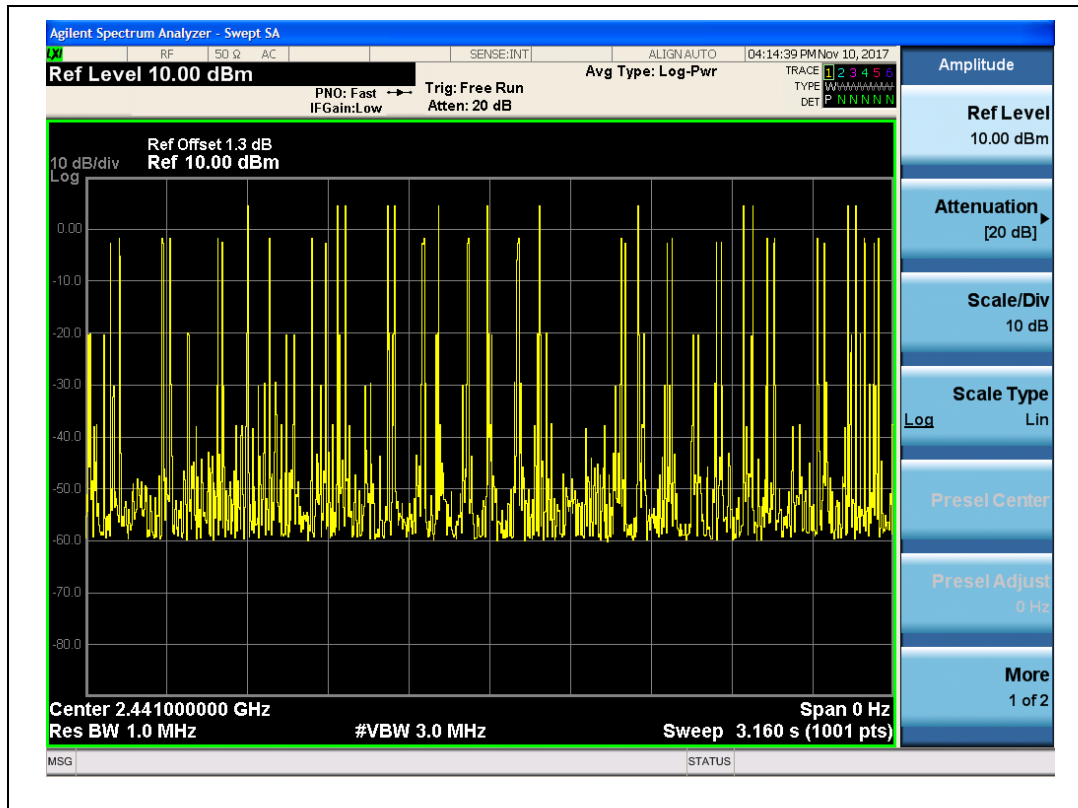

(Plot G: DH1 @ 8-DPSK)

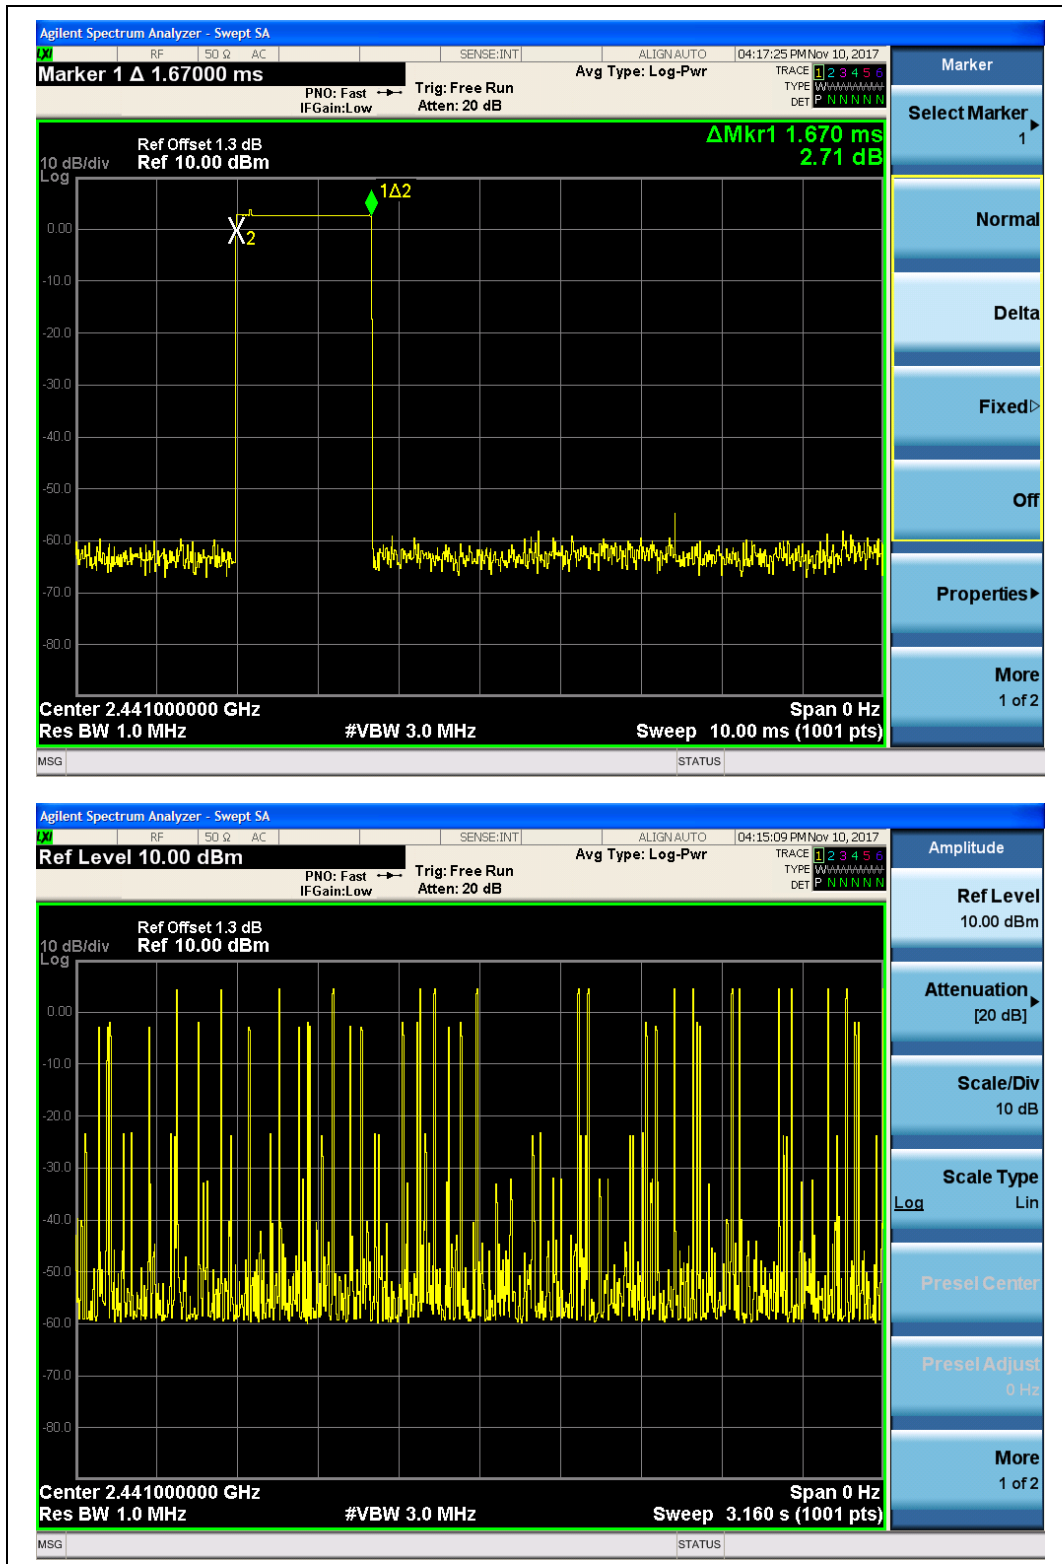

(Plot H: DH3 @ 8-DPSK)

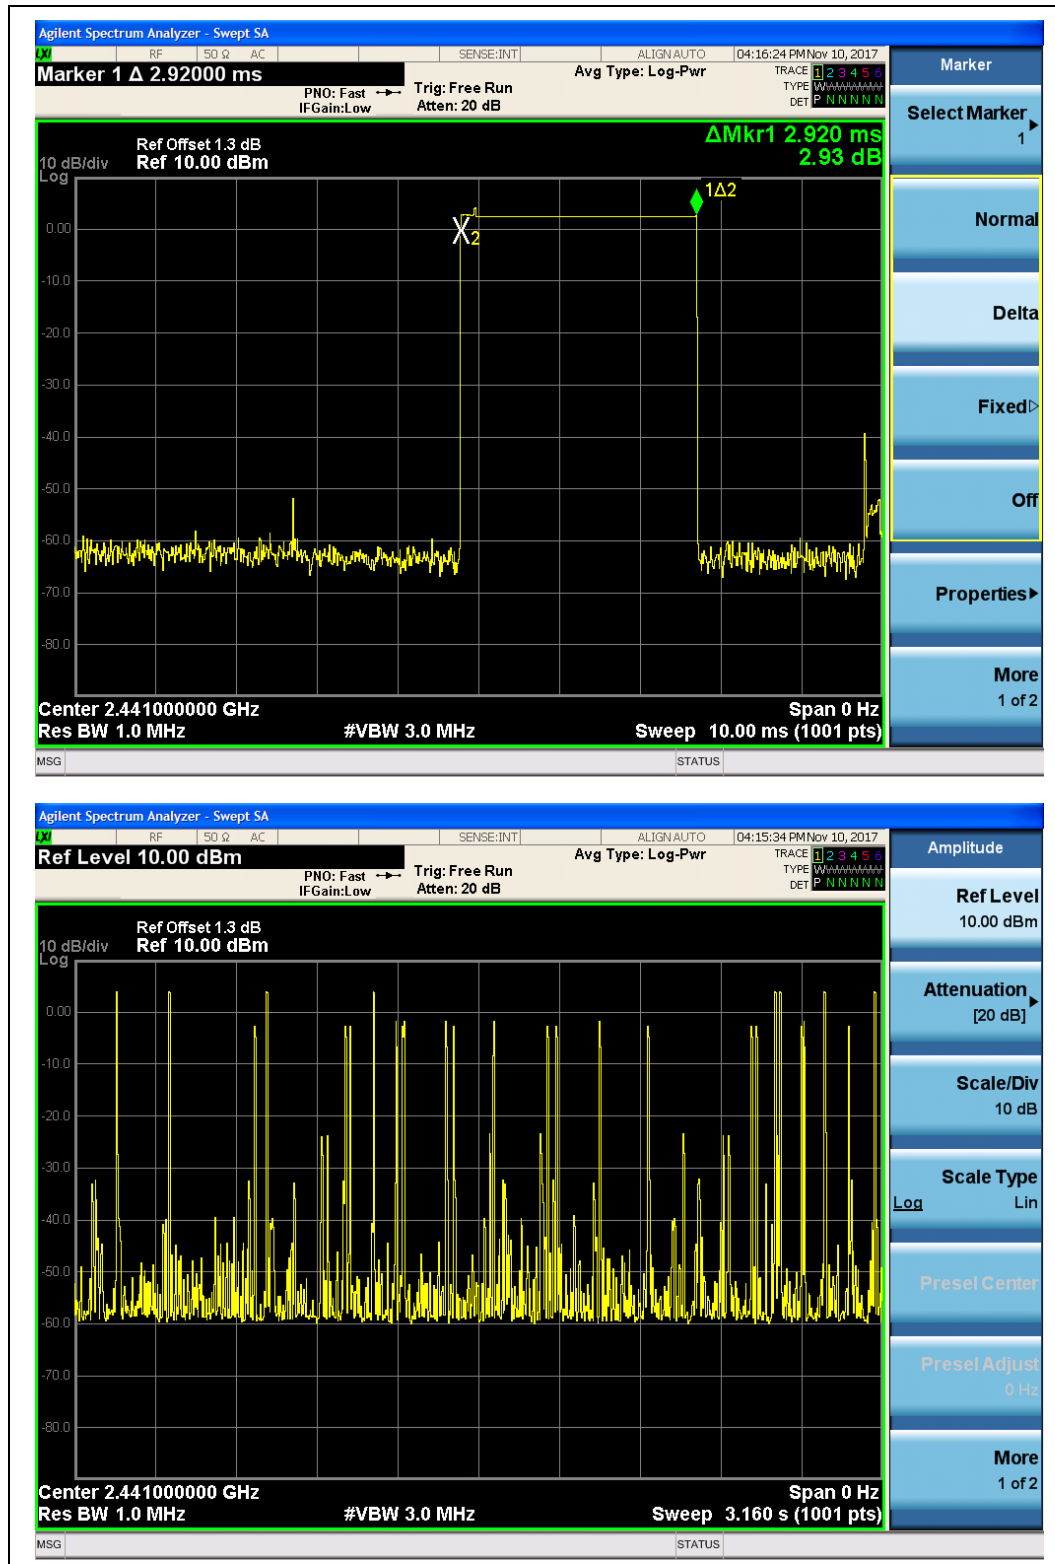

(Plot I: DH5 @ 8-DPSK)


2.7. Conducted Spurious Emissions

2.7.1. Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2. Test Description

A. Test Setup:

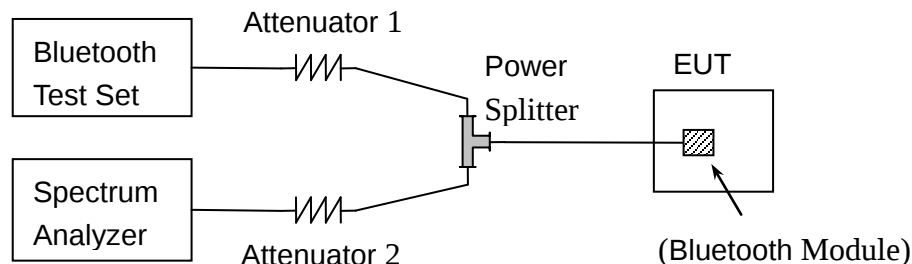

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.7.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak



Trace = max hold

Allow the trace to stabilize.

2.7.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


2.7.4.1 GFSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-41.47	Plot A	2.52	-17.48	PASS
39	2441	-42.64	Plot B	1.71	-18.29	PASS
78	2480	-43.72	Plot C	0.45	-19.55	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

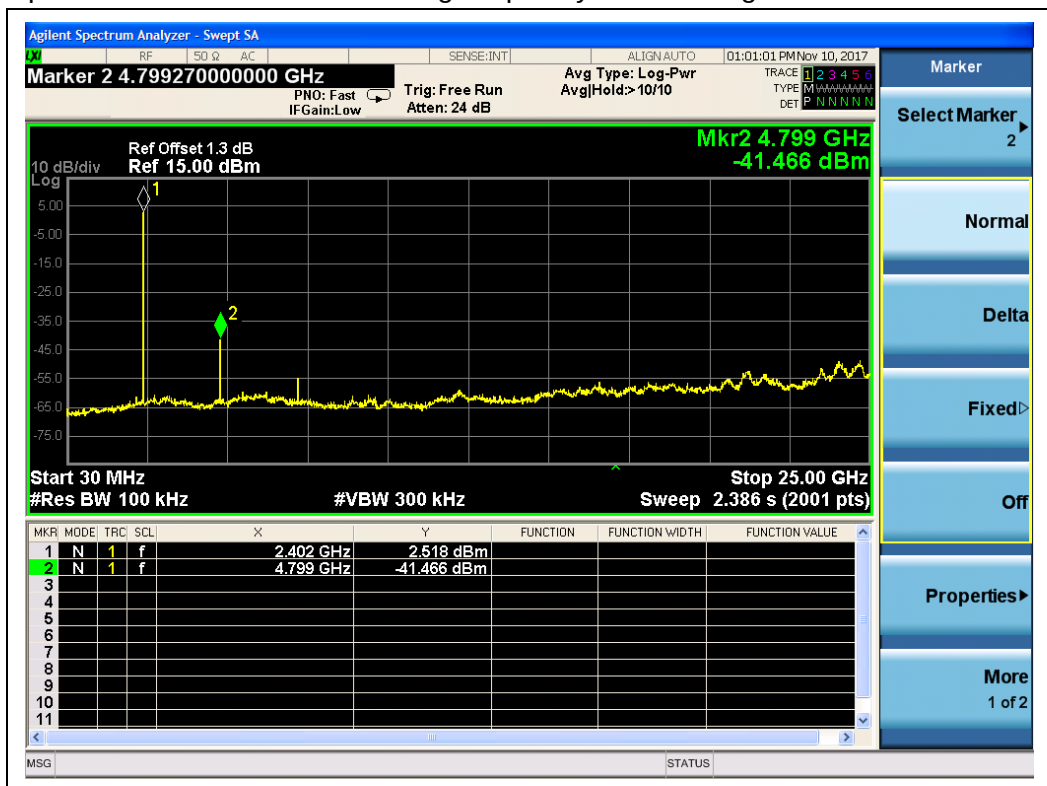


(Plot A: Channel = 0, 30MHz to 25GHz @ GFSK Mode)

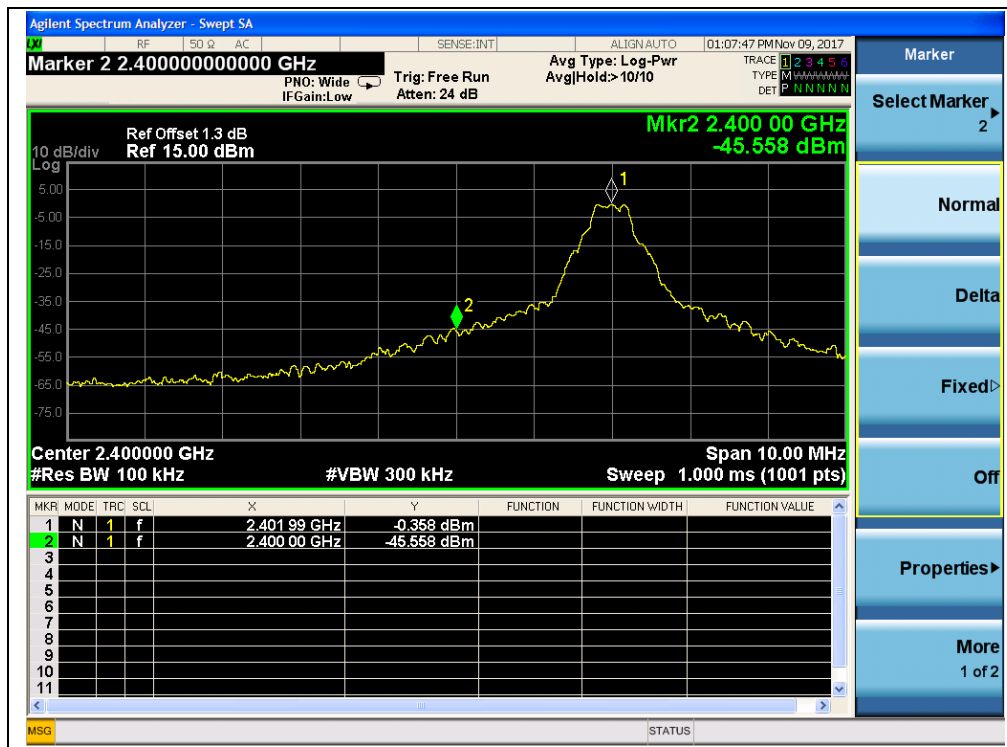


(Channel = 0, Band edge @ GFSK Mode)

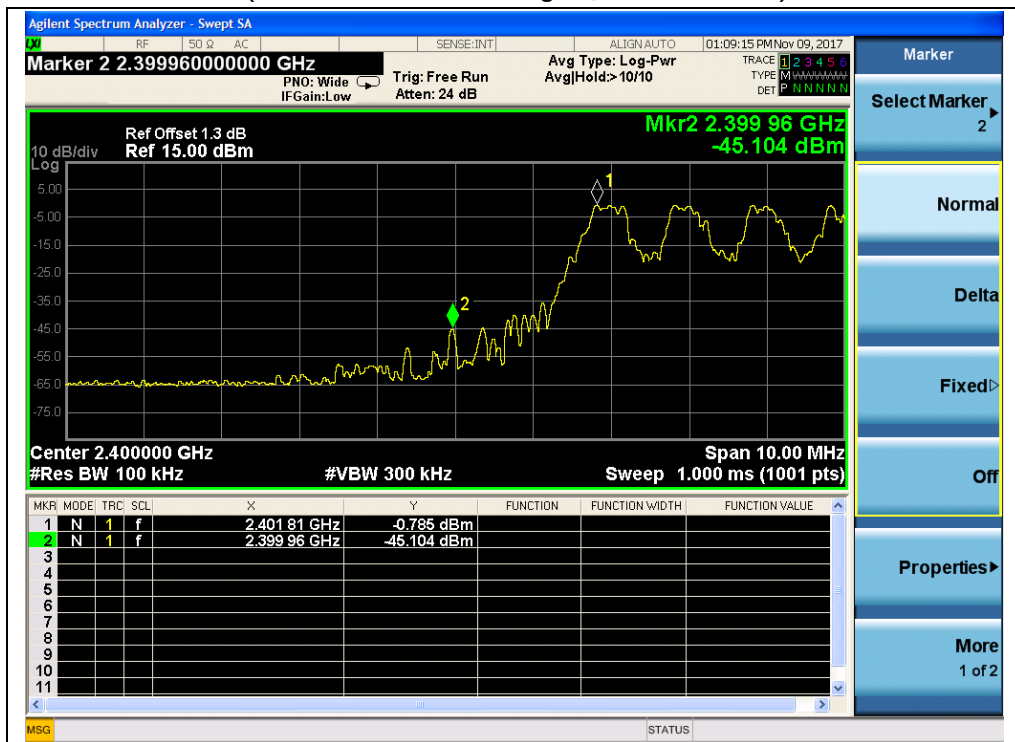


(Channel = 0, Band edge with hopping on @ GFSK Mode)

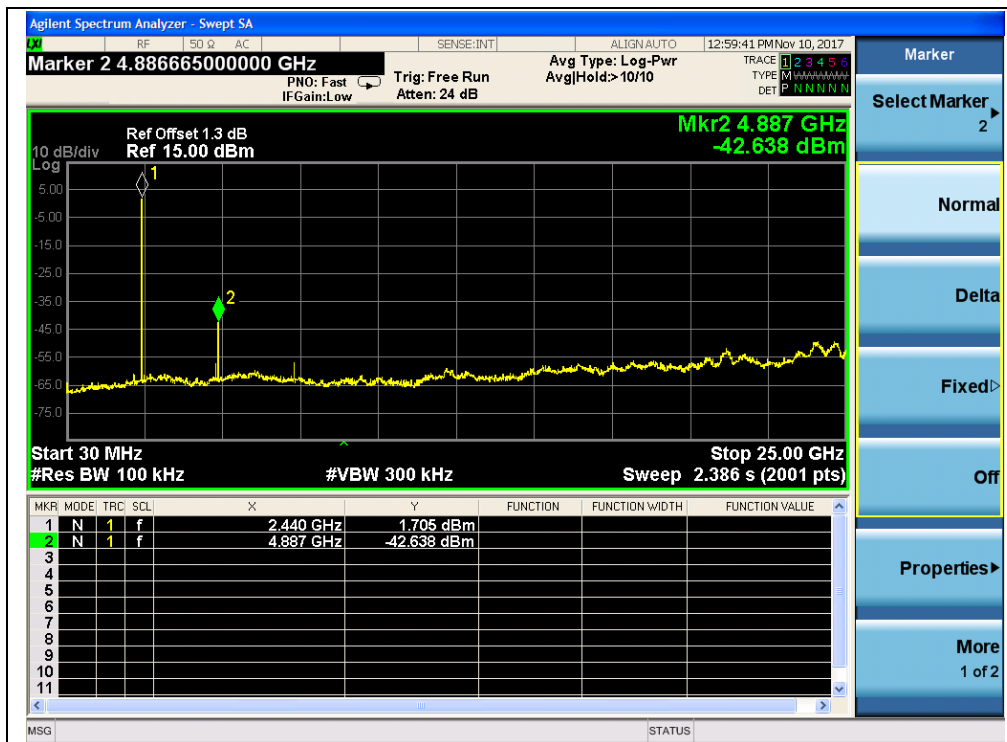

(Plot B: Channel = 39, 30MHz to 25GHz @ GFSK Mode)

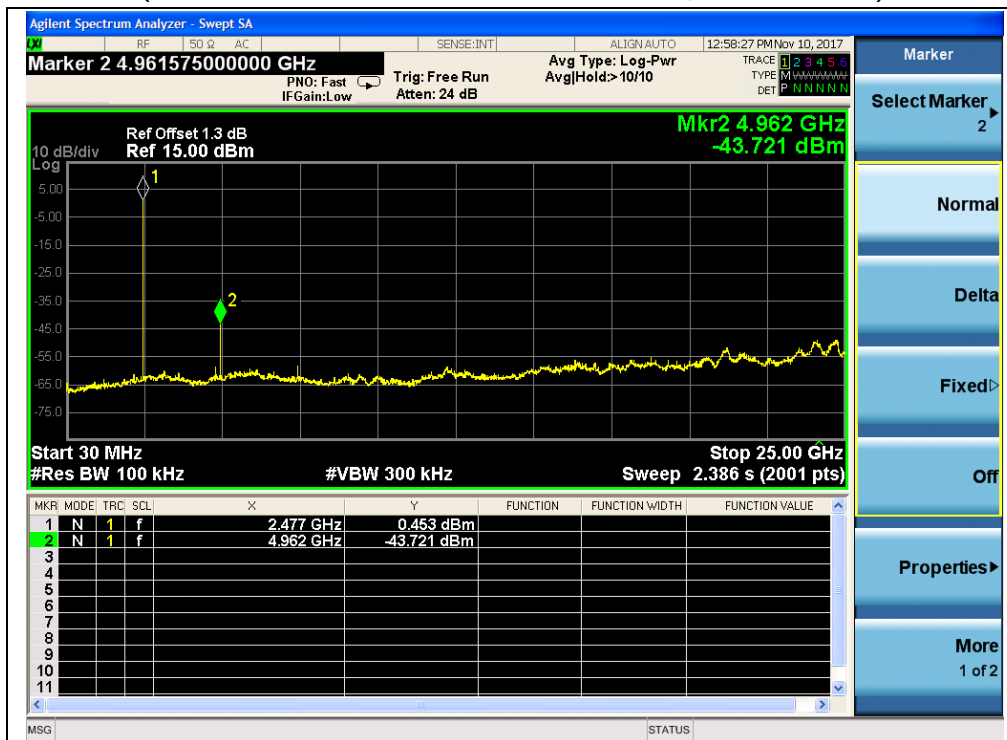

(Plot C: Channel = 78, 30MHz to 25GHz @ GFSK Mode)

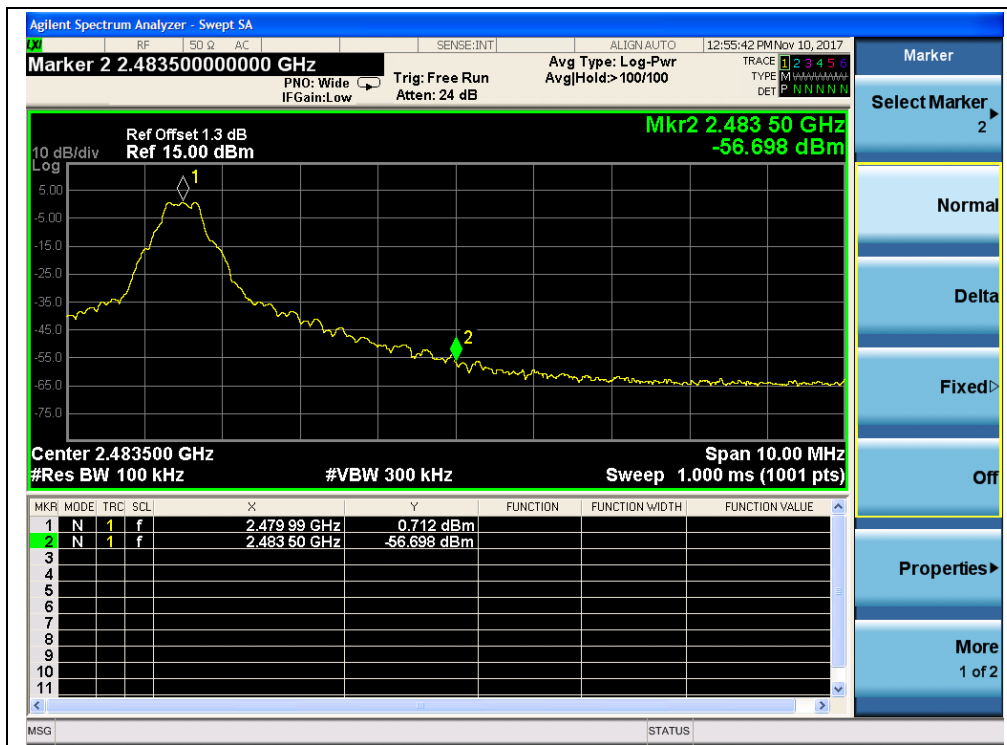

(Channel = 78, Band edge @ GFSK Mode)



(Channel = 78, Band edge with hopping on @ GFSK Mode)


2.7.4.2 $\pi/4$ -DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-41.42	Plot D	2.33	-17.67	PASS
39	2441	-43.62	Plot E	1.48	-18.52	PASS
78	2480	-44.20	Plot F	0.19	-19.81	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

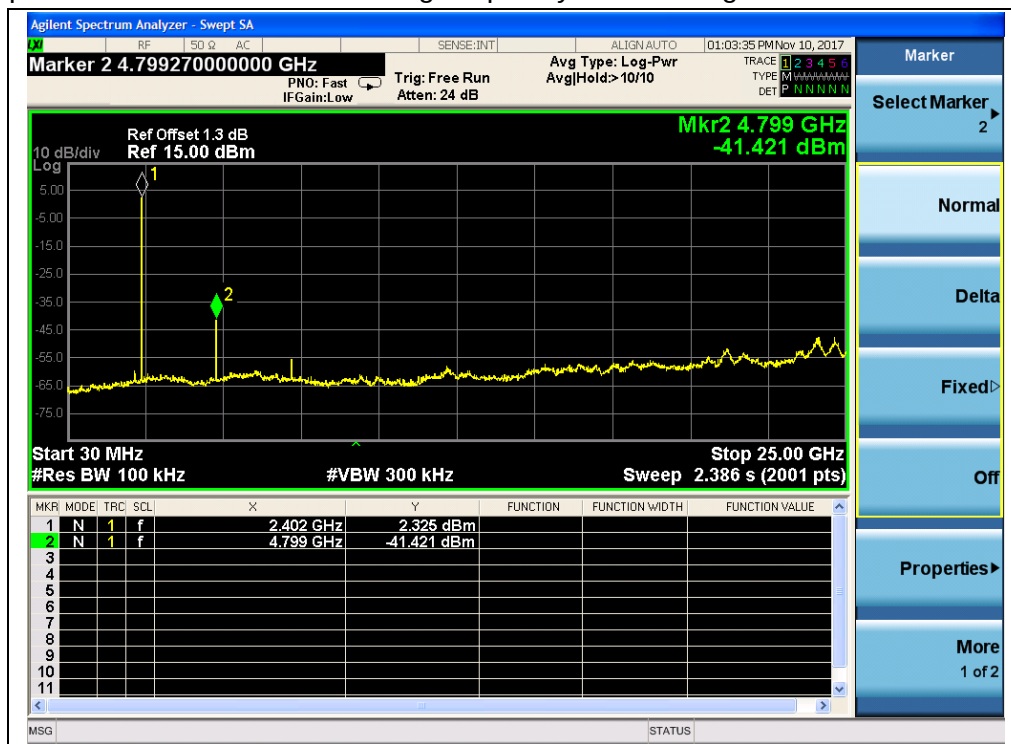



(Plot D: Channel = 0, 30MHz to 25GHz @ $\pi/4$ -DQPSK)



(Channel = 0, Band edge @ $\pi/4$ -DQPSK)

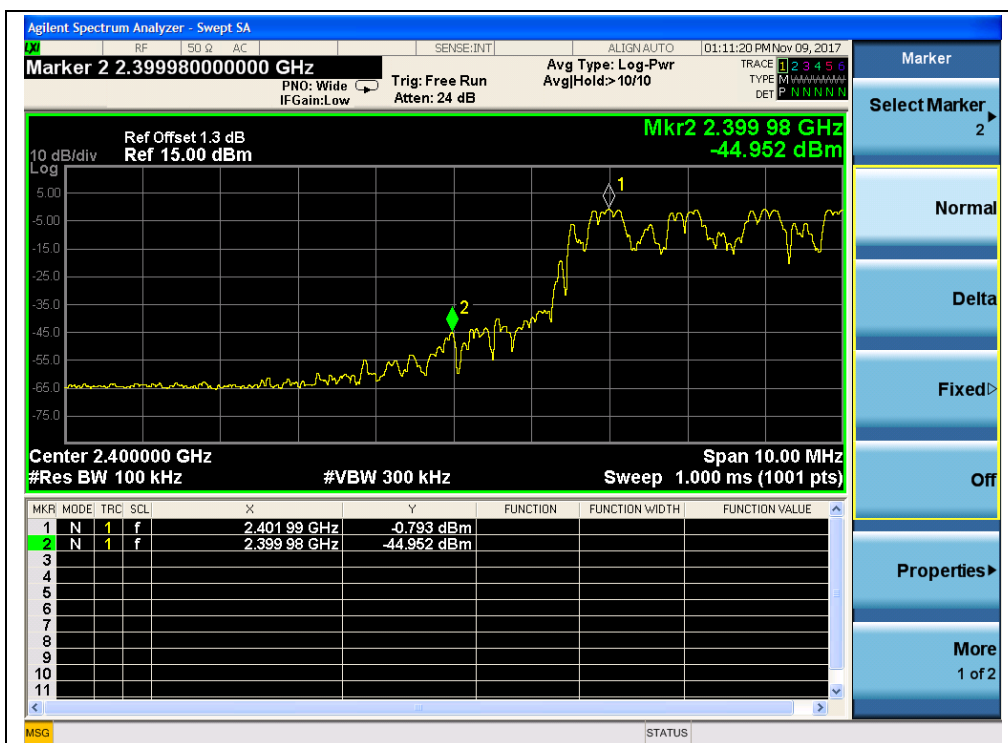

(Channel = 0, Band edge with hopping on @ $\pi/4$ -DQPSK)

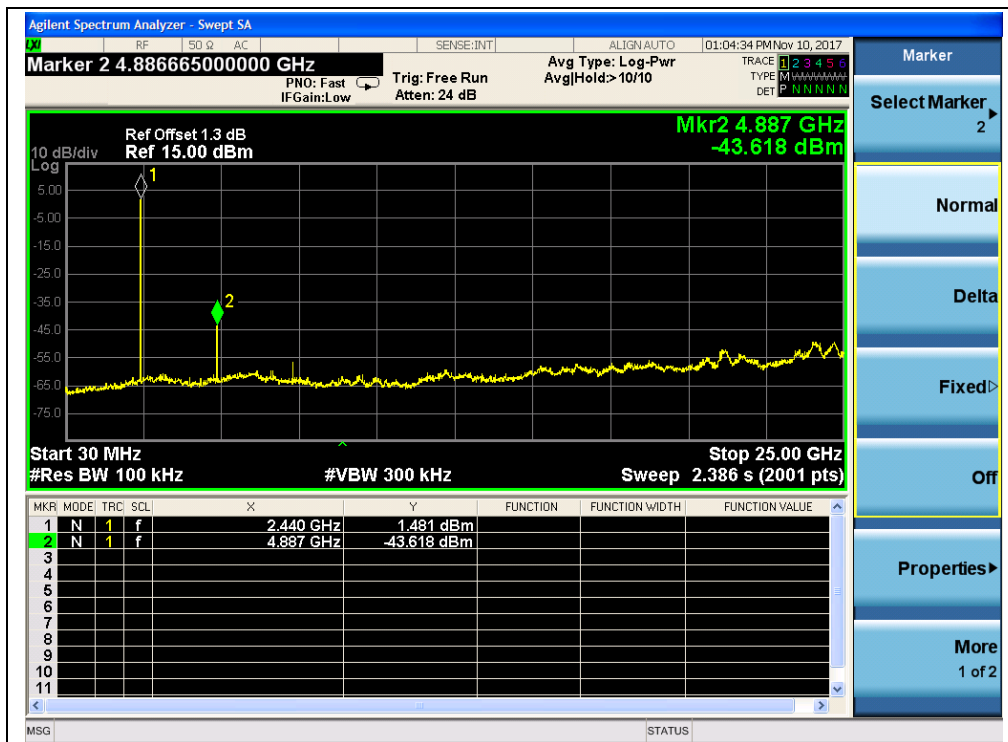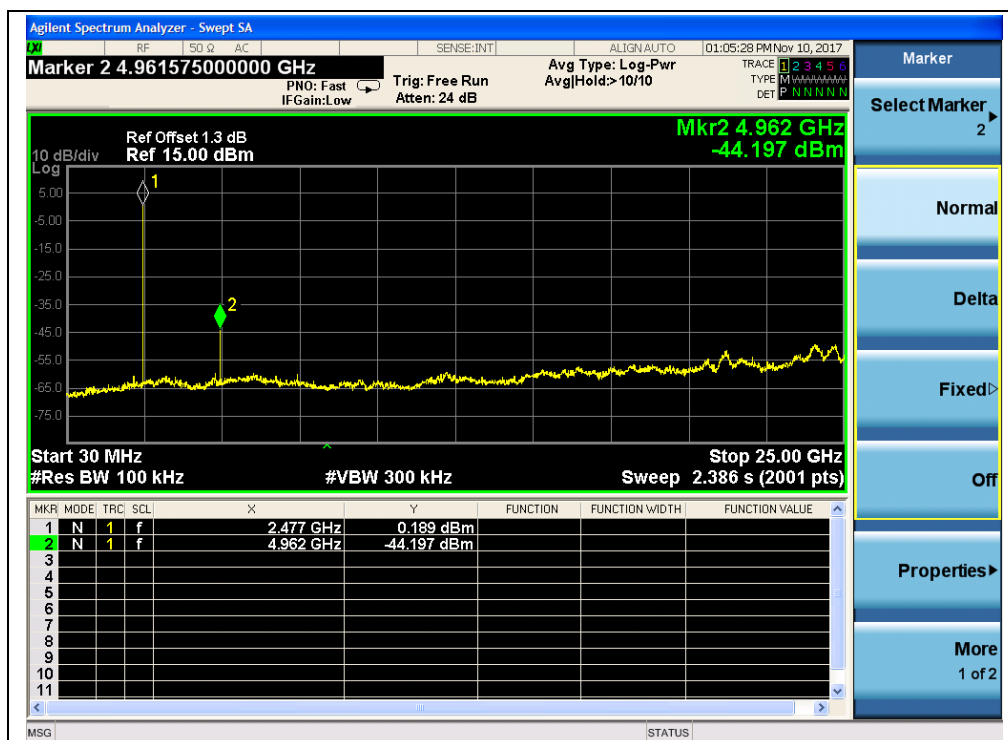(Plot E: Channel = 39, 30MHz to 25GHz @ $\pi/4$ -DQPSK)(Plot F: Channel = 78, 30MHz to 25GHz @ $\pi/4$ -DQPSK)



(Channel = 78, Band edge @ $\pi/4$ -DQPSK)



(Channel = 78, Band edge with hopping on @ $\pi/4$ -DQPSK)




2.7.4.3 8-DPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-41.48	Plot G	2.46	-17.54	PASS
39	2441	-45.04	Plot H	1.80	-18.20	PASS
78	2480	-45.95	Plot I	0.29	-19.71	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

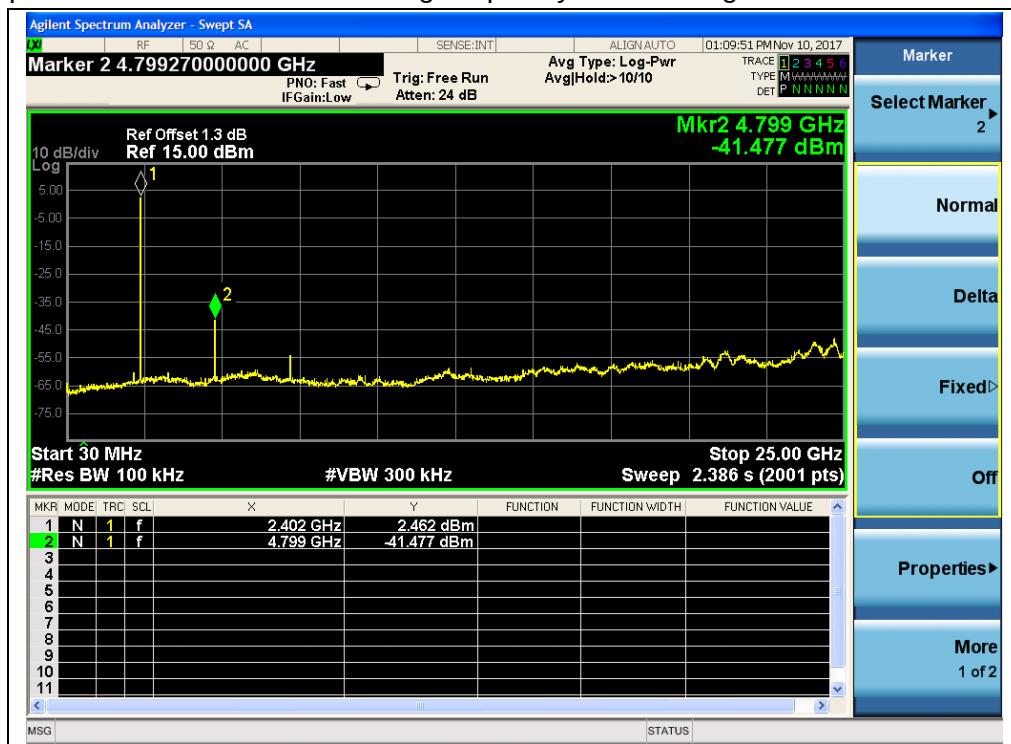


(Plot G: Channel = 0, 30MHz to 25GHz @ 8-DPSK)




(Channel = 0, Band edge @ 8-DPSK)

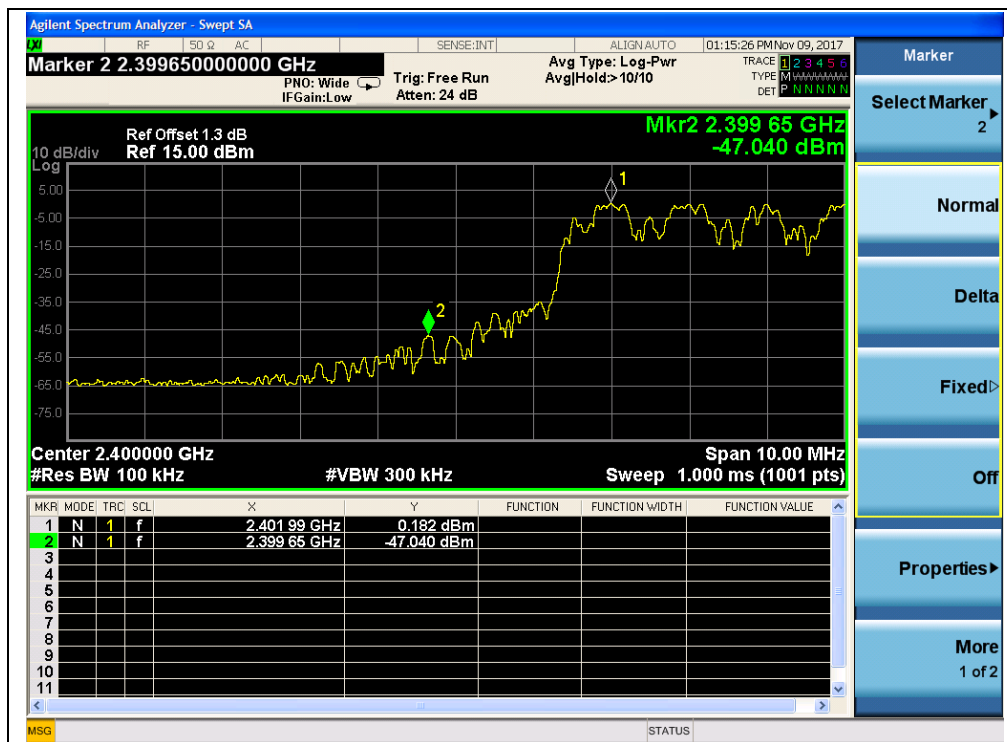

(Channel = 0, Band edge with hopping on @ 8-DPSK)

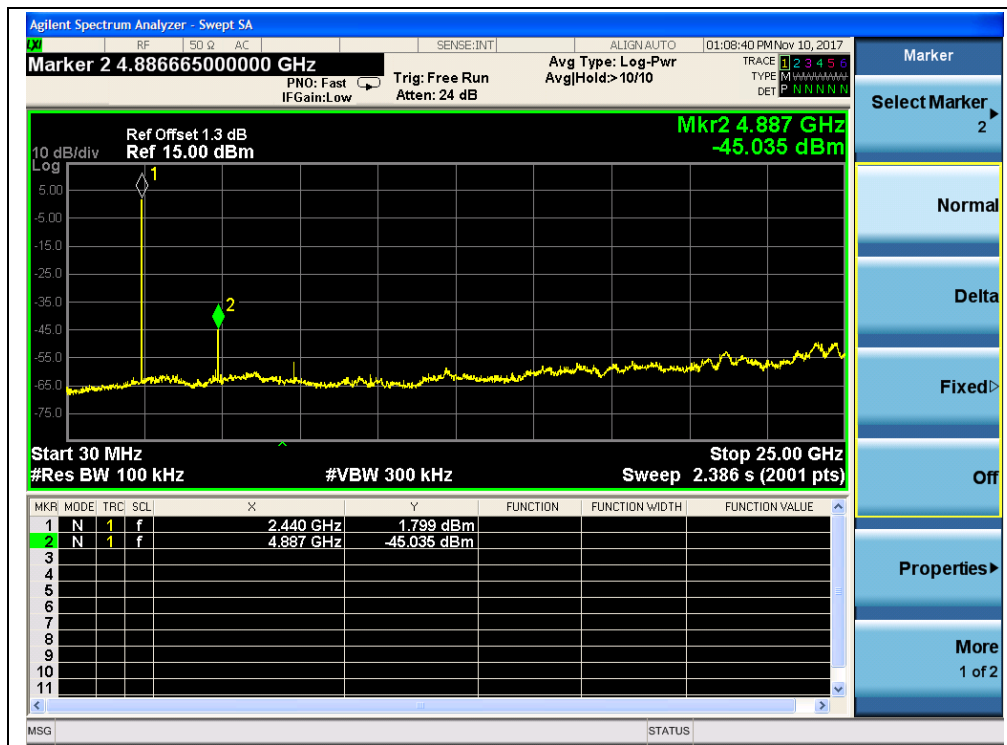

(Plot H: Channel = 39, 30MHz to 25GHz @ 8-DPSK)

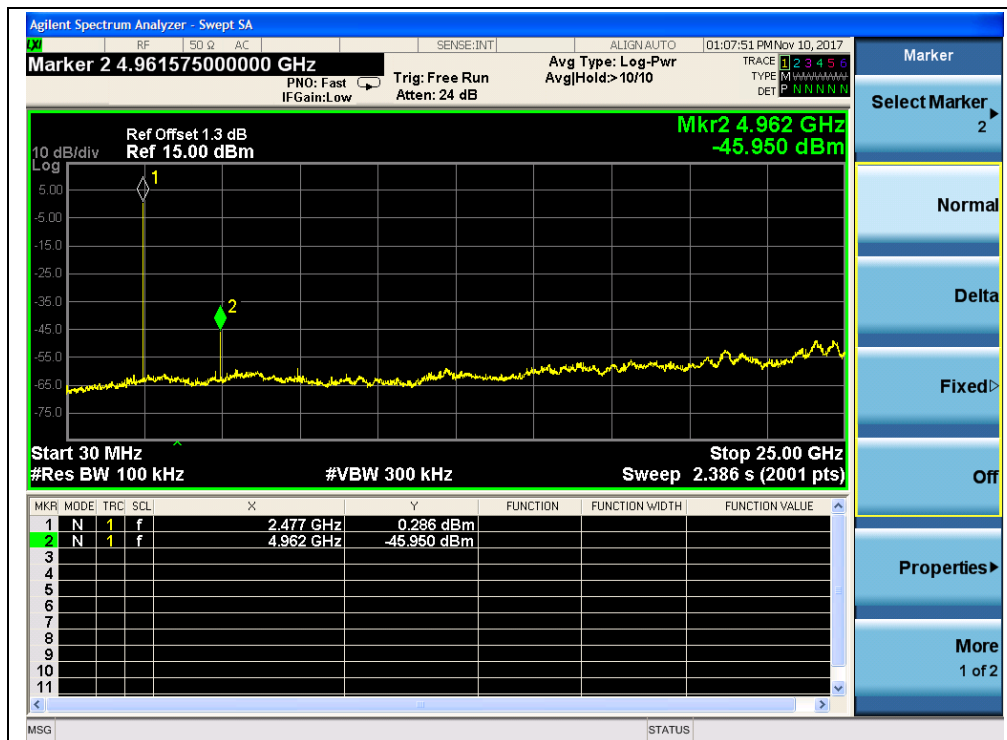

(Plot I: Channel = 78, 30MHz to 25GHz @ 8-DPSK)



(Plot I.1: Channel = 78, Band edge @ 8-DPSK)



(Plot I.1: Channel = 78, Band edge with hopping on @ 8-DPSK)


2.8. Restricted Frequency Bands

2.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2. Test Description

A. Test Setup:

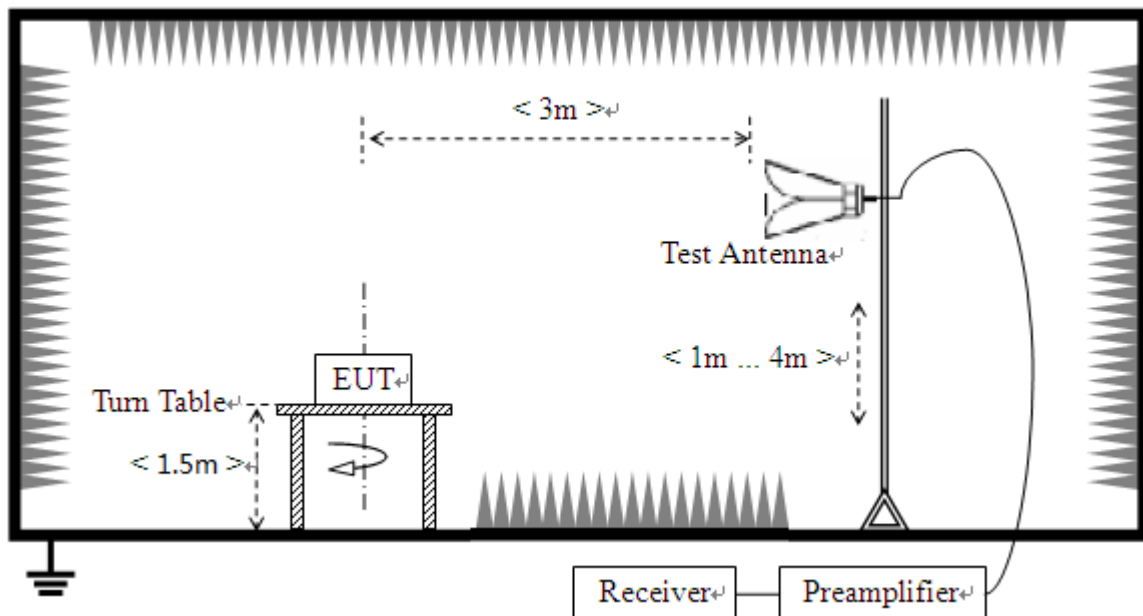

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under non hopping-on test mode transmitting 339 bytes DH5, 679 bytes 2DH5 and 1021 bytes 3DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

**B. Equipments List:**

Please reference ANNEX A(1.5).

2.8.3. Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 KHz for $f < 1\text{GHz}$

VBW = 3 MHz for peak and 10Hz for average

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

2.8.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; AT = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

AT: Total correction Factor except Antenna

UR: Receiver Reading

Gpreamp: Preamplifier Gain


AFactor: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


2.8.4.1 GFSK Mode**A. Test Verdict:**

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2388.71	PK	46.19	-33.63	32.56	45.12	74	Pass
0	2388.09	AV	33.26	-33.63	32.56	32.19	54	Pass
78	2484.29	PK	44.44	-33.18	32.50	43.76	74	Pass
78	2489.81	AV	32.60	-33.18	32.50	31.92	54	Pass


B. Test Plots:

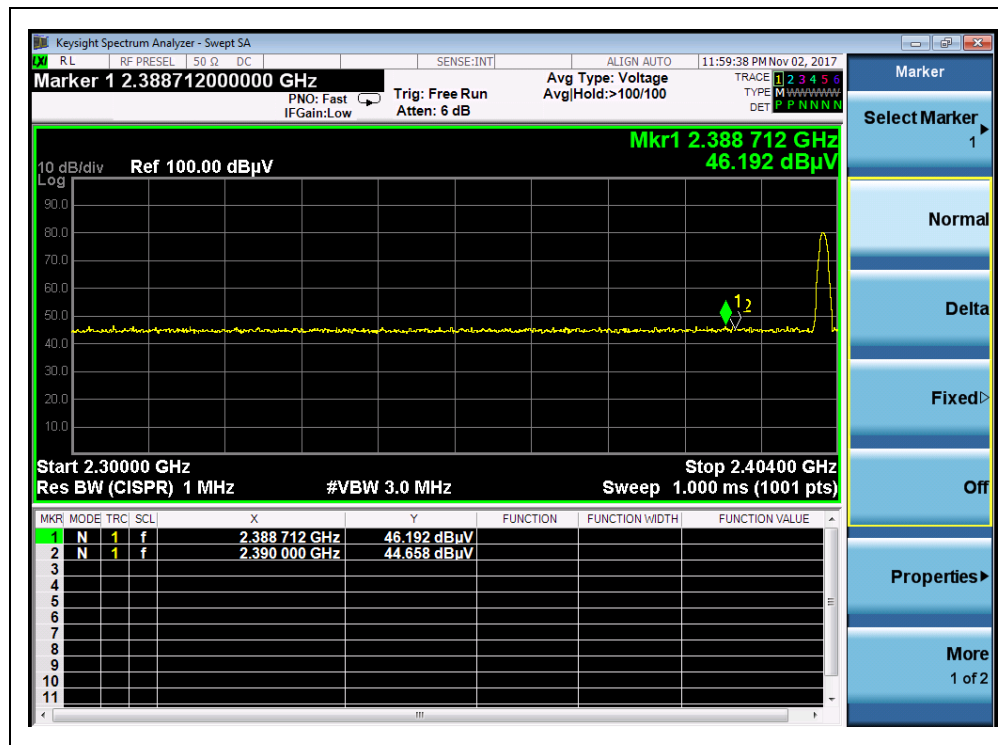


(Plot A1:Channel = 0 PEAK @ GFSK)

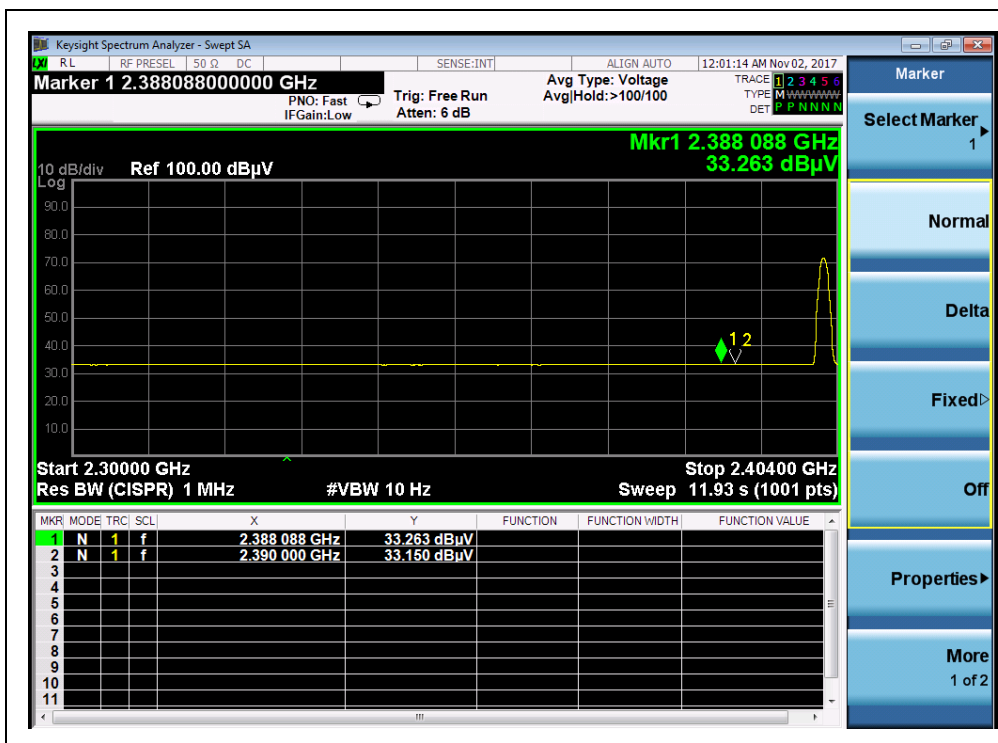

(Plot A2:Channel = 0 AVERAGE @ GFSK)

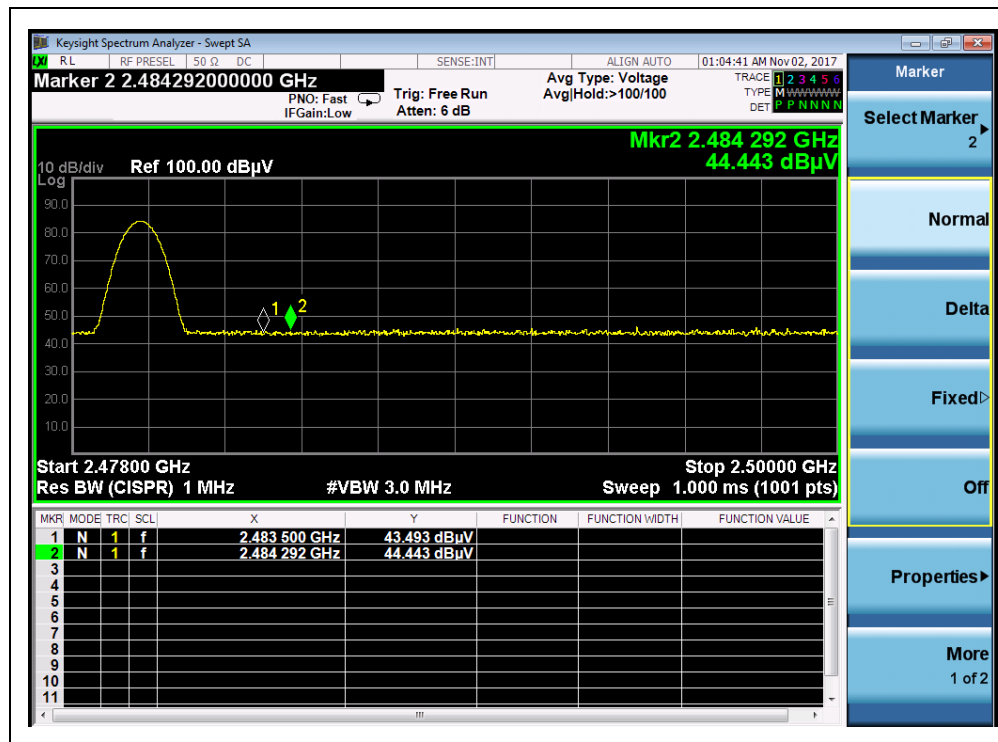

(Plot B1: Channel = 78 PEAK @ GFSK)

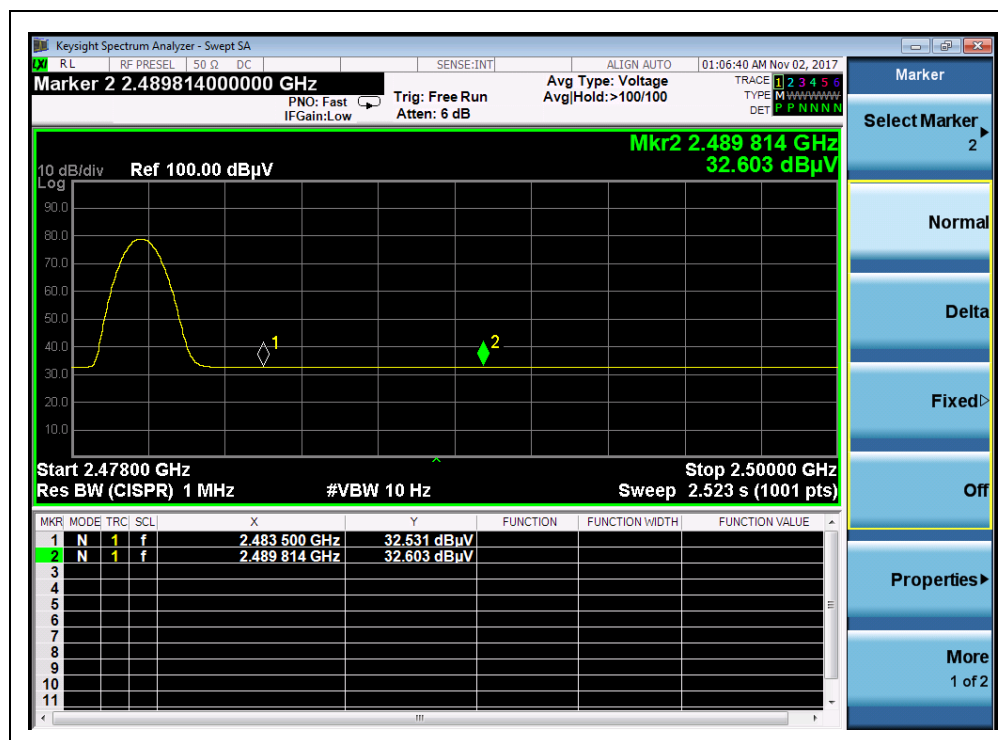

(Plot B2: Channel = 78 AVERAGE @ GFSK)




2.8.4.2 $\pi/4$ -DQPSK Mode



A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2388.50	PK	45.64	-33.63	32.56	44.57	74	Pass
0	2384.76	AV	33.25	-33.63	32.56	32.18	54	Pass
78	2484.58	PK	45.43	-33.18	32.5	44.75	74	Pass
78	2484.67	AV	32.60	-33.18	32.5	31.92	54	Pass

B. Test Plots:

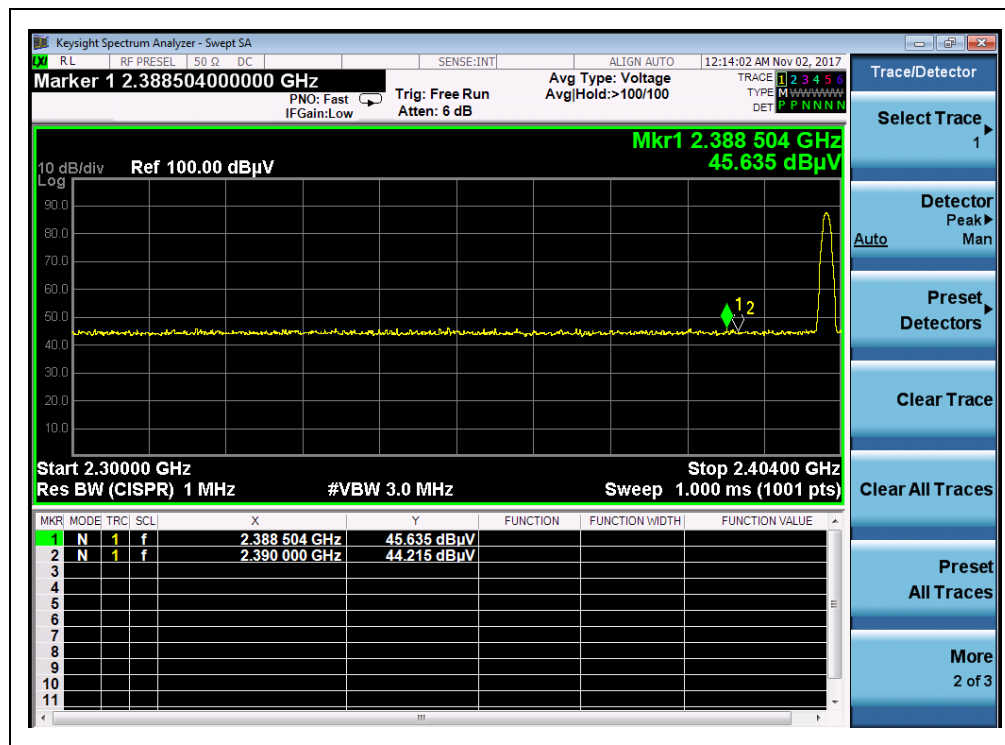

(Plot C1: Channel = 0 PEAK @ $\pi/4$ -DQPSK)

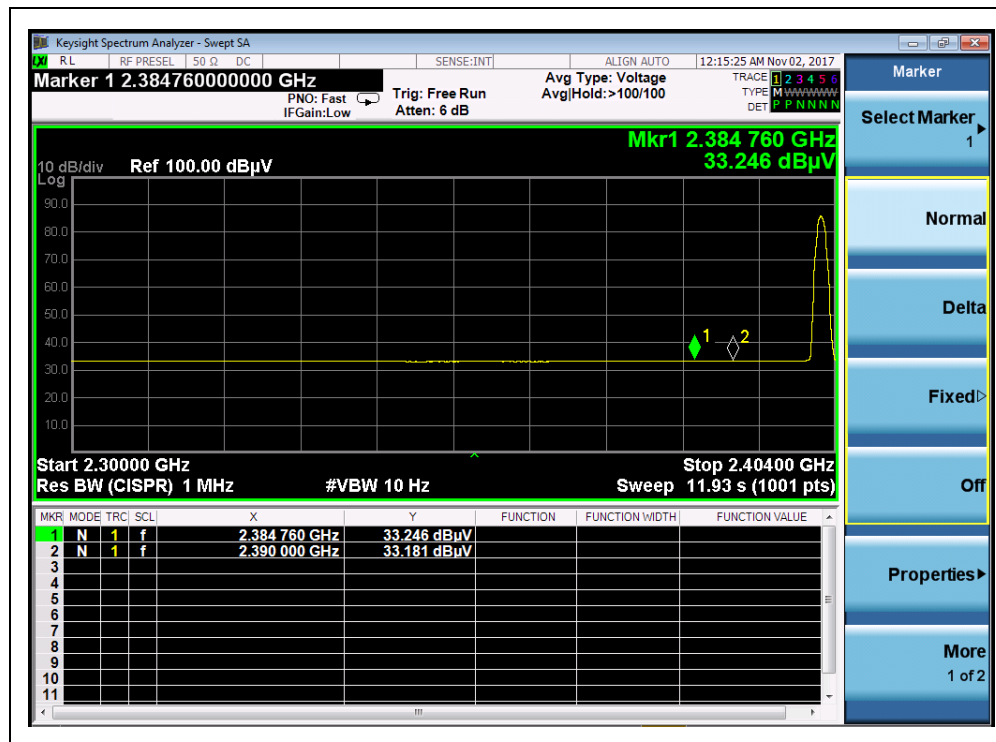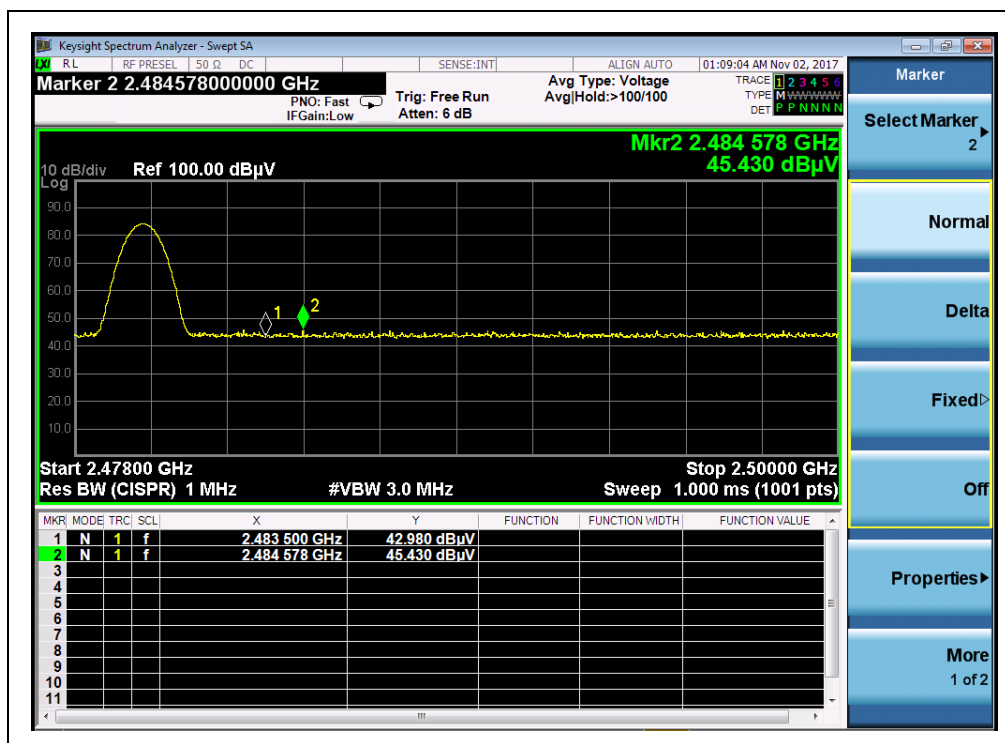(Plot C2: Channel = 0 AVERAGE @ $\pi/4$ -DQPSK)(Plot D1: Channel = 78 PEAK @ $\pi/4$ -DQPSK)




(Plot D2: Channel = 78 AVERAGE@ $\pi/4$ -DQPSK)

2.8.4.3 8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBμV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2385.38	PK	46.53	-33.63	32.56	45.46	74	Pass
0	2383.82	AV	33.07	-33.63	32.56	32.00	54	Pass
78	2487.90	PK	45.71	-33.18	32.5	45.03	74	Pass
78	2488.56	AV	32.84	-33.18	32.5	32.16	54	Pass


B. Test Plots:

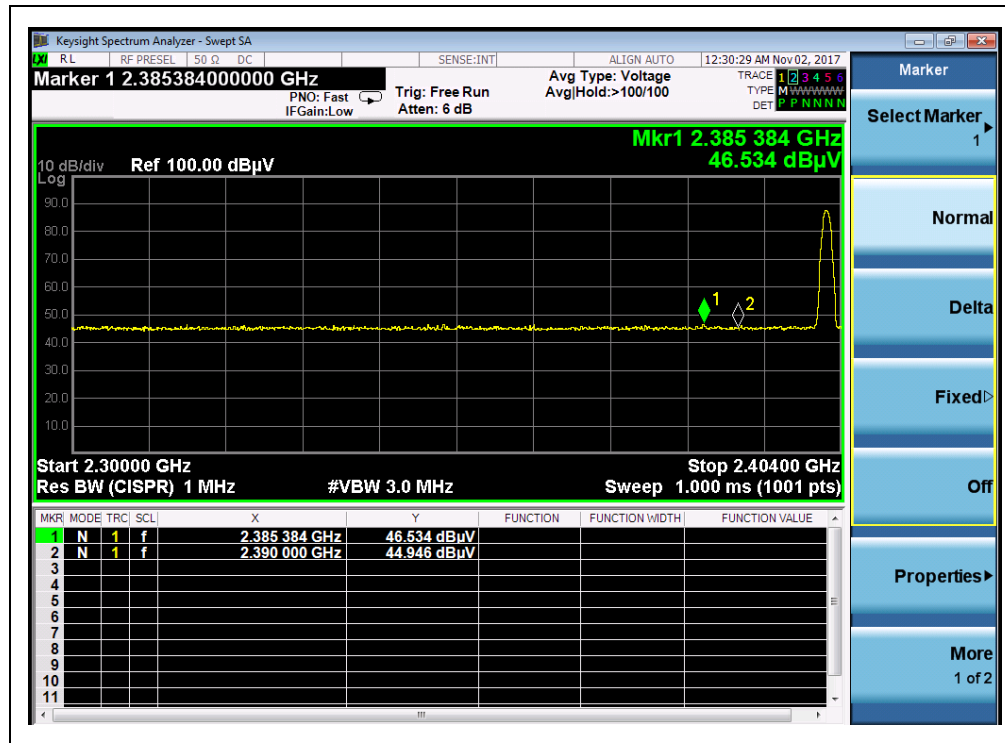


(Plot E1: Channel = 0 PEAK @ 8-DPSK Mode)

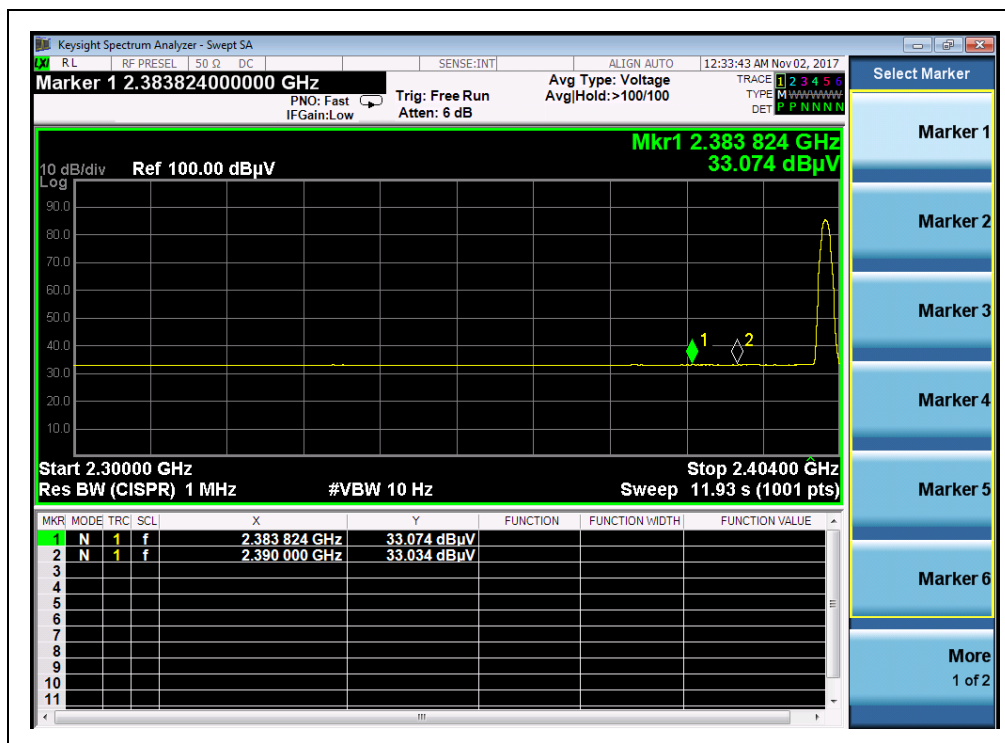

(Plot E2: Channel = 0 AVERAGE @ 8-DPSK Mode)

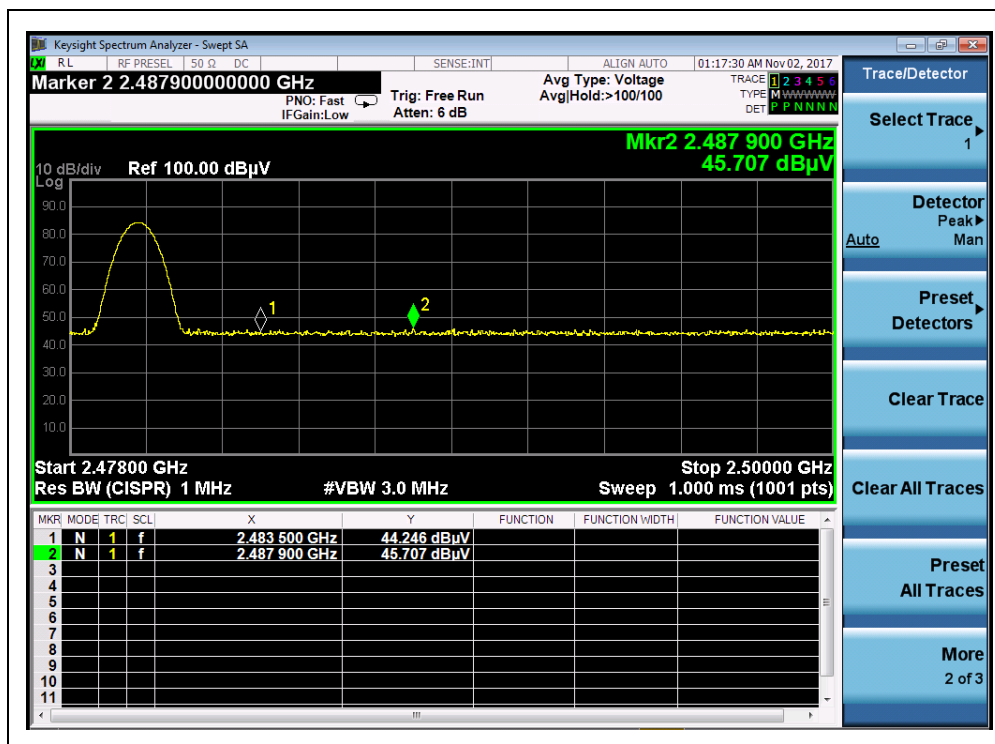

(Plot F1:Channel = 78 PEAK @ 8-DPSK Mode)

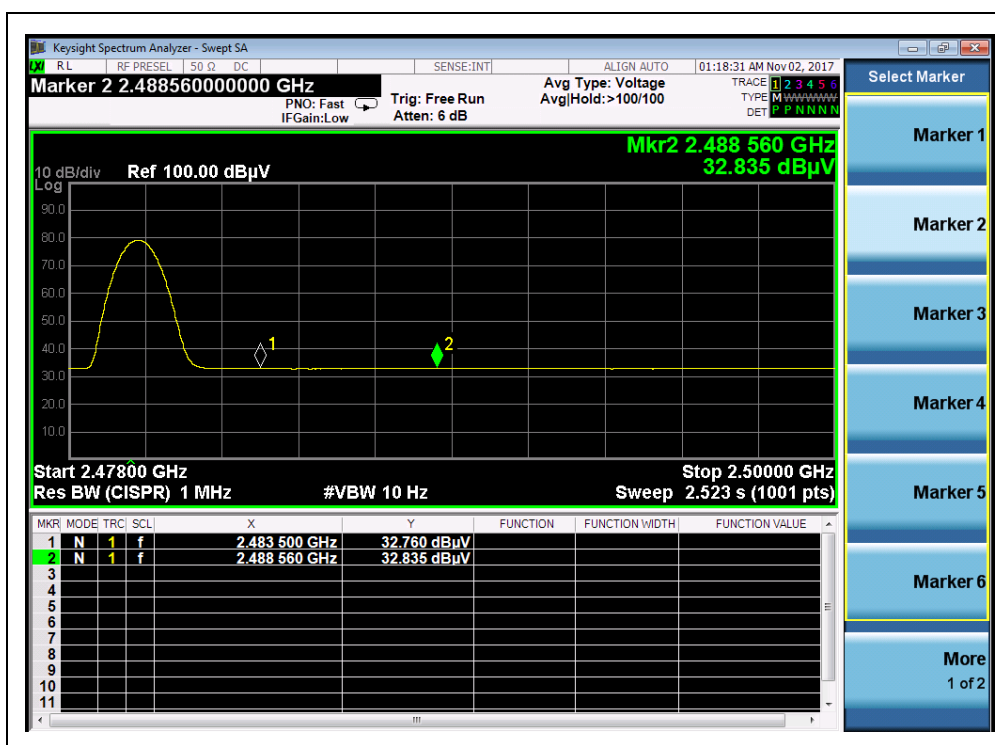

(Plot F2:Channel = 78 AVERAGE @ 8-DPSK Mode)

2.9. Conducted Emission

2.9.1. Requirement

According to RSS-GEN section 8.8, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency (MHz)	range	Conducted Limit (dB μ V)	
		Quai-peak	Average
0.15 - 0.50		66 to 56	56 to 46
0.50 - 5		56	46
5- 30		60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.9.2. Test Description

A. Test Setup:

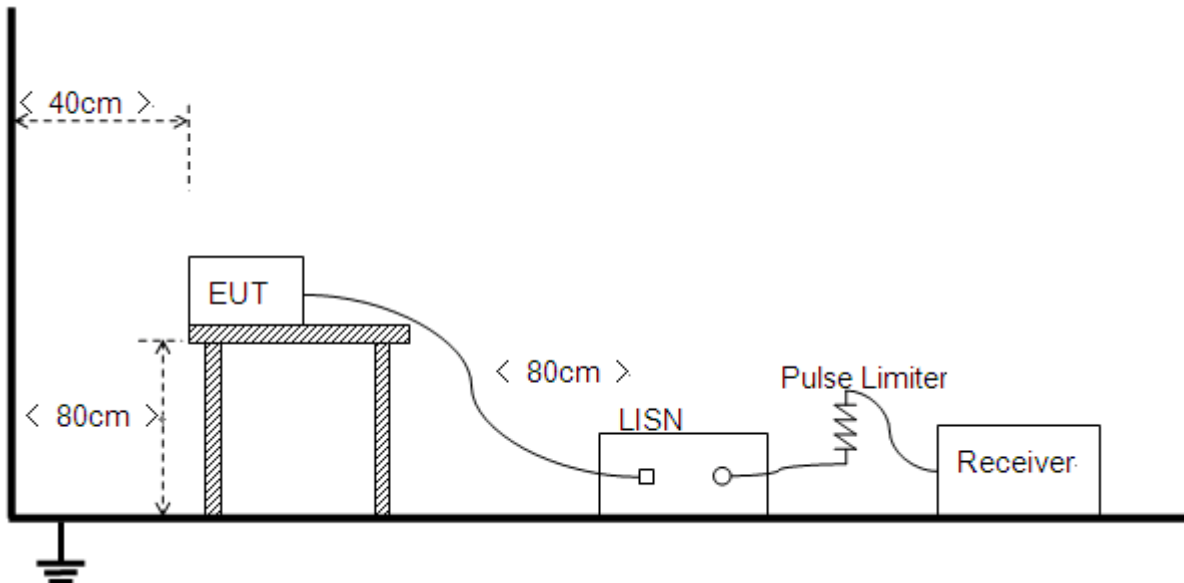

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth



EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.9.3. Test Result


The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

A. Test setup:

The EUT configuration of the emission tests is EUT + Link.


Note: The test voltage is AC 120V/60Hz.

B. Test Plots:

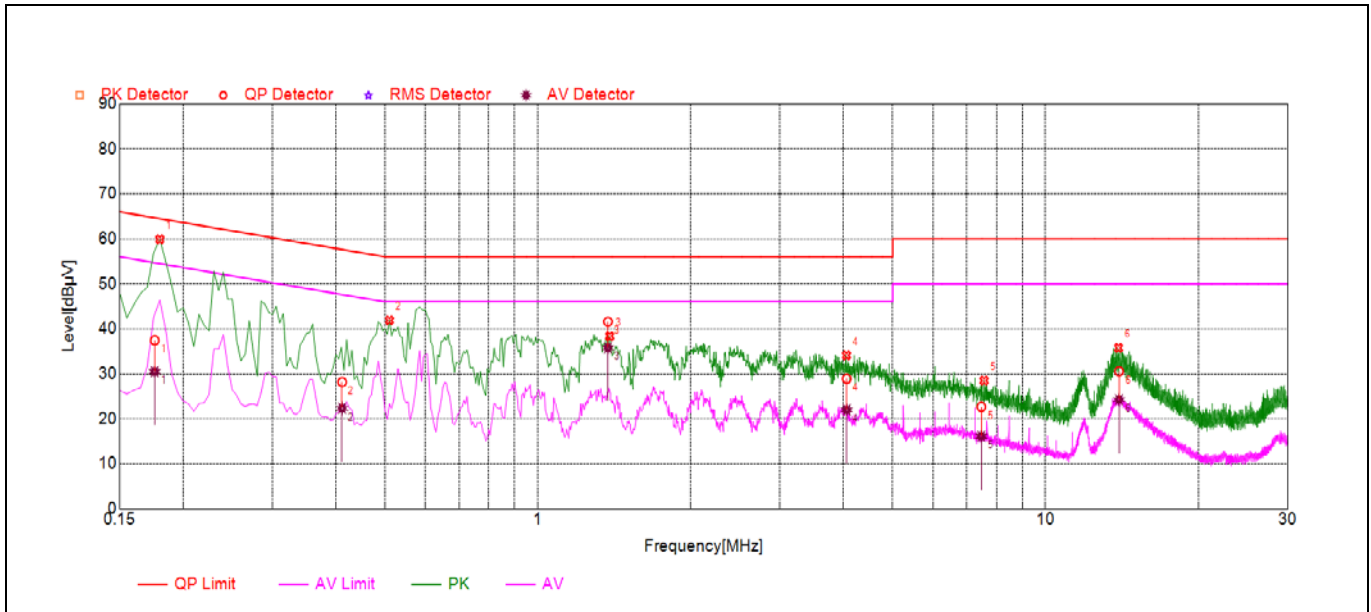

(Plot A: L Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1758	37.42	30.48	64.68	54.68	Line	PASS
2	0.4114	28.18	22.34	57.62	47.62		PASS
3	1.374	41.59	35.79	56.00	46.00		PASS
4	4.0584	28.92	22.00	56.00	46.00		PASS
5	7.4726	22.65	16.15	60.00	50.00		PASS
6	13.9584	30.56	24.26	60.00	50.00		PASS

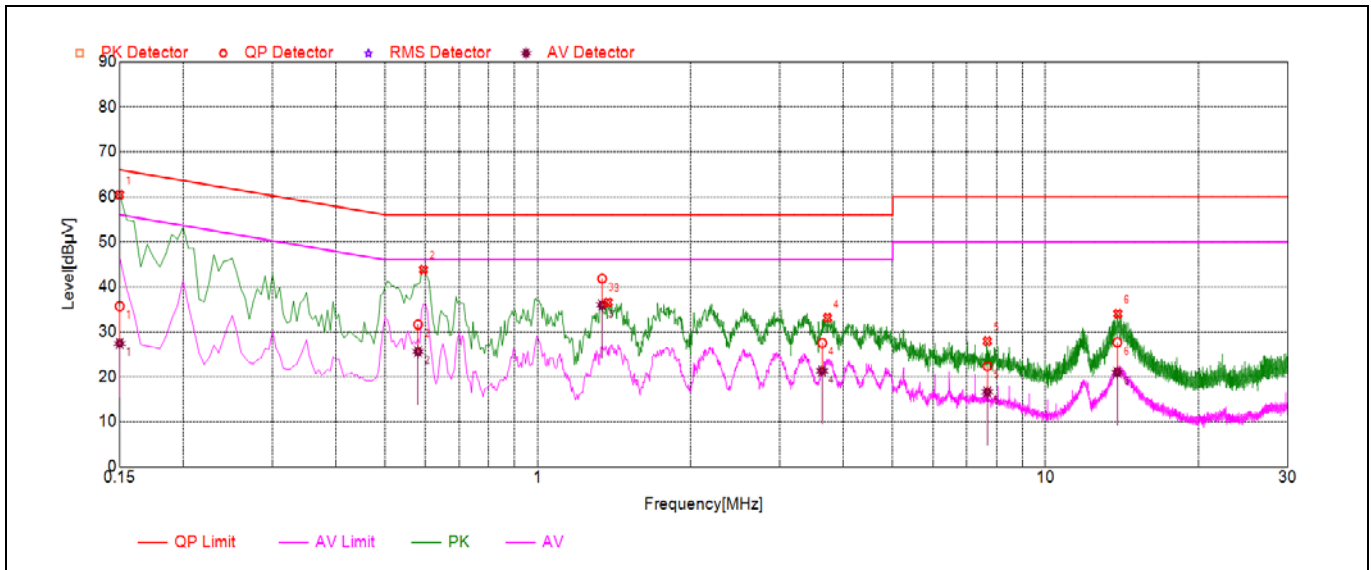

(Plot B: N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.15	35.70	27.42	66.00	56.00	Line	PASS
2	0.5806	31.62	25.62	56.00	46.00		PASS
3	1.3382	41.81	35.97	56.00	46.00		PASS
4	3.631	27.51	21.35	56.00	46.00		PASS
5	7.6826	22.37	16.66	60.00	50.00		PASS
6	13.8488	27.63	20.99	60.00	50.00		PASS

2.10. Radiated Emission

2.10.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.10.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

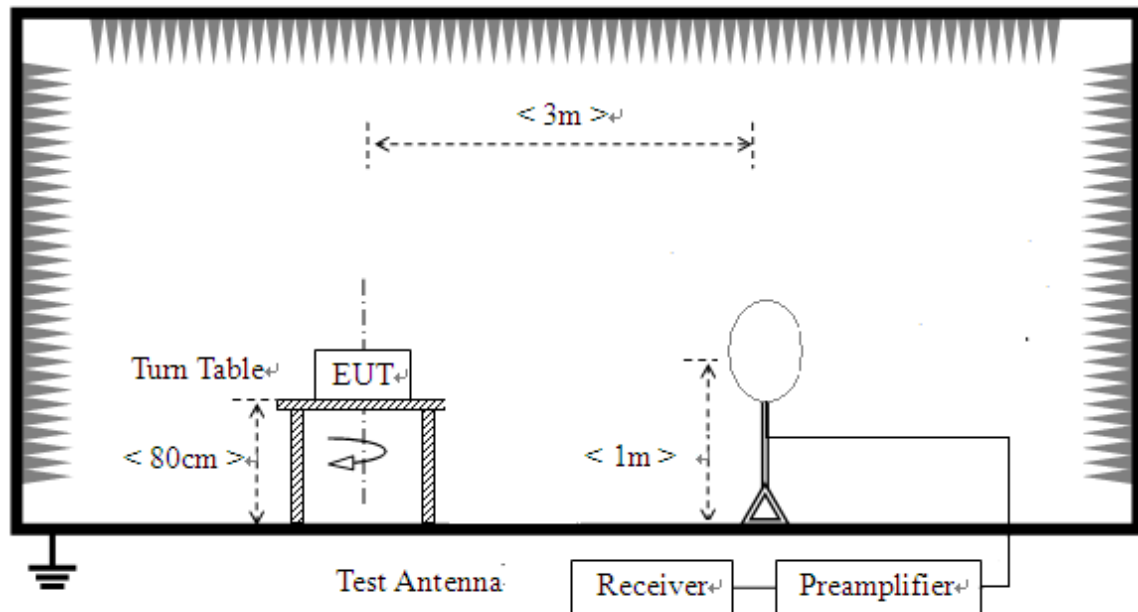

- 2) For radiated emissions from 30MHz to 1GHz

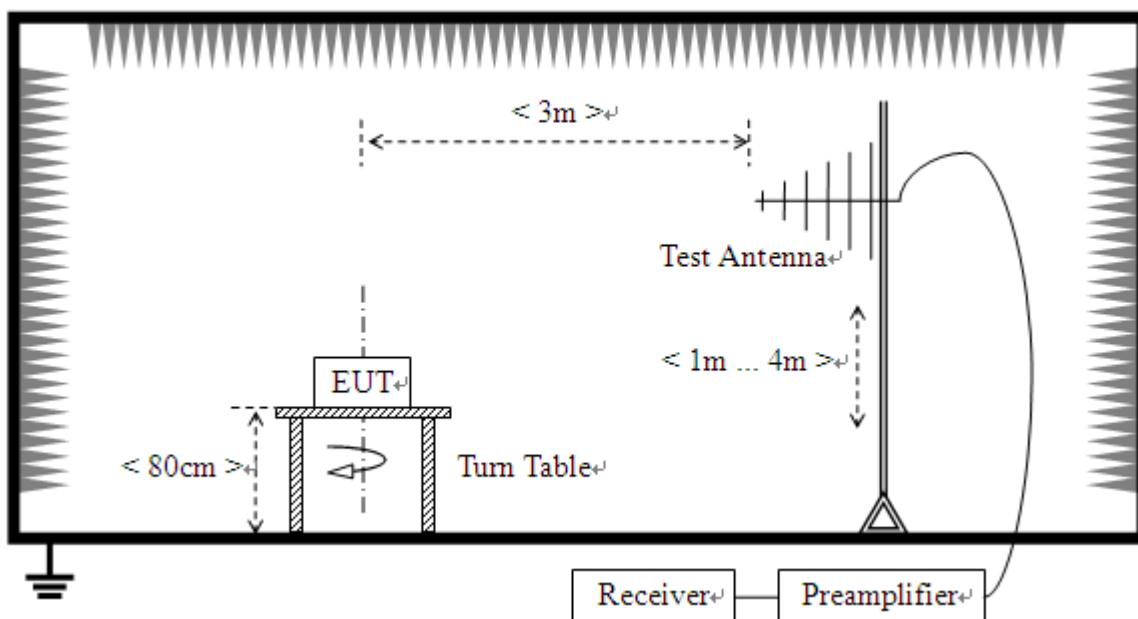

3) For radiated emissions above 1GHz

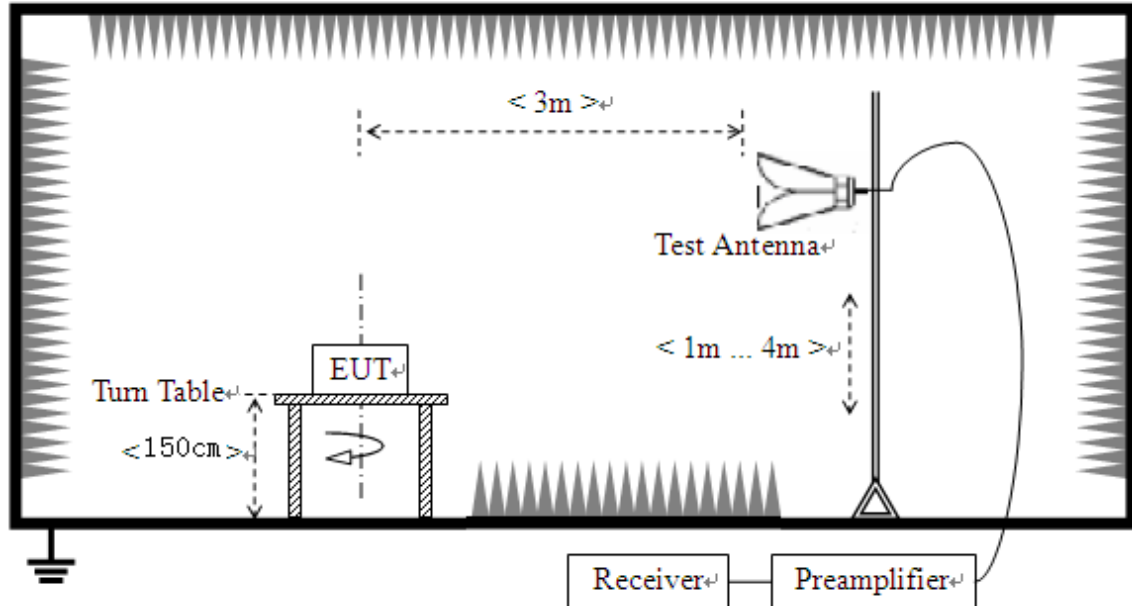

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, the EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant



emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX A(1.5).

2.10.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.10.4. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

**2.10.4.1 GFSK Mode:****A. Test Plots for the Whole Measurement Frequency Range:**

Plots for Channel = 0

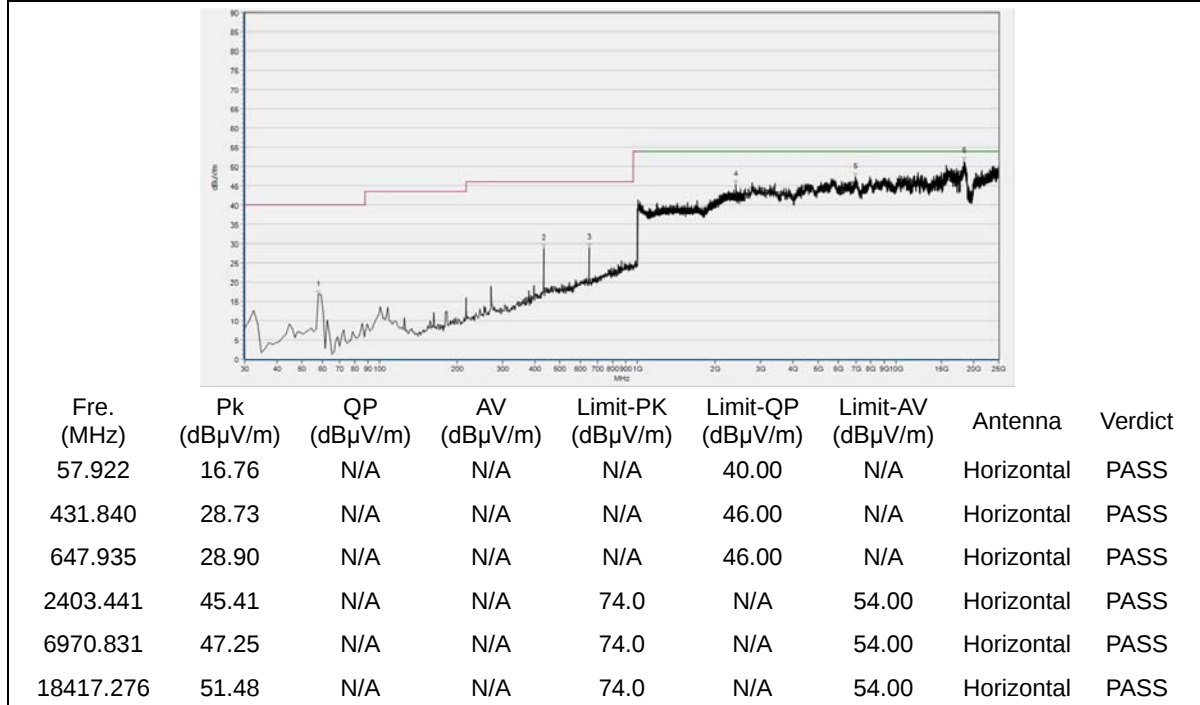

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 0)

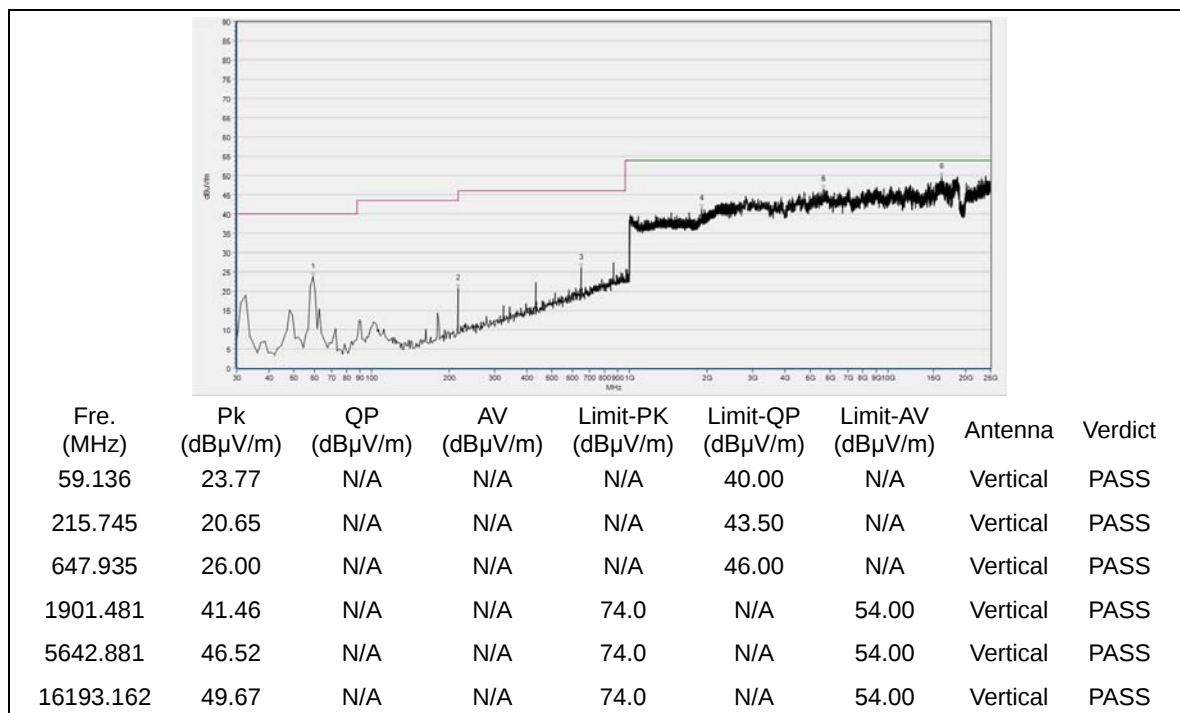

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 0)

Plot for Channel = 39



Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
59.136	16.06	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
431.840	28.48	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
647.935	28.44	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1979.592	43.99	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
5699.909	47.63	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
18490.598	50.45	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS


(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 39)




Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
59.136	19.98	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
215.745	19.59	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
647.935	27.07	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1303.481	39.38	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
2958.465	45.23	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
15798.036	49.81	N/A	N/A	74.0	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 39)

Plot for Channel = 78

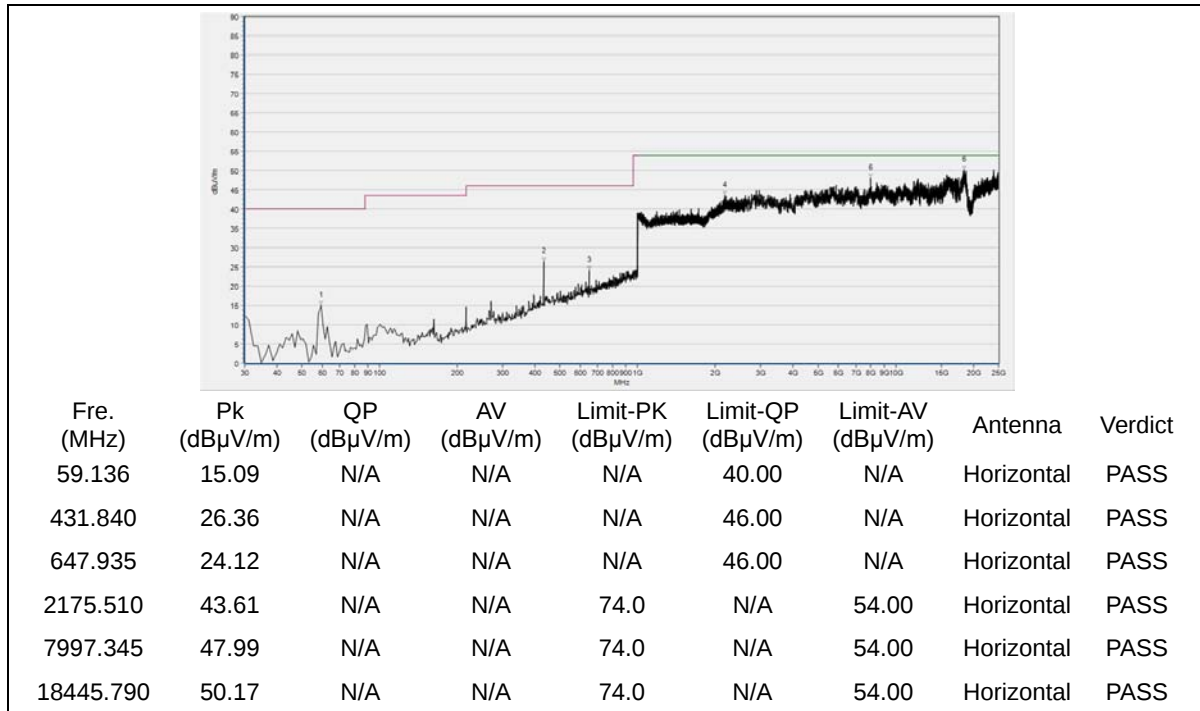

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 78)

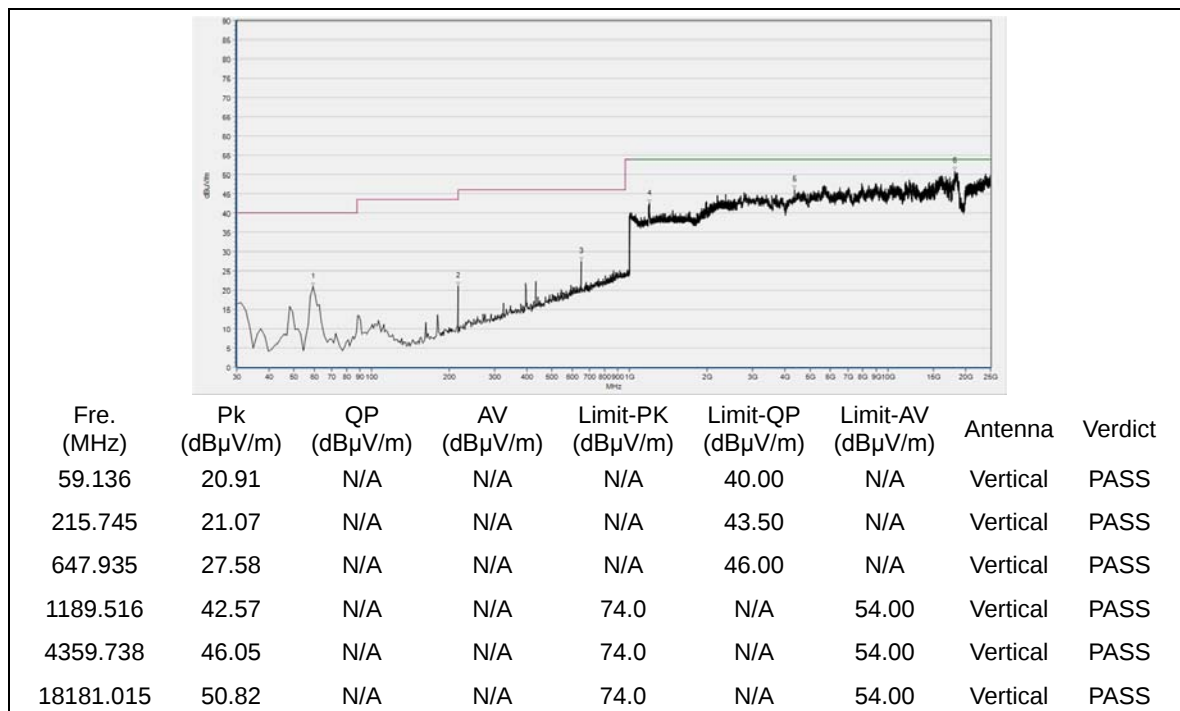


(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 78)


2.10.4.2 $\pi/4$ -DQPSK Mode:

B. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 0

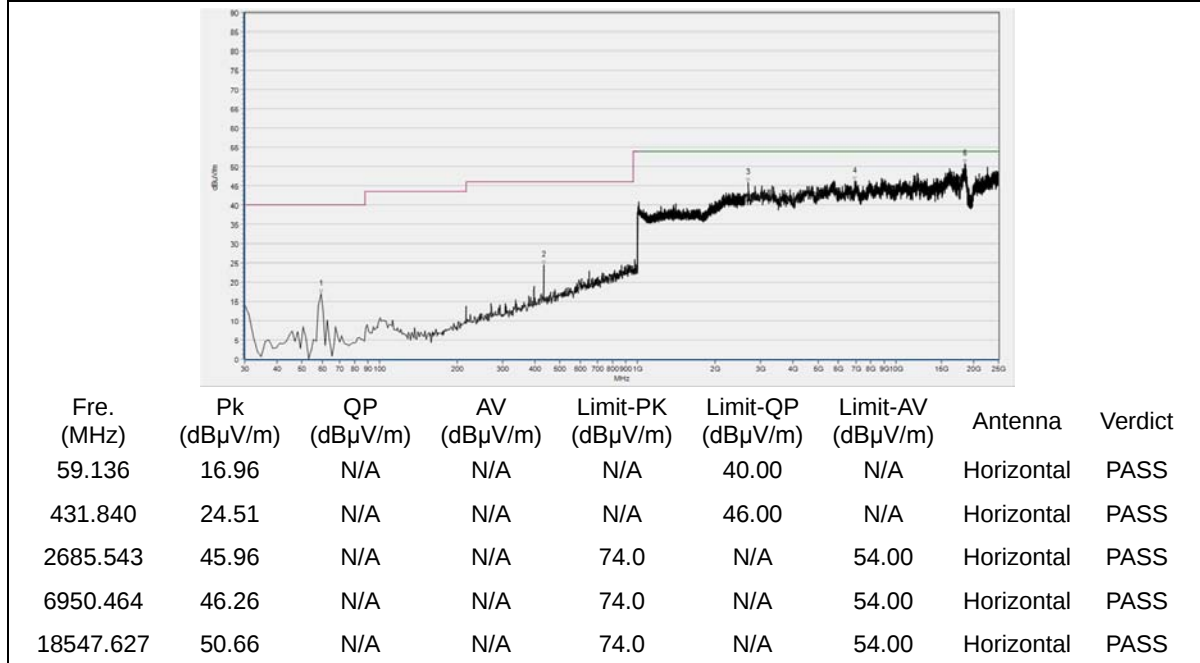


(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 0)

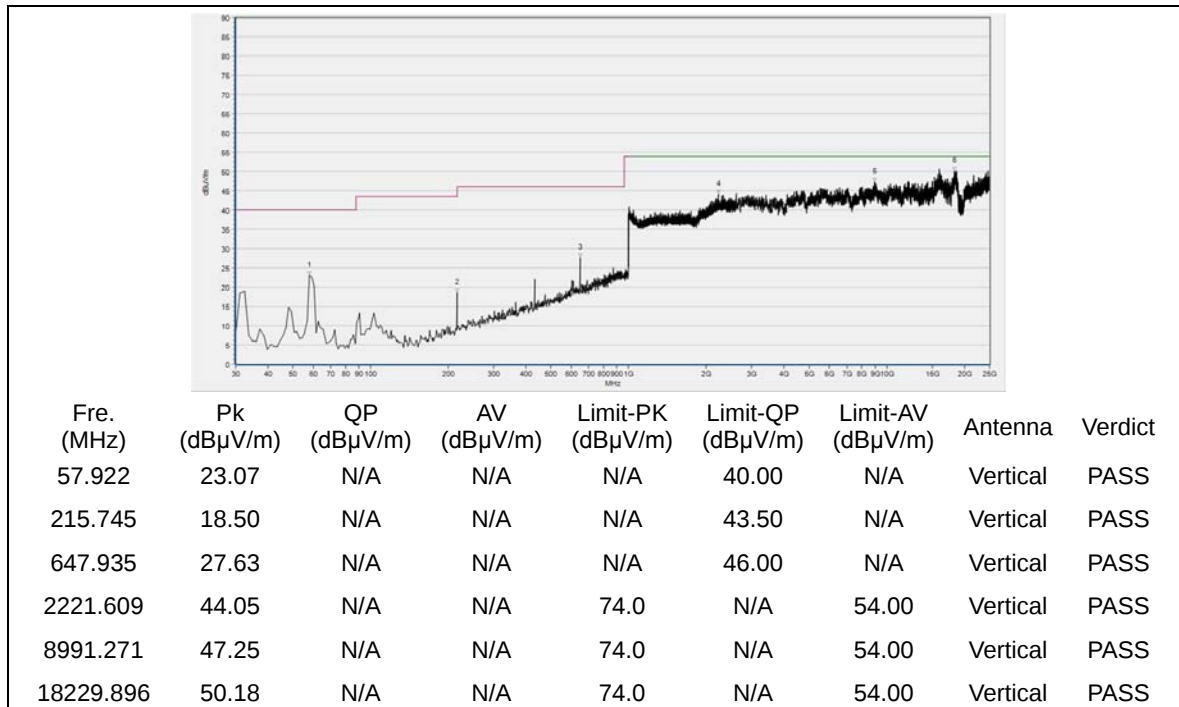


(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 0)


Plot for Channel = 39

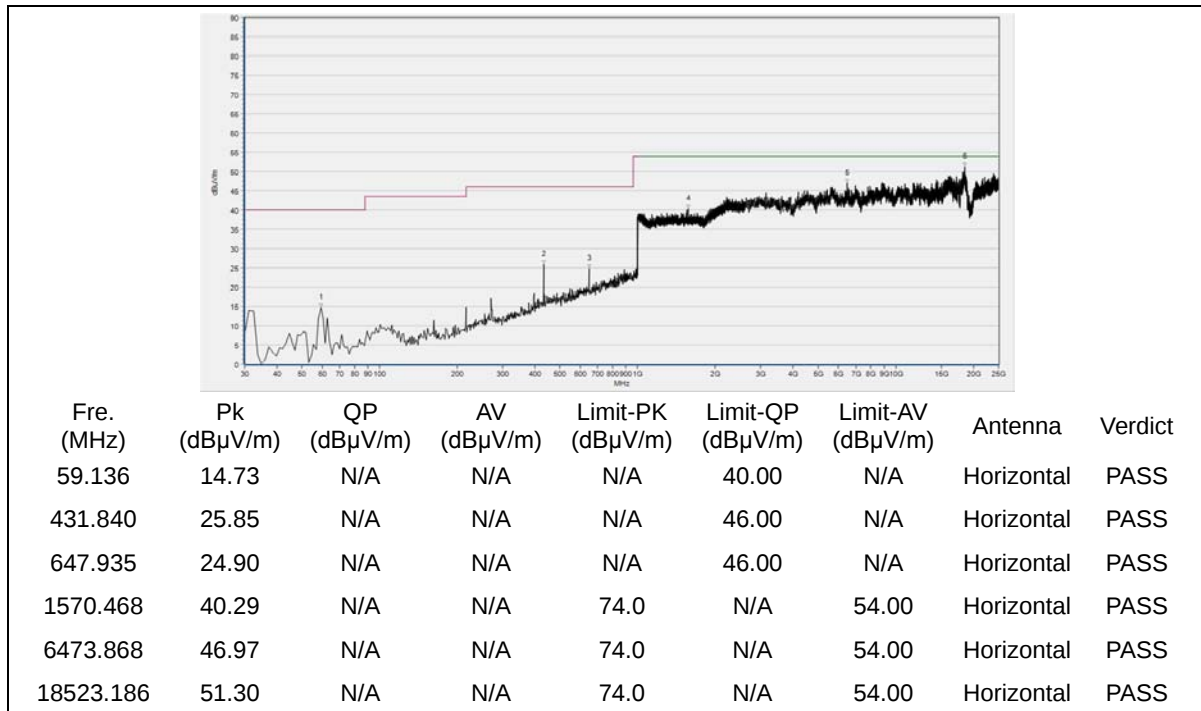

(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 39)

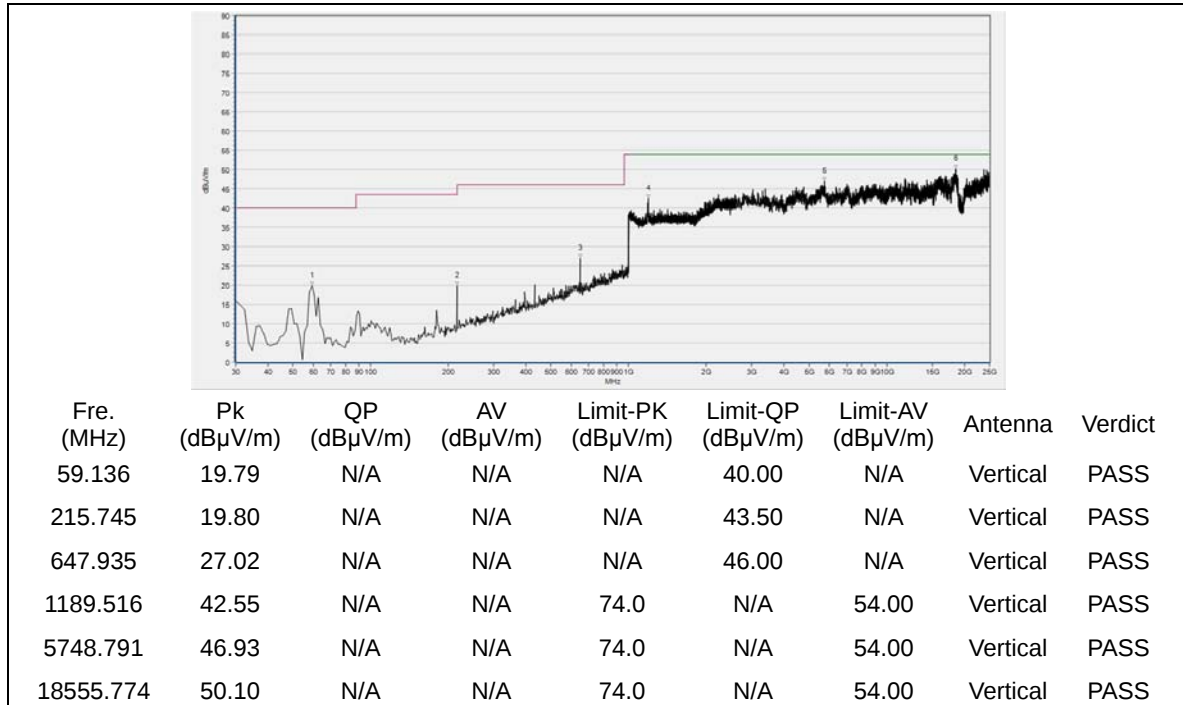

(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 39)

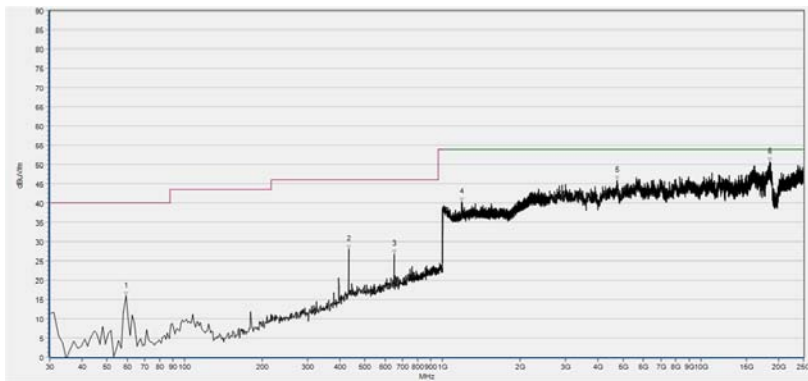Plot for Channel = 78

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
59.136	15.81	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
431.840	27.98	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
647.935	26.76	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1186.315	40.38	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
4734.497	45.95	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
18559.847	50.68	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 78)


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
59.136	20.73	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
215.745	19.84	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
647.935	27.02	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2274.750	43.39	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
5712.129	46.60	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
18596.508	50.13	N/A	N/A	74.0	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 78)


2.10.4.3 8-DPSK Mode:

C. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 0

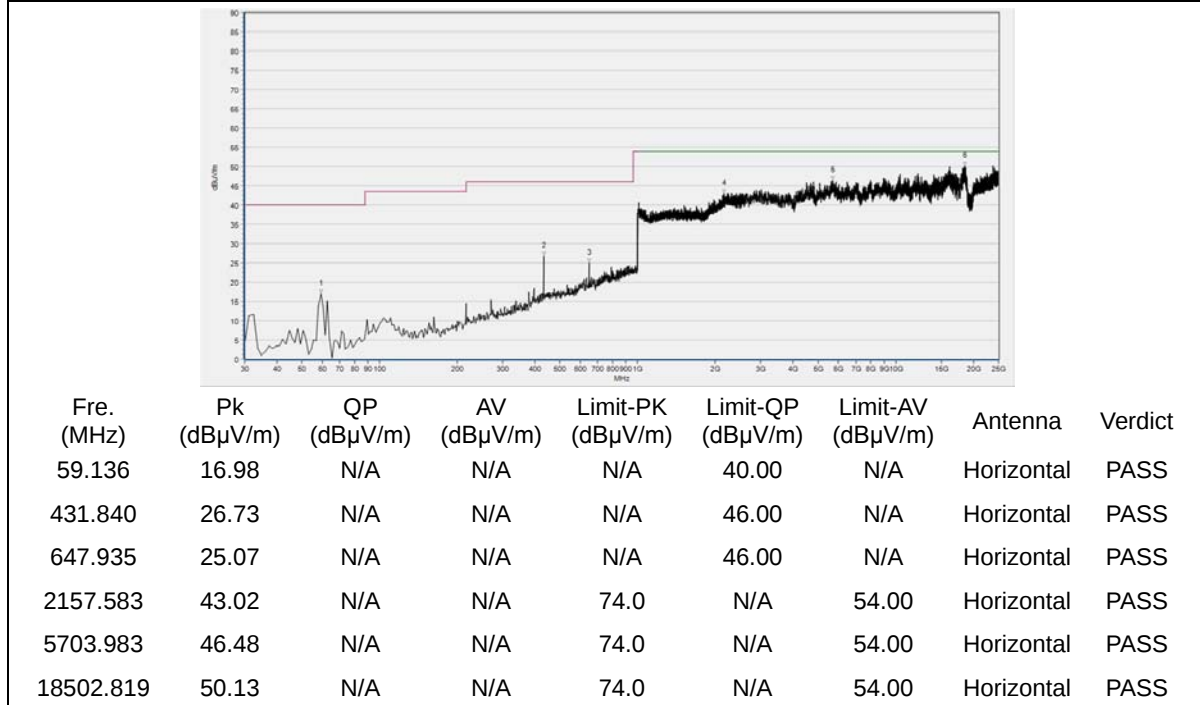


(30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 0)

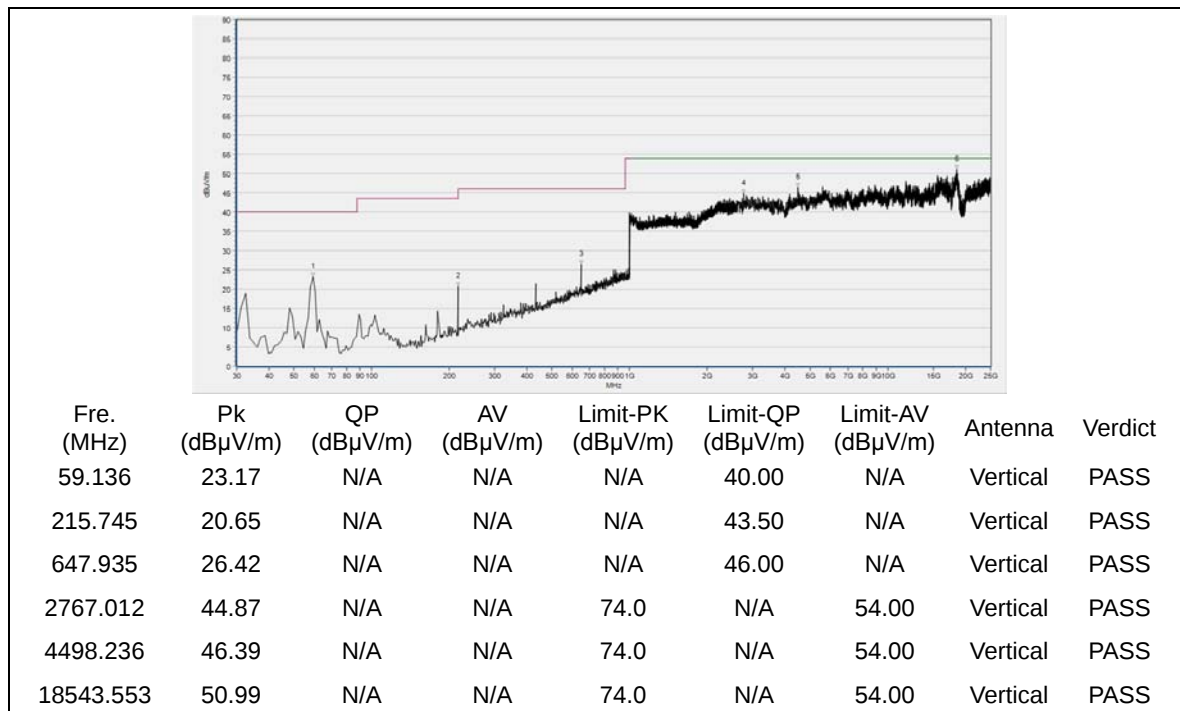

(30MHz to 25GHz, Antenna Vertical @8-DPSK, channel 0)



Plot for Channel = 39

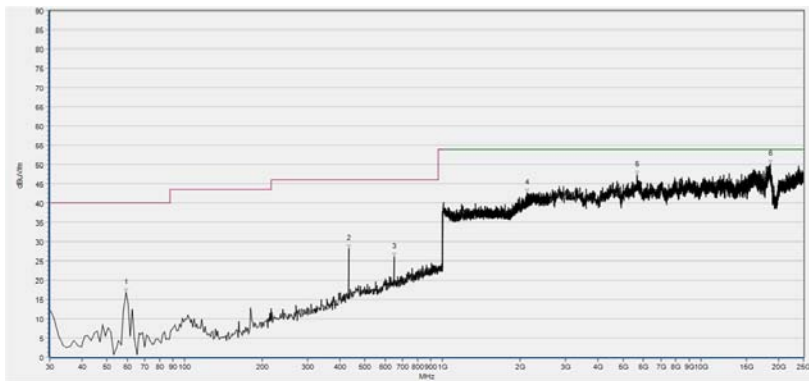

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
59.136	16.76	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
431.840	28.13	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
647.935	26.07	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2117.887	42.60	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
5663.248	47.23	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
18567.994	50.24	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 39)



Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
59.136	19.46	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
215.745	19.18	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
647.935	27.35	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2142.217	42.65	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
5276.268	45.86	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
18567.994	50.12	N/A	N/A	74.0	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @8-DPSK, channel 39)




Plot for Channel = 78



Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
59.136	15.73	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
431.840	29.01	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
647.935	28.41	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1186.315	41.92	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
5679.542	46.60	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
18563.921	50.60	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 78)

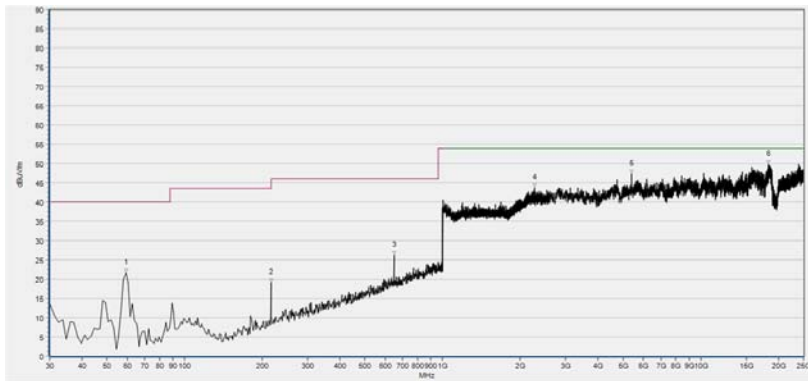

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
59.136	21.58	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
215.745	19.09	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
647.935	26.17	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2270.268	43.77	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
5390.326	47.32	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
18307.292	49.81	N/A	N/A	74.0	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @8-DPSK, channel 78)



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Number of Hopping Frequency	$\pm 5\%$
Peak Output Power	$\pm 2.22\text{dB}$
20dB Bandwidth	$\pm 5\%$
Carrier Frequency Separation	$\pm 5\%$
Time of Occupancy (Dwell time)	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77\text{ dB}$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

3. Facilities and Accreditations

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Spectrum Analyzer	MY45101810	E4407B	Agilent	2017.05.24	2018.05.23
Power Splitter	NW521	1506A	Weinschel	2017.05.24	2018.05.23
Attenuator 1	(N/A.)	10dB	Resnet	2017.05.24	2018.05.23
Attenuator 2	(N/A.)	3dB	Resnet	2017.05.24	2018.05.23
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2016.12.07	2017.12.06
Bluetooth Test Set	6K00006210	MT8852B	Anritsu	2017.05.24	2018.05.23
USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2017.05.24	2018.05.23
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	US44210471	E7405A	Agilent	2017.05.17	2018.05.16
LISN	812744	NSLK 8127	Schwarzbeck	2017.05.17	2018.05.16
Service Supplier	100448	CMU200	R&S	2017.05.17	2018.05.16
Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2017.05.17	2018.05.16
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

4.3 Auxiliary Test Equipment

Equipment Name	Model No.	Brand Name	Manufacturer	Cal.Date	Cal.Due Date
Computer	T430i	Think Pad	Lenovo	N/A	N/A

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
System Simulator	GB45360846	8960-E5515C	Agilent	2017.05.17	2018.05.16
Receiver	MY54130016	N9038A	Agilent	2017.05.17	2018.05.16
Test Antenna - Bi-Log	N/A	VULB9163	Schwarzbeck	2016.12.09	2017.12.08
Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2017.03.30	2018.03.29
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2017.03.30	2018.03.29
Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2017.03.30	2018.03.29
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable(N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2017.05.17	2018.05.16
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2017.05.17	2018.05.16
Climate Chamber	2004012	HL4003T	Yinhe	2017.01.11	2018.01.10
Vibration Table	N/A	ACT2000-S01 5L	CMI-COM	2017.01.11	2018.01.10
Anechoic Chamber	N/A	9m*6m*6m	Changning	2017.01.11	2018.01.10

————— END OF REPORT —————