

#98_FR1 n77_100M_BPSK_1_1_Front_10mm_Ch633332

Communication System:NR; Frequency: 3499.98 MHz;Duty Cycle: 1:1

Medium: HSL_3500_220425 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.971$ S/m; $\epsilon_r = 37.695$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(6.99, 6.99, 6.99) @ 3499.98 MHz; Calibrated: 2022/1/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2022/1/20
- Phantom: SAM_Left; Type: SAM; Serial: TP:1477
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.34 W/kg


Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 16.39 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.785 W/kg; SAR(10 g) = 0.279 W/kg

Maximum value of SAR (measured) = 1.23 W/kg

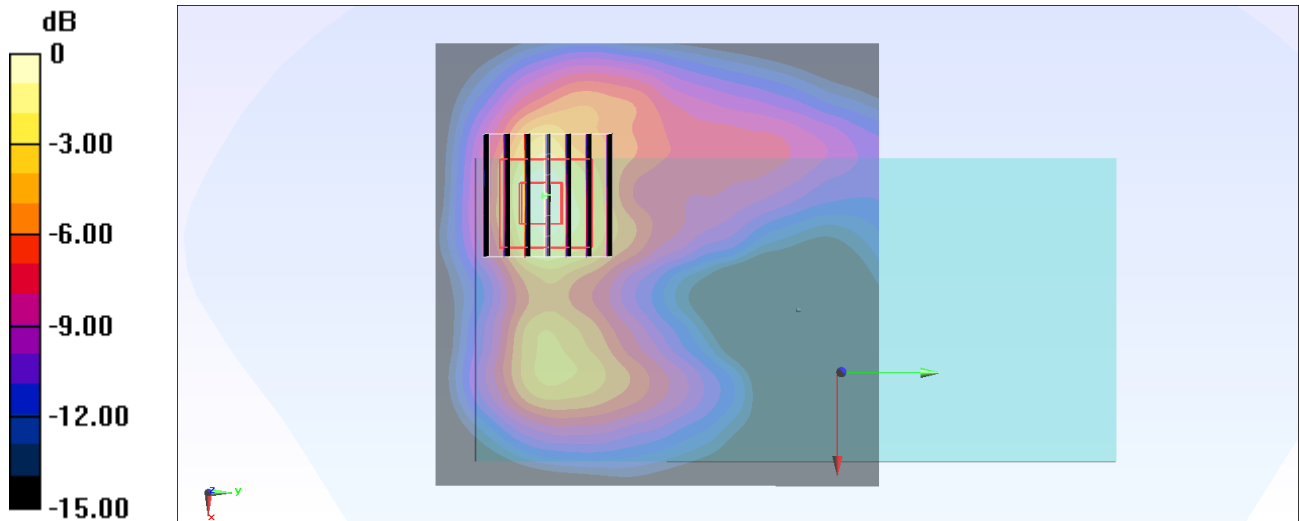

0 dB = 1.23 W/kg = 0.90 dBW/kg

#99_WLAN2.4GHz_802.11g 6Mbps_Back_10mm_Ch6;Ant 4+3

Communication System: 802.11g; Frequency: 2437 MHz; Duty Cycle: 1:1.071

Medium: HSL_2450_220428 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 40.067$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.62, 4.62, 4.62) @ 2437 MHz; Calibrated: 2021/9/21
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2022/3/29
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.869 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.56 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.681 W/kg; SAR(10 g) = 0.330 W/kg

Maximum value of SAR (measured) = 0.888 W/kg


Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.56 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.778 W/kg

SAR(1 g) = 0.390 W/kg; SAR(10 g) = 0.192 W/kg

Maximum value of SAR (measured) = 0.500 W/kg

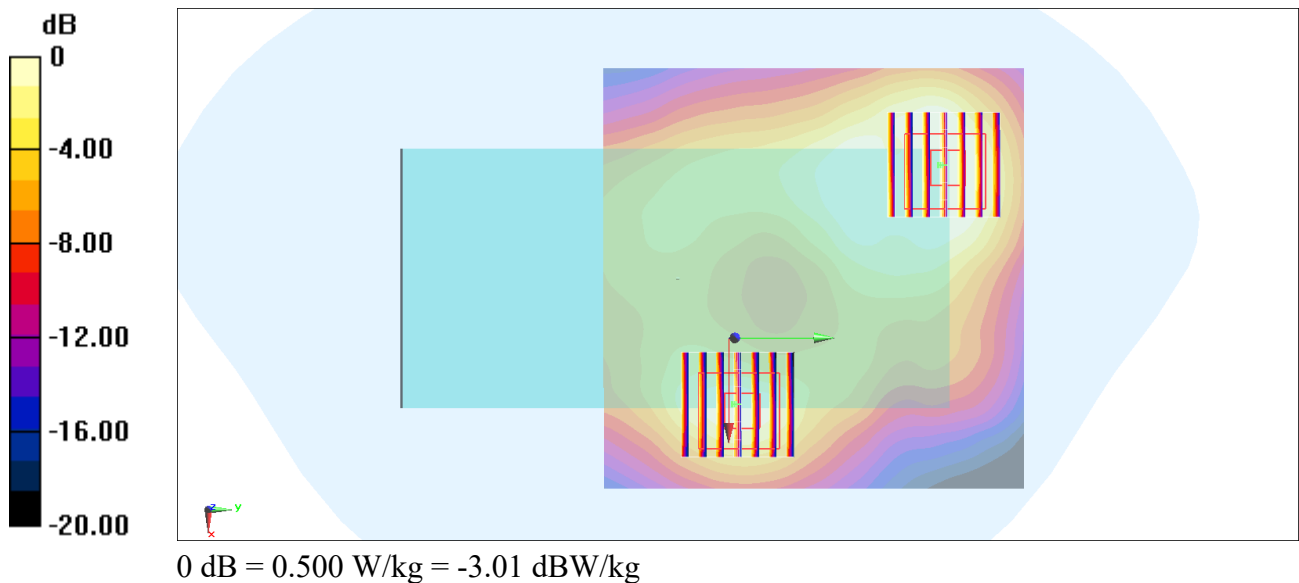

#100_WLAN5GHz_802.11n-HT40 MCS0_Front_10mm_Ch54;Ant 4+3

Communication System: 802.11n; Frequency: 5270 MHz; Duty Cycle: 1:1.033

Medium: HSL_5G_220426 Medium parameters used: $f = 5270$ MHz; $\sigma = 4.797$ S/m; $\epsilon_r = 36.839$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(5.45, 5.45, 5.45) @ 5270 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1696; Calibrated: 2021/11/3
- Phantom: PlaP2a_Twin-SAM_V4.0_(30deg)_Right; Type: QD 000 P40 CC; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (121x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.16 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 14.99 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.406 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.249 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 14.99 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.522 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 1.16 W/kg

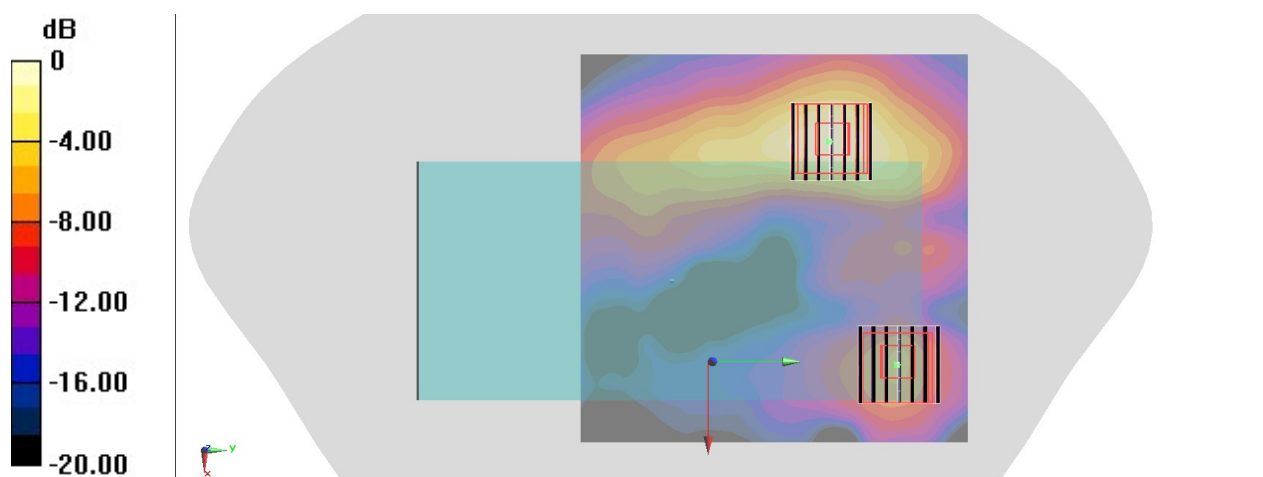

#101_WLAN5GHz_802.11ac-VHT80 MCS0_Front_10mm_Ch122;Ant 4+3

Communication System: 802.11ac; Frequency: 5610 MHz; Duty Cycle: 1:1.137

Medium: HSL_5G_220510 Medium parameters used: $f = 5610$ MHz; $\sigma = 5.08$ S/m; $\epsilon_r = 35.607$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.85, 4.85, 4.85) @ 5610 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1696; Calibrated: 2021/11/3
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (121x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.760 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 12.07 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.679 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.394 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 12.07 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.752 W/kg

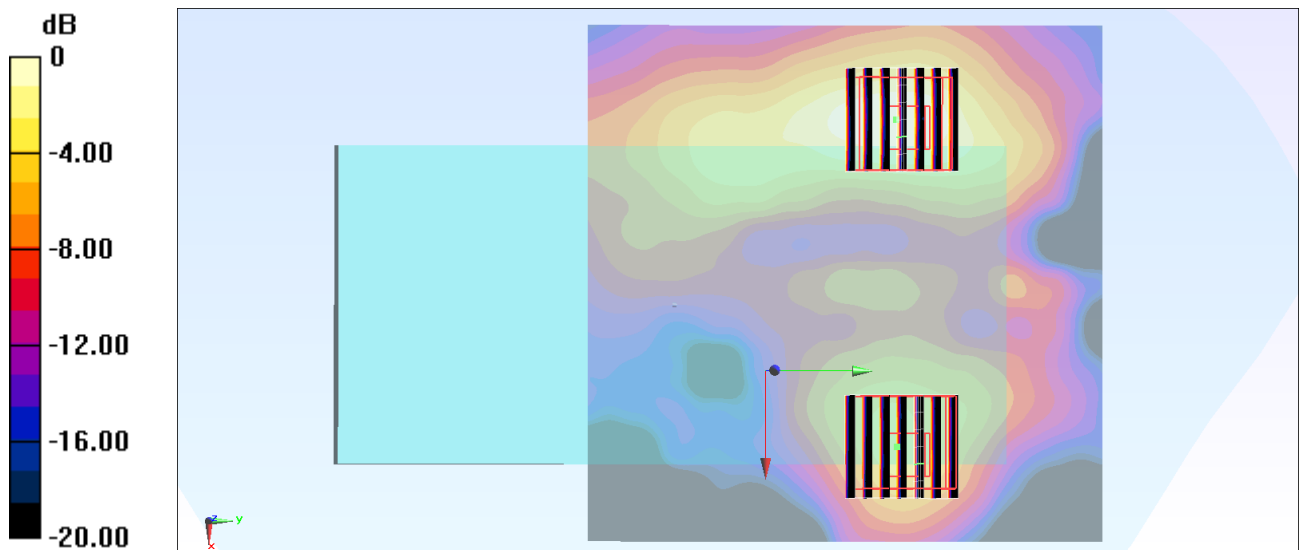

0 dB = 0.752 W/kg = -1.24 dBW/kg

#102_WLAN5GHz_802.11ac-VHT80 MCS0_Front_10mm_Ch155;Ant 4+3

Communication System: 802.11ac; Frequency: 5775 MHz; Duty Cycle: 1:1.137

Medium: HSL_5G_220427 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.045$ S/m; $\epsilon_r = 34.832$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.93, 4.93, 4.93) @ 5775 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1696; Calibrated: 2021/11/3
- Phantom: PlaP2a_Twin-SAM_V4.0_(30deg)_Right; Type: QD 000 P40 CC; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (131x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.20 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 10.01 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.876 W/kg

SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.509 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 10.01 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 0.487 W/kg; SAR(10 g) = 0.171 W/kg

Maximum value of SAR (measured) = 1.16 W/kg

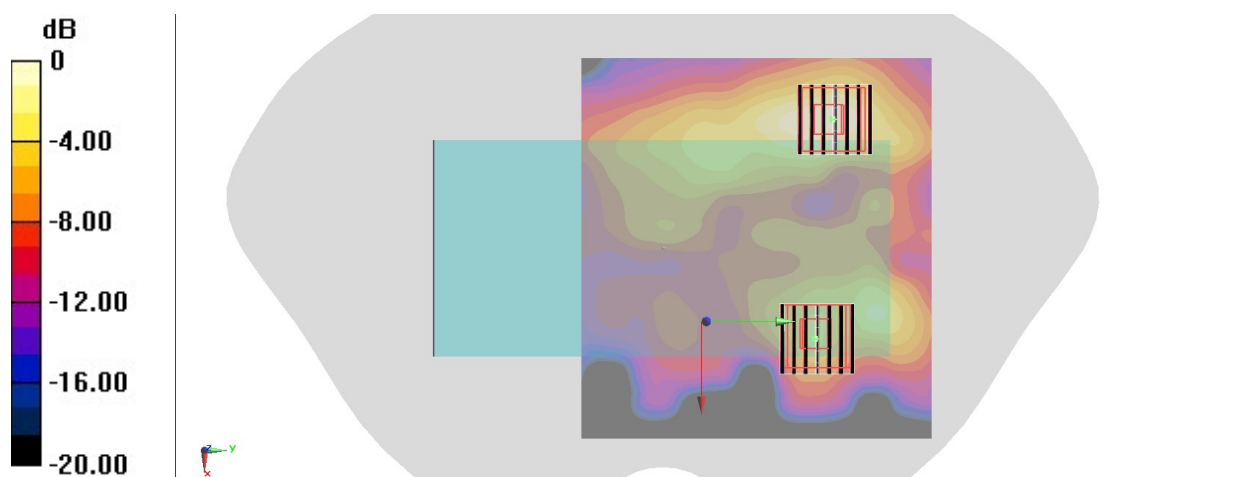

0 dB = 1.16 W/kg = 0.64 dBW/kg

#103_WLAN5GHz_802.11ac-VHT160 MCS0_Front_10mm_Ch163;Ant 4+3

Communication System: 802.11ac; Frequency: 5815 MHz; Duty Cycle: 1:1.149

Medium: HSL_5G_220426 Medium parameters used: $f = 5815$ MHz; $\sigma = 5.425$ S/m; $\epsilon_r = 36.017$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.93, 4.93, 4.93) @ 5815 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1696; Calibrated: 2021/11/3
- Phantom: PlaP2a_Twin-SAM_V4.0_(30deg)_Right; Type: QD 000 P40 CC; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (121x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.675 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 11.39 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.539 W/kg

SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.298 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 11.39 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 0.681 W/kg

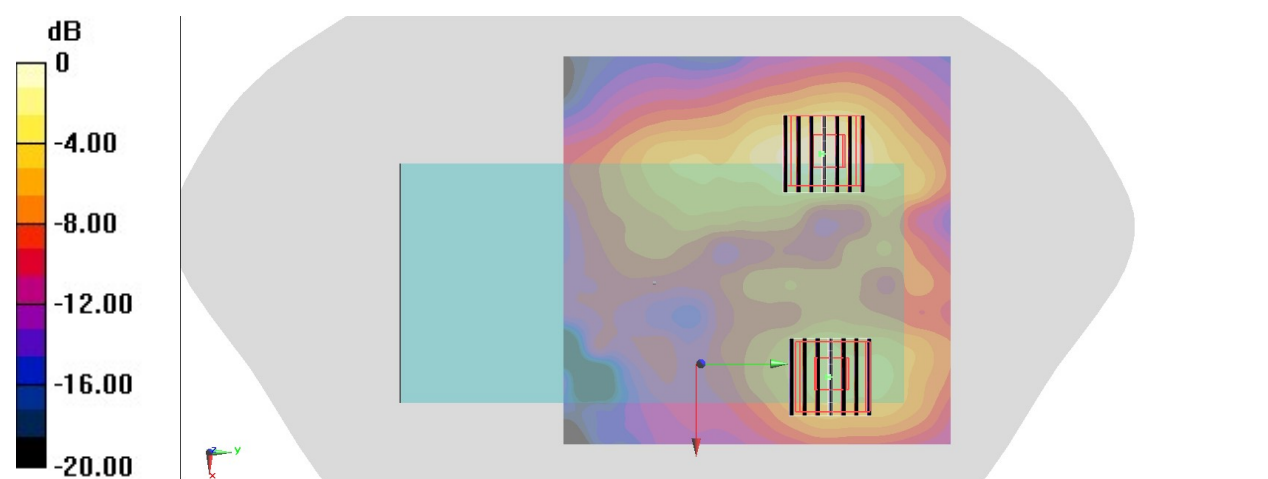

104_WLAN6GHz_802.11ax-HE160 MCS0_Front_10mm_Ch175

Communication System: U-NII-7; Frequency: 6825.0

Medium: HSL_6G_220429. Medium parameters used: $f = 6825.0$ MHz; $\sigma = 6.27$ S/m; $\epsilon_r = 33.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(5.0, 5.0, 5.0); Calibrated: 2022-03-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn699; Calibrated: 2022-02-24
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1488; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10743-AAC
- MAIA: Area Scan: Y; Zoom Scan: Y

Area Scan (119.0 mm x 119.0 mm): Measurement Grid: 8.5 mm x 8.5 mm


SAR (1g) = 0.097 W/kg; SAR (10g) = 0.031 W/kg;

Zoom Scan (23.8 mm x 23.8 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.07 dB

SAR (1g) = 0.102 W/kg; SAR (8g) = 0.039 W/kg; SAR (10g) = 0.034 W/kg;

psAPD (1.0cm², sq) = 1.02 [W/m²]; psAPD (4.0cm², sq) = 0.776 [W/m²]

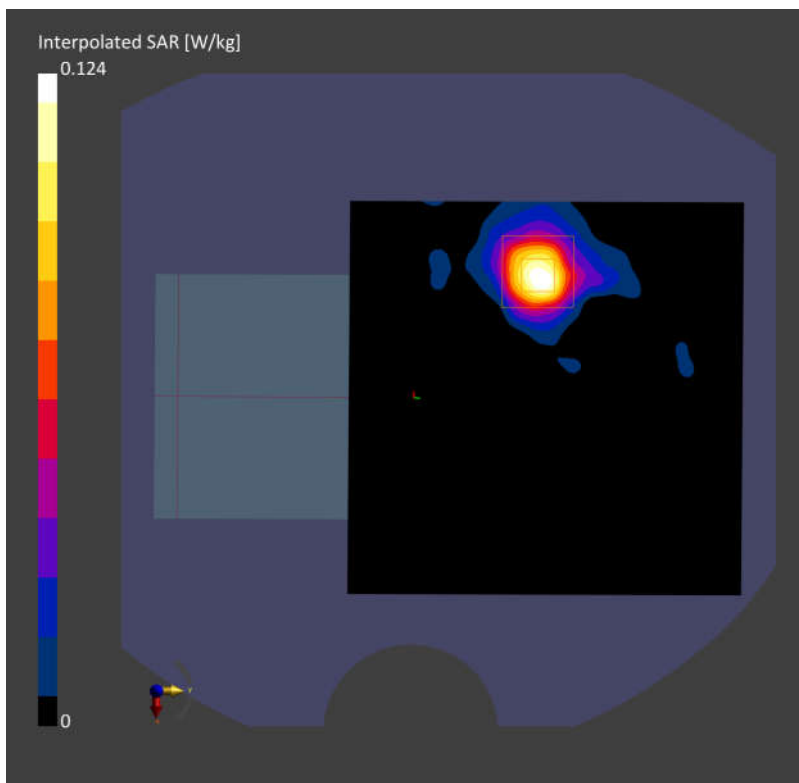

#105_Bluetooth_1Mbps_Back_10mm_Ch0;Ant 4

Communication System: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.295

Medium: HSL_2450_220503 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.794$ S/m; $\epsilon_r = 39.616$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.85, 7.85, 7.85) @ 2402 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 2022/1/26
- Phantom: SAM_Left; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.485 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.58 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.700 W/kg

SAR(1 g) = 0.335 W/kg; SAR(10 g) = 0.156 W/kg

Maximum value of SAR (measured) = 0.534 W/kg

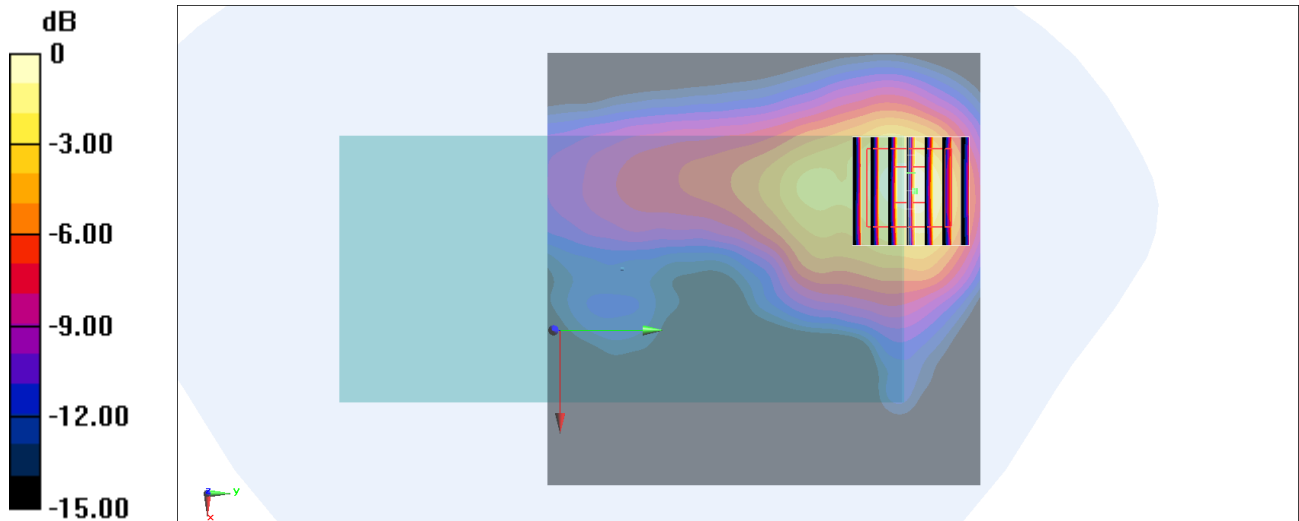

0 dB = 0.534 W/kg = -2.72 dBW/kg

#106_WCDMA II_RMC 12.2Kbps_Bottom Side_0mm_Ch9538

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL_1900_220421 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.418$ S/m; $\epsilon_r = 40.485$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.25, 8.25, 8.25) @ 1907.6 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2022/2/28
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 8.15 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 72.28 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 4.67 W/kg; SAR(10 g) = 2.06 W/kg

Maximum value of SAR (measured) = 8.90 W/kg

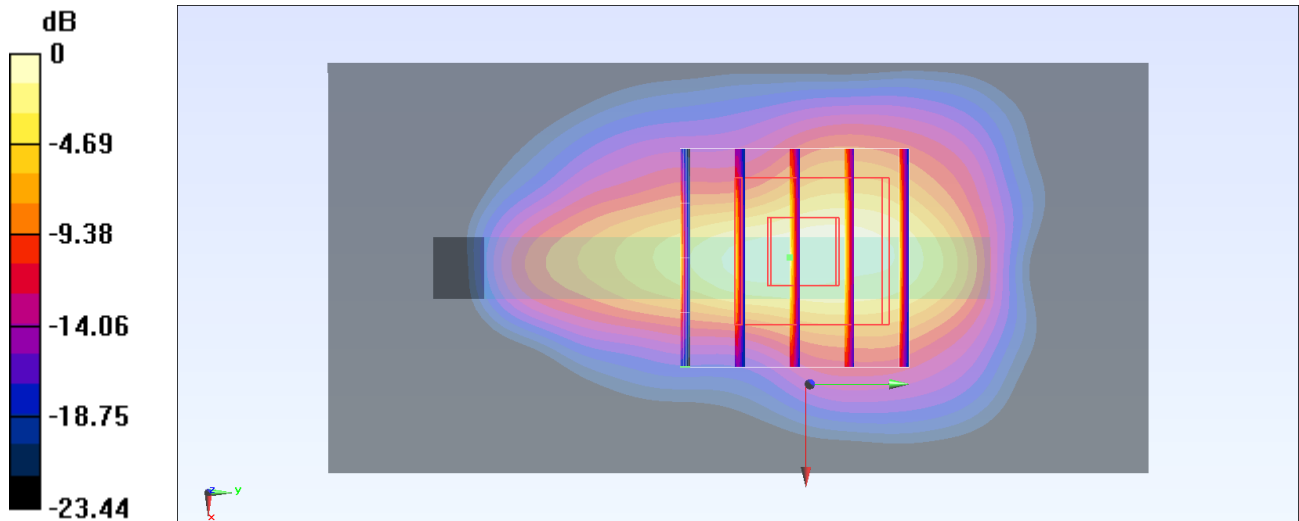

0 dB = 8.90 W/kg = 9.49 dBW/kg

#107_WCDMA IV_RMC 12.2Kbps_Bottom Side_0mm_Ch1513

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: HSL_1750_220421 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 41.434$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.6, 8.6, 8.6) @ 1752.6 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2022/2/28
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 8.27 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 70.21 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 10.1 W/kg

SAR(1 g) = 4.36 W/kg; SAR(10 g) = 1.94 W/kg

Maximum value of SAR (measured) = 8.33 W/kg

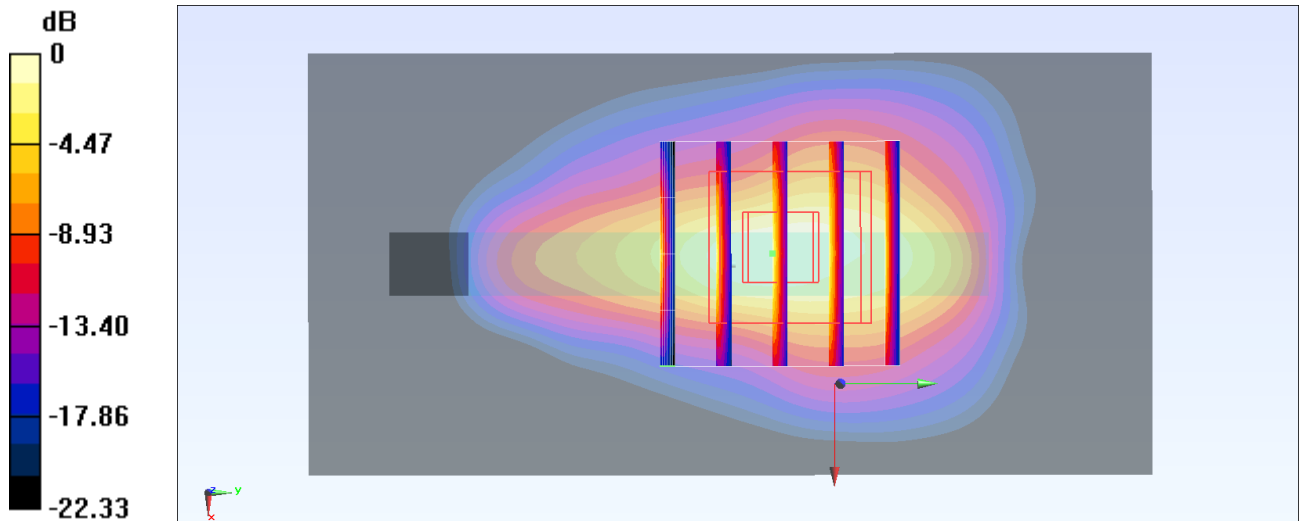

0 dB = 8.33 W/kg = 9.21 dBW/kg

#108_LTE Band 2_20M_QPSK_50_0_Top Side_0mm_Ch18900

Communication System: LTE; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1900_220504 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.389$ S/m; $\epsilon_r = 39.291$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.25, 8.25, 8.25) @ 1880 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2022/2/28
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 15.8 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 108.8 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 22.4 W/kg

SAR(1 g) = 7.01 W/kg; SAR(10 g) = 2.59 W/kg

Maximum value of SAR (measured) = 17.7 W/kg

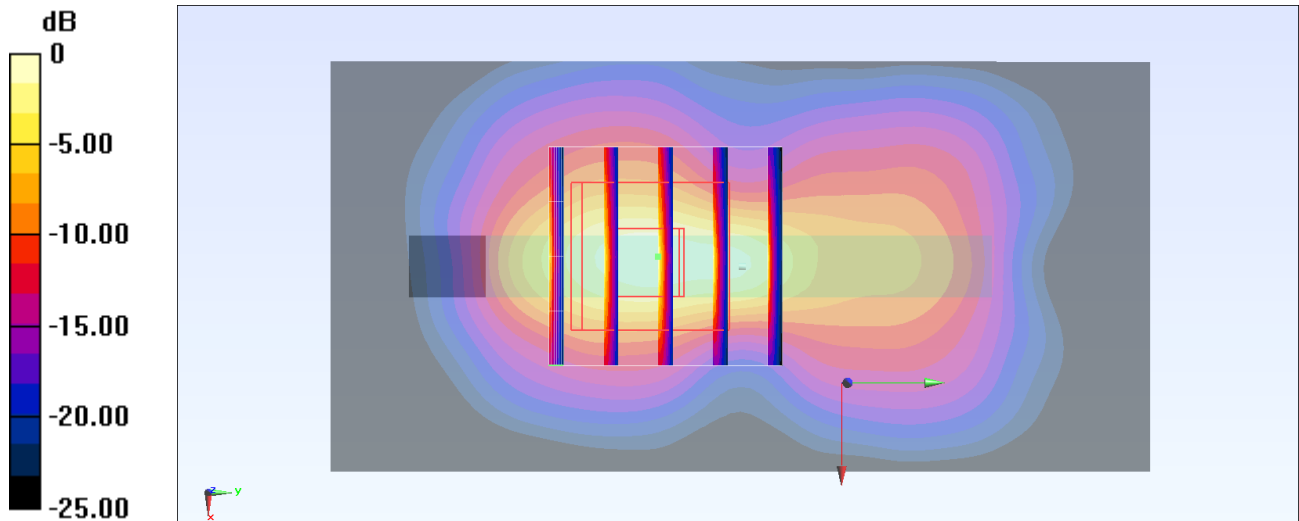

0 dB = 17.7 W/kg = 12.48 dBW/kg

#109_LTE Band 7_20M_QPSK_1_0_Right Side_0mm_Ch20850

Communication System: LTE; Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: HSL_2600_220430 Medium parameters used: $f = 2510$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 39.298$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.3, 7.3, 7.3) @ 2510 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2022/2/28
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (51x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 8.90 W/kg


Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.6 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 22.6 W/kg

SAR(1 g) = 6.96 W/kg; SAR(10 g) = 2.41 W/kg

Maximum value of SAR (measured) = 17.0 W/kg

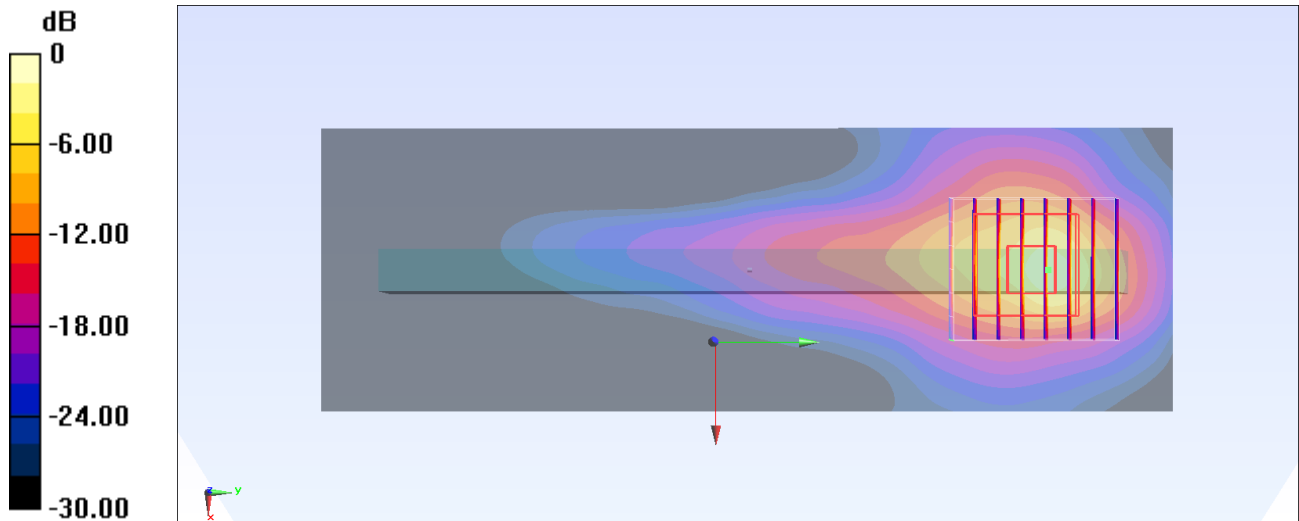

#110_LTE Band 25_20M_QPSK_1_0_Bottom Side_0mm_Ch26140

Communication System: LTE; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL_1900_220501 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 39.207$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.25, 8.25, 8.25) @ 1860 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2022/2/28
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.5 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 75.45 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 15.2 W/kg

SAR(1 g) = 6.32 W/kg; SAR(10 g) = 2.74 W/kg

Maximum value of SAR (measured) = 12.1 W/kg

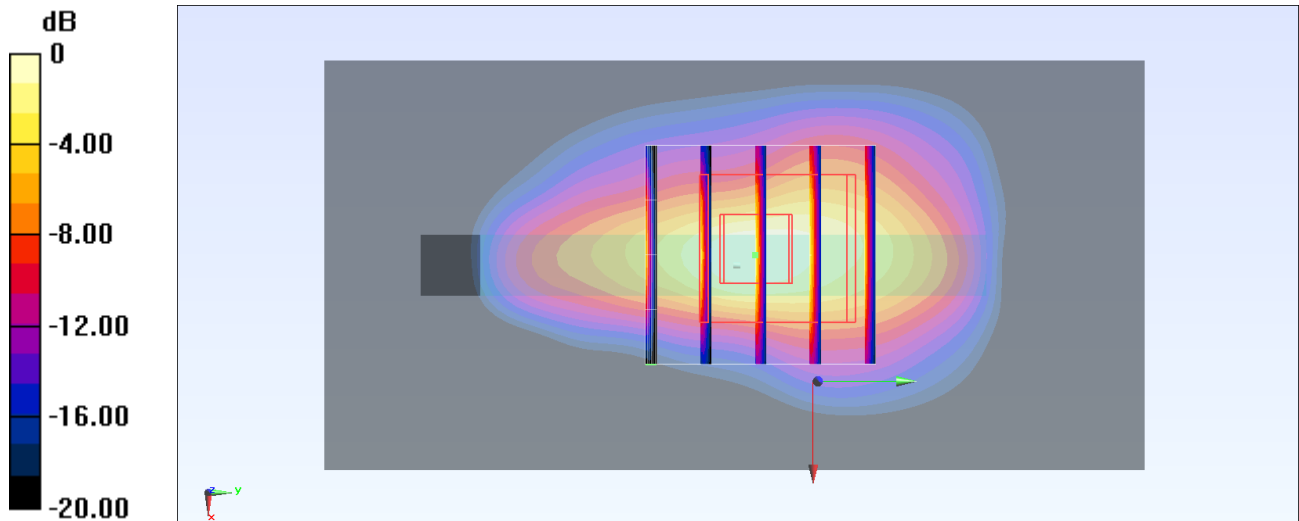

#111_LTE Band 30_10M_QPSK_1_0_Bottom Side_0mm_Ch27710

Communication System: LTE; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL_2300_220430 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.628$ S/m; $\epsilon_r = 40.173$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.77, 7.77, 7.77) @ 2310 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2022/2/28
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 10.3 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 72.88 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 21.4 W/kg

SAR(1 g) = 6.48 W/kg; SAR(10 g) = 2.73 W/kg

Maximum value of SAR (measured) = 14.0 W/kg

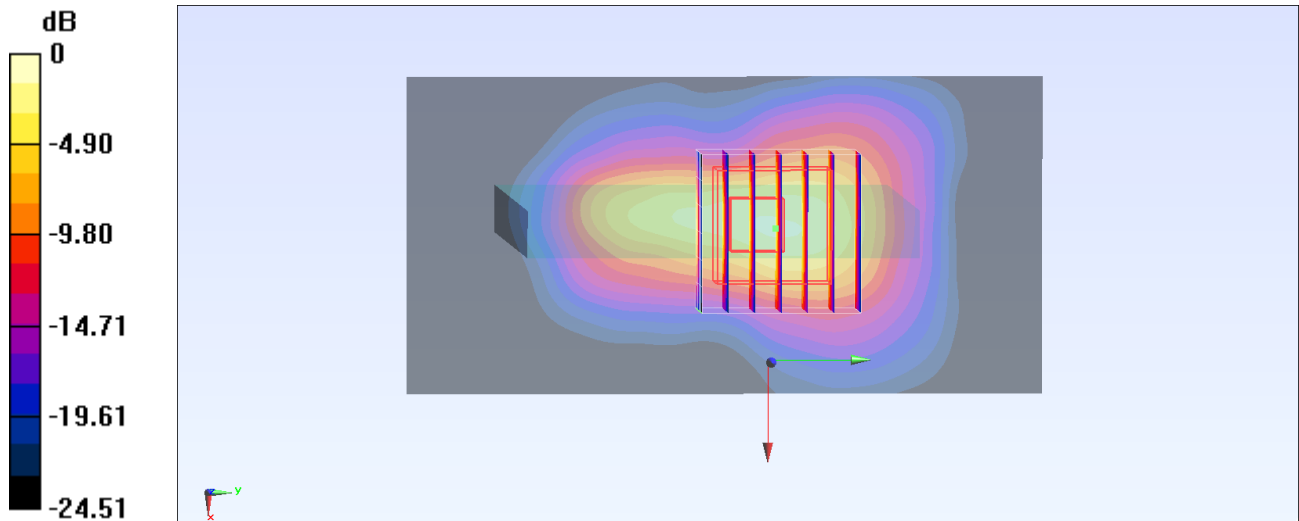

0 dB = 14.0 W/kg = 11.46 dBW/kg

#112_LTE Band 66_20M_QPSK_1_0_Bottom Side_0mm_Ch132572

Communication System: LTE; Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: HSL_1750_220501 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 39.685$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.6, 8.6, 8.6) @ 1770 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2022/2/28
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 8.71 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 66.52 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 11.1 W/kg

SAR(1 g) = 4.76 W/kg; SAR(10 g) = 2.16 W/kg

Maximum value of SAR (measured) = 8.81 W/kg

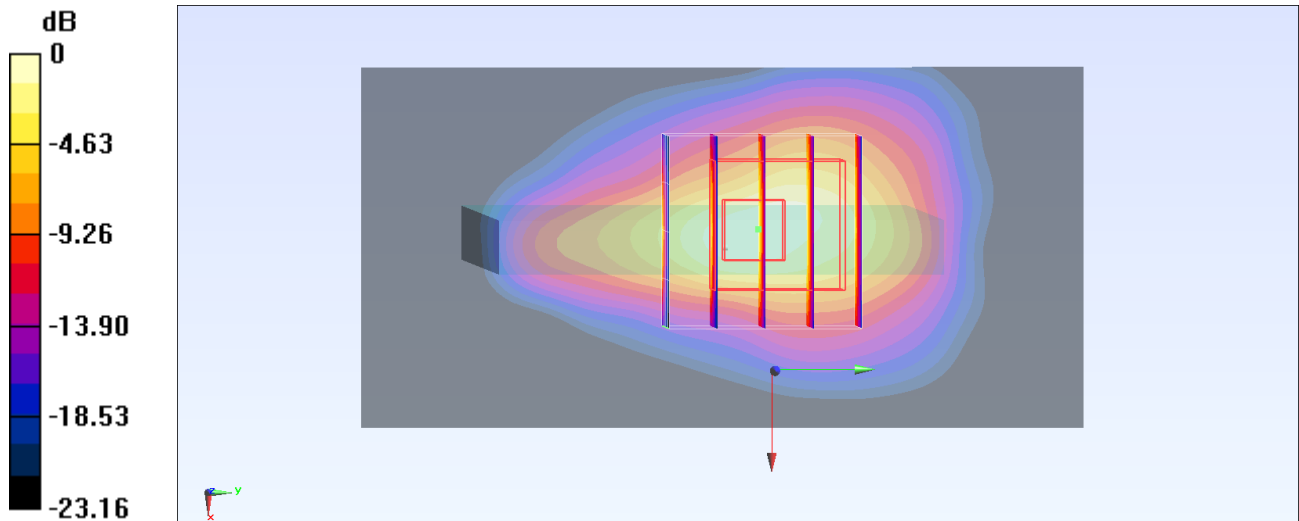

0 dB = 8.81 W/kg = 9.45 dBW/kg

#113_LTE Band 41_20M_QPSK_1_0_Bottom Side_0mm_Ch41055

Communication System: LTE; Frequency: 2636.5 MHz; Duty Cycle: 1:2.33

Medium: HSL_2600_220429 Medium parameters used: $f = 2636.5$ MHz; $\sigma = 1.985$ S/m; $\epsilon_r = 38.439$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.3, 7.3, 7.3) @ 2636.5 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2022/2/28
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.56 W/kg


Zoom Scan (7x11x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 42.11 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 8.24 W/kg

SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.07 W/kg

Maximum value of SAR (measured) = 5.93 W/kg

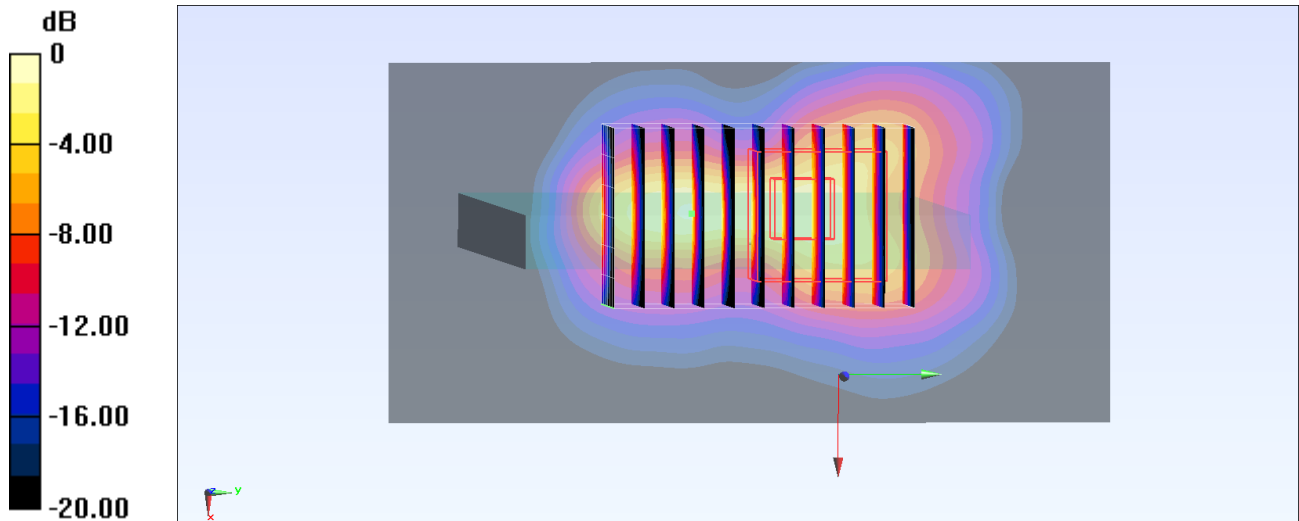

0 dB = 5.93 W/kg = 7.73 dBW/kg

#114_FR1 n2_20M_BPSK_1_53_Top Side_0mm_Ch372000

Communication System: NR; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL_1900_220422 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 39.442$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.25, 8.25, 8.25) @ 1860 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2022/2/28
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 6.85 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 63.43 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 15.9 W/kg

SAR(1 g) = 5.72 W/kg; SAR(10 g) = 2.39 W/kg

Maximum value of SAR (measured) = 12.8 W/kg

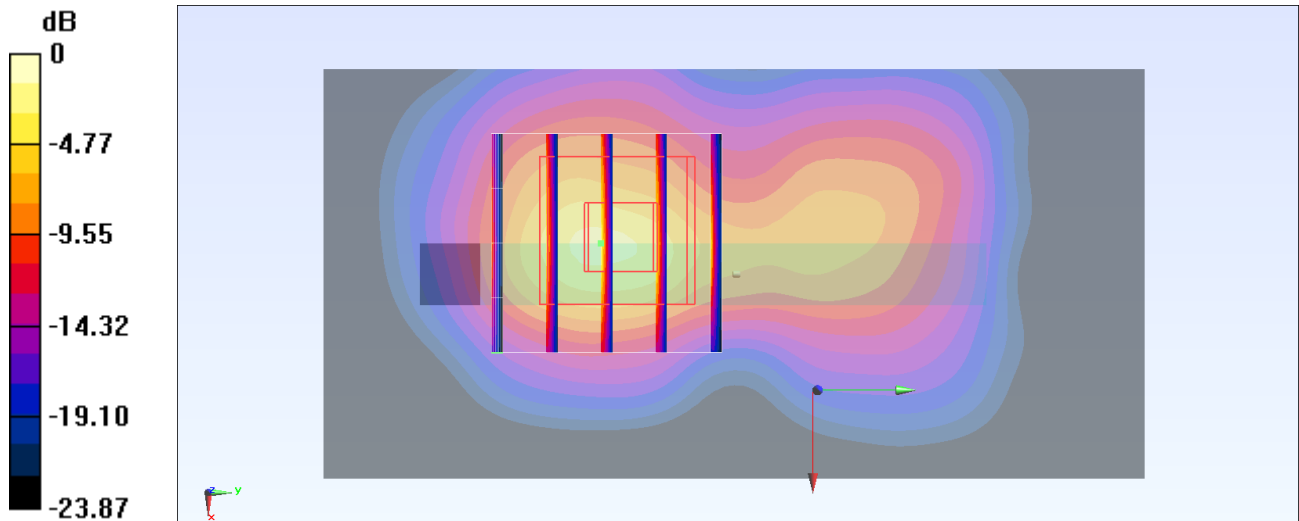

0 dB = 12.8 W/kg = 11.07 dBW/kg

#115_FR1 n7_50M_BPSK_1_1_Right Side_0mm_Ch507000

Communication System: NR; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL_2600_220424 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.863$ S/m; $\epsilon_r = 38.357$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.3, 7.3, 7.3) @ 2535 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2022/2/28
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (51x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 8.40 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.4 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 23.3 W/kg

SAR(1 g) = 7.19 W/kg; SAR(10 g) = 2.48 W/kg

Maximum value of SAR (measured) = 16.0 W/kg

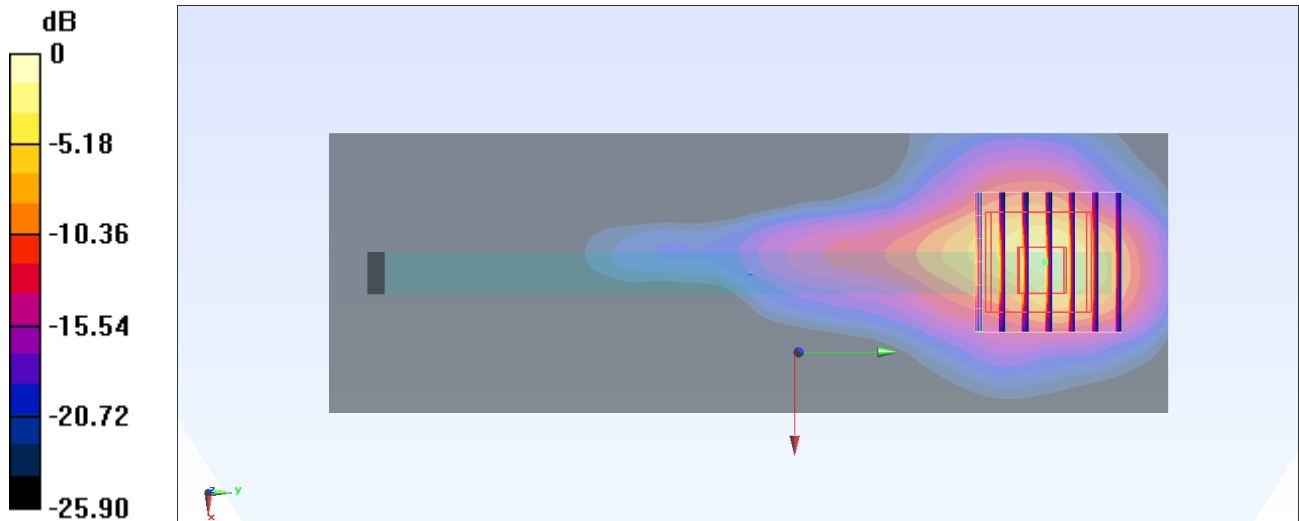

0 dB = 16.0 W/kg = 12.04 dBW/kg

#116_FR1 n30_10M_BPSK_1_26_Bottom Side_0mm_Ch462000

Communication System: NR; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL_2300_220424 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.604$ S/m; $\epsilon_r = 39.138$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.77, 7.77, 7.77) @ 2310 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2022/2/28
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 8.85 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.63 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 15.7 W/kg

SAR(1 g) = 4.91 W/kg; SAR(10 g) = 2.06 W/kg

Maximum value of SAR (measured) = 10.2 W/kg

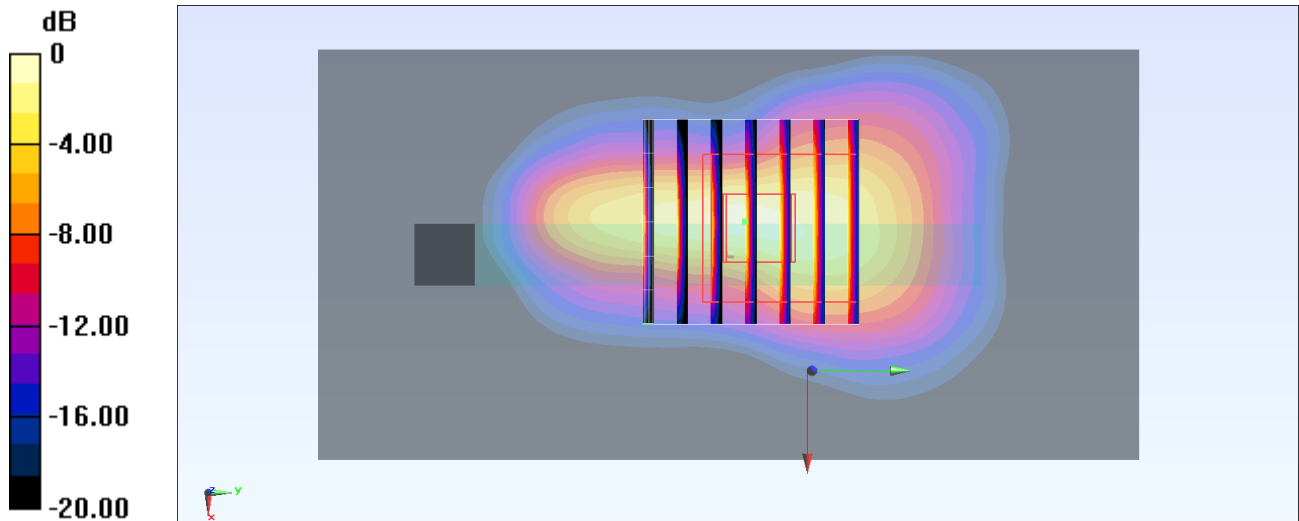

0 dB = 10.2 W/kg = 10.09 dBW/kg

#117_FR1 n66_40M_BPSK_1_108_Bottom Side_0mm_Ch349000

Communication System: NR; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL_1750_220423 Medium parameters used : $f = 1745$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 39.715$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.6, 8.6, 8.6) @ 1745 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2022/2/28
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 9.19 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 77.92 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 12.0 W/kg

SAR(1 g) = 4.53 W/kg; SAR(10 g) = 2.07 W/kg

Maximum value of SAR (measured) = 8.86 W/kg

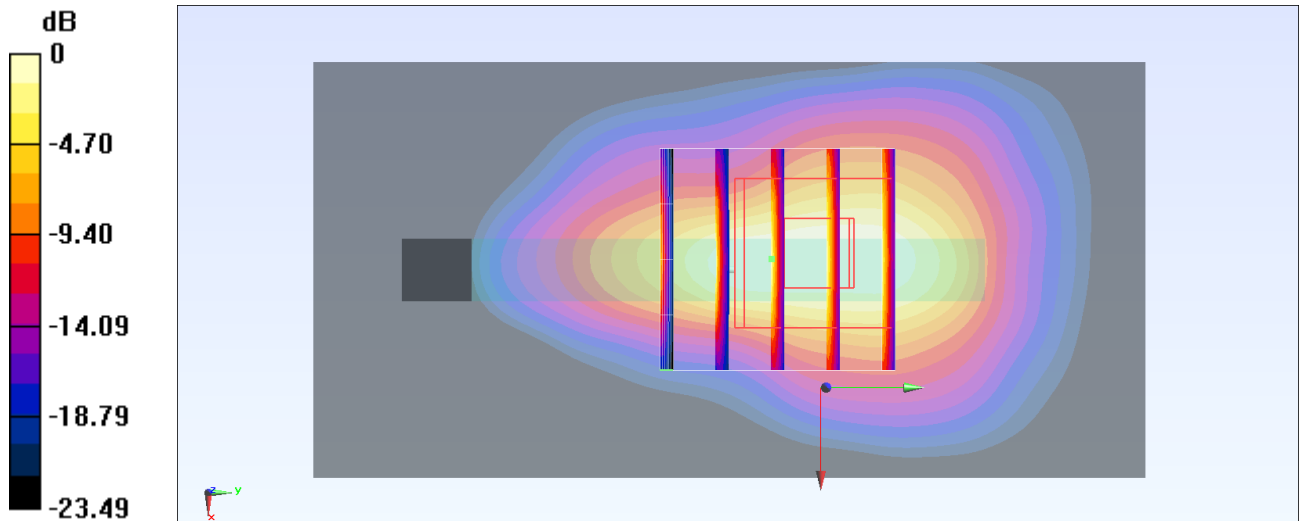

0 dB = 8.86 W/kg = 9.47 dBW/kg

#463_FR1 n41_100M_BPSK_1_1_Bottom Side_0mm_Ch518598

Communication System: NR; Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL_2600_220428 Medium parameters used: $f = 2592.99$ MHz; $\sigma = 2.034$ S/m; $\epsilon_r = 38.585$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.3, 7.3, 7.3) @ 2592.99 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2022/2/28
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.50 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.02 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 14.0 W/kg

SAR(1 g) = 3.92 W/kg; SAR(10 g) = 1.65 W/kg

Maximum value of SAR (measured) = 9.01 W/kg

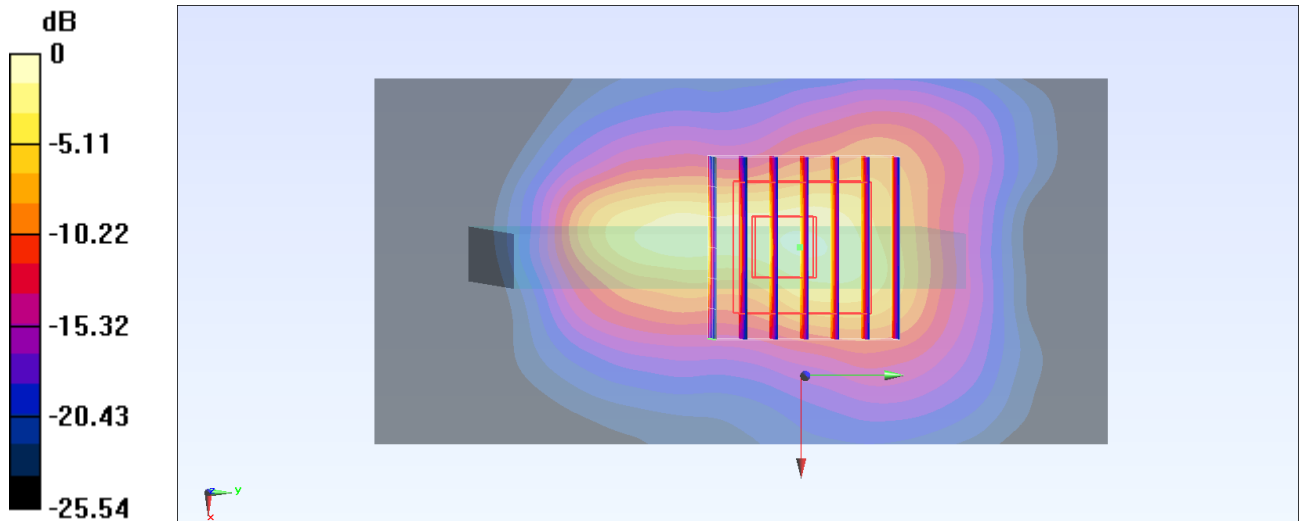

0 dB = 9.01 W/kg = 9.55 dBW/kg

#119_WLAN5GHz_802.11a 6Mbps_Left Side_0mm_Ch52;Ant 4+3

Communication System: 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1.073

Medium: HSL_5G_220426 Medium parameters used: $f = 5260$ MHz; $\sigma = 4.793$ S/m; $\epsilon_r = 36.863$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(5.45, 5.45, 5.45) @ 5260 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1696; Calibrated: 2021/11/3
- Phantom: PlaP2a Twin-SAM_V4.0_(30deg)_Right; Type: QD 000 P40 CC; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 33.2 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 64.26 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 75.3 W/kg

SAR(1 g) = 9.92 W/kg; SAR(10 g) = 2.27 W/kg

Maximum value of SAR (measured) = 33.0 W/kg

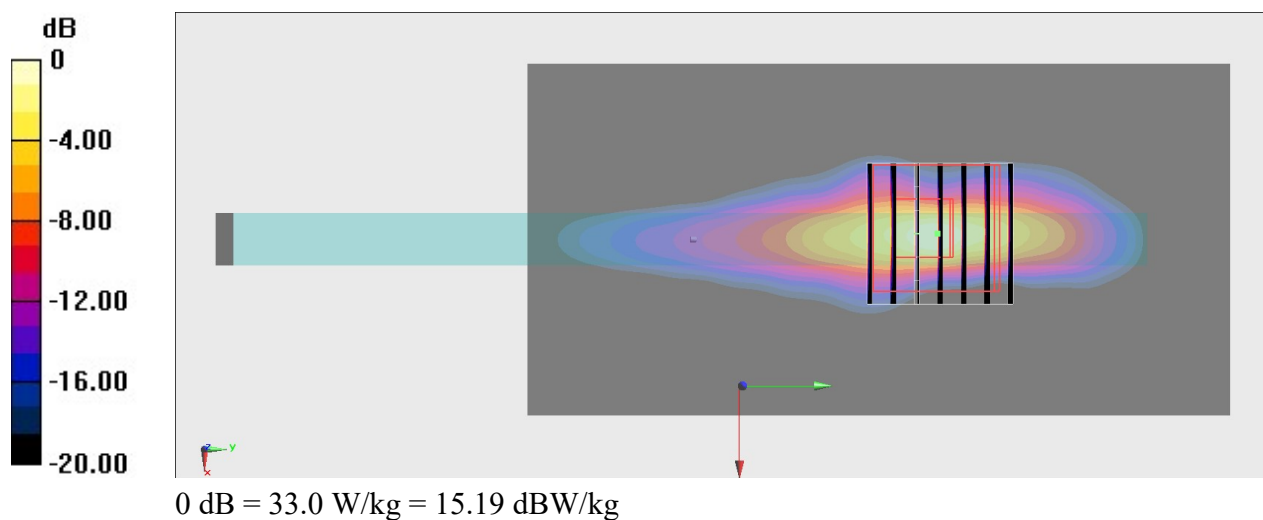

#120_WLAN5GHz_802.11ac-VHT80 MCS0_Left Side_0mm_Ch122;Ant 4+3

Communication System: 802.11ac; Frequency: 5610 MHz; Duty Cycle: 1:1.137

Medium: HSL_5G_220510 Medium parameters used : $f = 5610$ MHz; $\sigma = 5.08$ S/m; $\epsilon_r = 35.607$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.85, 4.85, 4.85) @ 5610 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1696; Calibrated: 2021/11/3
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 16.9 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 39.60 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 81.3 W/kg

SAR(1 g) = 8.74 W/kg; SAR(10 g) = 1.9 W/kg

Maximum value of SAR (measured) = 28.0 W/kg

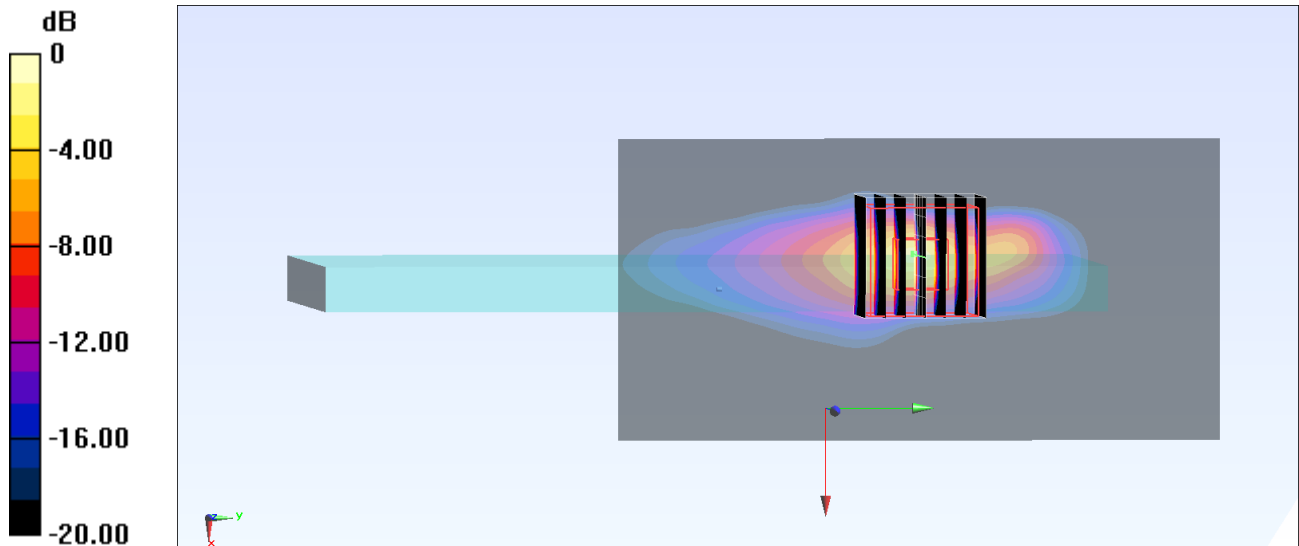

0 dB = 28.0 W/kg = 14.47 dBW/kg

#121_WLAN5GHz_802.11ac-VHT160 MCS0_Left Side_0mm_Ch163;Ant 4+3

Communication System: 802.11ac; Frequency: 5815 MHz; Duty Cycle: 1:1.149

Medium: HSL_5G_220425 Medium parameters used: $f = 5815$ MHz; $\sigma = 5.219$ S/m; $\epsilon_r = 35.162$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.93, 4.93, 4.93) @ 5815 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1696; Calibrated: 2021/11/3
- Phantom: PlaP2a_Twin-SAM_V4.0_(30deg)_Right; Type: QD 000 P40 CC; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 14.2 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 32.85 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 73.2 W/kg

SAR(1 g) = 8.08 W/kg; SAR(10 g) = 1.71 W/kg

Maximum value of SAR (measured) = 32.5 W/kg

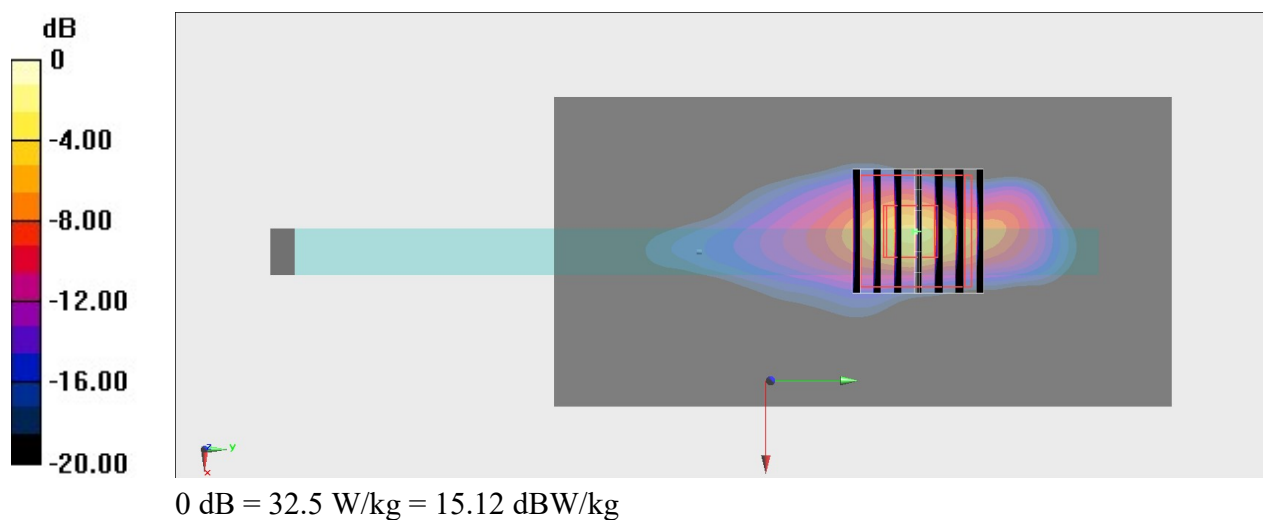

122_WLAN6GHz_802.11ax-HE160 MCS0_Left Side_0mm_Ch207

Communication System: U-NII-8; Frequency: 6985.0

Medium: HSL_6G_220427. Medium parameters used: $f = 6985.0$ MHz; $\sigma = 6.62$ S/m; $\epsilon_r = 33.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(5.0, 5.0, 5.0); Calibrated: 2022-03-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn699; Calibrated: 2022-02-24
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1488; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10743-AAC
- MAIA: Area Scan: N/A; Zoom Scan: N/A

Area Scan (51.0 mm x 119.0 mm): Measurement Grid: 8.5 mm x 8.5 mm


SAR (1g) = 1.72 W/kg; SAR (10g) = 0.387 W/kg;

Zoom Scan (23.8 mm x 23.8 mm x 22.0 mm): Measurement Grid: 2.7 mm x 2.7 mm x 1.2 mm

Power Drift = -0.19 dB

SAR (1g) = 1.65 W/kg; SAR (8g) = 0.433 W/kg; SAR (10g) = 0.363 W/kg;

psAPD (1.0cm², sq) = 16.5 [W/m²]; psAPD (4.0cm², sq) = 8.66 [W/m²]

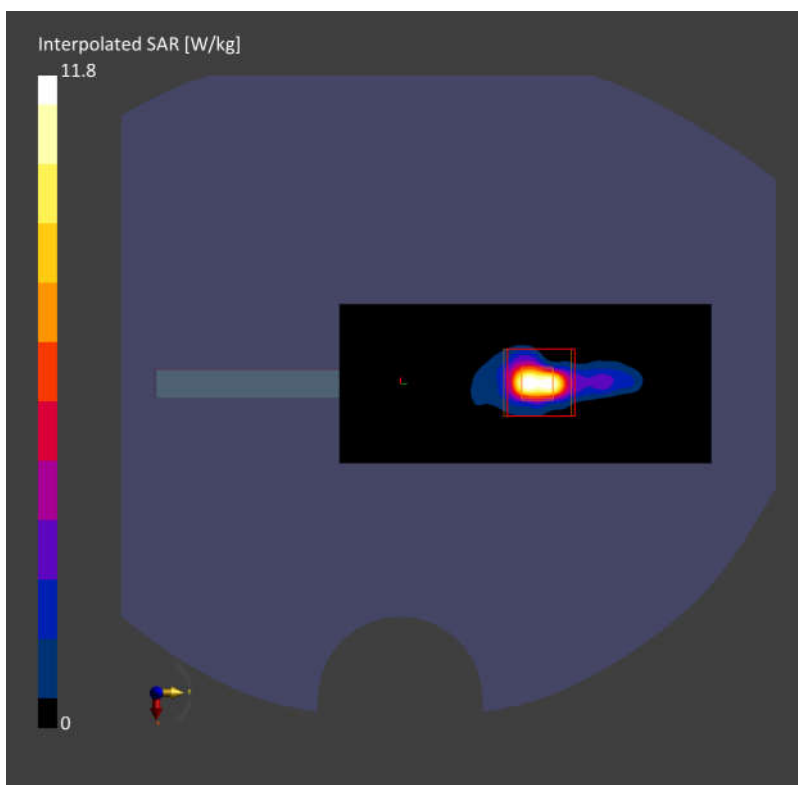

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device	156.0 x 77.0 x 9.0		Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	EDGE LEFT, 2.00	6505.0	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV4 – SN9461_F1–55GHz, 2021–10–22	DAE4 Sn699, 2022–02–24

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	60.0 x 90.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Date	2022–04–14, 06:03
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.68
psPDtot+ [W/m ²]	3.66
H _{max} [A/m]	0.150
E _{max} [V/m]	69.9
max _(Stot) [W/m ²]	7.18
Power Drift [dB]	0.05

