

Page: 1 of 346

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART E REQUIREMENT

OF

silex technology, Inc. Applicant:

2-3-1 Hikaridai, Seika-cho, Souraku-gun, Kyoto 619-0237, Japan

Product Name: SX-SDMAC2

Brand Name: silex technology, Inc.

Marketing Name: Wireless Embedded Module

Model No.: SX-SDMAC2

Model Difference: N/A

Report Number: T190321W03-RP4

FCC ID: N6C-SDMAC2 **FCC Rule Part:** §15.407, Cat: NII

Issue Date: Jul. 05, 2019

Date of Test: Mar. 21, 2019 ~ Jun. 06, 2019

Date of EUT Received: Mar. 21, 2019

Compliance Certification Services Inc. Wugu Lab.

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. Issued by

(R.O.C.)

service@ccsrf.com

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report. The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Tested By:

Jerry Lu / Sr. Engineer

Approved By:

Kevin Tsai / Deputy Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 2 of 346

Revision History

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
T190321W03-RP4	Rev.00	Initial creation of docu- ment	All	Jun. 19, 2019	Violetta Tang
T190321W03-RP4	Rev.01	Update description of test plots	62~341	Jul. 05, 2019	Violetta Tang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 3 of 346

Table of Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	8
3	SUMMARY OF TEST RESULT	10
4	DESCRIPTION OF TEST MODES	11
5	MEASUREMENT UNCERTAINTY	16
6	CONDUCTED EMISSION TEST	16
7	DUTY CYCLE TEST SIGNAL	21
8	26dB & 6dB EMISSION BANDWIDTH MEASUREMENT	24
9	MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	42
10	MAXIMUM POWER SPECTRAL DENSITY	46
11	UNDESIRABLE RADIATED EMISSION MEASUREMENT	50
12	TRANSMISSION IN THE ABSENCE OF DATA	342
13	FREQUENCY STABILITY	343
14	ANTENNA REQUIREMENT	346

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 4 of 346

GENERAL INFORMATION

Product Description

Product Name:	SX-SDMAC2	
Brand Name:	silex technology, Inc.	
Marketing Name:	Wireless Embedded Module	
Model No.:	SX-SDMAC2	
Model Difference:	N/A	
Hardware Version:	N/A	
Software Version:	N/A	
Power Supply:	3.3Vdc	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 5 of 346

WLAN 802.11	Frequency Range	Channels	Rated Power (Avg.) (dBm)	Modulation Technology
5150~5250		4	16.81 (2TX)	
	5250~5350	4	18.94 (2TX)	OFDM
а	5470~5725	11	18.65 (2TX)	OFDIVI
	5725-5850	5	18.96 (2TX)	
	5150~5250	4	HT: 16.79 (MIMO-CDD)	
n_HT	5250~5350	4	HT: 18.48 (MIMO-CDD)	OFDM
ac_VHT 20M	5470~5725	11	HT: 18.26 (MIMO-CDD)	OFDIVI
	5725-5850	5	HT: 18.49 (MIMO-CDD)	
	5150~5250	2	HT: 17.37 (MIMO-CDD)	
n_HT ac VHT	5250~5350	2	HT: 17.31 (MIMO-CDD)	OFDM
40M	5470~5725	5	HT: 17.36 (MIMO-CDD)	OFDIVI
	5725-5850		HT: 17.28 (MIMO-CDD)	
	5150~5250	1	10.81 (MIMO-CDD)	
ac_VHT	5250~5350	1	14.81 (MIMO-CDD)	OFDM
80M	5470~5725	2	17.37 (MIMO-CDD)	OFDIVI
	5725~5850	1	16.24 (MIMO-CDD)	
Modulation type		64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 802.11ac only		
		802.11 a: 6/9/12/18/24/36/48/54 Mbps 802.11 n_20MHz: 6.5 – 144.4Mbps		
Transition Rate:		802.11 n_40MHz: 13.5 - 300.0Mbps 802.11 ac 20MHz: 6.5 -173.3Mbps		
		802.11 ac_4	0MHz: 0.5 – 173.3Mbps 0MHz: 13.5 –400.0Mbps 0MHz: 29.3 – 866.7Mbps	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 6 of 346

1.2 **Antenna Designation**

Antenna Type	Supplier	Antenna Part No.	Freq. (MHz)	Peak Antenna Gain (dBi)	Worst Antenna Gain
PCB	Unictron	H2B1PC1A1C (AA258)	5GHz	4.4	
PCB	Unictron	H2B1PD1A1C (AA222)	5GHz	4.2	
PCB	molex	146153	5GHz	5	V
Dipole	Sansei Denki	ANTDC-081A0/B0	5GHz	2	V
Dipole	Sansei Denki	ANTDP-027A0	5GHz	0.8	
Dipole	Sansei Denki	ANTDP-039A0	5GHz	0.8	

Note: Pre-scanned was done on the above 6 antennas, the PCB (146153) & the Dipole (ANTDC-081A0/B0) results higher emission at 5GHz. Therefore, the completed set of measurement was done on both antennas to be presented on this test report.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 7 of 346

1.3 Test Methodology of Applied Standards

FCC Part 15, Subpart E §15.407

FCC KDB 789033 D02 General UNII Test Procedures New Rules V02r01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.4 Test Facility

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309)

FCC Designation number: TW1309

1.5 Special Accessories

There are no special accessories used while test was conducted.

1.6 **Equipment Modifications**

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 8 of 346

SYSTEM TEST CONFIGURATION

EUT Configuration 2.1

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 **EUT Exercise**

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 **Test Procedure**

2.3.1 **Conducted Emissions**

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Conducted Test (RF)

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

2.3.3 **Radiated Emissions**

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Note:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 9 of 346

2.5 **Configuration of Tested System** Fig. 2-1 Radiated Emission

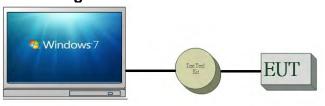


Fig 2-2 Conducted (Antenna Port) Configuration

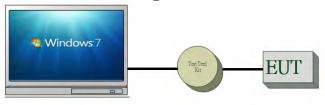


Fig 2-3 Conduction (AC Power Line)




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	WLAN Test Software	N/A	N/A	N/A	N/A	N/A
2.	Notebook	N/A	N/A	N/A	N/A	N/A
3.	Test Tool Kit	N/A	N/A	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧



Page: 10 of 346

SUMMARY OF TEST RESULT

FCC Rules	Description Of Test	Result
§15.207	AC Power Line Conducted Emission	Compliant
§15.403(i) §15.407(e)	26 dB & 6dB Emission Bandwidth	Compliant
§15.407(a)	Maximum Conducted Output Power	Compliant
§15.407(a)	Power Spectral Density	Compliant
§15.205 §15.209 §15.407(b)	Undesirable Radiated Emissions	Compliant
§15.407(c)	Transmission in case of Absence of Information	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.203 §15.407(a)	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 11 of 346

DESCRIPTION OF TEST MODES

4.1 Operated in U-NII Bands

Operated band in 5150 MHz ~5250 MHz:

operated band in order in			
802.11a / n HT20 Mode,			
802.11ac VHT20 Mode			
Channel	Frequency		
36	5180		
40	5200		
44	5220		
48	5240		

802.11 n HT40 Mode, 802.11ac VHT40 Mode			
channel Frequency			
38	5190		
46	5230		

802.11ac VHT80 Mode		
channel	Frequency	
42 5210		

Operated band in 5250 MHz ~5350 MHz:

802.11a / n HT20 Mode, 802.11ac VHT20 Mode			
channel	Frequency		
52	5260		
56 5280			
60	5300		
64 5320			

802.11 n HT40 Mode, 802.11ac VHT40 Mode			
channel Frequency			
54 5270			
62 5310			

802.11ac V	HT80 Mode
Channel	Frequency
58	5290

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 12 of 346

Operated band in 5470 MHz ~5725 MHz:

Operated band in 5470 Min		
802.11a / n HT20 Mode, 802.11ac VHT20 Mode		
802.11ac v	H120 Mode	
Channel	Frequency	
100	5500	
104	5520	
108	5540	
112	5560	
116	5580	
120	5600	
124	5620	
128	5640	
132	5660	
136	5680	
140	5700	

802.11 n HT40 Mode, 802.11ac VHT40 Mode			
channel	Frequency		
102	5510		
110	5550		
118	5590		
126	5630		
134	5670		

802.11ac VHT80 Mode		
channel	Frequency	
106	5530	
122	5610	

Operated band in 5745 MHz ~5850 MHz:

802.11a / n HT20 Mode, 802.11ac VHT20 Mode		
Channel	Frequency	
149	5745	
153	5765	
157	5785	
161	5805	
165	5825	

802.11 n HT40 Mode, 802.11ac VHT40 Mode		
channel	Frequency	
151	5755	
159	5795	

802.11ac VHT80 Mode		
channel	Frequency	
155	5775	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 13 of 346

4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting mode is programmed.
- 3. Investigation has been done on all the possible configurations for searching the worst case. The gevin UE is pre-scanned among below modes.

Modulation	Transmission Chain		Multiple Transmission Spatial
⊠ 802.11 a	⊠ Ch0	⊠ Ch1	⊠ 2TX
⊠ 802.11 n	⊠ Ch0	⊠ Ch1	⊠ MIMO
⊠ 802.11 ac	⊠ Ch0	⊠ Ch1	⊠ MIMO

4. Therefore, below summary is the modes of test configuration that yield the highest reading and generate the highest emission chosen to carry out the relevantly mandatory test items.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 14 of 346

AC POWER LINE CONDUCTED EMISSION TEST:

Test Condition	AC Power line conducted emission for line and neutra	
Worst Case	Operation in normal mode	

DIATED EMICCION TECT

RADIATED EMISSION TEST:						
RADIATED EMISSION TEST (BELOW 1 GHz)						
MODE	FREQUENCY	AVAILABLE	TESTED	MODULATION	DATA RATE	ANTENNA
MODE	BAND (MHz)	CHANNEL	CHANNEL	WIODULATION	(Mbps)	PORT
802.11a	5180~5240	36 to 48	44	OFDM	6	2TX
802.11ac_VHT80	5210	42	42	OFDM	MCS0	MIMO
802.11a	5260~5320	52 to 64	60	OFDM	6	2TX
802.11ac_VHT80	5290	58	58	OFDM	MCS0	MIMO
802.11a	5500~5700	100 to 140	116	OFDM	6	2TX
802.11ac_VHT80	5530~5610	106 to 138	122	OFDM	MCS0	MIMO
802.11a	5745~5825	149 to 165	157	OFDM	6	2TX
802.11ac_VHT80	5775	155	155	OFDM	MCS0	MIMO
	RADI	ATED EMISS	SION TEST (AE	BOVE 1 GHz)		
MODE	FREQUENCY	AVAILABLE	TESTED	MODULATION	DATA RATE	ANTENNA
INIODE	BAND (MHz)	CHANNEL	CHANNEL	- MODULATION	(Mbps)	PORT
802.11a	5180~5240	36 to 48	36,44,48	OFDM	6	2TX
802.11n_HT20	3100~3240	30 10 40	30,44,40	OFDM	MCS8	MIMO
802.11n_HT40	5190~5230	38 to 46	38,46	OFDM	MCS8	MIMO
802.11ac_VHT80	5210	42	42	OFDM	MCS0	MIMO
802.11a	5260~5320	52 to 64	52,60,64	OFDM	6	2TX
802.11n_HT20			32,00,04	OFDM	MCS8	MIMO
802.11n_HT40	5270~5310	54 to 62	54,62	OFDM	MCS8	MIMO
802.11ac_VHT80	5290	58	58	OFDM	MCS0	MIMO
802.11a	5500~5700)~5700 100 to 140 1	100,116,140	OFDM	6	2TX
802.11n_HT20				OFDM	MCS8	MIMO
802.11n_HT40	5510~5670	102 to 134	102,110,134	OFDM	MCS8	MIMO
802.11ac_VHT80	5530~5610	106 to 122	106,122	OFDM	MCS0	MIMO
802.11a	5745~5825	149 to 165	149,157,165	OFDM	6	2TX
802.11n_HT20			, ,	OFDM	MCS8	MIMO
802.11n_HT40	5755~5795	151 to 159	151,159	OFDM	MCS8	MIMO
802.11ac_VHT80	5775	155	155	OFDM	MCS0	MIMO

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11a/n/ac WLAN Transmitter for channel Low, Mid and High, the worst case H position was reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧



Page: 15 of 346

ANTENNA PORT CONDUCTED MEASUREMENT:

ARTERNATOR	ANTENNA PORT CONDUCTED MEASUREMENT.					
CONDUCTED TEST						
MODE	FREQUENCY BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT
802.11a	F400 F040	26 to 49	26 44 49	OFDM	6	2TX
802.11n_HT20	5180~5240	36 to 48	36,44,48	OFDM	MCS8	MIMO
802.11n_HT40	5190~5230	38 to 46	38,46	OFDM	MCS8	MIMO
802.11ac_VHT80	5210	42	42	OFDM	MCS0	MIMO
802.11a	F060 F000	52 to 64	0.1- 0.4	OFDM	6	2TX
802.11n_HT20	5260~5320	52 10 04	52,60,64	OFDM	MCS8	MIMO
802.11n_HT40	5270~5310	54 to 62	54,62	OFDM	MCS8	MIMO
802.11ac_VHT80	5290	58	58	OFDM	MCS0	MIMO
802.11a	5500~5700 10	100 to 110	100,116,140	OFDM	6	2TX
802.11n_HT20	5500~5700	100 to 140	100,116,140	OFDM	MCS8	MIMO
802.11n_HT40	5510~5670	102 to 134	102,110,134	OFDM	MCS8	MIMO
802.11ac_VHT80	5530~5610	106 to 122	106,122	OFDM	MCS0	MIMO
802.11a	5745~5825 149 to 165	140 to 165	149,157,165	OFDM	6	2TX
802.11n_HT20	3743~3623	149 to 165		OFDM	MCS8	MIMO
802.11n_HT40	5755~5795	151 to 159	151,159	OFDM	MCS8	MIMO
802.11ac_VHT80	5775	155	155	OFDM	MCS0	MIMO

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 16 of 346

MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575 dB
26dB & 6dB Emission Bandwidth	+/- 147.256 Hz
The Maximum Output Power	+/- 2.128 dB
Peak Power Spectral Density	+/- 2.878 dB
Frequency Stability	+/- 147.256 Hz
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12 dB
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68 dB
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18 dB
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47 dB
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81 dB
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87 dB

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.
- 3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧



Page: 17 of 346

CONDUCTED EMISSION TEST

Standard Applicable 6.1

Frequency range within 150 kHz to 30 MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)			
MHz	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

Note

6.2 **Measurement Equipment Used**

EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
CABLE	EMCI	CFD300-NL	CERF	06/29/2018	06/28/2019
EMI Test Receiver	R&S	ESCI	100064	07/24/2018	07/23/2019
LISN	SCHWARZBECK	NSLK 8127	8127-541	01/31/2019	01/30/2020
LISN	SCHAFFNER	NNB 41	03/10013	02/13/2019	02/12/2020
Software	EZ-EMC(CCS-3A1-CE)				

6.3 **EUT Setup**

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The rear of the EUT and peripherals were placed flushed with the rear of the table top.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


^{1.} The lower limit shall apply at the transition frequencies

^{2.} The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50



Page: 18 of 346

6.4 Test SET-UP

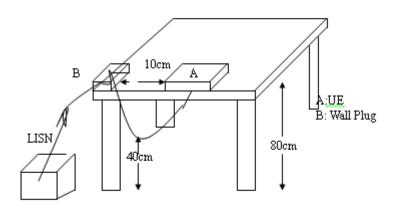

6.5 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed.

6.6 Measurement Result

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 19 of 346

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation 2019/5/24 **Description:** Date: Temp.(°C)/Hum.(%): L1 Line: 23.8(°C)/59% Test Voltage: AC 120V/60Hz Peter Test By:

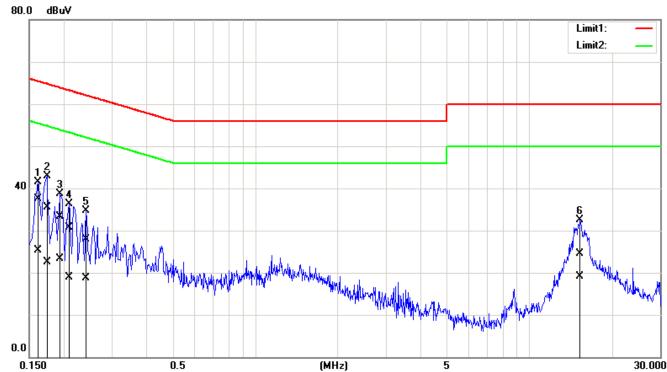

No.	Fre- quency	Qua- siPeak reading	Average reading	Cor- rection factor	Qua- siPeak result	Average result	Qua- siPeak limit	Average limit	Qua- siPeak margin	Aver- age margin	Re- mark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.1620	37.34	25.06	0.16	37.50	25.22	65.36	55.36	-27.86	-30.14	Pass
2	0.1740	35.42	22.30	0.16	35.58	22.46	64.76	54.77	-29.18	-32.31	Pass
3	0.1940	33.10	23.10	0.15	33.25	23.25	63.86	53.86	-30.61	-30.61	Pass
4	0.2100	30.62	18.80	0.15	30.77	18.95	63.20	53.21	-32.43	-34.26	Pass
5	0.2420	27.74	18.51	0.15	27.89	18.66	62.02	52.03	-34.13	-33.37	Pass
6	15.3460	24.01	18.55	0.59	24.60	19.14	60.00	50.00	-35.40	-30.86	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧




Page: 20 of 346

Description: 2019/5/24 Operation Date:

Temp.(°C)/Hum.(%): Line: 23.8(°C)/59%

Test Voltage: AC 120V/60Hz Peter Test By:

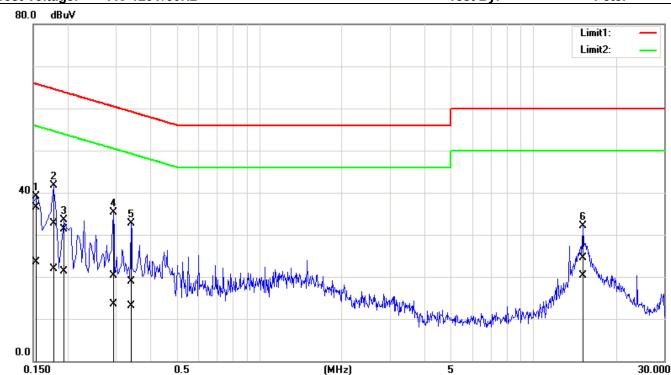

No.	Fre- quency	Qua- siPeak	Average reading	Cor- rection	Qua- siPeak	Average result	Qua- siPeak	Average limit	Qua- siPeak	Aver- age	Re- mark
	(MHz)	reading (dBuV)	(dBuV)	factor (dB)	result (dBuV)	(dBuV)	limit (dBuV)	(dBuV)	margin (dB)	margin (dB)	
1*	0.1539	36.32	23.38	0.10	36.42	23.48	65.78	55.79	-29.36	-32.31	Pass
2	0.1780	32.60	21.78	0.10	32.70	21.88	64.57	54.58	-31.87	-32.70	Pass
3	0.1940	31.28	21.13	0.10	31.38	21.23	63.86	53.86	-32.48	-32.63	Pass
4	0.2940	20.11	13.45	0.10	20.21	13.55	60.41	50.41	-40.20	-36.86	Pass
5	0.3420	18.71	13.02	0.11	18.82	13.13	59.15	49.15	-40.33	-36.02	Pass
6	15.1460	23.98	19.83	0.47	24.45	20.30	60.00	50.00	-35.55	-29.70	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧



Page: 21 of 346

DUTY CYCLE TEST SIGNAL

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

Formula:

Duty Cycle = Ton / (Ton+Toff)

Measurement Procedure:

- 1. Set span = Zero
- 2. RBW = 8MHz
- 3. VBW = 8MHz,
- 4. Detector = Peak

Duty Cycle:

Mode	Duty Cycle (%)	Duty Factor (dB) =10*log (1/Duty Cycle)	1/T (kHz)	VBW setting (kHz)
802.11a	93.24	0.30	0.48	1.00
802.11n_20	94.05	0.27	0.52	1.00
802.11n_40	90.71	0.42	1.05	2.00
802.11ac_80	76.44	1.17	2.16	3.00

Duty Cycle Factor: $10 * \log(1/0.9324) = 0.3$ Duty Cycle Factor: $10 * \log(1/0.9405) = 0.27$ Duty Cycle Factor: $10 * \log(1/0.9071) = 0.42$ Duty Cycle Factor: $10 * \log(1/0.7644) = 1.17$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 22 of 346

DUTY CYCLE TEST SIGNAL MEASUREMENT RESULT 802.11a



802.11n HT20



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 23 of 346

802.11n HT 40



802.11 ac VHT 80



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 24 of 346

26DB & 6DB EMISSION BANDWIDTH MEASUREMENT

8.1 Standard Applicable

There is no limit bandwidth for U-NII-1, U-NII-2-A and U-NII-2-C. The minimum of 6dB Bandwidth measurement is 0.5 MHz for U-NII-3

8.2 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the Antenna port to the spectrum analyzer.
 - a. 26dB Band width Measurement: Set the spectrum analyzer as 1% of emission BW Sweep=auto, Detector = Peak, Trace Mode = Max Hold, Manually readjust RBW until the RBW/EBW ratio is 1% based on EBW as observed on the result of pre-sequence measurement.
 - b. Mark the peak frequency and -26dB (upper and lower) frequency.
- 4. Repeat the procedures as list above until all test default channels (low, middle, and high) are completed.
- 5. Minimum Emission Bandwidth for the band 5.725-5.850GHz.
 - a. Set the spectrum analyzer as RBW = 100 kHz, VBW = 3*RBW, Span = 30M/50MHz, Detector=Peak,
 - Sweep=auto
 - b. Mark the peak frequency and -6dB (upper and lower) frequency.
- 6. Repeat above procedures until all frequency of interest measured was complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Page: 25 of 346

8.3 **Measurement Equipment Used**

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
PXA Spectrum Analyzer	Agilent	N9030A	MY53120760	04/22/2019	04/21/2020
Thermo- static/Hrgrosatic Chamber	TAICHY	MHG-150LF	930619	10/08/2018	10/07/2019
DC Block	Mini-Circuits	BLK-18-S+	31129(1)	02/26/2019	02/25/2020
Attenuator	Mini-Circuit	BW-S10W2+	1	02/26/2019	02/25/2020
Attenuator	Mini-Circuit	BW-S10W2+	3	02/26/2019	02/25/2020

8.4 **Test Set-up**



8.5 **Measurement Result** 26dB Bandwidth

802.11a Ch0

802.	11a	Ch1

002.11a_0110			002.11a_0111			
Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)	Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)	
5180	18.49	12.668	5180	18.58	12.691	
5220	18.65	12.706	5220	20.09	13.030	
5240	18.52	12.677	5240	19.72	12.950	
5260	18.65	12.706	5260	18.08	12.572	
5300	18.48	12.667	5300	18.30	12.625	
5320	18.06	12.568	5320	18.56	12.685	
5500	18.81	12.744	5500	20.26	13.066	
5580	18.79	12.738	5580	18.46	12.663	
5700	18.89	12.763	5700	18.59	12.693	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction. documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)



Page: 26 of 346

802.11n_HT20_Ch0

802.11n HT20 Ch1

Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5180	20.08	13.027
5220	25.54	14.073
5240	20.23	13.059
5260	19.36	12.868
5300	19.20	12.832
5320	19.26	12.845
5500	29.36	14.678
5580	19.37	12.872
5700	19.48	12.896

Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5180	19.42	12.882
5220	19.10	12.811
5240	19.52	12.904
5260	19.28	12.850
5300	19.30	12.856
5320	19.45	12.888
5500	19.71	12.946
5580	19.51	12.903
5700	19.50	12.901

802.11n _HT40_Ch0

802.11n _HT40_Ch1

Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5190	39.33	15.947
5230	40.59	16.084
5270	39.25	15.939
5310	38.94	15.904
5510	39.24	15.937
5550	39.39	15.954
5670	39.10	15.922

Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5190	40.88	16.115
5230	39.88	16.007
5270	39.95	16.015
5310	39.45	15.960
5510	43.96	16.431
5550	39.52	15.968
5670	40.30	16.053

26dB

BW

(MHz) 80.87

81.50

80.75

80.63

802.11ac _VHT80_Ch0

802.11ac _VHT80_Ch1

Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)	Frequency (MHz)
5210	86.95	19.393	5210
5290	79.95	19.028	5290
5530	79.13	18.984	5530
5610	80.32	19.048	5610

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction. documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

10 Log (B)

(dB)

19.078

19.111

19.071

19.065



Page: 27 of 346

6dB Bandwidth (5725 MHz~ 5850 MHz) measure with Peak detector for FCC

802.11a Ch0

802.11a Ch1

Frequency (MHz)	6dB BW (MHz)	10 Log (B) (dB)		
5745	15.99	12.038		
5785	15.92	12.019		
5825	14.70	11.674		

Frequency (MHz)	6dB BW (MHz)	10 Log (B) (dB)	
5745	15.08	11.785	
5785	15.46	11.892	
5825	13.55	11.320	

802.11n_HT20_Ch0

802.11n_HT20_Ch1

Frequency (MHz)	6dB BW (MHz)	10 Log (B) (dB)	
5745	15.12	11.797	
5785	15.69	11.957	
5825	15.44	11.886	

Frequency (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5745	15.14	11.800
5785	15.06	11.777
5825	14.67	11.665

802.11n_HT40_Ch0

802.11n HT40 Ch1

Frequency (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5755	35.08	15.450
5795	33.85	15.296

Frequency (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5755	35.08	15.450
5795	35.13	15.456

802.11ac VHT80 Ch0

802.11ac _VHT80_Ch1

Frequency (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5775	70.10	18.457

Frequency (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5775	72.61	18.610

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 28 of 346

99% BW Verification of DFS Function

802.11a Ch0

802.11a Ch1

Frequency	Measured Frequency	Limit (MHz)	Frequency	Measured Frequency	Limit	
(MHz)	(MHz)		(MHz)	(MHz)	(MHz)	
5240	5248.13	< 5250	5240	5248.13	< 5250	
5745	5736.69	> 5725	5745	5736.87	> 5725	

802.11n HT20 Ch0

802.	111	ν п.	T20	Ch1
OUZ.	.TTr	1 П	I ZU	Cni

<u> </u>				_	
Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)	Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)
5240	5248.73	< 5250	5240	5248.70	< 5250
5745	5736.21	> 5725	5745	5736.24	> 5725

802.11n _HT40_Ch0

802.11n	HT40	Ch1
---------	------	-----

Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)	Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)
5230	5247.90	< 5250	5230	5247.85	< 5250
5755	5736.90	> 5725	5755	5736.95	> 5725

802.11ac _VHT80_Ch0

802.11n _HT80_Ch1

Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)	Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)
5210	5247.20	< 5250	5210	5247.30	< 5250
5775	5737.50	> 5725	5775	5737.20	> 5725


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 29 of 346


FCC_802.11a_20MHz_Chain0_5180MHz

FCC_802.11a_20MHz_Chain0_5260MHz

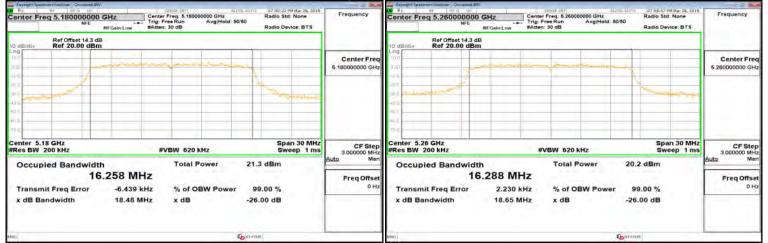


FCC_802.11a_20MHz_Chain0_5220MHz

FCC_802.11a_20MHz_Chain0_5300MHz

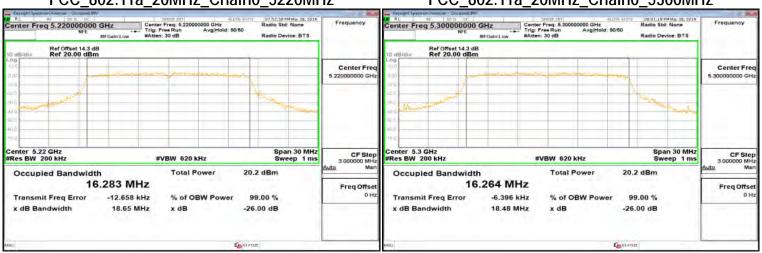

FCC_802.11a_20MHz_Chain0_5240MHz

FCC_802.11a_20MHz_Chain0_5320MHz

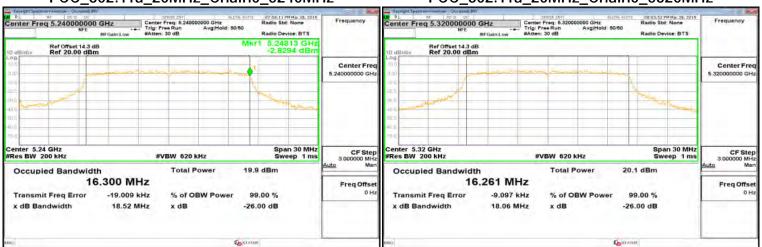

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 30 of 346


FCC_802.11a_20MHz_Chain0_5500MHz

FCC_802.11a_20MHz_Chain0_5745MHz

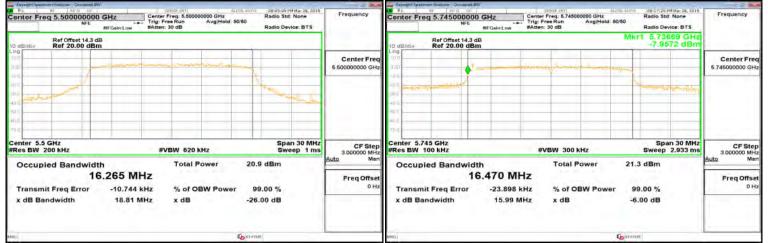


FCC_802.11a_20MHz_Chain0_5580MHz

FCC_802.11a_20MHz_Chain0_5785MHz

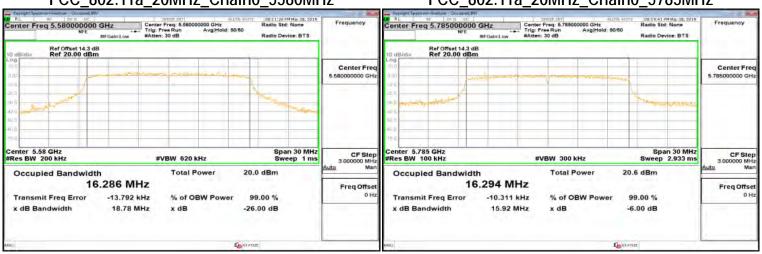

FCC_802.11a_20MHz_Chain0_5700MHz

FCC_802.11a_20MHz_Chain0_5825MHz

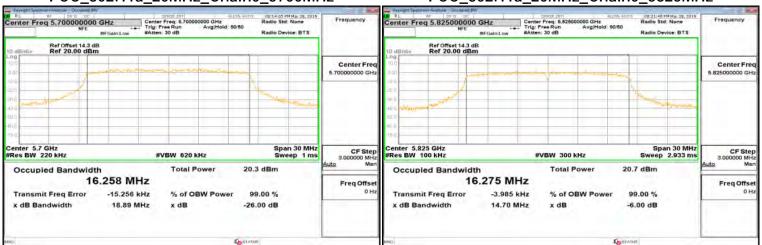

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 31 of 346


FCC_802.11n_20MHz_Chain0_5180MHz

FCC_802.11n_20MHz_Chain0_5260MHz

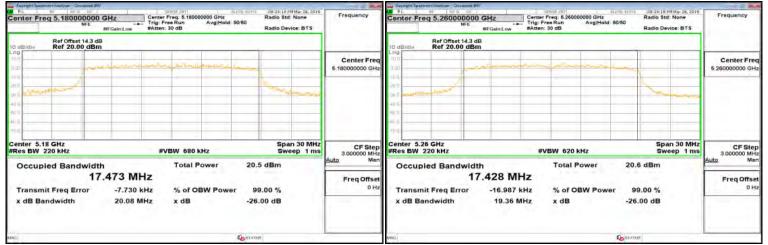

FCC_802.11n_20MHz_Chain0_5220MHz

FCC_802.11n_20MHz_Chain0_5300MHz

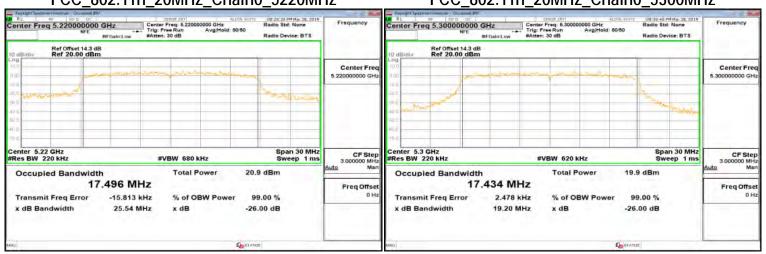

FCC_802.11n_20MHz_Chain0_5240MHz

FCC_802.11n_20MHz_Chain0_5320MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 32 of 346


FCC_802.11n_20MHz_Chain0_5500MHz

FCC_802.11n_20MHz_Chain0_5745MHz

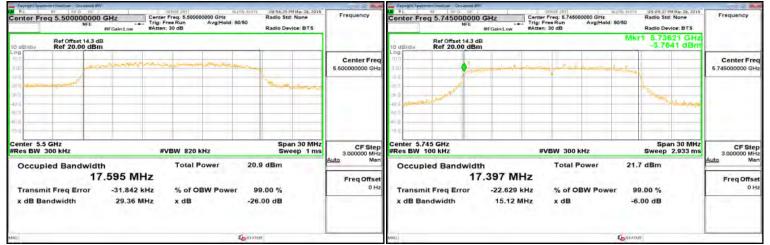


FCC_802.11n_20MHz_Chain0_5580MHz

FCC_802.11n_20MHz_Chain0_5785MHz

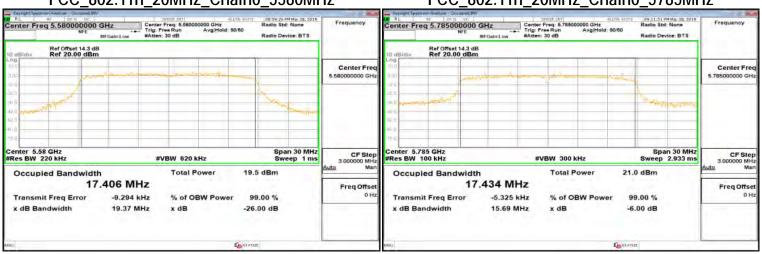

FCC_802.11n_20MHz_Chain0_5700MHz

FCC_802.11n_20MHz_Chain0_5825MHz

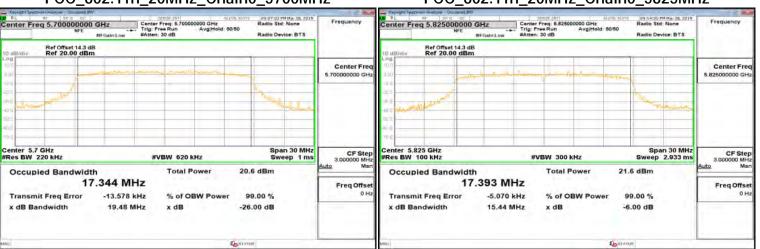

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 33 of 346


FCC_802.11n_40MHz_Chain0_5190MHz

FCC_802.11n_40MHz_Chain0_5310MHz

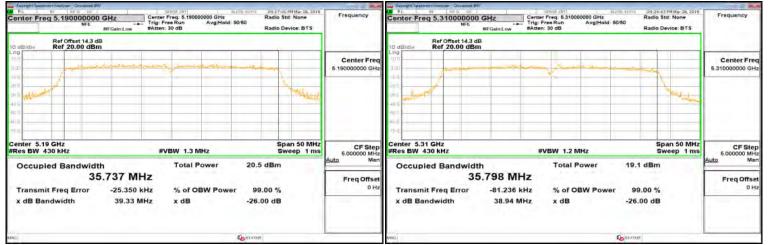


FCC_802.11n_40MHz_Chain0_5230MHz

FCC 802.11n 40MHz Chain0 5510MHz

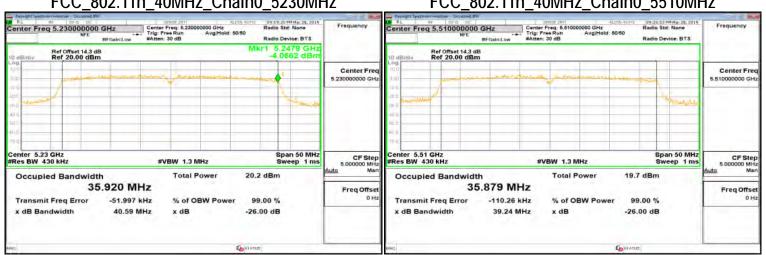

FCC_802.11n_40MHz_Chain0_5270MHz

FCC_802.11n_40MHz_Chain0_5550MHz

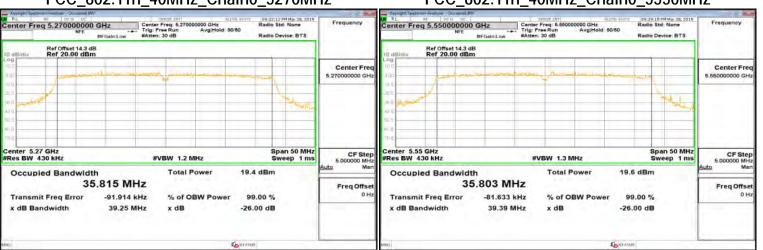

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 34 of 346


FCC_802.11n_40MHz_Chain0_5670MHz

FCC_802.11ac_80MHz_Chain0_5210MHz

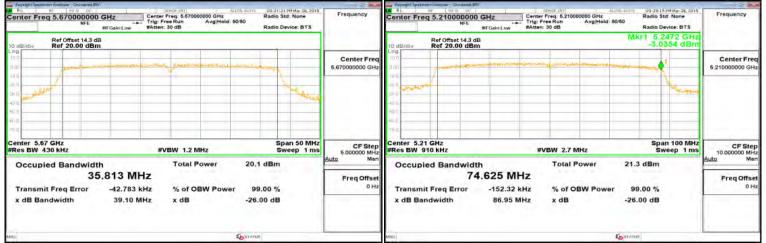


FCC_802.11n_40MHz_Chain0_5755MHz

FCC_802.11ac_80MHz_Chain0_5290MHz

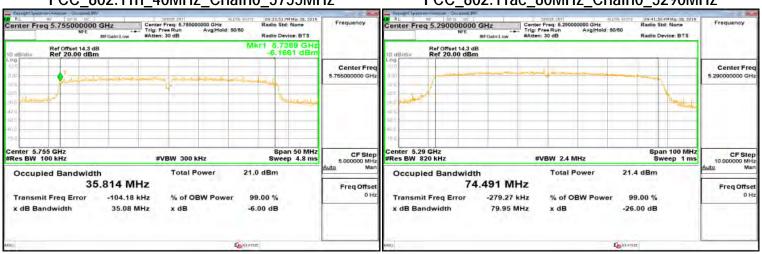

FCC_802.11n_40MHz_Chain0_5795MHz

FCC_802.11ac_80MHz_Chain0_5530MHz

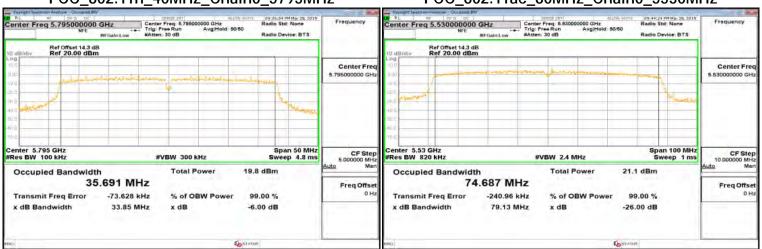

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 35 of 346


FCC_802.11ac_80MHz_Chain0_5610MHz

FCC_802.11a_20MHz_Chain1_5180MHz

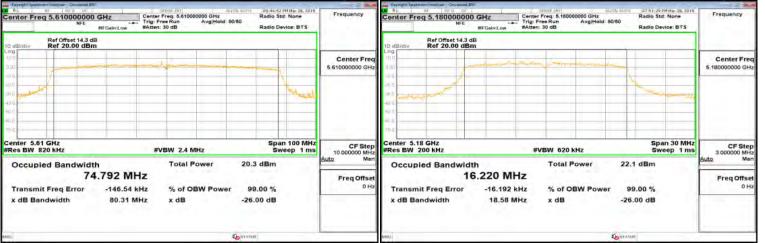


FCC_802.11ac_80MHz_Chain0_5775MHz

FCC_802.11a_20MHz_Chain1_5220MHz

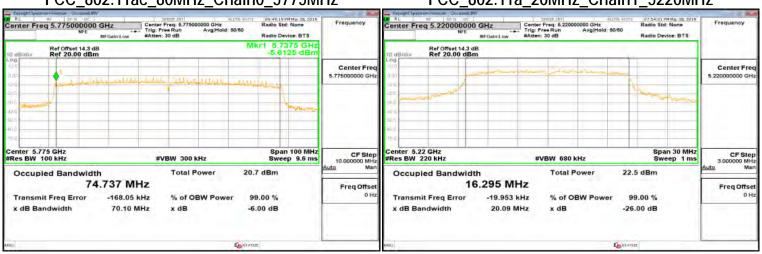

FCC_802.11a_20MHz_Chain1_5240MHz

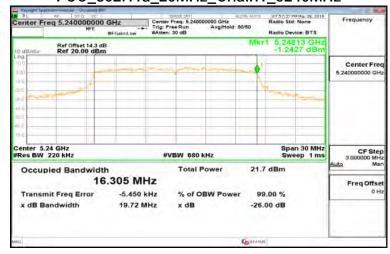

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 36 of 346


FCC_802.11a_20MHz_Chain1_5260MHz

FCC_802.11a_20MHz_Chain1_5500MHz

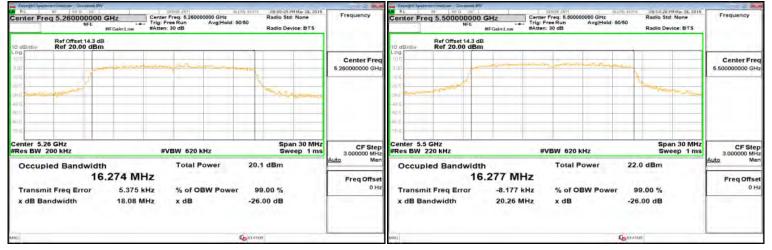


FCC_802.11a_20MHz_Chain1_5300MHz

FCC_802.11a_20MHz_Chain1_5580MHz

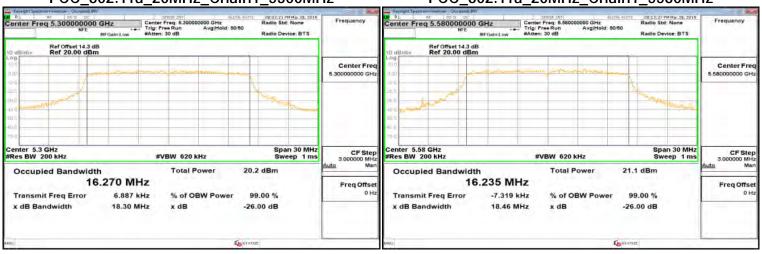

FCC_802.11a_20MHz_Chain1_5320MHz

FCC_802.11a_20MHz_Chain1_5700MHz

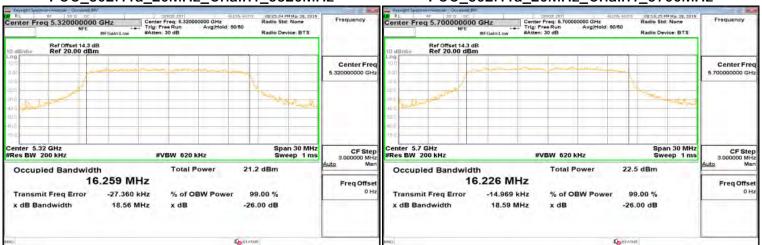

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 37 of 346


FCC_802.11a_20MHz_Chain1_5745MHz

FCC_802.11n_20MHz_Chain1_5180MHz

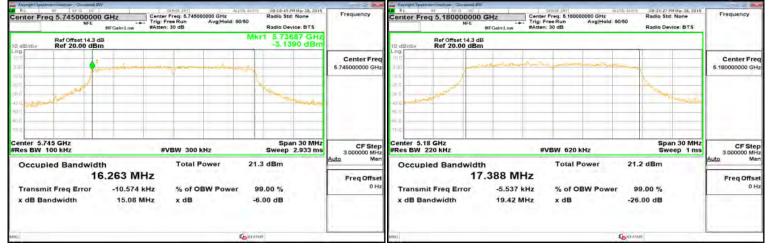


FCC_802.11a_20MHz_Chain1_5785MHz

FCC_802.11n_20MHz_Chain1_5220MHz

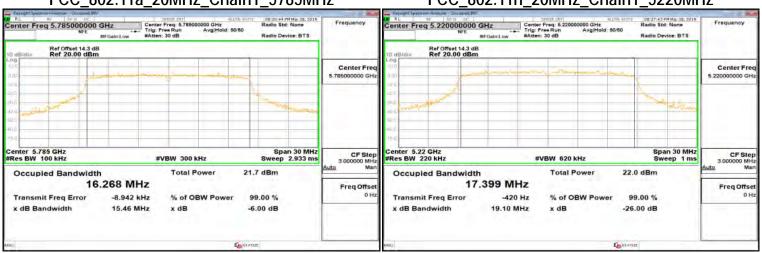

FCC_802.11a_20MHz_Chain1_5825MHz

FCC_802.11n_20MHz_Chain1_5240MHz

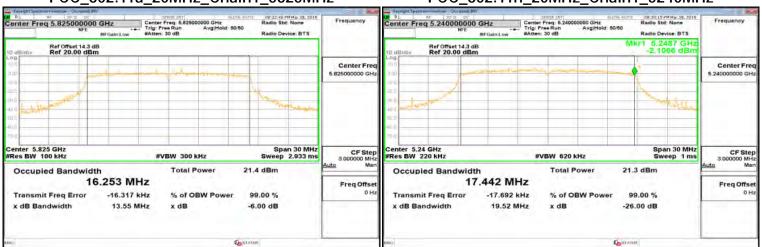

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 38 of 346


FCC_802.11n_20MHz_Chain1_5260MHz

FCC_802.11n_20MHz_Chain1_5500MHz

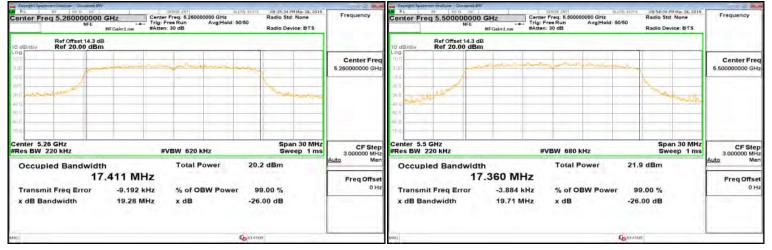

FCC_802.11n_20MHz_Chain1_5300MHz

FCC_802.11n_20MHz_Chain1_5580MHz

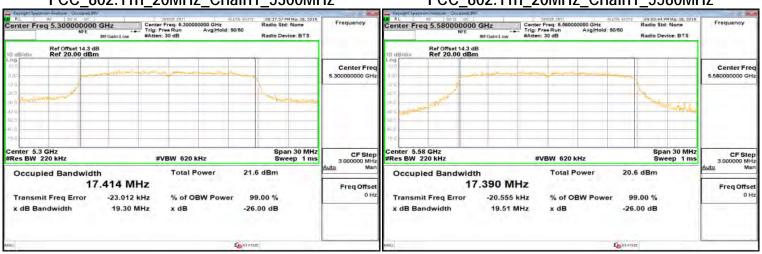

FCC_802.11n_20MHz_Chain1_5320MHz

FCC_802.11n_20MHz_Chain1_5700MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 39 of 346


FCC_802.11n_20MHz_Chain1_5745MHz

FCC_802.11n_40MHz_Chain1_5190MHz

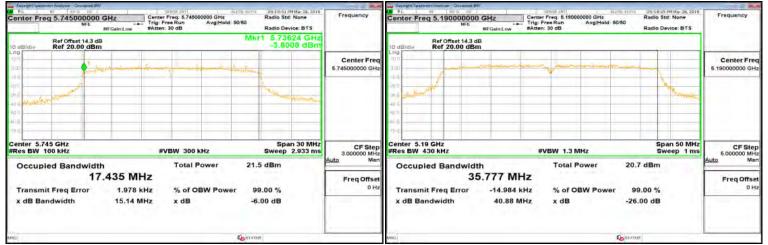


FCC_802.11n_20MHz_Chain1_5785MHz

FCC 802.11n 40MHz Chain1 5230MHz

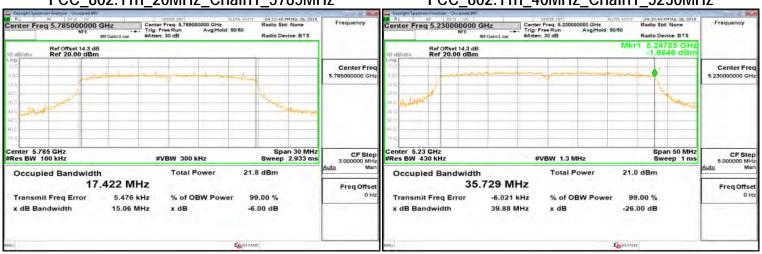

FCC_802.11n_20MHz_Chain1_5825MHz

FCC_802.11n_40MHz_Chain1_5270MHz

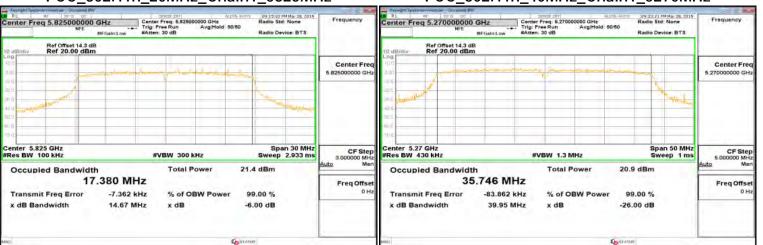

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 40 of 346


FCC_802.11n_40MHz_Chain1_5310MHz

FCC_802.11n_40MHz_Chain1_5670MHz

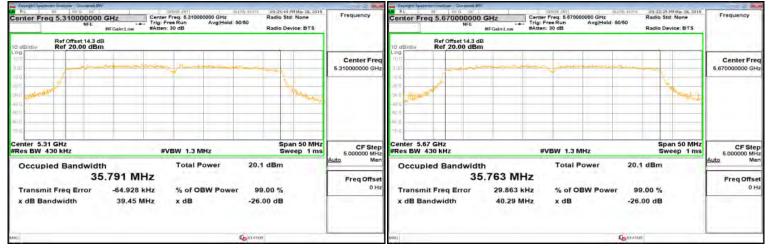


FCC_802.11n_40MHz_Chain1_5510MHz

FCC 802.11n 40MHz Chain1 5755MHz

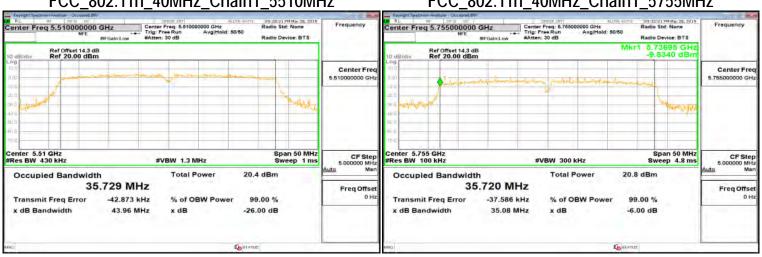

FCC_802.11n_40MHz_Chain1_5550MHz

FCC_802.11n_40MHz_Chain1_5795MHz

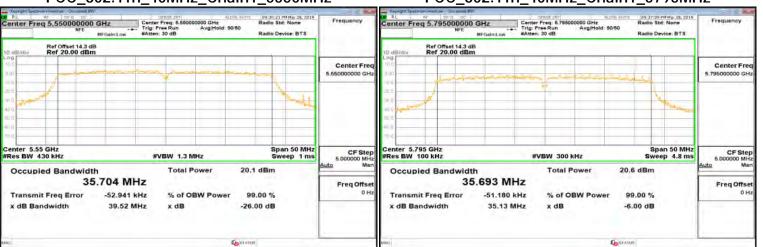

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 41 of 346


FCC_802.11ac_80MHz_Chain1_5210MHz

FCC_802.11ac_80MHz_Chain1_5610MHz

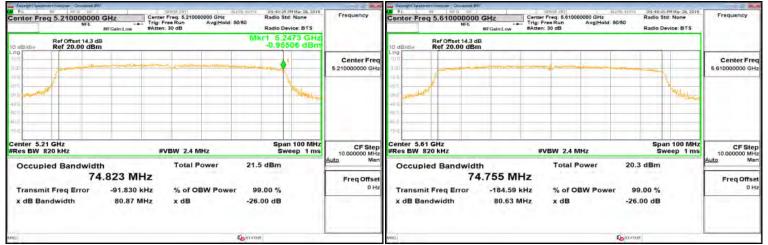


FCC_802.11ac_80MHz_Chain1_5290MHz

FCC_802.11ac_80MHz_Chain1_5775MHz

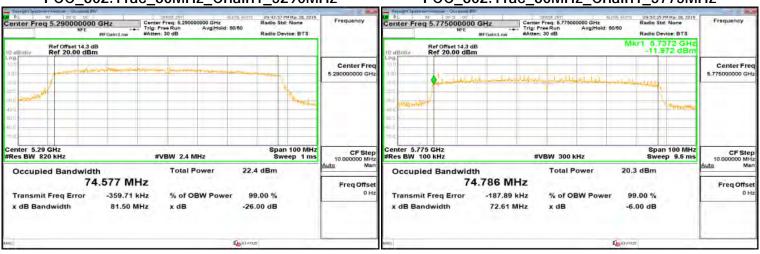

FCC_802.11ac_80MHz_Chain1_5530MHz

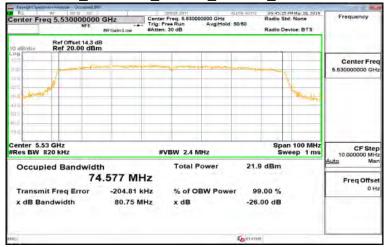

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 42 of 346

MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

Standard Applicable 9.1

OPERZTION Band	EUT CATEGORY	LIMIT
	Access Point (Master device)	1 Watt(30dBm)
U-NII-1	Fixed point-to-point Access Ponit	1 Watt(30dBm)
	 Mobile and portable client device	250mW(23.98dBm)
U-NII-2A		250mW(23.98dBm) or 11dBm+10 log B
U-NII-2C		250mW(23.98dBm) or 11dBm+10 log B
U-NII-3		1 Watt(30dBm)

If transmitting antennas of directional gain greater than 6 dBi are used, the Maximum transmit power shall be reduced by the amount in dB that the direction-al gain of the antenna exceeds 6 dBi.

Note:

As per FCC KDB 662911 D01

(f)Cyclic Delay Diversity (CDD) [also known as cyclic shift diversity (CSD)]. CDD signals are correlated and create unintended array gain that varies with signal bandwidth, antenna geometry, and cyclic delay values. Consequently, depending on system parameters, it may be appropriate to use different values of array gain for compliance with power limits versus compliance with power spectral density limits.

(i) For power measurements on IEEE 802.11 devices, 1,2

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less, for 20-MHz channel widths with NANT ≥ 5.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 43 of 346


9.2 **Measurement Procedure**

- 1. Place the EUT on the table and set it in transmitting mode.
- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter
- Power Meter is used as the auxiliary test equipment to conduct the output power meas-4. urement.
- Record the max. reading and add 10 log(1/duty cycle).
- Repeat above procedures until all frequency (low, middle, and high channel) measured were complete.

9.3 **Measurement Equipment Used**

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power Meter	Anritsu	ML2496A	1242004	10/23/2018	10/22/2019
Power Sensor	Anritsu	MA2411B	1207365	10/23/2018	10/22/2019
Power Sensor	Anritsu	MA2411B	1207368	10/24/2018	10/23/2019
Attenuator	Mini-Circuit	BW-S10W2+	1	02/26/2019	02/25/2020
Attenuator	Mini-Circuit	BW-S10W2+	3	02/26/2019	02/25/2020

Test Set-up 9.4



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 44 of 346

9.5 **Measurement Result**

802.11a 2Tx

011	Frequency Data		Avg. POW	ER (dBm)		TOTAL		REQUIRED		DE0.11 T
СН	(MHz)	Rate	CH 0	CH 1	POWER (dBm)	POWER (mW)		LIMIT (dBm)		RESULT
36	5180	6	13.25	13.72	16.81	47.925		23.98		PASS
44	5220	6	12.76	13.19	16.29	42.605		23.98		PASS
48	5240	6	12.59	12.76	15.99	39.720		23.98		PASS
52	5260	6	15.71	15.02	18.69	74.011	23.98	or 11+10log(B) =	23.57	PASS
60	5300	6	15.94	15.28	18.94	78.285	23.98	or 11+10log(B) =	23.62	PASS
64	5320	6	14.26	13.18	17.07	50.907	23.98	or 11+10log(B) =	23.57	PASS
100	5500	6	13.81	12.75	16.63	45.989	23.98	or 11+10log(B) =	23.74	PASS
116	5580	6	15.83	14.77	18.65	73.224	23.98	or 11+10log(B) =	23.66	PASS
140	5700	6	12.66	11.51	15.44	34.972	23.98	or 11+10log(B) =	23.69	PASS
149	5745	6	15.81	14.85	18.67	73.633		30.00		PASS
157	5785	6	16.12	14.79	18.82	76.208		30.00		PASS
165	5825	6	16.03	15.22	18.96	78.671		30.00		PASS

802.11n_HT20_MIMO

011	Frequency	Data	Avg. POW	ER (dBm)		TOTAL		REQUIRED		DEOLU T
СН	(MHz)	Rate	CH 0	CH 1	POWER (dBm)	POWER (mW)		LIMIT (dBm)		RESULT
36	5180	MCS8	12.69	13.46	16.37	43.339		23.98		PASS
44	5220	MCS8	12.87	13.18	16.30	42.702		23.98		PASS
48	5240	MCS8	13.58	13.45	16.79	47.777		23.98		PASS
52	5260	MCS8	15.44	14.68	18.35	68.443	23.98	or 11+10log(B) =	23.85	PASS
60	5300	MCS8	15.61	14.75	18.48	70.436	23.98	or 11+10log(B) =	23.83	PASS
64	5320	MCS8	13.92	12.98	16.75	47.338	23.98	or 11+10log(B) =	23.85	PASS
100	5500	MCS8	13.82	12.78	16.61	45.791	23.98	or 11+10log(B) =	23.95	PASS
116	5580	MCS8	15.53	14.35	18.26	66.937	23.98	or 11+10log(B) =	23.87	PASS
140	5700	MCS8	13.88	12.71	16.61	45.825	23.98	or 11+10log(B) =	23.90	PASS
149	5745	MCS8	15.23	14.67	18.24	66.615		30.00		PASS
157	5785	MCS8	15.76	14.52	18.46	70.159		30.00		PASS
165	5825	MCS8	15.46	14.96	18.49	70.695		30.00		PASS

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 45 of 346

802.11n_HT40_MIMO

011	Frequency	equency Data		ER (dBm)		TOTAL		REQUIRED		DECLU T
СН	(MHz)	Rate	CH 0	CH 1	POWER (dBm)	POWER (mW)	LIMIT (dBm)			RESULT
38	5190	MCS8	14.05	13.72	17.32	53.974		23.98		PASS
46	5230	MCS8	14.26	13.58	17.37	54.539		23.98		PASS
54	5270	MCS8	14.24	13.47	17.31	53.775	23.98	or 11+10log(B) =	26.94	PASS
62	5310	MCS8	13.27	12.54	16.35	43.192	23.98	or 11+10log(B) =	26.90	PASS
102	5510	MCS8	9.85	8.94	12.85	19.287	23.98	or 11+10log(B) =	26.94	PASS
110	5550	MCS8	14.39	13.41	17.36	54.467	23.98	or 11+10log(B) =	26.95	PASS
134	5670	MCS8	13.52	12.43	16.44	44.084	23.98	or 11+10log(B) =	26.92	PASS
151	5755	MCS8	11.94	11.44	15.13	32.591		30.00		PASS
159	5795	MCS8	14.28	13.37	17.28	53.488		30.00		PASS

802.11ac_VHT80_MIMO

СН	Frequency	quency Data		ER (dBm)	TOTAL POWER	TOTAL POWER		REQUIRED LIMIT		RESULT
СП	(MHz)	Rate	CH 0	CH 1	(dBm)	(mW)		(dBm)		RESULI
42	5210	MCS0	6.78	6.48	10.81	12.049		23.98		PASS
58	5290	MCS0	11.09	10.12	14.81	30.263	23.98	or 11+10log(B) =	30.03	PASS
106	5530	MCS0	4.21	3.74	8.16	6.544	23.98	or 11+10log(B) =	29.98	PASS
122	5610	MCS0	13.7	12.63	17.37	54.638	23.98	or 11+10log(B) =	30.05	PASS
155	5775	MCS0	12.25	11.87	16.24	42.085		30.00		PASS

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 46 of 346

10 MAXIMUM POWER SPECTRAL DENSITY

10.1 **Standard Applicable**

OPERZTION Band		EUT CATEGORY	LIMIT	
		Access Point (Master device)	17dBm/ MHz	
U-NII-1		Fixed point-to-point Access Ponit	Trabili, Williz	
		Mobile and portable client device	11dBm/ MHz	
U-NII-2A			11dBm/ MHz	
U-NII-2C			11dBm/ MHz	
U-NII-3			30dBm/ 500kHz	

If transmitting antennas of directional gain greater than 6 dBi are used, the Maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note:

As per FCC KDB 662911 D01

(f)Cyclic Delay Diversity (CDD) [also known as cyclic shift diversity (CSD)]. CDD signals are correlated and create unintended array gain that varies with signal bandwidth, antenna geometry, and cyclic delay values. Consequently, depending on system parameters, it may be appropriate to use different values of array gain for compliance with power limits versus compliance with power spectral density limits.

- If all antennas have the same gain, GANT, Directional gain = GANT + Array Gain, where Array Gain is as follows.
 - For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS) dB.

The antenna gain is grater than 6 dBi in MIMO mode, therefore the limit needs to be reduced as below:

	Effective Legacy Gain (dBi)	PSD Limit		
UNII-1	8.01	8.99	dBm/MHz	
UNII-2A	8.01	8.99	dBm/MHz	
U-NII-2C	8.01	8.99	dBm/MHz	
U-NII-3	8.01	27.99	dBm/500 kHz	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 47 of 346

10.2 **Measurement Procedure**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to Spectrum.

4. For U-NII1, U-NII-2A, U-NII-2C Band:

Set RBW=1MHz, VBW=3MHz, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)

For U-NII-3 Band:

Set RBW=500 kHz, VBW≥ 3RBW, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)

- User the cursor on spectrum to peak search the highest level of trace
- Record the max. reading and add 10 log(1/duty cycle).
- 7. Repeat above procedures until all default test channel (low, middle, and high) was complete.
- 8. 802.11n MIMO mode: offset is set following "measure and add 10 Log (N)" on spectrum to measure the PSD for MIMO mode. Offset = cable loss + 10 log (N), where N is number of transmitting antenna. N=2 for this given application.

Note: For the test of PSD at MIMO mode, the highest emission of worst case employing Measure and add 10 log (N) technical is reported on this report after the comparison between Main Antenna at single transmitting mode and Aux that yields the higher value. The MIMO transmitting mode produces higher value of outcome

10.3 **Measurement Equipment Used**

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
PXA Spectrum Analyzer	Agilent	N9030A	MY53120760	04/22/2019	04/21/2020
Thermo- static/Hrgrosatic Chamber	TAICHY	MHG-150LF	930619	10/08/2018	10/07/2019
DC Block	Mini-Circuits	BLK-18-S+	31129(1)	02/26/2019	02/25/2020
Attenuator	Mini-Circuit	BW-S10W2+	1	02/26/2019	02/25/2020
Attenuator	Mini-Circuit	BW-S10W2+	3	02/26/2019	02/25/2020


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 48 of 346

10.4 **Test Set-up**



10.5 **Measurement Result**

	POWER DE	NSITY 80	02.11a MODI	2 TX	
Frequency (MHz)	PSD W/O Duty Factor (dBm)	Duty Factor	PSD With Duty Factor (dBm)	Limit (dBm)	Margin (dB)
5180	1.65	0.30	1.95	8.99	-7.04
5220	1.39	0.30	1.69	8.99	-7.30
5240	1.51	0.30	1.81	8.99	-7.18
5260	4.35	0.30	4.65	8.99	-4.34
5300	5.93	0.30	6.23	8.99	-2.76
5320	4.86	0.30	5.16	8.99	-3.83
5500	5.09	0.30	5.39	8.99	-3.60
5580	2.36	0.30	2.66	8.99	-6.33
5700	3.34	0.30	3.64	8.99	-5.35
5745	14.09	-	14.09	27.99	-13.90
5785	12.89	-	12.89	27.99	-15.10
5825	12.36	-	12.36	27.99	-15.63
ı	OWER DENS	TY 802.1	1n HT20 MO	DE_MIMO	<u> </u>
Frequency (MHz)	PSD W/O Duty Factor (dBm)	Duty Factor	PSD With Duty Factor (dBm)	Limit (dBm)	Margin (dB)
5180	1.23	0.27	1.50	8.99	-7.49
5220	1.68	0.27	1.95	8.99	-7.04
5240	1.45	0.27	1.72	8.99	-7.27
5260	1.53	0.27	1.80	8.99	-7.19
5300	0.92	0.27	1.19	8.99	-7.80
5320	4.66	0.27	4.93	8.99	-4.06
	2.74	0.27	3.01	8.99	-5.98
5500	2.74	0.2.	U.U.		
5500 5580	2.74	0.27	2.67	8.99	-6.32
				8.99 8.99	-6.32 -4.65
5580	2.40	0.27	2.67		
5580 5700	2.40 4.07	0.27 0.27	2.67 4.34	8.99	-4.65

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 49 of 346

Р	OWER DENSI	TY 802.1	1n HT40 MO	DE_MIMO	
Frequency (MHz)	PSD W/O Duty Factor (dBm)	Duty Factor	PSD With Duty Factor (dBm)	Limit (dBm)	Margin (dB)
5190	-2.69	0.42	-2.27	8.99	-11.26
5230	-1.25	0.42	-0.83	8.99	-9.82
5270	-4.4	0.42	-3.98	8.99	-12.97
5310	-6.87	0.42	-6.45	8.99	-15.44
5510	-5.84	0.42	-5.42	8.99	-14.41
5550	-5.25	0.42	-4.83	8.99	-13.82
5670	-4.77	0.42	-4.35	8.99	-13.34
5755	9.11	-	9.11	27.99	-18.88
5795	8.37	-	8.37	27.99	-19.62
PC	WER DENSIT	Y 802.11a	ac VHT80 M	ODE_MIMO	
Frequency (MHz)	PSD W/O Duty Factor (dBm)	Duty Factor	PSD With Duty Factor (dBm)	Limit (dBm)	Margin (dB)
5210	-10.44	1.17	-9.27	8.99	-18.26
5290	-4.95	1.17	-3.78	8.99	-12.77
5530	-6.73	1.17	-5.56	8.99	-14.55
5610	-9.91	1.17	-8.74	8.99	-17.73
5775	5.08	-	5.08	27.99	-22.91

Note:

Cable Loss= 14.3 dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 50 of 346

802.11a_20MHz_5180MHz




802.11a_20MHz_5260MHz




802.11a_20MHz_5220MHz




802.11a_20MHz_5300MHz

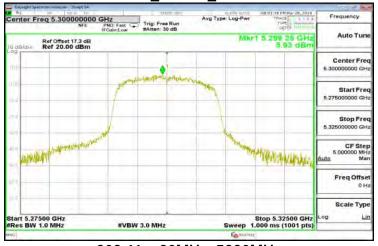

802.11a 20MHz 5240MHz

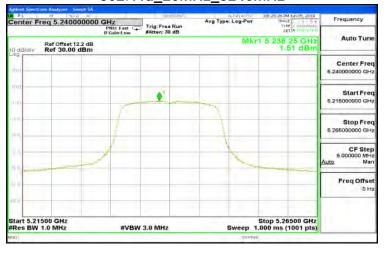

802.11a_20MHz_5320MHz

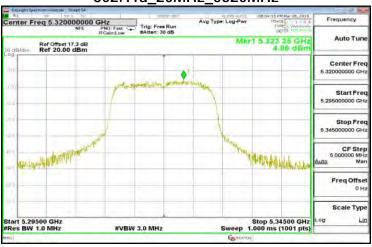

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 51 of 346


802.11a_20MHz_5500MHz



802.11a_20MHz_5745MHz



802.11a_20MHz_5580MHz

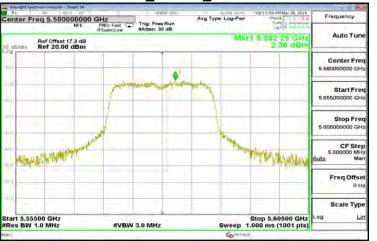

802.11a_20MHz_5785MHz



802.11a_20MHz_5700MHz



802.11a_20MHz_5825MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 52 of 346

802.11n_20MHz_5180MHz



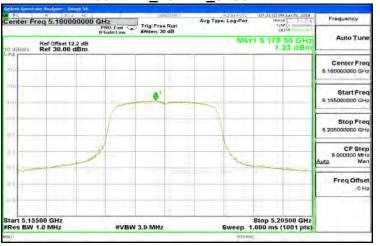



802.11n_20MHz_5220MHz

802.11n_20MHz_5300MHz






802.11n 20MHz 5240MHz

802.11n_20MHz_5320MHz



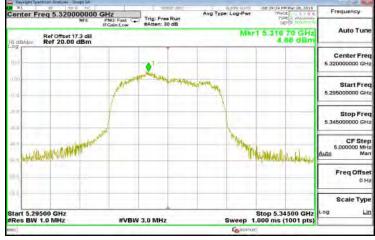

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 53 of 346

802.11n_20MHz_5500MHz



802.11n_20MHz_5745MHz



802.11n_20MHz_5580MHz



802.11n_20MHz_5785MHz



802.11n_20MHz_5700MHz



802.11n_20MHz_5825MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms-and-conditions.htm and for electronic format documents subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

程智科技股份有限公司




Page: 54 of 346

802.11n_40MHz_5190MHz



Freq Offse



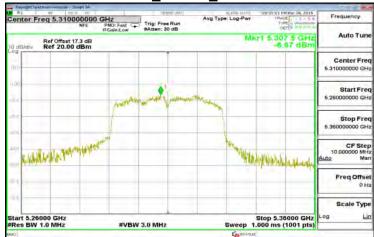

802.11n_40MHz_5230MHz

#VBW 3.0 MHz




802.11n_40MHz_5510MHz



802.11n_40MHz_5270MHz



802.11n_40MHz_5550MHz

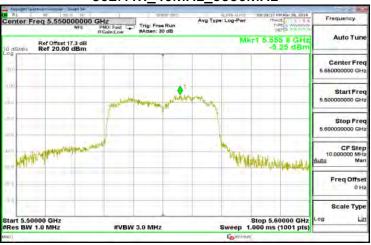

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 55 of 346

802.11n_40MHz_5670MHz




802.11ac_80MHz_5210MHz

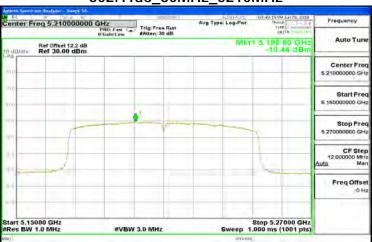

802.11n_40MHz_5755MHz



802.11ac 80MHz 5290MHz

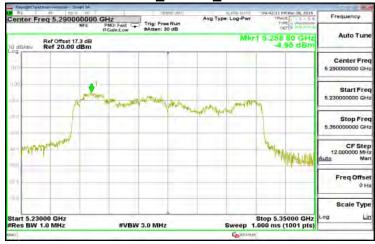

802.11n_40MHz_5795MHz



802.11ac_80MHz_5530MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 56 of 346

802.11ac_80MHz_5610MHz



802.11ac_80MHz_5775MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 57 of 346

11 UNDESIRABLE RADIATED EMISSION MEASUREMENT

11.1Standard Applicable

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- 1. For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- 2. For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

APPLICABLE TO	LIMIT				
FCC KDB 789033 D02 General UNII Test Procedures New Rules	FIELD STRENGTH AT 3m				
	PK: 74 (dBµV/m)	AV 54 (dBμV/m)			
APPLICABLE TO	EIRP LIMIT	FIELD STRENGTH AT 3m			
15.407(b)(1)					
15.407(b)(2)	PK: -27 (dBm/MHz)	PK: 68.3 (dBµV/m)			
15.407(b)(3)					
15.407(b)(4)(i)	PK:-27 (dBm/MHz) *1 PK:10 (dBm/MHz) *2 PK:15.6 (dBm/MHz) *3 PK:27 (dBm/MHz) *4	PK: 68.2(dBµV/m) *1 PK:105.2 (dBµV/m) *2 PK: 110.8(dBµV/m) *3 PK:122.2 (dBµV/m) *4			

^{*1} beyond 75 MHz or more above of the bandedge.

EIRP = ((E*d)^2) / 30, where E is the field in V/m, d is the measurement distance (3m), EIRP is the equivalent isotropically radiated power in Watts.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



Page: 58 of 346

Unwanted spurious emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(KHz)	300
0.490-1.705	24000/F(KHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 59 of 346

11.2Measurement Equipment Used

	966A Chamber								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.				
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/26/2019	02/25/2020				
Bilog Antenna	Sunol Sciences	JB3	A030105	07/13/2018	07/12/2019				
Cable	HUBER SU- HNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020				
Cable	HUBER SU- HNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020				
Digital Thermo-Hy- gro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020				
double Ridged Guide Horn An- tenna	ETC	MCTD 1209	DRH13M02003	08/20/2018	08/19/2019				
Loop Antenna	COM-POWER	AL-130	121051	03/22/2019	03/21/2020				
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020				
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020				
PSA Series Spec- trum Analyzer	Agilent	E4446A	MY46180323	05/31/2018	05/30/2019				
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R				
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R				
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R				
Software		e3 V6	.11-20180413						

NOTE: N.C.R refers to Not Calibrated Required.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 60 of 346

11.3Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

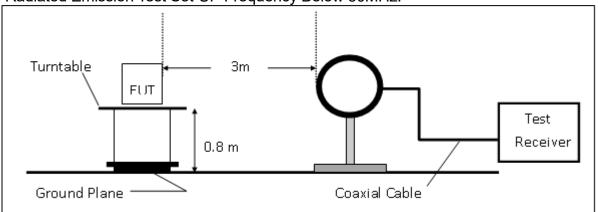

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

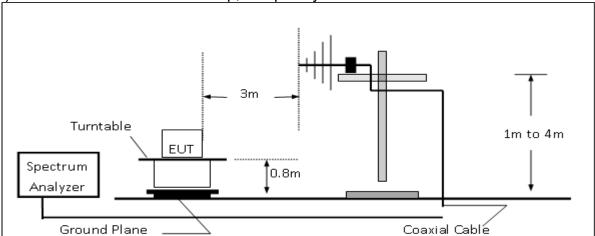

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

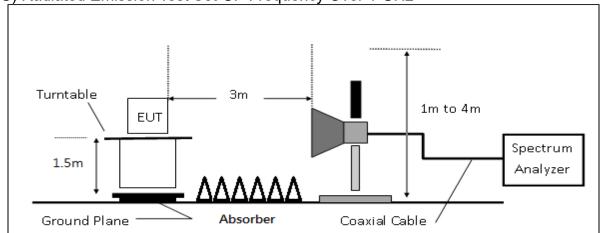

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧



Page: 61 of 346

11.4Measurement Procedure

- The EUT was placed on a turn table which is 0.8m above ground plane.
- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules. 2.
- 3. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- The turn table shall rotate 360 degrees to determine the position of maximum emission 4. level.
- EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) 6. and Quasi-peak (QP) at frequency below 1 GHz.
- Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency 7. above 1 GHz.
- 8. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- Maximum procedure was performed on the six highest emissions to ensure EUT compli-9. ance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 11. Repeat above procedures until all frequency measured were complete.

11.5Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual $FS(dB\mu V/m) = SPA$. Reading level(dB μV) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

11.6Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 62 of 346

11.7 Measurement Result **Radiated Spurious Emission Measurement Result Below 1GHz Worst-Case Data:**


PCB Antenna

Test Date **Project Number** : T190321W03 :2019-04-10

Operation Band :802.11a B1 Temp./Humi. :21 deg C / 62 RH

Fundamental Frequency :5220 MHz Engineer :Jerry Operation Mode :Tx CH MID :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plan

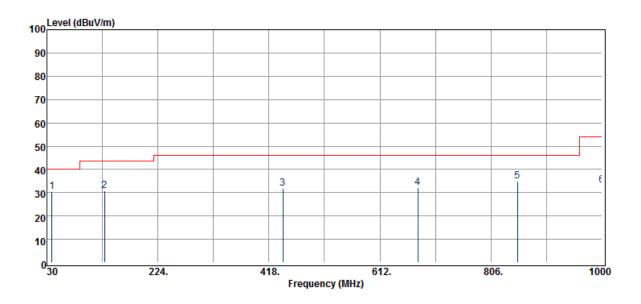

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
38.73	Peak	38.96	-8.56	30.40	40.00	-9.60
130.88	Peak	39.76	-9.02	30.74	43.50	-12.76
442.25	Peak	35.95	-4.04	31.91	46.00	-14.09
677.96	Peak	32.16	-0.05	32.11	46.00	-13.89
852.56	Peak	32.07	2.78	34.85	46.00	-11.15
1000.00	Peak	28.04	5.27	33.31	54.00	-20.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction. documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)




Page: 63 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11a B1 Temp./Humi. :21 deg C / 62 RH

Fundamental Frequency :5220 MHz Engineer :Jerry **Operation Mode** :Tx CH MID :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

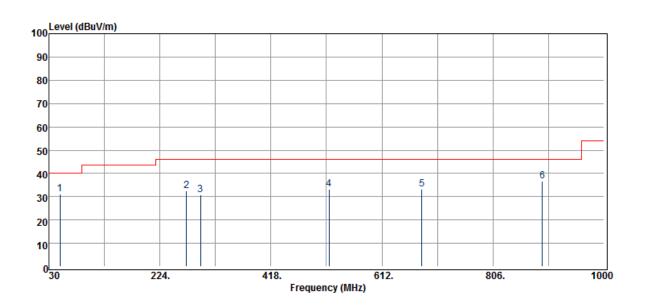

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
49.40	Peak	45.96	-14.98	30.98	40.00	-9.02
270.56	Peak	41.02	-8.53	32.49	46.00	-13.51
294.81	Peak	39.19	-8.32	30.87	46.00	-15.13
519.85	Peak	35.84	-2.60	33.24	46.00	-12.76
681.84	Peak	33.53	-0.29	33.24	46.00	-12.76
892.33	Peak	32.59	4.10	36.69	46.00	-9.31

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 64 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11a B2a Temp./Humi. :21 deg_C / 62 RH

Fundamental Frequency :5300 MHz Engineer :Jerry **Operation Mode** :Tx CH MID :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plan

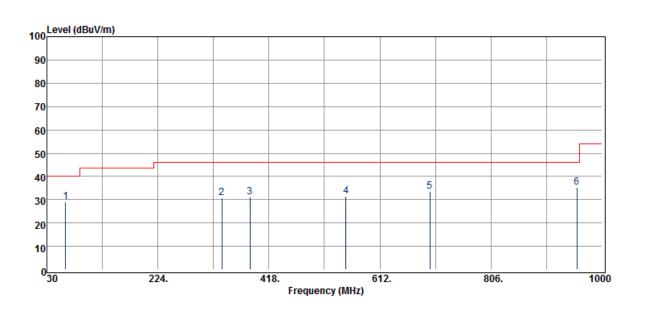

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
62.98	Peak	44.46	-15.49	28.97	40.00	-11.03
335.55	Peak	38.08	-7.18	30.90	46.00	-15.10
385.02	Peak	37.26	-6.23	31.03	46.00	-14.97
552.83	Peak	33.86	-2.25	31.61	46.00	-14.39
699.30	Peak	33.61	-0.04	33.57	46.00	-12.43
956.35	Peak	30.91	4.25	35.16	46.00	-10.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 65 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11a B2a Temp./Humi. :21 deg C / 62 RH

Fundamental Frequency :5300 MHz Engineer :Jerry :HORIZONTAL

Operation Mode :Tx CH MID Measurement Antenna Pol. EUT Pol. :H Plan

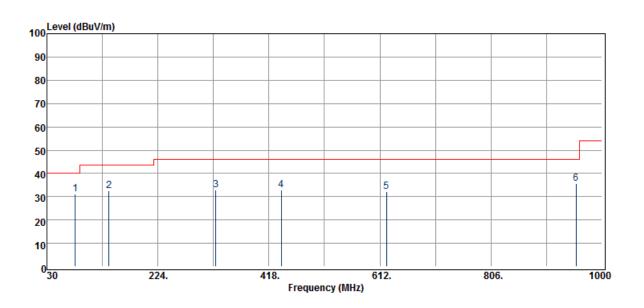

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
79.47	Peak	46.13	-15.14	30.99	40.00	-9.01
138.64	Peak	42.12	-9.70	32.42	43.50	-11.08
324.88	Peak	40.07	-7.33	32.74	46.00	-13.26
439.34	Peak	36.93	-4.11	32.82	46.00	-13.18
623.64	Peak	32.95	-0.66	32.29	46.00	-13.71
954.41	Peak	31.47	4.23	35.70	46.00	-10.30

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 66 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11a B2c Temp./Humi. :21 deg_C / 62 RH

Fundamental Frequency :5580 MHz Engineer :Jerry **Operation Mode** :Tx CH MID :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plan

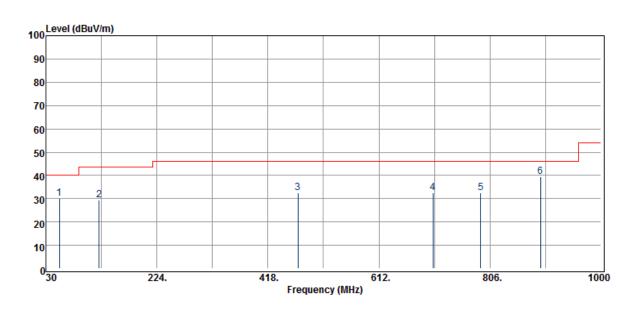

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
53.28	Peak	46.06	-15.81	30.25	40.00	-9.75
123.12	Peak	38.05	-8.78	29.27	43.50	-14.23
470.38	Peak	35.73	-3.27	32.46	46.00	-13.54
706.09	Peak	32.53	0.10	32.63	46.00	-13.37
789.51	Peak	31.36	1.09	32.45	46.00	-13.55
894.27	Peak	35.29	4.07	39.36	46.00	-6.64

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 67 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11a B2c Temp./Humi. :21 deg C / 62 RH

Fundamental Frequency :5580 MHz Engineer :Jerry **Operation Mode** :Tx CH MID :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

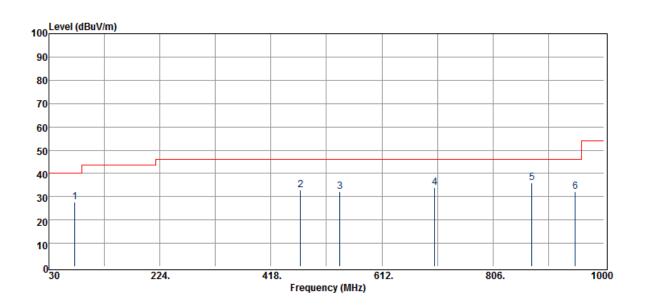

Freq.	Detector Mode	Spectrum	Factor	Actual FS	Limit	Margin
MHz	PK/QP/AV	Reading Level dBµV	dB	rS dBµV/m	@3m dBµV/m	dB
75.59	Peak	42.47	-14.79	27.68	40.00	-12.32
469.41	Peak	36.34	-3.34	33.00	46.00	-13.00
538.28	Peak	34.32	-2.16	32.16	46.00	-13.84
704.15	Peak	34.02	-0.07	33.95	46.00	-12.05
873.90	Peak	32.78	3.10	35.88	46.00	-10.12
949.56	Peak	28.31	4.02	32.33	46.00	-13.67

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 68 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11a B3 Temp./Humi. :21 deg_C / 62 RH

Fundamental Frequency :5785 MHz Engineer :Jerry

Operation Mode :Tx CH MID :VERTICAL Measurement Antenna Pol. EUT Pol. :H Plan

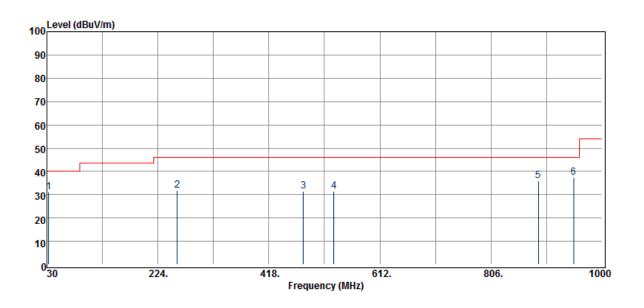

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
32.91	Peak	35.37	-4.28	31.09	40.00	-8.91
257.95	Peak	41.91	-10.00	31.91	46.00	-14.09
478.14	Peak	34.46	-2.97	31.49	46.00	-14.51
531.49	Peak	33.68	-2.24	31.44	46.00	-14.56
888.45	Peak	32.13	3.85	35.98	46.00	-10.02
950.53	Peak	33.23	4.10	37.33	46.00	-8.67

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 69 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11a B3 Temp./Humi. :21 deg C / 62 RH **Fundamental Frequency** :5785 MHz Engineer :Jerry

Operation Mode :Tx CH MID :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

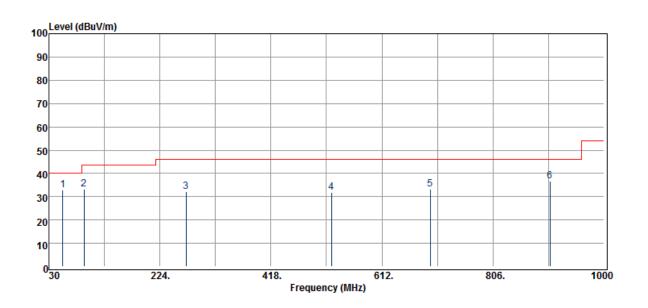

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
54.25	Peak	48.90	-15.96	32.94	40.00	-7.06
91.11	Peak	48.21	-15.12	33.09	43.50	-10.41
269.59	Peak	40.83	-8.58	32.25	46.00	-13.75
523.73	Peak	34.11	-2.36	31.75	46.00	-14.25
696.39	Peak	33.24	-0.16	33.08	46.00	-12.92
905.91	Peak	32.53	4.12	36.65	46.00	-9.35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 70 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11ac80 B1 Temp./Humi. :21 deg C / 62 RH

Fundamental Frequency :5210 MHz Engineer :Jerry :VERTICAL

Operation Mode :Tx CH LOW Measurement Antenna Pol. EUT Pol. :H Plan

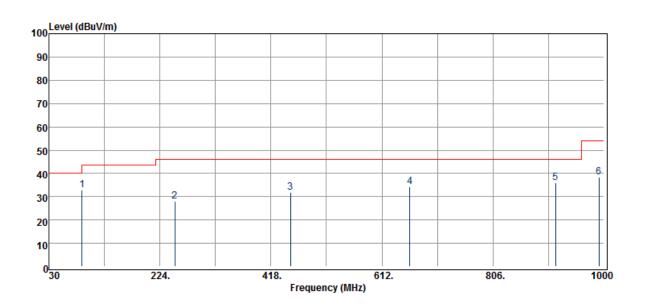

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dΒμV/m	dB
88.20	Peak	48.25	-15.47	32.78	43.50	-10.72
250.19	Peak	38.58	-10.40	28.18	46.00	-17.82
451.95	Peak	35.94	-3.94	32.00	46.00	-14.00
660.50	Peak	34.40	-0.23	34.17	46.00	-11.83
915.61	Peak	31.99	3.83	35.82	46.00	-10.18
991.27	Peak	33.20	5.23	38.43	54.00	-15.57

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 71 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11ac80 B1 Temp./Humi. :21 deg C / 62 RH **Fundamental Frequency** :5300 MHz Engineer :Jerry

Operation Mode :Tx CH LOW :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

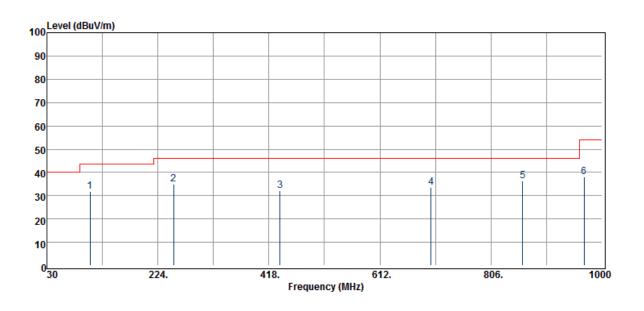

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
105.66	Peak	42.79	-11.02	31.77	43.50	-11.73
251.16	Peak	45.34	-10.38	34.96	46.00	-11.04
437.40	Peak	36.40	-4.26	32.14	46.00	-13.86
701.24	Peak	33.74	-0.04	33.70	46.00	-12.30
861.29	Peak	33.47	2.95	36.42	46.00	-9.58
968.96	Peak	32.92	5.23	38.15	54.00	-15.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction. documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)




Page: 72 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11ac80 B2a Temp./Humi. :21 deg C / 62 RH

Fundamental Frequency :5290 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plan

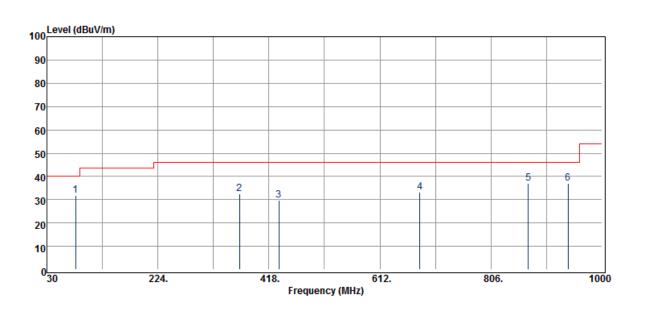

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
80.44	Peak	46.98	-15.28	31.70	40.00	-8.30
366.59	Peak	39.01	-6.50	32.51	46.00	-13.49
435.46	Peak	33.92	-4.27	29.65	46.00	-16.35
681.84	Peak	33.51	-0.29	33.22	46.00	-12.78
870.99	Peak	34.01	3.11	37.12	46.00	-8.88
940.83	Peak	33.10	3.77	36.87	46.00	-9.13

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 73 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11ac80 B2a Temp./Humi. :21 deg C / 62 RH

Fundamental Frequency :5290 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plan

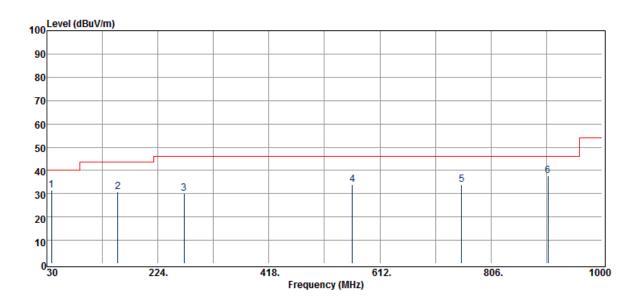

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
37.76	Peak	39.42	-7.85	31.57	40.00	-8.43	
154.16	Peak	40.97	-10.02	30.95	43.50	-12.55	
269.59	Peak	38.83	-8.58	30.25	46.00	-15.75	
563.50	Peak	36.19	-2.24	33.95	46.00	-12.05	
754.59	Peak	32.03	2.00	34.03	46.00	-11.97	
905.91	Peak	33.53	4.12	37.65	46.00	-8.35	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 74 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11ac80 B2c Temp./Humi. :21 deg C / 62 RH

Fundamental Frequency :5610 MHz Engineer :Jerry

Operation Mode :Tx CH MID :VERTICAL Measurement Antenna Pol. EUT Pol. :H Plan

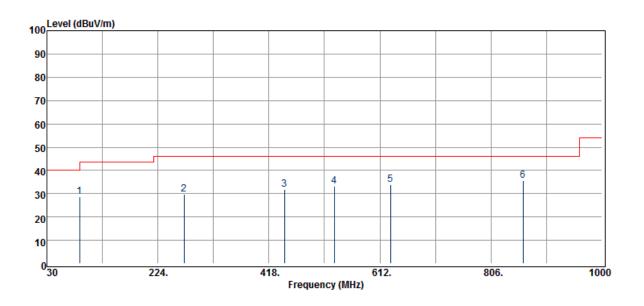

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
87.23	Peak	44.38	-15.55	28.83	40.00	-11.17	
269.59	Peak	38.43	-8.58	29.85	46.00	-16.15	
445.16	Peak	35.74	-4.06	31.68	46.00	-14.32	
532.46	Peak	35.45	-2.29	33.16	46.00	-12.84	
630.43	Peak	34.33	-0.52	33.81	46.00	-12.19	
862.26	Peak	32.48	3.00	35.48	46.00	-10.52	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 75 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11ac80 B2c Temp./Humi. :21 deg C / 62 RH

Fundamental Frequency :5610 MHz Engineer :Jerry :HORIZONTAL

Operation Mode :Tx CH MID Measurement Antenna Pol. EUT Pol. :H Plan

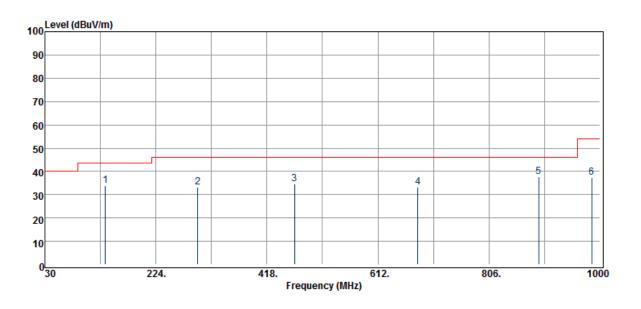

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
135.73	Peak	43.20	-9.46	33.74	43.50	-9.76
296.75	Peak	41.60	-8.28	33.32	46.00	-12.68
466.50	Peak	37.97	-3.51	34.46	46.00	-11.54
681.84	Peak	33.53	-0.29	33.24	46.00	-12.76
893.30	Peak	33.78	4.08	37.86	46.00	-8.14
985.45	Peak	32.05	5.38	37.43	54.00	-16.57

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 76 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11ac80 B3 Temp./Humi. :21 deg C / 62 RH

Fundamental Frequency :5775 MHz Engineer :Jerry

Operation Mode :Tx CH LOW :VERTICAL Measurement Antenna Pol. EUT Pol. :H Plan

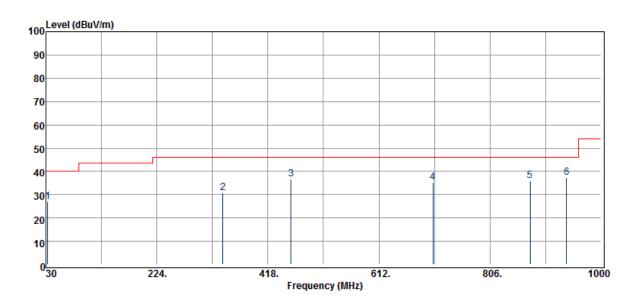

Fre	q. Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
МН		9	dB	dBμV/m	dBµV/m	dB
32.9	91 Peak	31.37	-4.28	27.09	40.00	-12.91
339.	43 Peak	37.79	-7.16	30.63	46.00	-15.37
458.	74 Peak	40.59	-3.81	36.78	46.00	-9.22
706.	09 Peak	35.33	0.10	35.43	46.00	-10.57
875.	84 Peak	32.69	3.30	35.99	46.00	-10.01
939.	86 Peak	33.61	3.73	37.34	46.00	-8.66

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 77 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11ac80 B3 Temp./Humi. :21 deg C / 62 RH Fundamental Frequency :5775 MHz Engineer :Jerry

Operation Mode :Tx CH LOW :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

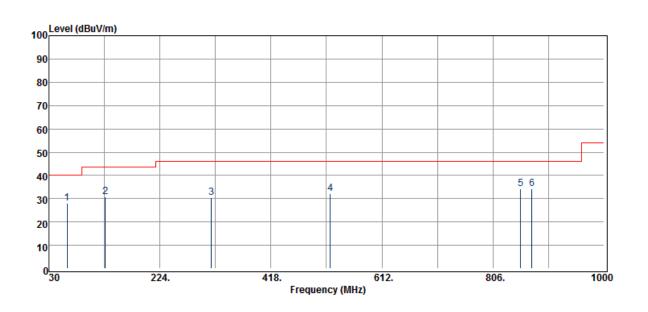

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
62.01	Peak	43.49	-15.60	27.89	40.00	-12.11
128.94	Peak	39.85	-8.95	30.90	43.50	-12.60
314.21	Peak	38.04	-7.76	30.28	46.00	-15.72
521.79	Peak	34.49	-2.38	32.11	46.00	-13.89
854.50	Peak	31.45	2.86	34.31	46.00	-11.69
873.90	Peak	31.18	3.10	34.28	46.00	-11.72

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 78 of 346


Dipole Antenna

:2019-04-10 **Project Number** : T190321W03 **Test Date**

:23 deg_C / 62 RH **Operation Band** Temp./Humi. :802.11a B1

Fundamental Frequency :5220 MHz Engineer :Jerry Operation Mode :Tx CH MID :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plan

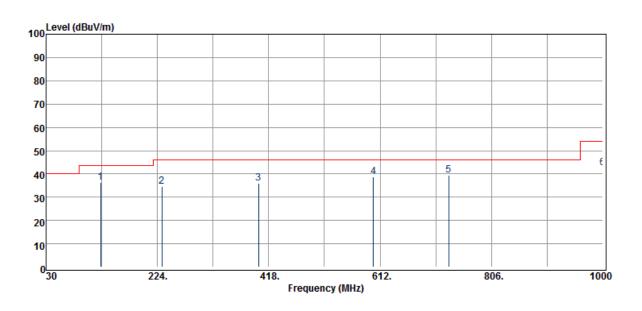

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
125.06	Peak	45.09	-8.80	36.29	43.50	-7.21
231.76	Peak	45.32	-10.75	34.57	46.00	-11.43
400.54	Peak	41.79	-5.64	36.15	46.00	-9.85
600.36	Peak	40.49	-1.65	38.84	46.00	-7.16
731.31	Peak	38.17	1.16	39.33	46.00	-6.67
1000.00	Peak	37.18	5.27	42.45	54.00	-11.55

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction. documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)




Page: 79 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11a B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5220 MHz Engineer :Jerry **Operation Mode** :Tx CH MID :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

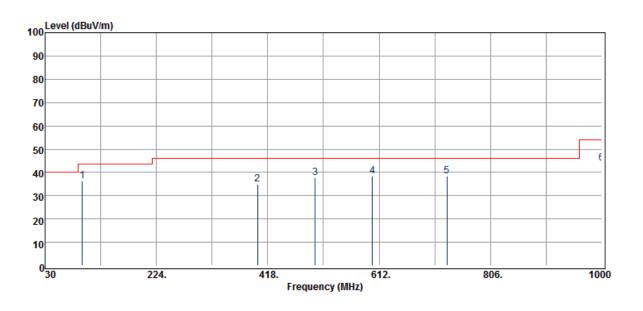

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
94.99	Peak	50.65	-14.24	36.41	43.50	-7.09
400.54	Peak	40.59	-5.64	34.95	46.00	-11.05
500.45	Peak	40.68	-2.93	37.75	46.00	-8.25
600.36	Peak	40.23	-1.65	38.58	46.00	-7.42
730.34	Peak	37.33	1.18	38.51	46.00	-7.49
1000.00	Peak	38.50	5.27	43.77	54.00	-10.23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 80 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11a B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5300 MHz Engineer :Jerry

Operation Mode :Tx CH MID :VERTICAL Measurement Antenna Pol. EUT Pol. :H Plan

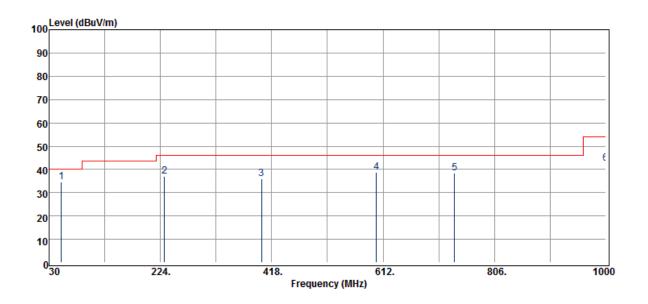

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
51.34	Peak	50.34	-15.57	34.77	40.00	-5.23
230.79	Peak	47.94	-10.80	37.14	46.00	-8.86
400.54	Peak	41.75	-5.64	36.11	46.00	-9.89
600.36	Peak	40.56	-1.65	38.91	46.00	-7.09
736.16	Peak	36.88	1.49	38.37	46.00	-7.63
1000.00	Peak	37.12	5.27	42.39	54.00	-11.61

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction. documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)




Page: 81 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11a B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5300 MHz Engineer :Jerry

Operation Mode :Tx CH MID :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plan

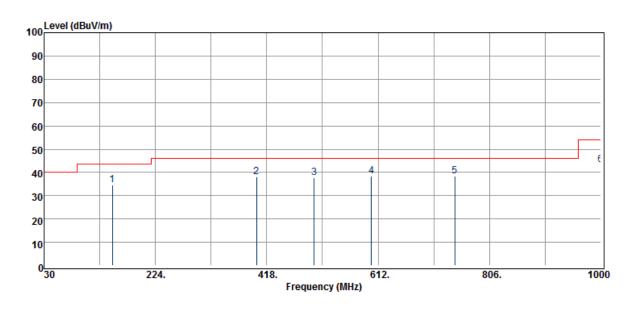

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
149.31	Peak	44.64	-10.10	34.54	43.50	-8.96
400.54	Peak	43.79	-5.64	38.15	46.00	-7.85
500.45	Peak	40.56	-2.93	37.63	46.00	-8.37
600.36	Peak	40.19	-1.65	38.54	46.00	-7.46
745.86	Peak	36.61	1.96	38.57	46.00	-7.43
1000.00	Peak	37.95	5.27	43.22	54.00	-10.78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 82 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11a B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5580 MHz Engineer :Jerry :VERTICAL

Operation Mode :Tx CH MID Measurement Antenna Pol. EUT Pol. :H Plan

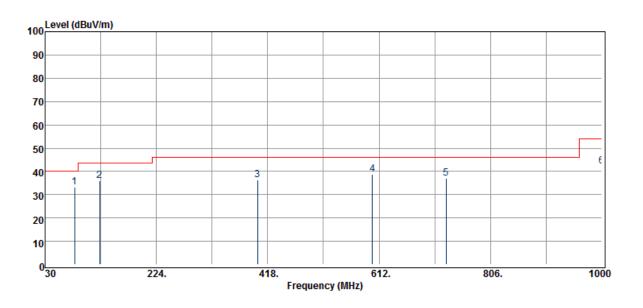

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
81.41	Peak	48.48	-15.43	33.05	40.00	-6.95
125.06	Peak	44.80	-8.80	36.00	43.50	-7.50
400.54	Peak	41.99	-5.64	36.35	46.00	-9.65
600.36	Peak	40.27	-1.65	38.62	46.00	-7.38
728.40	Peak	36.09	1.05	37.14	46.00	-8.86
1000.00	Peak	36.82	5.27	42.09	54.00	-11.91

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 83 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11a B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5580 MHz Engineer :Jerry **Operation Mode** :Tx CH MID :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

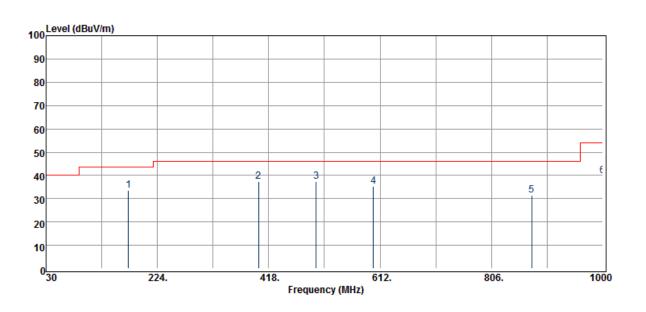

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
IVII IZ	1 1VQ1 /AV	αυμν	שט	ασμν/π	αυμν/πι	ub
173.56	Peak	46.44	-12.71	33.73	43.50	-9.77
400.54	Peak	45.73	-8.22	37.51	46.00	-8.49
500.45	Peak	43.58	-6.29	37.29	46.00	-8.71
600.36	Peak	40.15	-4.80	35.35	46.00	-10.65
875.84	Peak	32.27	-0.77	31.50	46.00	-14.50
1000.00	Peak	38.79	0.98	39.77	54.00	-14.23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 84 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11a B3 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5785 MHz Engineer :Jerry

Operation Mode :Tx CH MID :VERTICAL Measurement Antenna Pol. EUT Pol. :H Plan

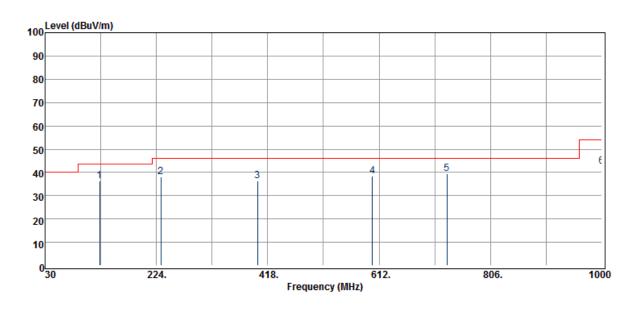

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
125.06	Peak	45.19	-8.80	36.39	43.50	-7.11
231.76	Peak	48.86	-10.75	38.11	46.00	-7.89
400.54	Peak	42.00	-5.64	36.36	46.00	-9.64
600.36	Peak	40.22	-1.65	38.57	46.00	-7.43
730.34	Peak	38.11	1.18	39.29	46.00	-6.71
1000.00	Peak	37.30	5.27	42.57	54.00	-11.43

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 85 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11a B3 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5785 MHz Engineer :Jerry **Operation Mode** :Tx CH MID :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

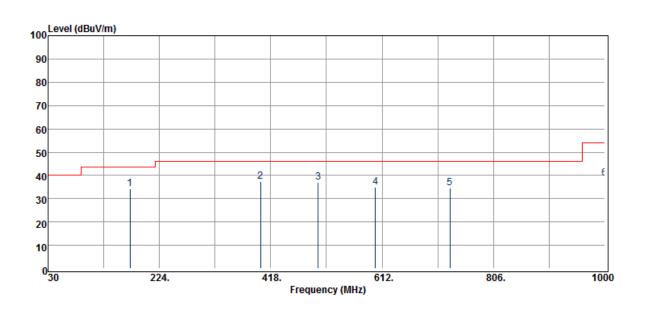

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
172.59	Peak	46.77	-12.62	34.15	43.50	-9.35
400.54	Peak	45.75	-8.22	37.53	46.00	-8.47
500.45	Peak	43.34	-6.29	37.05	46.00	-8.95
600.36	Peak	39.84	-4.80	35.04	46.00	-10.96
730.34	Peak	37.56	-2.80	34.76	46.00	-11.24
1000.00	Peak	37.87	0.98	38.85	54.00	-15.15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 86 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11ac80 B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5210 MHz Engineer :Jerry **Operation Mode** :Tx CH LOW :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plan

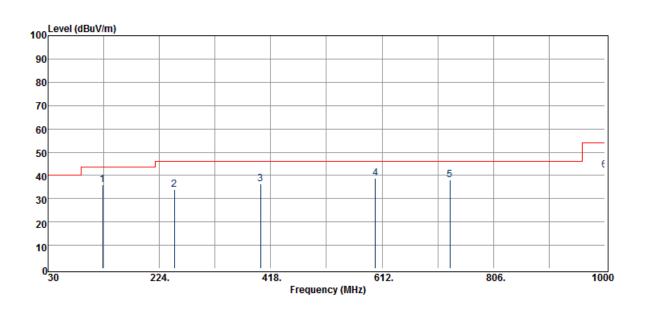

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
125.06	Peak	44.74	-8.80	35.94	43.50	-7.56
250.19	Peak	44.20	-10.40	33.80	46.00	-12.20
400.54	Peak	41.96	-5.64	36.32	46.00	-9.68
600.36	Peak	40.33	-1.65	38.68	46.00	-7.32
730.34	Peak	36.80	1.18	37.98	46.00	-8.02
1000.00	Peak	36.99	5.27	42.26	54.00	-11.74

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 87 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11ac80 B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5210 MHz Engineer :Jerry

Operation Mode :Tx CH LOW :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plan

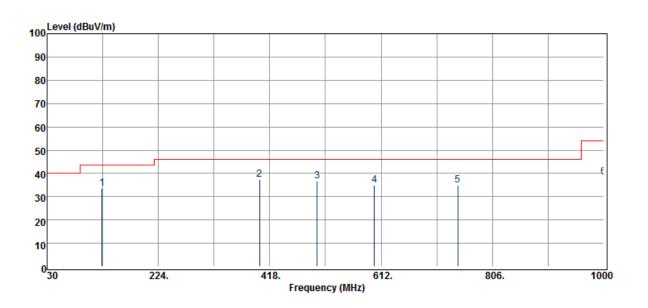

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
126.03	Peak	43.78	-10.29	33.49	43.50	-10.01
400.54	Peak	45.53	-8.22	37.31	46.00	-8.69
500.45	Peak	42.81	-6.29	36.52	46.00	-9.48
600.36	Peak	39.83	-4.80	35.03	46.00	-10.97
745.86	Peak	37.02	-2.09	34.93	46.00	-11.07
1000.00	Peak	37.59	0.98	38.57	54.00	-15.43

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 88 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11ac80 B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5290 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plan

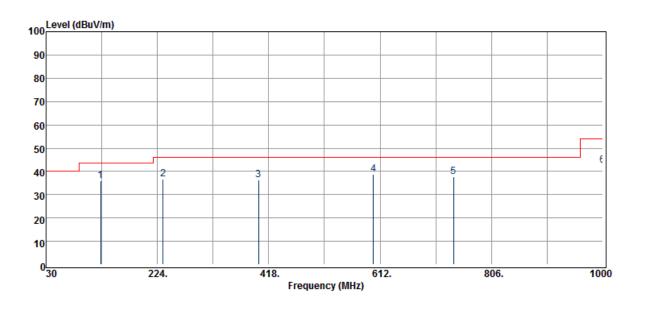

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
125.06	Peak	44.83	-8.80	36.03	43.50	-7.47
233.70	Peak	47.25	-10.63	36.62	46.00	-9.38
400.54	Peak	41.82	-5.64	36.18	46.00	-9.82
600.36	Peak	40.25	-1.65	38.60	46.00	-7.40
740.04	Peak	36.09	1.61	37.70	46.00	-8.30
1000.00	Peak	37.17	5.27	42.44	54.00	-11.56

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 89 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11ac80 B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5290 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

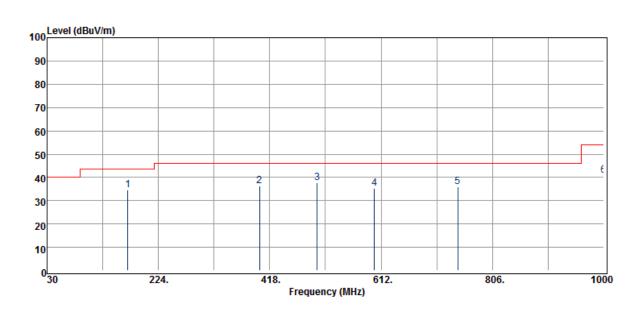

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
170.65	Peak	45.60	-10.83	34.77	43.50	-8.73
400.54	Peak	42.05	-5.64	36.41	46.00	-9.59
500.45	Peak	40.48	-2.93	37.55	46.00	-8.45
600.36	Peak	37.04	-1.65	35.39	46.00	-10.61
745.86	Peak	33.99	1.96	35.95	46.00	-10.05
1000.00	Peak	35.52	5.27	40.79	54.00	-13.21

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction. documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)




Page: 90 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11ac80 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5610 MHz Engineer :Jerry

Operation Mode :Tx CH MID :VERTICAL Measurement Antenna Pol. EUT Pol. :H Plan

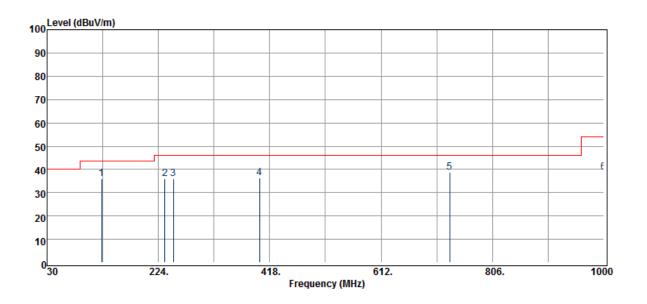

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
125.06	Peak	44.88	-8.80	36.08	43.50	-7.42
235.64	Peak	46.44	-10.56	35.88	46.00	-10.12
250.19	Peak	46.53	-10.40	36.13	46.00	-9.87
400.54	Peak	41.91	-5.64	36.27	46.00	-9.73
731.31	Peak	37.46	1.16	38.62	46.00	-7.38
1000.00	Peak	33.65	5.27	38.92	54.00	-15.08

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 91 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11ac80 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5610 MHz Engineer :Jerry **Operation Mode** :Tx CH MID :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

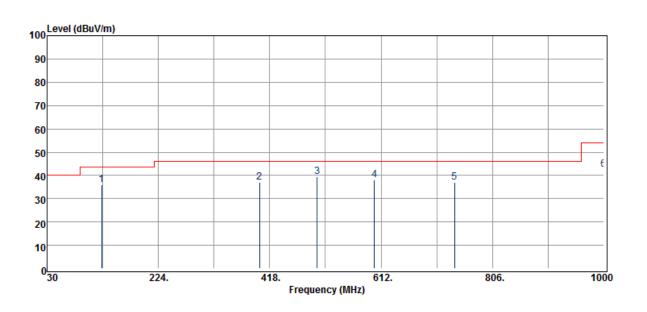

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
125.06	Peak	44.65	-8.80	35.85	43.50	-7.65
400.54	Peak	42.57	-5.64	36.93	46.00	-9.07
500.45	Peak	42.36	-2.93	39.43	46.00	-6.57
600.36	Peak	39.70	-1.65	38.05	46.00	-7.95
740.04	Peak	35.35	1.61	36.96	46.00	-9.04
1000.00	Peak	37.37	5.27	42.64	54.00	-11.36

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction. documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)




Page: 92 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11ac80 B3 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5775 MHz Engineer :Jerry

Operation Mode :Tx CH LOW :VERTICAL Measurement Antenna Pol. EUT Pol. :H Plan

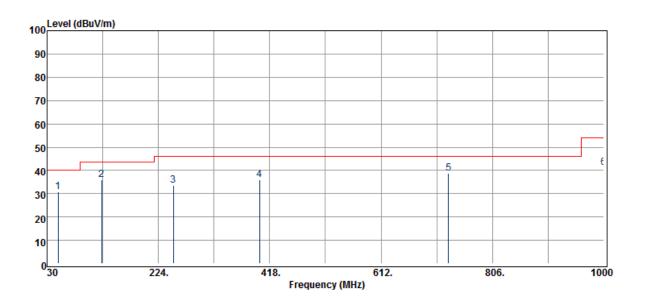

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
49.40	Peak	45.94	-14.98	30.96	40.00	-9.04
125.06	Peak	44.89	-8.80	36.09	43.50	-7.41
250.19	Peak	43.98	-10.40	33.58	46.00	-12.42
400.54	Peak	41.50	-5.64	35.86	46.00	-10.14
729.37	Peak	37.50	1.13	38.63	46.00	-7.37
1000.00	Peak	35.75	5.27	41.02	54.00	-12.98

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 93 of 346

Project Number : T190321W03 **Test Date** :2019-04-10

Operation Band :802.11ac80 B3 Temp./Humi. :23 deg C / 62 RH Fundamental Frequency :5775 MHz Engineer

:Jerry **Operation Mode** :Tx CH LOW :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

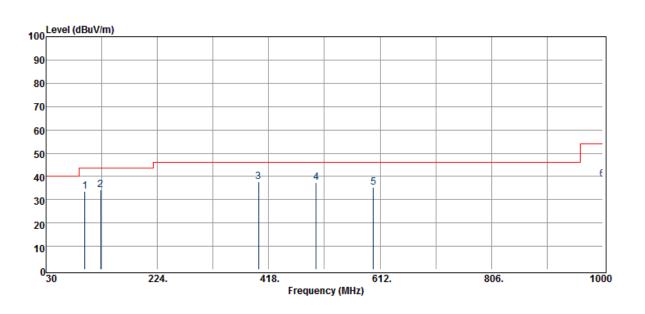

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
97.90	Peak	48.15	-14.54	33.61	43.50	-9.89
125.06	Peak	44.49	-10.28	34.21	43.50	-9.29
400.54	Peak	45.90	-8.22	37.68	46.00	-8.32
500.45	Peak	43.58	-6.29	37.29	46.00	-8.71
600.36	Peak	39.93	-4.80	35.13	46.00	-10.87
1000.00	Peak	37.72	0.98	38.70	54.00	-15.30

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 94 of 346


Above 1GHz Data: PCB Antenna

Project Number : T190321W03 **Test Date** :2019-04-09

:802.11a B1 Temp./Humi. **Operation Band** :23 deg_C / 62 RH

Fundamental Frequency :5180 MHz Engineer :Jerry Operation Mode :Tx CH LOW :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plan

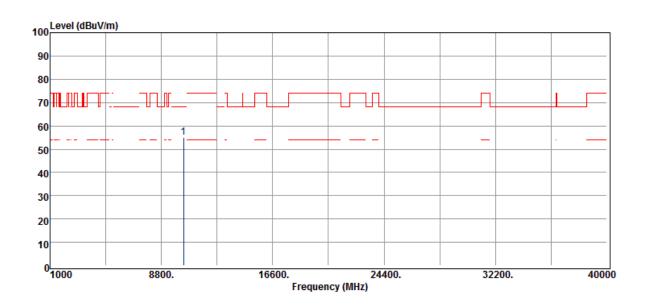

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
10360.00	Peak	40.44	14.41	54.85	68.20	-13.35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)




Page: 95 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5180 MHz Engineer :Jerry

Operation Mode :Tx CH LOW :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plan

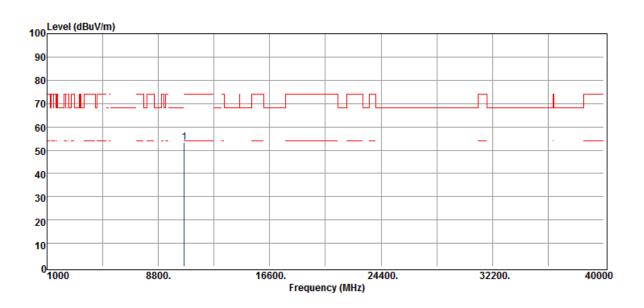

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
	10600.00	Peak	37 65	15 47	53 12	74.00	-20.88

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 96 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5220 MHz Engineer :Jerry **Operation Mode** :Tx CH MID :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plan

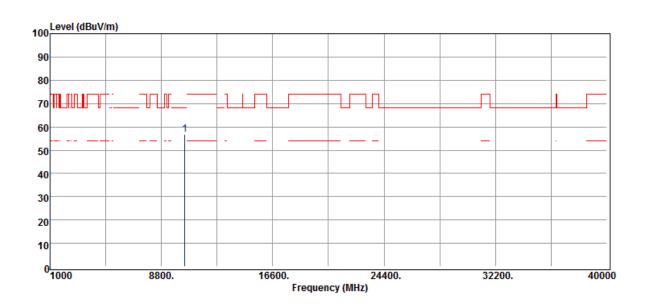

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10440.00	Peak	41.06	15.58	56.64	68.20	-11.56

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 97 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5220 MHz Engineer :Jerry **Operation Mode** :Tx CH MID :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

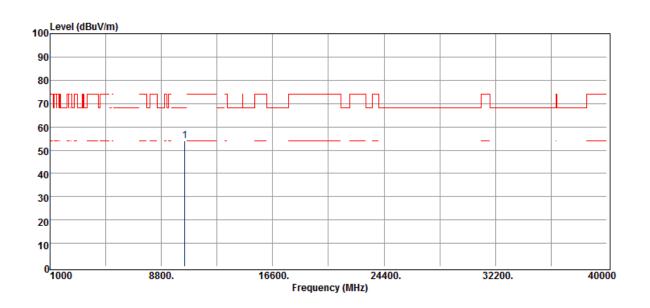

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10440.00	Peak	38.43	15.58	54.01	68.20	-14.19

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



:VERTICAL


Page: 98 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B1 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5240 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. EUT Pol. :H Plan

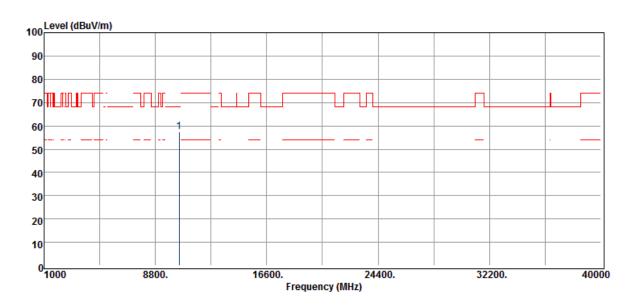

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
10480 00	Peak	41.00	16 48	57 48	68 20	-10 72

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)



Page: 99 of 346


Measurement Antenna Pol.

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5240 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :HORIZONTAL

EUT Pol. :H Plan

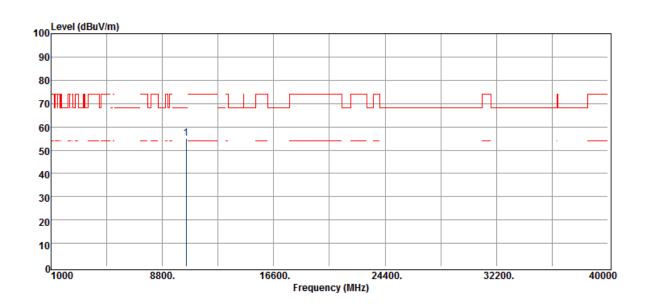

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10480.00	Peak	38.37	16.48	54.85	68.20	-13.35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 100 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B2a Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5260 MHz Engineer :Jerry **Operation Mode** :Tx CH LOW :VERTICAL

Measurement Antenna Pol. EUT Pol. :H Plan

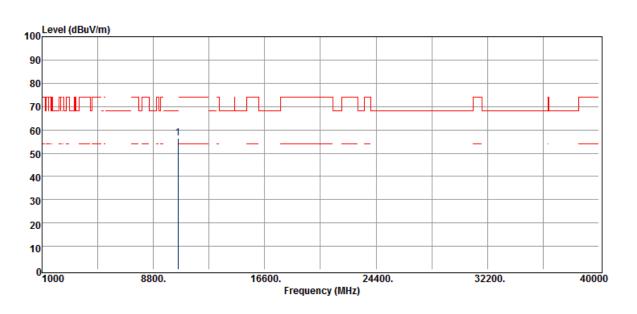

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dΒμV/m	dB
10520 00	Peak	40 93	15 57	56 50	68 20	-11 70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 101 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B2a Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5260 MHz Engineer :Jerry **Operation Mode** :Tx CH LOW :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

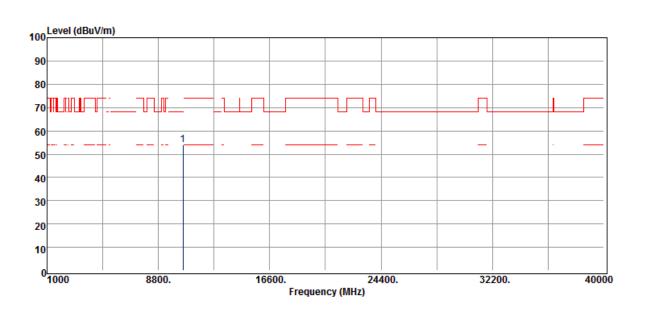

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
10520 00	Peak	38 27	15 57	53 84	68 20	-14 36

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 102 of 346


Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11a B2a
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5300 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :VERTICAL

EUT Pol. :H Plan

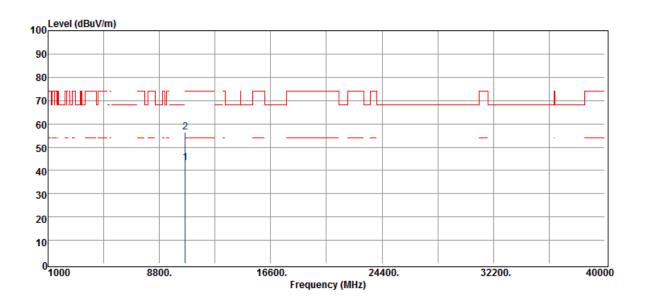

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dBµV	dB	dΒμV/m	dΒμV/m	dB
	10600.00	Average	27.85	15.47	43.32	54.00	-10.68
	10600.00	Peak	40.87	15.47	56.34	74.00	-17.66

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 103 of 346

Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11a B2a
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5300 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :HORIZONTAL EUT Pol. :H Plan

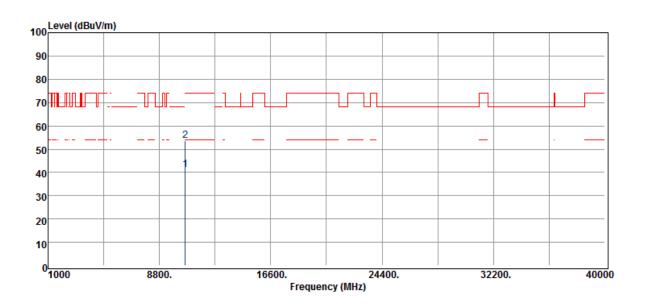

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
 10600.00	Average	25.88	15.47	41.35	54.00	-12.65
10600.00	Peak	38.26	15.47	53.73	74.00	-20.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 104 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11a B2a Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5320 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :VERTICAL

Operation Mode :Tx CH HIGH Measurement Antenna Pol. EUT Pol. :H Plan

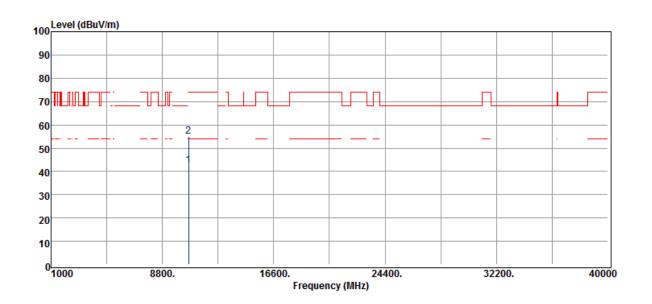

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
10640.0	0 Average	26.55	16.12	42.67	54.00	-11.33
10640.0	0 Peak	38.76	16.12	54.88	74.00	-19.12

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 105 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5320 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

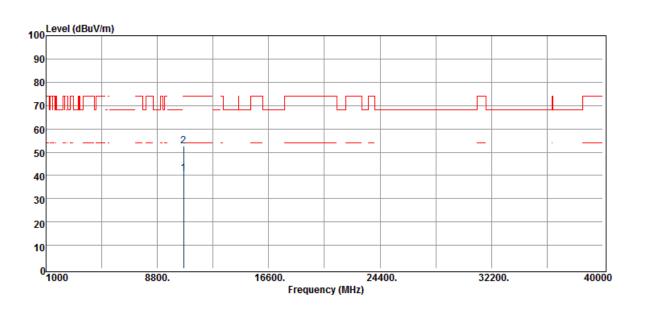

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
10640.00) Average	24.73	16.12	40.85	54.00	-13.15
10640.00) Peak	36.51	16.12	52.63	74.00	-21.37

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 106 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11a B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5500 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :VERTICAL

Operation Mode :Tx CH LOW Measurement Antenna Pol. EUT Pol. :H Plan

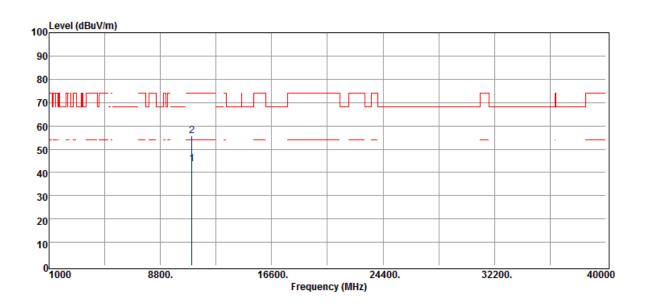

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	rS dBμV/m	dBµV/m	dB
11000.00	Average	25.72	17.75	43.47	54.00	-10.53
11000.00	Peak	37.88	17.75	55.63	74.00	-18.37

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 107 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5500 MHz Engineer :Jerry :HORIZONTAL

Operation Mode :Tx CH LOW Measurement Antenna Pol. EUT Pol. :H Plan

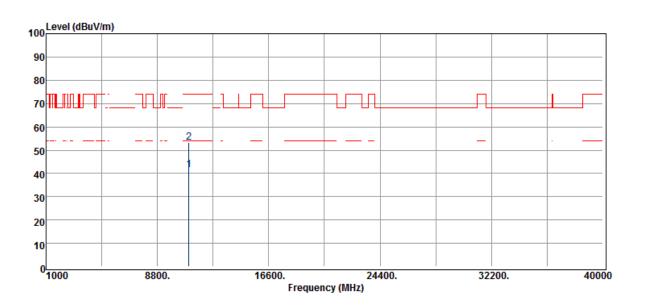

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
11000.00	Average	23.89	17.75	41.64	54.00	-12.36
11000.00	Peak	35.64	17.75	53.39	74.00	-20.61

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 108 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11a B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5580 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plan

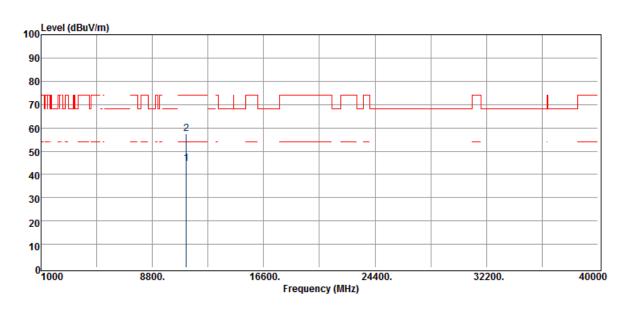

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dBµV	dB	dΒμV/m	dΒμV/m	dB
	11160.00	Average	27.99	16.53	44.52	54.00	-9.48
	11160.00	Peak	41.05	16.53	57.58	74.00	-16.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 109 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11a B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5580 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :HORIZONTAL EUT Pol. :H Plan

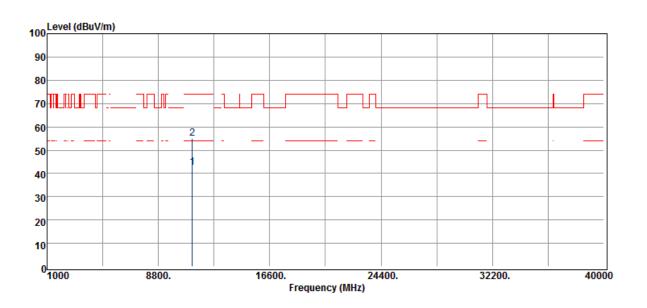

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
11160.00	Average	25.98	16.53	42.51	54.00	-11.49
11160.00	Peak	38.35	16.53	54.88	74.00	-19.12

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 110 of 346


Measurement Antenna Pol.

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5700 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :VERTICAL

EUT Pol. :H Plan

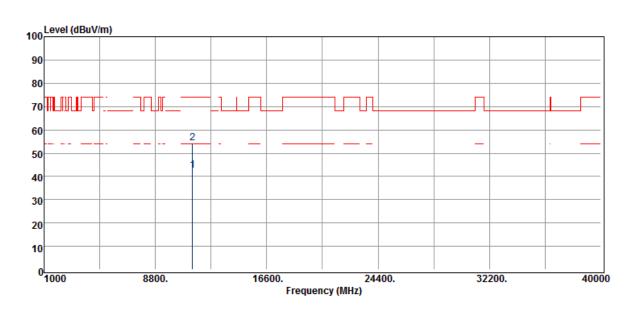

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
	11400.00	Average	26.10	16.48	42.58	54.00	-11.42
	11400.00	Peak	37.72	16.48	54.20	74.00	-19.80

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 111 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5700 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plan

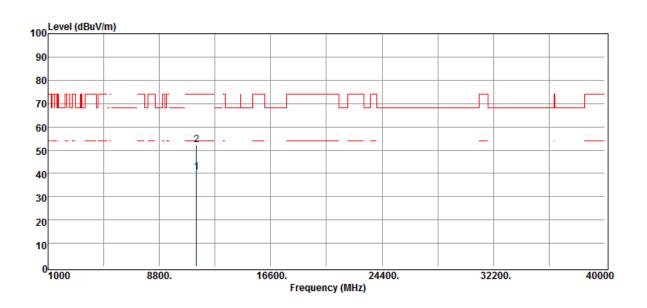

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
	11400.00	Average	24.17	16.48	40.65	54.00	-13.35
	11400.00	Peak	35.94	16.48	52.42	74.00	-21.58

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 112 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11a B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5745 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :VERTICAL

EUT Pol. :H Plan

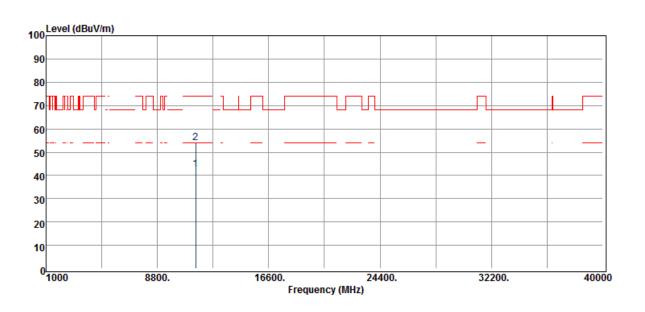

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
11490.00	Average	26.60	15.85	42.45	54.00	-11.55
11490.00	Peak	38.02	15.85	53.87	74.00	-20.13

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 113 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11a B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5745 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :HORIZONTAL EUT Pol. :H Plan

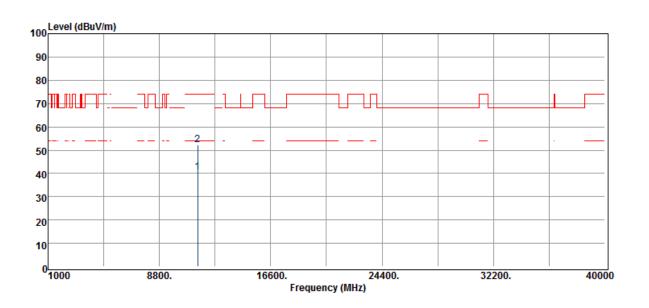

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dΒμV/m	dBµV/m	dB
11490.00	Average	24.64	15.85	40.49	54.00	-13.51
11490.00	Peak	36.26	15.85	52.11	74.00	-21.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 114 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11a B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5785 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :VERTICAL

EUT Pol. :H Plan

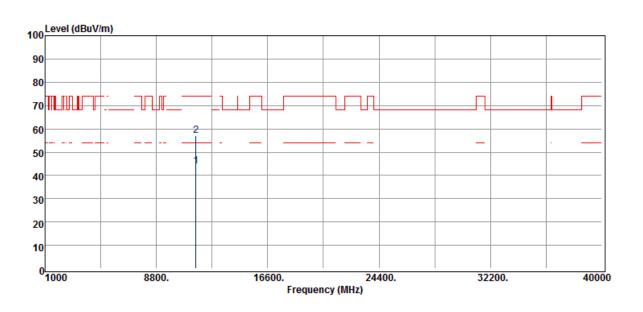

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
11570.00	Average	27.71	16.29	44.00	54.00	-10.00
11570.00	Peak	40.83	16.29	57.12	74.00	-16.88

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 115 of 346

Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11a B3
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5785 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :HORIZONTAL EUT Pol. :H Plan

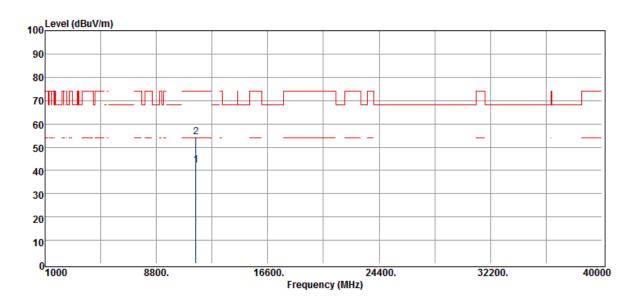

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
11570.00	Average	25.77	16.29	42.06	54.00	-11.94
11570.00	Peak	38.21	16.29	54.50	74.00	-19.50

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 116 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11a B3 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5825 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plan

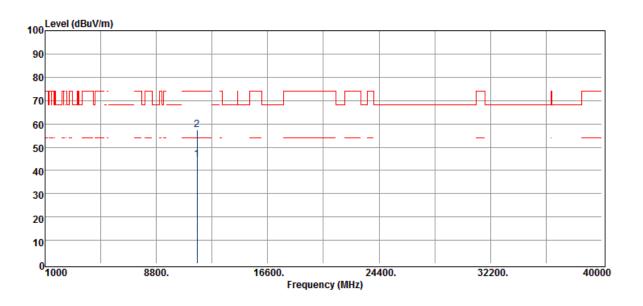

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
11650.00	Average	27.91	16.61	44.52	54.00	-9.48
11650.00	Peak	40.84	16.61	57.45	74.00	-16.55

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 117 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B3 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5825 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

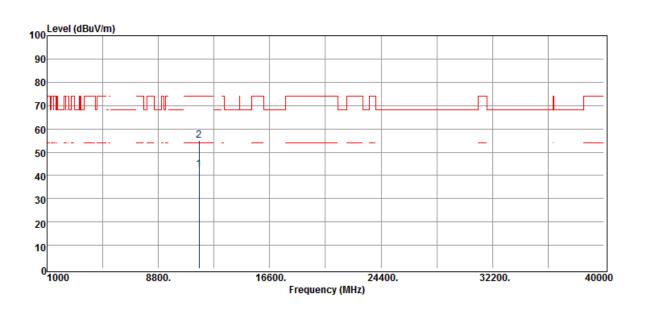

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
 MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
 11650.00	Average	25.95	16.61	42.56	54.00	-11.44
11650.00	Peak	38.31	16.61	54.92	74.00	-19.08

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 118 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n20 B1 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5180 MHz Engineer :Jerry :VERTICAL

Operation Mode :Tx CH LOW Measurement Antenna Pol. EUT Pol. :H Plan

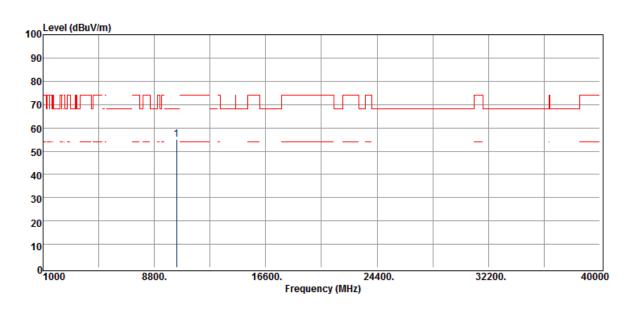

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
10360.00	Peak	40.74	14.41	55.15	68.20	-13.05

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 119 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n20 B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5180 MHz Engineer :Jerry **Operation Mode** :Tx CH LOW :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

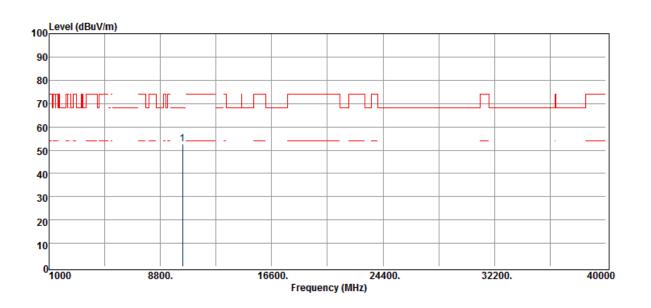

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
10360.00	Peak	38.07	14.41	52.48	68.20	-15.72

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 120 of 346


Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11n20 B1
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5220 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :VERTICAL

EUT Pol. :H Plan

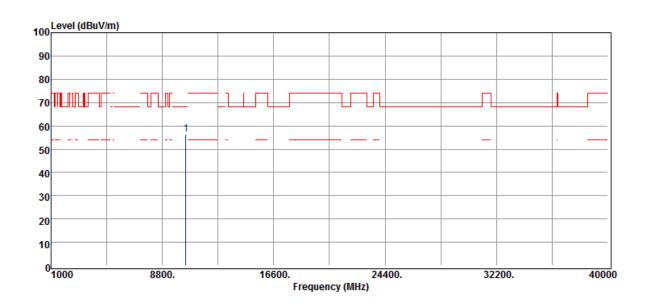

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
10440.00	Peak	40.76	15.58	56.34	68.20	-11.86

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

程智科技股份有限公司




Page: 121 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n20 B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5220 MHz Engineer :Jerry **Operation Mode** :Tx CH MID :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

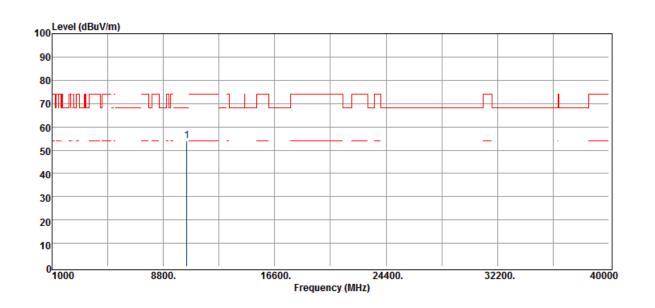

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
10440.00	Peak	38.26	15.58	53.84	68.20	-14.36

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 122 of 346


Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11n20 B1
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5240 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :VERTICAL

EUT Pol. :H Plan

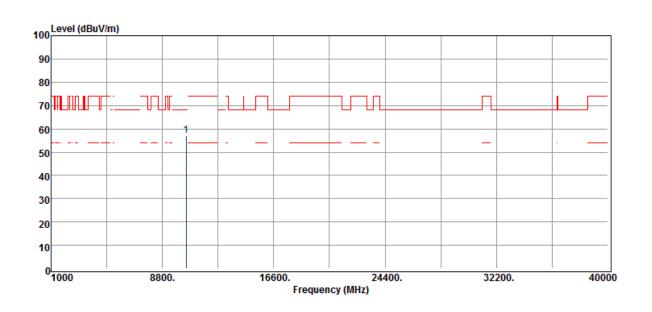

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10480.00	Peak	40.74	16.48	57.22	68.20	-10.98

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 123 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B1 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5240 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :HORIZONTAL

EUT Pol. :H Plan

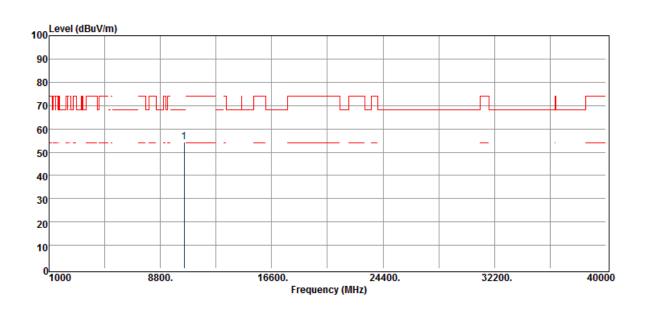

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10480.00	Peak	37.86	16.48	54.34	68.20	-13.86

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)



Page: 124 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B2a Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5260 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :VERTICAL

Operation Mode :Tx CH LOW Measurement Antenna Pol. EUT Pol. :H Plan

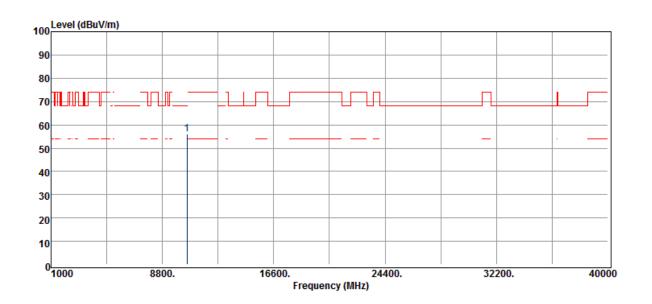

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10520.00	Peak	40.62	15.57	56.19	68.20	-12.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 125 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n20 B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5260 MHz Engineer :Jerry **Operation Mode** :Tx CH LOW :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

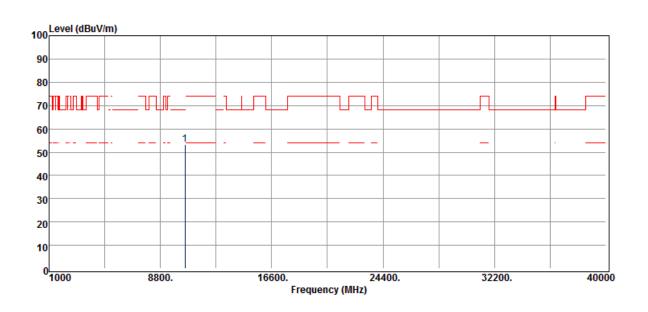

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10520.00	Peak	37.87	15.57	53.44	68.20	-14.76

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 126 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B2a Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5300 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :VERTICAL

EUT Pol. :H Plan

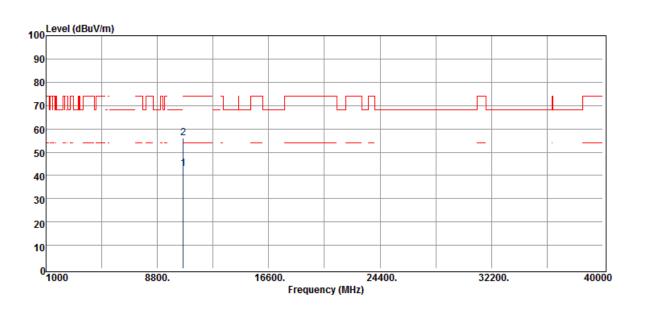

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
10600.00	Average	27.52	15.47	42.99	54.00	-11.01
10600.00	Peak	40.55	15.47	56.02	74.00	-17.98

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 127 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B2a Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5300 MHz Engineer :Jerry
Operation Mode :Tx CH MID Measurement Antenna Pol. :HORIZONTAL

EUT Pol. :H Plan

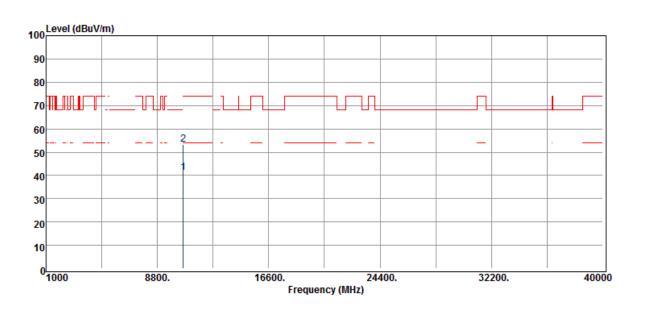

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
10600.00	Average	25.60	15.47	41.07	54.00	-12.93
10600.00	Peak	37.86	15.47	53.33	74.00	-20.67

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 128 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B2a Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5320 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plan

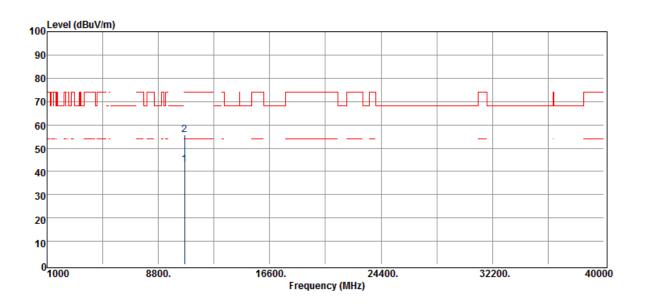

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dΒμV/m	dB
10640.00	Average	26.93	16.12	43.05	54.00	-10.95
10640.00	Peak	39.56	16.12	55.68	74.00	-18.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 129 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n20 B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5320 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plan

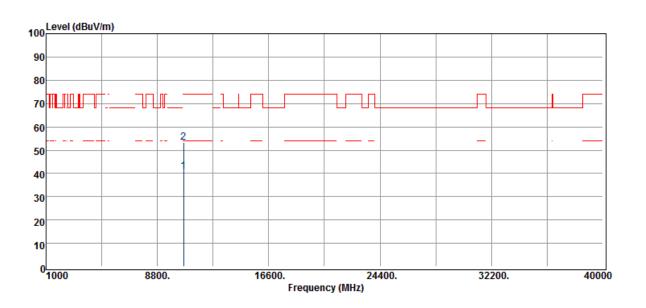

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dΒμV/m	dΒμV/m	dB
10640.00	Average	24.83	16.12	40.95	54.00	-13.05
10640.00	Peak	37.01	16.12	53.13	74.00	-20.87

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 130 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5500 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :VERTICAL

Operation Mode :Tx CH LOW Measurement Antenna Pol. EUT Pol. :H Plan

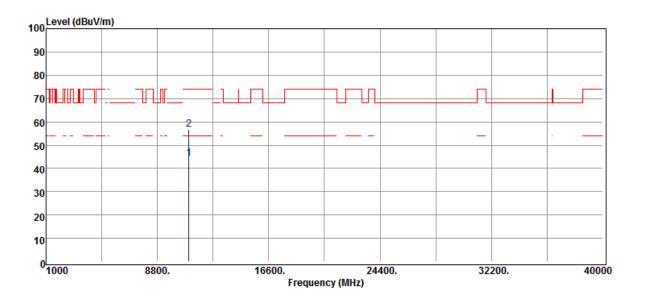

Freq.	Detector Mode	Spectrum	Factor	Actual FS	Limit	Margin
MHz	PK/QP/AV	Reading Level dBµV	dB	rS dBµV/m	@3m dBµV/m	dB
11000.00	Average	26.42	17.75	44.17	54.00	-9.83
11000.00	Peak	39.05	17.75	56.80	74.00	-17.20

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 131 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n20 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5500 MHz Engineer :Jerry :HORIZONTAL

Operation Mode :Tx CH LOW Measurement Antenna Pol. EUT Pol. :H Plan

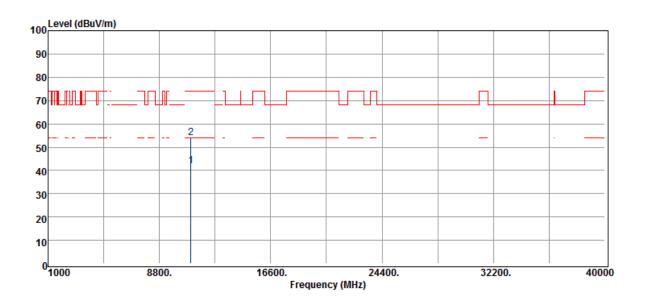

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
11000.00	Average	24.27	17.75	42.02	54.00	-11.98
11000.00	Peak	36.25	17.75	54.00	74.00	-20.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 132 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5580 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :VERTICAL

Operation Mode :Tx CH MID Measurement Antenna Pol. EUT Pol. :H Plan

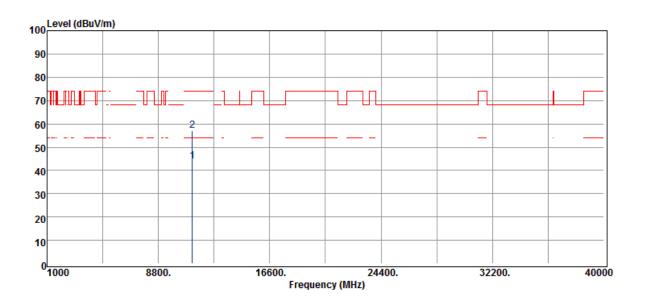

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
11160.00	Average	27.54	16.53	44.07	54.00	-9.93
11160.00	Peak	40.46	16.53	56.99	74.00	-17.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 133 of 346

Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11n20 B2c
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5580 MHz Engineer :Jerry
Operation Mode :Tx CH MID Measurement Antenna Pol. :HORIZONTAL

EUT Pol. :H Plan

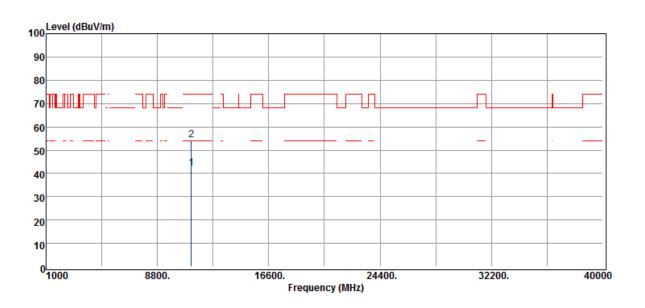

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dΒμV/m	dB
11160.00	Average	25.55	16.53	42.08	54.00	-11.92
11160.00	Peak	37.95	16.53	54.48	74.00	-19.52

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 134 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5700 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plan

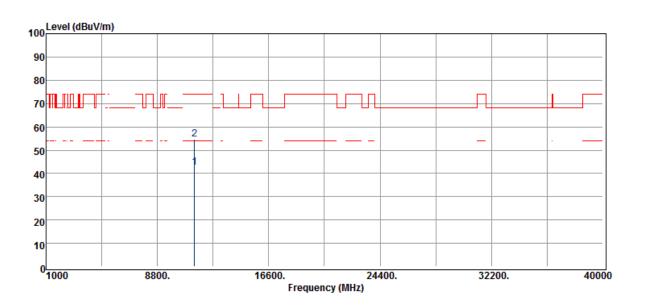

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
	11400.00	Average	26.16	16.48	42.64	54.00	-11.36
	11400.00	Peak	38.08	16.48	54.56	74.00	-19.44

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 135 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n20 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5700 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

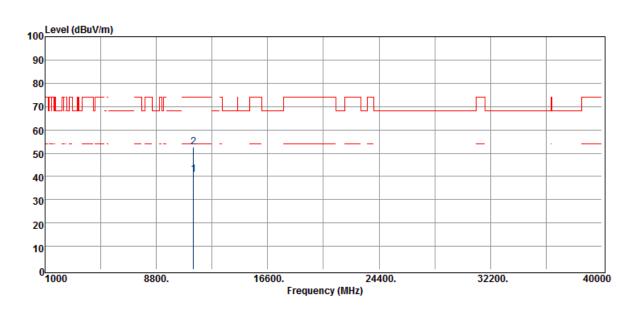

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
	11400.00	Average	24.27	16.48	40.75	54.00	-13.25
	11400.00	Peak	36.06	16.48	52.54	74.00	-21.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 136 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5745 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :VERTICAL

EUT Pol. :H Plan

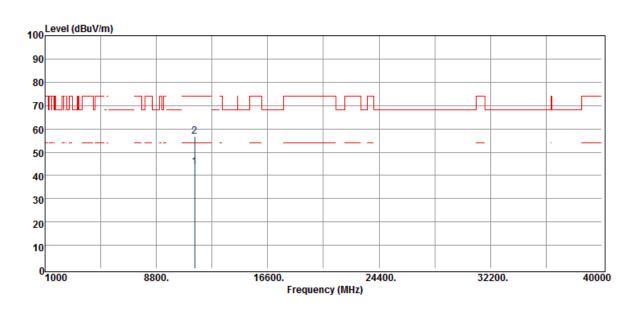

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
11490.00	Average	27.82	15.85	43.67	54.00	-10.33
11490.00	Peak	40.79	15.85	56.64	74.00	-17.36

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 137 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5745 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :HORIZONTAL EUT Pol. :H Plan

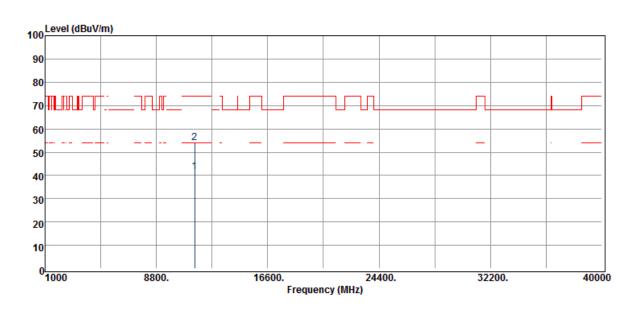

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
11490.00	Average	25.82	15.85	41.67	54.00	-12.33	
11490.00	Peak	38.15	15.85	54.00	74.00	-20.00	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)




Page: 138 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5785 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plan

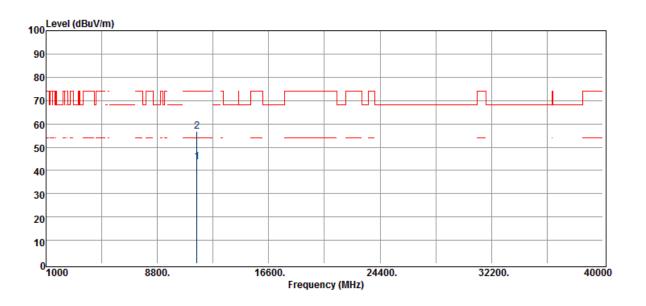

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
11570.00	Average	27.41	16.29	43.70	54.00	-10.30
11570.00	Peak	40.39	16.29	56.68	74.00	-17.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 139 of 346

Project Number : T190321W03 Test Date :2019-04-09

Fundamental Frequency :5785 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :HORIZONTAL

Operation Mode :Tx CH MID Measurement Antenna Pol. EUT Pol. :H Plan

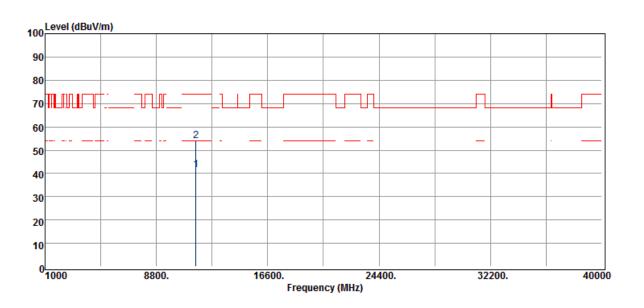

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
	11570.00	Average	25.31	16.29	41.60	54.00	-12.40
	11570.00	Peak	37.71	16.29	54.00	74.00	-20.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 140 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5825 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plan

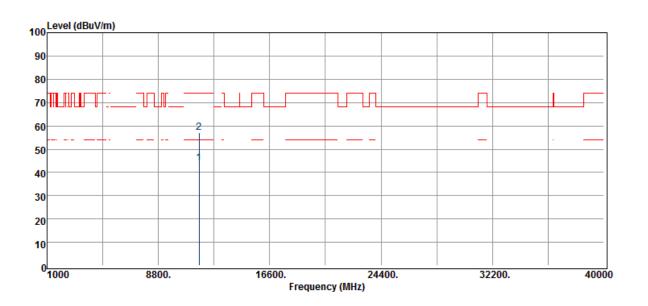

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
	11650.00	Average	27.48	16.61	44.09	54.00	-9.91
	11650.00	Peak	40.54	16.61	57.15	74.00	-16.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 141 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B3 Temp./Humi. :23 deg_C / 62 RH Fundamental Frequency :5825 MHz Engineer :Jerry

Fundamental Frequency :5825 MHz Engineer :Jerry
Operation Mode :Tx CH HIGH Measurement Antenna Pol. :HORIZONTAL

EUT Pol. :H Plan

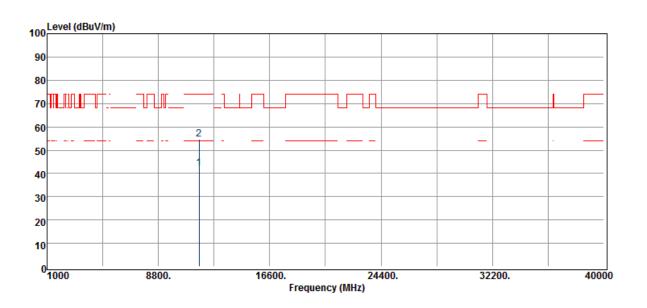

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
 MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
11650.00	Average	25.49	16.61	42.10	54.00	-11.90
11650.00	Peak	37.91	16.61	54.52	74.00	-19.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 142 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n40 B1 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5190 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :VERTICAL

EUT Pol. :H Plan

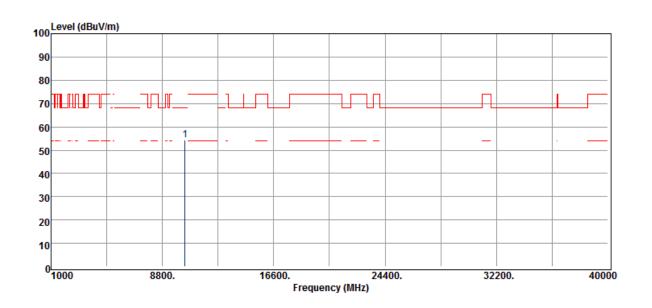

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10380.00	Peak	39.60	14.58	54.18	68.20	-14.02

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 143 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n40 B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5190 MHz Engineer :Jerry **Operation Mode** :Tx CH LOW :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

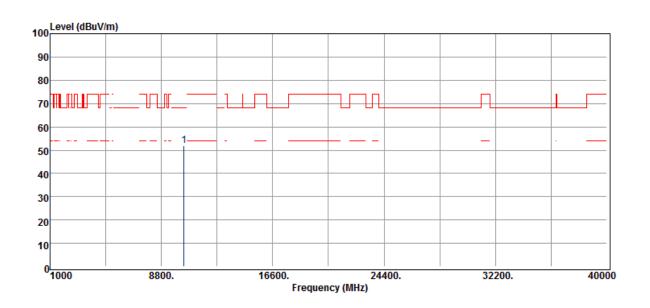

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10380.00	Peak	37.47	14.58	52.05	68.20	-16.15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 144 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n40 B1 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5230 MHz Engineer :Jerry :VERTICAL

Operation Mode :Tx CH HIGH Measurement Antenna Pol. EUT Pol. :H Plan

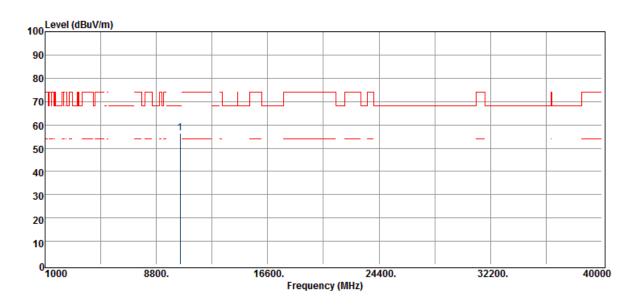

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
 MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
10460 00	Peak	40.33	15 97	56.30	68 20	-11 90

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 145 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n40 B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5230 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

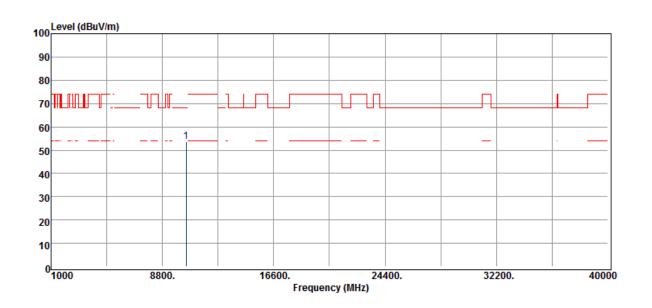

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10460.00	Peak	37.65	15.97	53.62	68.20	-14.58

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 146 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n40 B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5270 MHz Engineer :Jerry :VERTICAL

Operation Mode :Tx CH LOW Measurement Antenna Pol. EUT Pol. :H Plan

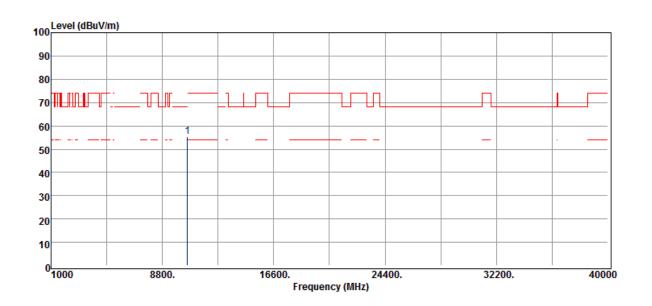

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
10540.00	Peak	39.79	15.67	55.46	68.20	-12.74

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 147 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n40 B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5270 MHz Engineer :Jerry

Operation Mode :Tx CH LOW :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plan

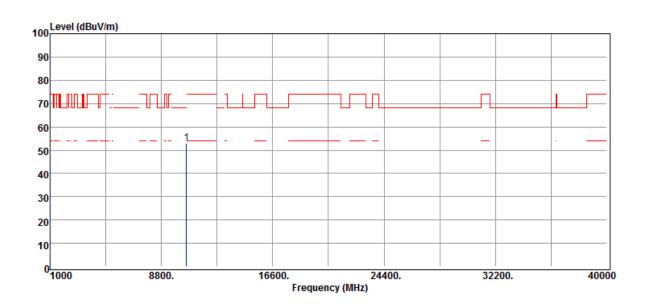

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10540.00	Peak	37.20	15.67	52.87	68.20	-15.33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 148 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n40 B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5310 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH :VERTICAL Measurement Antenna Pol. EUT Pol. :H Plan

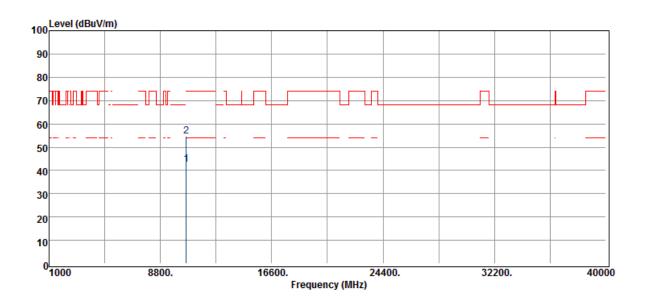

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
1	0620.00	Average	26.68	15.78	42.46	54.00	-11.54
1	0620.00	Peak	38.79	15.78	54.57	74.00	-19.43

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 149 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n40 B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5310 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plan

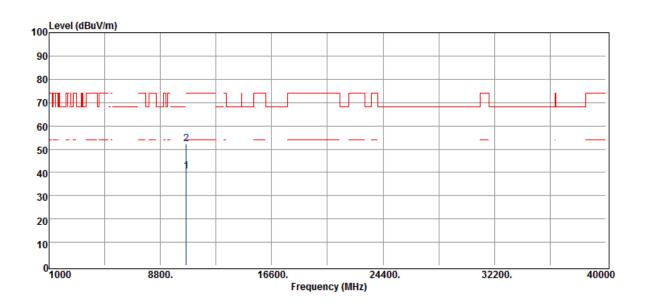

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
10620.00	Average	24.77	15.78	40.55	54.00	-13.45
10620.00	Peak	36.52	15.78	52.30	74.00	-21.70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 150 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n40 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5510 MHz Engineer :Jerry :VERTICAL

Operation Mode :Tx CH LOW Measurement Antenna Pol. EUT Pol. :H Plan

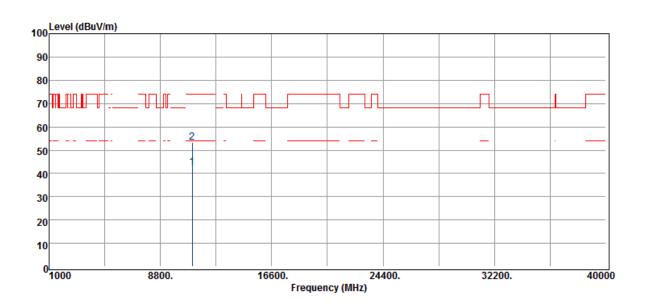

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
11020.00	Average	24.63	17.87	42.50	54.00	-11.50
11020.00	Peak	35.28	17.87	53.15	74.00	-20.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 151 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n40 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5510 MHz Engineer :Jerry :HORIZONTAL

Operation Mode :Tx CH LOW Measurement Antenna Pol. EUT Pol. :H Plan

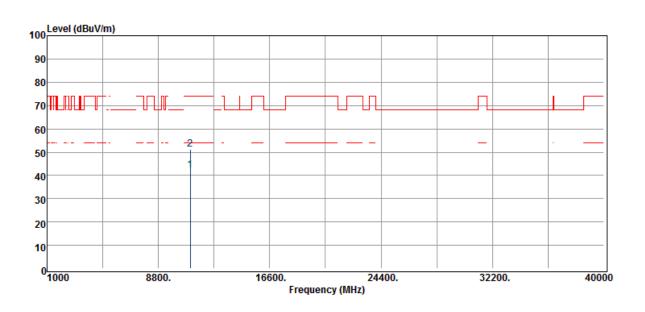

Fr	eq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
M	lHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
110	20.00	Average	24.38	17.87	42.25	54.00	-11.75
110	20.00	Peak	33.31	17.87	51.18	74.00	-22.82

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 152 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n40 B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5550 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :VERTICAL

Operation Mode :Tx CH MID Measurement Antenna Pol. EUT Pol. :H Plan

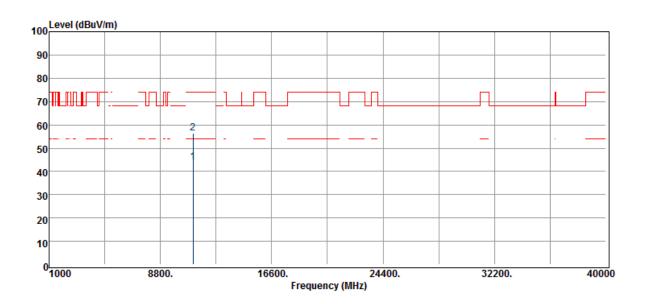

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
11100.00	Average	26.60	17.25	43.85	54.00	-10.15
11100.00	Peak	39.29	17.25	56.54	74.00	-17.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 153 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n40 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5550 MHz Engineer :Jerry

Operation Mode :Tx CH MID :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plan

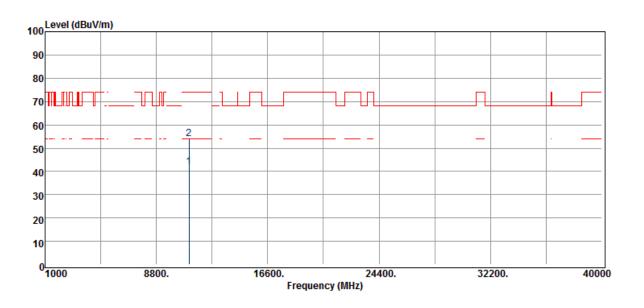

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
11100.00	Average	24.74	17.25	41.99	54.00	-12.01
11100.00	Peak	36.86	17.25	54.11	74.00	-19.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 154 of 346


Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11n40 B2c
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5670 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :VERTICAL

Operation Mode :Tx CH HIGH Measurement Antenna Pol. EUT Pol. :H Plan

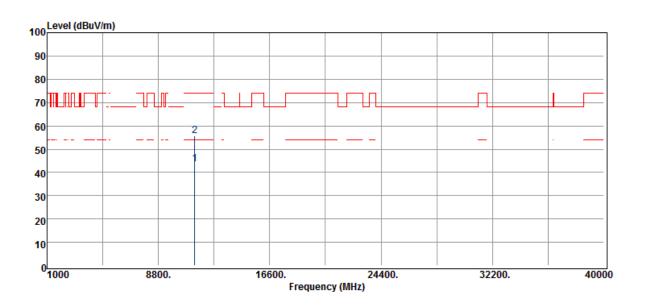

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
11340.00	Average	27.25	16.36	43.61	54.00	-10.39
11340.00	Peak	39.46	16.36	55.82	74.00	-18.18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)




Page: 155 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n40 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5670 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

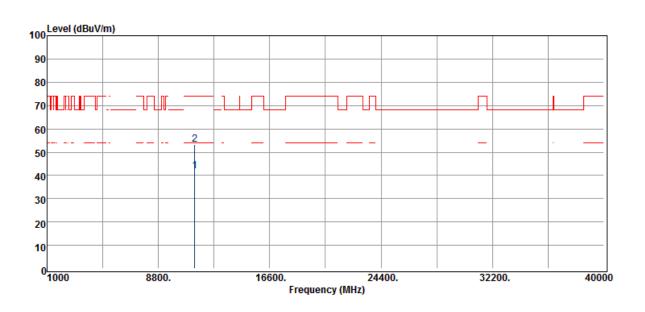

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
 11340.00	Average	25.34	16.36	41.70	54.00	-12.30
11340.00	Peak	36.98	16.36	53.34	74.00	-20.66

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 156 of 346


Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11n40 B3
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5755 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :VERTICAL

EUT Pol. :H Plan

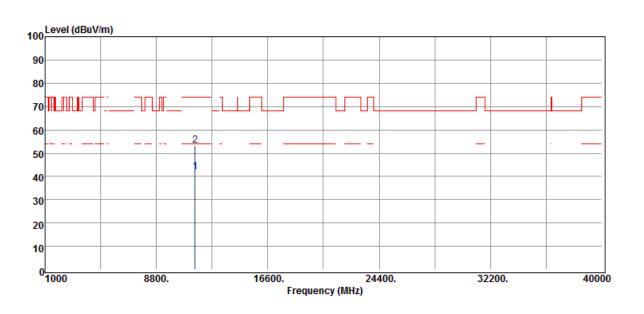

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	MHz	Mode PK/QP/AV	Reading Level dBuV	dB	FS dBuV/m	@3m dBuV/m	dB
_	11510.00	Average	26.58	15.41	41.99	54.00	-12.01
	11510.00	Peak	37.83	15.41	53.24	74.00	-20.76

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 157 of 346


Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11n40 B3
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5755 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :HORIZONTAL

Operation Mode :Tx CH LOW Measurement Antenna Pol. EUT Pol. :H Plan

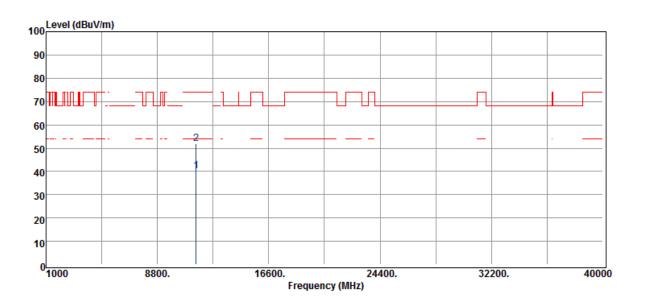

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
11510.00	Average	24.75	15.41	40.16	54.00	-13.84
11510.00	Peak	36.43	15.41	51.84	74.00	-22.16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 158 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n40 B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5795 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plan

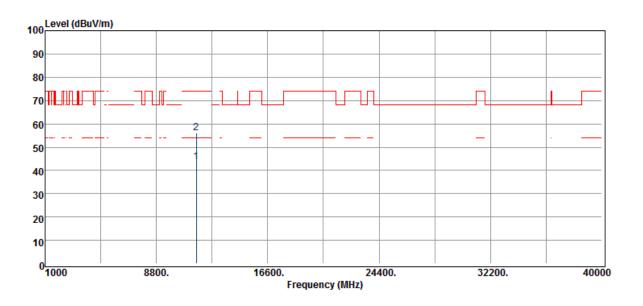

Freq.	Detector Mode	Spectrum	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	Reading Level dBµV	dB	rS dBμV/m	dBµV/m	dB
11590.00	Average	26.81	16.81	43.62	54.00	-10.38
11590.00	Peak	39.26	16.81	56.07	74.00	-17.93

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 159 of 346


Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11n40 B3
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5795 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :HORIZONTAL

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :H EUT Pol. :H Plan

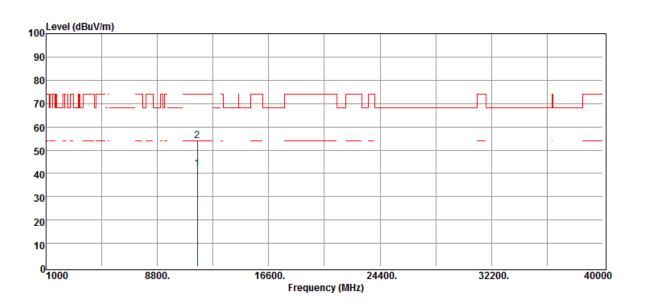

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
11590.00	Average	24.94	16.81	41.75	54.00	-12.25
11590.00	Peak	37.07	16.81	53.88	74.00	-20.12

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 160 of 346


Measurement Antenna Pol.

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11ac80 B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5210 MHz Engineer :Jerry **Operation Mode** :Tx CH LOW :VERTICAL

EUT Pol. :H Plan

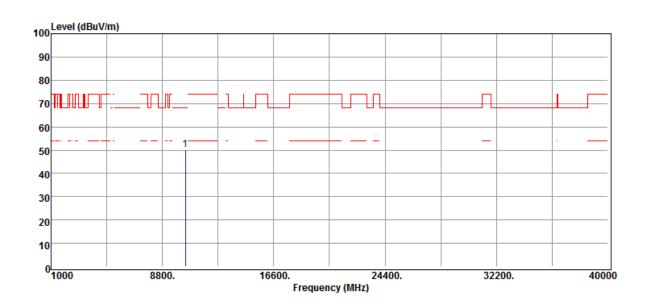

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10420.00	Peak	34.98	15.12	50.10	68.20	-18.10

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)




Page: 161 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11ac80 B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5210 MHz Engineer :Jerry **Operation Mode** :Tx CH LOW :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

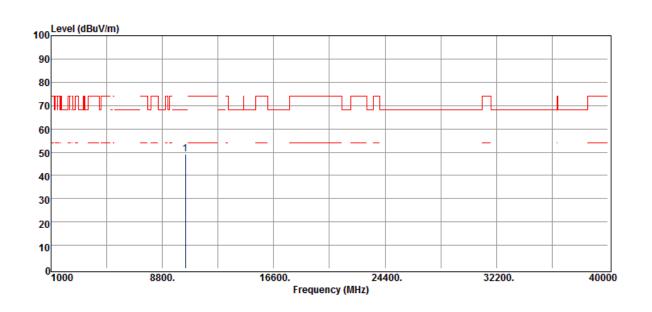

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
10420.00	Peak	34.16	15.12	49.28	68.20	-18.92

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)




Page: 162 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11ac80 B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5290 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :VERTICAL

Measurement Antenna Pol. EUT Pol. :H Plan

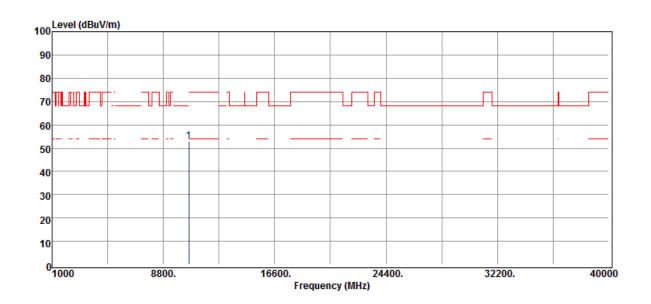

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
10580.00	Peak	37.63	15.43	53.06	68.20	-15.14

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 163 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11ac80 B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5290 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

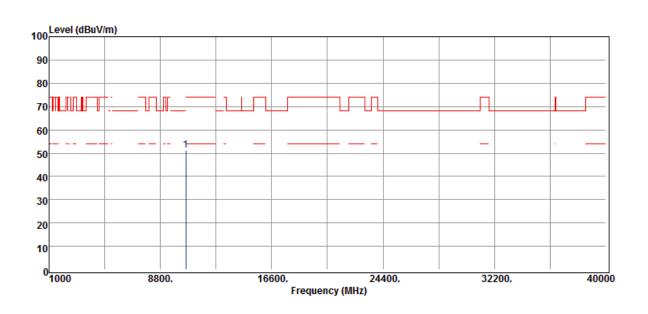

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10580.00	Peak	35.65	15.43	51.08	68.20	-17.12

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 164 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11ac80 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5530 MHz Engineer :Jerry

Operation Mode :Tx CH LOW :VERTICAL Measurement Antenna Pol. EUT Pol. :H Plan

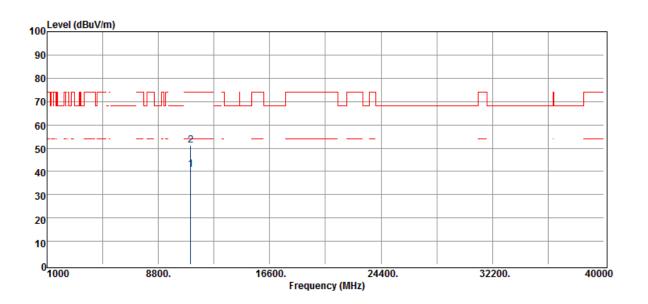

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
11060.00	Average	23.45	17.50	40.95	54.00	-13.05
11060.00	Peak	33.68	17.50	51.18	74.00	-22.82

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 165 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11ac80 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5530 MHz Engineer :Jerry **Operation Mode** :Tx CH LOW :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

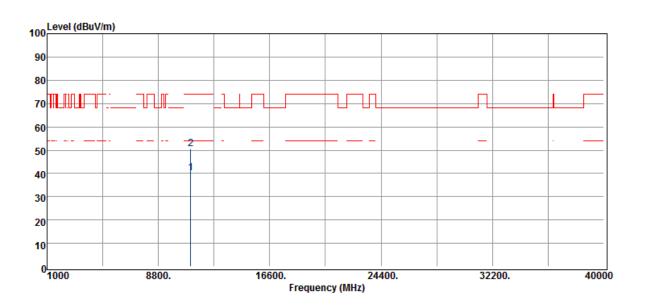

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
11060.00	Average	22.63	17.50	40.13	54.00	-13.87
11060.00	Peak	32.88	17.50	50.38	74.00	-23.62

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 166 of 346


Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11ac80 B2c
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5610 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :VERTICAL

Operation Mode :Tx CH MID Measurement Antenna Pol. EUT Pol. :H Plan

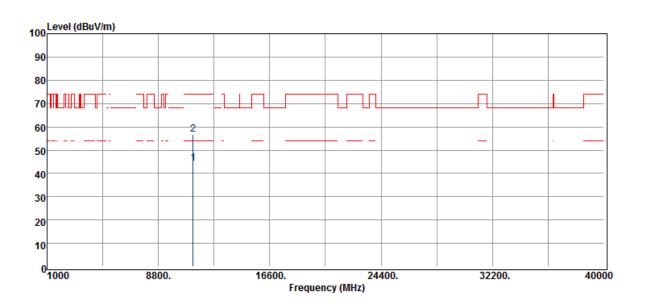

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
	11220.00	Average	27.64	16.53	44.17	54.00	-9.83
	11220.00	Peak	40.05	16.53	56.58	74.00	-17.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 167 of 346


Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11ac80 B2c
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5610 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :HORIZONTAL

Operation Mode :Tx CH MID Measurement Antenna Pol. EUT Pol. :H Plan

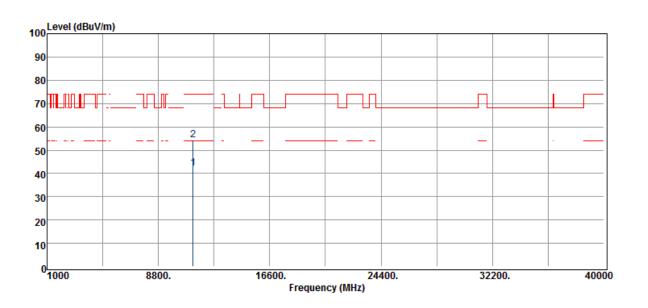

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
11220.00) Average	25.59	16.53	42.12	54.00	-11.88
11220.00) Peak	37.68	16.53	54.21	74.00	-19.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 168 of 346

Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11ac80 B2c
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5690 MHz Engineer :Jerry
Operation Mode :Tx CH HIGH Measurement Antenna Pol. :VERTICAL

EUT Pol. :H Plan

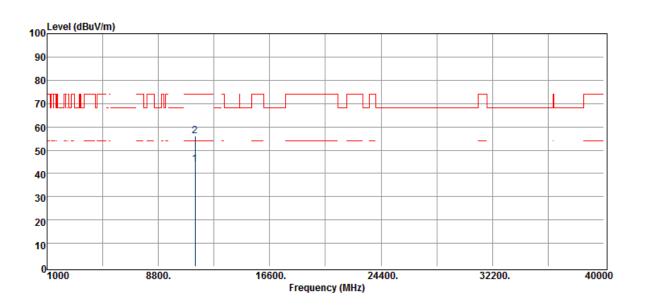

F	req.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
N	1Hz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
113	80.00	Average	27.36	16.48	43.84	54.00	-10.16
113	80.00	Peak	39.72	16.48	56.20	74.00	-17.80

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 169 of 346

Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11ac80 B2c
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5690 MHz Engineer :Jerry
Operation Mode :Tx CH HIGH Measurement Antenna Pol. :HORIZONTAL

EUT Pol. :H Plan

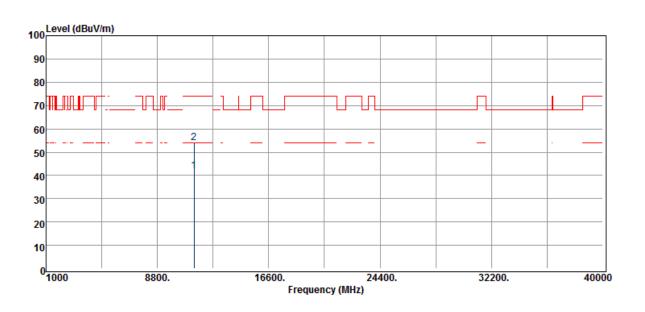

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
11380.00	Average	25.28	16.48	41.76	54.00	-12.24
11380.00	Peak	37.34	16.48	53.82	74.00	-20.18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 170 of 346


Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11ac80 B3
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5775 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :VERTICAL

Operation Mode :Tx CH LOW Measurement Antenna Pol. EUT Pol. :H Plan

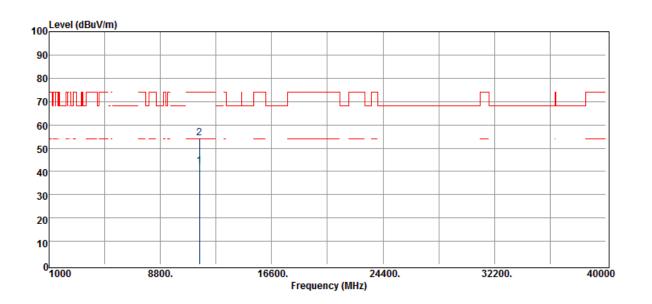

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
_	11550.00	Average	26.43	15.82	42.25	54.00	-11.75
	11550.00	Peak	38.68	15.82	54.50	74.00	-19.50

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 171 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11ac80 B3 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5775 MHz Engineer :Jerry

Operation Mode :Tx CH LOW :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plan

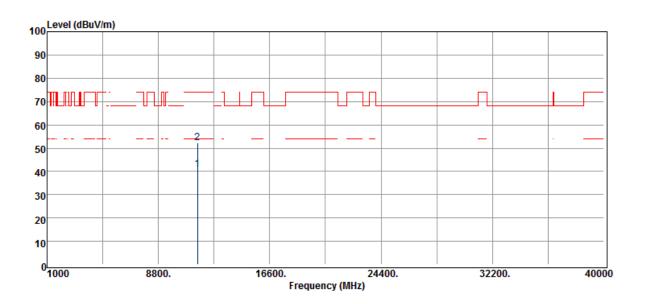

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
11550.00	Average	24.85	15.82	40.67	54.00	-13.33
11550.00	Peak	36.51	15.82	52.33	74.00	-21.67

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 172 of 346


Dipole Antenna

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band Temp./Humi. :802.11a B1 :23 deg_C / 62 RH

Fundamental Frequency :5180 MHz Engineer :Jerry **Operation Mode** :Tx CH LOW :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plan

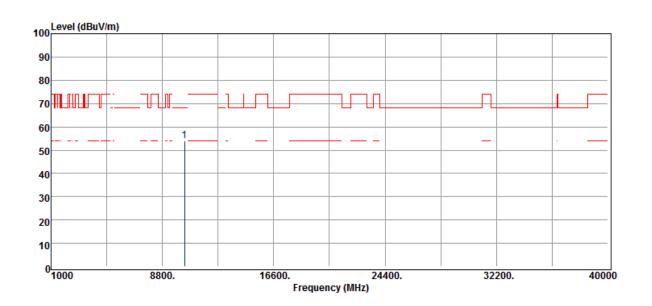

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
 MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
10360.00	Peak	39.70	14.41	54.11	68.20	-14.09

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)




Page: 173 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5180 MHz Engineer :Jerry **Operation Mode** :Tx CH LOW :HORIZONTAL

Measurement Antenna Pol. EUT Pol. :H Plan

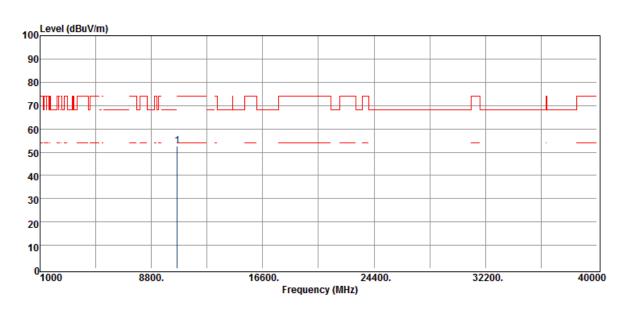

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
_	10600 00	Peak	37 20	15 47	52 67	74.00	-21 33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 174 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5220 MHz Engineer :Jerry **Operation Mode** :Tx CH MID :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plan

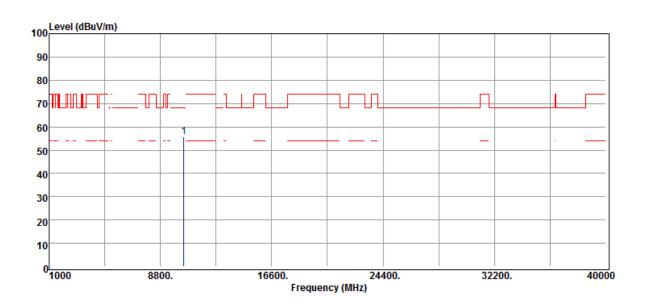

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10440.00	Peak	40.22	15.58	55.80	68.20	-12.40

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)




Page: 175 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5220 MHz Engineer :Jerry **Operation Mode** :Tx CH MID :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

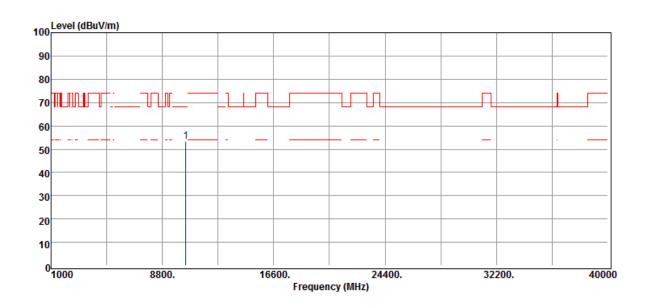

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10440.00	Peak	37.86	15.58	53.44	68.20	-14.76

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 176 of 346


Measurement Antenna Pol.

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B1 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5240 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :VERTICAL

EUT Pol. :H Plan

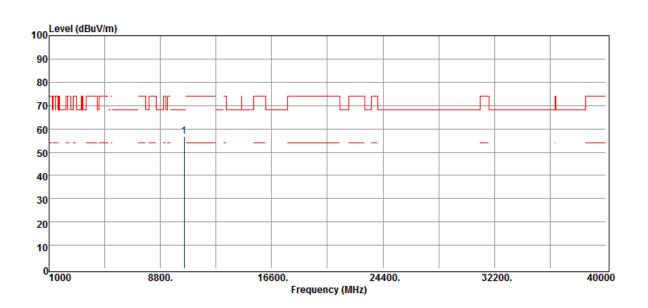

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
10480 00	Peak	40 19	16 48	56 67	68 20	-11 53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 177 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5240 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plan

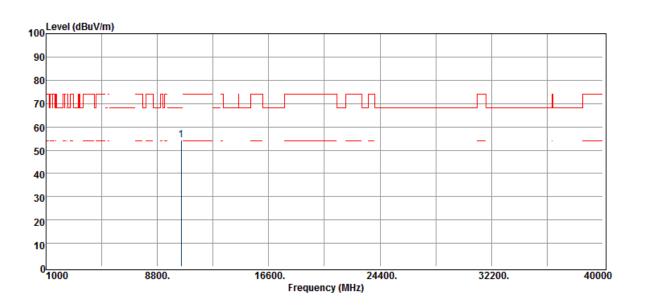

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dBμV/m	dB
10480 00	Peak	37 72	16 48	54 20	68 20	-14 00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 178 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5260 MHz Engineer :Jerry **Operation Mode** :Tx CH LOW :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plan

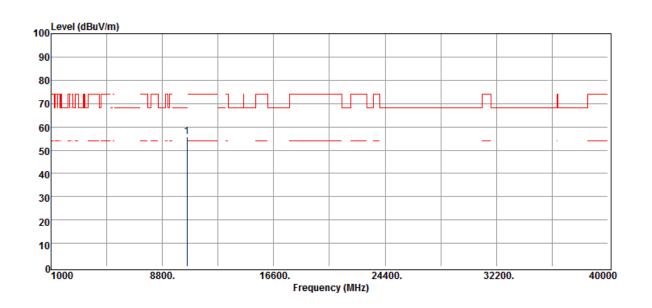

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
10520.00	Peak	40.25	15.57	55.82	68.20	-12.38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 179 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5260 MHz Engineer :Jerry **Operation Mode** :Tx CH LOW :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

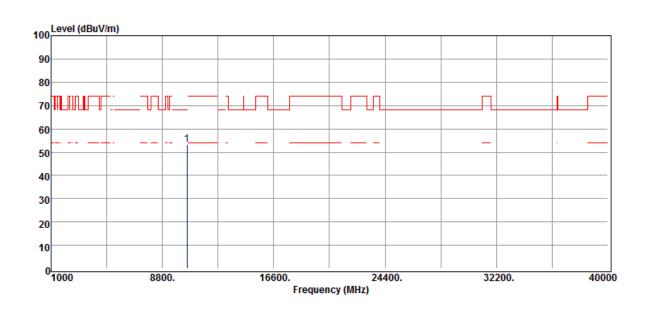

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10520.00	Peak	37.71	15.57	53.28	68.20	-14.92

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 180 of 346


Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11a B2a
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5300 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :VERTICAL

EUT Pol. :H Plan

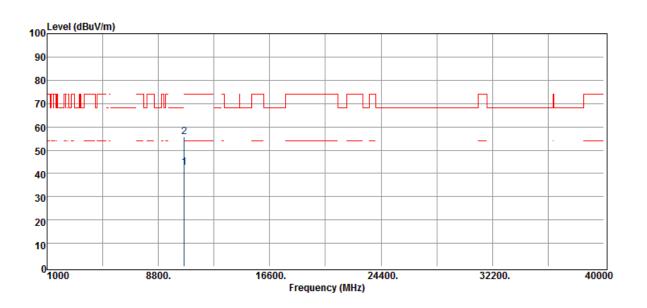

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
10600.0	00 Average	27.12	15.47	42.59	54.00	-11.41
10600.0	00 Peak	40.11	15.47	55.58	74.00	-18.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 181 of 346


Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11a B2a
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5300 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :HORIZONTAL

EUT Pol. :H Plan

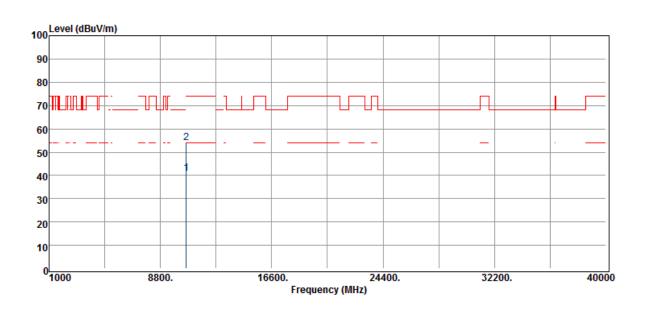

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
10600.00	Average	25.50	15.47	40.97	54.00	-13.03	_
10600.00	Peak	38.35	15.47	53.82	74.00	-20.18	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 182 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11a B2a Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5320 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :VERTICAL

EUT Pol. :H Plan

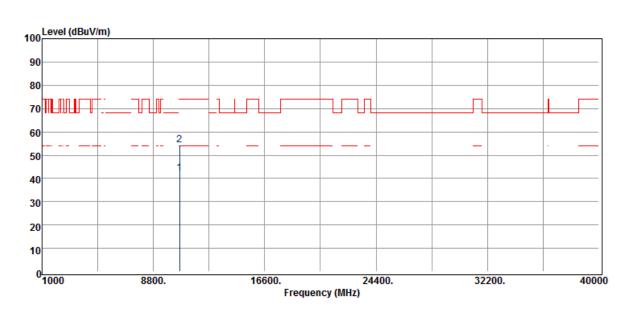

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
 MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
 10640.00	Average	26.18	16.12	42.30	54.00	-11.70
10640.00	Peak	38.22	16.12	54.34	74.00	-19.66

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 183 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5320 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plan

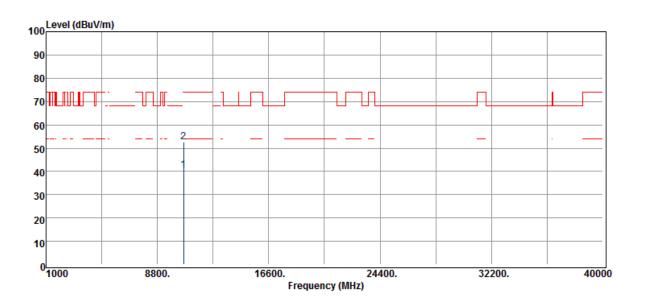

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
10640.00	Average	24.40	16.12	40.52	54.00	-13.48
10640.00	Peak	36.58	16.12	52.70	74.00	-21.30

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 184 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11a B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5500 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plan

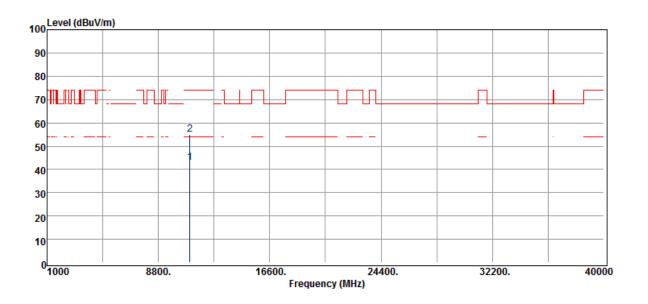

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB	
11000.00	Average	25.22	17.75	42.97	54.00	-11.03	•
11000.00	Peak	37.37	17.75	55.12	74.00	-18.88	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 185 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5500 MHz Engineer :Jerry **Operation Mode** :Tx CH LOW :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

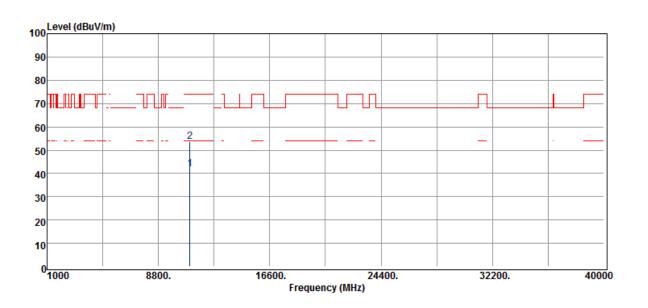

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
	11000.00	Average	24.03	17.75	41.78	54.00	-12.22
	11000.00	Peak	35.78	17.75	53.53	74.00	-20.47

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 186 of 346


Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11a B2c
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5580 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :VERTICAL

Operation Mode :Tx CH MID Measurement Antenna Pol. EUT Pol. :H Plan

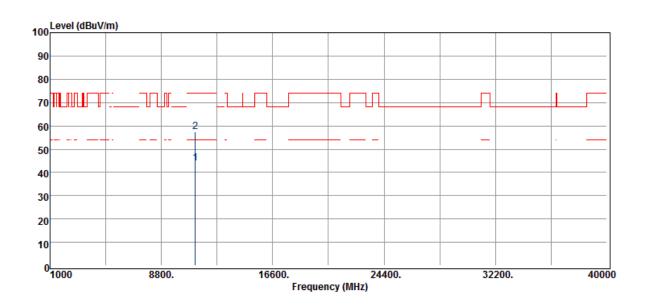

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
11160.00	Average	27.30	16.53	43.83	54.00	-10.17
11160.00	Peak	40.74	16.53	57.27	74.00	-16.73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 187 of 346

Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11a B2c
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5580 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :HORIZONTAL EUT Pol. :H Plan

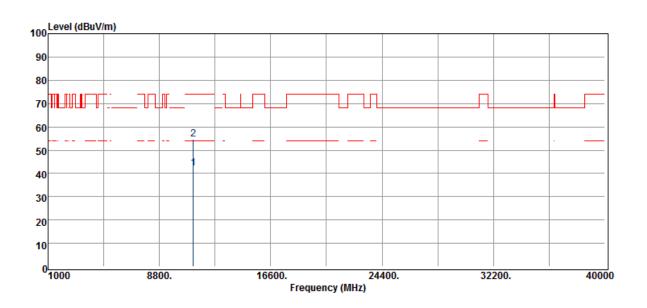

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
11160.00	Average	25.67	16.53	42.20	54.00	-11.80
11160.00	Peak	38.02	16.53	54.55	74.00	-19.45

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 188 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11a B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5700 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plan

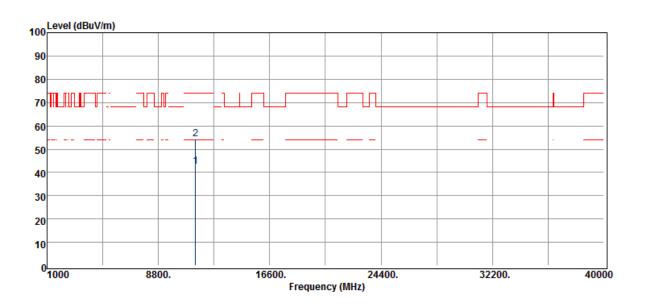

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
	11400.00	Average	26.15	16.48	42.63	54.00	-11.37
	11400.00	Peak	37.89	16.48	54.37	74.00	-19.63

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 189 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11a B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5700 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plan

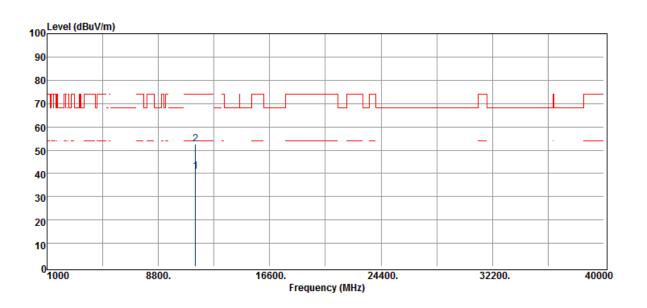

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
	11400.00	Average	24.35	16.48	40.83	54.00	-13.17
	11400.00	Peak	36.23	16.48	52.71	74.00	-21.29

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 190 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11a B3 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5745 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plan

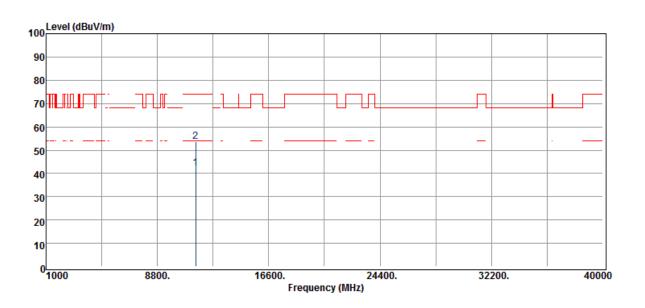

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
 11490.00	Average	26.51	15.85	42.36	54.00	-11.64
11490.00	Peak	37.86	15.85	53.71	74.00	-20.29

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 191 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11a B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5745 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :HORIZONTAL EUT Pol. :H Plan

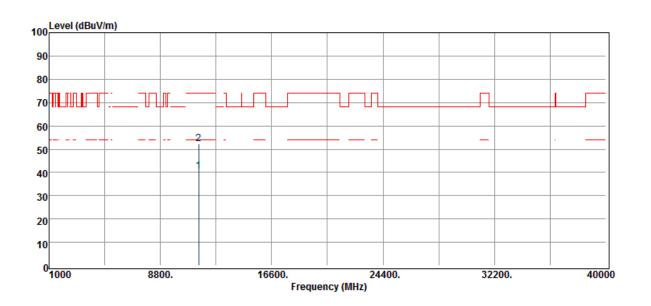

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
	11490.00	Average	24.75	15.85	40.60	54.00	-13.40
	11490.00	Peak	36.36	15.85	52.21	74.00	-21.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 192 of 346


Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11a B3
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5785 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :VERTICAL

EUT Pol. :H Plan

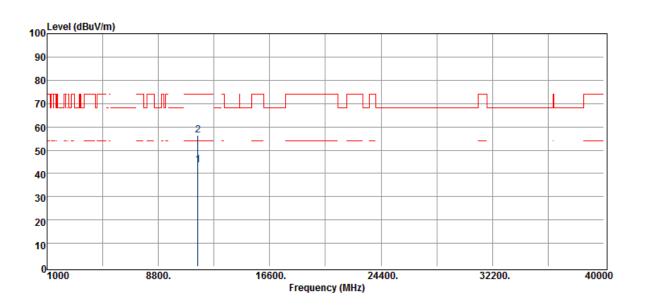

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dΒμV/m	dB
11570.00	Average	27.22	16.29	43.51	54.00	-10.49
11570.00	Peak	40.20	16.29	56.49	74.00	-17.51

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 193 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11a B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5785 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :HORIZONTAL EUT Pol. :H Plan

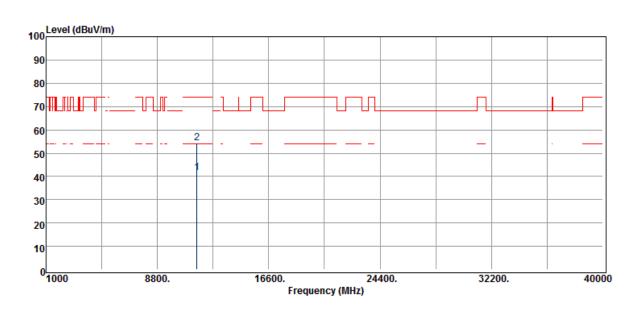

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11570.00	Average	25.24	16.29	41.53	54.00	-12.47
11570.00	Peak	37.87	16.29	54.16	74.00	-19.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 194 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11a B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5825 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plan

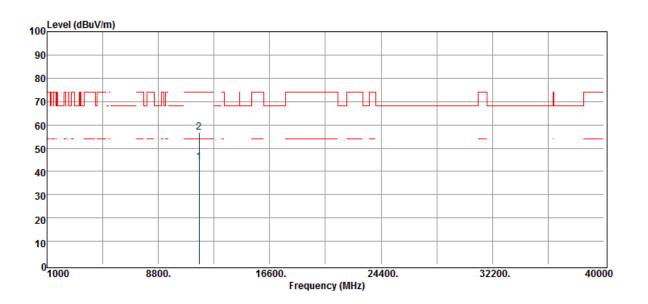

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
11650.00	Average	27.35	16.61	43.96	54.00	-10.04
11650.00	Peak	40.26	16.61	56.87	74.00	-17.13

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 195 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11a B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5825 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :HORIZONTAL

EUT Pol. :H Plan

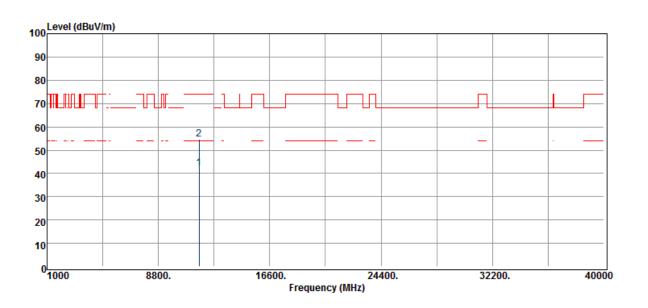

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
11650.00	Average	25.51	16.61	42.12	54.00	-11.88
11650.00	Peak	38.10	16.61	54.71	74.00	-19.29

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 196 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B1 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5180 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :VERTICAL

Operation Mode :Tx CH LOW Measurement Antenna Pol. EUT Pol. :H Plan

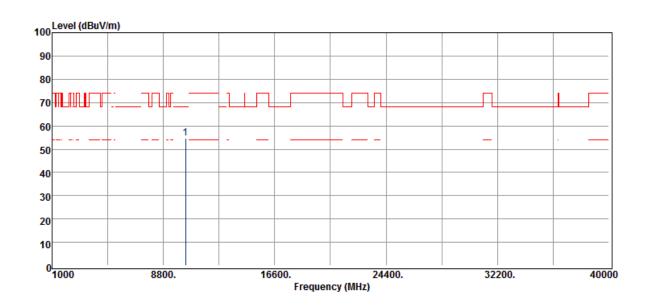

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10360.00	Peak	40.25	14.41	54.66	68.20	-13.54

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 197 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n20 B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5180 MHz Engineer :Jerry **Operation Mode** :Tx CH LOW :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

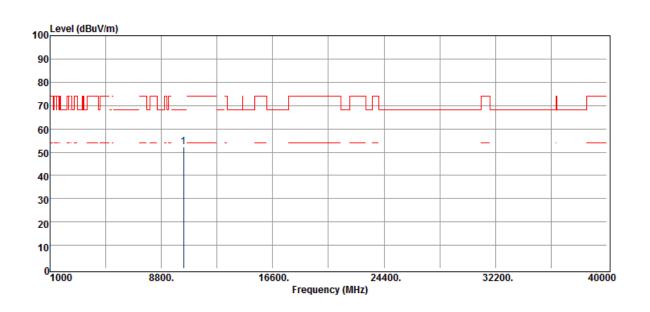

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10360.00	Peak	37.74	14.41	52.15	68.20	-16.05

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 198 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n20 B1 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5220 MHz Engineer :Jerry :VERTICAL

Operation Mode :Tx CH MID Measurement Antenna Pol. EUT Pol. :H Plan

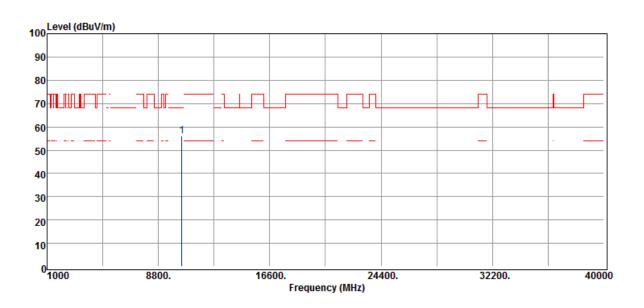

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
10440 00	Peak	40.33	15 58	55 91	68 20	-12 29

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 199 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n20 B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5220 MHz Engineer :Jerry

Operation Mode :Tx CH MID :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plan

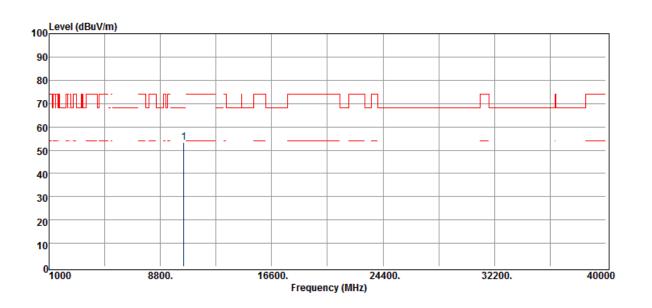

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
10440.00	Peak	37.82	15.58	53.40	68.20	-14.80

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 200 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n20 B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5240 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :VERTICAL

Measurement Antenna Pol. EUT Pol. :H Plan

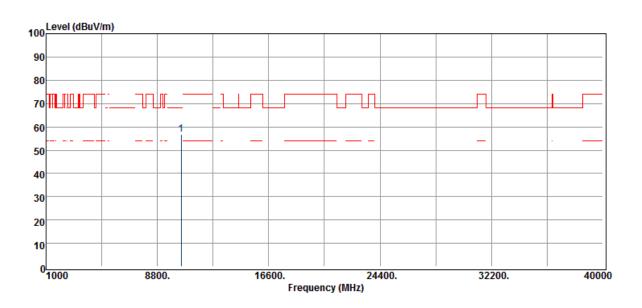

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10480 00	Peak	40.28	16 48	56.76	68 20	-11 44

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 201 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n20 B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5240 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

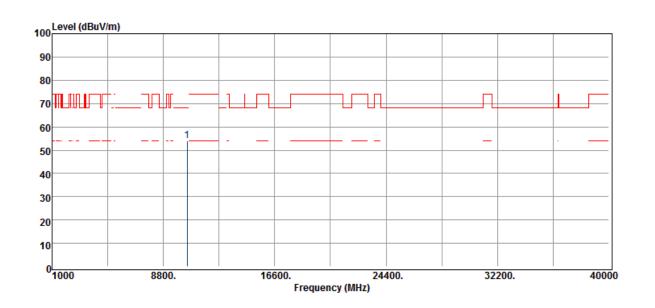

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10480.00	Peak	37.39	16.48	53.87	68.20	-14.33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 202 of 346

Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11n20 B2a
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5260 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plan

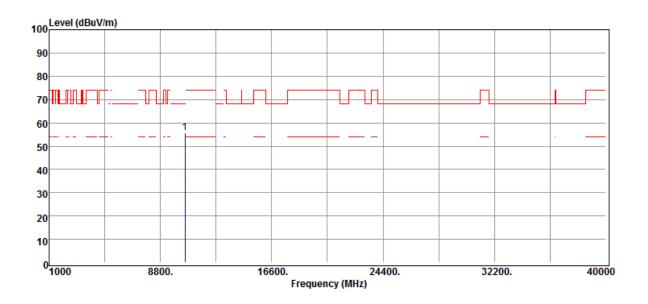

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
10520.00	Peak	40.13	15.57	55.70	68.20	-12.50

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 203 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B2a Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5260 MHz Engineer :Jerry
Operation Mode :Tx CH LOW Measurement Antenna Pol. :HORIZONTAL

EUT Pol. :H Plan

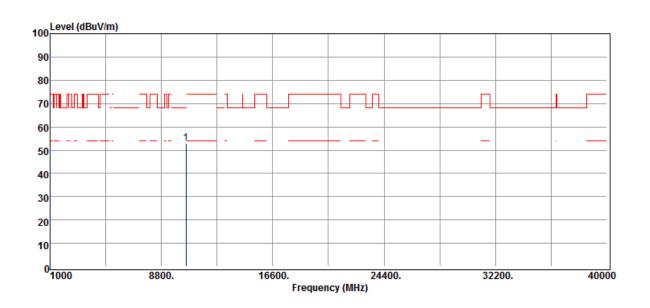

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10520.00	Peak	37.37	15.57	52.94	68.20	-15.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 204 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B2a Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5300 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :VERTICAL

EUT Pol. :H Plan

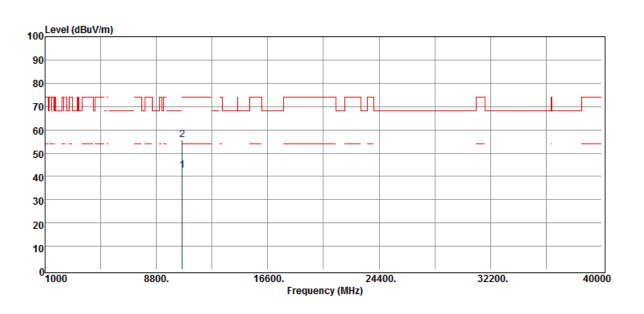

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10600.00	Average	27.23	15.47	42.70	54.00	-11.30
10600.00	Peak	40.20	15.47	55.67	74.00	-18.33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 205 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B2a Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5300 MHz Engineer :Jerry
Operation Mode :Tx CH MID Measurement Antenna Pol. :HORIZONTAL

EUT Pol. :H Plan

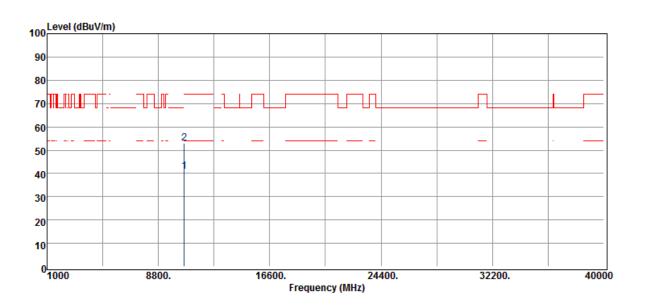

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
 MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
10600.00	Average	25.31	15.47	40.78	54.00	-13.22
10600.00	Peak	37.30	15.47	52.77	74.00	-21.23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 206 of 346


Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11n20 B2a
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5320 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :VERTICAL

EUT Pol. :H Plan

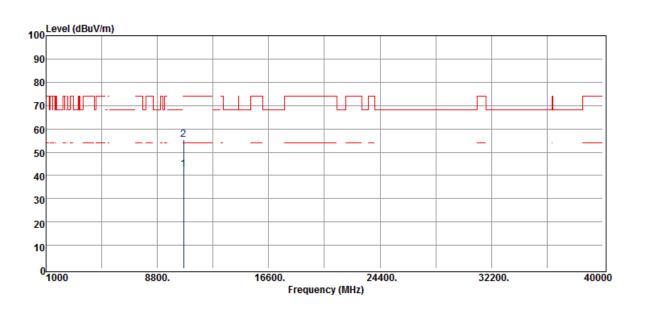

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	rS dBμV/m	dBµV/m	dB
10640.00	Average	26.60	16.12	42.72	54.00	-11.28
10640.00	Peak	39.37	16.12	55.49	74.00	-18.51

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 207 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n20 B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5320 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

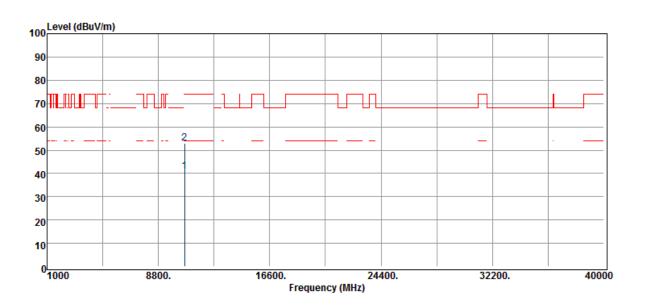

Fr	eq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
M	Hz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
1064	10.00	Average	24.61	16.12	40.73	54.00	-13.27
1064	10.00	Peak	36.91	16.12	53.03	74.00	-20.97

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 208 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5500 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :VERTICAL

Operation Mode :Tx CH LOW Measurement Antenna Pol. EUT Pol. :H Plan

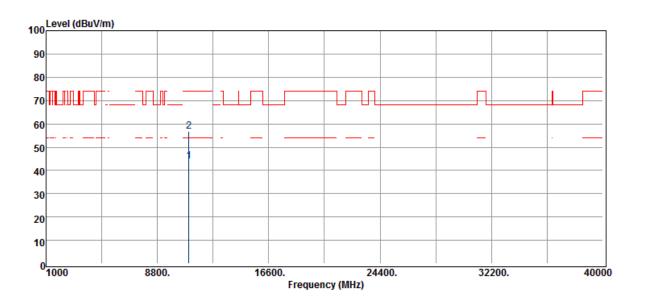

Freq.	Detector Mode	Spectrum	Factor	Actual FS	Limit	Margin
MHz	PK/QP/AV	Reading Level dBµV	dB	rS dBµV/m	@3m dBµV/m	dB
11000.00	Average	26.33	17.75	44.08	54.00	-9.92
11000.00	Peak	38.88	17.75	56.63	74.00	-17.37

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 209 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n20 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5500 MHz Engineer :Jerry **Operation Mode** :Tx CH LOW :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

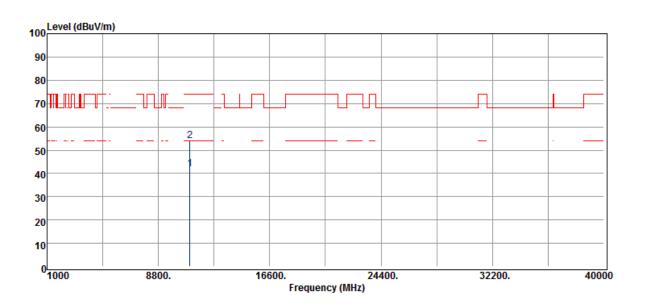

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
11000.00	Average	24.14	17.75	41.89	54.00	-12.11
11000.00	Peak	36.12	17.75	53.87	74.00	-20.13

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 210 of 346


Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11n20 B2c
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5580 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :VERTICAL

EUT Pol. :H Plan

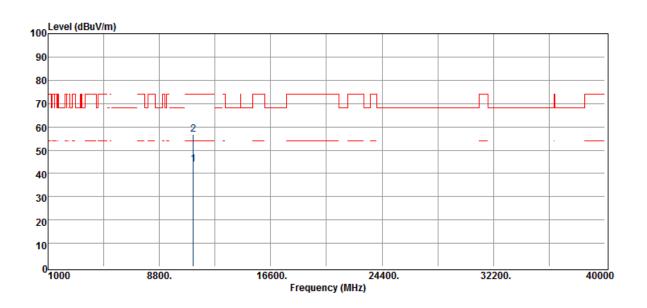

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
 MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
11160.00	Average	27.34	16.53	43.87	54.00	-10.13
11160.00	Peak	40.20	16.53	56.73	74.00	-17.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 211 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5580 MHz Engineer :Jerry
Operation Mode :Tx CH MID Measurement Antenna Pol. :HORIZONTAL

EUT Pol. :H Plan

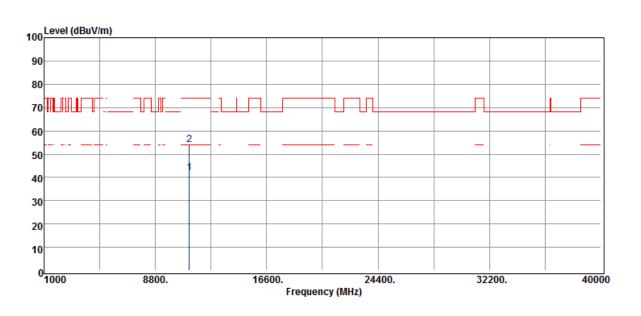

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
11160.00	Average	25.32	16.53	41.85	54.00	-12.15
11160.00	Peak	37.54	16.53	54.07	74.00	-19.93

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 212 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5700 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :VERTICAL

EUT Pol. :H Plan

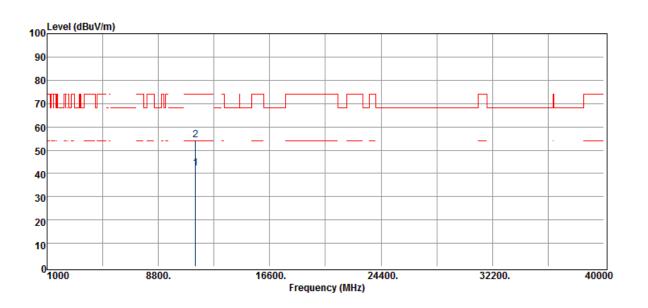

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
	11400.00	Average	25.79	16.48	42.27	54.00	-11.73
	11400.00	Peak	37.83	16.48	54.31	74.00	-19.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 213 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n20 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5700 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :HORIZONTAL

Measurement Antenna Pol. EUT Pol. :H Plan

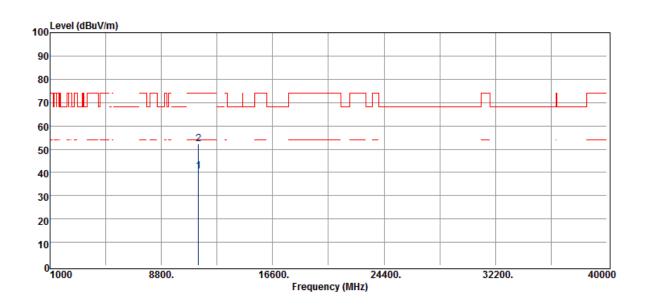

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
11400.00	Average	24.06	16.48	40.54	54.00	-13.46
11400.00	Peak	35.91	16.48	52.39	74.00	-21.61

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 214 of 346


Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11n20 B3
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5745 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :VERTICAL

Operation Mode :Tx CH LOW Measurement Antenna Pol. EUT Pol. :H Plan

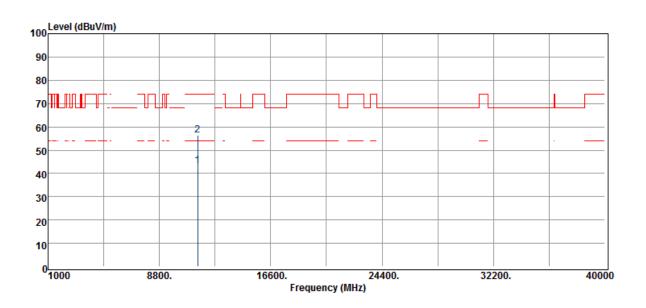

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
11490.00	Average	27.52	15.85	43.37	54.00	-10.63
11490.00	Peak	40.63	15.85	56.48	74.00	-17.52

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 215 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5745 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :HORIZONTAL EUT Pol. :H Plan

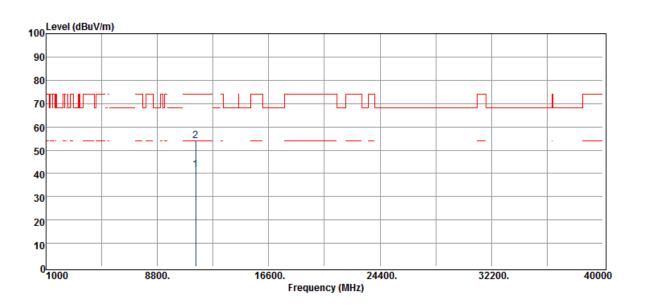

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
11490.00	Average	25.63	15.85	41.48	54.00	-12.52
11490.00	Peak	38.06	15.85	53.91	74.00	-20.09

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 216 of 346

Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11n20 B3
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5785 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plan

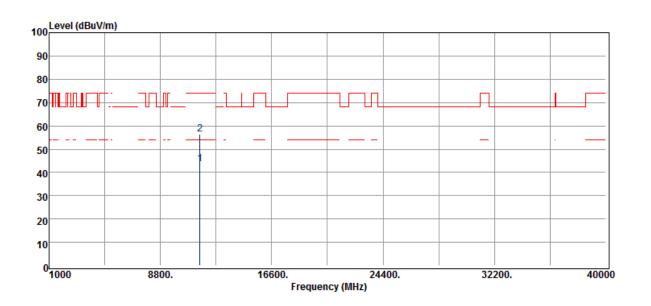

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
11570.00	Average	27.26	16.29	43.55	54.00	-10.45
11570.00	Peak	40.16	16.29	56.45	74.00	-17.55

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 217 of 346


Measurement Antenna Pol.

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n20 B3 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5785 MHz Engineer :Jerry **Operation Mode** :Tx CH MID :HORIZONTAL

EUT Pol. :H Plan

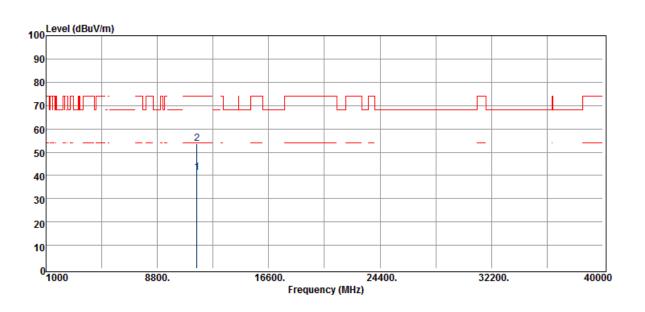

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
11570.00	Average	25.03	16.29	41.32	54.00	-12.68
11570.00	Peak	37.40	16.29	53.69	74.00	-20.31

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 218 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n20 B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5825 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plan

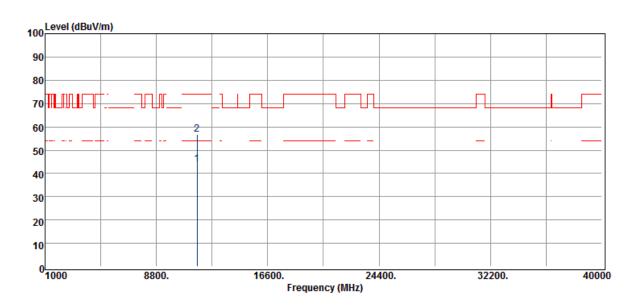

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
11650.00	Average	27.21	16.61	43.82	54.00	-10.18
11650.00	Peak	40.15	16.61	56.76	74.00	-17.24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 219 of 346

Project Number : T190321W03 Test Date :2019-04-09

Fundamental Frequency :5825 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :HORIZONTAL

EUT Pol. :H Plan

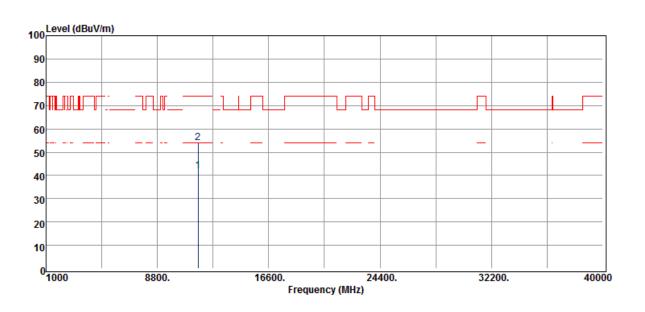

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
11650.00	Average	25.30	16.61	41.91	54.00	-12.09
11650.00	Peak	37.49	16.61	54.10	74.00	-19.90

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 220 of 346


Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11n40 B1
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5190 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :VERTICAL

Operation Mode :Tx CH LOW Measurement Antenna Pol. EUT Pol. :H Plan

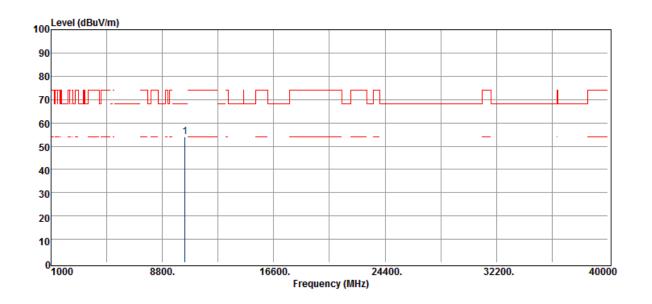

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m	-	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB	
10380.00	Peak	39.27	14.58	53.85	68.20	-14.35	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 221 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n40 B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5190 MHz Engineer :Jerry **Operation Mode** :Tx CH LOW :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

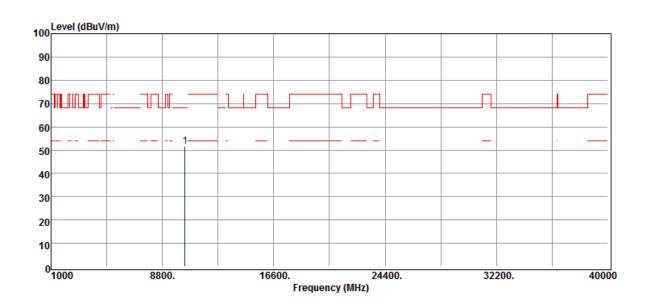

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10380.00	Peak	37.14	14.58	51.72	68.20	-16.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 222 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n40 B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5230 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plan

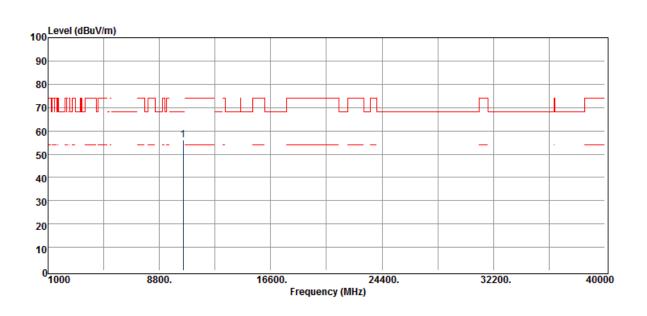

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10460.00	Peak	39.91	15.97	55.88	68.20	-12.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 223 of 346

Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11n40 B1
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5230 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :HORIZONTAL EUT Pol. :H Plan

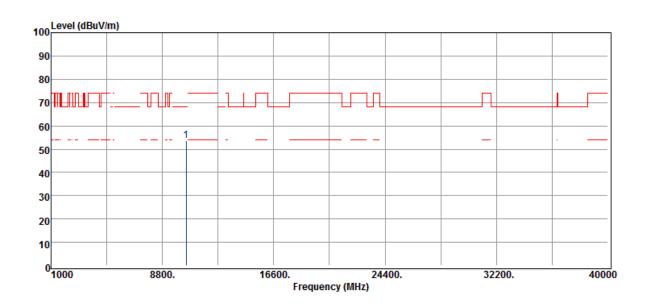

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10460.00	Peak	37.51	15.97	53.48	68.20	-14.72

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 224 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n40 B2a Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5270 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :VERTICAL

Operation Mode :Tx CH LOW Measurement Antenna Pol. EUT Pol. :H Plan

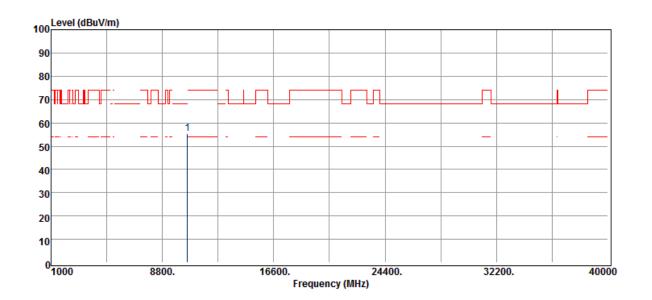

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
10540.00	Peak	39.60	15.67	55.27	68.20	-12.93

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



:HORIZONTAL


Page: 225 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n40 B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5270 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. EUT Pol. :H Plan

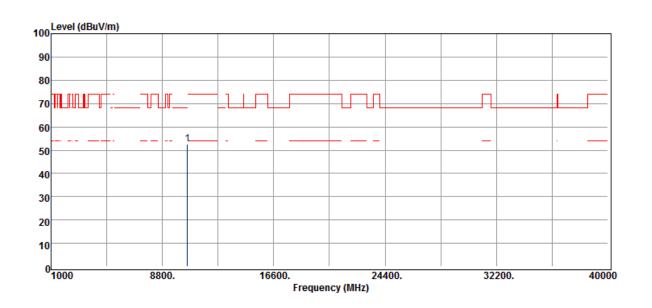

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
10540.00	Peak	36.88	15.67	52.55	68.20	-15.65

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 226 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n40 B2a Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5310 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :VERTICAL

Operation Mode :Tx CH HIGH Measurement Antenna Pol. EUT Pol. :H Plan

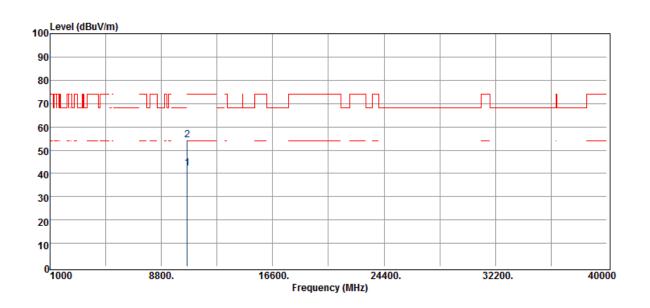

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
10620.00	Average	26.40	15.78	42.18	54.00	-11.82
10620.00	Peak	38.52	15.78	54.30	74.00	-19.70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 227 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n40 B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5310 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

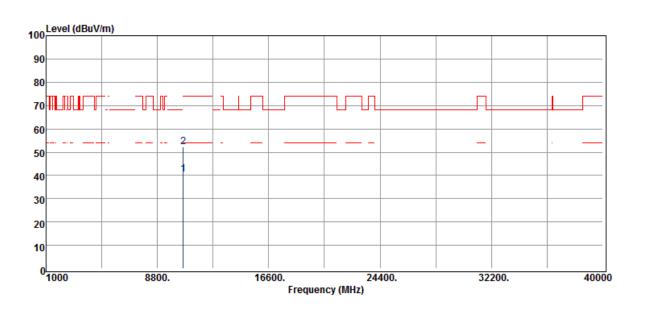

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
 MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
10620.00	Average	24.54	15.78	40.32	54.00	-13.68
10620.00	Peak	36.40	15.78	52.18	74.00	-21.82

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 228 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n40 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5510 MHz Engineer :Jerry **Operation Mode** :Tx CH LOW :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plan

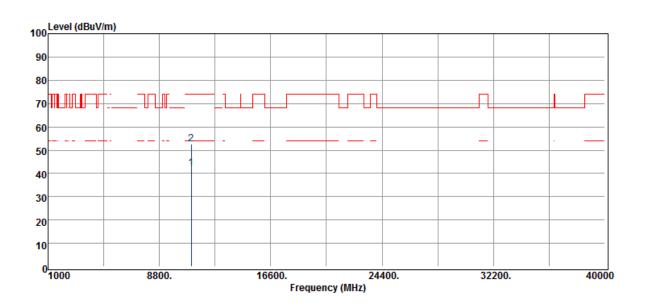

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
11020.00	Average	24.37	17.87	42.24	54.00	-11.76
11020.00	Peak	34.69	17.87	52.56	74.00	-21.44

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 229 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n40 B2c Temp./Humi. :23 deg C / 62 RH **Fundamental Frequency** :5510 MHz Engineer :Jerry

Operation Mode :Tx CH LOW :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

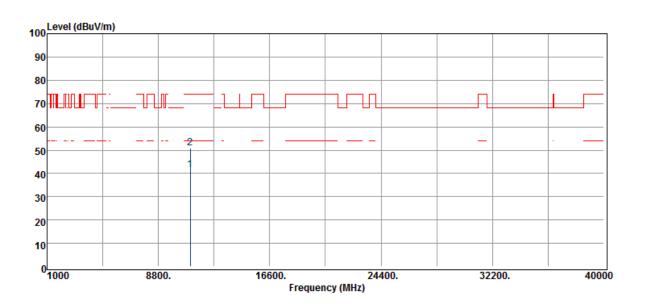

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
11020.00	Average	23.50	17.87	41.37	54.00	-12.63
11020.00	Peak	33.12	17.87	50.99	74.00	-23.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 230 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n40 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5550 MHz Engineer :Jerry :VERTICAL

Operation Mode :Tx CH MID Measurement Antenna Pol. EUT Pol. :H Plan

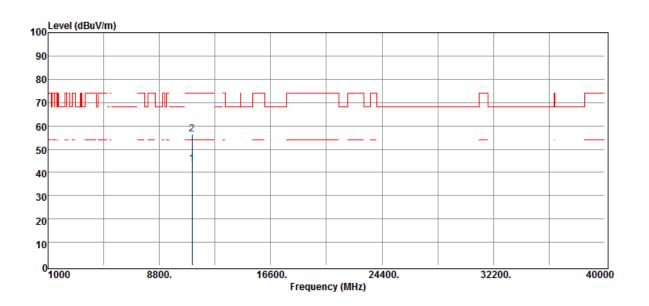

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
11100.00	Average	26.32	17.25	43.57	54.00	-10.43
11100.00	Peak	39.03	17.25	56.28	74.00	-17.72

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 231 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n40 B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5550 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :HORIZONTAL EUT Pol. :H Plan

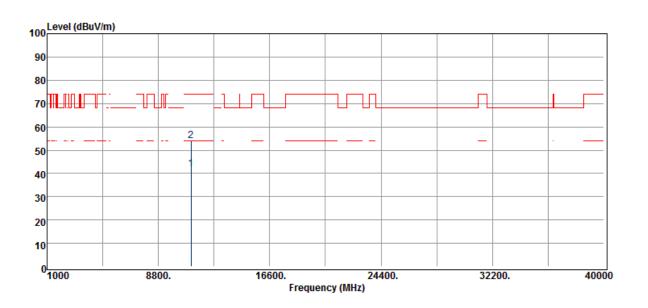

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
11100.00	Average	24.58	17.25	41.83	54.00	-12.17	_
11100.00	Peak	36.56	17.25	53.81	74.00	-20.19	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 232 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n40 B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5670 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plan

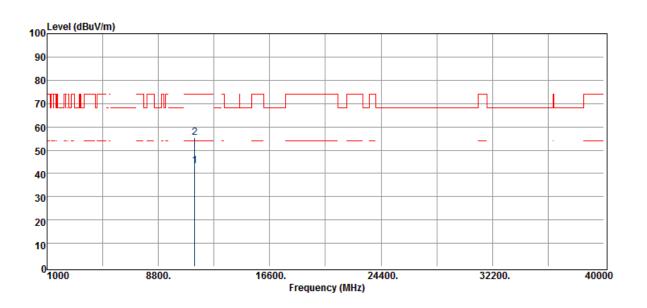

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
	11340.00	Average	26.89	16.36	43.25	54.00	-10.75
	11340.00	Peak	39.15	16.36	55.51	74.00	-18.49

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 233 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11n40 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5670 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

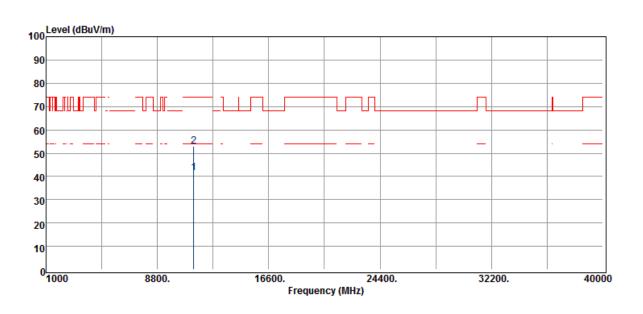

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
1′	1340.00	Average	25.25	16.36	41.61	54.00	-12.39
1′	1340.00	Peak	36.71	16.36	53.07	74.00	-20.93

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 234 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n40 B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5755 MHz Engineer :Jerry
Operation Mode :Tx CH LOW Measurement Antenna Pol. :VERTICAL

Operation Mode :Tx CH LOW Measurement Antenna Pol. EUT Pol. :H Plan

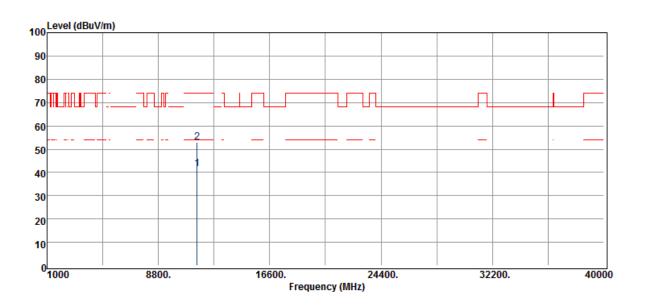

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
	11510.00	Average	26.27	15.41	41.68	54.00	-12.32
	11510.00	Peak	37.51	15.41	52.92	74.00	-21.08

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 235 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n40 B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5755 MHz Engineer :Jerry
Operation Mode :Tx CH LOW Measurement Antenna Pol. :HORIZONTAL

EUT Pol. :H Plan

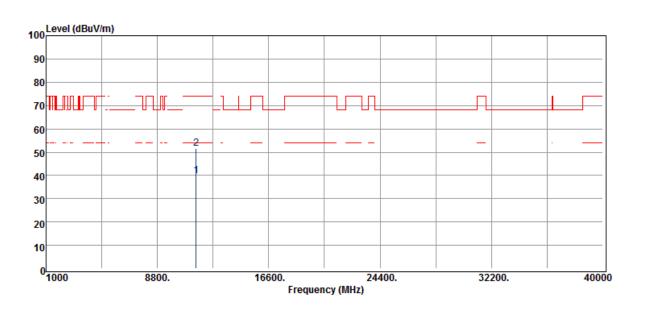

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
 11510.00	Average	24.55	15.41	39.96	54.00	-14.04
11510.00	Peak	36.28	15.41	51.69	74.00	-22.31

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 236 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n40 B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5795 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plan

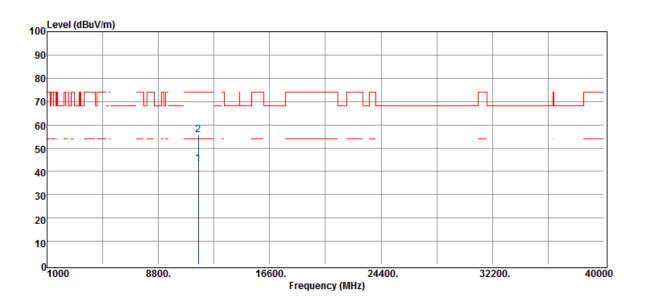

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
11590.00	Average	26.51	16.81	43.32	54.00	-10.68
11590.00	Peak	38.93	16.81	55.74	74.00	-18.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 237 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11n40 B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5795 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :HORIZONTAL

EUT Pol. :H Plan

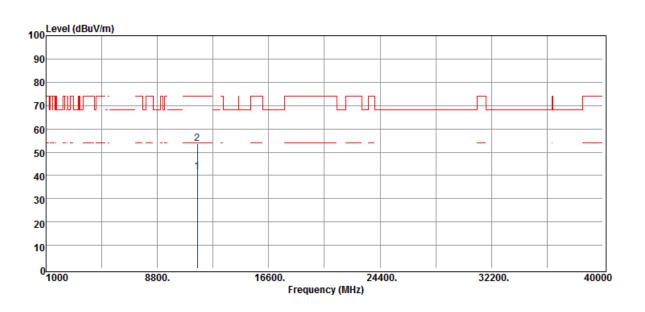

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
 MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
 11590.00	Average	24.72	16.81	41.53	54.00	-12.47
11590.00	Peak	36.89	16.81	53.70	74.00	-20.30

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



:VERTICAL


Page: 238 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11ac80 B1 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5210 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. EUT Pol. :H Plan

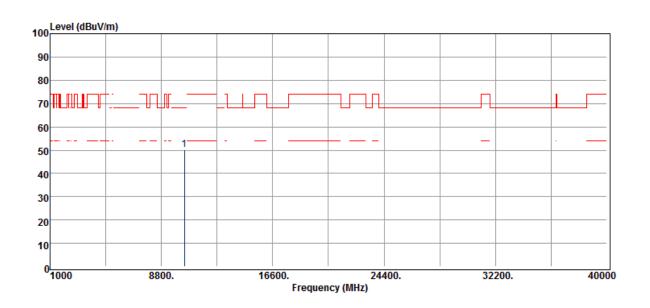

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10420.00	Peak	35.14	15.12	50.26	68.20	-17.94

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 239 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11ac80 B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5210 MHz Engineer :Jerry

Operation Mode :Tx CH LOW :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plan

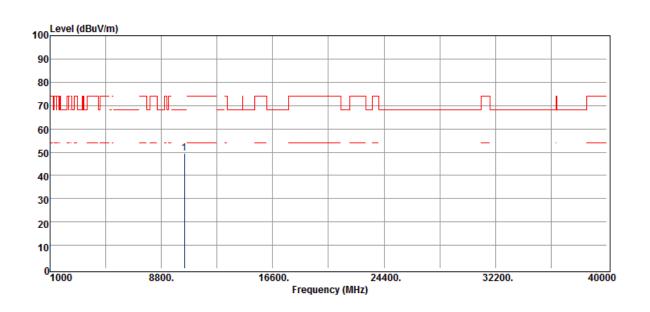

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10420.00	Peak	34.22	15.12	49.34	68.20	-18.86

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)




Page: 240 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11ac80 B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5290 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plan

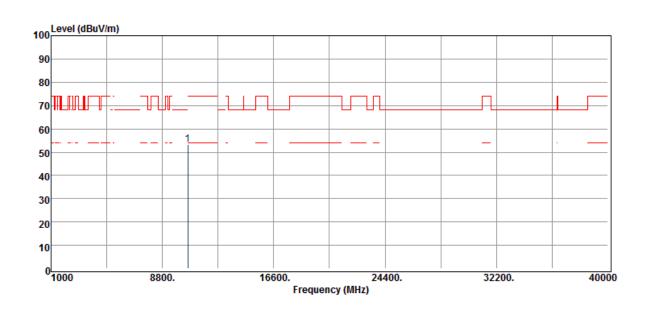

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
10580.00	Peak	37.76	15.43	53.19	68.20	-15.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 241 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11ac80 B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5290 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

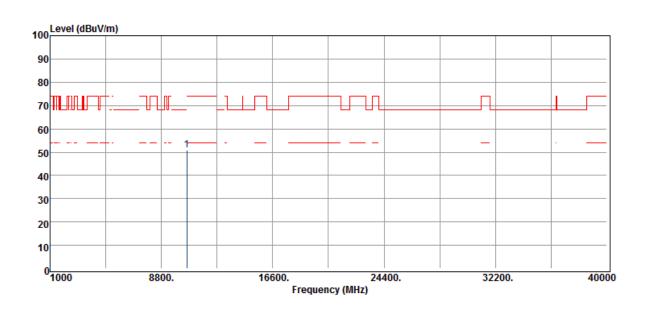

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
10580.00	Peak	35.56	15.43	50.99	68.20	-17.21

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 242 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11ac80 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5530 MHz Engineer :Jerry **Operation Mode** :Tx CH LOW :VERTICAL

Measurement Antenna Pol. EUT Pol. :H Plan

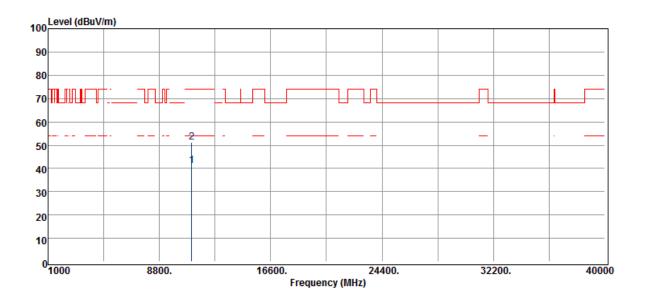

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	rS dBμV/m	dBµV/m	dB
11060.00	Average	23.52	17.50	41.02	54.00	-12.98
11060.00	Peak	33.75	17.50	51.25	74.00	-22.75

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 243 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11ac80 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5530 MHz Engineer :Jerry **Operation Mode** :Tx CH LOW :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

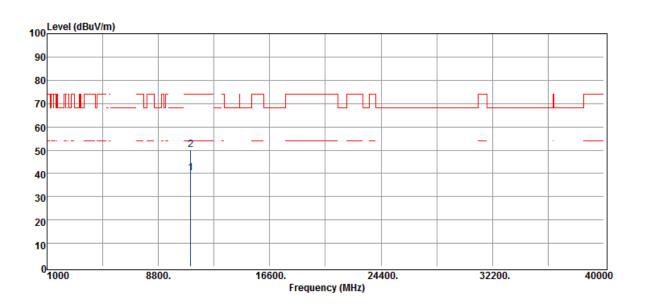

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
11060.00	Average	22.79	17.50	40.29	54.00	-13.71
11060.00	Peak	32.72	17.50	50.22	74.00	-23.78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 244 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11ac80 B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5610 MHz Engineer :Jerry

Operation Mode :Tx CH MID Measurement Antenna Pol. :VERTICAL

EUT Pol. :H Plan

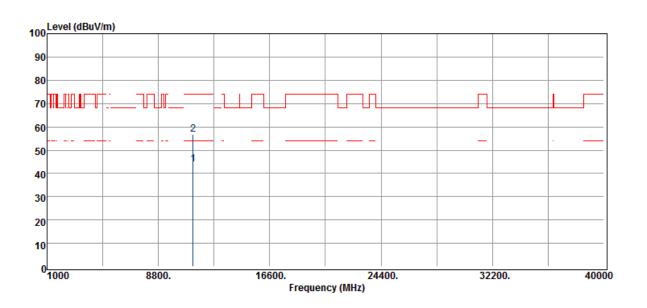

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
11220.00	Average	27.59	16.53	44.12	54.00	-9.88
11220.00	Peak	40.12	16.53	56.65	74.00	-17.35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 245 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11ac80 B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5610 MHz Engineer :Jerry
Operation Mode :Tx CH MID Measurement Antenna Pol. :HORIZONTAL

EUT Pol. :H Plan

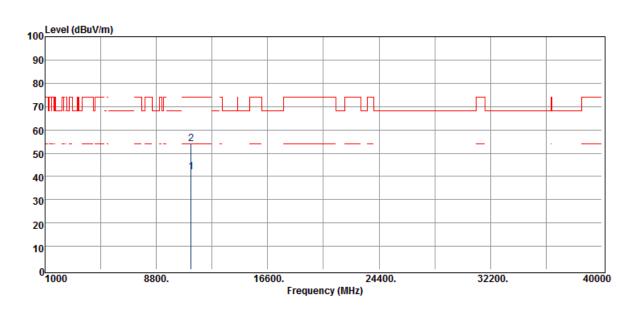

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	_
	11220.00	Average	25.38	16.53	41.91	54.00	-12.09	
	11220.00	Peak	37.51	16.53	54.04	74.00	-19.96	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 246 of 346


Project Number : T190321W03 Test Date :2019-04-09

 Operation Band
 :802.11ac80 B2c
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5690 MHz Engineer :Jerry

Operation Mode :Tx CH HIGH Measurement Antenna Pol. :VERTICAL

EUT Pol. :H Plan

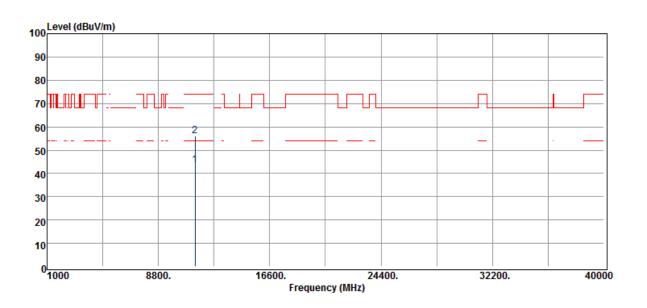

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
•	11380.00	Average	27.25	16.48	43.73	54.00	-10.27
•	11380.00	Peak	39.63	16.48	56.11	74.00	-17.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 247 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11ac80 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5690 MHz Engineer :Jerry **Operation Mode** :Tx CH HIGH :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plan

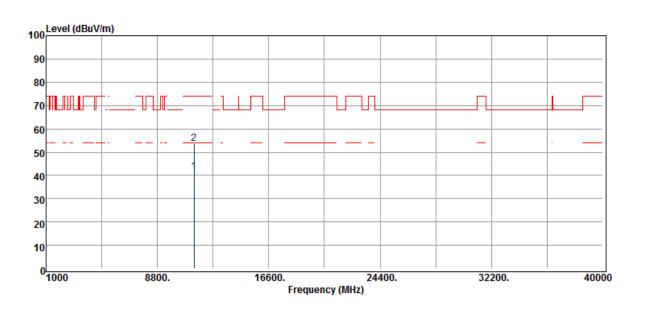

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
11380.00	Average	25.12	16.48	41.60	54.00	-12.40
11380.00	Peak	37.21	16.48	53.69	74.00	-20.31

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 248 of 346


Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11ac80 B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5775 MHz Engineer :Jerry

Operation Mode :Tx CH LOW Measurement Antenna Pol. :VERTICAL

Operation Mode :Tx CH LOW Measurement Antenna Pol. EUT Pol. :H Plan

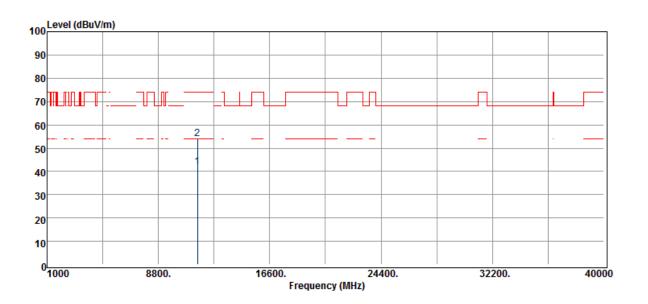

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
11550.00	Average	26.13	15.82	41.95	54.00	-12.05
11550.00	Peak	38.15	15.82	53.97	74.00	-20.03

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 249 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11ac80 B3 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5775 MHz Engineer :Jerry **Operation Mode** :Tx CH LOW :HORIZONTAL

Measurement Antenna Pol. EUT Pol. :H Plan

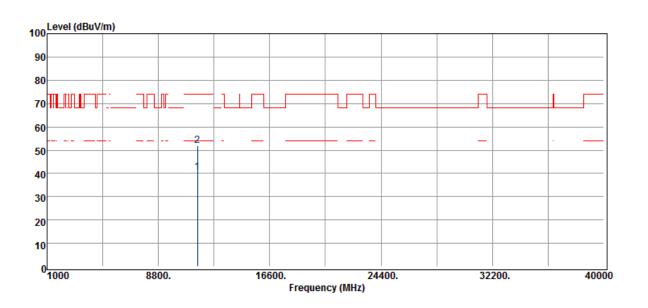

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
11550.00	Average	24.52	15.82	40.34	54.00	-13.66
11550.00	Peak	36.22	15.82	52.04	74.00	-21.96

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 250 of 346


Band edge falling to restricted band **PCB Antenna**

Project Number : T190321W03 **Test Date** :2019-04-02

:23 deg_C / 62 RH **Operation Band** :802.11a B1 Temp./Humi. :5180 MHz

Fundamental Frequency Engineer :Jerry Operation Mode :Bandedge CH LOW :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plane

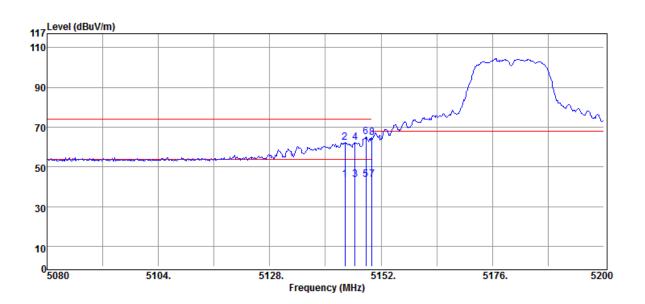

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
5144.20	Average	38.97	4.55	43.52	54.00	-10.48
5144.20	Peak	57.90	4.55	62.45	74.00	-11.55
5146.36	Average	39.05	4.55	43.60	54.00	-10.40
5146.36	Peak	57.62	4.55	62.17	74.00	-11.83
5148.76	Average	39.24	4.54	43.78	54.00	-10.22
5148.76	Peak	60.47	4.54	65.01	74.00	-8.99
5150.00	Average	39.34	4.55	43.89	54.00	-10.11
5150.00	Peak	60.04	4.55	64.59	74.00	-9.41

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)



Page: 251 of 346

Project Number : T190321W03 **Test Date** :2019-04-02


Operation Band :802.11a B1 Fundamental Frequency :5180 MHz

Operation Mode :Bandedge CH LOW

EUT Pol. :H Plane Temp./Humi. :23 deg C / 62 RH Engineer

:Jerry

:HORIZONTAL Measurement Antenna Pol.

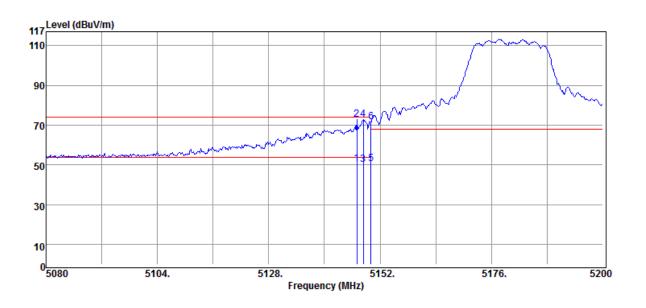

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
5146.96	Average	46.13	4.54	50.67	54.00	-3.33
5146.96	Peak	68.38	4.54	72.92	74.00	-1.08
5148.40	Average	45.77	4.55	50.32	54.00	-3.68
5148.40	Peak	68.35	4.55	72.90	74.00	-1.10
5150.00	Average	46.22	4.55	50.77	54.00	-3.23
5150.00	Peak	66.97	4.55	71.52	74.00	-2.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 252 of 346

Project Number : T190321W03 Test Date :2019-04-02

Operation Band :802.11a B2a Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5320 MHz Engineer :Jerry

Operation Mode :Bandedge CH HIGH Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plane

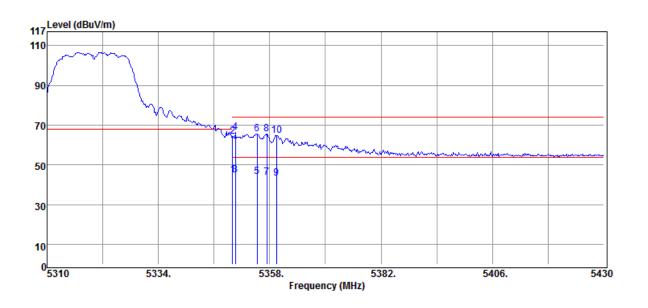

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dΒμV/m	dB
5350.00	Average	39.75	5.19	44.94	54.00	-9.06
5350.00	Peak	59.23	5.19	64.42	74.00	-9.58
5350.56	Average	39.65	5.20	44.85	54.00	-9.15
5350.56	Peak	61.39	5.20	66.59	74.00	-7.41
5355.24	Average	38.76	5.21	43.97	54.00	-10.03
5355.24	Peak	60.56	5.21	65.77	74.00	-8.23
5357.40	Average	38.69	5.21	43.90	54.00	-10.10
5357.40	Peak	60.34	5.21	65.55	74.00	-8.45
5359.44	Average	38.12	5.22	43.34	54.00	-10.66
5359.44	Peak	59.60	5.22	64.82	74.00	-9.18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 253 of 346

Project Number : T190321W03 **Test Date** :2019-04-02 Operation Band :802.11a B2a Temp./Humi.

:23 deg C / 62 RH Fundamental Frequency :5320 MHz Engineer :Jerry

Operation Mode :Bandedge CH HIGH :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plane

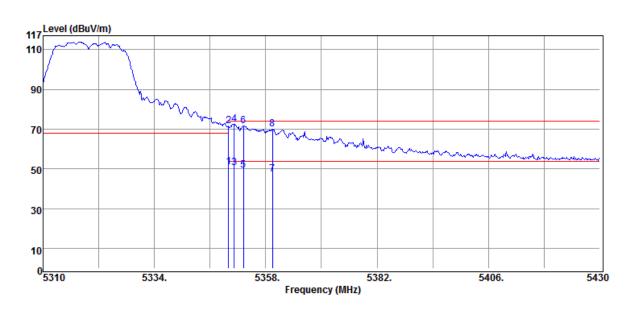

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
5350.00	Average	45.83	5.19	51.02	54.00	-2.98
5350.00	Peak	66.40	5.19	71.59	74.00	-2.41
5351.16	Average	45.22	5.20	50.42	54.00	-3.58
5351.16	Peak	67.43	5.20	72.63	74.00	-1.37
5353.20	Average	44.27	5.20	49.47	54.00	-4.53
5353.20	Peak	66.45	5.20	71.65	74.00	-2.35
5359.44	Average	42.00	5.22	47.22	54.00	-6.78
5359.44	Peak	64.72	5.22	69.94	74.00	-4.06

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 254 of 346

Project Number : T190321W03 Test Date :2019-04-02

Operation Band :802.11a B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5500 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plane

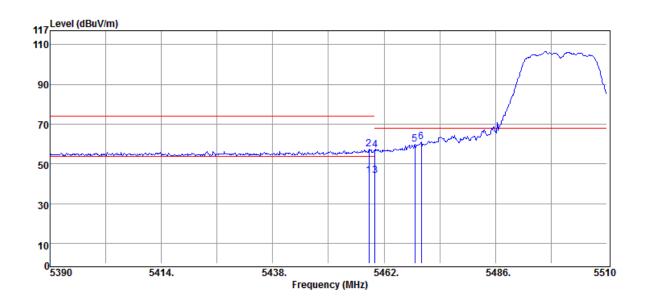

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
5458.76	Average	38.58	5.55	44.13	54.00	-9.87
5458.76	Peak	51.90	5.55	57.45	74.00	-16.55
5460.00	Average	38.66	5.54	44.20	54.00	-9.80
5460.00	Peak	51.55	5.54	57.09	74.00	-16.91
5468.60	Peak	54.57	5.52	60.09	68.20	-8.11
5470.00	Peak	55.53	5.52	61.05	68.20	-7.15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 255 of 346

Project Number : T190321W03 Test Date :2019-04-02

 Operation Band
 :802.11a B2c
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5500 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW Measurement Antenna Pol. :HORIZONTAL EUT Pol. :H Plane

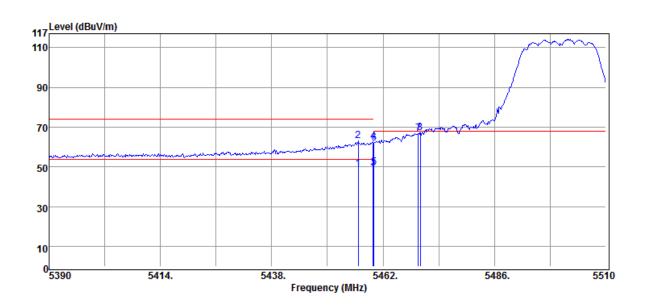

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
5456.60	Average	43.53	5.55	49.08	54.00	-4.92
5456.60	Peak	57.52	5.55	63.07	74.00	-10.93
5459.84	Average	43.99	5.54	49.53	54.00	-4.47
5459.84	Peak	57.27	5.54	62.81	74.00	-11.19
5460.00	Average	44.08	5.54	49.62	54.00	-4.38
5460.00	Peak	56.59	5.54	62.13	74.00	-11.87
5469.56	Peak	61.44	5.52	66.96	68.20	-1.24
5470.00	Peak	61.66	5.52	67.18	68.20	-1.02

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 256 of 346

Project Number : T190321W03 **Test Date** :2019-04-02

Operation Band :802.11a B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5700 MHz Engineer :Jerry

Operation Mode :Bandedge CH HIGH :VERTICAL Measurement Antenna Pol. EUT Pol. :H Plane

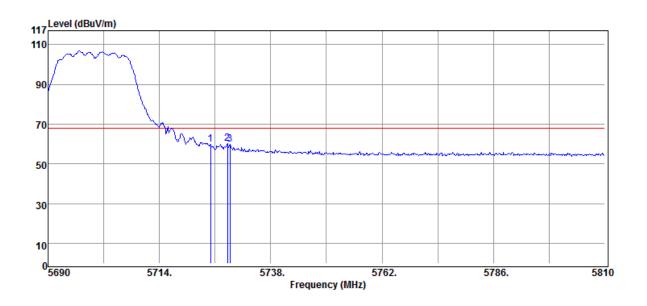

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
 MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
5725.00	Peak	53.24	6.55	59.79	68.20	-8.41
5728.64	Peak	53.61	6.54	60.15	68.20	-8.05
5729.24	Peak	53.45	6.53	59.98	68.20	-8.22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 257 of 346

Project Number : T190321W03 **Operation Band** :802.11a B2c Fundamental Frequency :5700 MHz


Operation Mode :Bandedge CH HIGH

EUT Pol. :H Plane **Test Date** :2019-04-02

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

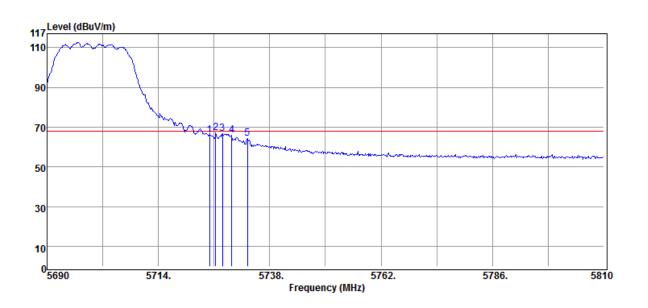

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
5725.04	Peak	59.63	6.55	66.18	68.20	-2.02	
5726.36	Peak	60.48	6.54	67.02	68.20	-1.18	
5727.80	Peak	60.46	6.54	67.00	68.20	-1.20	
5729.84	Peak	59.59	6.53	66.12	68.20	-2.08	
5733.20	Peak	57.64	6.53	64.17	68.20	-4.03	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



:23 deg C / 62 RH


Page: 258 of 346

Project Number : T190321W03 **Test Date** :2019-04-02

Operation Band :802.11a B3 Temp./Humi.

Fundamental Frequency :5745 MHz Engineer :Jerry **Operation Mode** :Bandedge CH LOW :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plane

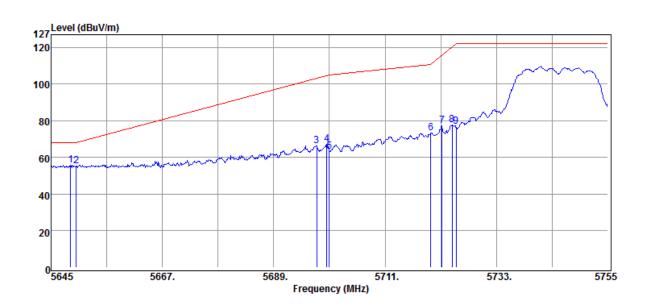

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
5648.85	Peak	49.81	5.89	55.70	68.23	-12.53
5650.00	Peak	49.32	5.91	55.23	68.23	-13.00
5697.47	Peak	60.17	6.40	66.57	103.36	-36.79
5699.45	Peak	60.63	6.43	67.06	104.82	-37.76
5700.00	Peak	56.97	6.43	63.40	105.23	-41.83
5720.00	Peak	66.66	6.55	73.21	110.83	-37.62
5722.22	Peak	70.69	6.54	77.23	115.89	-38.66
5724.20	Peak	71.14	6.55	77.69	120.41	-42.72
5725.00	Peak	70.33	6.55	76.88	122.23	-45.35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 259 of 346

Project Number : T190321W03 **Test Date** :2019-04-02


Operation Band :802.11a B3 Fundamental Frequency :5745 MHz

Operation Mode :Bandedge CH LOW

EUT Pol. :H Plane Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

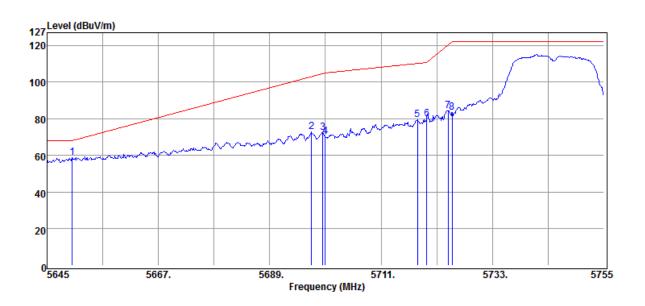

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB	
5650.00	Peak	52.93	5.91	58.84	68.23	-9.39	
5697.25	Peak	66.40	6.40	72.80	103.19	-30.39	
5699.45	Peak	65.95	6.43	72.38	104.82	-32.44	
5700.00	Peak	63.76	6.43	70.19	105.23	-35.04	
5718.15	Peak	73.05	6.54	79.59	110.31	-30.72	
5720.00	Peak	73.45	6.55	80.00	110.83	-30.83	
5724.20	Peak	78.03	6.55	84.58	120.41	-35.83	
5725.00	Peak	76.88	6.55	83.43	122.23	-38.80	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Page: 260 of 346

Project Number : T190321W03 **Test Date** :2019-04-02

Operation Band :802.11a B3 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5825 MHz Engineer :Jerry

Operation Mode :Bandedge CH HIGH :VERTICAL Measurement Antenna Pol. EUT Pol. :H Plane

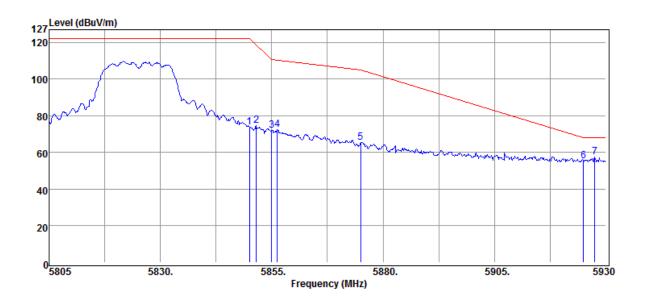

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
5850.00	Peak	67.54	6.41	73.95	122.23	-48.28
5851.50	Peak	68.19	6.42	74.61	118.81	-44.20
5855.00	Peak	65.48	6.43	71.91	110.83	-38.92
5856.25	Peak	66.23	6.43	72.66	110.48	-37.82
5875.00	Peak	59.14	6.49	65.63	105.23	-39.60
5925.00	Peak	48.77	6.44	55.21	68.23	-13.02
5927.50	Peak	51.07	6.46	57.53	68.23	-10.70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 261 of 346

Project Number : T190321W03 **Test Date** :2019-04-02


Operation Band :802.11a B3 Fundamental Frequency :5825 MHz

Operation Mode :Bandedge CH HIGH

EUT Pol. :H Plane Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

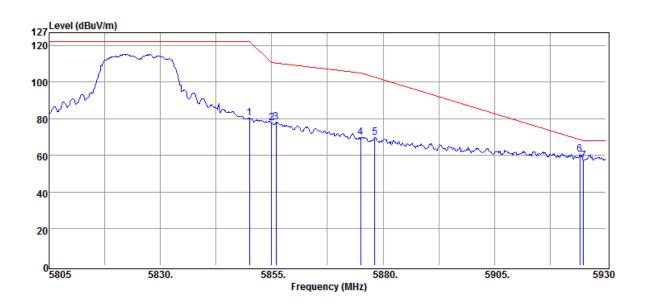

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin	
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB	
5850.00	Peak	73.80	6.41	80.21	122.23	-42.02	
5855.00	Peak	71.27	6.43	77.70	110.83	-33.13	
5856.00	Peak	71.93	6.43	78.36	110.55	-32.19	
5875.00	Peak	63.20	6.49	69.69	105.23	-35.54	
5878.13	Peak	63.44	6.51	69.95	102.92	-32.97	
5924.13	Peak	54.07	6.43	60.50	68.88	-8.38	
5925.00	Peak	50.87	6.44	57.31	68.23	-10.92	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 262 of 346

Project Number : T190321W03 Test Date
Operation Band :802.11n20 B1 Temp./Humi.

Fundamental Frequency :5180 MHz

Operation Mode :Bandedge CH LOW


EUT Pol. :H Plane

Test Date :2019-04-02

Temp./Humi. :23 deg_C / 62 RH

Engineer :Jerry

Measurement Antenna Pol. : VERTICAL

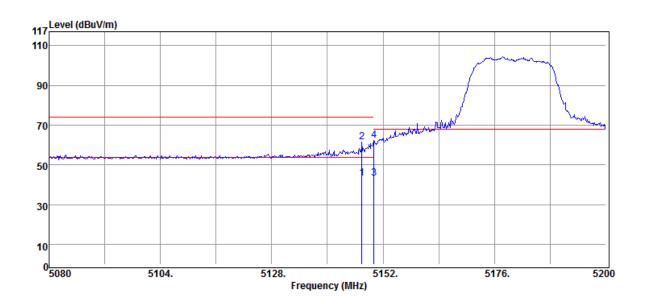

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
5147.44	Average	38.59	4.55	43.14	54.00	-10.86
5147.44	Peak	56.88	4.55	61.43	74.00	-12.57
5150.00	Peak	38.94	4.55	43.49	74.00	-30.51
5150.00	Peak	57.65	4.55	62.20	74.00	-11.80

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 263 of 346

Project Number : T190321W03 **Test Date Operation Band**

:802.11n20 B1 Fundamental Frequency :5180 MHz


Operation Mode :Bandedge CH LOW

EUT Pol. :H Plane :2019-04-02

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

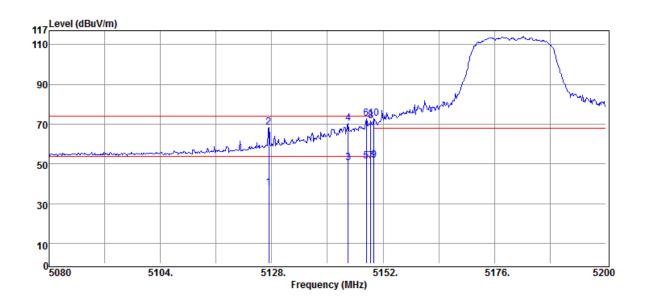

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
5127.40	Average	33.54	4.68	38.22	54.00	-15.78
5127.40	Peak	63.62	4.68	68.30	74.00	-5.70
5144.44	Average	46.13	4.55	50.68	54.00	-3.32
5144.44	Peak	66.04	4.55	70.59	74.00	-3.41
5148.40	Average	46.79	4.55	51.34	54.00	-2.66
5148.40	Peak	68.27	4.55	72.82	74.00	-1.18
5149.36	Average	46.88	4.54	51.42	54.00	-2.58
5149.36	Peak	67.28	4.54	71.82	74.00	-2.18
5150.00	Average	47.12	4.55	51.67	54.00	-2.33
5150.00	Peak	68.36	4.55	72.91	74.00	-1.09

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 264 of 346

Project Number : T190321W03 **Test Date** :2019-04-03

Operation Band :802.11n20 B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5320 MHz Engineer :Jerry **Operation Mode** :Bandedge CH HIGH :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plane

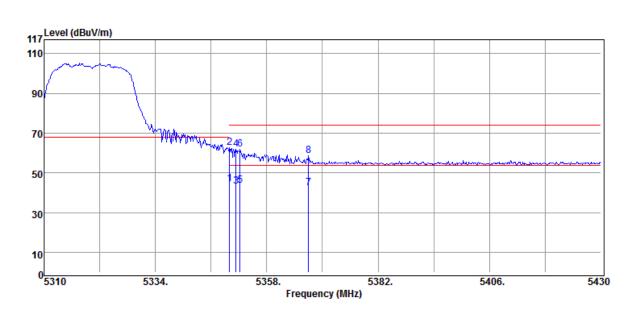

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB	
5350.00	Average	39.15	5.19	44.34	54.00	-9.66	
5350.00	Peak	57.43	5.19	62.62	74.00	-11.38	
5351.40	Average	38.06	5.20	43.26	54.00	-10.74	
5351.40	Peak	56.92	5.20	62.12	74.00	-11.88	
5352.24	Average	38.68	5.20	43.88	54.00	-10.12	
5352.24	Peak	56.76	5.20	61.96	74.00	-12.04	
5367.00	Average	37.12	5.29	42.41	54.00	-11.59	
5367.00	Peak	53.59	5.29	58.88	74.00	-15.12	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 265 of 346

Project Number : T190321W03 **Operation Band** :802.11n20 B2a


Fundamental Frequency :5320 MHz **Operation Mode** :Bandedge CH HIGH

EUT Pol. :H Plane **Test Date** :2019-04-03

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

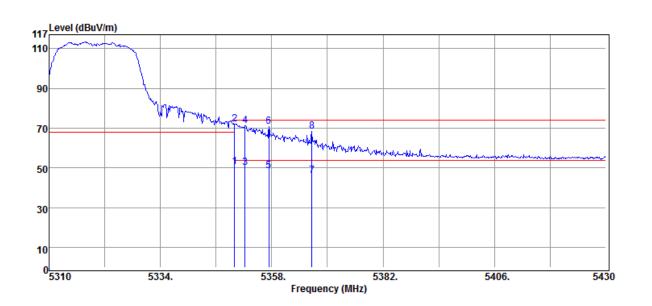

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
5350.00	Average	45.61	5.19	50.80	54.00	-3.20
5350.00	Peak	66.83	5.19	72.02	74.00	-1.98
5352.24	Average	44.82	5.20	50.02	54.00	-3.98
5352.24	Peak	66.18	5.20	71.38	74.00	-2.62
5357.40	Average	43.18	5.21	48.39	54.00	-5.61
5357.40	Peak	65.82	5.21	71.03	74.00	-2.97
5366.64	Average	40.99	5.28	46.27	54.00	-7.73
5366.64	Peak	62.99	5.28	68.27	74.00	-5.73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 266 of 346

Project Number : T190321W03 Test Date :2019-04-03

Operation Band :802.11n20 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5500 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plane

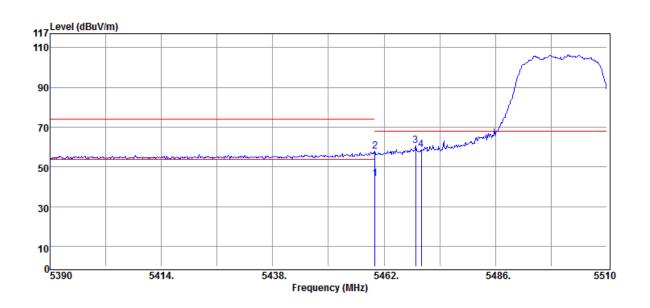

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
5460.00	Average	38.72	5.54	44.26	54.00	-9.74
5460.00	Peak	52.23	5.54	57.77	74.00	-16.23
5468.84	Peak	55.24	5.53	60.77	68.20	-7.43
5470.00	Peak	53.21	5.52	58.73	68.20	-9.47

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 267 of 346

Project Number : T190321W03 **Test Date** :2019-04-03

Operation Band :802.11n20 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5500 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plane

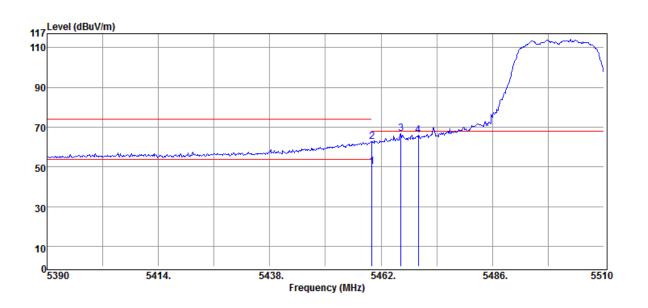

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
5460.00	Average	44.73	5.54	50.27	54.00	-3.73
5460.00	Peak	57.33	5.54	62.87	74.00	-11.13
5466.32	Peak	61.25	5.53	66.78	68.20	-1.42
5470.00	Peak	60.45	5.52	65.97	68.20	-2.23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 268 of 346

Project Number : T190321W03 Test Date :2019-04-03

Operation Band :802.11n20 B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5700 MHz Engineer :Jerry

Operation Mode :Bandedge CH HIGH Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plane

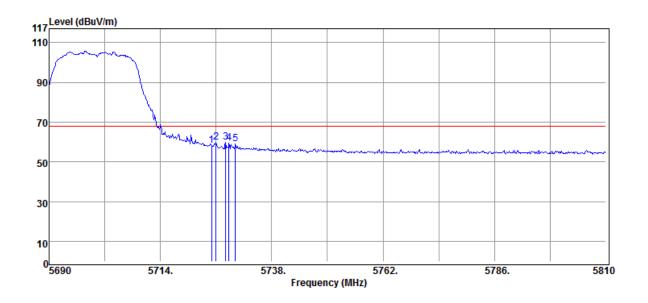

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin	
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB	_
5725.00	Peak	51.69	6.55	58.24	68.20	-9.96	
5726.00	Peak	53.26	6.54	59.80	68.20	-8.40	
5728.04	Peak	53.38	6.54	59.92	68.20	-8.28	
5728.76	Peak	53.16	6.54	59.70	68.20	-8.50	
5730.20	Peak	52.51	6.53	59.04	68.20	-9.16	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 269 of 346

Project Number : T190321W03 **Test Date** :2019-04-03

Operation Band :802.11n20 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5700 MHz Engineer :Jerry

Operation Mode :Bandedge CH HIGH :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plane

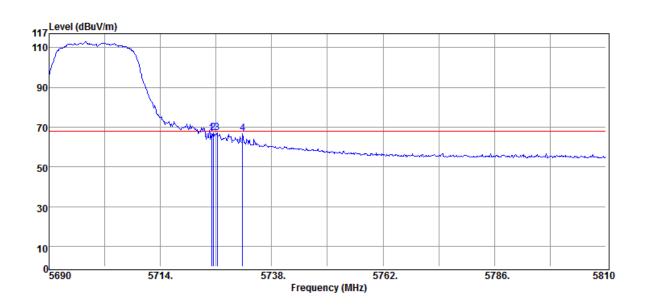

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
5725.00	Peak	60.25	6.55	66.80	68.20	-1.40
5725.40	Peak	60.62	6.55	67.17	68.20	-1.03
5726.24	Peak	60.48	6.54	67.02	68.20	-1.18
5731.76	Peak	60.38	6.53	66.91	68.20	-1.29

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 270 of 346

Project Number : T190321W03 **Test Date** :2019-04-03

Operation Band :802.11n20 B3 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5745 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW :VERTICAL Measurement Antenna Pol. EUT Pol. :H Plane

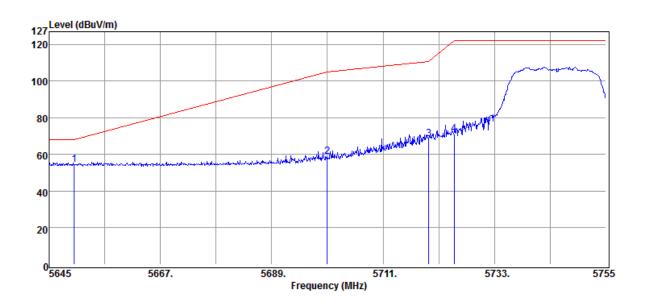

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
5650.00	Peak	48.42	5.91	54.33	68.23	-13.90
5700.00	Peak	52.52	6.43	58.95	105.23	-46.28
5720.00	Peak	62.00	6.55	68.55	110.83	-42.28
5725.00	Peak	64.43	6.55	70.98	122.23	-51.25

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 271 of 346


Project Number : T190321W03 Test Date :2019-04-03

Operation Band :802.11n20 B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5745 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW Measurement Antenna Pol. :HORIZONTAL

Operation Mode :Bandedge CH LOW Measurement Antenna Pol. EUT Pol. :H Plane

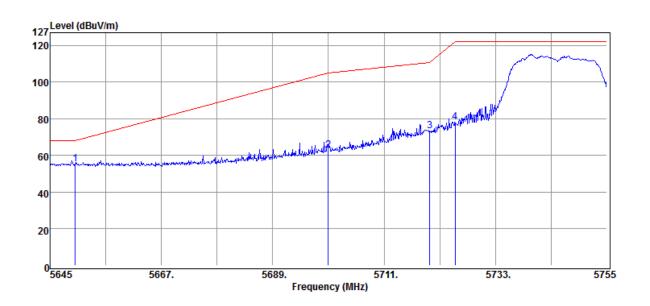

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
5650.00	Peak	49.40	5.91	55.31	68.23	-12.92
5700.00	Peak	56.49	6.43	62.92	105.23	-42.31
5720.00	Peak	66.73	6.55	73.28	110.83	-37.55
5725.00	Peak	71.50	6.55	78.05	122.23	-44.18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 272 of 346

Project Number : T190321W03 Operation Band :802.11n20 B3

Fundamental Frequency :5825 MHz
Operation Mode :Bandedge CH HIGH


EUT Pol. :H Plane

Test Date :2019-04-03

Temp./Humi. :23 deg_C / 62 RH

Engineer :Jerry

Measurement Antenna Pol. : VERTICAL

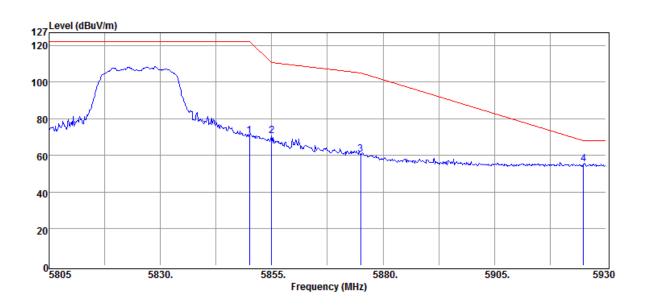

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
5850.00	Peak	64.24	6.41	70.65	122.23	-51.58
5855.00	Peak	64.33	6.43	70.76	110.83	-40.07
5875.00	Peak	54.07	6.49	60.56	105.23	-44.67
5925.00	Peak	49.10	6.44	55.54	68.23	-12.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 273 of 346

Project Number : T190321W03 **Test Date** :2019-04-03 Temp./Humi. :23 deg C / 62 RH

Operation Band :802.11n20 B3 Fundamental Frequency :5825 MHz

Engineer :Jerry **Operation Mode** :Bandedge CH HIGH :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plane

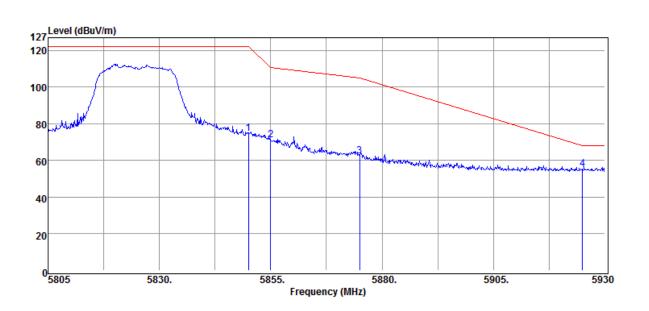

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
5850.00	Peak	68.17	6.41	74.58	122.23	-47.65
5855.00	Peak	64.77	6.43	71.20	110.83	-39.63
5875.00	Peak	55.88	6.49	62.37	105.23	-42.86
5925.00	Peak	48.95	6.44	55.39	68.23	-12.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 274 of 346

Project Number : T190321W03 **Test Date** :2019-04-02

Operation Band :802.11n40 B1 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5190 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW :VERTICAL Measurement Antenna Pol. EUT Pol. :H Plane

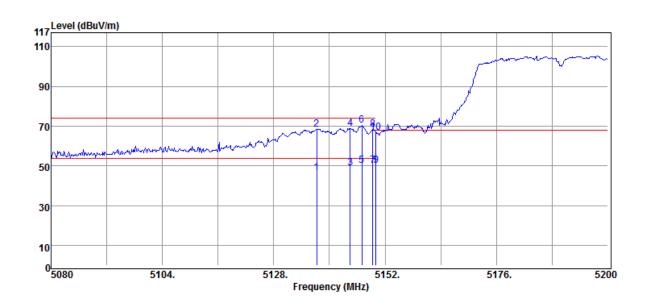

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
5137.24	Average	42.16	4.58	46.74	54.00	-7.26
5137.24	Peak	63.97	4.58	68.55	74.00	-5.45
5144.44	Average	44.51	4.55	49.06	54.00	-4.94
5144.44	Peak	64.33	4.55	68.88	74.00	-5.12
5146.96	Average	45.54	4.54	50.08	54.00	-3.92
5146.96	Peak	65.85	4.54	70.39	74.00	-3.61
5149.36	Average	45.72	4.54	50.26	54.00	-3.74
5149.36	Peak	63.73	4.54	68.27	74.00	-5.73
5150.00	Average	45.81	4.55	50.36	54.00	-3.64
5150.00	Peak	62.37	4.55	66.92	74.00	-7.08

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 275 of 346

Project Number : T190321W03 **Test Date** Operation Band :802.11n40 B1


Fundamental Frequency :5190 MHz

Operation Mode :Bandedge CH LOW EUT Pol. :H Plane

:2019-04-02 Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

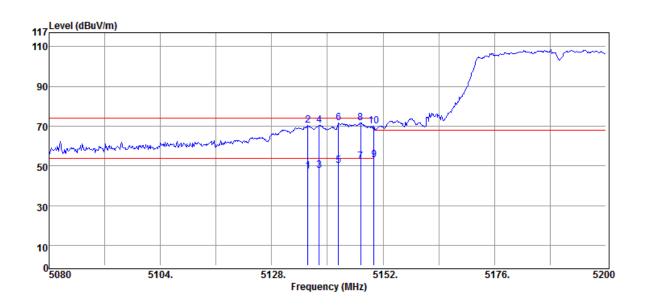

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
5135.80	Average	42.67	4.59	47.26	54.00	-6.74
5135.80	Peak	65.90	4.59	70.49	74.00	-3.51
5138.20	Average	43.34	4.58	47.92	54.00	-6.08
5138.20	Peak	65.86	4.58	70.44	74.00	-3.56
5142.40	Average	45.65	4.55	50.20	54.00	-3.80
5142.40	Peak	67.10	4.55	71.65	74.00	-2.35
5147.20	Average	47.84	4.54	52.38	54.00	-1.62
5147.20	Peak	67.24	4.54	71.78	74.00	-2.22
5150.00	Average	48.34	4.55	52.89	54.00	-1.11
5150.00	Peak	65.52	4.55	70.07	74.00	-3.93

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 276 of 346

Project Number : T190321W03
Operation Band :802.11n40 B2a
Fundamental Frequency :5310 MHz

Operation Mode :Bandedge CH HIGH


EUT Pol. :H Plane

Test Date :2019-04-02

Temp./Humi. :23 deg_C / 62 RH

Engineer :Jerry

Measurement Antenna Pol. :VERTICAL

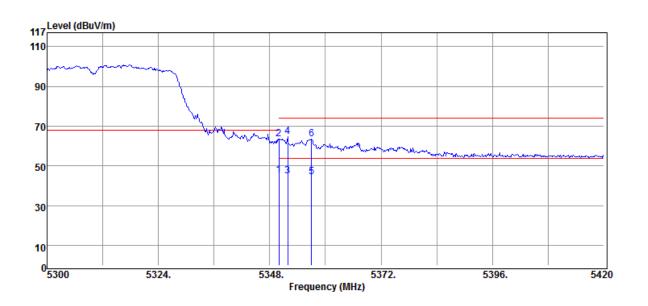

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
	5350.00	Average	40.23	5.19	45.42	54.00	-8.58	
	5350.00	Peak	58.25	5.19	63.44	74.00	-10.56	
	5351.84	Average	39.76	5.20	44.96	54.00	-9.04	
	5351.84	Peak	59.46	5.20	64.66	74.00	-9.34	
	5357.00	Average	39.23	5.21	44.44	54.00	-9.56	
	5357.00	Peak	58.39	5.21	63.60	74.00	-10.40	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 277 of 346

Project Number : T190321W03 Operation Band :802.11n40 B2a

Fundamental Frequency :5310 MHz


Operation Mode :Bandedge CH HIGH EUT Pol. :H Plane

Test Date :2019-04-02

Temp./Humi. :23 deg_C / 62 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

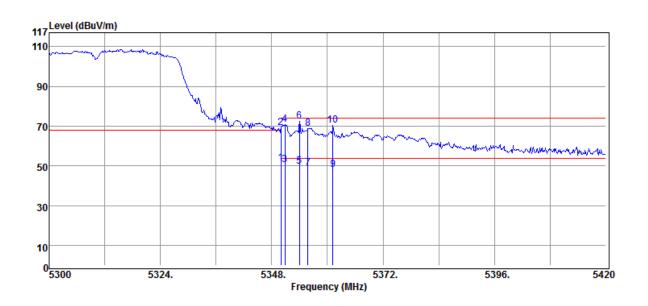

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
5350.00	Average	46.28	5.19	51.47	54.00	-2.53
5350.00	Peak	63.95	5.19	69.14	74.00	-4.86
5350.88	Average	45.58	5.20	50.78	54.00	-3.22
5350.88	Peak	65.55	5.20	70.75	74.00	-3.25
5354.00	Average	44.68	5.20	49.88	54.00	-4.12
5354.00	Peak	67.22	5.20	72.42	74.00	-1.58
5355.80	Average	43.78	5.21	48.99	54.00	-5.01
5355.80	Peak	63.78	5.21	68.99	74.00	-5.01
5361.20	Average	42.75	5.23	47.98	54.00	-6.02
5361.20	Peak	65.07	5.23	70.30	74.00	-3.70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)



Page: 278 of 346

Project Number : T190321W03 **Operation Band** :802.11n40 B2c Fundamental Frequency :5510 MHz


Operation Mode :Bandedge CH LOW

EUT Pol. :H Plane **Test Date** :2019-04-02

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

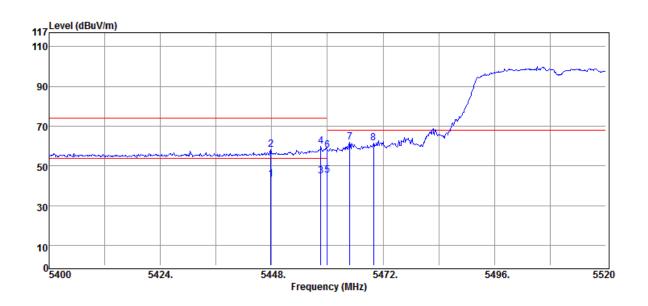

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
5447.76	Average	37.69	5.57	43.26	54.00	-10.74
5447.76	Peak	52.59	5.57	58.16	74.00	-15.84
5458.56	Average	39.56	5.54	45.10	54.00	-8.90
5458.56	Peak	54.34	5.54	59.88	74.00	-14.12
5460.00	Average	39.73	5.54	45.27	54.00	-8.73
5460.00	Peak	52.54	5.54	58.08	74.00	-15.92
5464.80	Peak	56.27	5.53	61.80	68.20	-6.40
5469.96	Peak	55.85	5.52	61.37	68.20	-6.83

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction. documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)



Page: 279 of 346


Project Number : T190321W03 Test Date :2019-04-02

Operation Band :802.11n40 B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5510 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW Measurement Antenna Pol. :HORIZONTAL

EUT Pol. :H Plane

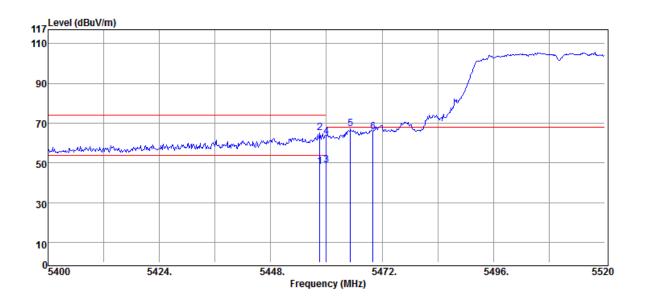

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
5458.56	Average	42.74	5.54	48.28	54.00	-5.72
5458.56	Peak	59.63	5.54	65.17	74.00	-8.83
5460.00	Average	43.58	5.54	49.12	54.00	-4.88
5460.00	Peak	57.45	5.54	62.99	74.00	-11.01
5465.16	Peak	61.50	5.53	67.03	68.20	-1.17
5470.00	Peak	60.23	5.52	65.75	68.20	-2.45

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 280 of 346

Project Number : T190321W03 **Test Date** :2019-04-02

Operation Band :802.11n40 B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5670 MHz Engineer :Jerry

Operation Mode :Bandedge CH HIGH :VERTICAL Measurement Antenna Pol. EUT Pol. :H Plane

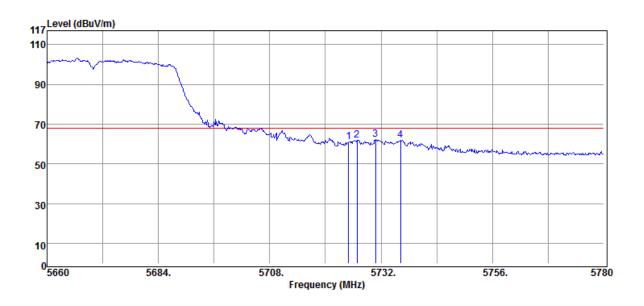

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
5725.00	Peak	54.45	6.55	61.00	68.20	-7.20
5726.84	Peak	55.43	6.54	61.97	68.20	-6.23
5730.80	Peak	55.62	6.53	62.15	68.20	-6.05
5736.20	Peak	55.45	6.52	61.97	68.20	-6.23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 281 of 346

Project Number : T190321W03 Test Date :2019-04-02

Operation Band :802.11n40 B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5670 MHz Engineer :Jerry

Operation Mode :Bandedge CH HIGH Measurement Antenna Pol. :HORIZONTAL EUT Pol. :H Plane

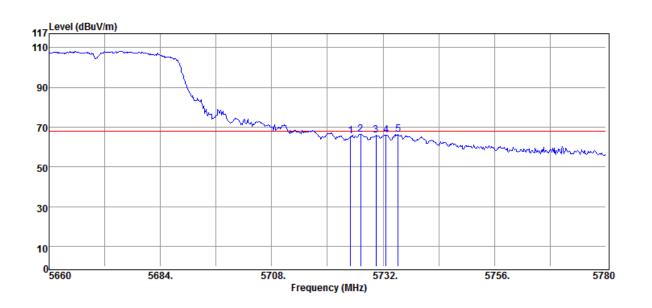

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB	
	5725.00	Peak	59.21	6.55	65.76	68.20	-2.44	
	5727.20	Peak	59.91	6.53	66.44	68.20	-1.76	
	5730.44	Peak	59.42	6.53	65.95	68.20	-2.25	
	5732.60	Peak	59.57	6.54	66.11	68.20	-2.09	
	5735.24	Peak	59.89	6.53	66.42	68.20	-1.78	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 282 of 346

Project Number : T190321W03 **Test Date** :2019-04-02

Operation Band :802.11n40 B3 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5755 MHz Engineer :Jerry **Operation Mode** :Bandedge CH LOW :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plane

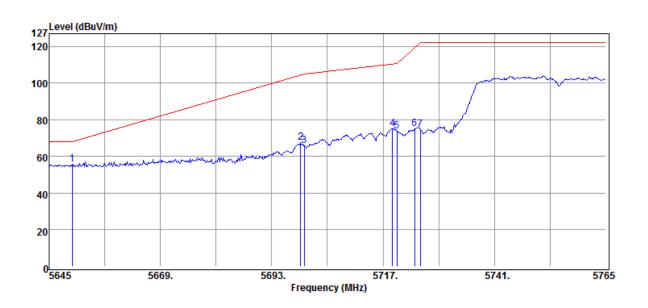

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
Ę	5650.00	Peak	49.83	5.91	55.74	68.23	-12.49
Ę	5699.24	Peak	61.32	6.41	67.73	104.67	-36.94
Ę	5700.00	Peak	59.56	6.43	65.99	105.23	-39.24
Ę	5719.04	Peak	68.67	6.55	75.22	110.56	-35.34
Ę	5720.00	Peak	67.27	6.55	73.82	110.83	-37.01
Ę	5723.84	Peak	68.80	6.55	75.35	119.58	-44.23
Ę	5725.00	Peak	68.15	6.55	74.70	122.23	-47.53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)




Page: 283 of 346

Project Number : T190321W03 **Test Date** :2019-04-02

Operation Band :802.11n40 B3 Temp./Humi. :23 deg C / 62 RH Fundamental Frequency :5755 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plane

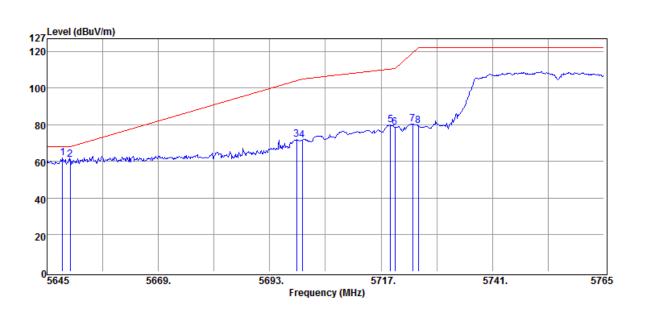

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
5648.36	Peak	56.17	5.89	62.06	68.23	-6.17	
5650.00	Peak	55.36	5.91	61.27	68.23	-6.96	
5698.76	Peak	65.81	6.41	72.22	104.31	-32.09	
5700.00	Peak	65.21	6.43	71.64	105.23	-33.59	
5719.04	Peak	73.52	6.55	80.07	110.56	-30.49	
5720.00	Peak	72.17	6.55	78.72	110.83	-32.11	
5723.84	Peak	73.88	6.55	80.43	119.58	-39.15	
5725.00	Peak	72.78	6.55	79.33	122.23	-42.90	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 284 of 346

Project Number : T190321W03 **Test Date** :2019-04-02

Operation Band :802.11n40 B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5795 MHz Engineer :Jerry

Operation Mode :Bandedge CH HIGH :VERTICAL Measurement Antenna Pol. EUT Pol. :H Plane

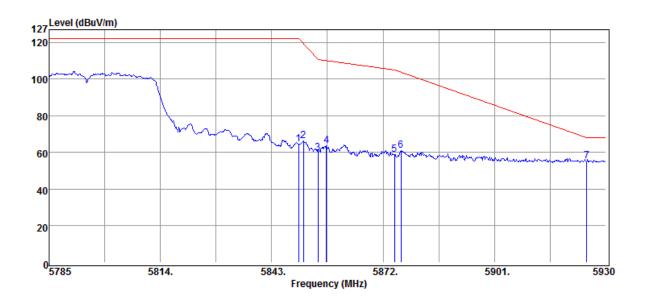

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin	
_	MHz	PK/QP/AV	dBµV	dB	dBμV/m	dΒμV/m	dB	
	5850.00	Peak	58.13	6.41	64.54	122.23	-57.69	_
	5851.27	Peak	60.13	6.42	66.55	119.35	-52.80	
	5855.00	Peak	53.32	6.43	59.75	110.83	-51.08	
	5857.21	Peak	57.17	6.44	63.61	110.21	-46.60	
	5875.00	Peak	52.39	6.49	58.88	105.23	-46.35	
	5876.64	Peak	54.36	6.50	60.86	104.02	-43.16	
	5925.00	Peak	49.06	6.44	55.50	68.23	-12.73	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)



Page: 285 of 346

Project Number : T190321W03 **Test Date** :2019-04-02


Operation Band :802.11n40 B3 Fundamental Frequency :5795 MHz

Operation Mode :Bandedge CH HIGH

EUT Pol. :H Plane Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

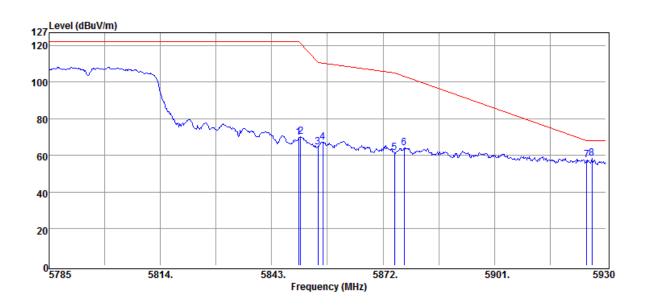

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	B 41 1	Mode	Reading Level	ID.	FS ID V	@3m	ID	
_	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB	
	5850.00	Peak	63.36	6.41	69.77	122.23	-52.46	
	5850.54	Peak	63.69	6.42	70.11	121.00	-50.89	
	5855.00	Peak	58.04	6.43	64.47	110.83	-46.36	
	5856.34	Peak	60.85	6.43	67.28	110.45	-43.17	
	5875.00	Peak	55.17	6.49	61.66	105.23	-43.57	
	5877.51	Peak	57.83	6.50	64.33	103.37	-39.04	
	5925.00	Peak	50.93	6.44	57.37	68.23	-10.86	
	5926.38	Peak	52.02	6.44	58.46	68.23	-9.77	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 286 of 346

Project Number : T190321W03 **Test Date** :2019-04-03

Operation Band :802.11ac80 B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5210 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW :VERTICAL Measurement Antenna Pol. EUT Pol. :H Plane

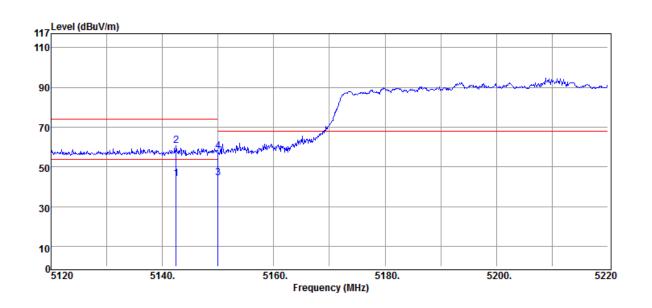

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
5142.50	Average	39.68	4.55	44.23	54.00	-9.77
5142.50	Peak	56.00	4.55	60.55	74.00	-13.45
5150.00	Average	39.93	4.55	44.48	54.00	-9.52
5150.00	Peak	53.53	4.55	58.08	74.00	-15.92

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 287 of 346

Project Number : T190321W03 Operation Band :802.11ac80 B1

Fundamental Frequency :5210 MHz


Operation Mode :Bandedge CH LOW

EUT Pol. :H Plane **Test Date** :2019-04-03

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

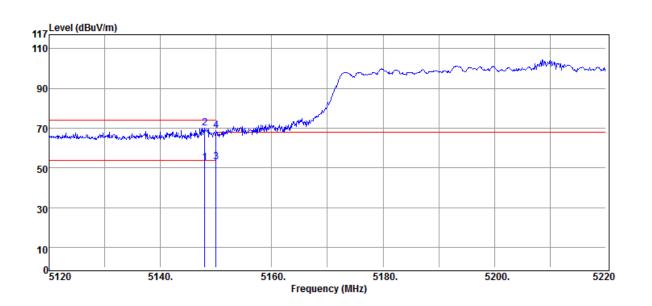

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
5148.00	Average	48.03	4.55	52.58	54.00	-1.42
5148.00	Peak	65.42	4.55	69.97	74.00	-4.03
5150.00	Average	48.30	4.55	52.85	54.00	-1.15
5150.00	Peak	64.45	4.55	69.00	74.00	-5.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 288 of 346

Project Number : T190321W03 Test Date :2019-04-03

Operation Band :802.11ac80 B2a Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5290 MHz Engineer :Jerry
Operation Mode :Bandedge CH HIGH Measurement Antenna Pol. :VERTICAL

EUT Pol. :H Plane

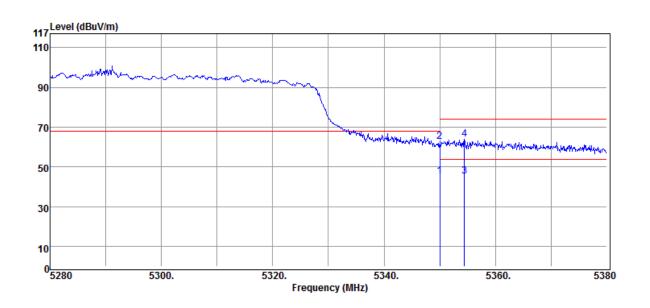

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
5350.00	Average	40.04	5.19	45.23	54.00	-8.77
5350.00	Peak	57.68	5.19	62.87	74.00	-11.13
5354.40	Average	40.04	5.21	45.25	54.00	-8.75
5354.40	Peak	58.58	5.21	63.79	74.00	-10.21

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 289 of 346

Project Number : T190321W03 **Test Date** Operation Band :802.11ac80 B2a

Fundamental Frequency :5290 MHz


Operation Mode :Bandedge CH HIGH

EUT Pol. :H Plane :2019-04-03

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

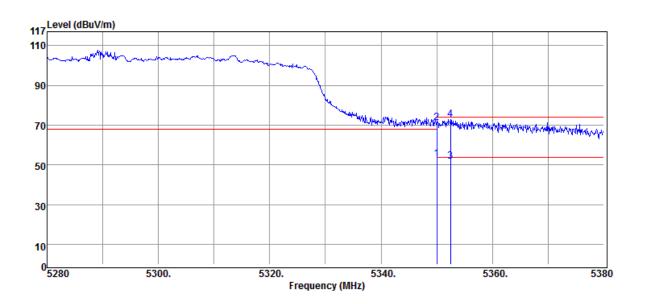

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
5350.00	Average	47.74	5.19	52.93	54.00	-1.07
5350.00	Peak	65.94	5.19	71.13	74.00	-2.87
5352.50	Average	46.82	5.20	52.02	54.00	-1.98
5352.50	Peak	67.57	5.20	72.77	74.00	-1.23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 290 of 346

Project Number : T190321W03 Test Date :2019-04-03

Operation Band :802.11ac80 B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5530 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plane

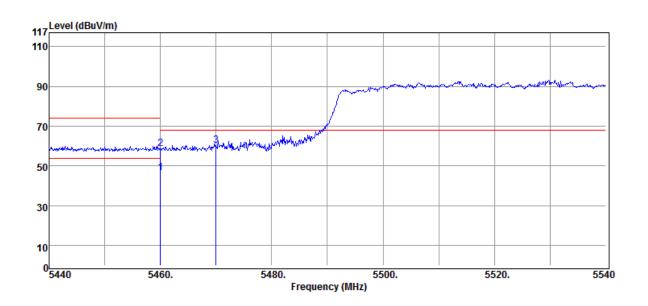

Freq	. Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
5460.0	00 Average	40.93	5.54	46.47	54.00	-7.53
5460.0	00 Peak	53.04	5.54	58.58	74.00	-15.42
5470.0	00 Peak	54.76	5.52	60.28	68.20	-7.92

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 291 of 346

Project Number : T190321W03 **Test Date** :2019-04-03

Operation Band :802.11ac80 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5530 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plane

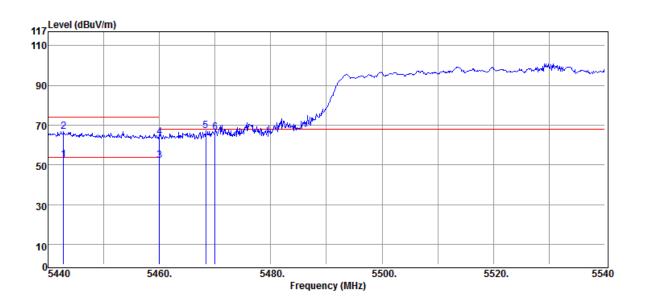

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
5442.80	Average	47.10	5.59	52.69	54.00	-1.31
5442.80	Peak	61.01	5.59	66.60	74.00	-7.40
5460.00	Average	46.51	5.54	52.05	54.00	-1.95
5460.00	Peak	58.53	5.54	64.07	74.00	-9.93
5468.30	Peak	61.52	5.51	67.03	68.20	-1.17
5470.00	Peak	61.05	5.52	66.57	68.20	-1.63

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 292 of 346

Operation Band :802.11ac80 B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5775 MHz Engineer :Jerry
Operation Mode :Bandedge CH LOW Measurement Antenna Pol. :VERTICAL

EUT Pol. :H Plane

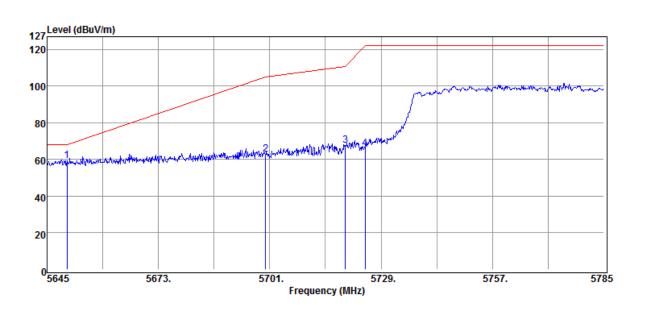

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
5650.00	Peak	53.35	5.91	59.26	68.23	-8.97
5700.00	Peak	56.32	6.43	62.75	105.23	-42.48
5720.00	Peak	61.00	6.55	67.55	110.83	-43.28
5725.00	Peak	59.18	6.55	65.73	122.23	-56.50

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 293 of 346

Project Number : T190321W03 Operation Band :802.11ac80 B3 Fundamental Frequency :5775 MHz


Operation Mode :Bandedge CH LOW

EUT Pol. :H Plane **Test Date** :2019-04-03

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

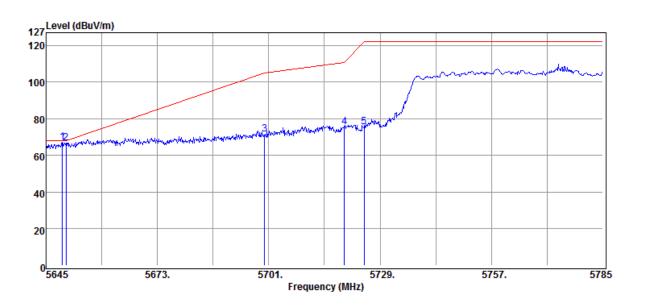

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	_
	5649.06	Peak	61.29	5.89	67.18	68.23	-1.05	
	5650.00	Peak	60.72	5.91	66.63	68.23	-1.60	
	5700.00	Peak	65.17	6.43	71.60	105.23	-33.63	
	5720.00	Peak	69.06	6.55	75.61	110.83	-35.22	
	5725.00	Peak	69.20	6.55	75.75	122.23	-46.48	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 294 of 346

Project Number : T190321W03 Operation Band :802.11ac80 B3


Fundamental Frequency :5775 MHz **Operation Mode** :Bandedge CH HIGH

EUT Pol. :H Plane **Test Date** :2019-04-03

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

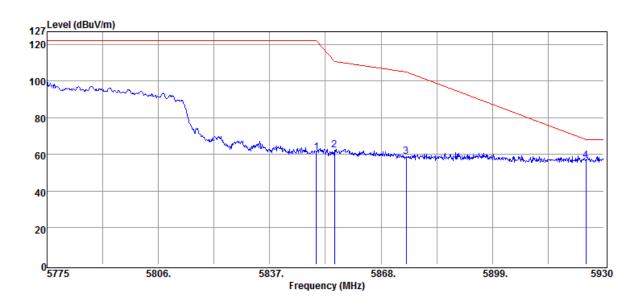

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
5850.00	Peak	54.85	6.41	61.26	122.23	-60.97
5855.00	Peak	55.95	6.43	62.38	110.83	-48.45
5875.00	Peak	52.61	6.49	59.10	105.23	-46.13
5925.00	Peak	50.22	6.44	56.66	68.23	-11.57

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 295 of 346

Project Number : T190321W03 Test Date :2019-04-03

Operation Band :802.11ac80 B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5775 MHz Engineer :Jerry
Operation Mode :Bandedge CH HIGH Measurement Antenna Pol. :HORIZONTAL

EUT Pol. :H Plane

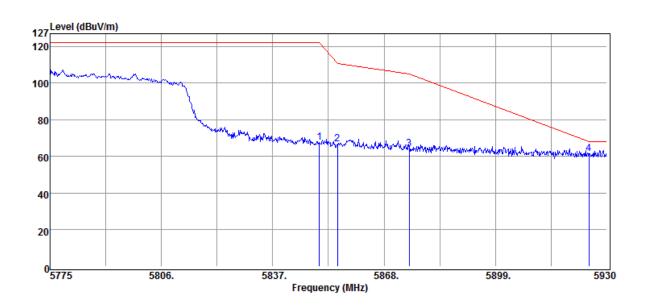

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
5850.00	Peak	61.36	6.41	67.77	122.23	-54.46
5855.00	Peak	60.25	6.43	66.68	110.83	-44.15
5875.00	Peak	57.76	6.49	64.25	105.23	-40.98
5925.00	Peak	55.11	6.44	61.55	68.23	-6.68

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 296 of 346


Dipole Antenna

:2019-04-08 **Project Number** : T190321W03 **Test Date**

:23 deg_C / 62 RH **Operation Band** Temp./Humi. :802.11a B1

Fundamental Frequency :5180 MHz Engineer :Jerry Operation Mode :Bandedge CH LOW :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plane

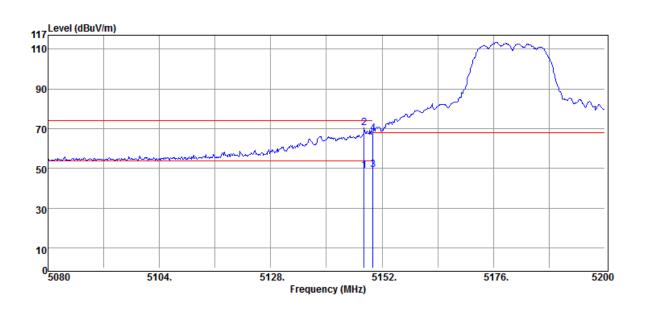

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
5148.16	Average	44.57	4.55	49.12	54.00	-4.88
5148.16	Peak	65.89	4.55	70.44	74.00	-3.56
5150.00	Average	44.84	4.55	49.39	54.00	-4.61
5150.00	Peak	63.21	4.55	67.76	74.00	-6.24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 297 of 346

Project Number : T190321W03 Test Date :2019-04-08

Operation Band :802.11a B1 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5180 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW Measurement Antenna Pol. :HORIZONTAL EUT Pol. :H Plane

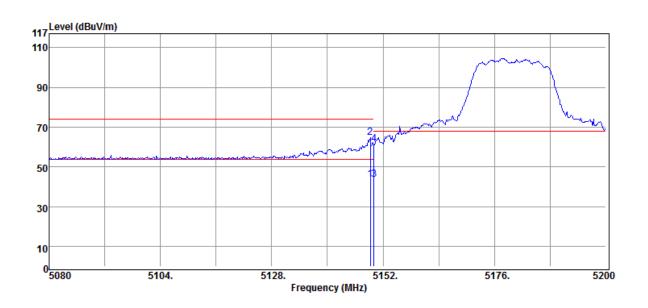

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
5149.24	Average	39.15	4.54	43.69	54.00	-10.31
5149.24	Peak	60.28	4.54	64.82	74.00	-9.18
5150.00	Average	39.21	4.55	43.76	54.00	-10.24
5150.00	Peak	57.01	4.55	61.56	74.00	-12.44

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 298 of 346

Project Number : T190321W03 **Test Date** :2019-04-08

Operation Band :802.11a B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5320 MHz Engineer :Jerry **Operation Mode** :Bandedge CH HIGH :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plane

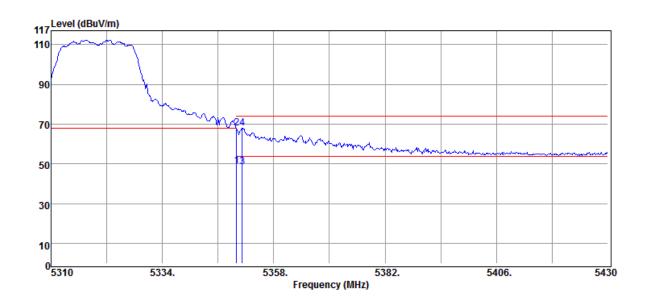

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
5350.00	Average	43.91	5.19	49.10	54.00	-4.90
5350.00	Peak	62.88	5.19	68.07	74.00	-5.93
5351.16	Average	43.28	5.20	48.48	54.00	-5.52
5351.16	Peak	62.69	5.20	67.89	74.00	-6.11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 299 of 346

Project Number : T190321W03 Test Date :2019-04-08

 Operation Band
 :802.11a B2a
 Temp./Humi.
 :23 deg_C / 62 RH

Fundamental Frequency :5320 MHz Engineer :Jerry

Operation Mode :Bandedge CH HIGH Measurement Antenna Pol. :HORIZONTAL EUT Pol. :H Plane

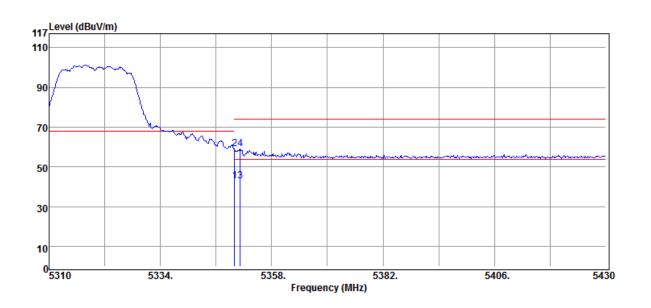

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
5350.00	Average	37.66	5.19	42.85	54.00	-11.15
5350.00	Peak	53.95	5.19	59.14	74.00	-14.86
5351.16	Average	37.64	5.20	42.84	54.00	-11.16
5351.16	Peak	53.87	5.20	59.07	74.00	-14.93

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 300 of 346

Project Number : T190321W03 Test Date :2019-04-08

Operation Band :802.11a B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5500 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plane

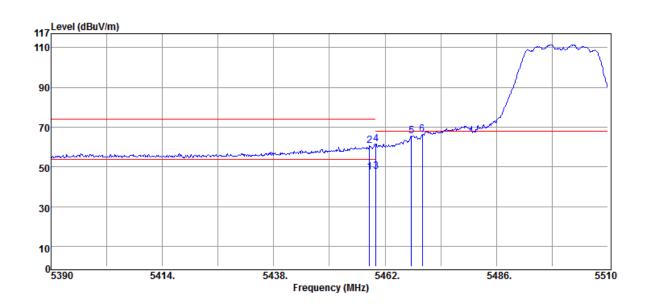

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
5458.64	Average	41.82	5.54	47.36	54.00	-6.64
5458.64	Peak	55.01	5.54	60.55	74.00	-13.45
5460.00	Average	42.25	5.54	47.79	54.00	-6.21
5460.00	Peak	55.98	5.54	61.52	74.00	-12.48
5467.64	Peak	60.23	5.52	65.75	68.20	-2.45
5470.00	Peak	60.99	5.52	66.51	68.20	-1.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 301 of 346

Project Number : T190321W03 Test Date :2019-04-08

Operation Band :802.11a B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5500 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW Measurement Antenna Pol. :HORIZONTAL EUT Pol. :H Plane

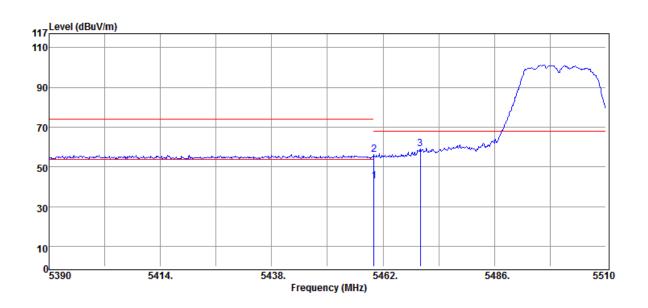

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
5460.0	0 Average	37.35	5.54	42.89	54.00	-11.11
5460.0	0 Peak	50.60	5.54	56.14	74.00	-17.86
5470.0	0 Peak	53.43	5.52	58.95	68.20	-9.25

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 302 of 346

Project Number : T190321W03 **Test Date** :2019-04-08

Operation Band :802.11a B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5700 MHz Engineer :Jerry

Operation Mode :Bandedge CH HIGH :VERTICAL Measurement Antenna Pol. EUT Pol. :H Plane

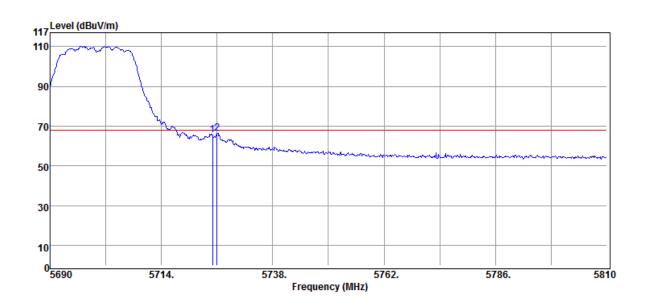

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
5725.00	Peak	59.22	6.55	65.77	68.20	-2.43
5726.00	Peak	60.00	6.54	66.54	68.20	-1.66

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 303 of 346

Project Number : T190321W03 **Test Date** :2019-04-08

Operation Band :802.11a B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5700 MHz Engineer :Jerry

Operation Mode :Bandedge CH HIGH :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plane

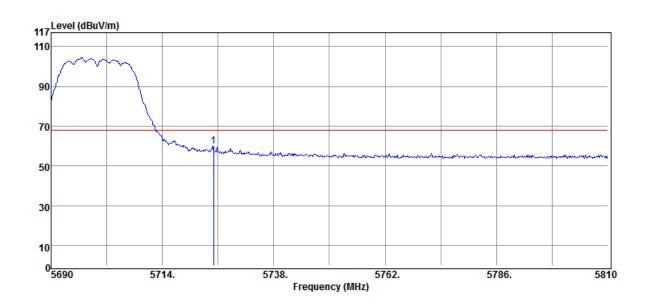

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
5725.00	Peak	53.29	6.55	59.84	68.20	-8.36

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 304 of 346

Project Number : T190321W03 **Test Date** :2019-04-08

Operation Band :802.11a B3 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5745 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW :VERTICAL Measurement Antenna Pol. EUT Pol. :H Plane

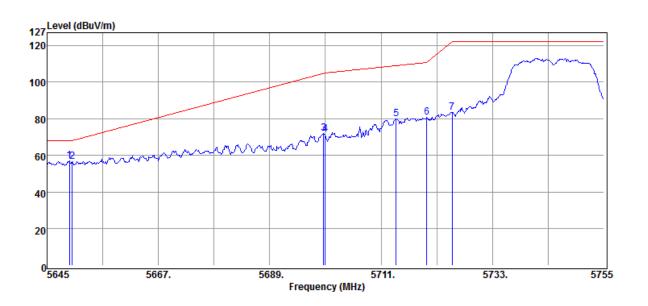

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
5649.40	Peak	51.43	5.90	57.33	68.23	-10.90
5650.00	Peak	50.71	5.91	56.62	68.23	-11.61
5699.67	Peak	65.45	6.43	71.88	104.99	-33.11
5700.00	Peak	65.10	6.43	71.53	105.23	-33.70
5713.97	Peak	73.66	6.51	80.17	109.14	-28.97
5720.00	Peak	74.28	6.55	80.83	110.83	-30.00
5725.00	Peak	77.16	6.55	83.71	122.23	-38.52

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)



Page: 305 of 346

Project Number : T190321W03 **Test Date** Operation Band :802.11a B3

Fundamental Frequency :5745 MHz


Operation Mode :Bandedge CH LOW

EUT Pol. :H Plane :2019-04-08

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

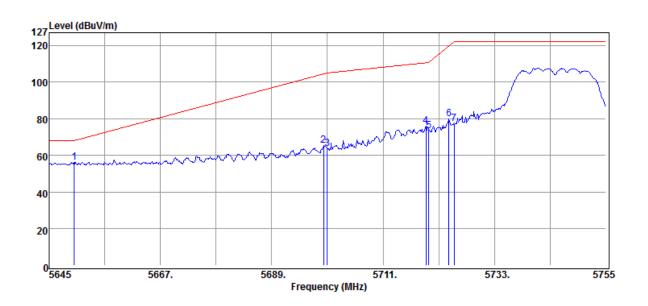

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
5650.00	Peak	50.15	5.91	56.06	68.23	-12.17
5699.23	Peak	58.85	6.41	65.26	104.66	-39.40
5700.00	Peak	57.20	6.43	63.63	105.23	-41.60
5719.47	Peak	69.59	6.55	76.14	110.68	-34.54
5720.00	Peak	66.66	6.55	73.21	110.83	-37.62
5723.98	Peak	73.26	6.55	79.81	119.90	-40.09
5725.00	Peak	70.64	6.55	77.19	122.23	-45.04

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 306 of 346

Project Number : T190321W03 **Test Date** :2019-04-08

Operation Band :802.11a B3 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5825 MHz Engineer :Jerry

Operation Mode :Bandedge CH HIGH :VERTICAL Measurement Antenna Pol. EUT Pol. :H Plane

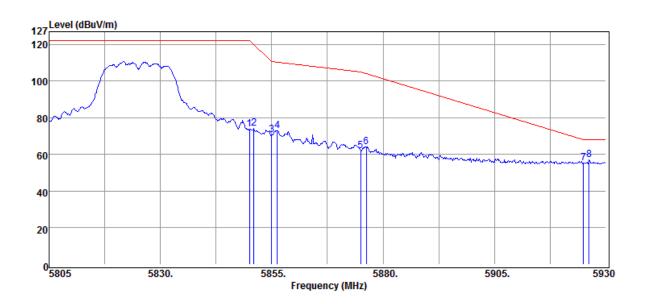

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
5850.00	Peak	67.52	6.41	73.93	122.23	-48.30
5851.00	Peak	67.71	6.42	74.13	119.95	-45.82
5855.00	Peak	64.23	6.43	70.66	110.83	-40.17
5856.25	Peak	66.46	6.43	72.89	110.48	-37.59
5875.00	Peak	55.57	6.49	62.06	105.23	-43.17
5876.25	Peak	57.83	6.50	64.33	104.31	-39.98
5925.00	Peak	48.97	6.44	55.41	68.23	-12.82
5926.25	Peak	50.72	6.44	57.16	68.23	-11.07

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 307 of 346

Project Number : T190321W03 **Test Date** :2019-04-08

Operation Band :802.11a B3 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5825 MHz Engineer :Jerry

Operation Mode :Bandedge CH HIGH :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plane

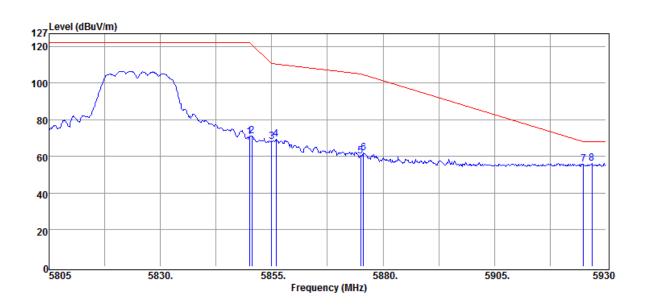

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBμV	dB	dBμV/m	dΒμV/m	dB
5850.00	Peak	64.51	6.41	70.92	122.23	-51.31
5850.50	Peak	64.76	6.42	71.18	121.09	-49.91
5855.00	Peak	61.75	6.43	68.18	110.83	-42.65
5856.00	Peak	62.88	6.43	69.31	110.55	-41.24
5875.00	Peak	53.58	6.49	60.07	105.23	-45.16
5875.63	Peak	55.38	6.50	61.88	104.77	-42.89
5925.00	Peak	49.37	6.44	55.81	68.23	-12.42
5926.88	Peak	50.02	6.44	56.46	68.23	-11.77

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 308 of 346

Project Number : T190321W03 **Test Date** :2019-04-08

Operation Band :802.11n20 B1 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5180 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW :VERTICAL Measurement Antenna Pol. EUT Pol. :H Plane

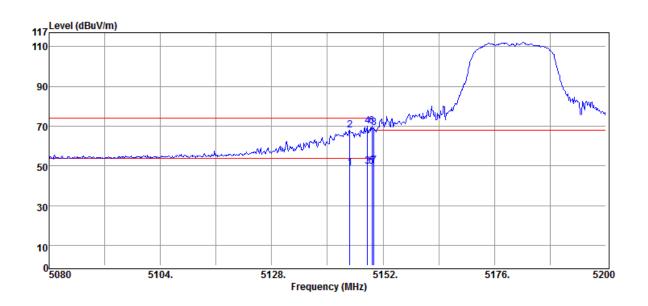

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
5144.80	Average	44.25	4.55	48.80	54.00	-5.20
5144.80	Peak	63.39	4.55	67.94	74.00	-6.06
5148.64	Average	45.21	4.54	49.75	54.00	-4.25
5148.64	Peak	65.39	4.54	69.93	74.00	-4.07
5149.60	Average	45.43	4.55	49.98	54.00	-4.02
5149.60	Peak	65.51	4.55	70.06	74.00	-3.94
5150.00	Average	45.67	4.55	50.22	54.00	-3.78
5150.00	Peak	64.72	4.55	69.27	74.00	-4.73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 309 of 346

Project Number : T190321W03 Operation Band :802.11n20 B1 Fundamental Frequency :5180 MHz


Operation Mode :Bandedge CH LOW

EUT Pol. :H Plane **Test Date** :2019-04-08

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

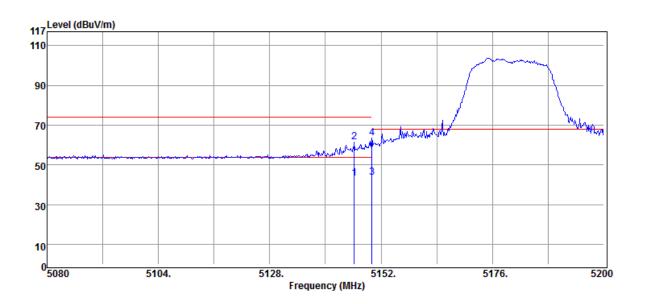

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
5146.24	Average	38.79	4.55	43.34	54.00	-10.66
5146.24	Peak	57.05	4.55	61.60	74.00	-12.40
5150.00	Average	39.26	4.55	43.81	54.00	-10.19
5150.00	Peak	59.11	4.55	63.66	74.00	-10.34

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 310 of 346

Project Number : T190321W03 **Test Date** :2019-04-08

Operation Band :802.11n20 B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5320 MHz Engineer :Jerry **Operation Mode** :Bandedge CH HIGH :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plane

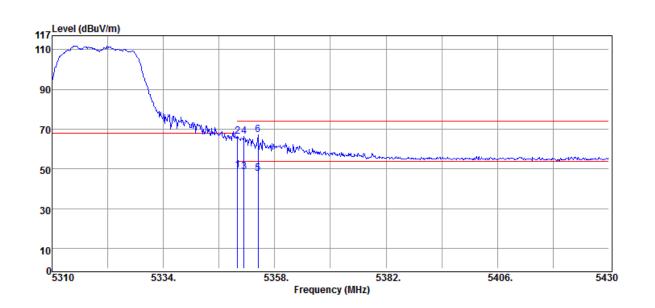

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dΒμV/m	dΒμV/m	dB
5350.00	Average	44.27	5.19	49.46	54.00	-4.54
5350.00	Peak	61.36	5.19	66.55	74.00	-7.45
5351.40	Average	43.25	5.20	48.45	54.00	-5.55
5351.40	Peak	61.03	5.20	66.23	74.00	-7.77
5354.40	Average	42.36	5.21	47.57	54.00	-6.43
5354.40	Peak	62.06	5.21	67.27	74.00	-6.73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 311 of 346

Project Number : T190321W03 **Test Date** :2019-04-08

Operation Band :802.11n20 B2a Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5320 MHz Engineer :Jerry

Operation Mode :Bandedge CH HIGH :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plane

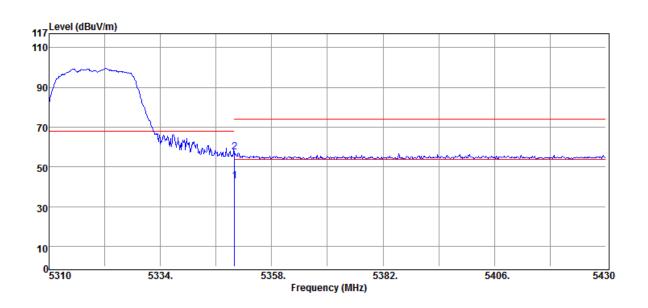

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
5350.00	Average	37.88	5.19	43.07	54.00	-10.93
5350.00	Peak	52.38	5.19	57.57	74.00	-16.43

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Page: 312 of 346

Project Number : T190321W03 Test Date :2019-04-08

Operation Band :802.11n20 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5500 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plane

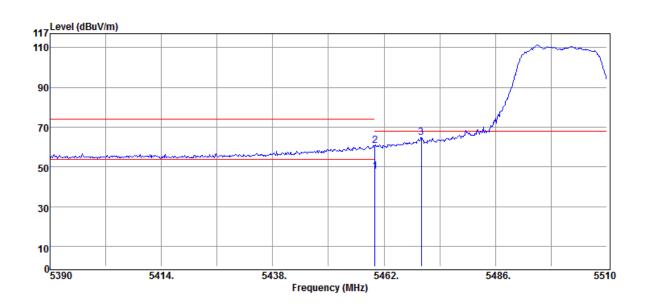

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
5460.00	Average	42.35	5.54	47.89	54.00	-6.11
5460.00	Peak	55.31	5.54	60.85	74.00	-13.15
5470.00	Peak	59.23	5.52	64.75	68.20	-3.45

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 313 of 346

Project Number : T190321W03 Test Date :2019-04-08

Operation Band :802.11n20 B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5500 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW Measurement Antenna Pol. :HORIZONTAL EUT Pol. :H Plane

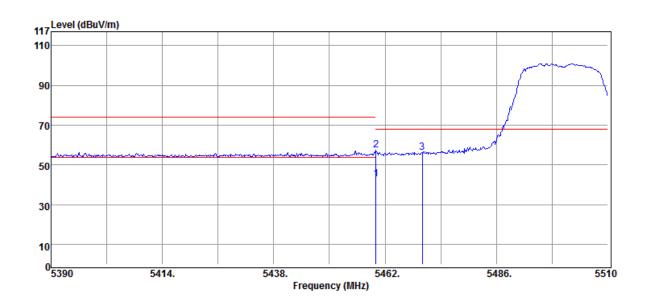

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
 MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
5460.00	Average	37.39	5.54	42.93	54.00	-11.07
5460.00	Peak	51.93	5.54	57.47	74.00	-16.53
5470.00	Peak	50.84	5.52	56.36	68.20	-11.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 314 of 346

Project Number : T190321W03 **Operation Band** :802.11n20 B2c

Fundamental Frequency :5700 MHz


Operation Mode :Bandedge CH HIGH

EUT Pol. :H Plane **Test Date** :2019-04-08

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

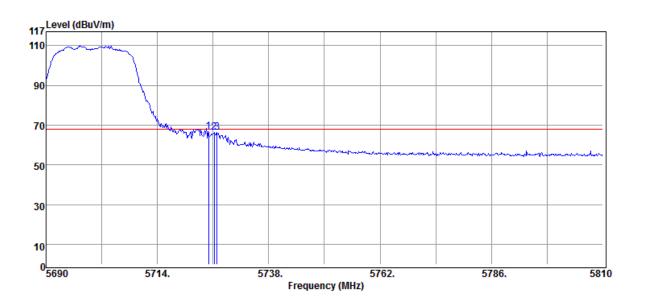

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
5725.04	Peak	60.12	6.55	66.67	68.20	-1.53
5726.24	Peak	59.67	6.54	66.21	68.20	-1.99
5726.84	Peak	59.86	6.54	66.40	68.20	-1.80

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 315 of 346

Project Number : T190321W03 **Test Date** :2019-04-08

Operation Band :802.11n20 B2c Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5700 MHz Engineer :Jerry **Operation Mode** :Bandedge CH HIGH :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plane

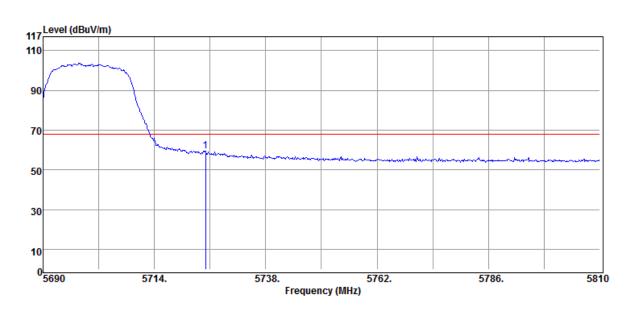

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
 MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
5725 04	Peak	52 93	6 55	59 48	68 20	-8 72

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 316 of 346

Project Number : T190321W03 **Test Date** :2019-04-08

Operation Band :802.11n20 B3 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5745 MHz Engineer :Jerry **Operation Mode** :Bandedge CH LOW :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plane

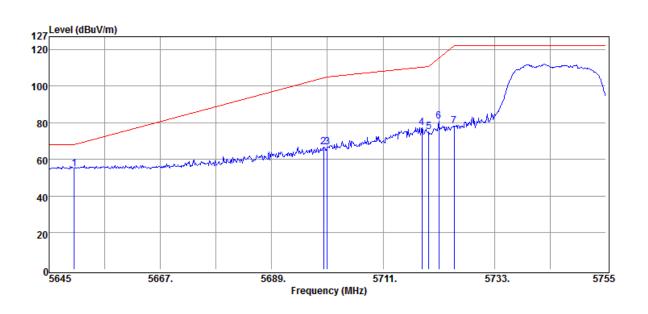

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	
	5650.00	Peak	49.20	5.91	55.11	68.23	-13.12	_
	5699.23	Peak	60.34	6.41	66.75	104.66	-37.91	
	5700.00	Peak	60.15	6.43	66.58	105.23	-38.65	
	5718.70	Peak	70.97	6.55	77.52	110.47	-32.95	
	5720.00	Peak	68.71	6.55	75.26	110.83	-35.57	
	5722.00	Peak	74.35	6.55	80.90	115.39	-34.49	
	5725.00	Peak	71.52	6.55	78.07	122.23	-44.16	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 317 of 346

Project Number : T190321W03 **Test Date** :2019-04-08

Operation Band :802.11n20 B3 Fundamental Frequency :5745 MHz


Operation Mode :Bandedge CH LOW

EUT Pol. :H Plane

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

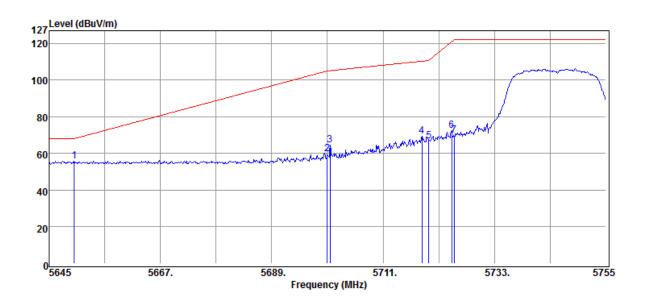

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	MUI	Mode	Reading Level	٩D	FS dBu\//m	@3m	٩D
_	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
	5650.00	Peak	49.86	5.91	55.77	68.23	-12.46
	5700.00	Peak	53.49	6.43	59.92	105.23	-45.31
	5700.55	Peak	58.10	6.43	64.53	105.38	-40.85
	5718.70	Peak	62.76	6.55	69.31	110.47	-41.16
	5720.00	Peak	60.05	6.55	66.60	110.83	-44.23
	5724.53	Peak	65.82	6.55	72.37	121.16	-48.79
	5725.00	Peak	63.23	6.55	69.78	122.23	-52.45

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 318 of 346

Project Number : T190321W03 **Test Date** :2019-04-08

Operation Band :802.11n20 B3 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5825 MHz Engineer :Jerry **Operation Mode** :Bandedge CH HIGH :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plane

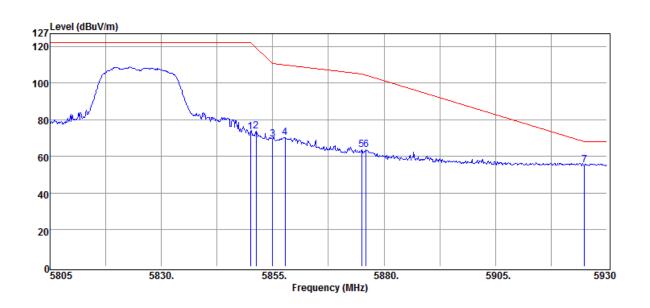

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
5850.00	Peak	67.15	6.41	73.56	122.23	-48.67
5851.25	Peak	67.34	6.42	73.76	119.38	-45.62
5855.00	Peak	62.98	6.43	69.41	110.83	-41.42
5857.75	Peak	63.81	6.43	70.24	110.06	-39.82
5875.00	Peak	57.14	6.49	63.63	105.23	-41.60
5876.00	Peak	57.03	6.50	63.53	104.49	-40.96
5925.00	Peak	49.08	6.44	55.52	68.23	-12.71

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 319 of 346

Project Number : T190321W03 **Test Date** :2019-04-08

Operation Band :802.11n20 B3 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5825 MHz Engineer :Jerry

Operation Mode :Bandedge CH HIGH :HORIZONTAL Measurement Antenna Pol. EUT Pol. :H Plane

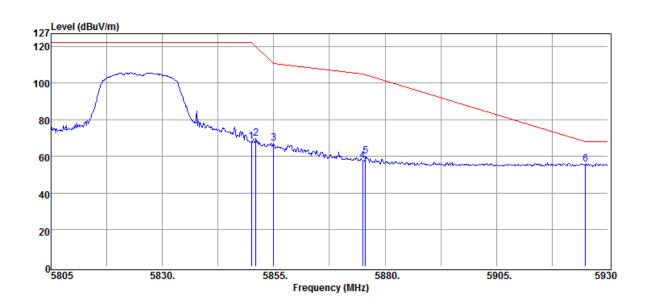

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dΒμV/m	dBµV/m	dB
5850.00	Peak	61.77	6.41	68.18	122.23	-54.05
5851.00	Peak	63.26	6.42	69.68	119.95	-50.27
5855.00	Peak	60.93	6.43	67.36	110.83	-43.47
5875.00	Peak	51.29	6.49	57.78	105.23	-47.45
5875.63	Peak	53.55	6.50	60.05	104.77	-44.72
5925.00	Peak	49.26	6.44	55.70	68.23	-12.53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 320 of 346


Project Number : T190321W03 Test Date :2019-04-08

Operation Band :802.11n40 B1 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5190 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW Measurement Antenna Pol. :VERTICAL

Operation Mode :Bandedge CH LOW Measurement Antenna Pol. : EUT Pol. :H Plane

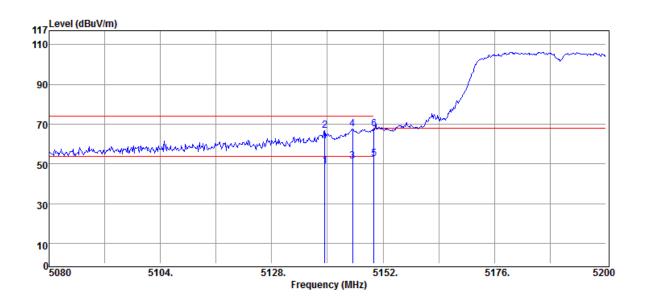

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
 MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	_
5139.40	Average	44.28	4.56	48.84	54.00	-5.16	
5139.40	Peak	62.19	4.56	66.75	74.00	-7.25	
5145.40	Average	46.70	4.55	51.25	54.00	-2.75	
5145.40	Peak	62.97	4.55	67.52	74.00	-6.48	
5150.00	Average	48.21	4.55	52.76	54.00	-1.24	
5150.00	Peak	62.86	4.55	67.41	74.00	-6.59	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 321 of 346

Project Number : T190321W03 Operation Band :802.11n40 B1


Fundamental Frequency :5190 MHz **Operation Mode** :Bandedge CH LOW

EUT Pol. :H Plane **Test Date** :2019-04-08

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

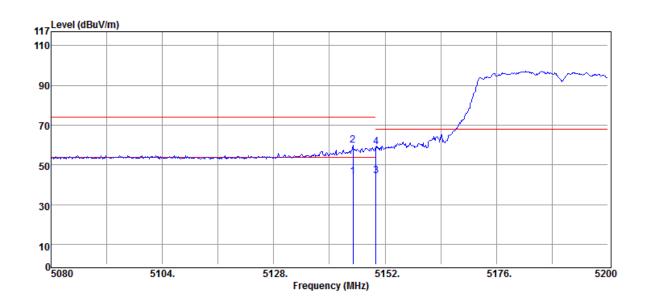

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
5145.04	Average	39.67	4.55	44.22	54.00	-9.78
5145.04	Peak	55.46	4.55	60.01	74.00	-13.99
5150.00	Average	40.12	4.55	44.67	54.00	-9.33
5150.00	Peak	54.60	4.55	59.15	74.00	-14.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 322 of 346

Project Number : T190321W03 Operation Band :802.11n40 B2a


Fundamental Frequency :5310 MHz **Operation Mode** :Bandedge CH HIGH

EUT Pol. :H Plane **Test Date** :2019-04-08

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

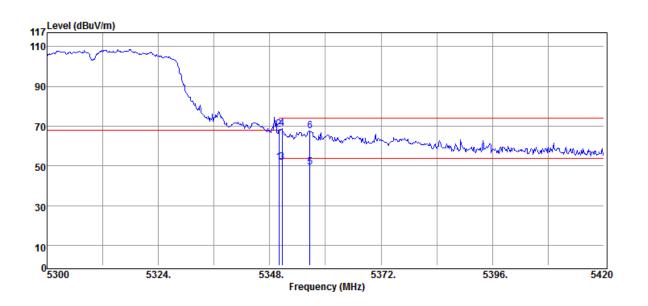

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	_
5350.00	Average	46.65	5.19	51.84	54.00	-2.16	
5350.00	Peak	63.29	5.19	68.48	74.00	-5.52	
5350.64	Average	46.54	5.20	51.74	54.00	-2.26	
5350.64	Peak	63.61	5.20	68.81	74.00	-5.19	
5356.64	Average	44.28	5.21	49.49	54.00	-4.51	
5356.64	Peak	62.60	5.21	67.81	74.00	-6.19	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 323 of 346

Project Number : T190321W03
Operation Band :802.11n40 B2a
Fundamental Frequency :5310 MHz

Operation Mode :Bandedge CH HIGH


EUT Pol. :H Plane

Test Date :2019-04-08

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

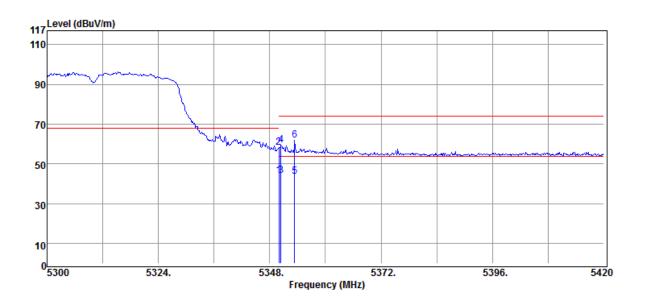

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	_
	5350.00	Average	38.96	5.19	44.15	54.00	-9.85	
	5350.00	Peak	52.98	5.19	58.17	74.00	-15.83	
	5350.40	Average	38.81	5.20	44.01	54.00	-9.99	
	5350.40	Peak	54.33	5.20	59.53	74.00	-14.47	
	5353.40	Average	38.59	5.20	43.79	54.00	-10.21	
	5353.40	Peak	56.68	5.20	61.88	74.00	-12.12	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)



Page: 324 of 346


Project Number : T190321W03 Test Date :2019-04-08

Operation Band :802.11n40 B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5510 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW Measurement Antenna Pol. :VERTICAL

Operation Mode :Bandedge CH LOW Measurement Antenna Pol. EUT Pol. :H Plane

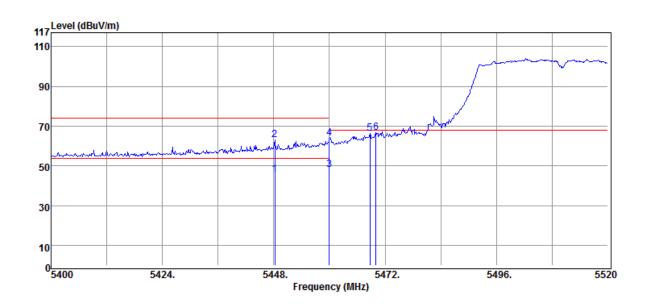

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dΒμV/m	dB
5448.24	Average	40.13	5.56	45.69	54.00	-8.31
5448.24	Peak	57.76	5.56	63.32	74.00	-10.68
5460.00	Average	42.68	5.54	48.22	54.00	-5.78
5460.00	Peak	58.29	5.54	63.83	74.00	-10.17
5468.76	Peak	60.82	5.53	66.35	68.20	-1.85
5470.00	Peak	61.18	5.52	66.70	68.20	-1.50

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明・此報告結果僅對測試之樣品負責・同時此樣品僅保留90天。本報告未經本公司書面許可・不可部份複製。




Page: 325 of 346

Project Number : T190321W03 Test Date :2019-04-08

Operation Band :802.11n40 B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5510 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW Measurement Antenna Pol. :HORIZONTAL EUT Pol. :H Plane

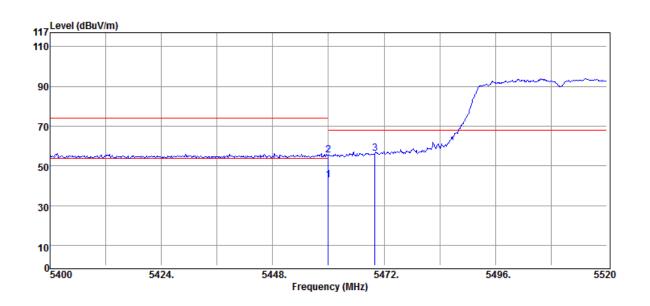

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
5460.00) Average	37.18	5.54	42.72	54.00	-11.28
5460.00) Peak	49.78	5.54	55.32	74.00	-18.68
5470.00) Peak	50.75	5.52	56.27	68.20	-11.93

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 326 of 346


Project Number : T190321W03 Test Date :2019-04-08

Operation Band :802.11n40 B2c Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5670 MHz Engineer :Jerry

Operation Mode :Bandedge CH HIGH Measurement Antenna Pol. :VERTICAL

Operation Mode :Bandedge CH HIGH Measurement Antenna Pol. EUT Pol. :H Plane

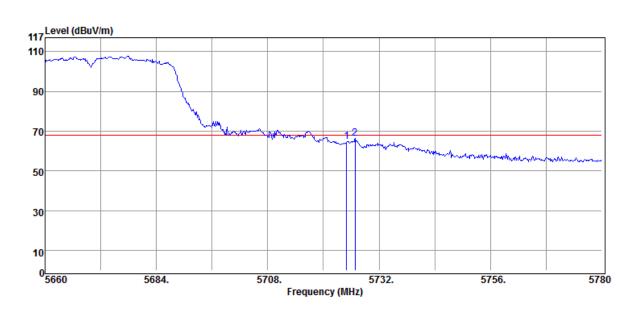

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
5725.00	Peak	58.13	6.55	64.68	68.20	-3.52
5726.84	Peak	59.80	6.54	66.34	68.20	-1.86

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 327 of 346

Project Number : T190321W03 **Operation Band** :802.11n40 B2c Fundamental Frequency :5670 MHz


Operation Mode :Bandedge CH HIGH

EUT Pol. :H Plane **Test Date** :2019-04-08

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

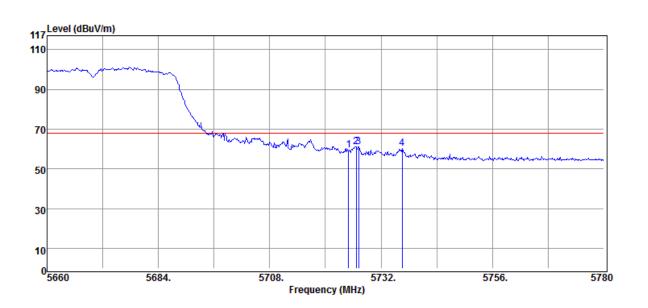

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
5725.00	Peak	53.13	6.55	59.68	68.20	-8.52
5726.60	Peak	54.64	6.54	61.18	68.20	-7.02
5727.20	Peak	54.72	6.53	61.25	68.20	-6.95
5736.56	Peak	53.85	6.52	60.37	68.20	-7.83

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 328 of 346

Project Number : T190321W03 Test Date :2019-04-08

Operation Band :802.11n40 B3 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5755 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW Measurement Antenna Pol. :VERTICAL EUT Pol. :H Plane

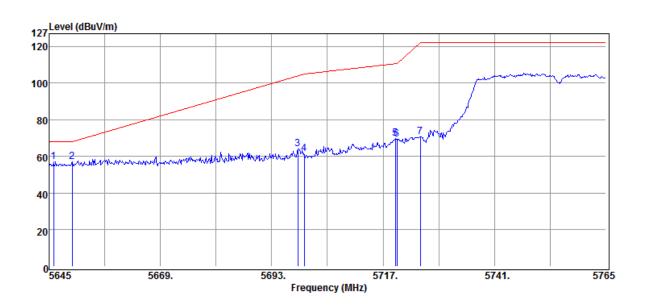

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	N 41 1	Mode	Reading Level	٩D	FS	@3m	٩D
_	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
	5645.96	Peak	51.27	5.88	57.15	68.23	-11.08
	5650.00	Peak	51.08	5.91	56.99	68.23	-11.24
	5698.64	Peak	57.75	6.41	64.16	104.22	-40.06
	5700.00	Peak	55.14	6.43	61.57	105.23	-43.66
	5719.64	Peak	63.46	6.55	70.01	110.73	-40.72
	5720.00	Peak	63.04	6.55	69.59	110.83	-41.24
	5725.00	Peak	64.19	6.55	70.74	122.23	- 51.49

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 329 of 346

Project Number : T190321W03 Test Date :2019-04-08

Operation Band :802.11n40 B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5755 MHz Engineer :Jerry

Operation Mode :Bandedge CH LOW Measurement Antenna Pol. :HORIZONTAL EUT Pol. :H Plane

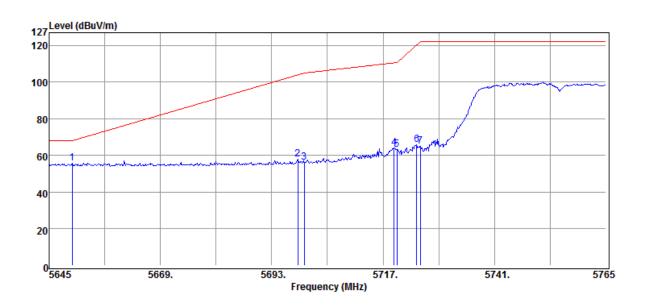

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB	
	5650.00	Peak	49.71	5.91	55.62	68.23	-12.61	
	5698.64	Peak	51.61	6.41	58.02	104.22	-46.20	
	5700.00	Peak	49.95	6.43	56.38	105.23	-48.85	
	5719.40	Peak	57.46	6.55	64.01	110.66	-46.65	
	5720.00	Peak	56.89	6.55	63.44	110.83	-47.39	
	5724.20	Peak	59.24	6.55	65.79	120.41	-54.62	
	5725.00	Peak	58.55	6.55	65.10	122.23	-57.13	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page: 330 of 346

Project Number : T190321W03 **Test Date** :2019-04-08

Operation Band :802.11n40 B3 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5795 MHz Engineer :Jerry :VERTICAL

Operation Mode :Bandedge CH HIGH Measurement Antenna Pol. EUT Pol. :H Plane

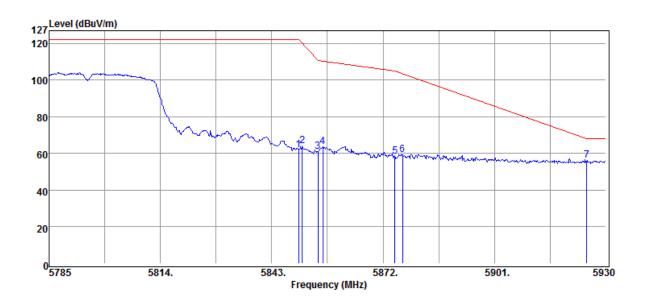

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin	
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dΒμV/m	dB	_
5849.96	Peak	55.64	6.41	62.05	122.23	-60.18	_
5850.98	Peak	57.57	6.42	63.99	120.01	-56.02	
5855.04	Peak	54.58	6.43	61.01	110.82	-49.81	
5856.34	Peak	57.18	6.43	63.61	110.45	-46.84	
5875.05	Peak	51.90	6.49	58.39	105.20	-46.81	
5877.08	Peak	52.86	6.50	59.36	103.69	-44.33	
5925.00	Peak	49.88	6.44	56.32	68.23	-11.91	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)




Page: 331 of 346

Project Number : T190321W03 **Test Date** :2019-04-08

Operation Band :802.11n40 B3 Temp./Humi. :23 deg C / 62 RH Fundamental Frequency :5795 MHz Engineer :Jerry

Operation Mode :Bandedge CH HIGH :HORIZONTAL Measurement Antenna Pol.

EUT Pol. :H Plane

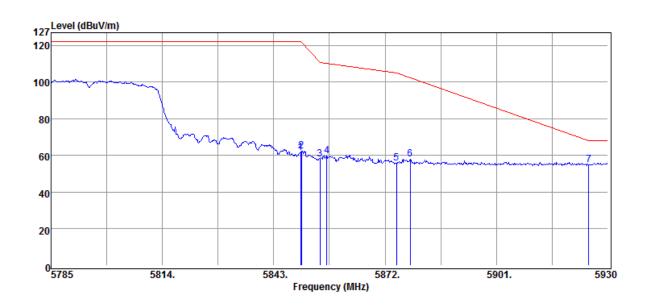

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
MUI	Mode	Reading Level	٩D	FS dBu\//m	@3m	٩D
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
5850.00	Peak	55.31	6.41	61.72	122.23	-60.51
5850.25	Peak	56.06	6.42	62.48	121.66	-59.18
5855.00	Peak	51.76	6.43	58.19	110.83	-52.64
5856.78	Peak	53.30	6.44	59.74	110.33	-50.59
5875.00	Peak	49.51	6.49	56.00	105.23	-49.23
5878.53	Peak	51.59	6.51	58.10	102.62	-44.52
5925.00	Peak	48.38	6.44	54.82	68.23	-13.41

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 332 of 346

Project Number : T190321W03 **Test Date** :2019-04-08

Operation Band :802.11ac80 B1 Fundamental Frequency :5210 MHz


Operation Mode :Bandedge CH LOW

EUT Pol. :H Plane

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

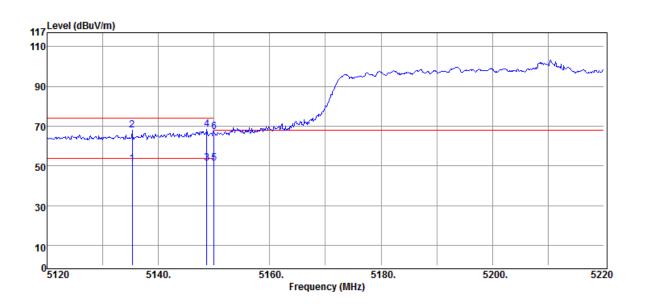

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
5135.30	Average	46.38	4.60	50.98	54.00	-3.02
5135.30	Peak	63.31	4.60	67.91	74.00	-6.09
5148.70	Average	46.79	4.54	51.33	54.00	-2.67
5148.70	Peak	63.68	4.54	68.22	74.00	-5.78
5150.00	Average	46.74	4.55	51.29	54.00	-2.71
5150.00	Peak	62.46	4.55	67.01	74.00	-6.99

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 333 of 346

Project Number : T190321W03 Test Date :2019-04-08

Operation Band :802.11ac80 B1 Fundamental Frequency :5210 MHz


Operation Mode :Bandedge CH LOW

EUT Pol. :H Plane

Test Date :2019-04-08
Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

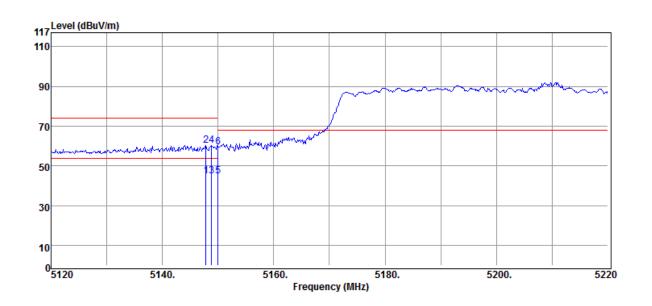

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
5147.80	Average	40.58	4.55	45.13	54.00	-8.87
5147.80	Peak	55.92	4.55	60.47	74.00	-13.53
5148.80	Average	40.57	4.54	45.11	54.00	-8.89
5148.80	Peak	55.62	4.54	60.16	74.00	-13.84
5150.00	Average	40.34	4.55	44.89	54.00	-9.11
5150.00	Peak	54.89	4.55	59.44	74.00	-14.56

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 334 of 346

Project Number : T190321W03 **Operation Band** :802.11ac80 B2a **Fundamental Frequency** :5290 MHz

Operation Mode


:Bandedge CH HIGH

EUT Pol. :H Plane **Test Date** :2019-04-08

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

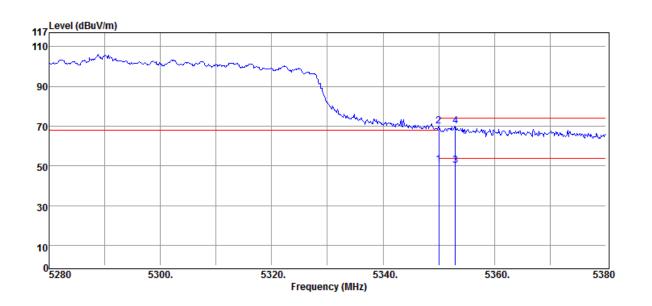

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
5350.00	Average	45.38	5.19	50.57	54.00	-3.43
5350.00	Peak	64.71	5.19	69.90	74.00	-4.10
5353.00	Average	44.90	5.20	50.10	54.00	-3.90
5353.00	Peak	64.68	5.20	69.88	74.00	-4.12

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 335 of 346

Project Number : T190321W03 **Operation Band** :802.11ac80 B2a **Fundamental Frequency**

Operation Mode

EUT Pol.

:5290 MHz

:Bandedge CH HIGH


:H Plane

Test Date :2019-04-08

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

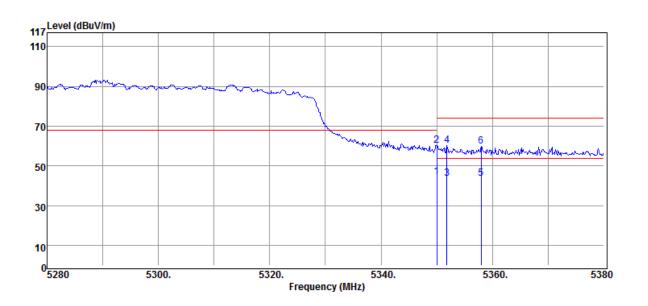

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
	5350.00	Average	39.22	5.19	44.41	54.00	-9.59
	5350.00	Peak	55.28	5.19	60.47	74.00	-13.53
	5351.80	Average	38.65	5.20	43.85	54.00	-10.15
	5351.80	Peak	54.95	5.20	60.15	74.00	-13.85
	5358.00	Average	38.69	5.21	43.90	54.00	-10.10
	5358.00	Peak	54.82	5.21	60.03	74.00	-13.97

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 336 of 346

Project Number : T190321W03 **Operation Band** :802.11ac80 B2c


Fundamental Frequency :5530 MHz **Operation Mode** :Bandedge CH LOW

EUT Pol. :H Plane **Test Date** :2019-04-09

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

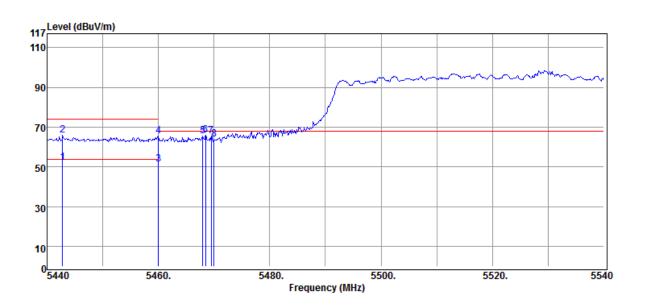

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
5442.80	Average	46.58	5.59	52.17	54.00	-1.83
5442.80	Peak	60.44	5.59	66.03	74.00	-7.97
5460.00	Average	45.79	5.54	51.33	54.00	-2.67
5460.00	Peak	60.04	5.54	65.58	74.00	-8.42
5468.00	Peak	60.22	5.52	65.74	68.20	-2.46
5468.50	Peak	60.64	5.52	66.16	68.20	-2.04
5469.50	Peak	60.26	5.52	65.78	68.20	-2.42
5470.00	Peak	58.34	5.52	63.86	68.20	-4.34

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction. documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this

document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Operation Mode

Report No.: T190321W03-RP4

Page: 337 of 346

Project Number : T190321W03 **Operation Band** :802.11ac80 B2c

Fundamental Frequency :5530 MHz


:Bandedge CH LOW EUT Pol. :H Plane

Test Date :2019-04-09

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

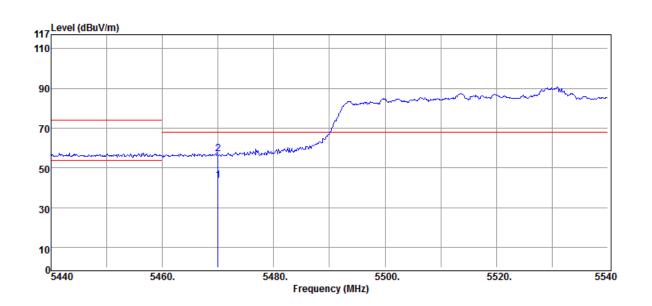

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB	
5470.00	Average	38.17	5.52	43.69	500.00	-456.31	
5470.00	Peak	51.68	5.52	57.20	68.20	-11.00	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 338 of 346

Project Number : T190321W03
Operation Band :802.11ac80 B3
Fundamental Frequency :5775 MHz

Operation Mode :Bandedge CH LOW


EUT Pol. :H Plane

Test Date :2019-04-09

Temp./Humi. :23 deg_C / 62 RH

Engineer :Jerry

Measurement Antenna Pol. : VERTICAL

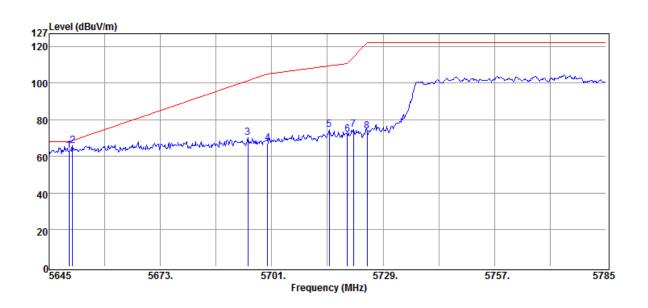

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB	
5650.00	Peak	57.19	5.91	63.10	68.23	-5.13	
5650.88	Peak	60.18	5.92	66.10	68.88	-2.78	
5694.98	Peak	63.78	6.37	70.15	101.52	-31.37	
5700.00	Peak	61.02	6.43	67.45	105.23	-37.78	
5715.42	Peak	68.30	6.52	74.82	109.55	-34.73	
5720.00	Peak	65.61	6.55	72.16	110.83	-38.67	
5721.58	Peak	68.29	6.55	74.84	114.43	-39.59	
5725.00	Peak	67.32	6.55	73.87	122.23	-48.36	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明・此報告結果僅對測試之樣品負責・同時此樣品僅保留90天。本報告未經本公司書面許可・不可部份複製。




Page: 339 of 346

Project Number : T190321W03 **Test Date** :2019-04-09

Operation Band :802.11ac80 B3 Temp./Humi. :23 deg C / 62 RH

Fundamental Frequency :5775 MHz Engineer :Jerry **Operation Mode** :Bandedge CH HIGH :VERTICAL Measurement Antenna Pol.

EUT Pol. :H Plane

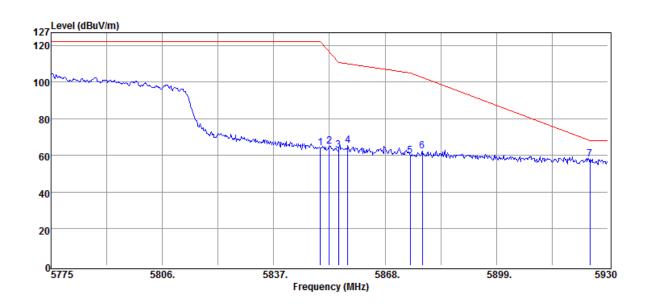

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
5850.00	Peak	57.75	6.41	64.16	122.23	-58.07
5852.50	Peak	58.72	6.42	65.14	116.53	-51.39
5855.00	Peak	56.59	6.43	63.02	110.83	-47.81
5857.62	Peak	59.11	6.43	65.54	110.10	-44.56
5875.00	Peak	53.30	6.49	59.79	105.23	-45.44
5878.39	Peak	55.71	6.51	62.22	102.73	-40.51
5925.00	Peak	51.64	6.44	58.08	68.23	-10.15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 340 of 346

Project Number : T190321W03 **Operation Band** :802.11ac80 B3 Fundamental Frequency :5775 MHz


Operation Mode :Bandedge CH LOW

EUT Pol. :H Plane **Test Date** :2019-04-09

Temp./Humi. :23 deg C / 62 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

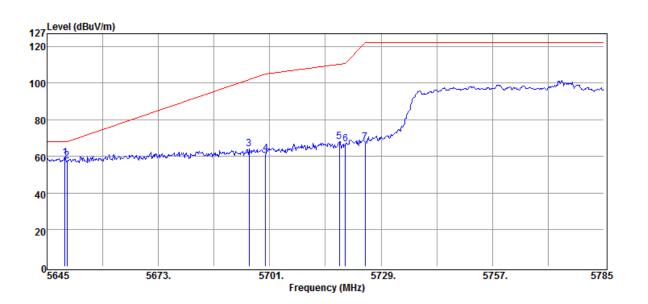

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	
	5649.48	Peak	53.64	5.90	59.54	68.23	-8.69	
	5650.00	Peak	51.77	5.91	57.68	68.23	-10.55	
	5695.82	Peak	57.64	6.38	64.02	102.14	-38.12	
	5700.00	Peak	55.30	6.43	61.73	105.23	-43.50	
	5718.50	Peak	61.65	6.54	68.19	110.41	-42.22	
	5720.00	Peak	60.15	6.55	66.70	110.83	-44.13	
	5725.00	Peak	61.02	6.55	67.57	122.23	-54.66	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 341 of 346

Project Number : T190321W03 Test Date :2019-04-09

Operation Band :802.11ac80 B3 Temp./Humi. :23 deg_C / 62 RH

Fundamental Frequency :5775 MHz Engineer :Jerry
Operation Mode :Bandedge CH HIGH Measurement Antenna Pol. :HORIZONTAL

EUT Pol. :H Plane

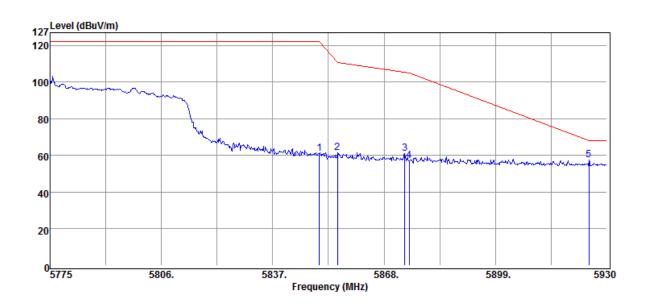

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
5850.00	Peak	54.89	6.41	61.30	122.23	-60.93
5855.00	Peak	54.91	6.43	61.34	110.83	-49.49
5873.74	Peak	54.69	6.49	61.18	105.58	-44.40
5875.00	Peak	50.53	6.49	57.02	105.23	-48.21
5925.00	Peak	51.09	6.44	57.53	68.23	-10.70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)



Page: 342 of 346

12 TRANSMISSION IN THE ABSENCE OF DATA

12.1Standard Applicable

According to §15.407(c)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

12.2Result

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ASK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 343 of 346

13 FREQUENCY STABILITY

13.1Standard Applicable


Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

13.2Measurement Procedure

- 1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
- 2. Set EUT as normal operation.
- 3. Turn the EUT on and couple its output to spectrum.
- 4. Turn the EUT off and set the chamber to the highest temperature specified.
- 5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
- 6. Repeat step with the temperature chamber set to the lowest temperature.

13.3Test SET-UP

Temperature Chamber

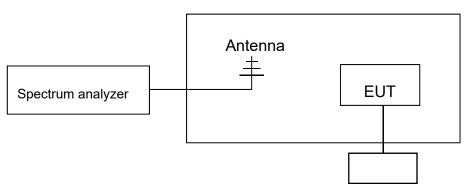

Variable AC Power Supply

13.4Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
PXA Spectrum Analyzer	Agilent	N9030A	MY53120760	04/22/2019	04/21/2020
Thermo- static/Hrgrosatic Chamber	TAICHY	MHG-150LF	930619	10/08/2018	10/07/2019
DC Block	Mini-Circuits	BLK-18-S+	31129(1)	02/26/2019	02/25/2020
Attenuator	Mini-Circuit	BW-S10W2+	1	02/26/2019	02/25/2020
Attenuator	Mini-Circuit	BW-S10W2+	3	02/26/2019	02/25/2020

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 344 of 346

13.5Measurement Result

Startup:

Operation Mode	802.11 a	Test Date	2019.03.28
Temperature	: 23.1°C	Test By	Peter
Humidity	: 59%		

Test Temp.(℃)	Test Voltage(V)	Channel	Measured Frequency (MHz)	Spectrum Frequency (MHz)	ΔFrequency (MHz)
-30	3.465	36	5180	5,179.99200	0.00000154
-30	3.145	36	5180	5,179.99175	0.00000159
25	3.3	36	5180	5,180.00236	-0.00000046
70	3.465	36	5180	5,180.00550	-0.00000106
/0	3.145	36	5180	5,180.00469	-0.00000090

2 minutes:

Operation Mode	802.11 a	Test Date	2019.03.28
Temperature	: 23.1℃	Test By	Peter
Humidity	: 59%		

Test Temp.(℃)	Test Voltage(V)	Channel	Measured Frequency (MHz)	Spectrum Frequency (MHz)	Δ Frequency (MHz)
-30	3.465	36	5180	5,179.99227	0.00000149
-30	3.145	36	5180	5,179.99504	0.00000096
25	3.3	36	5180	5,180.00649	-0.00000125
70	3.465	36	5180	5,180.00782	-0.00000151
70	3.145	36	5180	5,180.00692	-0.00000134

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 345 of 346

5 minutes:

Operation Mode	802.11 a	Test Date	2019.03.28
Temperature	: 23.1°C	Test By	Peter
Humidity	: 59%		

Test Temp.(℃)	Test Voltage(V)	Channel	Measured Frequency (MHz)	Spectrum Frequency (MHz)	Δ Frequency (MHz)
-30	3.465	36	5180	5,179.99506	0.00000095
-30	3.145	36	5180	5,179.99124	0.00000169
25	3.3	36	5180	5,180.00168	-0.00000032
70	3.465	36	5180	5,180.00747	-0.00000144
70	3.145	36	5180	5,180.00824	-0.00000159

10 minutes:

Operation Mode	802.11 a	Test Date	2019.03.28
Temperature	: 23.1°C	Test By	Peter
Humidity	: 59%	_	

Test Temp.(℃)	Test Voltage(V)	Channel	Measured Frequency (MHz)	Spectrum Frequency (MHz)	Δ Frequency (MHz)
-30	3.465	36	5180	5,179.99236	0.00000147
	3.145	36	5180	5,179.99205	0.00000153
25	3.3	36	5180	5,180.00114	-0.00000022
70	3.465	36	5180	5,180.00909	-0.00000176
	3.145	36	5180	5,180.00970	-0.00000187

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 346 of 346

14 ANTENNA REQUIREMENT

14.1 Standard Applicable

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

According to §15.407, If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

14.2 **Antenna Connected Construction**

The antenna is designed with unique RF connector and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧