

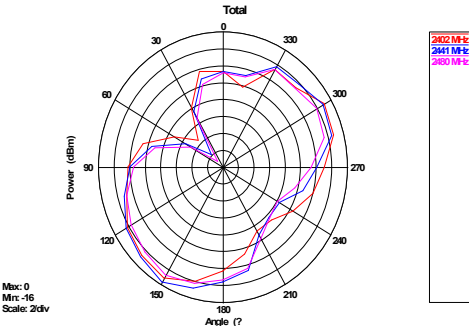
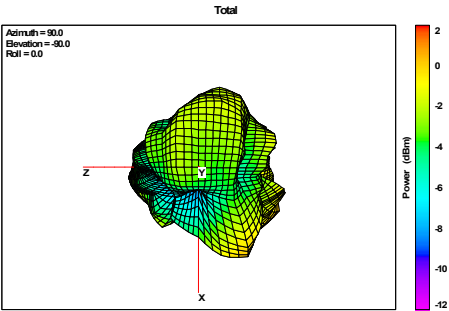



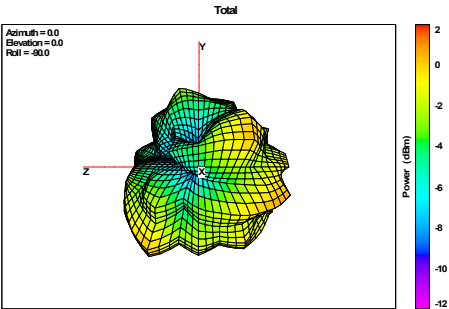


OTA TEST RESULT

Client	佛山照明	Test Date	2024/8/9
Product Name	/	Model	antenna
Temperature	19°C-21°C		70%

#9 插座			
Frequency (MHz)	Efficiency (dB)	Efficiency (%)	Gain (dBi)
2350	-3.18	48.05	0.94
2355	-3.37	45.99	0.74
2360	-3.15	48.44	0.92
2365	-3.30	46.75	0.82
2370	-3.33	46.42	0.81
2375	-3.40	45.67	0.68
2380	-3.39	45.81	0.69
2385	-3.26	47.20	0.73
2390	-3.29	46.88	0.59
2395	-3.16	48.28	0.60
2400	-3.46	45.08	0.31
2402	-3.55	44.19	0.14
2405	-3.62	43.43	-0.05
2410	-3.75	42.13	-0.07
2415	-3.80	41.71	-0.12
2420	-3.69	42.72	-0.16
2425	-3.79	41.80	-0.03
2430	-3.90	40.78	-0.18
2435	-4.09	38.98	-0.22
2440	-4.08	39.09	-0.18
2441	-4.03	39.58	-0.06
2445	-3.95	40.23	0.13
2450	-3.89	40.81	0.18
2455	-3.78	41.83	0.42
2460	-3.99	39.89	0.09
2465	-4.05	39.35	0.15
2470	-4.33	36.92	-0.32
2475	-4.39	36.40	-0.35
2480	-4.52	35.33	-0.60
2482	-4.57	34.89	-0.71
2485	-4.58	34.82	-0.73
2490	-4.66	34.20	-0.88
2495	-4.62	34.49	-0.89
2500	-4.72	33.74	-1.02
2505	-4.72	33.70	-0.92
2510	-4.85	32.72	-1.08
2515	-5.14	30.60	-1.32
2520	-5.45	28.50	-1.72
2525	-5.78	26.45	-2.01
2530	-5.92	25.56	-1.99
2535	-5.98	25.26	-1.99
2540	-5.91	25.63	-1.77
2545	-5.76	26.53	-1.49
2550	-5.69	26.97	-1.34
2555	-5.69	26.96	-1.20
2560	-5.79	26.37	-1.30
2565	-5.84	26.07	-1.26
2570	-5.87	25.87	-1.32
2575	-5.80	26.28	-1.23
2580	-5.77	26.51	-1.03

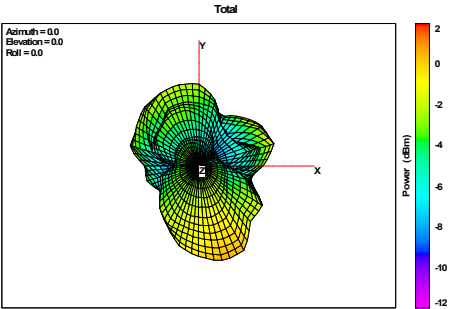

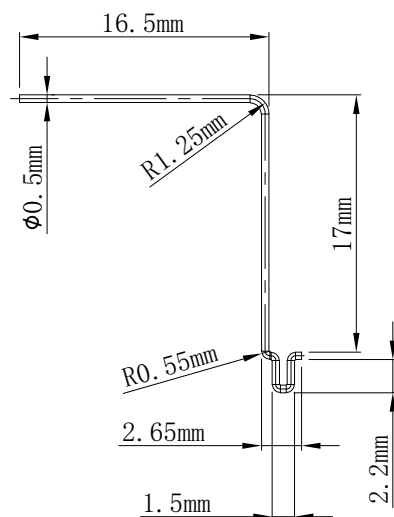

技术要求:

- 1、不锈钢SUS201, 表面镀镍, 无毛刺、钝锋、多缺料等影响外观及装配现象
2、物料编码及描述:
18X804040055 天线-K5转换插 18.65*19.7mm Φ0.5粗 不锈钢镀镍 本色 RS

>120	±0.5
>30~120	±0.3
>6~30	±0.2
>3~6	±0.1
0~3	±0.1

Tolerance following if without spec.
未注实体尺寸公差按下表执行

1						0~3	±0.1
标 记	更改内容					Tolerance following if without spec. 未注实体尺寸公差按下表执行	
名 称	姓 名	日 期	18X804040055 天线-K5 转换插		图序号		
设 计					版本号	A/0	
制 图					第 1 页		
修 改					共 1 页		
校 对					比 例	2:1	
审 核			材 料		重 量		
批 准			视角显示		佛山电器照明股份有限公司		