


EUT	OAW-AP1351	Date of Test	2021-05-14
Factor	VULB 9162	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Hance
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	By PoE

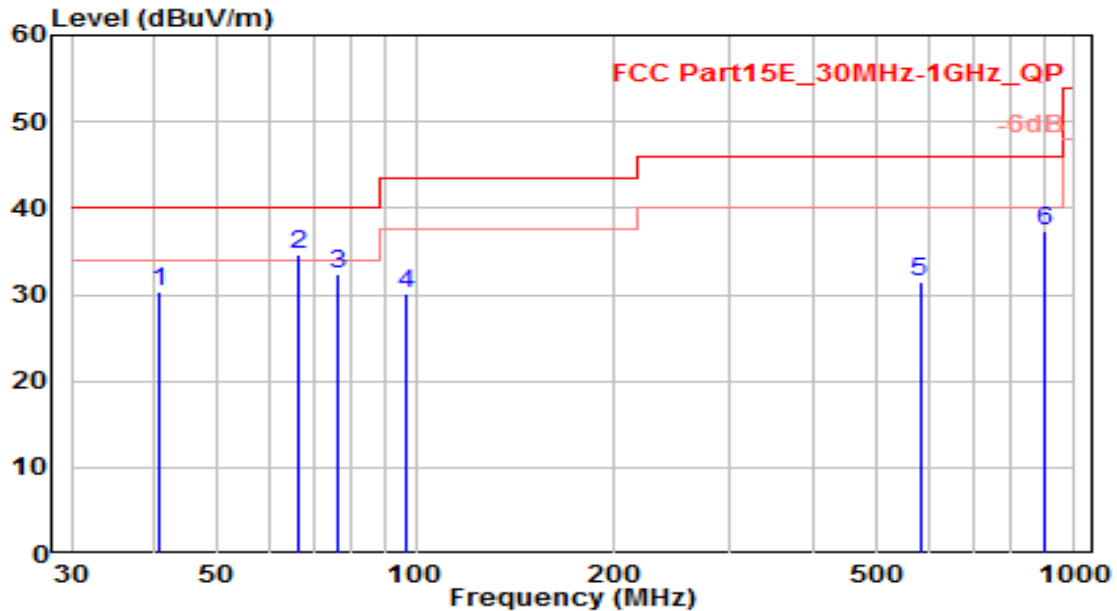


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		40.810	9.16	21.18	30.34	-9.66	40.00	110	145	QP
2	*	66.320	16.54	18.16	34.70	-5.30	40.00	110	20	QP
3		76.250	17.06	15.33	32.39	-7.61	40.00	125	150	QP
4		96.420	11.69	18.36	30.05	-13.45	43.50	105	240	QP
5		582.420	4.13	27.45	31.58	-14.42	46.00	115	200	QP
6		901.250	5.67	31.78	37.45	-8.55	46.00	100	120	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-14
Factor	VULB 9162	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Hance
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

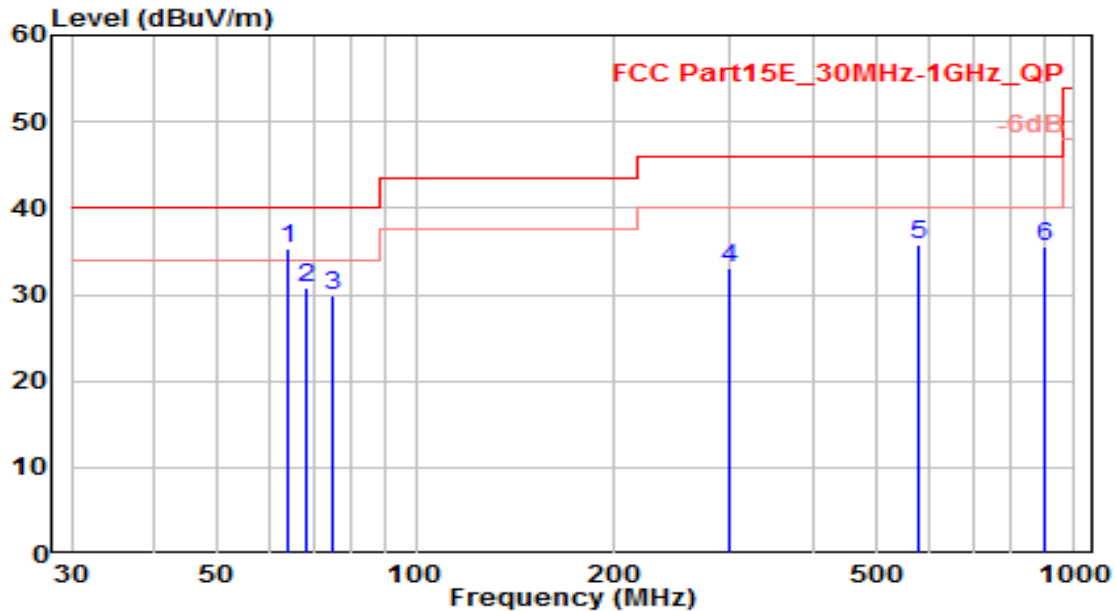


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	64.130	16.46	18.87	35.33	-4.67	40.00	125	120	QP
2		68.340	13.32	17.51	30.83	-9.17	40.00	105	115	QP
3		74.690	14.16	15.74	29.90	-10.10	40.00	110	35	QP
4		298.650	11.64	21.47	33.11	-12.89	46.00	100	120	QP
5		581.430	8.42	27.43	35.85	-10.15	46.00	125	250	QP
6		901.520	3.75	31.78	35.53	-10.47	46.00	100	250	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-14
Factor	VULB 9162	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Hance
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

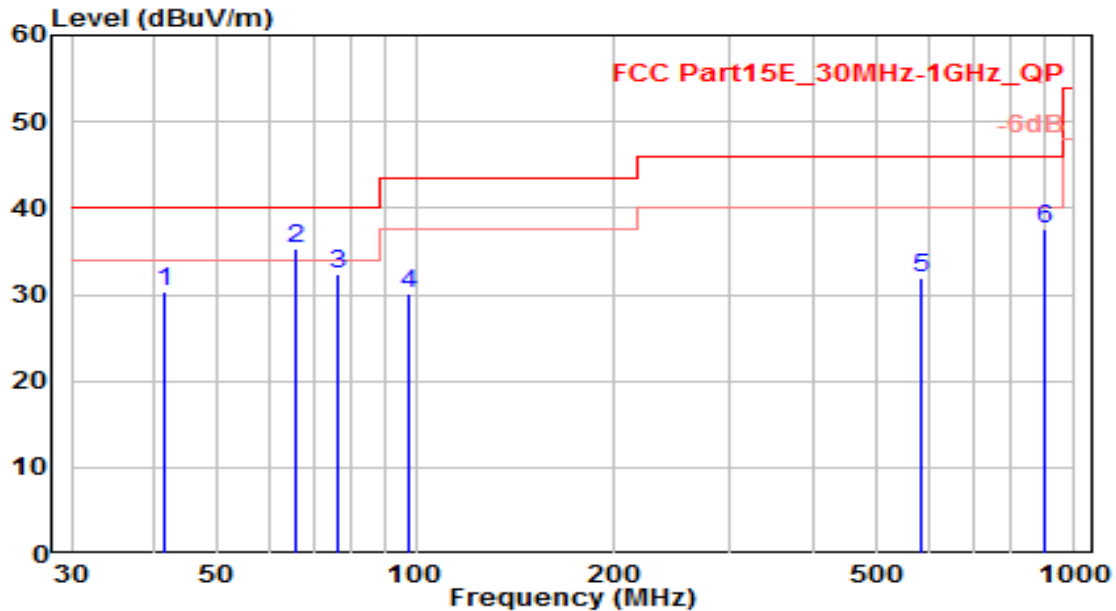


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		41.420	9.06	21.27	30.33	-9.67	40.00	100	120	QP
2	*	65.980	17.16	18.27	35.43	-4.57	40.00	110	55	QP
3		75.970	17.05	15.41	32.46	-7.54	40.00	110	110	QP
4		97.630	11.42	18.64	30.06	-13.44	43.50	125	175	QP
5		582.640	4.52	27.46	31.98	-14.02	46.00	120	130	QP
6		900.690	5.92	31.78	37.70	-8.30	46.00	100	140	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	By PoE

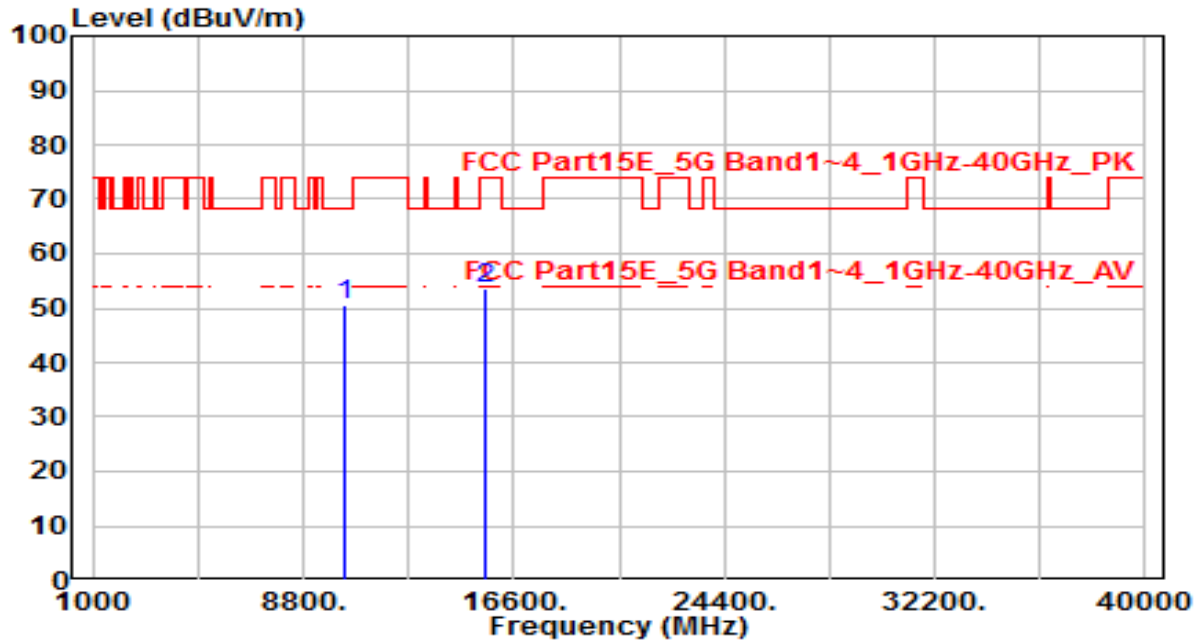


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	32.52	18.01	50.52	-17.68	68.20	150	360	Peak
2		15540.000	32.47	21.25	53.72	-20.28	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	By PoE

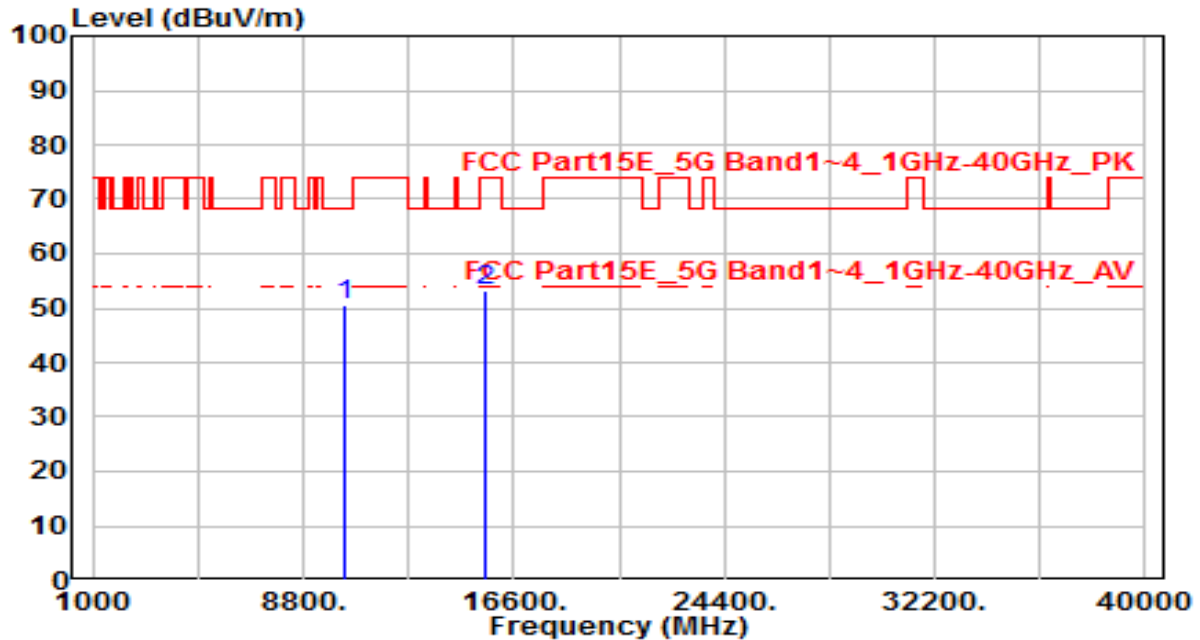


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	32.62	18.01	50.63	-17.57	68.20	150	360	Peak
2		15540.000	31.99	21.25	53.24	-20.76	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	By PoE

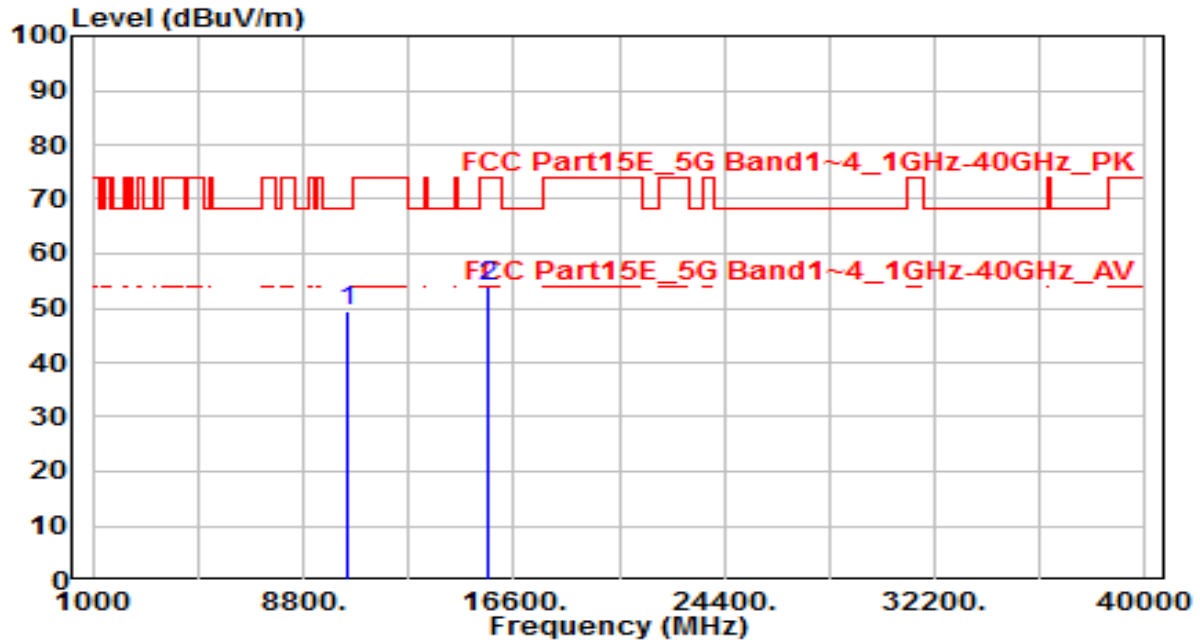


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	30.94	18.33	49.27	-18.93	68.20	150	360	Peak
2		15660.000	32.85	20.95	53.80	-20.20	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	By PoE

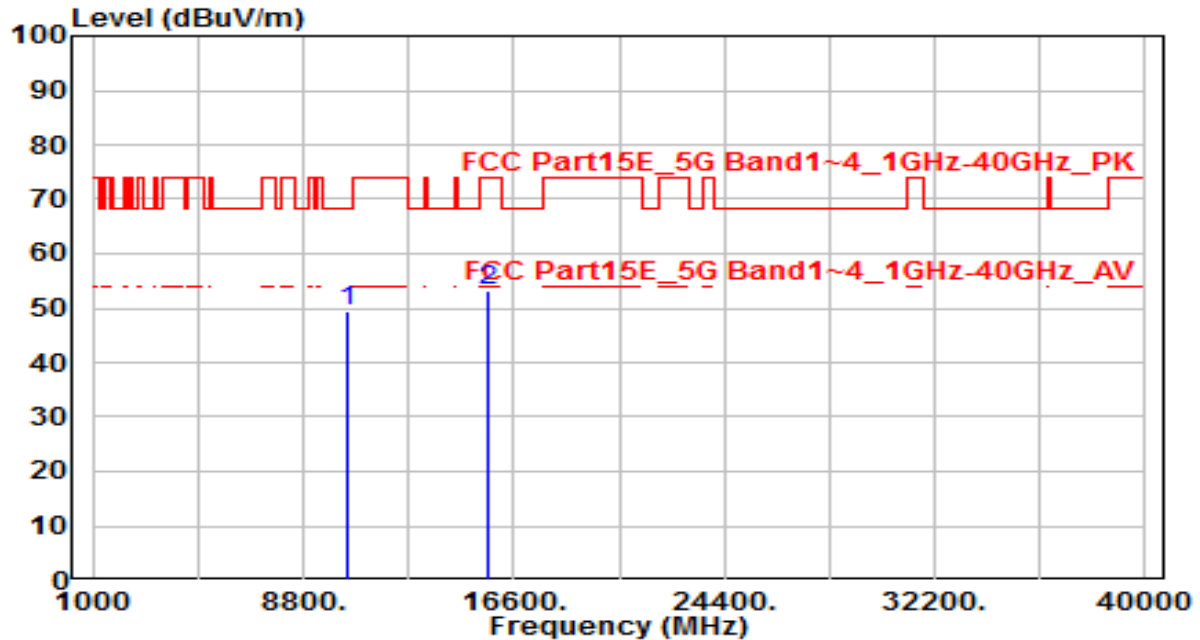


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	31.10	18.33	49.42	-18.78	68.20	150	360	Peak
2		15660.000	32.18	20.95	53.13	-20.87	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	By PoE

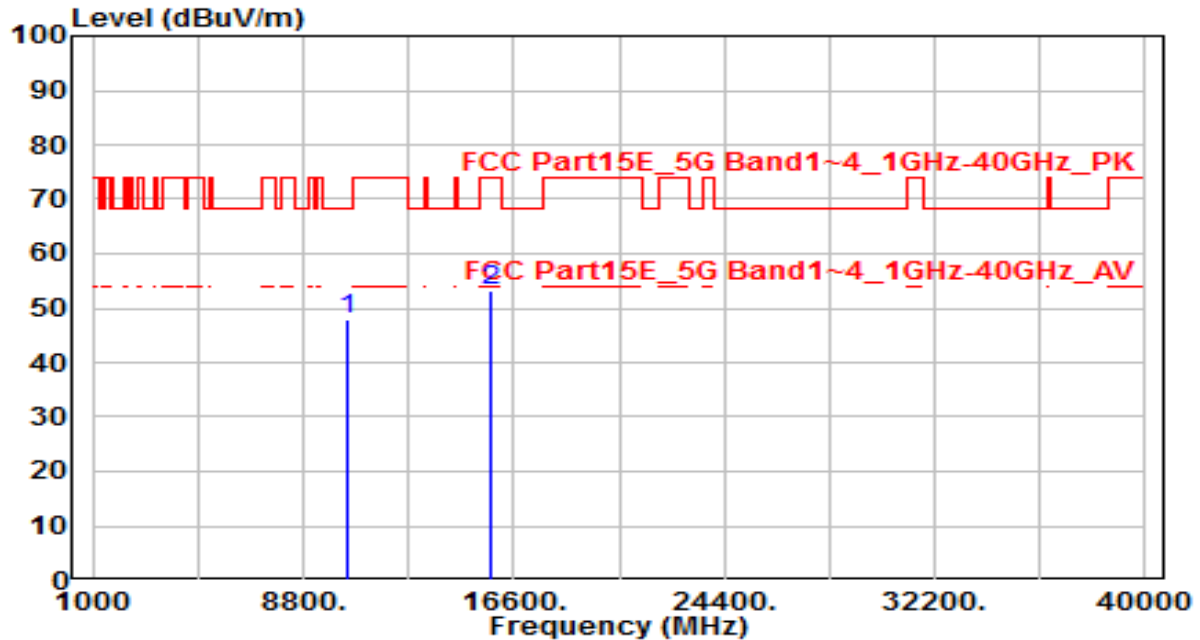


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	29.60	18.49	48.08	-20.12	68.20	150	360	Peak
2		15720.000	32.30	20.80	53.10	-20.90	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	By PoE

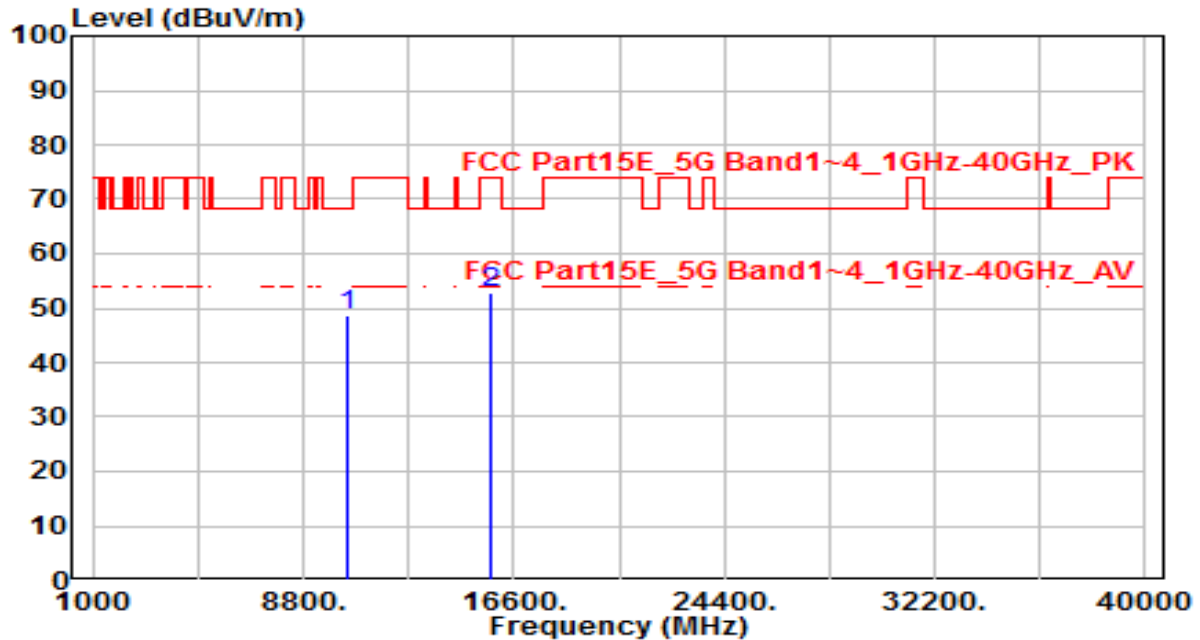


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	30.29	18.49	48.78	-19.42	68.20	150	360	Peak
2		15720.000	32.16	20.80	52.97	-21.03	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	By PoE

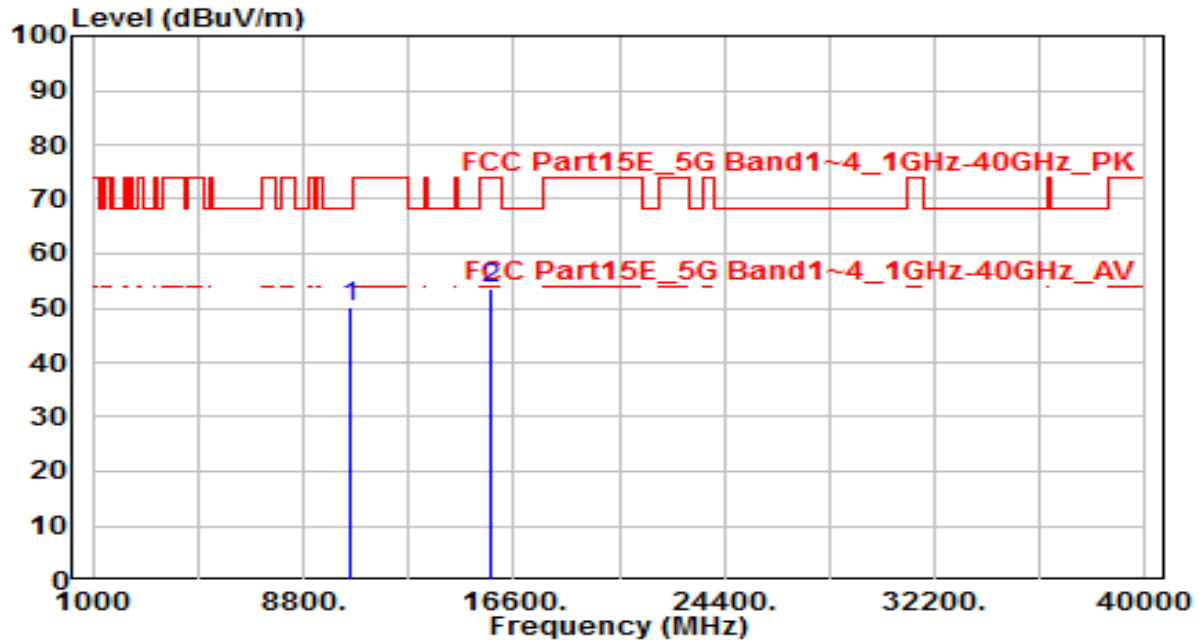


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	31.54	18.60	50.14	-18.06	68.20	150	360	Peak
2		15780.000	32.80	20.66	53.45	-20.55	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	By PoE

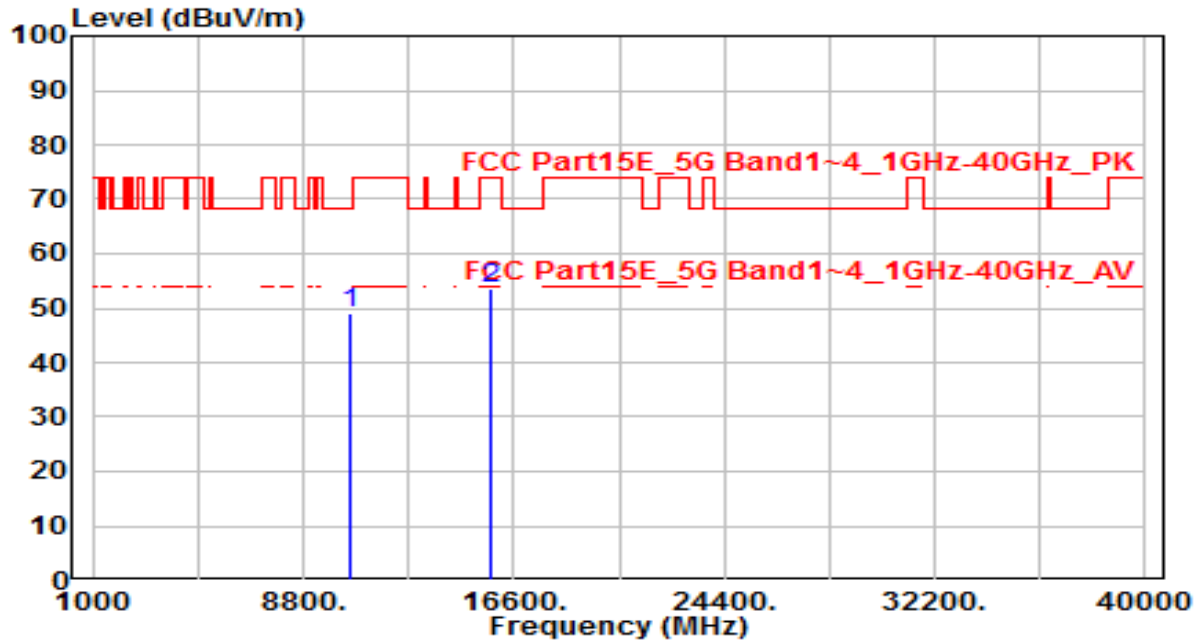


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	30.51	18.60	49.11	-19.09	68.20	150	360	Peak
2		15780.000	32.75	20.66	53.41	-20.59	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	By PoE

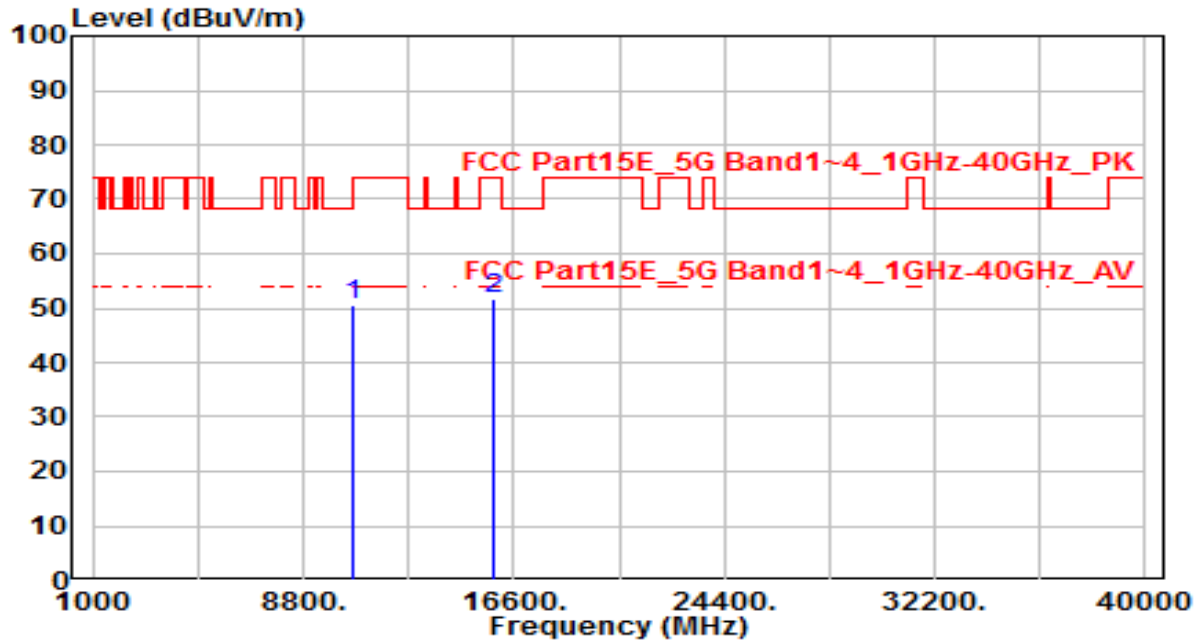


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	31.94	18.71	50.65	-17.55	68.20	150	360	Peak
2		15900.000	31.33	20.36	51.69	-22.31	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	By PoE

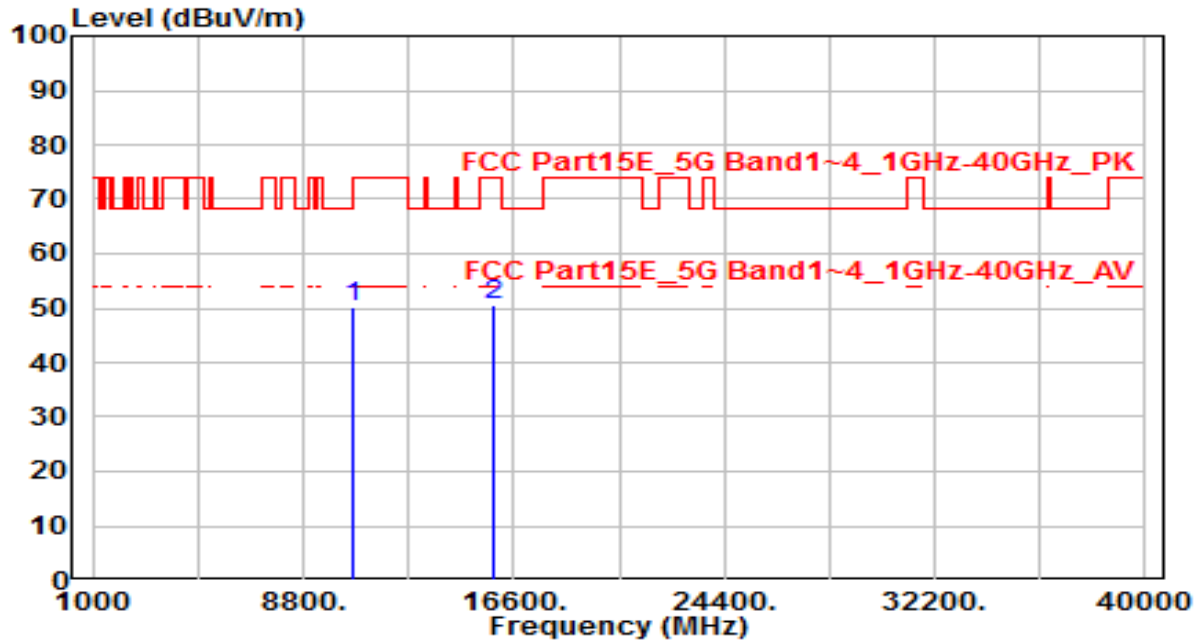


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	31.60	18.71	50.31	-17.89	68.20	150	360	Peak
2		15900.000	30.23	20.36	50.59	-23.41	74.00	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	By PoE

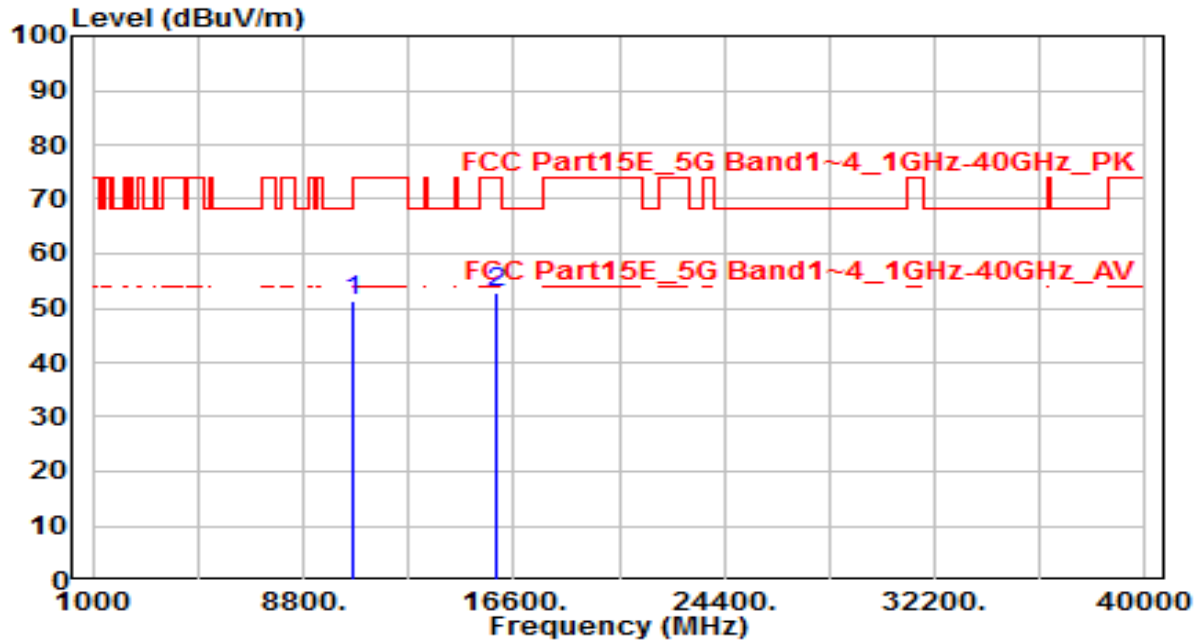


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	32.68	18.77	51.45	-22.55	74.00	150	360	Peak
2	* 15960.000	32.78	20.21	52.99	-21.01	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	By PoE

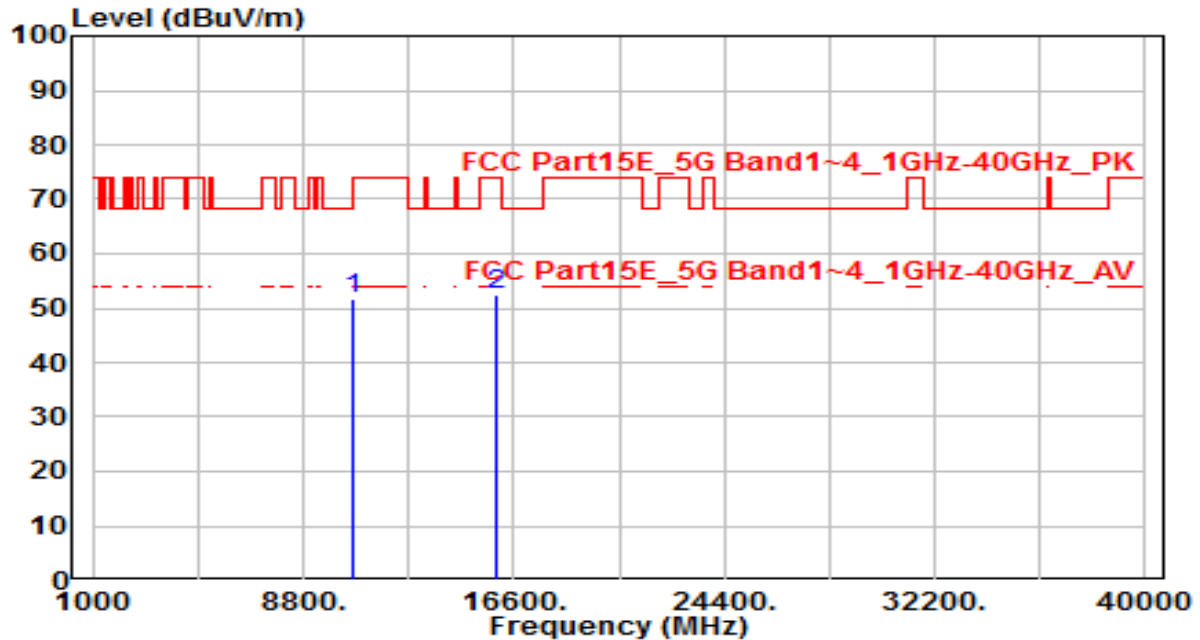


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	32.91	18.77	51.68	-22.32	74.00	150	360	Peak
2	* 15960.000	32.07	20.21	52.28	-21.72	74.00	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	By PoE

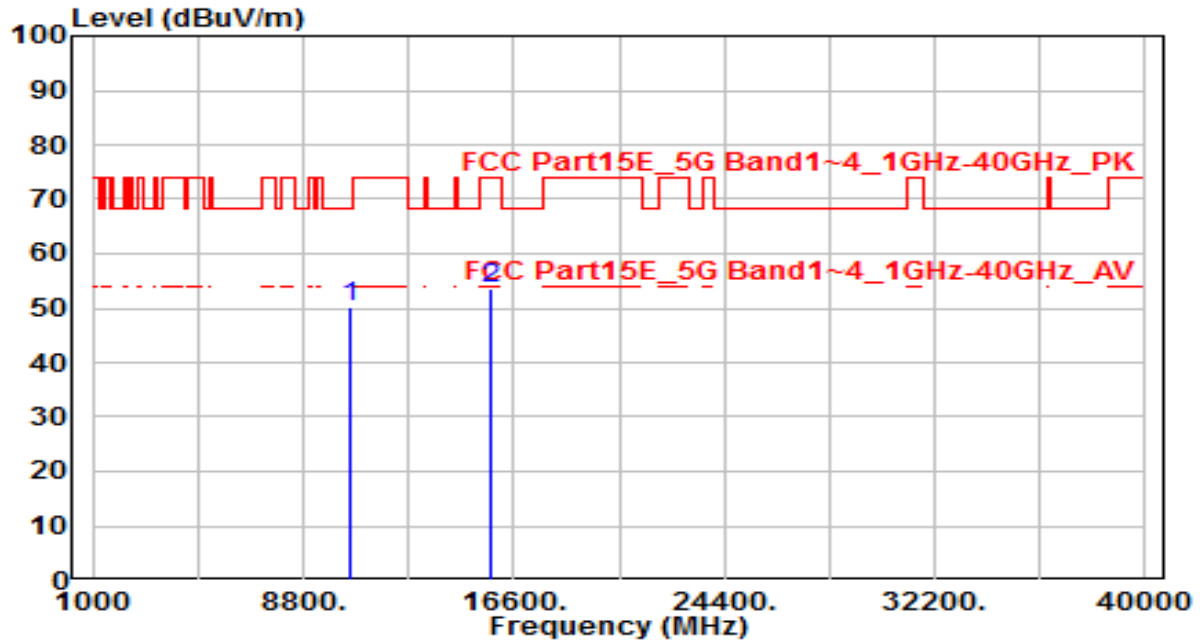


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	31.54	18.60	50.14	-18.06	68.20	150	360	Peak
2		15780.000	32.80	20.66	53.45	-20.55	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	By PoE

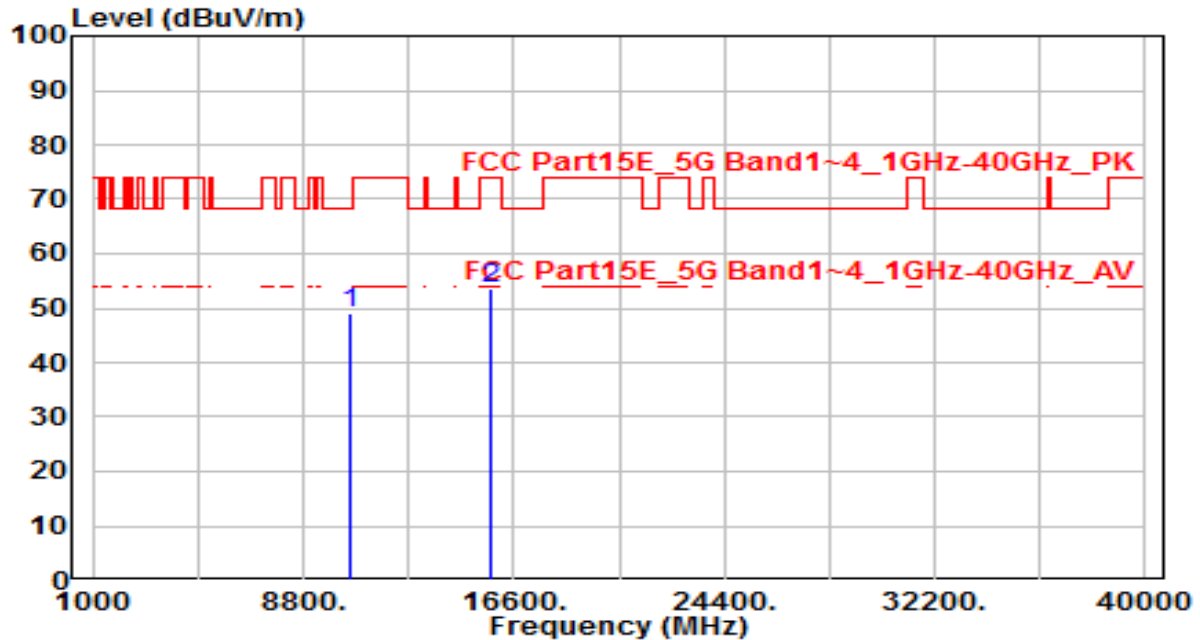


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	30.51	18.60	49.11	-19.09	68.20	150	360	Peak
2		15780.000	32.75	20.66	53.41	-20.59	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	By PoE

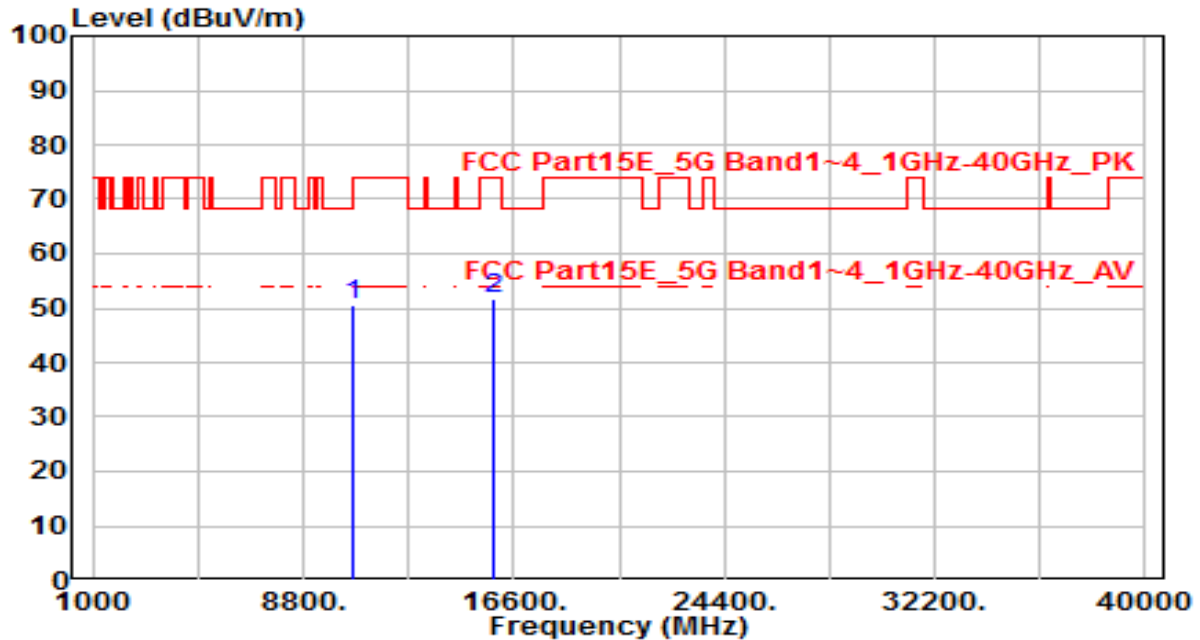


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	31.94	18.71	50.65	-17.55	68.20	150	360	Peak
2		15900.000	31.33	20.36	51.69	-22.31	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	By PoE

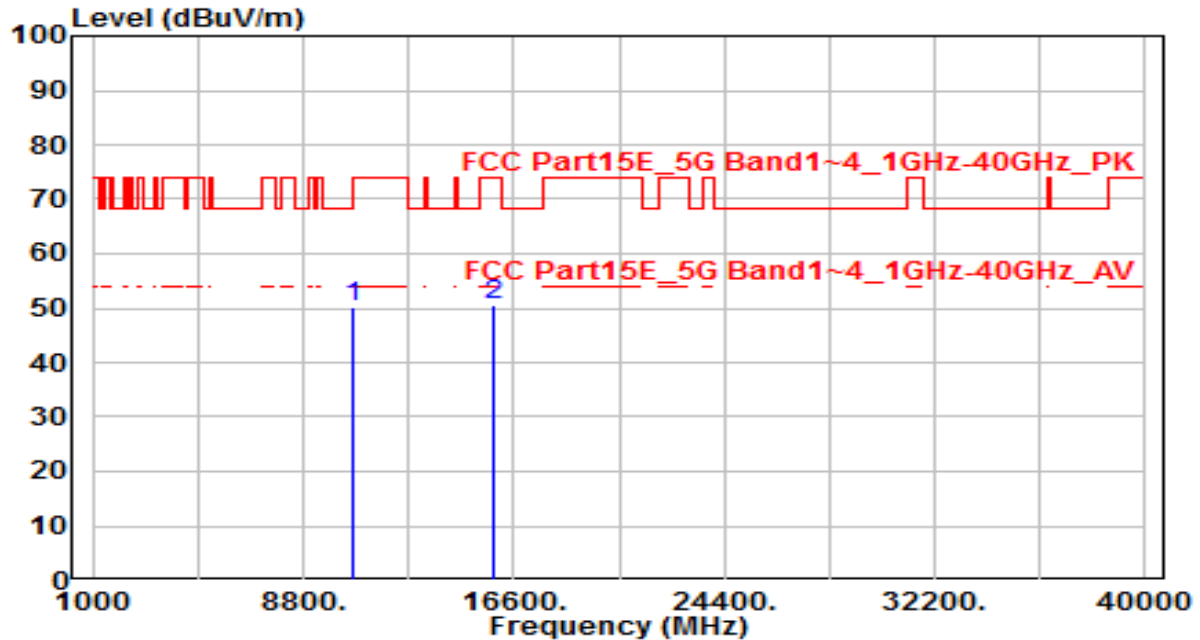


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	31.60	18.71	50.31	-17.89	68.20	150	360	Peak
2		15900.000	30.23	20.36	50.59	-23.41	74.00	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	By PoE

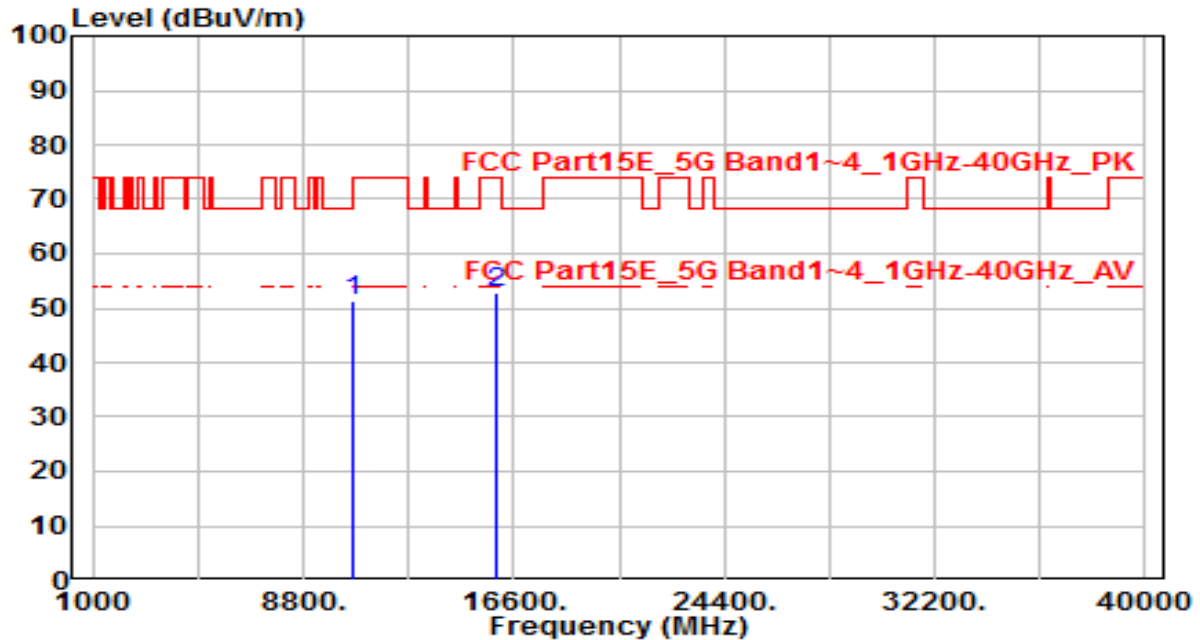


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	32.68	18.77	51.45	-22.55	74.00	150	360	Peak
2	* 15960.000	32.78	20.21	52.99	-21.01	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	By PoE

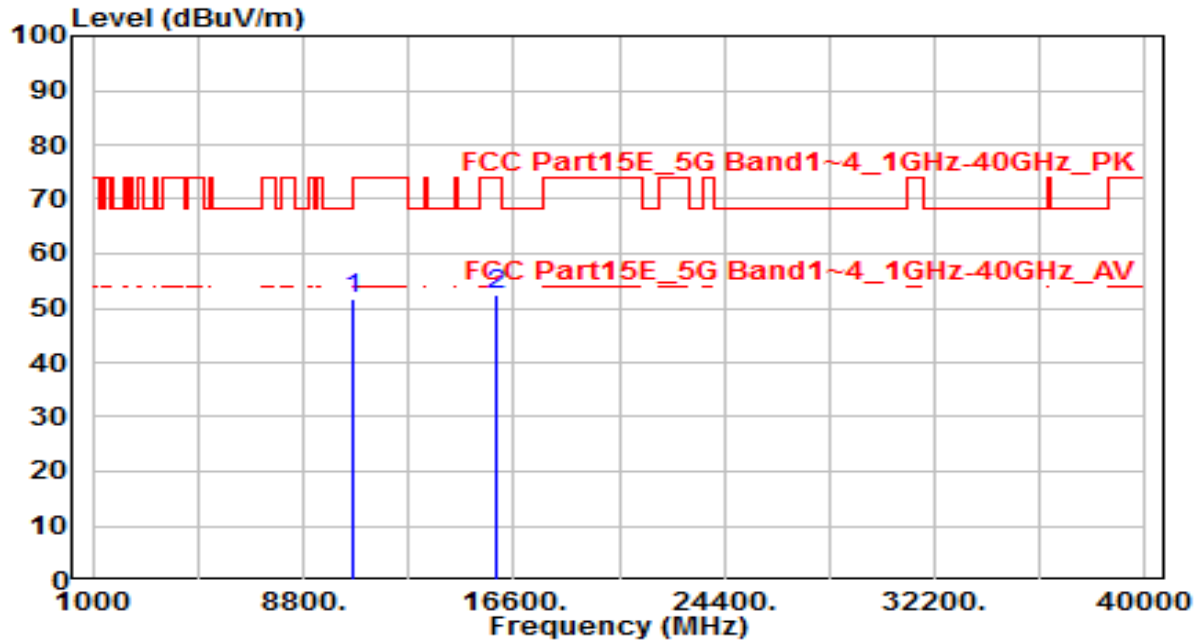


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	32.91	18.77	51.68	-22.32	74.00	150	360	Peak
2	* 15960.000	32.07	20.21	52.28	-21.72	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band3_CH 100_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

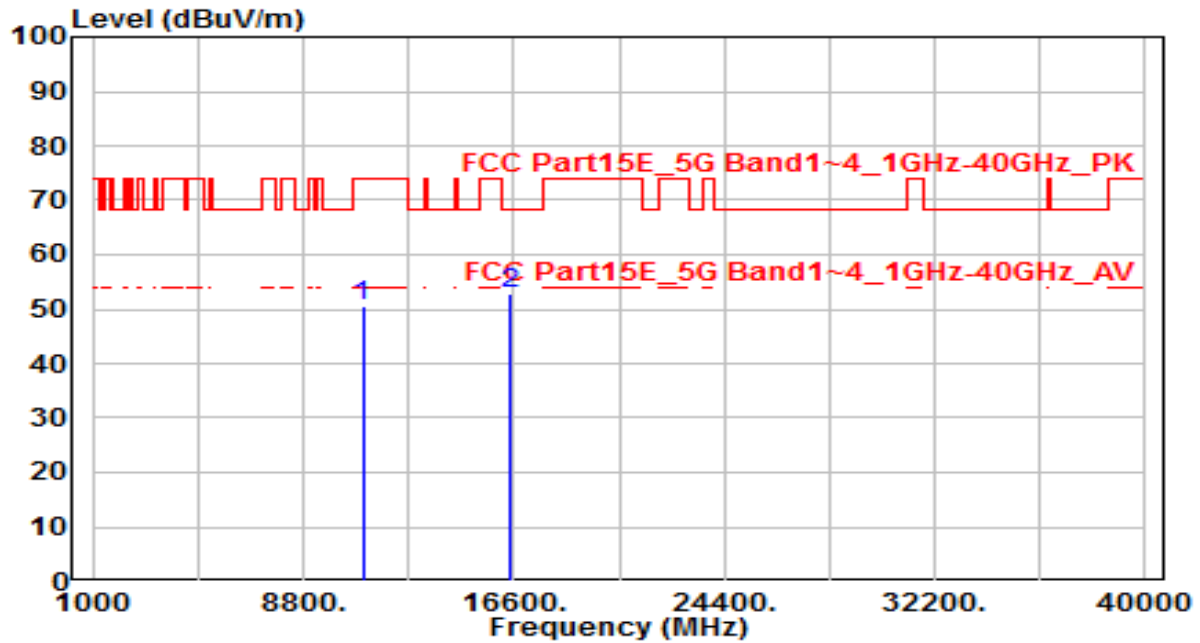


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	31.27	19.28	50.55	-23.45	74.00	150	360	Peak
2	* 16500.000	31.54	21.26	52.80	-15.40	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band3_CH 100_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

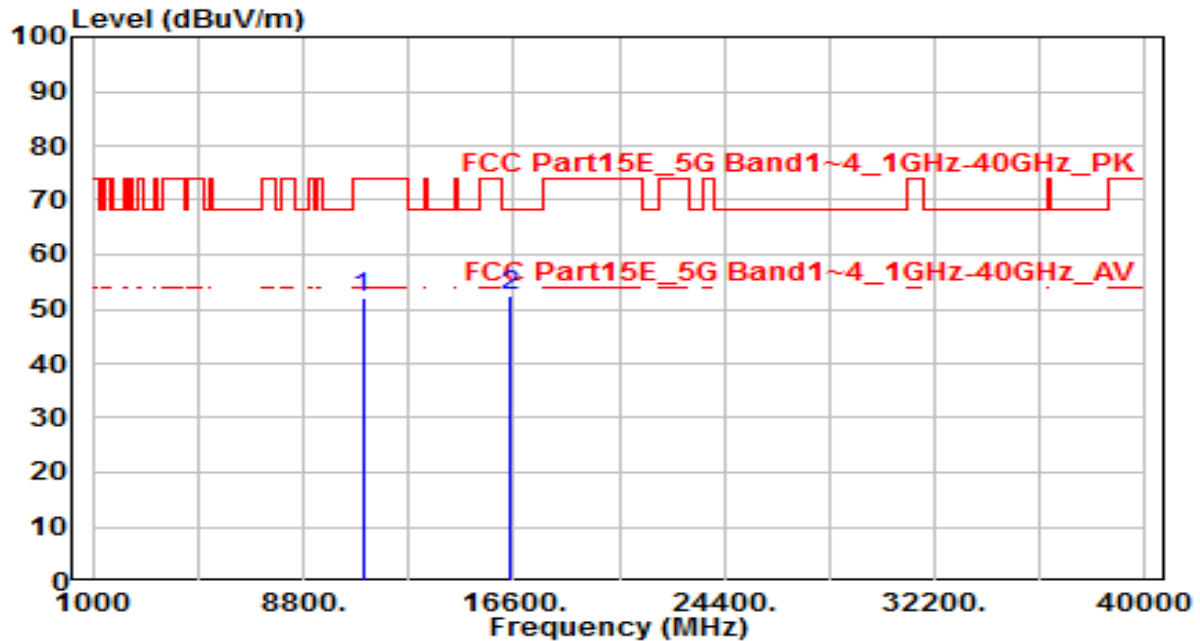


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	32.74	19.28	52.02	-21.98	74.00	150	360	Peak
2	* 16500.000	31.37	21.26	52.63	-15.57	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band3_CH 116_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

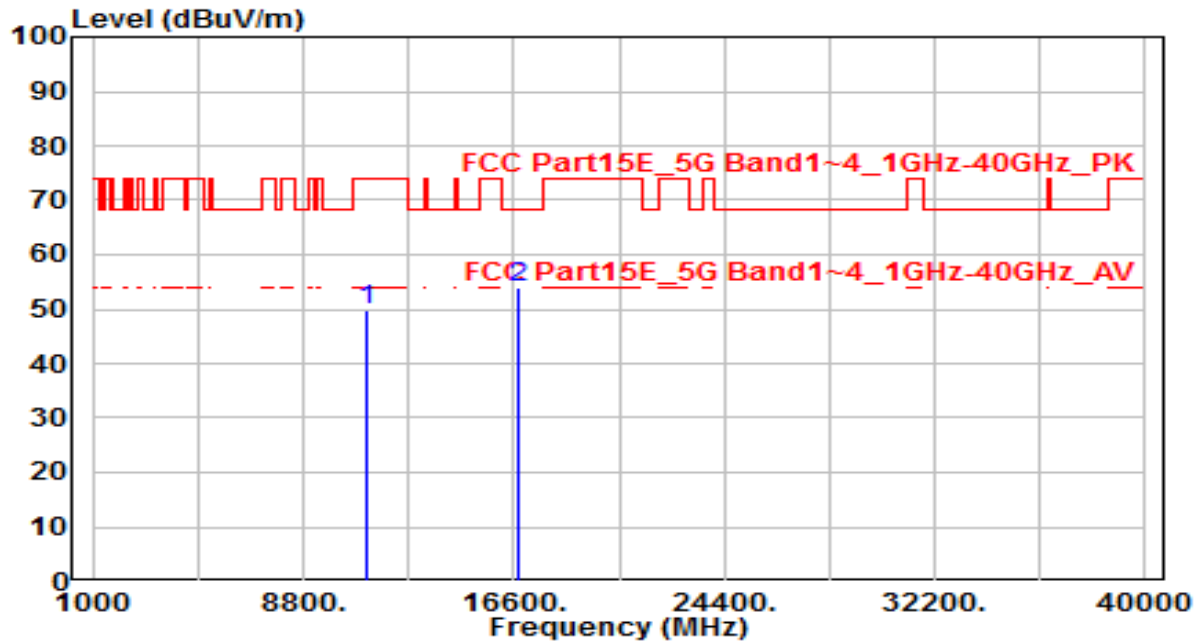


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	30.36	19.53	49.88	-24.12	74.00	150	360	Peak
2	* 16740.000	31.24	22.82	54.06	-14.14	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band3_CH 116_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

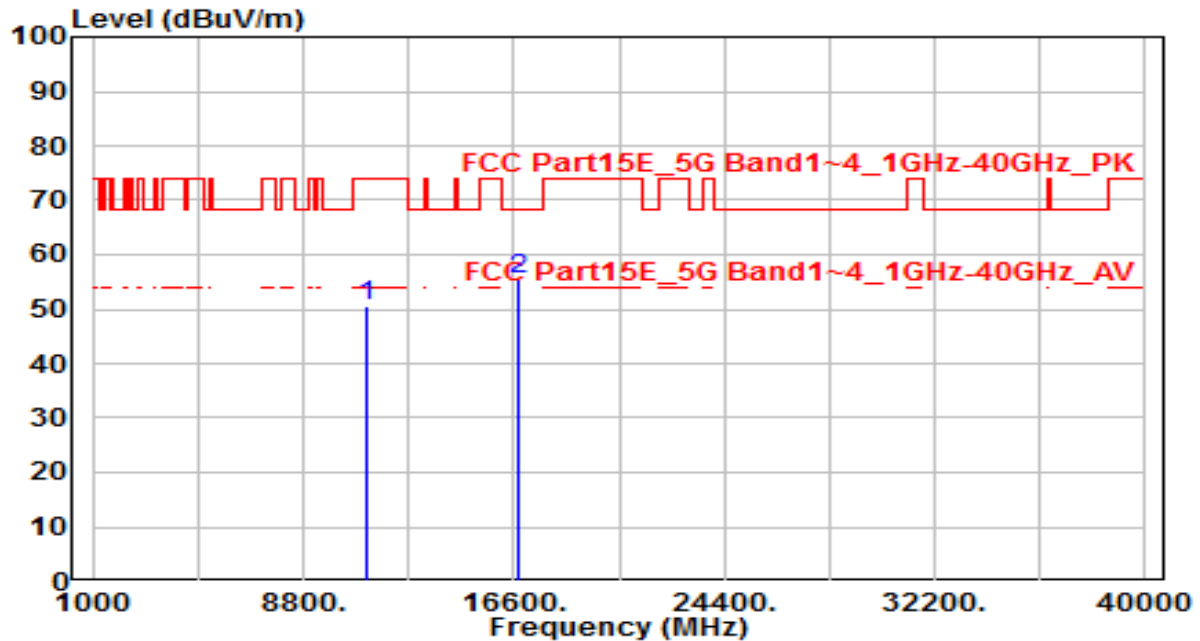


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	30.88	19.53	50.41	-23.59	74.00	150	360	Peak
2	* 16740.000	32.68	22.82	55.50	-12.70	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band3_CH 140_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

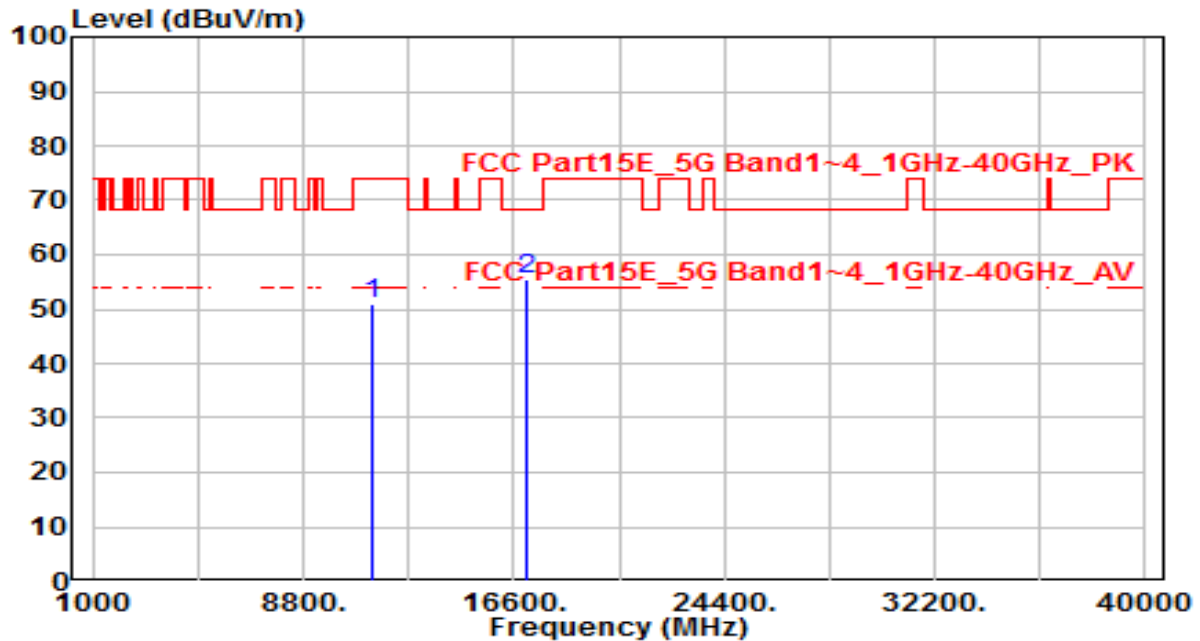


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	31.08	19.90	50.97	-23.03	74.00	150	360	Peak
2	* 17100.000	30.25	25.18	55.43	-12.77	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band3_CH 140_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

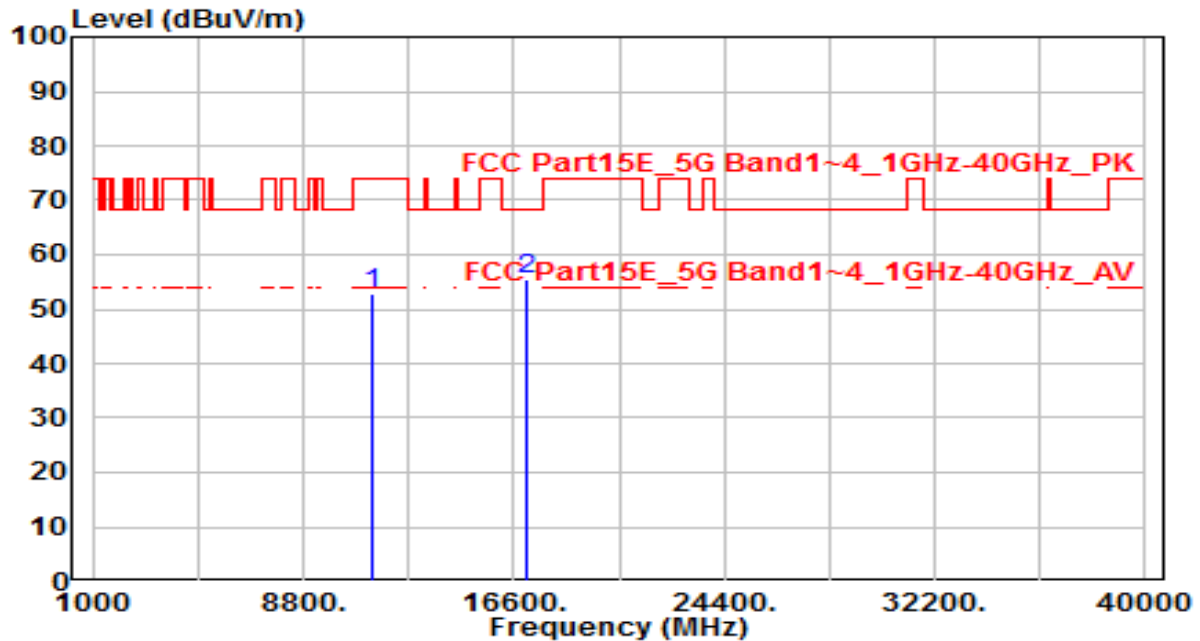


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	33.10	19.90	53.00	-21.00	74.00	150	360	Peak
2	* 17100.000	30.23	25.18	55.41	-12.79	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band3_CH 144_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

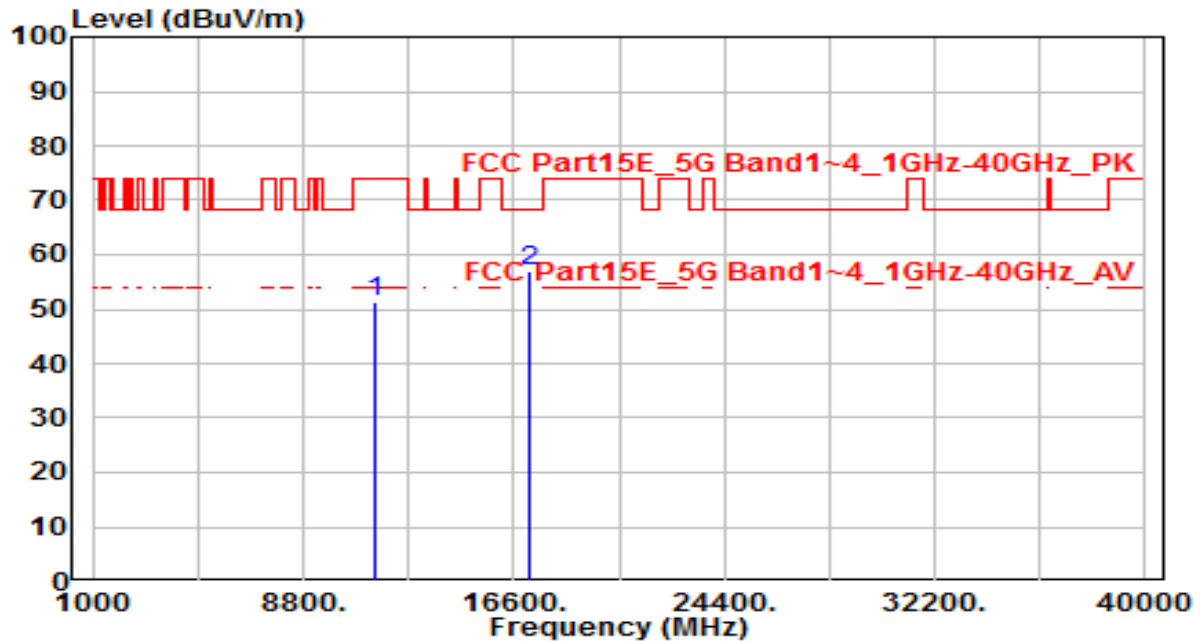


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	31.43	19.96	51.39	-22.61	74.00	150	360	Peak
2	* 17160.000	31.29	25.58	56.86	-11.34	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band3_CH 144_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

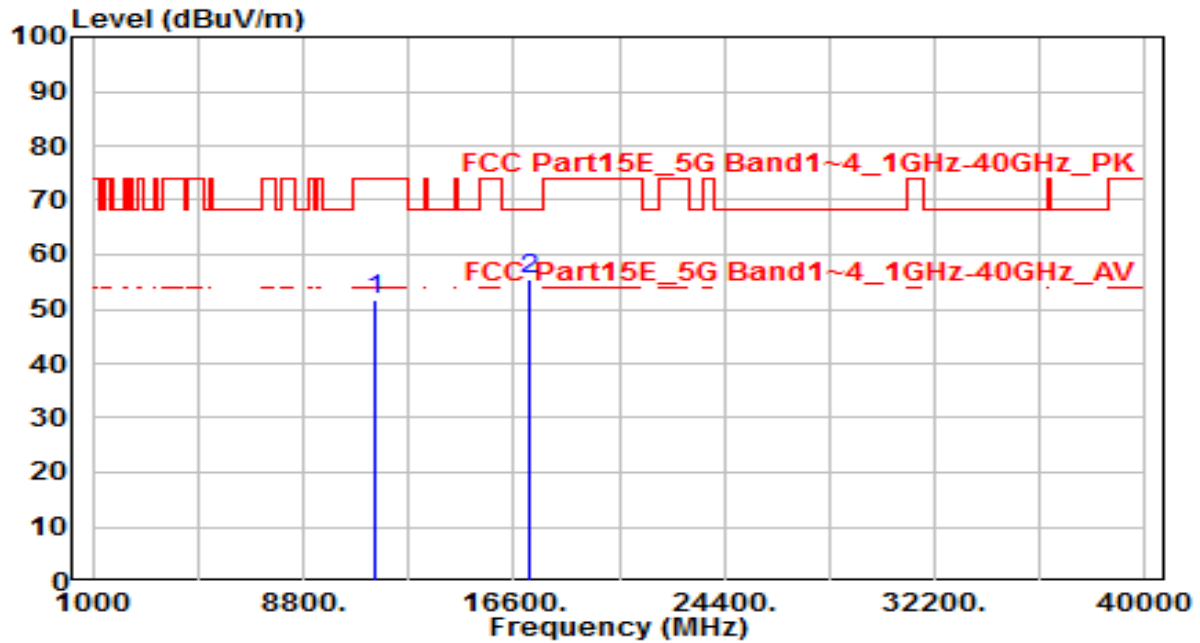


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	31.57	19.96	51.53	-22.47	74.00	150	360	Peak
2	* 17160.000	29.73	25.58	55.30	-12.90	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 149_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

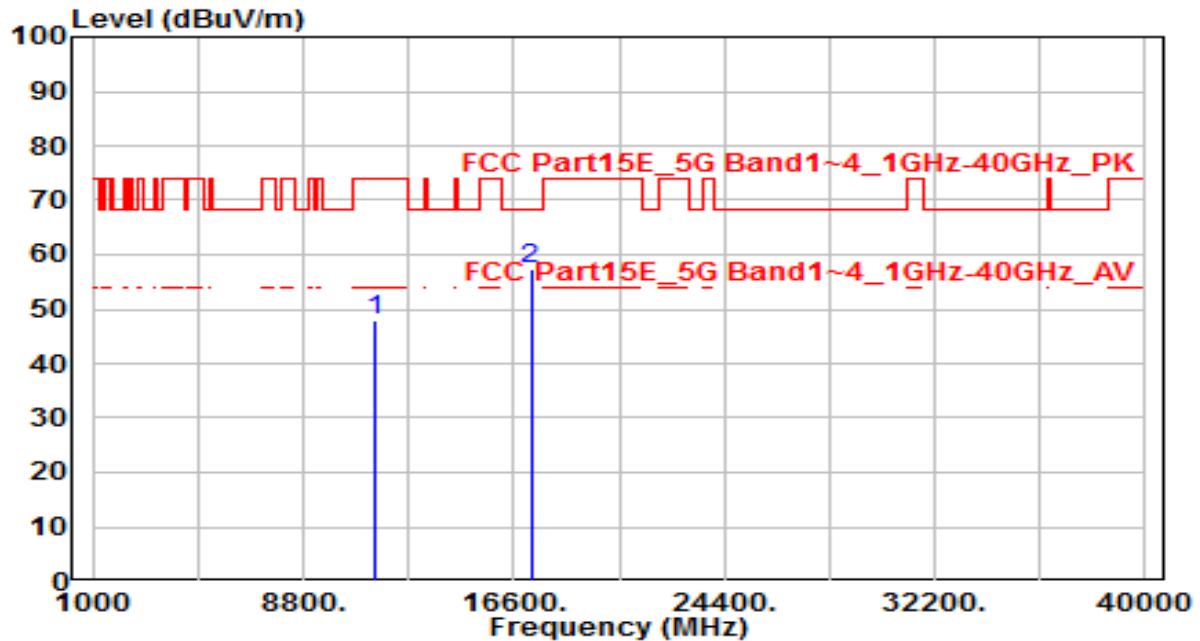


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	27.84	20.03	47.87	-26.13	74.00	150	360	Peak
2	* 17235.000	31.15	26.08	57.22	-10.98	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 149_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

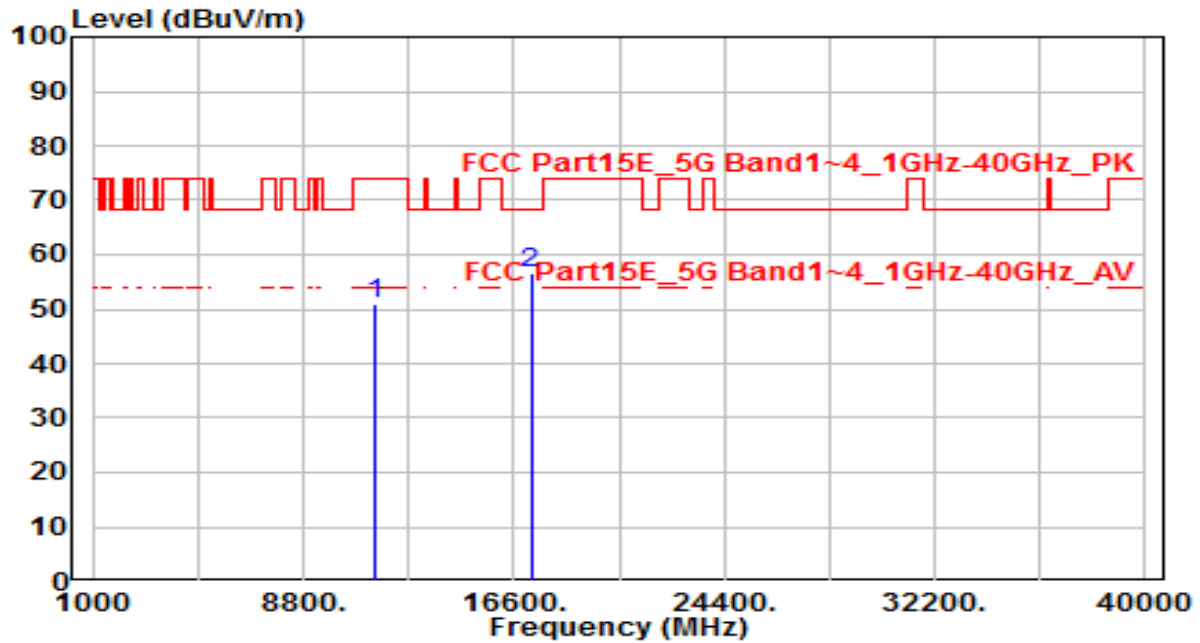


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	30.81	20.03	50.85	-23.15	74.00	150	360	Peak
2	* 17235.000	30.50	26.08	56.57	-11.63	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 157_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

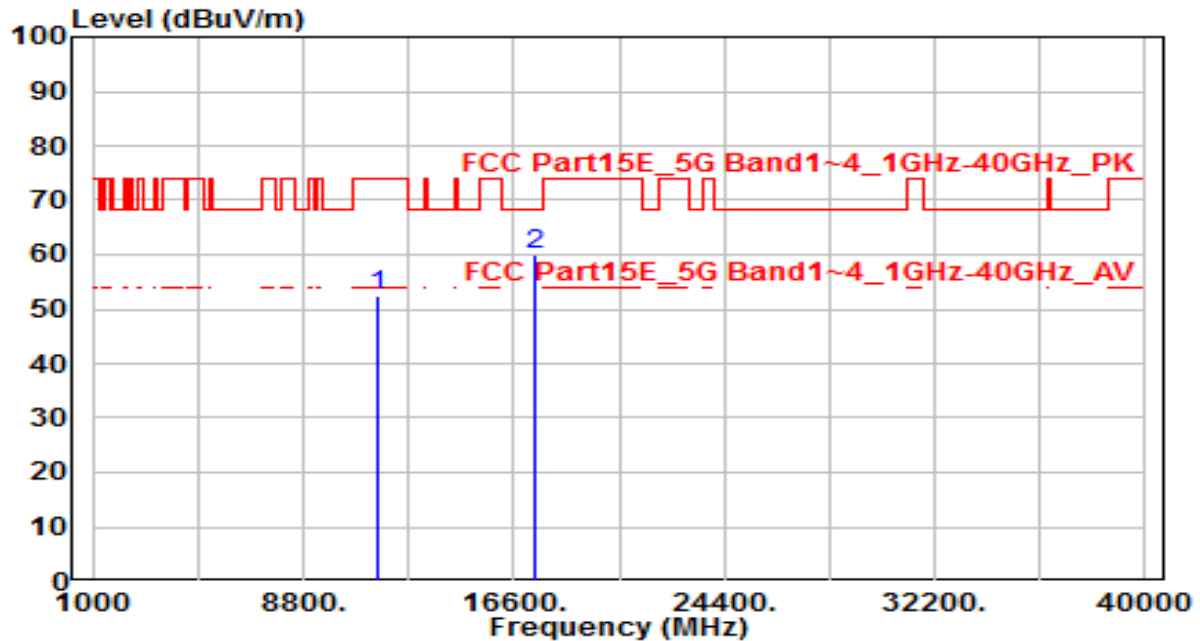


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	32.68	19.89	52.57	-21.43	74.00	150	360	Peak
2	* 17355.000	32.96	26.87	59.84	-8.36	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 157_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

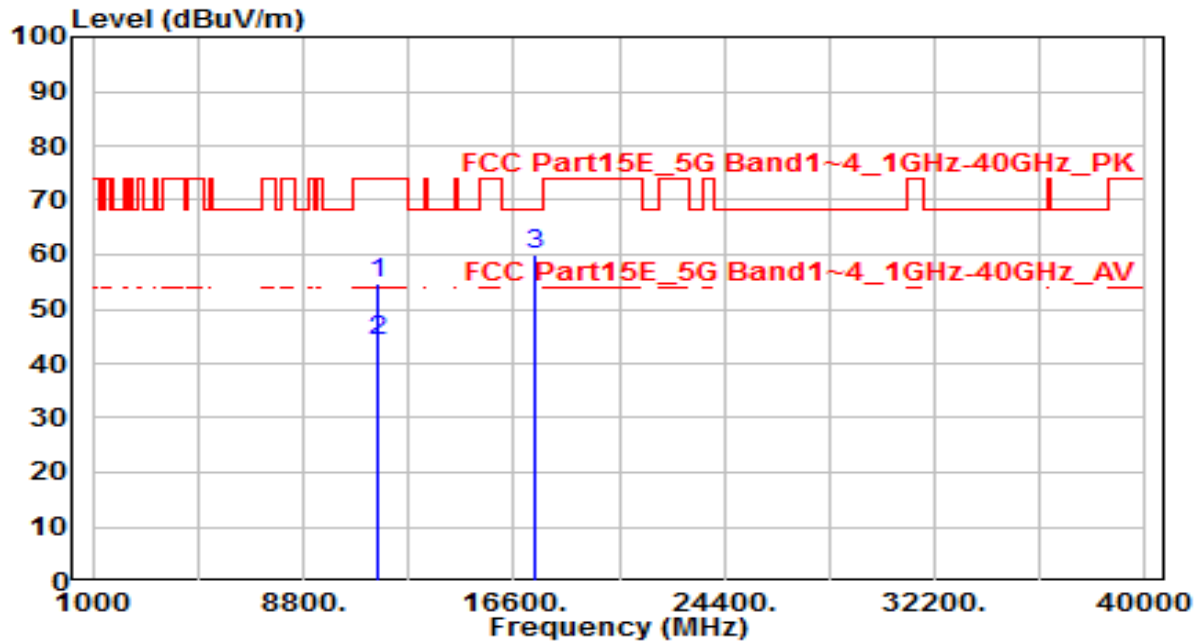


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	35.00	19.89	54.89	-19.11	74.00	150	110	Peak
2	*	11570.000	24.24	19.89	44.13	-9.87	54.00	150	110	Average
3	*	17355.000	33.29	26.87	60.16	-8.04	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 165_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

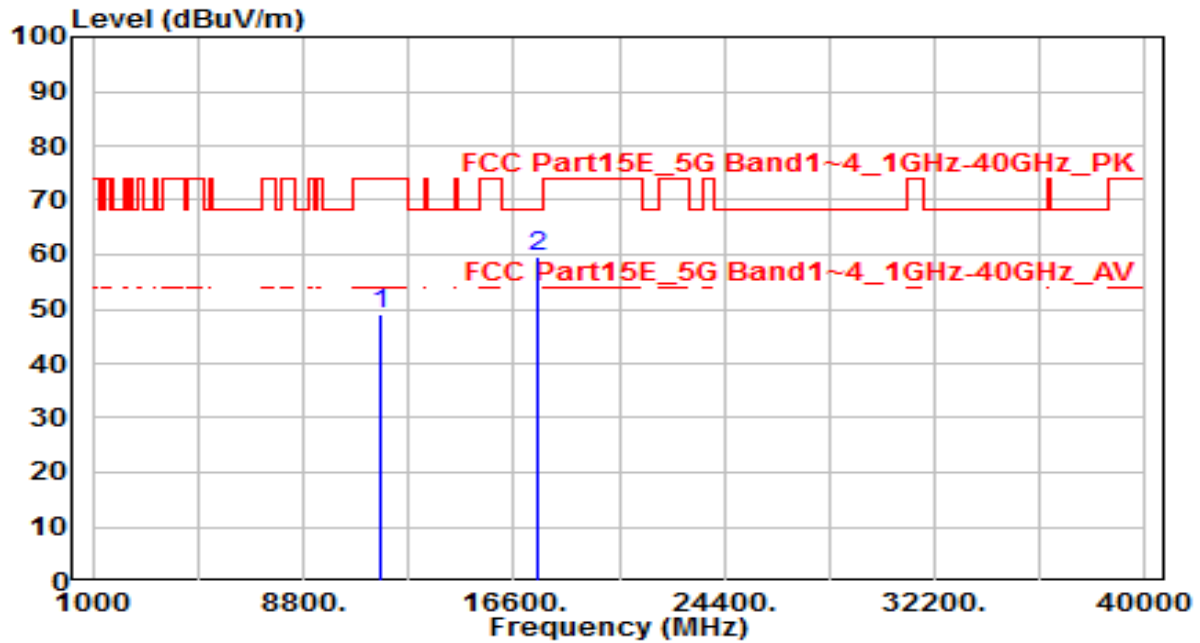


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	29.43	19.71	49.14	-24.86	74.00	150	360	Peak
2	* 17475.000	31.97	27.67	59.64	-8.56	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 165_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

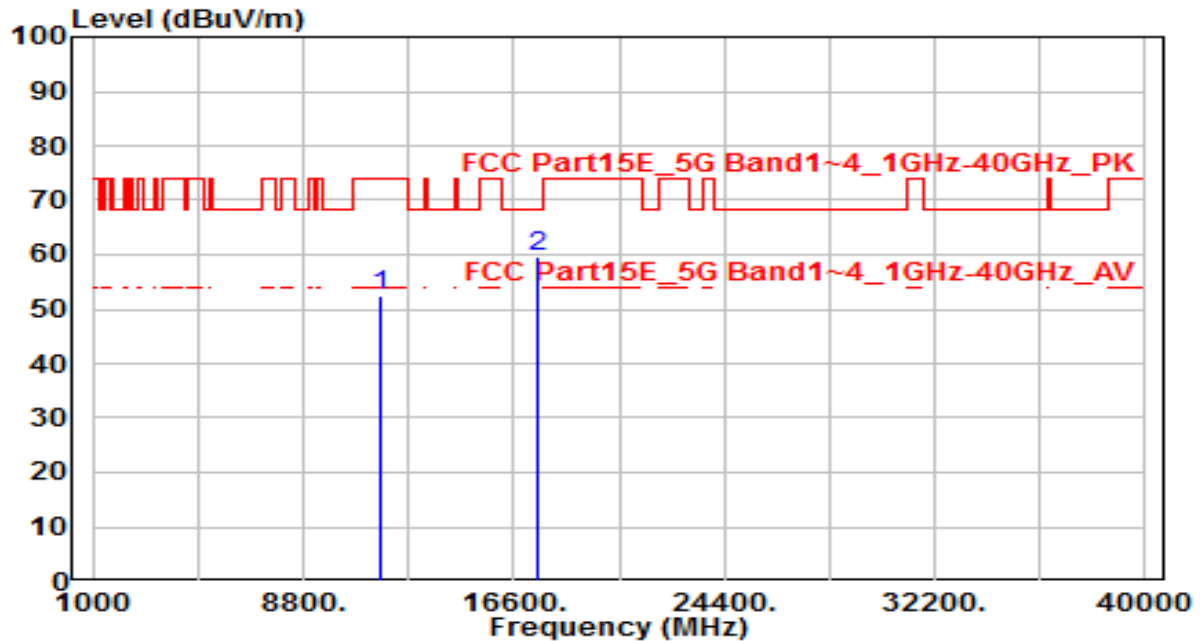


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	32.86	19.71	52.57	-21.43	74.00	150	360	Peak
2	* 17475.000	31.81	27.67	59.49	-8.71	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	By PoE

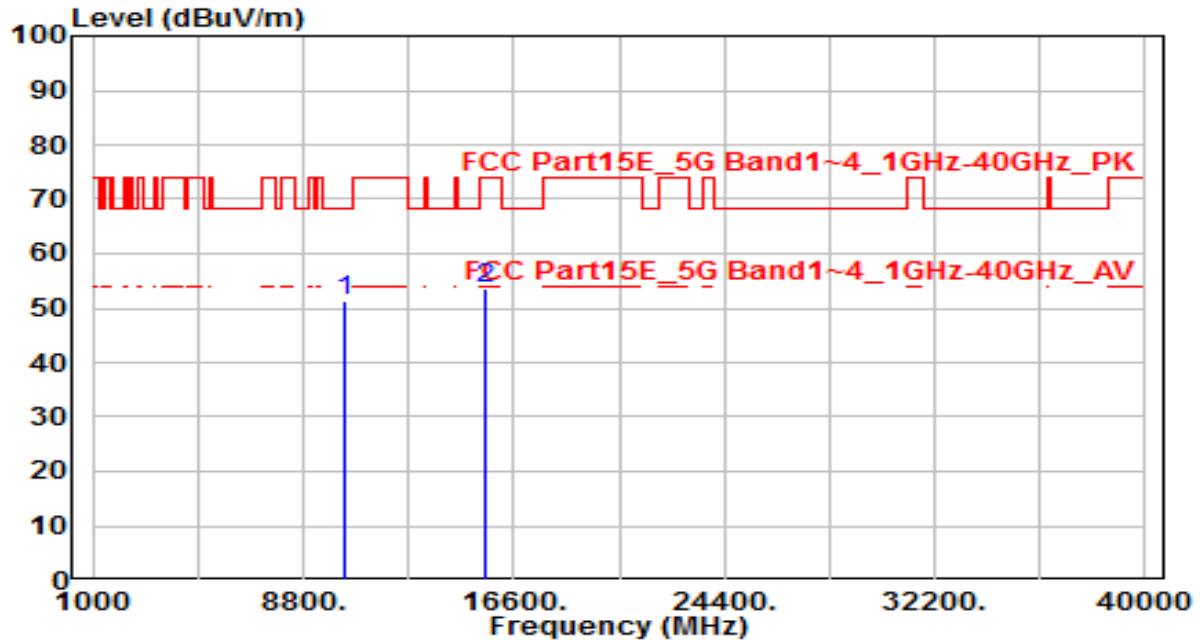


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	33.17	18.01	51.18	-17.02	68.20	150	360	Peak
2		15540.000	32.28	21.25	53.53	-20.47	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	By PoE

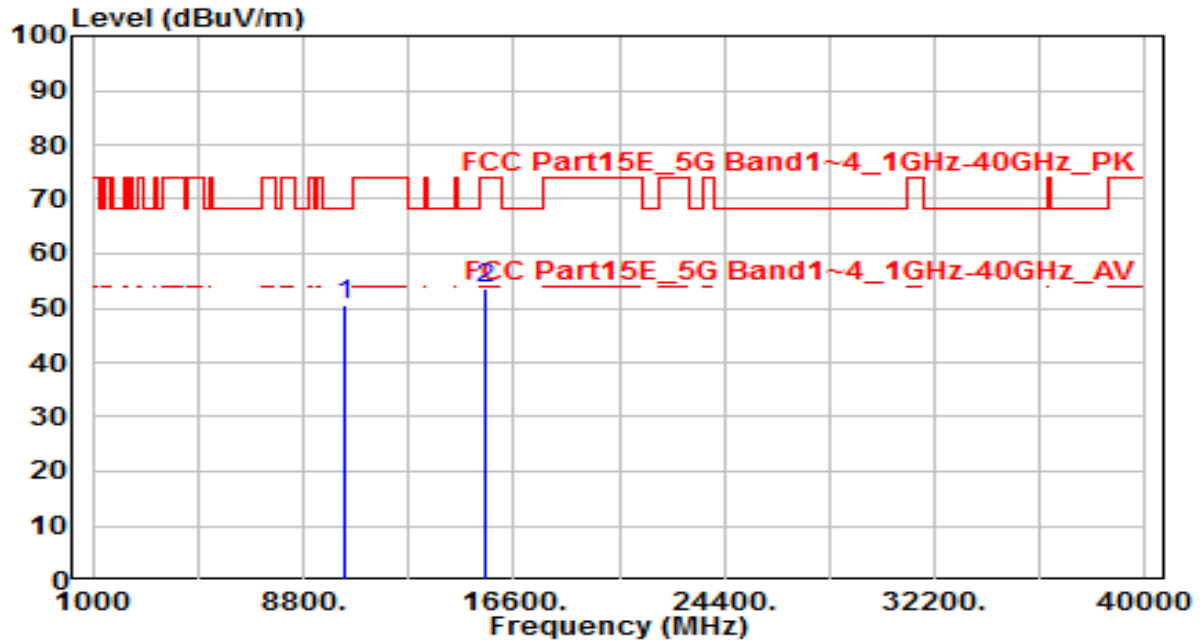


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	32.66	18.01	50.67	-17.53	68.20	150	360	Peak
2		15540.000	32.36	21.25	53.61	-20.39	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	By PoE

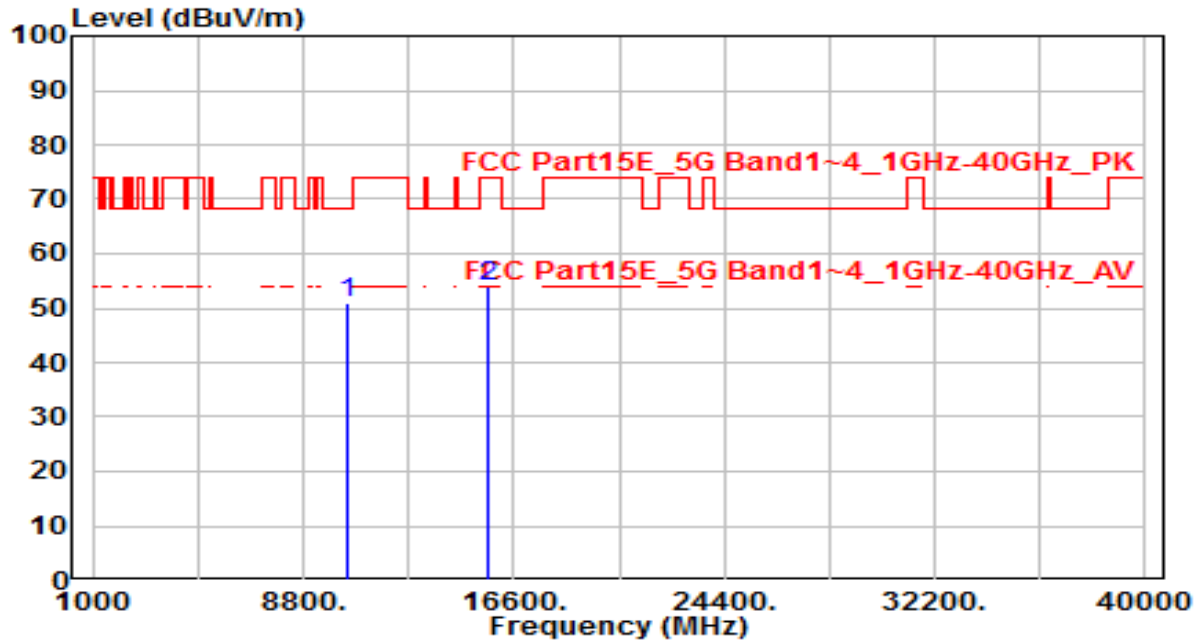


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	32.45	18.33	50.78	-17.42	68.20	150	360	Peak
2		15660.000	32.82	20.95	53.78	-20.22	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	By PoE

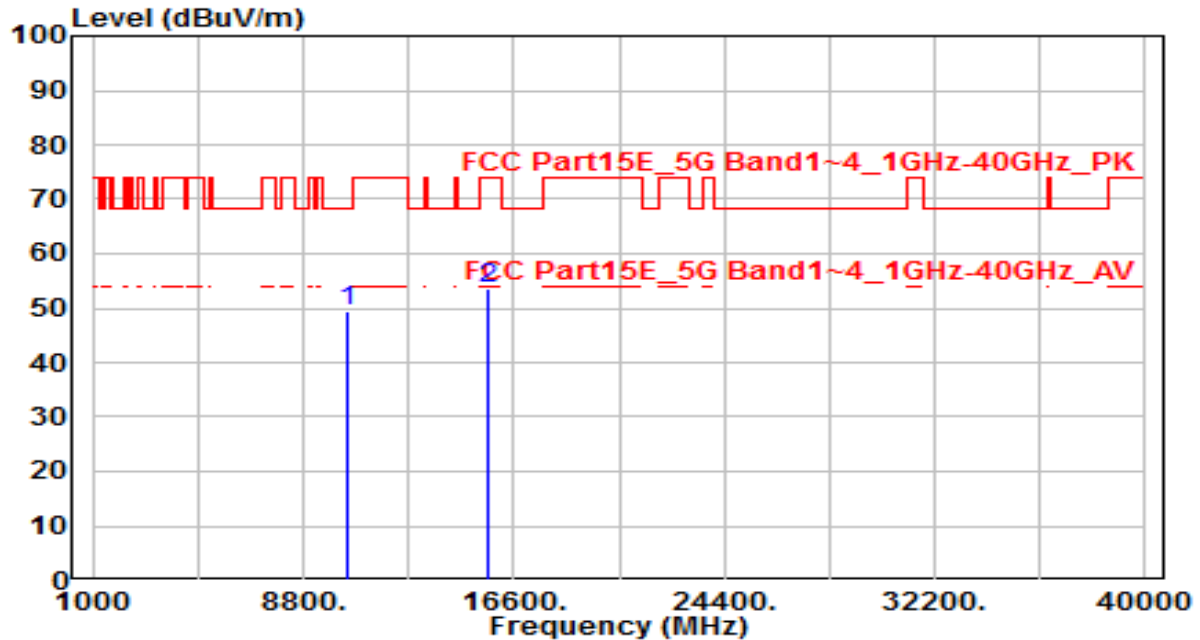


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	31.00	18.33	49.32	-18.88	68.20	150	360	Peak
2		15660.000	32.57	20.95	53.52	-20.48	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	By PoE

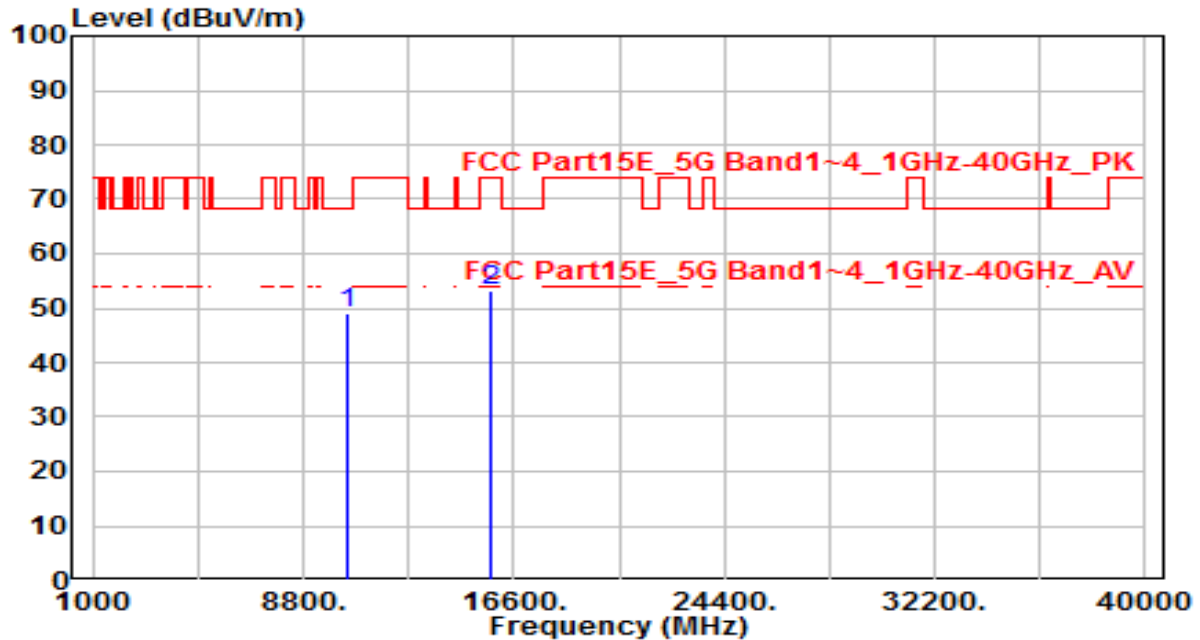


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	30.47	18.49	48.95	-19.25	68.20	150	360	Peak
2		15720.000	32.56	20.80	53.37	-20.63	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	By PoE

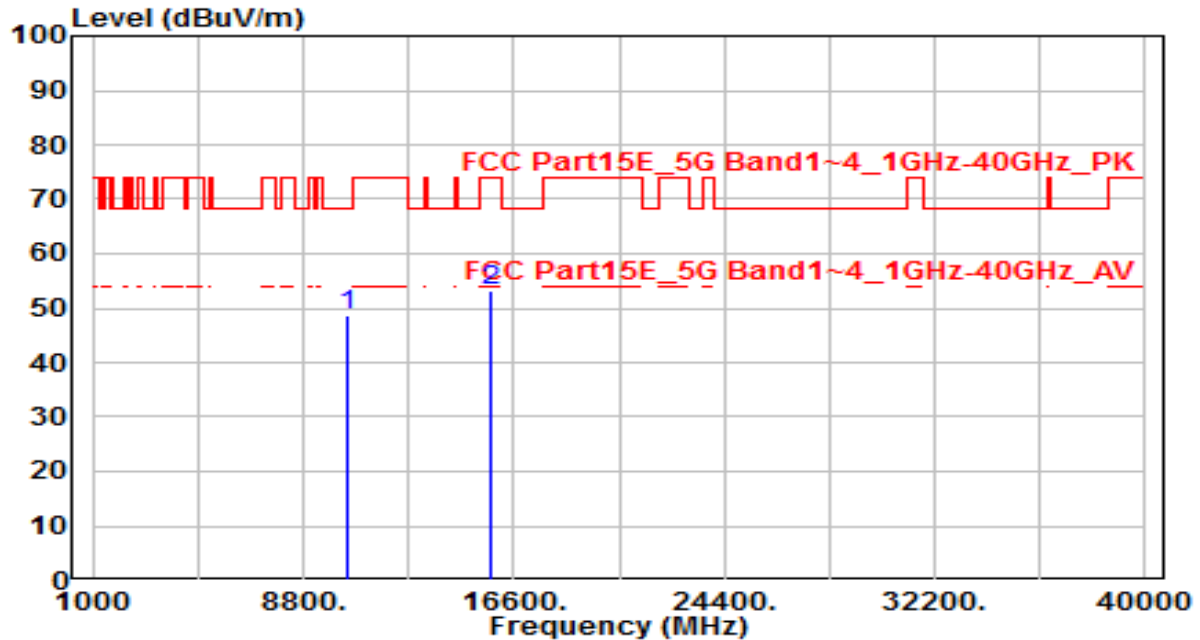


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	30.34	18.49	48.83	-19.37	68.20	150	360	Peak
2		15720.000	32.47	20.80	53.27	-20.73	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	By PoE

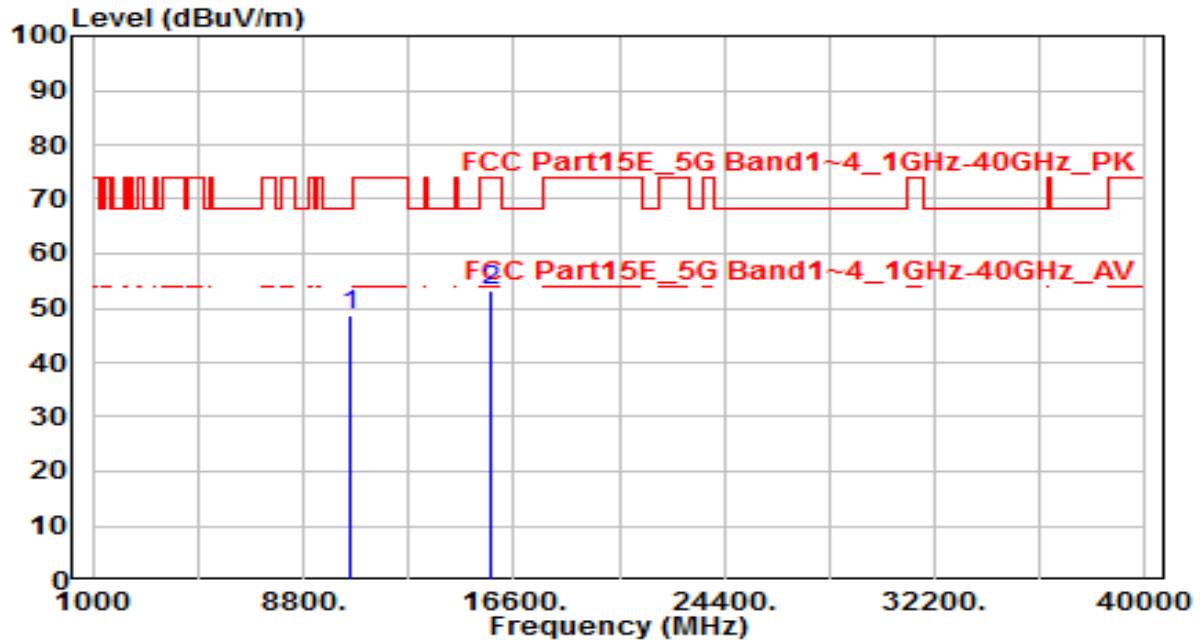


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	30.25	18.60	48.85	-19.35	68.20	150	360	Peak
2		15780.000	32.50	20.66	53.16	-20.84	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	By PoE

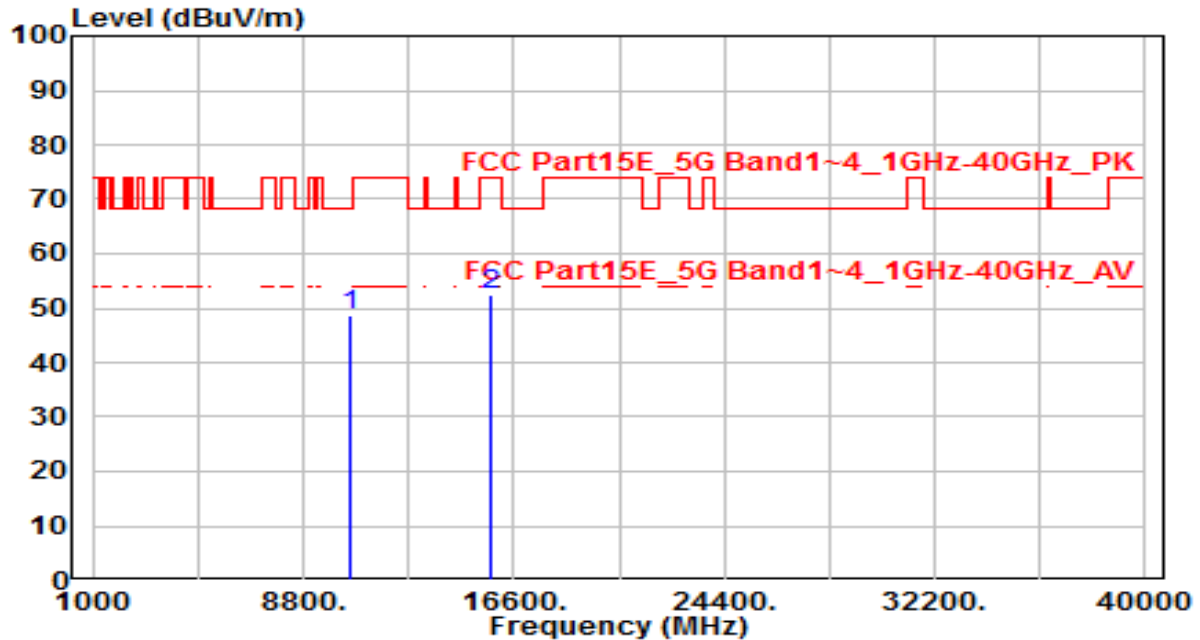


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	30.20	18.60	48.80	-19.40	68.20	150	360	Peak
2		15780.000	31.93	20.66	52.58	-21.42	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	By PoE

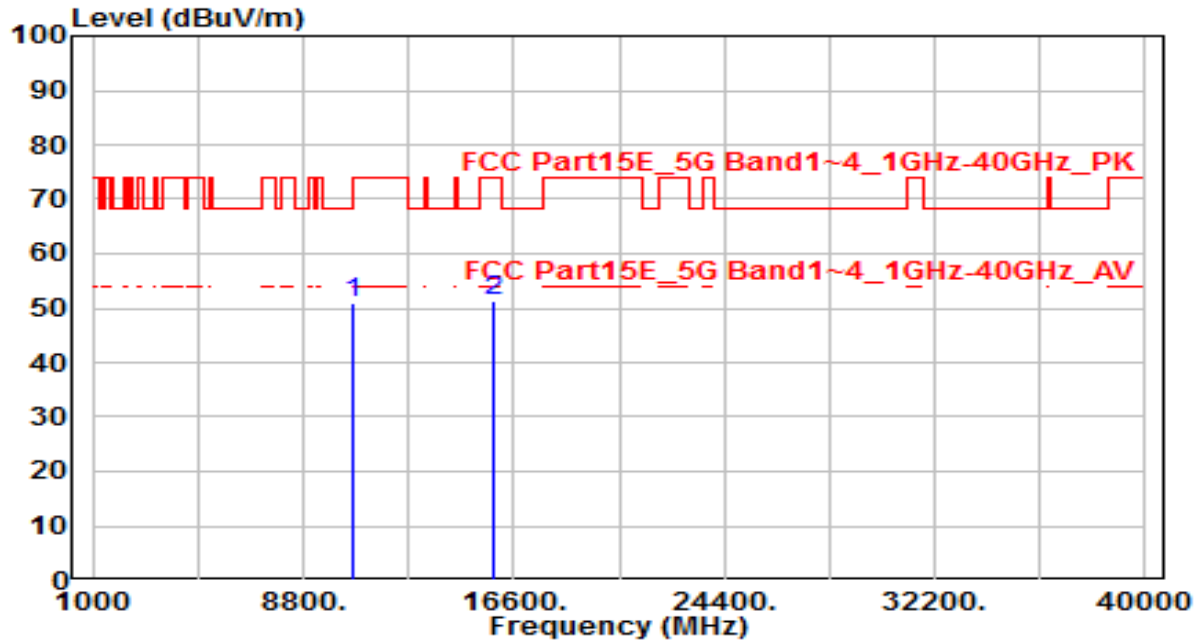


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	32.19	18.71	50.91	-17.29	68.20	150	360	Peak
2		15900.000	31.14	20.36	51.50	-22.50	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	By PoE

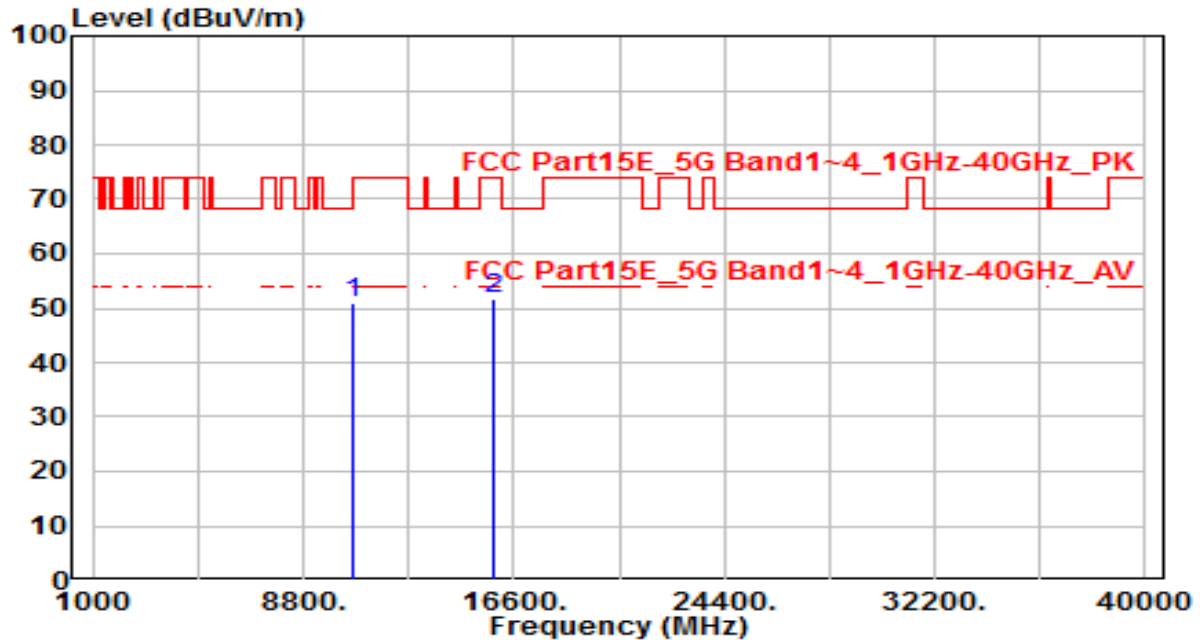


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	32.17	18.71	50.88	-17.32	68.20	150	360	Peak
2		15900.000	31.16	20.36	51.51	-22.49	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	By PoE

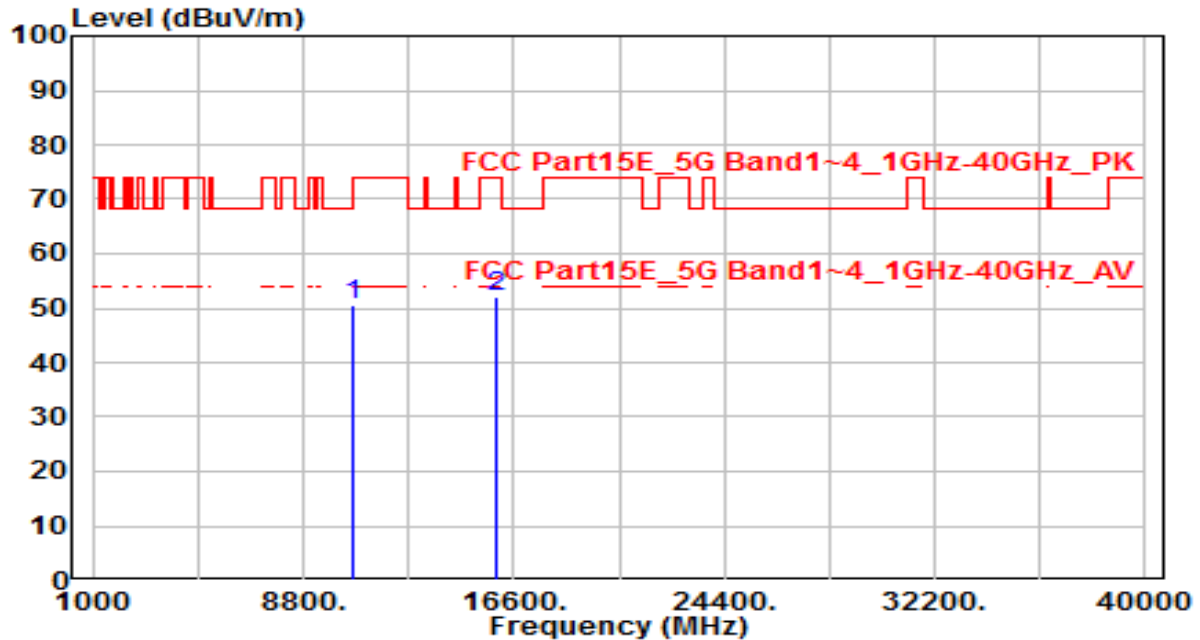


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	31.74	18.77	50.51	-23.49	74.00	150	360	Peak
2	* 15960.000	31.86	20.21	52.07	-21.93	74.00	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	By PoE

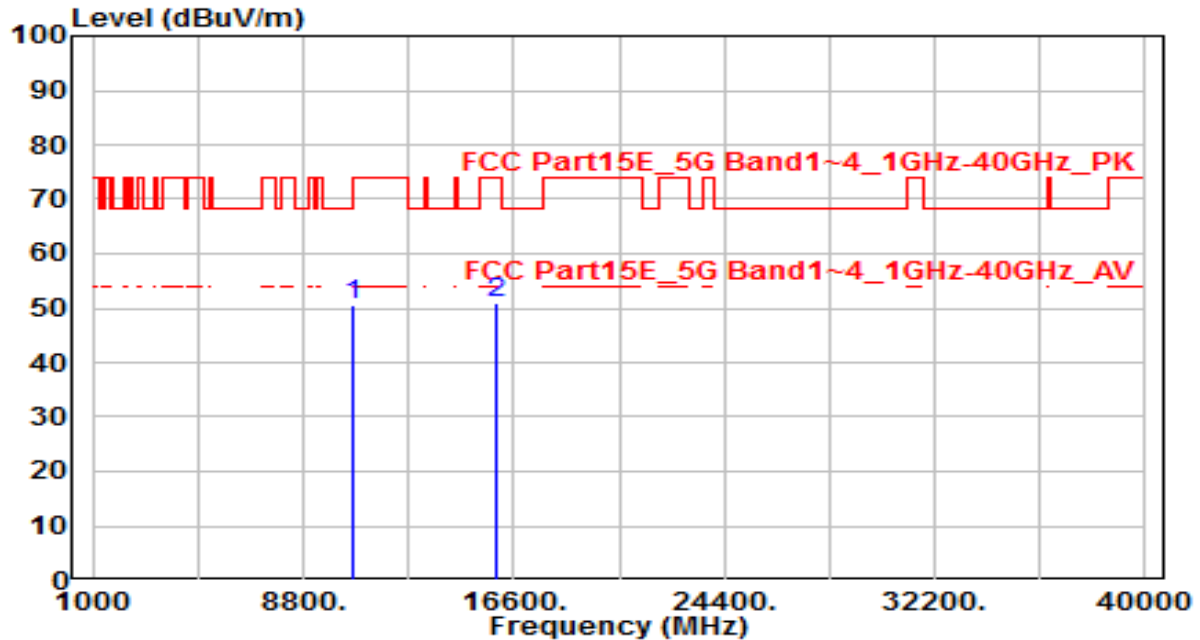


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	31.86	18.77	50.63	-23.37	74.00	150	360	Peak
2	* 15960.000	30.84	20.21	51.05	-22.95	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

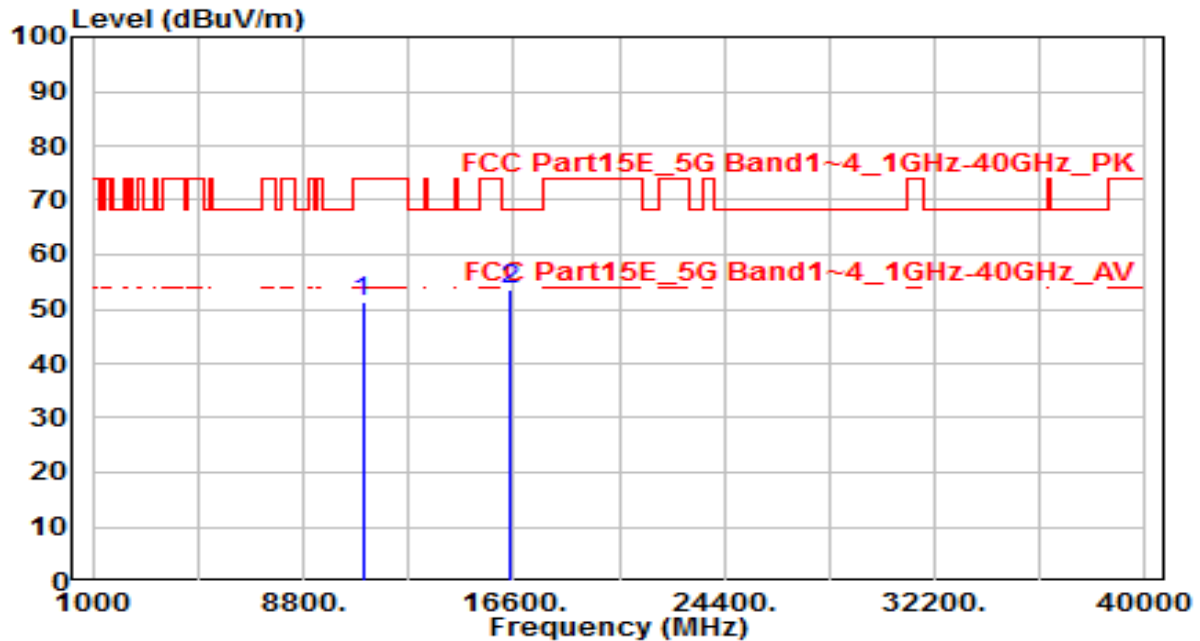


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	31.89	19.28	51.17	-22.83	74.00	150	360	Peak
2	* 16500.000	32.21	21.26	53.47	-14.73	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

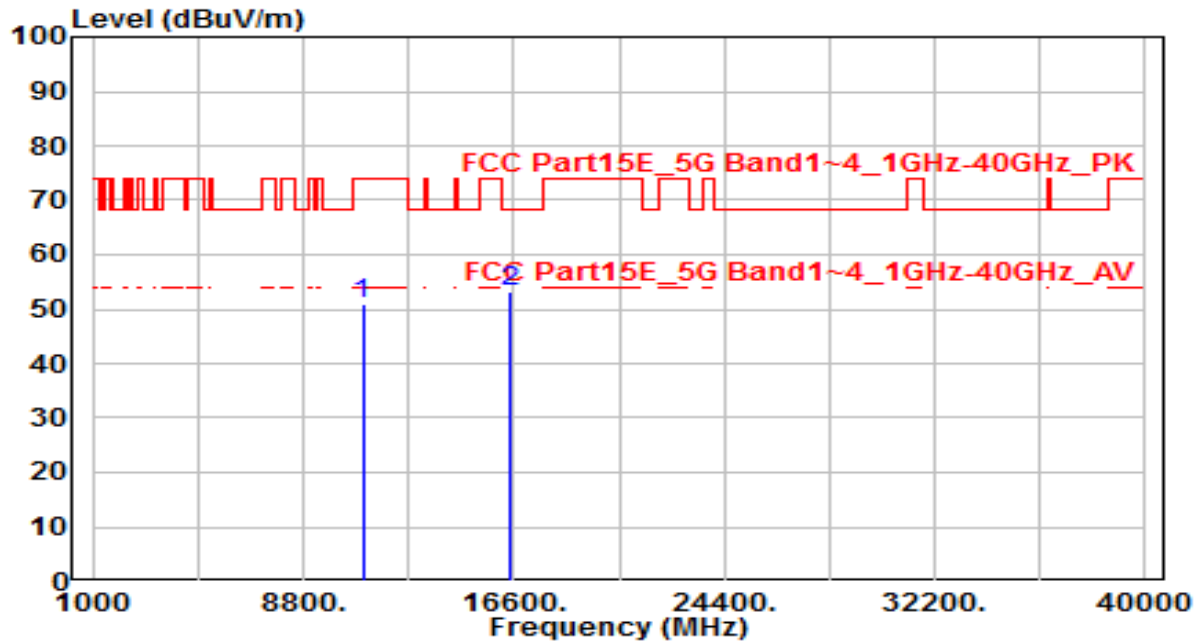


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	31.61	19.28	50.89	-23.11	74.00	150	360	Peak
2	* 16500.000	31.80	21.26	53.06	-15.14	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

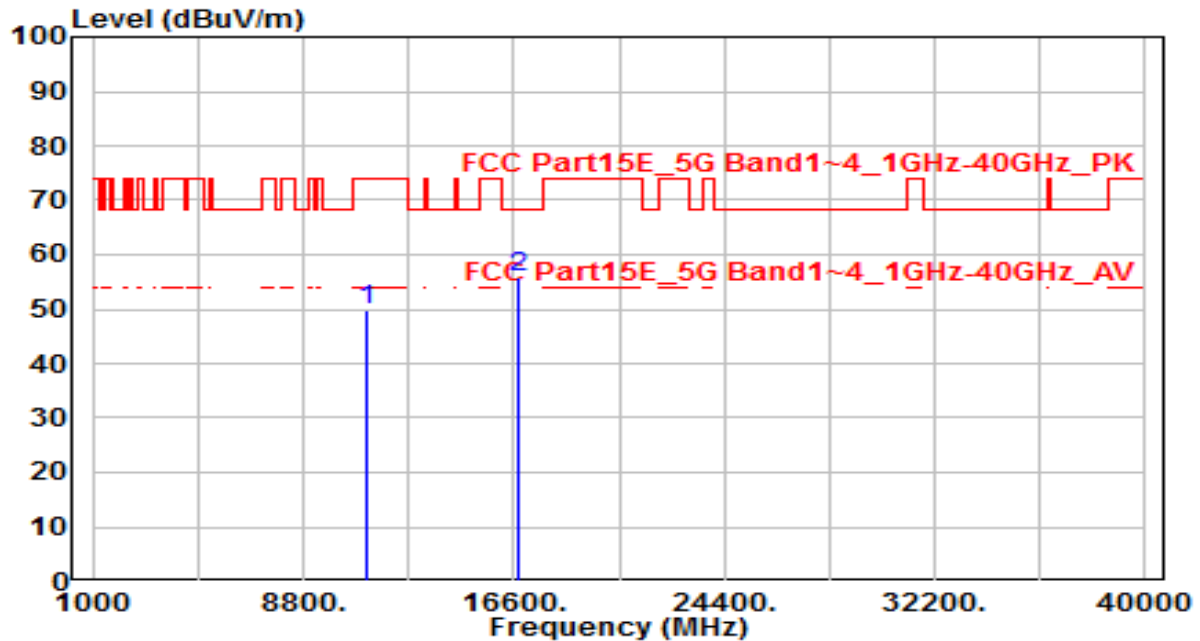


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	30.15	19.53	49.68	-24.32	74.00	150	360	Peak
2	* 16740.000	33.00	22.82	55.82	-12.38	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

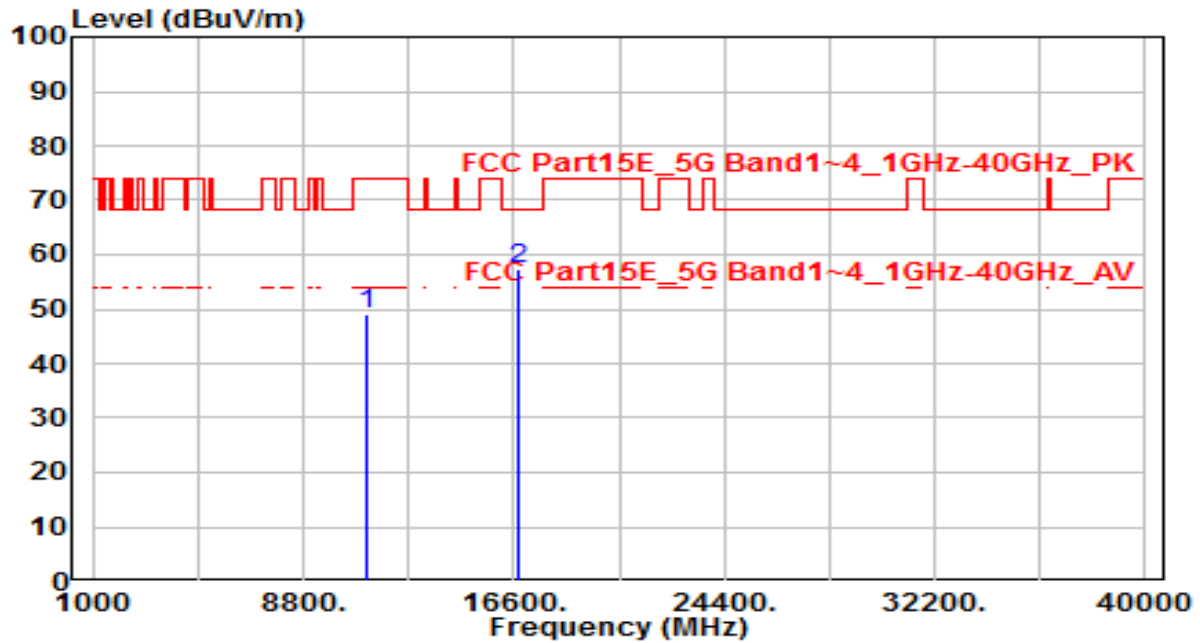


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	29.42	19.53	48.95	-25.05	74.00	150	360	Peak
2	* 16740.000	34.64	22.82	57.46	-10.74	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

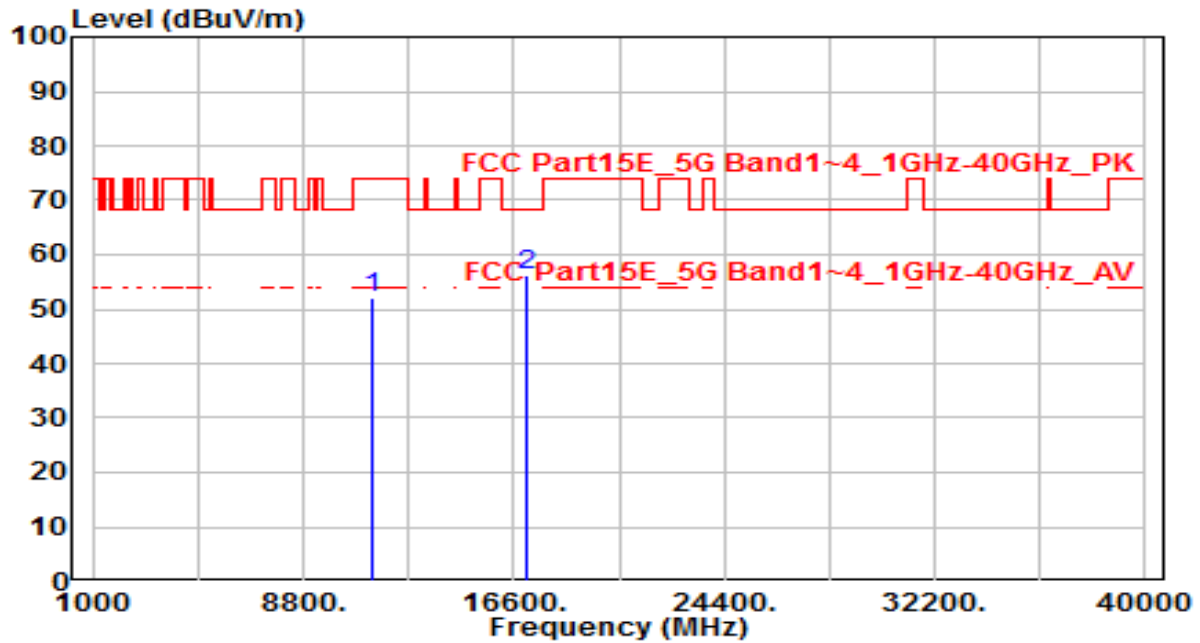


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	32.07	19.90	51.97	-22.03	74.00	150	360	Peak
2	* 17100.000	30.87	25.18	56.05	-12.15	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

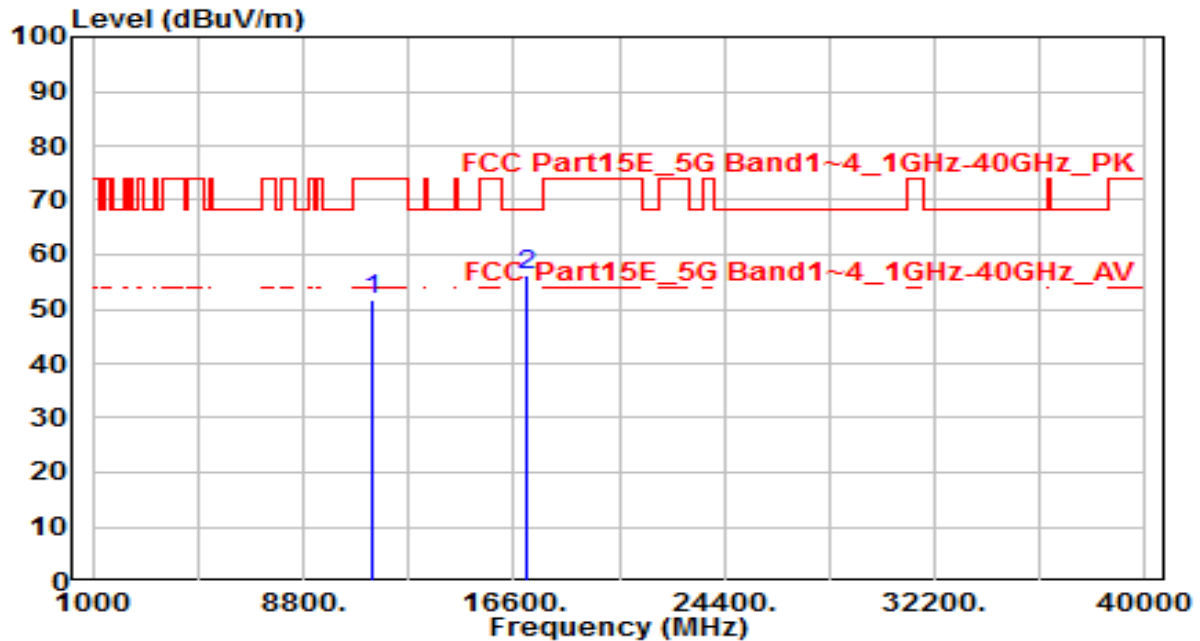


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	31.93	19.90	51.83	-22.17	74.00	150	360	Peak
2	* 17100.000	31.21	25.18	56.39	-11.81	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

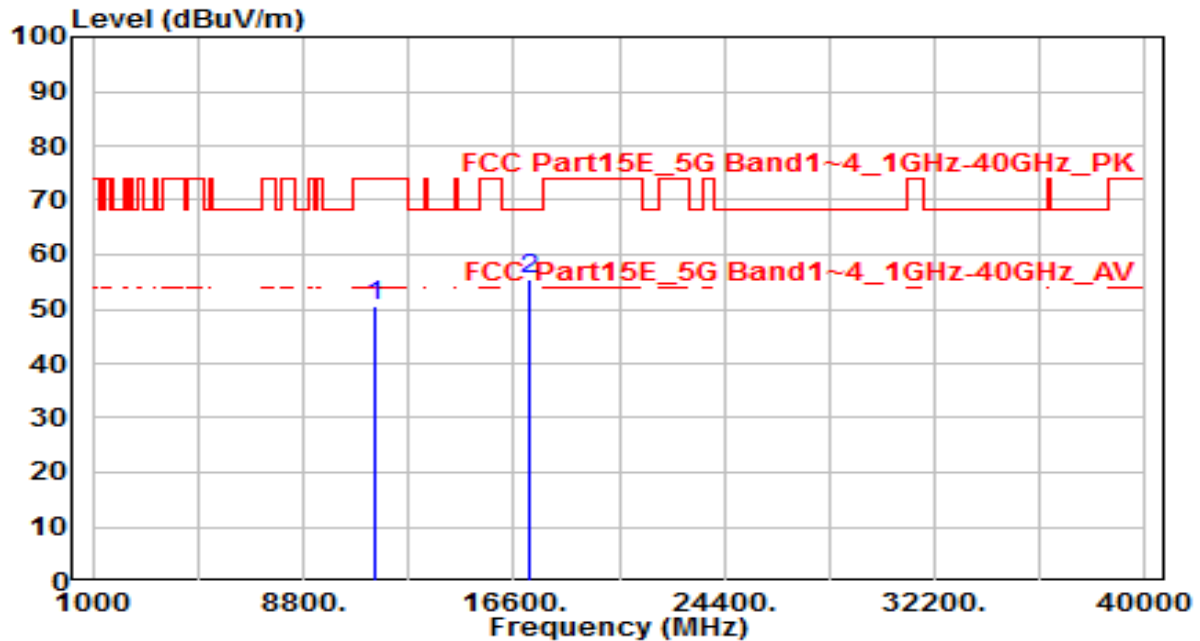


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	30.77	19.96	50.72	-23.28	74.00	150	360	Peak
2	* 17160.000	29.97	25.58	55.55	-12.65	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

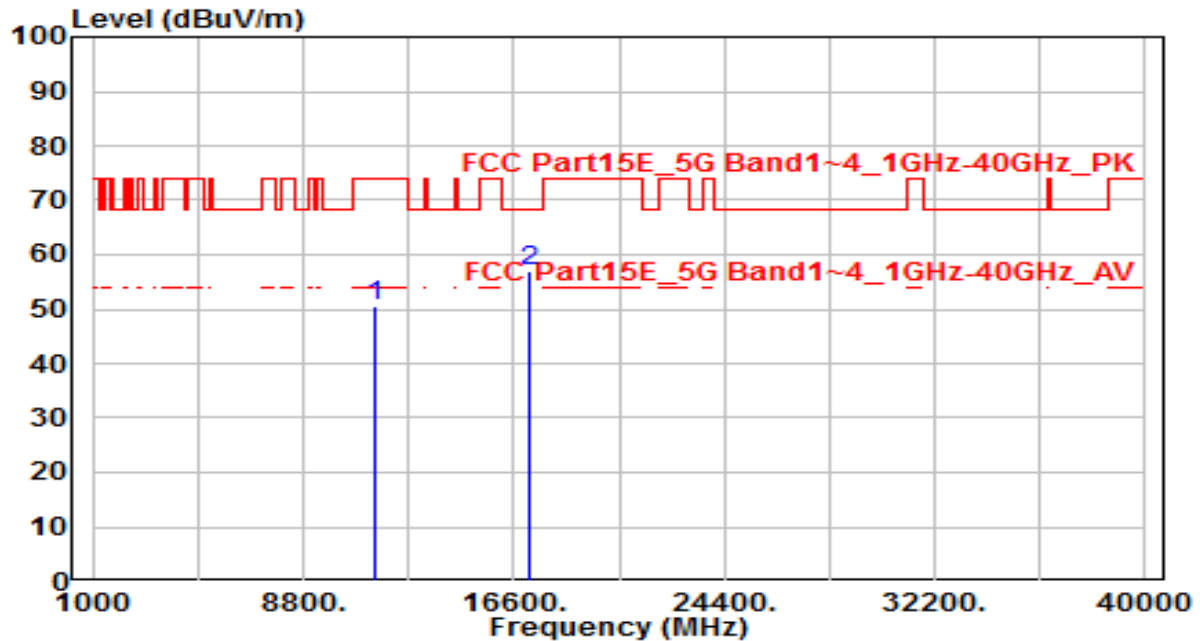


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	30.62	19.96	50.58	-23.42	74.00	150	360	Peak
2	* 17160.000	31.24	25.58	56.82	-11.38	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

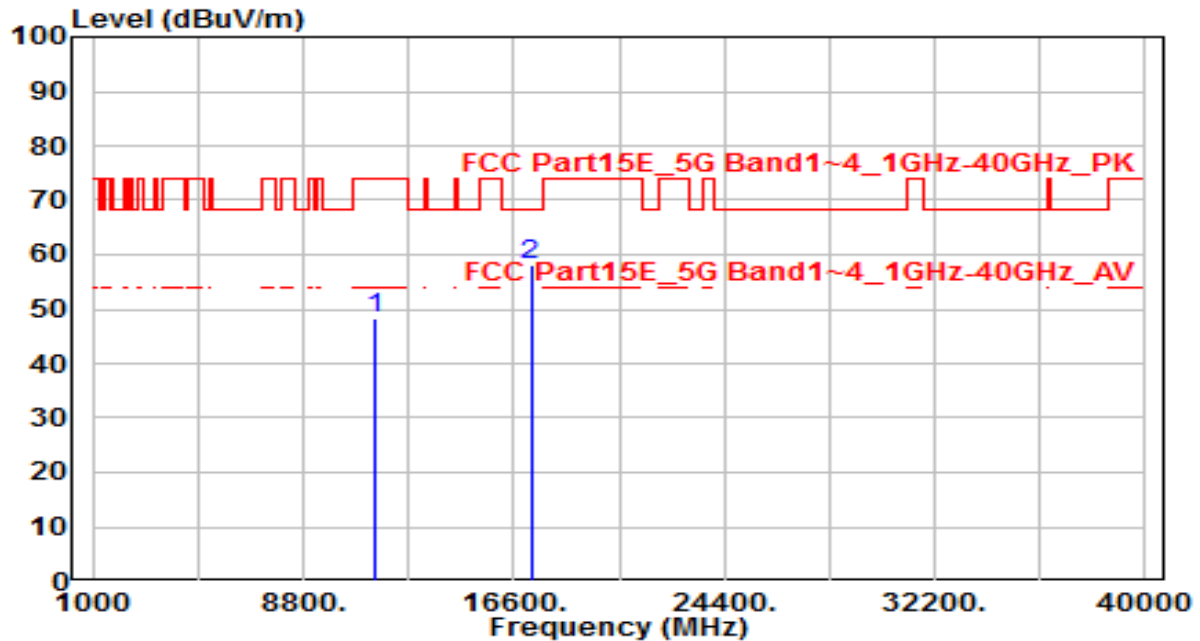


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	28.39	20.03	48.42	-25.58	74.00	150	360	Peak
2	* 17235.000	31.88	26.08	57.96	-10.24	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

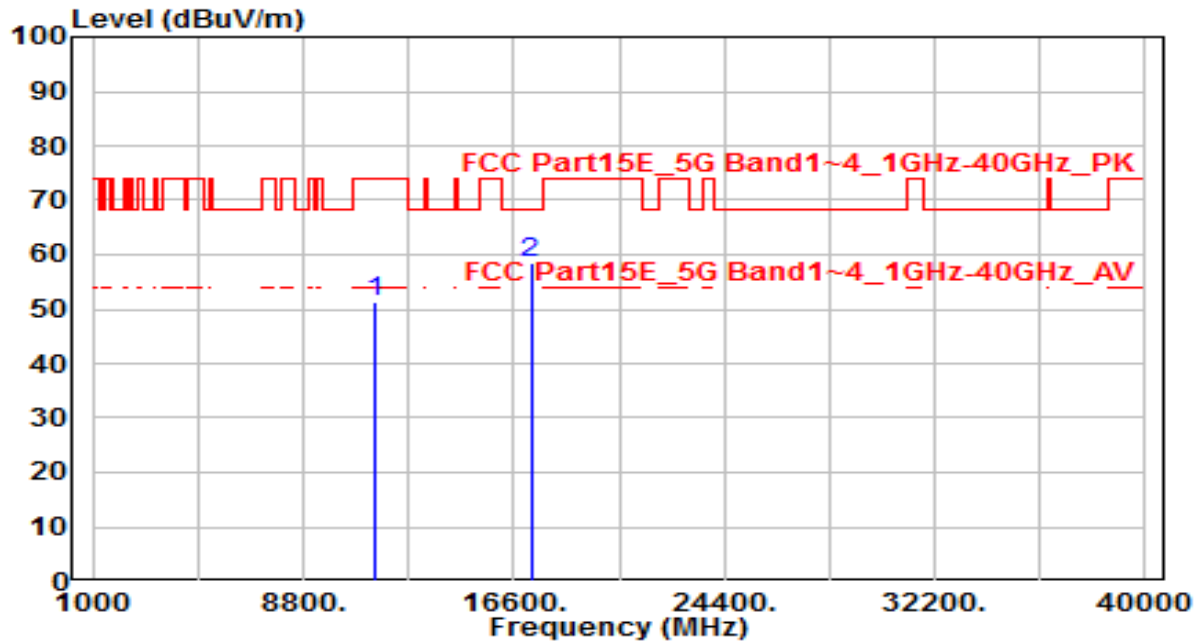


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	31.47	20.03	51.50	-22.50	74.00	150	360	Peak
2	* 17235.000	32.35	26.08	58.42	-9.78	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

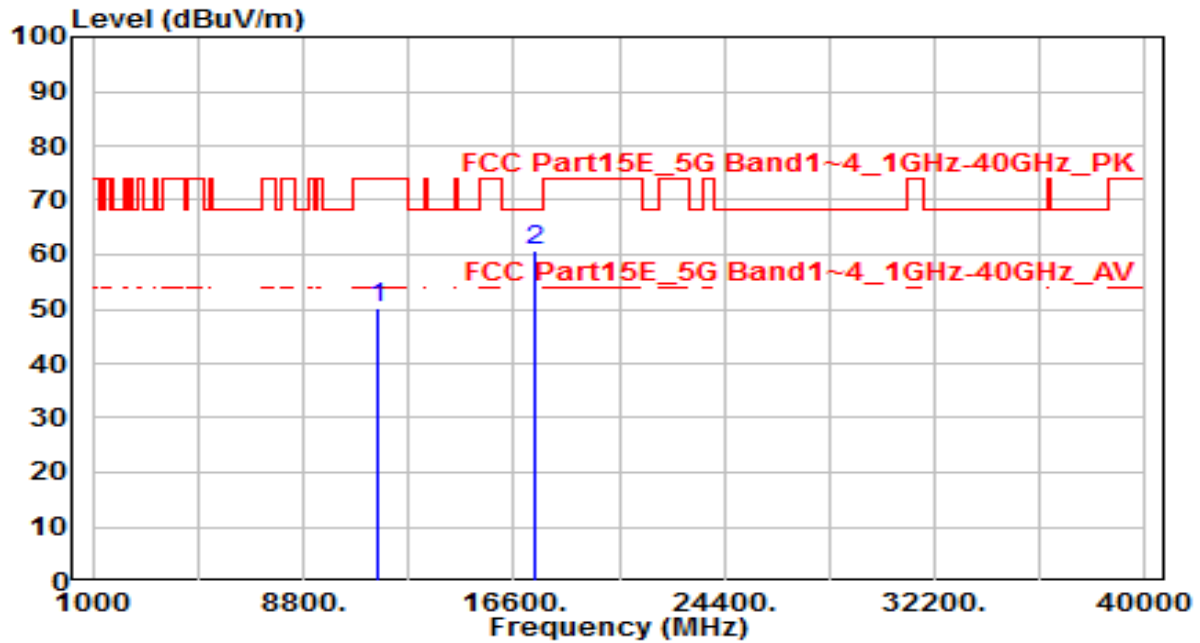


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	30.45	19.89	50.34	-23.66	74.00	150	360	Peak
2	* 17355.000	34.05	26.87	60.92	-7.28	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

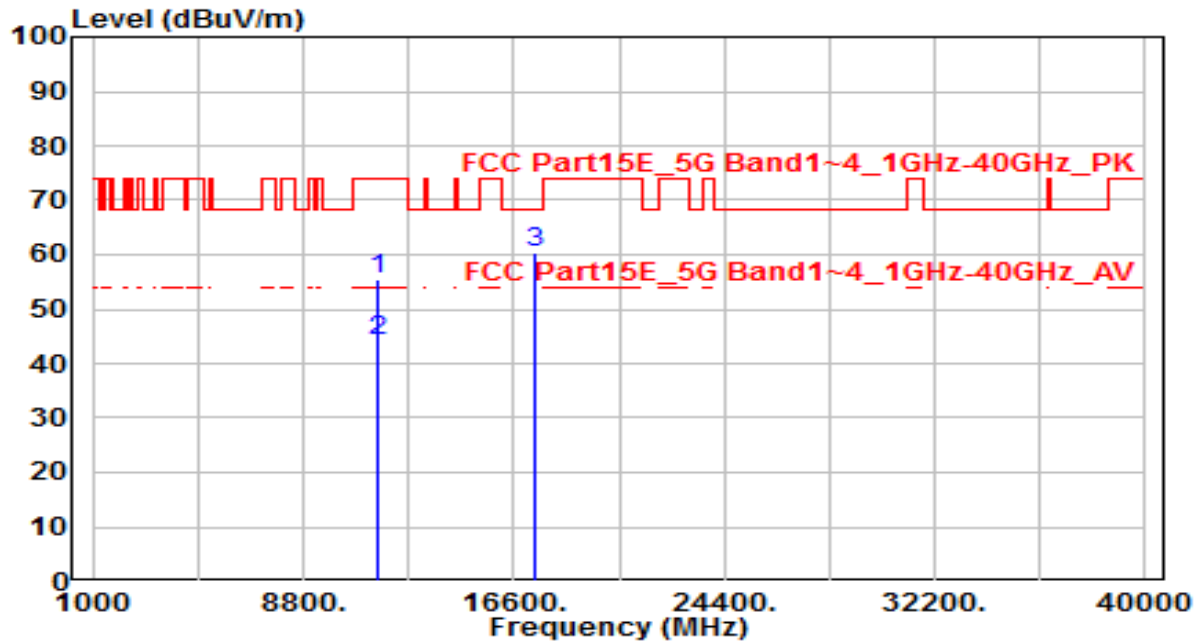


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	35.48	19.89	55.38	-18.62	74.00	150	110	Peak
2	*	11570.000	24.18	19.89	44.07	-9.93	54.00	150	110	Average
3	*	17355.000	33.61	26.87	60.49	-7.71	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

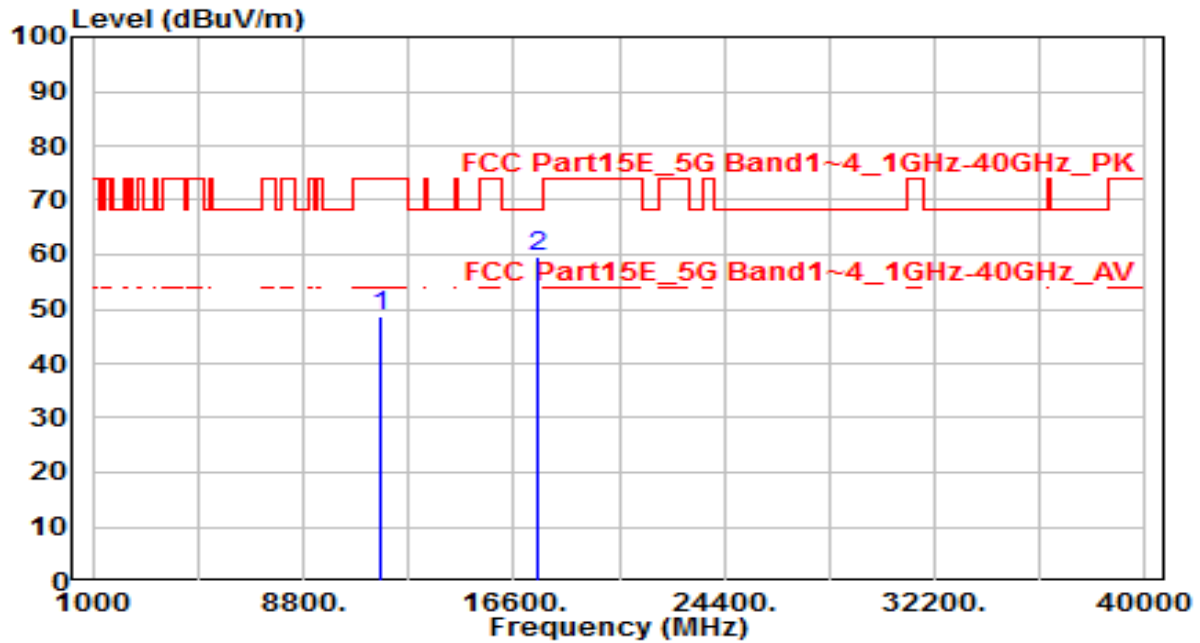


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	28.83	19.71	48.54	-25.46	74.00	150	360	Peak
2	* 17475.000	31.91	27.67	59.58	-8.62	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

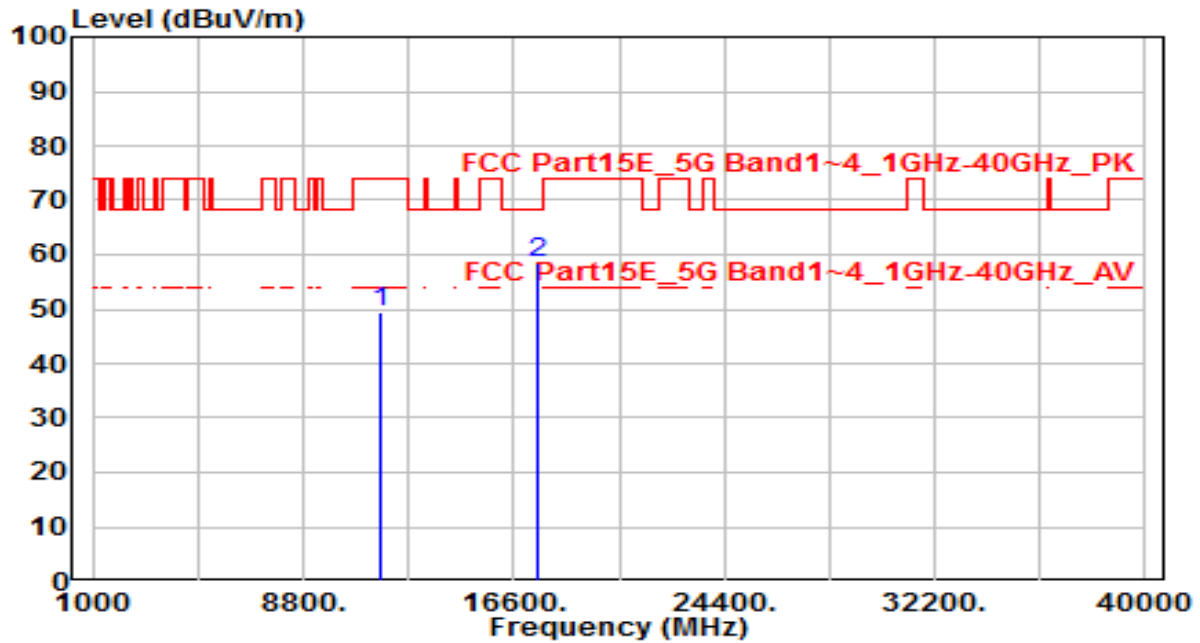


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	29.78	19.71	49.49	-24.51	74.00	150	360	Peak
2	* 17475.000	30.97	27.67	58.64	-9.56	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	By PoE

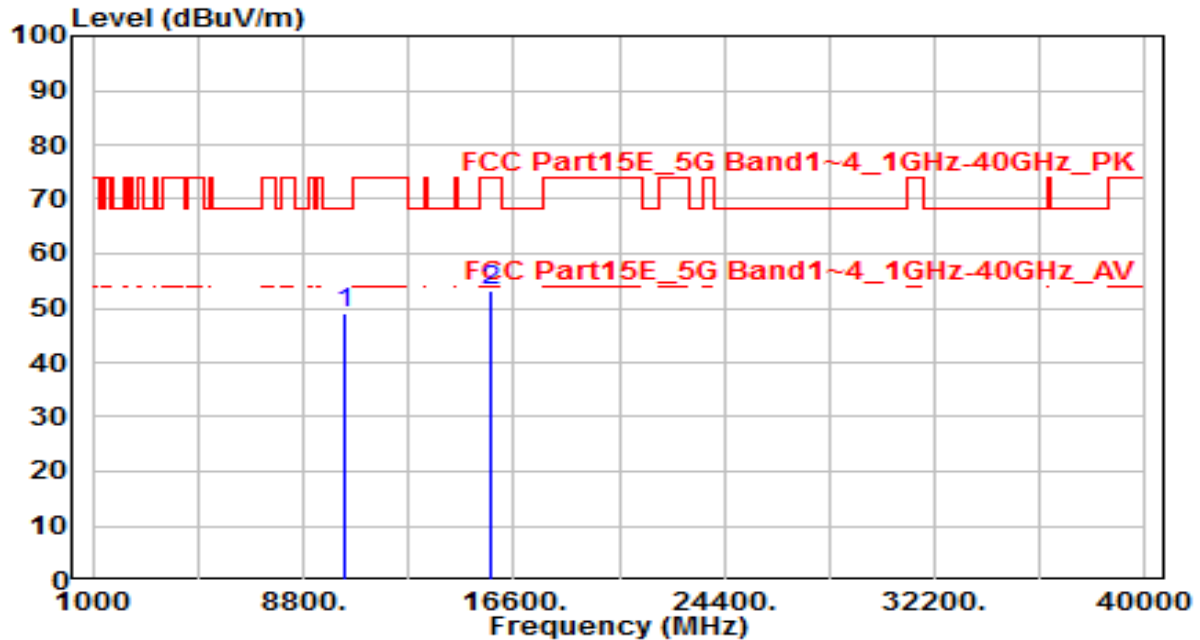


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	31.00	18.09	49.09	-19.11	68.20	150	360	Peak
2		15770.000	32.56	20.68	53.24	-20.76	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	By PoE

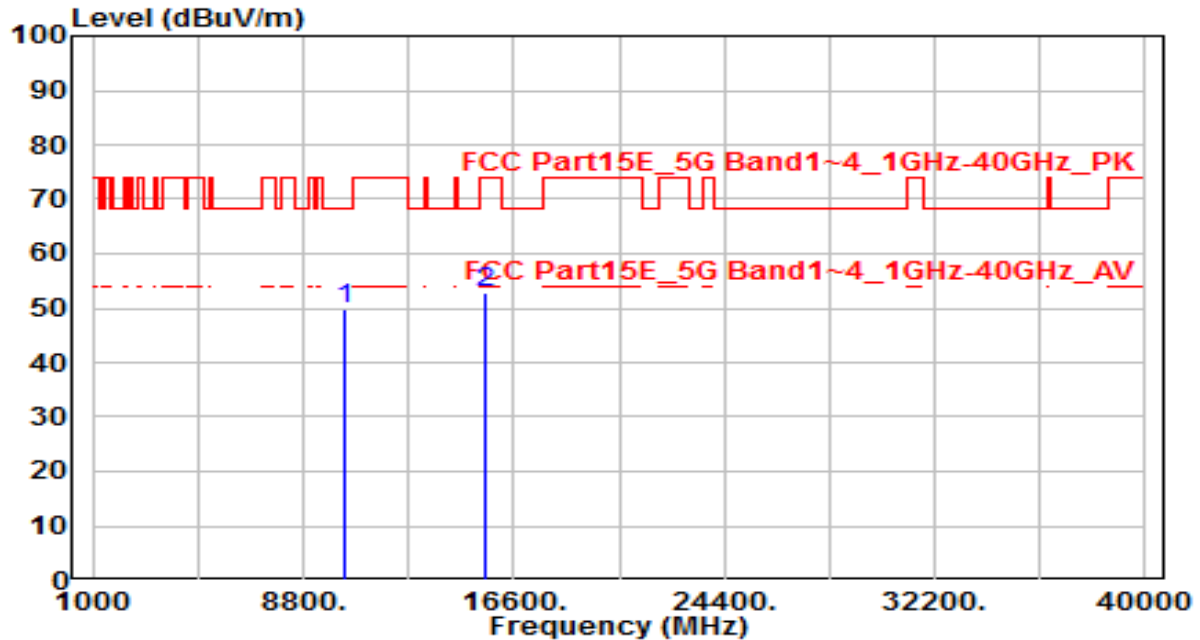


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	31.73	18.09	49.82	-18.38	68.20	150	360	Peak
2		15570.000	31.57	21.18	52.74	-21.26	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1+2+3	Test Voltage	By PoE

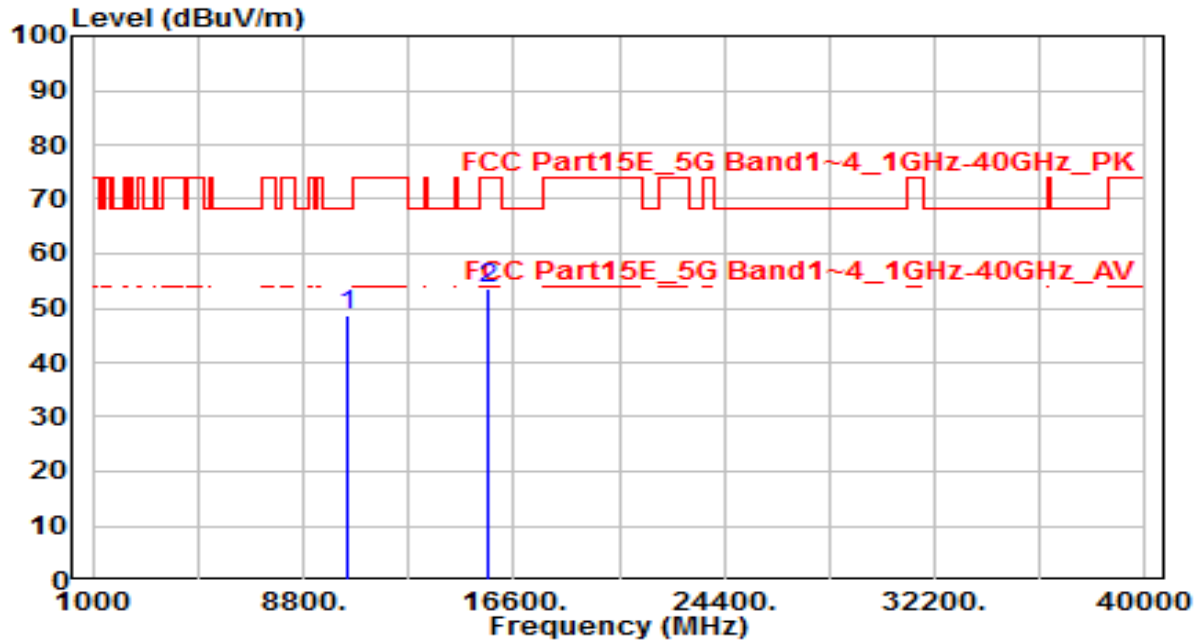


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	30.16	18.41	48.57	-19.63	68.20	150	360	Peak
2		15690.000	32.62	20.88	53.50	-20.50	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1+2+3	Test Voltage	By PoE

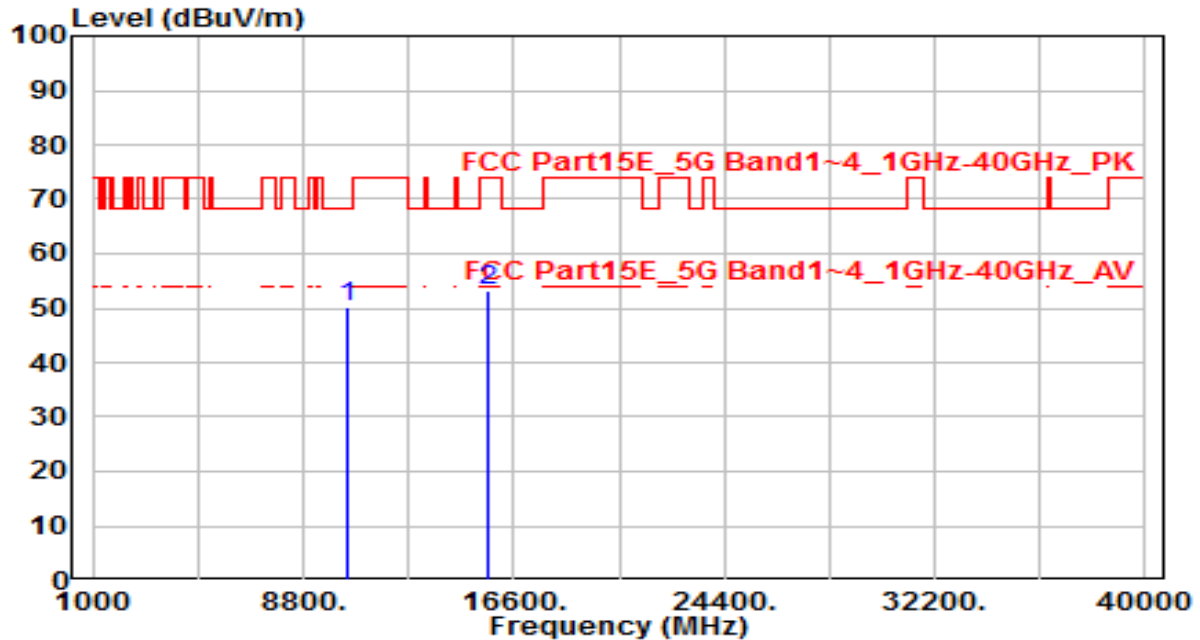


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	31.66	18.41	50.07	-18.13	68.20	150	360	Peak
2		15690.000	32.51	20.88	53.38	-20.62	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1+2+3	Test Voltage	By PoE

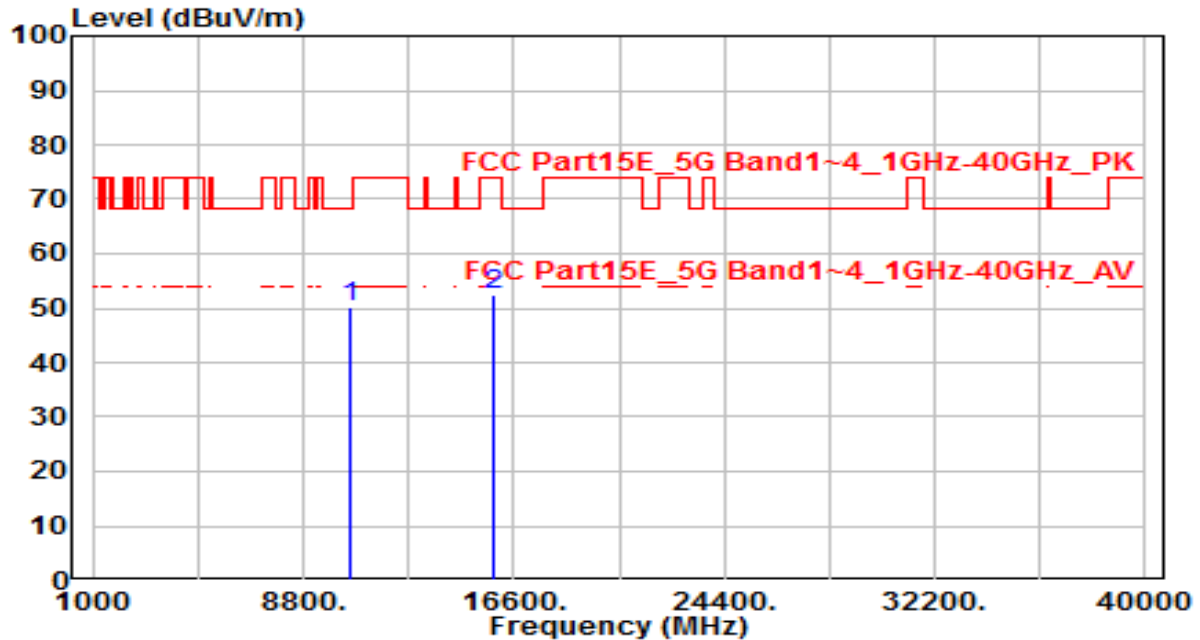


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	31.62	18.63	50.25	-17.95	68.20	150	360	Peak
2		15810.000	31.93	20.58	52.51	-21.49	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1+2+3	Test Voltage	By PoE

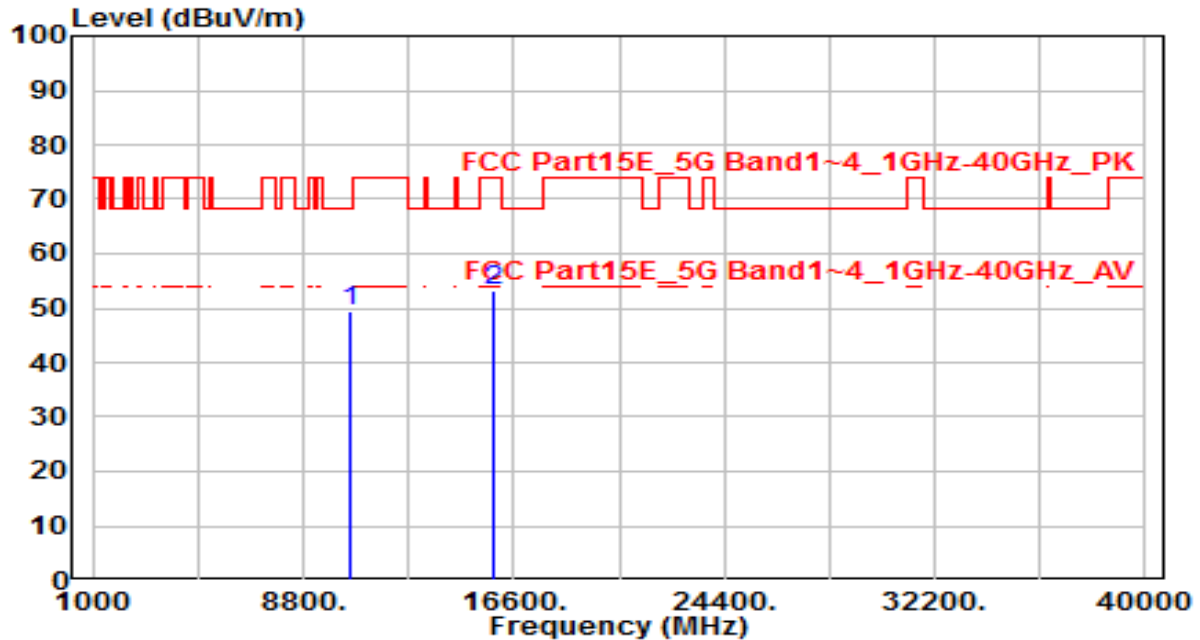


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	30.98	18.63	49.61	-18.59	68.20	150	360	Peak
2		15810.000	32.81	20.58	53.39	-20.61	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	By PoE

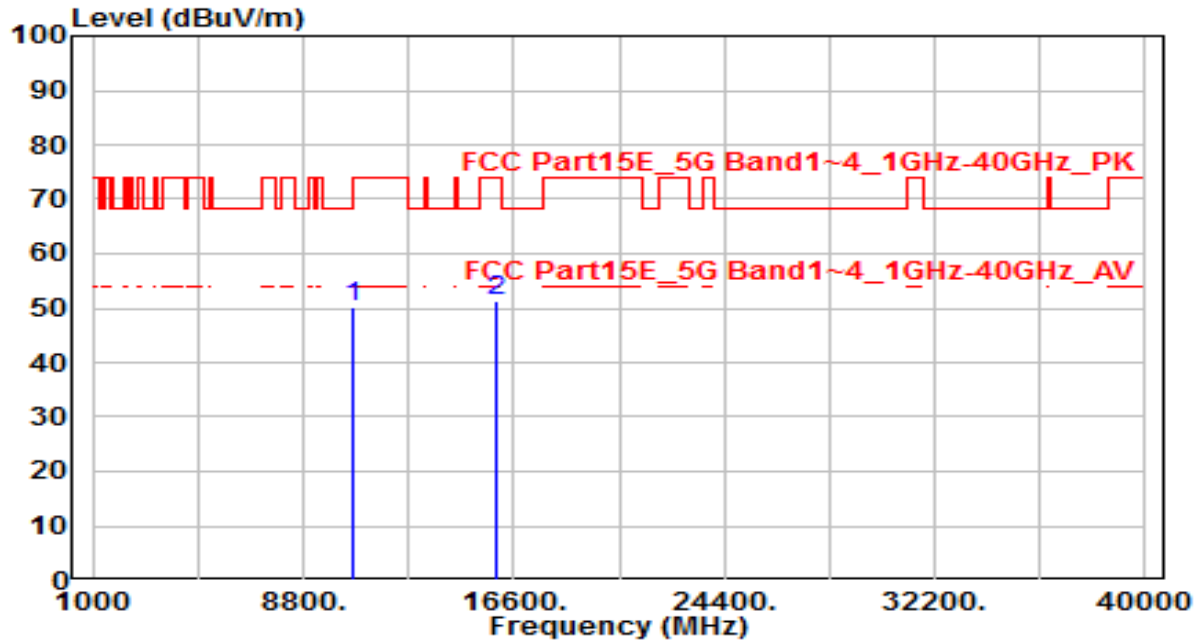


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	31.40	18.74	50.14	-23.86	74.00	150	360	Peak
2	* 15930.000	31.11	20.28	51.40	-22.60	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	By PoE

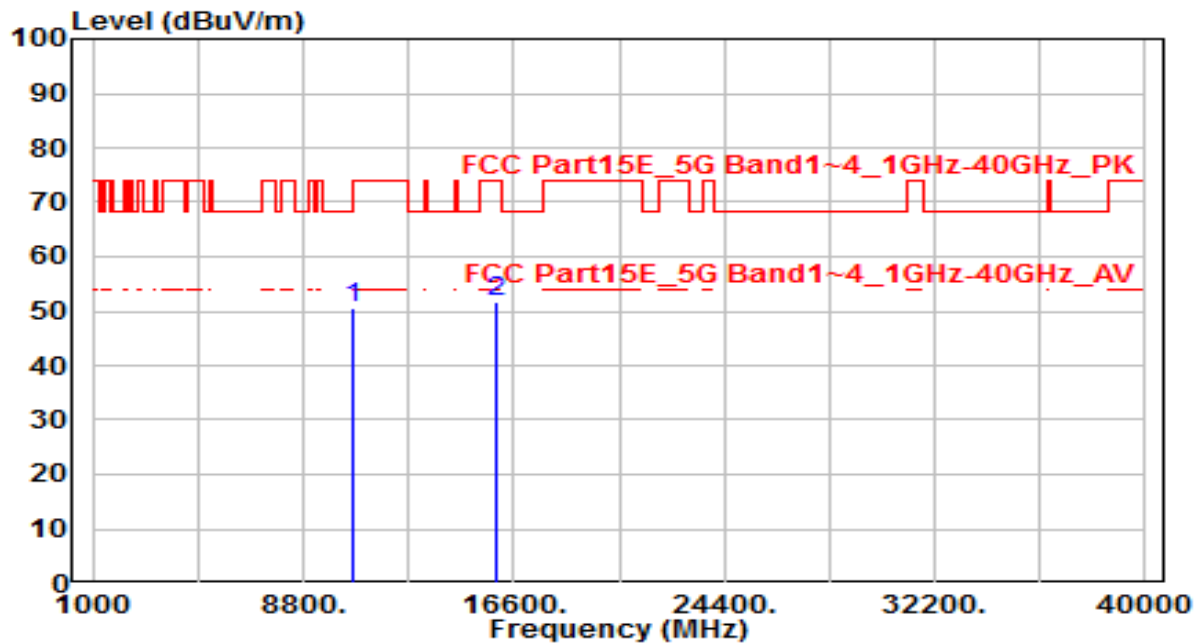


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	31.68	18.74	50.42	-23.58	74.00	150	360	Peak
2	* 15930.000	31.49	20.28	51.77	-22.23	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

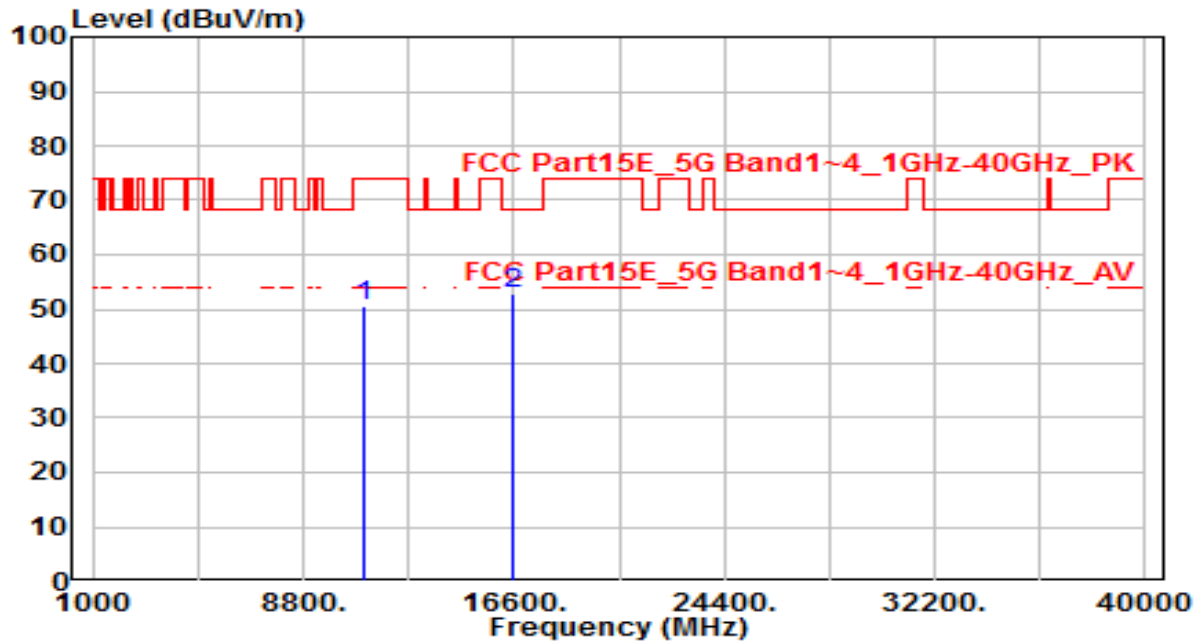


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	31.39	19.31	50.70	-23.30	74.00	150	360	Peak
2	* 16530.000	31.41	21.46	52.86	-15.34	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

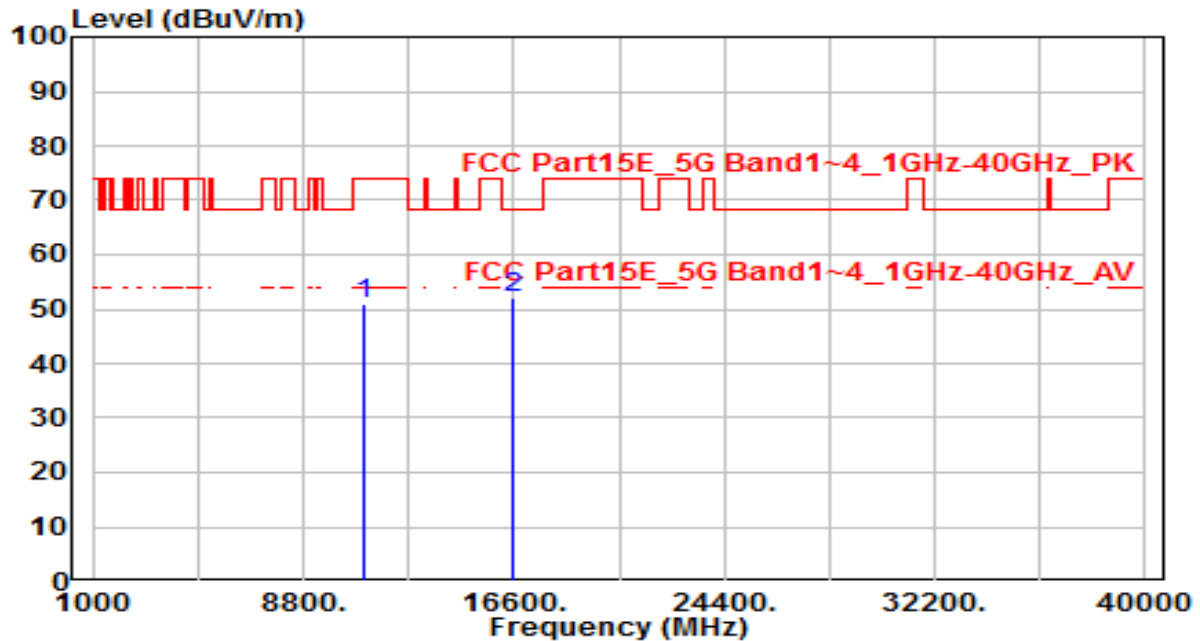


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	31.73	19.31	51.04	-22.96	74.00	150	360	Peak
2	* 16530.000	30.72	21.46	52.17	-16.03	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

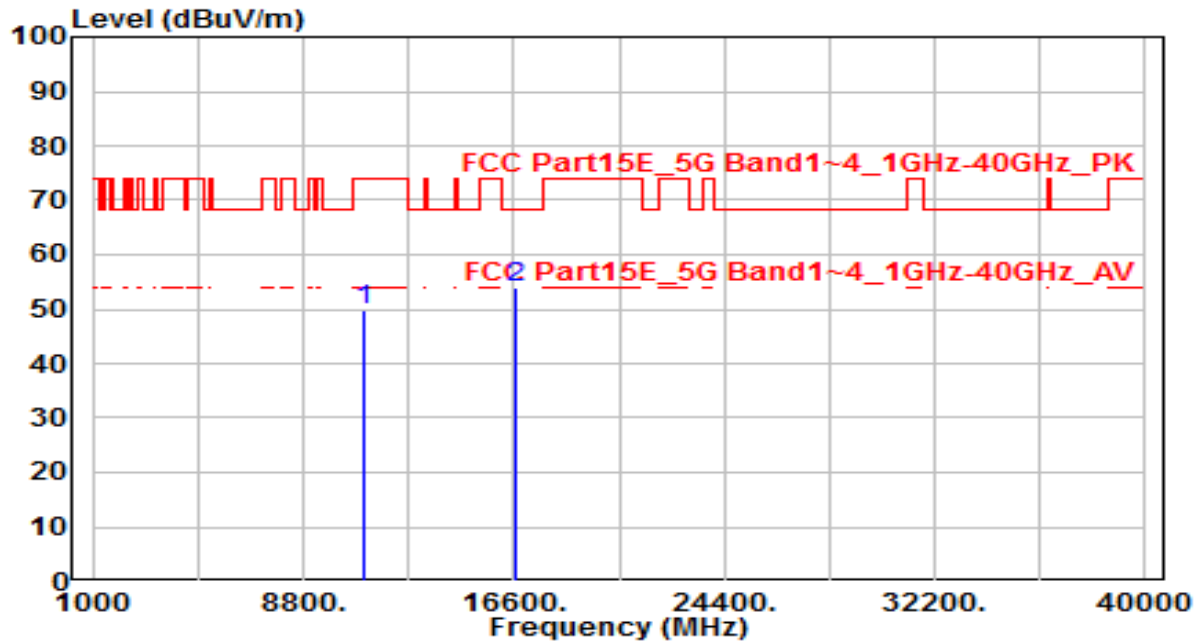


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	30.25	19.43	49.68	-24.32	74.00	150	360	Peak
2	* 16650.000	31.78	22.24	54.01	-14.19	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

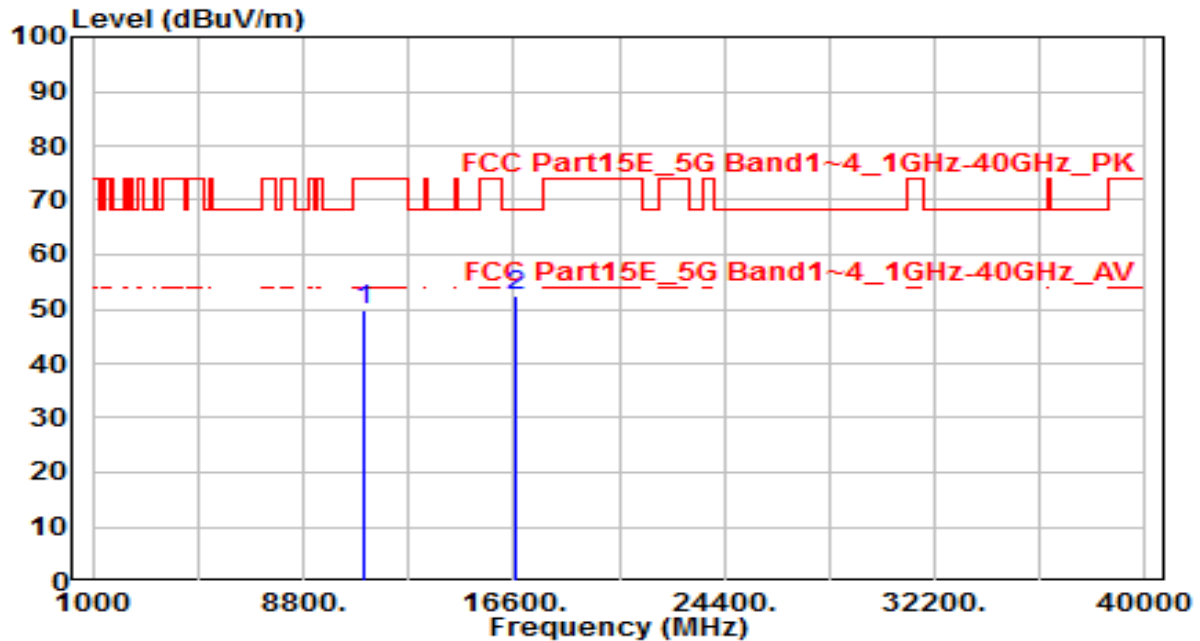


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	30.29	19.43	49.72	-24.28	74.00	150	360	Peak
2	* 16650.000	30.36	22.24	52.59	-15.61	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

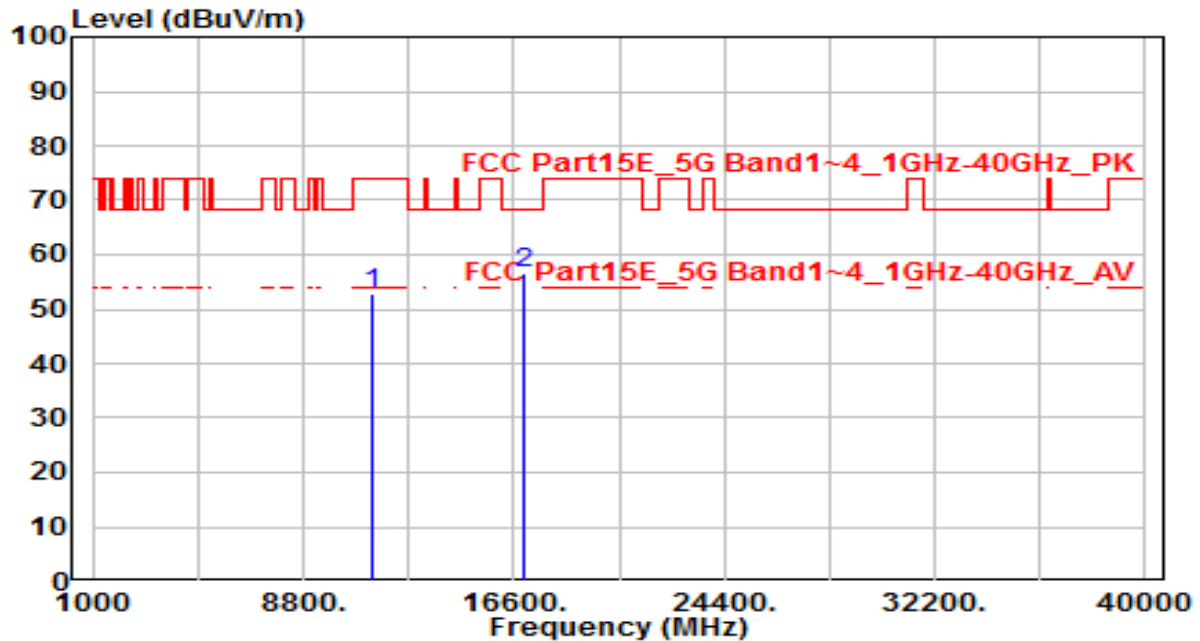


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	32.87	19.80	52.67	-21.33	74.00	150	360	Peak
2	* 17010.000	32.11	24.58	56.68	-11.52	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

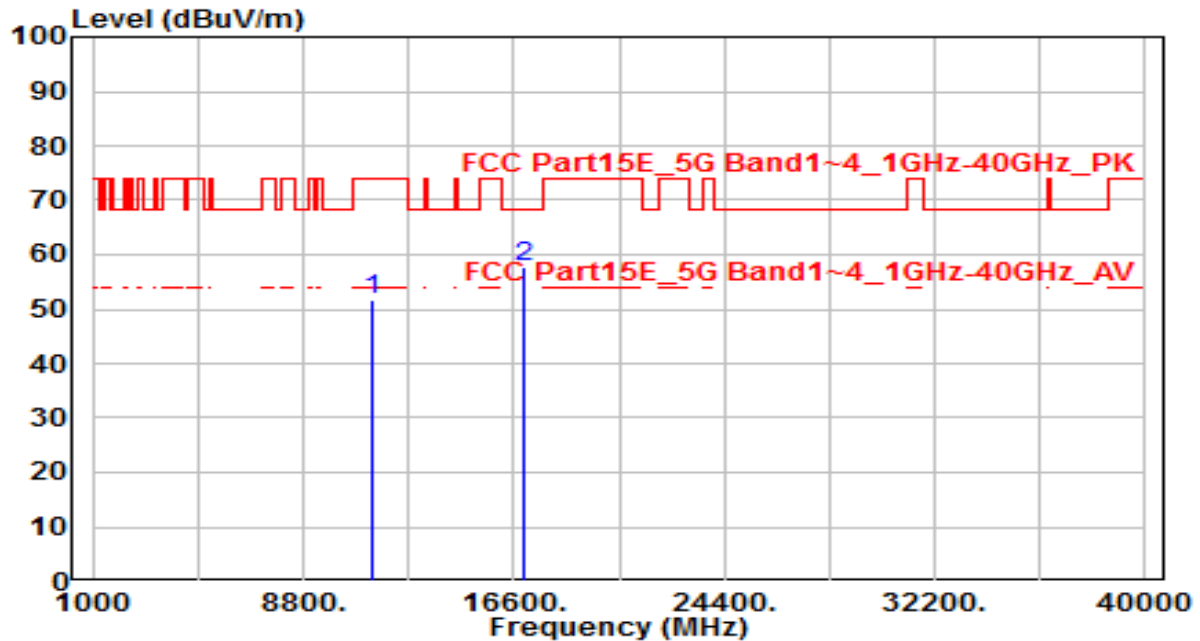


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	32.04	19.80	51.85	-22.15	74.00	150	360	Peak
2	* 17010.000	33.07	24.58	57.65	-10.55	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

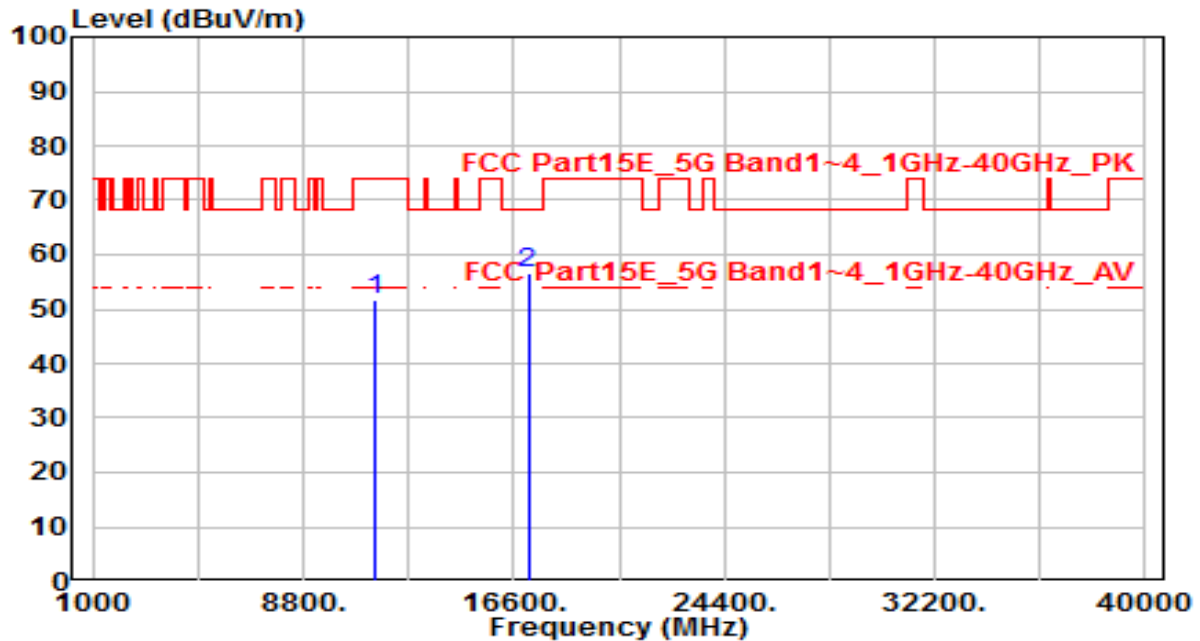


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	31.81	19.93	51.74	-22.26	74.00	150	360	Peak
2	* 17130.000	31.24	25.38	56.61	-11.59	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

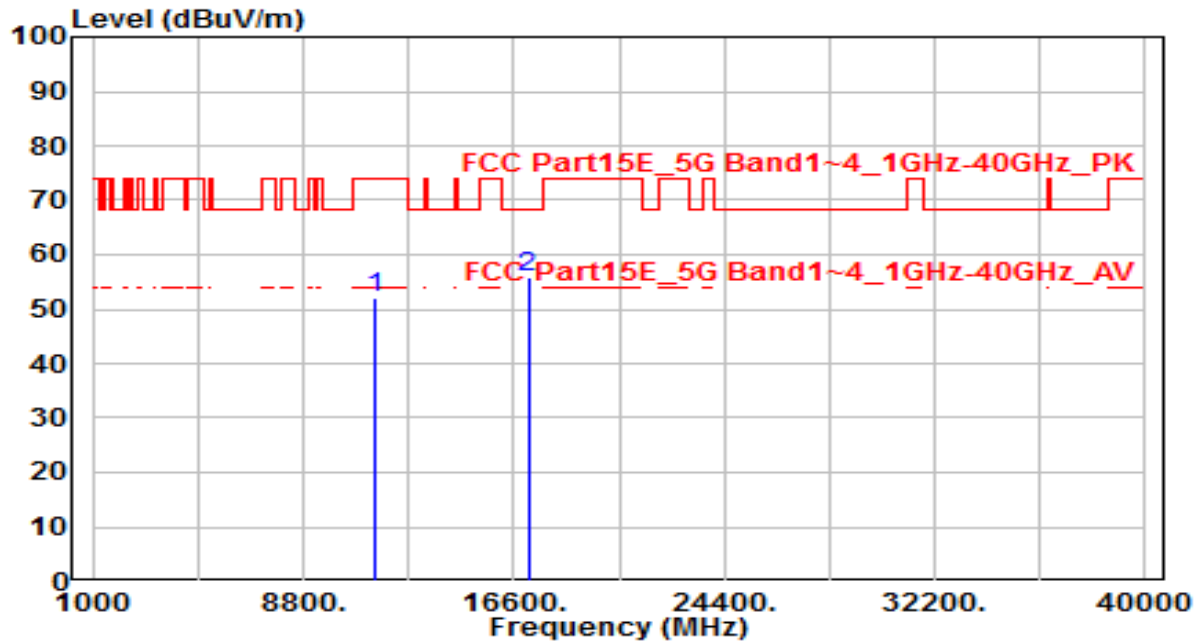


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	32.02	19.93	51.95	-22.05	74.00	150	360	Peak
2	* 17130.000	30.51	25.38	55.89	-12.31	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

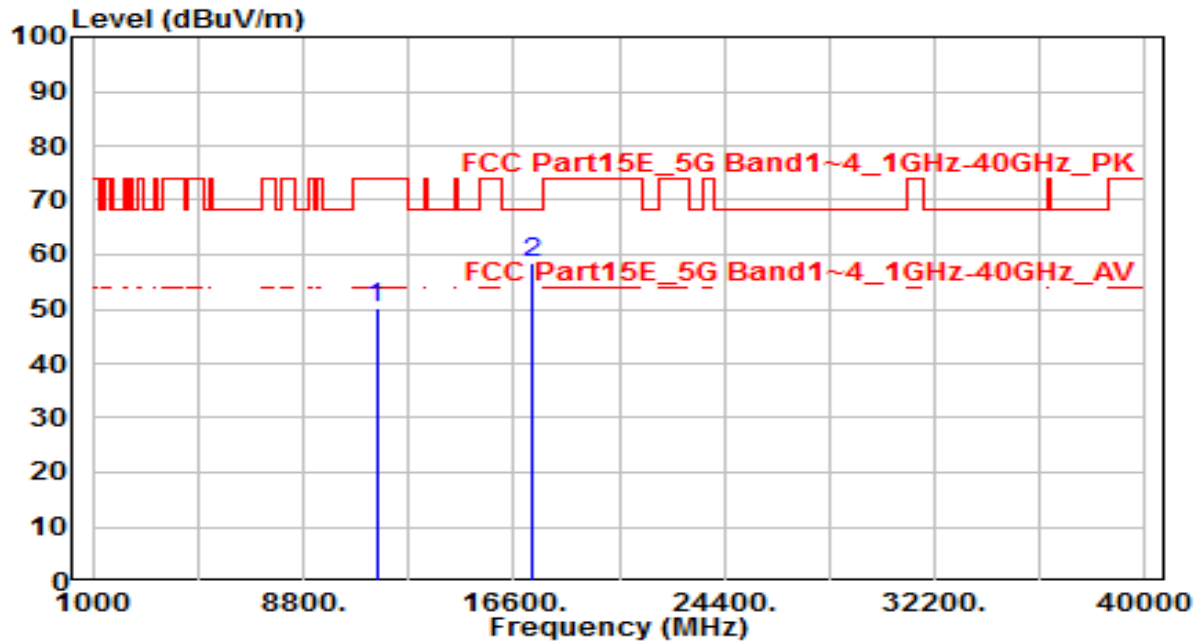


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	30.31	20.03	50.34	-23.66	74.00	150	360	Peak
2	* 17265.000	32.08	26.27	58.36	-9.84	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

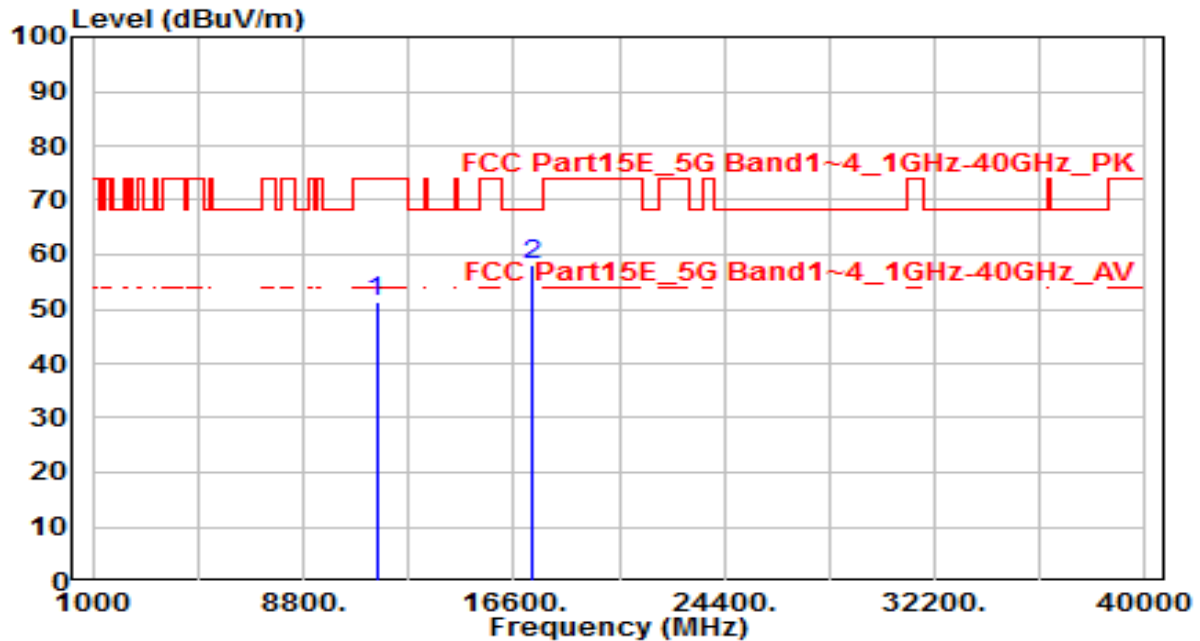


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	31.33	20.03	51.36	-22.64	74.00	150	360	Peak
2	* 17265.000	31.67	26.27	57.94	-10.26	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

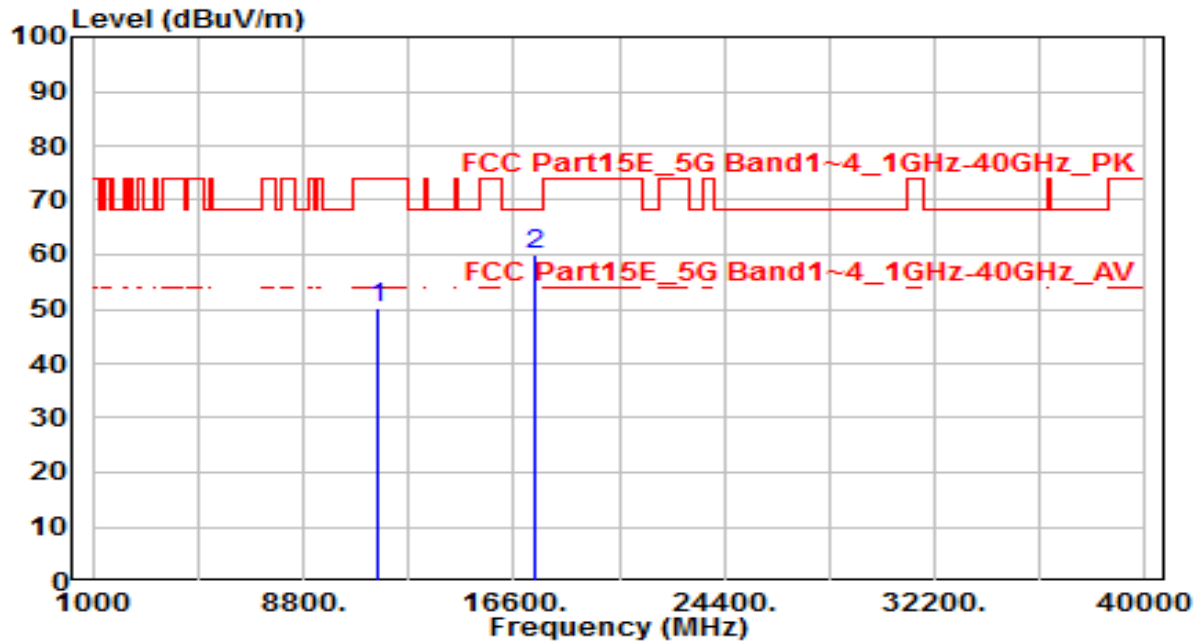


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	30.38	19.85	50.23	-23.77	74.00	150	360	Peak
2	* 17385.000	33.02	27.07	60.09	-8.11	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

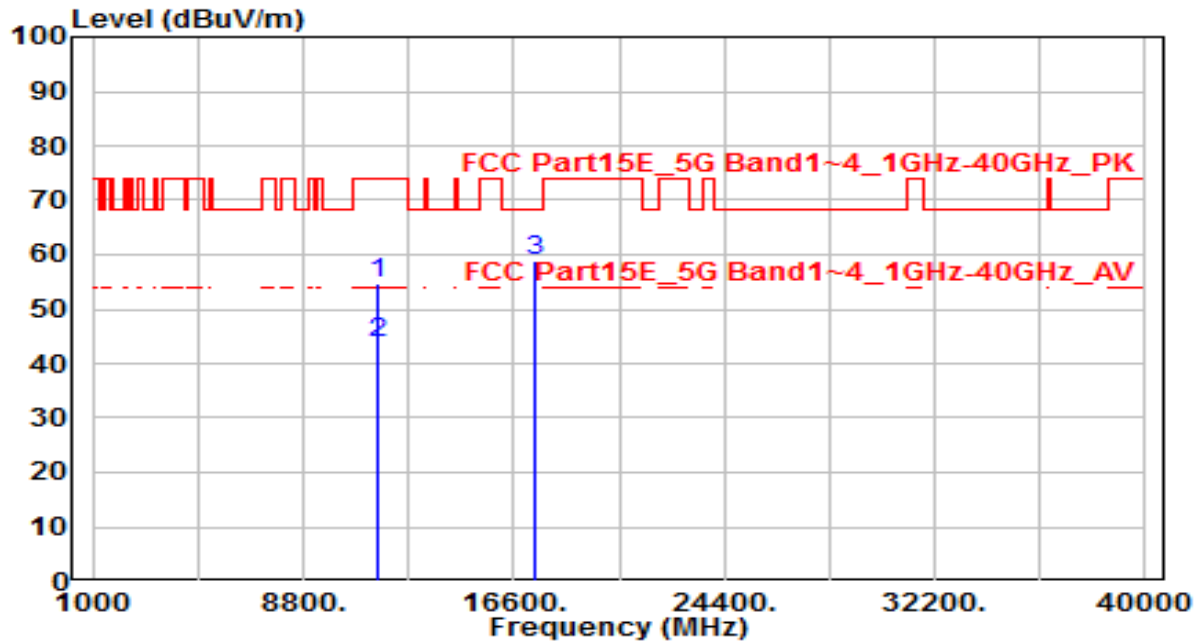


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	34.91	19.85	54.76	-19.24	74.00	150	110	Peak
2	*	11590.000	23.91	19.85	43.76	-10.24	54.00	150	110	Average
3	*	17385.000	31.69	27.07	58.76	-9.44	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	By PoE

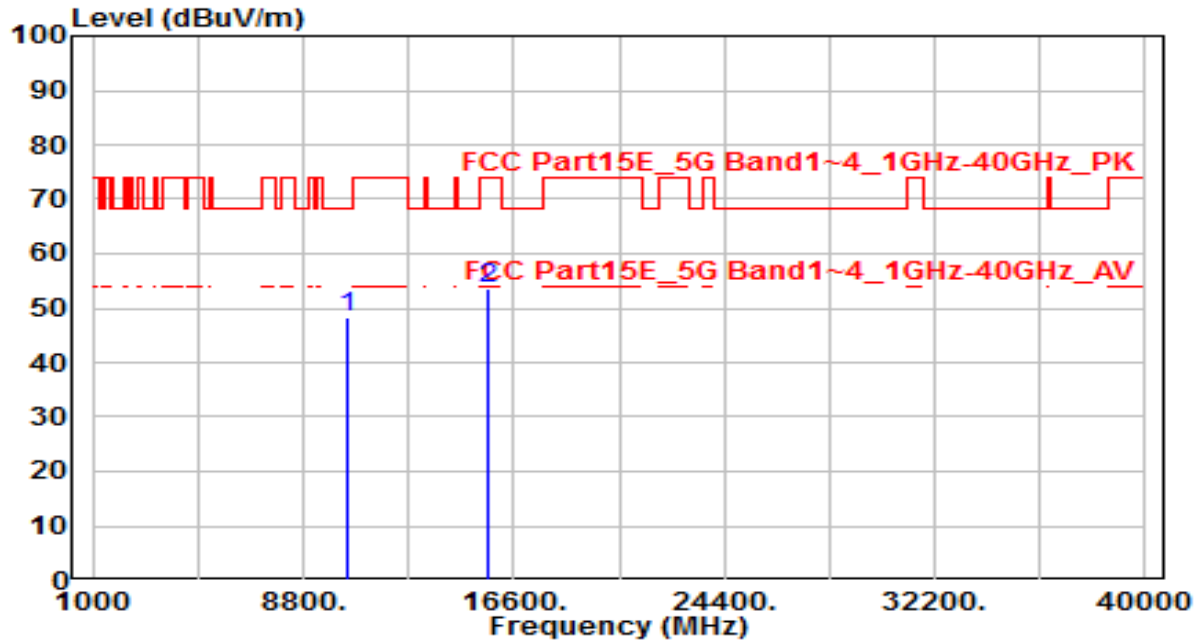


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	30.12	18.25	48.37	-19.83	68.20	150	360	Peak
2		15630.000	32.74	21.03	53.77	-20.23	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	By PoE

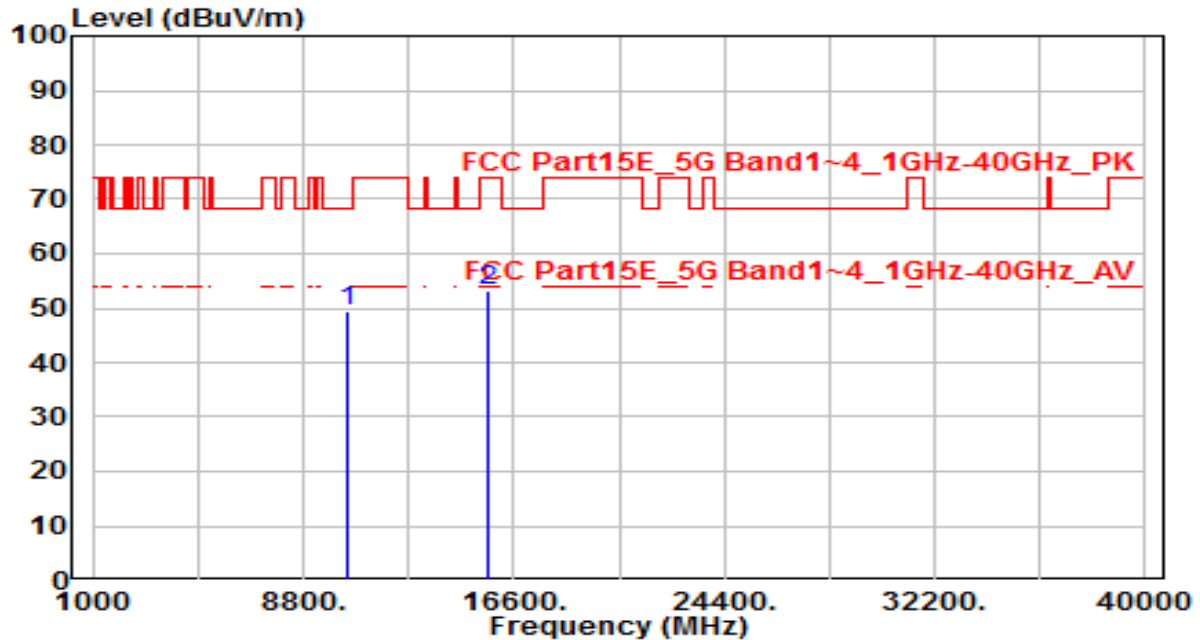


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	31.07	18.25	49.32	-18.88	68.20	150	360	Peak
2		15630.000	32.29	21.03	53.31	-20.69	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	By PoE

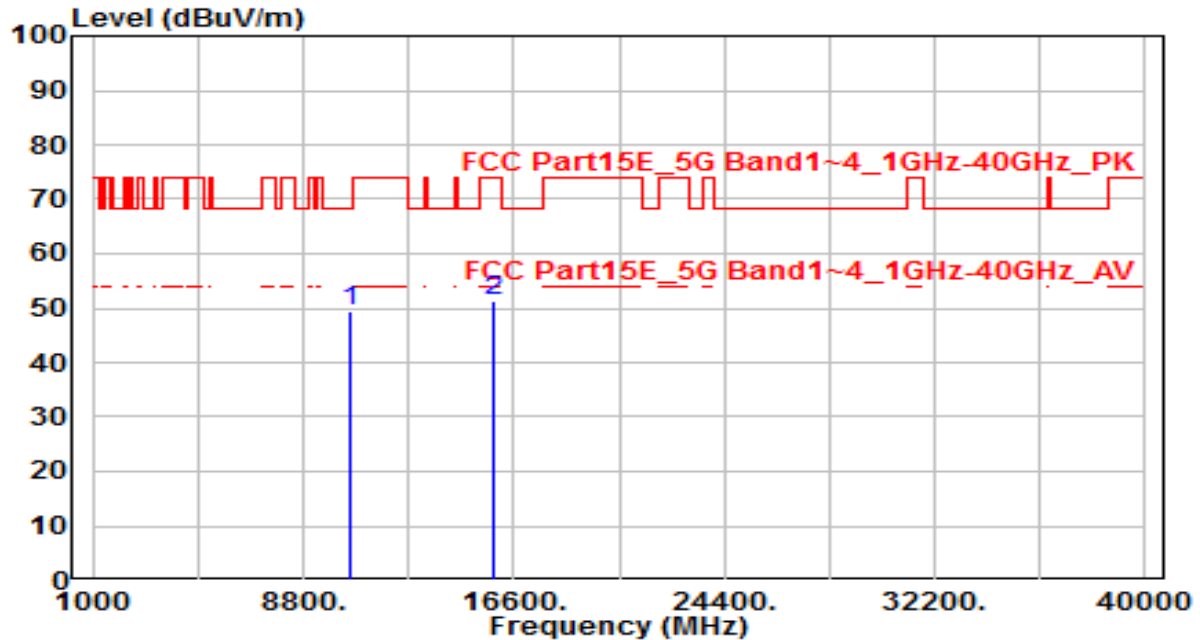


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	30.77	18.68	49.46	-18.74	68.20	150	360	Peak
2		15870.000	30.81	20.43	51.24	-22.76	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	By PoE

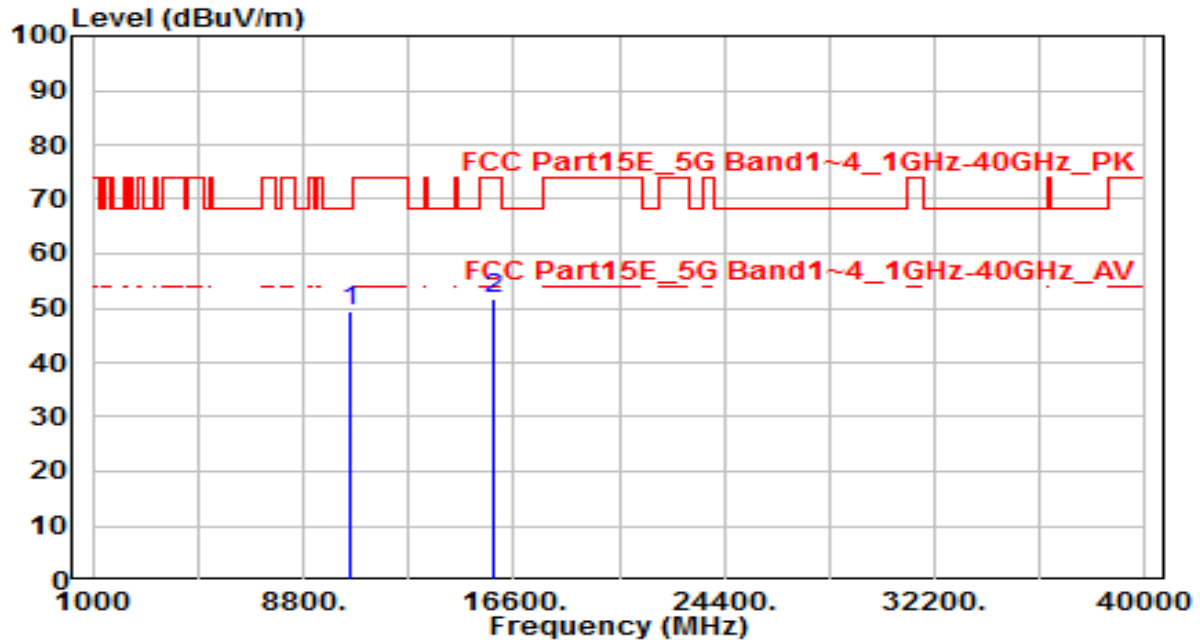


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	30.70	18.68	49.38	-18.82	68.20	150	360	Peak
2		15870.000	31.32	20.43	51.75	-22.25	74.00	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

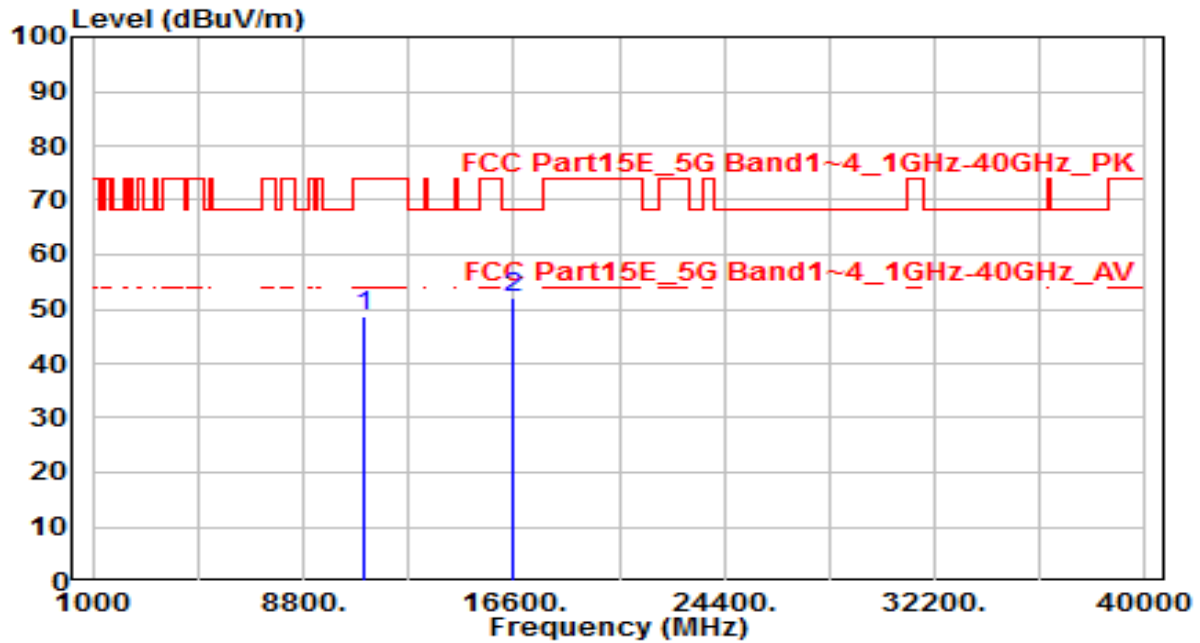


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	29.34	19.37	48.71	-25.29	74.00	150	360	Peak
2	* 16590.000	30.30	21.85	52.14	-16.06	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

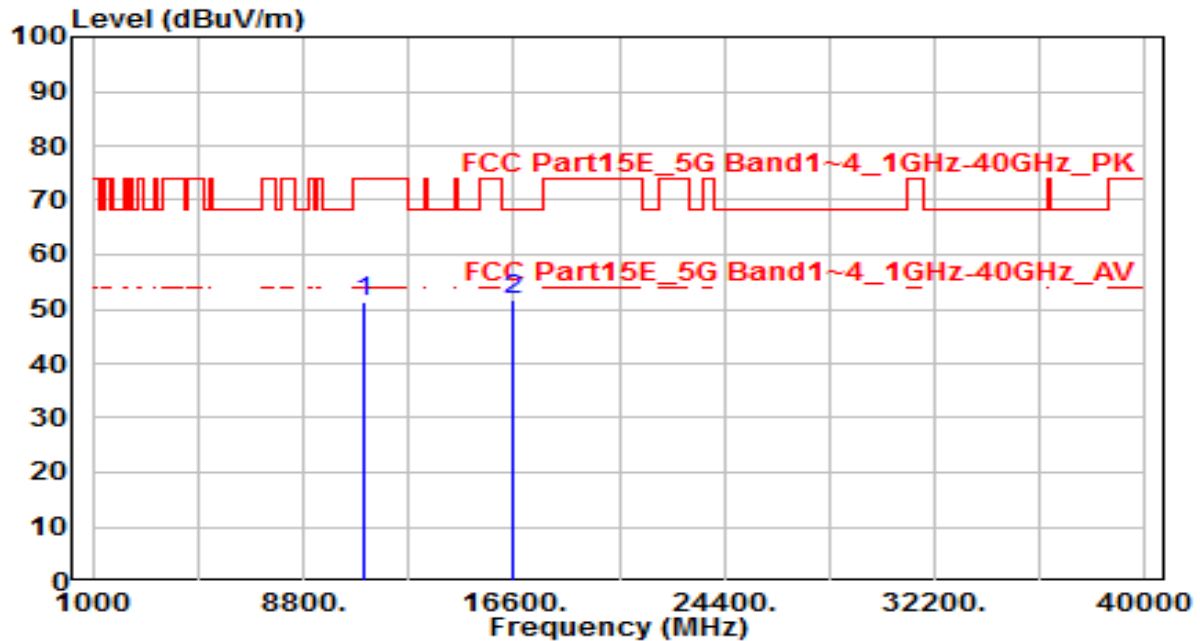


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	31.83	19.37	51.20	-22.80	74.00	150	360	Peak
2	* 16590.000	29.93	21.85	51.78	-16.42	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

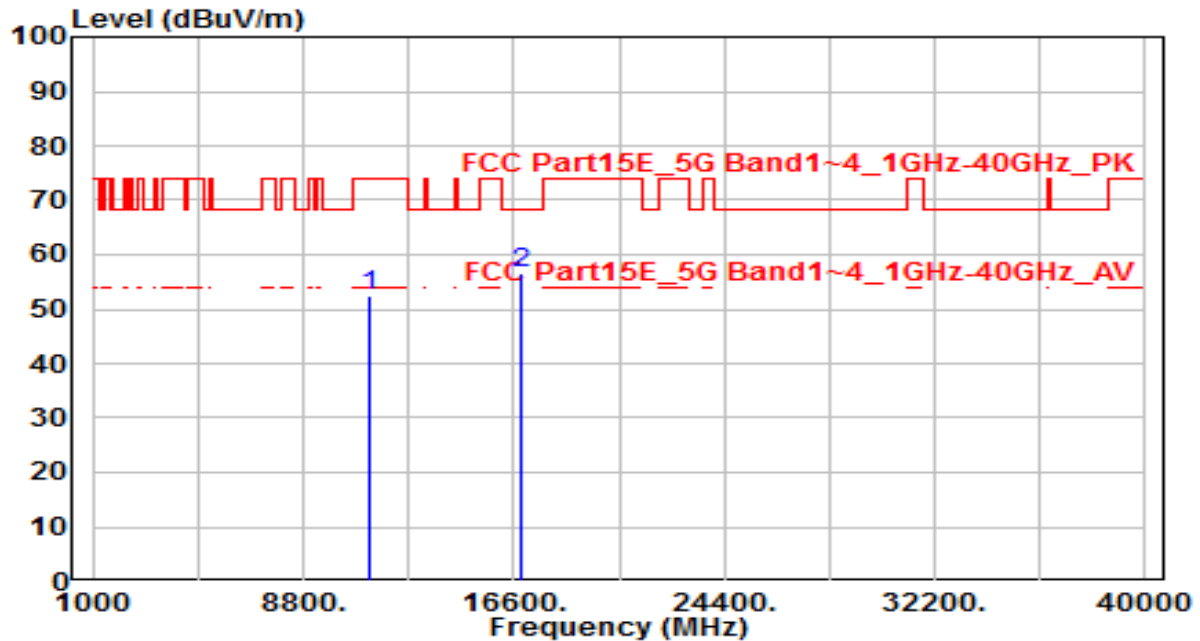


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	32.65	19.62	52.27	-21.73	74.00	150	360	Peak
2	* 16830.000	33.09	23.41	56.49	-11.71	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

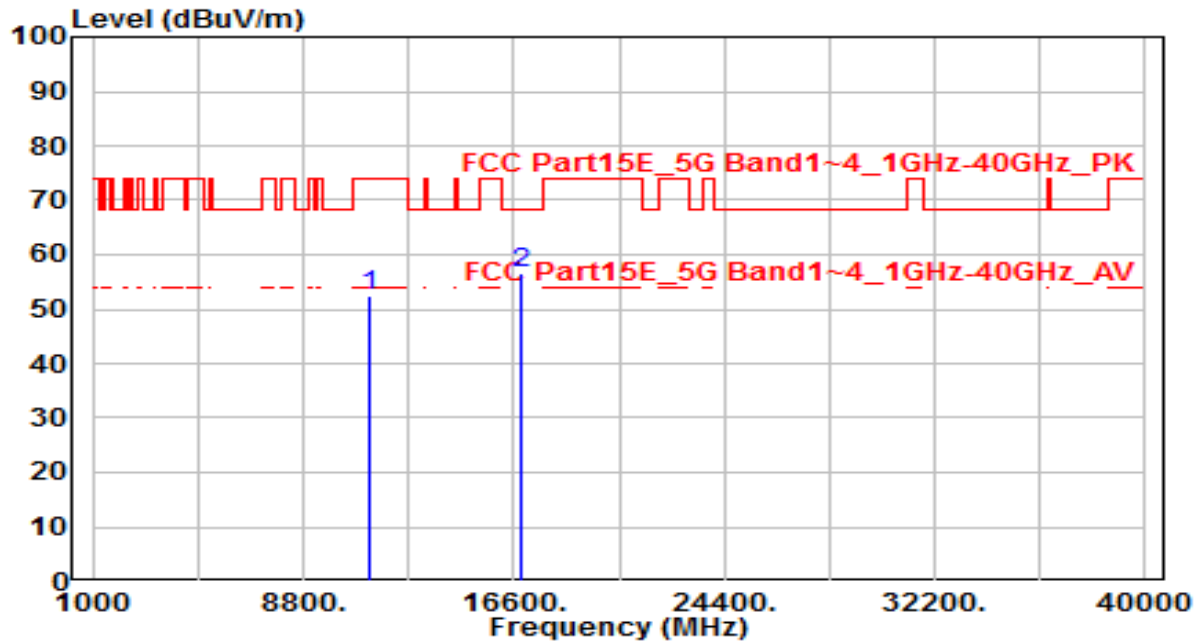


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	32.70	19.62	52.32	-21.68	74.00	150	360	Peak
2	* 16830.000	33.35	23.41	56.75	-11.45	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

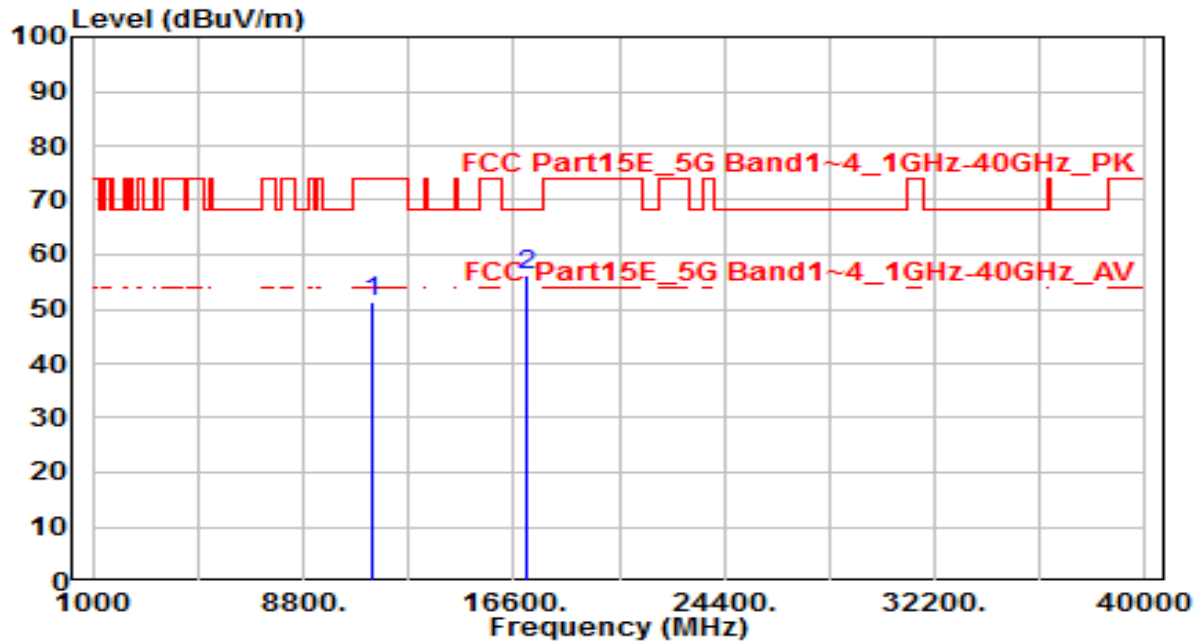


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	31.32	19.87	51.18	-22.82	74.00	150	380	Peak
2	* 17070.000	31.21	24.98	56.19	-12.01	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

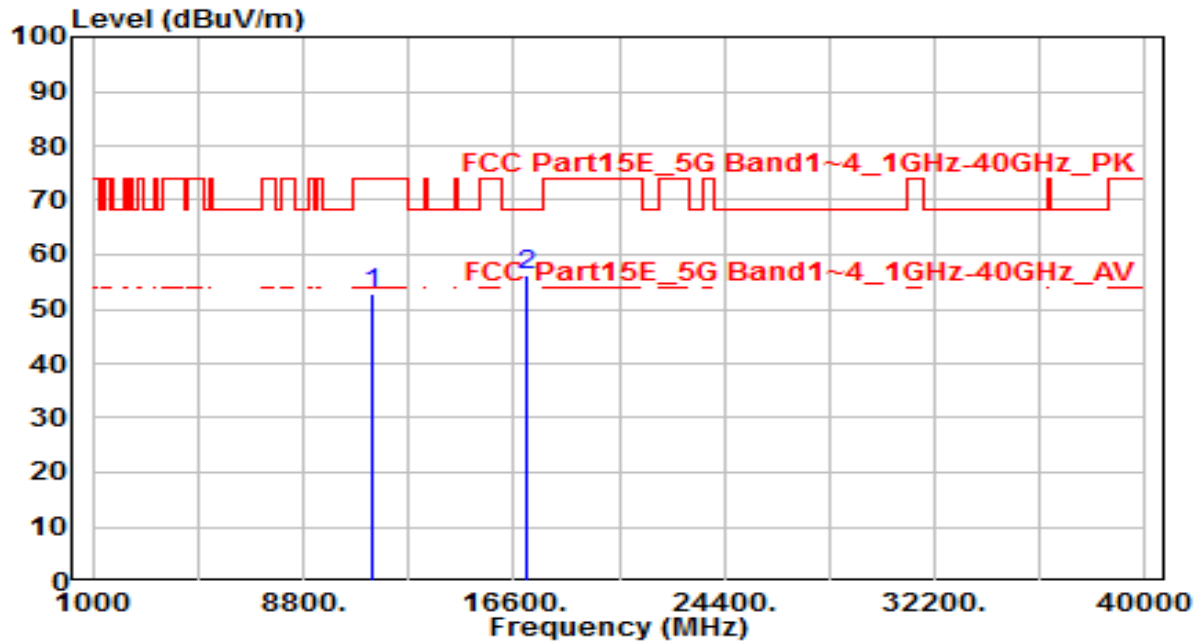


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	32.97	19.87	52.84	-21.16	74.00	150	360	Peak
2	* 17070.000	31.11	24.98	56.08	-12.12	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

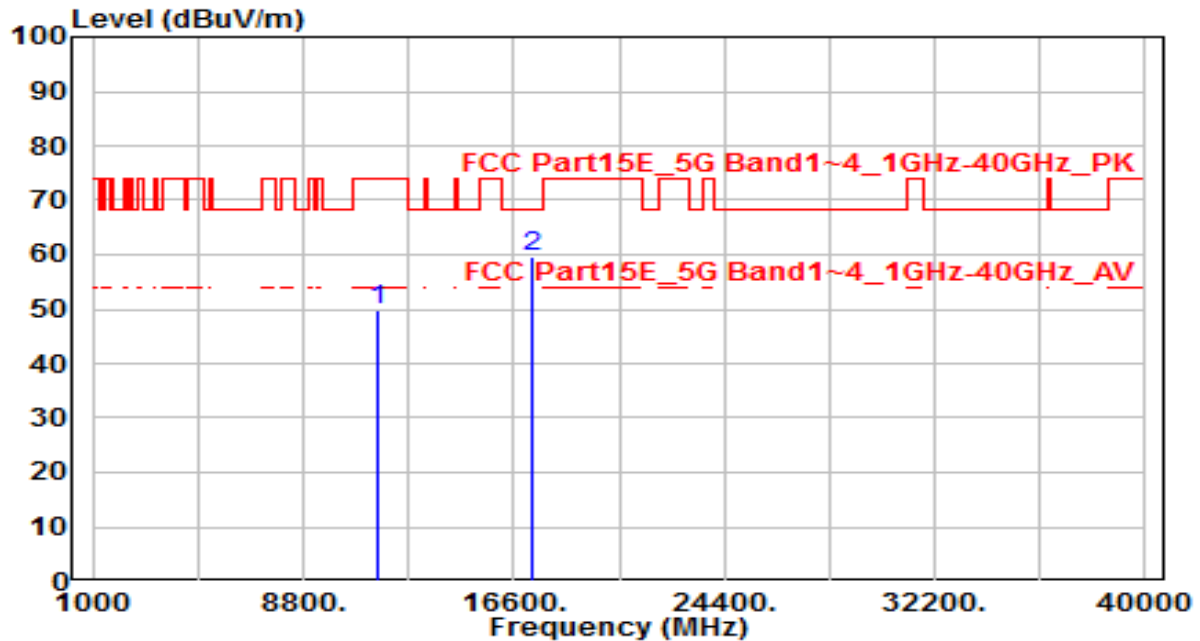


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	29.71	19.94	49.64	-24.36	74.00	150	360	Peak
2	* 17325.000	33.07	26.67	59.75	-8.45	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

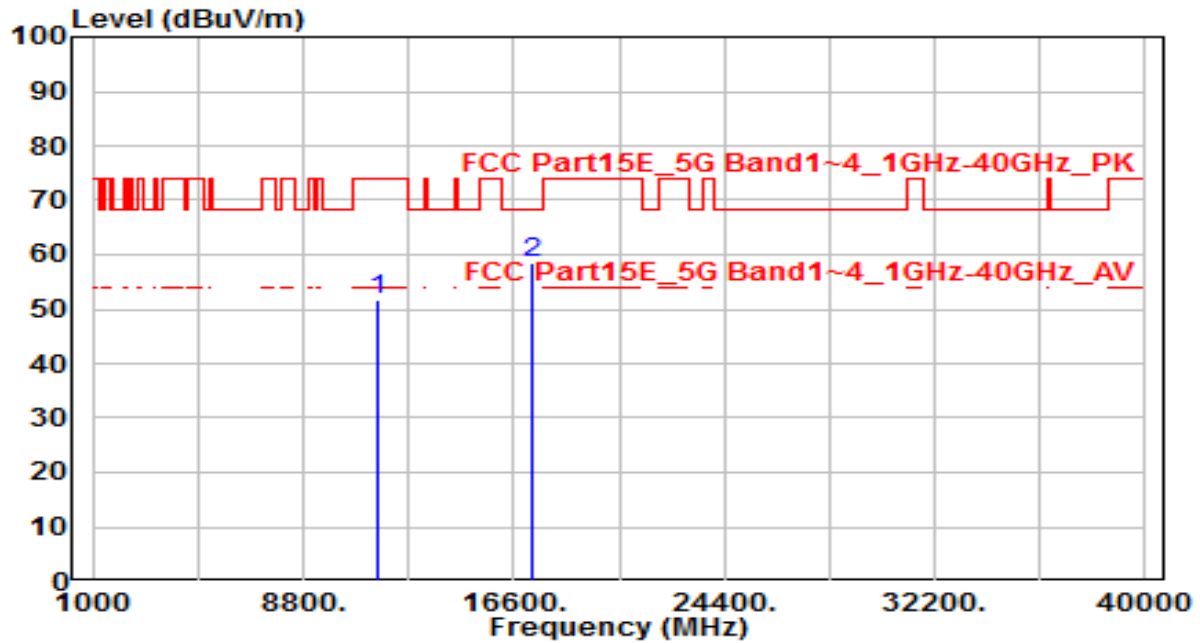


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	31.92	19.94	51.86	-22.14	74.00	150	360	Peak
2	* 17325.000	31.68	26.67	58.36	-9.84	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	By PoE

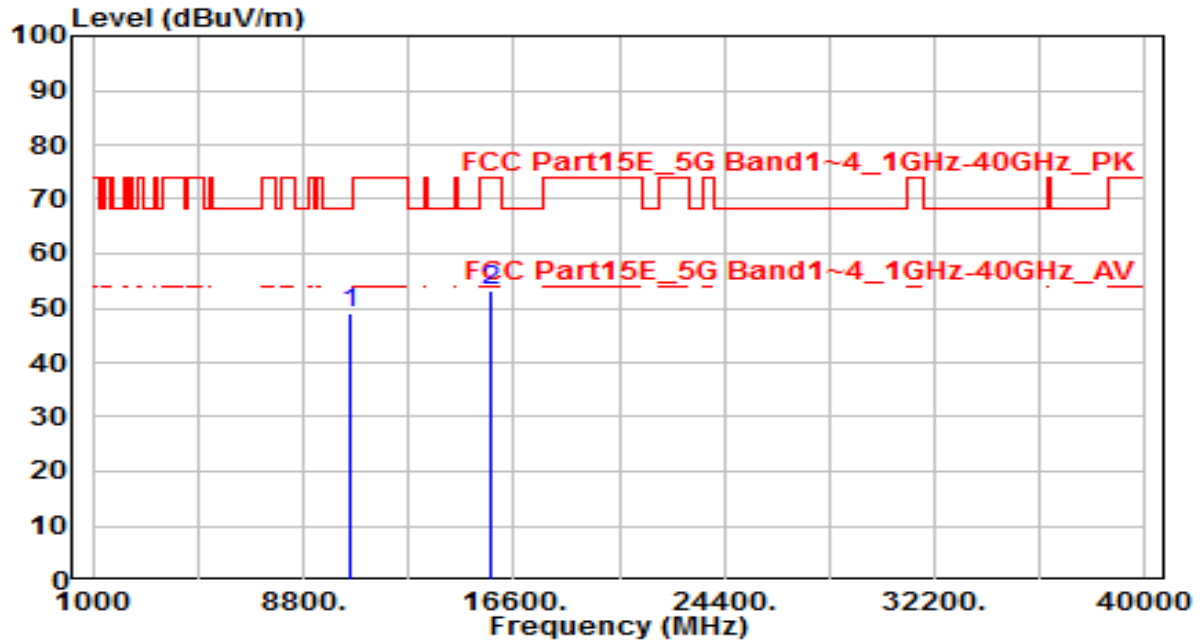


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	30.55	18.57	49.12	-19.08	68.20	150	360	Peak
2		15750.000	32.42	20.73	53.15	-20.85	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	By PoE

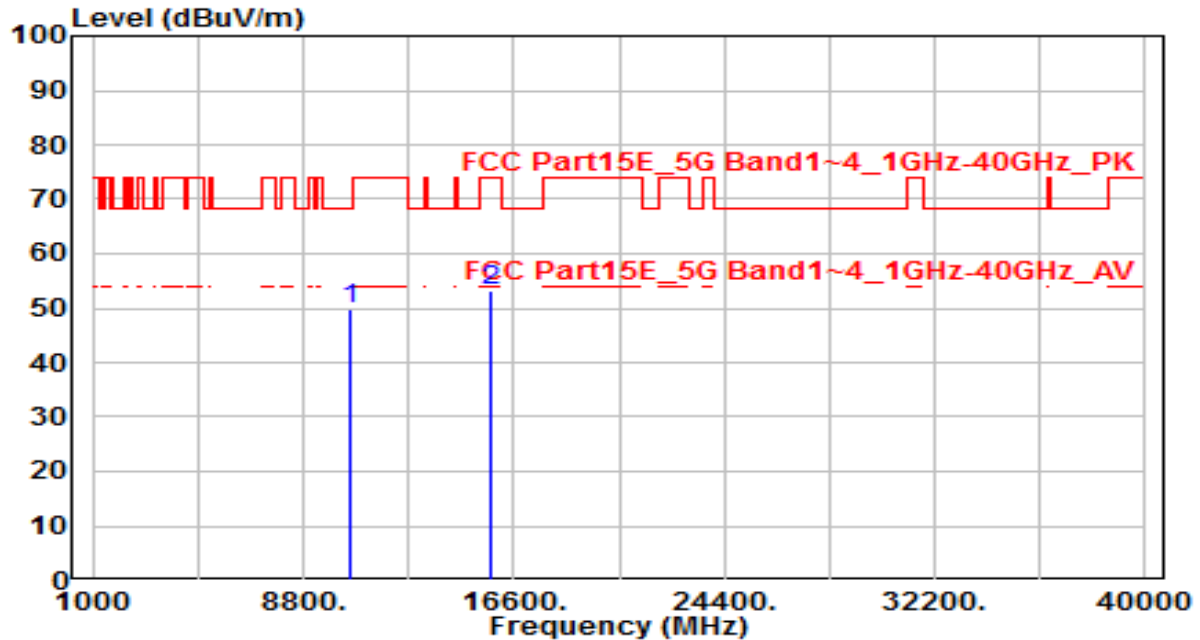


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	31.06	18.57	49.63	-18.57	68.20	150	360	Peak
2		15750.000	32.32	20.73	53.05	-20.95	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	By PoE

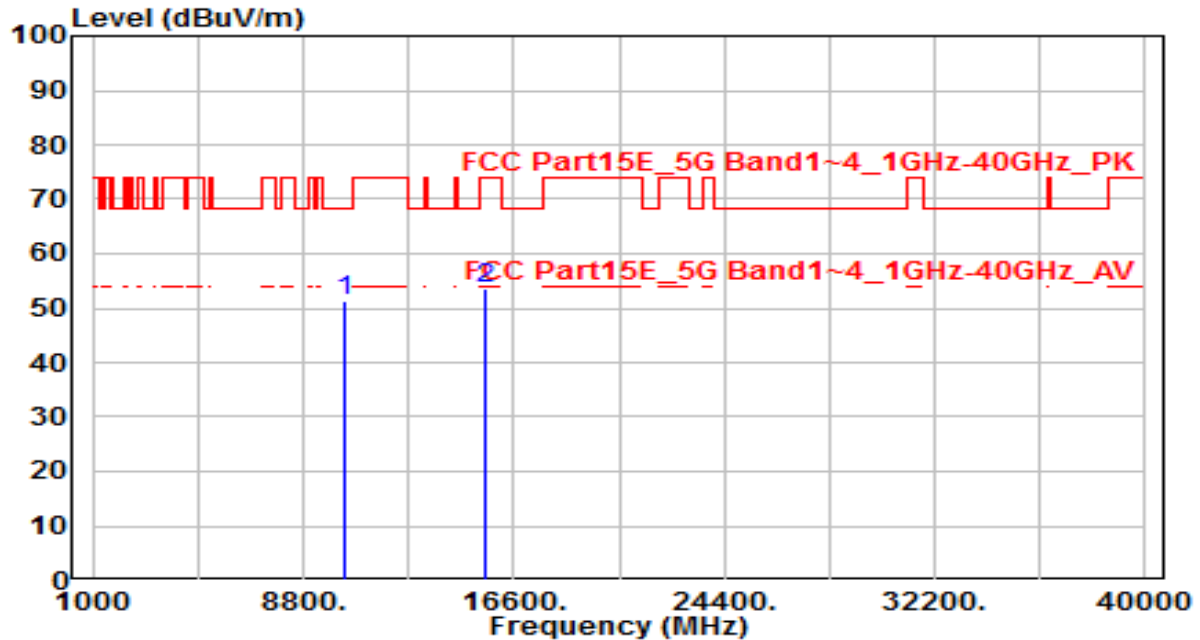


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	33.49	18.01	51.50	-16.70	68.20	150	360	Peak
2		15540.000	32.44	21.25	53.69	-20.31	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	By PoE

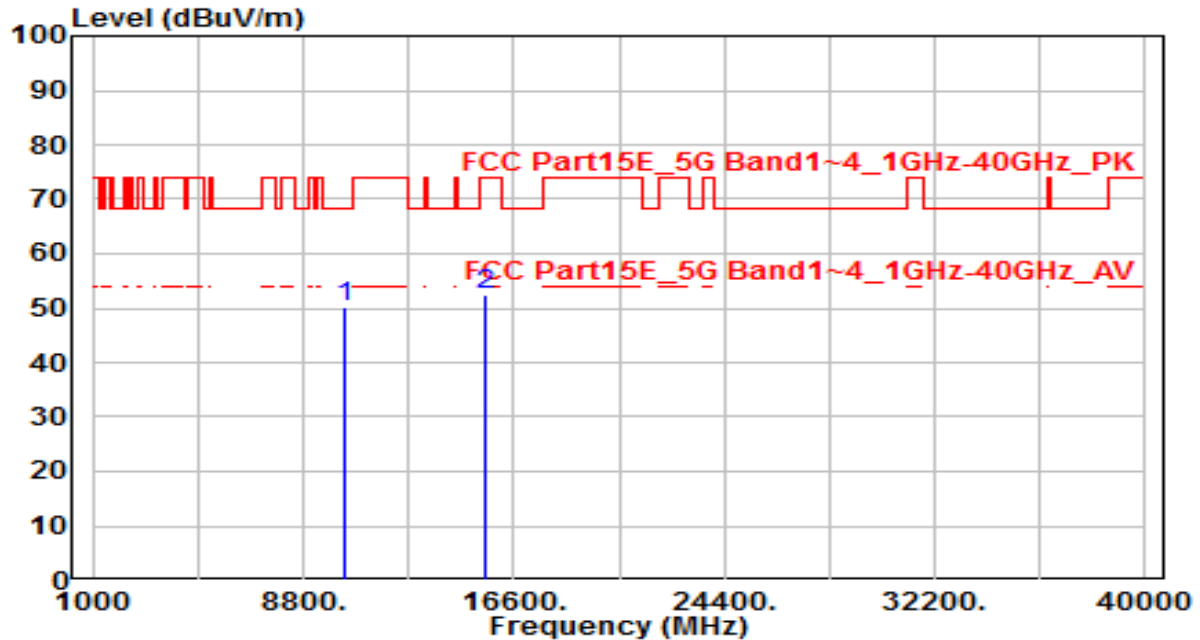


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	32.01	18.01	50.02	-18.18	68.20	150	360	Peak
2		15540.000	31.38	21.25	52.63	-21.37	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	By PoE

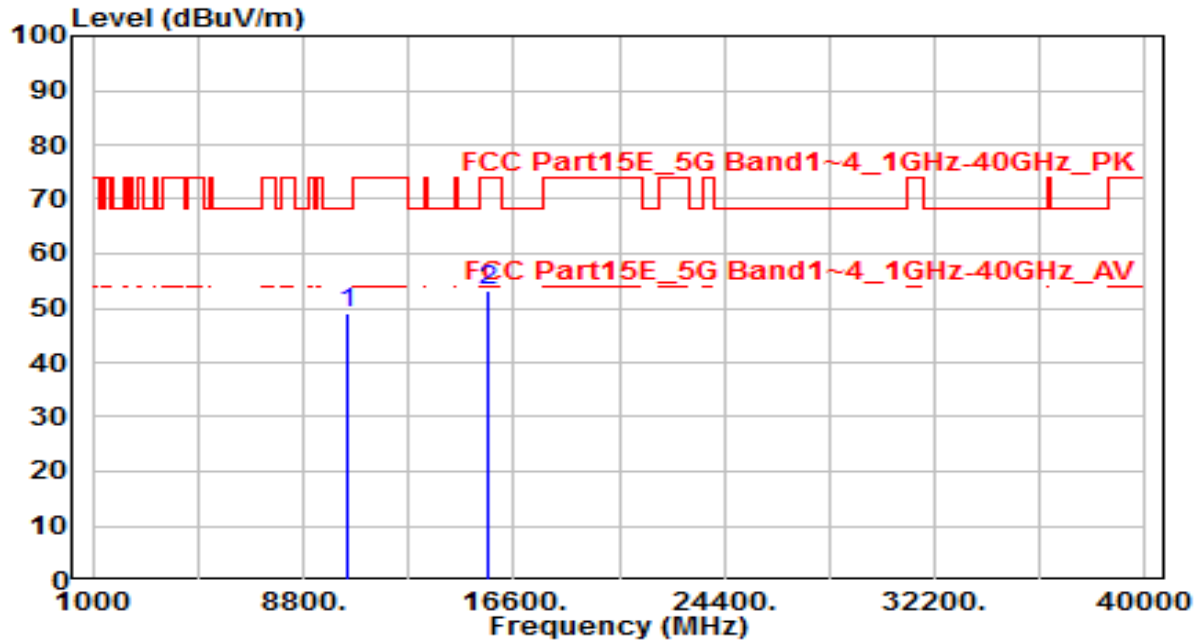


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	30.68	18.33	49.01	-19.19	68.20	150	360	Peak
2		15660.000	32.34	20.95	53.30	-20.70	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	By PoE

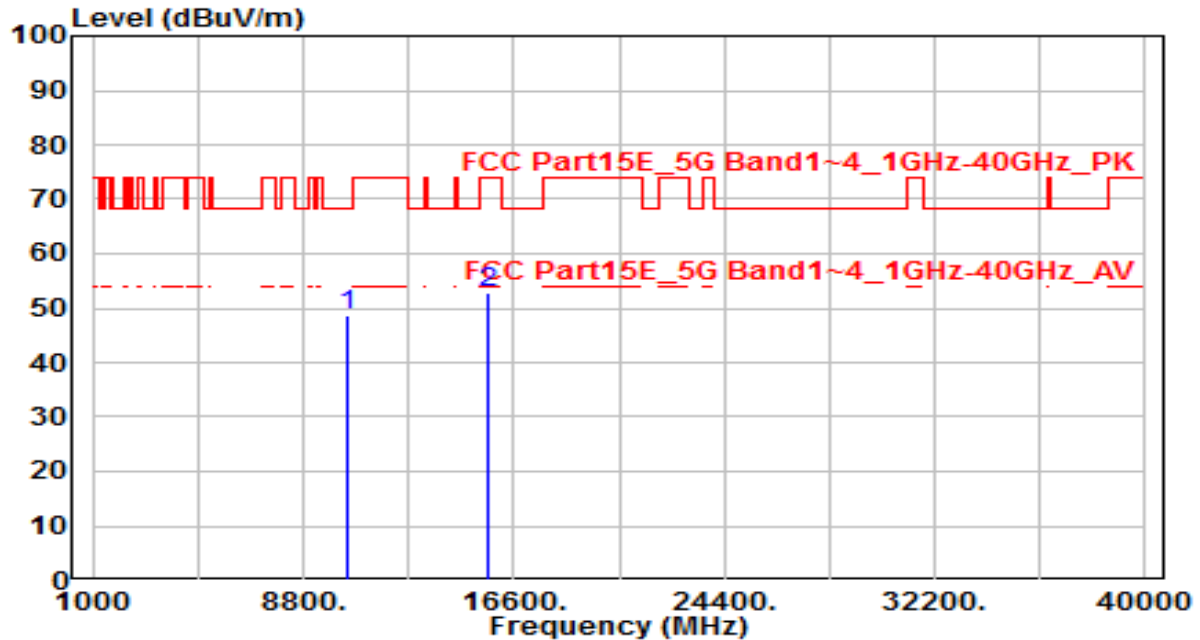


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	30.53	18.33	48.85	-19.35	68.20	150	360	Peak
2		15660.000	31.70	20.95	52.65	-21.35	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	By PoE

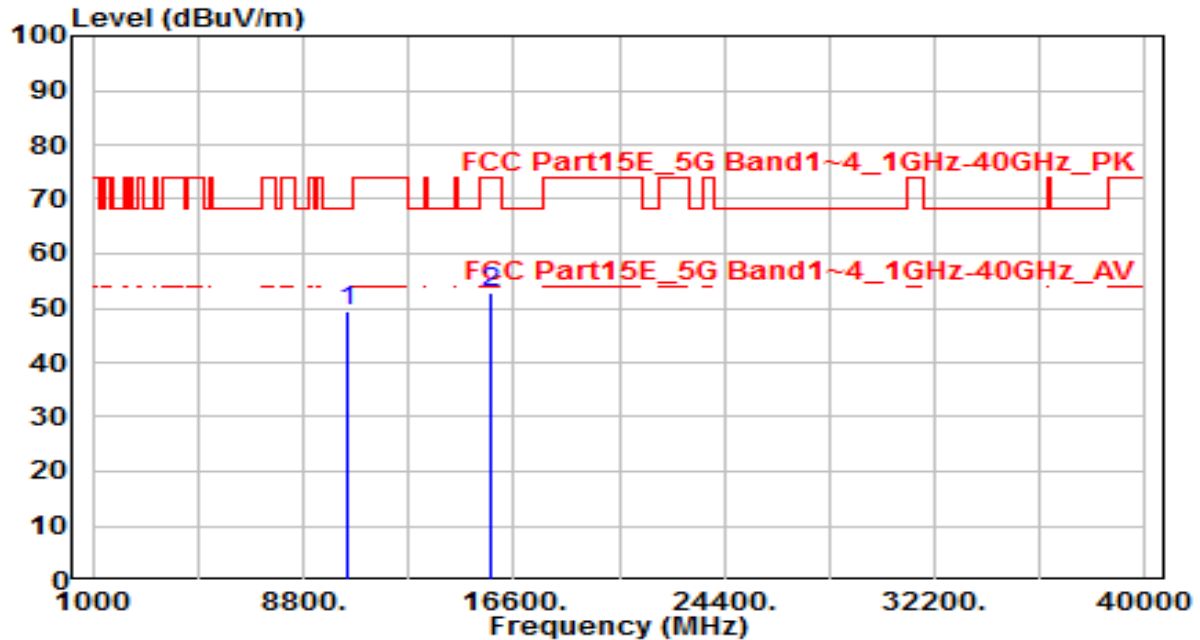


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	30.77	18.49	49.26	-18.94	68.20	150	360	Peak
2		15720.000	32.18	20.80	52.99	-21.01	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	By PoE

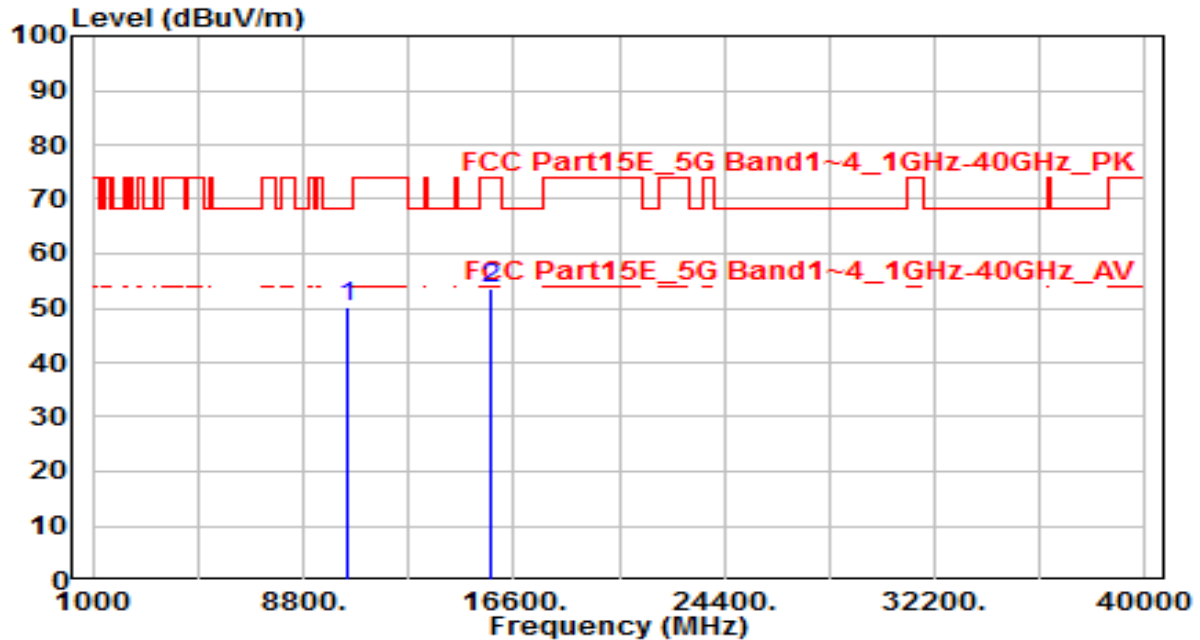


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	31.64	18.49	50.13	-18.07	68.20	150	360	Peak
2		15720.000	32.65	20.80	53.45	-20.55	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	By PoE

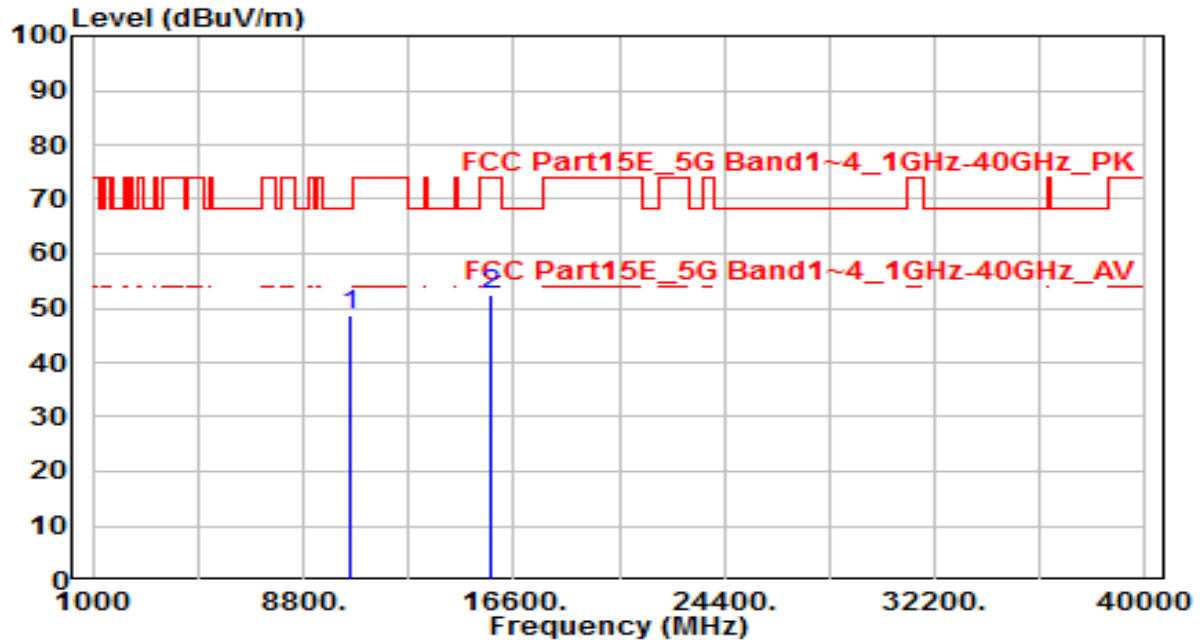


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	29.91	18.60	48.51	-19.69	68.20	150	360	Peak
2		15780.000	31.71	20.66	52.37	-21.63	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	By PoE

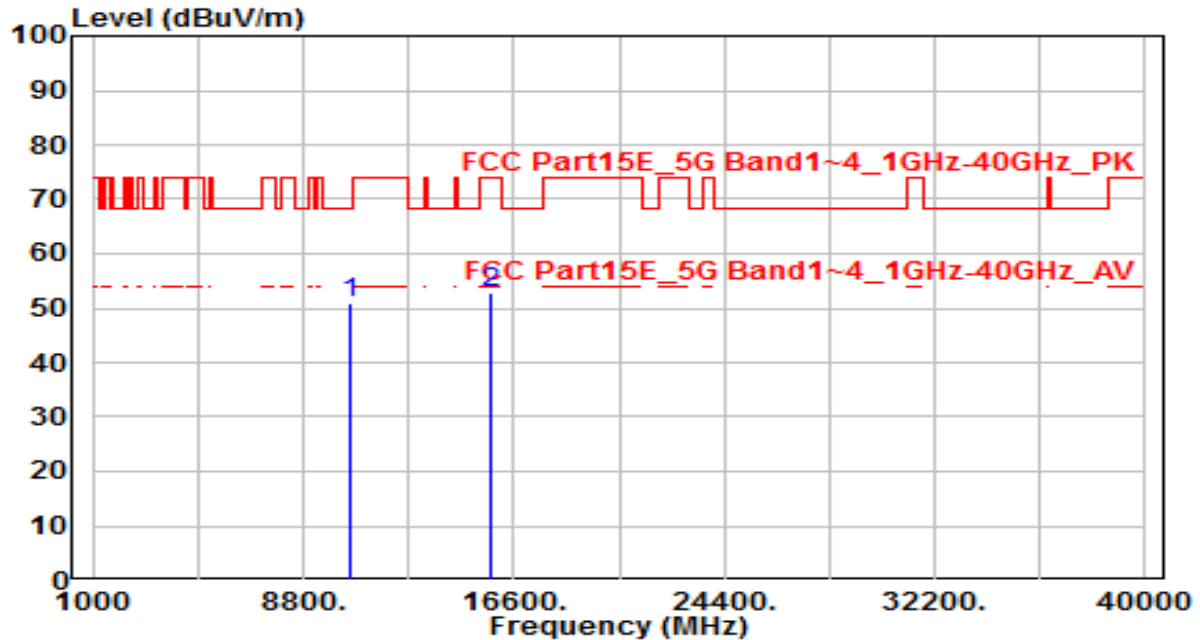


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	32.26	18.60	50.86	-17.34	68.20	150	360	Peak
2		15780.000	32.11	20.66	52.77	-21.23	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	By PoE

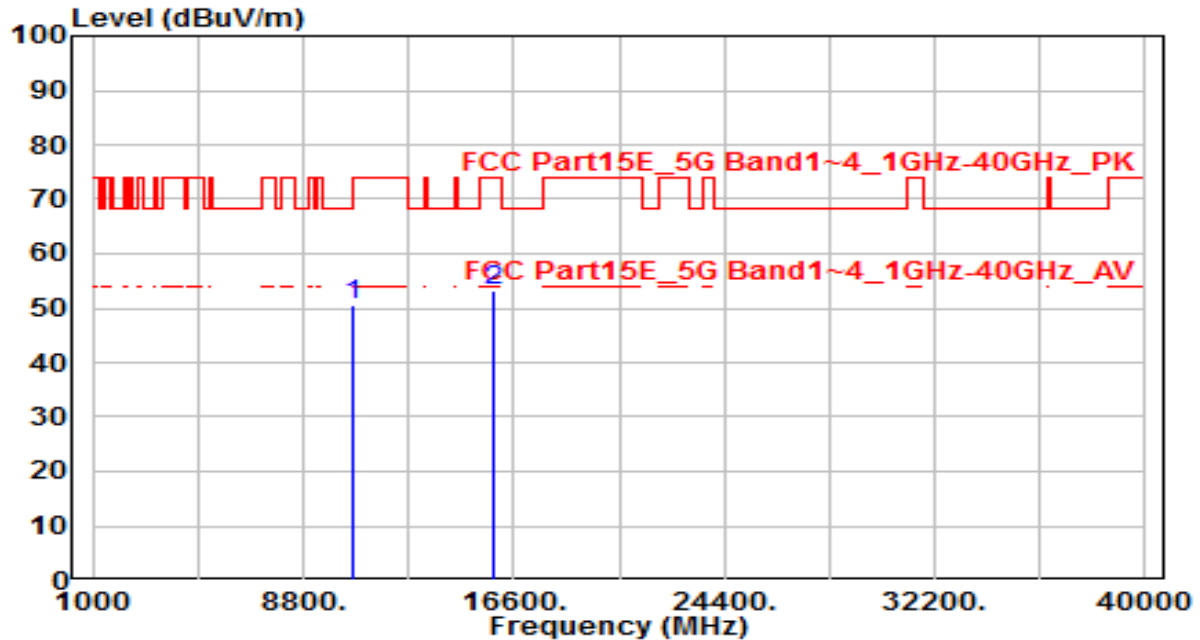


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	32.02	18.71	50.73	-17.47	68.20	150	360	Peak
2		15900.000	32.89	20.36	53.24	-20.76	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	By PoE

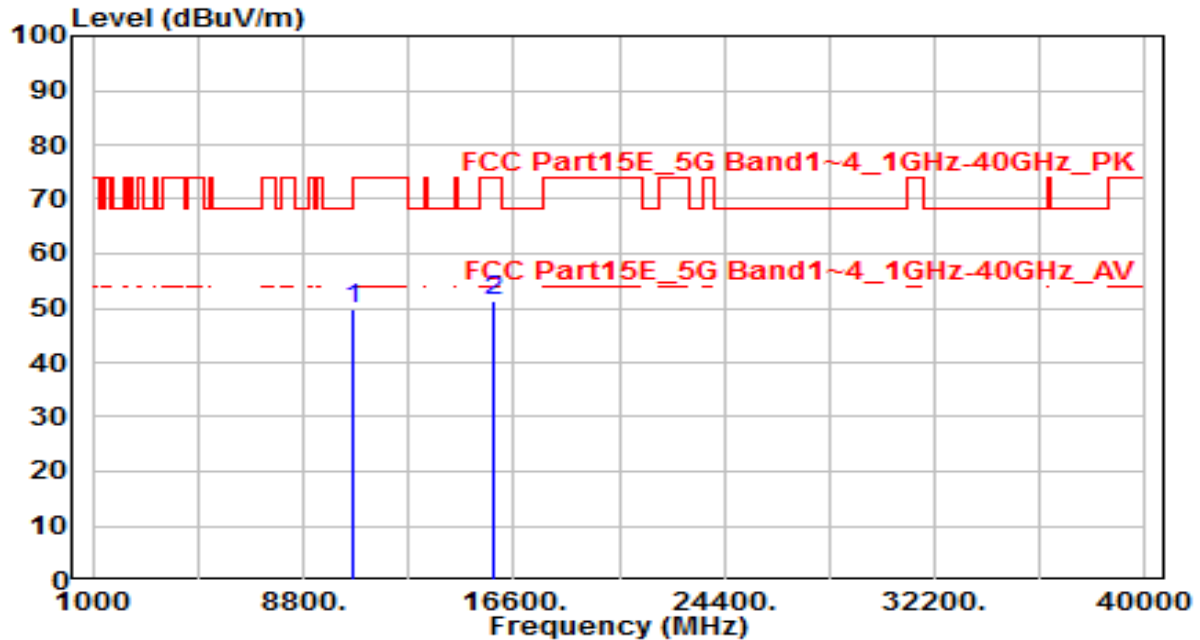


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	31.11	18.71	49.82	-18.38	68.20	150	360	Peak
2		15900.000	30.97	20.36	51.32	-22.68	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	By PoE

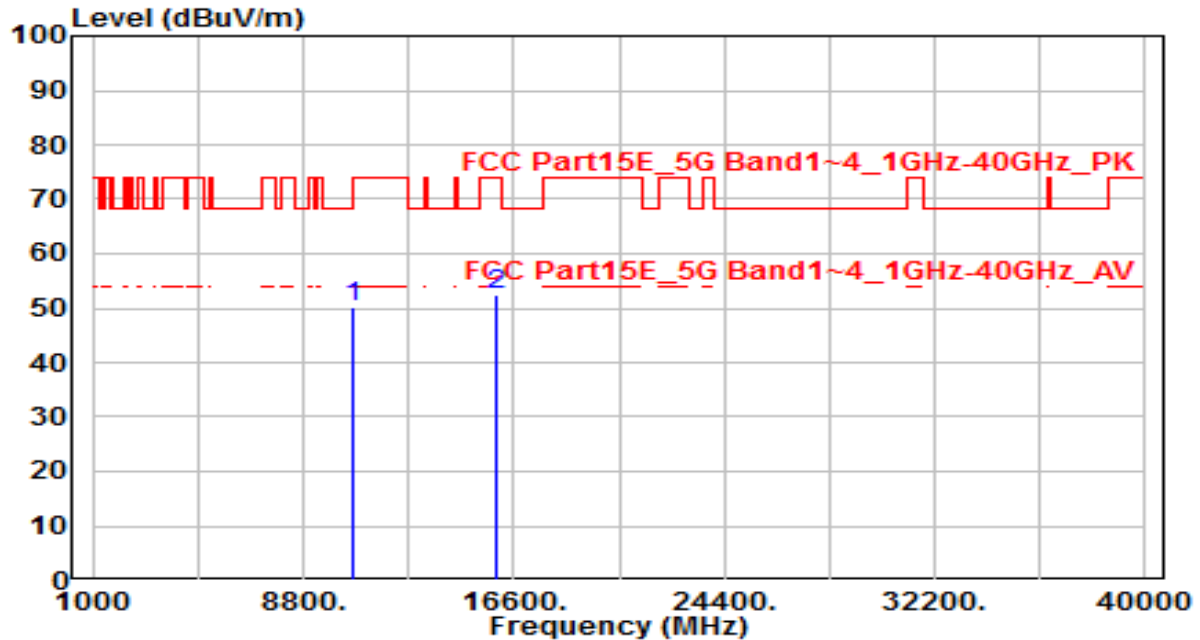


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	31.57	18.77	50.34	-23.66	74.00	150	360	Peak
2	* 15960.000	32.21	20.21	52.42	-21.58	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	By PoE

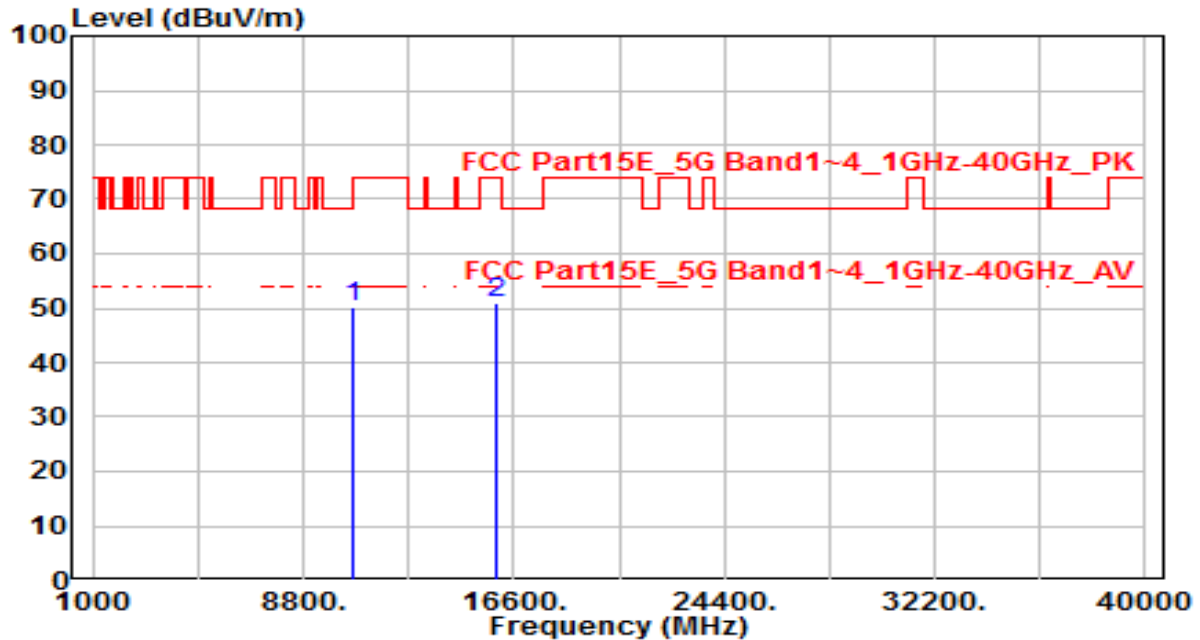


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	31.51	18.77	50.27	-23.73	74.00	150	360	Peak
2	* 15960.000	30.81	20.21	51.02	-22.98	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

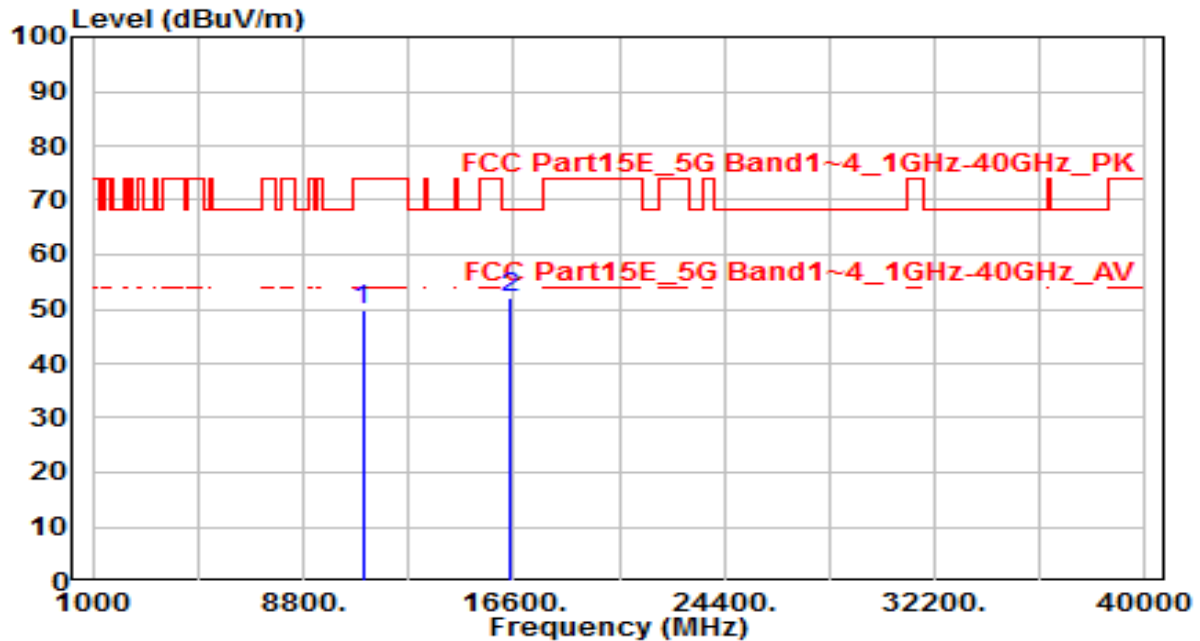


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	30.34	19.28	49.62	-24.38	74.00	150	360	Peak
2	* 16500.000	30.76	21.26	52.02	-16.18	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

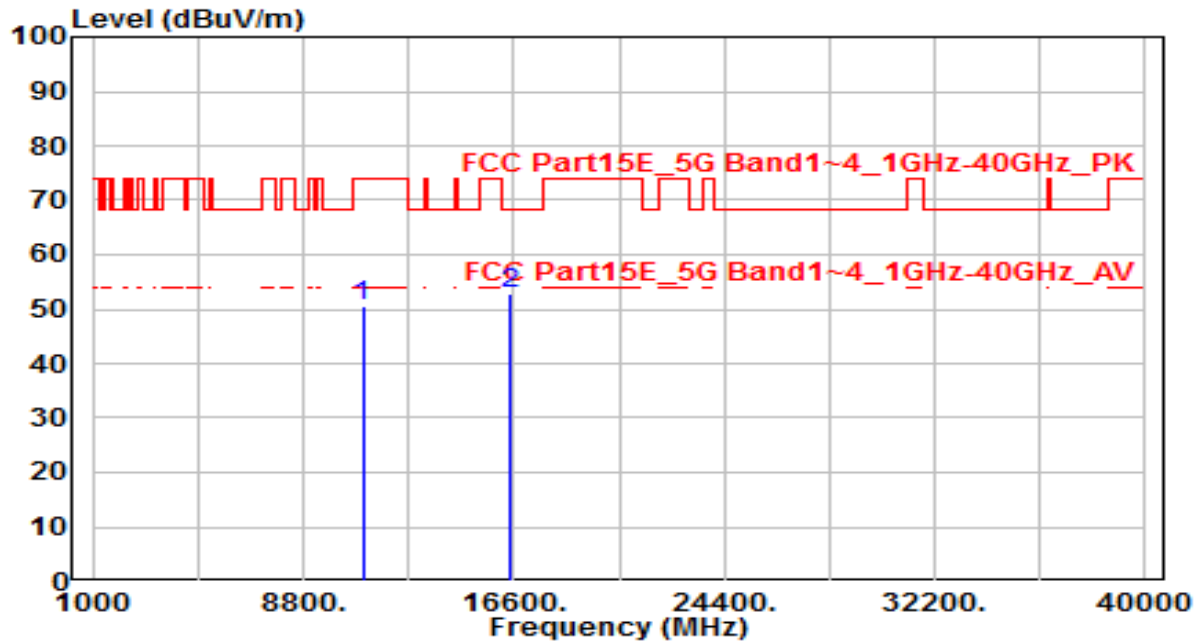


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	31.14	19.28	50.42	-23.58	74.00	150	360	Peak
2	* 16500.000	31.62	21.26	52.88	-15.32	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band3_CH 116_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

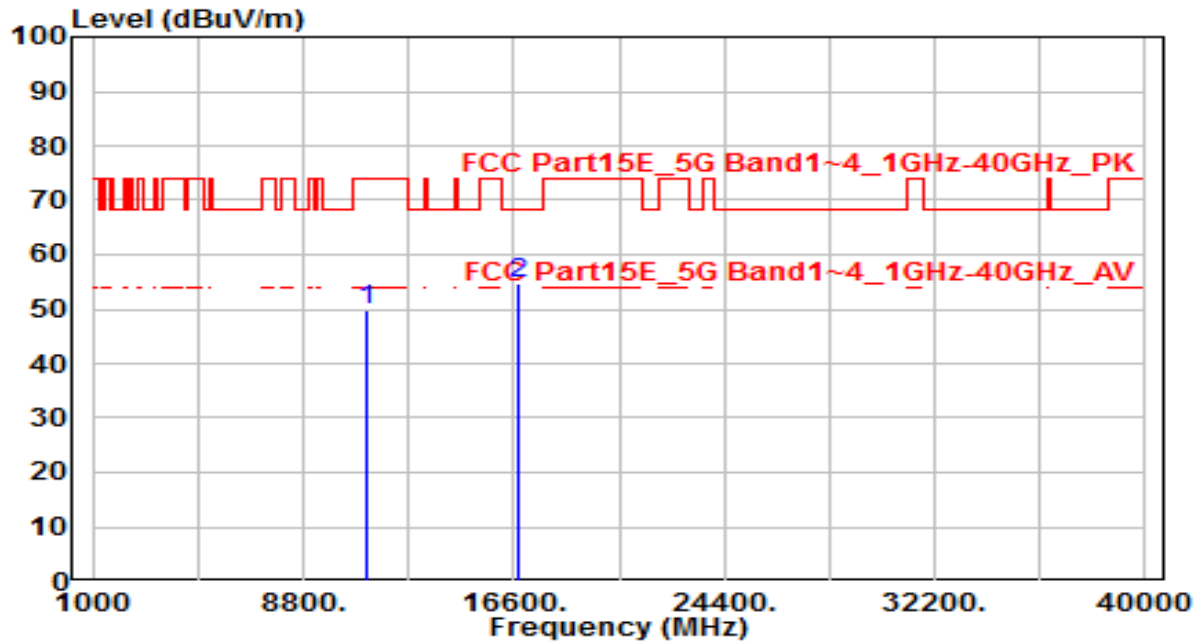


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	30.30	19.53	49.83	-24.17	74.00	150	360	Peak
2	* 16740.000	31.81	22.82	54.63	-13.57	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band3_CH 116_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

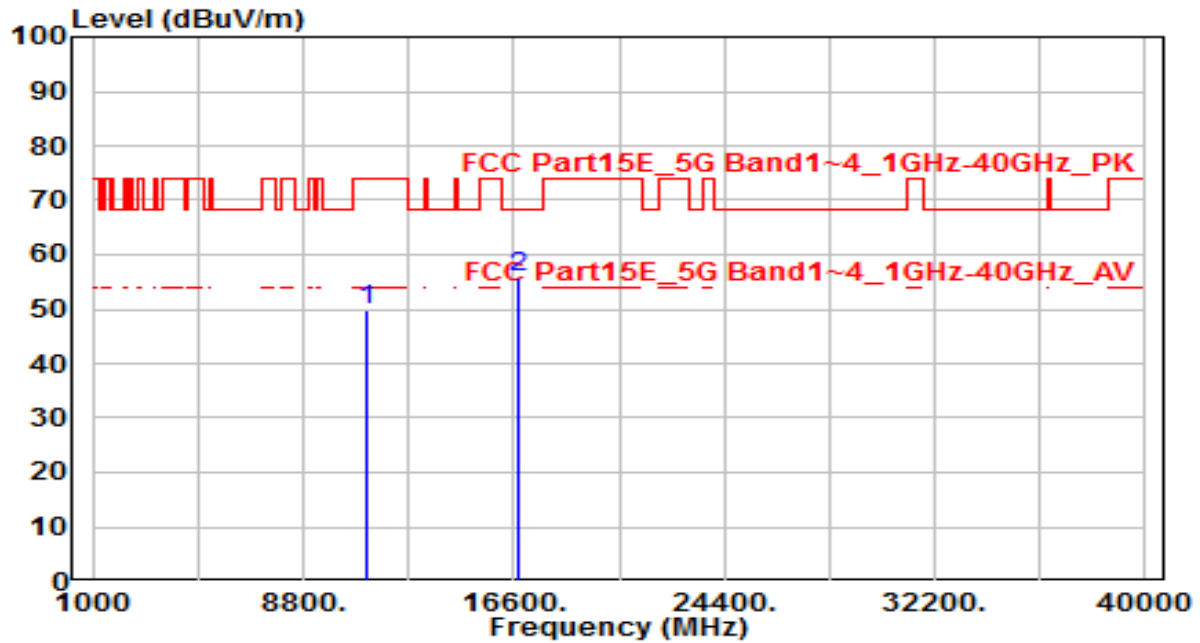


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	30.36	19.53	49.89	-24.11	74.00	150	360	Peak
2	* 16740.000	32.90	22.82	55.72	-12.48	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

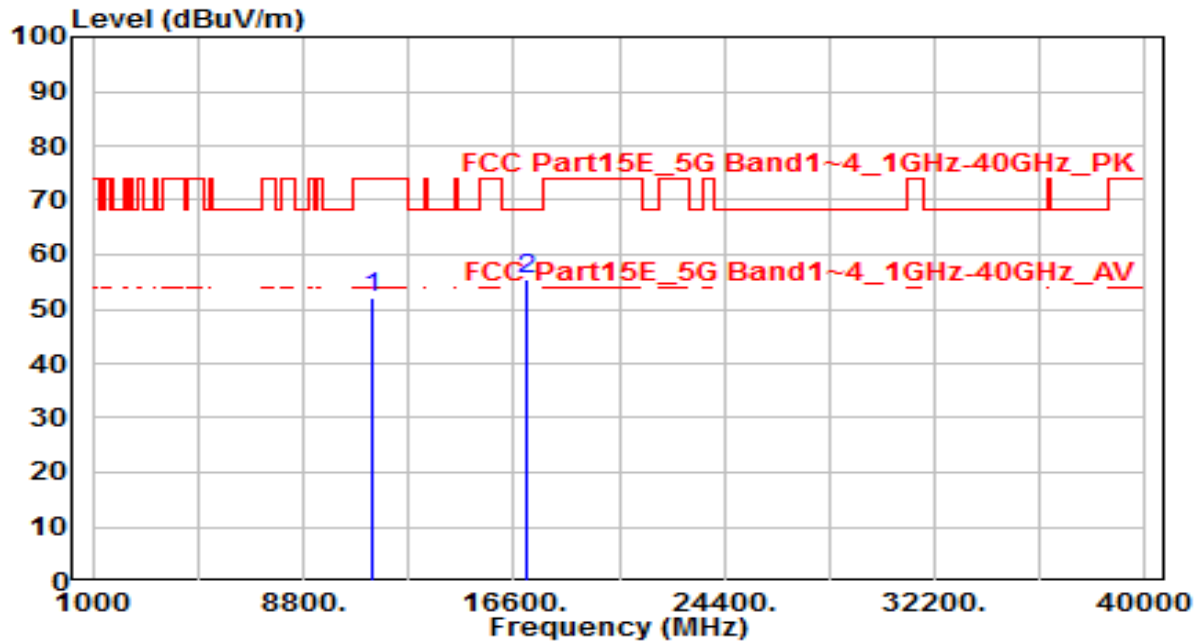


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	32.17	19.90	52.06	-21.94	74.00	150	360	Peak
2	* 17100.000	30.15	25.18	55.33	-12.87	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

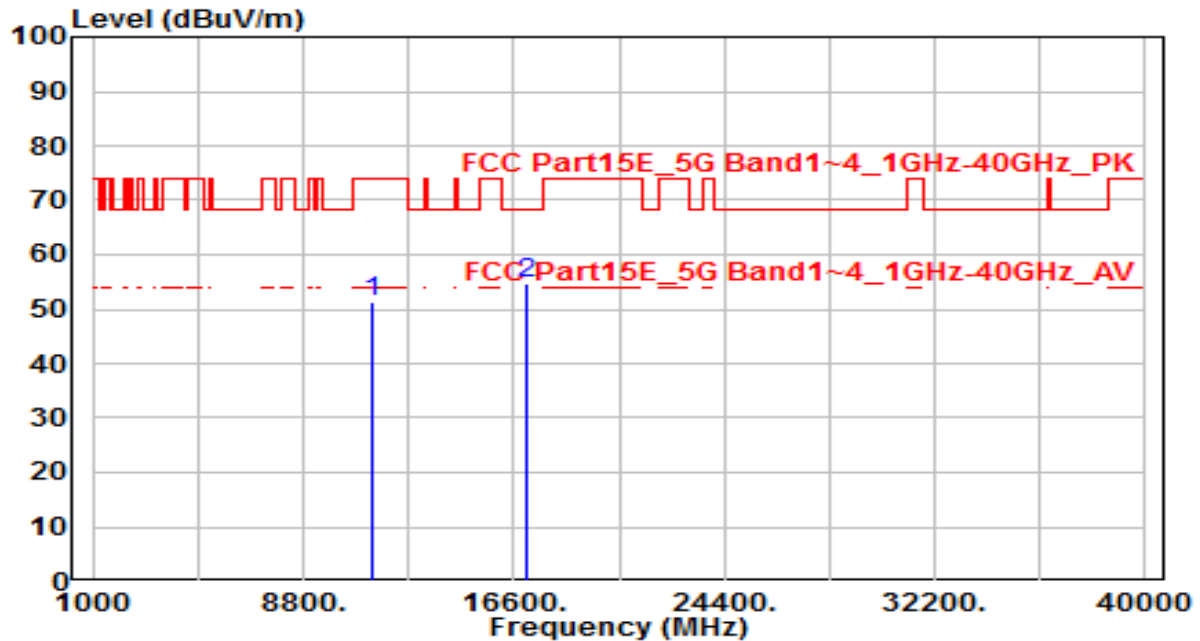


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	31.50	19.90	51.40	-22.60	74.00	150	360	Peak
2	* 17100.000	29.40	25.18	54.58	-13.62	68.20	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band3_CH 144_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

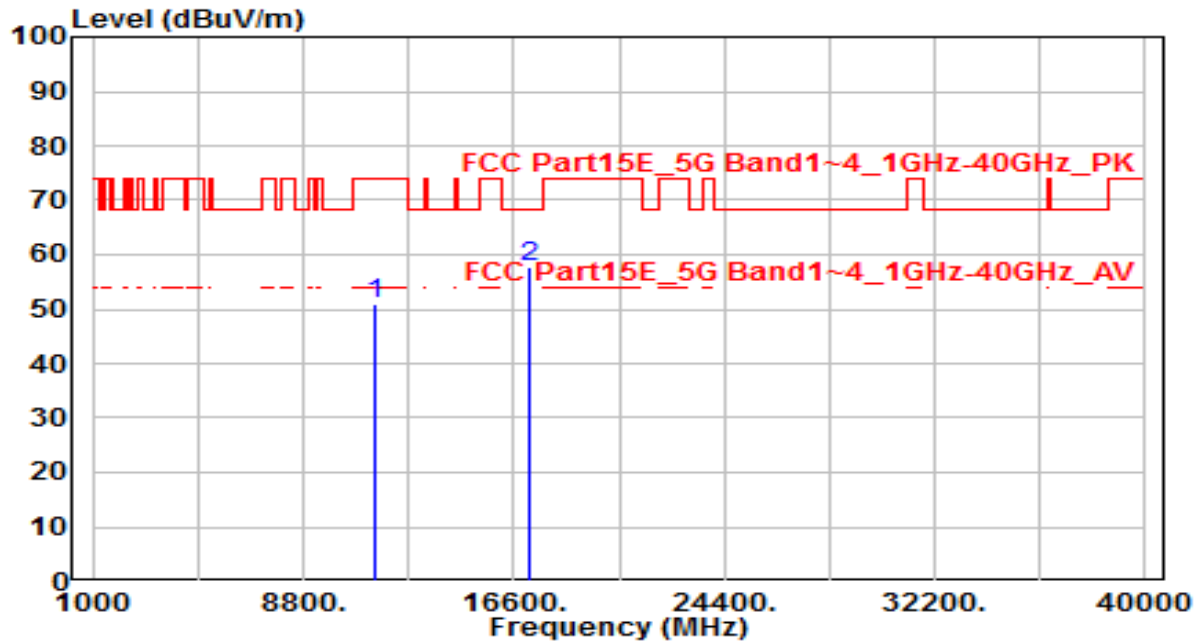


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	30.99	19.96	50.94	-23.06	74.00	150	360	Peak
2	* 17160.000	32.03	25.58	57.60	-10.60	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band3_CH 144_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

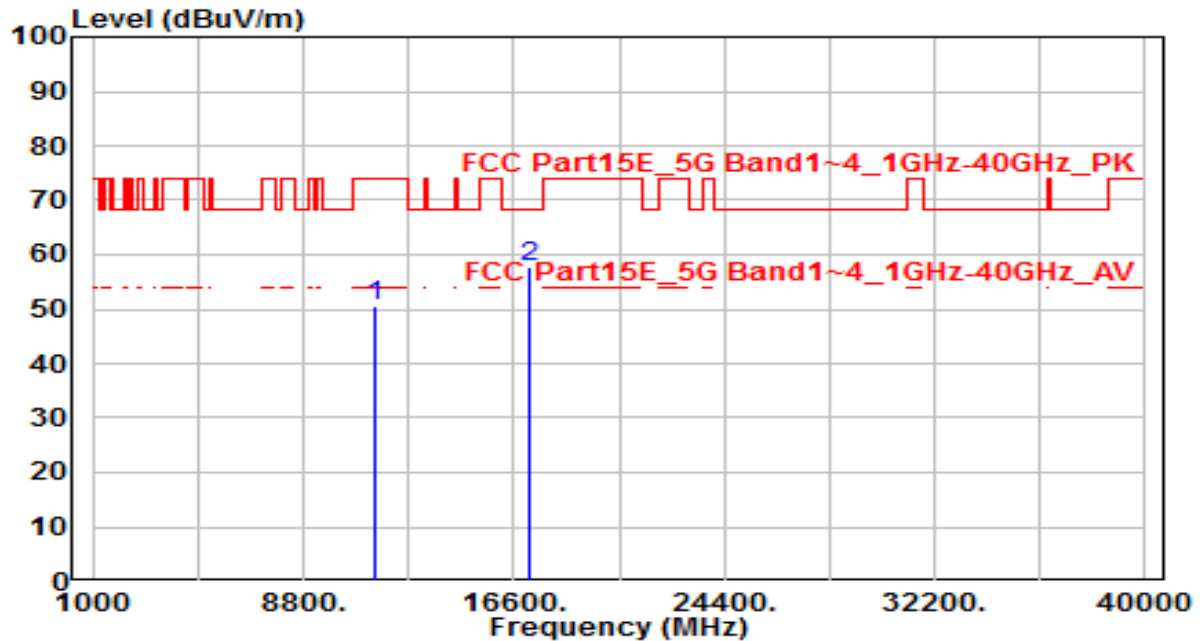


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	30.61	19.96	50.57	-23.43	74.00	150	360	Peak
2	* 17160.000	32.31	25.58	57.89	-10.31	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

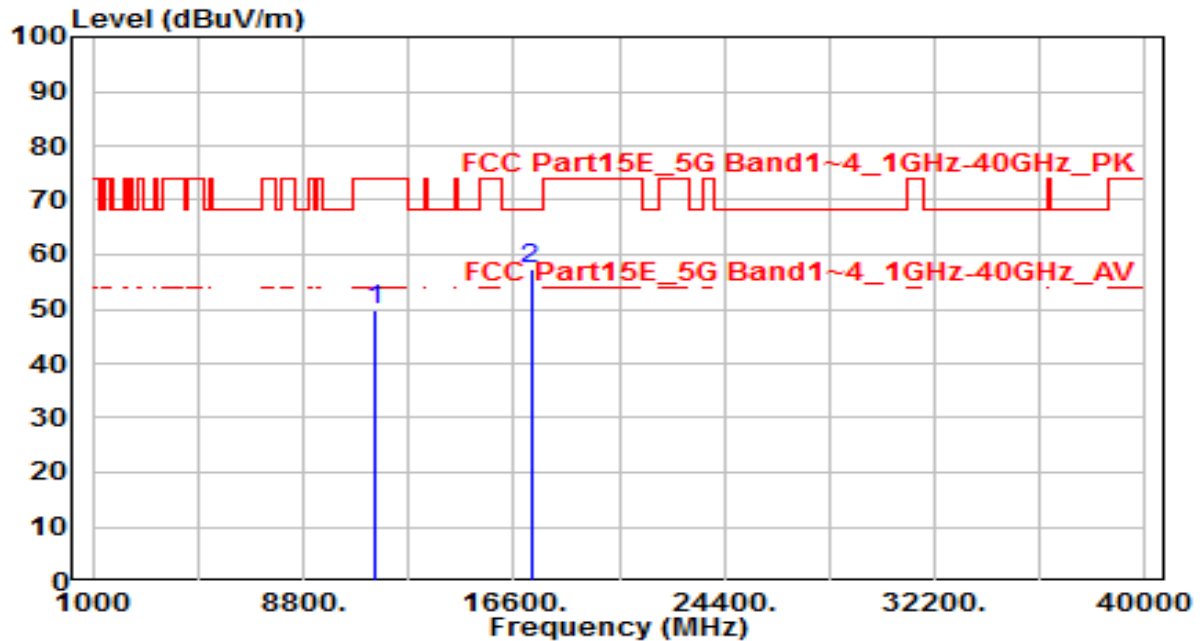


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	29.94	20.03	49.98	-24.02	74.00	150	360	Peak
2	* 17235.000	31.10	26.08	57.18	-11.02	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

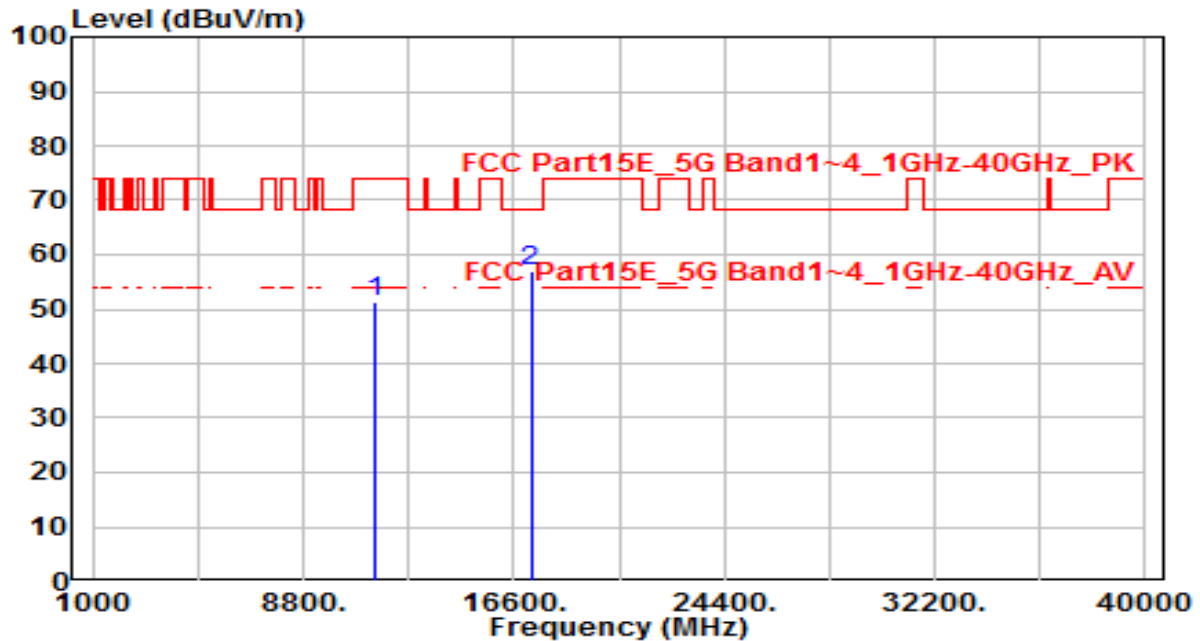


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	31.37	20.03	51.41	-22.59	74.00	150	360	Peak
2	* 17235.000	31.02	26.08	57.09	-11.11	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band4_CH 157_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

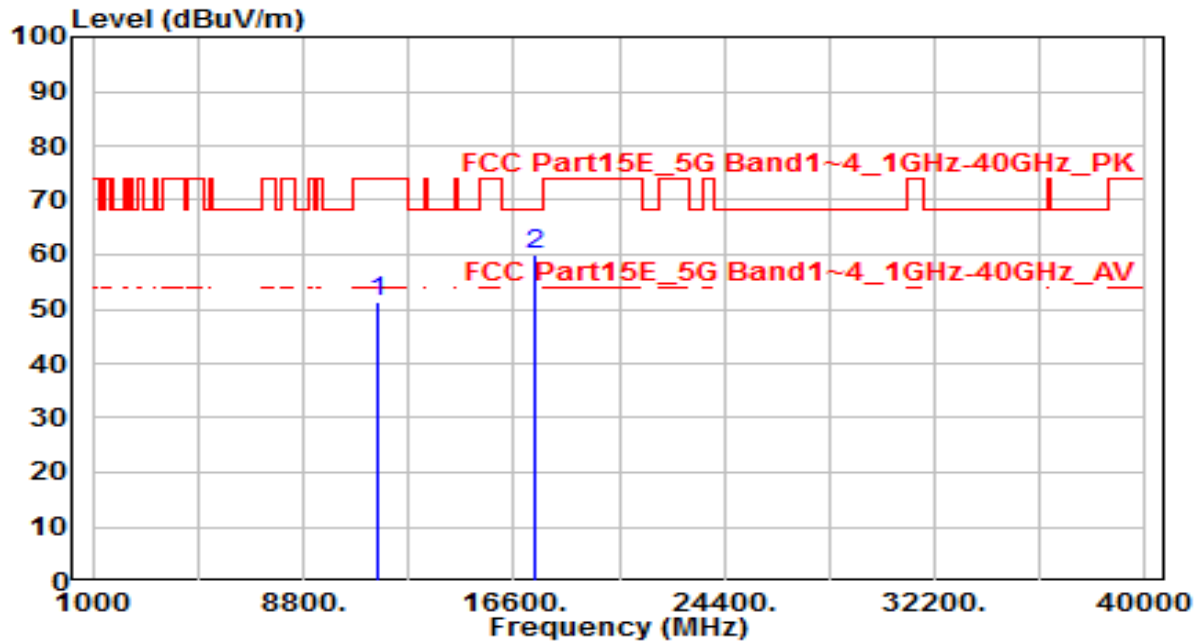


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	31.32	19.89	51.21	-22.79	74.00	150	360	Peak
2	* 17355.000	33.28	26.87	60.16	-8.04	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band4_CH 157_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

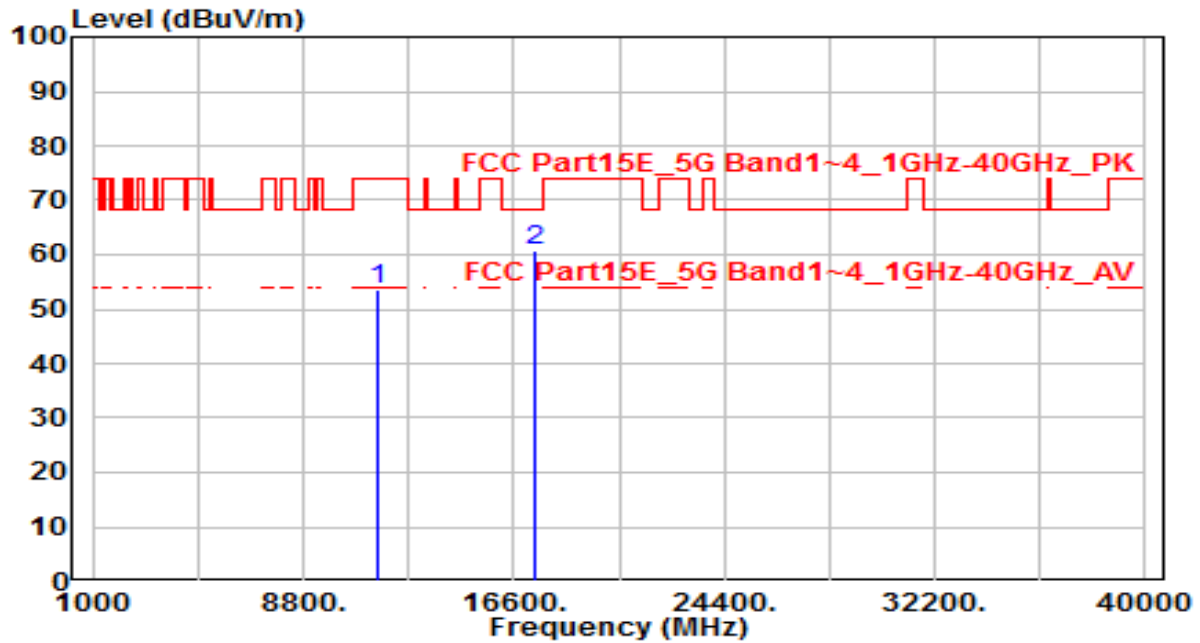


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	33.73	19.89	53.62	-20.38	74.00	150	360	Peak
2	* 17355.000	34.03	26.87	60.91	-7.29	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

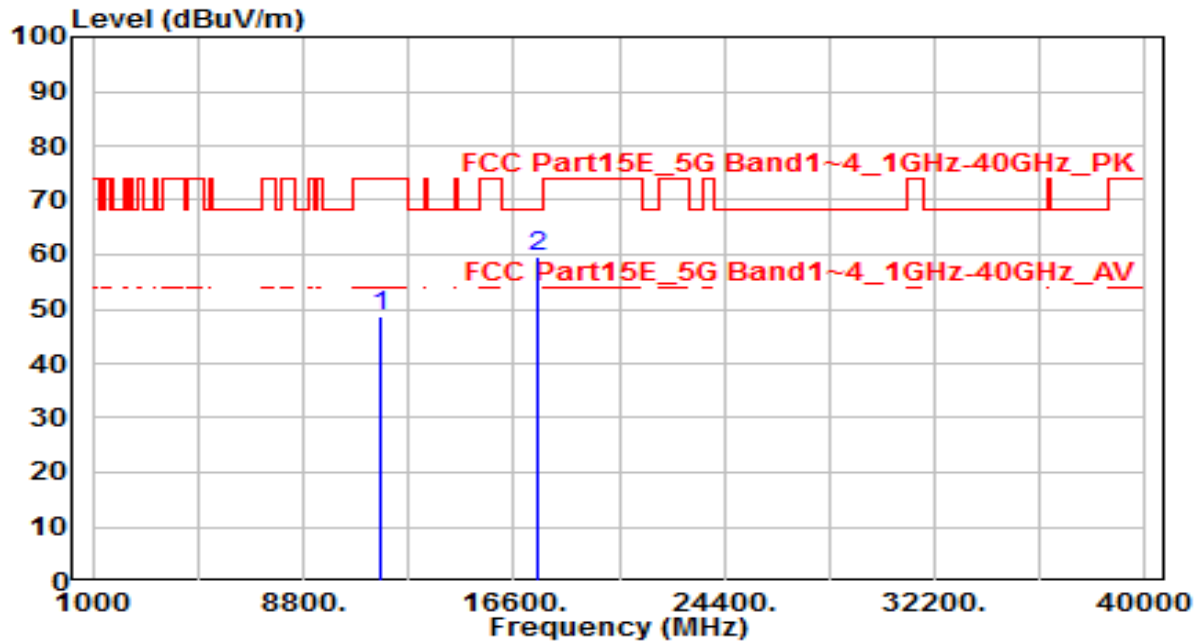


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	28.92	19.71	48.63	-25.37	74.00	150	360	Peak
2	* 17475.000	32.00	27.67	59.68	-8.52	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

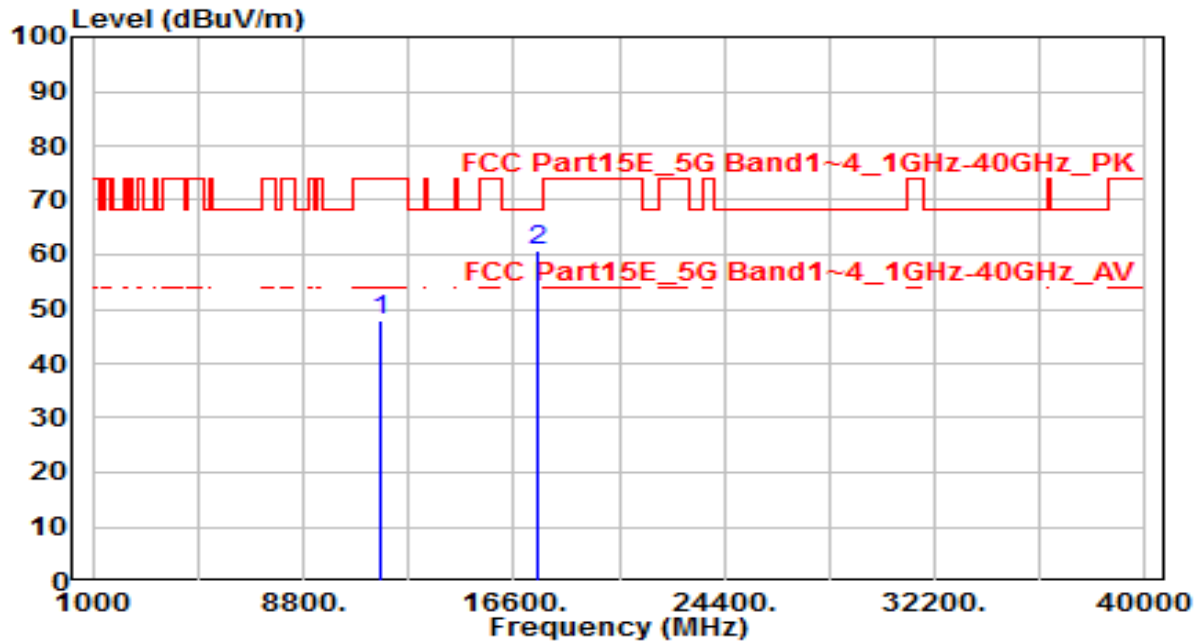


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	28.13	19.71	47.84	-26.16	74.00	150	360	Peak
2	* 17475.000	32.96	27.67	60.63	-7.57	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	By PoE

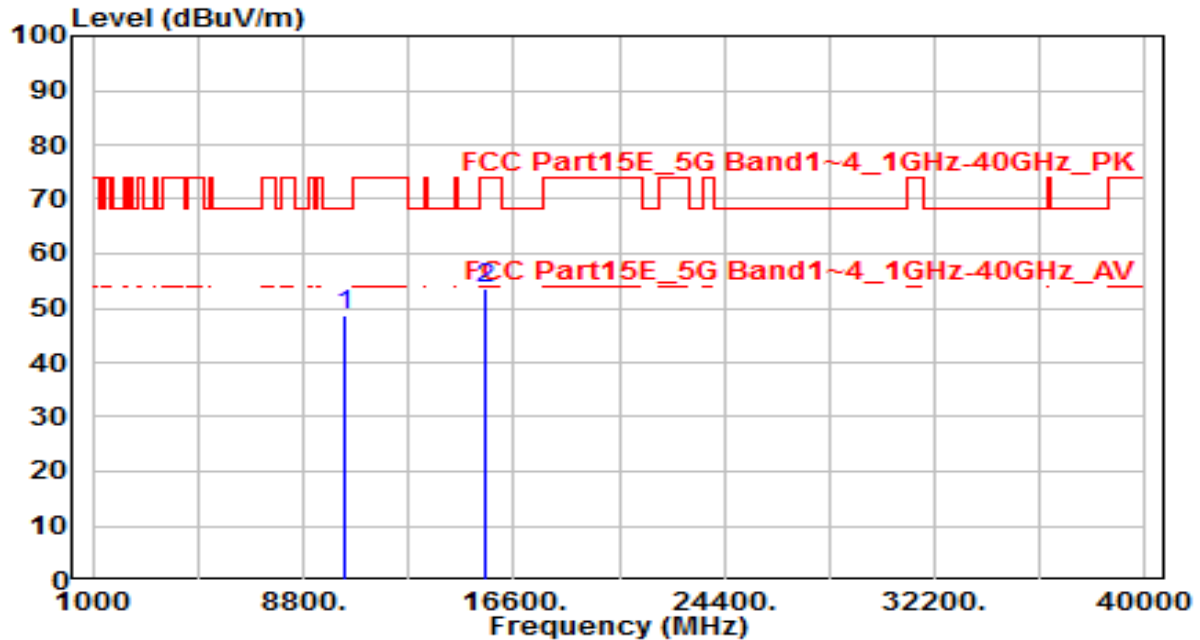


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	30.69	18.09	48.78	-19.42	68.20	150	360	Peak
2		15570.000	32.41	21.18	53.58	-20.42	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	By PoE

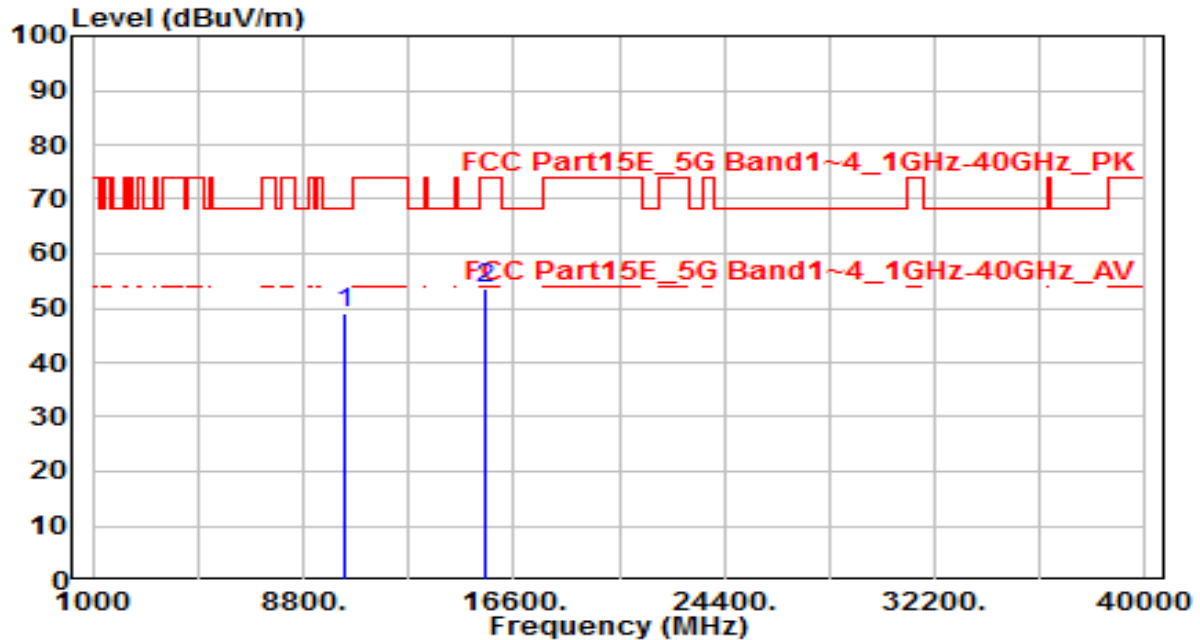


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	30.87	18.09	48.96	-19.24	68.20	150	360	Peak
2		15570.000	32.47	21.18	53.64	-20.36	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-40MHz_TX_Band1_CH 46_ANT 0+1+2+3	Test Voltage	By PoE

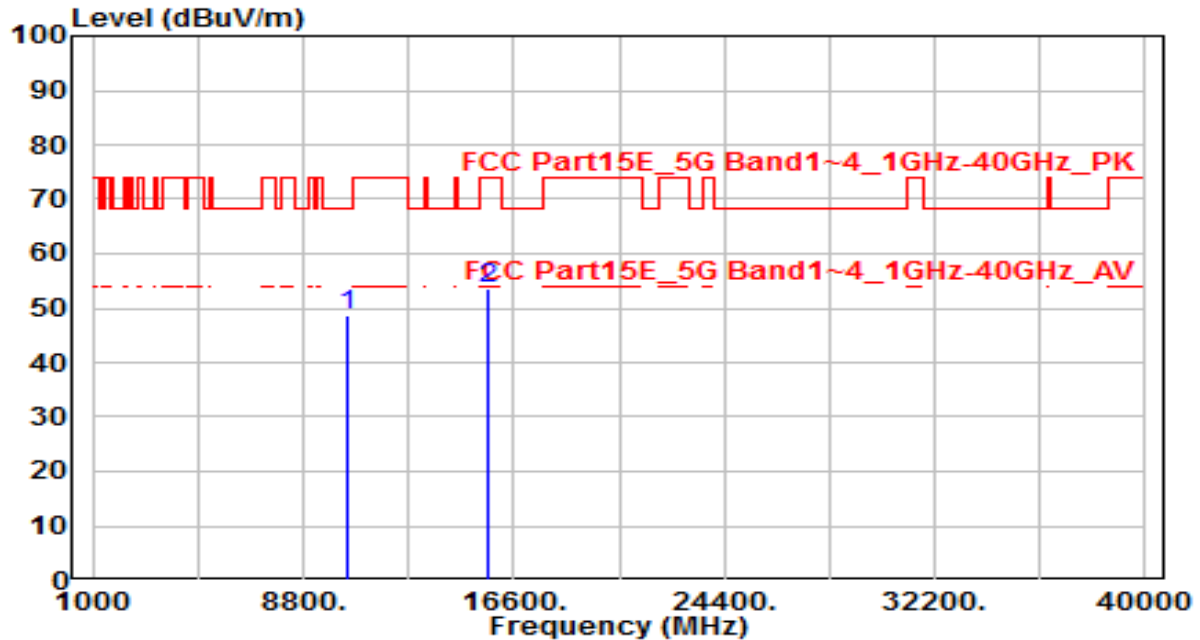


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	30.45	18.41	48.86	-19.34	68.20	150	360	Peak
2		15690.000	32.82	20.88	53.70	-20.30	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-40MHz_TX_Band1_CH 46_ANT 0+1+2+3	Test Voltage	By PoE

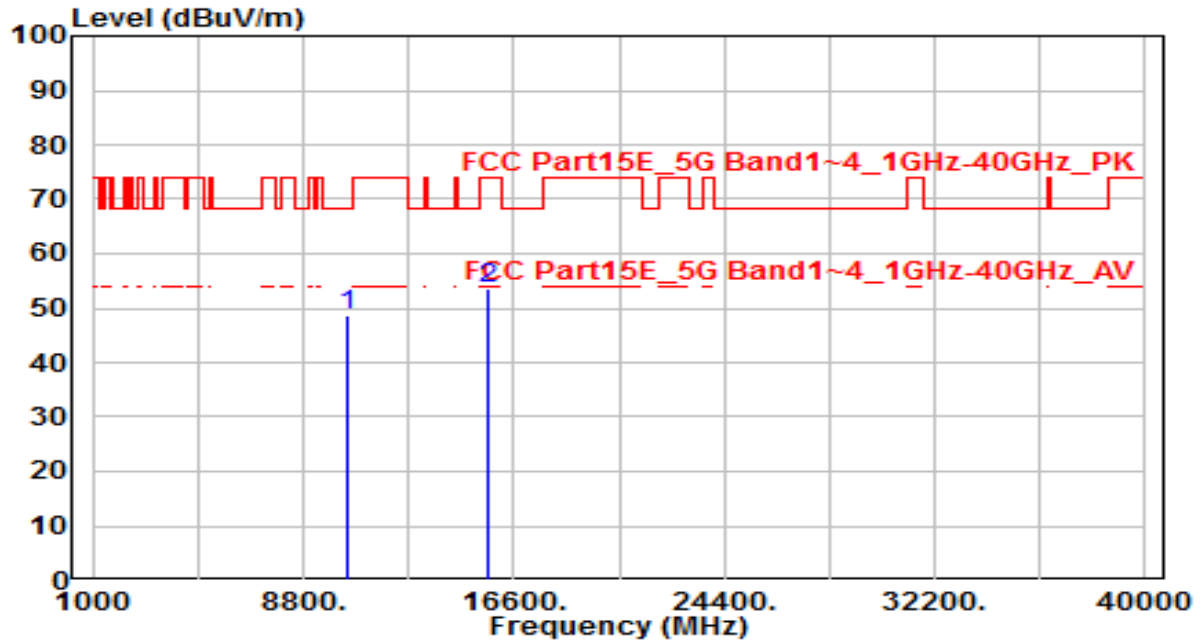


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	30.26	18.41	48.67	-19.53	68.20	150	360	Peak
2		15690.000	32.54	20.88	53.42	-20.58	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-40MHz_TX_Band2_CH 54_ANT 0+1+2+3	Test Voltage	By PoE

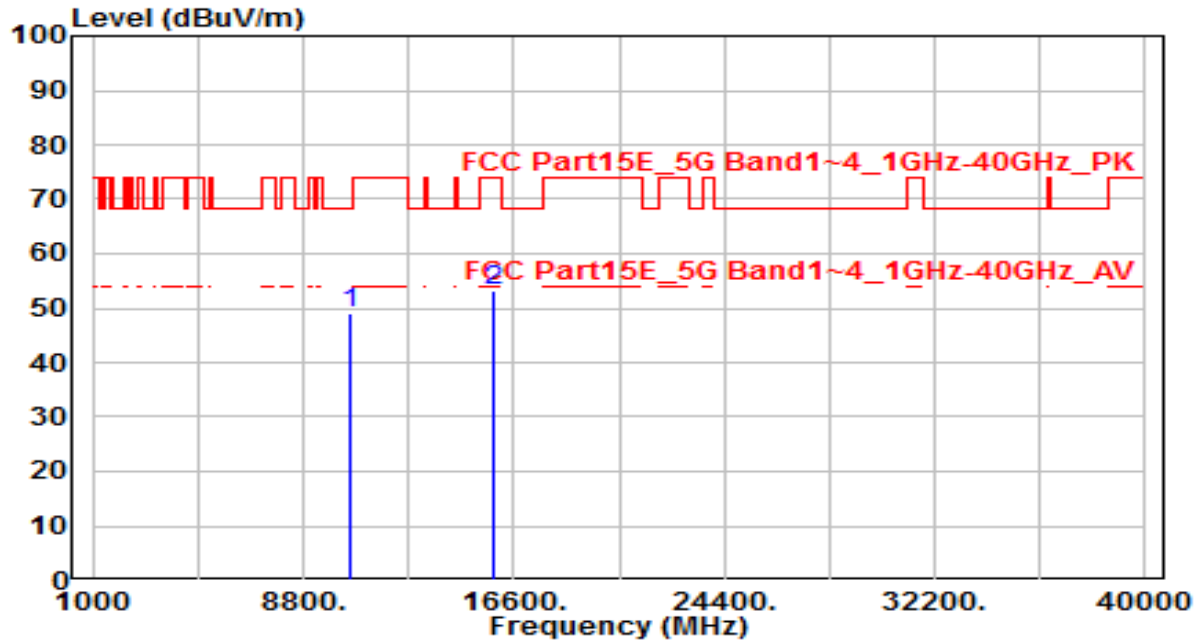


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	30.51	18.63	49.14	-19.06	68.20	150	360	Peak
2		15810.000	32.51	20.58	53.09	-20.91	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-40MHz_TX_Band2_CH 54_ANT 0+1+2+3	Test Voltage	By PoE

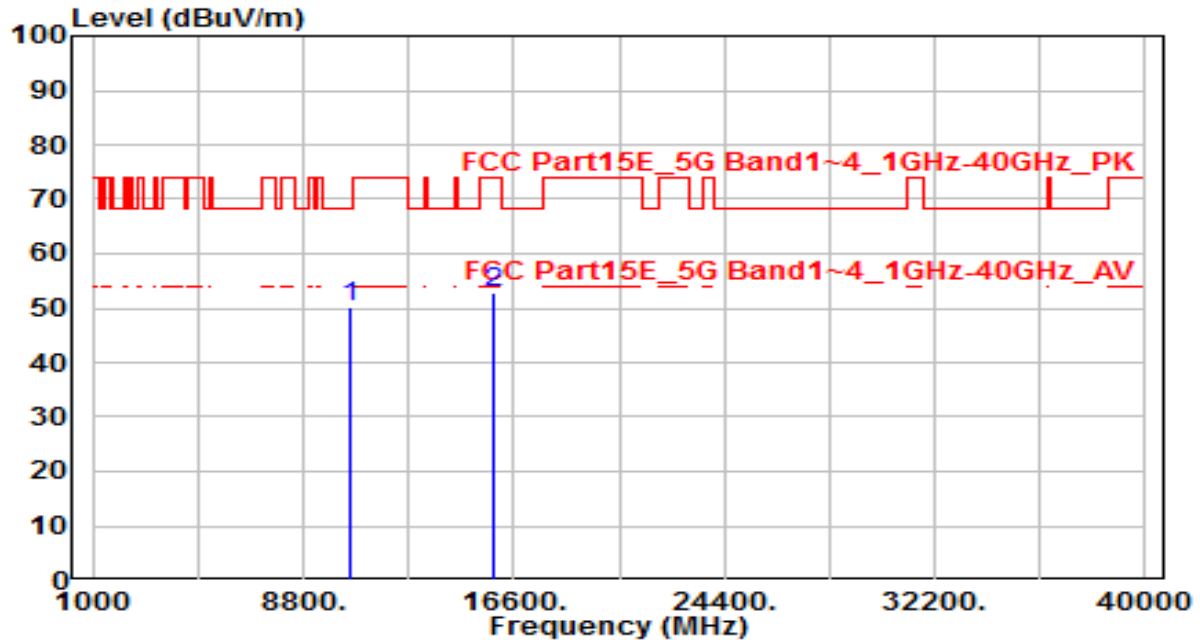


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	31.46	18.63	50.09	-18.11	68.20	150	360	Peak
2		15810.000	32.31	20.58	52.89	-21.11	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	By PoE

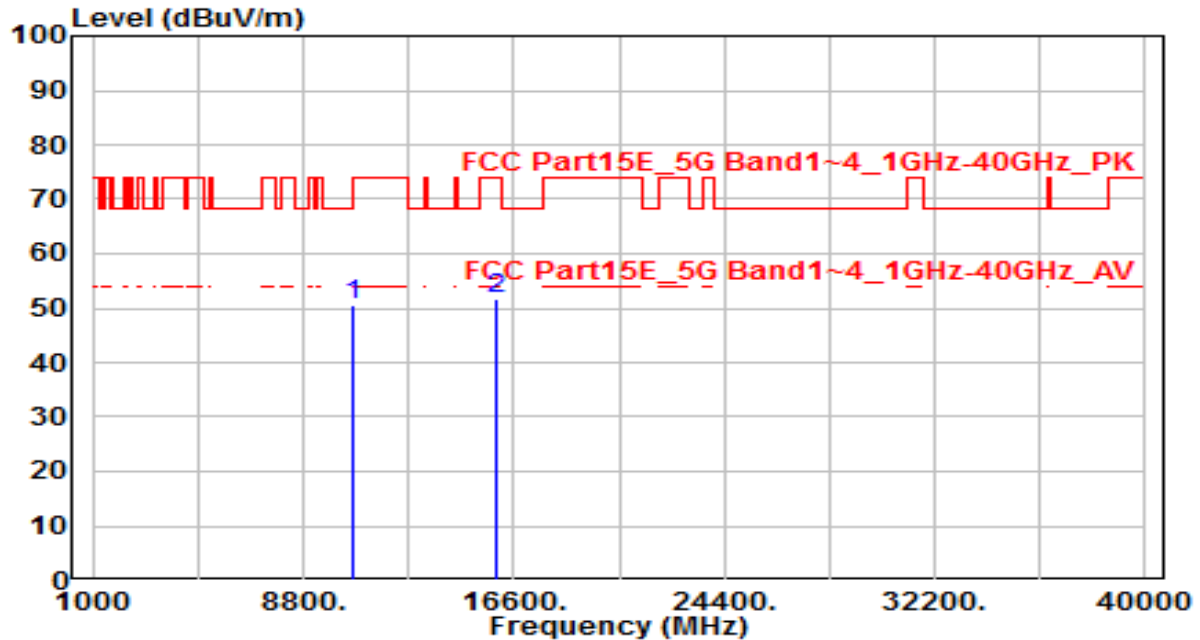


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	31.69	18.74	50.43	-23.57	74.00	150	360	Peak
2	* 15930.000	31.30	20.28	51.58	-22.42	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	By PoE

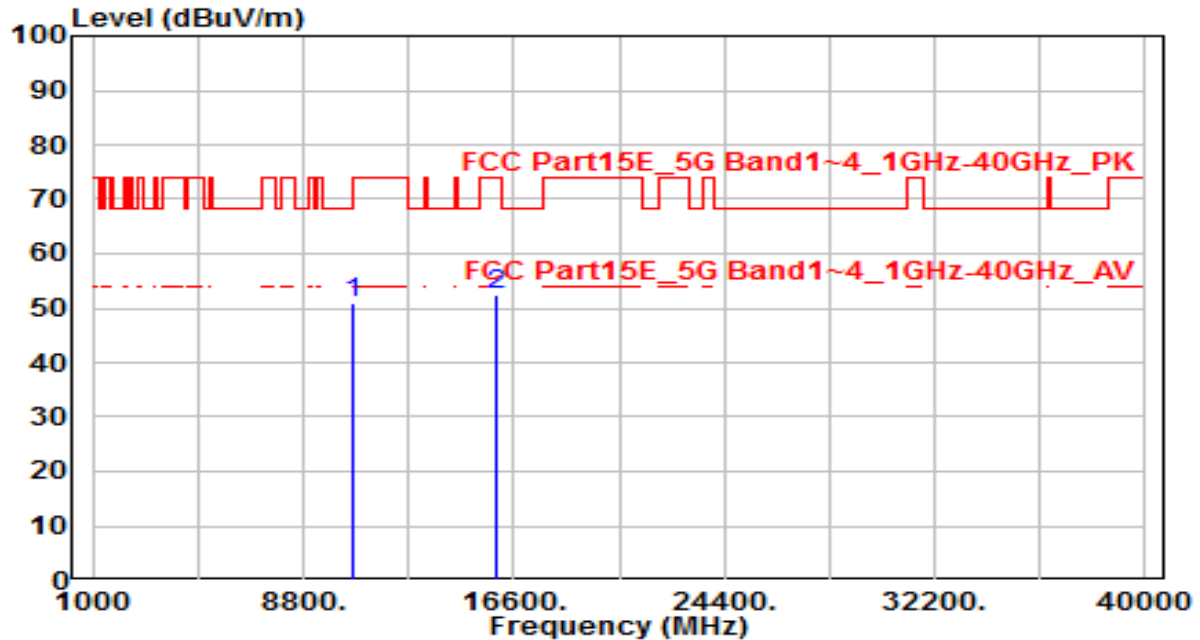


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	32.29	18.74	51.03	-22.97	74.00	150	360	Peak
2	* 15930.000	32.31	20.28	52.59	-21.41	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

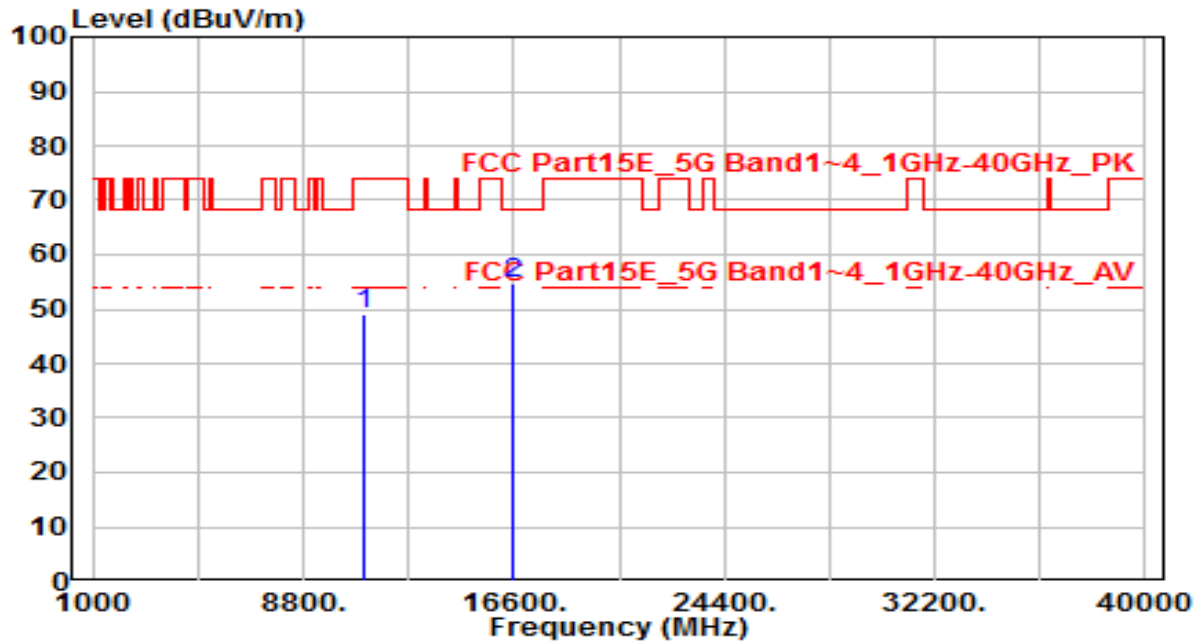


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	29.63	19.31	48.94	-25.06	74.00	150	360	Peak
2	* 16530.000	33.09	21.46	54.54	-13.66	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

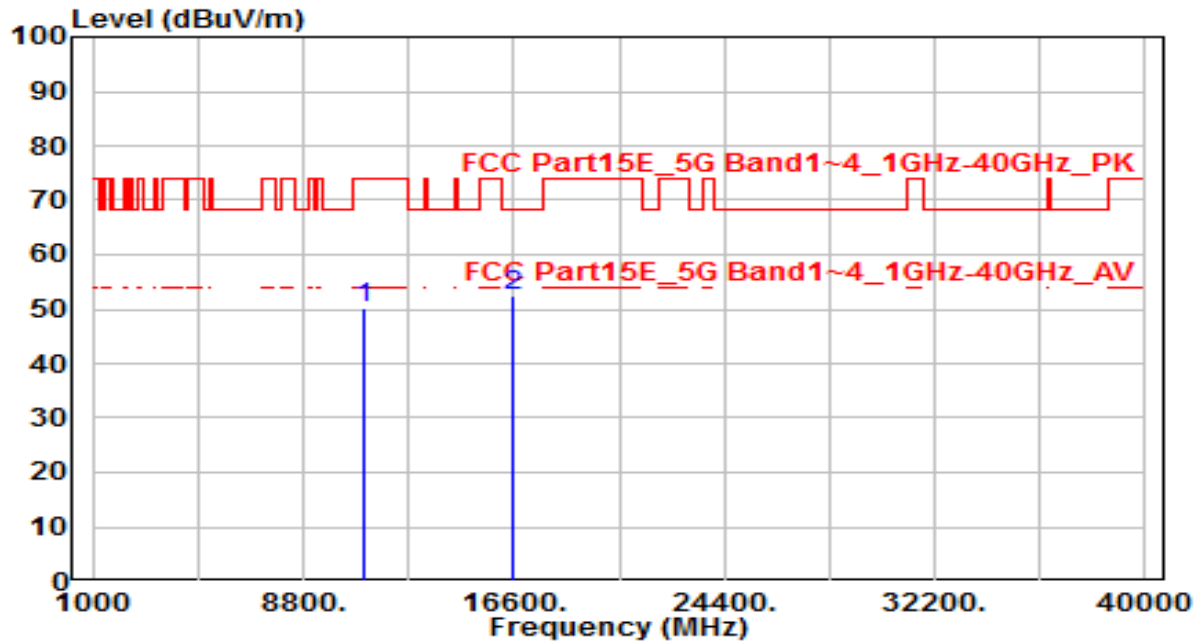


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	30.82	19.31	50.13	-23.87	74.00	150	360	Peak
2	* 16530.000	31.05	21.46	52.50	-15.70	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-40MHz_TX_Band3_CH 110_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

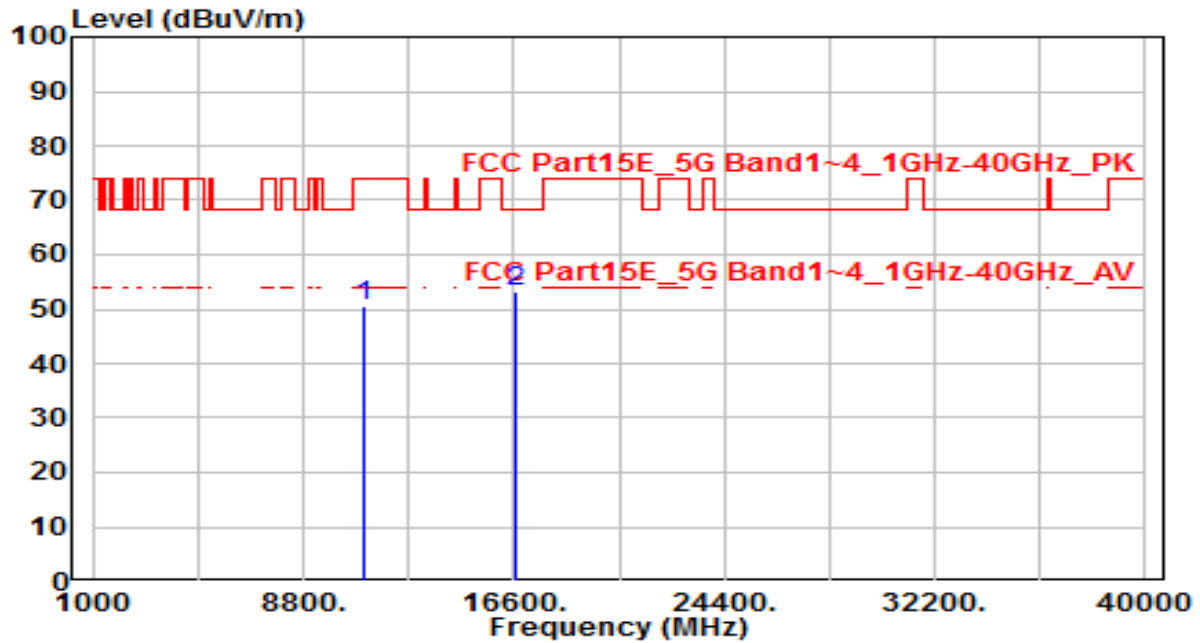


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	31.01	19.43	50.44	-23.56	74.00	150	360	Peak
2	* 16650.000	30.82	22.24	53.06	-15.14	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-40MHz_TX_Band3_CH 110_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

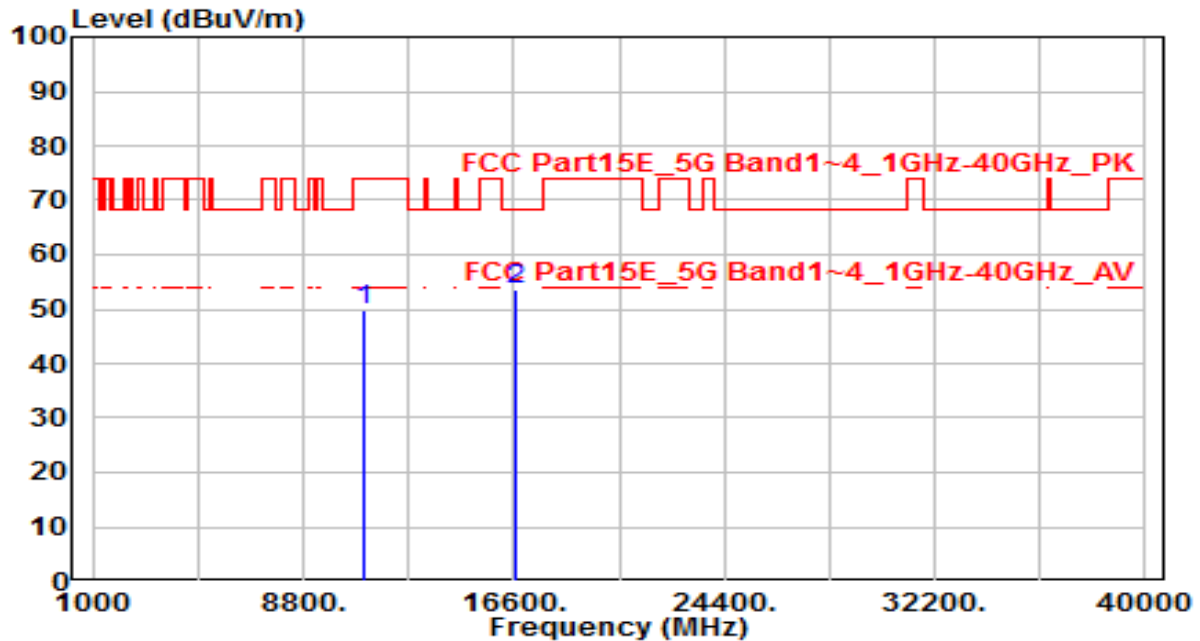


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	30.30	19.43	49.74	-24.26	74.00	150	360	Peak
2	* 16650.000	31.34	22.24	53.57	-14.63	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

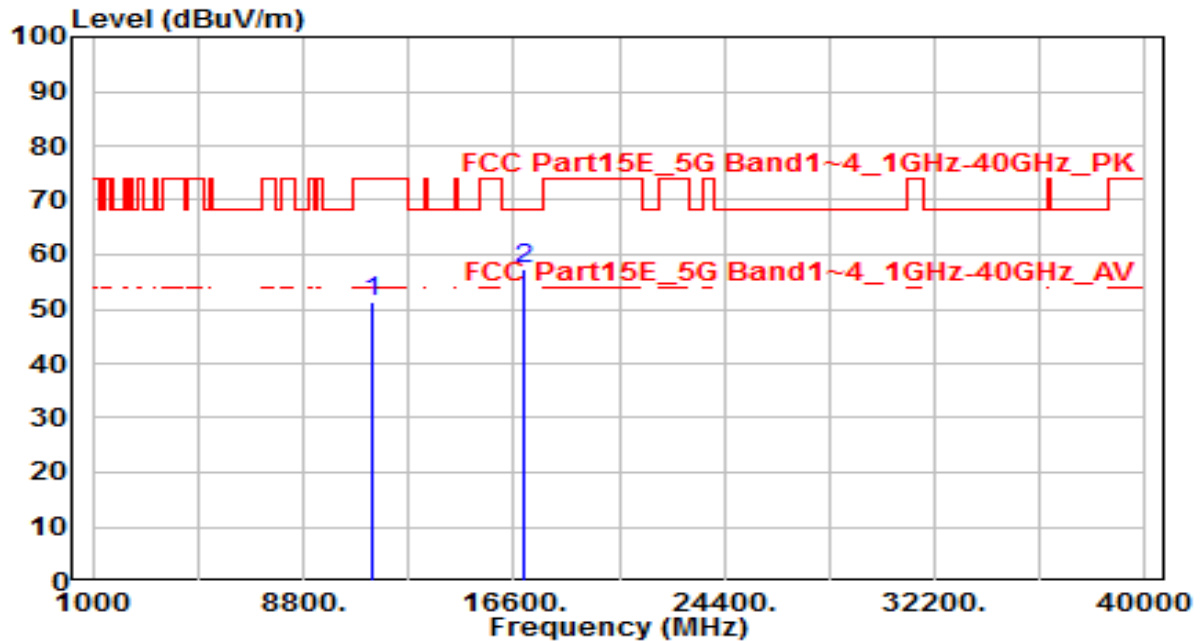


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	31.60	19.80	51.40	-22.60	74.00	150	360	Peak
2	* 17010.000	32.66	24.58	57.23	-10.97	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

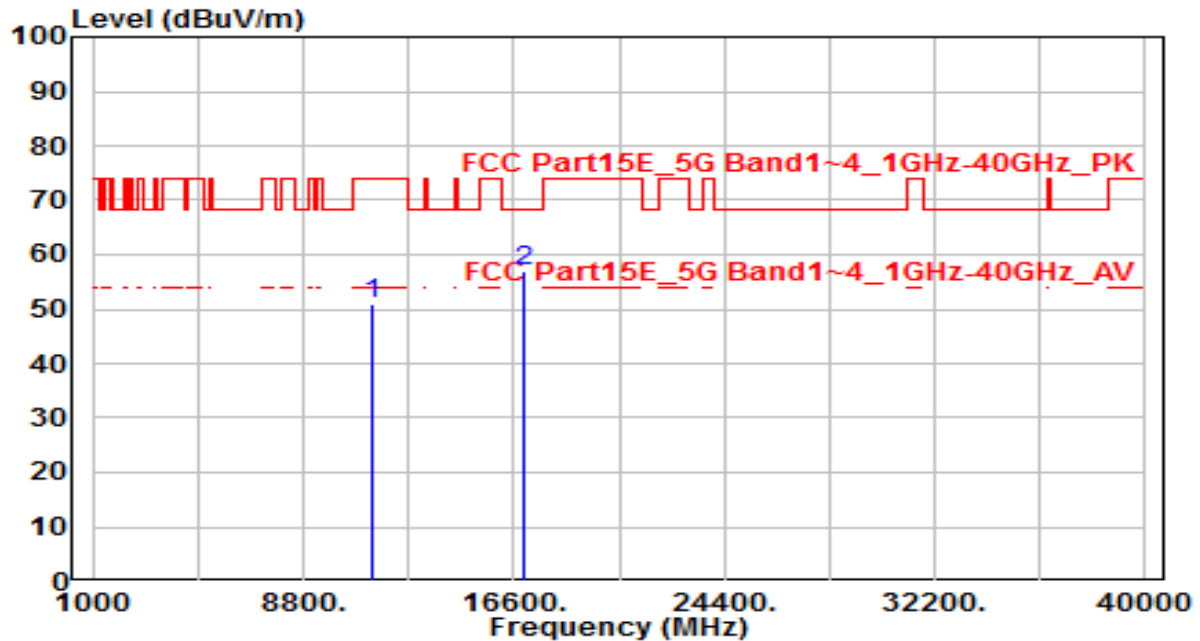


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	31.15	19.80	50.95	-23.05	74.00	150	360	Peak
2	* 17010.000	32.28	24.58	56.85	-11.35	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

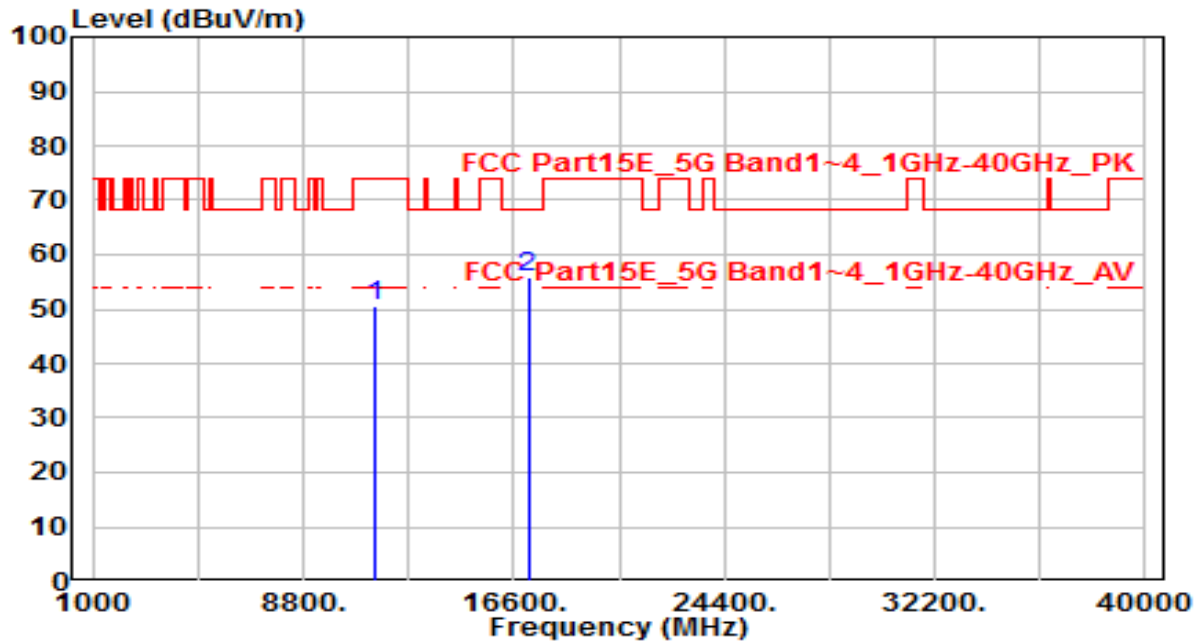


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	30.72	19.93	50.65	-23.35	74.00	150	360	Peak
2	* 17130.000	30.65	25.38	56.03	-12.17	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

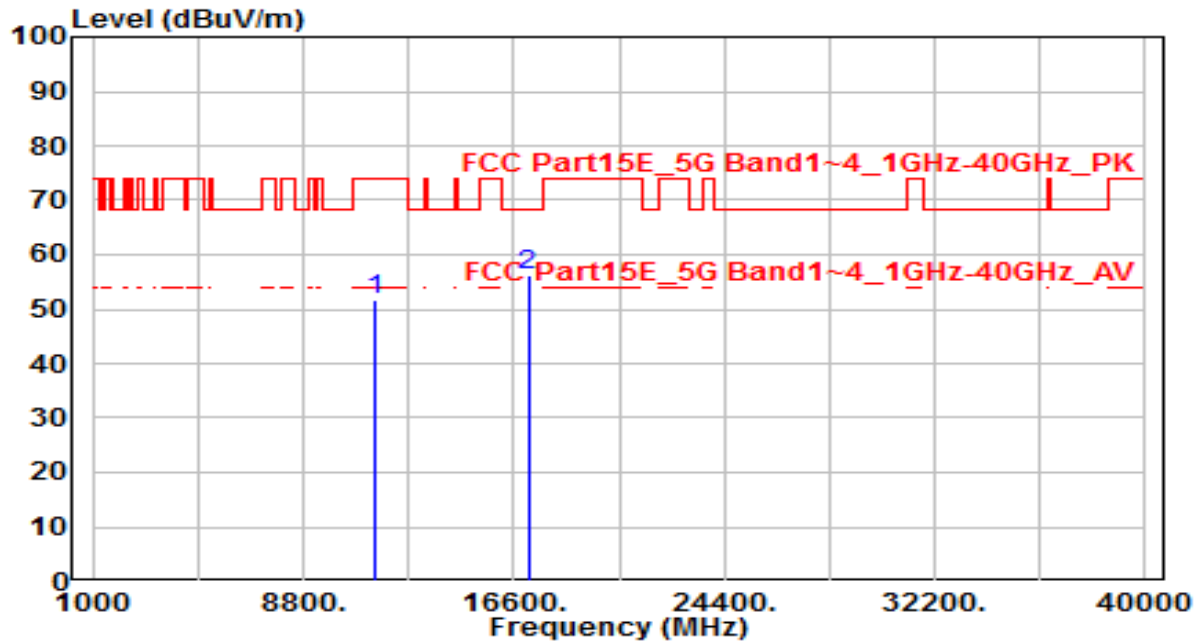


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	31.78	19.93	51.71	-22.29	74.00	150	360	Peak
2	* 17130.000	30.92	25.38	56.30	-11.90	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

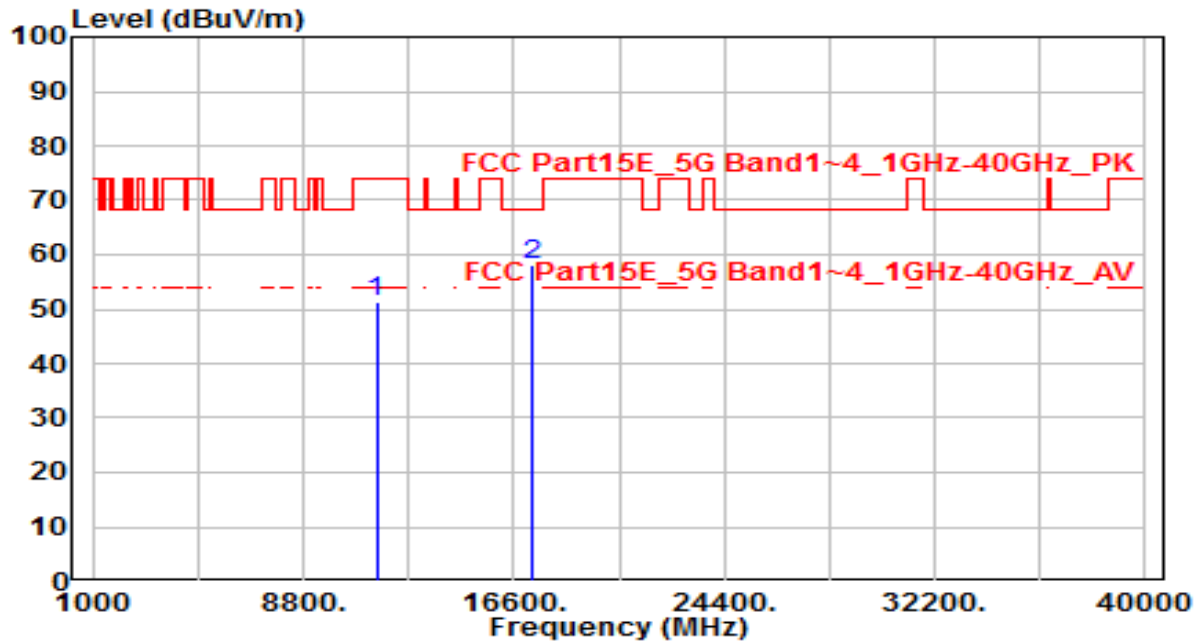


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	31.24	20.03	51.27	-22.73	74.00	150	360	Peak
2	* 17265.000	31.85	26.27	58.12	-10.08	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

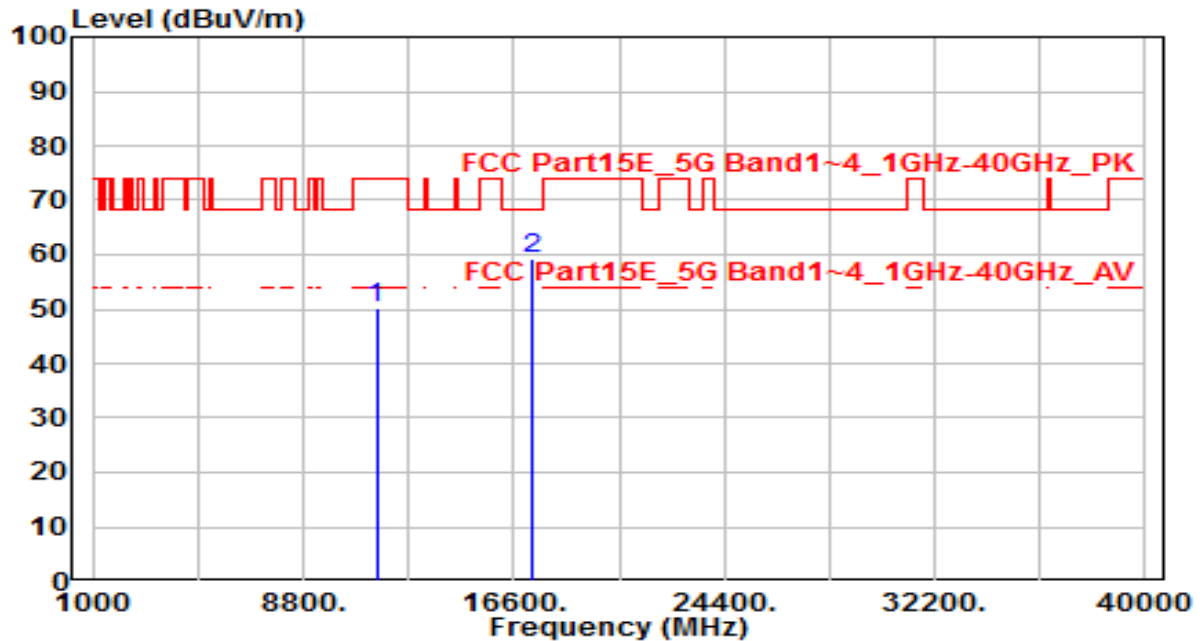


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	30.32	20.03	50.35	-23.65	74.00	150	360	Peak
2	* 17265.000	32.87	26.27	59.15	-9.05	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

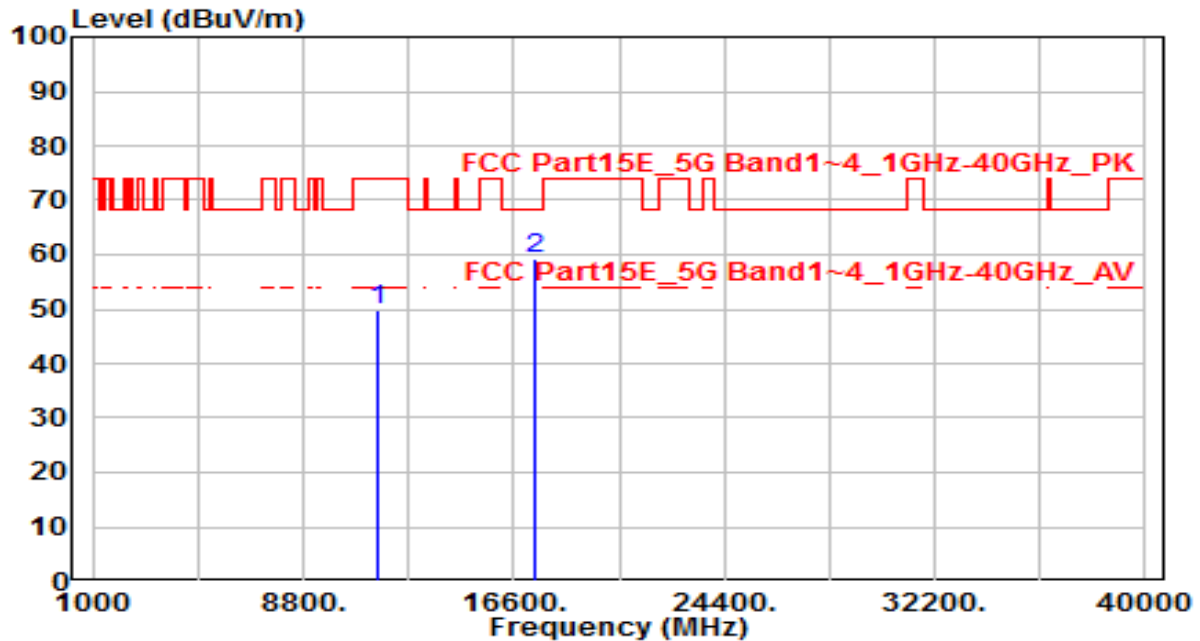


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	29.90	19.85	49.74	-24.26	74.00	150	360	Peak
2	* 17385.000	32.13	27.07	59.20	-9.00	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

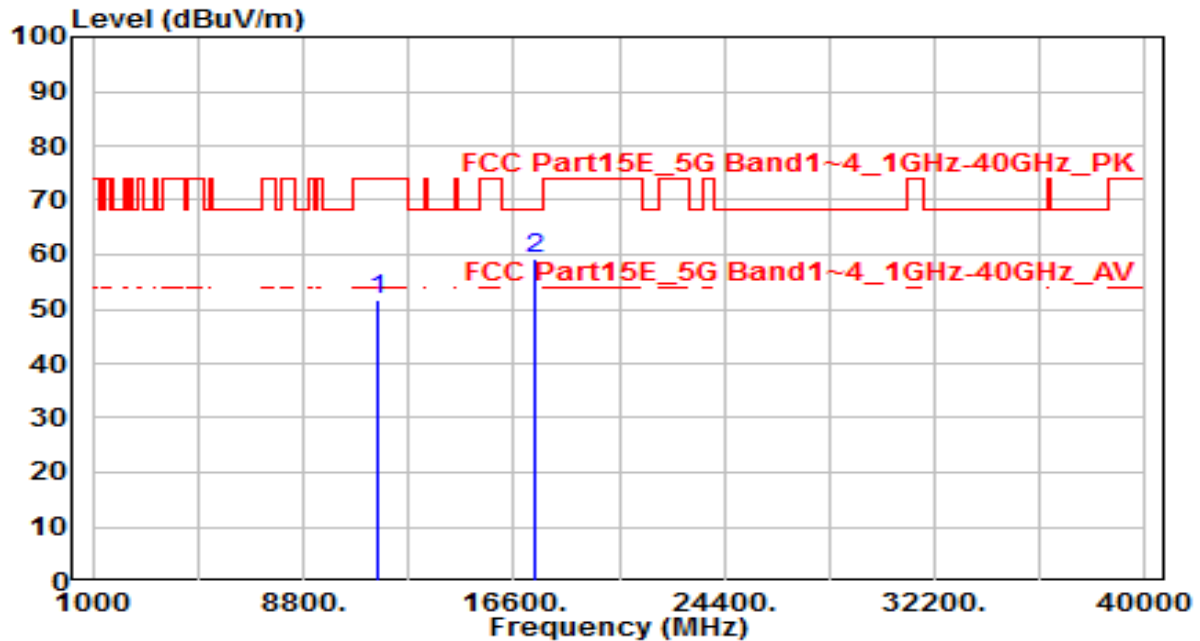


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	31.87	19.85	51.72	-22.28	74.00	150	360	Peak
2	* 17385.000	32.01	27.07	59.09	-9.11	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	By PoE

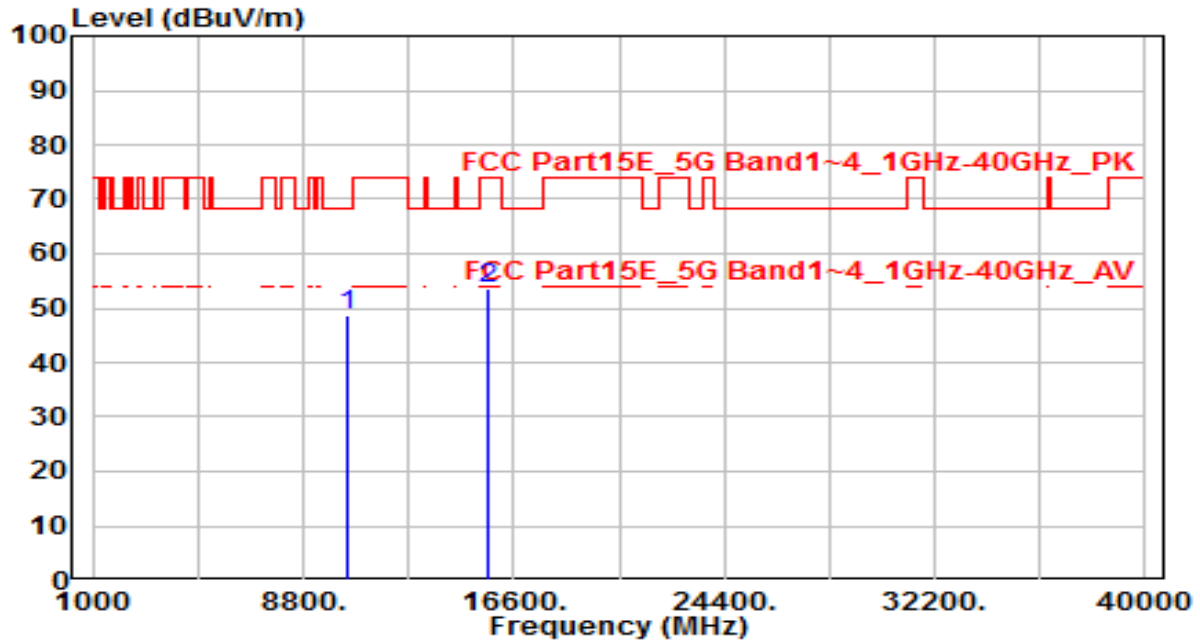


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	30.34	18.25	48.58	-19.62	68.20	150	360	Peak
2		15630.000	32.48	21.03	53.51	-20.49	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	By PoE

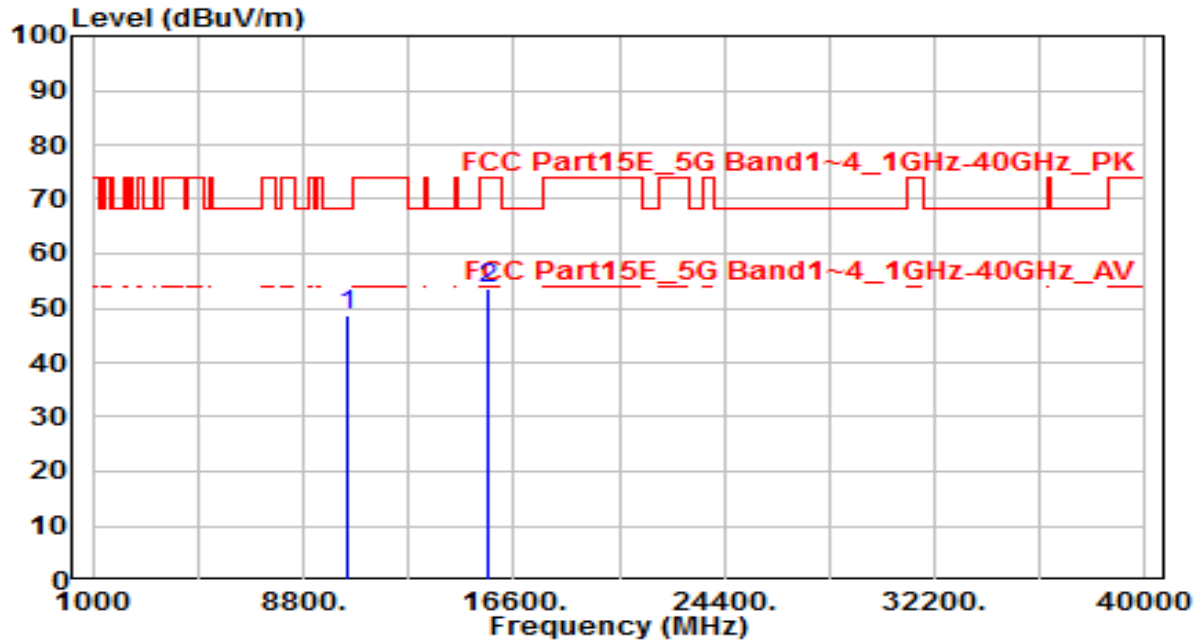


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	30.24	18.25	48.49	-19.71	68.20	150	360	Peak
2		15630.000	32.51	21.03	53.54	-20.46	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	By PoE

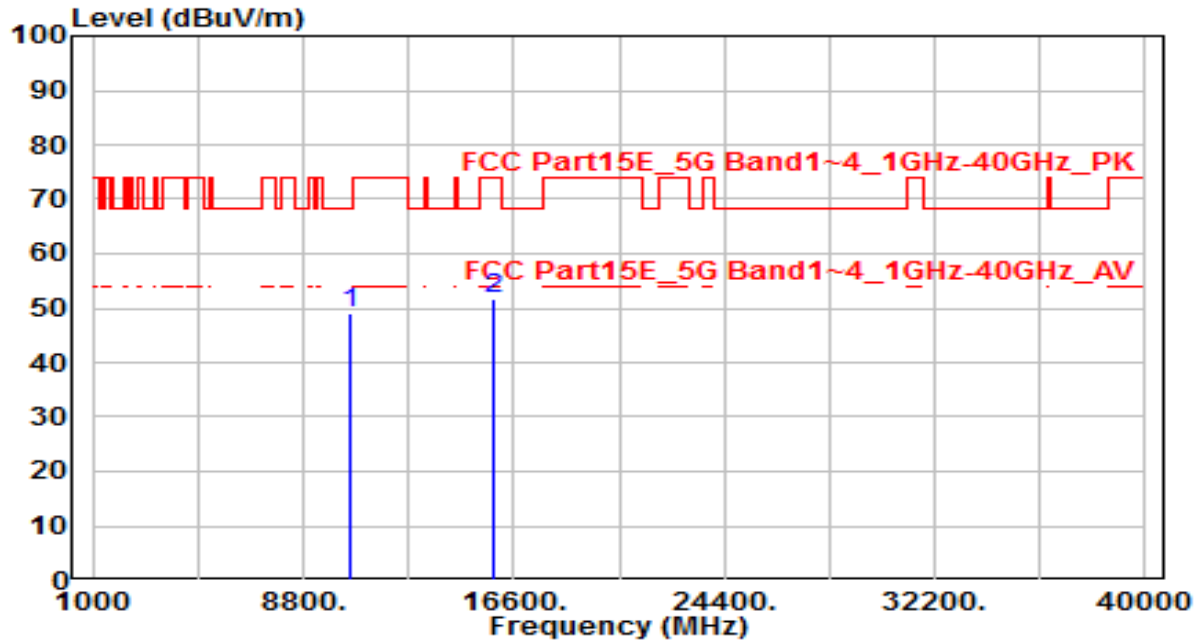


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	30.48	18.68	49.17	-19.03	68.20	150	360	Peak
2		15870.000	31.10	20.43	51.53	-22.47	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	By PoE

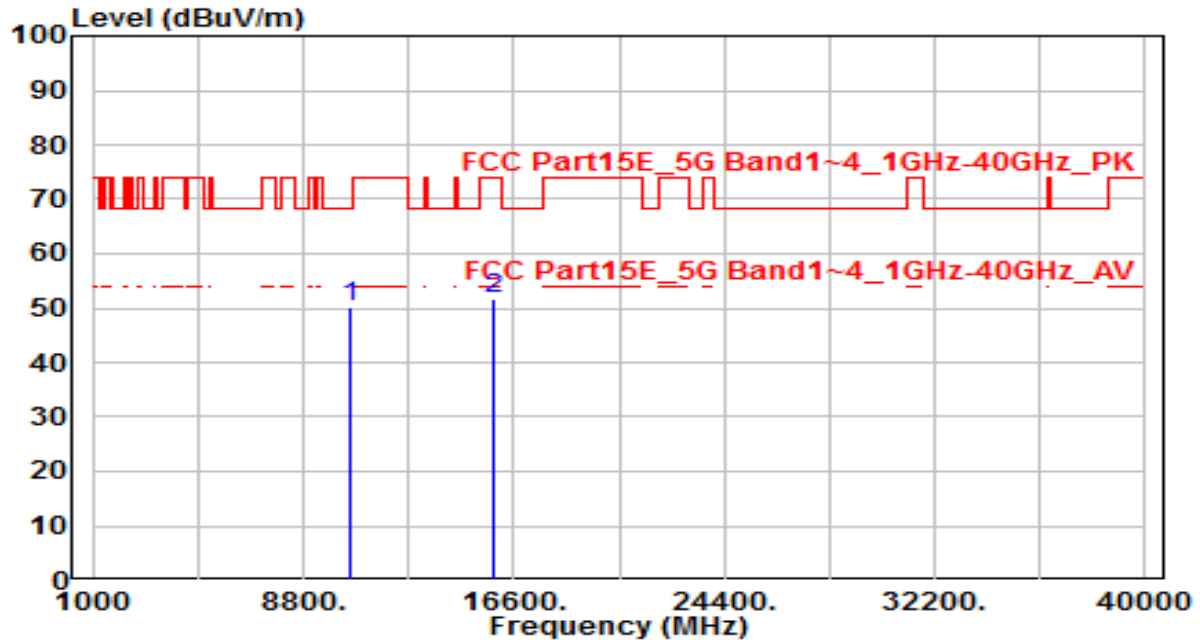


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	31.43	18.68	50.11	-18.09	68.20	150	360	Peak
2		15870.000	31.12	20.43	51.55	-22.45	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

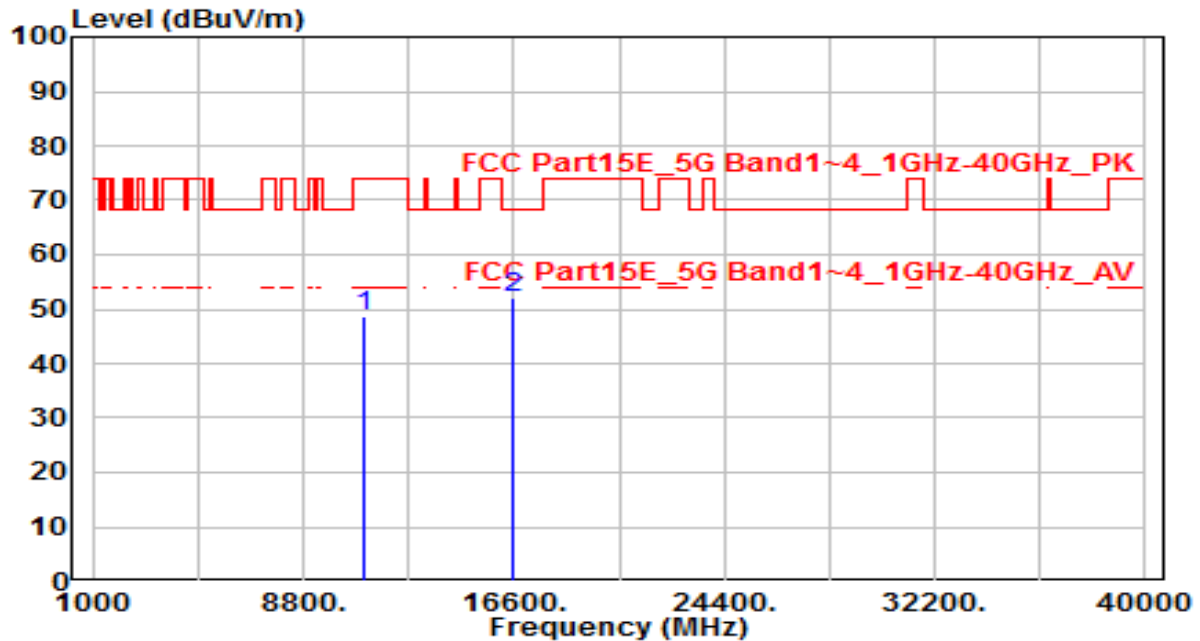


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	29.15	19.37	48.52	-25.48	74.00	150	360	Peak
2	* 16590.000	30.37	21.85	52.22	-15.98	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

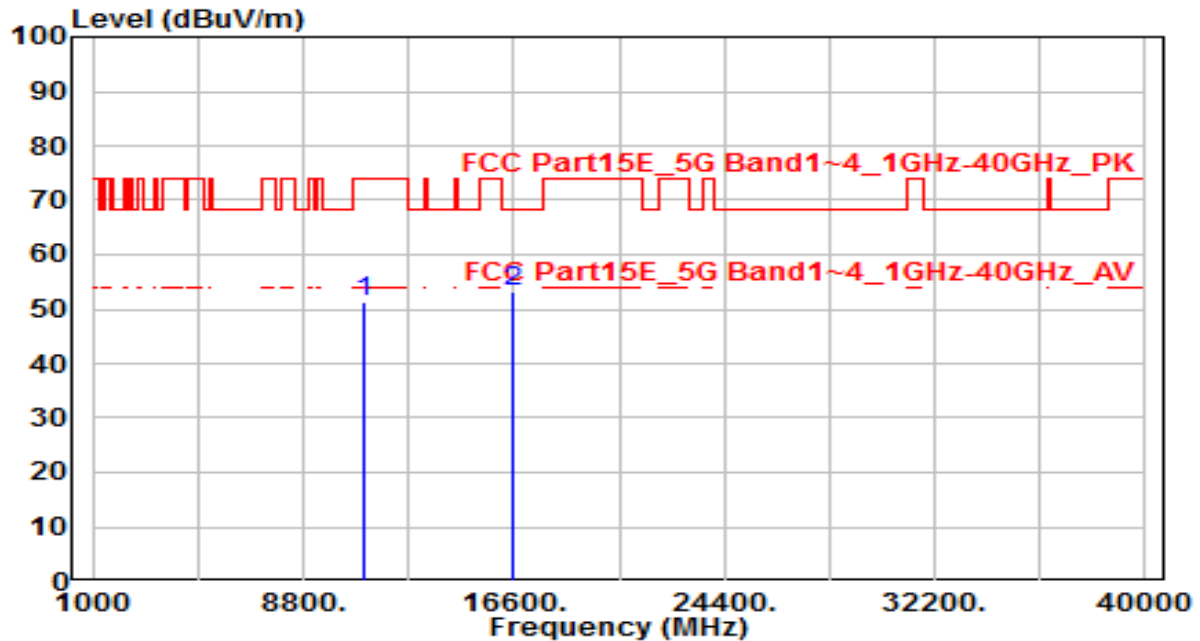


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	31.93	19.37	51.30	-22.70	74.00	150	360	Peak
2	* 16590.000	31.23	21.85	53.07	-15.13	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

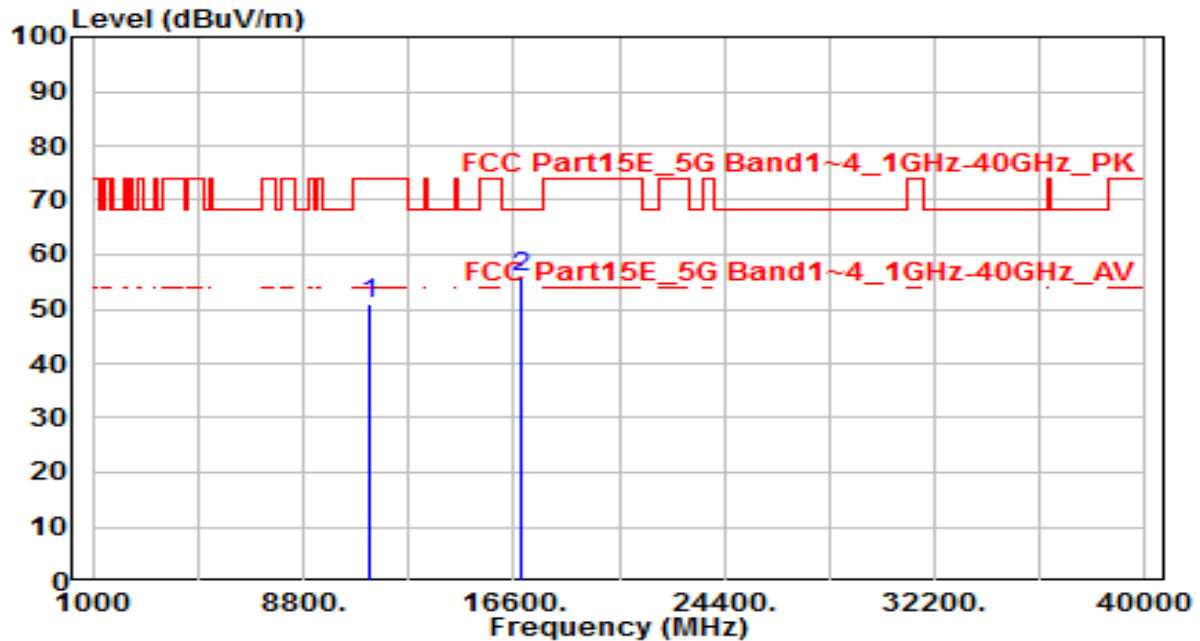


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	31.46	19.62	51.08	-22.92	74.00	150	360	Peak
2	* 16830.000	32.56	23.41	55.97	-12.23	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

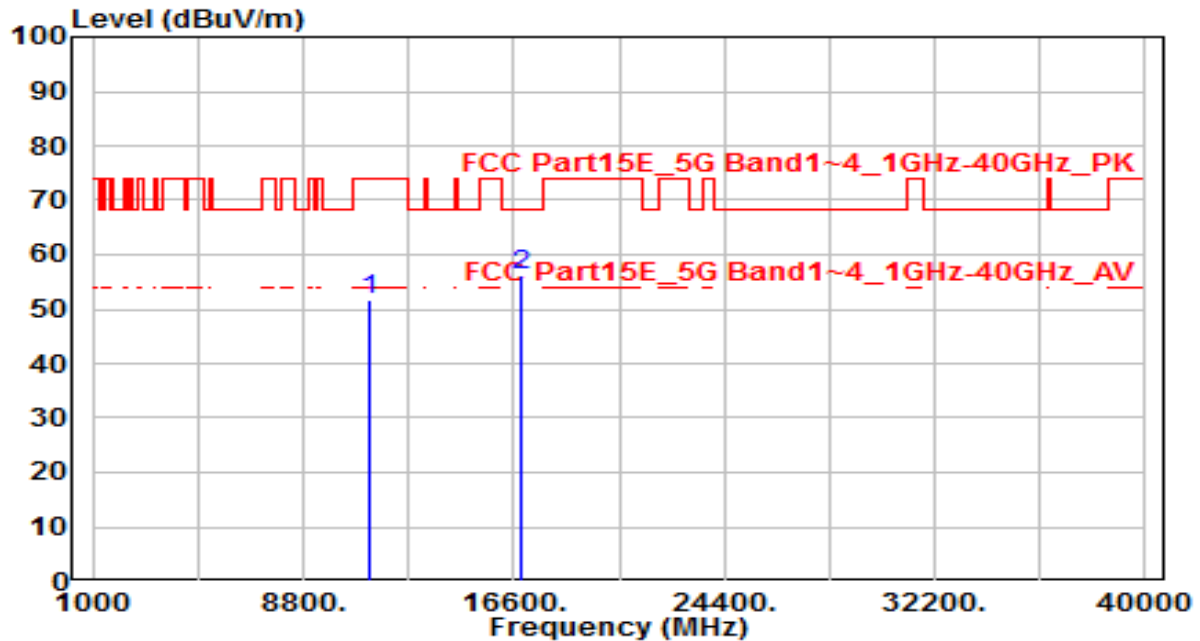


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	32.14	19.62	51.76	-22.24	74.00	150	360	Peak
2	* 16830.000	32.84	23.41	56.25	-11.96	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

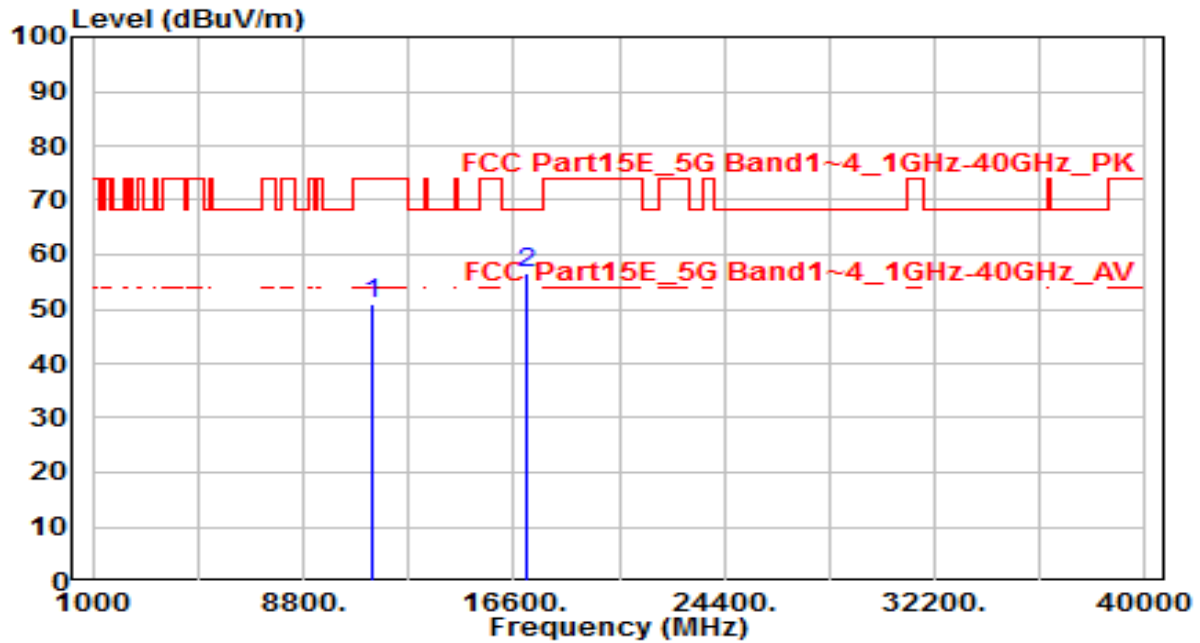


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	31.16	19.87	51.03	-22.97	74.00	150	360	Peak
2	* 17070.000	31.44	24.98	56.42	-11.78	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

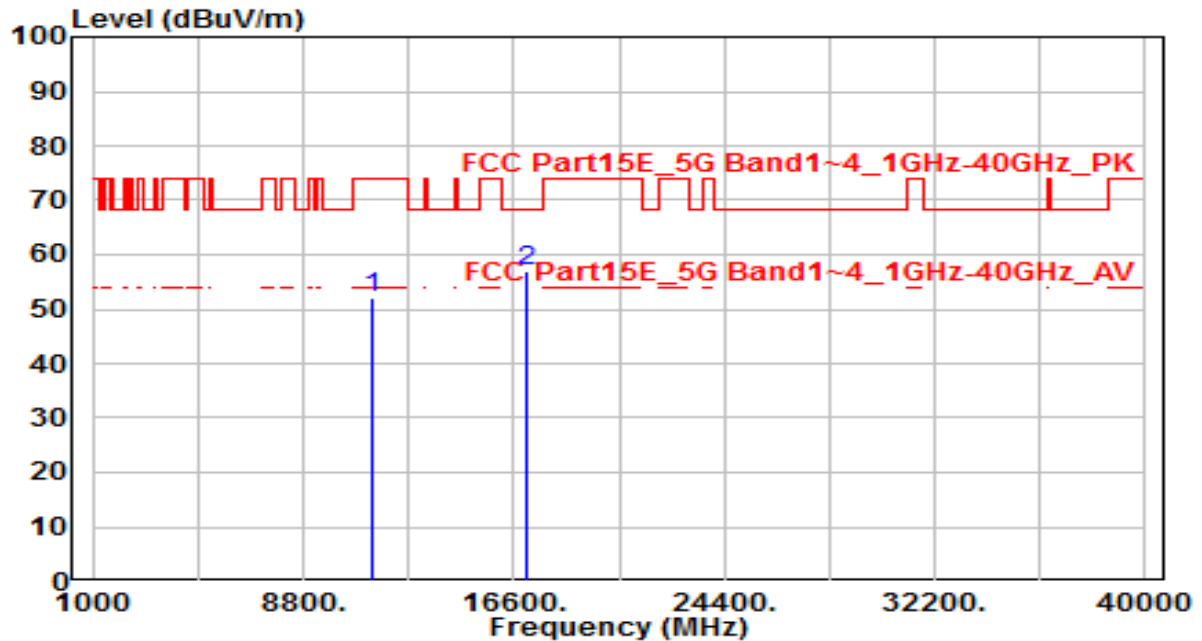


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	32.31	19.87	52.17	-21.83	74.00	150	360	Peak
2	* 17070.000	31.89	24.98	56.86	-11.34	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

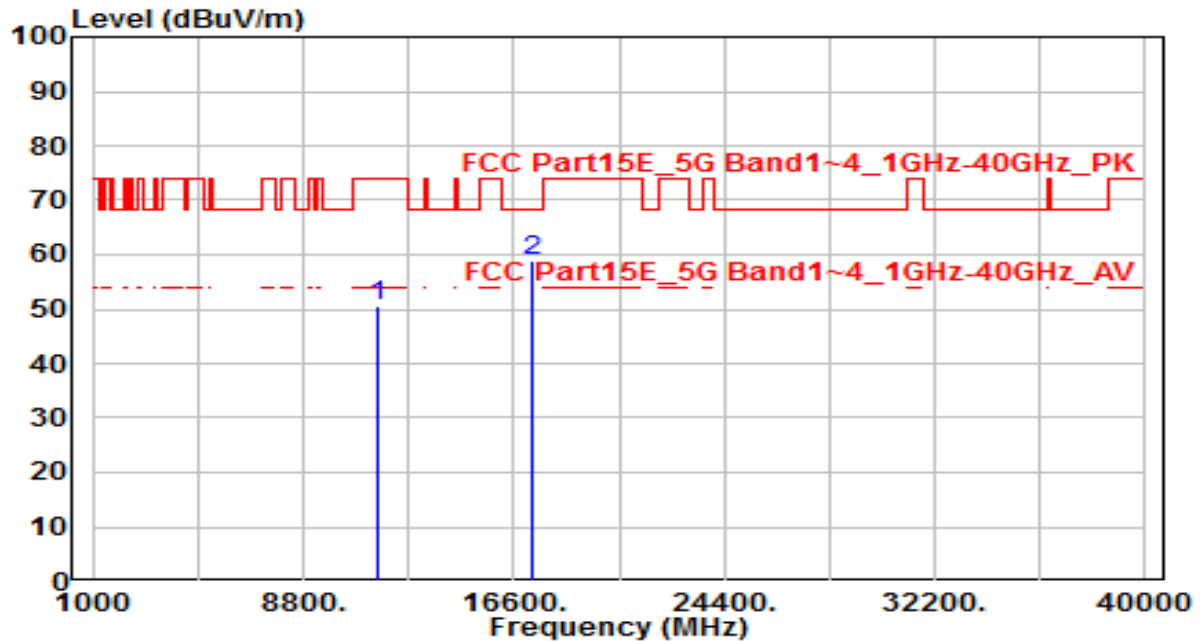


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	30.55	19.94	50.49	-23.51	74.00	150	360	Peak
2	* 17325.000	32.21	26.67	58.88	-9.32	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ ANT 0+1+2+3+4+5+6+7	Test Voltage	By PoE

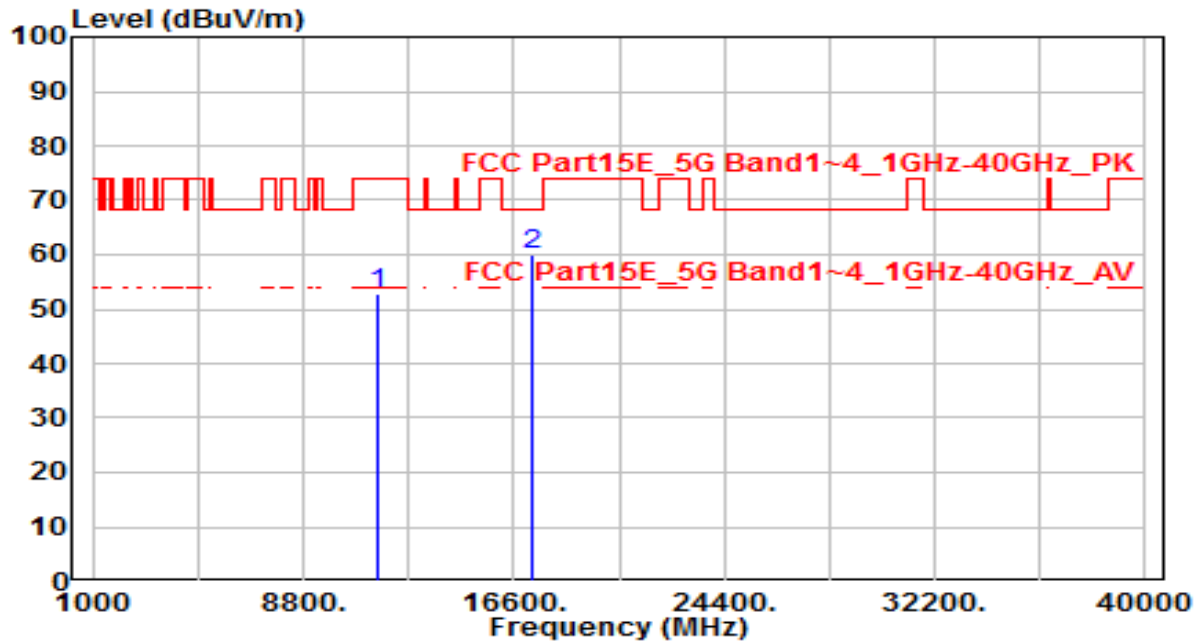


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	32.82	19.94	52.76	-21.24	74.00	150	360	Peak
2	* 17325.000	33.18	26.67	59.85	-8.35	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	By PoE

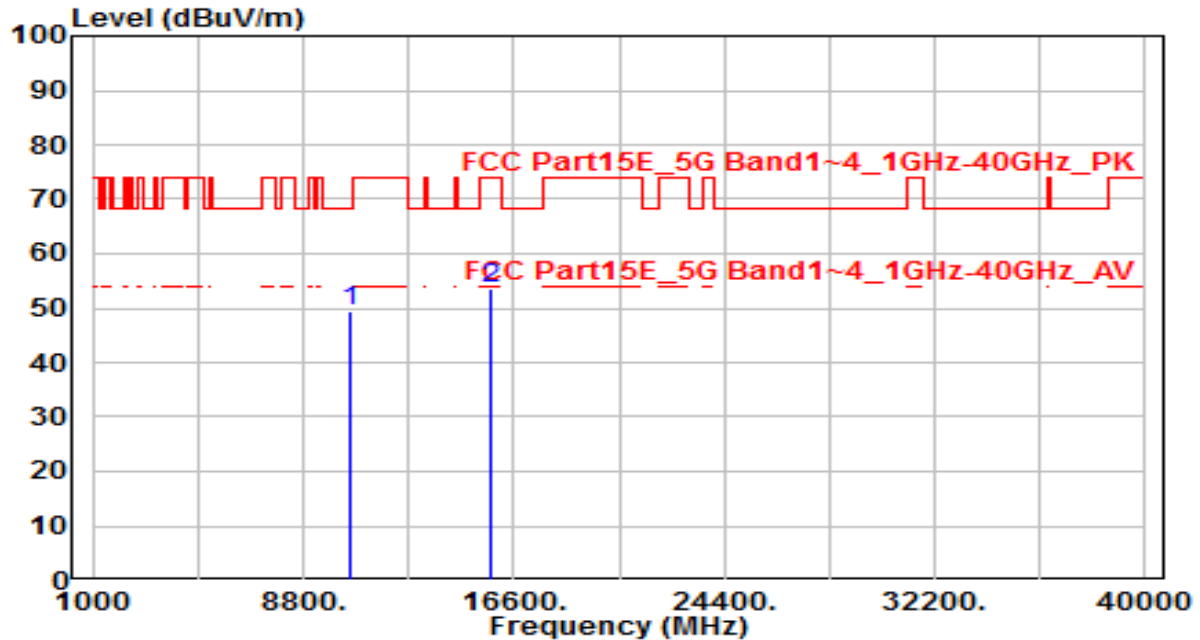


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	30.75	18.57	49.32	-18.88	68.20	150	360	Peak
2		15750.000	32.94	20.73	53.67	-20.33	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-20
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /68%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	By PoE

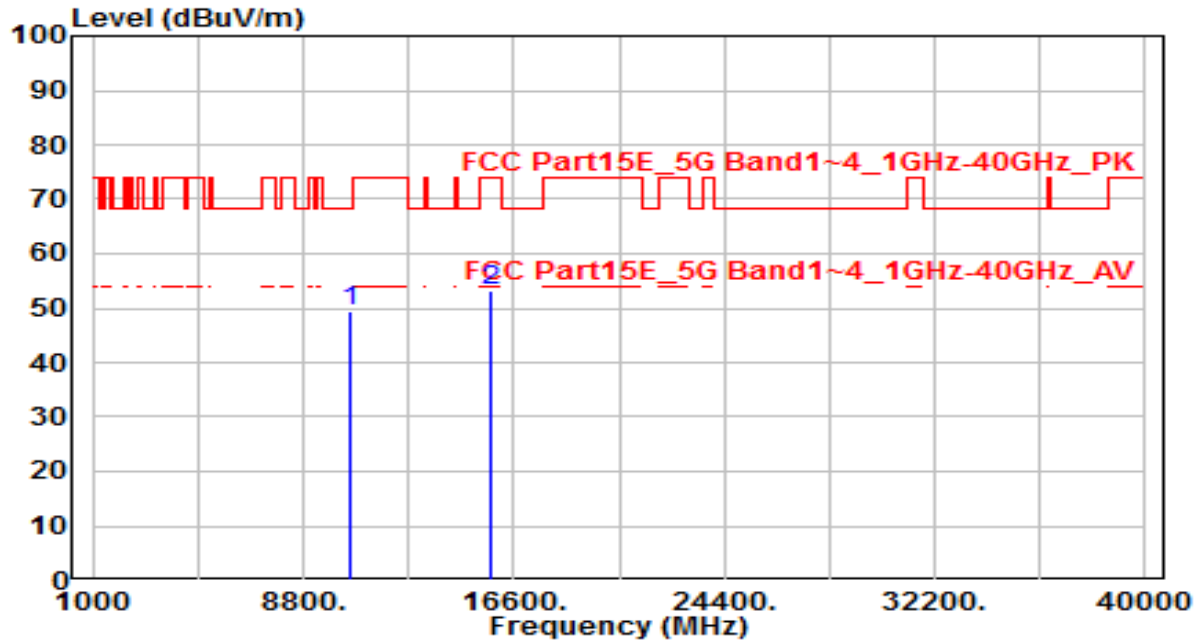


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	30.85	18.57	49.42	-18.78	68.20	150	360	Peak
2		15750.000	32.61	20.73	53.34	-20.66	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-14
Factor	VULB 9162	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Hance
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0	Test Voltage	By PoE

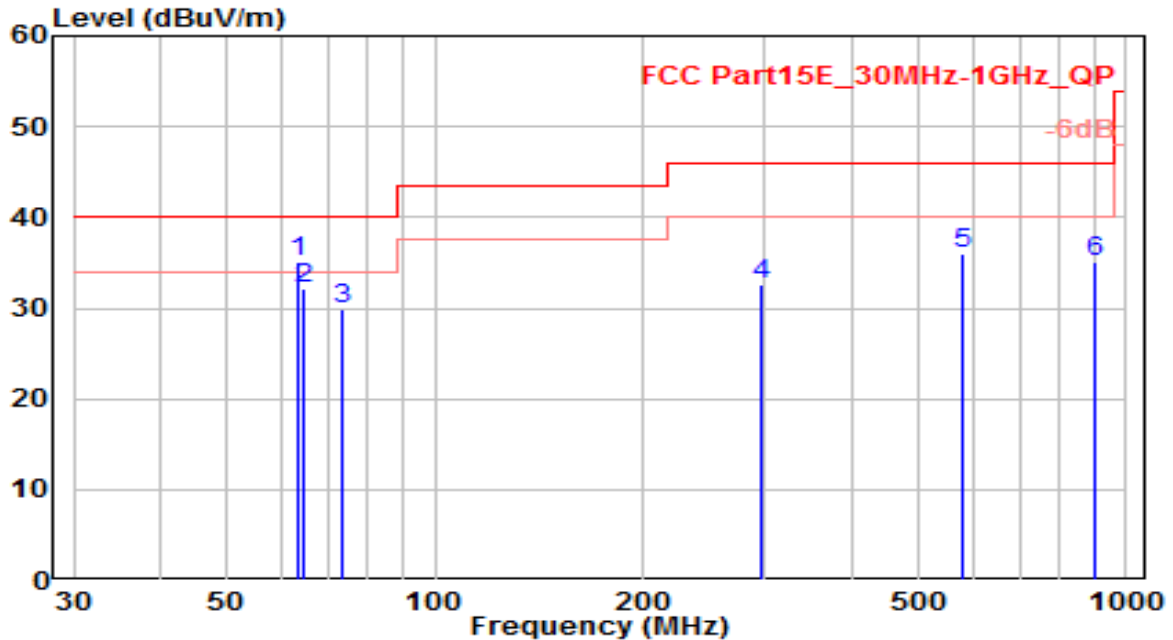


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	63.630	16.12	19.03	35.15	-4.85	40.00	130	250	QP
2		64.730	13.46	18.68	32.14	-7.86	40.00	120	10	QP
3		73.650	13.94	16.01	29.95	-10.05	40.00	110	210	QP
4		297.230	11.06	21.44	32.50	-13.50	46.00	110	260	QP
5		580.630	8.69	27.42	36.11	-9.89	46.00	130	320	QP
6		900.630	3.42	31.77	35.19	-10.81	46.00	100	130	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-14
Factor	VULB 9162	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Hance
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0	Test Voltage	By PoE

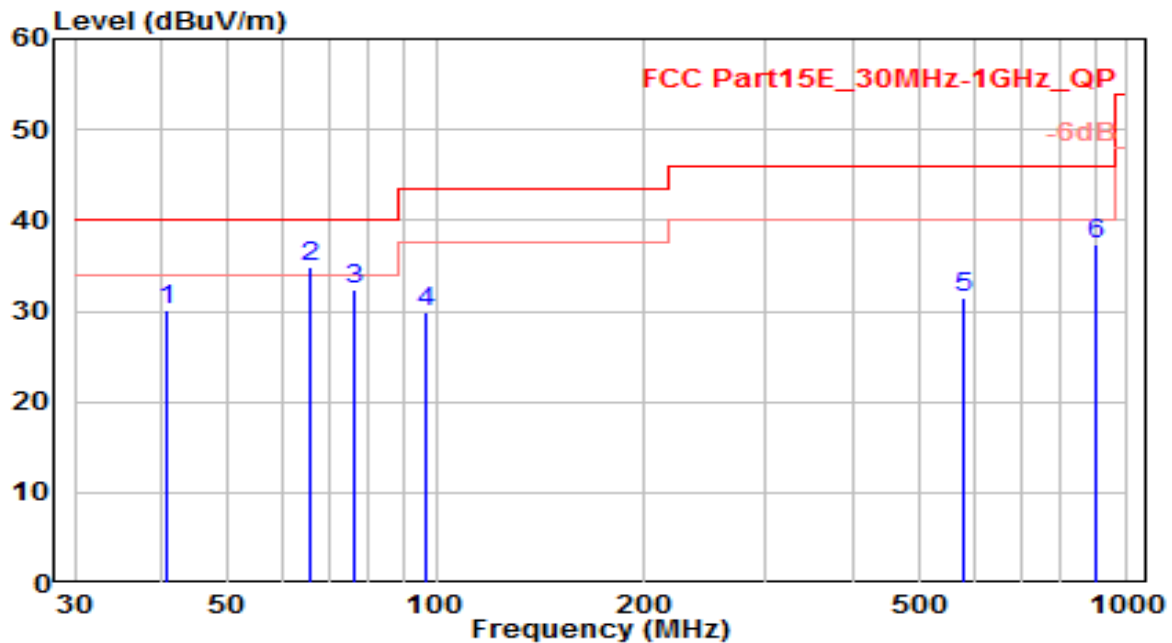


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	40.590	8.93	21.15	30.08	-9.92	40.00	100	160	QP
2	* 65.680	16.42	18.37	34.79	-5.21	40.00	110	110	QP
3	75.830	16.94	15.44	32.38	-7.62	40.00	125	165	QP
4	96.850	11.35	18.46	29.81	-13.69	43.50	120	50	QP
5	581.630	4.06	27.44	31.50	-14.50	46.00	130	210	QP
6	900.460	5.69	31.77	37.46	-8.54	46.00	100	140	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 36_ANT 0	Test Voltage	By PoE

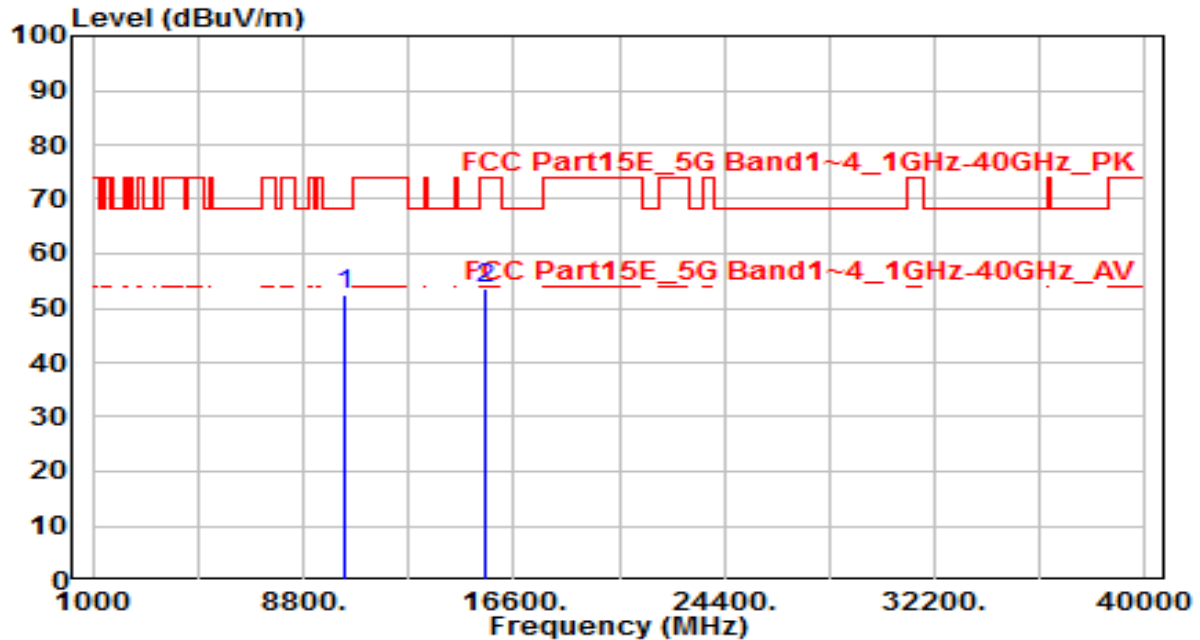


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	34.44	18.01	52.45	-15.75	68.20	150	360	Peak
2		15540.000	32.21	21.25	53.46	-20.54	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 36_ANT 0	Test Voltage	By PoE

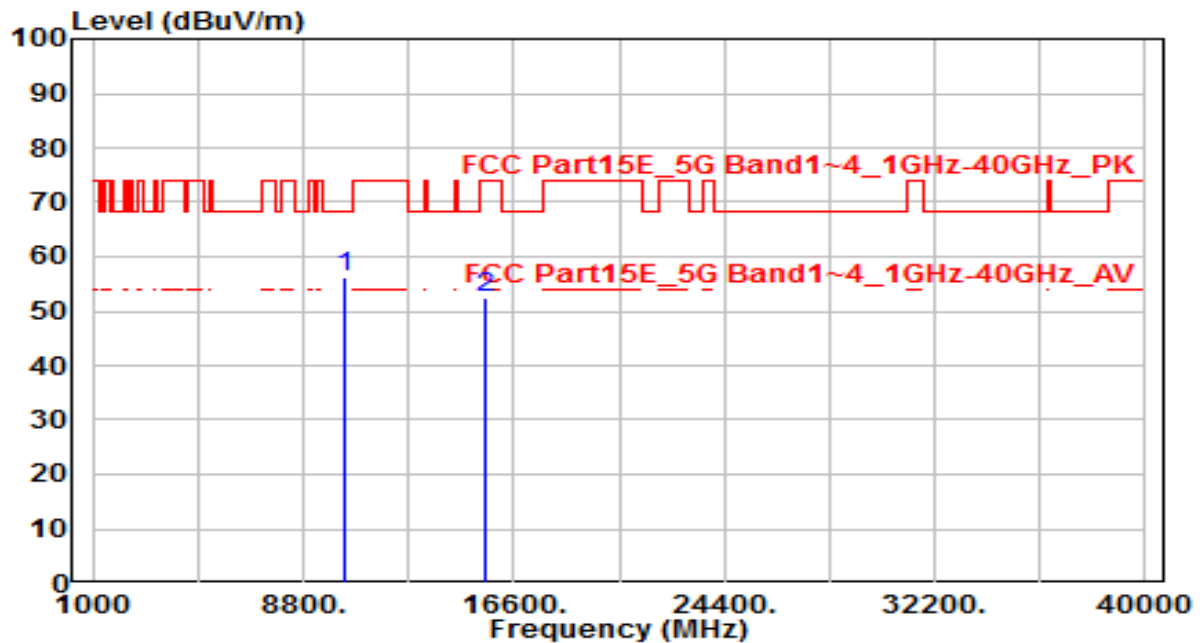


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	38.12	18.01	56.12	-12.08	68.20	150	360	Peak
2		15540.000	31.13	21.25	52.38	-21.62	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 44_ANT 0	Test Voltage	By PoE

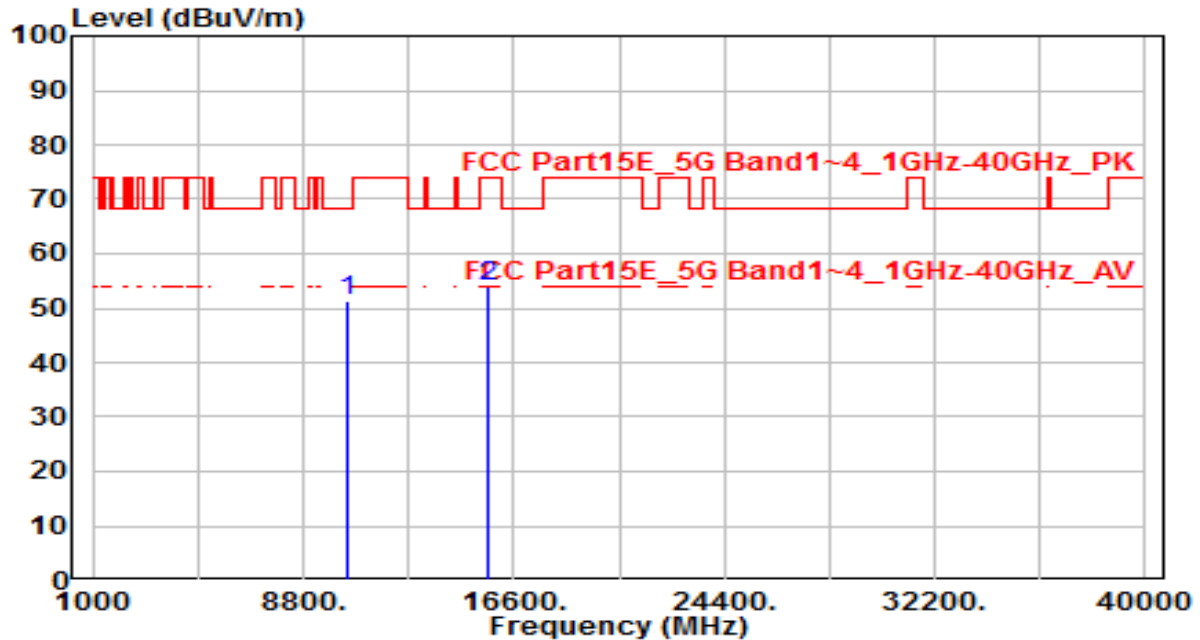


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	32.83	18.33	51.16	-17.04	68.20	150	360	Peak
2		15660.000	32.92	20.95	53.88	-20.12	74.00	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 44_ANT 0	Test Voltage	By PoE

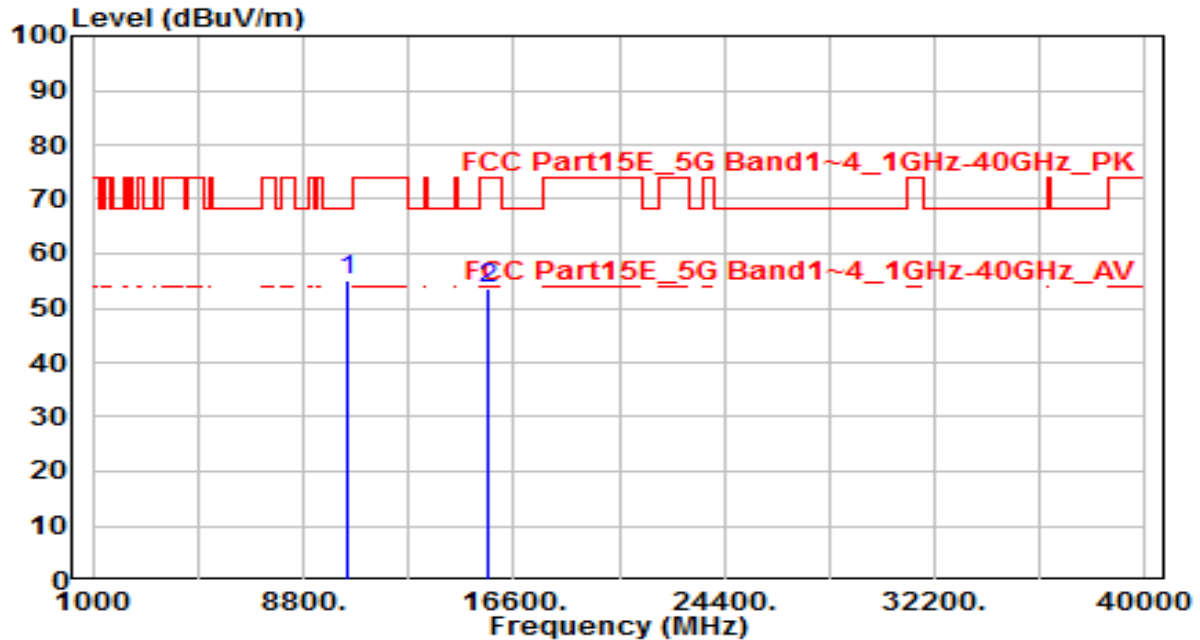


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	36.90	18.33	55.23	-12.97	68.20	150	360	Peak
2		15660.000	32.69	20.95	53.64	-20.36	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 48_ANT 0	Test Voltage	By PoE

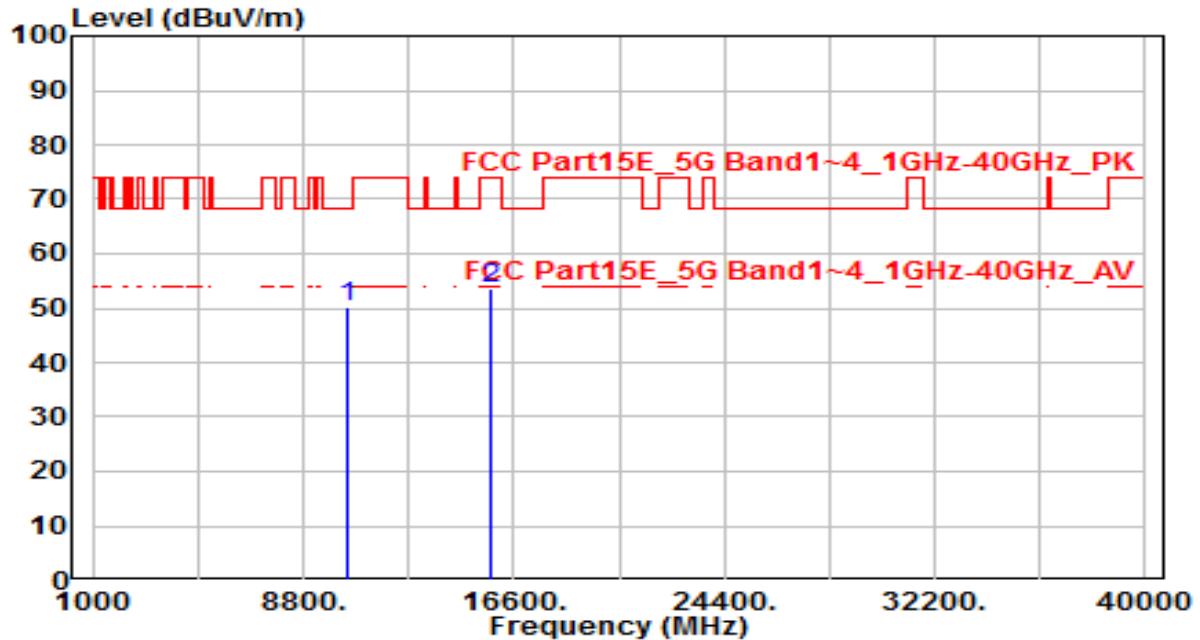


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	31.82	18.49	50.31	-17.89	68.20	150	360	Peak
2		15720.000	32.96	20.80	53.77	-20.23	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 48_ANT 0	Test Voltage	By PoE

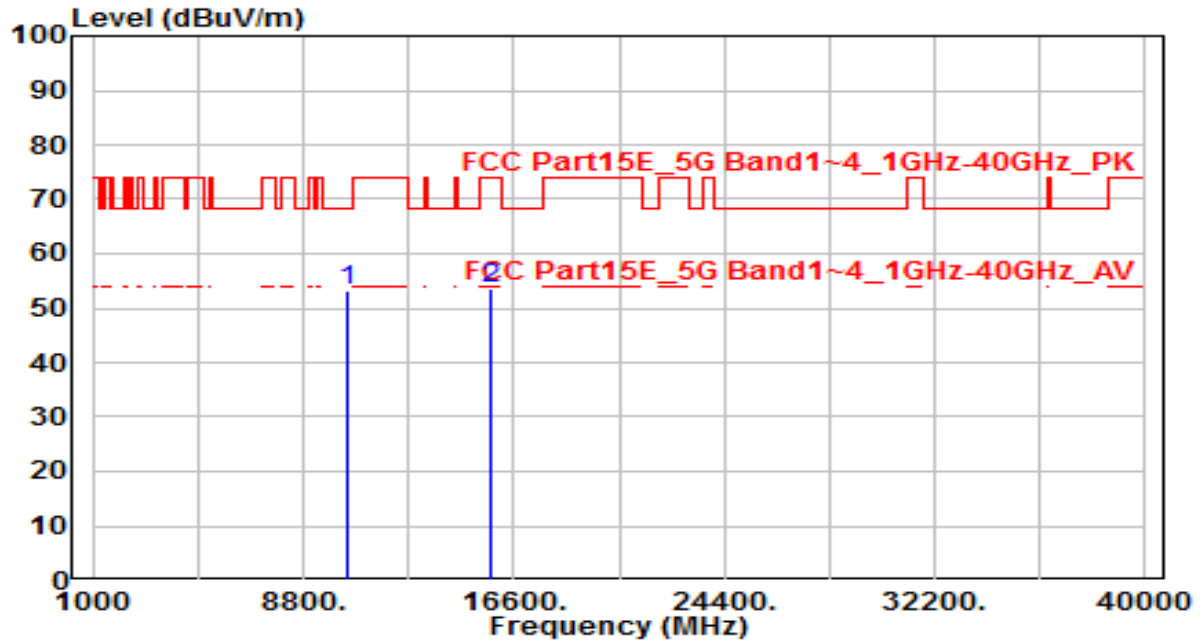


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	34.79	18.49	53.28	-14.92	68.20	150	360	Peak
2		15720.000	32.83	20.80	53.63	-20.37	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 149_ANT 0	Test Voltage	By PoE

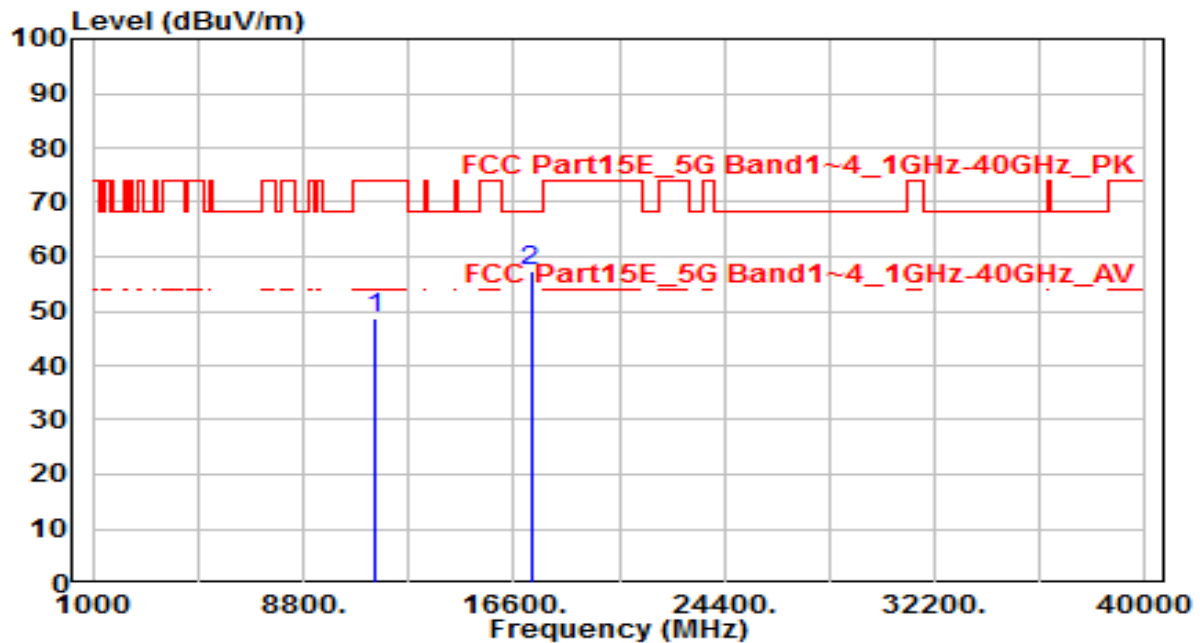


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	28.74	20.03	48.78	-25.22	74.00	150	360	Peak
2	* 17235.000	31.42	26.08	57.49	-10.71	68.20	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 149_ANT 0	Test Voltage	By PoE

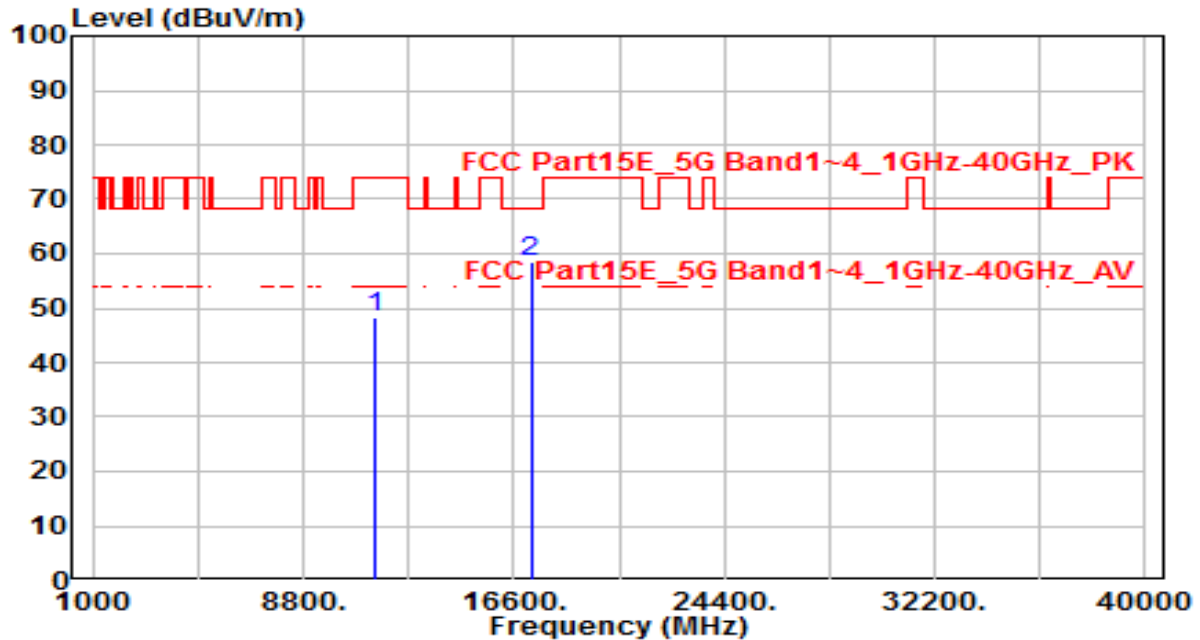


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	28.37	20.03	48.41	-25.59	74.00	150	360	Peak
2	* 17235.000	32.59	26.08	58.67	-9.53	68.20	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 157_ANT 0	Test Voltage	By PoE

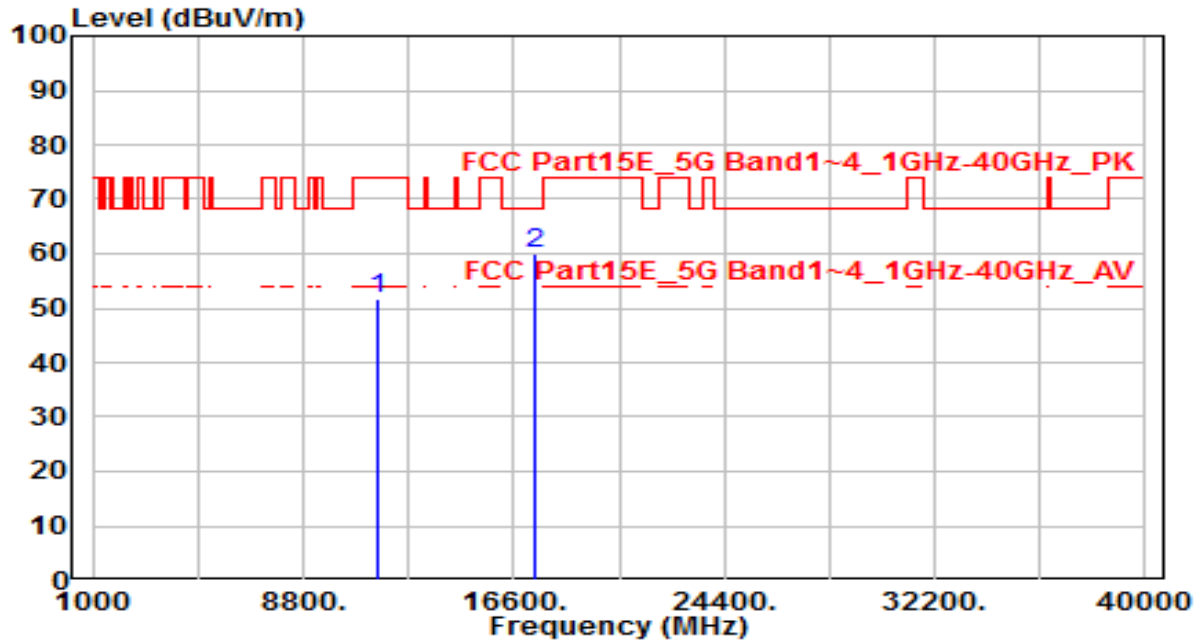


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	31.66	19.89	51.55	-22.45	74.00	150	360	Peak
2	* 17355.000	33.28	26.87	60.16	-8.04	68.20	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 157_ANT 0	Test Voltage	By PoE

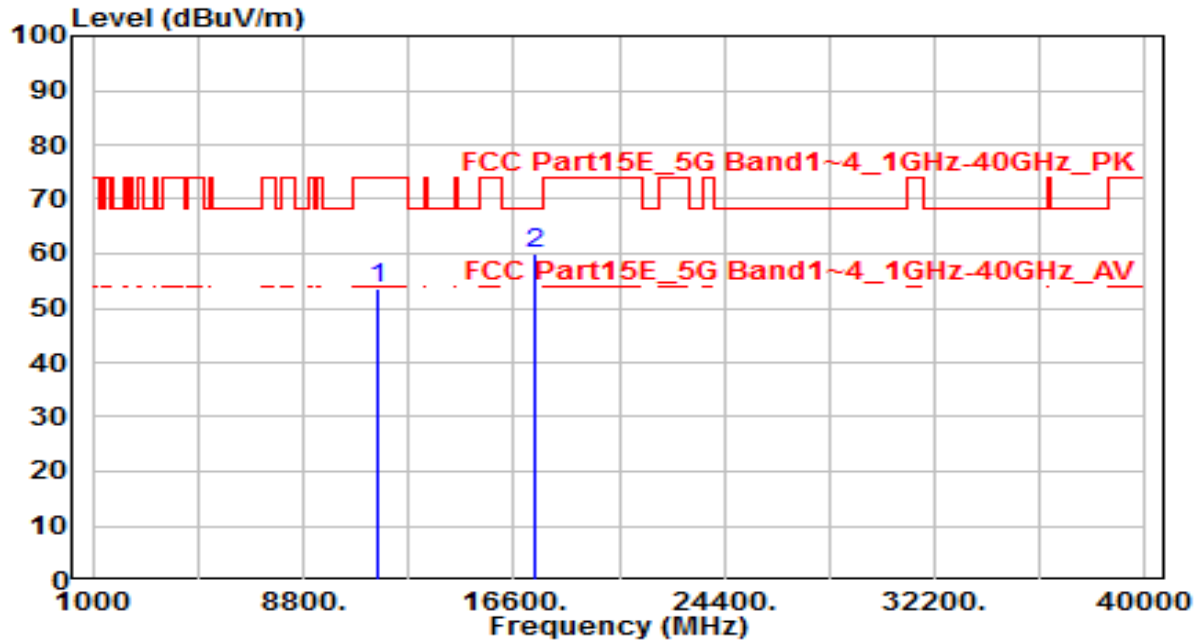


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	33.53	19.89	53.42	-20.58	74.00	150	360	Peak
2	* 17355.000	33.17	26.87	60.05	-8.15	68.20	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 165_ANT 0	Test Voltage	By PoE

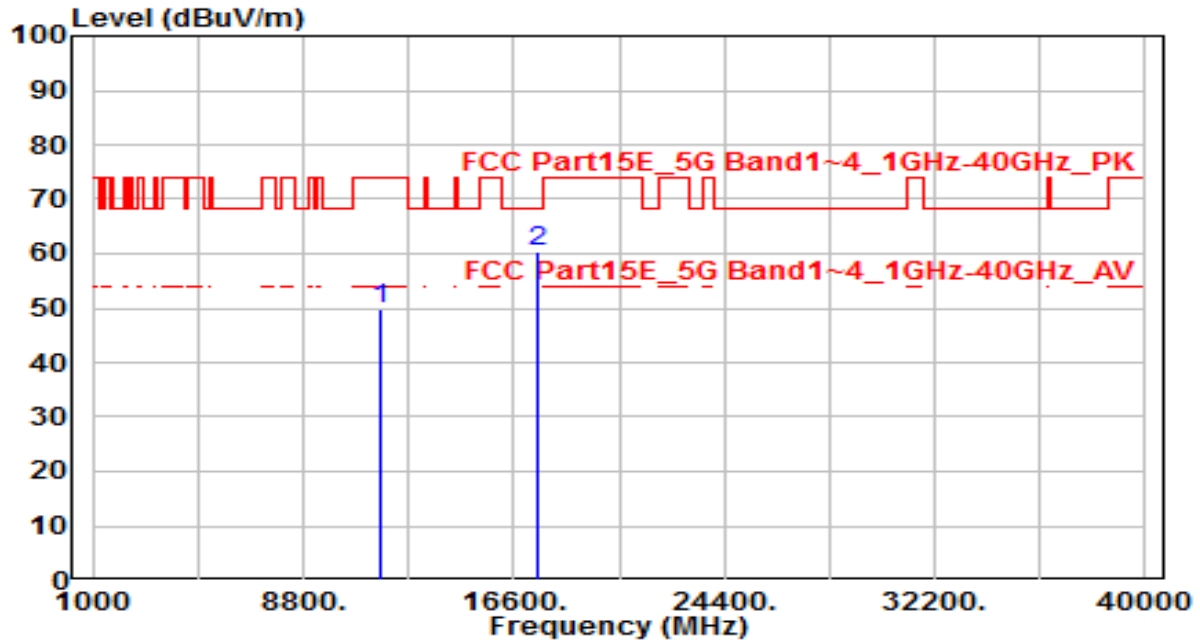


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	30.07	19.71	49.78	-24.22	74.00	150	360	Peak
2	* 17475.000	32.78	27.67	60.45	-7.75	68.20	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 165_ANT 0	Test Voltage	By PoE

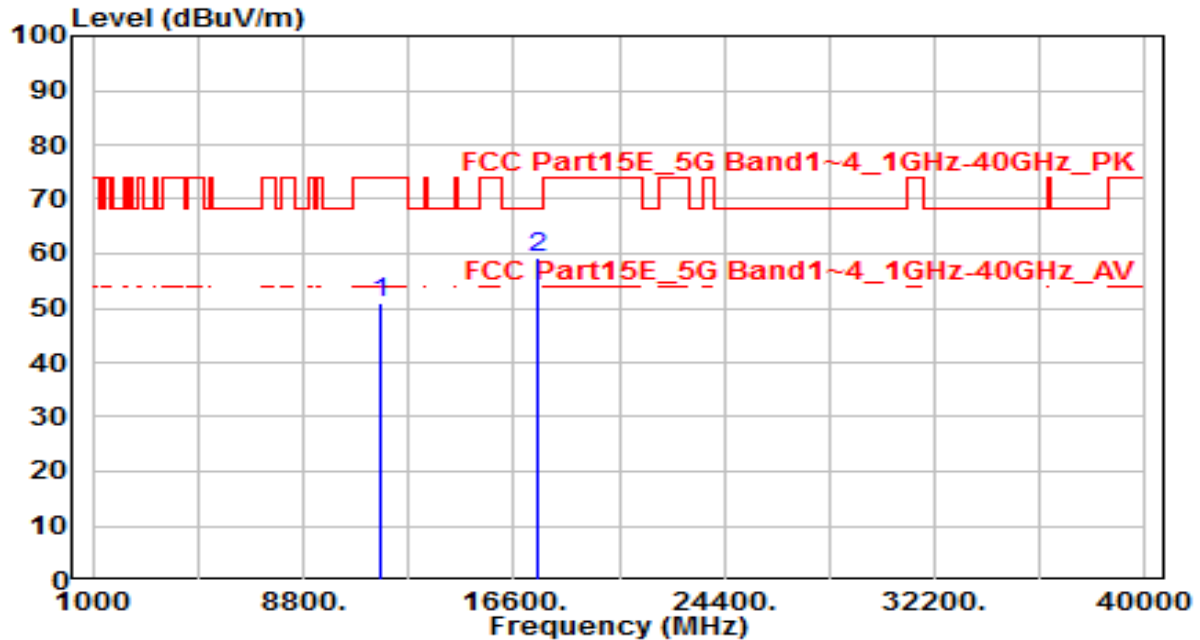


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	31.34	19.71	51.05	-22.95	74.00	150	360	Peak
2	* 17475.000	31.70	27.67	59.37	-8.83	68.20	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0	Test Voltage	By PoE

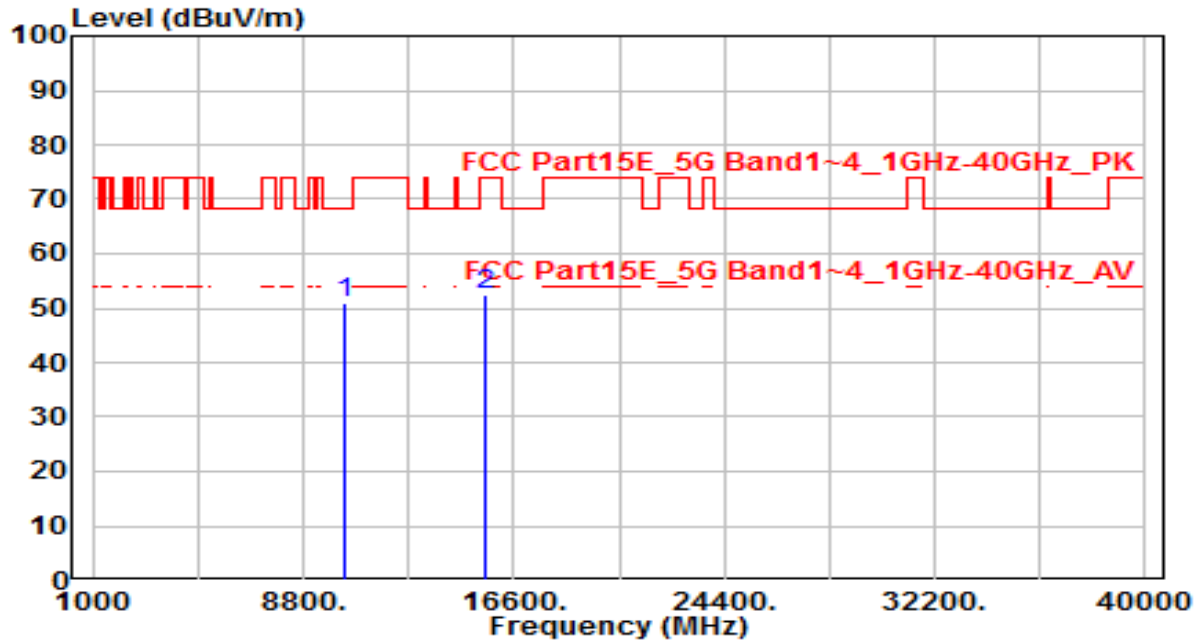


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	32.93	18.01	50.94	-17.26	68.20	150	360	Peak
2		15540.000	31.12	21.25	52.37	-21.63	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0	Test Voltage	By PoE

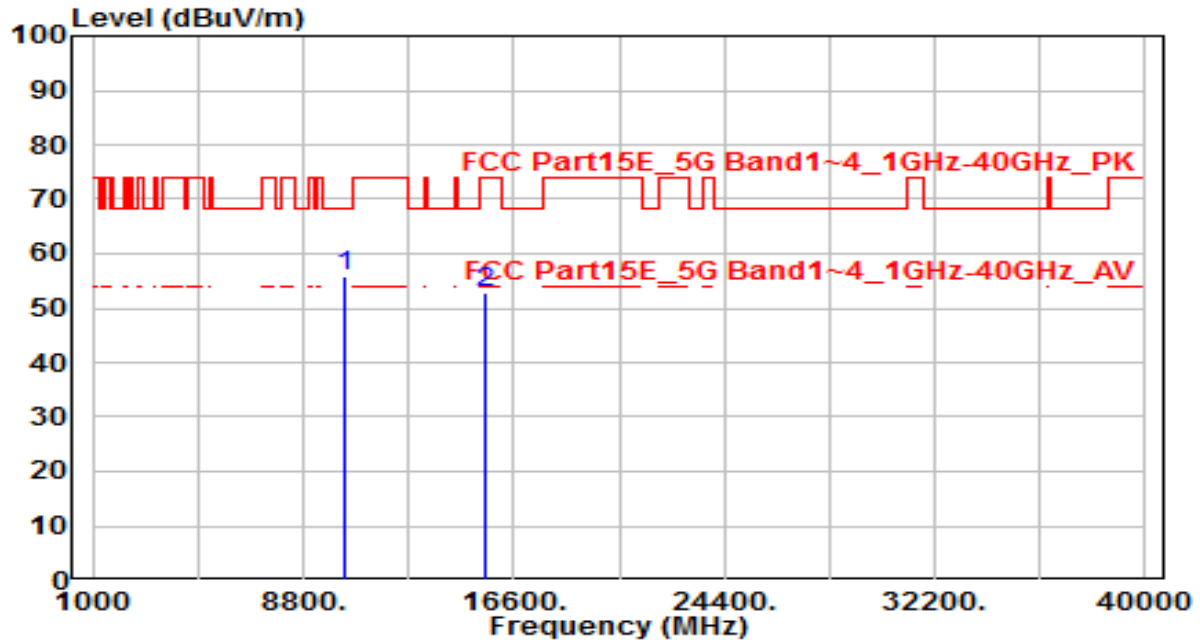


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	37.74	18.01	55.75	-12.45	68.20	150	360	Peak
2		15540.000	31.61	21.25	52.86	-21.14	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0	Test Voltage	By PoE

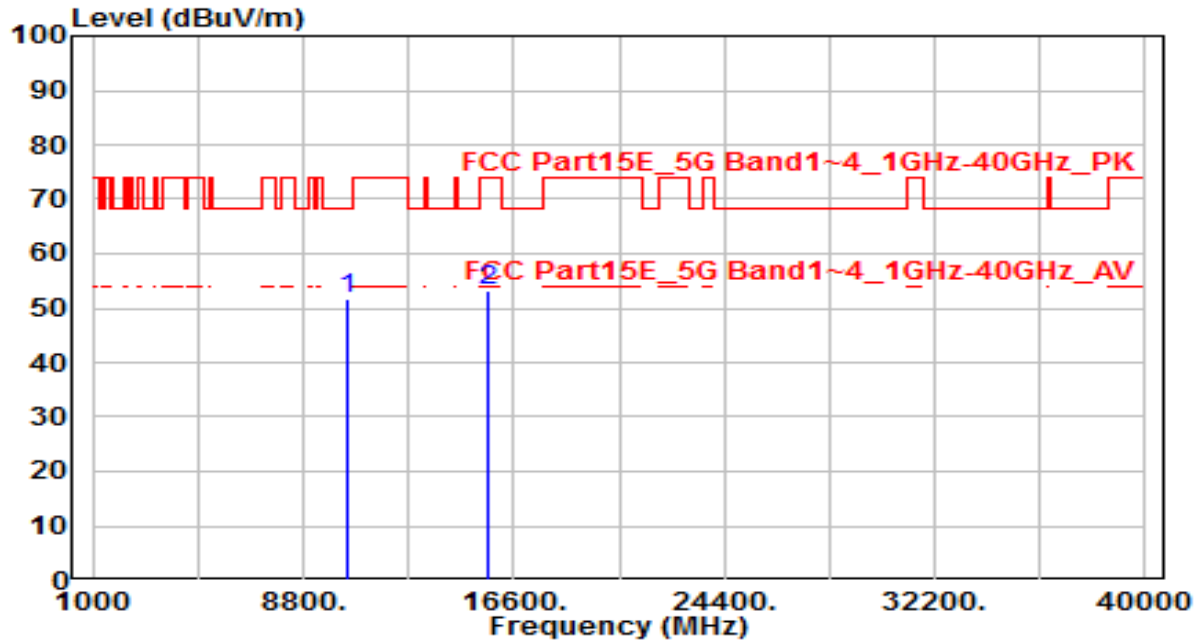


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	33.43	18.33	51.76	-16.44	68.20	150	360	Peak
2		15660.000	32.41	20.95	53.36	-20.64	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0	Test Voltage	By PoE

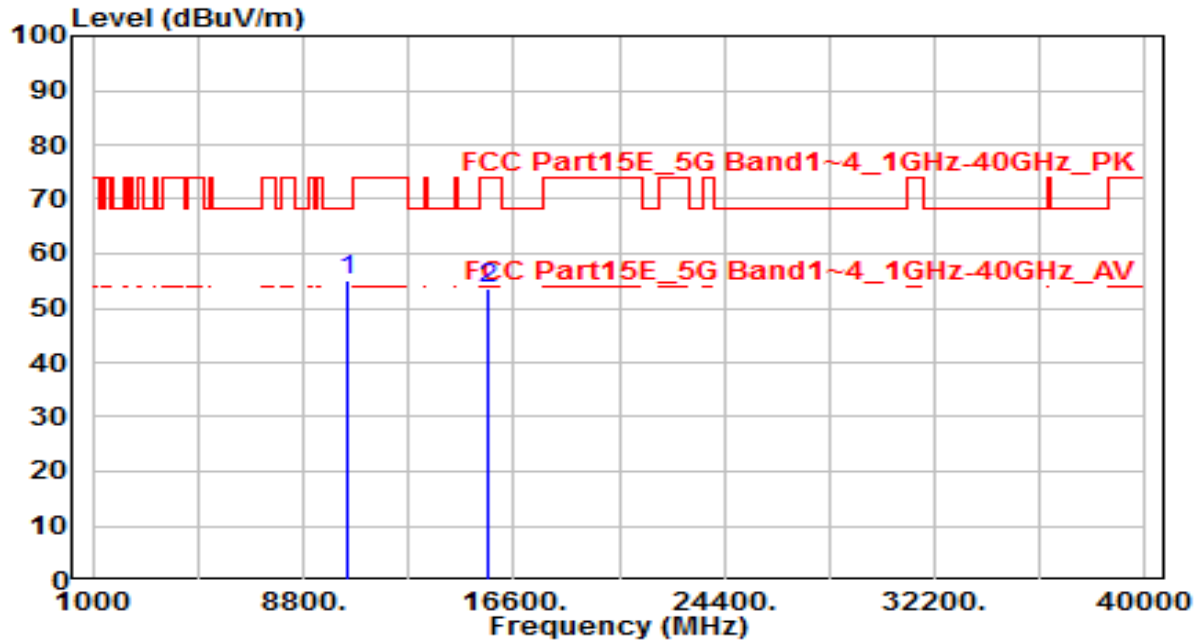


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	36.72	18.33	55.05	-13.15	68.20	150	360	Peak
2		15660.000	32.58	20.95	53.53	-20.47	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0	Test Voltage	By PoE

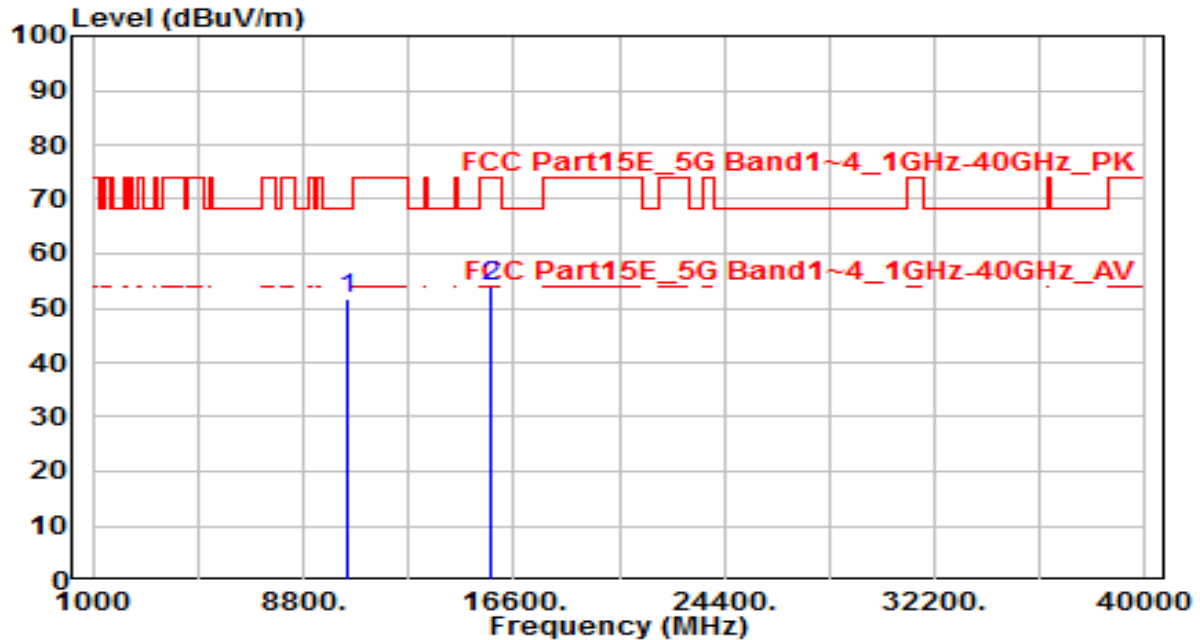


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	33.31	18.49	51.80	-16.40	68.20	150	360	Peak
2		15720.000	33.00	20.80	53.81	-20.19	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0	Test Voltage	By PoE

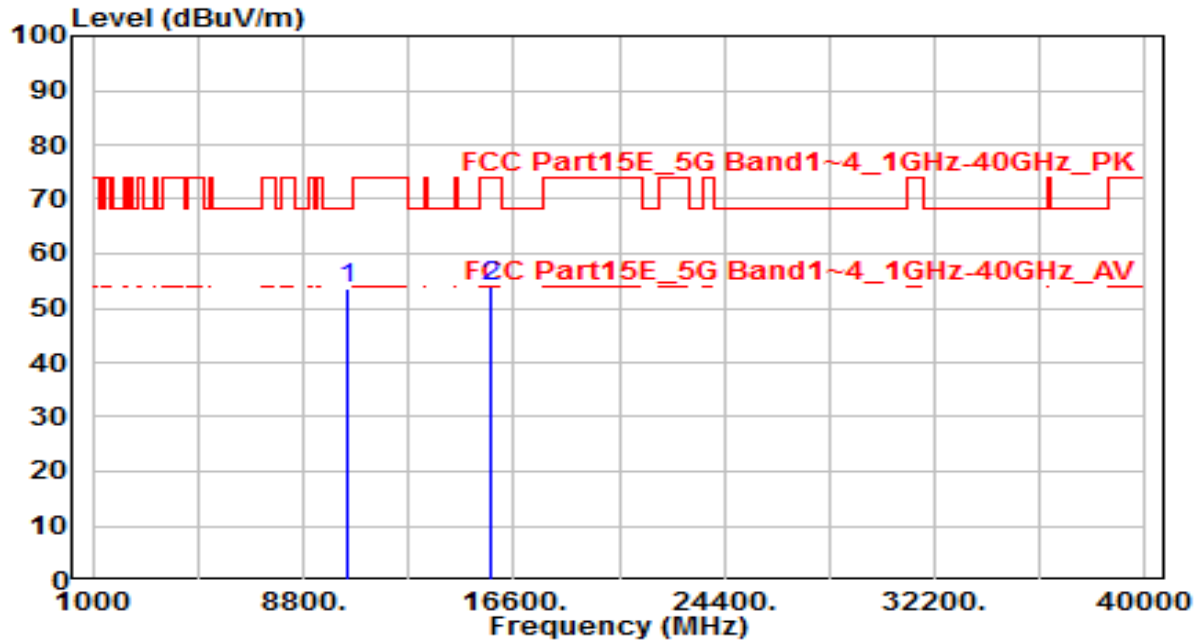


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	34.99	18.49	53.48	-14.72	68.20	150	360	Peak
2		15720.000	33.33	20.80	54.14	-19.86	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0	Test Voltage	By PoE

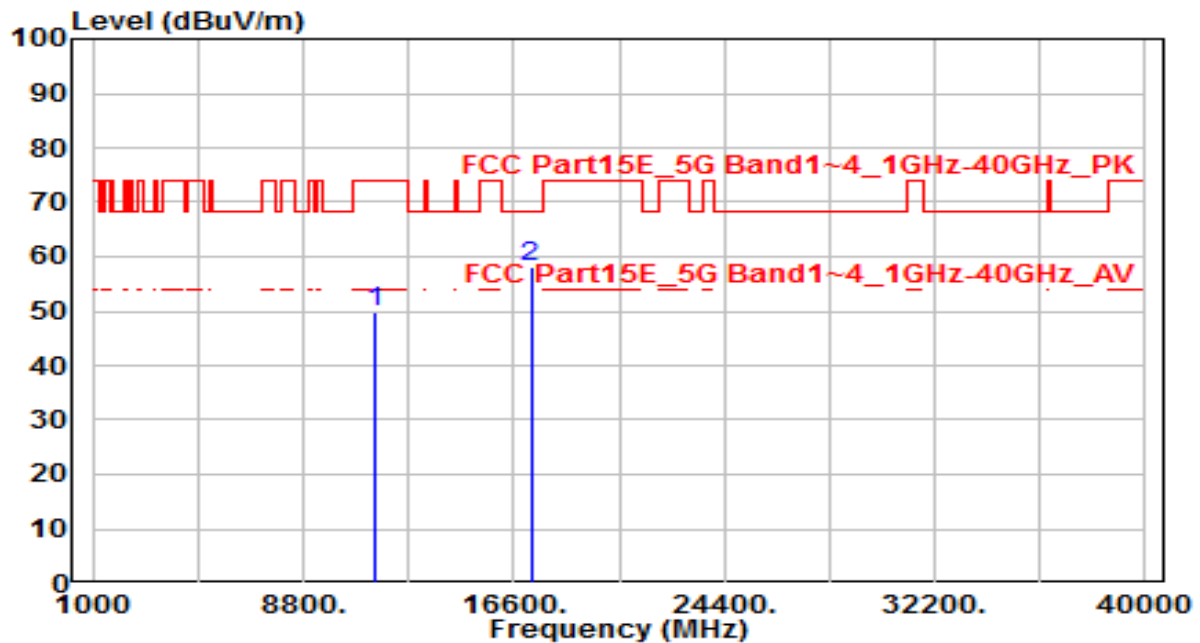


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	29.76	20.03	49.80	-24.20	74.00	150	360	Peak
2	* 17235.000	32.06	26.08	58.13	-10.07	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0	Test Voltage	By PoE

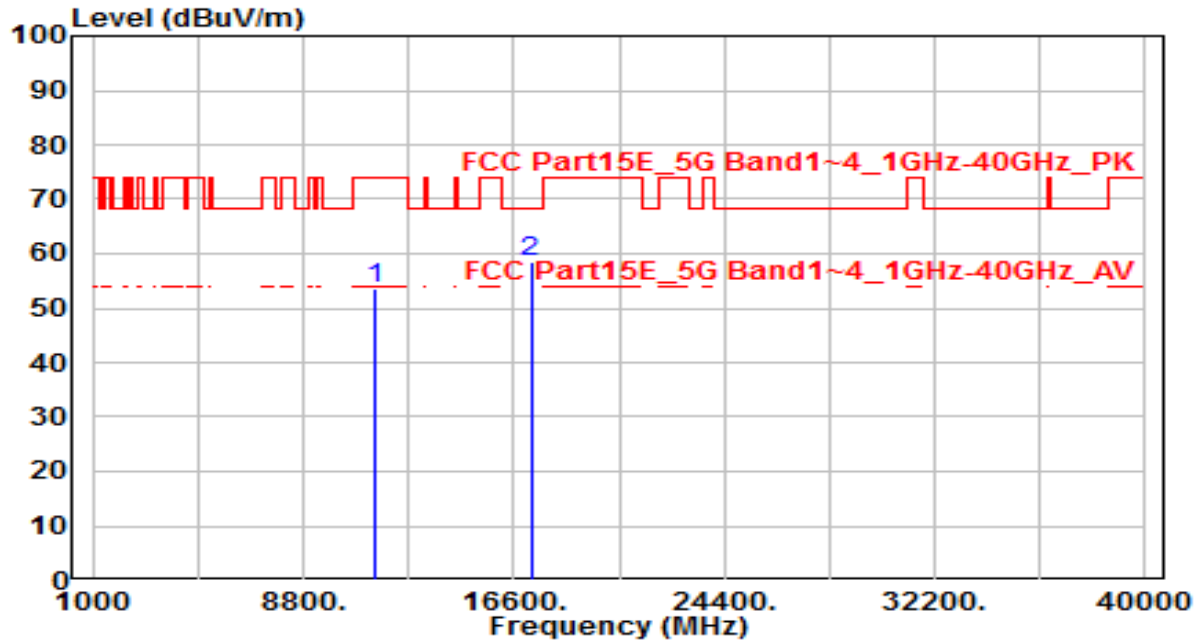


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	33.53	20.03	53.57	-20.43	74.00	150	360	Peak
2	* 17235.000	32.41	26.08	58.48	-9.72	68.20	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 0	Test Voltage	By PoE

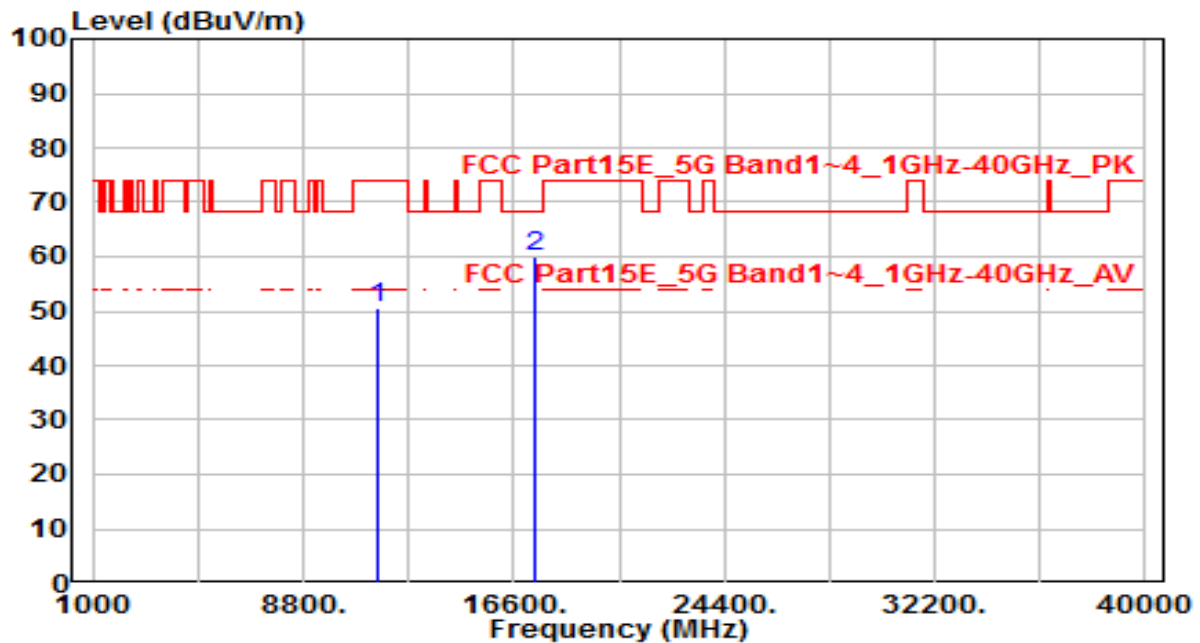


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	30.57	19.89	50.46	-23.54	74.00	150	360	Peak
2	* 17355.000	33.02	26.87	59.90	-8.30	68.20	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 0	Test Voltage	By PoE

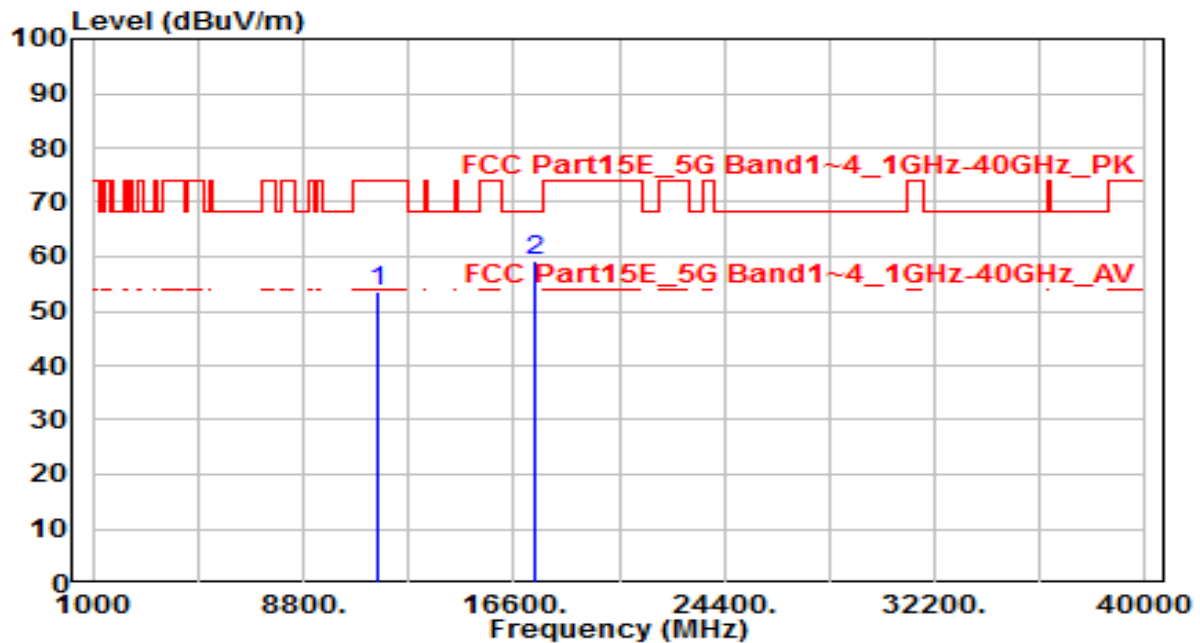


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	33.65	19.89	53.54	-20.46	74.00	150	360	Peak
2	* 17355.000	32.19	26.87	59.06	-9.14	68.20	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0	Test Voltage	By PoE

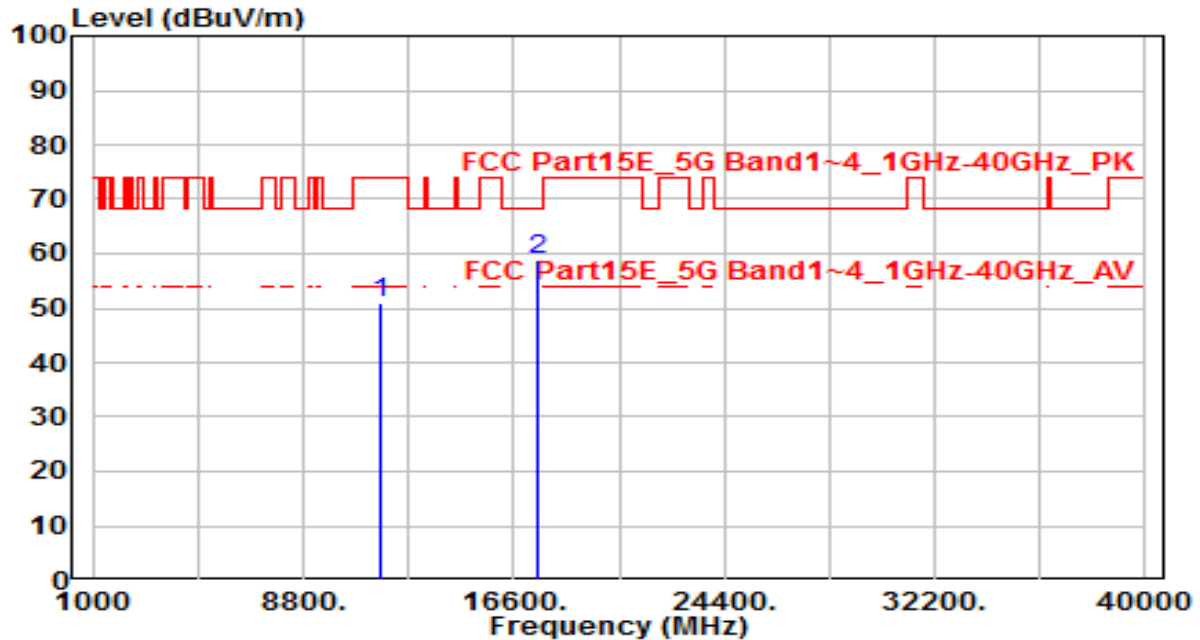


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	31.08	19.71	50.79	-23.21	74.00	150	360	Peak
2	* 17475.000	31.02	27.67	58.69	-9.51	68.20	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0	Test Voltage	By PoE

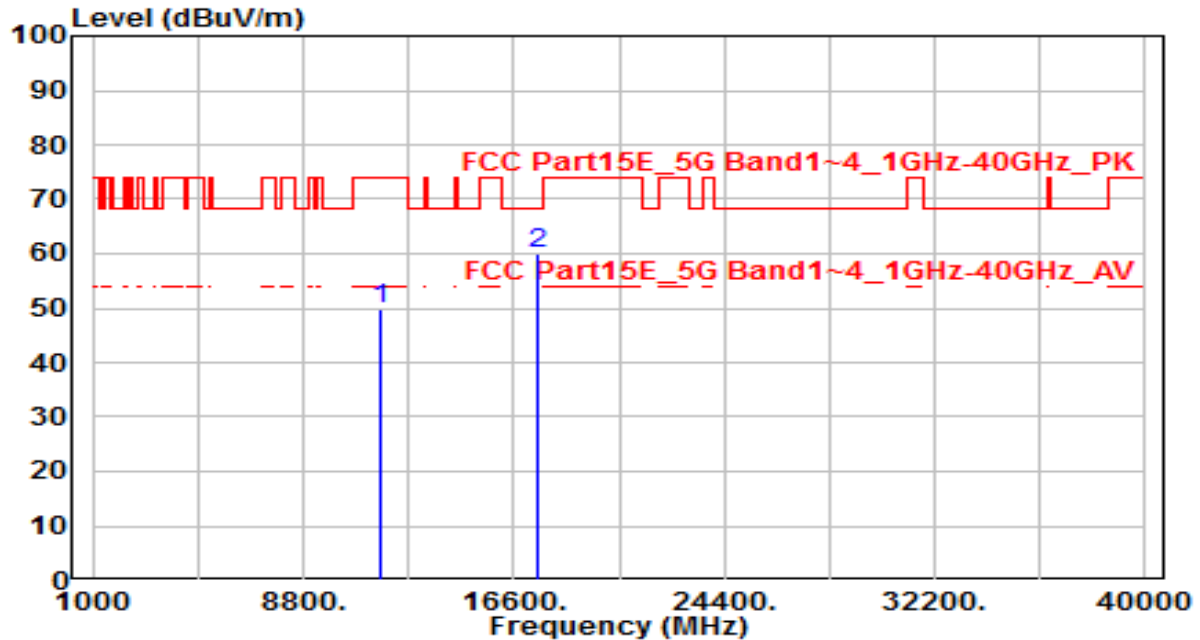


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	30.14	19.71	49.85	-24.15	74.00	150	360	Peak
2	* 17475.000	32.26	27.67	59.93	-8.27	68.20	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0	Test Voltage	By PoE

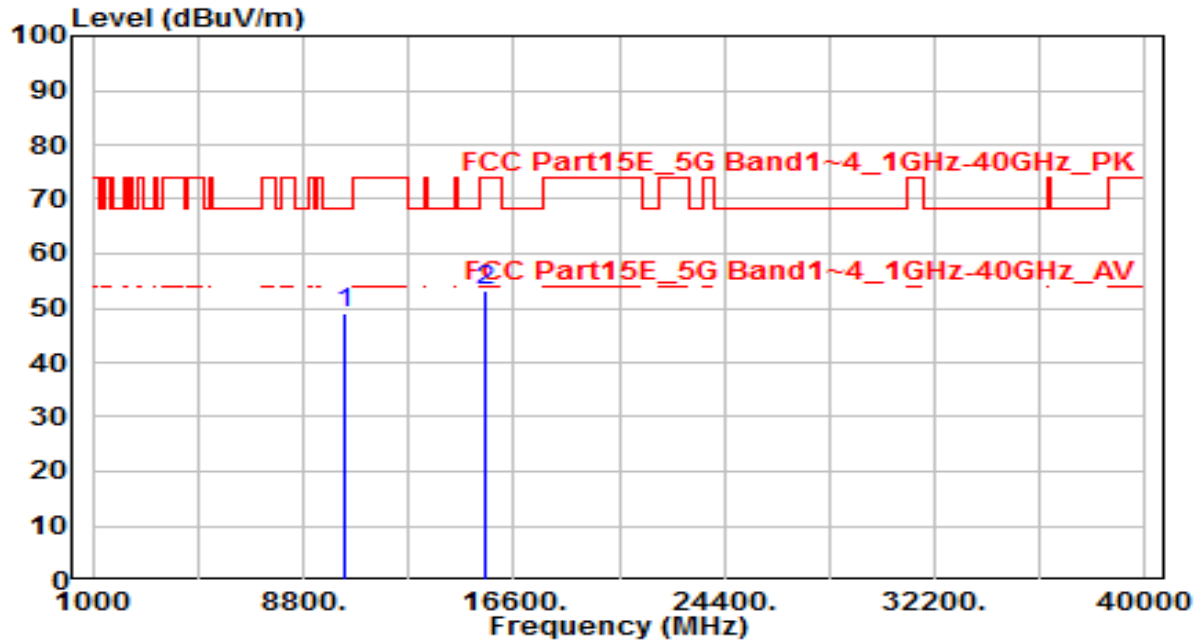


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	30.95	18.09	49.04	-19.16	68.20	150	360	Peak
2		15570.000	31.97	21.18	53.15	-20.85	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0	Test Voltage	By PoE

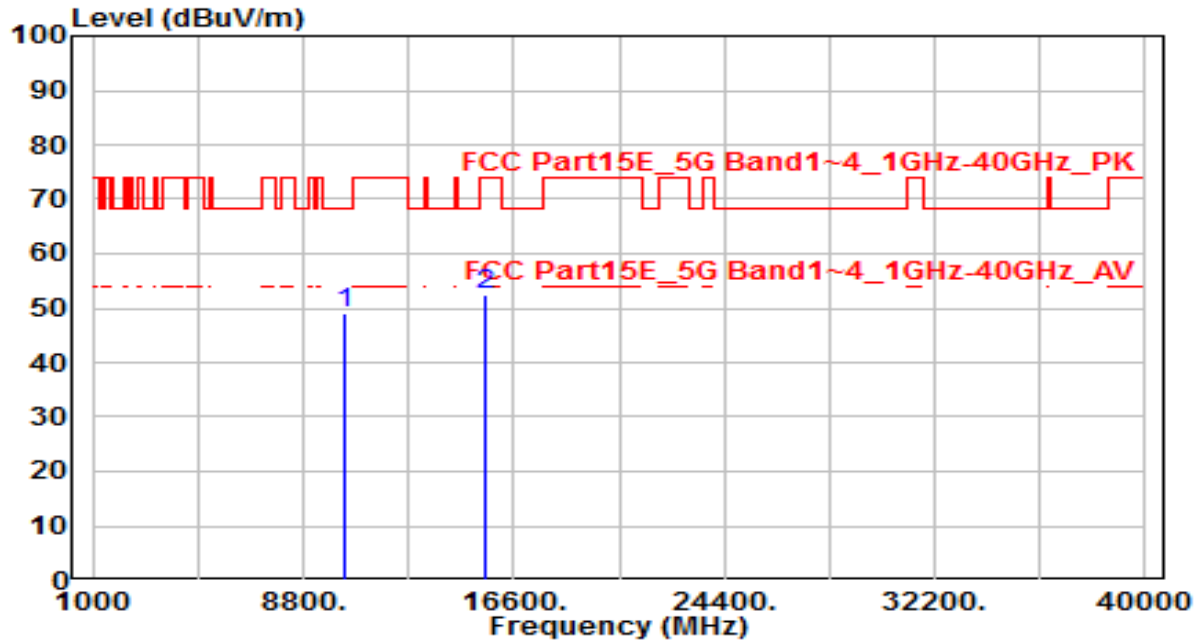


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	31.10	18.09	49.19	-19.01	68.20	150	360	Peak
2		15570.000	31.09	21.18	52.27	-21.73	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0	Test Voltage	By PoE

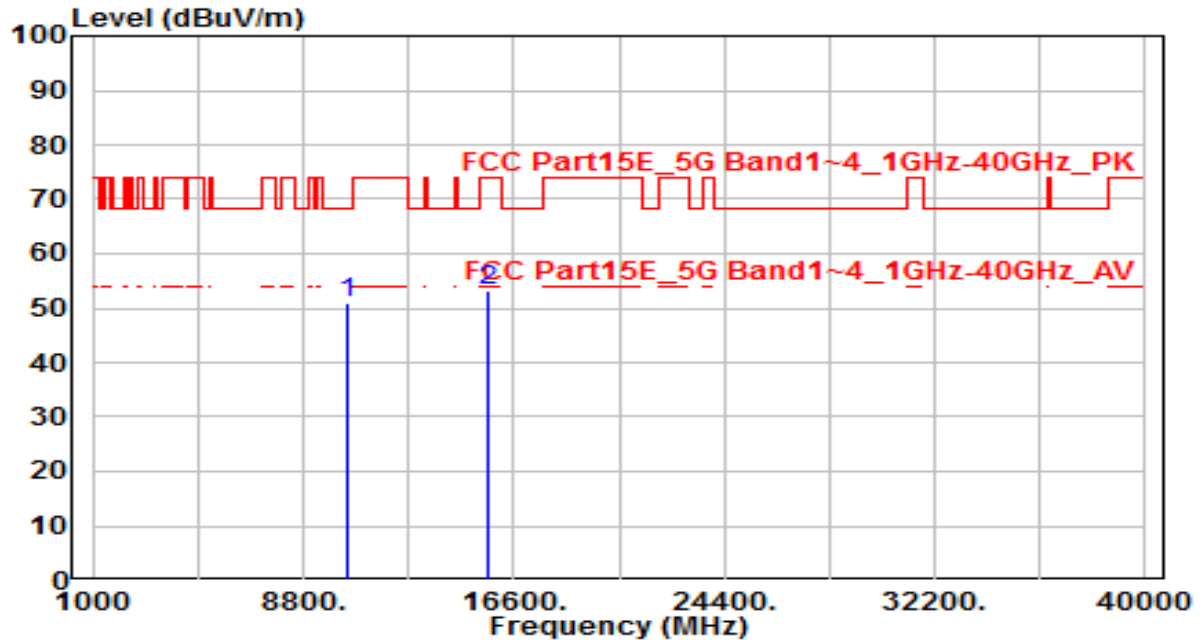


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	32.41	18.41	50.82	-17.38	68.20	150	360	Peak
2		15690.000	32.43	20.88	53.31	-20.69	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0	Test Voltage	By PoE

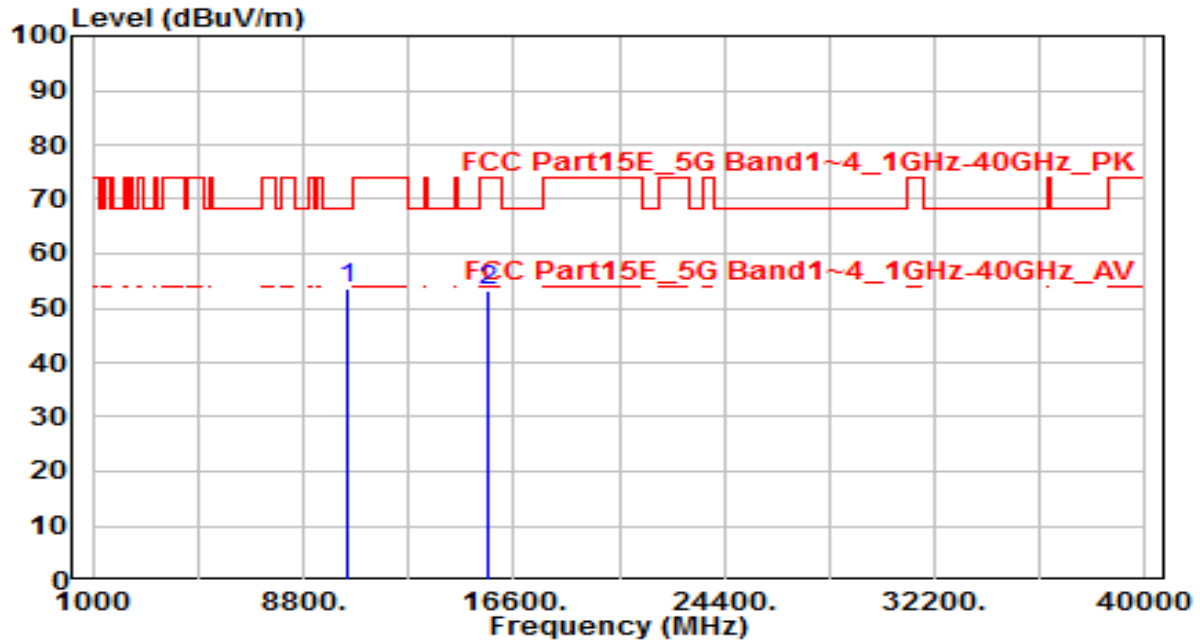


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	35.26	18.41	53.67	-14.53	68.20	150	360	Peak
2		15690.000	32.33	20.88	53.21	-20.79	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0	Test Voltage	By PoE

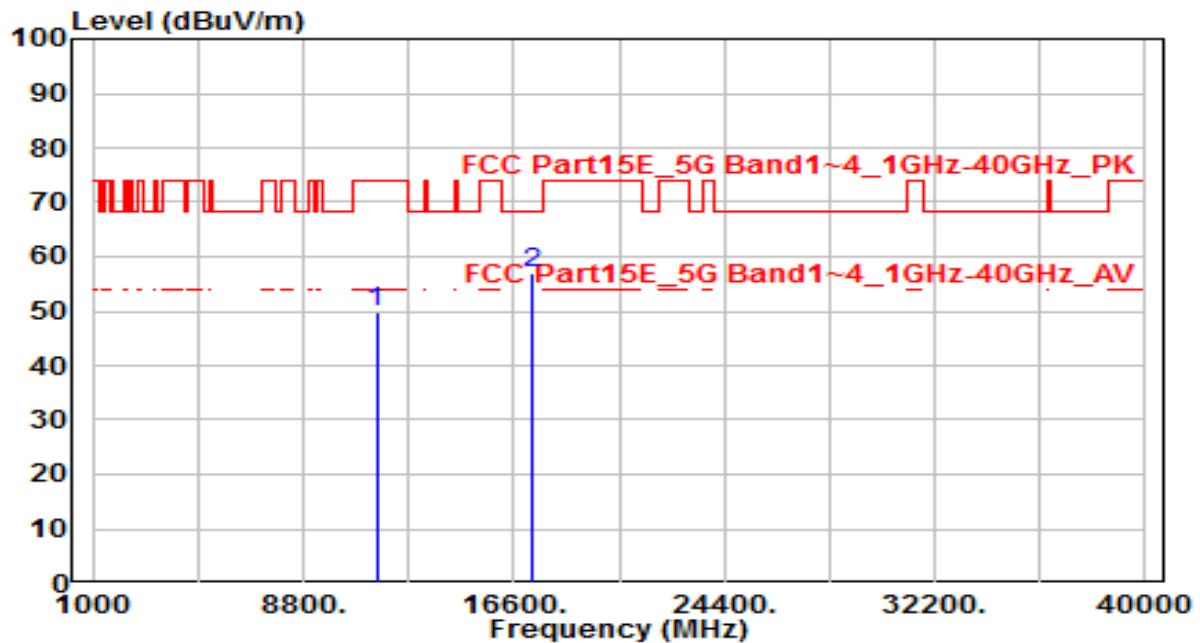


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	29.95	20.03	49.98	-24.02	74.00	150	360	Peak
2	* 17265.000	30.81	26.27	57.08	-11.12	68.20	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0	Test Voltage	By PoE

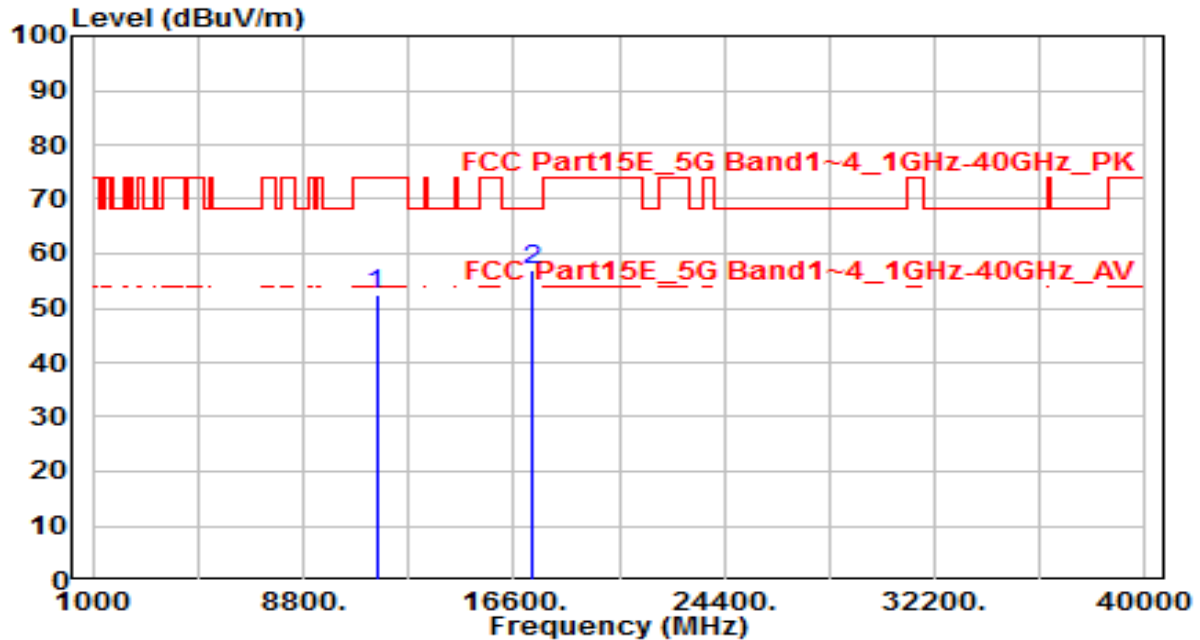


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	32.47	20.03	52.50	-21.50	74.00	150	360	Peak
2	* 17265.000	30.84	26.27	57.12	-11.08	68.20	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0	Test Voltage	By PoE

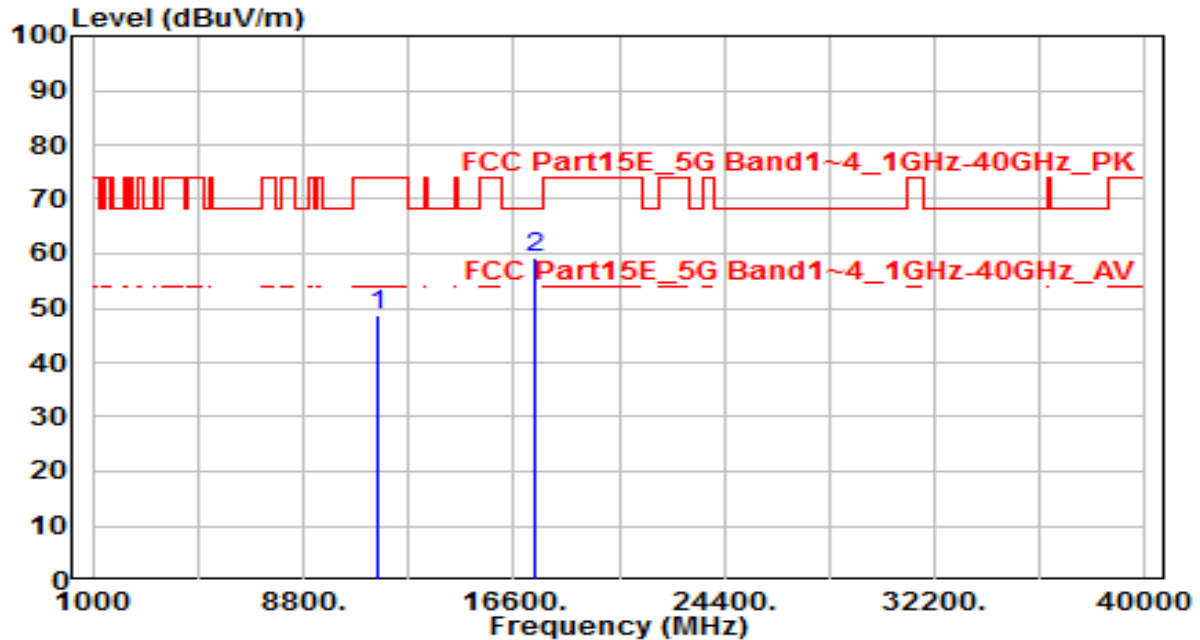


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	28.84	19.85	48.69	-25.31	74.00	150	360	Peak
2	* 17385.000	32.10	27.07	59.18	-9.02	68.20	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0	Test Voltage	By PoE

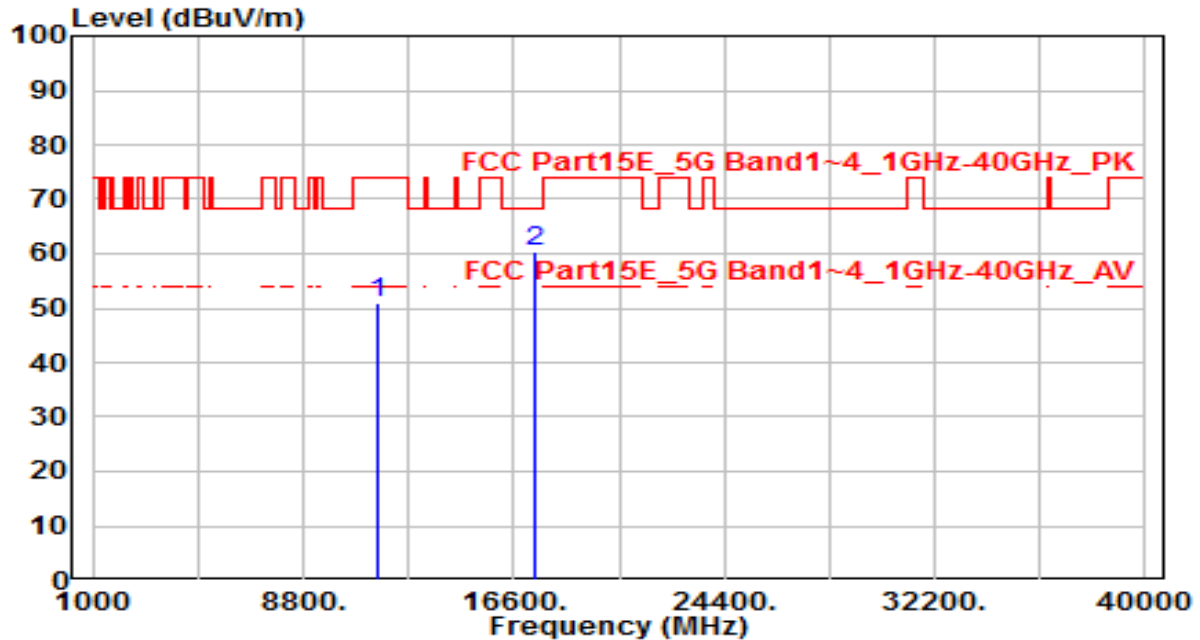


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	31.01	19.85	50.86	-23.14	74.00	150	360	Peak
2	* 17385.000	33.18	27.07	60.26	-7.94	68.20	150	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OAW-AP1351	Date of Test	2021-05-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0	Test Voltage	By PoE

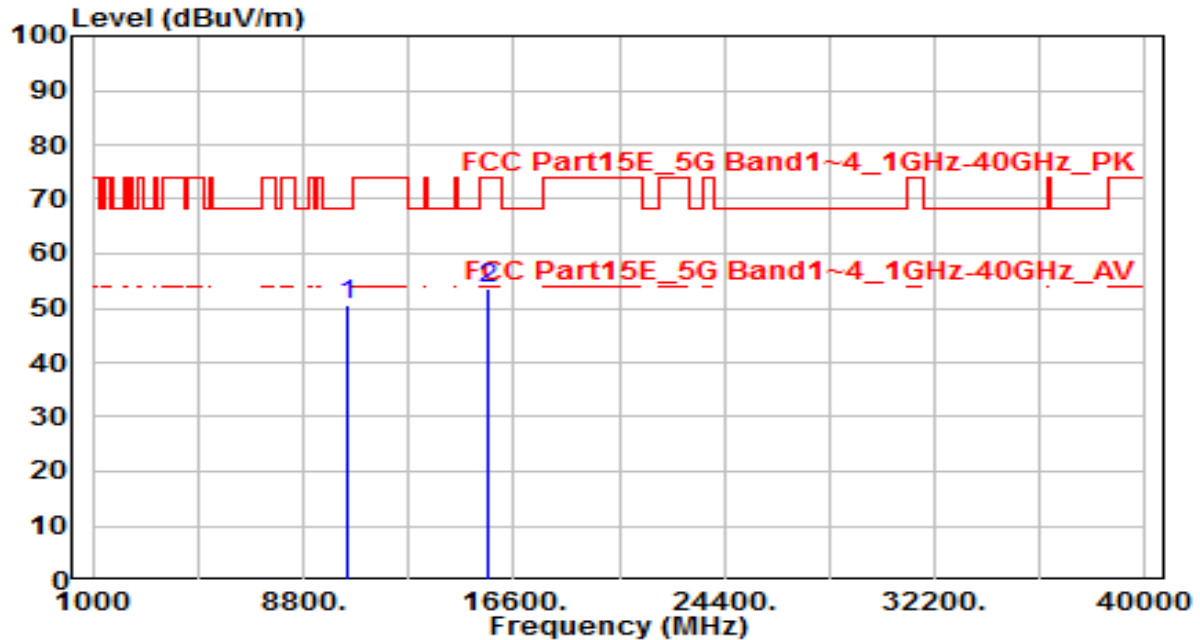

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	32.20	18.25	50.45	-17.75	68.20	150	360	Peak
2		15630.000	32.61	21.03	53.64	-20.36	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.