



Inter**Lab**[®]

Final Report on

Sparky, HILTI PD-C (01)

FCC ID SDL-PDC01

IC: 5228A-PDC01

Report Reference: MDE_ELEKT_1404_FCCa_rev2
acc. Title 47 CFR chapter I part 15 subpart C

Date: December 16, 2015

Test Laboratory:

7layers GmbH
Borsigstraße 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH

Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350
www.7layers.com

Geschäftsführer /
Managing Director:
Dr. Harald Ansorge

Registergericht registered in:
Düsseldorf, HRB 75554
USt-IdNr VAT No.:
DE203159652
TAX No. 147/5869/0385
A Bureau Veritas Group Company

1 Administrative Data

1.1 Project Data

Project Responsible: Abdellah Ahakki
Date Of Test Report: 2015/12/16
Date of first test: 2015/04/21
Date of last test: 2015/04/22

1.2 Applicant Data

Company Name: Hilti Entwicklungsgesellschaft GmbH
Street: Hiltistrasse 6
City: 86916 Kaufering
Country: Germany
Contact Person: Mr. Dirk Bischoff

1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:


7 layers DE

Company Name : 7layers GmbH
Street : Borsigstrasse 11
City : 40880 Ratingen
Country : Germany
Contact Person : Mr. Michael Albert
Phone : +49 2102 749 201
Fax : +49 2102 749 444
E Mail : Michael.Albert@7Layers.com

Laboratory Details


Lab ID	Identification	Responsible	Accreditation Info
Lab 1	Conducted Emissions	Mr. Andreas Petz Mr. Wolfgang Richter	DAkKS-Registration no. D-PL-12140-01-01
Lab 2	Radiated Emissions	Mr. Marco Kullik Mr. Jens Dörwald	DAkKS-Registration no. D-PL-12140-01-01
Lab 3	Regulatory Bluetooth RF Test Solution	Mr. Jimmy Chatheril Mr. Sören Berentzen	DAkKS-Registration no. D-PL-12140-01-01

1.4 Signature of the Testing Responsible

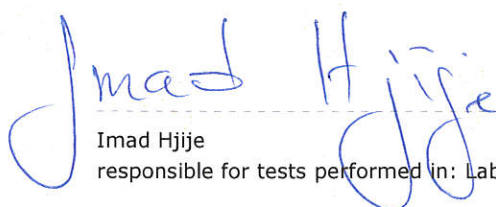

Imad Hjije
responsible for tests performed in: Lab 1, Lab 2, Lab 3

1.5 Signature of the Accreditation Responsible

 [B. RETKA]

Accreditation scope responsible person
responsible for Lab 1, Lab 2, Lab 3

2 Test Object Data

2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

OUT: HILTI PD-C (01)

Type / Model / Family:	Sparky, HILTI PD-C (01) FCC ID SDL-PDC01 IC: 5228A-PDC01
Product Category:	Others
Manufacturer:	
Company Name:	Hillos GmbH
Street:	Pruessingstrasse 41
City:	D-07745 Jena
Country:	Germany
Contact Person:	Mr. Mareen Rauh
Phone:	+49 (0) 3641 65 2944
E-Mail:	mareen.rauh@jenoptik.com

Parameter List:

Parameter name	Value
AC Power Supply	120 V / 60 Hz
Antenna Gain	1.3 (dBi)
DC Power Supply	3.7 (V)
highest channel (BT)	2480 (MHz)
lowest channel (BT)	2402 (MHz)
mid channel (BT)	2441 (MHz)

2.2 Detailed Description of OUT Samples

Sample : aa01

<i>OUT Identifier</i>	HILTI PD-C (01)		
<i>Sample Description</i>	Radio Sample 1		
<i>Serial No.</i>	321		
<i>Low Voltage</i>	3,6 V	<i>Low Temp.</i>	-10 °C
<i>High Voltage</i>	4,2 V	<i>High Temp.</i>	+55 °C
<i>Nominal Voltage</i>	3,7 V	<i>Normal Temp.</i>	+22 °C

Sample : ab01

<i>OUT Identifier</i>	HILTI PD-C (01)		
<i>Sample Description</i>	Radio Sample 2		
<i>Serial No.</i>	311		
<i>Low Voltage</i>	3,6 V	<i>Low Temp.</i>	-10 °C
<i>High Voltage</i>	4,2 V	<i>High Temp.</i>	+55 °C
<i>Nominal Voltage</i>	3,7 V	<i>Normal Temp.</i>	+22 °C

Sample : ac01

<i>OUT Identifier</i>	HILTI PD-C (01)		
<i>Sample Description</i>	Conducted Sample1		
<i>Serial No.</i>	302		
<i>Low Voltage</i>	3,6 V	<i>Low Temp.</i>	-10 °C
<i>High Voltage</i>	4,2 V	<i>High Temp.</i>	+55 °C
<i>Nominal Voltage</i>	3,7 V	<i>Normal Temp.</i>	+22 °C

2.3 OUT Features

Features for OUT: HILTI PD-C (01)

<i>Designation</i>	<i>Description</i>	<i>Allowed Values</i>	<i>Supported Value(s)</i>
Features for scope: FCC_v2			
AC	The OUT is powered by or connected to AC Mains		
BT	EUT supports Bluetooth data rate of 1 Mbps with GFSK modulation in the band 2400 MHz - 2483.5 MHz		
DC	The OUT is powered by or connected to DC		
EDR2	EUT supports Bluetooth using data rate of 2 Mbps with PI/4 DQPSK modulation in the band 2400 MHz - 2483.5 MHz		
EDR3	EUT supports Bluetooth using data rate of 3 Mbps with 8DPSK modulation in the band 2400 MHz - 2483.5 MHz		
Iant	Integral Antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment		
TantC	temporary antenna connector, which may be only built-in for testing, designed as an example part of the equipment		

2.4 Auxiliary Equipment

<i>AE No.</i>	<i>Type Designation</i>	<i>Serial No.</i>	<i>HW Status</i>	<i>SW Status</i>	<i>Description</i>
AE AE01					AC DC Adapter

2.5 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

<i>Setup No.</i>	<i>List of OUT samples</i>		<i>List of auxiliary equipment</i>	
	<i>Sample No.</i>	<i>Sample Description</i>	<i>AE No.</i>	<i>AE Description</i>
S_AA01				
	Sample: aa01	Radio Sample 1	AE AE01	AC DC Adapter
S_AB01				
	Sample: ab01	Radio Sample 2	AE AE01	AC DC Adapter
S_AC01				
	Sample: ac01	Conducted Sample1	AE AE01	AC DC Adapter

3 Results

3.1 General

Documentation of tested devices:

Available at the test laboratory.

Interpretation of the test results:

The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.

In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.

In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.

Note:

1. All tests are performed under environmental conditions within the requirements of the specifications. Environmental conditions are available at the laboratory.

2. The device is a hands-free kit containing a BT Transceiver operating in the 2.4 GHz ISM band. The EUT was controlled by the CBT via Bluetooth test mode.

3. This report is a revision of "MDE_ELEKT_1404_FCCa_rev1". please refer to the revision table (Revision History)

3.2 List of the Applicable Body

(Body for Scope: FCC_v2)

<i>Designation</i>	<i>Description</i>
FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES	Subpart C - Intentional Radiators; 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

3.3 List of Test Specification

<i>Test Specification:</i>	FCC part 2 and 15
<i>Version</i>	10-1-14 Edition
<i>Title:</i>	PART 2 - GENERAL RULES AND REGULATIONS PART 15 - RADIO FREQUENCY DEVICES

3.4 Summary

<i>Test Case Identifier / Name</i> <i>Test (condition)</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab Ref.</i>	<i>Setup</i>
15c.1 Conducted emissions (AC power line) §15.207				
15c.1; Mode = transmit	Passed	2015/04/22	Lab 1	S_AB01
15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209				
15c.2; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = low	Passed	2015/04/22	Lab 2	S_AA01
15c.2; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2015/04/22	Lab 2	S_AA01
15c.2; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2015/04/22	Lab 2	S_AA01
15c.2; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = highest	Passed	2015/04/22	Lab 2	S_AA01
15c.2; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2015/04/22	Lab 2	S_AA01
15c.3 Occupied bandwidth §15.247 (a) (1)				
15c.3; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.3; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.3; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.3; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.3; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.3; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.3; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.3; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.3; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2015/04/21	Lab 3	S_AC01



Reference: MDE_ELEKT_1404_FCCa_rev2
acc. Title 47 CFR chapter I part 15 subpart C

Test Case Identifier / Name Test (condition)	Result	Date of Test	Lab Ref.	Setup
15c.4 Peak power output §15.247 (b) (1)				
15c.4; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.4; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.4; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.4; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.4; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.4; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.4; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.4; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.4; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.5 Spurious RF conducted emissions §15.247 (d)				
15c.5; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.5; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.5; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.5; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.5; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.5; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.5; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.5; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.5; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2015/04/21	Lab 3	S_AC01



Reference: MDE_ELEKT_1404_FCCa_rev2
acc. Title 47 CFR chapter I part 15 subpart C

Test Case Identifier / Name Test (condition)	Result	Date of Test	Lab Ref.	Setup
15c.6 Band edge compliance §15.247 (d)				
15c.6; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = conducted, band edge = 2400 MHz	Passed	2015/04/21	Lab 3	S_AC01
15c.6; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = conducted, band edge = 2400 MHz	Passed	2015/04/21	Lab 3	S_AC01
15c.6; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = conducted, band edge = 2400 MHz	Passed	2015/04/21	Lab 3	S_AC01
15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = conducted, band edge = 2483.5 MHz	Passed	2015/04/21	Lab 3	S_AC01
15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = radiated	Passed	2015/04/22	Lab 2	S_AA01
15c.6; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = conducted, band edge = 2483.5 MHz	Passed	2015/04/21	Lab 3	S_AC01
15c.6; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = radiated	Passed	2015/04/22	Lab 2	S_AA01
15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = conducted, band edge = 2483.5 MHz	Passed	2015/04/21	Lab 3	S_AC01
15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = radiated	Passed	2015/04/22	Lab 2	S_AA01
15c.6; Frequency = hopping, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = conducted, band edge = 2400 MHz	Passed	2015/04/21	Lab 3	S_AC01
15c.6; Frequency = hopping, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = conducted, band edge = 2483.5 MHz	Passed	2015/04/21	Lab 3	S_AC01
15c.6; Frequency = hopping, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = conducted, band edge=2400 MHz	Passed	2015/04/21	Lab 3	S_AC01
15c.6; Frequency = hopping, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method=conducted, band edge=2483.5 MHz	Passed	2015/04/21	Lab 3	S_AC01
15c.6; Frequency = hopping, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = conducted, band edge = 2400 MHz	Passed	2015/04/21	Lab 3	S_AC01
15c.6; Frequency = hopping, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = conducted, band edge = 2483.5 MHz	Passed	2015/04/21	Lab 3	S_AC01
15c.7 Dwell time §15.247 (a) (1) (iii)				
15c.7; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.8 Channel separation §15.247 (a) (1)				
15c.8; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2015/04/21	Lab 3	S_AC01



Reference: MDE_ELEKT_1404_FCCa_rev2
acc. Title 47 CFR chapter I part 15 subpart C

<i>Test Case Identifier / Name</i>		<i>Lab</i>		
<i>Test (condition)</i>	<i>Result</i>	<i>Date of Test</i>	<i>Ref.</i>	<i>Setup</i>
15c.9 Number of hopping frequencies §15.247 (a) (1) (iii)				
15c.9; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.9; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2015/04/21	Lab 3	S_AC01
15c.9; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2015/04/21	Lab 3	S_AC01



3.5 Detailed Results

3.5.1 15c.1 Conducted emissions (AC power line) §15.207

Test: 15c.1; Mode = transmit

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AB01
<i>Date of Test:</i>	2015/04/22 14:59
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

AC MAINS CONDUCTED

EUT: (DE1132000ab01)
 Manufacturer: Elektrobit
 Operating Condition: BT-Hopping, metering by Laser switched on
 Test Site: 7 layers Ratingen
 Operator: Pet/Rem
 Test Specification: ANSI C63.4; FCC 15.107 / 15.207 Class B
 Comment: supplied by AC/DC adapter at 120 V / 60 Hz
 Start of Test: 16.04.2015 / 18:02:42

SCAN TABLE: "FCC Voltage"

Short Description:			FCC Voltage	Meas.	IF	Transducer
Start	Stop	Step	Detector	Time	Bandw.	
Frequency	Frequency	Width				
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	20.0 ms	9 kHz	ESH3-Z5
			Average			

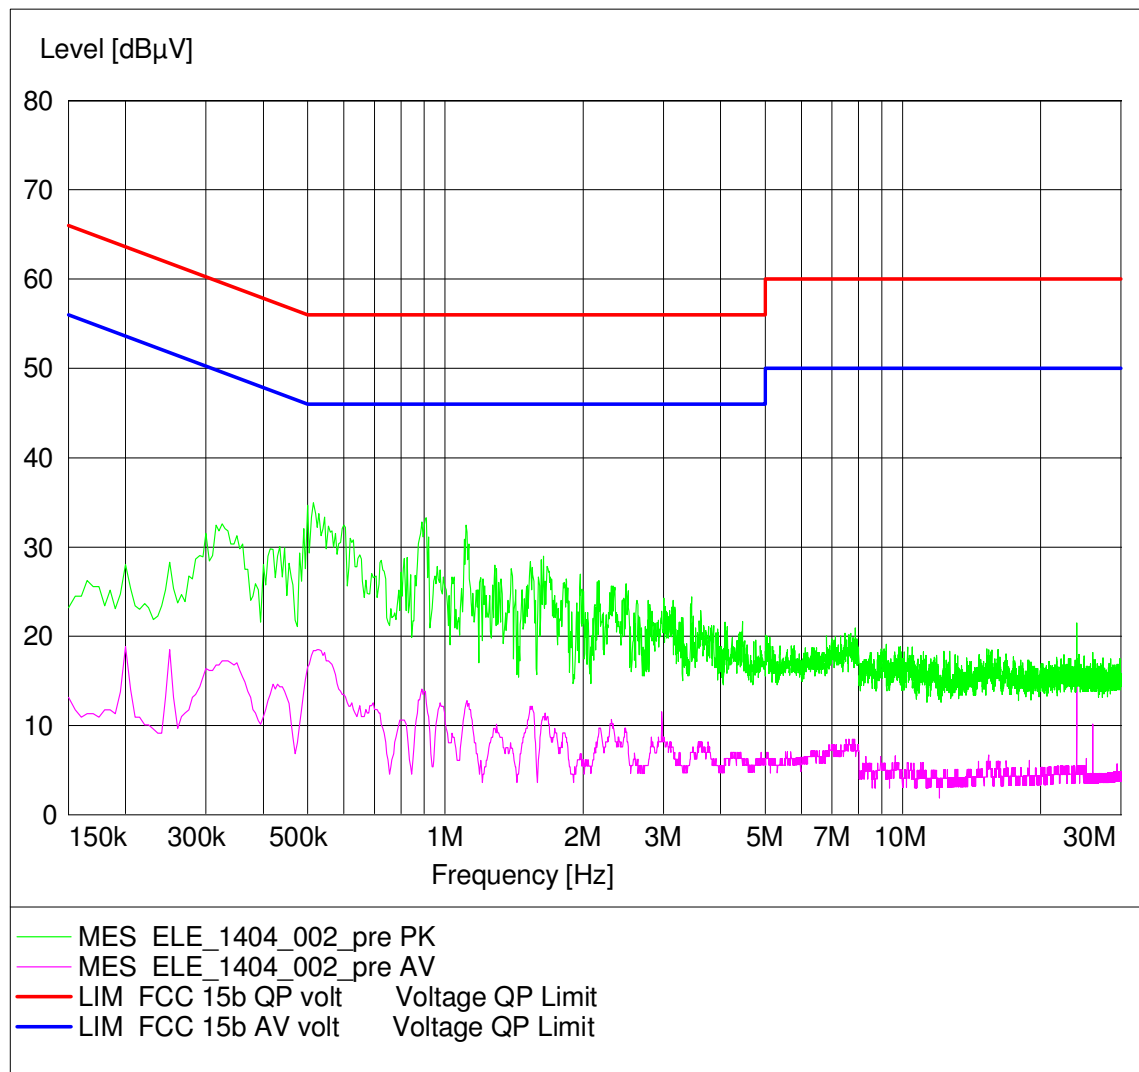

3.5.2 15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209

Test: 15c.2; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = low

Result: Passed
Setup No.: S_AA01
Date of Test: 2015/04/22 15:07
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2402 MHz 1-DH1

Frequency range 30 MHz - 1 GHz

Ant. Polar.	Limit QPK [dBµV]	Frequency [MHz]	Corrected value QPK [dBµV]	Margin QPK [dB]	Result
Ver + Hor					Passed

Frequency range 1 GHz - 25 GHz

Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	2377	56.48	35.74	17.52	18.26	Passed
Ver + Hor	74	54	2389	54.53	35.79	19.47	18.21	Passed
Ver + Hor	74	54						Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed
Setup No.: S_AA01
Date of Test: 2015/04/22 15:19
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2402 MHz 2-DH1

Frequency range 1 GHz - 8 GHz

Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor								Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed
Setup No.: S_AA01
Date of Test: 2015/04/22 15:20
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2441 MHz								2-DH1
Frequency range 1 GHz - 8 GHz								
Ant. Polar.	Limit PK [dBμV]	Limit AV [dBμV]	Frequency [MHz]	Corrected value PK [dBμV]	Corrected value AV [dBμV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	2388	54.02	35.69	19.98	18.31	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = highest

Result: Passed
Setup No.: S_AA01
Date of Test: 2015/04/22 15:15
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2480 MHz					1-DH1
Frequency range 30 MHz - 1 GHz					
Ant. Polar.	Limit QPK [dBμV]	Frequency [MHz]	Corrected value QPK [dBμV]	Margin QPK [dB]	Result
Ver + Hor					Passed

Frequency range 1 GHz - 25 GHz								
Ant. Polar.	Limit PK [dBμV]	Limit AV [dBμV]	Frequency [MHz]	Corrected value PK [dBμV]	Corrected value AV [dBμV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	2390	54.39	35.90	19.61	18.10	Passed
Ver + Hor	74	54	7439	49.08	35.77	24.92	18.23	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed
Setup No.: S_AA01
Date of Test: 2015/04/22 15:21
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2480 MHz 2-DH1

Frequency range 1 GHz - 8 GHz

Ant. Polar.	Limit PK [dBμV]	Limit AV [dBμV]	Frequency [MHz]	Corrected value PK [dBμV]	Corrected value AV [dBμV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	7440	48.46	34.74	25.54	19.26	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

3.5.3 15c.3 Occupied bandwidth §15.247 (a) (1)


Test: 15c.3; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AC01
<i>Date of Test:</i>	2015/04/21 11:12
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
0.884

added by operator

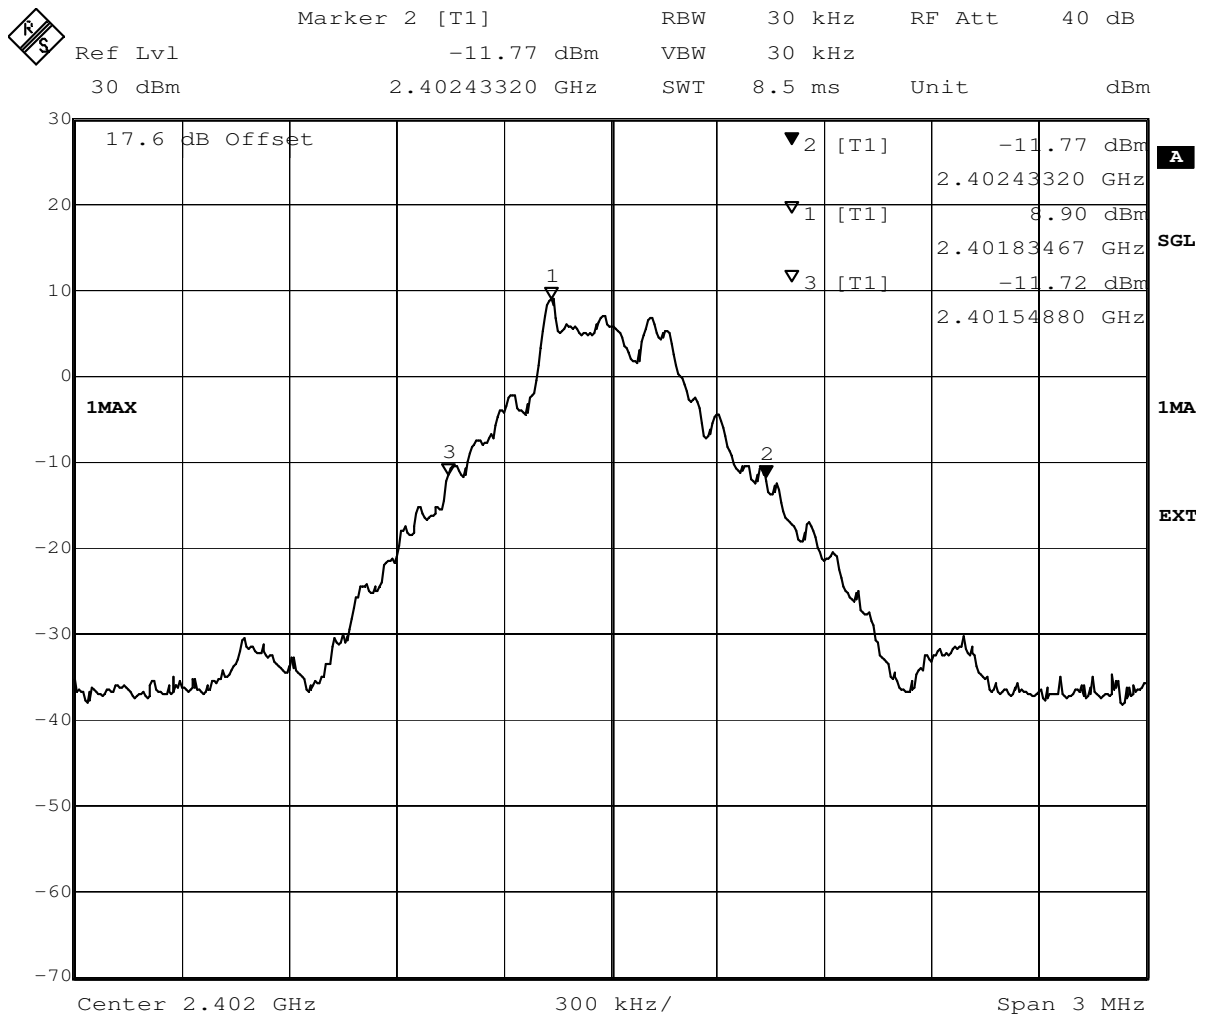

Title: 20dB Bandwidth
Comment A: CH B: 2402 MHz; 20dB bandwidth (kHz):884.4
Date: 20.APR.2015 08:39:30

added by operator



Reference: MDE_ELEKT_1404_FCCa_rev2
acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.3; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AC01
<i>Date of Test:</i>	2015/04/21 11:17
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

20 dB bandwidth MHz
1.264

added by operator



Marker 2 [T1] RBW 30 kHz RF Att 40 dB
Ref Lvl -16.52 dBm VBW 30 kHz
30 dBm 2.40261980 GHz SWT 8.5 ms Unit dBm

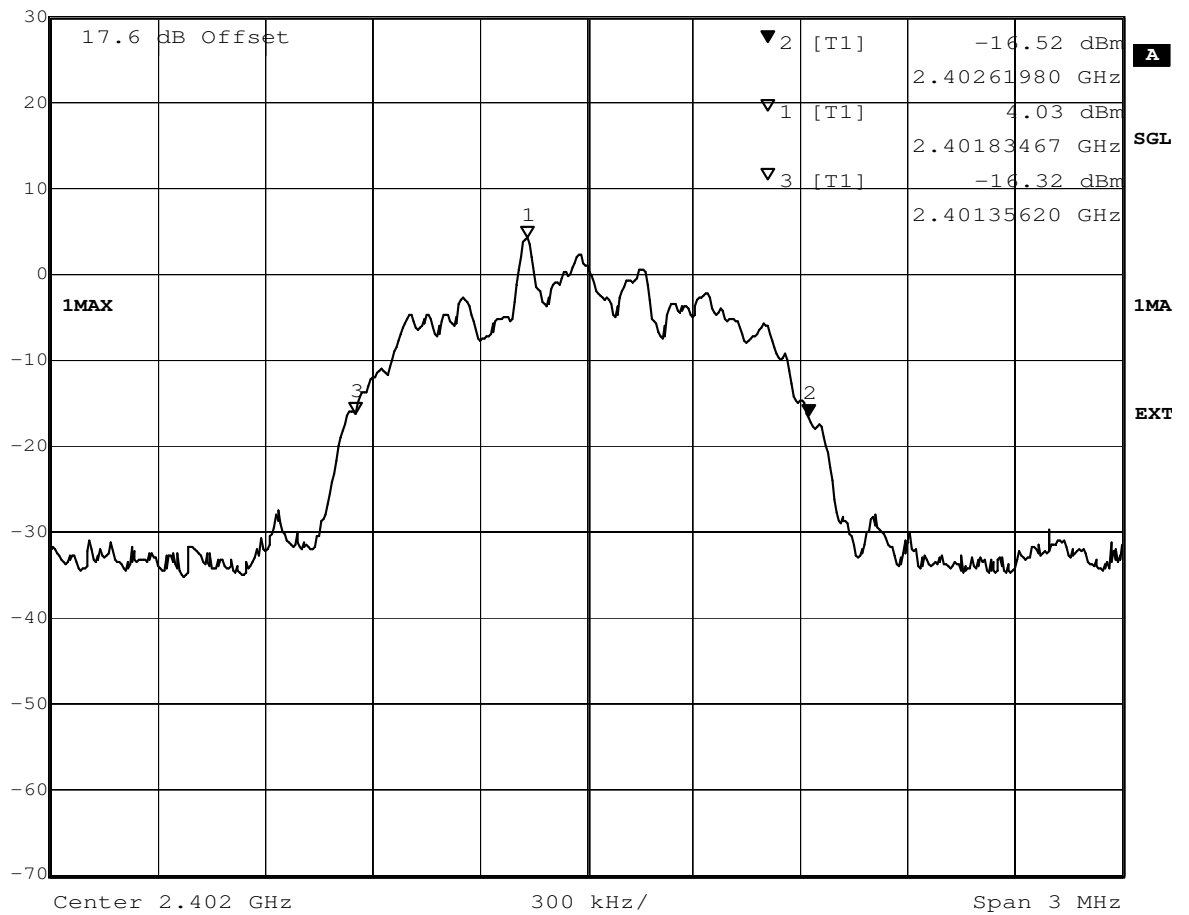

Title: 20dB Bandwidth
Comment A: CH B: 2402 MHz; 20dB bandwidth (kHz):1263.6
Date: 20.APR.2015 08:57:35

added by operator



Reference: MDE_ELEKT_1404_FCCa_rev2
acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.3; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AC01
<i>Date of Test:</i>	2015/04/21 11:24
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

20 dB bandwidth MHz
1.312

added by operator



Marker 2 [T1] RBW 30 kHz RF Att 40 dB
Ref Lvl -17.85 dBm VBW 30 kHz
30 dBm 2.40264980 GHz SWT 8.5 ms Unit dBm

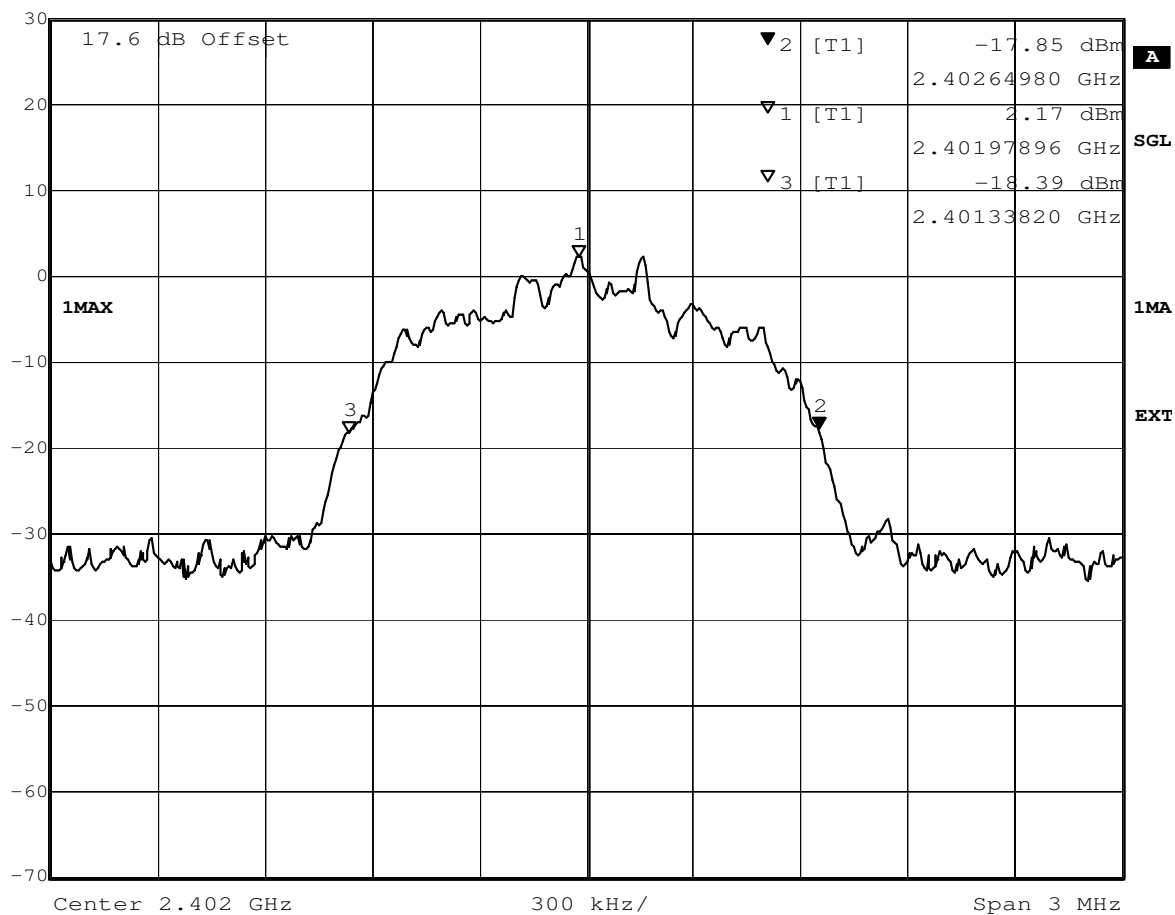

Title: 20dB Bandwidth
Comment A: CH B: 2402 MHz; 20dB bandwidth (kHz):1311.6
Date: 20.APR.2015 10:08:36

added by operator



Reference: MDE_ELEKT_1404_FCCa_rev2
acc. Title 47 CFR chapter I part 15 subpart C


Test: 15c.3; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AC01
<i>Date of Test:</i>	2015/04/21 11:12
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
0.884

added by operator

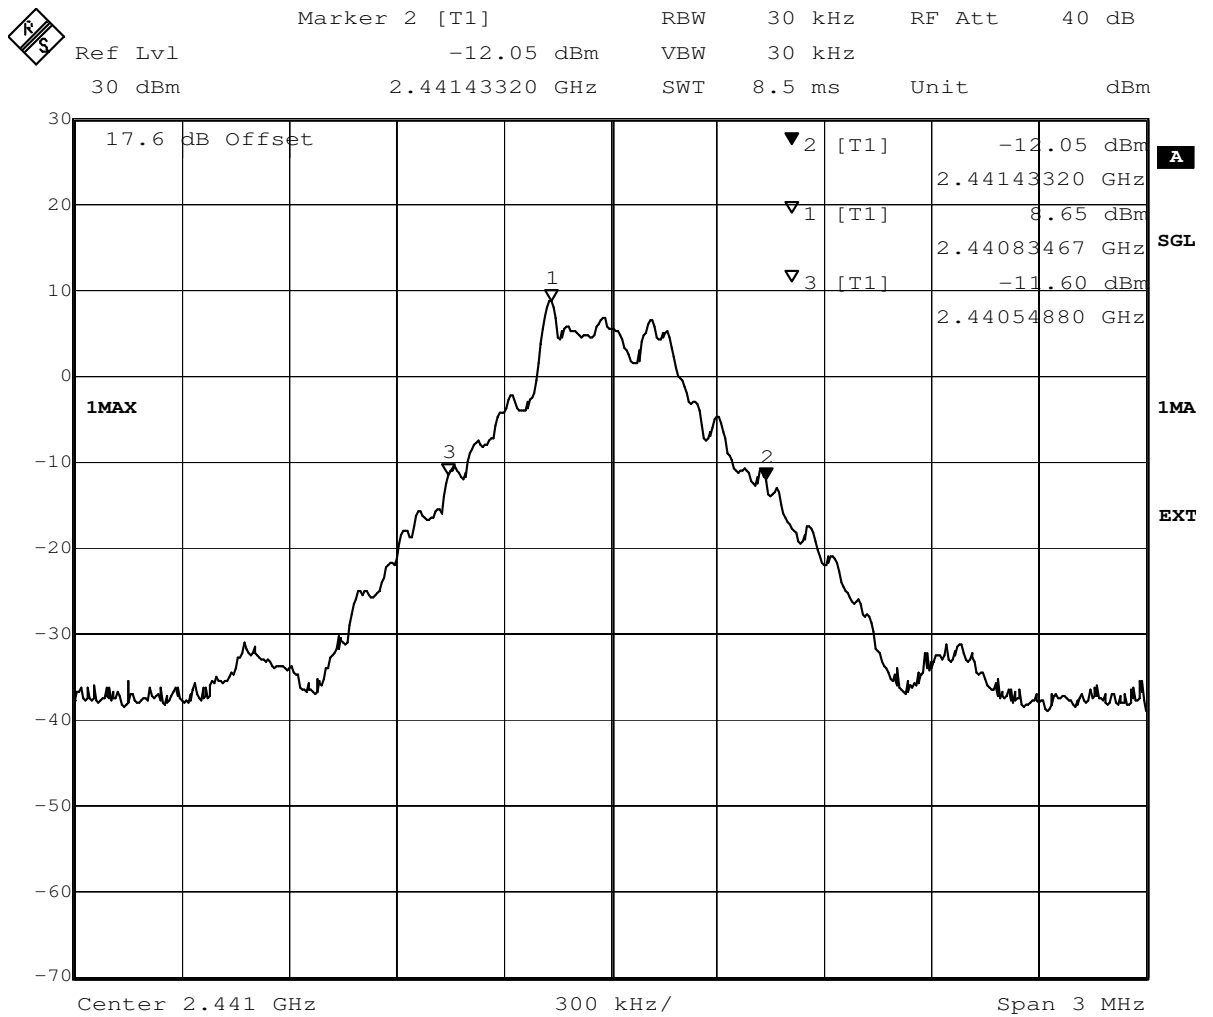

Title: 20dB Bandwidth
Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):884.4
Date: 20.APR.2015 10:34:35

added by operator



Reference: MDE_ELEKT_1404_FCCa_rev2
acc. Title 47 CFR chapter I part 15 subpart C


Test: 15c.3; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AC01
<i>Date of Test:</i>	2015/04/21 11:17
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
1.288

added by operator

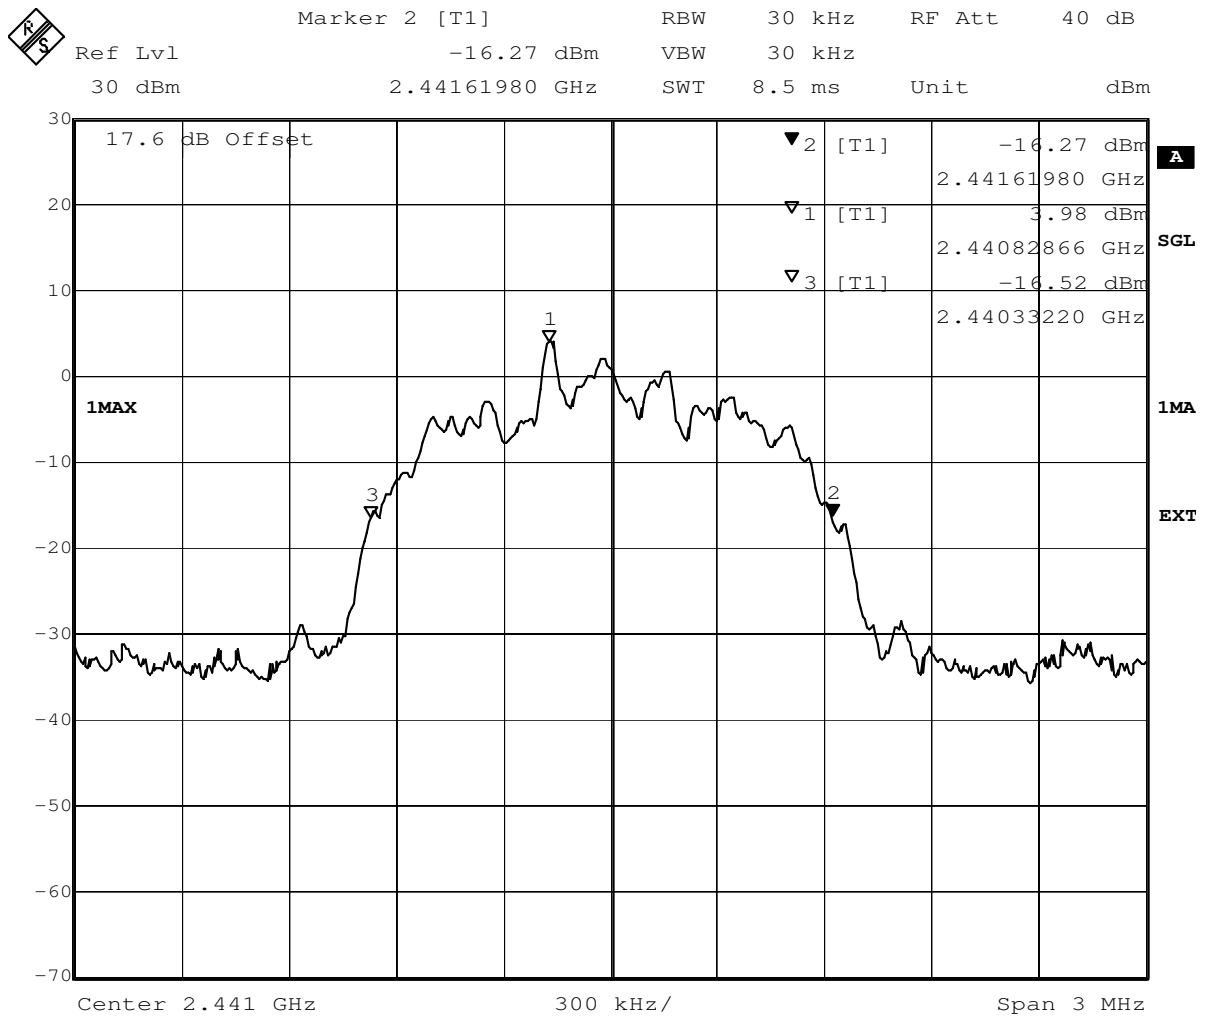

Title: 20dB Bandwidth
Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):1287.6
Date: 20.APR.2015 11:23:13

added by operator



Reference: MDE_ELEKT_1404_FCCa_rev2
acc. Title 47 CFR chapter I part 15 subpart C


Test: 15c.3; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AC01
<i>Date of Test:</i>	2015/04/21 11:24
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
1.306

added by operator

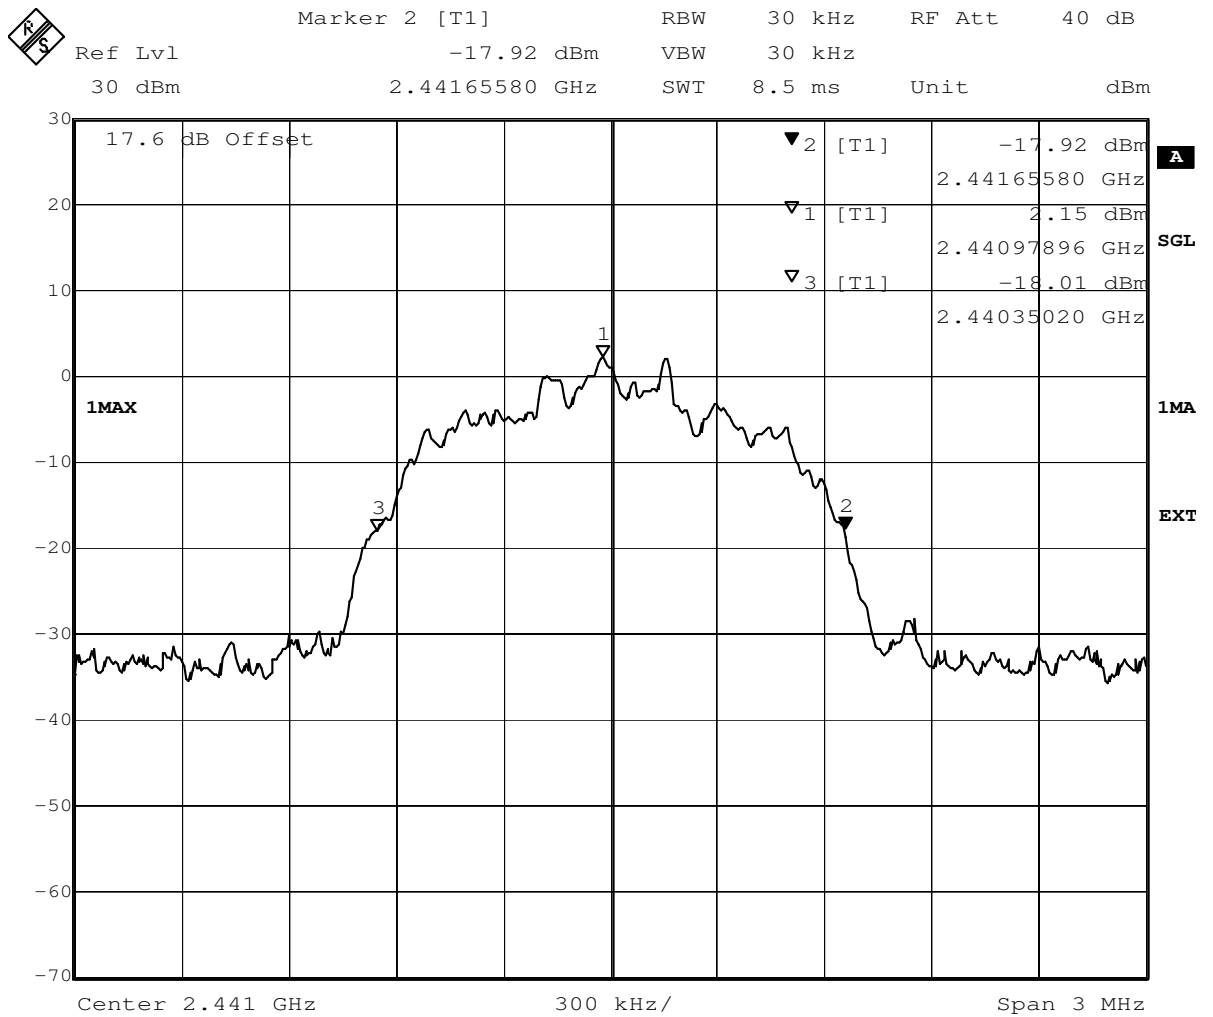

Title: 20dB Bandwidth
Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):1305.6
Date: 20.APR.2015 13:04:16

added by operator



Reference: MDE_ELEKT_1404_FCCa_rev2
acc. Title 47 CFR chapter I part 15 subpart C


Test: 15c.3; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AC01
<i>Date of Test:</i>	2015/04/21 11:12
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
0.884

added by operator

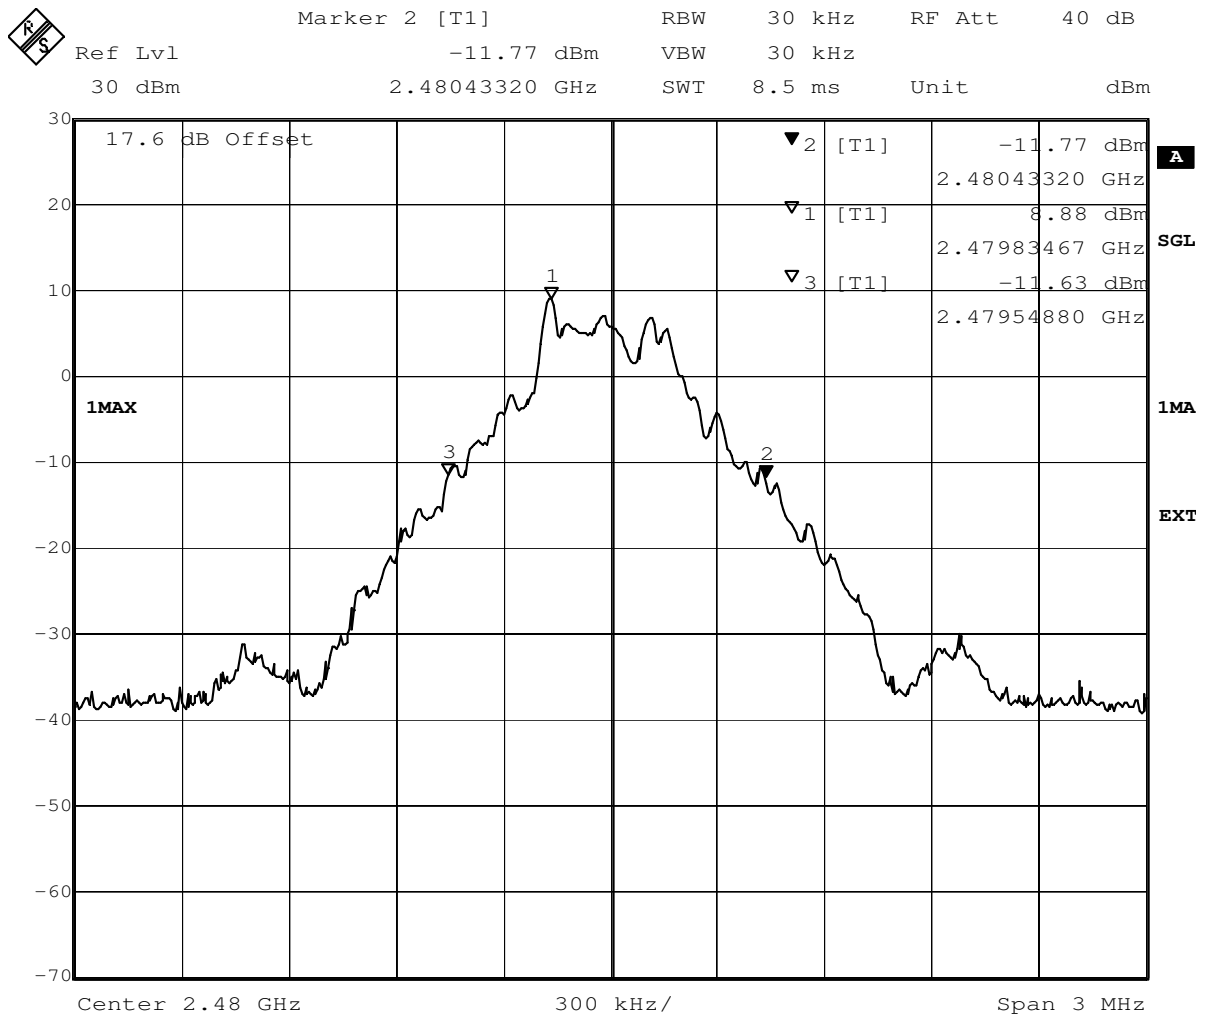

Title: 20dB Bandwidth
Comment A: CH T: 2480 MHz; 20dB bandwidth (kHz):884.4
Date: 20.APR.2015 14:12:05

added by operator



Reference: MDE_ELEKT_1404_FCCa_rev2
acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.3; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AC01
<i>Date of Test:</i>	2015/04/21 11:17
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

20 dB bandwidth MHz
1.264

added by operator



Marker 2 [T1] RBW 30 kHz RF Att 40 dB
Ref Lvl -16.69 dBm VBW 30 kHz
30 dBm 2.48061980 GHz SWT 8.5 ms Unit dBm

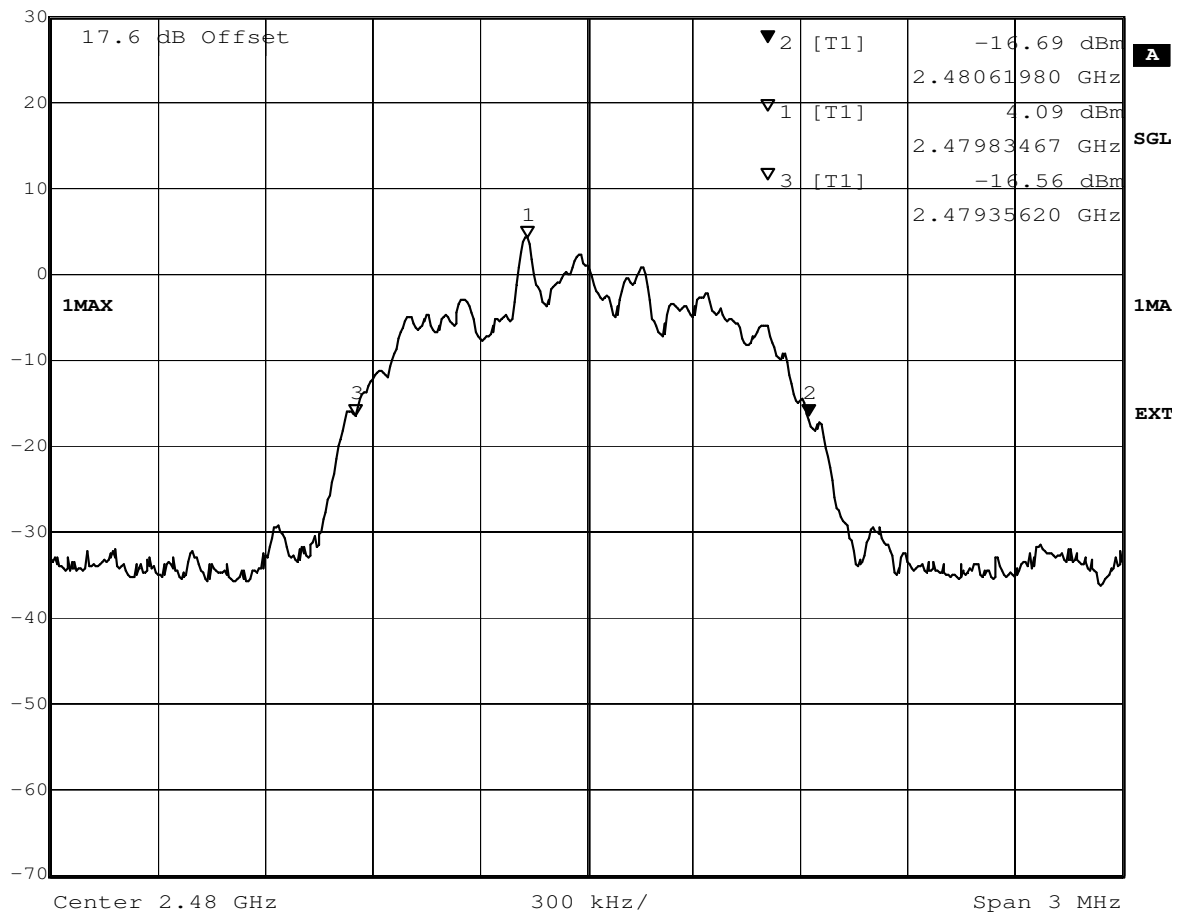

Title: 20dB Bandwidth
Comment A: CH T: 2480 MHz; 20dB bandwidth (kHz):1263.6
Date: 20.APR.2015 13:46:50

added by operator



Reference: MDE_ELEKT_1404_FCCa_rev2
acc. Title 47 CFR chapter I part 15 subpart C


Test: 15c.3; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AC01
<i>Date of Test:</i>	2015/04/21 11:24
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
1.306

added by operator

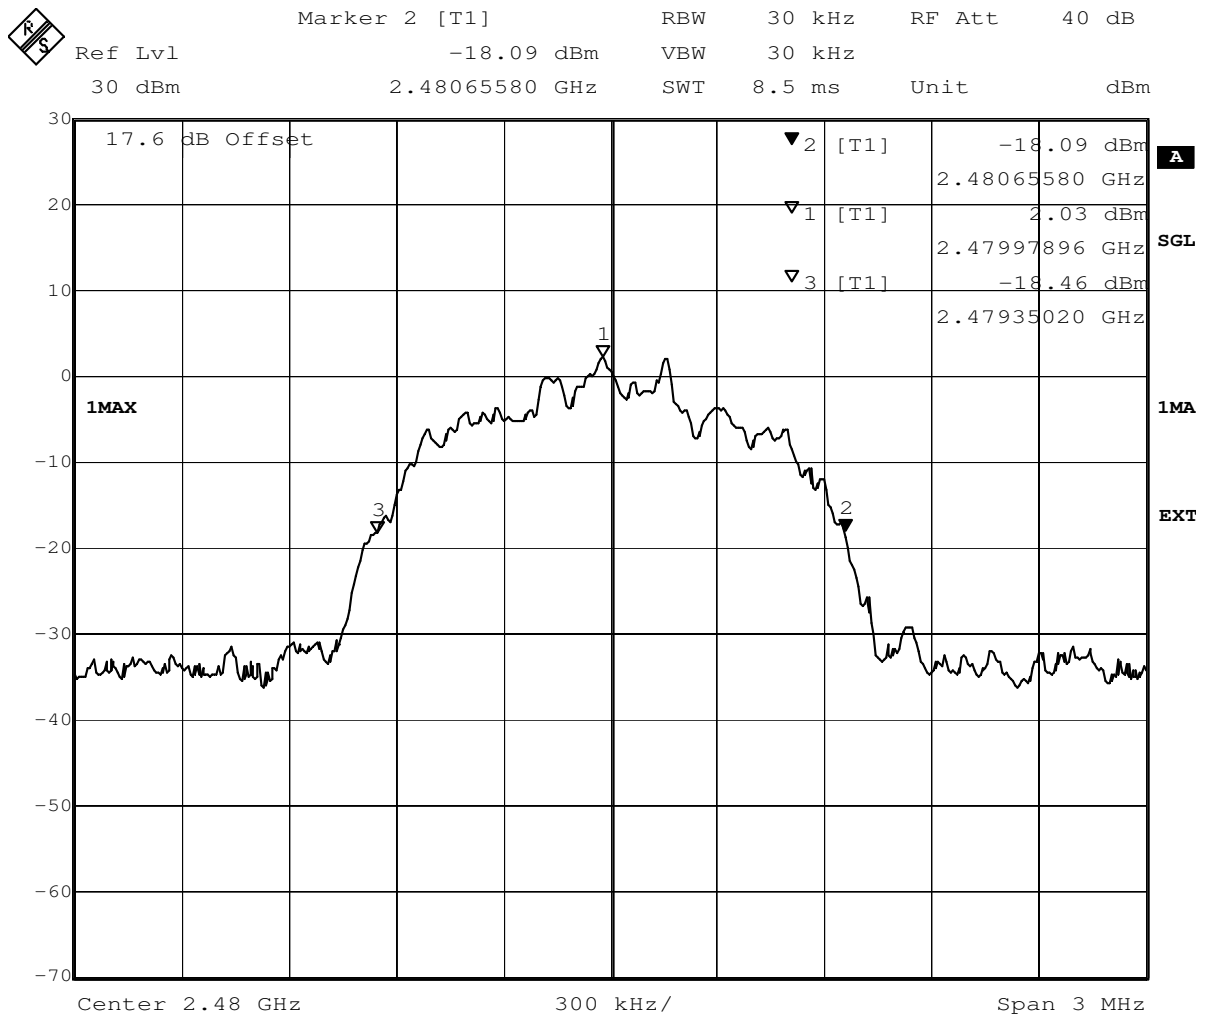

Title: 20dB Bandwidth
Comment A: CH T: 2480 MHz; 20dB bandwidth (kHz):1305.6
Date: 20.APR.2015 13:23:48

added by operator



3.5.4 15c.4 Peak power output §15.247 (b) (1)

Test: 15c.4; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AC01
<i>Date of Test:</i>	2015/04/21 11:13
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
10.39	1.30	11.69

added by operator



Marker 1 [T1] RBW 3 MHz RF Att 40 dB
Ref Lvl 10.39 dBm VBW 3 MHz
30 dBm 2.40176553 GHz SWT 5 ms Unit dBm

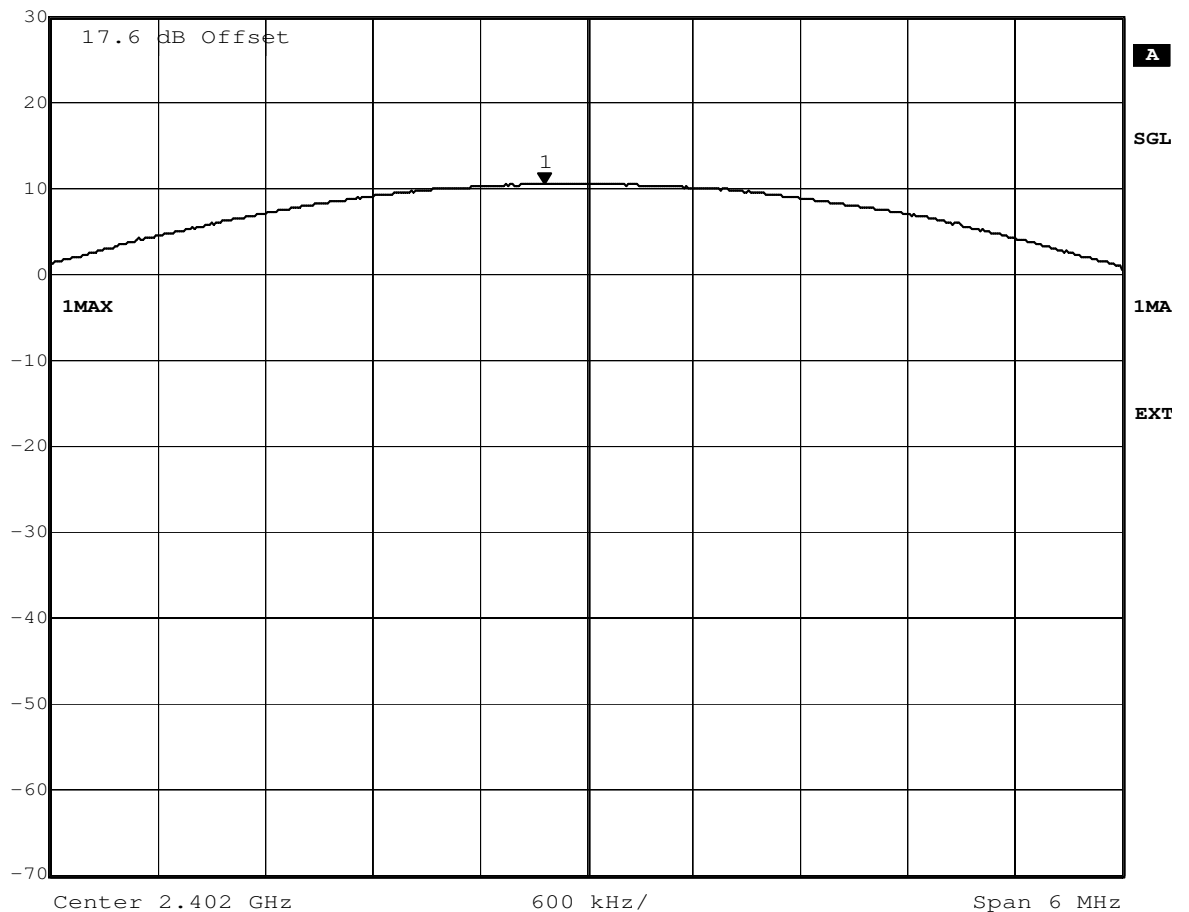

Title: Peak outputpower Power
Comment A: CH B: 2402 MHz
Date: 20.APR.2015 08:40:12

added by operator



Reference: MDE_ELEKT_1404_FCCa_rev2
acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AC01
<i>Date of Test:</i>	2015/04/21 11:18
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
7.74	1.30	9.04

added by operator



Marker 1 [T1] RBW 3 MHz RF Att 40 dB
Ref Lvl 7.74 dBm VBW 3 MHz
30 dBm 2.40181363 GHz SWT 5 ms Unit dBm

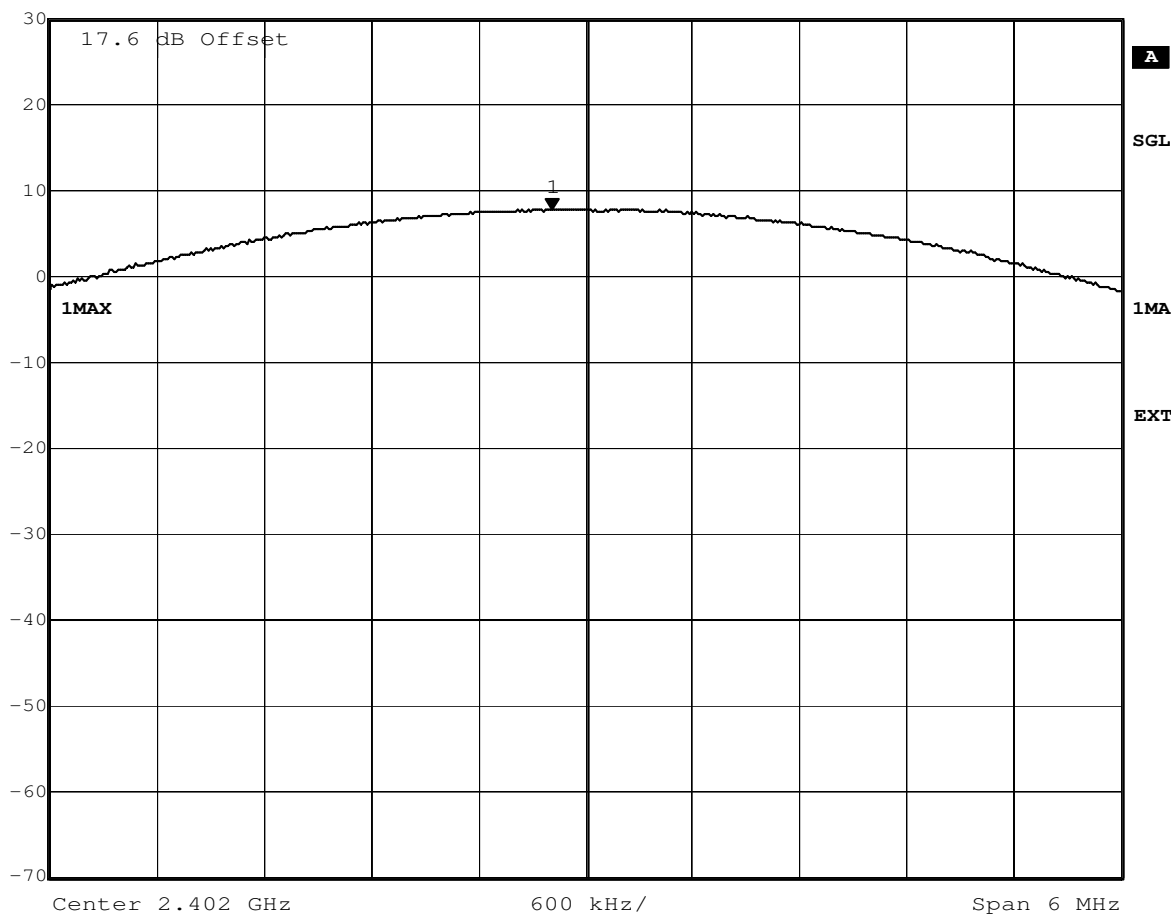

Title: Peak outputpower Power
Comment A: CH B: 2402 MHz
Date: 20.APR.2015 08:58:13

added by operator



Reference: MDE_ELEKT_1404_FCCa_rev2
acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AC01
<i>Date of Test:</i>	2015/04/21 11:25
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
8.18	1.30	9.48

added by operator



Marker 1 [T1] RBW 3 MHz RF Att 40 dB
Ref Lvl 8.18 dBm VBW 3 MHz
30 dBm 2.40196994 GHz SWT 5 ms Unit dBm

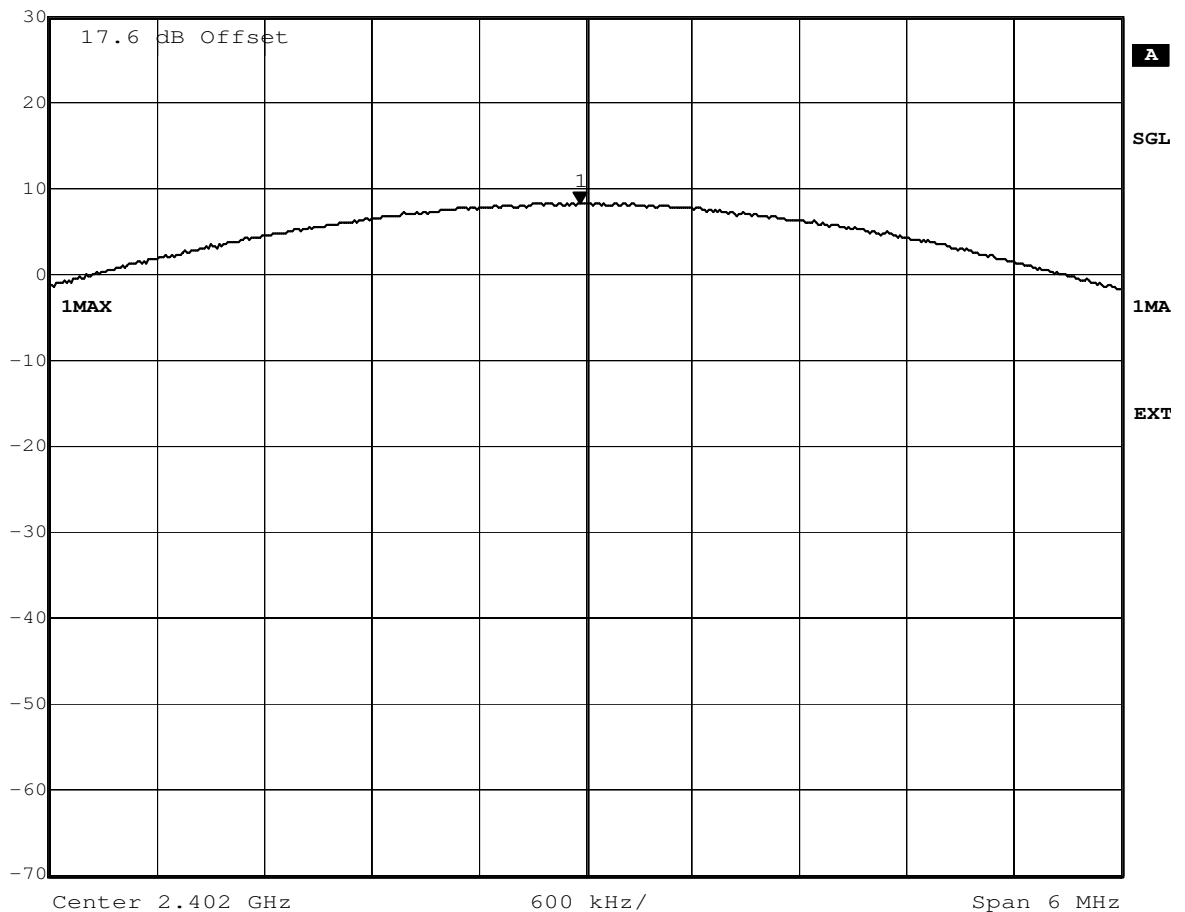

Title: Peak outputpower Power
Comment A: CH B: 2402 MHz
Date: 20.APR.2015 10:09:14

added by operator



Reference: MDE_ELEKT_1404_FCCa_rev2
acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AC01
<i>Date of Test:</i>	2015/04/21 11:13
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
10.10	1.30	11.40

added by operator



Marker 1 [T1] RBW 3 MHz RF Att 40 dB
Ref Lvl 10.10 dBm VBW 3 MHz
30 dBm 2.44089780 GHz SWT 5 ms Unit dBm

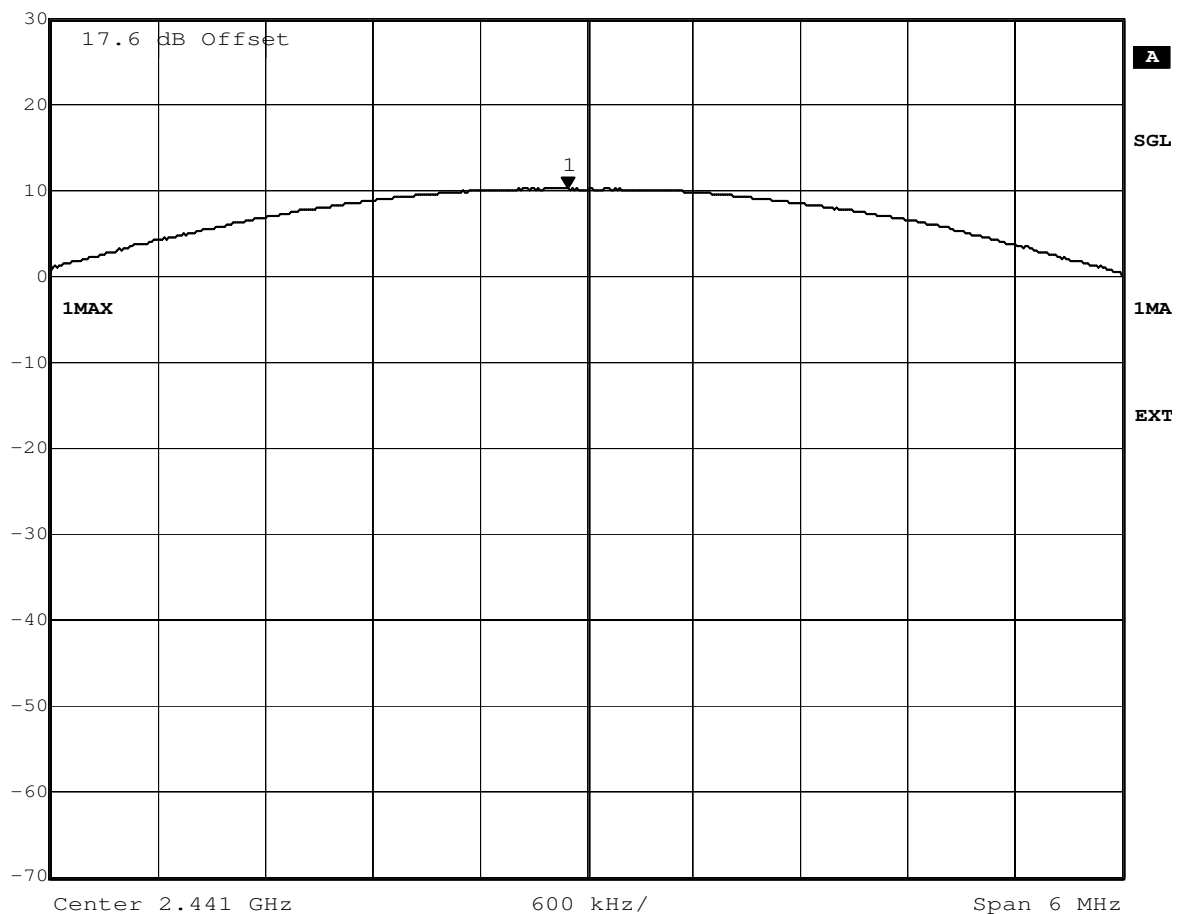

Title: Peak outputpower Power
Comment A: CH M: 2441 MHz
Date: 20.APR.2015 10:35:14

added by operator



Reference: MDE_ELEKT_1404_FCCa_rev2
acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AC01
<i>Date of Test:</i>	2015/04/21 11:18
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
7.56	1.30	8.86

added by operator



Marker 1 [T1] RBW 3 MHz RF Att 40 dB
Ref Lvl 7.56 dBm VBW 3 MHz
30 dBm 2.44123447 GHz SWT 5 ms Unit dBm

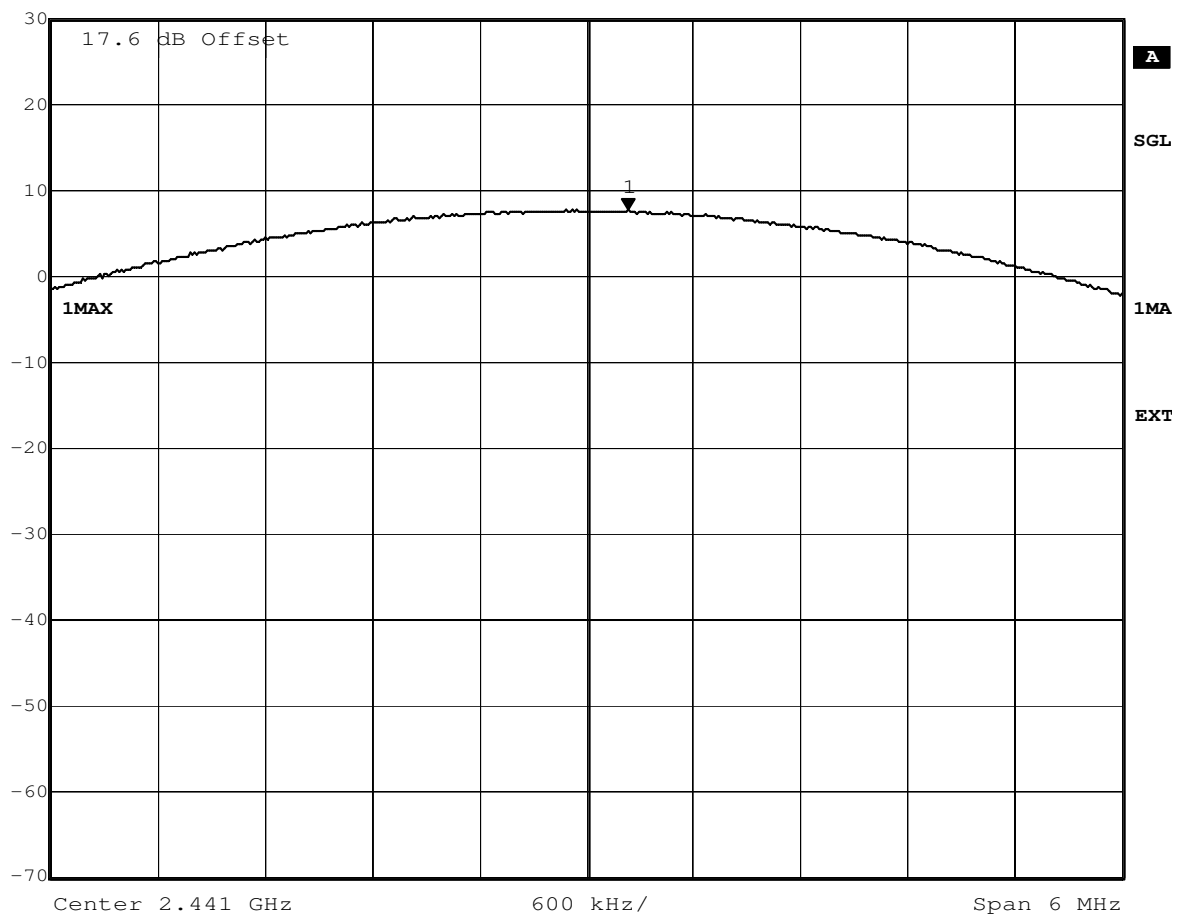

Title: Peak outputpower Power
Comment A: CH M: 2441 MHz
Date: 20.APR.2015 11:23:55

added by operator



Reference: MDE_ELEKT_1404_FCCa_rev2
acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AC01
<i>Date of Test:</i>	2015/04/21 11:25
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
8.24	1.30	9.54

added by operator



Marker 1 [T1] RBW 3 MHz RF Att 40 dB
Ref Lvl 8.24 dBm VBW 3 MHz
30 dBm 2.44096994 GHz SWT 5 ms Unit dBm

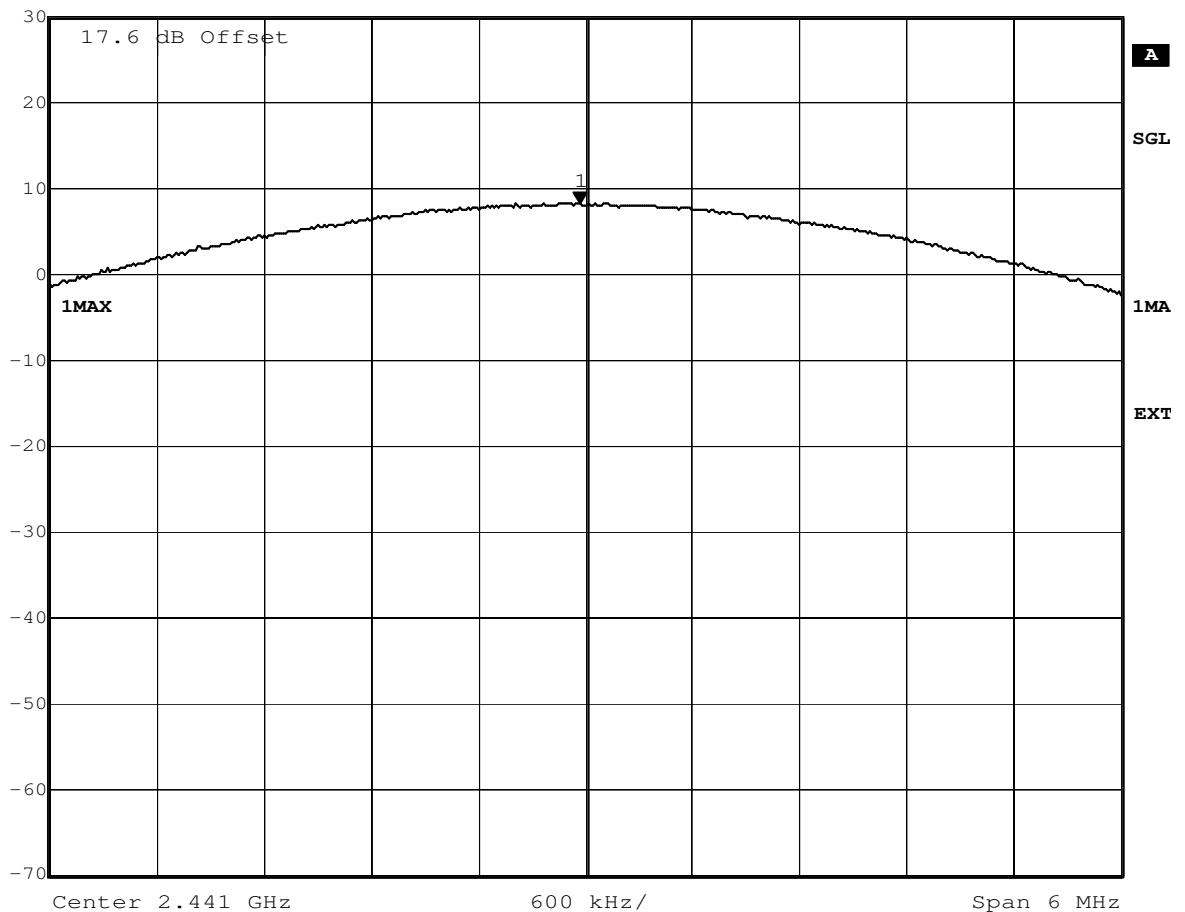

Title: Peak outputpower Power
Comment A: CH M: 2441 MHz
Date: 20.APR.2015 13:04:55

added by operator



Reference: MDE_ELEKT_1404_FCCa_rev2
acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AC01
<i>Date of Test:</i>	2015/04/21 11:13
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
10.35	1.30	11.65

added by operator



Marker 1 [T1] RBW 3 MHz RF Att 40 dB
Ref Lvl 10.35 dBm VBW 3 MHz
30 dBm 2.47981363 GHz SWT 5 ms Unit dBm

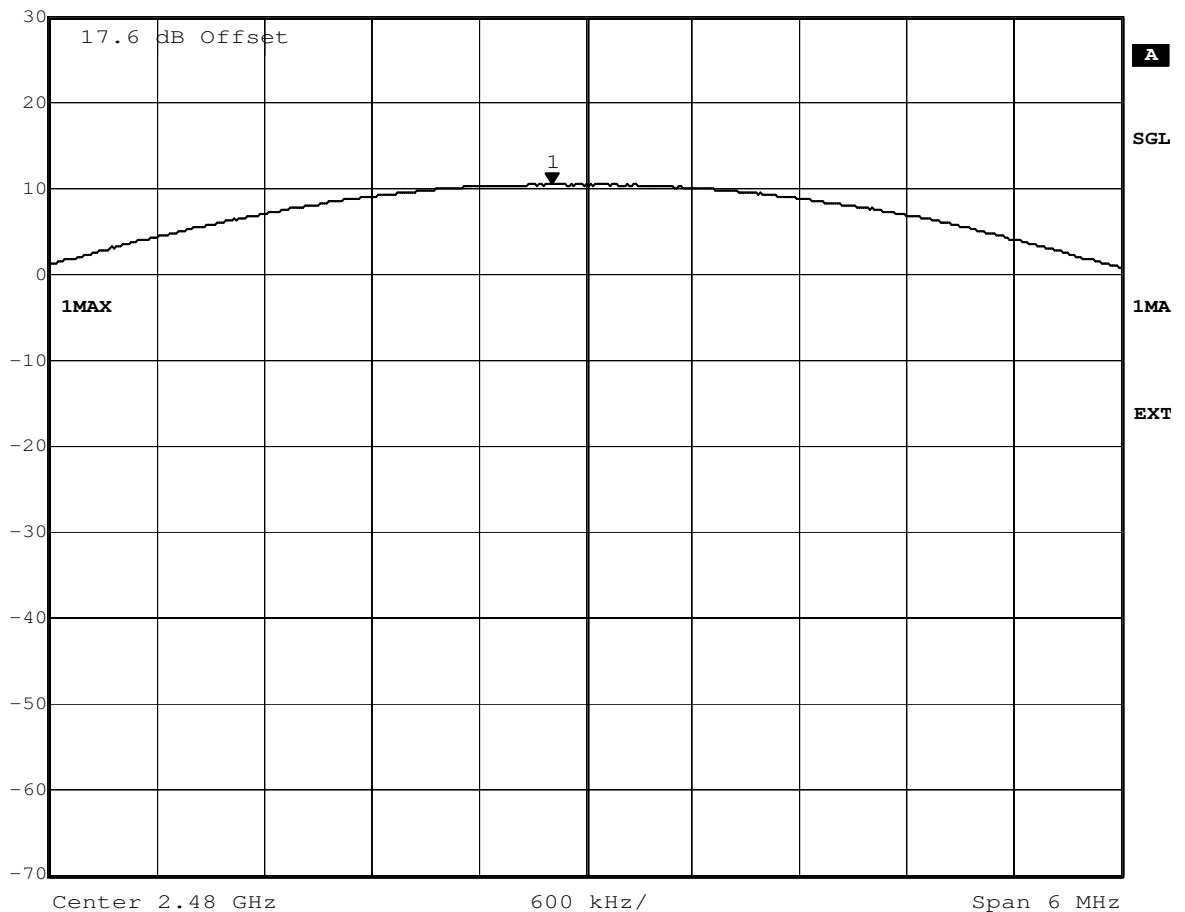

Title: Peak outputpower Power
Comment A: CH T: 2480 MHz
Date: 20.APR.2015 14:06:02

added by operator



Reference: MDE_ELEKT_1404_FCCa_rev2
acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AC01
<i>Date of Test:</i>	2015/04/21 11:18
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
7.70	1.30	9.00

added by operator



Marker 1 [T1] RBW 3 MHz RF Att 40 dB
Ref Lvl 7.70 dBm VBW 3 MHz
30 dBm 2.47963327 GHz SWT 5 ms Unit dBm

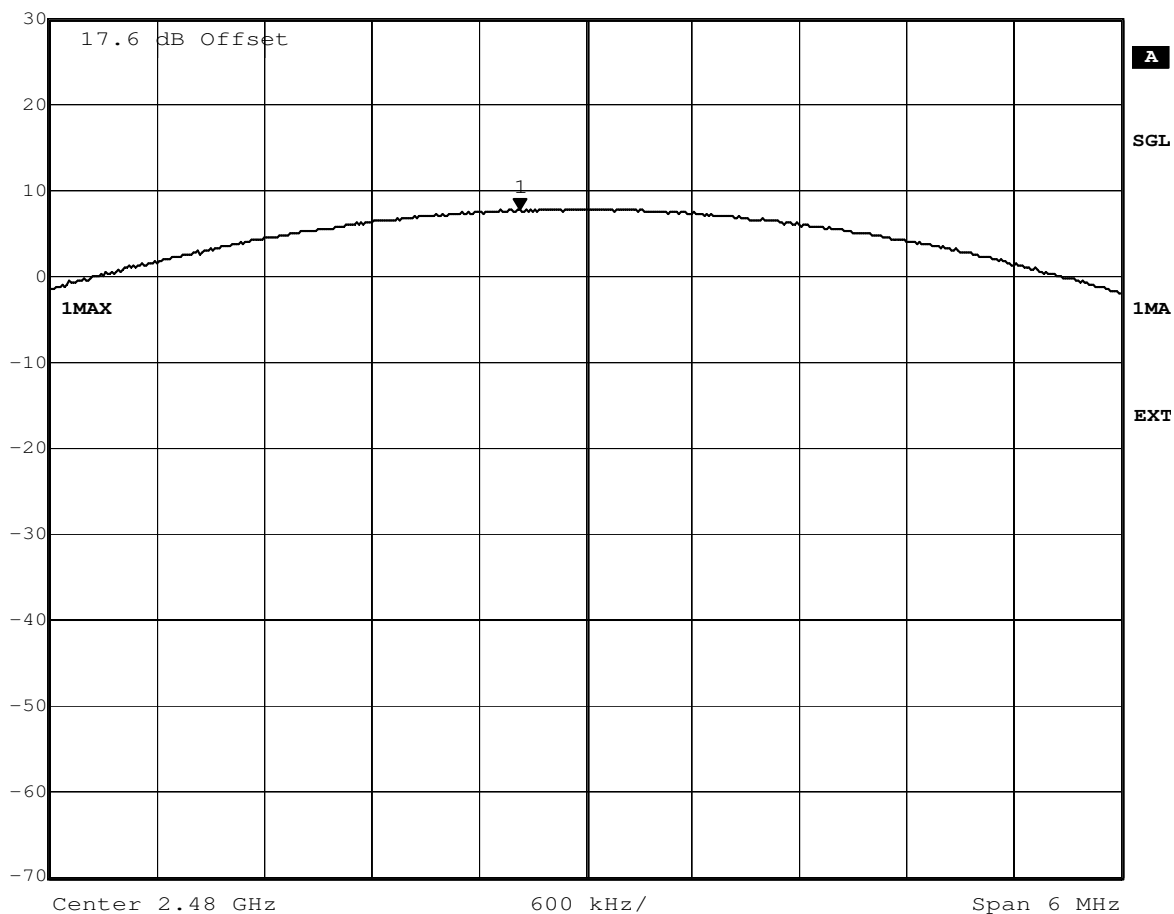

Title: Peak outputpower Power
Comment A: CH T: 2480 MHz
Date: 20.APR.2015 13:47:28

added by operator



Reference: MDE_ELEKT_1404_FCCa_rev2
acc. Title 47 CFR chapter I part 15 subpart C


Test: 15c.4; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AC01
<i>Date of Test:</i>	2015/04/21 11:25
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
10.15	1.30	11.45

added by operator

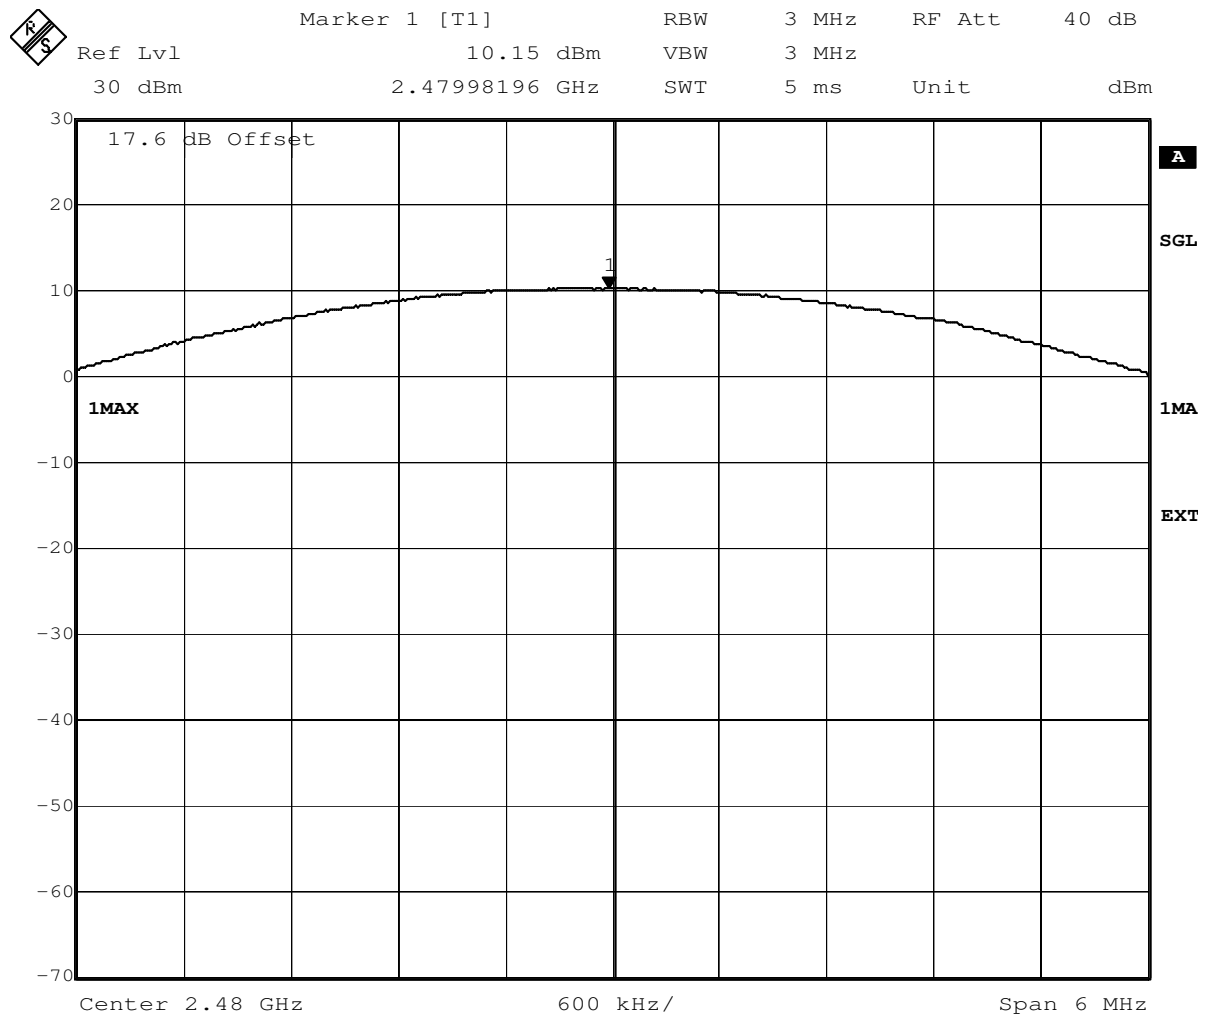

Title: Peak outputpower Power
Comment A: CH T: 2480 MHz
Date: 20.APR.2015 13:24:26

added by operator

3.5.5 15c.5 Spurious RF conducted emissions §15.247 (d)

Test: 15c.5; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed


Setup No.: S_AC01

Date of Test: 2015/04/21 11:14

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

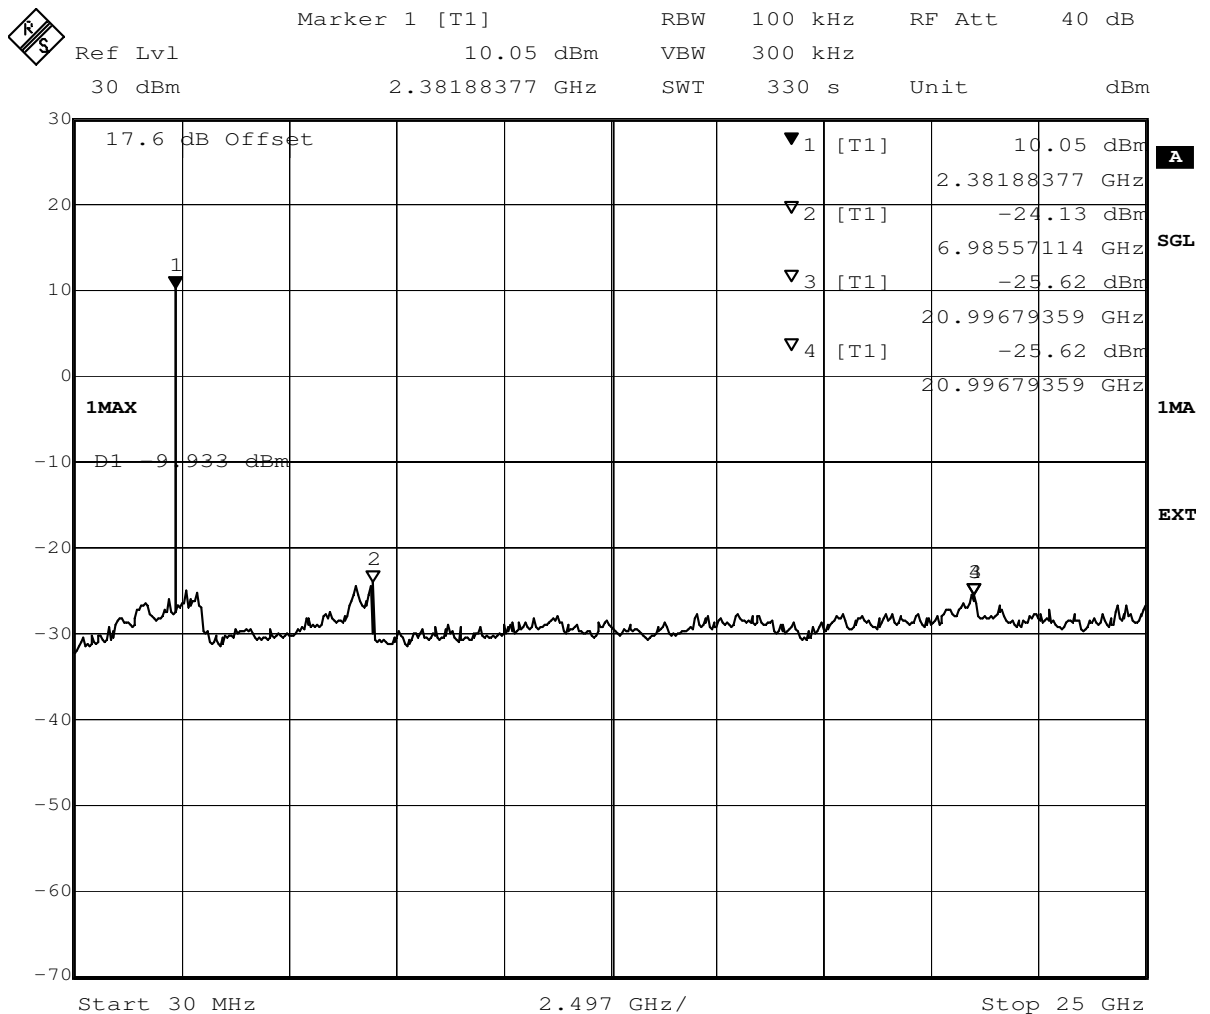


Title: spurious emissions
Comment A: CH B: 2402 MHz
Date: 20.APR.2015 09:59:37

added by operator

Test: 15c.5; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed
Setup No.: S_AC01
Date of Test: 2015/04/21 11:18
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

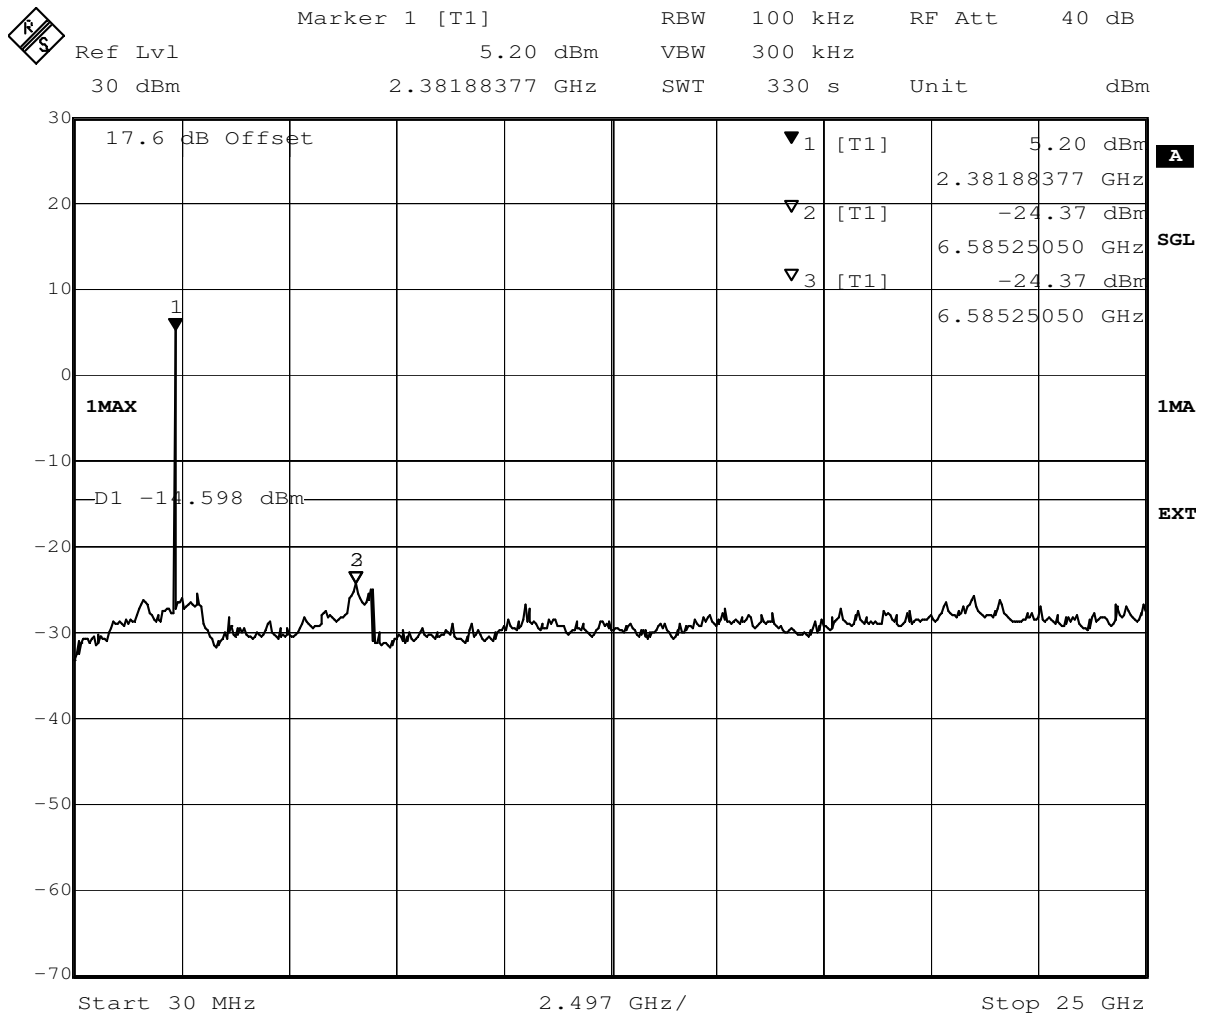


Title: spurious emissions
Comment A: CH B: 2402 MHz
Date: 20.APR.2015 12:58:37

added by operator

Test: 15c.5; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed
Setup No.: S_AC01
Date of Test: 2015/04/21 11:26
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

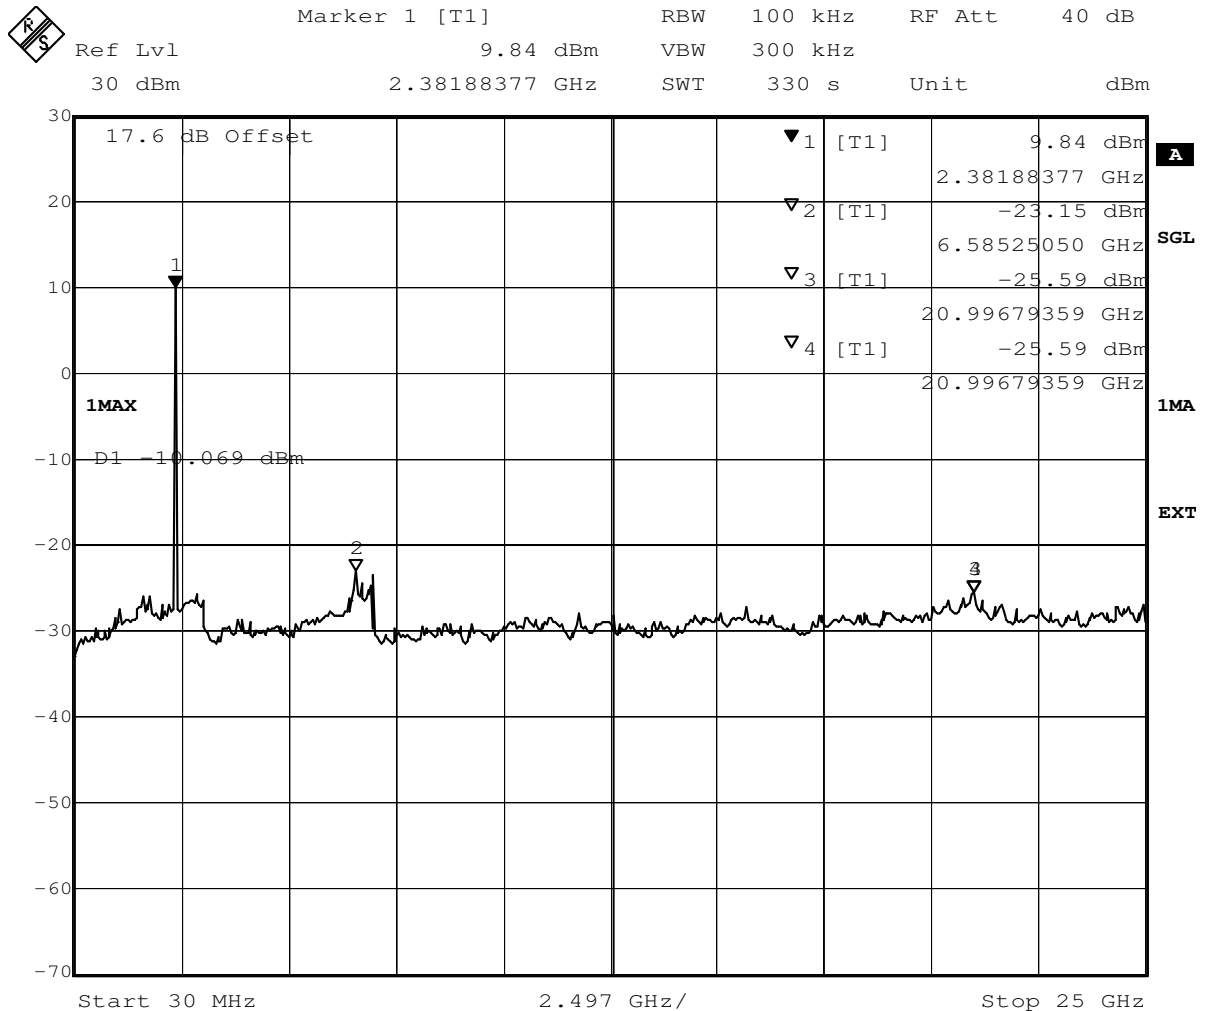

Title: spurious emissions
Comment A: CH B: 2402 MHz
Date: 20.APR.2015 10:29:50

added by operator

Test: 15c.5; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed

Setup No.: S_AC01

Date of Test: 2015/04/21 11:14


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2441		9.83		

added by operator

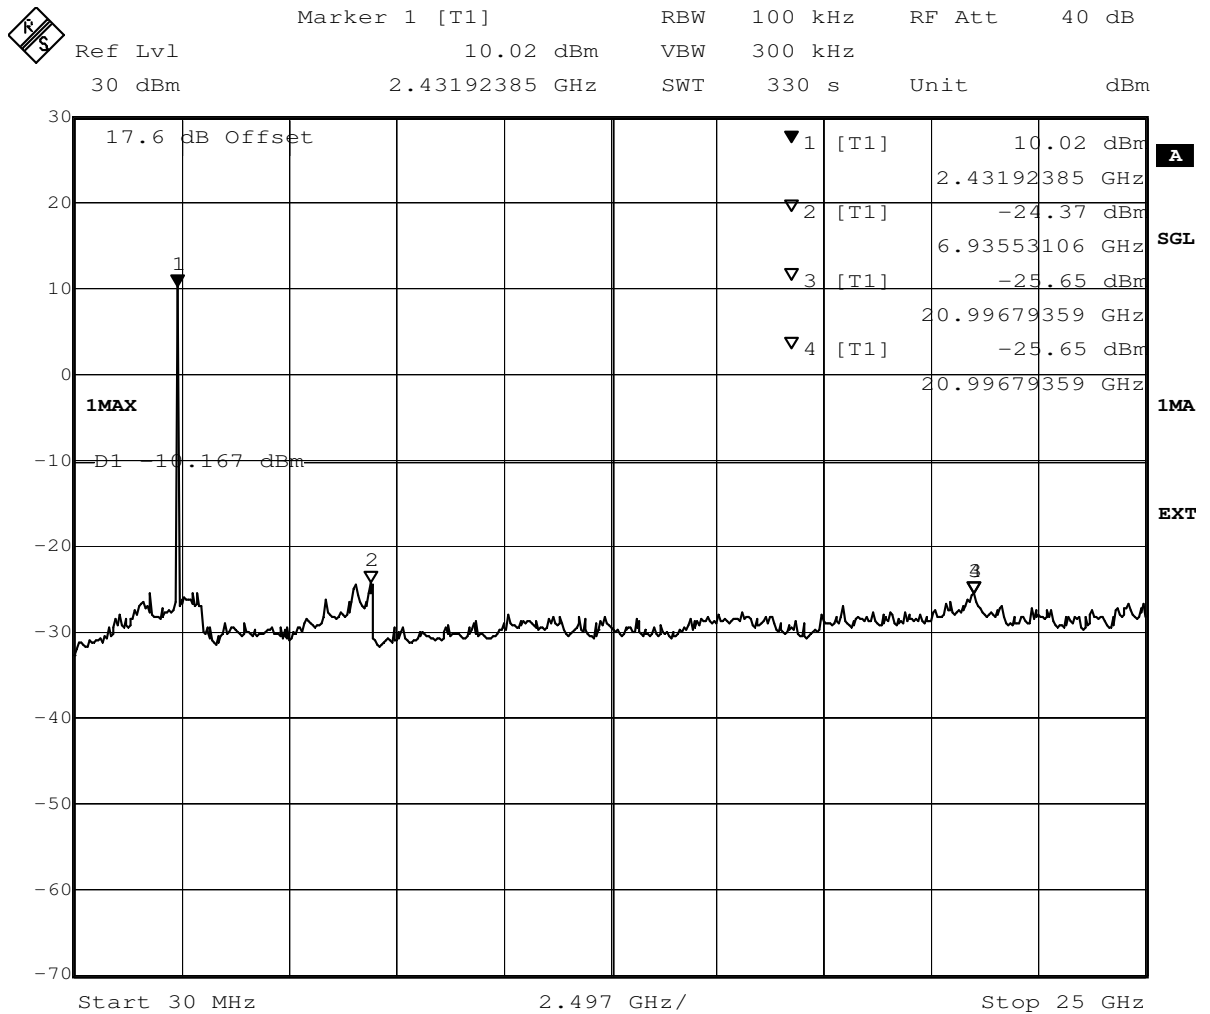

Title: spurious emissions
Comment A: CH M: 2441 MHz
Date: 20.APR.2015 11:19:54

added by operator

Test: 15c.5; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: S_AC01

Date of Test: 2015/04/21 11:18


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2441		5.28		

added by operator

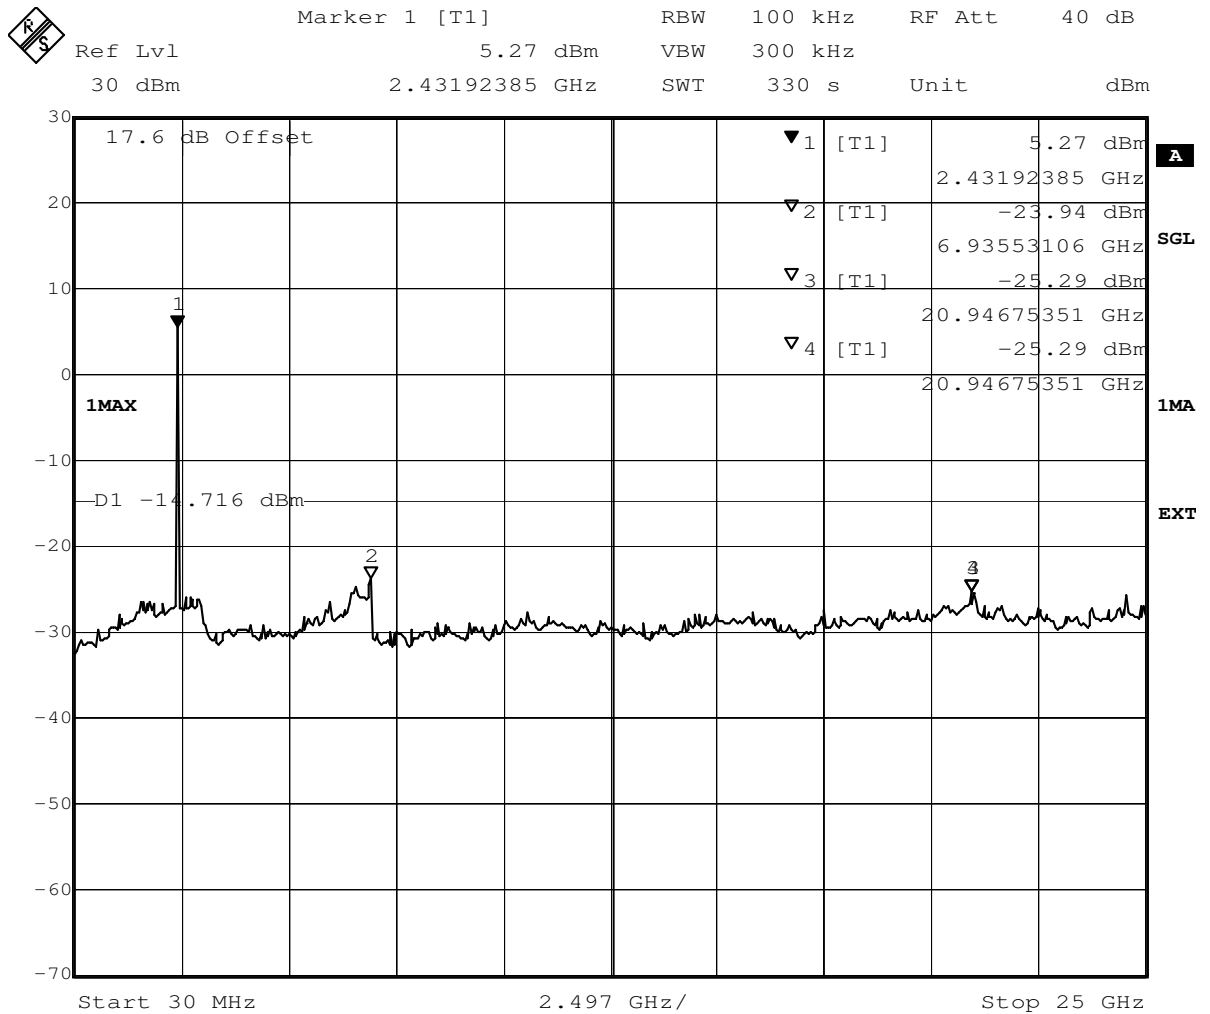

Title: spurious emissions
Comment A: CH M: 2441 MHz
Date: 20.APR.2015 12:36:26

added by operator

Test: 15c.5; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: S_AC01

Date of Test: 2015/04/21 11:26


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2441		5.31		

added by operator

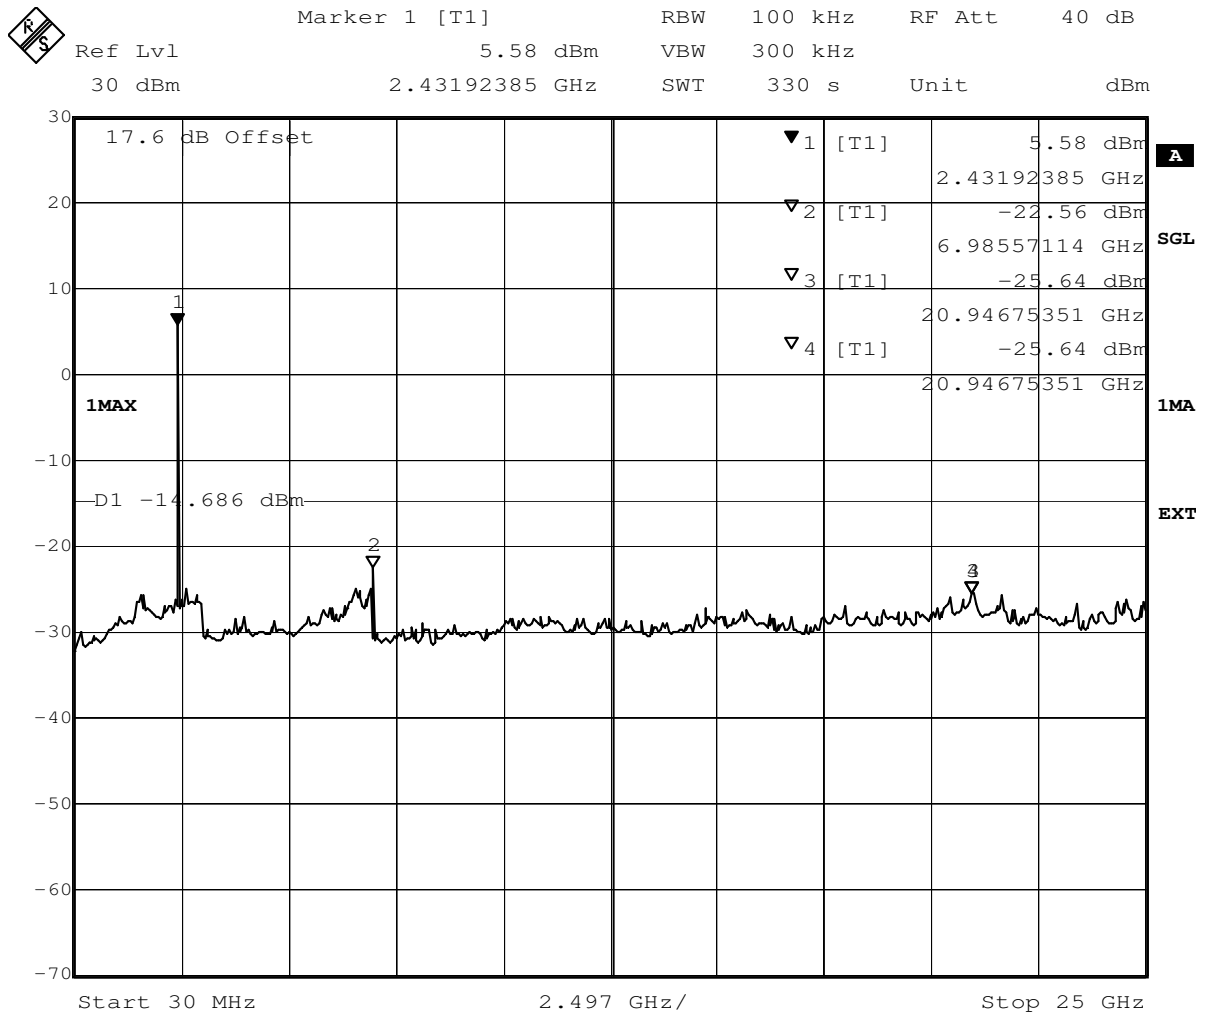

Title: spurious emissions
Comment A: CH M: 2441 MHz
Date: 20.APR.2015 13:19:37

added by operator

Test: 15c.5; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed


Setup No.: S_AC01

Date of Test: 2015/04/21 11:14

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

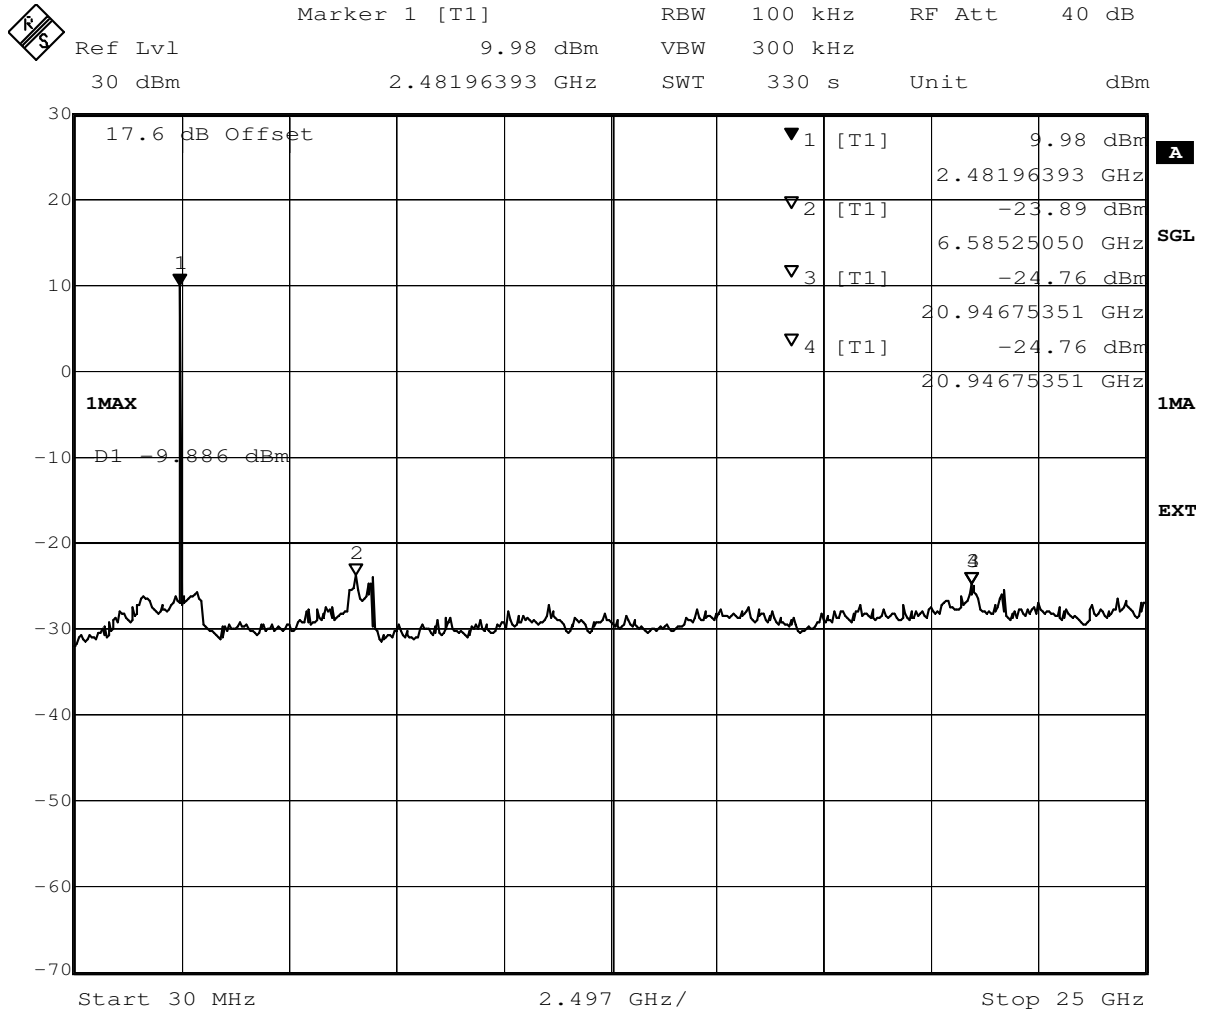

Title: spurious emissions
Comment A: CH T: 2480 MHz
Date: 20.APR.2015 14:26:23

added by operator

Test: 15c.5; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed


Setup No.: S_AC01

Date of Test: 2015/04/21 11:18

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

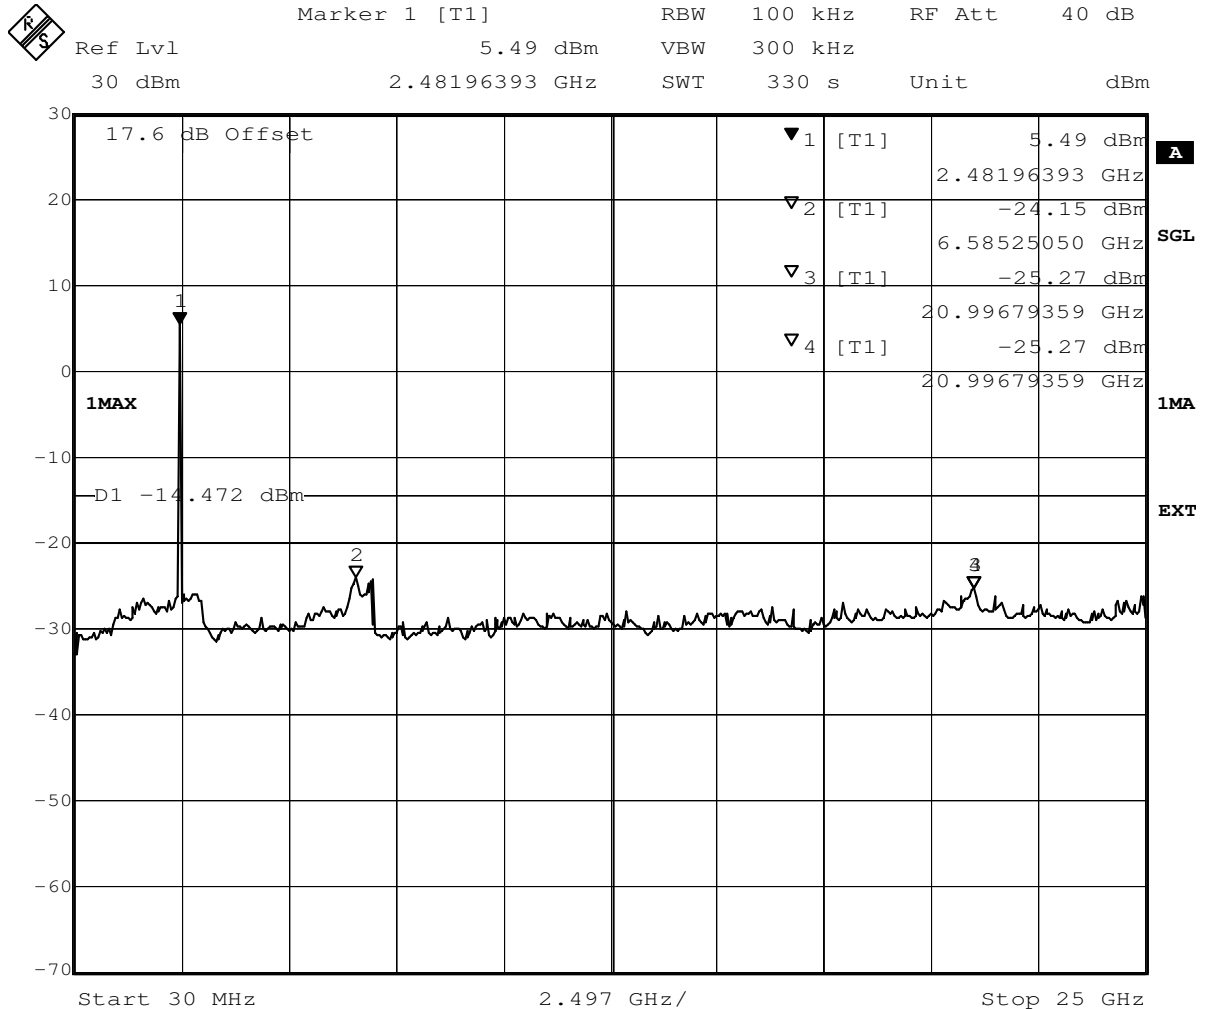

Title: spurious emissions
Comment A: CH T: 2480 MHz
Date: 20.APR.2015 13:59:59

added by operator

Test: 15c.5; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed


Setup No.: S_AC01

Date of Test: 2015/04/21 11:26

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

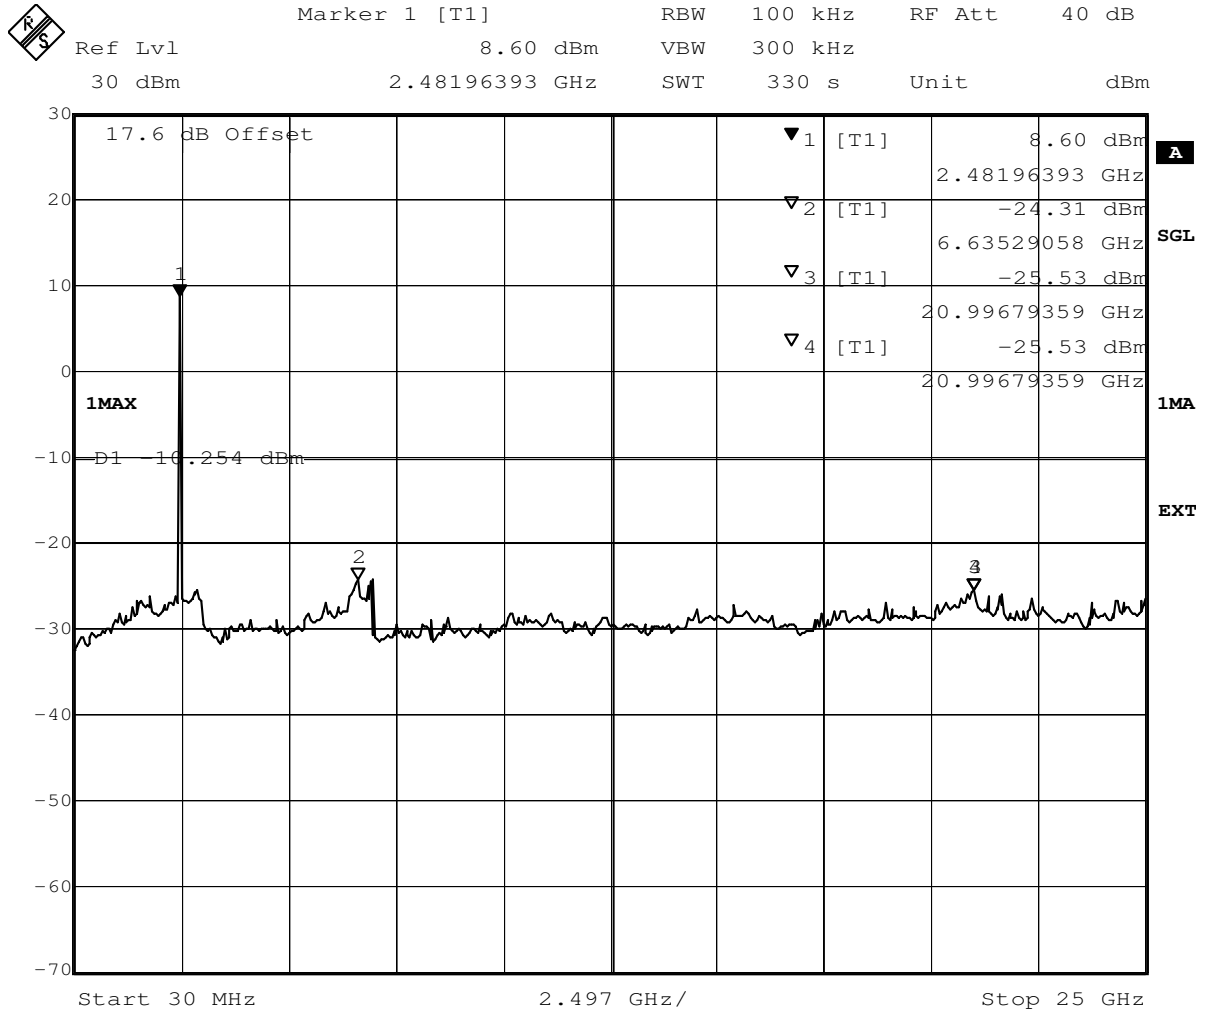

Title: spurious emissions
Comment A: CH T: 2480 MHz
Date: 20.APR.2015 13:39:13

added by operator


3.5.6 15c.6 Band edge compliance §15.247 (d)

Test: 15c.6; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = conducted, band edge = 2400 MHz

Result: Passed
Setup No.: S_AC01
Date of Test: 2015/04/21 11:14
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2400	-27.79	10.07	-9.93	17.86

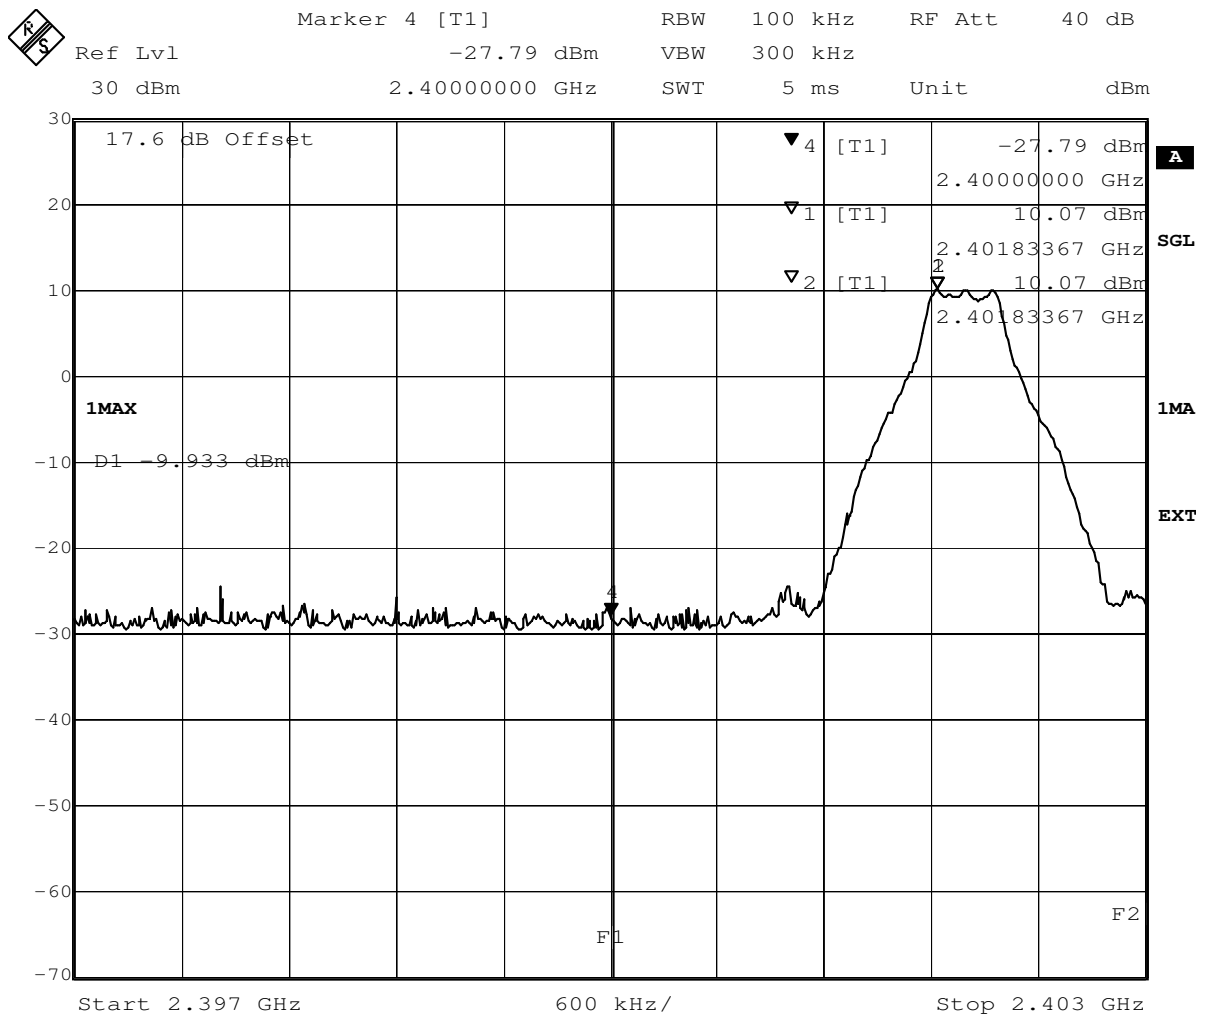


Date: 20.APR.2015 09:46:09

Test: 15c.6; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = conducted, band edge = 2400 MHz

Result: Passed
Setup No.: S_AC01
Date of Test: 2015/04/21 11:19
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2400	-28.14	5.40	-14.60	13.54

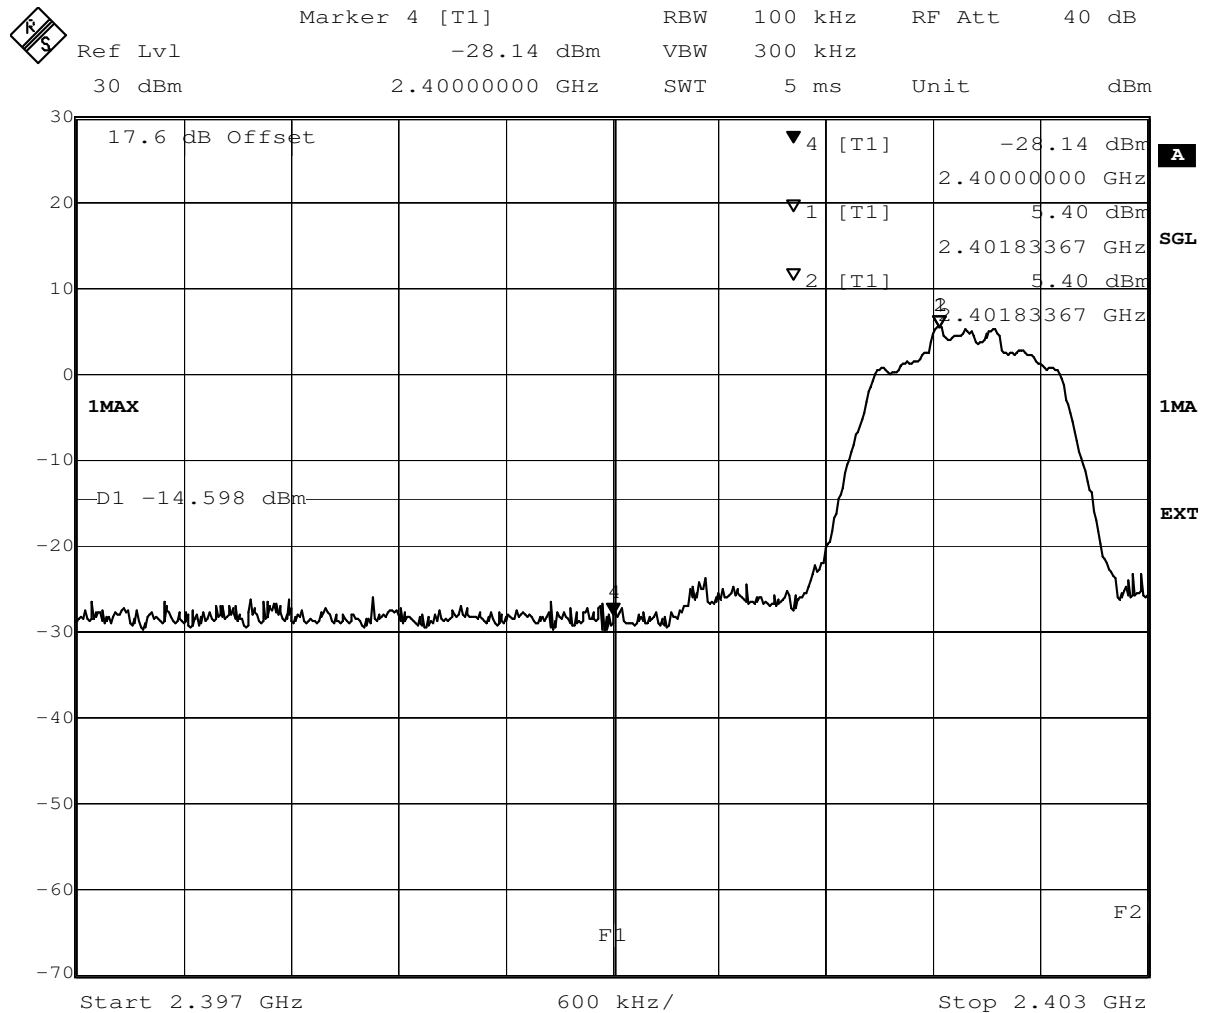


Date: 20.APR.2015 12:46:37

Test: 15c.6; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = conducted, band edge = 2400 MHz

Result: Passed
Setup No.: S_AC01
Date of Test: 2015/04/21 11:26
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2400	-28.87	9.93	-10.07	18.80

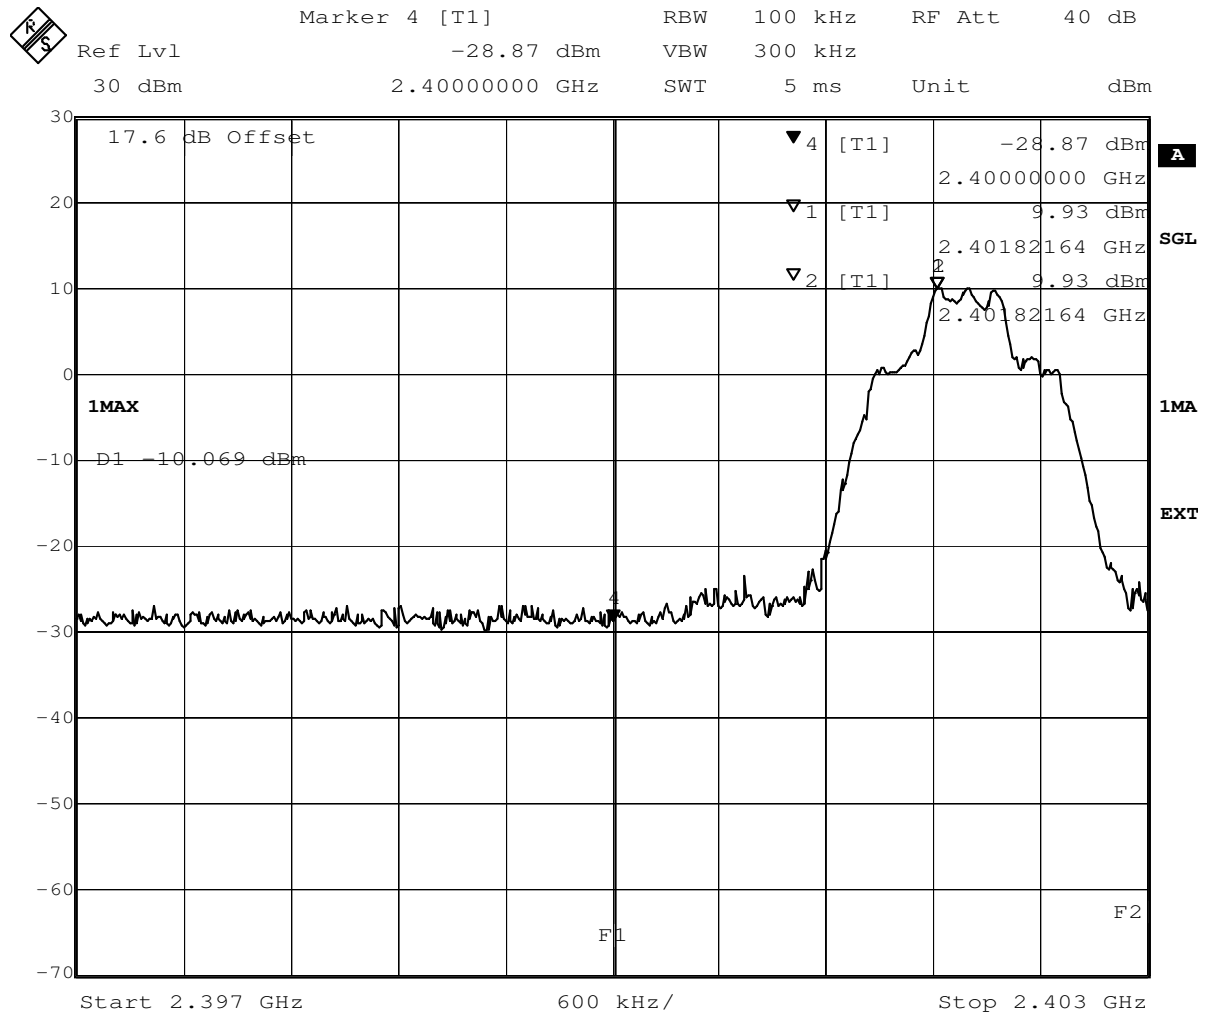


Date: 20.APR.2015 10:13:52

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = conducted, band edge = 2483.5 MHz

Result: Passed
Setup No.: S_AC01
Date of Test: 2015/04/21 11:14
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2484	-30.11	10.11	-9.89	20.23

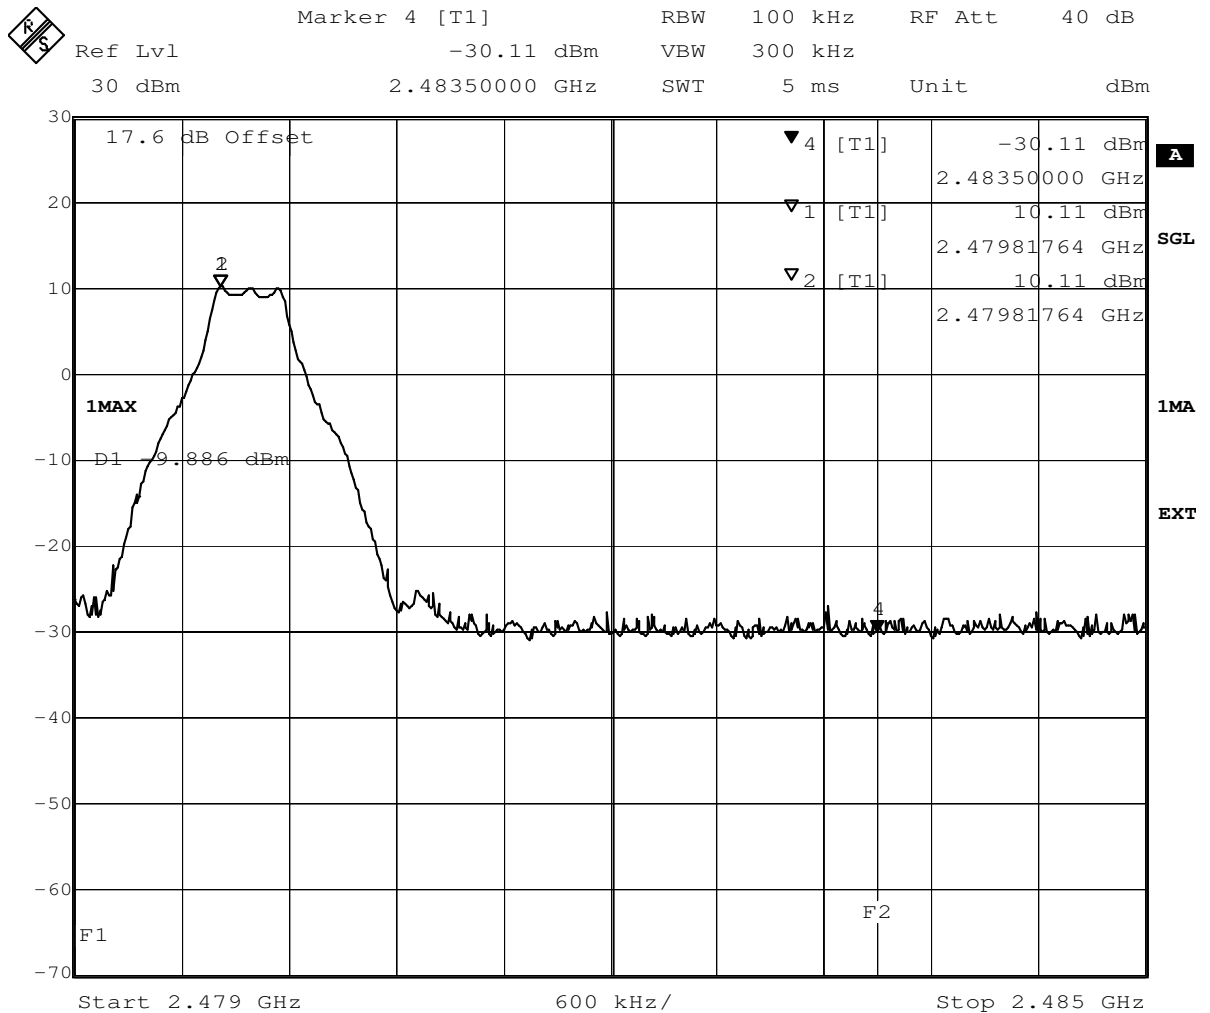

Date: 20.APR.2015 14:13:54



Reference: MDE_ELEKT_1404_FCCa_rev2
acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = radiated

Result: Passed
Setup No.: S_AA01
Date of Test: 2015/04/22 15:16
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:


Diagram No.	TX on	Ant. Polar.	Limit PK [dBμV]	Limit AV [dBμV]	Frequency [MHz]	Corrected value PK [dBμV]	Corrected value AV [dBμV]	Margin PK [dB]	Margin AV [dB]	Result
xxx_yyyy_004	2480 MHz	Ver + Hor	74	54	2483.5	49.89	36.99	24.11	17.01	Passed

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = conducted, band edge = 2483.5 MHz

Result: Passed
Setup No.: S_AC01
Date of Test: 2015/04/21 11:19
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2484	-29.71	5.53	-14.47	15.24

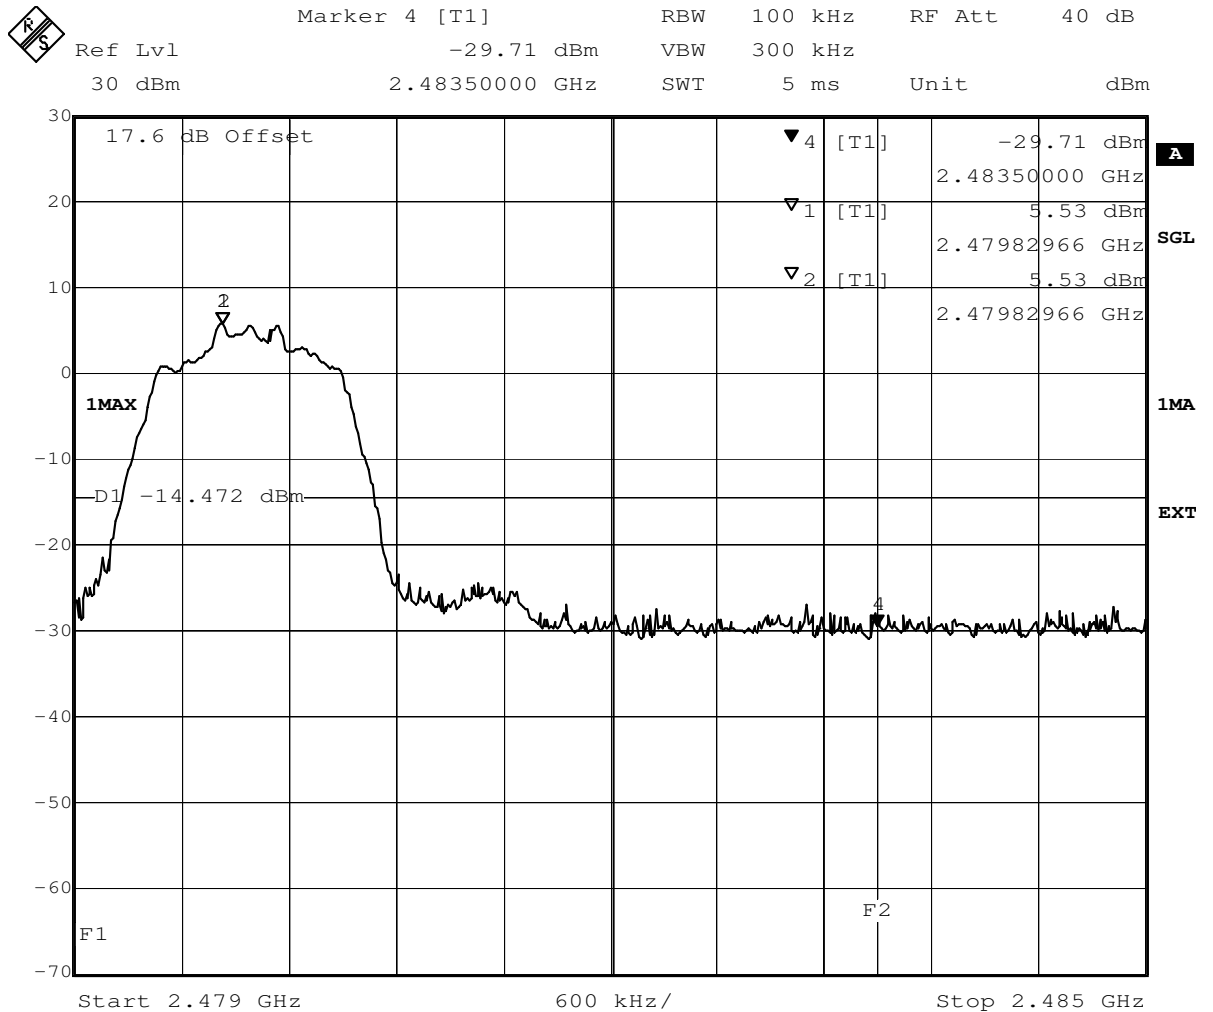

Date: 20.APR.2015 13:48:27

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = radiated

Result: Passed

Setup No.: S_AA01

Date of Test: 2015/04/22 15:18

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

TX on	Ant. Polar.	Limit PK [dBμV]	Limit AV [dBμV]	Frequency [MHz]	Corrected value PK [dBμV]	Corrected value AV [dBμV]	Margin PK [dB]	Margin AV [dB]	Result
2480 MHz	Ver + Hor	74	54	2483.5	51.59	36.69	22.41	17.31	Passed

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = conducted, band edge = 2483.5 MHz

Result: Passed

Setup No.: S_AC01


Date of Test: 2015/04/21 11:26

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2484	-30.15	9.75	-10.25	19.89

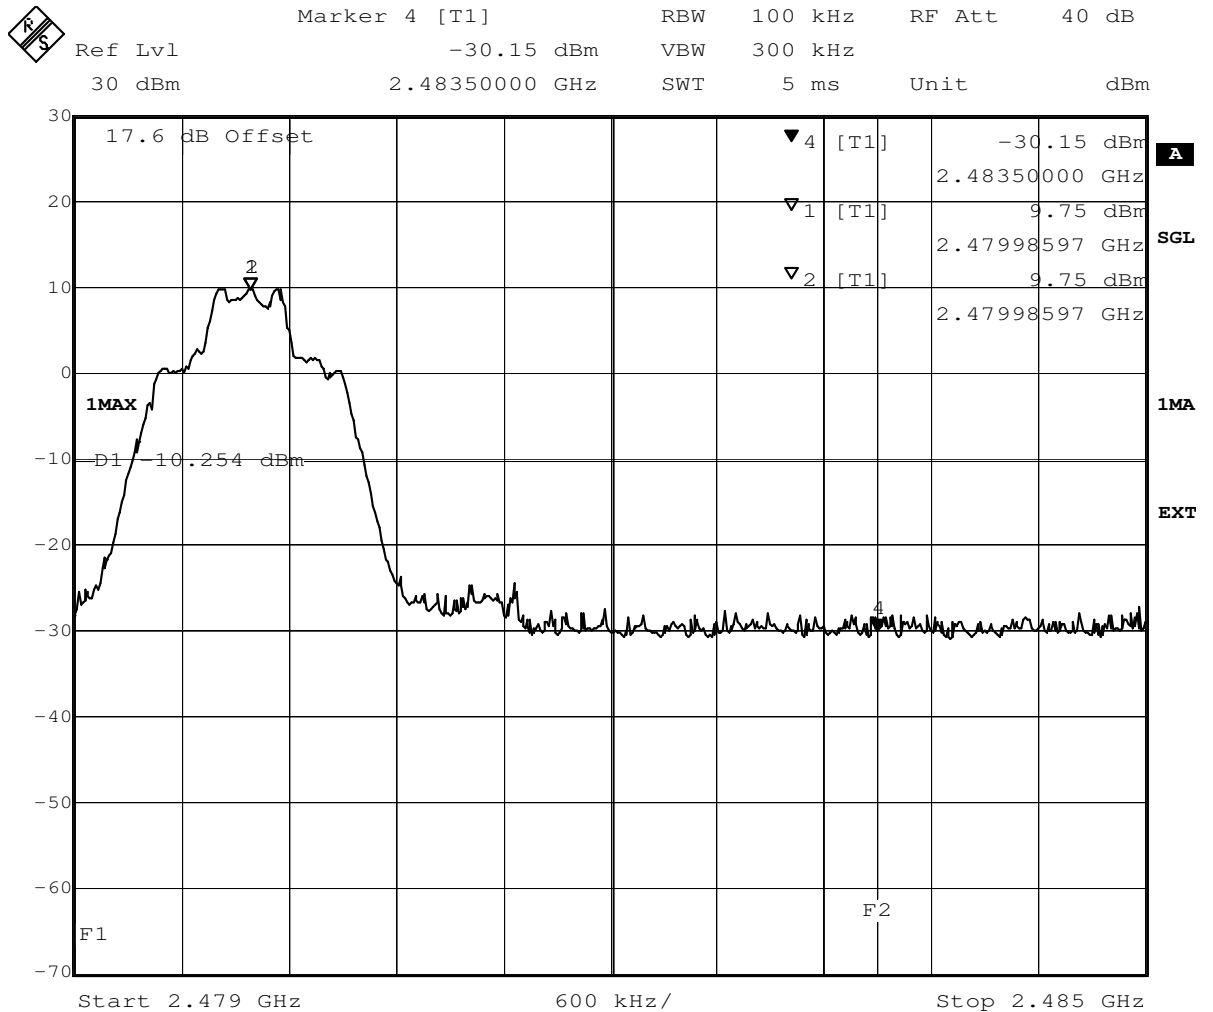

Date: 20.APR.2015 13:25:27

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = radiated

Result: Passed

Setup No.: S_AA01

Date of Test: 2015/04/22 15:18

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

TX on	Ant. Polar.	Limit PK [dBμV]	Limit AV [dBμV]	Frequency [MHz]	Corrected value PK [dBμV]	Corrected value AV [dBμV]	Margin PK [dB]	Margin AV [dB]	Result
2480 MHz	Ver + Hor	74	54	2483.5	51.45	36.78	22.55	17.22	Passed

Test: 15c.6; Frequency = hopping, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = conducted, band edge = 2400 MHz

Result: Passed


Setup No.: S_AC01

Date of Test: 2015/04/21 11:14

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

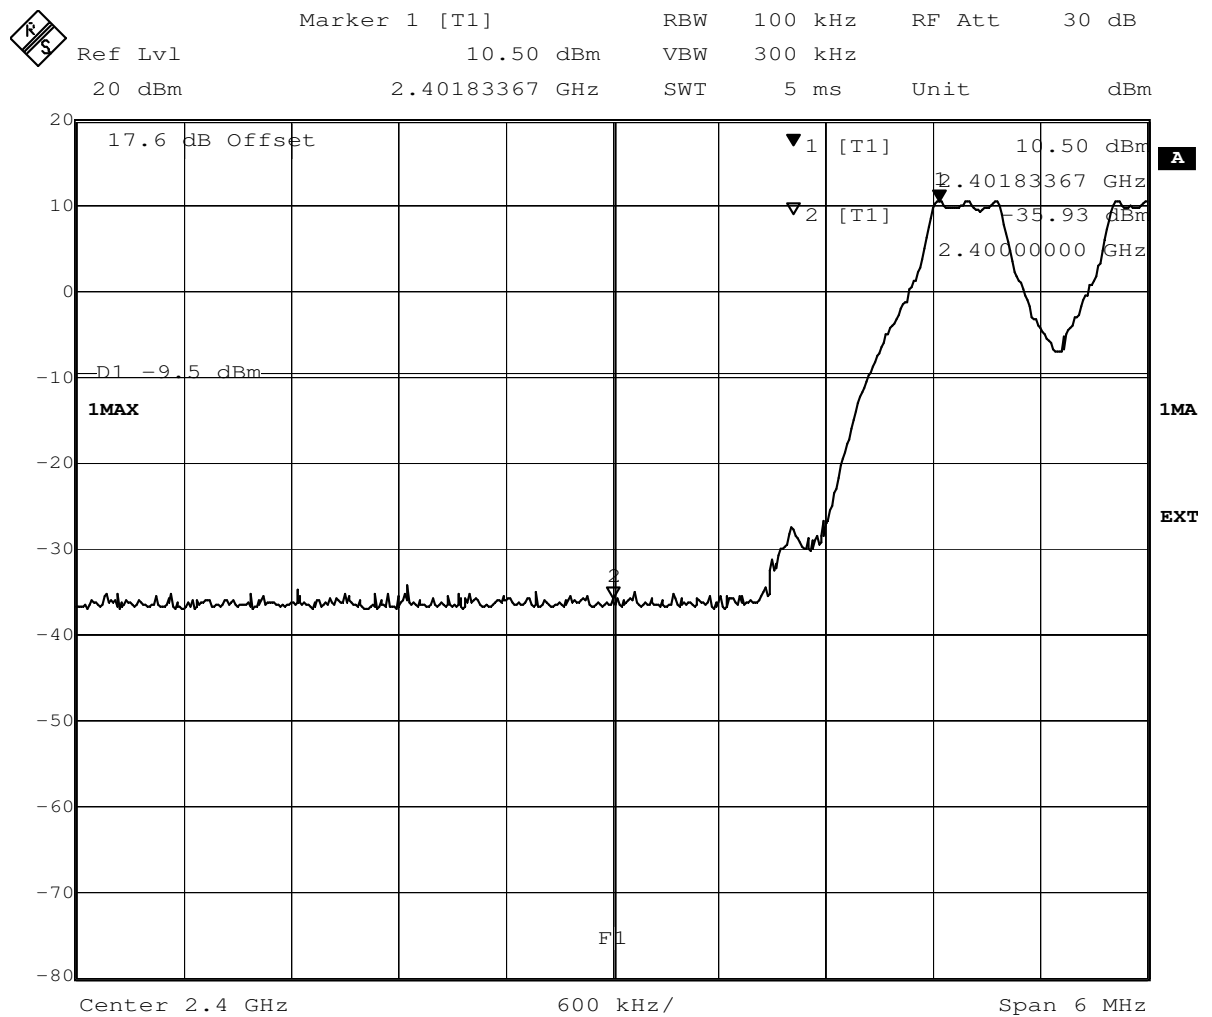


Date: 21.APR.2015 10:33:09

Test: 15c.6; Frequency = hopping, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = conducted, band edge = 2483.5 MHz

Result: Passed
Setup No.: S_AC01
Date of Test: 2015/04/21 11:14
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

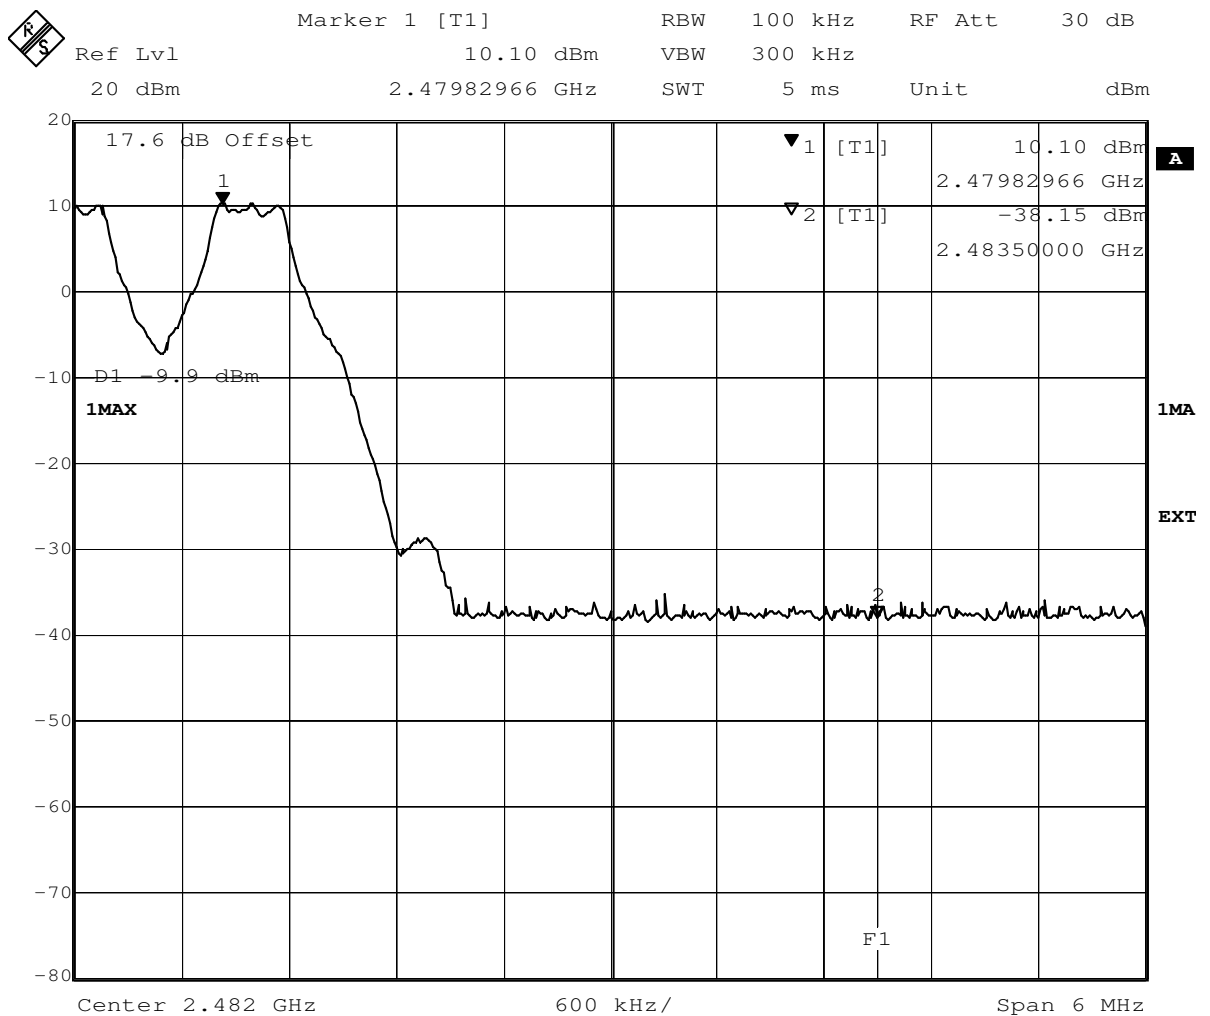


Date: 21.APR.2015 09:17:41

Test: 15c.6; Frequency = hopping, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = conducted, band edge=2400 MHz

Result: Passed
Setup No.: S_AC01
Date of Test: 2015/04/21 11:19
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

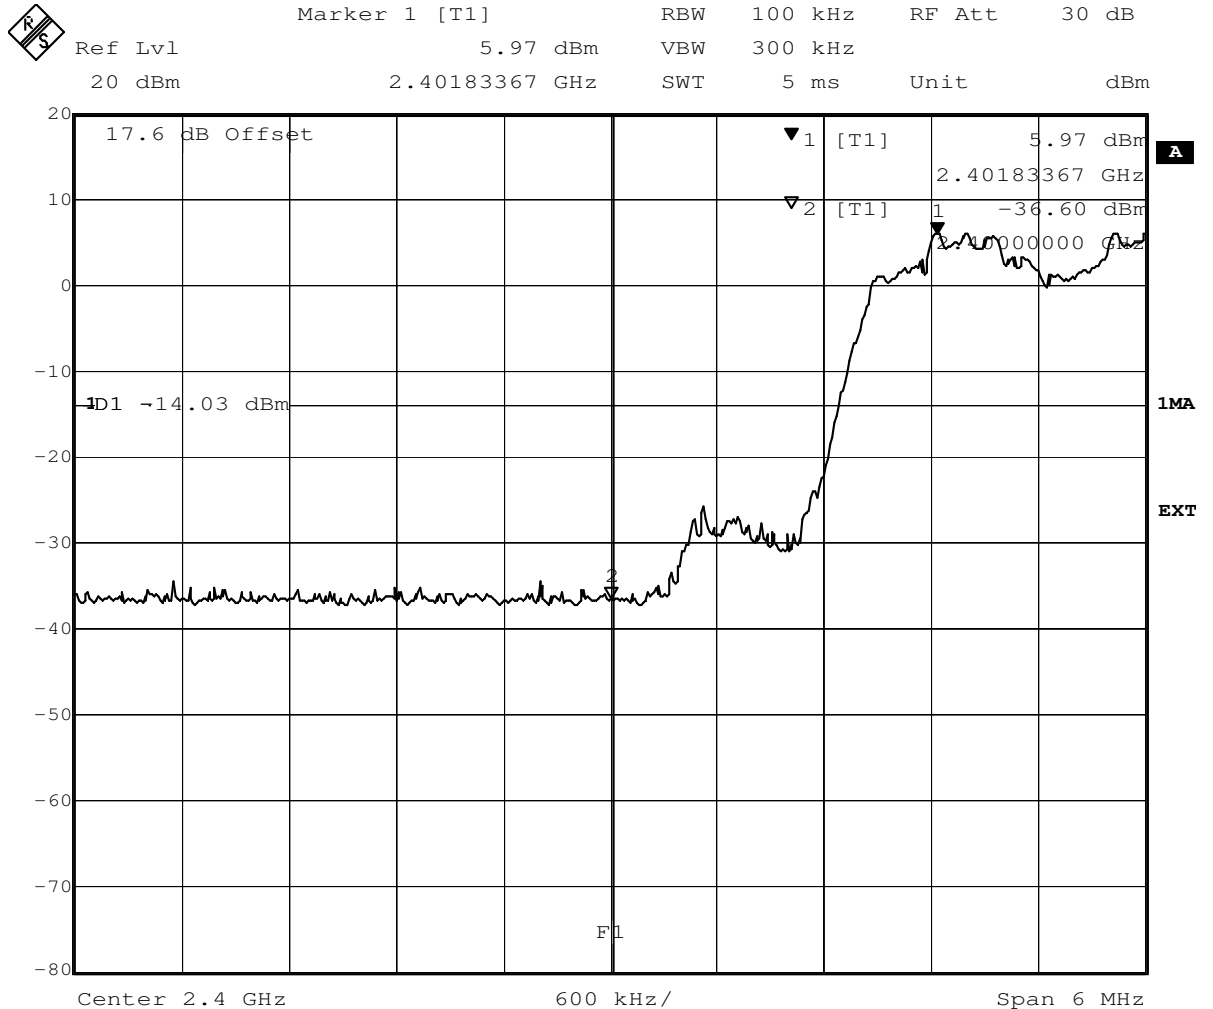

Date: 21.APR.2015 10:43:47

Test: 15c.6; Frequency = hopping, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method=conducted, band edge=2483.5 MHz

Result: Passed


Setup No.: S_AC01

Date of Test: 2015/04/21 11:19

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

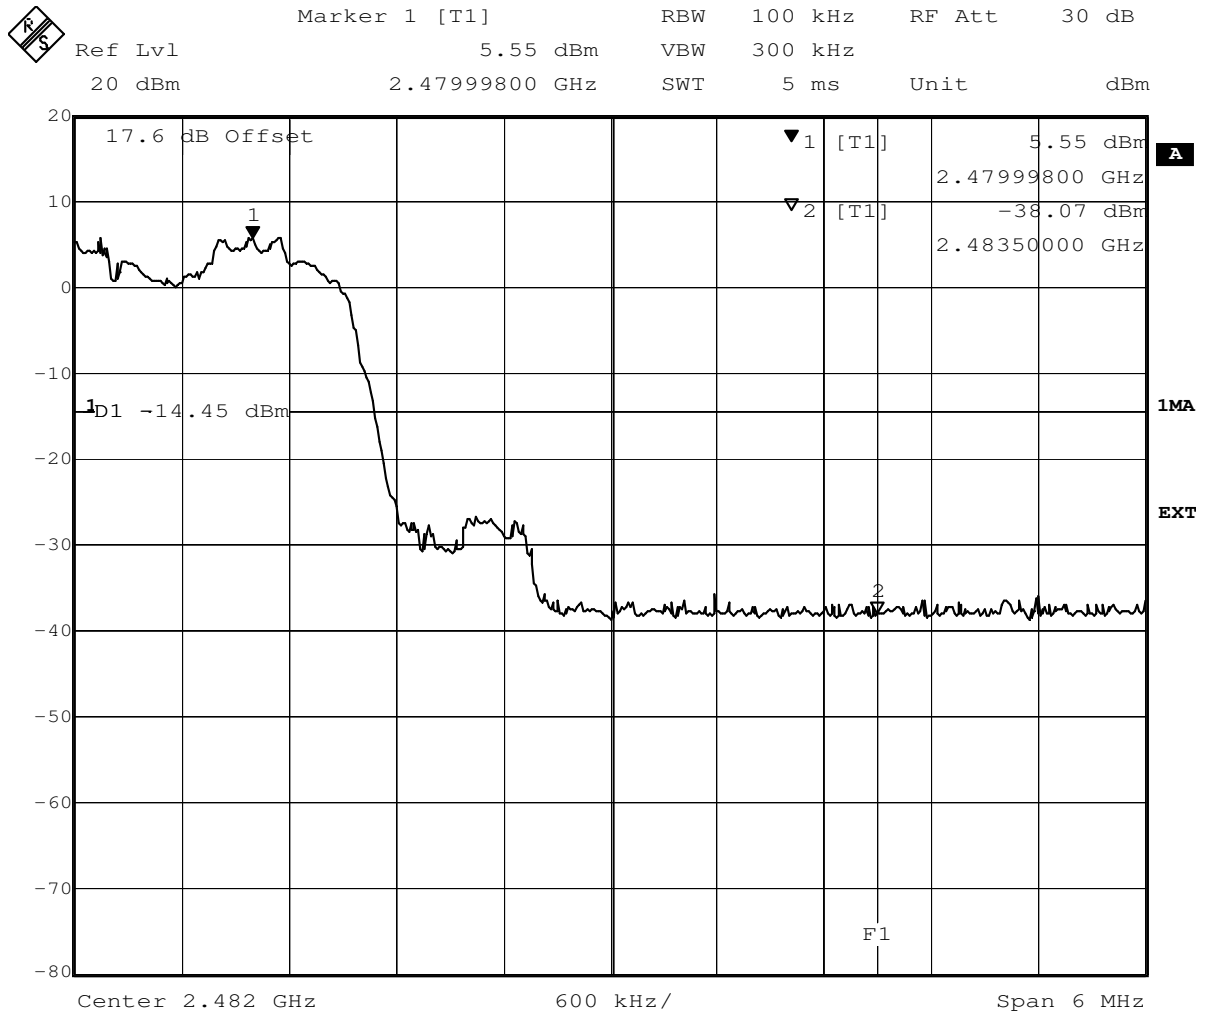

Date: 21.APR.2015 09:31:55

Test: 15c.6; Frequency = hopping, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = conducted, band edge = 2400 MHz

Result: Passed


Setup No.: S_AC01

Date of Test: 2015/04/21 11:26

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

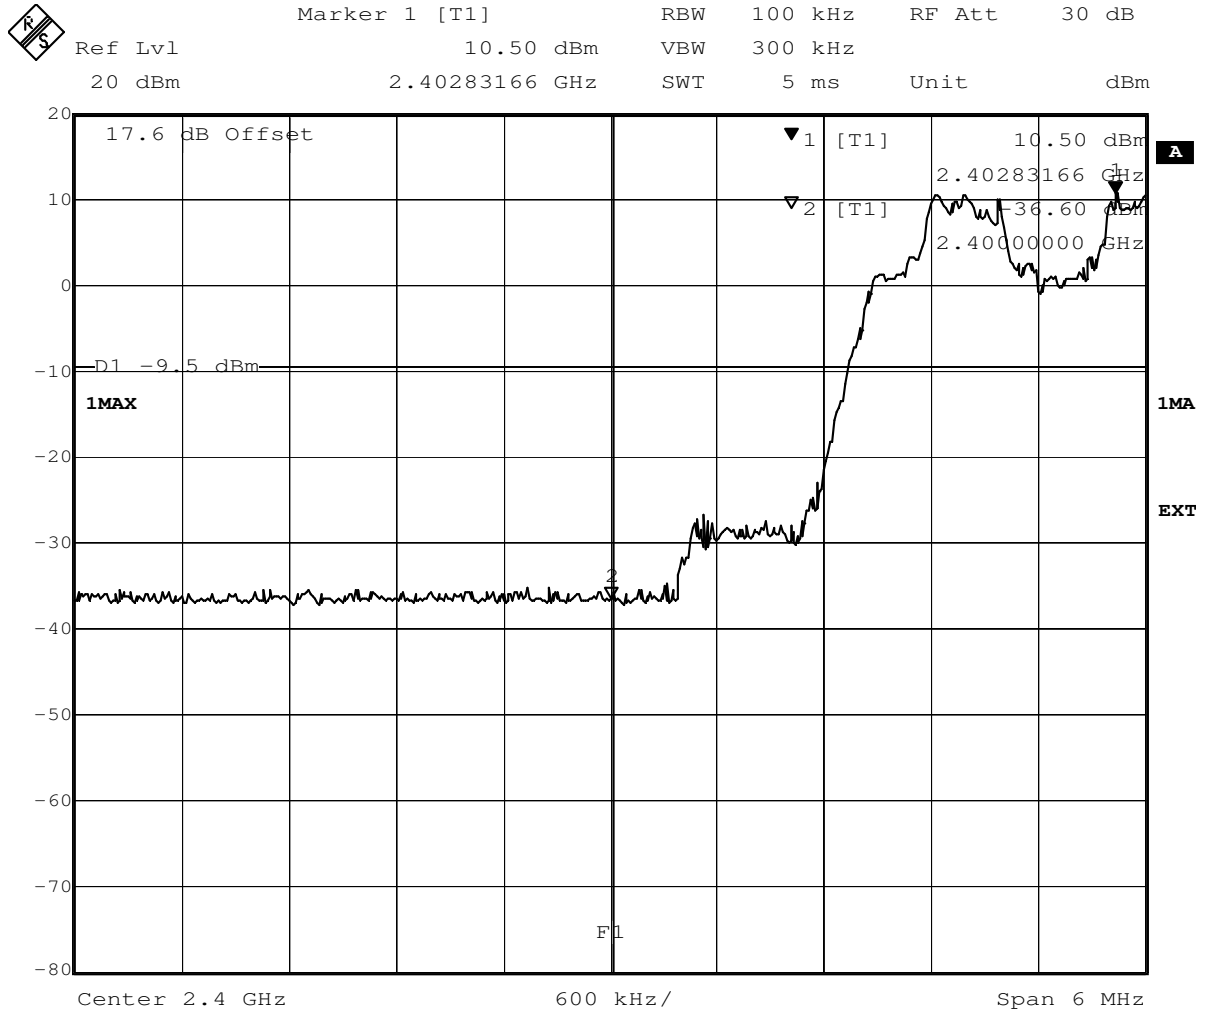

Date: 21.APR.2015 10:58:23

Test: 15c.6; Frequency = hopping, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = conducted, band edge = 2483.5 MHz

Result: Passed


Setup No.: S_AC01

Date of Test: 2015/04/21 11:26

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

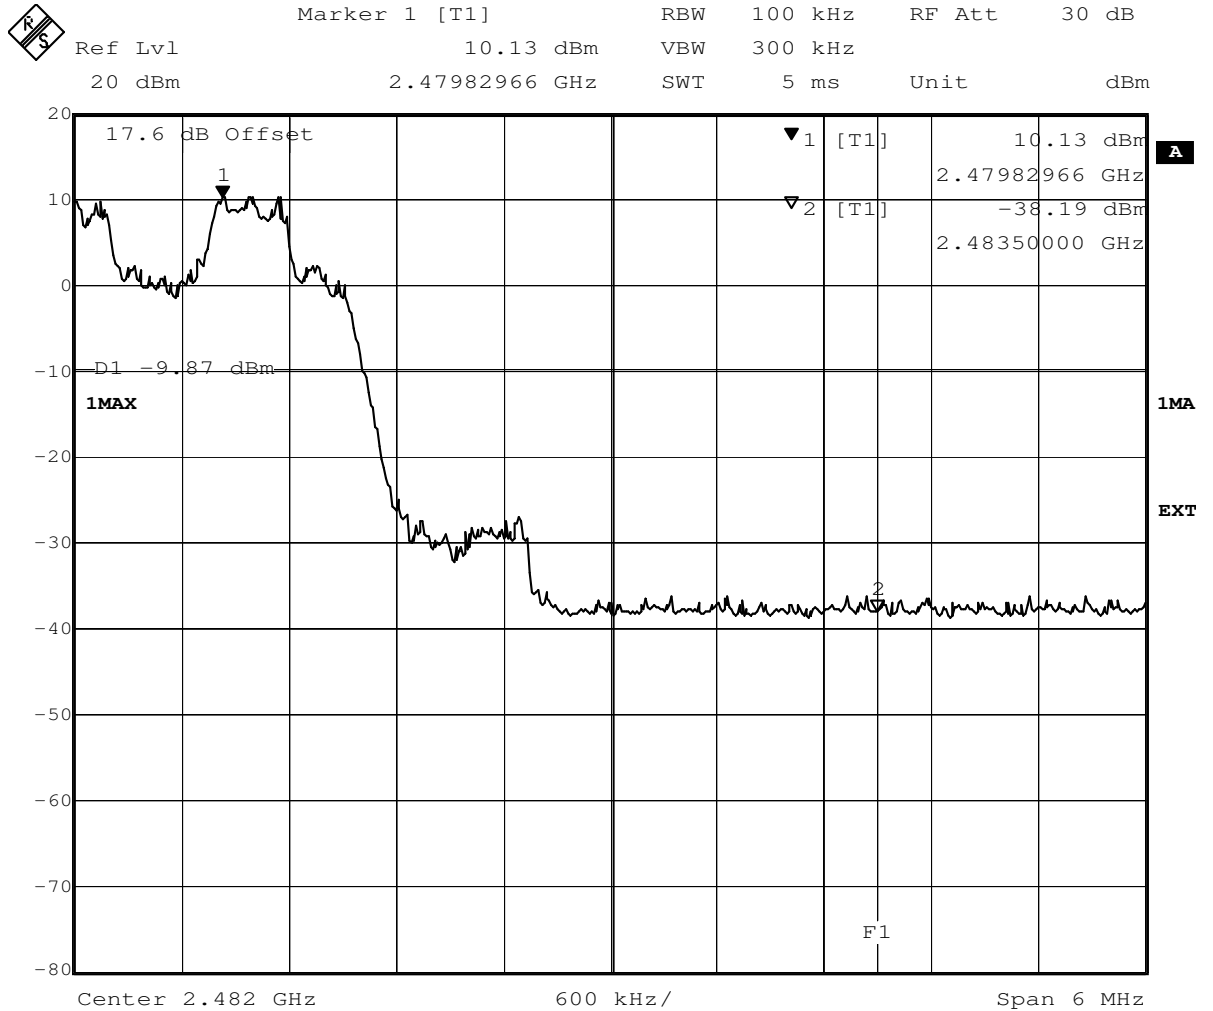

Date: 21.APR.2015 09:44:16



3.5.7 15c.7 Dwell time §15.247 (a) (1) (iii)


Test: 15c.7; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AC01
<i>Date of Test:</i>	2015/04/21 11:16
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

Packet type	Time slot length	Dwell time	Dwell time ms
DH1	0.40	time slot length * 1600/5 /79 * 31.6	51.30

added by operator

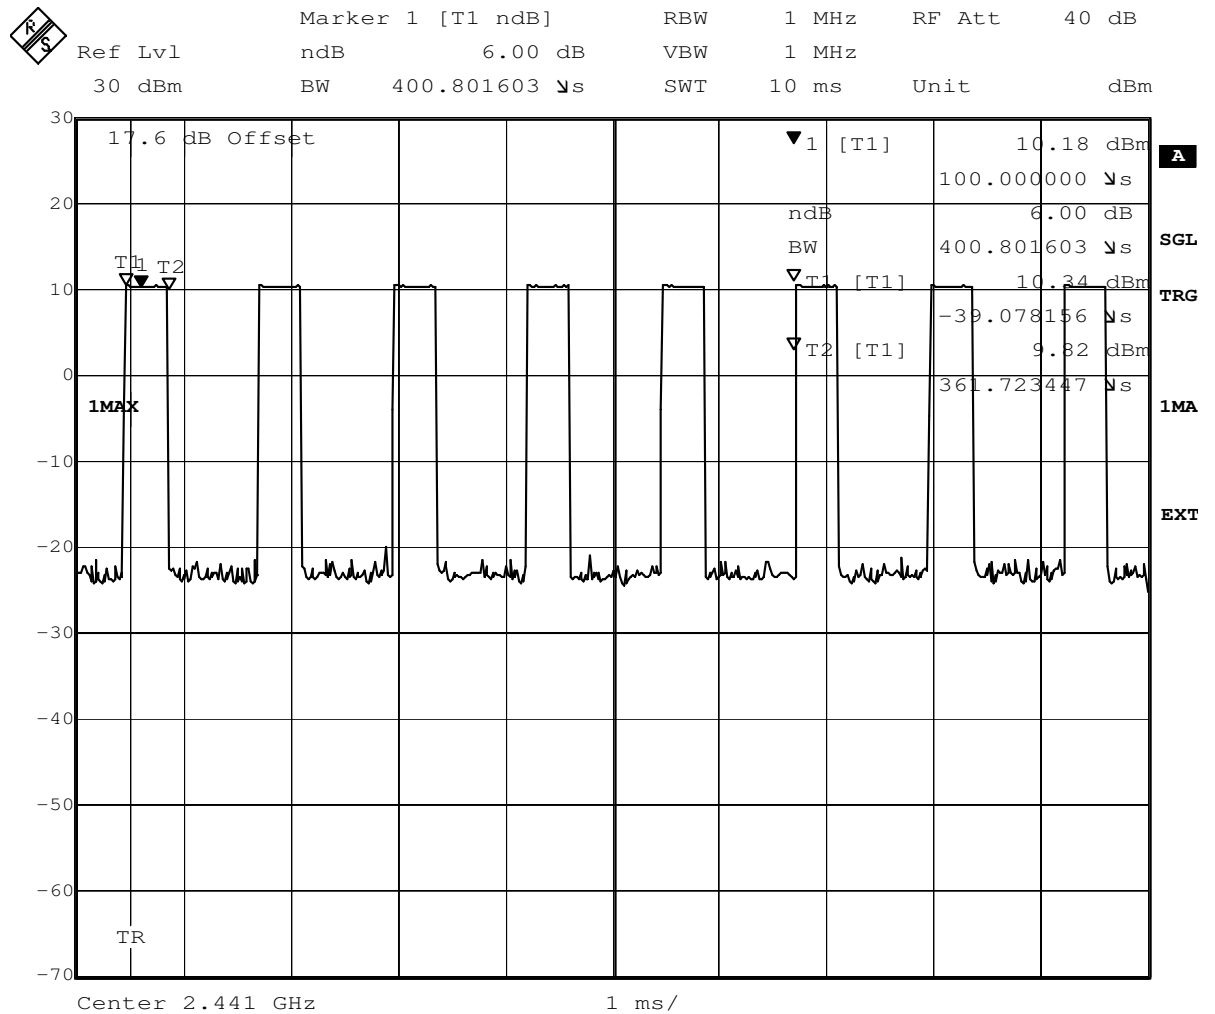


Title: Dwell time
Comment A: CH M: 2441 MHz
Date: 20.APR.2015 14:28:19

added by operator

Packet type	Time slot length	Dwell time	Dwell time ms
DH3	1.66	time slot length * 1600/5 /79 * 31.6	212.91

added by operator

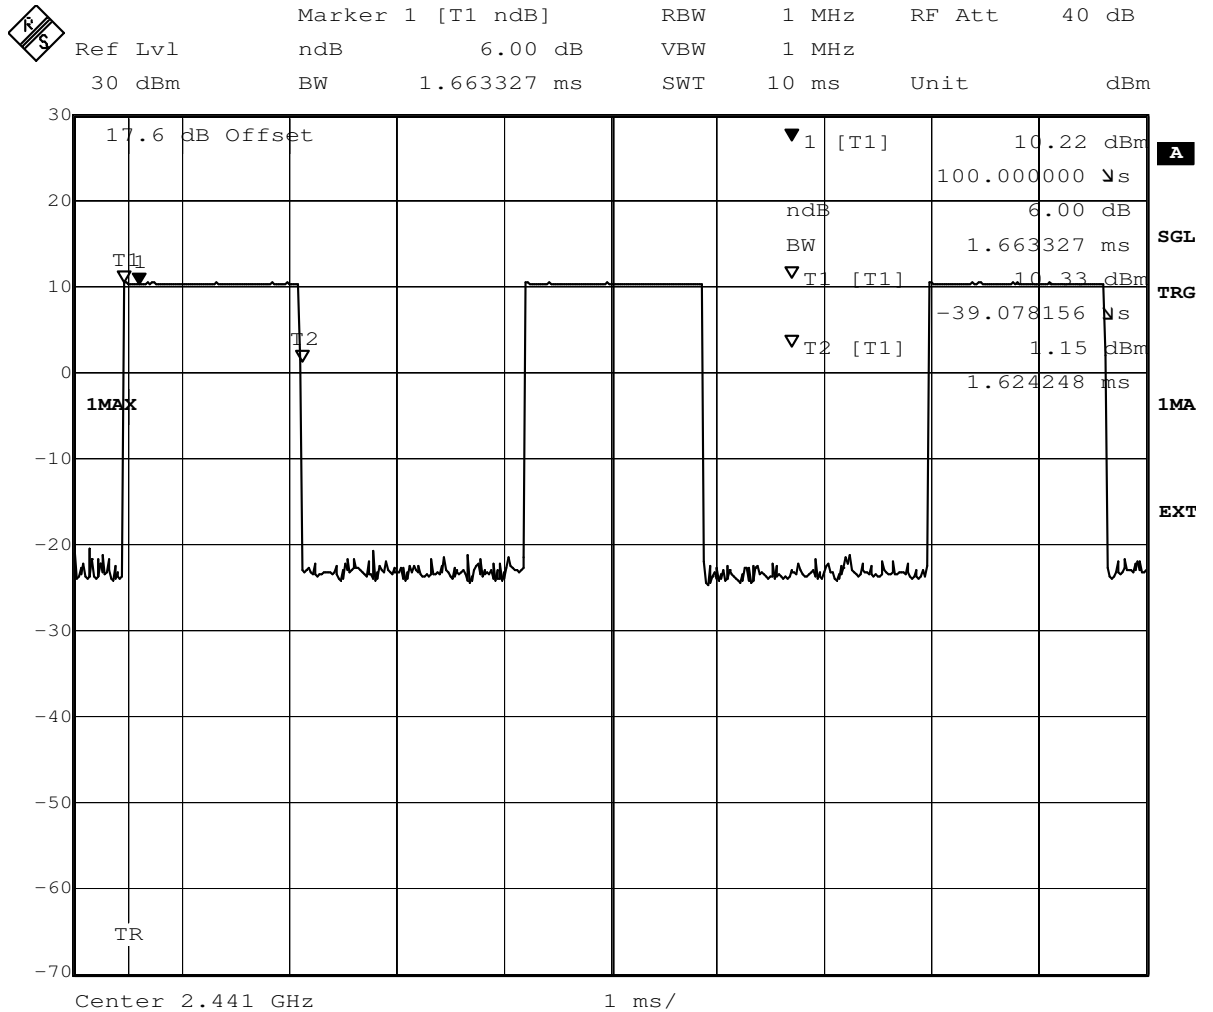


Title: Dwell time
Comment A: CH M: 2441 MHz
Date: 20.APR.2015 14:29:01

added by operator

Packet type	Time slot length	Dwell time	Dwell time ms
DH5	2.91	time slot length * 1600/5 /79 * 31.6	371.94

added by operator

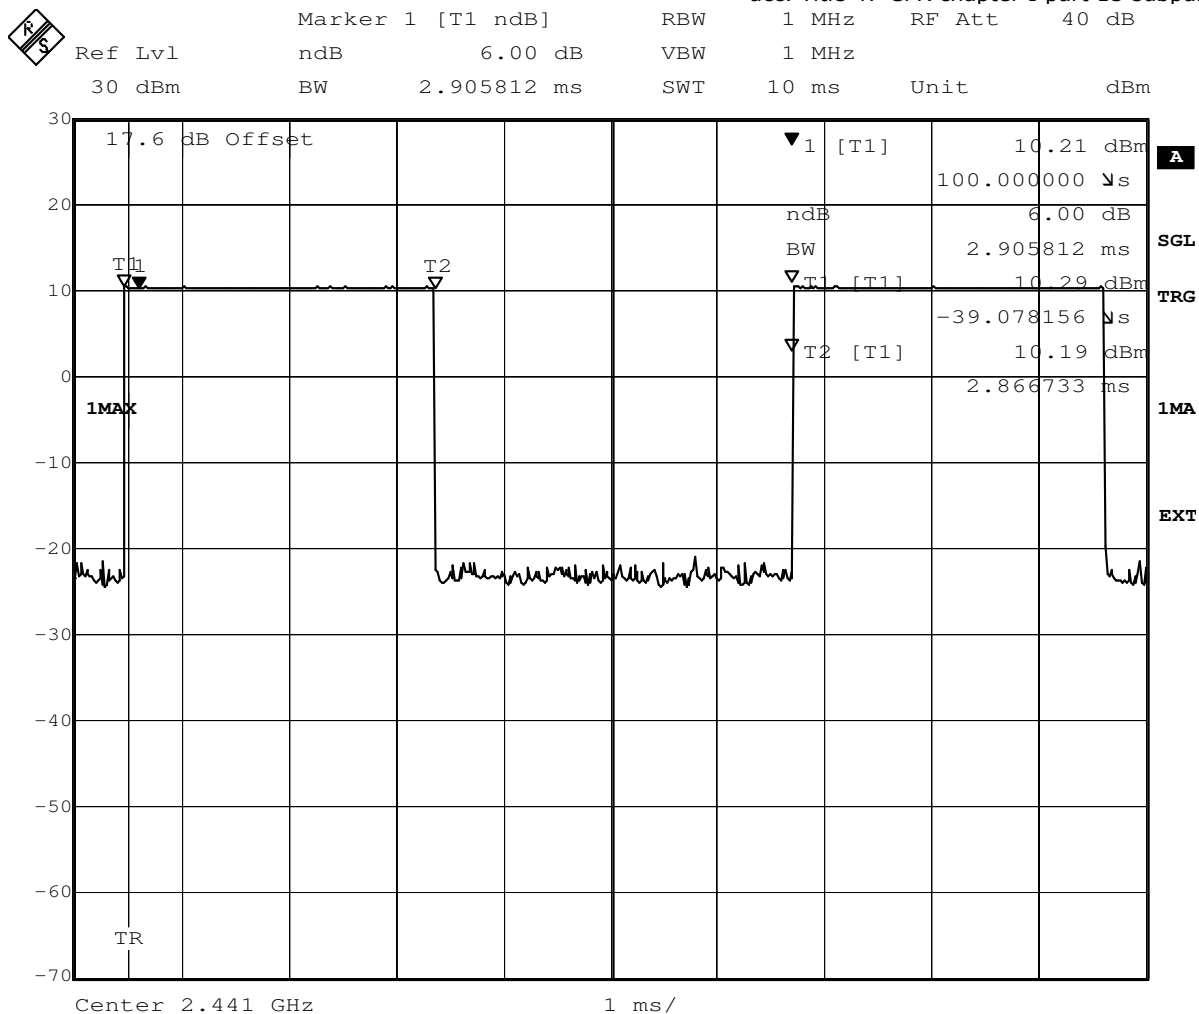

Title: Dwell time
Comment A: CH M: 2441 MHz
Date: 20.APR.2015 14:29:36

Worst case


3.5.8 15c.8 Channel separation §15.247 (a) (1)

Test: 15c.8; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AC01
<i>Date of Test:</i>	2015/04/21 11:17
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

Channel separation / MHz
1.000

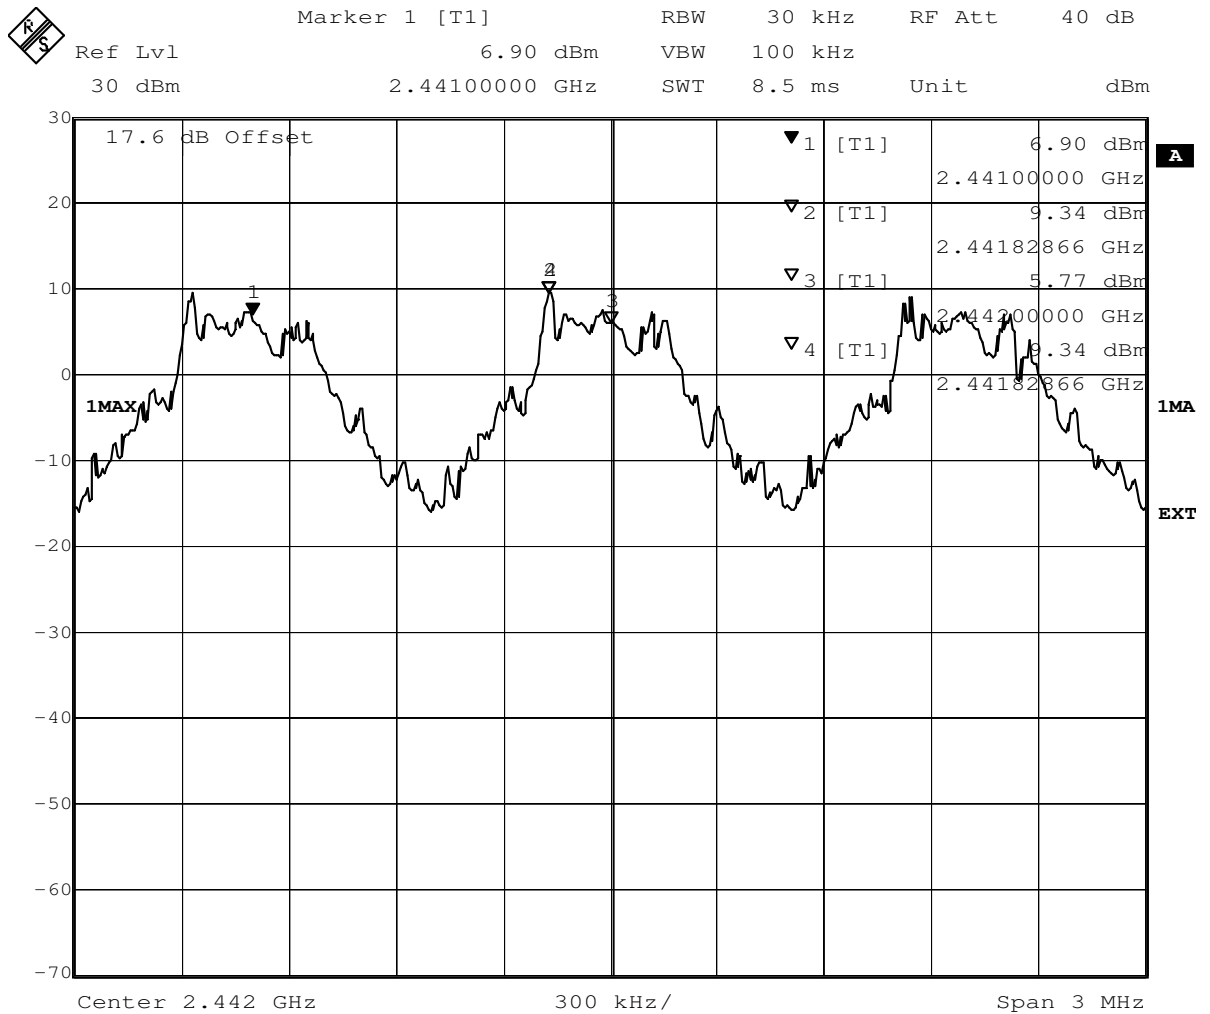

Date: 20.APR.2015 14:53:46

added by operator




3.5.9 15c.9 Number of hopping frequencies §15.247 (a) (1) (iii)

Test: 15c.9; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AC01
<i>Date of Test:</i>	2015/04/21 11:17
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

Number of Hopping Frequencies
79

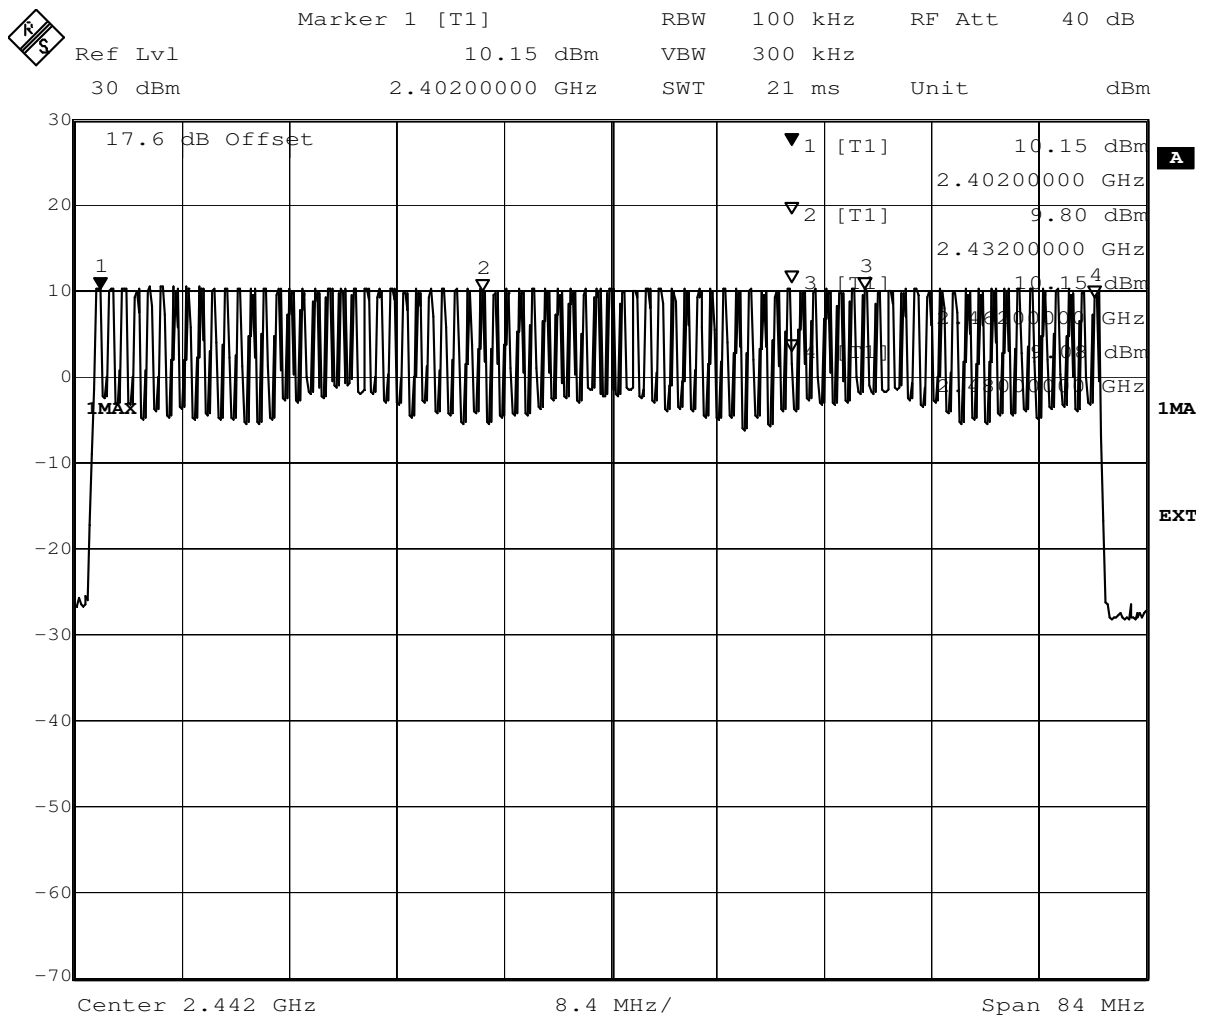

Title: Number of hopping frequencies

Comment A: CH H: Hopping

Date: 20.APR.2015 15:02:55

added by operator

Test: 15c.9; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: S_AC01


Date of Test: 2015/04/21 11:24

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Number of Hopping Frequencies
79

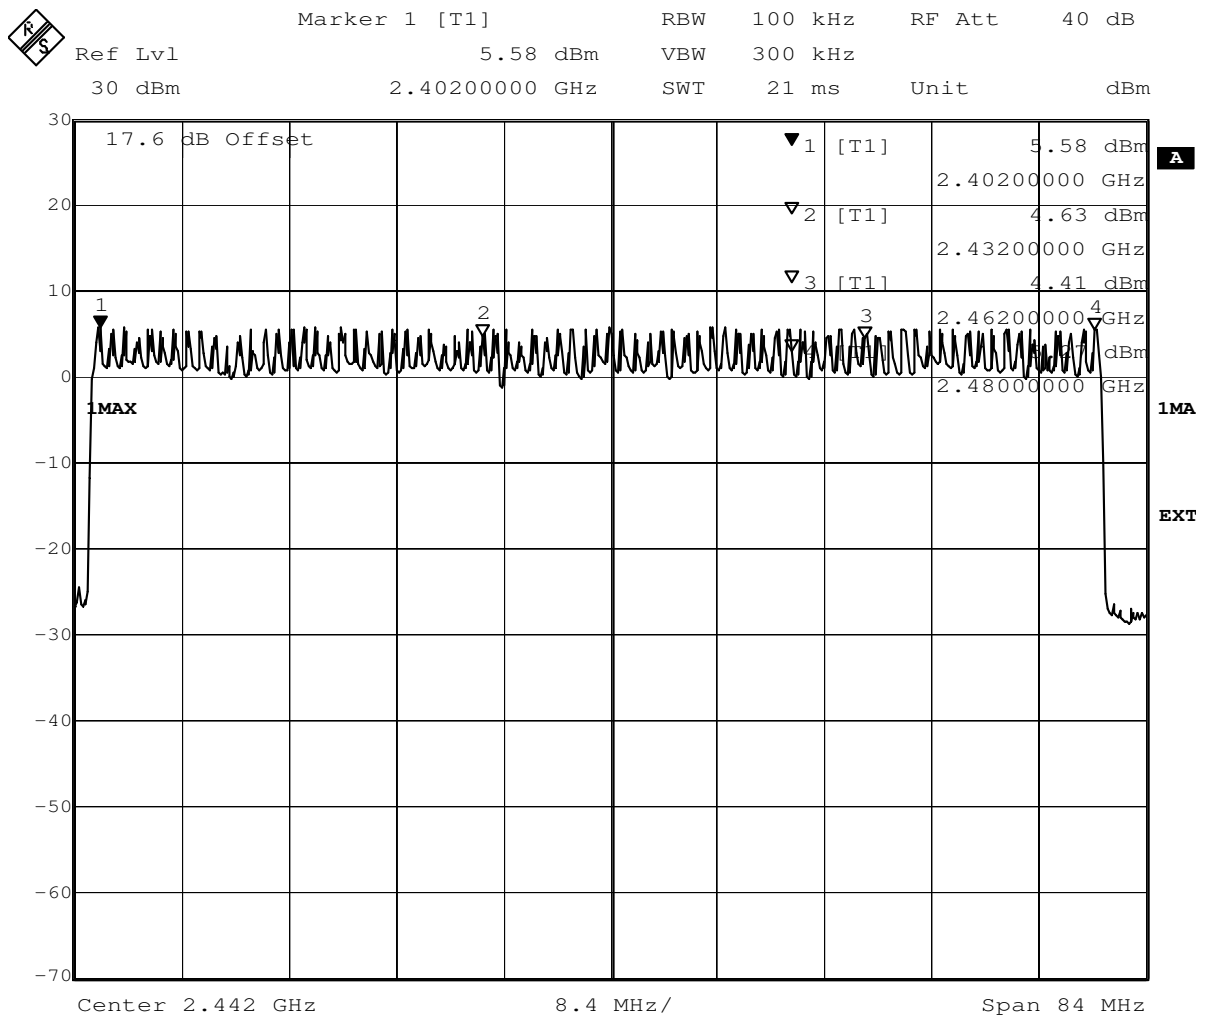

Title: Number of hopping frequencies
Comment A: CH H: Hopping
Date: 20.APR.2015 15:24:02

Test: 15c.9; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: S_AC01


Date of Test: 2015/04/21 11:28

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Number of Hopping Frequencies
79

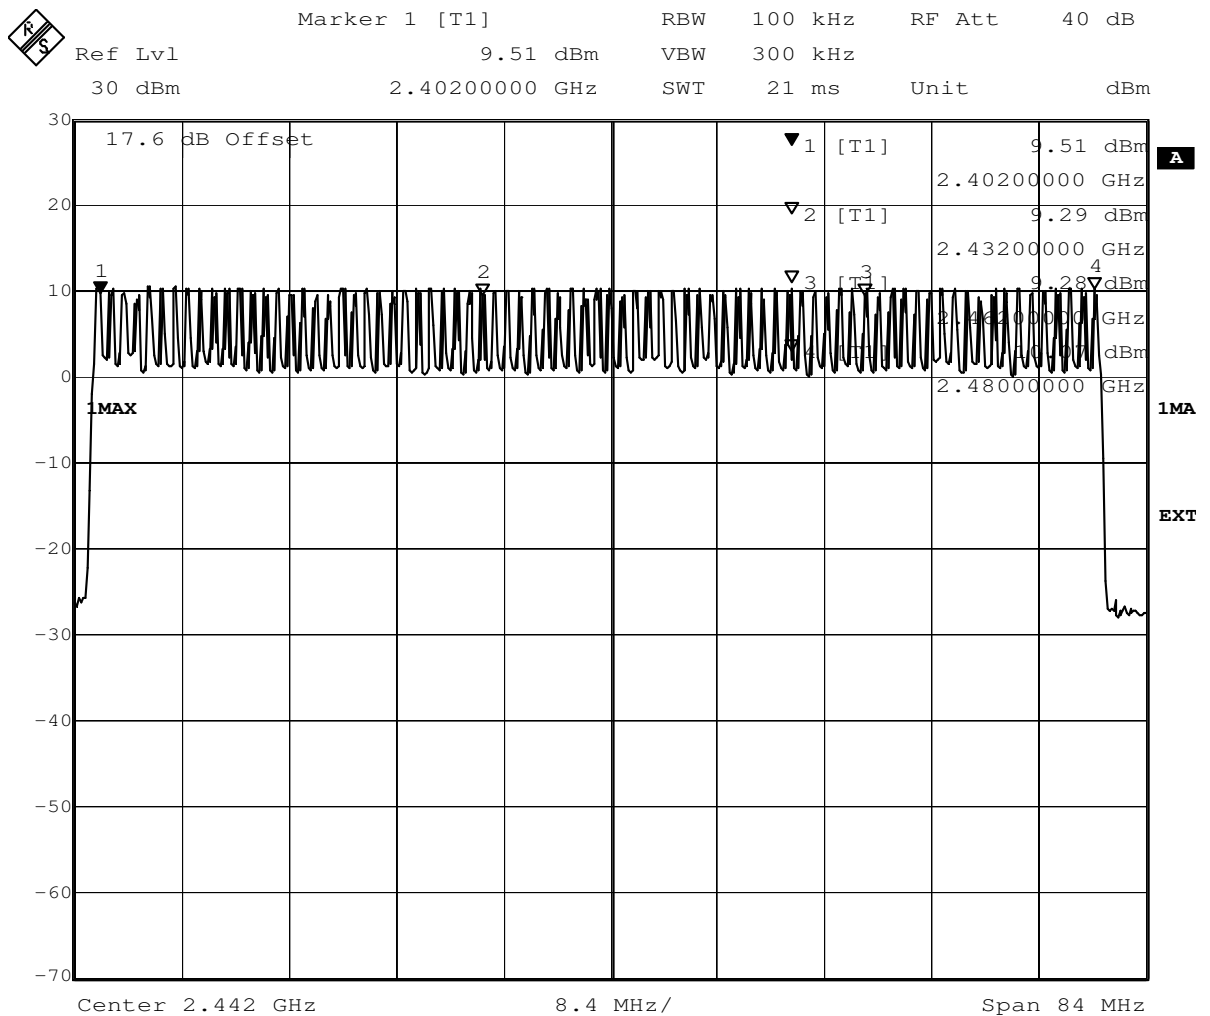

Title: Number of hopping frequencies
Comment A: CH H: Hopping
Date: 21.APR.2015 08:18:51

4 Test Equipment Details

4.1 List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 2		
Manufacturer:	Frankonia		
Description:	Anechoic Chamber for radiated testing		
Type:	10.58x6.38x6.00 m ³		
	<i>Calibration Details</i>	<i>Last Execution</i>	<i>Next Exec.</i>
	NSA (FCC)	2014/01/09	2017/01/09

Single Devices for Anechoic Chamber

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³	none	Frankonia
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	FCC listing 96716 3m Part15/18		2014/01/09 2017/01/08
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

Test Equipment Auxiliary Equipment for Conducted emissions

Lab ID: Lab 1
Manufacturer: Rohde & Schwarz GmbH & Co.KG
Description: EMI Conducted Auxiliary Equipment

Single Devices for Auxiliary Equipment for Conducted emissions

Single Device Name	Type	Serial Number	Manufacturer
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner
Impedance Stabilization Network	ISN T800	36159	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2014/02/06 2016/02/28
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ENY41	100002	Rohde & Schwarz GmbH & Co. KG
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ST08	36292	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2014/01/10 2016/01/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN T8-Cat6	32187	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2014/01/08 2016/01/31
One-Line V-Network	ESH 3-Z6	100489	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	standard calibration		2014/06/18 2017/11/30
One-Line V-Network	ESH 3-Z6	100570	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2013/11/25 2016/11/24
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	DAkKS Calibration		2015/03/30 2017/03/31
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	DAkKS Calibration		2015/03/30 2017/03/31

Test Equipment Auxiliary Equipment for Radiated emissions

Lab ID: Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer
Antenna mast	AM 4.0	AM4.0/180/11920 513	Maturo GmbH
Biconical Broadband Antenna	SBA 9119	9119-005	Schwarzbeck Mess-Elektronik OHG
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck Mess-Elektronik OHG
Broadband Amplifier 1 GHz - 4 GHz	AFS4-01000400-1Q-10P-4	-	Miteq
Broadband Amplifier 18 GHz - 26 GHz	JS4-18002600-32-5P	849785	Miteq
Broadband Amplifier 30 MHz - 18 GHz	JS4-00101800-35-5P	896037	Miteq
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01-2	Kabel Kusch
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02-2	Rosenberger Micro-Coax
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution Next Exec.</i>
Standard Calibration			2012/06/26 2015/06/25
Double-ridged horn-duplicated 2015-07-15 10:47:55	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	5HC3500/18000-1.2-KK	200035008	Trilithic
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright
Horn Antenna Schwarzbeck 15-26.5 GHz BBHA 9170	BBHA 9170	BBHA9170262	Schwarzbeck Mess-Elektronik OHG
Log.-per. Antenna	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution Next Exec.</i>
Standard Calibration			2012/12/18 2015/12/17
Log.-per. Antenna (upgraded)	HL 562 Ultralog new biconicals	830547/003	Rohde & Schwarz GmbH & Co. KG
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution Next Exec.</i>
DKD Calibration			2014/11/27 2017/11/27
Standard Gain / Pyramidal Horn Antenna 26.5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Standard Gain / Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH

Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5-10kg/024/3790709	Maturo GmbH

Test Equipment Auxiliary Test Equipment

Lab ID:	Lab 2
Manufacturer:	see single devices
Description:	Single Devices for various Test Equipment
Type:	various
Serial Number:	none

Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
		<i>Calibration Details</i>	<i>Last Execution</i> <i>Next Exec.</i>
		Customized calibration	2013/12/04 2015/12/03
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Signal Analyzer	FSV30	103005	Rohde & Schwarz GmbH & Co. KG
		<i>Calibration Details</i>	<i>Last Execution</i> <i>Next Exec.</i>
		Standard	2014/02/10 2016/02/09
Spectrum Analyser	FSU26	200418	Rohde & Schwarz GmbH & Co.KG
		<i>Calibration Details</i>	<i>Last Execution</i> <i>Next Exec.</i>
		Standard calibration	2014/07/29 2015/07/28
Spectrum Analyzer	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
		<i>Calibration Details</i>	<i>Last Execution</i> <i>Next Exec.</i>
		Standard	2012/06/13 2015/06/12
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG

Test Equipment Digital Signalling Devices

Lab ID: Lab 1, Lab 2
Description: Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2014/01/27 2016/01/26
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	DKD calibration		2014/12/02 2017/12/01
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>HW/SW Status</i>		<i>Date of Start Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04 Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22 Firmware: µP1 8v50 02.05.06 ---		2007/07/16
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	DKD calibration		2014/12/03 2017/12/02
	<i>HW/SW Status</i>		<i>Date of Start Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 ---		2007/01/02
	SW: K62, K69		2008/11/03
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG

Test Equipment Emission measurement devices

Lab ID: Lab 1, Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer
EMI Receiver / Spectrum Analyzer	ESR 7	101424	Rohde & Schwarz
	Calibration Details		Last Execution Next Exec.
	Initial Factory Calibration		2014/11/13 2016/11/12
Personal Computer	Dell	30304832059	Dell
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	Calibration Details		Last Execution Next Exec.
	Standard calibration		2014/05/13 2015/05/10
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	Calibration Details		Last Execution Next Exec.
	Standard calibration		2014/05/13 2015/05/10
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution Next Exec.
	Standard Calibration		2014/06/24 2017/06/23
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution Next Exec.
	Standard Calibration		2014/01/07 2016/01/31
	HW/SW Status		Date of Start Date of End
	Firmware-Update 4.34.4 from 3.45 during calibration		2009/12/03
Spectrum Analyzer	FSW 43	103779	Rohde & Schwarz
	Calibration Details		Last Execution Next Exec.
	Initial Factory Calibration		2014/11/17 2016/11/16

Test Equipment Multimeter 03

Lab ID: Lab 2
Description: Fluke 177
Serial Number: 86670383

Single Devices for Multimeter 03

Single Device Name	Type	Serial Number	Manufacturer
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	Calibration Details		Last Execution Next Exec.
	Customized calibration		2013/12/04 2015/12/03

Test Equipment Multimeter 12

Lab ID: Lab 3
Description: Ex-Tech 520
Serial Number: 05157876

Single Devices for Multimeter 12

Single Device Name	Type	Serial Number	Manufacturer
Digital Multimeter 12 (Multimeter)	EX520	05157876	Extech Instruments Corp.
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2013/12/04 2015/12/03

Test Equipment Regulatory Bluetooth RF Test Solution

Lab ID: Lab 3
Description: Regulatory Bluetooth RF Tests
Type: Bluetooth RF
Serial Number: 001

Single Devices for Regulatory Bluetooth RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer
ADU 200 Relay Box 7	Relay Box	A04380	Ontrak Control Systems Inc.
Bluetooth Signalling Unit CBT	CBT	100302	Rohde & Schwarz GmbH & Co.KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard calibration			2014/08/29 2015/08/28
Power Meter NRVD	NRVD	832025/059	
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard calibration			2014/08/29 2015/08/28
Power Sensor NRV Z1 A	PROBE	832279/013	
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard calibration			2014/08/28 2015/08/27
Power Supply	NGSM 32/10	2725	
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard calibration			2013/06/20 2015/06/19
Rubidium Frequency Normal MFS	Datum MFS	002	Datum GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard calibration			2014/08/29 2015/08/28
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG
Vector Signal Generator SMIQ03B	SMIQ03B	832870/017	
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard calibration			2013/06/21 2016/06/20

Test Equipment Shielded Room 02

Lab ID: Lab 1
Manufacturer: Frankonia
Description: Shielded Room for conducted testing
Type: 12 qm
Serial Number: none

Test Equipment Shielded Room 07

Lab ID: Lab 3
Description: Shielded Room 4m x 6m

Test Equipment T/A Logger 13

Lab ID: Lab 1, Lab 2
Description: Lufft Opus10 TPR
Type: Opus10 TPR
Serial Number: 13936

Single Devices for T/A Logger 13

Single Device Name	Type	Serial Number	Manufacturer
ThermoAirpressure Datalogger 13 (Environ)	Opus10 TPR (8253.00)	13936	Lufft Mess- und Regeltechnik GmbH
Calibration Details			Last Execution Next Exec.
Customized calibration			2015/02/27 2017/02/26

Test Equipment T/H Logger 02

Lab ID: Lab 1
Description: Lufft Opus10
Serial Number: 7489

Single Devices for T/H Logger 02

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro Datalogger 02 (Environ)	Opus10 THI (8152.00)	7489	Lufft Mess- und Regeltechnik GmbH
Calibration Details			Last Execution Next Exec.
Customized calibration			2015/02/27 2017/02/26

Test Equipment T/H Logger 12

Lab ID: Lab 2
Description: Lufft Opus10
Serial Number: 12482

Single Devices for T/H Logger 12

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro Datalogger 12 (Environ)	Opus10 THI (8152.00)	12482	Lufft Mess- und Regeltechnik GmbH
Calibration Details			Last Execution Next Exec.
Customized calibration			2015/03/10 2017/03/09

Test Equipment T/H Logger 15

Lab ID: Lab 3
Description: Lufft Opus10
Serial Number: 13985

Single Devices for T/H Logger 15

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro Datalogger 15 (Environ)	Opus10 THI (8152.00)	13985	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2015/03/10 2017/03/09

Test Equipment Temperature Chamber 01

Lab ID: Lab 3
Manufacturer: see single devices
Description: Temperature Chamber KWP 120/70
Type: Weiss
Serial Number: see single devices

Single Devices for Temperature Chamber 01

Single Device Name	Type	Serial Number	Manufacturer
Temperature Chamber Weiss 01	KWP 120/70	59226012190010	Weiss Umwelttechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2014/03/12 2016/03/11



5 Annex

5.1 Additional Information for Report



Summary of Test Results

The EUT complied with all performed tests as listed in the summary section of this report.

Technical Report Summary

Type of Authorization :

Certification for an Intentional Radiator (Frequency Hopping Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15. The following subparts are applicable to the results in this test report:

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

Additional documents

The tests were selected and performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000. Instead of applying ANSI C63.4-1992 which is referenced in the FCC Public Note, the newer ANSI C63.10-2013 is applied.

FCC and IC Correlation of measurement requirements

The following table shows the correlation of measurement requirements for FHSS equipment (e.g. Bluetooth) from FCC and IC Standards.

Measurement	FCC reference	IC reference
Conducted emissions on AC mains	§ 15.207	RSS-Gen Issue 4: 8.8
Occupied bandwidth	§ 15.247 (a) (1)	RSS-247 Issue 1: 5.1 (2)
Peak power output	§ 15.247 (b) (1),(4)	RSS-247 Issue 1: 5.4 (2)
Spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen Issue 4: 6.13/8.9/8.10; RSS-247 Issue 1: 5.5
Spurious radiated emissions	§ 15.247 (d)	RSS-Gen Issue 4: 6.13/8.9/8.10; RSS-247 Issue 1: 5.5
Band edge compliance	§ 15.247 (d)	RSS-247 Issue 1: 5.5
Dwell time	§ 15.247 (a)(1)(iii)	RSS-247 Issue 1: 5.1 (4)
Channel separation	§ 15.247 (a)(1)	RSS-247 Issue 1: 5.1 (2)
No. of hopping frequencies	§ 15.247 (a)(1)(iii)	RSS-247 Issue 1: 5.1 (4)
Hybrid systems (only)	§ 15.247 (e), (f)	RSS-247 Issue 1: 5.3
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 4: 8.3
Receiver spurious emissions	- - -	- - -

Description of Methods of Measurements

Conducted emissions (AC power line)

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.10,

Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.10.

The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 μ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads. The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords.

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.207

Frequency Range (MHz)	QP Limit (dB μ V)	AV Limit (dB μ V)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

Used conversion factor: Limit (dB μ V) = 20 log (Limit (μ V)/1 μ V).

Occupied bandwidth

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.10

Test Description

The Equipment Under Test (EUT) was setup to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produces the worst-case (widest) occupied bandwidth. The resolution bandwidth for measuring the reference level and the occupied bandwidth was 30 kHz.

The EUT was connected to the spectrum analyzer via a short coax cable.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Implication by the test laboratory:

Since the Bluetooth technology defines a fixed channel separation of 1 MHz this design parameter defines the maximum allowed occupied bandwidth depending on the EUT's output power:

1. Under the provision that the system operates with an output power not greater than 125 mW (21.0 dBm):
Implicit Limit: Max. 20 dB BW = $1.0 \text{ MHz} / 2/3 = 1.5 \text{ MHz}$
2. If the system output power exceeds 125 mW (21.0 dBm):
Implicit Limit: Max. 20 dB BW = 1.0 MHz

Used conversion factor: Output power (dBm) = $10 \log (\text{Output power (W)} / 1\text{mW})$

The measured output power of the system is below 125 mW (21.0 dBm). For the results, please refer to the related chapter of this report. Therefore the limit is determined as 1.5 MHz.

Peak power output

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.10

Test Description

The Equipment Under Test (EUT) was set up to perform the output power measurements. The resolution bandwidth for measuring the output power was set to 3 MHz. The reference level of the spectrum analyzer was set higher than the output power of the EUT. The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (b) (1)

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
(1) For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt.

Used conversion factor: Limit (dBm) = $10 \log (\text{Limit (W)} / 1\text{mW})$

==> Maximum Output Power: 30 dBm

Spurious RF conducted emissions

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.10

Test Description

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements. The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak-Maxhold
- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: 330 s

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance" (cf. chapter 3.6). This value is used to calculate the 20 dBc limit.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

Spurious radiated emissions

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.10,

Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4 in a typical installation configuration.

The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m² in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software ES-K1 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT.

The final test on all kind of EUTs is performed at 2 axes. A pre-check is also performed while the EUT is powered from both AC and DC (battery) power in order to find the worst-case operating condition.

1. Measurement up to 30 MHz

The Loop antenna HFH2-Z2 is used.

Step 1: pre-measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 – 0.15 and 0.15 – 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will

be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz – 10 kHz
- Measuring time / Frequency step: 100 ms

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 μ s (BT Timing 1.25 ms)
- Turntable angle range: -180 to $+180^\circ$
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180 to $+180^\circ$
- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by $\pm 22.5^\circ$ around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by ± 25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -22.5° to $+22.5^\circ$ around the determined value
- Height variation range: -0.25 m to $+0.25$ m around the determined value

Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The measurement distance was reduced to 1.4 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a standard gain horn antenna (18–25 GHz) are used, the steps 2–4 are omitted. Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

For the enhanced data rate packets the test is performed as worst-case-check in order to verify that emissions have a comparable level as found at basic data rate. Typically, the measurement for these packets is performed in the frequency range 1 to 8 GHz but it depends on the emissions found during the test for the basic data rate. Please refer to the results for the used frequency range.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency (MHz)	Limit (µV/m)	Measurement distance (m)	Limit @ 10 m distance (dBµV/m)
0.009 – 0.49	2400/F(kHz)	300	48.5..13.8 + 59.1 dB = 107.6..72.9
0.49 – 1.705	24000/F(kHz)	30	33.8..23.0 + 19.1 dB = 52.9..42.1
1.705 - 30	30	30	29.5 + 19.1 = 48.6

Frequency (MHz)	Limit (µV/m)	Measurement distance (m)	Limit (dBµV/m)
30 - 88	100	3	40.0
88 - 216	150	3	43.5
216 - 960	200	3	46.0
above 960	500	3	54.0

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)

Band edge compliance

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.10

Test Description

The procedure to show compliance with the band edge requirement is divided into two measurements:

1. Show compliance of the lower band edge by a conducted measurement and
2. show compliance of the higher band edge by a radiated and conducted measurement.

For the first measurement the EUT is set to transmit on the lowest channel (2402 MHz). The lower band edge is 2400 MHz.

Analyzer settings:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

For the second measurement the EUT is set to transmit on the highest channel (2480 MHz). The higher band

edge is 2483.5 MHz.

Analyzer settings for conducted measurement:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

EMI receiver settings for radiated measurement:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

Test Requirements / Limits

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

...

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the measurement of the lower band edge the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

For the measurement of the higher band edge the limit is "specified in Section 15.209(a)".

Dwell time

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.10

Test Description

The Equipment Under Test (EUT) was set up to perform the dwell time measurements. The EUT was connected to the spectrum analyzer via a short coax cable. The dwell time is independent from the modulation pattern. The dwell time is calculated by:

Dwell time = time slot length * hop rate / number of hopping channels * 31.6 s

with:

- hop rate = $1600 \cdot 1/s$ for DH1 packets = 1600 s⁻¹
- hop rate = $1600/3 \cdot 1/s$ for DH3 packets = 533.33 s⁻¹
- hop rate = $1600/5 \cdot 1/s$ for DH5 packets = 320 s⁻¹
- number of hopping channels = 79
- $31.6 \text{ s} = 0.4 \text{ seconds multiplied by the number of hopping channels} = 0.4 \text{ s} \cdot 79$

The highest value of the dwell time is reported.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6 seconds.

Channel separation

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.10

Test Description

The Equipment Under Test (EUT) was set up to perform the channel separation measurements. The channel separation is independent from the modulation pattern.

The EUT was connected to spectrum analyzer via a short coax cable.

Analyzer settings:

- Detector: Peak-Maxhold
- Span: 3 MHz
- Centre Frequency: a mid frequency of the 2.4 GHz ISM band
- Resolution Bandwidth (RBW): 30 kHz
- Video Bandwidth (VBW): 100 kHz
- Sweep Time: Coupled

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Number of hopping frequencies

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.10

Test Description

The Equipment Under Test (EUT) was set up to perform the number of hopping frequencies measurement.

The number of hopping frequencies is independent from the modulation pattern.

The EUT was connected to spectrum analyzer via a short coax cable.

Analyzer settings:


- Detector: Peak-Maxhold
- Centre frequency: 2442 MHz
- Frequency span: 84 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: Coupled

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (iii)


Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

Setup Drawings

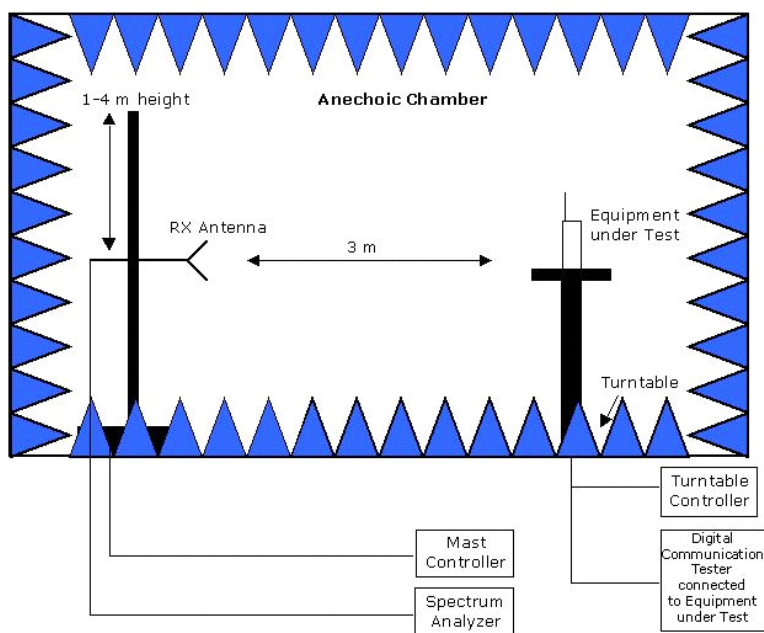


Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Setup in the Anechoic chamber:
Measurements below 1 GHz: Semi-anechoic, conducting ground plane.
Measurements above 1 GHz: Fully-anechoic, absorbers on all surfaces

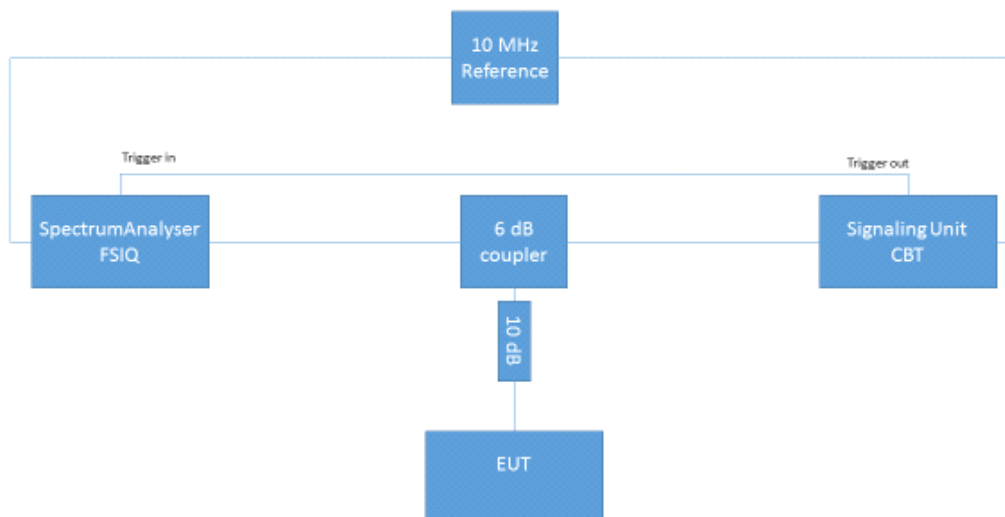

Test Setup; Conducted Tests; Bluetooth normal mode (BDR/EDR)

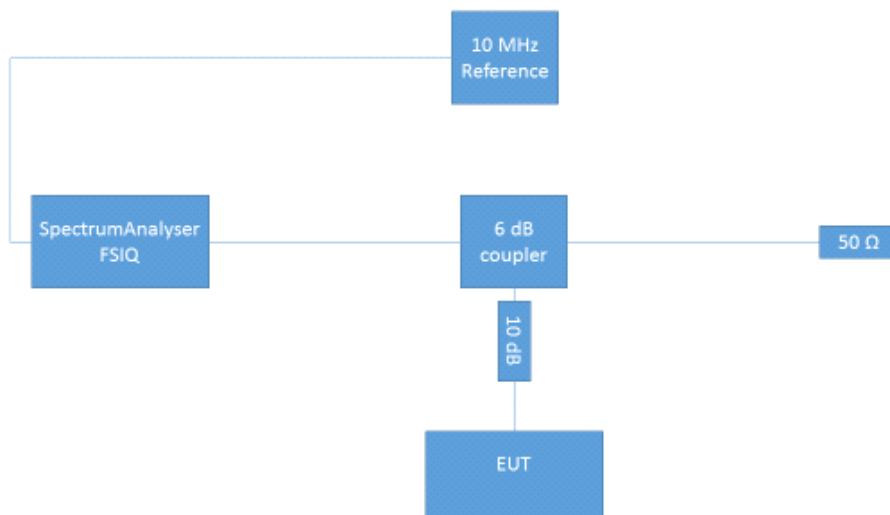

Test Setup; Conducted Tests; Bluetooth Low Energy Mode

September, 2015

To Whom This May Concern

**Correlation of measurement requirements for
FHSS (e.g. Bluetooth®) equipment
from
FCC and IC**

FHSS equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 4: 8.8
Occupied bandwidth	§ 15.247 (a) (1)	RSS-247 Issue 1: 5.1 (2)
Peak conducted output power	§ 15.247 (b) (1), (4)	RSS-247 Issue 1: 5.4 (2)
Transmitter spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen Issue 4: 6.13/8.9/8.10; RSS-247 Issue 1: 5.5
Transmitter spurious radiated emissions	§ 15.247 (d); § 15.209 (a)	RSS-Gen Issue 4: 6.13 / 8.9/8.10; RSS-247 Issue 1: 5.5
Band edge compliance	§ 15.247 (d)	RSS-247 Issue 1: 5.5
Dwell time	§ 15.247 (a) (1) (iii)	RSS-247 Issue 1: 5.1 (4)
Channel separation	§ 15.247 (a) (1)	RSS-247 Issue 1: 5.1 (2)
No. of hopping frequencies	§ 15.247 (a) (1) (iii)	RSS-247 Issue 1: 5.1 (4)
Hybrid systems (only)	§ 15.247 (f); § 15.247 (e)	RSS-247 Issue 1: 5.3
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 4: 8.3
Receiver spurious emissions	-	-

Measurement Uncertainties

FCC Part 22, 24, 27, 90
IC RSS-132, RSS-133, RSS-139

Test Case	Parameter	Uncertainty
RF Power Output	Power	± 2.2 dB
Frequency Stability	Frequency	± 25 Hz
Spurious Emissions at antenna terminal	Power	± 2.2 dB
Field strength of spurious radiation	Power	± 4.5 dB
Emission and Occupied Bandwidth	Power Frequency	± 2.9 dB GSM: ± 10.6 kHz UMTS, LTE: ± 120.0 kHz
Band Edge Compliance	Power Frequency	± 2.9 dB GSM: ± 14.6 kHz UMTS, LTE: ± 68.0 kHz

FCC Part 15b
IC ICES-003

Test Case	Parameter	Uncertainty
AC Power Line	Power	± 3.4 dB
Field Strength of spurious radiation	Power+	± 5.5 dB

FCC Part 15c, 15e
IC RSS-210, IC RSS-247

Test Case	Parameter	Uncertainty
AC Power Line	Power	± 3.4 dB
Field Strength of spurious radiation	Power	± 5.5 dB
6 dB / 26 dB / 99% Bandwidth	Power Frequency	± 2.9 dB ± 11.2 kHz
Conducted Output Power		± 2.2 dB
Spurious Emissions at antenna terminal	Power	± 2.2 dB
Band Edge Compliance	Power Frequency	± 2.2 dB ± 11.2 kHz
Frequency Stability	Frequency	± 25 Hz
Power Spectral Density	Power	± 2.2 dB

Revision History

Report version control			
Version	Release date	Change Description	Version validity
initial	2015-07-21	--	invalid
rev1	2015-11-30	• Updated Appendix1 • Added Appendix3 • Added new correlation table referencing RSS-247 • Added FCC_IC Measurement uncertainty	valid
rev2	2015-12-16	• Adding packet types DH1 & DH3 to the Dwell Time and Number of Hopping frequencies results	valid



6 Index

1 Administrative Data	2
1.1 Project Data	2
1.2 Applicant Data	2
1.3 Test Laboratory Data	2
1.4 Signature of the Testing Responsible	2
1.5 Signature of the Accreditation Responsible	3
2 Test Object Data	3
2.1 General OUT Description	3
2.2 Detailed Description of OUT Samples	4
2.3 OUT Features	5
2.4 Auxiliary Equipment	5
2.5 Setups used for Testing	5
3 Results	6
3.1 General	6
3.2 List of the Applicable Body	6
3.3 List of Test Specification	6
3.4 Summary	7
3.5 Detailed Results	11
3.5.1 15c.1 Conducted emissions (AC power line) §15.207	11
3.5.2 15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209	13
3.5.3 15c.3 Occupied bandwidth §15.247 (a) (1)	16
3.5.4 15c.4 Peak power output §15.247 (b) (1)	34
3.5.5 15c.5 Spurious RF conducted emissions §15.247 (d)	52
3.5.6 15c.6 Band edge compliance §15.247 (d)	61
3.5.7 15c.7 Dwell time §15.247 (a) (1) (iii)	75
3.5.8 15c.8 Channel separation §15.247 (a) (1)	79
3.5.9 15c.9 Number of hopping frequencies §15.247 (a) (1) (iii)	81
4 Test Equipment Details	85



4.1 List of Used Test Equipment	85
5 Annex	94
5.1 Additional Information for Report	94
6 Index	108