



TEST REPORT

Report No.:	E20190305034301-2	Application No.:	E20190305034301
Applicant:	GL Technologies (HongKong) Limited		
Address:	Unit 210D ,2/F Enterprise Place HongKong Science Park Shatin,N.T. Hong Kong, China		
Sample Description:	AC1300 Home Gateway		
Model:	GL-S1300		
Adding Model:	GL-S1300F16		
FCC ID:	2AFIW-S1300		
Test Specification:	FCC 47 CFR Part 15 Subpart C		
Test Date:	2019-03-24 to 2019-04-12		
Issue Date:	2019-04-25		
Test Result:	PASS		
Prepared By:	Reviewed By:	Approved By:	
Darry Wu / Test Engineer	Eve Wang / Technical Manager	Tony Han / Manager	
			
Date: 2019-04-25	Date: 2019-04-25	Date: 2019-04-25	
Other Aspects:			
/			
Abbreviations: ok / P = passed; fail / F = failed; n.a. / N = not applicable			
The test result in this test report refers exclusively to the presented test sample. This report shall not be reproduced except in full, without the written approval of GRGT.			

DIRECTIONS OF TEST

1. This company carries out test task according to the national regulation of verifications which can be traced to National Primary Standards and BIPM.
2. The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory.
3. If there is any objection concerning the test, the client should inform the laboratory within 15 days from the date of receiving the test report.

TABLE OF CONTENTS

1. TEST RESULT SUMMARY	4
2. GENERAL DESCRIPTION OF EUT.....	5
2.1. APPLICANT	5
2.2. MANUFACTURER	5
2.3. FACTORY	5
2.4. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST	5
2.5. TEST OPERATION MODE	6
2.6. LOCAL SUPPORTIVE INSTRUMENTS	6
3. LABORATORY AND ACCREDITATIONS	8
3.1. LABORATORY	8
3.2. ACCREDITATIONS.....	8
3.3. MEASUREMENT UNCERTAINTY	8
4. LIST OF USED TEST EQUIPMENT AT GRGT.....	9
5. ANTENNA REQUIREMENT	10
6. CONDUCTED EMISSION MEASUREMENT	11
6.1. LIMITS.....	11
6.2. TEST PROCEDURES.....	11
6.3. TEST SETUP	12
6.4. DATA SAMPLE	12
6.5. TEST RESULTS	13
7. RADIATED SPURIOUS EMISSIONS	17
7.1. LIMITS.....	17
7.2. TEST PROCEDURES (PLEASE REFER TO MEASUREMENT STANDARD).....	17
7.3. TEST SETUP	21
7.4. DATA SAMPLE	22
7.5. TEST RESULTS	23
8. 6DB BANDWIDTH.....	34
8.1. LIMITS.....	34
8.2. TEST PROCEDURES.....	34
8.3. TEST SETUP	34
8.4. TEST RESULTS	35
9. MAXIMUM PEAK OUTPUT POWER.....	48
9.1. LIMITS.....	48
9.2. TEST PROCEDURES.....	48
9.3. TEST SETUP	48
9.4. TEST RESULTS	49
10. POWER SPECTRAL DENSITY.....	51
10.1. LIMITS.....	51
10.2. TEST PROCEDURES.....	51
10.3. TEST SETUP	51
10.4. TEST RESULTS	52
11. CONDUCTED BAND EDGES AND SPURIOUS EMISSIONS	65
11.1. LIMITS.....	65
11.2. TEST PROCEDURES.....	65
11.3. TEST SETUP	65
11.4. TEST RESULTS	66
12. RESTRICTED BANDS OF OPERATION.....	90
12.1. LIMITS.....	90
12.2. TEST PROCEDURES.....	90
12.3. TEST SETUP	91
12.4. TEST RESULTS	92
APPENDIX A: PHOTOGRAPH OF THE TEST ARRANGEMENT.....	116

1. TEST RESULT SUMMARY

Section B of FCC Part 15.247:2012			
Standard	Item	Limit / Severity	Result
FCC Part 15, Subpart C (15.247)	Antenna Requirement	§15.203	PASS
	Conducted Emissions	§15.207 (a)	PASS
	Radiated Spurious Emission	§15.247(d)	PASS
	6 dB Bandwidth	§15.247 (a)(2)	PASS
	Maximum Peak Output Power	§15.247(b)(3)	PASS
	Power Spectral Density	§15.247(e)	PASS
	Conducted band edges and Spurious Emission	§15.247(d)	PASS
	Restricted bands of operation	§15.205	PASS

2. GENERAL DESCRIPTION OF EUT

2.1. APPLICANT

Name: GL Technologies (HongKong) Limited
Address: Unit 210D ,2/F Enterprise Place HongKong Science Park Shatin,N.T.
Hong Kong, China

2.2. MANUFACTURER

Name: GL Technologies (HongKong) Limited
Address: Unit 210D ,2/F Enterprise Place HongKong Science Park Shatin,N.T.
Hong Kong, China

2.3. FACTORY

Name: Shenzhen Guanglian zhitong Tech Co.,Ltd
Address: Room 305-306, Skyworth Digital Building , Shiyan Street, Baoan
District, Shenzhen, China

2.4. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST

Equipment: AC1300 Home Gateway
Model No.: GL-S1300
Adding Model: GL-S1300F16
Model Discrepancy: All models are identical except for model name and the flash capacity.
Trade Name: GL.iNET
Power supply: DC12V supplied by the adapter
Adapter 1: Model:JZB024-120150X
Specification: Input:100-240V , 50/60Hz , 0.7A
Output: 12V, 1500mA
DC Cable: Unshielded,1.20m
Adapter 2: Model:ICP20-120-1500D
Specification: Input:100-240V , 50/60Hz , 0.6A
Output: 12V, 1500mA
DC Cable: Unshielded,1.20m
Frequency Range: 2412MHz~2462MHz: 802.11b; 802.11g; 802.11n(HT20)
2422MHz~2452MHz: 802.11n(HT40);
Transmit Power: 24.79dBm for 802.11b mode (antenna 0)
24.81dBm for 802.11b mode (antenna 1)
27.18dBm for 802.11g mode (antenna 0)
27.35dBm for 802.11g mode (antenna 1)
combine with antenna 0 and antenna 1:
26.51dBm for 802.11n HT20 mode
25.41dBm for 802.11n HT40 mode
Modulation type: DSSS for 802.11b mode;
OFDM for 802.11g mode;

OFDM for 802.11n mode.

Channel space: 5MHz

Antenna Internal antenna 0 with 4.00dBi gain (Max.)

Specification: Internal antenna 1 with 4.01dBi gain (Max)

Temperature Range: -20 °C ~ +40 °C

Hardware Version: V1.2.2

Software Version: V2.272

Note: /

2.5. TEST OPERATION MODE

Test Item	Mode No.	Description of the modes
Conducted Emission	1	Full system (adapter 1)
	2	Full system (adapter 2)
Radiated Emission	1	Continuously Transmitting

2.6. LOCAL SUPPORTIVE INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Note
Notebook 1	LENOVO	Thinkpad X270	/	/
Adapter (Notebook 1)	LENOVO	ADLX45NCC3A	5A10H03912	/
Notebook 2	LENOVO	Thinkpad S2	SL10K92342	/
Adapter (Notebook 2)	LENOVO	ADLX45NCC3A	5A11F14738	/
Notebook 3	LENOVO	Thinkpad E335	R9-WN0KH	/
Adapter (Notebook 3)	LENOVO	ADLX65NCT3A	36200292	/
Notebook 4	HP	ProBook 5310m	/	/
Adapter (Notebook 4)	HP	Series PPP012H-S	608428-002	/
GL BLE & ZigBee Module	GL.iNET	GL-EFR32H	/	/
USB to TTL adapter	SILABS	CP2102	/	/
GL-S1300	GL.iNET	GL-S1300	/	/
HDD3.0	WD	WDBUZG0010BBL-CESN	WXC1A176S C9Z	/

Cable				
AC Cable*2	/	/	/	Unshielded, 1.00m
AC Cable*2	/	/	/	Unshielded, 1.50m
DC Cable*4	/	/	/	Shielded, 1.80m
DC Cable*4	/	/	/	Unshielded, 1.50m
USB Cable	/	/	/	Shielded, 0.50m
RJ45 Cable*3	/	/	/	Unshielded, 2.00m
RJ45 Cable*2	/	/	/	Unshielded, 5.00m
Serial port Cable	/	/	/	Unshielded, 0.12m

Test software:

Software version	Test level
QCARCT	802.11b: 13 802.11g: 13 802.11n HT20: 13 802.11n HT40: 9

3. LABORATORY AND ACCREDITATIONS

3.1. LABORATORY

The tests and measurements refer to this report were performed by EMC Laboratory of GRG METROLOGY & TEST (SHENZHEN) CO., LTD

Add. : No. 1301, Guanguang Road, Xinlan Community, Guanlan Street, Longhua District, Shenzhen, 518110, People's Republic of China

Telephone : +86-755-61180008

Fax : /

3.2. ACCREDITATIONS

A2LA	Certificate Number 2861.01
------	----------------------------

3.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement		Frequency	Uncertainty
Radiated Emission	Horizontal	30MHz~1000MHz	4.8dB
		1GHz~26.5GHz	5.8dB
	Vertical	30MHz~1000MHz	4.8dB
		1GHz~26.5GHz	5.9dB
Conducted Emission		9kHz~30MHz	3.5 dB

This uncertainty represents an expanded uncertainty factor of $k=2$.



4. LIST OF USED TEST EQUIPMENT AT GRGT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Conducted Emissions				
EMI TEST Receiver	ROHDE&SCHWARZ	ESCI	100783	2020-01-10
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543	2020-01-10
Hygrothermograph	VICTOR	HTC-1	N/A	2019-12-25
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE		
Radiated Spurious Emission& Restricted bands of operation				
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI	101026	2020-01-09
EXA signal analyzer	Agilent	N9010A	MY52221469	2020-01-10
Bilog Antenna	Schwarzbeck	VULB 9160	9160-3401	2019-12-21
Horn Antenna	Schwarzbeck	BBHA9120	D286	2019-12-21
Board-Band Horn Antenna	Schwarzbeck	BBHA9170	9170-497	2020-01-15
Active Loop Antenna	COM-POWER	AL-130	121044	2019-12-27
Amplifier	EM Electronics Corporation	EM330	060661	2019-12-21
High Noise Amplifier	Agilent	8449B	3008A02060	2019-12-21
Hygrothermograph	VICTOR	HTC-1	NA	2019-12-24
Test SW	FARAD	EZ-EMC/ CCS-3A1-CE		
6 dB Bandwidth				
EXA signal analyzer	Agilent	N9010A	MY52221469	2020-01-10
Maximum Peak Output Power				
EXA signal analyzer	Agilent	N9010A	MY52221469	2020-01-10
Conducted band edges and Spurious Emission				
EXA signal analyzer	Agilent	N9010A	MY52221469	2020-01-10
Power Spectral Density				
EXA signal analyzer	Agilent	N9010A	MY52221469	2020-01-10

5. ANTENNA REQUIREMENT

The EUT has two antennas. The antennas are internal antennas.

The max gain of antenna 0 is 4.00dBi and the max gain of antenna 1 is 4.01dBi. which accordance 15.203.is considered sufficient to comply with the provisions of this section

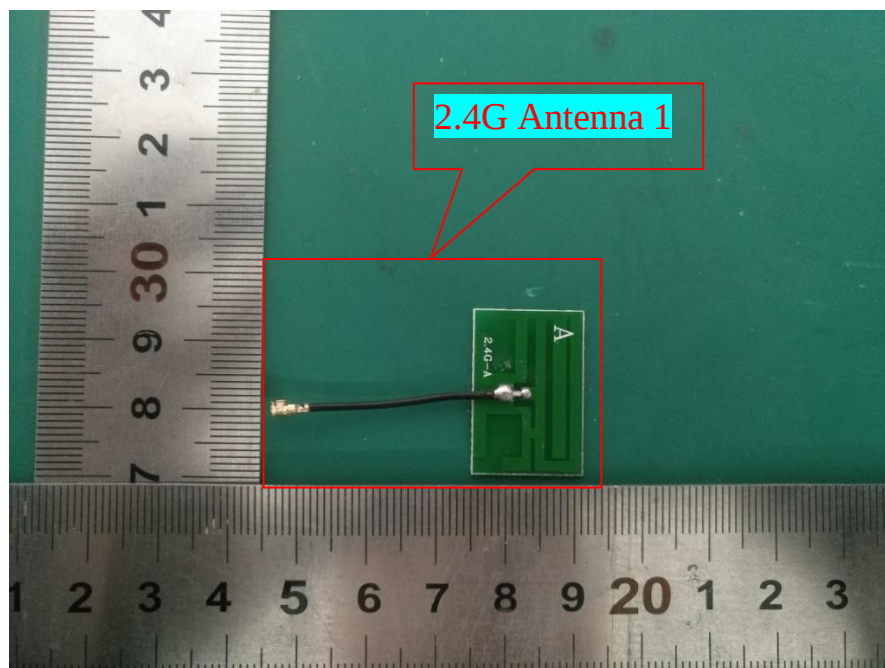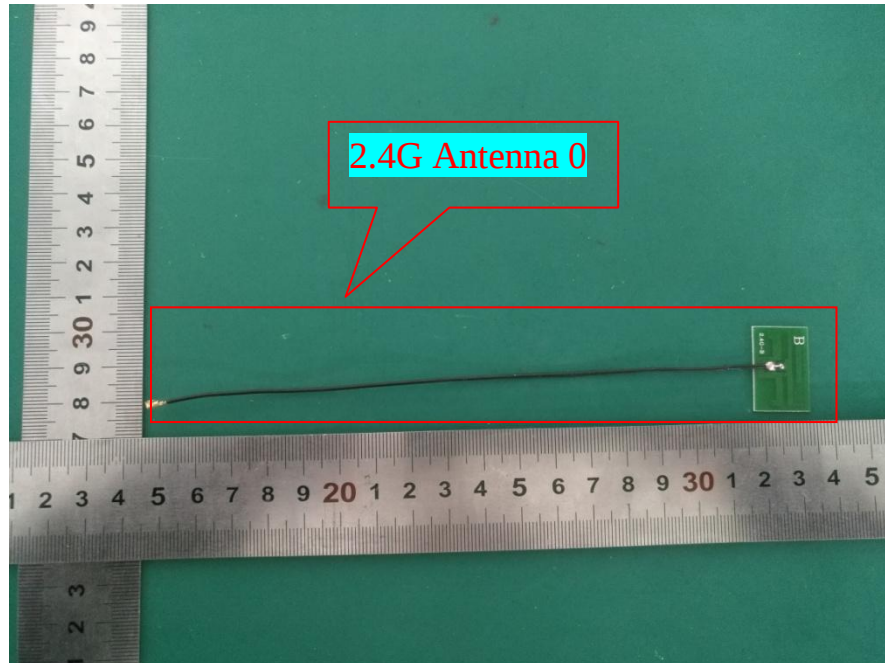

6. CONDUCTED EMISSION MEASUREMENT

6.1. LIMITS

Frequency range	Limits (dB μ V)	
	Quasi-peak	Average
150kHz $\sim$ 0.5MHz	66 $\sim$ 56	56 $\sim$ 46
0.5 MHz $\sim$ 5 MHz	56	46
5 MHz $\sim$ 30 MHz	60	50

NOTE: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases in line with the logarithm of the frequency in the range of 150 kHz to 0.5MHz.

6.2. TEST PROCEDURES

Procedure of Preliminary Test

Test procedures follow ANSI C63.4:2014.

For measurement of the disturbance voltage the equipment under test (EUT) is connected to the power supply mains and any other extended network via one or more artificial network(s). An EUT, whether intended to be grounded or not, and which is to be used on a table is configured as follows:


- Either the bottom or the rear of the EUT shall be at a controlled distance of 40 cm from a reference ground plane. This ground plane is normally the wall or floor of a shielded room. It may also be a grounded metal plane of at least 2 m by 2 m. This is physically accomplished as follows:
 - 1) place the EUT on a table of non-conducting material which is at least 80 cm high. Place the EUT so that it is 40 cm from the wall of the shielded room, or
 - 2) place the EUT on a table of non-conducting material which is 40 cm high so that the bottom of the EUT is 40 cm above the ground plane;
- All other conductive surfaces of the EUT shall be at least 80 cm from the reference ground plane;
- The EUT are placed on the floor that one side of the housings is 40 cm from the vertical reference ground plane and other metallic parts;
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth forming a bundle 30 cm to 40 cm long, hanging approximately in the middle between the ground plane and the table.
- I/O cables that are connected to a peripheral shall be bundled in the centre. The end of the cable may be terminated if required using correct terminating impedance. The total length shall not exceed 1 m.

The test mode(s) described in Item 2.4 were scanned during the preliminary test. After the preliminary scan, we found the test mode described in Item 2.4 producing the highest emission level. The EUT configuration and cable configuration of the above highest emission levels were recorded for reference of the final test.

Procedure of Final Test

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test. A scan was taken on both power lines, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. The test data of the worst-case condition(s) was recorded.

6.3. TEST SETUP

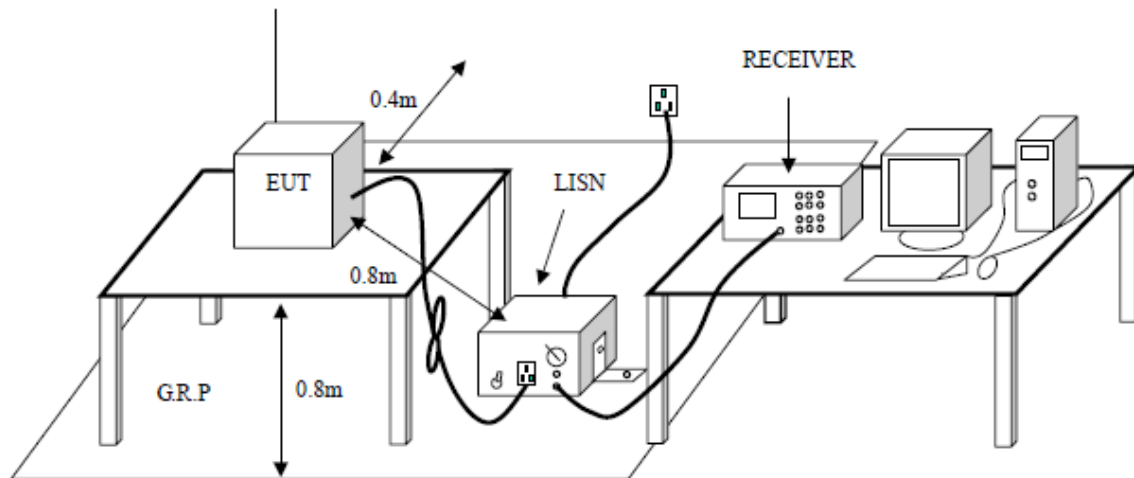

6.4. DATA SAMPLE


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XXXX	32.69	25.65	11.52	44.21	37.17	65.78	55.79	-21.57	-18.62	Pass

Factor = Insertion loss of LISN + Cable Loss
 Result = Quasi-peak Reading/ Average Reading + Factor
 Limit = Limit stated in standard
 Margin = Result (dBuV) – Limit (dBuV)

6.5. TEST RESULTS

Pre-test Mode 1 and Mode 2, found that Mode 2 are the worst case.


Model No.	GL-S1300	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 2
Tested by	Luja Huang	Line	L
Test Date	2019-03-24	Test Voltage	AC120V/60Hz

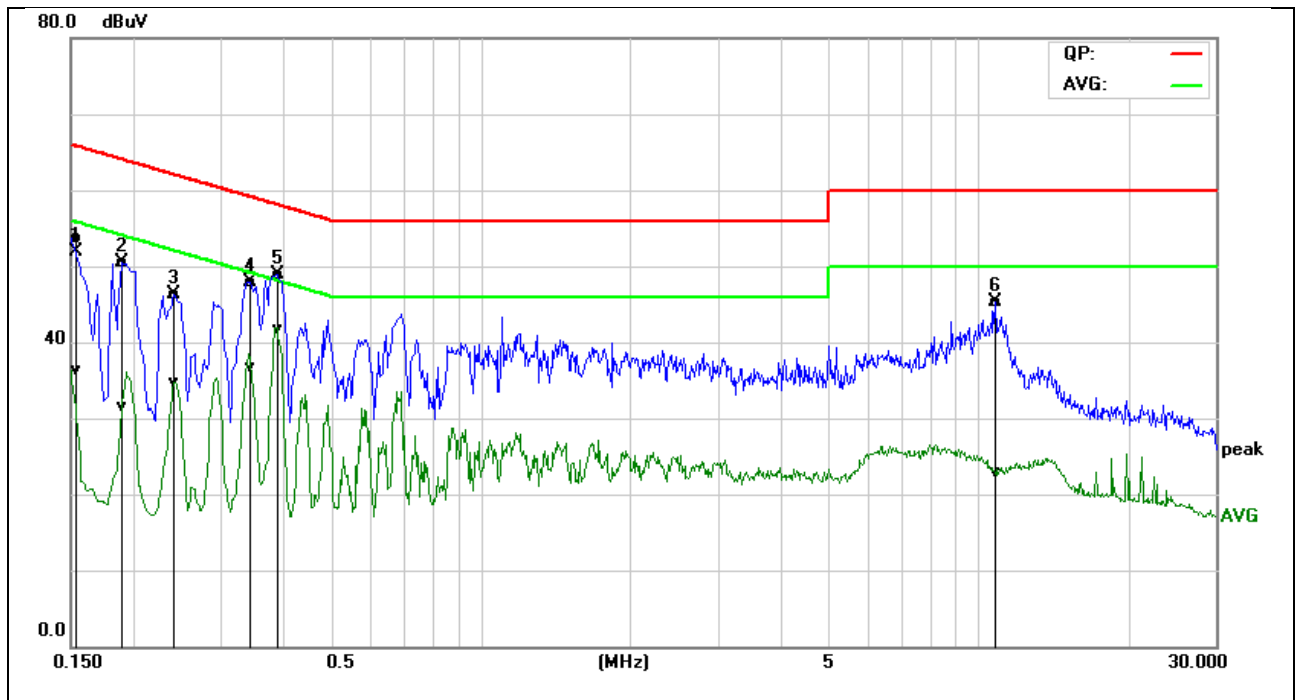

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1548	33.84	16.34	19.88	53.72	36.22	65.73	55.74	-12.01	-19.52	Pass
0.1900	30.66	11.72	19.87	50.53	31.59	64.03	54.04	-13.50	-22.45	Pass
0.2420	26.45	14.93	19.85	46.30	34.78	62.02	52.03	-15.72	-17.25	Pass
0.3460	28.15	16.83	19.84	47.99	36.67	59.06	49.06	-11.07	-12.39	Pass
0.3899	29.09	21.97	19.83	48.92	41.80	58.06	48.07	-9.14	-6.27	Pass
10.7940	25.04	2.75	20.17	45.21	22.92	60.00	50.00	-14.79	-27.08	Pass

REMARKS: L = Live Line


Model No.	GL-S1300	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 2
Tested by	Luja Huang	Line	N
Test Date	2019-03-24	Test Voltage	AC120V/60Hz

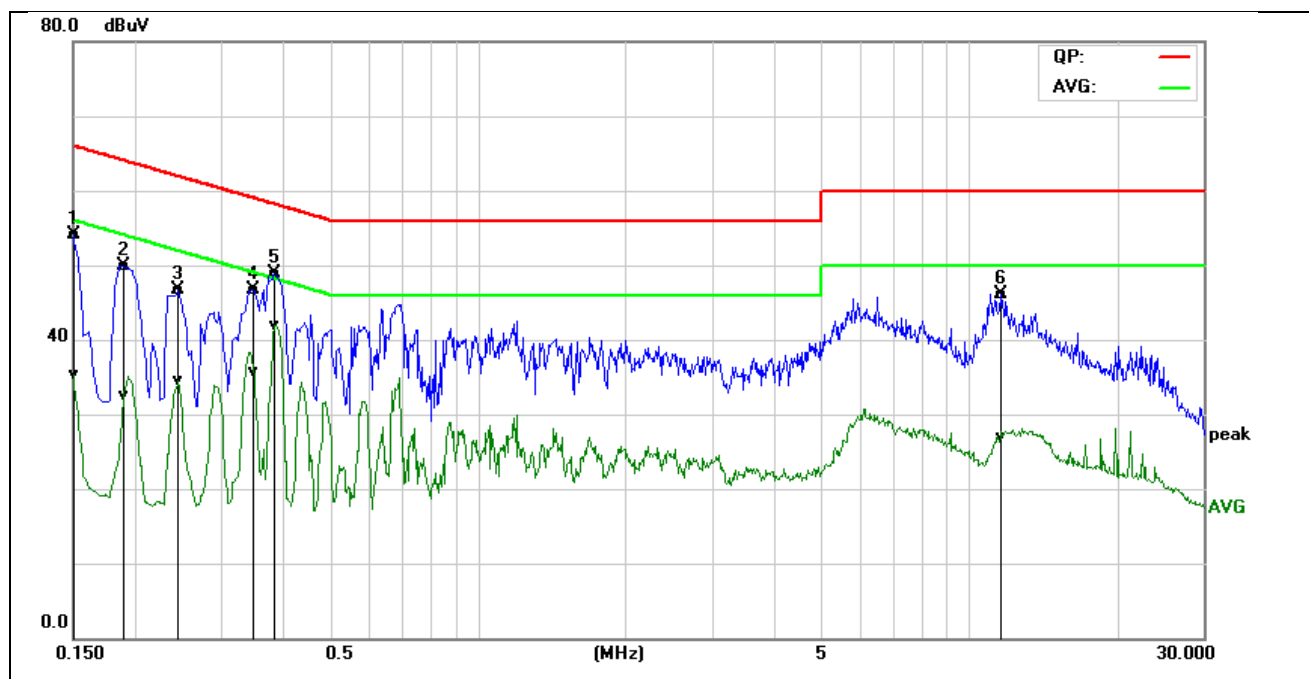

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1500	34.28	15.41	19.87	54.15	35.28	65.99	56.00	-11.84	-20.72	Pass
0.1900	30.12	12.73	19.85	49.97	32.58	64.03	54.04	-14.06	-21.46	Pass
0.2460	26.78	14.57	19.84	46.62	34.41	61.89	51.89	-15.27	-17.48	Pass
0.3500	26.93	15.90	19.83	46.76	35.73	58.96	48.96	-12.20	-13.23	Pass
0.3860	29.05	22.07	19.83	48.88	41.90	58.15	48.15	-9.27	-6.25	Pass
11.6140	25.95	6.72	20.13	46.08	26.85	60.00	50.00	-13.92	-23.15	Pass

REMARKS: N= Neutral Line


Model No.	GL-S1300	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 2
Tested by	Luja Huang	Line	L
Test Date	2019-04-12	Test Voltage	AC240V/50Hz

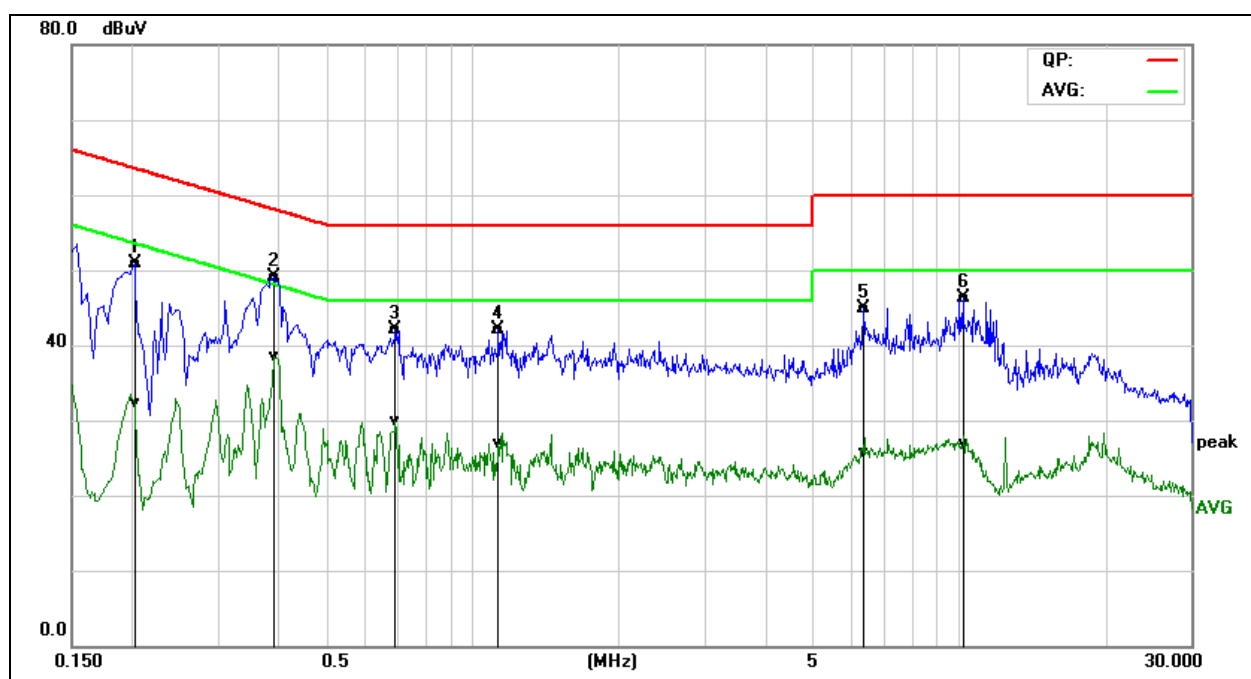

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.2020	31.09	12.52	19.86	50.95	32.38	63.52	53.53	-12.57	-21.15	Pass
0.3899	29.21	18.66	19.83	49.04	38.49	58.06	48.07	-9.02	-9.58	Pass
0.6940	22.20	10.07	19.90	42.10	29.97	56.00	46.00	-13.90	-16.03	Pass
1.1340	22.29	6.99	19.85	42.14	26.84	56.00	46.00	-13.86	-19.16	Pass
6.3620	24.96	5.68	19.93	44.89	25.61	60.00	50.00	-15.11	-24.39	Pass
10.2020	26.17	6.60	20.21	46.38	26.81	60.00	50.00	-13.62	-23.19	Pass

REMARKS: L = Live Line

Model No.	GL-S1300	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 2
Tested by	Luja Huang	Line	N
Test Date	2019-04-12	Test Voltage	AC240V/50Hz

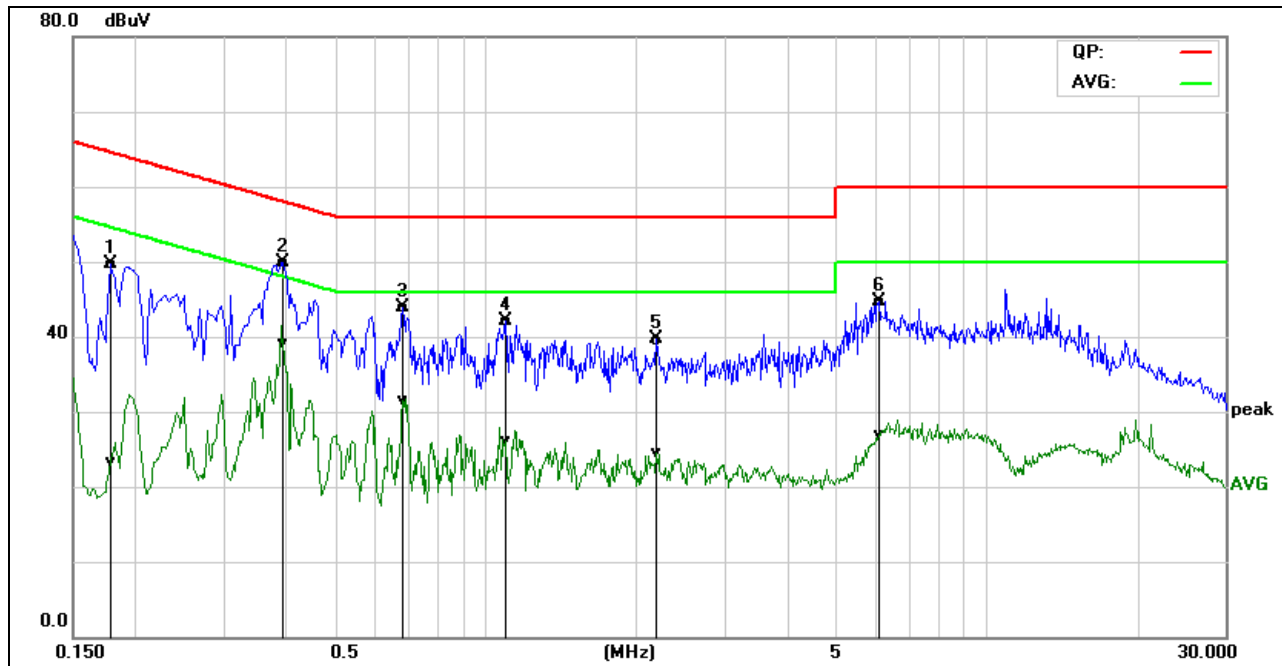

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1780	29.87	3.49	19.85	49.72	23.34	64.57	54.58	-14.85	-31.24	Pass
0.3940	30.03	19.29	19.83	49.86	39.12	57.98	47.98	-8.12	-8.86	Pass
0.6860	23.95	11.52	19.89	43.84	31.41	56.00	46.00	-12.16	-14.59	Pass
1.0940	22.32	6.17	19.85	42.17	26.02	56.00	46.00	-13.83	-19.98	Pass
2.1900	19.69	4.62	19.91	39.60	24.53	56.00	46.00	-16.40	-21.47	Pass
6.1100	24.75	7.06	19.92	44.67	26.98	60.00	50.00	-15.33	-23.02	Pass

REMARKS: N= Neutral Line

7. RADIATED SPURIOUS EMISSIONS

7.1. LIMITS

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Frequency (MHz)	Quasi-peak(μ V/m)	Measurement distance(m)	Quasi-peak(dB μ V/m)@distance 3m
0.009-0.490	2400/F(kHz)	300	53.8~88.5
0.490-1.705	24000/F(kHz)	30	43~53.8
1.705-30.0	30	30	49.5
30 ~ 88	100	3	40
88~216	150	3	43.5
216 ~ 960	200	3	46
Above 960	500	3	54

NOTE: (1) The lower limit shall apply at the transition frequencies.

7.2. TEST PROCEDURES (please refer to measurement standard)

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

--- Identified emissions during the pre measurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).

--- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz**Setup:**

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Pre measurement:

--- The turntable rotates from 0° to 315° using 45° steps.

--- The antenna is polarized vertical and horizontal.

--- The antenna height changes from 1 to 3 meter.

--- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz**Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz**Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

Pre measurement:

- The antenna is moved spherical over the EUT in different polarisations of the antenna.

Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

NOTE: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).

1.3. TEST SETUP

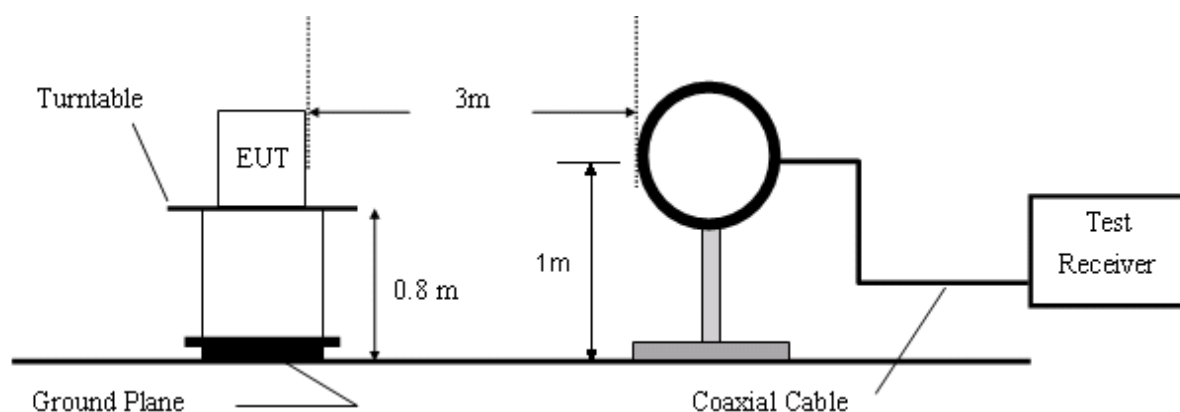


Figure 1. 9KHz to 30MHz radiated emissions test configuration

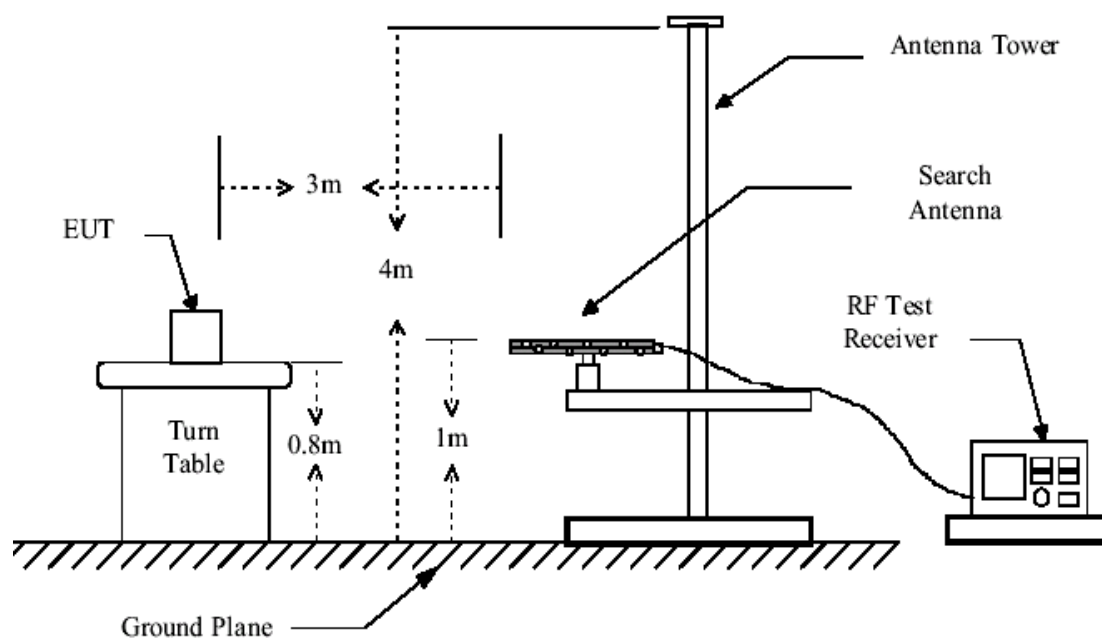


Figure 2. 30MHz to 1GHz radiated emissions test configuration

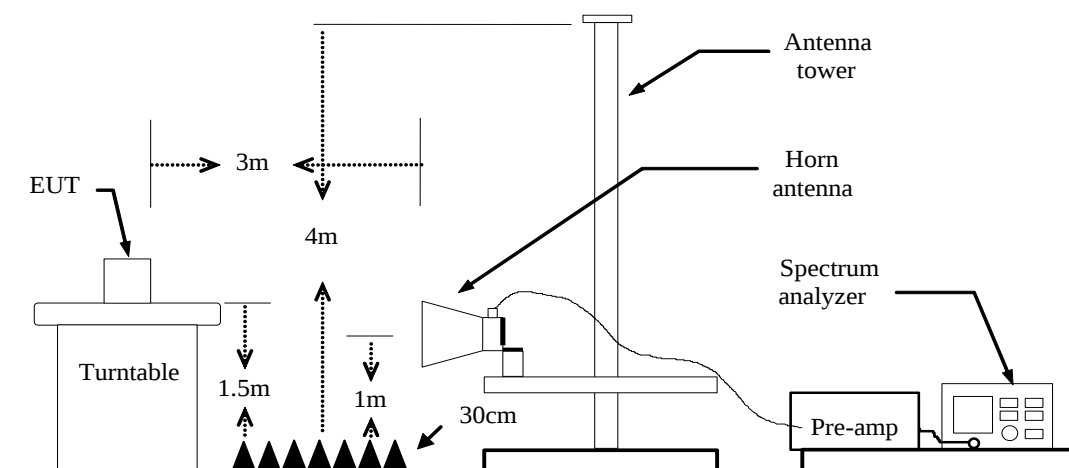


Figure 3. Above 1GHz radiated emissions test configuration

7.3. DATA SAMPLE

30MHz to 1GHz

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
xxx	xxx	37.06	-15.48	21.58	40.00	-18.42	QP	Vertical

Above 1 GHz

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
xxx	xxx	65.45	-11.12	54.33	74.00	-19.67	peak	Vertical
xxx	xxx	63.00	-11.12	51.88	54.00	-2.12	AVG	Vertical

Frequency (MHz)	= Emission frequency in MHz
Ant.Pol. (H/V)	= Antenna polarization
Reading (dBuV)	= Uncorrected Analyzer / Receiver reading
Correction Factor (dB/m)	= Antenna factor + Cable loss – Amplifier gain
Result (dBuV/m)	= Reading (dBuV) + Correction Factor (dB/m)
Limit (dBuV/m)	= Limit stated in standard
Margin (dB)	= Remark Result (dBuV/m) – Limit (dBuV/m)
Peak	= Peak Reading
QP	= Quasi-peak Reading
AVG	= Average Reading

1.4. TEST RESULTS


30MHz to 1GHz

Pre-scan all modes and recorded the worst case results in this report (IEEE 802.11b (Low Channel))

Mode: TX/ IEEE 802.11b

Lowest channel (2412MHz)

Date: 2019-03-27

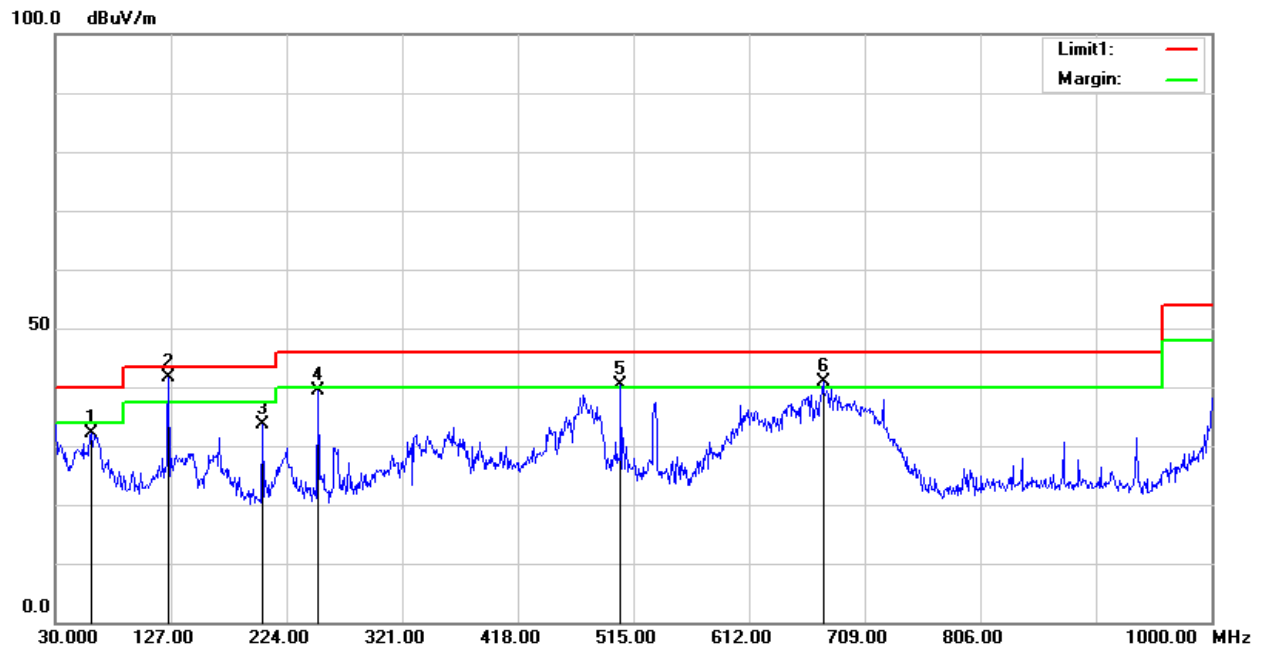


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	60.0700	51.09	-18.96	32.13	40.00	-7.87	QP	Vertical
2	125.0600	59.25	-17.74	41.51	43.50	-1.99	QP	Vertical
3	203.6300	53.25	-19.58	33.67	43.50	-9.83	QP	Vertical
4	250.1900	55.62	-16.23	39.39	46.00	-6.61	QP	Vertical
5	504.3300	50.32	-9.88	40.44	46.00	-5.56	QP	Vertical
6	674.0800	45.75	-4.93	40.82	46.00	-5.18	QP	Vertical

Mode: TX/ IEEE 802.11b

Lowest channel (2412MHz)

Date: 2019-03-27

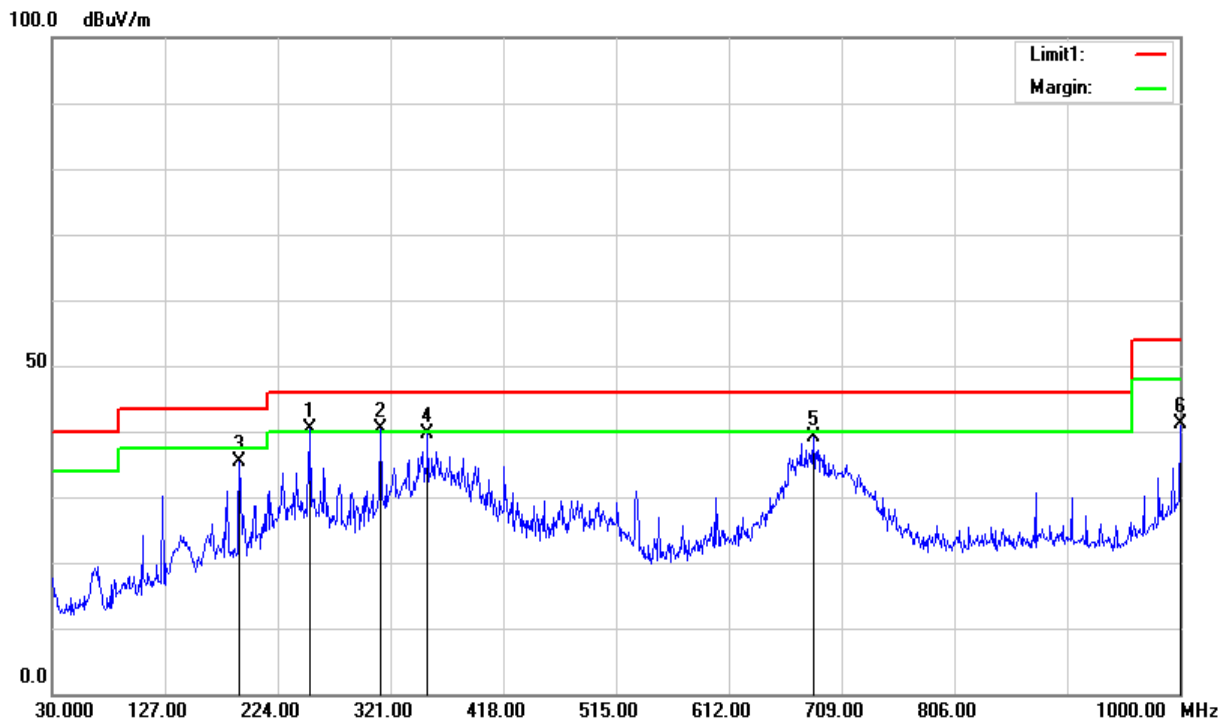

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	252.1300	56.54	-16.21	40.33	46.00	-5.67	QP	Horizontal
2	312.2700	55.65	-15.26	40.39	46.00	-5.61	QP	Horizontal
3	191.0200	54.95	-19.57	35.38	43.50	-8.12	QP	Horizontal
4	353.0100	53.29	-13.74	39.55	46.00	-6.45	QP	Horizontal
5	684.7500	43.90	-4.86	39.04	46.00	-6.96	QP	Horizontal
6	1000.0000	38.60	2.65	41.25	54.00	-12.75	QP	Horizontal

Remark:

- 1 No emission found between lowest internal used/generated frequency to 30MHz.
- 2 Radiated emissions measured in frequency range from 9 kHz to 1GHz were made with an instrument using Quasi-peak detector mode.
- 3 Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of Receiver between 30MHz to 1GHz was 120 kHz.

Above 1GHz:

Mode: TX / IEEE 802.11b (antenna 0)

Lowest channel (2412MHz)

Date: 2019-03-24

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	2557.000	46.09	-0.99	45.10	74.00	-28.90	peak	Vertical
2	3214.000	45.38	0.92	46.30	74.00	-27.70	peak	Vertical
3	4024.000	43.31	1.63	44.94	74.00	-29.06	peak	Vertical
4	4825.000	43.51	2.34	45.85	74.00	-28.15	peak	Vertical
5	5455.000	40.26	3.54	43.80	74.00	-30.20	peak	Vertical
6	6247.000	43.40	5.63	49.03	74.00	-24.97	peak	Vertical
7	1891.000	46.23	-3.00	43.23	74.00	-30.77	peak	Horizontal
8	3214.000	46.72	0.92	47.64	74.00	-26.36	peak	Horizontal
9	4240.000	41.20	2.05	43.25	74.00	-30.75	peak	Horizontal
10	4825.000	43.74	2.34	46.08	74.00	-27.92	peak	Horizontal
11	6085.000	39.59	5.39	44.98	74.00	-29.02	peak	Horizontal
12	7201.000	40.34	7.55	47.89	74.00	-26.11	peak	Horizontal

Mode: TX/ IEEE 802.11b (antenna 0)

Middle channel (2437 MHz)

Date: 2019-03-24

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	2233.000	46.37	-1.83	44.54	74.00	-29.46	peak	Vertical
2	2800.000	45.15	0.05	45.20	74.00	-28.80	peak	Vertical
3	3250.000	46.56	0.92	47.48	74.00	-26.52	peak	Vertical
4	4024.000	42.00	1.63	43.63	74.00	-30.37	peak	Vertical
5	4870.000	44.92	2.31	47.23	74.00	-26.77	peak	Vertical
6	6247.000	43.36	5.63	48.99	74.00	-25.01	peak	Vertical
7	2440.000	48.17	-1.36	46.81	74.00	-27.19	peak	Horizontal
8	3250.000	47.94	0.92	48.86	74.00	-25.14	peak	Horizontal
9	3763.000	42.77	1.27	44.04	74.00	-29.96	peak	Horizontal
10	4870.000	46.18	2.31	48.49	74.00	-25.51	peak	Horizontal
11	5815.000	40.85	4.67	45.52	74.00	-28.48	peak	Horizontal
12	7327.000	39.80	7.86	47.66	74.00	-26.34	peak	Horizontal

Mode: TX/ IEEE 802.11b (antenna 0)

Highest channel (2462MHz)

Date: 2019-03-24

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	1801.000	46.13	-3.54	42.59	74.00	-31.41	peak	Vertical
2	2458.000	46.99	-1.33	45.66	74.00	-28.34	peak	Vertical
3	3286.000	47.42	0.91	48.33	74.00	-25.67	peak	Vertical
4	4042.000	43.99	1.67	45.66	74.00	-28.34	peak	Vertical
5	4924.000	44.31	2.28	46.59	74.00	-27.41	peak	Vertical
6	6247.000	43.60	5.63	49.23	74.00	-24.77	peak	Vertical
7	1621.000	46.48	-4.62	41.86	74.00	-32.14	peak	Horizontal
8	2458.000	46.85	-1.33	45.52	74.00	-28.48	peak	Horizontal
9	3286.000	48.32	0.91	49.23	74.00	-24.77	peak	Horizontal
10	4204.000	41.84	1.98	43.82	74.00	-30.18	peak	Horizontal
11	4924.000	43.67	2.28	45.95	74.00	-28.05	peak	Horizontal
12	6535.000	40.71	6.08	46.79	74.00	-27.21	peak	Horizontal

Mode: TX / IEEE 802.11b (antenna 1)

Lowest channel (2412MHz)

Date: 2019-03-24

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	1810.000	44.93	-3.49	41.44	74.00	-32.56	peak	Vertical
2	2530.000	45.34	-1.10	44.24	74.00	-29.76	peak	Vertical
3	3358.000	42.93	0.91	43.84	74.00	-30.16	peak	Vertical
4	3898.000	42.04	1.46	43.50	74.00	-30.50	peak	Vertical
5	4825.000	47.48	2.34	49.82	74.00	-24.18	peak	Vertical
6	6247.000	43.74	5.63	49.37	74.00	-24.63	peak	Vertical
7	1801.000	45.63	-3.54	42.09	74.00	-31.91	peak	Horizontal
8	3115.000	43.83	0.91	44.74	74.00	-29.26	peak	Horizontal
9	3826.000	43.06	1.36	44.42	74.00	-29.58	peak	Horizontal
10	4825.000	44.55	2.34	46.89	74.00	-27.11	peak	Horizontal
11	5716.000	40.97	4.35	45.32	74.00	-28.68	peak	Horizontal
12	6247.000	41.00	5.63	46.63	74.00	-27.37	peak	Horizontal

Mode: TX/ IEEE 802.11b (antenna 1)

Middle channel (2437 MHz)

Date: 2019-03-24

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	1900.000	44.91	-2.95	41.96	74.00	-32.04	peak	Vertical
2	2440.000	46.15	-1.36	44.79	74.00	-29.21	peak	Vertical
3	3070.000	44.27	0.91	45.18	74.00	-28.82	peak	Vertical
4	3754.000	42.85	1.25	44.10	74.00	-29.90	peak	Vertical
5	4870.000	44.87	2.31	47.18	74.00	-26.82	peak	Vertical
6	6247.000	44.04	5.63	49.67	74.00	-24.33	peak	Vertical
7	2440.000	47.40	-1.36	46.04	74.00	-27.96	peak	Horizontal
8	3250.000	43.78	0.92	44.70	74.00	-29.30	peak	Horizontal
9	4231.000	41.88	2.03	43.91	74.00	-30.09	peak	Horizontal
10	4870.000	46.01	2.31	48.32	74.00	-25.68	peak	Horizontal
11	5959.000	40.12	5.13	45.25	74.00	-28.75	peak	Horizontal
12	6814.000	40.53	6.67	47.20	74.00	-26.80	peak	Horizontal

Mode: TX/ IEEE 802.11b (antenna 1)

Highest channel (2462MHz)

Date: 2019-03-24

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	1891.000	48.59	-3.00	45.59	74.00	-28.41	peak	Vertical
2	2467.000	47.89	-1.32	46.57	74.00	-27.43	peak	Vertical
3	3367.000	43.70	0.91	44.61	74.00	-29.39	peak	Vertical
4	4024.000	42.80	1.63	44.43	74.00	-29.57	peak	Vertical
5	4924.000	42.40	2.28	44.68	74.00	-29.32	peak	Vertical
6	6247.000	43.41	5.63	49.04	74.00	-24.96	peak	Vertical
7	2548.000	45.62	-1.03	44.59	74.00	-29.41	peak	Horizontal
8	3088.000	44.53	0.90	45.43	74.00	-28.57	peak	Horizontal
9	4276.000	42.03	2.12	44.15	74.00	-29.85	peak	Horizontal
10	4708.000	42.88	2.41	45.29	74.00	-28.71	peak	Horizontal
11	5716.000	41.40	4.35	45.75	74.00	-28.25	peak	Horizontal
12	6589.000	40.81	6.20	47.01	74.00	-26.99	peak	Horizontal

Mode: TX / IEEE 802.11g (antenna 0)

Lowest channel (2412MHz)

Date: 2019-03-24

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	2512.000	45.87	-1.19	44.68	74.00	-29.32	peak	Vertical
2	3214.000	46.95	0.92	47.87	74.00	-26.13	peak	Vertical
3	4213.000	41.76	2.00	43.76	74.00	-30.24	peak	Vertical
4	4825.000	43.99	2.34	46.33	74.00	-27.67	peak	Vertical
5	5653.000	40.59	4.16	44.75	74.00	-29.25	peak	Vertical
6	6247.000	44.37	5.63	50.00	74.00	-24.00	peak	Vertical
7	1621.000	46.95	-4.62	42.33	74.00	-31.67	peak	Horizontal
8	2521.000	45.32	-1.15	44.17	74.00	-29.83	peak	Horizontal
9	3214.000	48.47	0.92	49.39	74.00	-24.61	peak	Horizontal
10	4672.000	42.15	2.44	44.59	74.00	-29.41	peak	Horizontal
11	5680.000	41.24	4.24	45.48	74.00	-28.52	peak	Horizontal
12	6571.000	40.53	6.16	46.69	74.00	-27.31	peak	Horizontal

Mode: TX/ IEEE 802.11g (antenna 0)

Middle channel (2437 MHz)

Date: 2019-03-24

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	2521.000	45.91	-1.15	44.76	74.00	-29.24	peak	Vertical
2	3250.000	49.38	0.92	50.30	74.00	-23.70	peak	Vertical
3	4249.000	41.62	2.06	43.68	74.00	-30.32	peak	Vertical
4	4870.000	44.42	2.31	46.73	74.00	-27.27	peak	Vertical
5	5626.000	39.82	4.07	43.89	74.00	-30.11	peak	Vertical
6	6247.000	44.49	5.63	50.12	74.00	-23.88	peak	Vertical
7	1630.000	46.63	-4.57	42.06	74.00	-31.94	peak	Horizontal
8	3250.000	51.16	0.92	52.08	74.00	-21.92	peak	Horizontal
9	4204.000	42.21	1.98	44.19	74.00	-29.81	peak	Horizontal
10	4870.000	44.62	2.31	46.93	74.00	-27.07	peak	Horizontal
11	5977.000	40.14	5.19	45.33	74.00	-28.67	peak	Horizontal
12	6247.000	41.78	5.63	47.41	74.00	-26.59	peak	Horizontal

Mode: TX/ IEEE 802.11g (antenna 0)

Highest channel (2462MHz)

Date: 2019-03-24

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	2467.000	46.59	-1.32	45.27	74.00	-28.73	peak	Vertical
2	3286.000	49.94	0.91	50.85	74.00	-23.15	peak	Vertical
3	4267.000	42.28	2.10	44.38	74.00	-29.62	peak	Vertical
4	4924.000	45.70	2.28	47.98	74.00	-26.02	peak	Vertical
5	5653.000	40.72	4.16	44.88	74.00	-29.12	peak	Vertical
6	6247.000	44.86	5.63	50.49	74.00	-23.51	peak	Vertical
7	1792.000	45.83	-3.59	42.24	74.00	-31.76	peak	Horizontal
8	2458.000	46.75	-1.33	45.42	74.00	-28.58	peak	Horizontal
9	3286.000	50.98	0.91	51.89	74.00	-22.11	peak	Horizontal
10	4285.000	42.54	2.14	44.68	74.00	-29.32	peak	Horizontal
11	4924.000	43.72	2.28	46.00	74.00	-28.00	peak	Horizontal
12	5941.000	40.50	5.07	45.57	74.00	-28.43	peak	Horizontal

Mode: TX / IEEE 802.11g (antenna 1)

Lowest channel (2412MHz)

Date: 2019-03-24

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	2107.000	46.93	-2.10	44.83	74.00	-29.17	peak	Vertical
2	2818.000	44.97	0.13	45.10	74.00	-28.90	peak	Vertical
3	3385.000	43.45	0.92	44.37	74.00	-29.63	peak	Vertical
4	4825.000	48.89	2.34	51.23	74.00	-22.77	peak	Vertical
5	5869.000	40.41	4.84	45.25	74.00	-28.75	peak	Vertical
6	6247.000	43.45	5.63	49.08	74.00	-24.92	peak	Vertical
7	2161.000	45.42	-1.99	43.43	74.00	-30.57	peak	Horizontal
8	2647.000	44.61	-0.61	44.00	74.00	-30.00	peak	Horizontal
9	3349.000	43.29	0.92	44.21	74.00	-29.79	peak	Horizontal
10	4825.000	47.21	2.34	49.55	74.00	-24.45	peak	Horizontal
11	5545.000	40.59	3.80	44.39	74.00	-29.61	peak	Horizontal
12	6247.000	42.40	5.63	48.03	74.00	-25.97	peak	Horizontal

Mode: TX/ IEEE 802.11g (antenna 1)

Middle channel (2437 MHz)

Date: 2019-03-24

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	1792.000	45.80	-3.59	42.21	74.00	-31.79	peak	Vertical
2	3088.000	43.59	0.90	44.49	74.00	-29.51	peak	Vertical
3	4024.000	42.58	1.63	44.21	74.00	-29.79	peak	Vertical
4	4879.000	48.35	2.31	50.66	74.00	-23.34	peak	Vertical
5	5806.000	40.45	4.64	45.09	74.00	-28.91	peak	Vertical
6	6247.000	43.69	5.63	49.32	74.00	-24.68	peak	Vertical
7	2431.000	46.99	-1.40	45.59	74.00	-28.41	peak	Horizontal
8	3349.000	43.77	0.92	44.69	74.00	-29.31	peak	Horizontal
9	4879.000	46.17	2.31	48.48	74.00	-25.52	peak	Horizontal
10	5806.000	40.01	4.64	44.65	74.00	-29.35	peak	Horizontal
11	6247.000	41.67	5.63	47.30	74.00	-26.70	peak	Horizontal
12	6877.000	40.68	6.80	47.48	74.00	-26.52	peak	Horizontal

Mode: TX/ IEEE 802.11g (antenna 1)

Highest channel (2462MHz)

Date: 2019-03-24

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	1891.000	48.23	-3.00	45.23	74.00	-28.77	peak	Vertical
2	2467.000	48.78	-1.32	47.46	74.00	-26.54	peak	Vertical
3	3349.000	42.84	0.92	43.76	74.00	-30.24	peak	Vertical
4	4186.000	42.39	1.94	44.33	74.00	-29.67	peak	Vertical
5	4924.000	45.28	2.28	47.56	74.00	-26.44	peak	Vertical
6	6247.000	43.38	5.63	49.01	74.00	-24.99	peak	Vertical
7	2161.000	45.73	-1.99	43.74	74.00	-30.26	peak	Horizontal
8	2845.000	44.20	0.25	44.45	74.00	-29.55	peak	Horizontal
9	3772.000	43.61	1.29	44.90	74.00	-29.10	peak	Horizontal
10	4915.000	44.33	2.28	46.61	74.00	-27.39	peak	Horizontal
11	5518.000	40.33	3.72	44.05	74.00	-29.95	peak	Horizontal
12	6211.000	40.62	5.58	46.20	74.00	-27.80	peak	Horizontal

Mode: TX / IEEE 802.11n HT20 (combine with antenna 0 and antenna 1)

Lowest channel (2412MHz)

Date: 2019-03-24

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	1891.000	48.66	-3.00	45.66	74.00	-28.34	peak	Vertical
2	3214.000	46.76	0.92	47.68	74.00	-26.32	peak	Vertical
3	3772.000	42.46	1.29	43.75	74.00	-30.25	peak	Vertical
4	4825.000	51.06	2.34	53.40	74.00	-20.60	peak	Vertical
5	4825.000	38.09	2.34	40.43	54.00	-13.57	peak	Vertical
6	6247.000	43.62	5.63	49.25	74.00	-24.75	peak	Vertical
7	1603.000	46.06	-4.72	41.34	74.00	-32.66	peak	Horizontal
8	2422.000	46.74	-1.42	45.32	74.00	-28.68	peak	Horizontal
9	3214.000	48.43	0.92	49.35	74.00	-24.65	peak	Horizontal
10	3907.000	41.83	1.47	43.30	74.00	-30.70	peak	Horizontal
11	4816.000	48.88	2.35	51.23	74.00	-22.77	peak	Horizontal
12	5968.000	40.55	5.15	45.70	74.00	-28.30	peak	Horizontal

Mode: TX/ IEEE 802.11n HT20 (combine with antenna 0 and antenna 1)

Middle channel (2437 MHz)

Date: 2019-03-24

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	1891.000	51.30	-3.00	48.30	74.00	-25.70	peak	Vertical
2	2431.000	47.52	-1.40	46.12	74.00	-27.88	peak	Vertical
3	3250.000	49.02	0.92	49.94	74.00	-24.06	peak	Vertical
4	4870.000	53.88	2.31	56.19	74.00	-17.81	peak	Vertical
5	4870.000	44.05	2.31	46.36	54.00	-7.64	AVG	Vertical
6	5635.000	41.93	4.09	46.02	74.00	-27.98	peak	Vertical
7	6247.000	43.78	5.63	49.41	74.00	-24.59	peak	Vertical
8	2440.000	51.62	-1.36	50.26	74.00	-23.74	peak	Horizontal
9	3250.000	49.88	0.92	50.80	74.00	-23.20	peak	Horizontal
10	3790.000	42.82	1.31	44.13	74.00	-29.87	peak	Horizontal
11	4870.000	50.33	2.31	52.64	74.00	-21.36	peak	Horizontal
12	4870.000	38.92	2.31	41.23	54.00	-12.77	AVG	Horizontal
13	6247.000	41.58	5.63	47.21	74.00	-26.79	peak	Horizontal
14	7354.000	39.93	7.92	47.85	74.00	-26.15	peak	Horizontal

Mode: TX/ IEEE 802.11n HT20 (combine with antenna 0 and antenna 1)

Highest channel (2462MHz)

Date: 2019-03-24

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	2467.000	50.88	-1.32	49.56	74.00	-24.44	peak	Vertical
2	3286.000	49.56	0.91	50.47	74.00	-23.53	peak	Vertical
3	4249.000	41.81	2.06	43.87	74.00	-30.13	peak	Vertical
4	4924.000	52.26	2.28	54.54	74.00	-19.46	peak	Vertical
5	4924.000	40.08	2.28	42.36	54.00	-11.64	VG	Vertical
6	5716.000	40.38	4.35	44.73	74.00	-29.27	peak	Vertical
7	6247.000	43.79	5.63	49.42	74.00	-24.58	peak	Vertical
8	2458.000	48.92	-1.33	47.59	74.00	-26.41	peak	Horizontal
9	3286.000	49.74	0.91	50.65	74.00	-23.35	peak	Horizontal
10	4141.000	42.11	1.86	43.97	74.00	-30.03	peak	Horizontal
11	4915.000	47.59	2.28	49.87	74.00	-24.13	peak	Horizontal
12	6058.000	40.08	5.35	45.43	74.00	-28.57	peak	Horizontal
13	6940.000	40.21	6.93	47.14	74.00	-26.86	peak	Horizontal

Mode: TX / IEEE 802.11n HT40 (combine with antenna 0 and antenna 1)

Lowest channel (2422MHz)

Date: 2019-03-24

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	2134.000	46.05	-2.06	43.99	74.00	-30.01	peak	Vertical
2	2638.000	45.32	-0.65	44.67	74.00	-29.33	peak	Vertical
3	3232.000	48.98	0.91	49.89	74.00	-24.11	peak	Vertical
4	3754.000	43.65	1.25	44.90	74.00	-29.10	peak	Vertical
5	4825.000	47.85	2.34	50.19	74.00	-23.81	peak	Vertical
6	6247.000	43.84	5.63	49.47	74.00	-24.53	peak	Vertical
7	2431.000	47.48	-1.40	46.08	74.00	-27.92	peak	Horizontal
8	3232.000	49.33	0.91	50.24	74.00	-23.76	peak	Horizontal
9	4195.000	42.61	1.96	44.57	74.00	-29.43	peak	Horizontal
10	4843.000	46.54	2.33	48.87	74.00	-25.13	peak	Horizontal
11	5734.000	41.29	4.41	45.70	74.00	-28.30	peak	Horizontal
12	6247.000	43.24	5.63	48.87	74.00	-25.13	peak	Horizontal

Mode: TX/ IEEE 802.11n HT40 (combine with antenna 0 and antenna 1)

Middle channel (2437 MHz)

Date: 2019-03-24

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	2449.000	46.20	-1.35	44.85	74.00	-29.15	peak	Vertical
2	3250.000	48.80	0.92	49.72	74.00	-24.28	peak	Vertical
3	4195.000	43.40	1.96	45.36	74.00	-28.64	peak	Vertical
4	4870.000	47.97	2.31	50.28	74.00	-23.72	peak	Vertical
5	5626.000	41.26	4.07	45.33	74.00	-28.67	peak	Vertical
6	6247.000	44.20	5.63	49.83	74.00	-24.17	peak	Vertical
7	2449.000	48.80	-1.35	47.45	74.00	-26.55	peak	Horizontal
8	3250.000	49.99	0.92	50.91	74.00	-23.09	peak	Horizontal
9	4222.000	42.33	2.02	44.35	74.00	-29.65	peak	Horizontal
10	4870.000	46.65	2.31	48.96	74.00	-25.04	peak	Horizontal
11	6121.000	40.47	5.44	45.91	74.00	-28.09	peak	Horizontal
12	7300.000	41.28	7.79	49.07	74.00	-24.93	peak	Horizontal

Mode: TX/ IEEE 802.11n HT40 (combine with antenna 0 and antenna 1)

Highest channel (2452MHz)

Date: 2019-03-24

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	2467.000	47.64	-1.32	46.32	74.00	-27.68	peak	Vertical
2	3268.000	49.88	0.92	50.80	74.00	-23.20	peak	Vertical
3	4213.000	42.10	2.00	44.10	74.00	-29.90	peak	Vertical
4	4888.000	47.21	2.30	49.51	74.00	-24.49	peak	Vertical
5	5833.000	40.35	4.73	45.08	74.00	-28.92	peak	Vertical
6	6247.000	42.24	5.63	47.87	74.00	-26.13	peak	Vertical
7	2449.000	48.78	-1.35	47.43	74.00	-26.57	peak	Horizontal
8	3268.000	49.62	0.92	50.54	74.00	-23.46	peak	Horizontal
9	4132.000	42.20	1.84	44.04	74.00	-29.96	peak	Horizontal
10	4897.000	46.02	2.29	48.31	74.00	-25.69	peak	Horizontal
11	6247.000	43.49	5.63	49.12	74.00	-24.88	peak	Horizontal
12	7354.000	39.90	7.92	47.82	74.00	-26.18	peak	Horizontal

Remark:

- 1 Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2 Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3 Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4 Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

8. 6DB BANDWIDTH


8.1. LIMITS

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2. TEST PROCEDURES

- 1) Remove the antenna from the EUT, and then connect a low loss RF cable from antenna port to the spectrum analyzer.
- 2) Set resolution bandwidth (RBW) = 100kHz. Set the video bandwidth (VBW) $\geq 3 \times$ RBW. Detector = Peak. Trace mode = max hold. Sweep = auto couple. Allow the trace to stabilize, record 6dB bandwidth value.
- 3) Repeat above procedures until all frequencies measured were complete.

8.3. TEST SETUP



8.4. TEST RESULTS

Test mode: IEEE 802.11b

Channel No.	Frequency (MHz)	Bandwidth (kHz)		Limit (kHz)	Test Result
		antenna 0	antenna 1		
1	2412	8073	8073	>500	PASS
6	2437	8073	8074		PASS
11	2462	8073	8074		PASS

Test mode: IEEE 802.11g

Channel No.	Frequency (MHz)	Bandwidth (kHz)		Limit (kHz)	Test Result
		antenna 0	antenna 1		
1	2412	16370	16370	>500	PASS
6	2437	16360	16350		PASS
11	2462	16360	16390		PASS


Test mode: IEEE 802.11n HT20

Channel No.	Frequency (MHz)	Bandwidth (kHz)		Limit (kHz)	Test Result
		antenna 0	antenna 1		
1	2412	17610	17590	>500	PASS
6	2437	17590	17600		PASS
11	2462	17600	17590		PASS


Test mode: IEEE 802.11n HT40

Channel No.	Frequency (MHz)	Bandwidth (kHz)		Limit (kHz)	Test Result
		antenna 0	antenna 1		
3	2422	36360	36350	>500	PASS
6	2437	36350	36380		PASS
9	2452	36330	36360		PASS


802.11b mode (antenna 0):
Channel 2412MHz

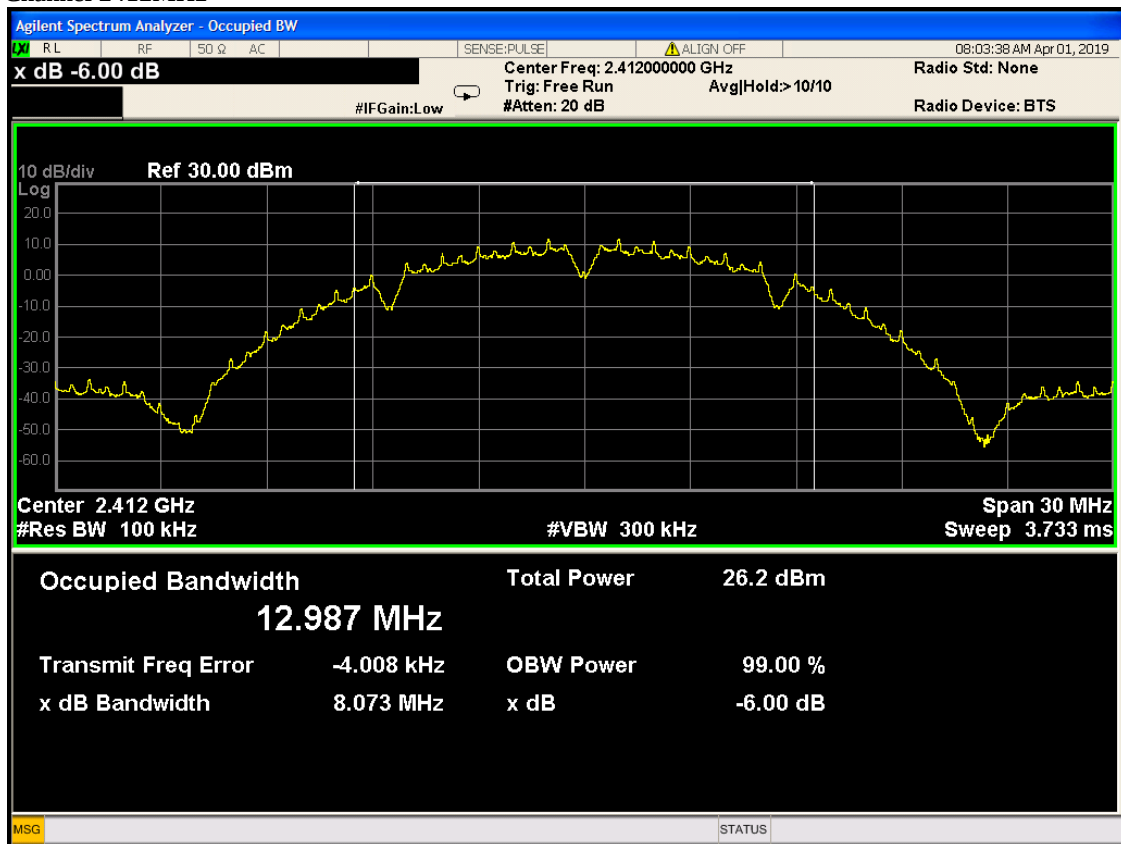

Channel 2437MHz

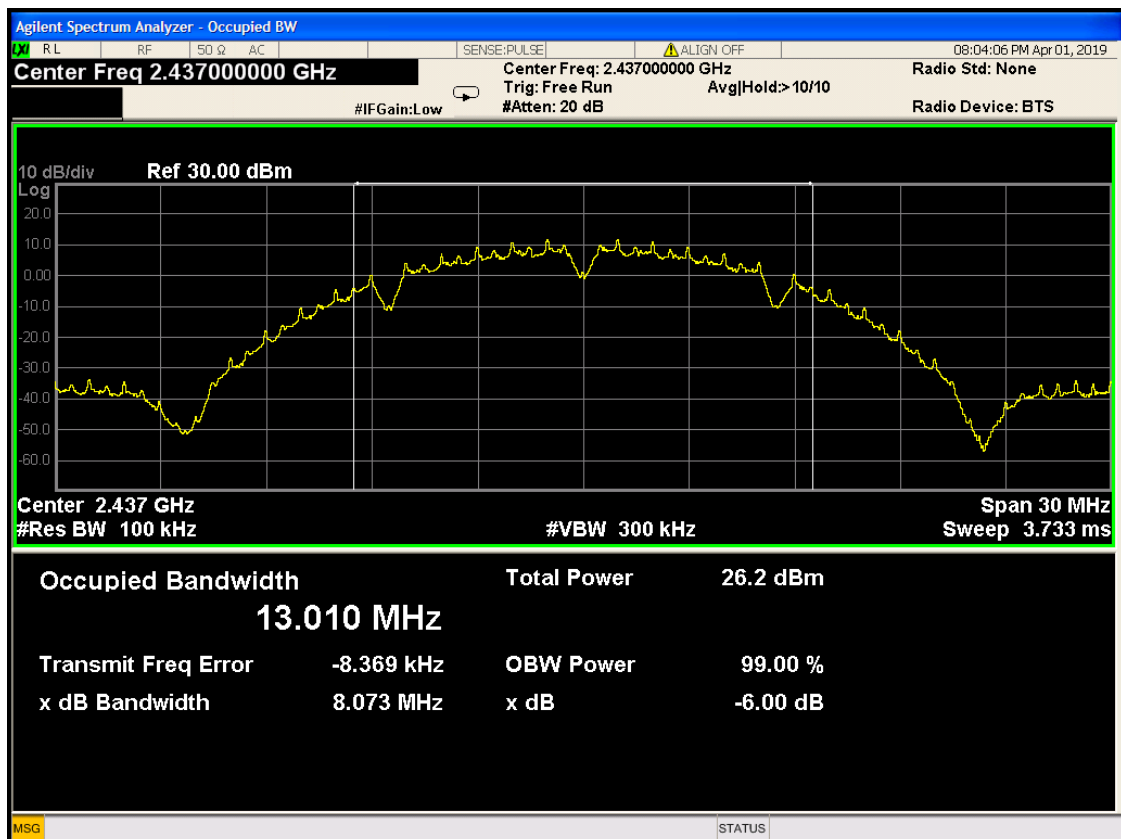


Channel 2462MHz

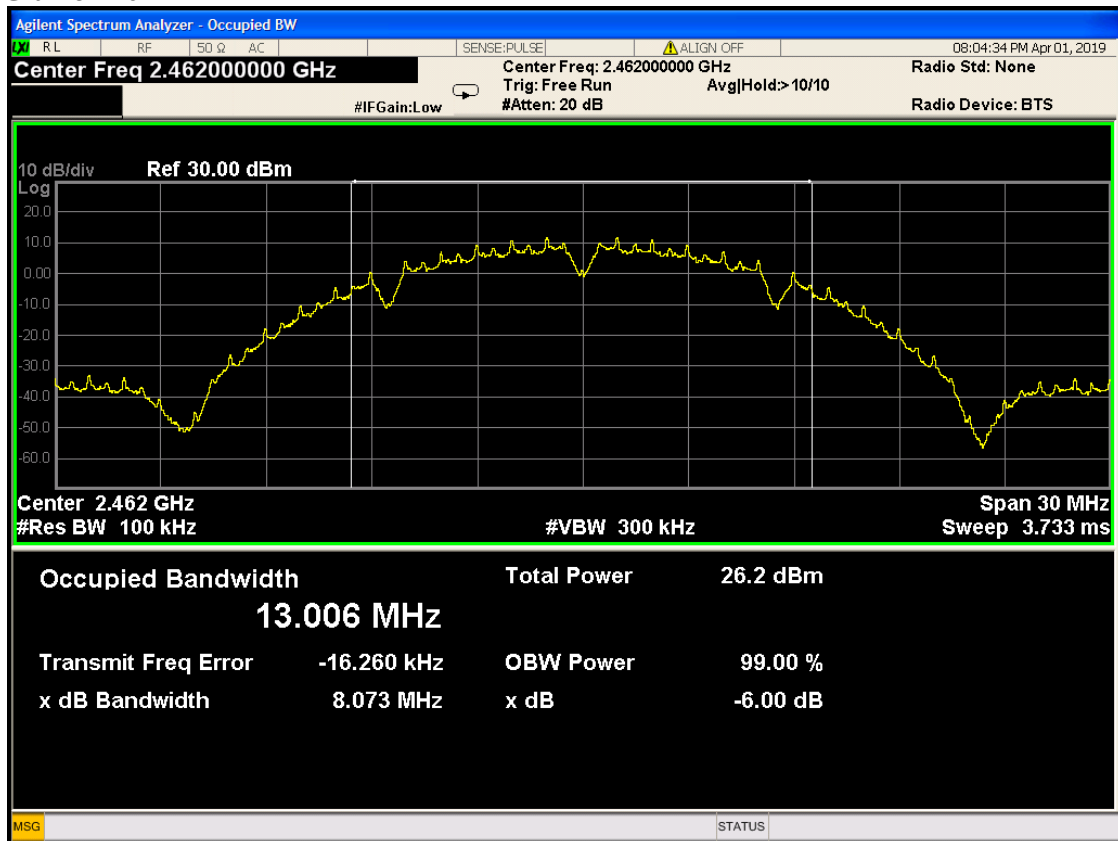


802.11b mode (antenna 1):


Channel 2412MHz

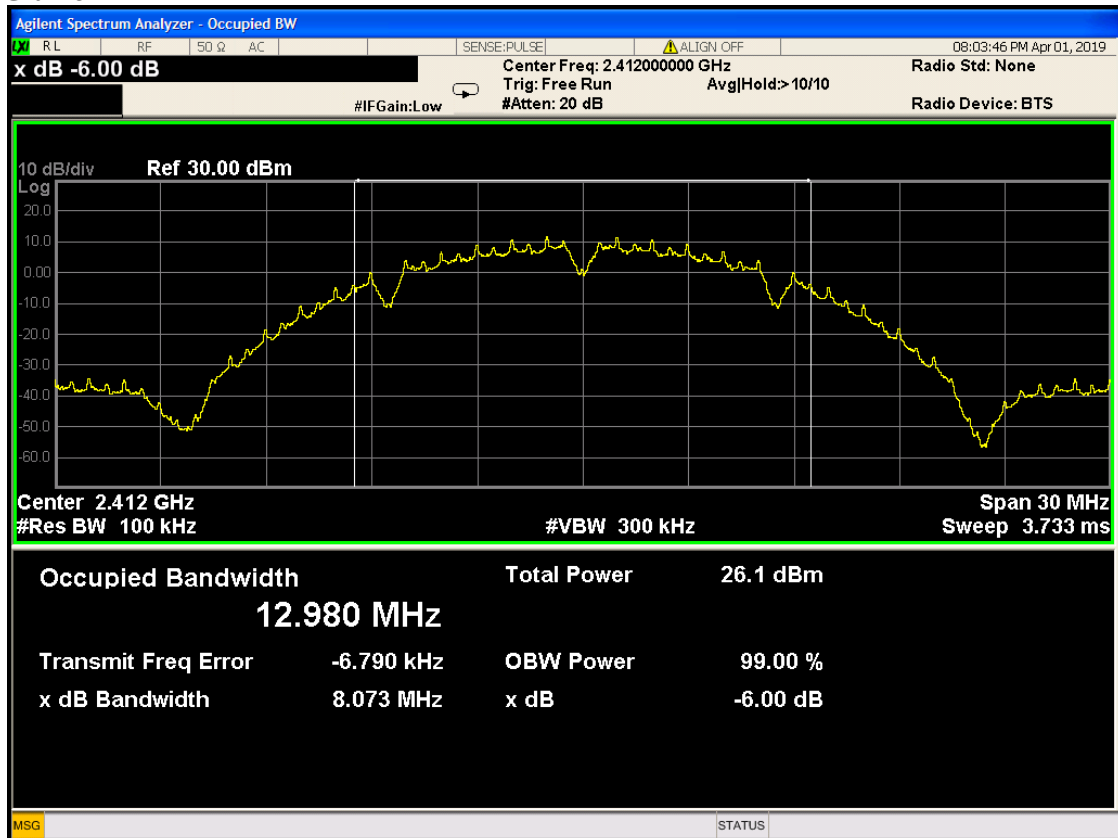


Channel 2437MHz

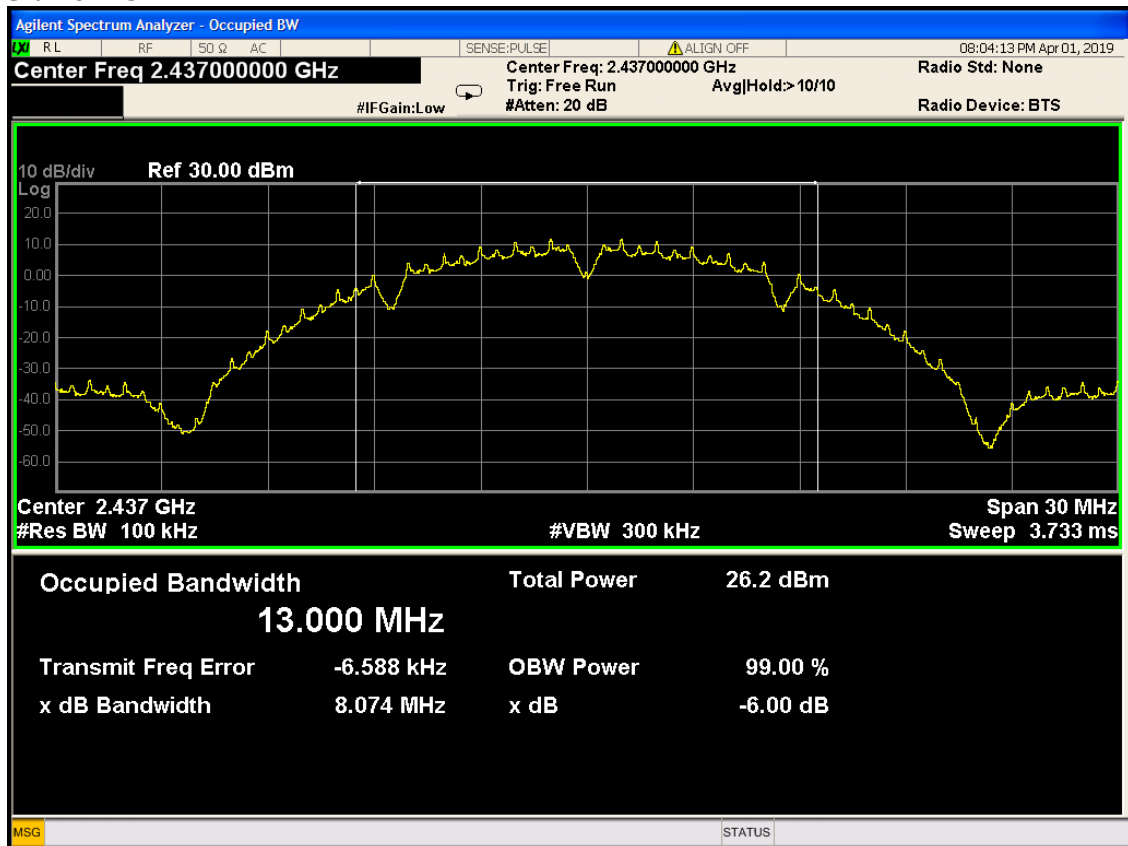


Channel 2462MHz

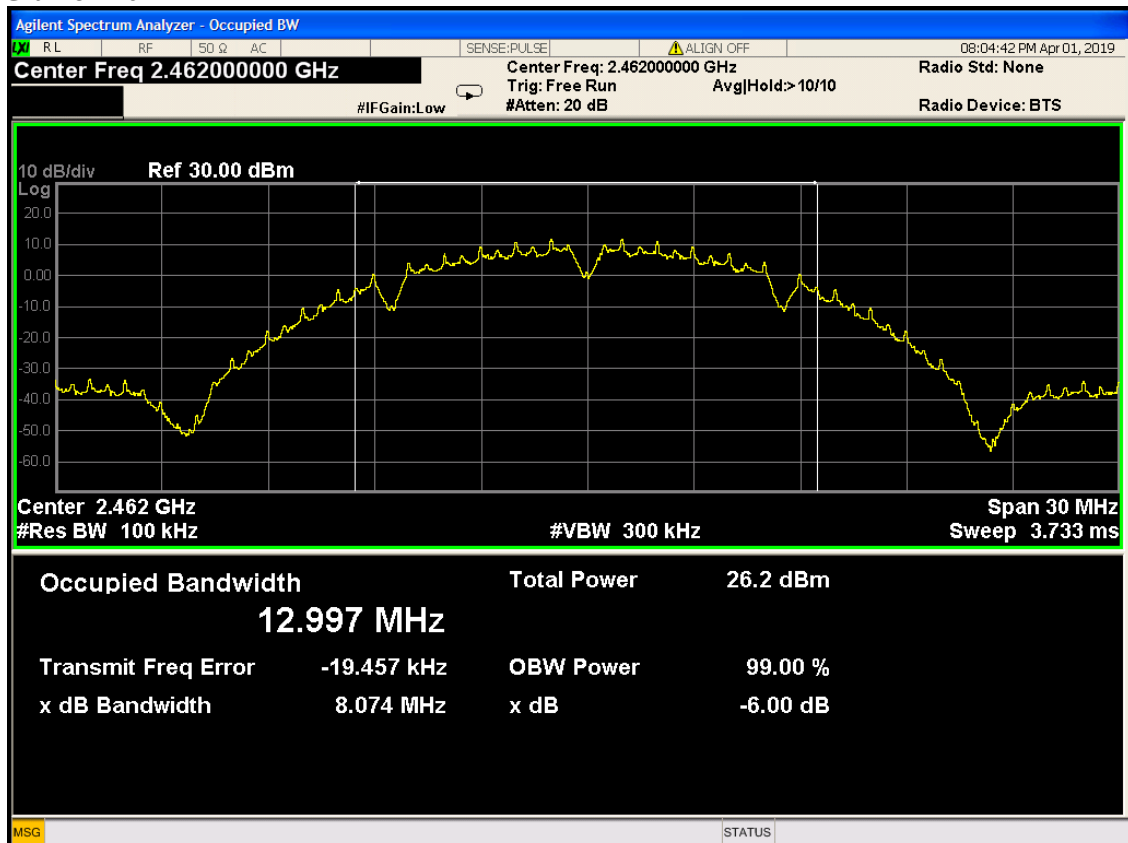


802.11g mode (antenna 0):
Channel 2412MHz

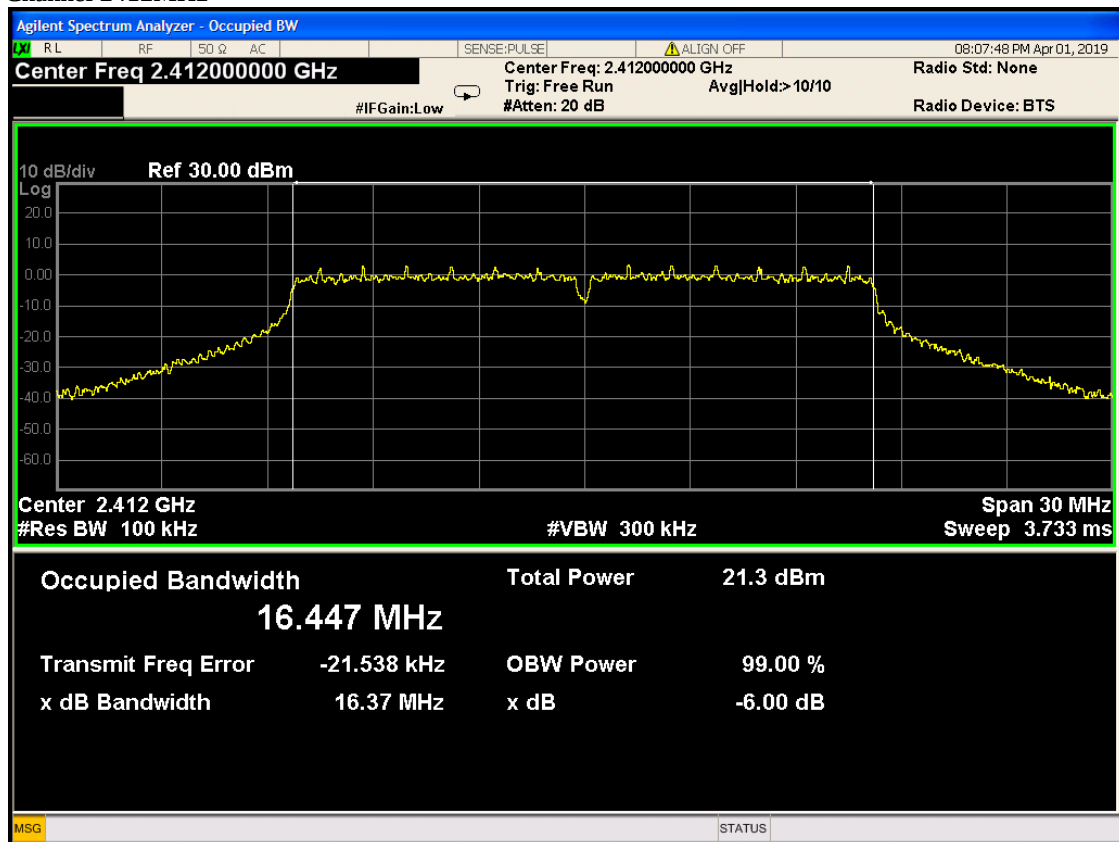

Channel 2437MHz

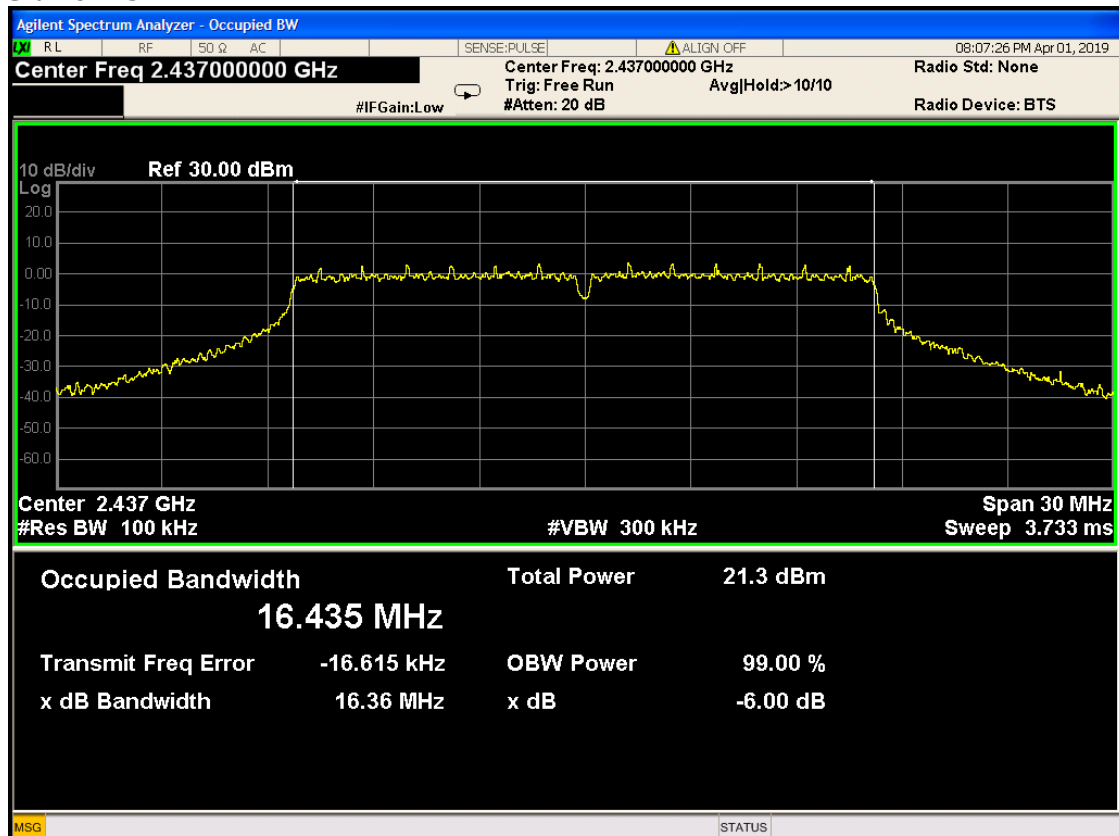


Channel 2462MHz

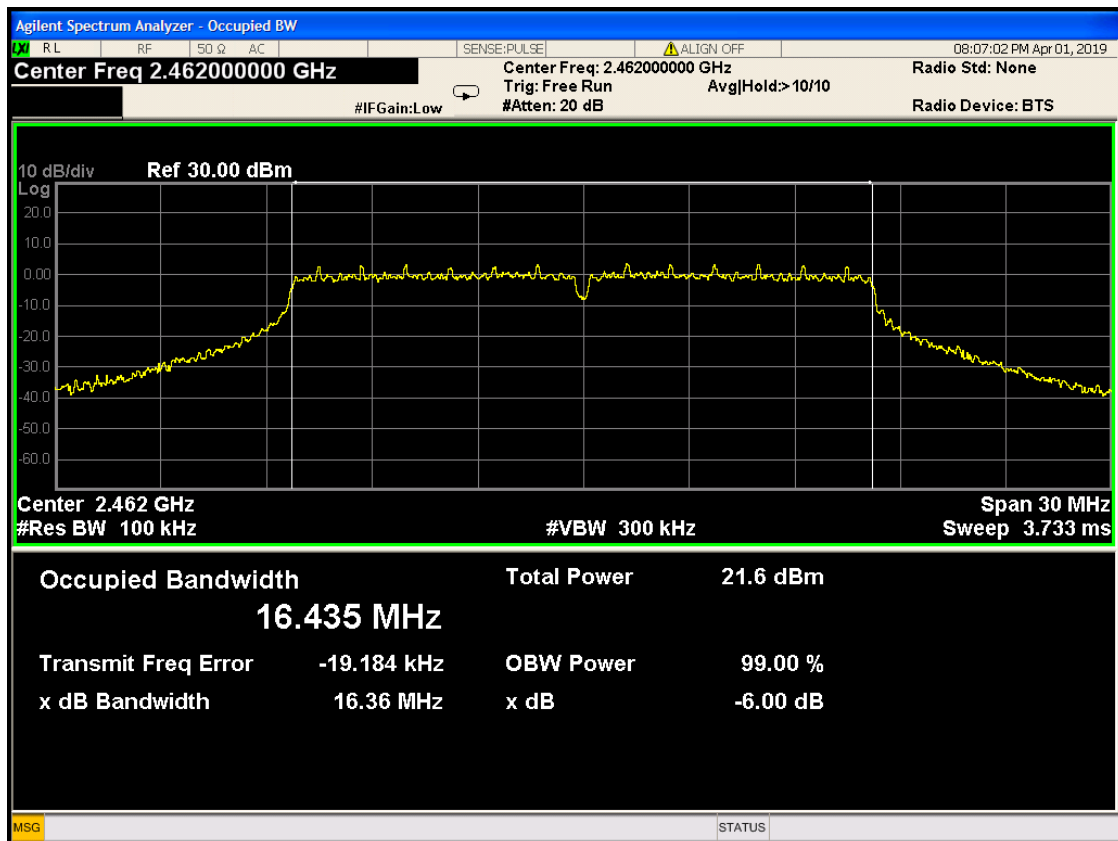


802.11g mode (antenna 1):


Channel 2412MHz

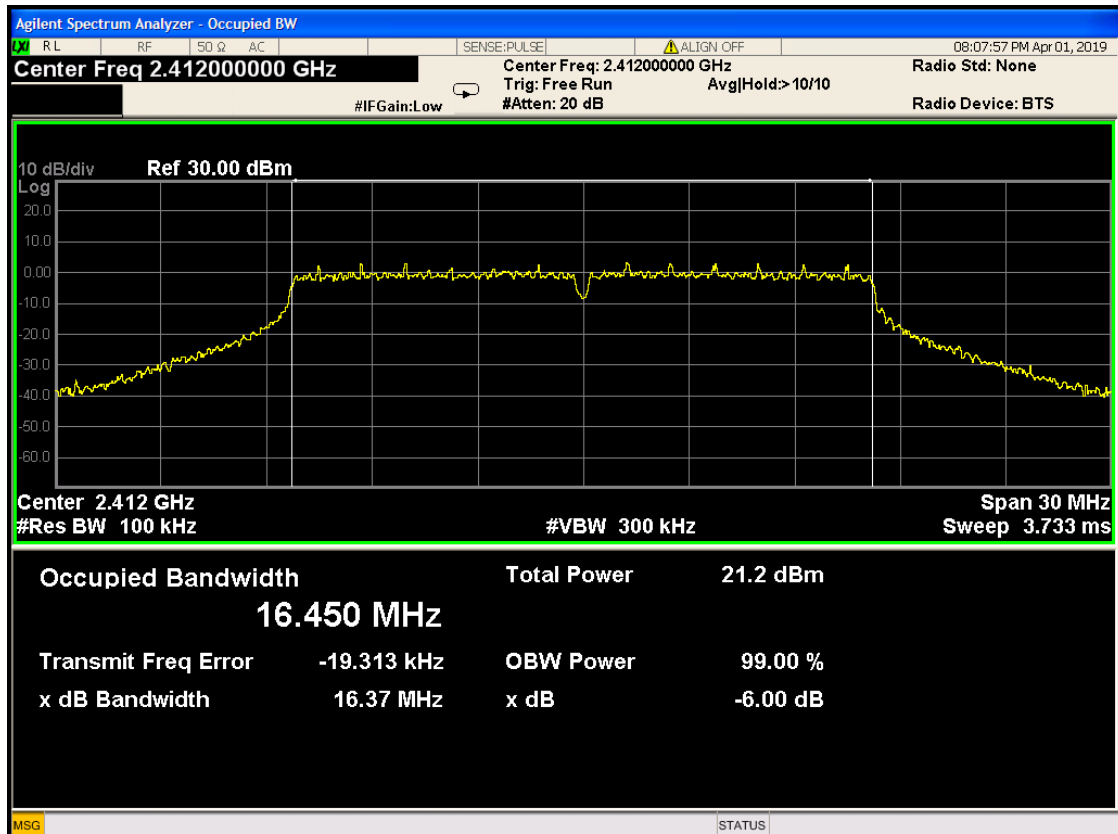


Channel 2437MHz

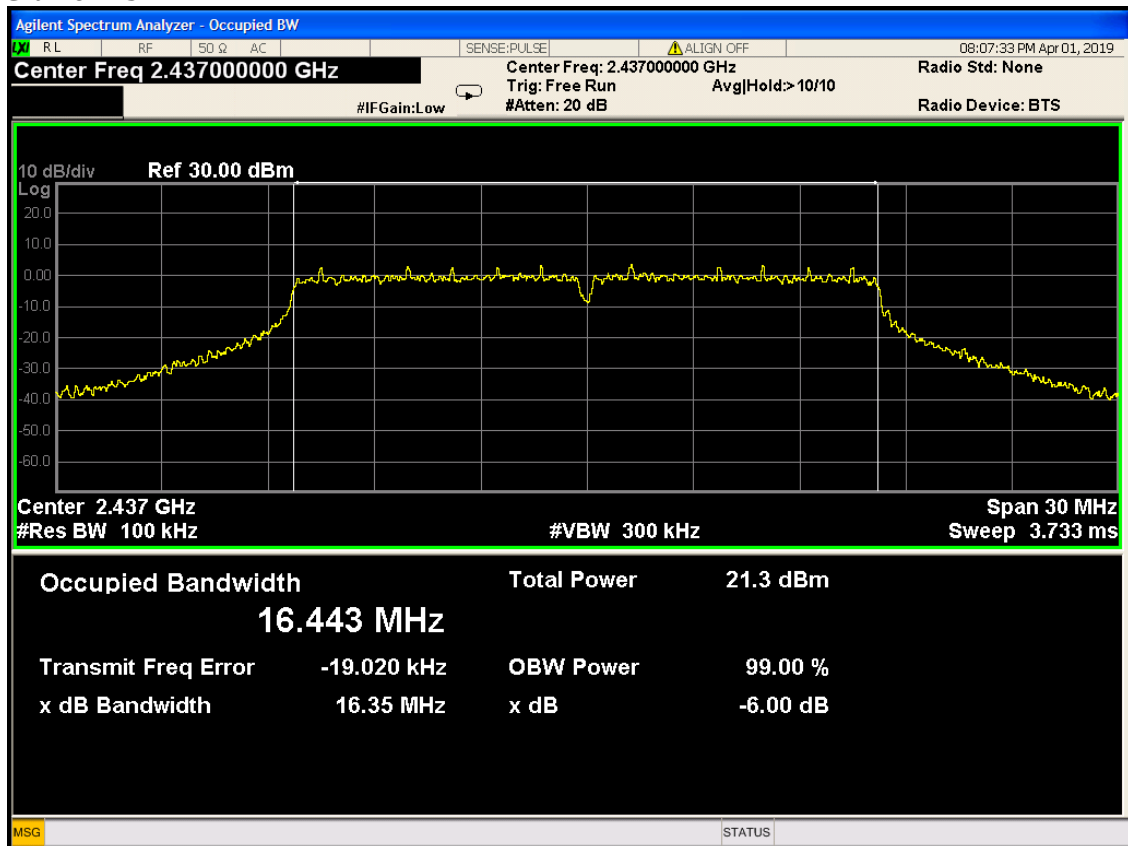


Channel 2462MHz

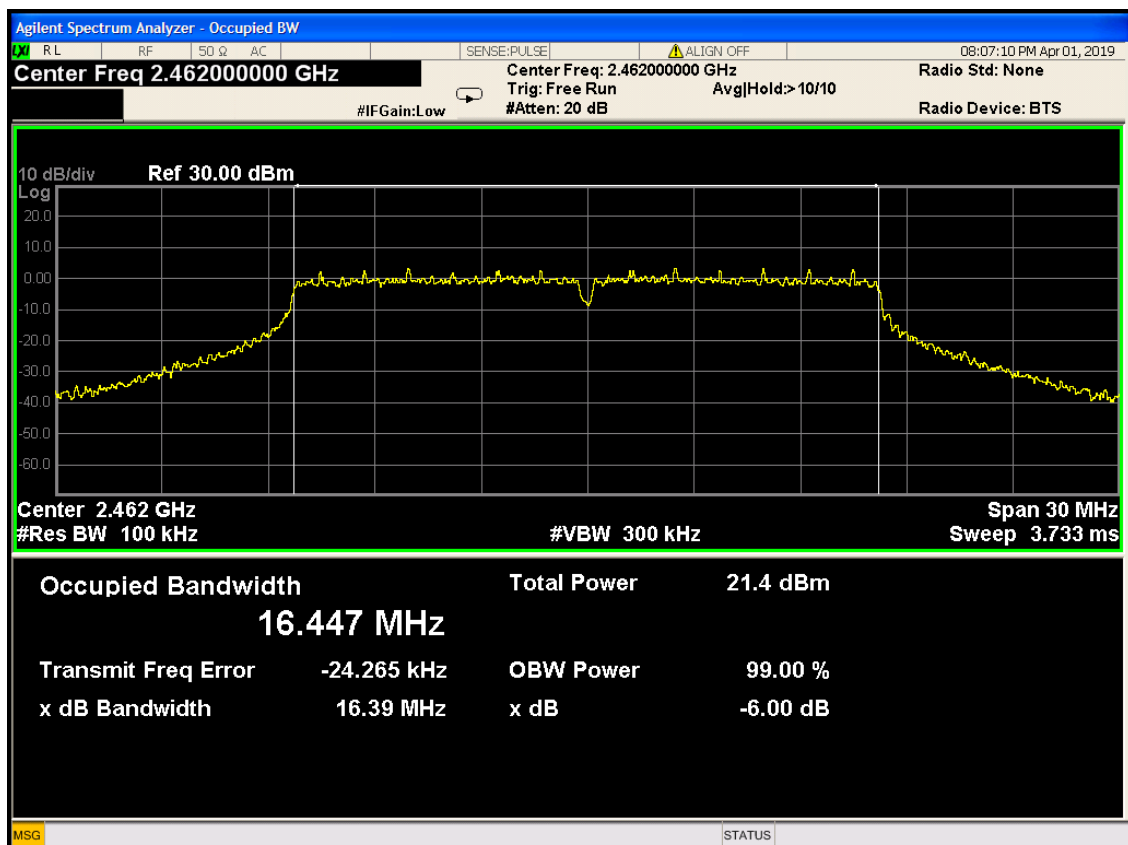


802.11n HT20 mode (antenna 0):
Channel 2412MHz

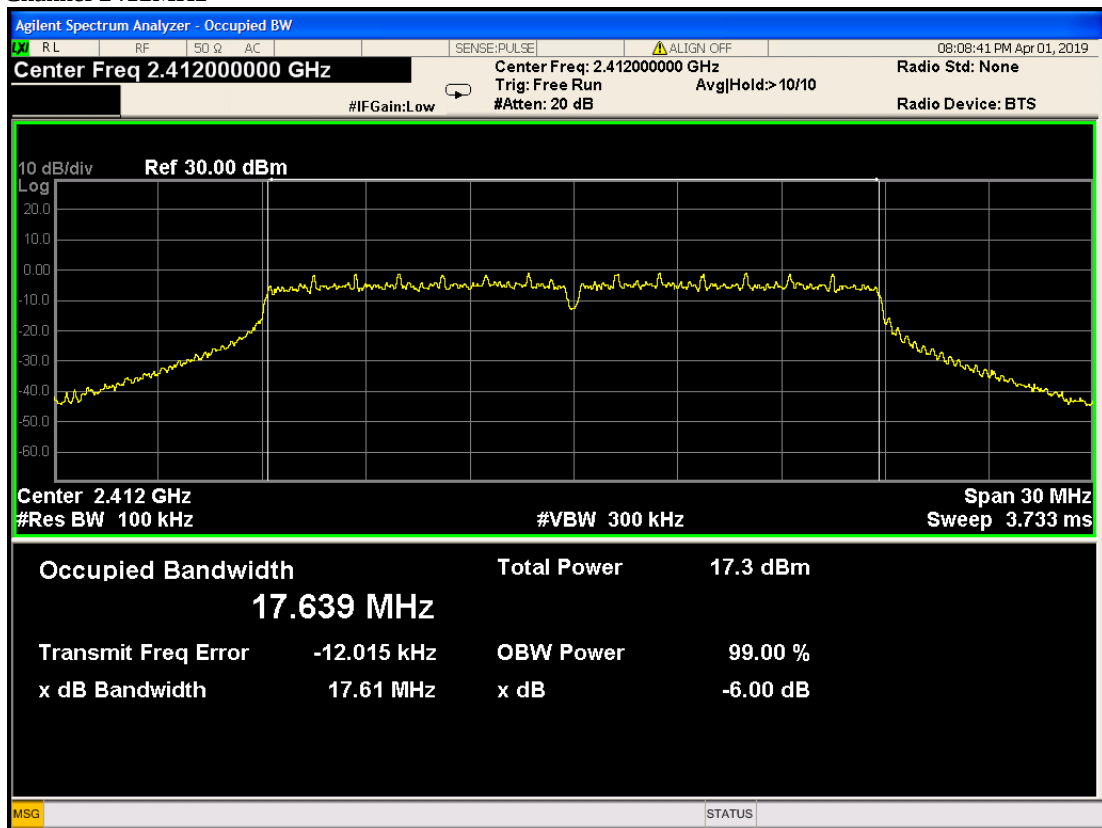

Channel 2437MHz

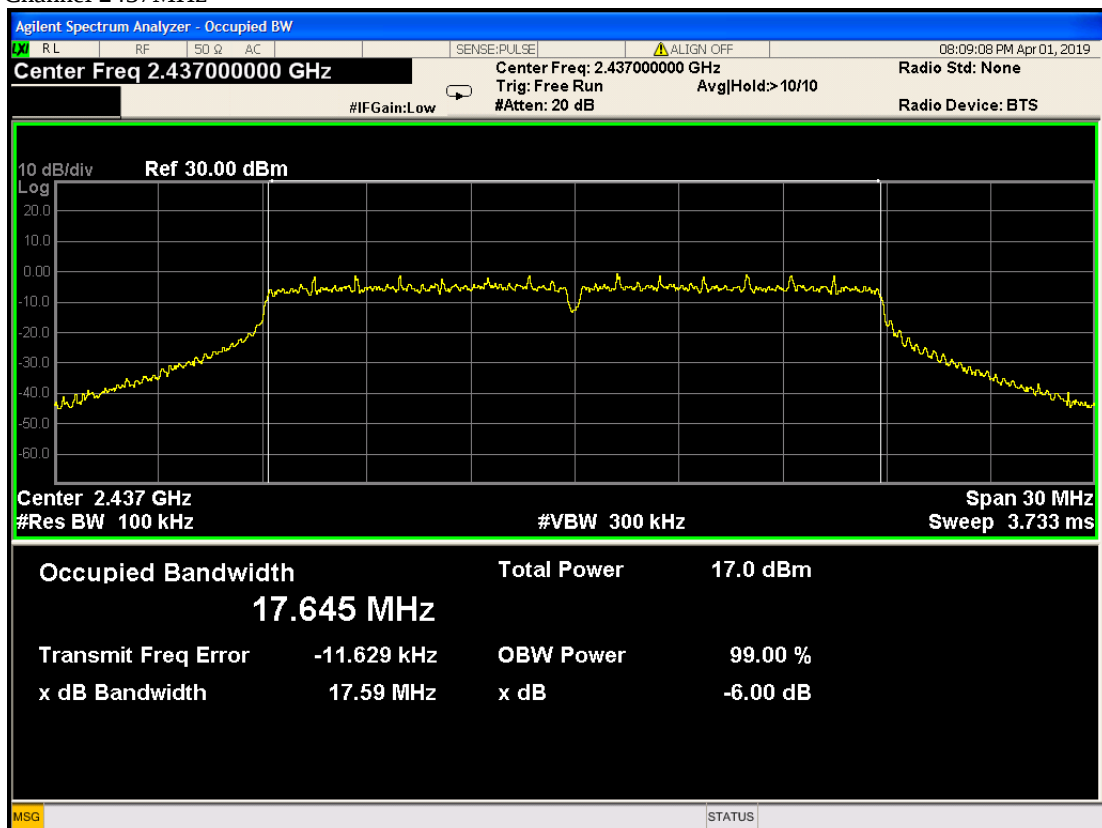


Channel 2462MHz

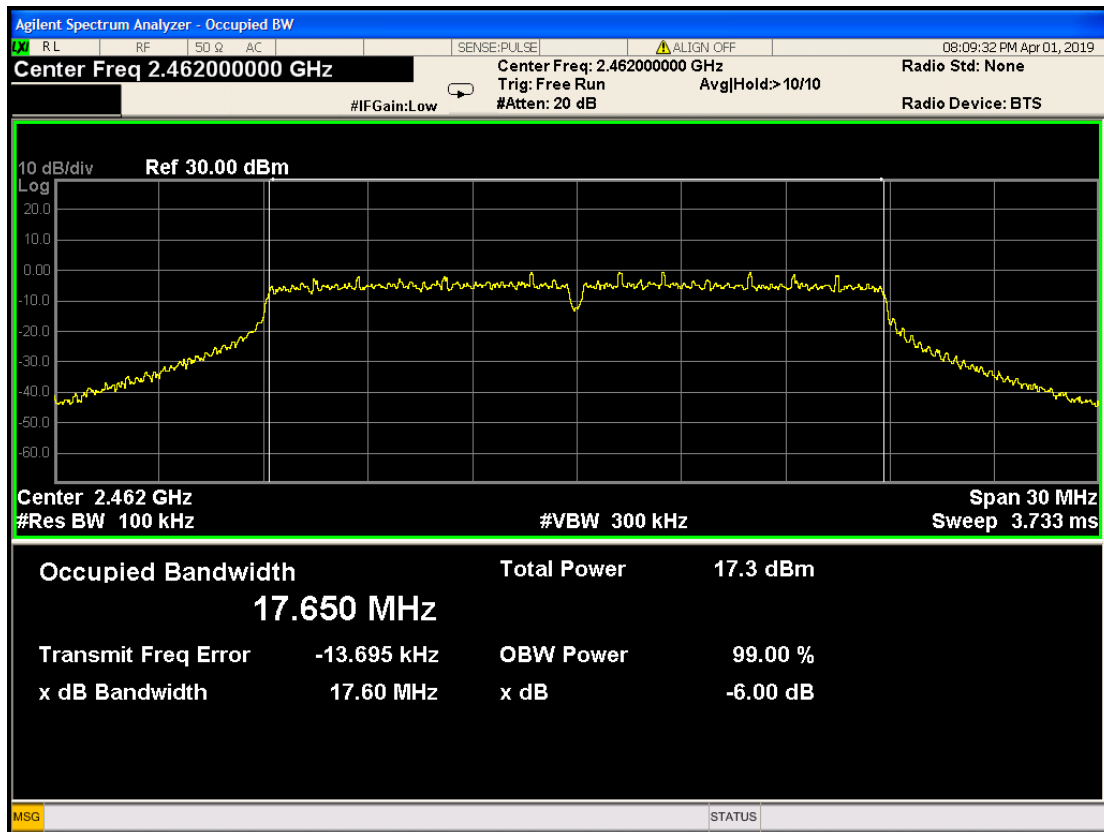


802.11n HT20 mode (antenna 1):


Channel 2412MHz

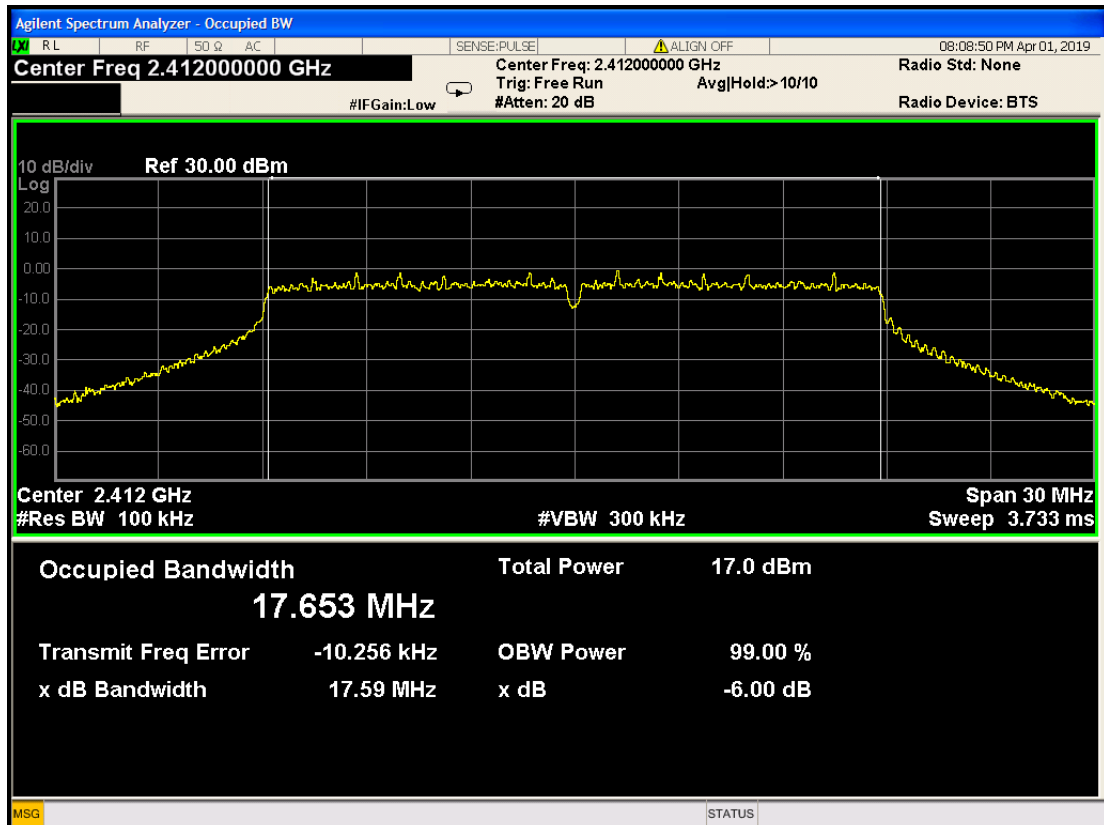


Channel 2437MHz

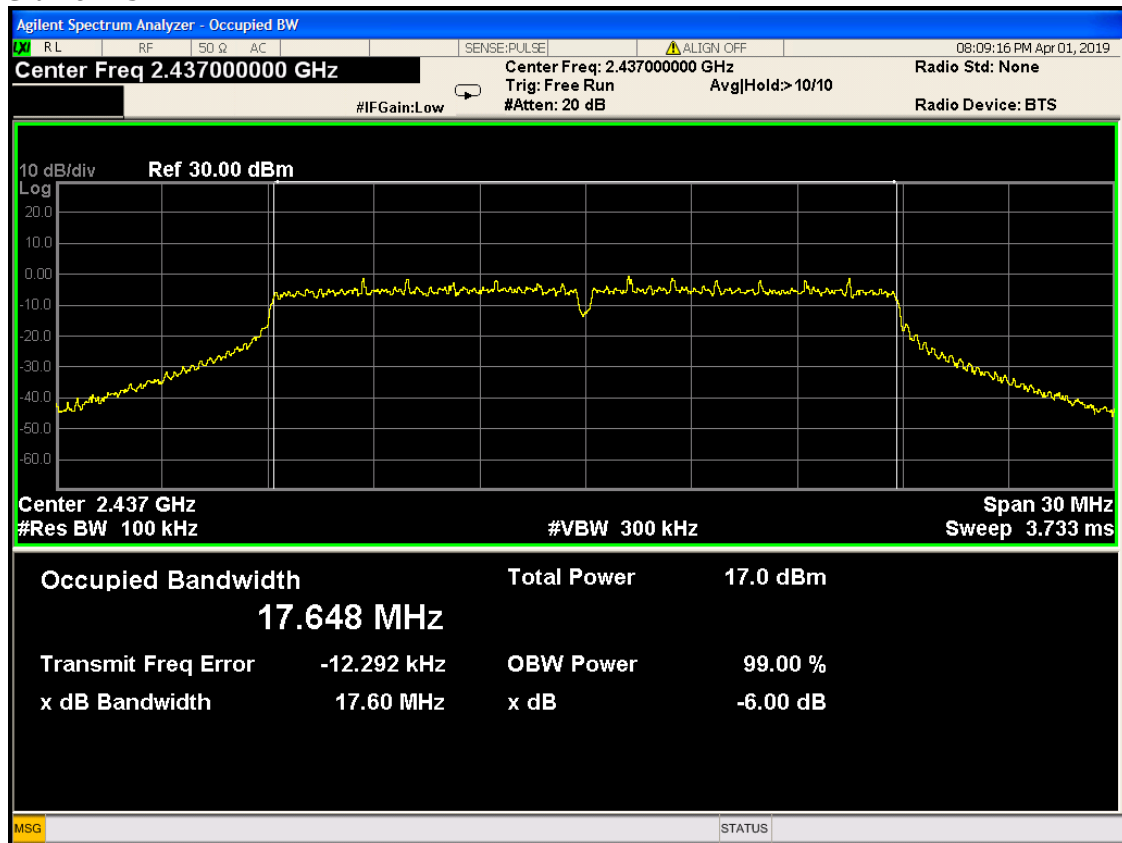


Channel 2462MHz

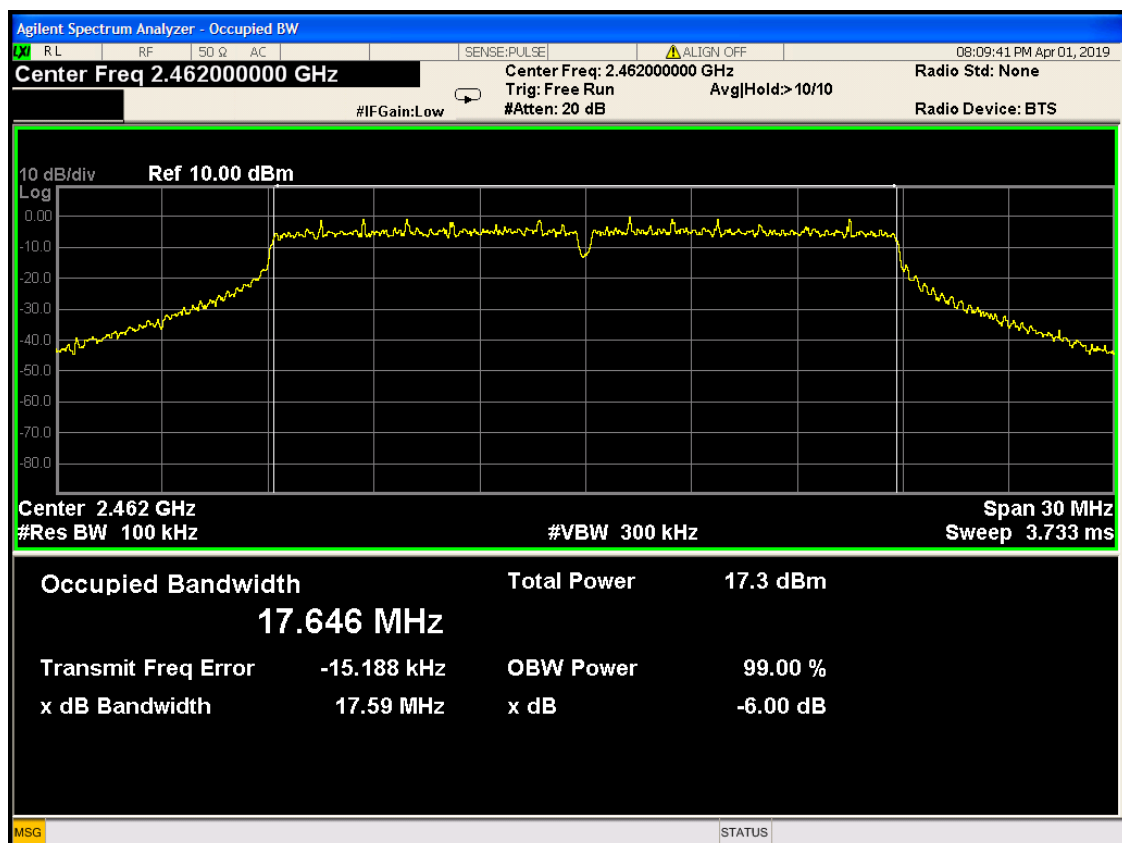


802.11n HT40 mode (antenna 0):
Channel 2422MHz

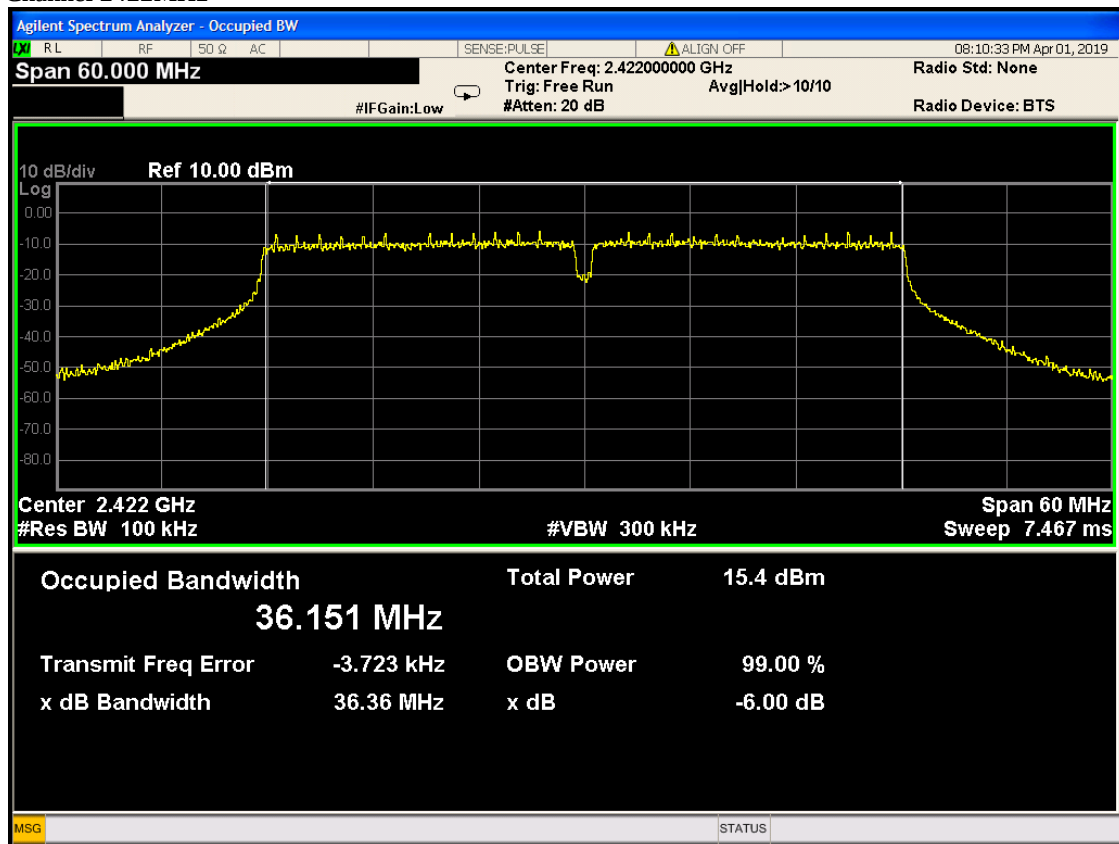

Channel 2437MHz

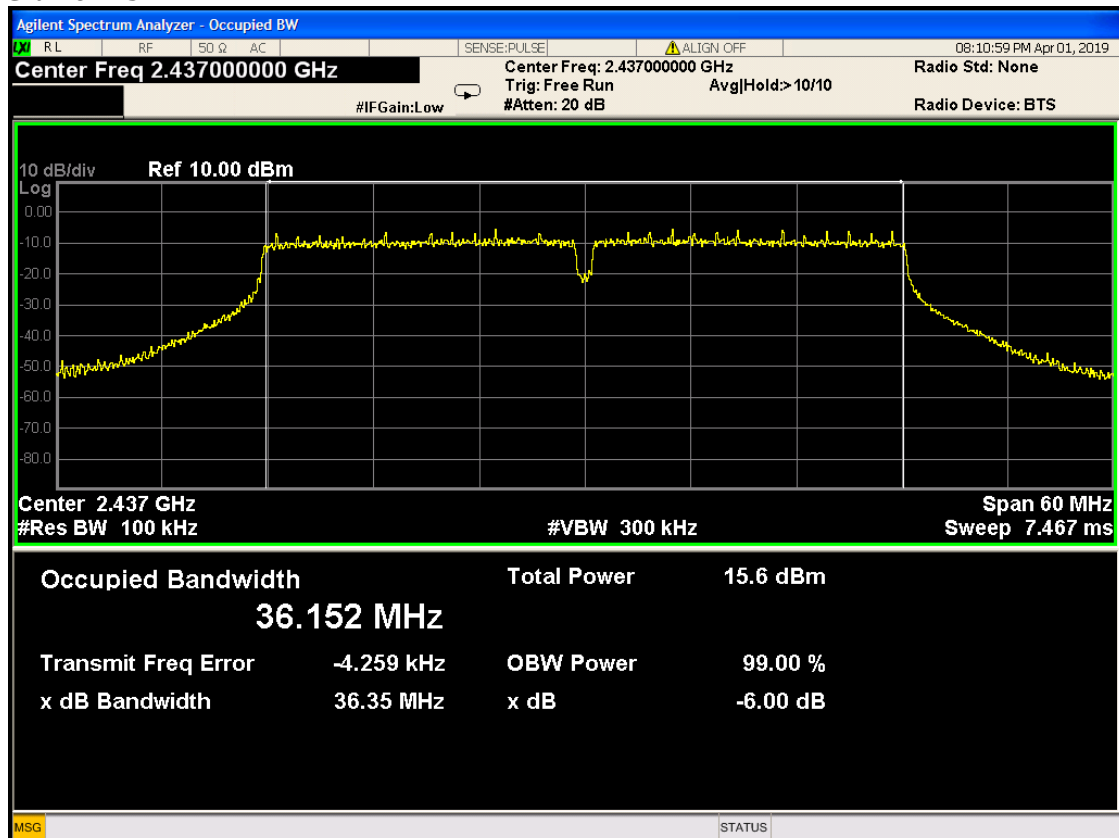


Channel 2452MHz

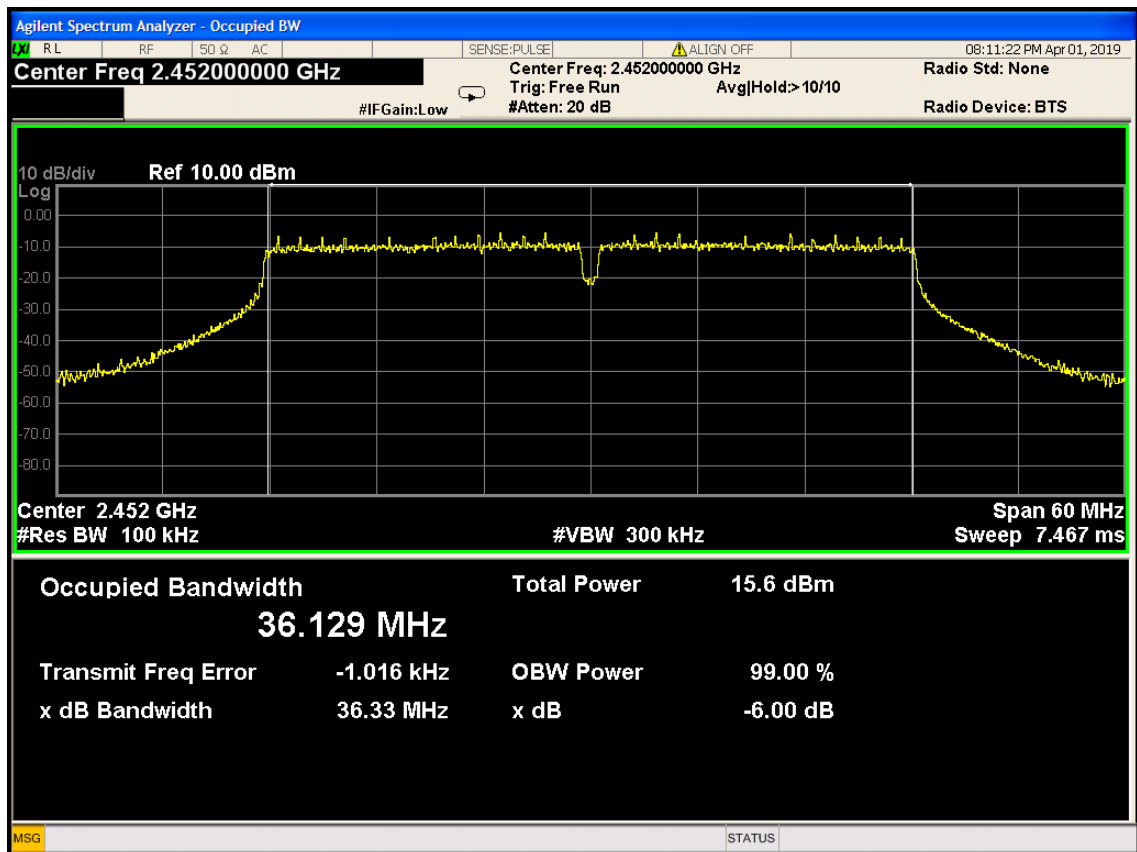


802.11n HT40 mode (antenna 1):


Channel 2422MHz

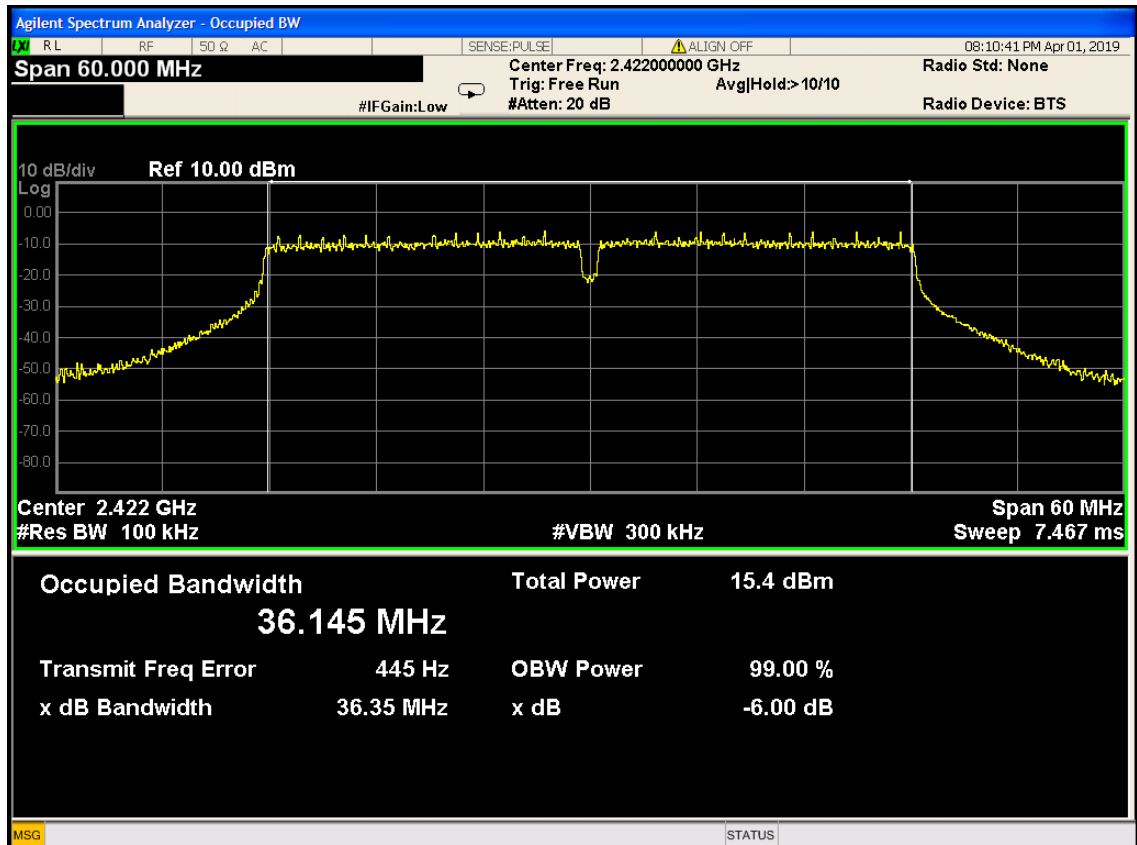

Channel 2437MHz

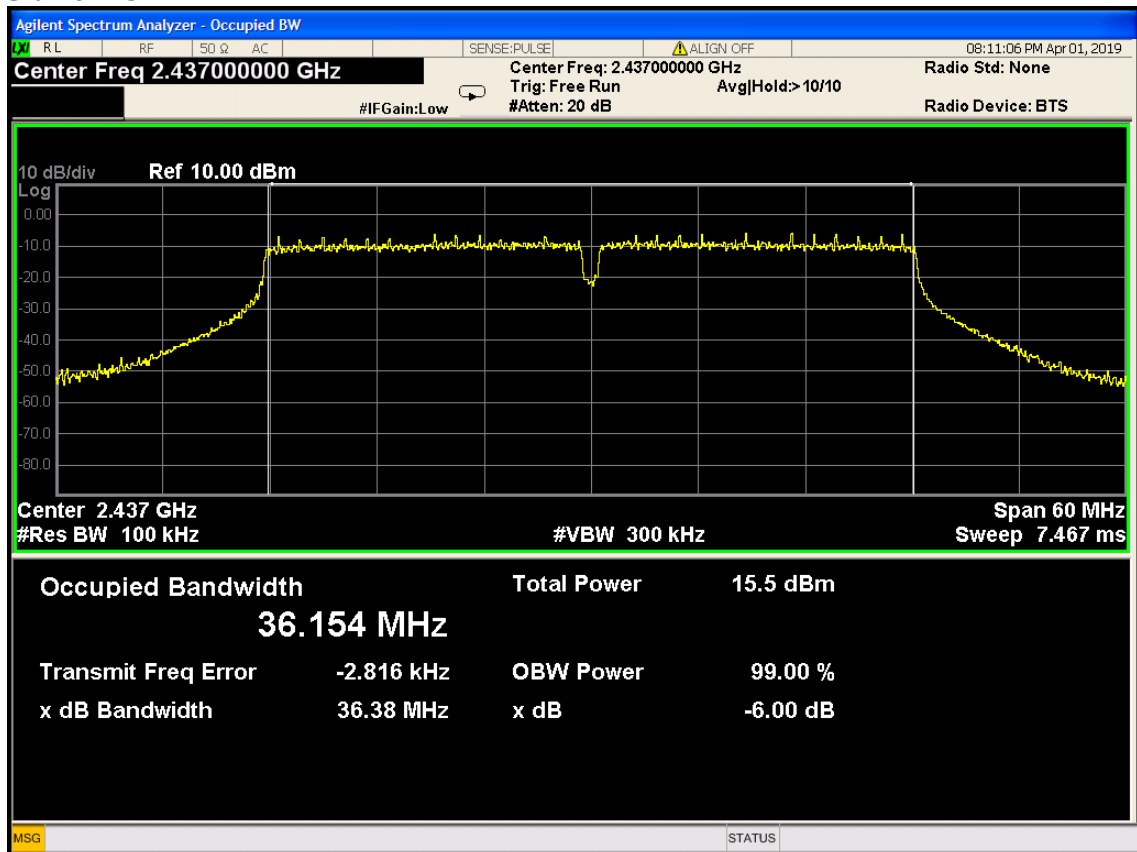

Channel 2452MHz

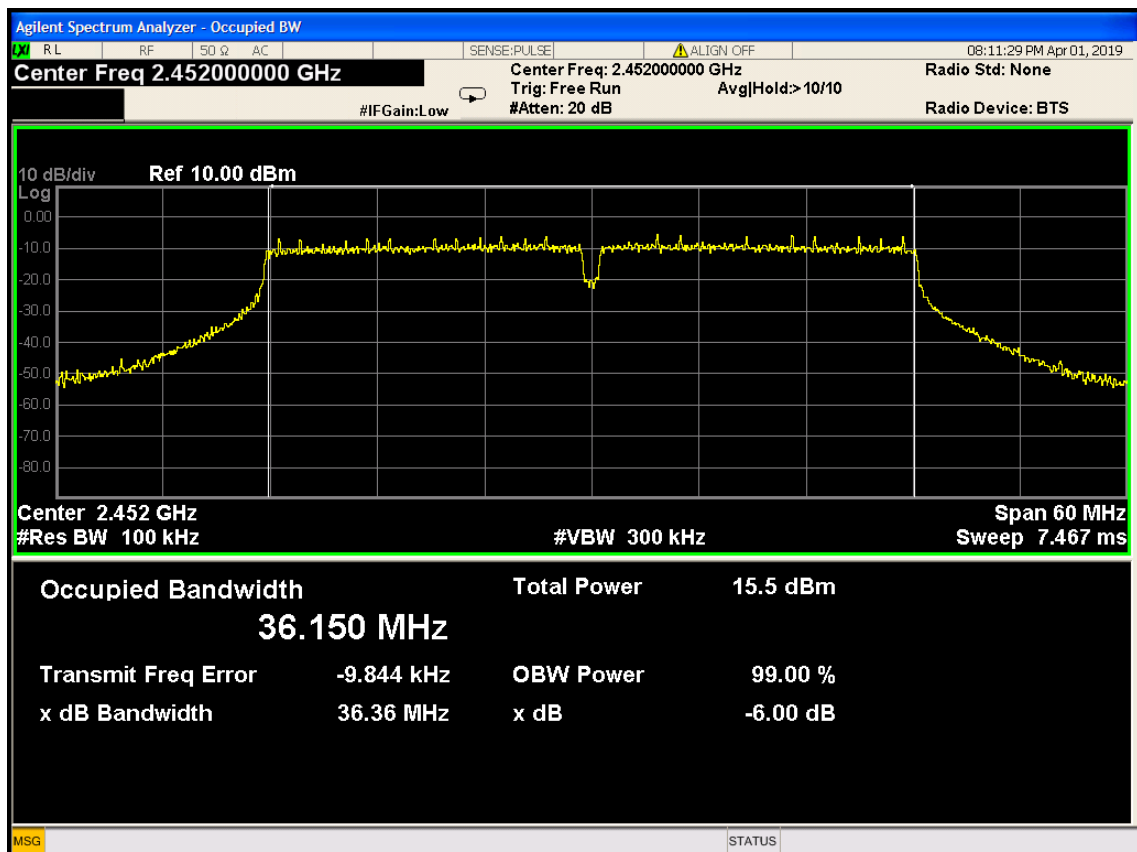

9. MAXIMUM PEAK OUTPUT POWER


9.1. LIMITS

The maximum Peak output power measurement is 1W

9.2. TEST PROCEDURES

- 1) Place the EUT on a bench and set it in transmitting mode.
- 2) Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
- 3) The spectrum analyzer resolution bandwidth that is $\leq \text{EBW}$. So we test the Maximum Conducted Output Power — Integrated band power method.
- 4) Set the analyzer span $\geq 1.5 \times \text{DTS bandwidth}$. Set the RBW = 1 MHz. Set the VBW ≥ 3 MHz. Sweep time = auto couple. Detector = peak. Allow trace to fully stabilize.

9.3. TEST SETUP



9.4. TEST RESULTS

802.11b Mode (antenna 0):

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)	Peak / AVG	Limit	Result
1	2412	24.18	Peak	1W (30dBm)	Pass
6	2437	24.27			Pass
11	2462	24.79			Pass
1	2412	21.94	AVG	1W (30dBm)	Pass
6	2437	21.94			Pass
11	2462	22.48			Pass

802.11b Mode (antenna 1):

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)	Peak / AVG	Limit	Result
1	2412	24.73	Peak	1W (30dBm)	Pass
6	2437	24.81			Pass
11	2462	24.78			Pass
1	2412	22.21	AVG	1W (30dBm)	Pass
6	2437	22.34			Pass
11	2462	22.25			Pass

802.11g Mode (antenna 0):

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)	Peak / AVG	Limit	Result
1	2412	27.01	Peak	1W (30dBm)	Pass
6	2437	27.12			Pass
11	2462	27.18			Pass
1	2412	17.45	AVG	1W (30dBm)	Pass
6	2437	17.54			Pass
11	2462	17.65			Pass

802.11g Mode (antenna 1):

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)	Peak / AVG	Limit	Result
1	2412	27.29	Peak	1W (30dBm)	Pass
6	2437	27.35			Pass
11	2462	27.31			Pass
1	2412	17.44	AVG	1W (30dBm)	Pass
6	2437	17.56			Pass
11	2462	17.67			Pass

802.11n HT20 Mode (combine with antenna 0 and antenna 1):

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)			Peak/AVG	Limit	Result
		antenna 0	antenna 1	total			
1	2412	22.87	23.14	26.02	Peak	1W (30dBm)	Pass
6	2437	23.70	23.29	26.51			Pass
11	2462	23.09	23.58	26.35			Pass
1	2412	14.07	13.43	16.77	AVG	1W (30dBm)	Pass
6	2437	13.98	13.60	16.80			Pass
11	2462	14.05	13.86	16.97			Pass

802.11n HT40 Mode (combine with antenna 0 and antenna 1):

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)			Peak/AVG	Limit	Result
		antenna 0	antenna 1	total			
3	2422	22.10	22.03	25.08	Peak	1W (30dBm)	Pass
6	2437	22.77	21.99	25.41			Pass
9	2452	22.38	22.02	25.21			Pass
3	2422	12.80	12.48	15.65	AVG	1W (30dBm)	Pass
6	2437	12.88	12.57	15.74			Pass
9	2452	13.08	12.58	15.85			Pass

10. POWER SPECTRAL DENSITY


10.1. LIMITS

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

10.2. TEST PROCEDURES

- 1) Remove the antenna from the EUT, and then connect a low loss RF cable from antenna port to the spectrum analyzer.
- 2) Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3) Set the analyzer span to 1.5 times the DTS bandwidth. Set the RBW = 3 kHz. Set the VBW ≥ 3 RBW. Detector = peak. Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW (use of a greater number of measurement points than this minimum requirement is recommended).
- 4) Repeat above procedures until all frequencies measured were complete.

10.3. TEST SETUP



10.4. TEST RESULTS

802.11b Mode:

Channel No.	Frequency (MHz)	PPSD (dBm)		Limit (dBm)	Result
		antenna 0	antenna 1		
1	2412	-4.542	-3.792	6.99	Pass
6	2437	-6.901	-4.004		Pass
11	2462	-6.655	-3.551		Pass

802.11g Mode:

Channel No.	Frequency (MHz)	PPSD (dBm)		Limit (dBm)	Result
		antenna 0	antenna 1		
1	2412	-12.684	-13.064	6.99	Pass
6	2437	-12.646	-12.505		Pass
11	2462	-12.114	-11.667		Pass

802.11n HT20 Mode:

Channel No.	Frequency (MHz)	PPSD (dBm)			Limit (dBm)	Result
		antenna 0	antenna 1	total		
1	2412	-16.042	-15.440	-12.720	6.99	Pass
6	2437	-13.472	-17.024	-11.884		Pass
11	2462	-15.925	-16.388	-13.140		Pass

802.11n HT40 Mode:

Channel No.	Frequency (MHz)	PPSD (dBm)			Limit (dBm)	Result
		antenna 0	antenna 1	total		
3	2422	-18.636	-24.198	-17.571	6.99	Pass
6	2437	-20.047	-19.042	-16.505		Pass
9	2452	-19.383	-18.556	-15.940		Pass

Remark:


Directional Gain = $10 \log \left[\left(10^{\frac{G_1}{10}} + 10^{\frac{G_2}{10}} + \dots + 10^{\frac{G_n}{10}} \right)^2 / N_{\text{ant}} \right]$ dBi

Limits = limits - (Directional Gain - 6)


N_{ant} : Number of Transmit Antennas

$G_1, G_2, \dots, G_n$: Gain of Individual Antennas (Difference for Each Antenna)


802.11b mode (antenna 0):
Channel 2412MHz

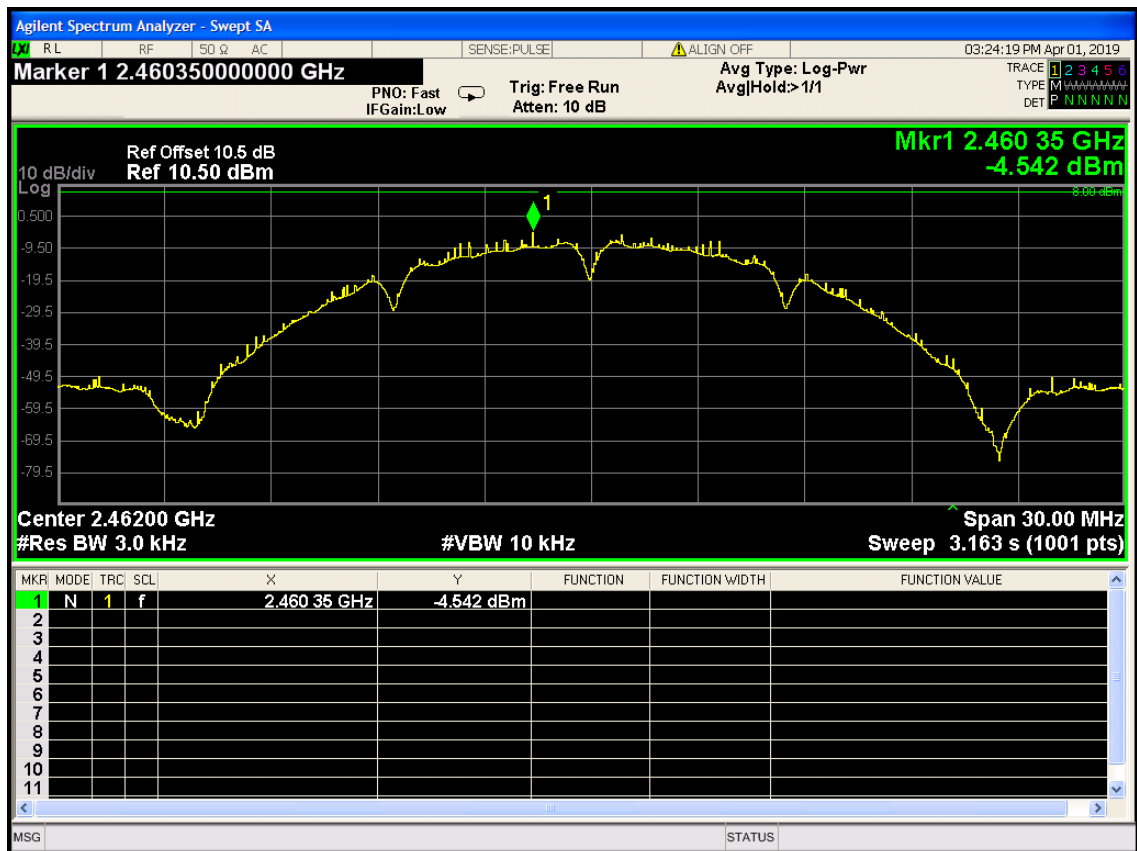

Channel 2437MHz

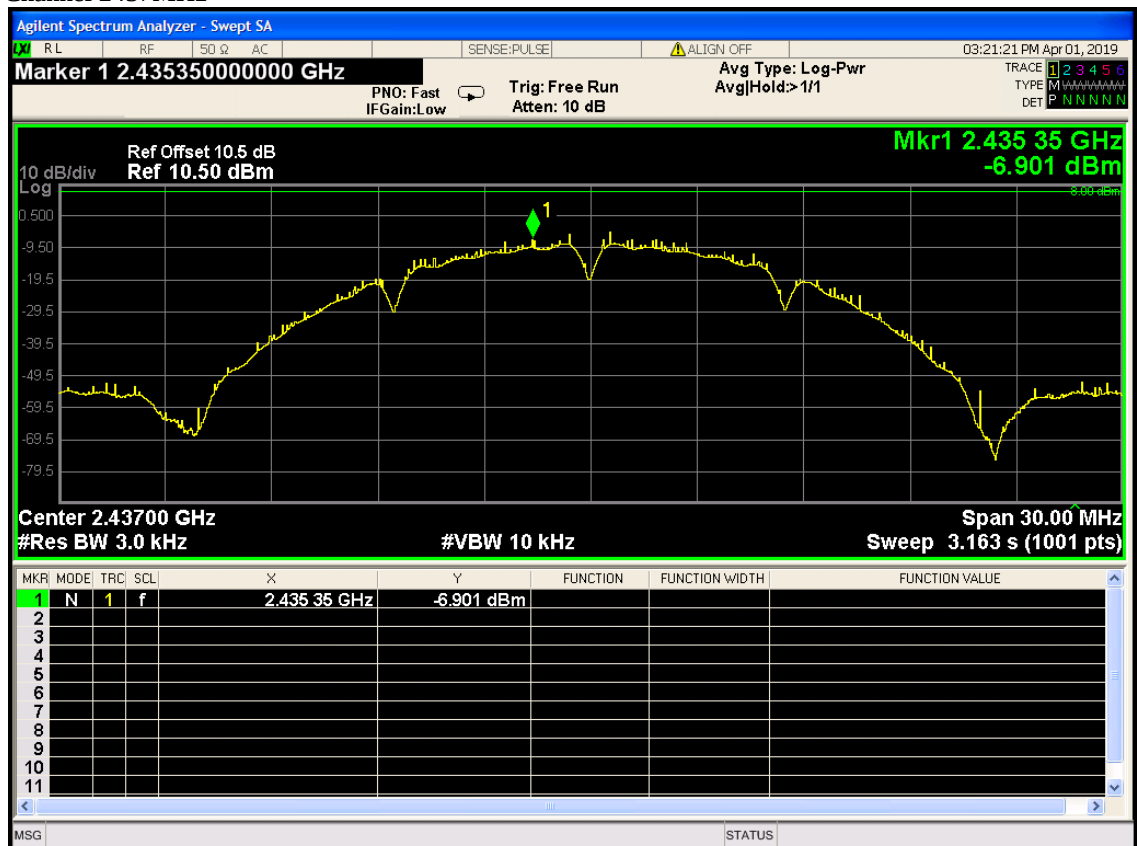


Channel 2462MHz

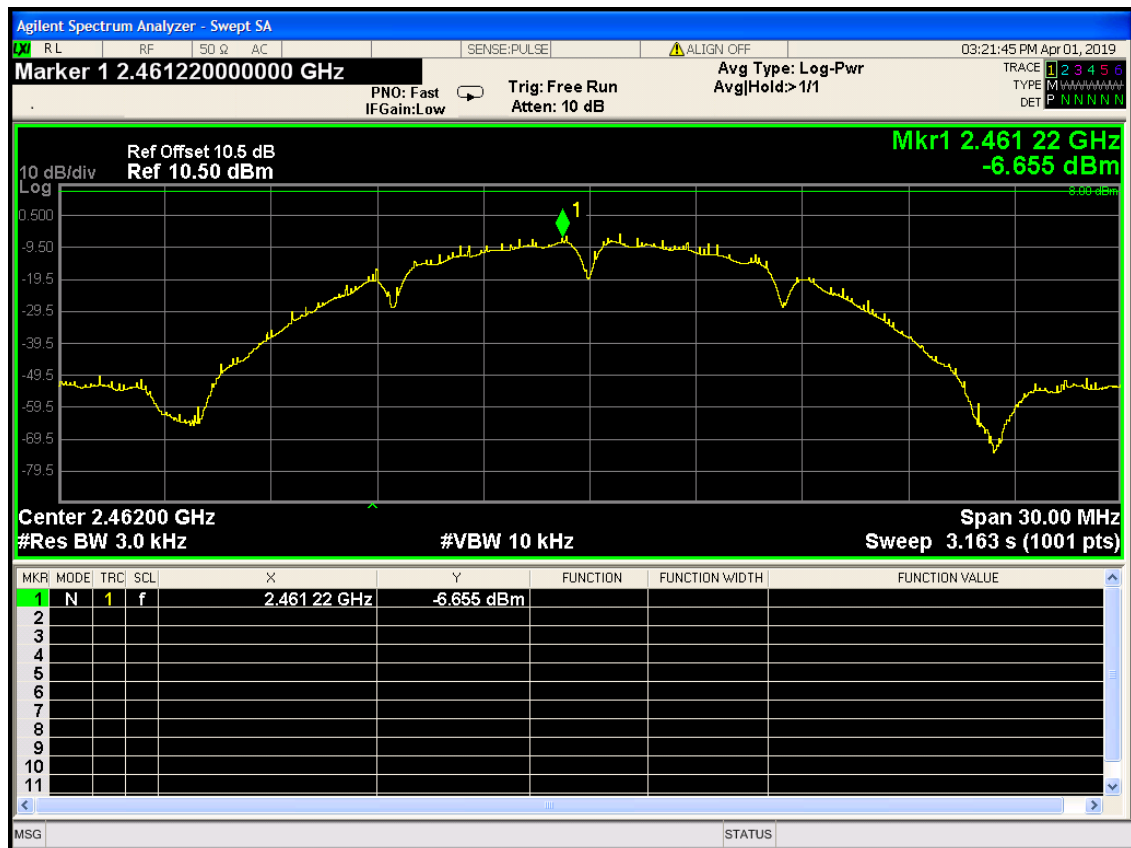


802.11b mode (antenna 1):


Channel 2412MHz

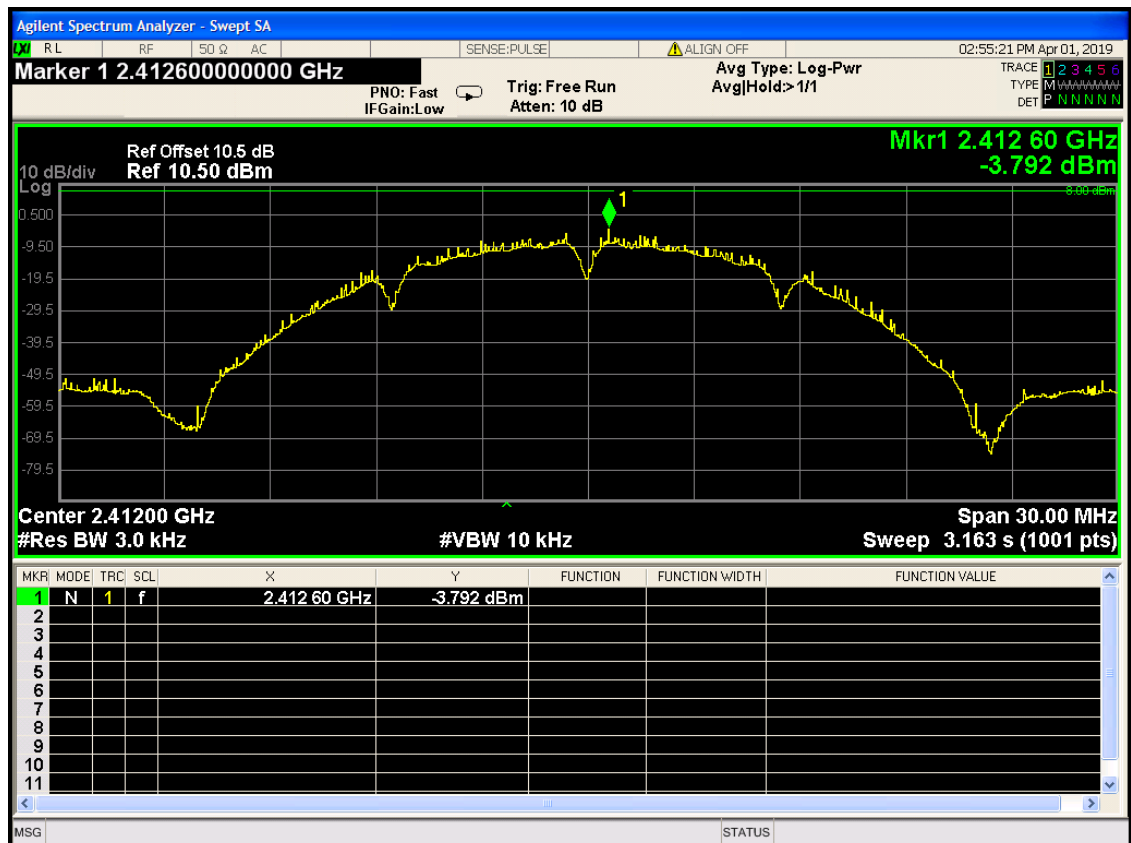


Channel 2437MHz

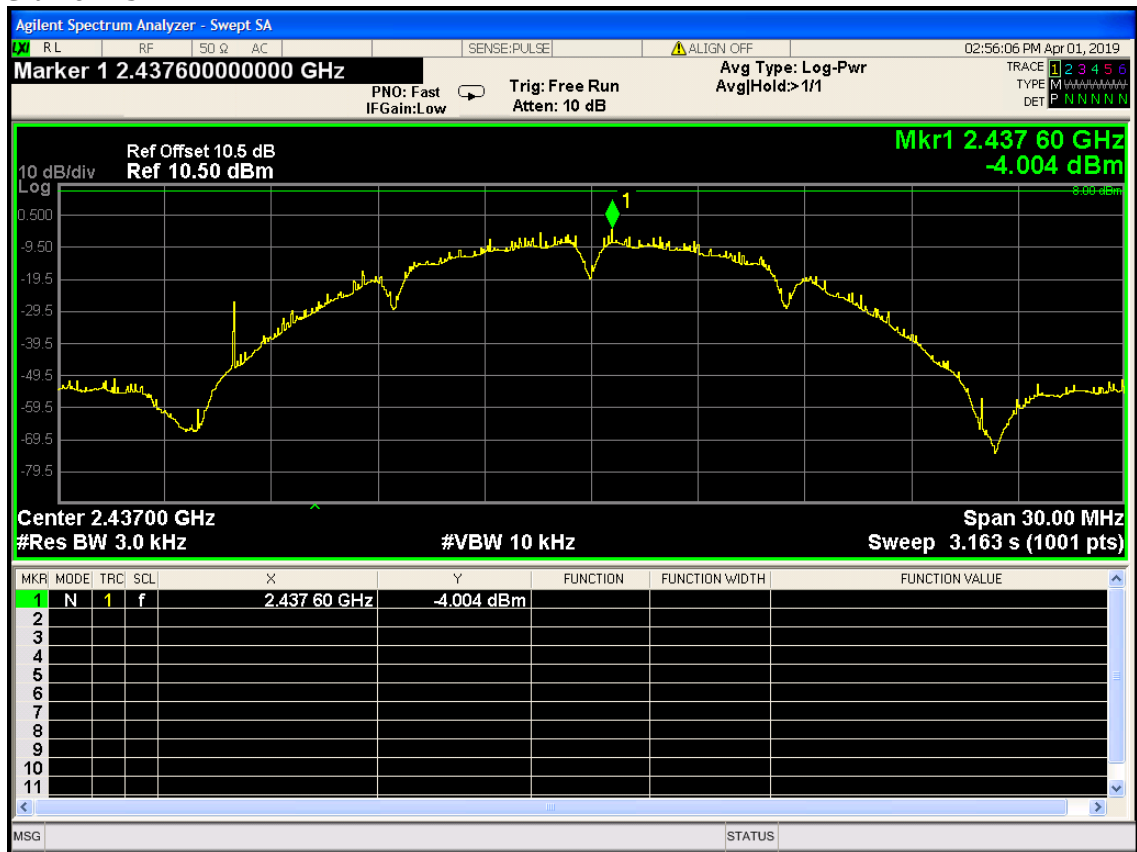


Channel 2462MHz

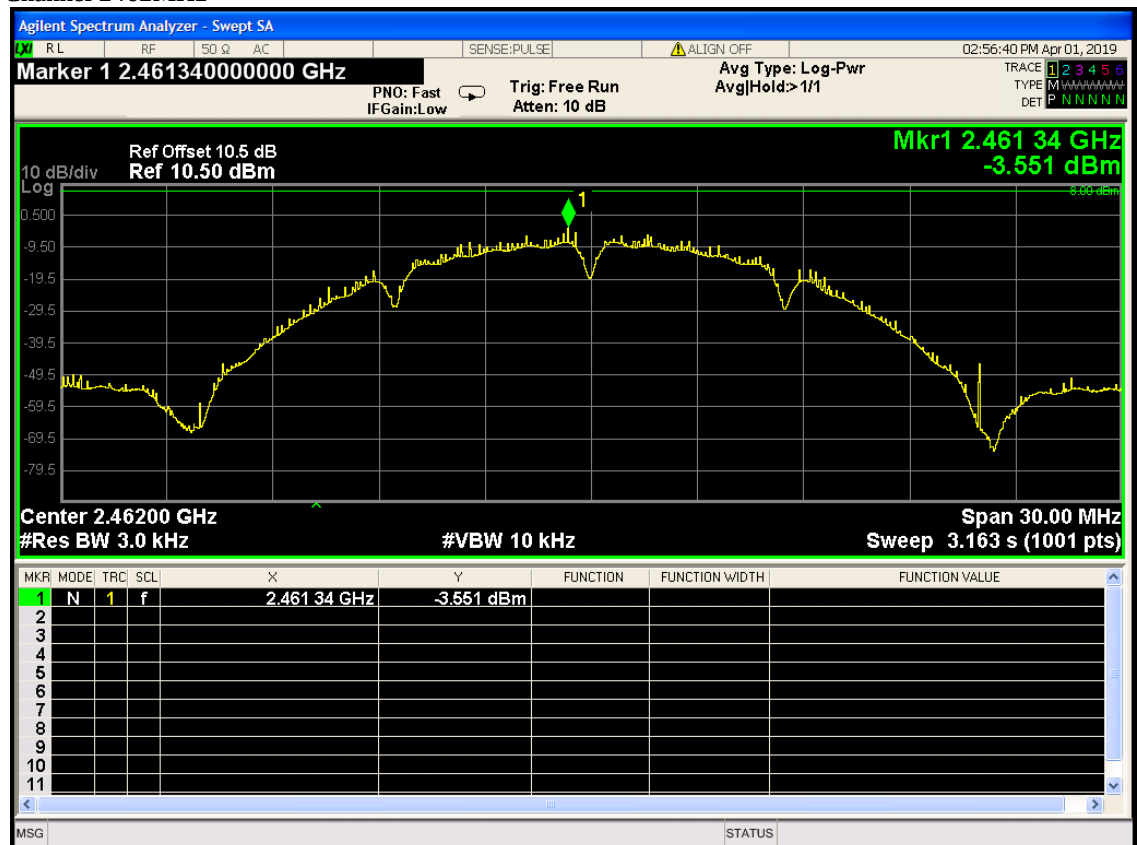


802.11g mode (antenna 0):
Channel 2412MHz

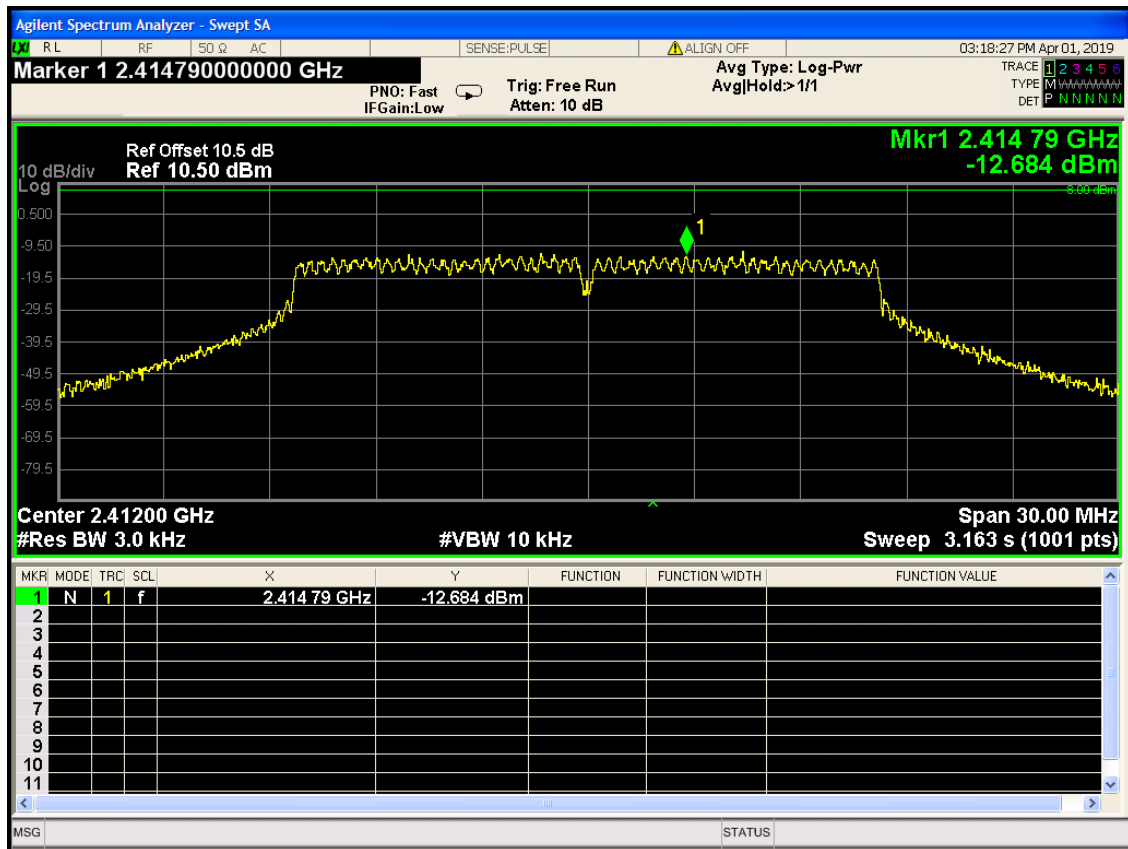

Channel 2437MHz

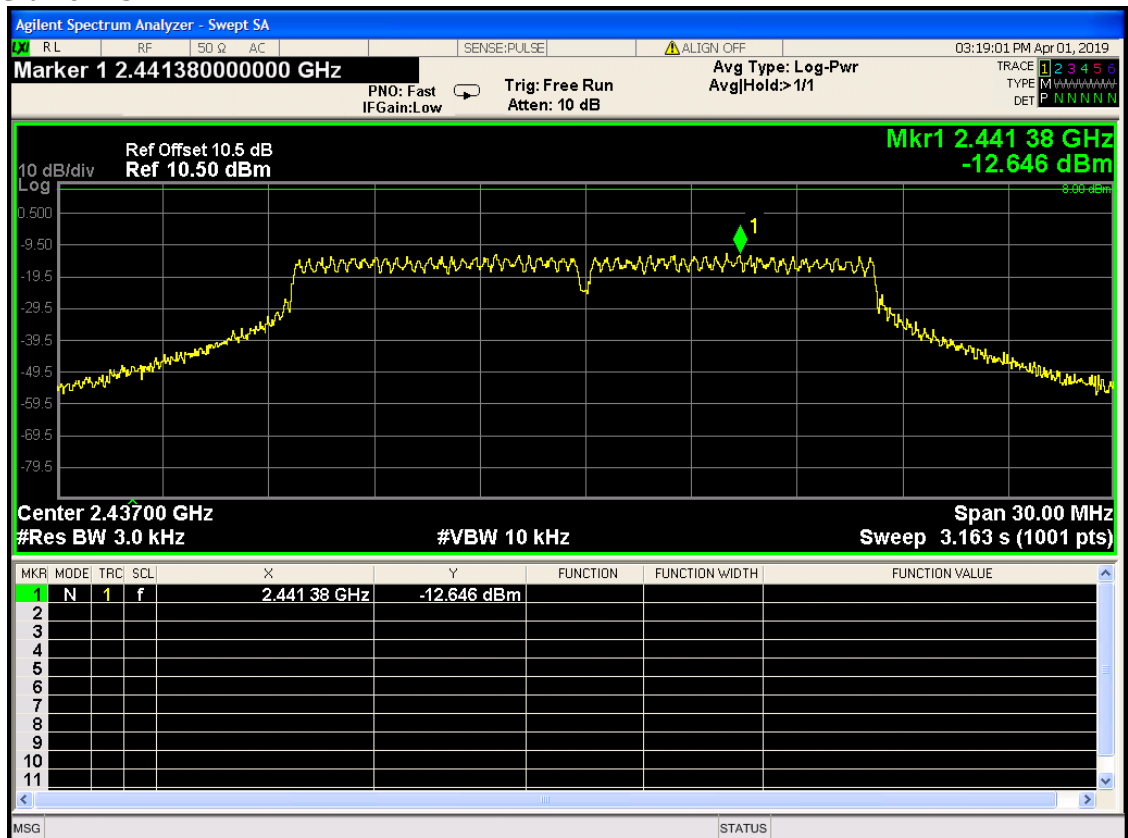


Channel 2462MHz

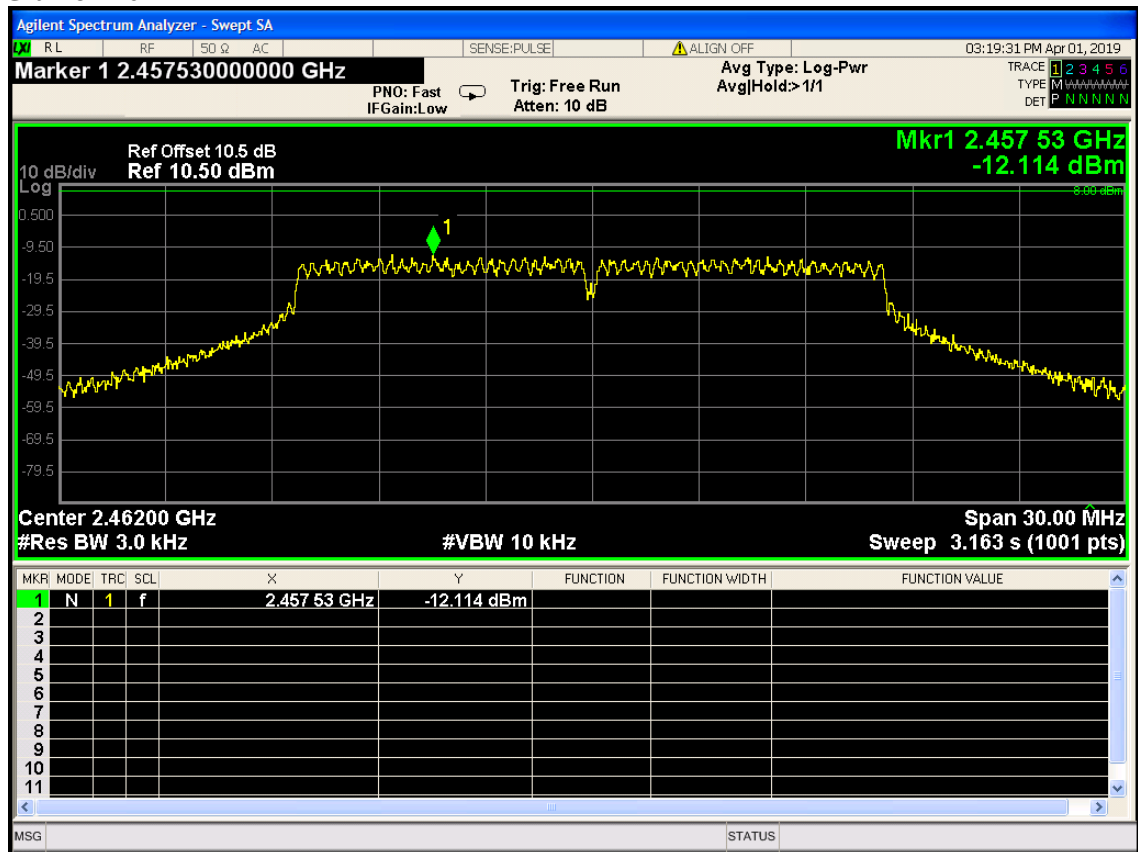


802.11g mode (antenna 1):


Channel 2412MHz

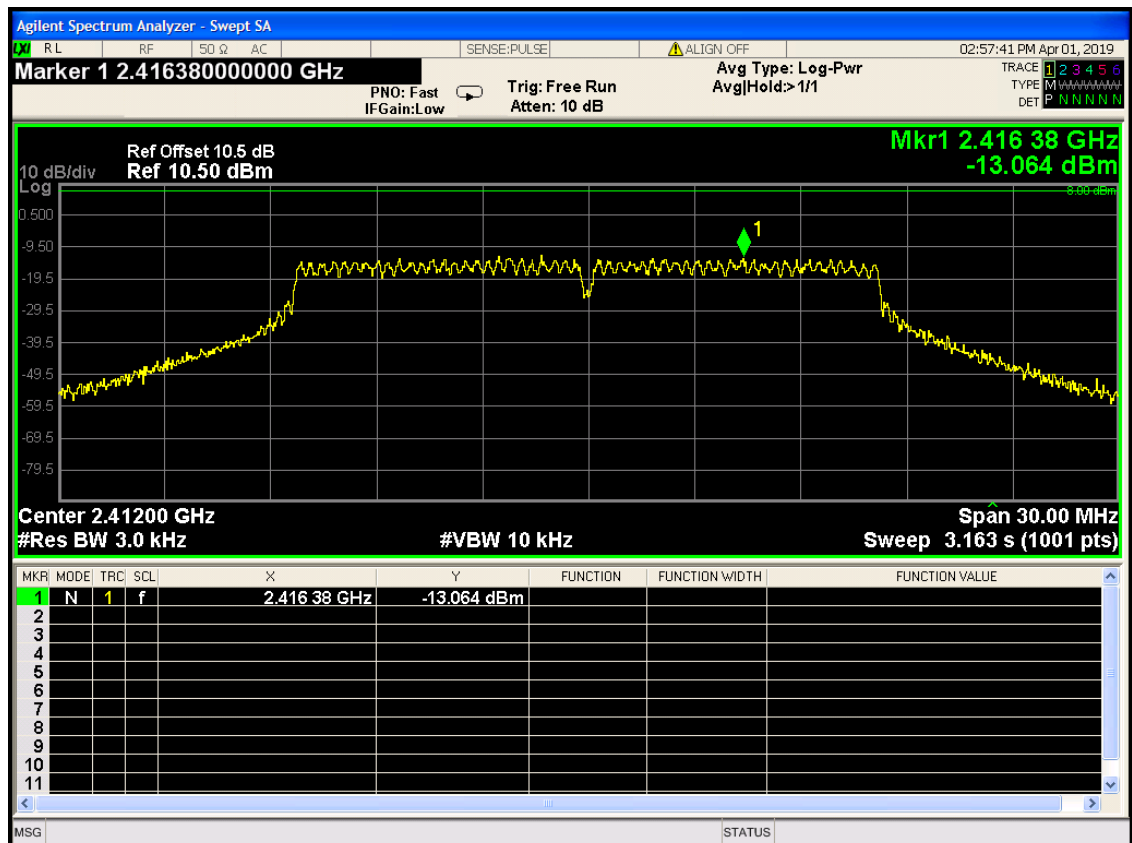


Channel 2437MHz

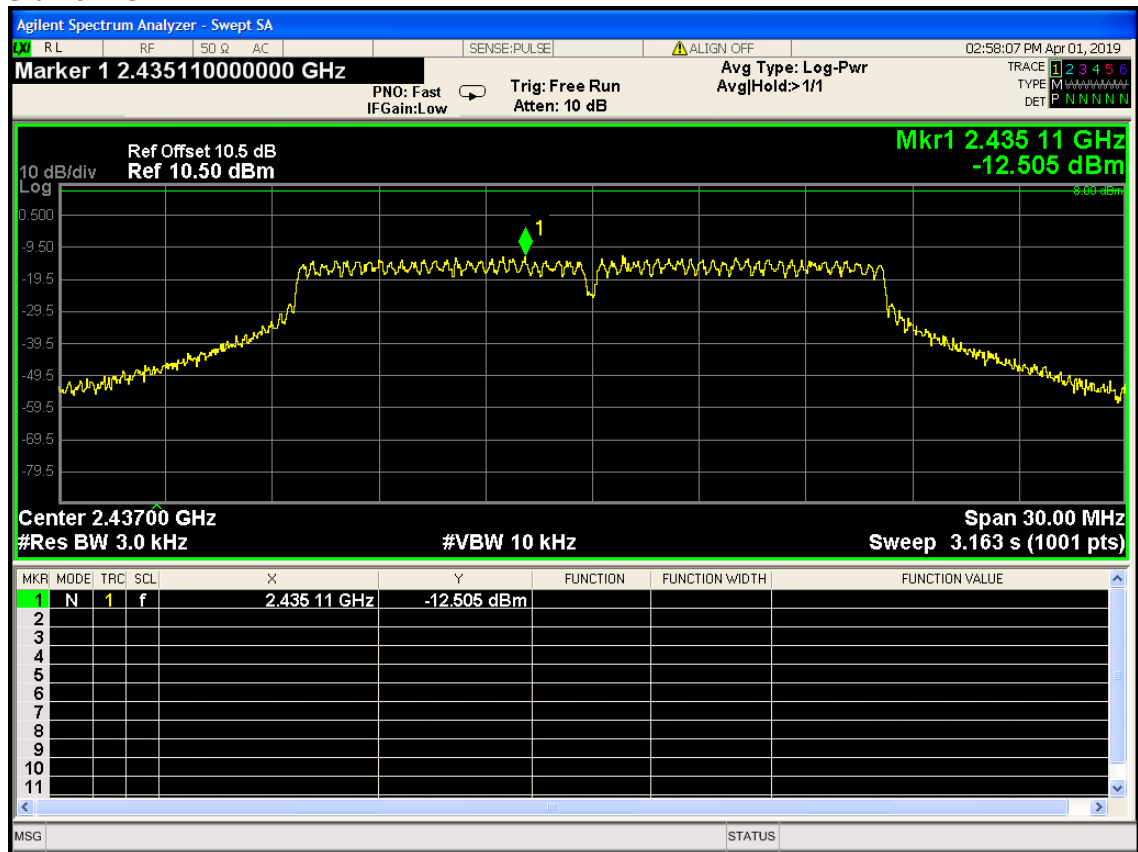


Channel 2462MHz

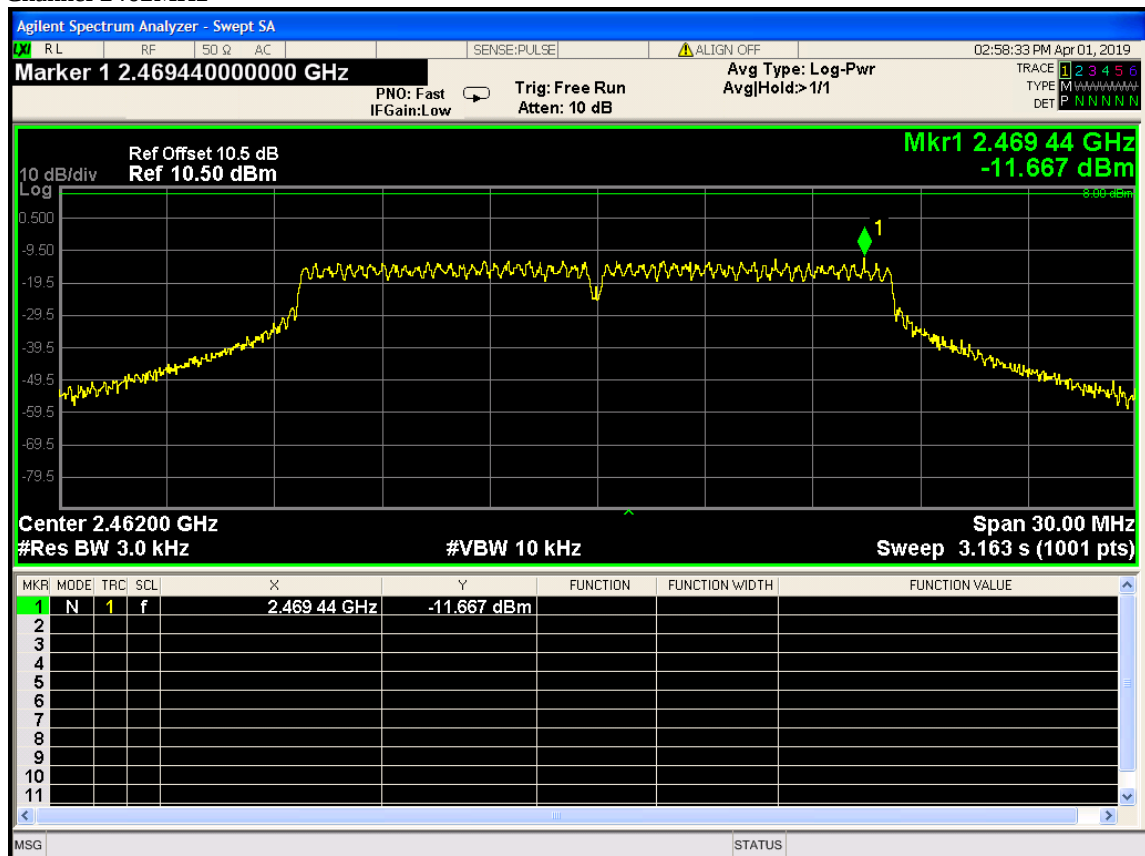


802.11n HT20 mode (antenna 0):
Channel 2412MHz

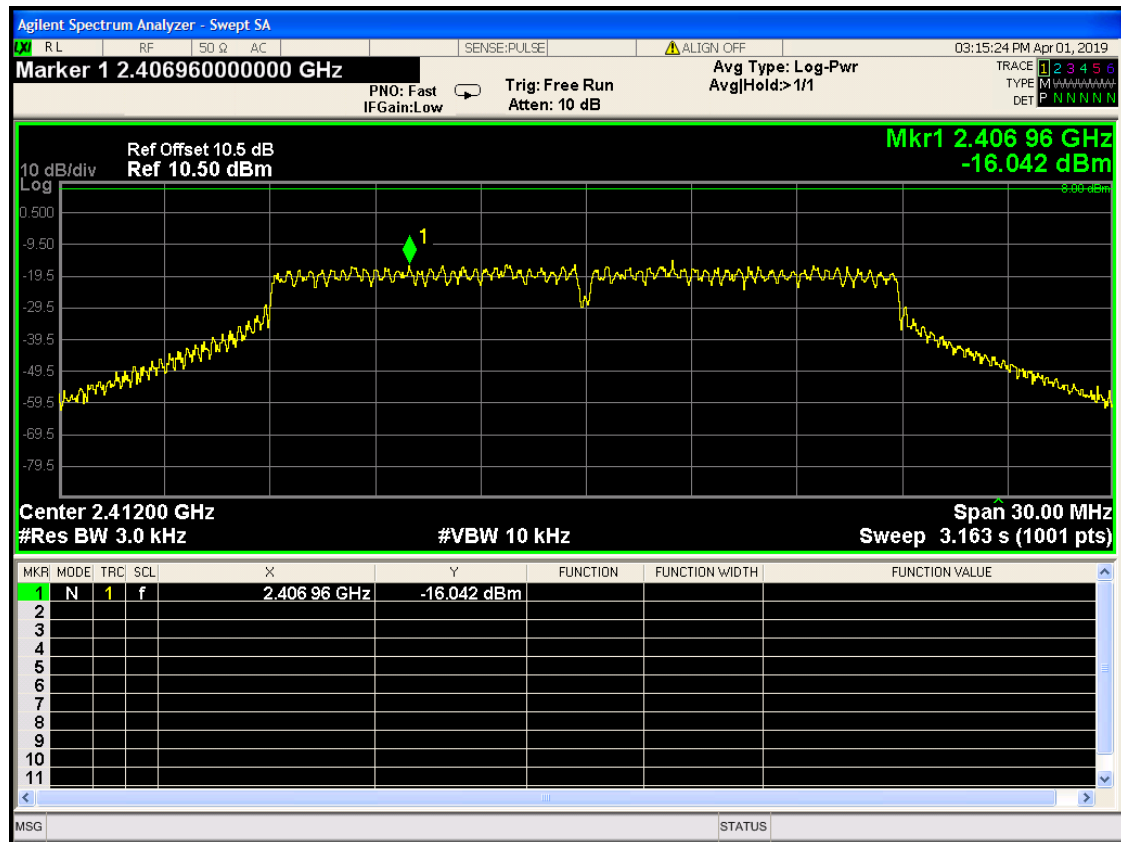

Channel 2437MHz

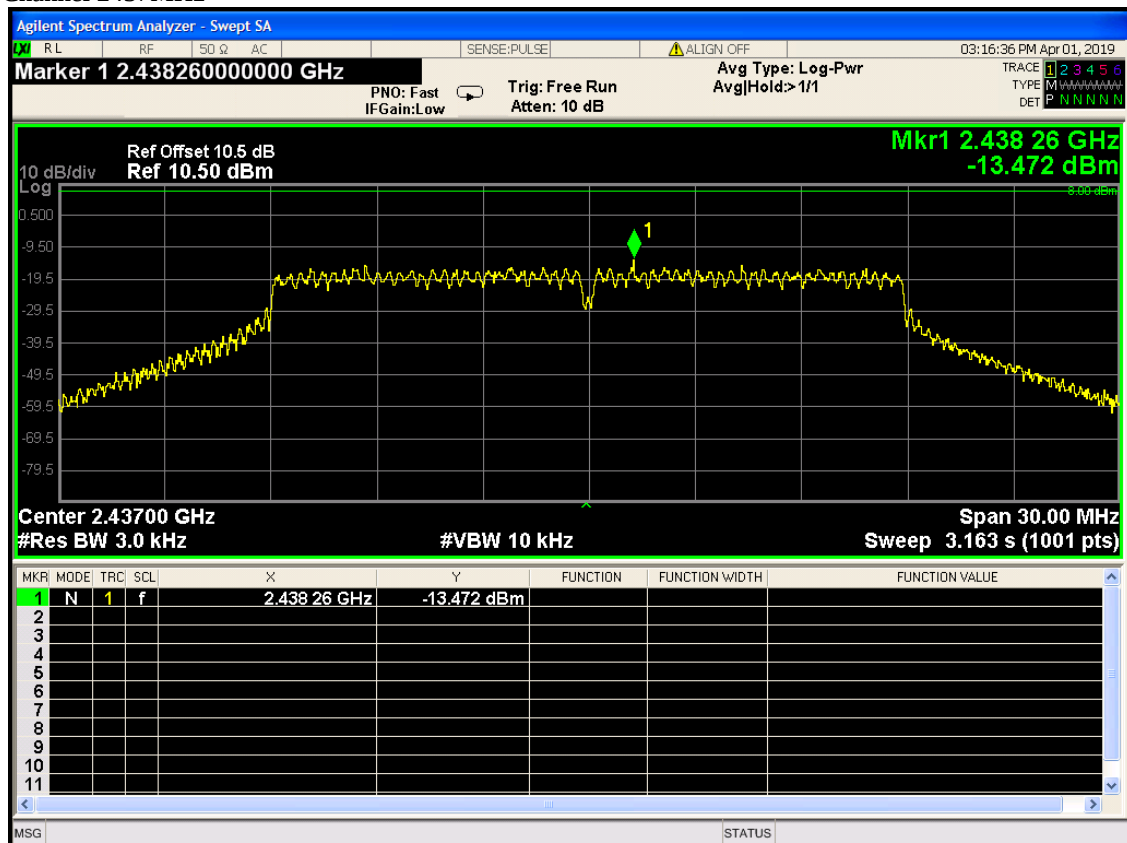


Channel 2462MHz

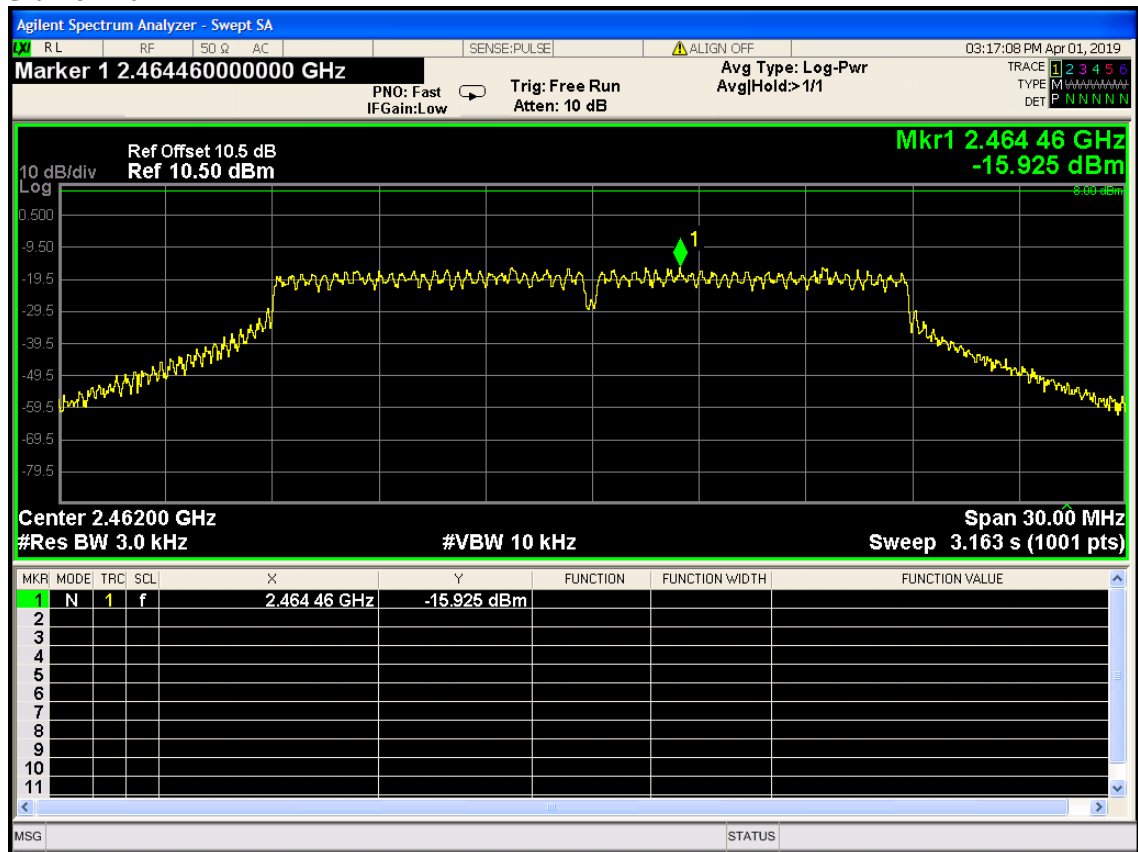


802.11n HT20 mode (antenna 1):


Channel 2412MHz

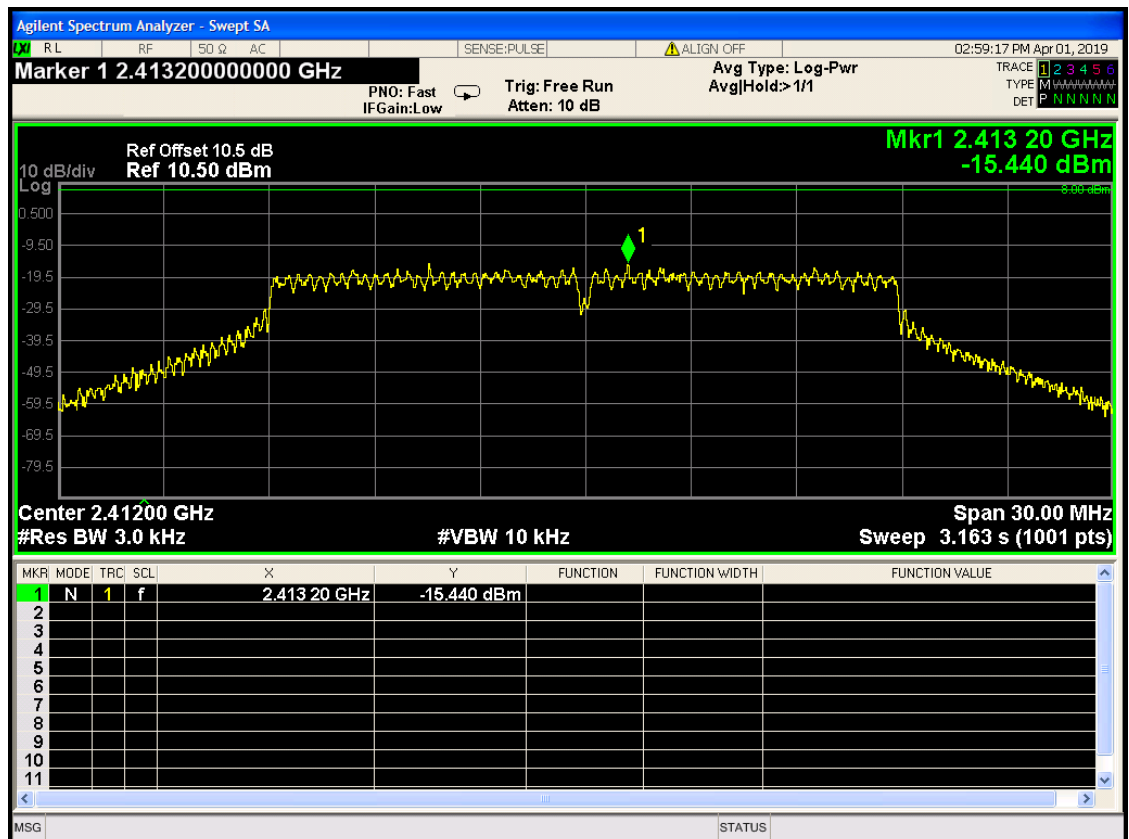


Channel 2437MHz

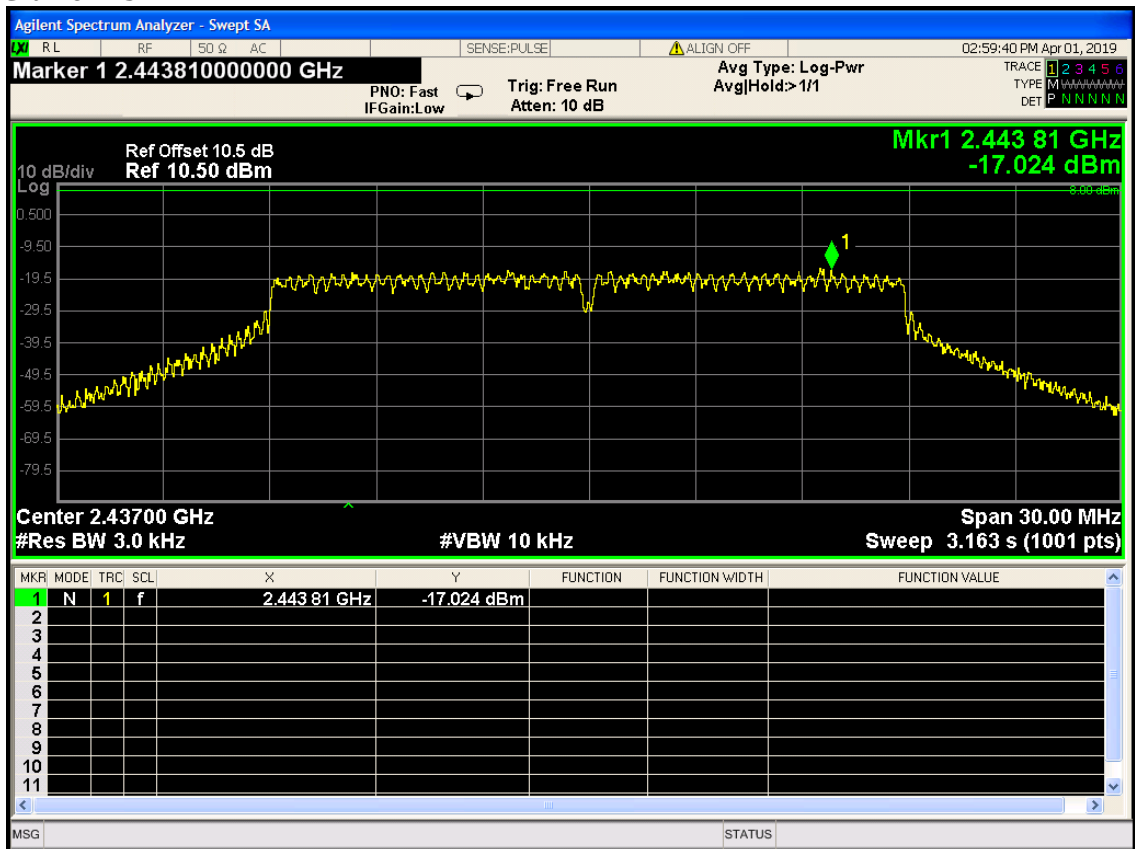


Channel 2462MHz

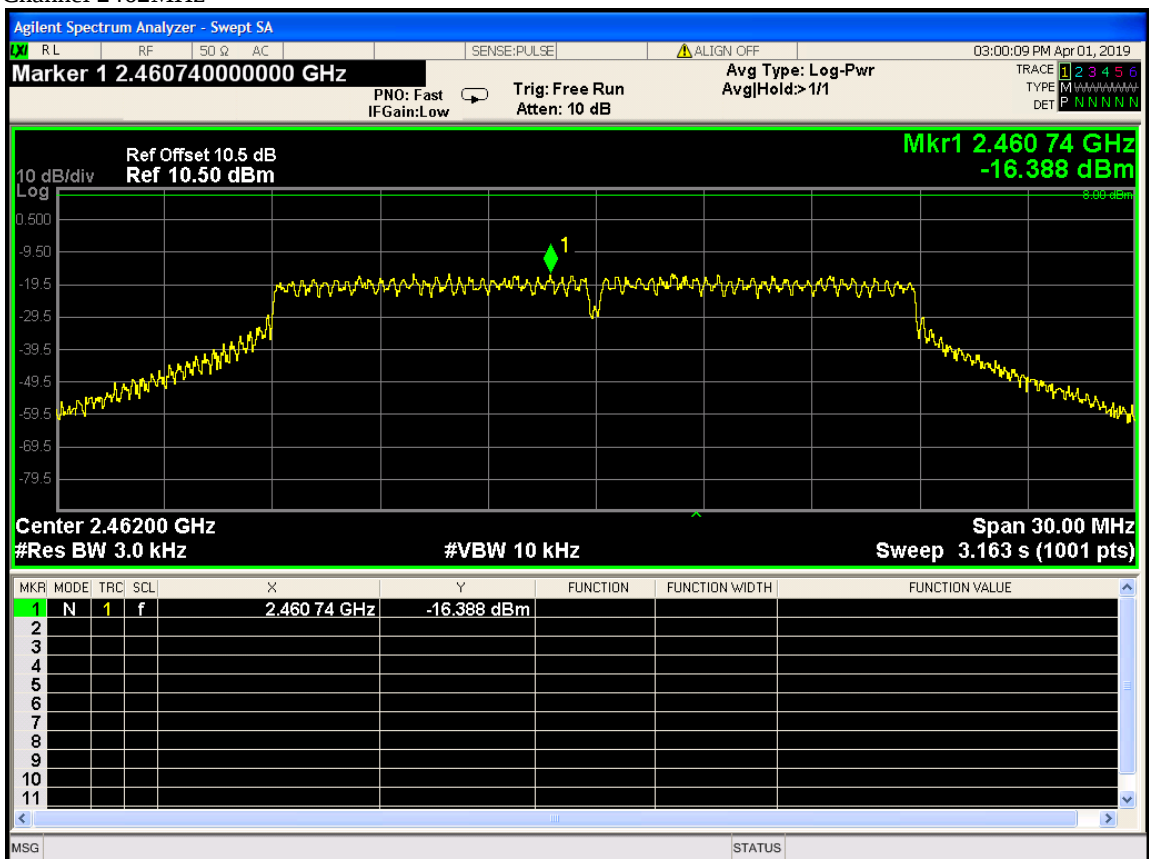


802.11n HT40 mode (antenna 0):
Channel 2422MHz

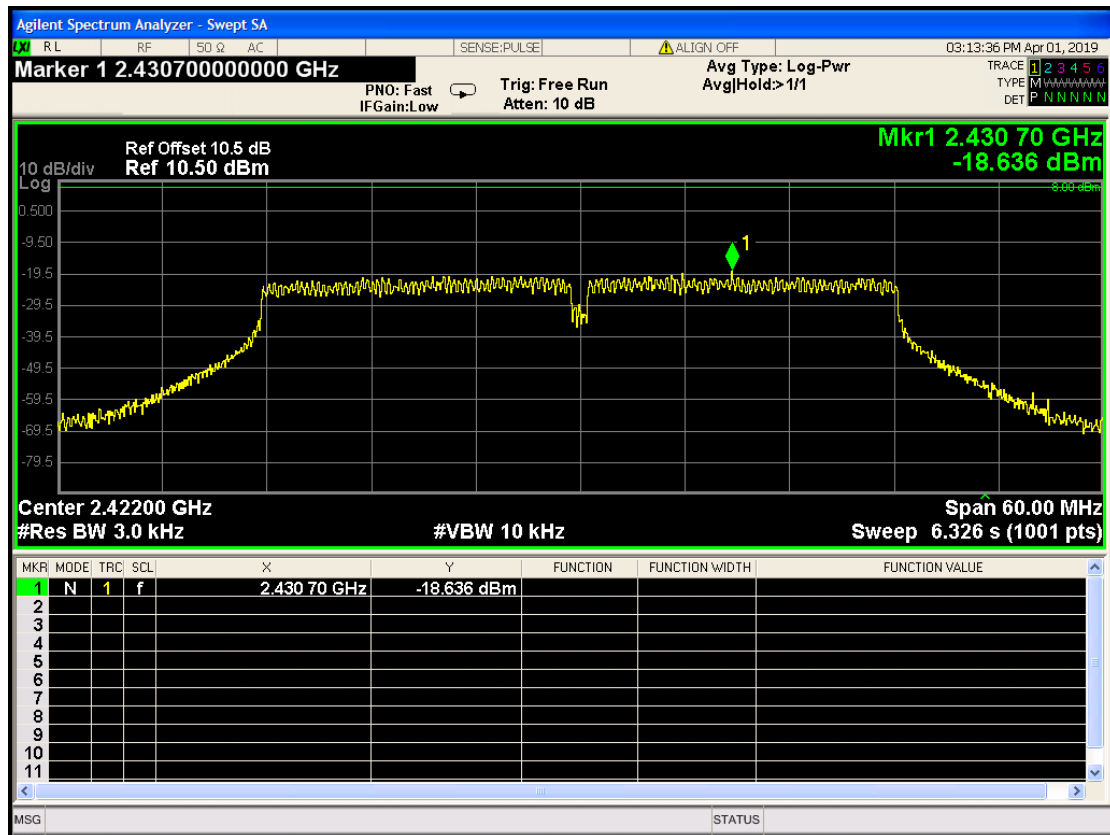

Channel 2437MHz

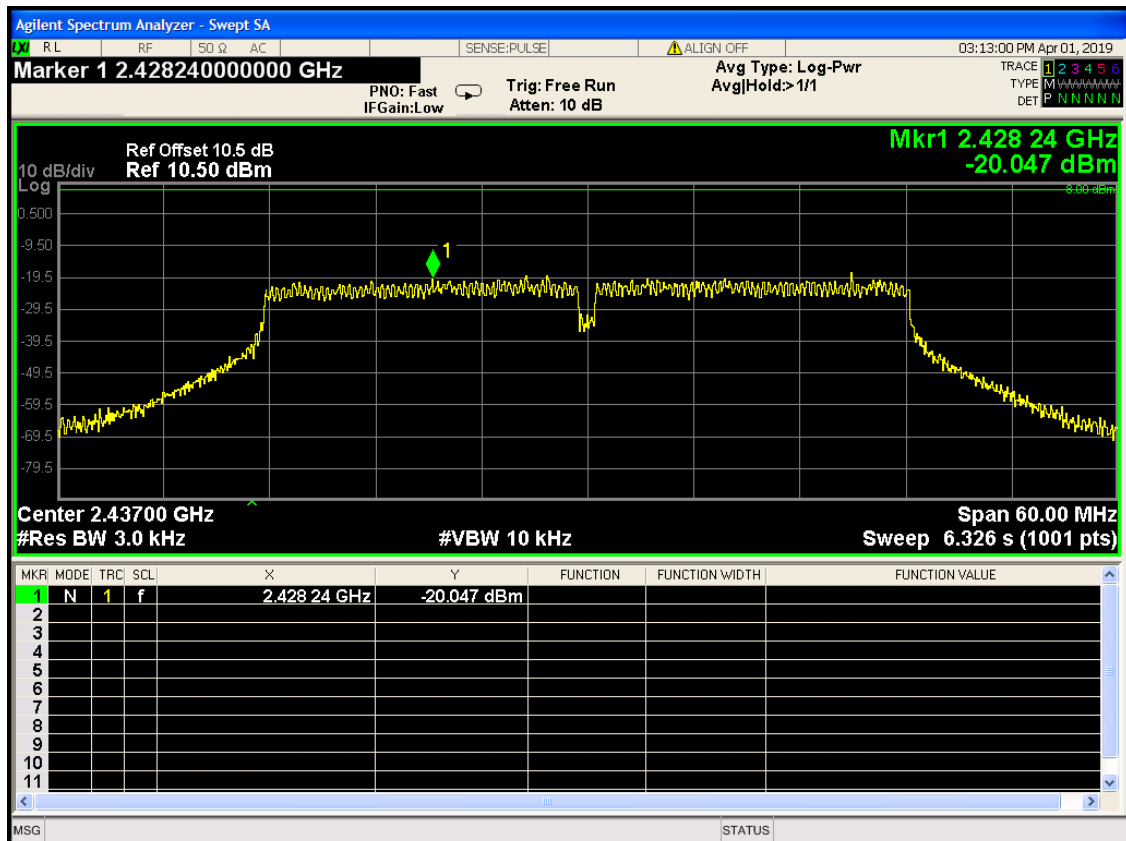


Channel 2452MHz

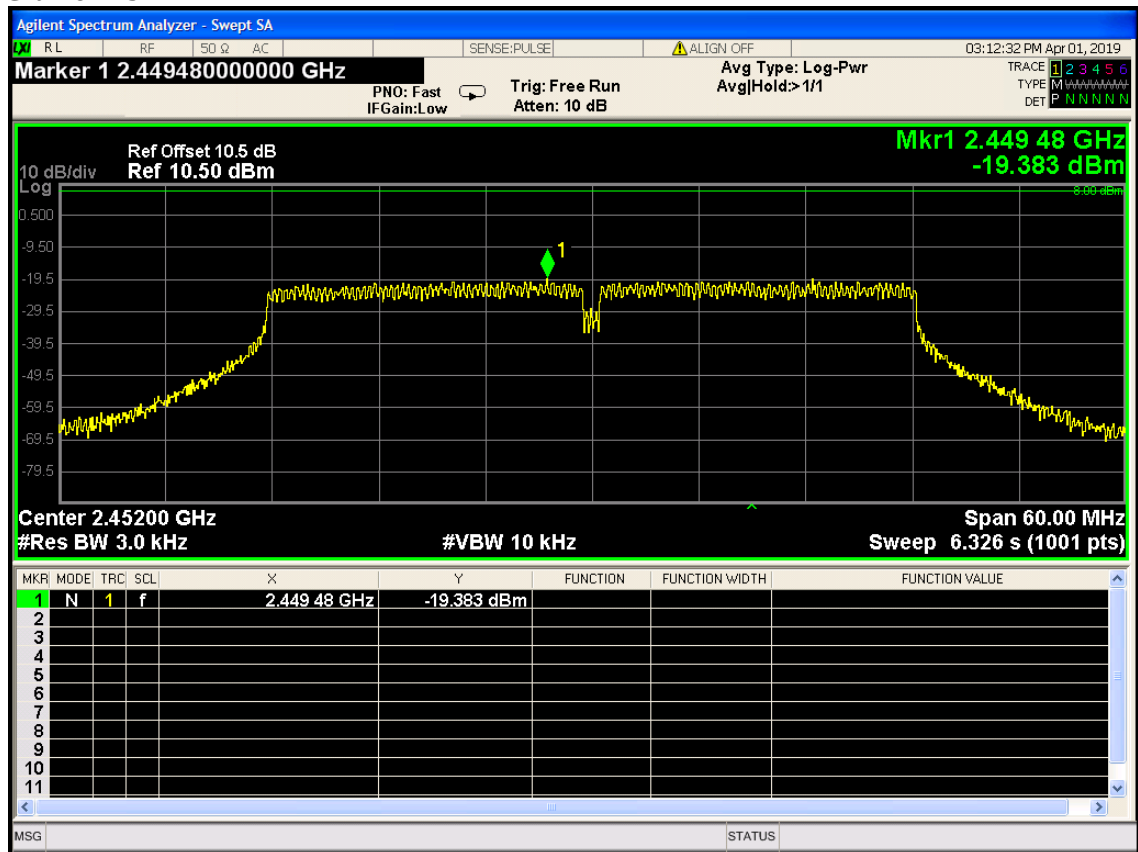


802.11n HT40 mode (antenna 1):


Channel 2422MHz

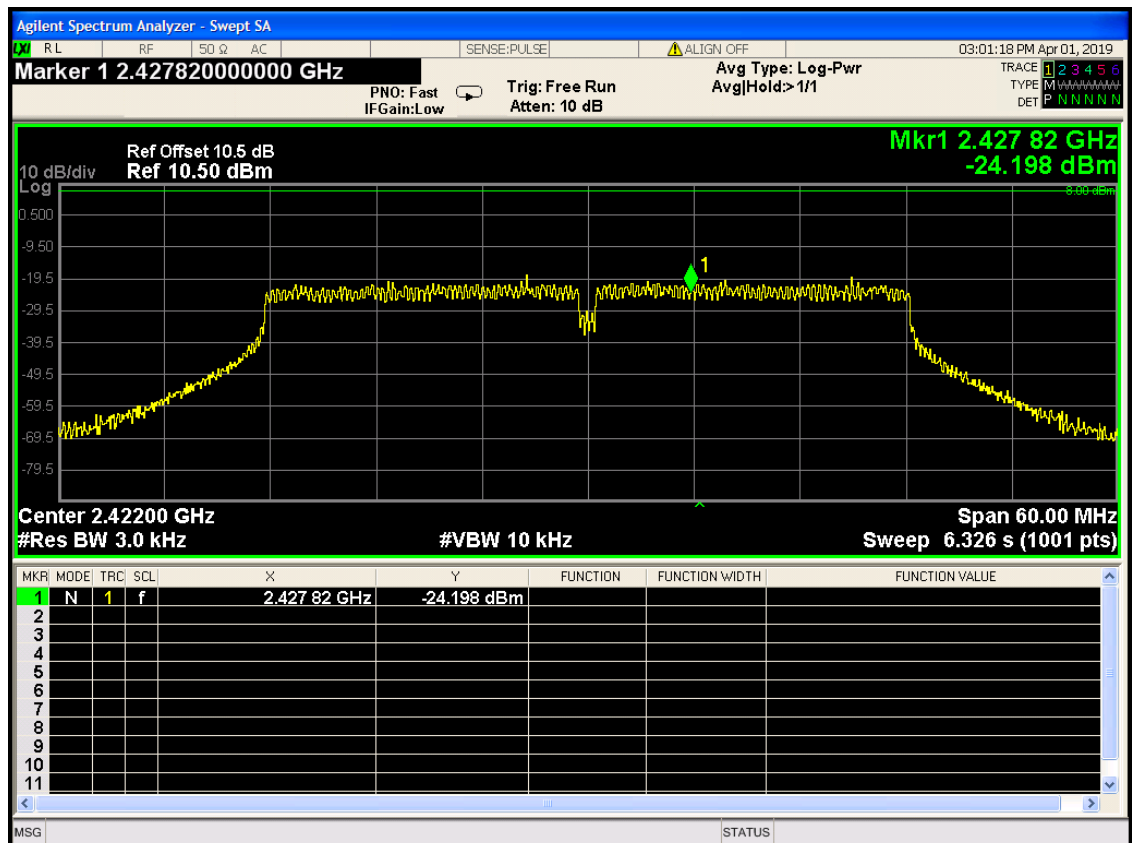

Channel 2437MHz

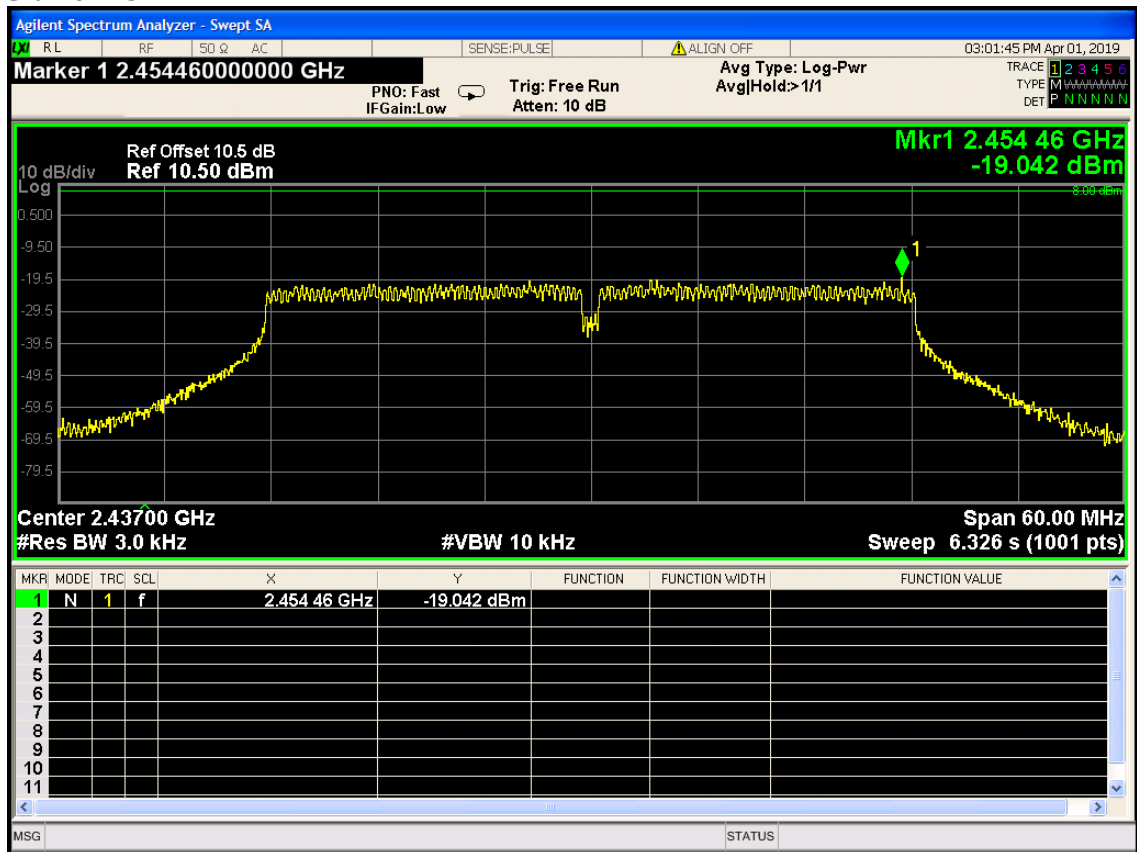

Channel 2452MHz

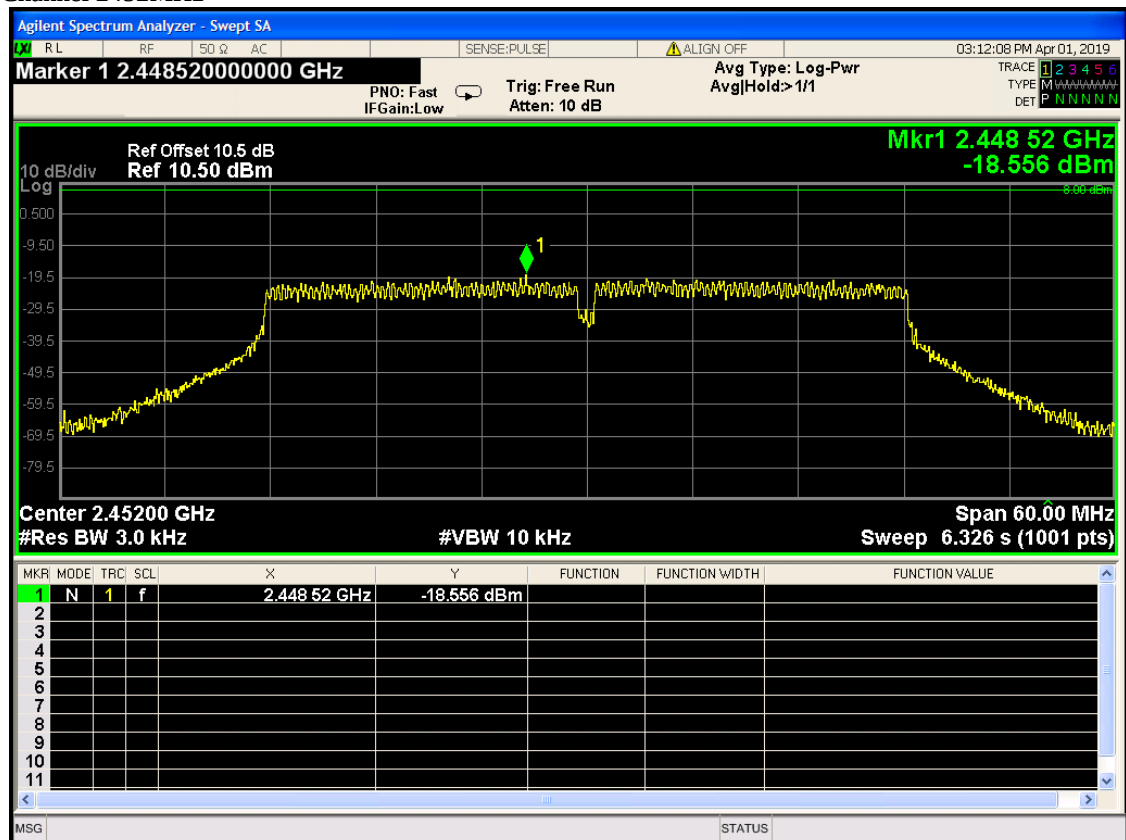

11. CONDUCTED BAND EDGES AND SPURIOUS EMISSIONS

11.1. LIMITS

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


11.2. TEST PROCEDURES

Test procedures follow KDB 558074 D01 DTS Measurement Guidance v03r01.

Remove the antenna from the EUT and then connect a low attenuation cable from the antenna port to the spectrum.


- 1) Remove the antenna from the EUT and then connect a low attenuation cable from the antenna port to the spectrum.
- 2) Set the spectrum analyzer: RBW = 100KHz; VBW = 300KHz, Span = 10MHz to 26GHz; Sweep = auto; Detector Function = Peak. Trace = Max, hold.
- 3) Measure and record the results in the test report.
- 4) The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

11.3. TEST SETUP




11.4.TEST RESULTS



802.11b mode (antenna 0):
Channel 2412MHz
0.01GHz-26.5GHz

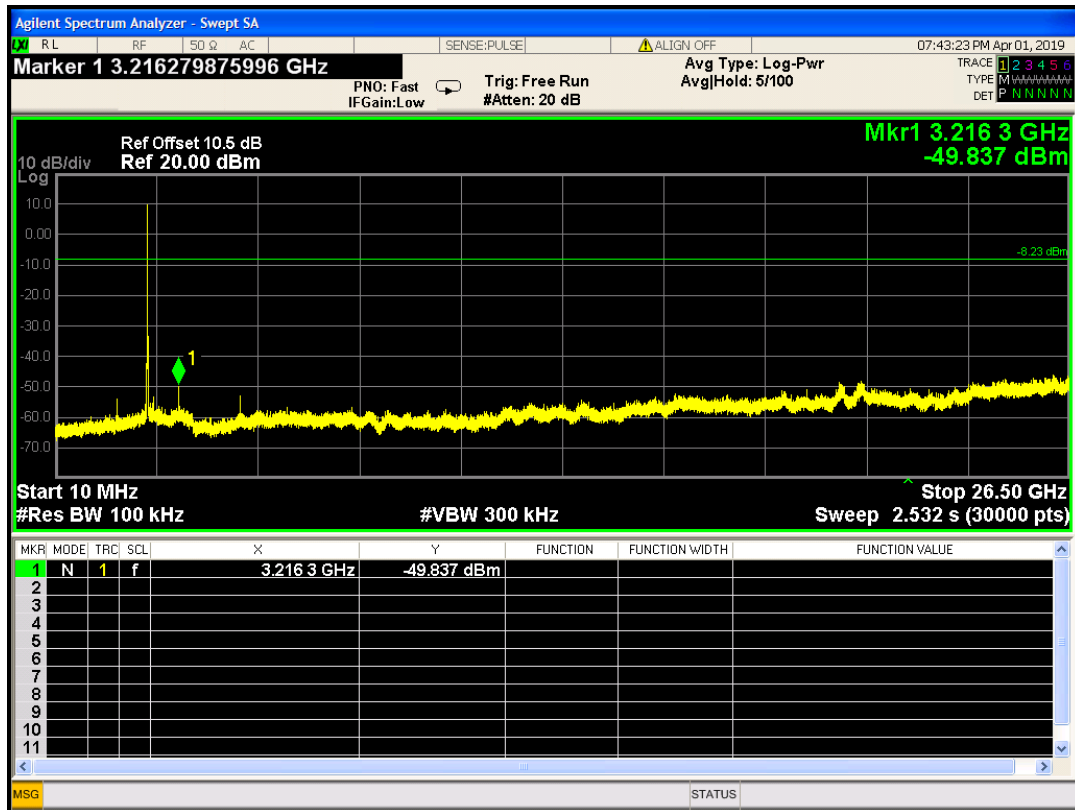


2.31GHz-2.43GHz

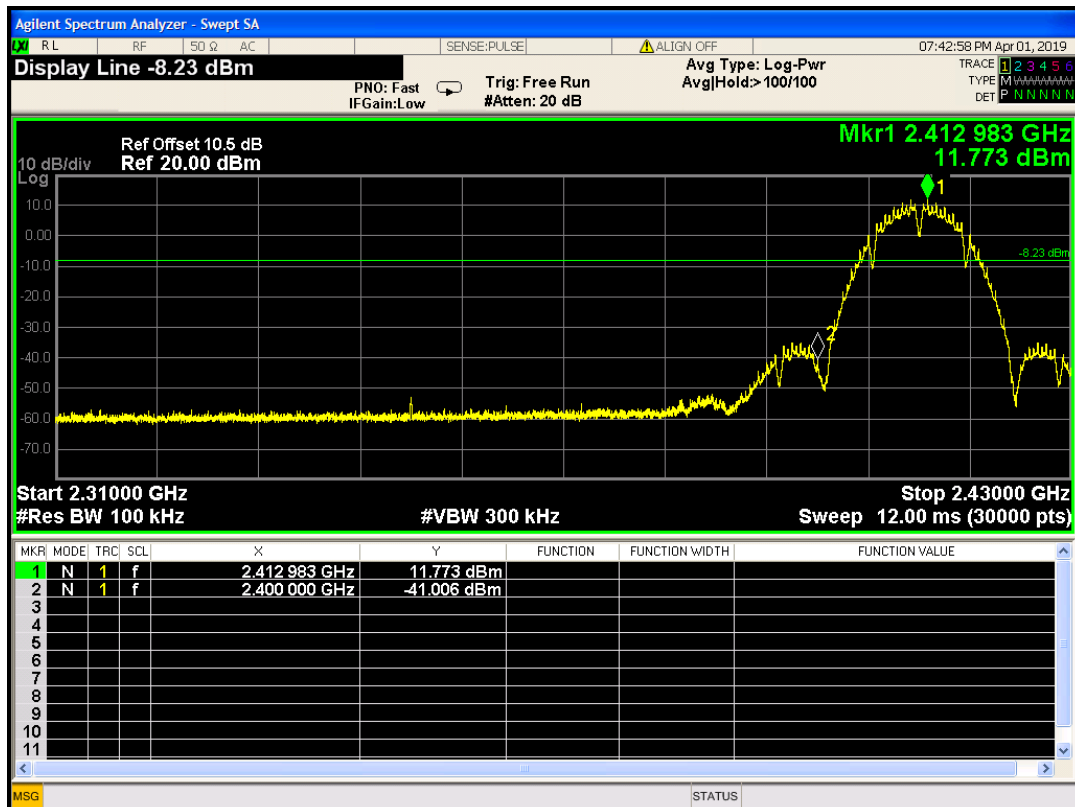

802.11b mode (antenna 0):
Channel 2437MHz
0.01GHz-26.5GHz

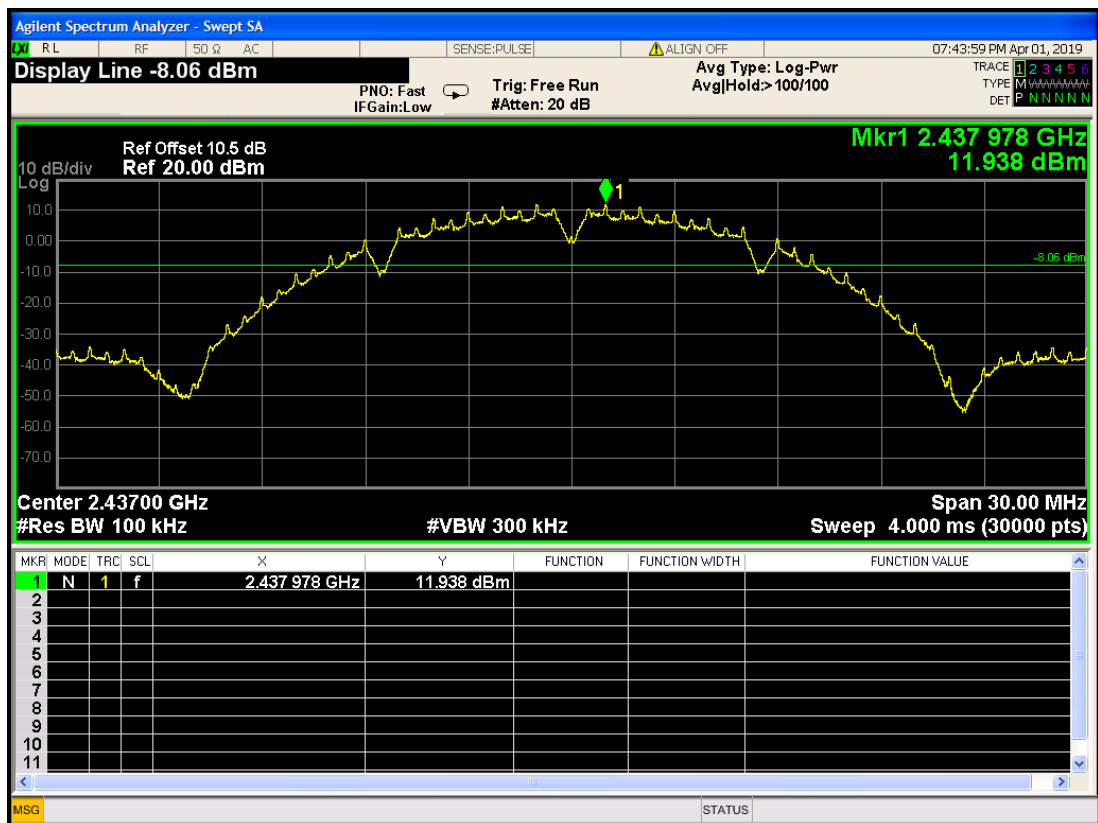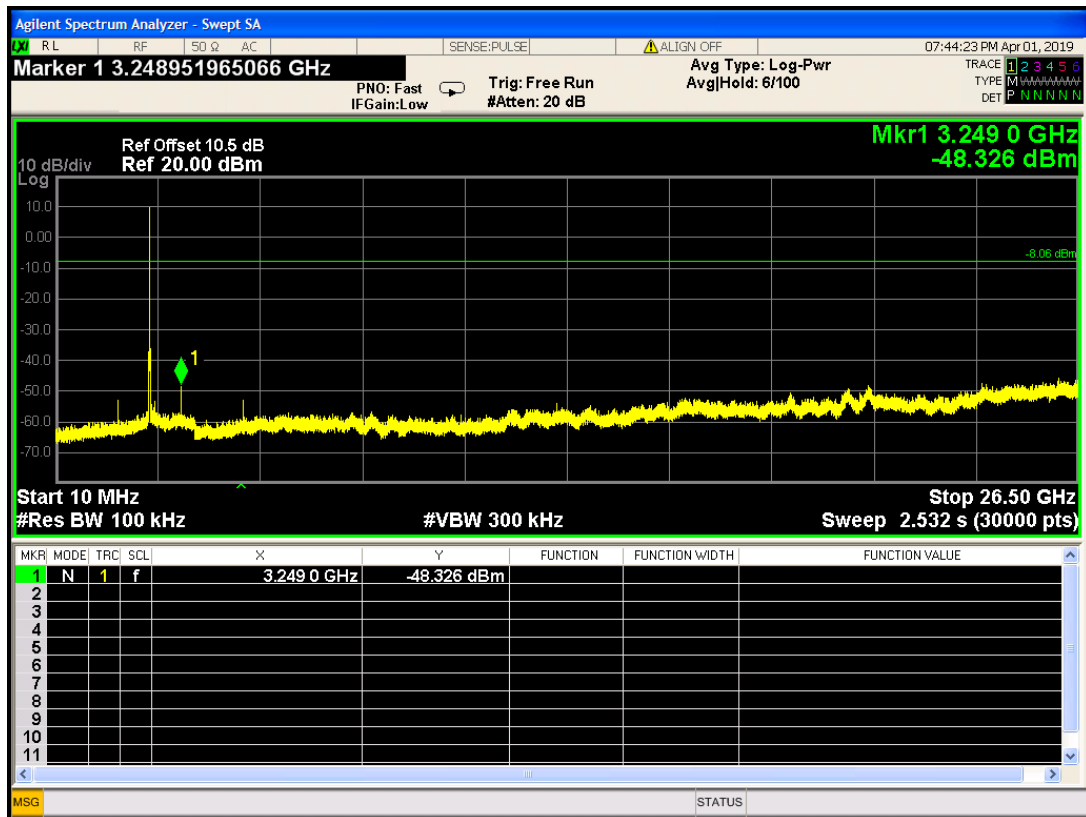


802.11b mode (antenna 0):
Channel 2462MHz
0.01GHz-26.5GHz

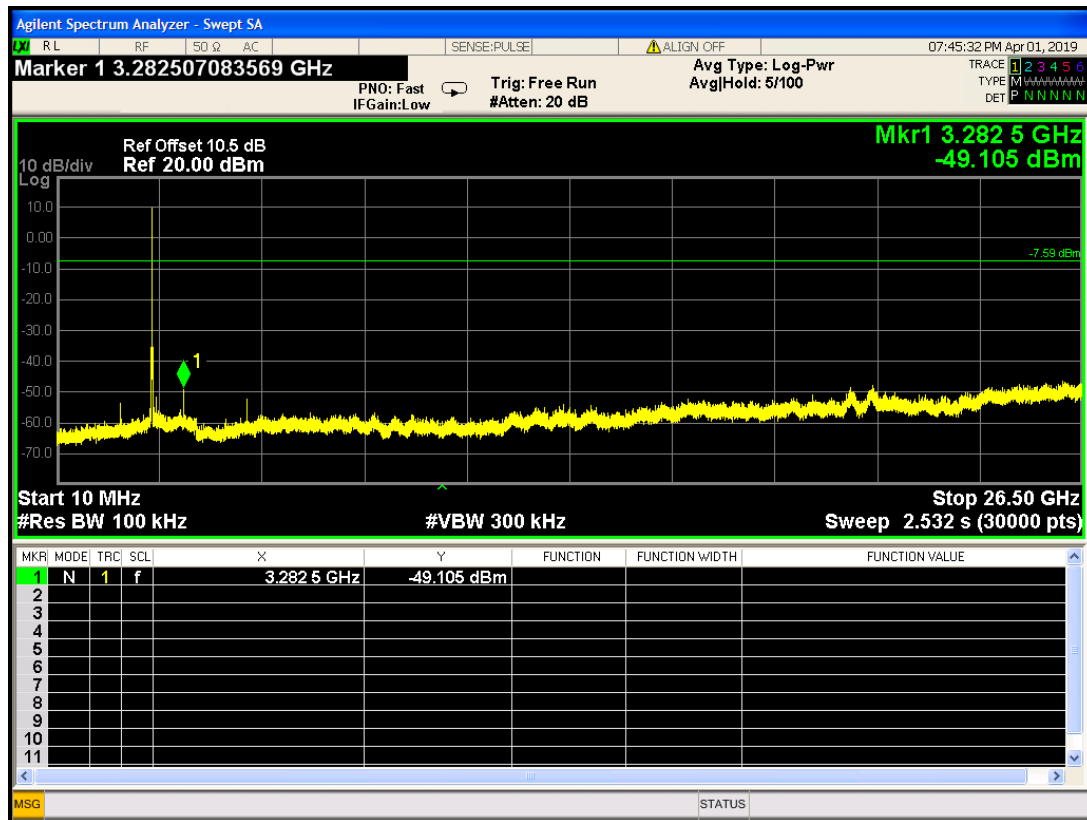


2.45GHz-2.5GHz





802.11b mode (antenna 1):
Channel 2412MHz
0.01GHz-26.5GHz

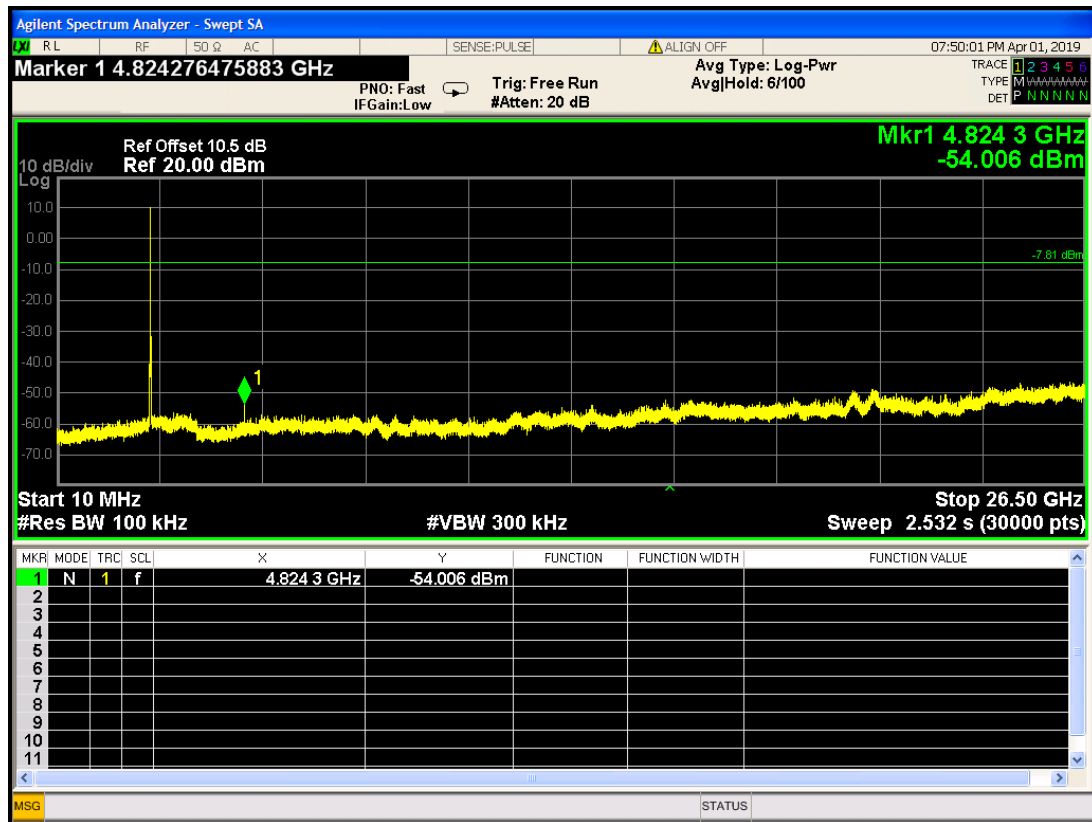


2.31GHz-2.43GHz

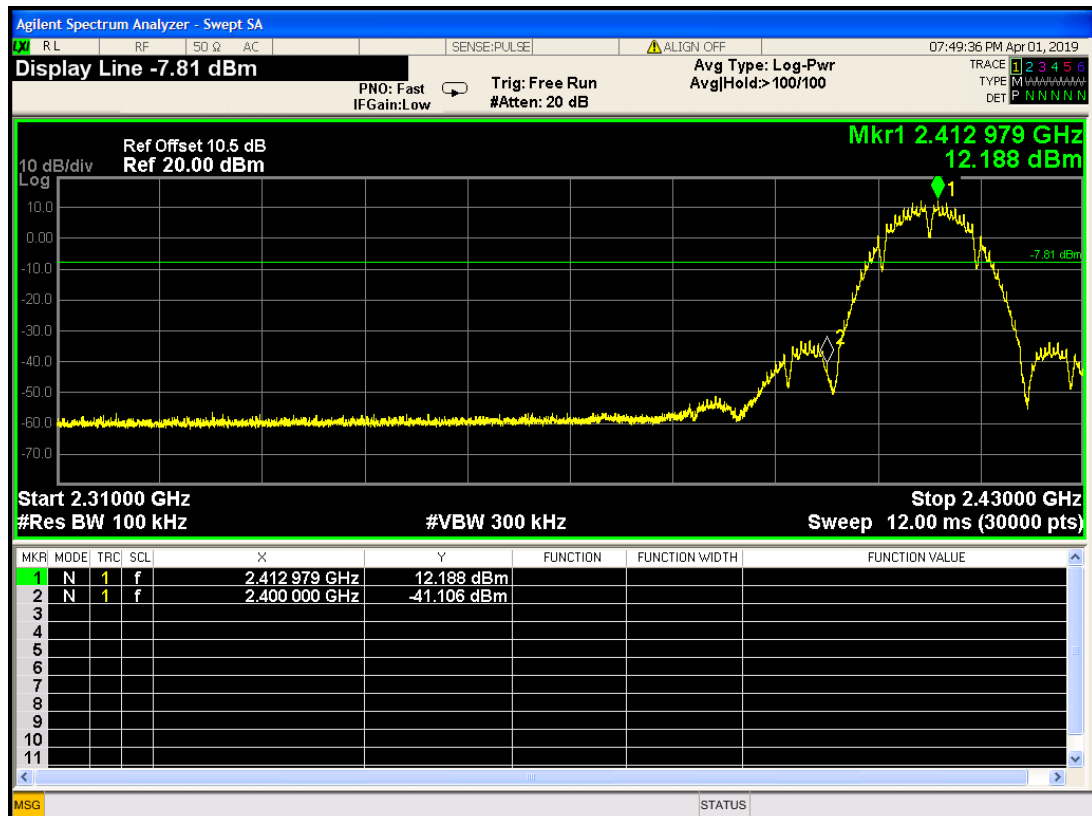


802.11b mode (antenna 1):
Channel 2437MHz
0.01GHz-26.5GHz

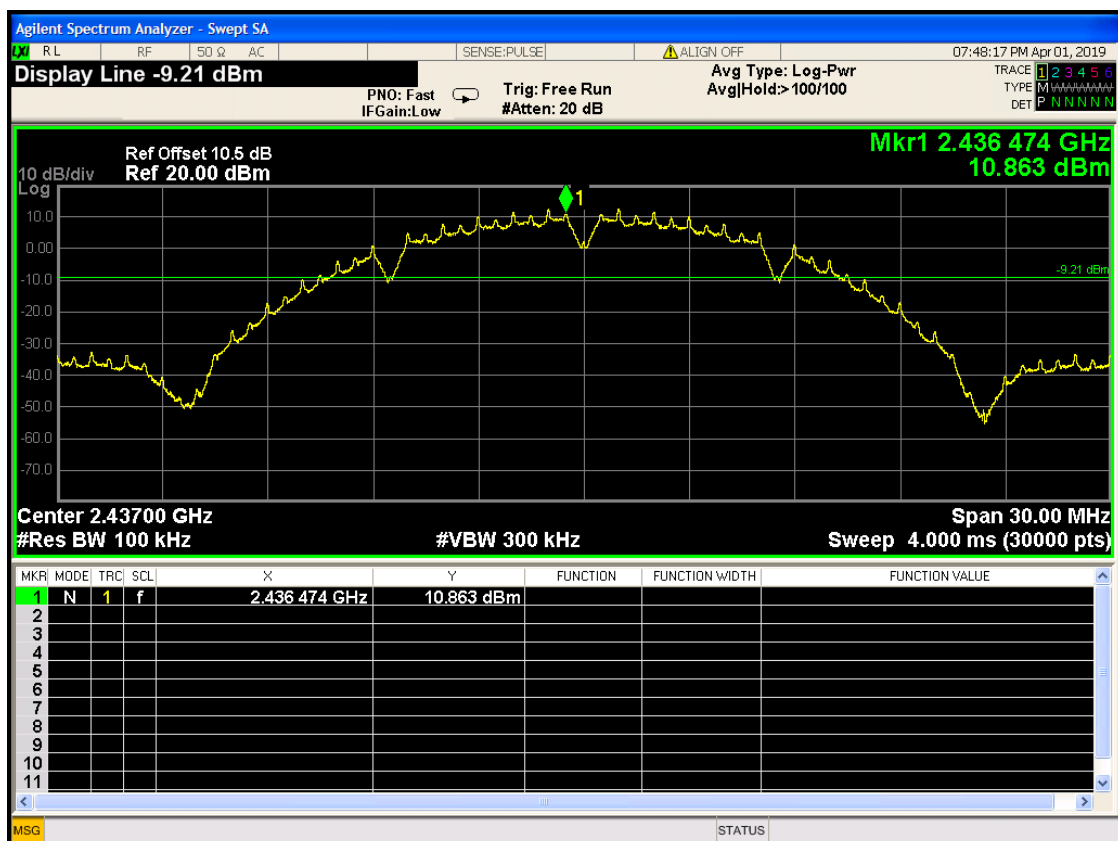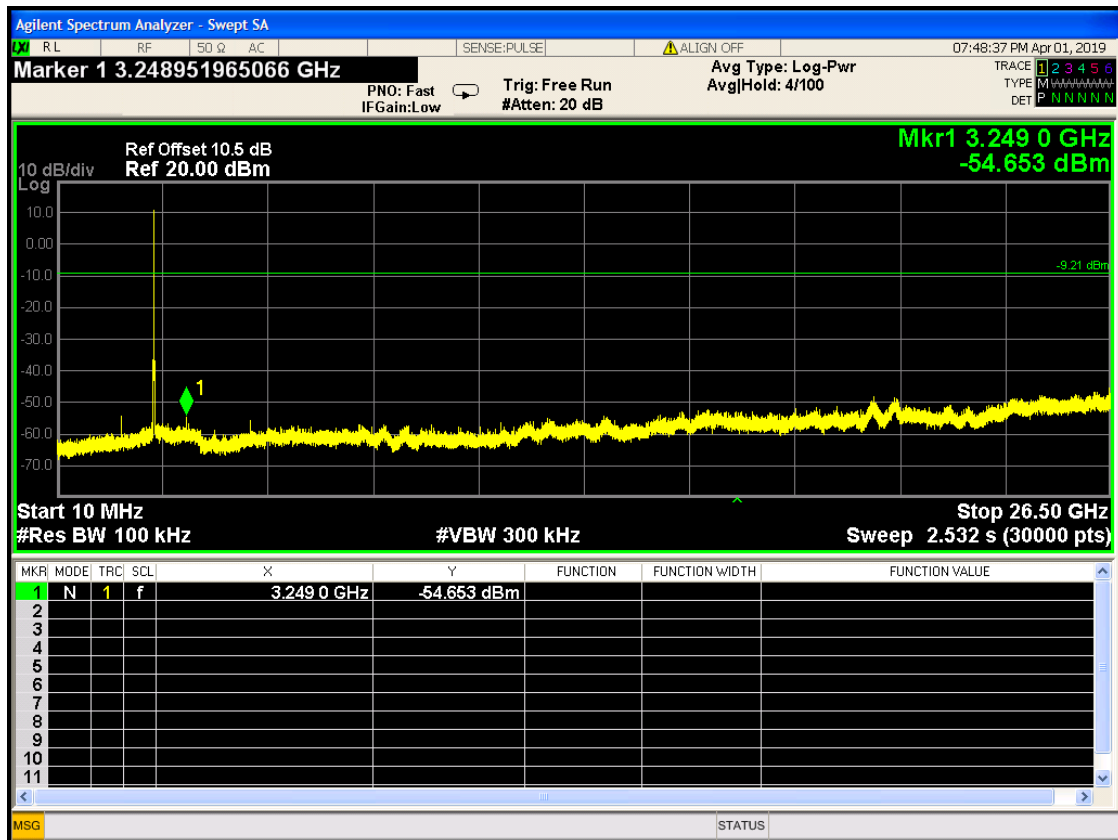


802.11b mode (antenna 1):
Channel 2462MHz
0.01GHz-26.5GHz

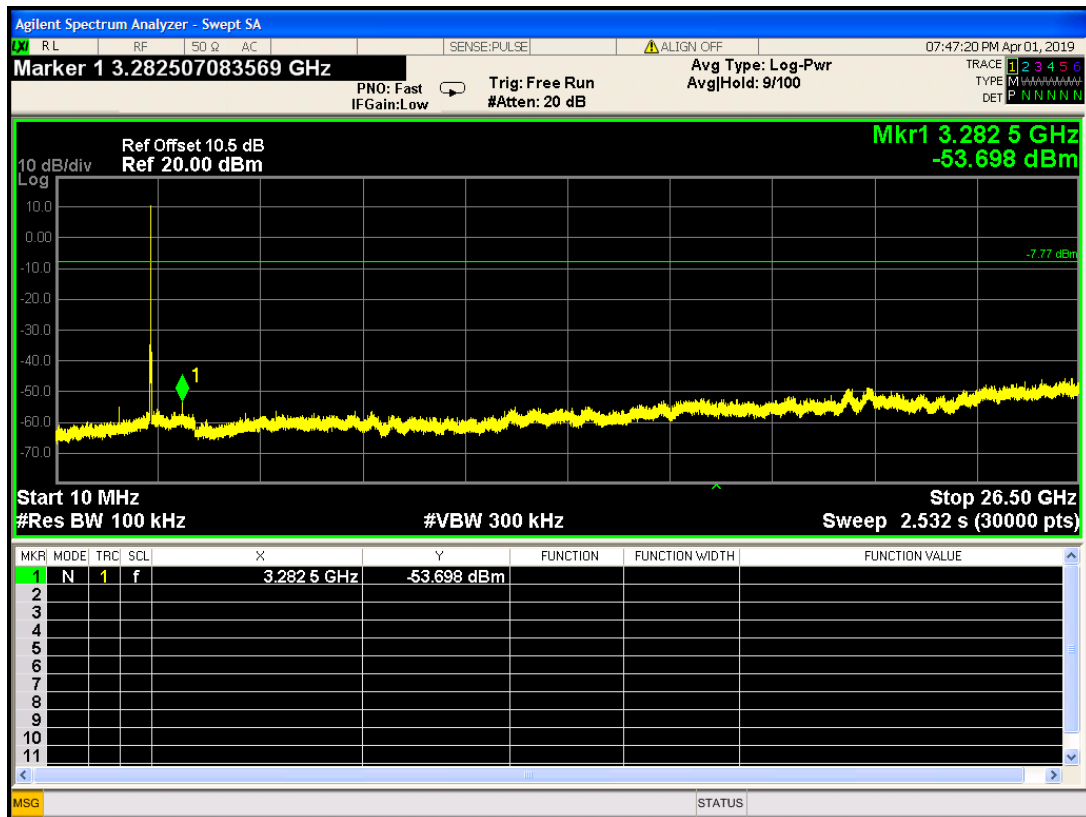


2.45GHz-2.5GHz

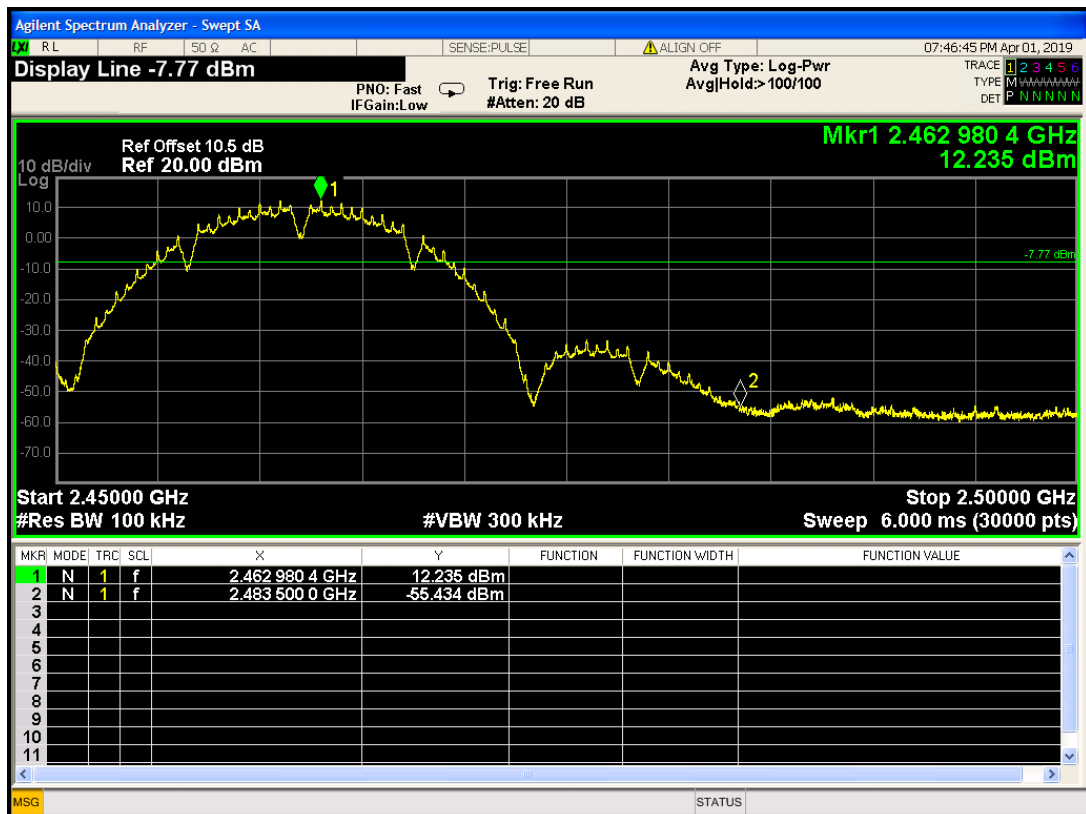



802.11g mode (antenna 0):
Channel 2412MHz
0.01GHz-26.5GHz

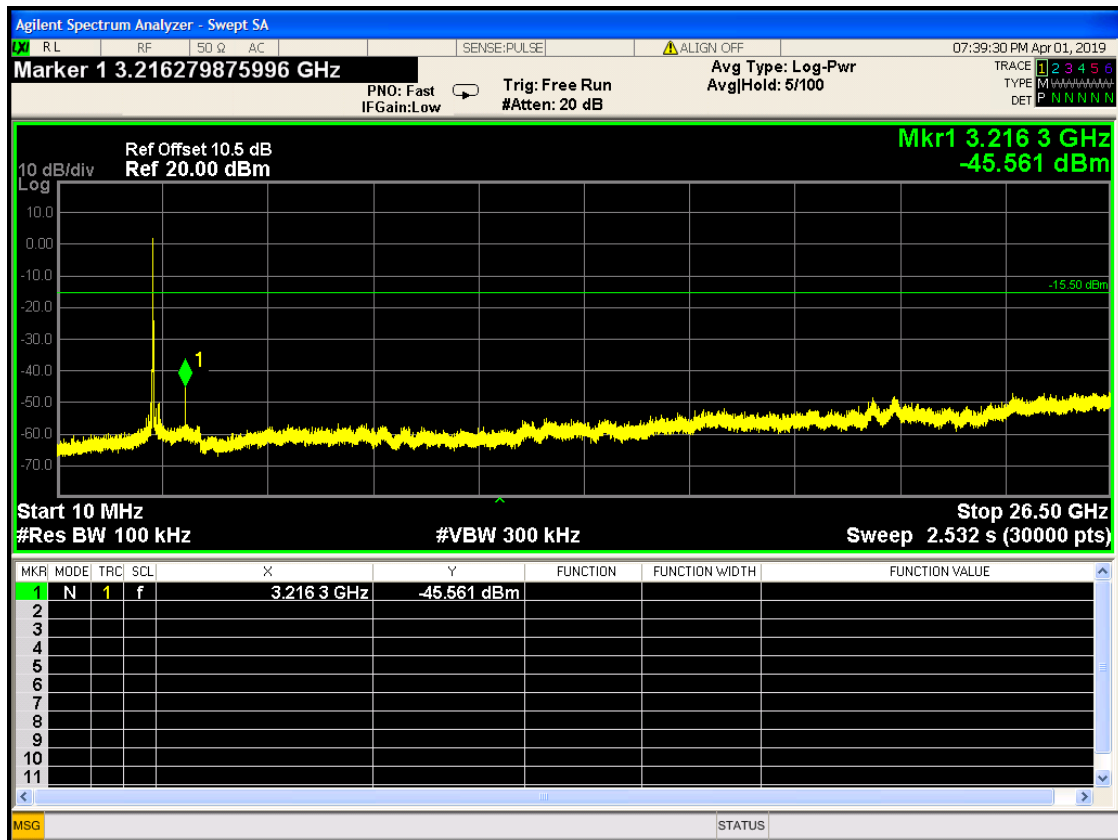


2.31GHz-2.43GHz

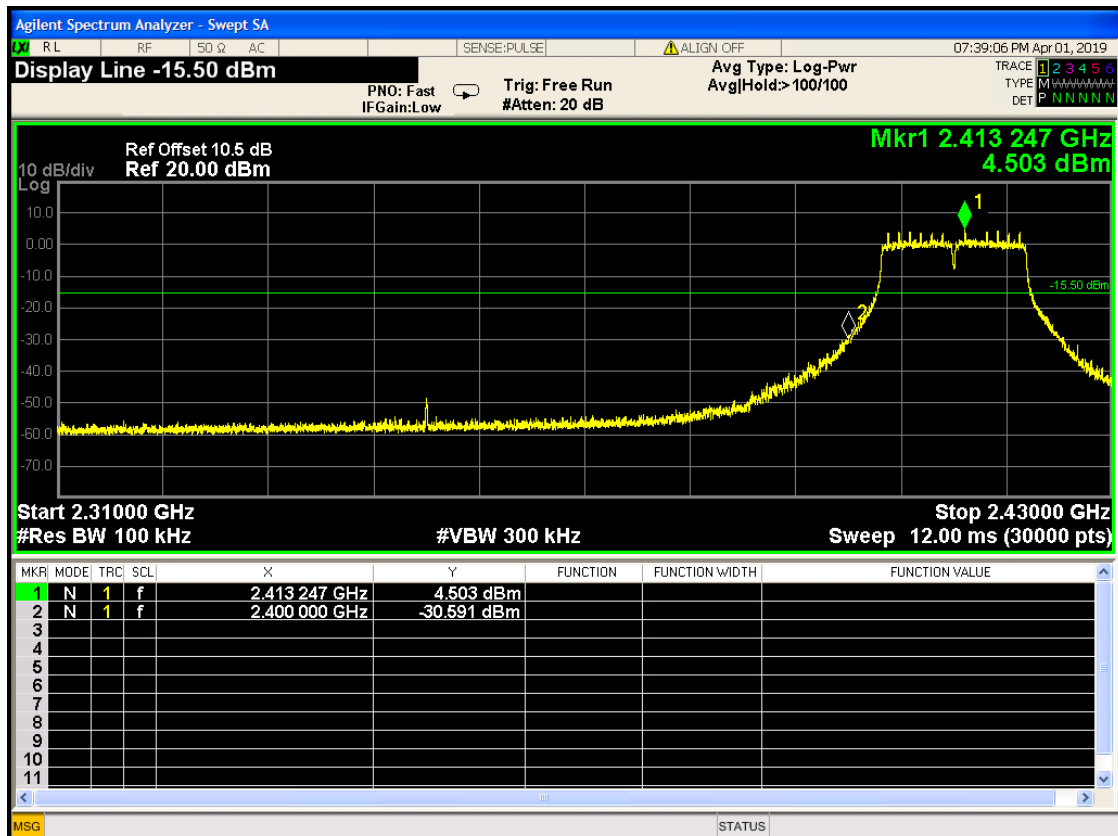


802.11g mode (antenna 0):
Channel 2437MHz
0.01GHz-26.5GHz

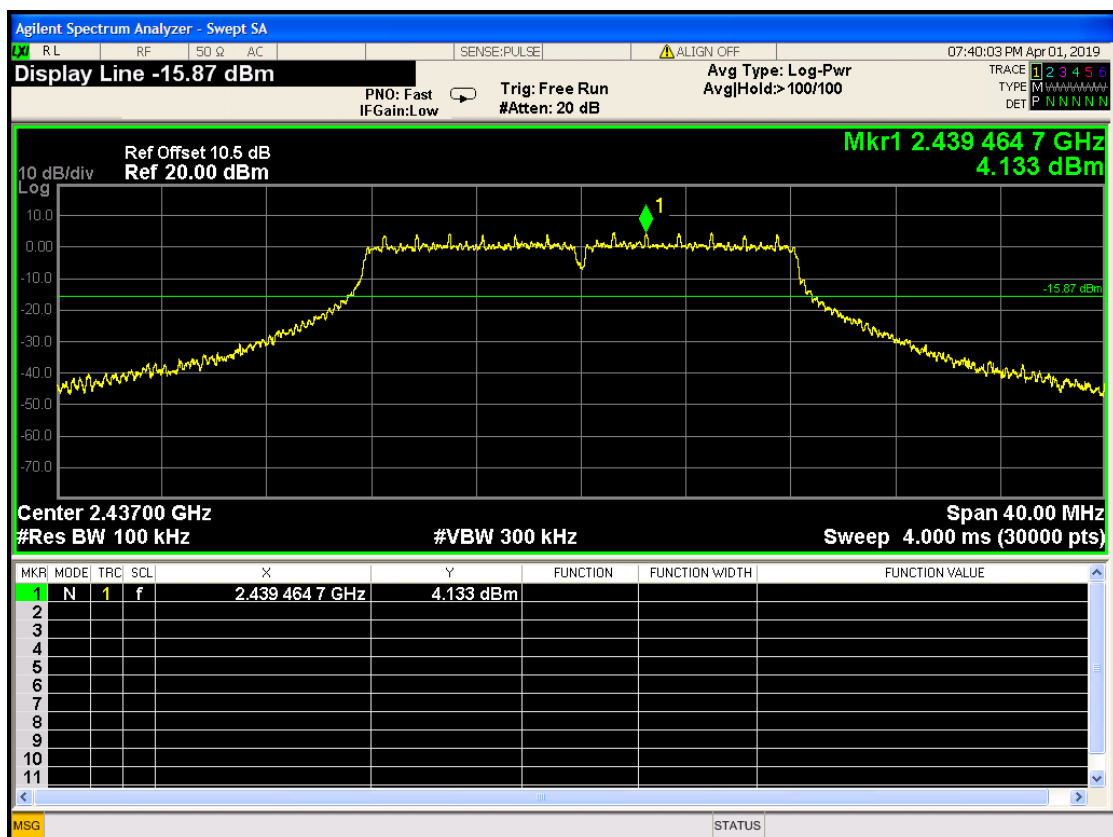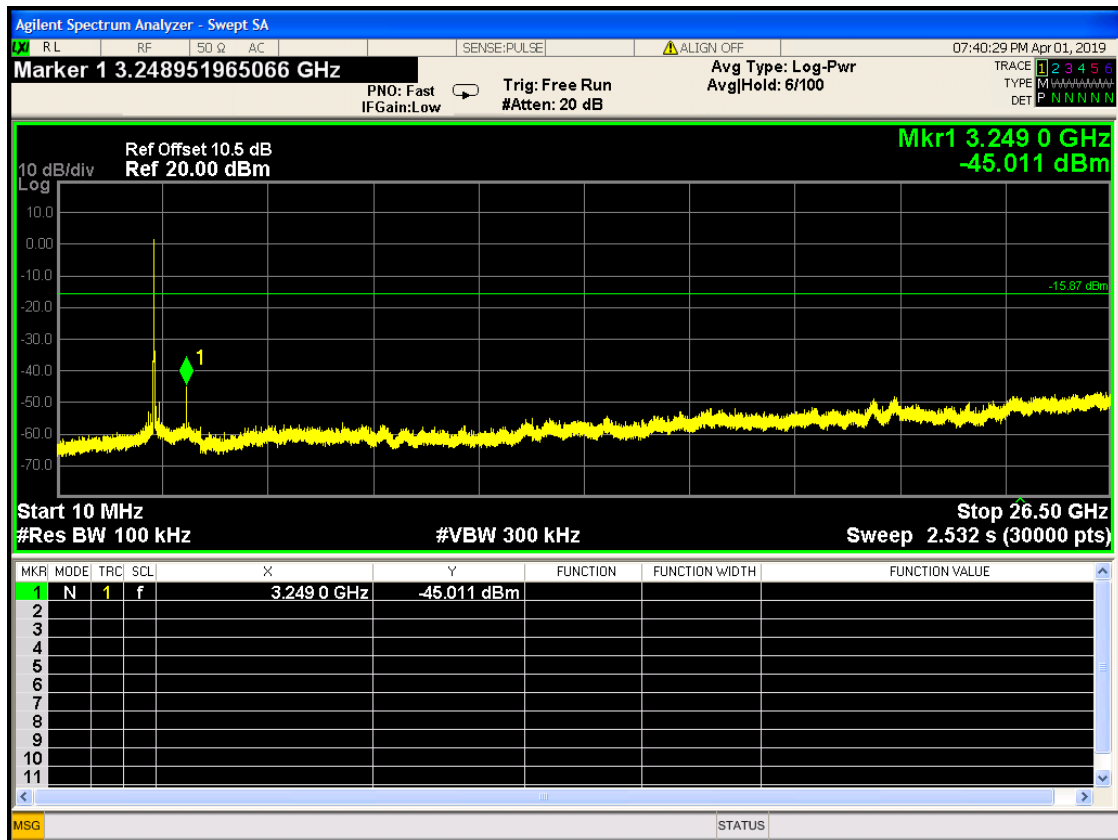


802.11g mode (antenna 0):
Channel 2462MHz
0.01GHz-26.5GHz

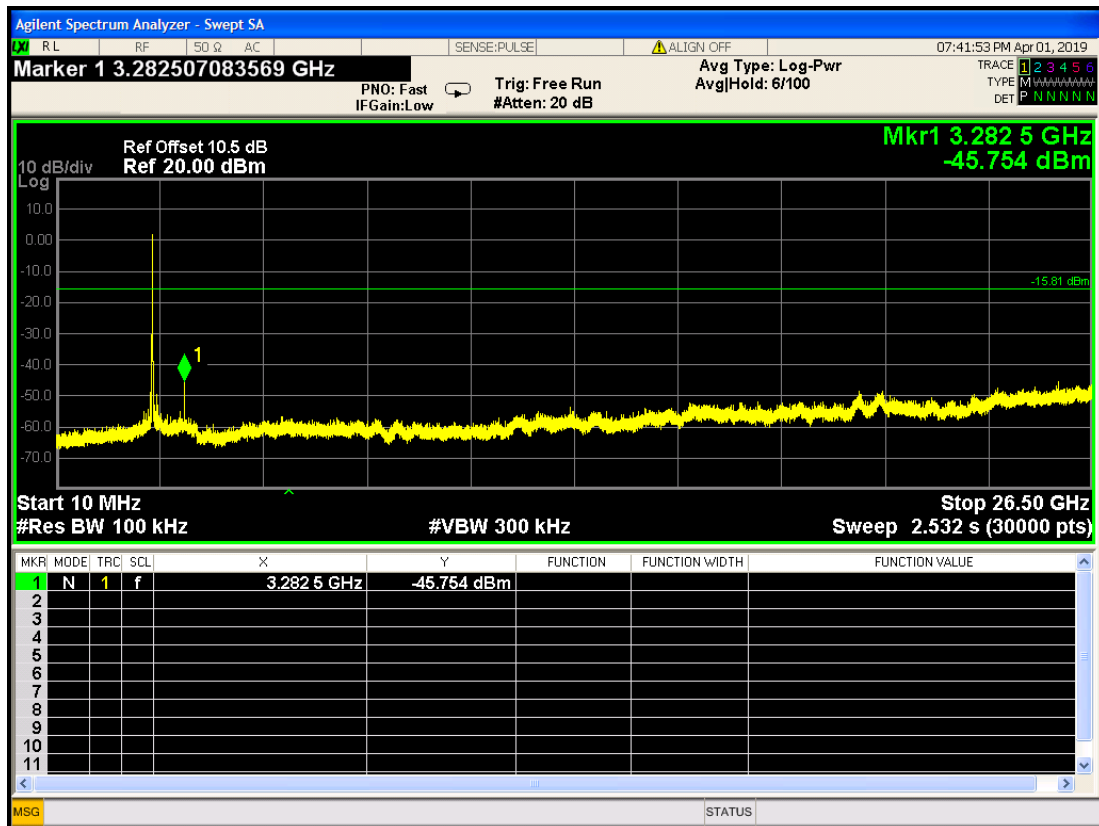


2.45GHz-2.5GHz

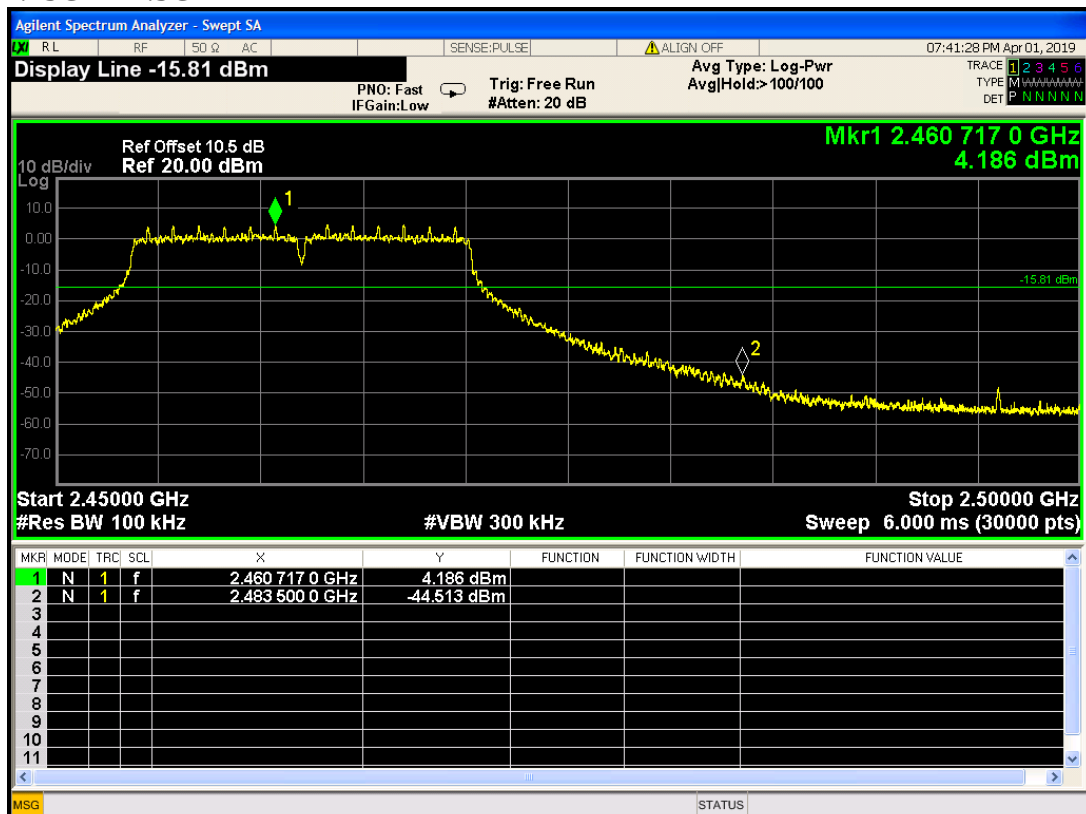



802.11g mode (antenna 1):
Channel 2412MHz
0.01GHz-26.5GHz

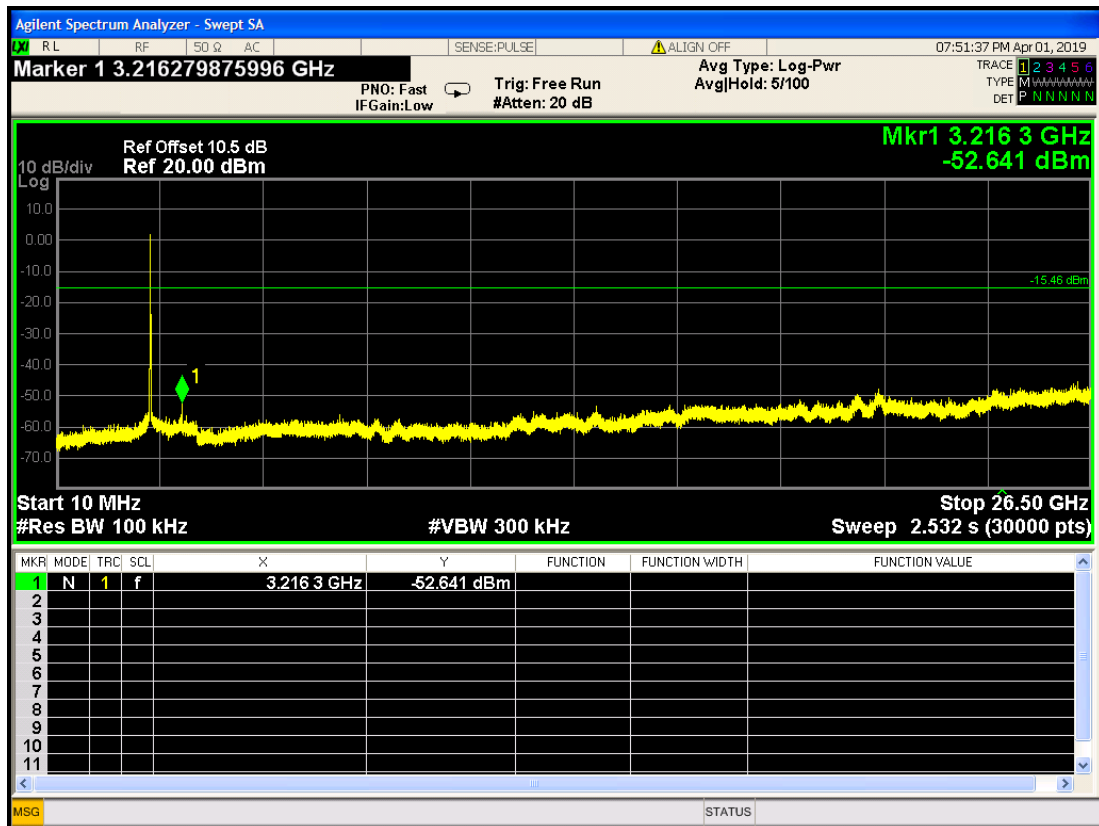


2.31GHz-2.43GHz

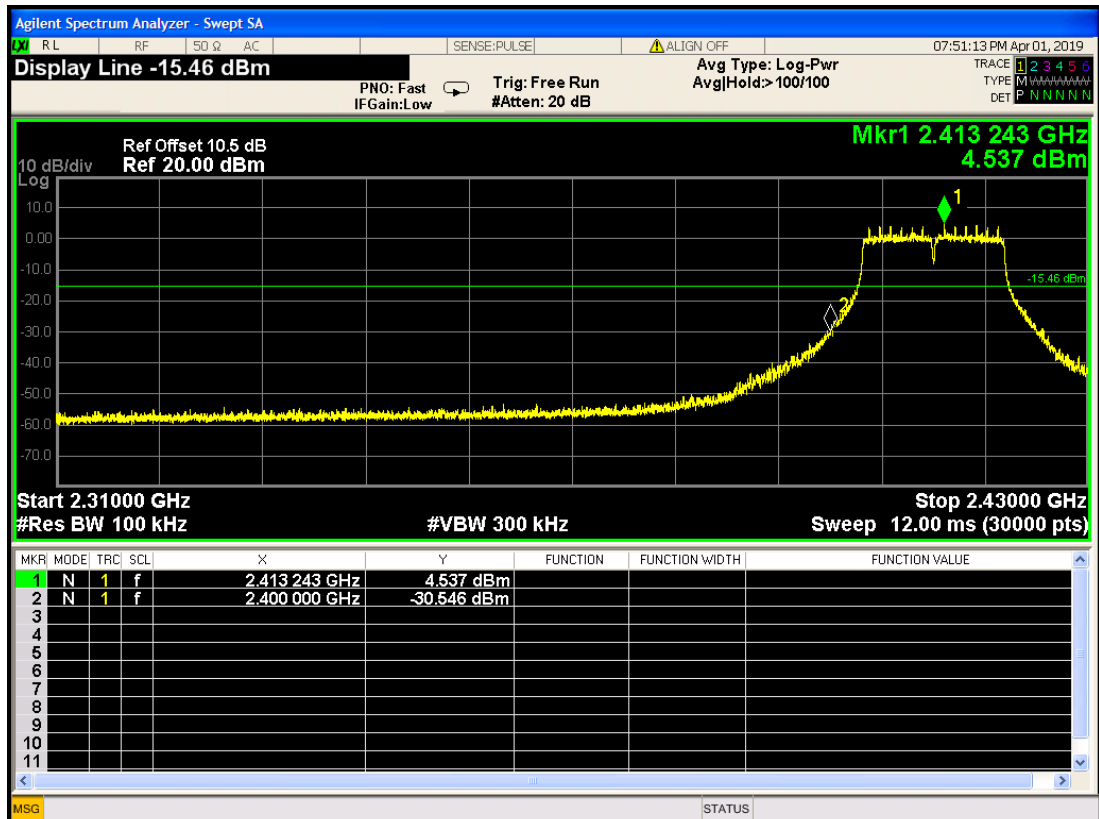


802.11g mode (antenna 1):
Channel 2437MHz
0.01GHz-26.5GHz

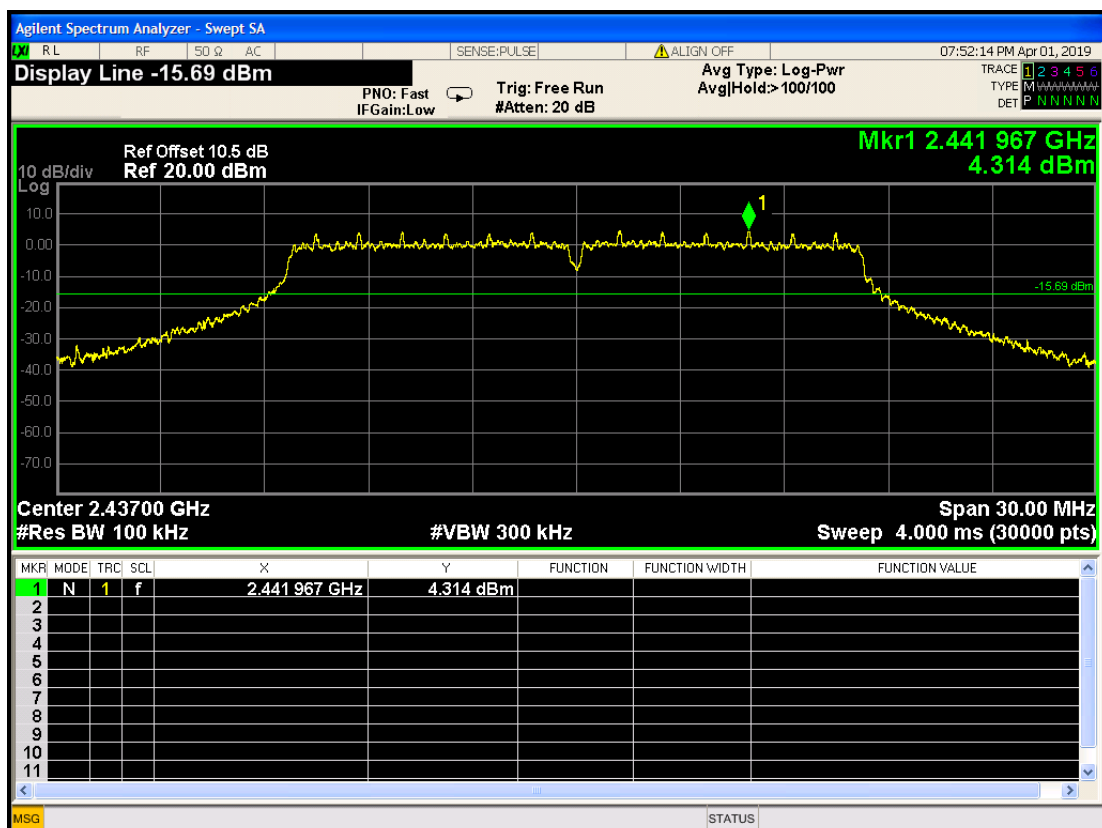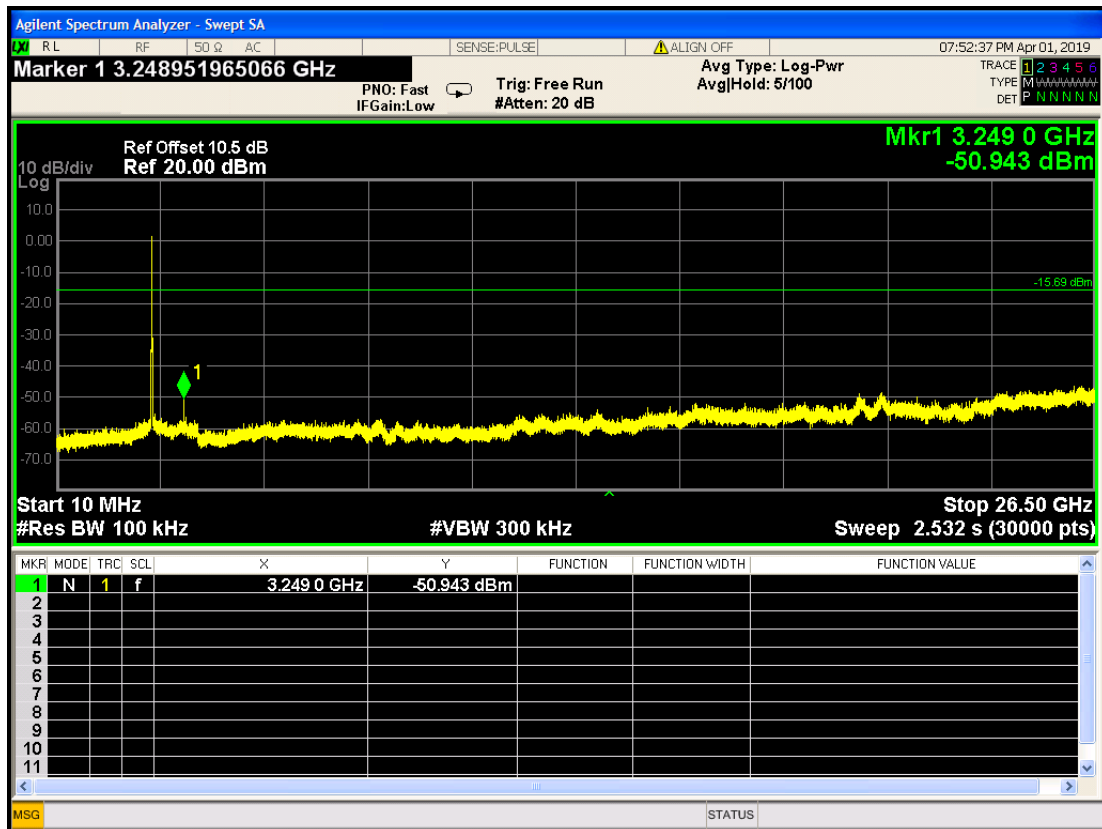


802.11g mode (antenna 1):
Channel 2462MHz
0.01GHz-26.5GHz

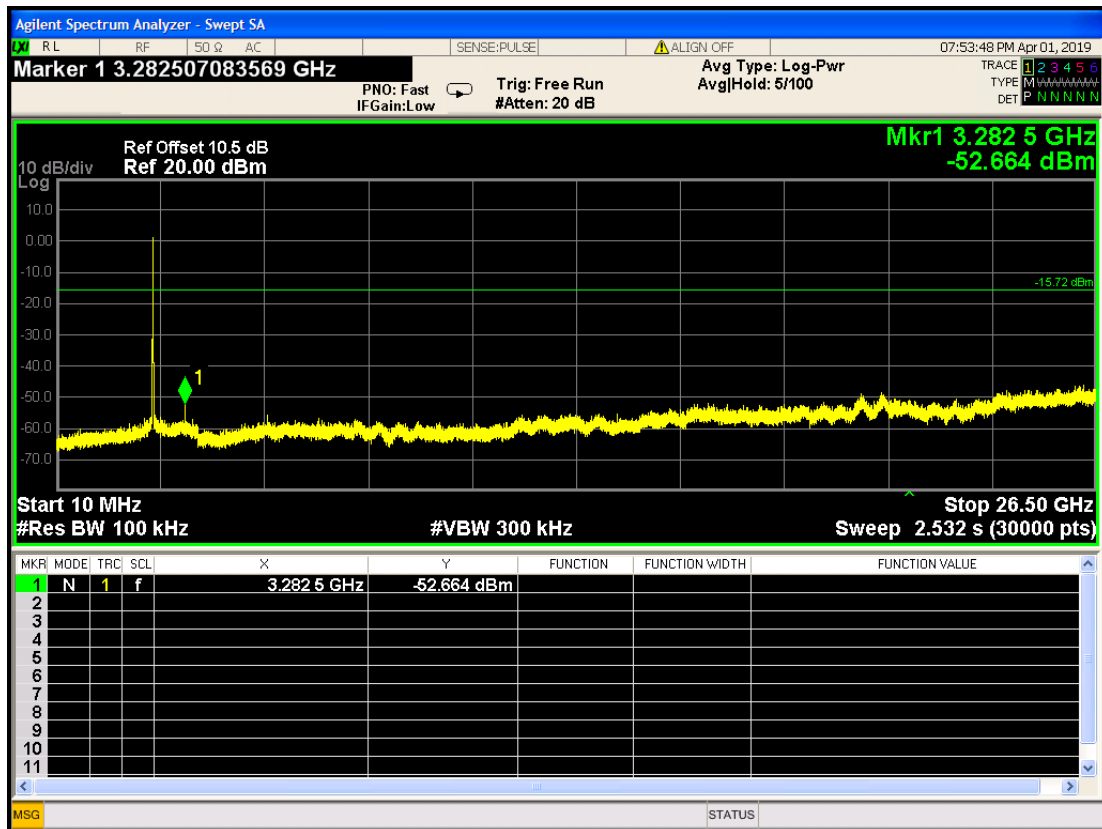


2.45GHz-2.5GHz

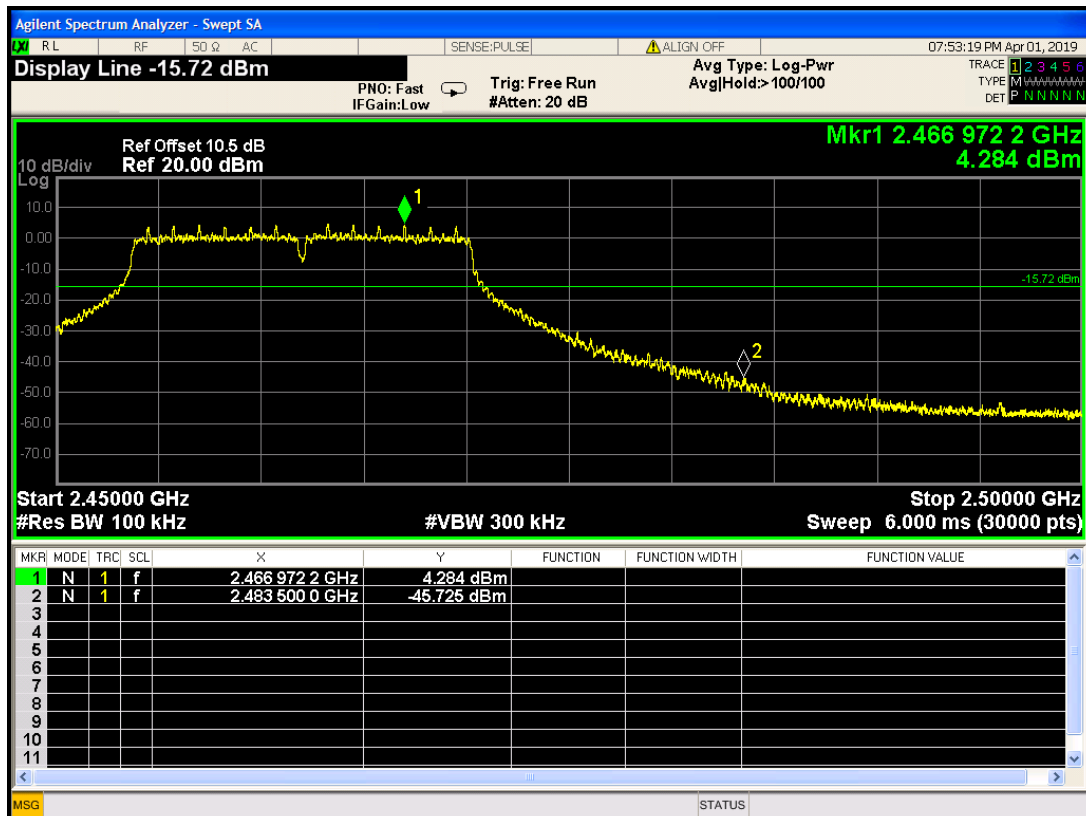



802.11n HT20 mode (antenna 0):
Channel 2412MHz
0.01GHz-26.5GHz

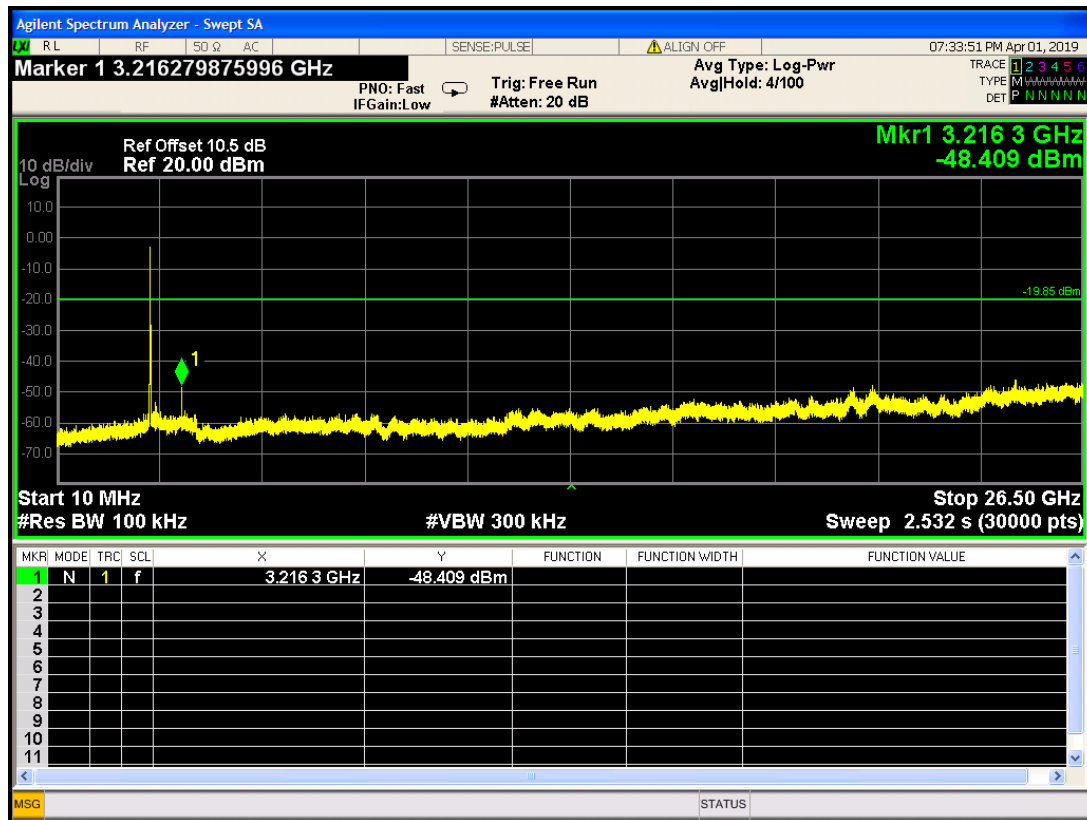


2.31GHz-2.43GHz

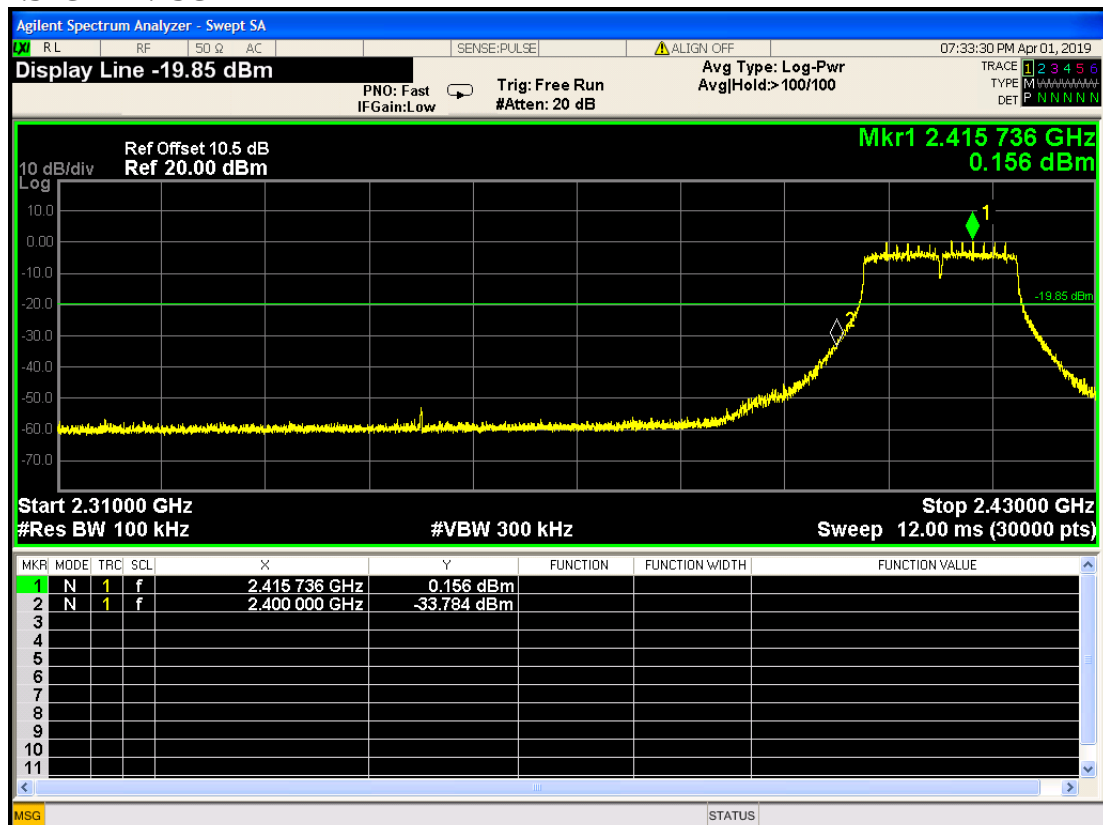


802.11n HT20 mode (antenna 0):
Channel 2437MHz
0.01GHz-26.5GHz

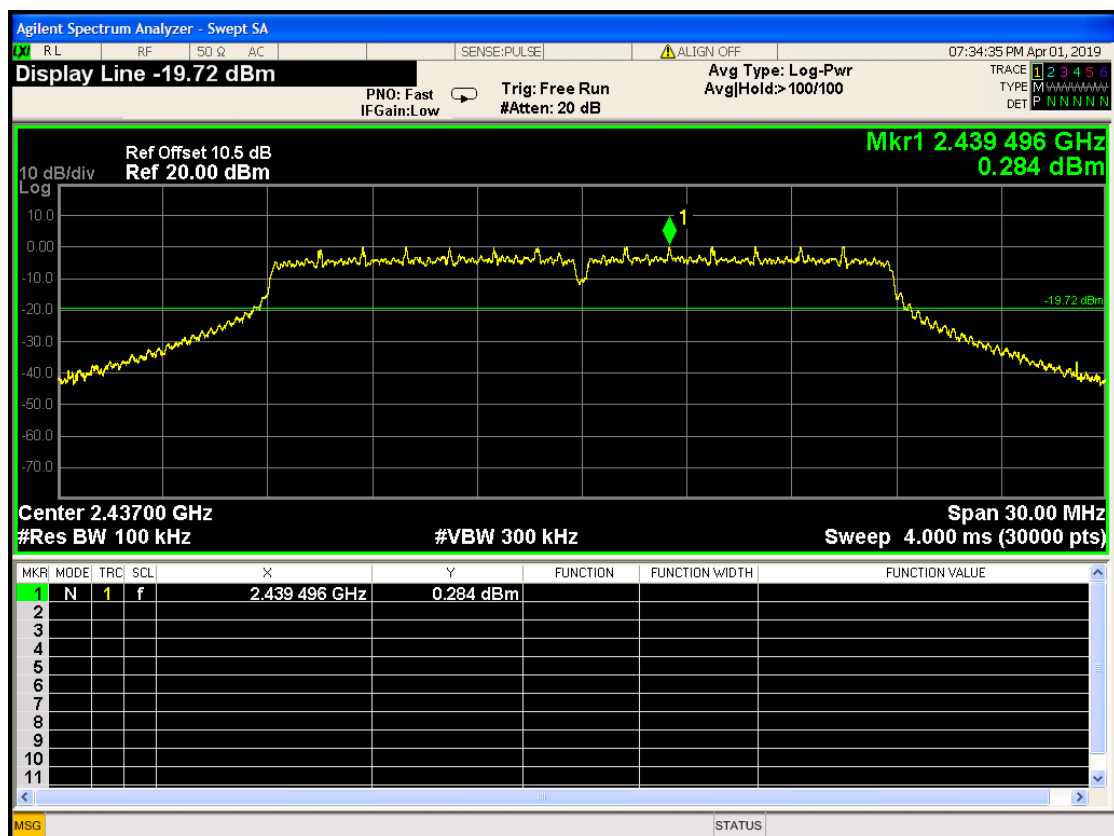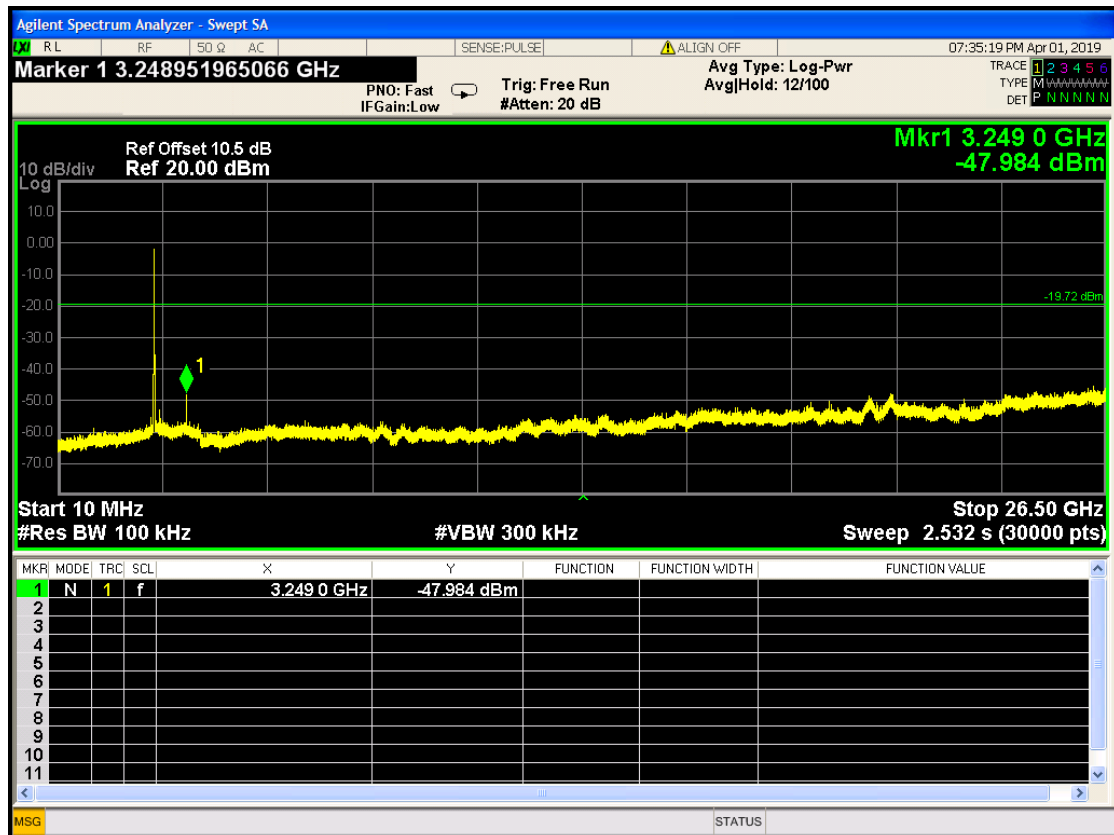


802.11n HT20 mode (antenna 0):
Channel 2462MHz
0.01GHz-26.5GHz

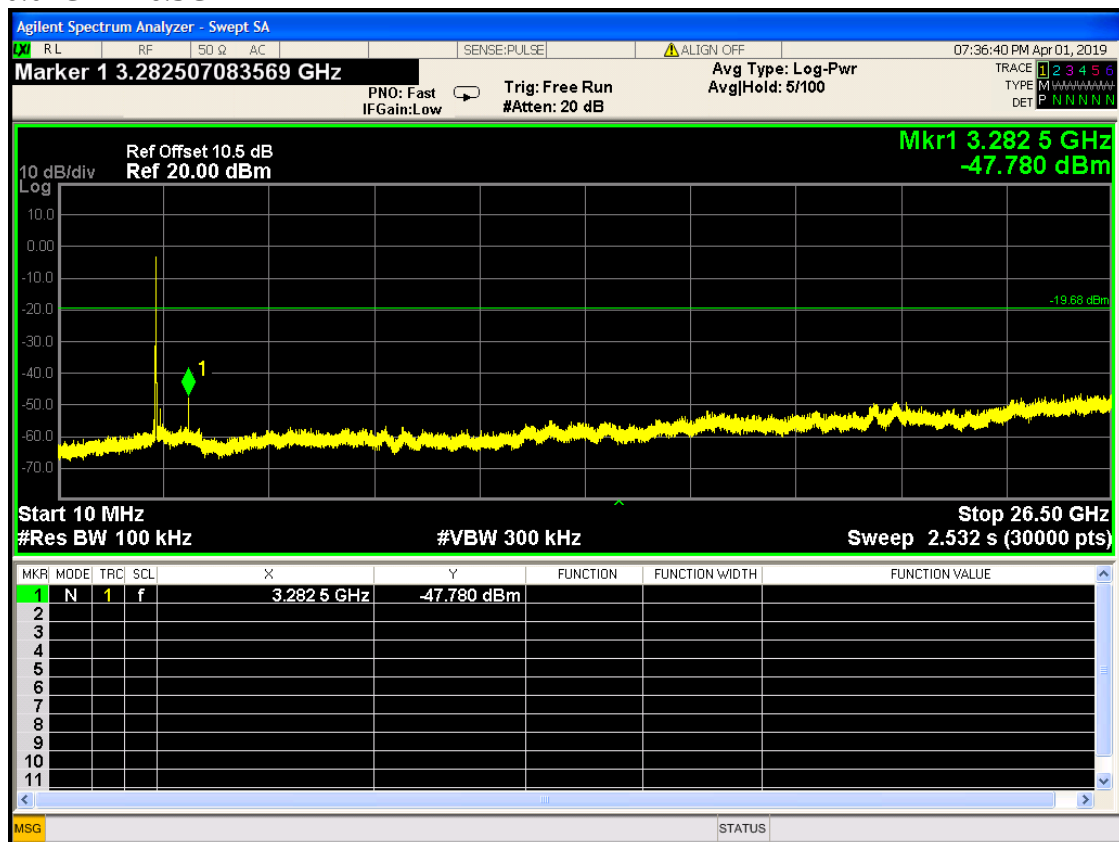


2.45GHz-2.5GHz

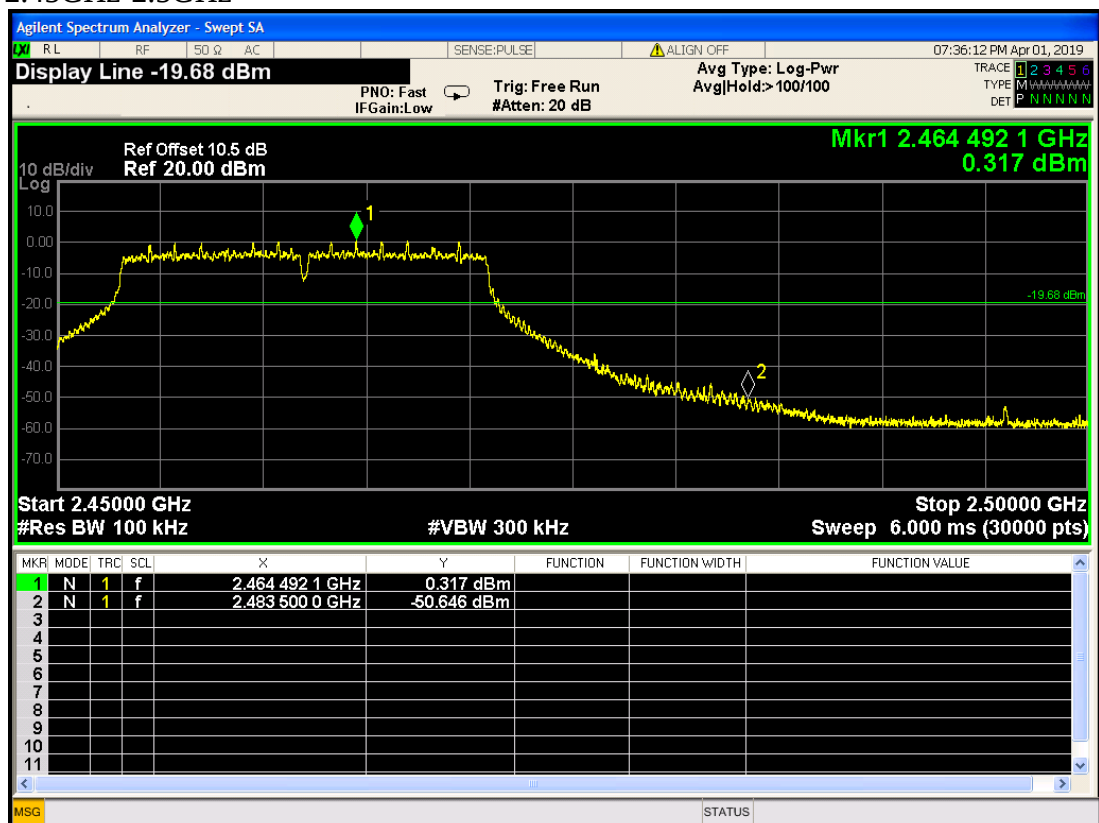



802.11n HT20 mode (antenna 1):
Channel 2412MHz
0.01GHz-26.5GHz

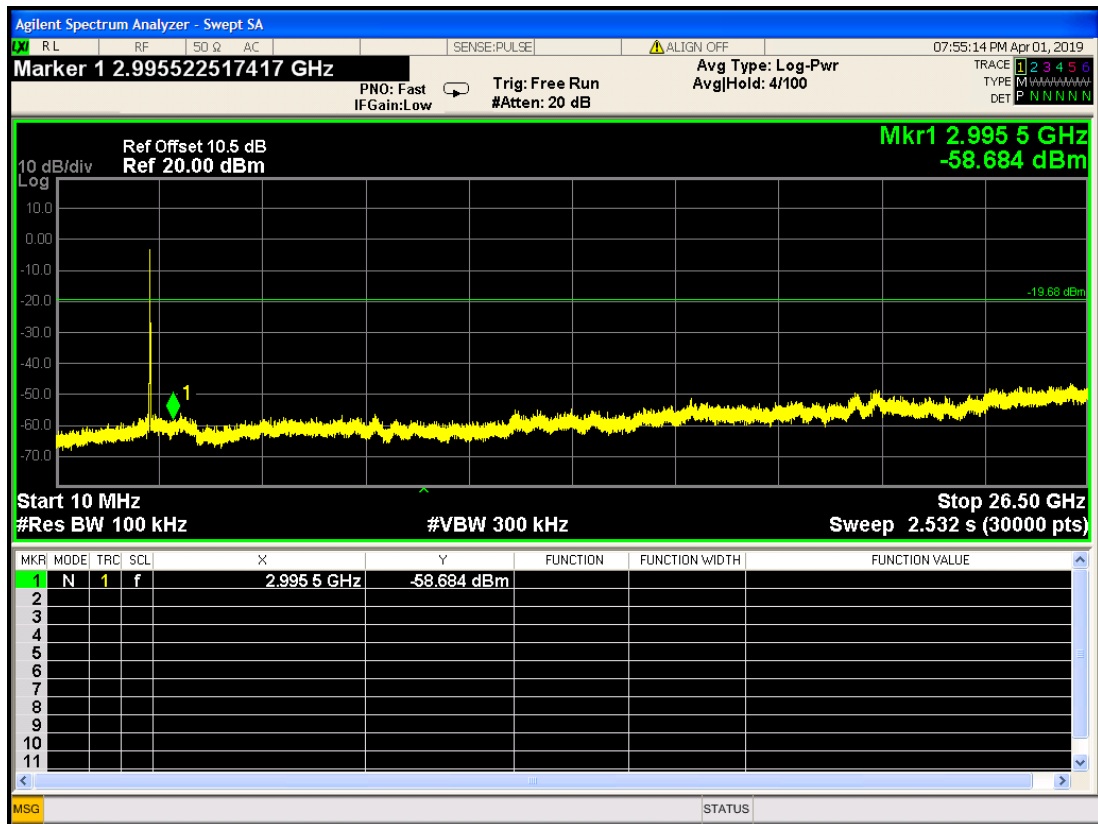


2.31GHz-2.43GHz

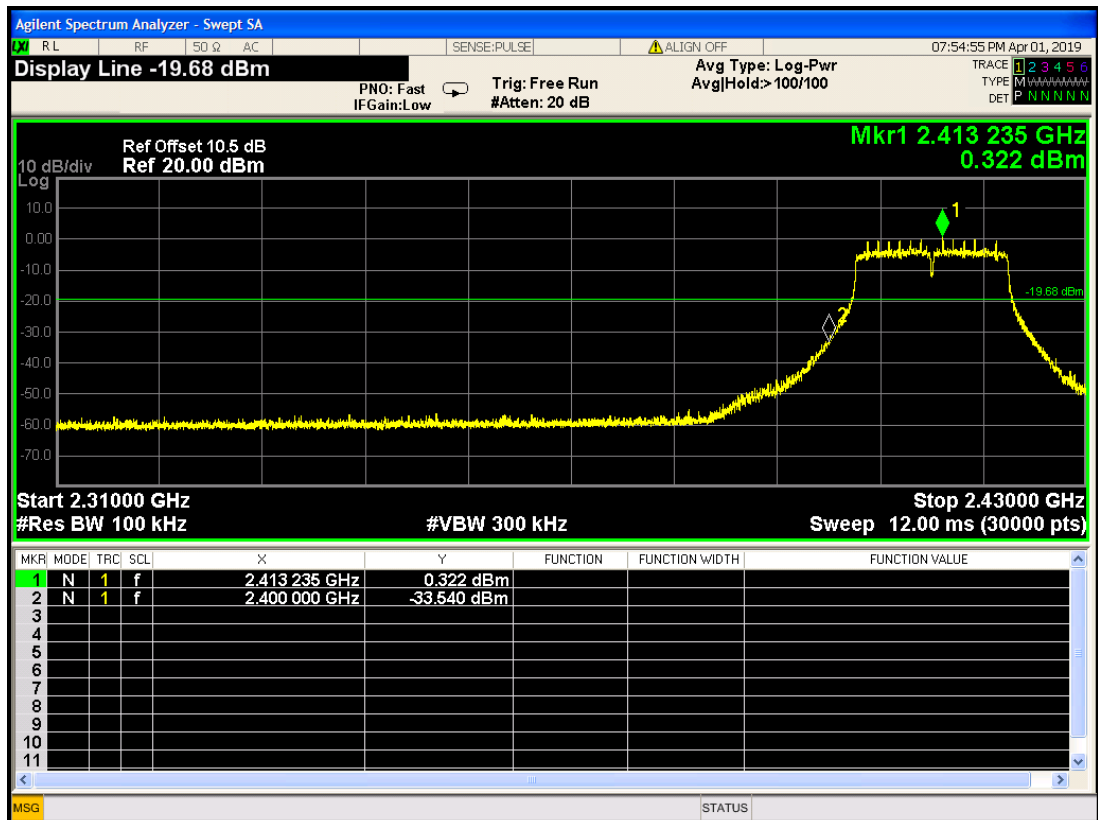


802.11n HT20 mode (antenna 1):
Channel 2437MHz
0.01GHz-26.5GHz

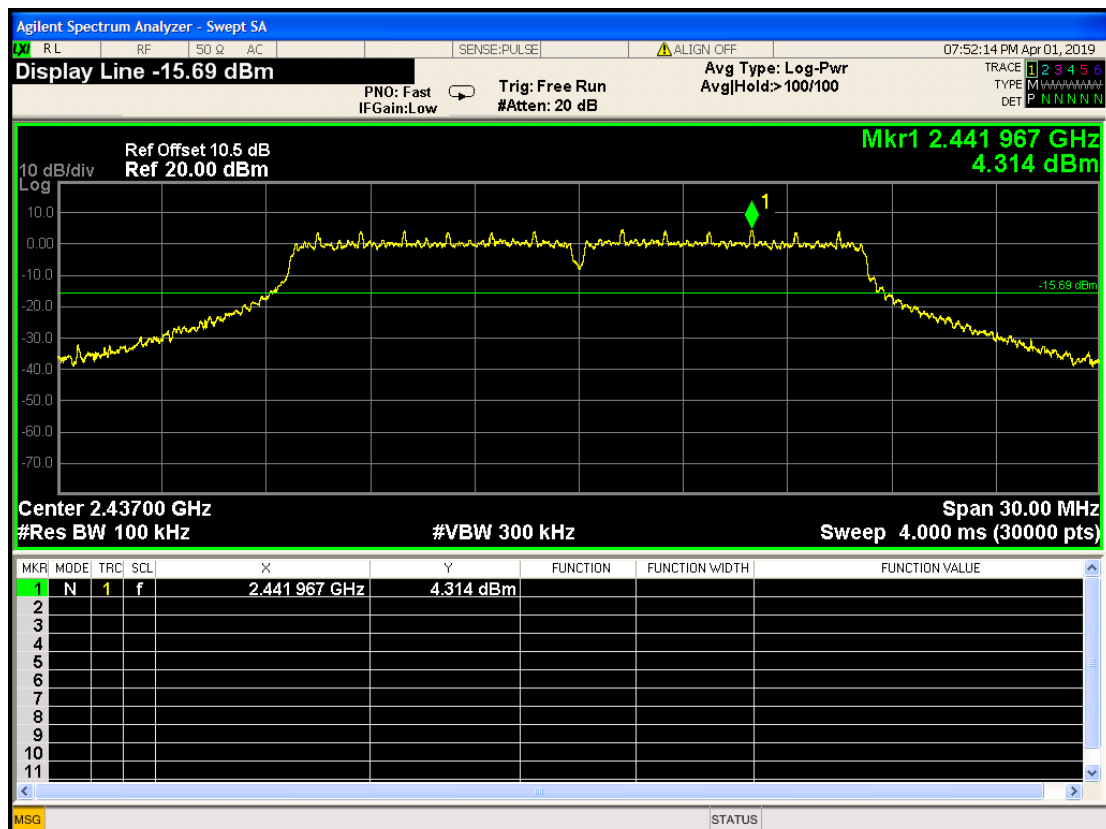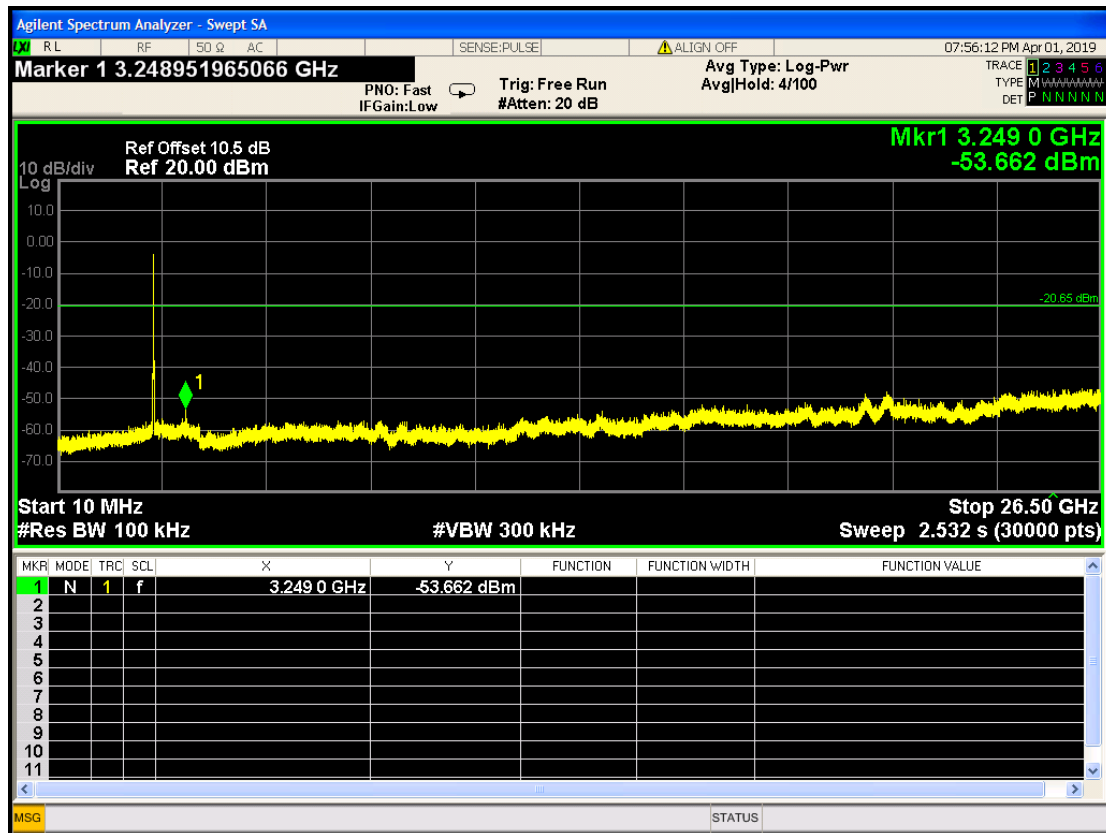


802.11n HT20 mode (antenna 1):
Channel 2462MHz
0.01GHz-26.5GHz

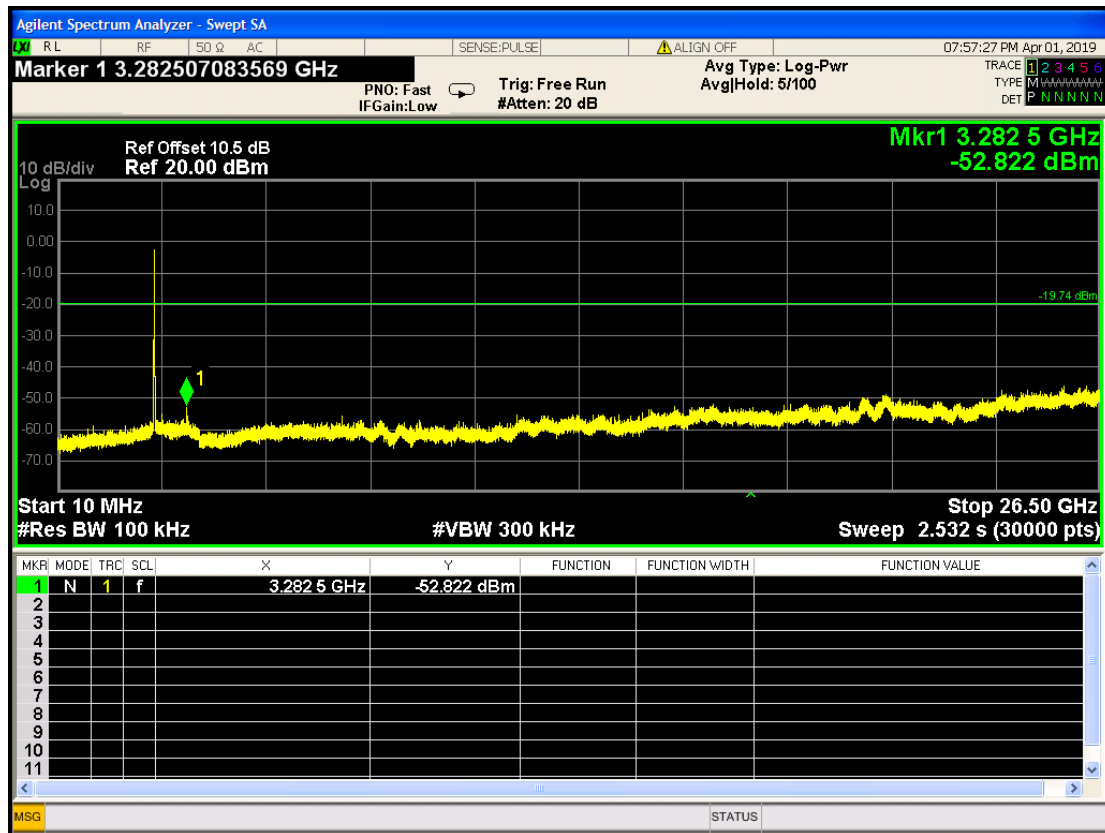


2.45GHz-2.5GHz

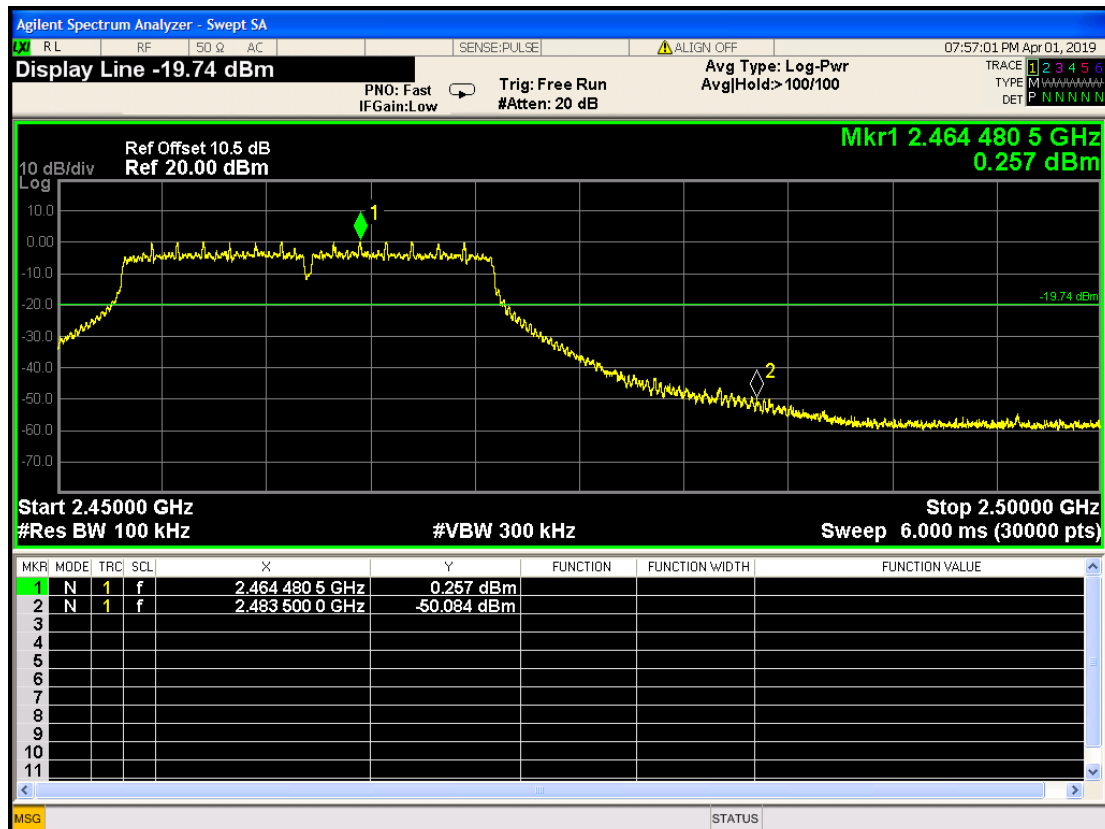



802.11n HT40 mode (antenna 0):
Channel 2422MHz
0.01GHz-26.5GHz

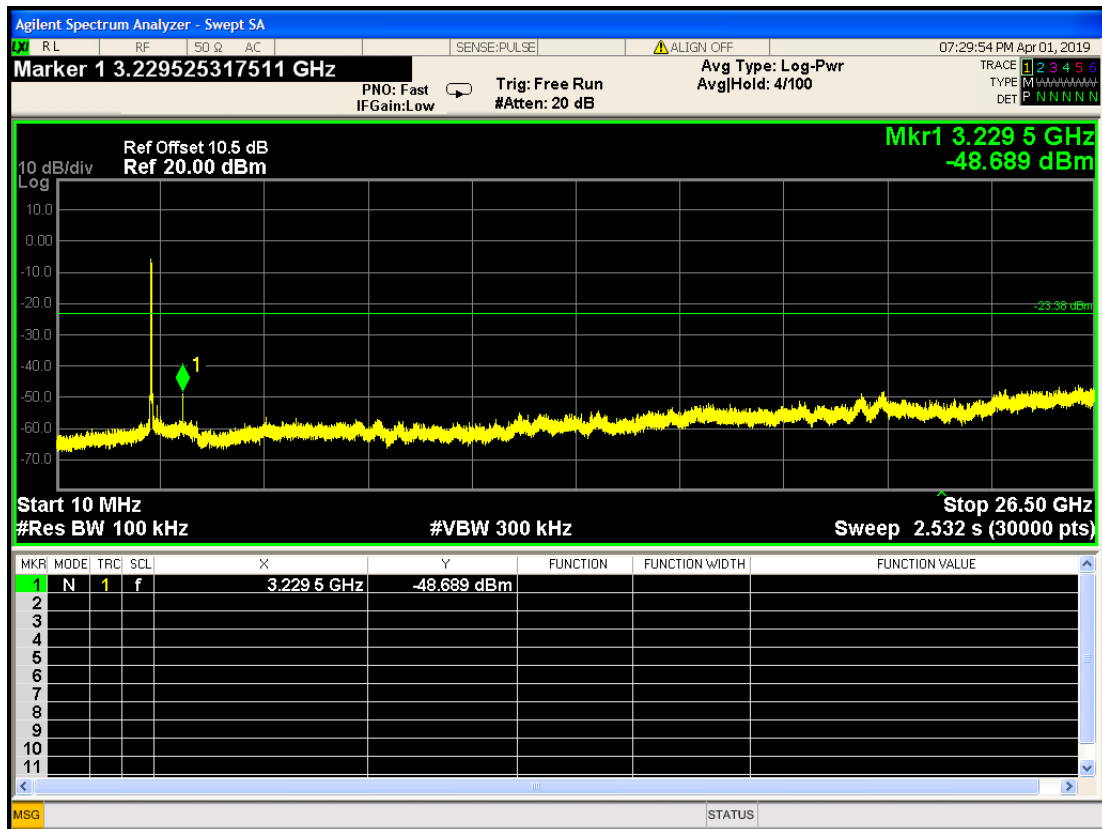


2.31GHz-2.45GHz

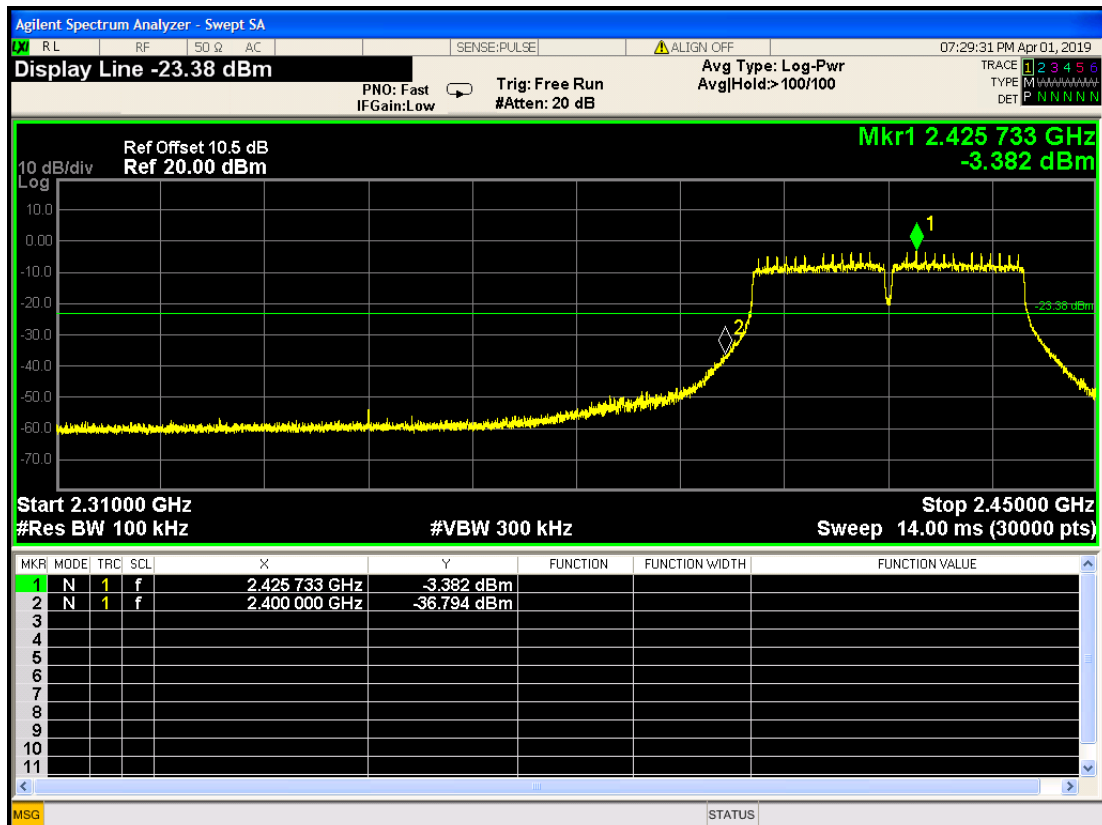


802.11n HT40 mode (antenna 0):
Channel 2437MHz
0.01GHz-26.5GHz

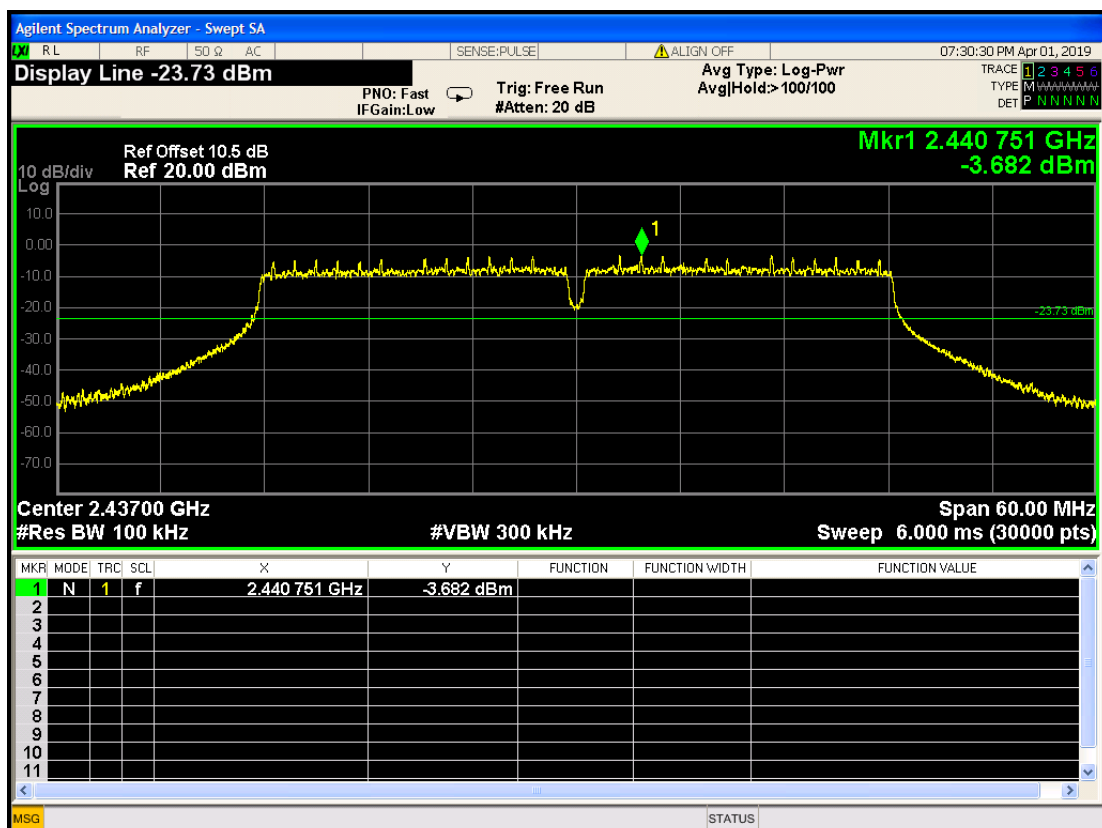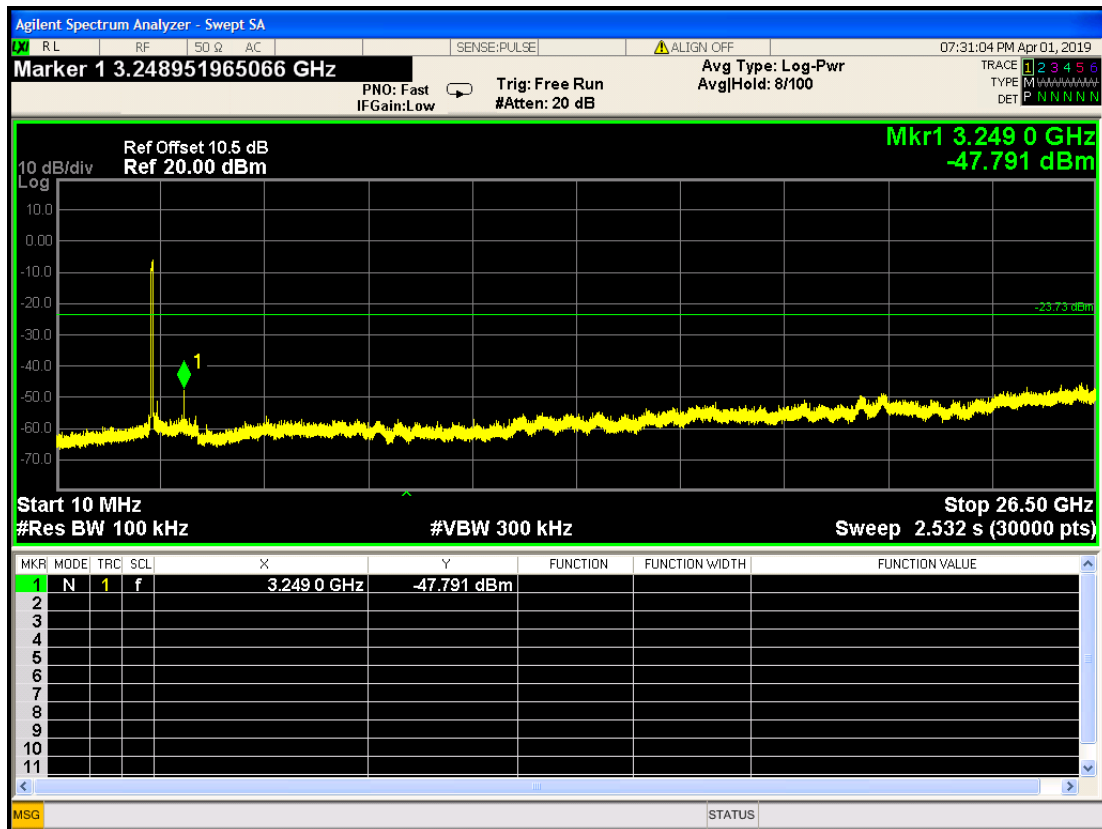


802.11n HT40 mode (antenna 0):
Channel 2452MHz
0.01GHz-26.5GHz

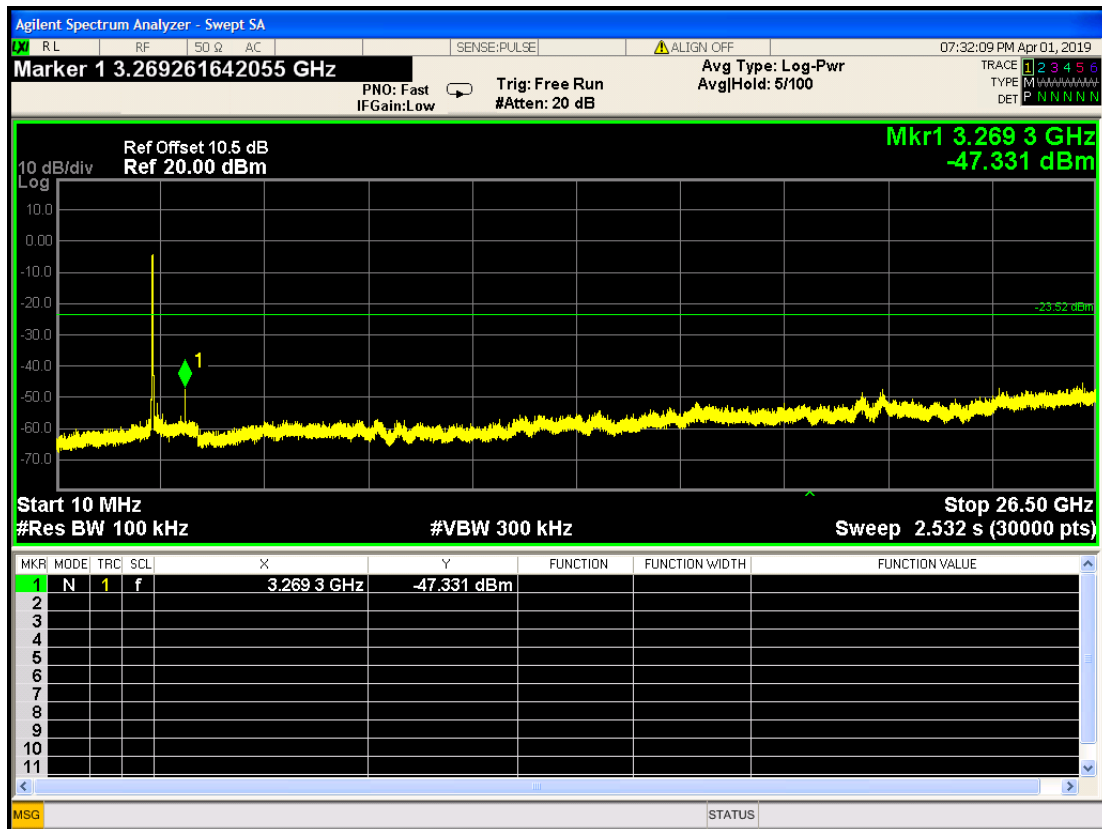


2.43GHz-2.5GHz

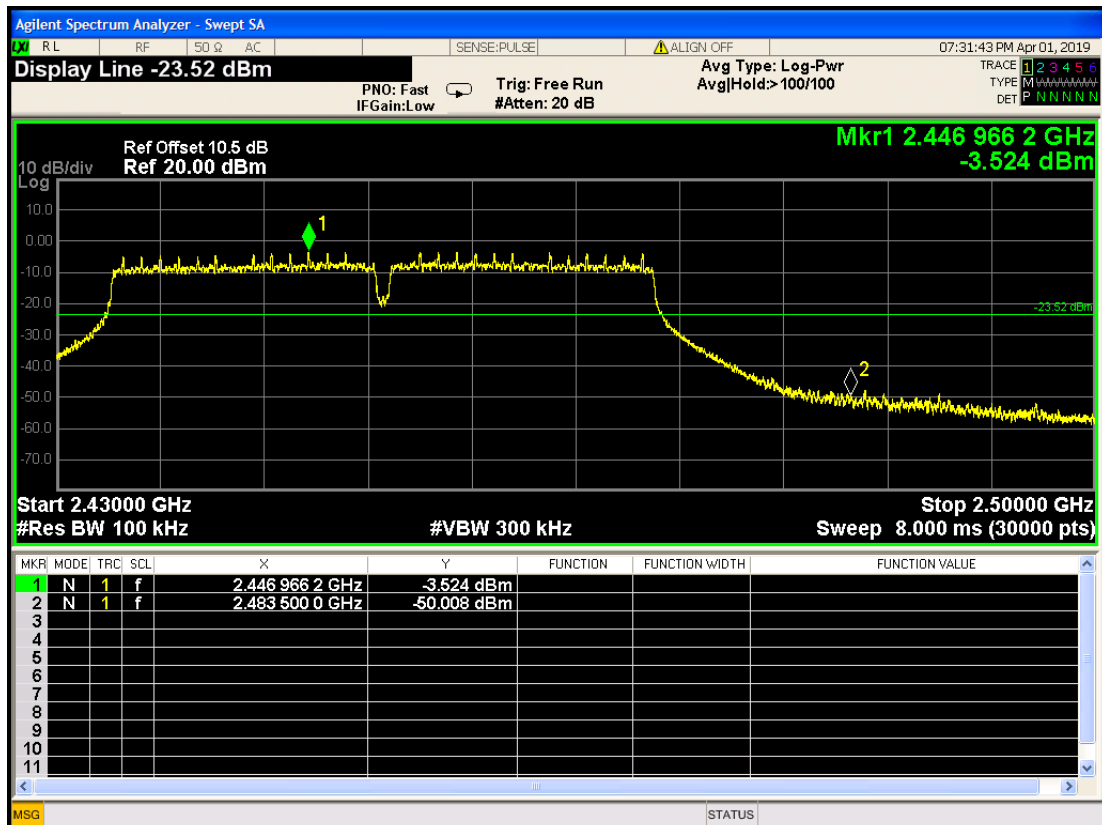



802.11n HT40 mode (antenna 1):
Channel 2422MHz
0.01GHz-26.5GHz

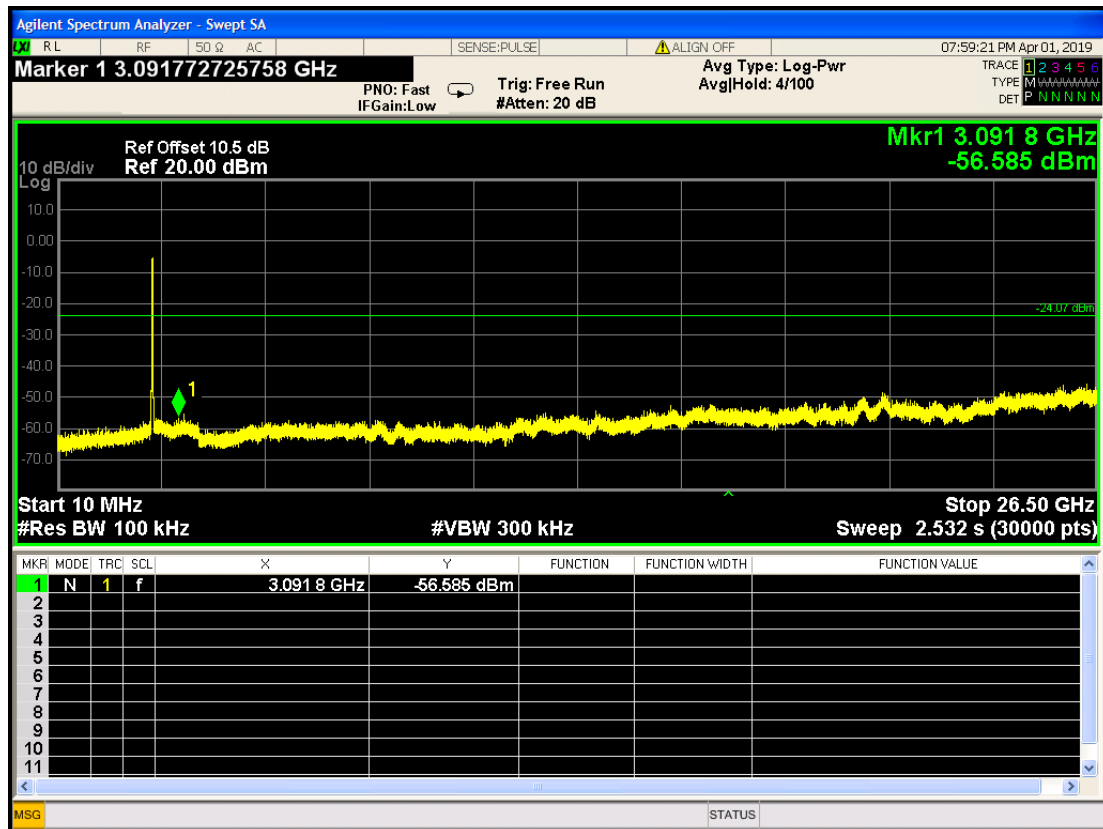


2.31GHz-2.45GHz

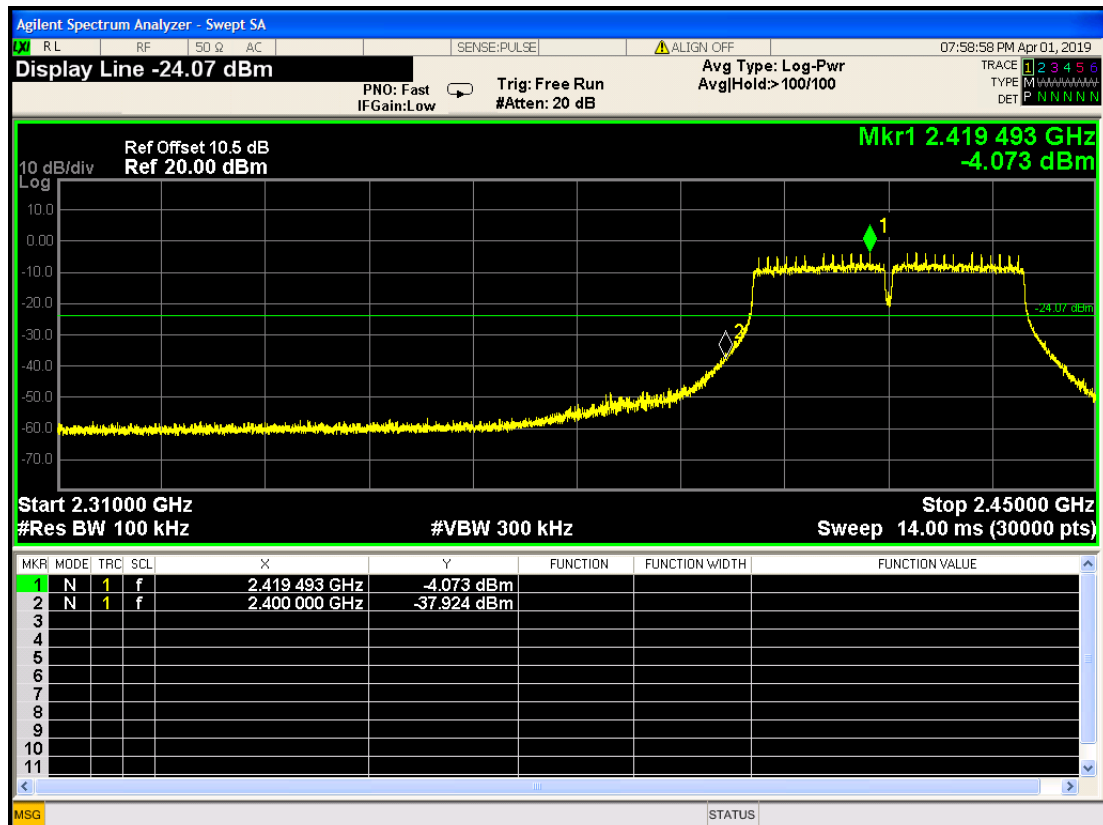


802.11n HT40 mode (antenna 1):
Channel 2437MHz
0.01GHz-26.5GHz

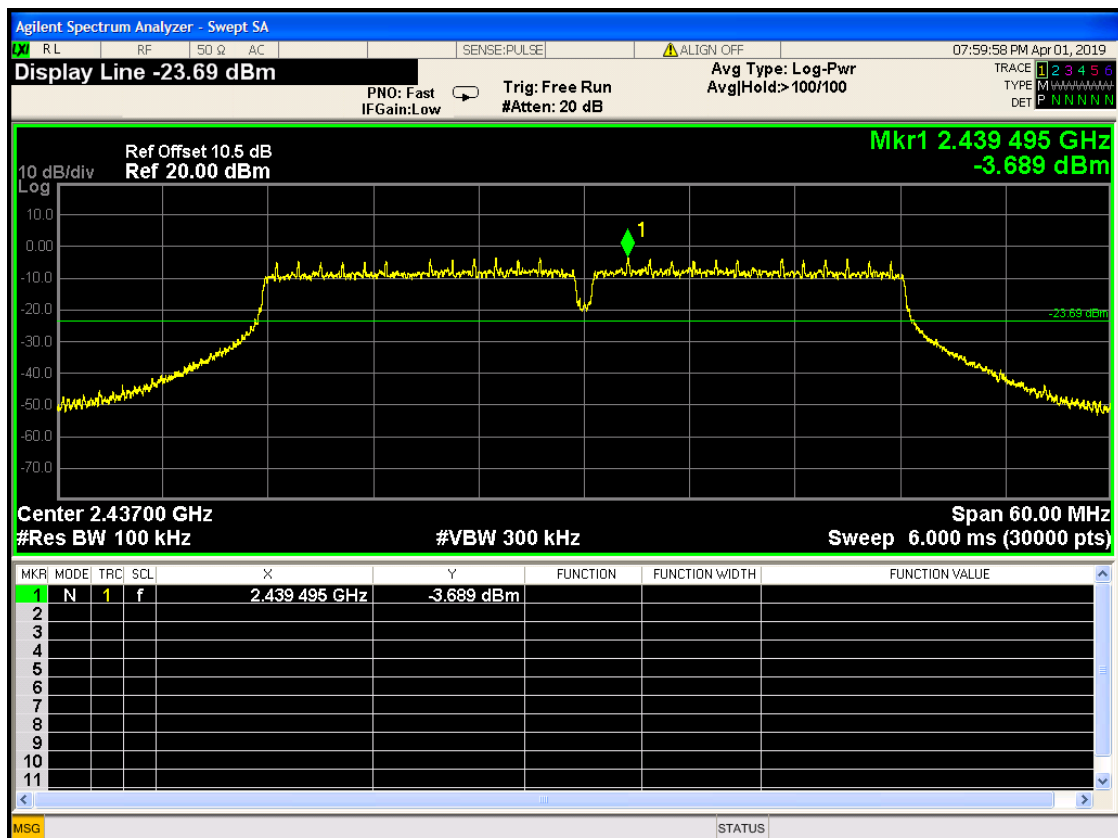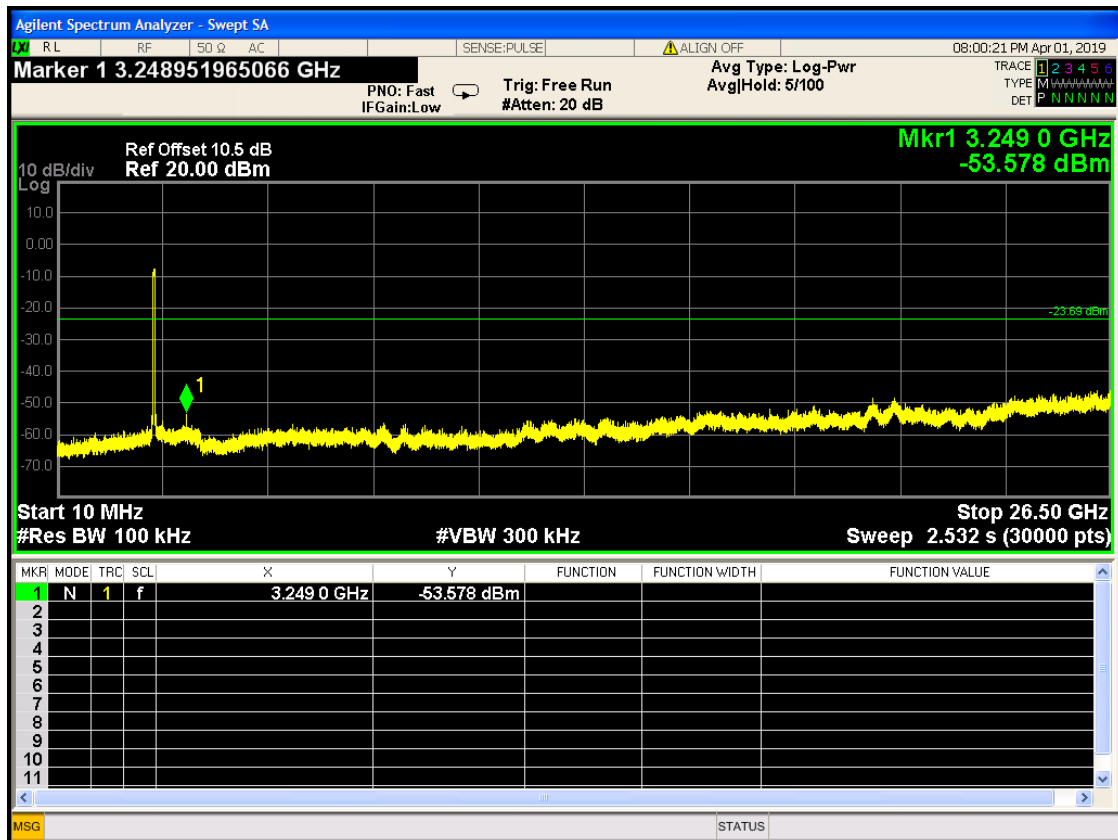

802.11n HT40 mode (antenna 1):
Channel 2452MHz
0.01GHz-26.5GHz

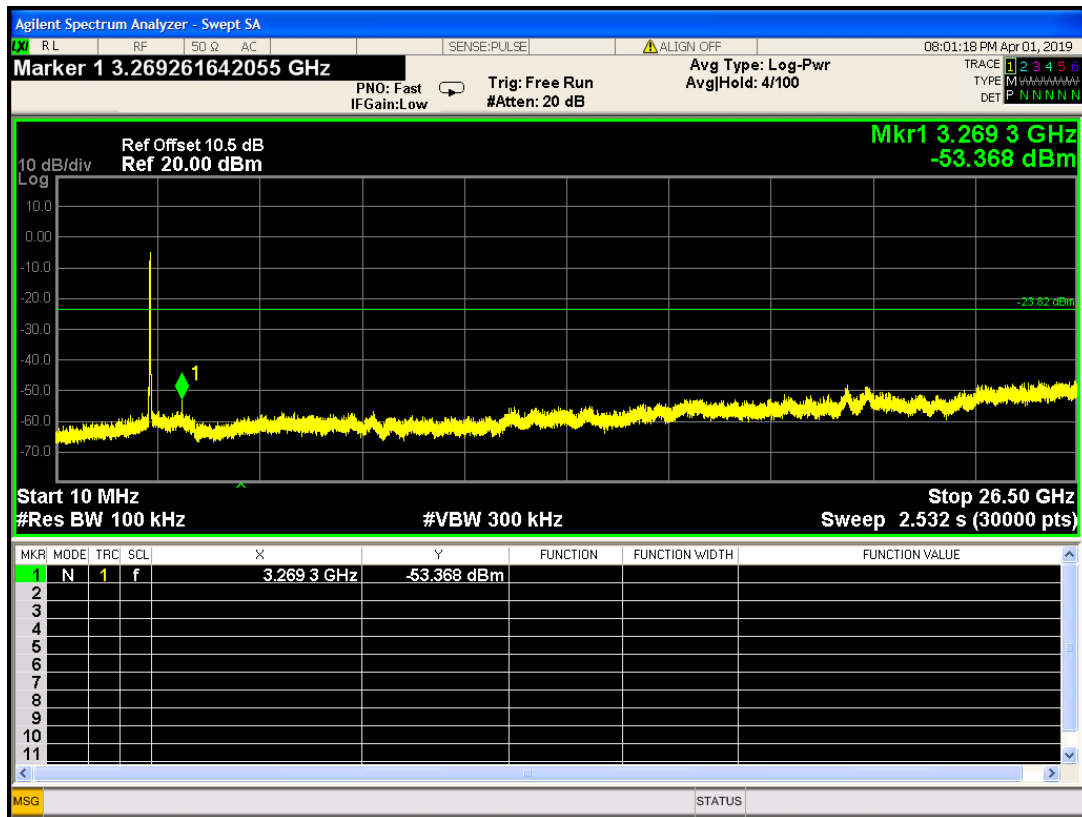

2.43GHz-2.5GHz

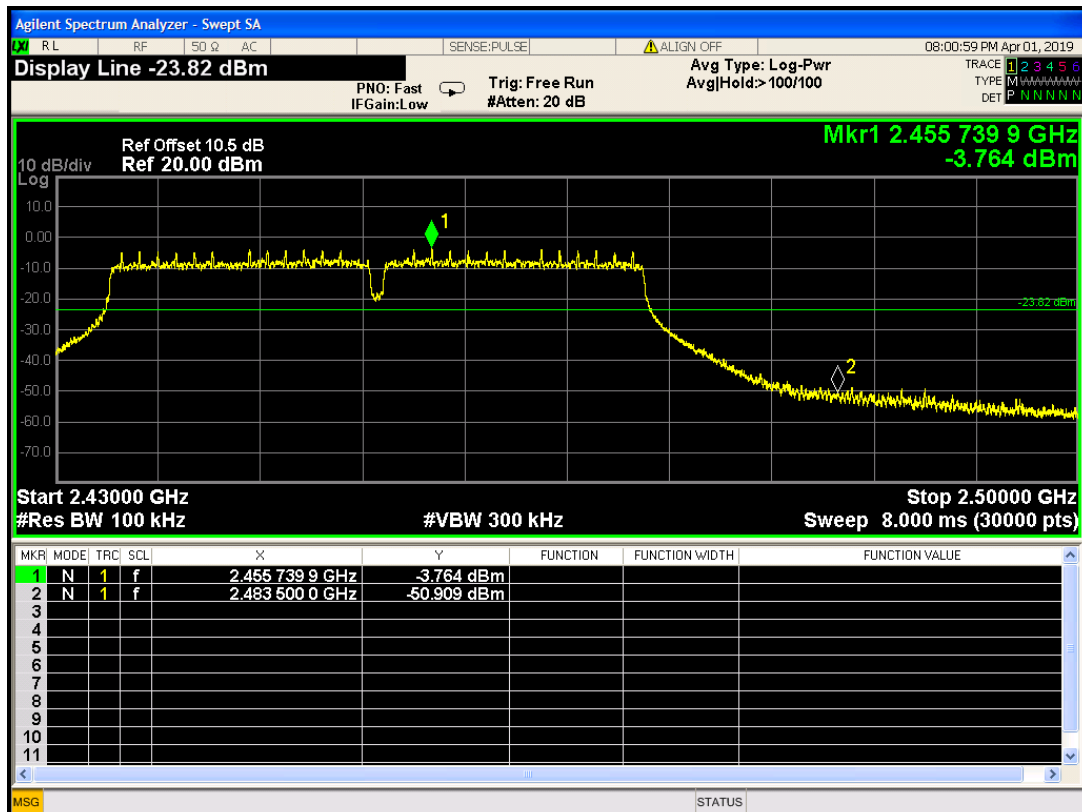

12. RESTRICTED BANDS OF OPERATION

12.1.LIMITS

Section 15.247(d) In addition, Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 -	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.69525	960 - 1240	7.25 - 7.75
4.125 - 4.128	16.80425 -	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	16.80475	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	25.5 - 25.67	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	37.5 - 38.25	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	73 - 74.6	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	74.8 - 75.2	2200 - 2300	14.47 - 14.5
8.291 - 8.294	108 - 121.94	2310 - 2390	15.35 - 16.2
8.362 - 8.366	123 - 138	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	149.9 - 150.05	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.52475 -	3260 - 3267	23.6 - 24.0
12.29 - 12.293	156.52525	3332 - 3339	31.2 - 31.8
12.51975 -	156.7 - 156.9	3345.8 - 3358	36.43 - 36.5
12.52025	162.0125 - 167.17	3600 - 4400	
12.57675 -	167.72 - 173.2		
12.57725	240 - 285		
13.36 - 13.41	322 - 335.4		

12.2.TEST PROCEDURES

Test procedures follow KDB 558074 D01 DTS Meas Guidance v03r01.

- 1) The EUT is placed on a turntable, which is 1.5m above the ground plane.
- 2) The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4) Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - a) PEAK: RBW=1MHz / VBW=1MHz / Sweep=AUTO
 - b) AVERAGE: RBW=1MHz / VBW=1/T / Sweep=AUTO
- 5) Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

12.3.TEST SETUP

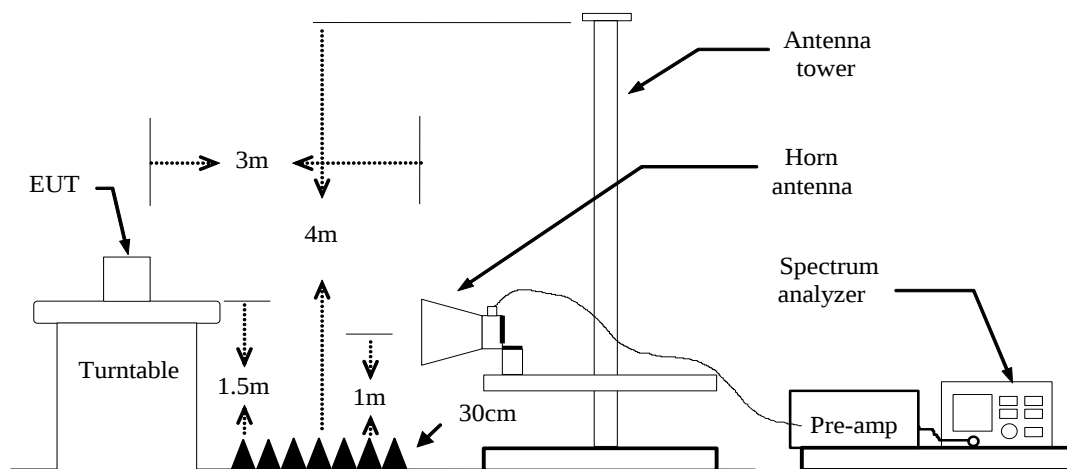


12.4.TEST RESULTS

802.11b mode (antenna 0)

Lowest Channel


Detector mode: Peak

Polarity: Vertical

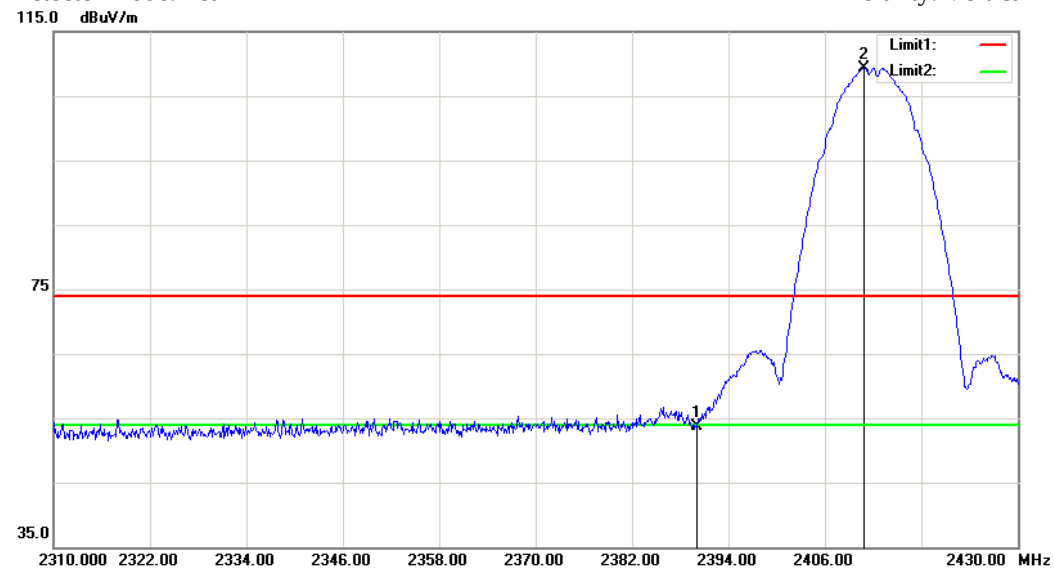

Detector mode: Average

Polarity: Vertical

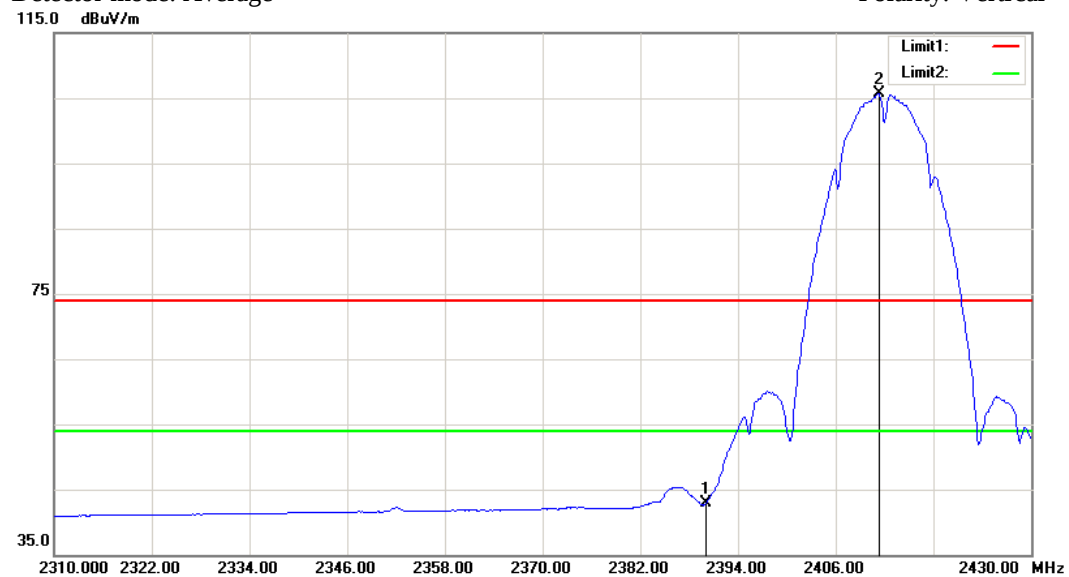


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2390.000	55.13	-1.48	53.65	74.00	-20.35	Peak	Vertical
2	2410.920	110.69	-1.43	---	74.00	---	Peak	Vertical
1	2390.000	44.35	-1.48	42.87	54.00	-11.13	Average	Vertical
2	2411.280	107.18	-1.43	---	54.00	---	Average	Vertical

802.11b mode (antenna 0)**Lowest Channel**


Detector mode: Peak

Polarity: Horizontal

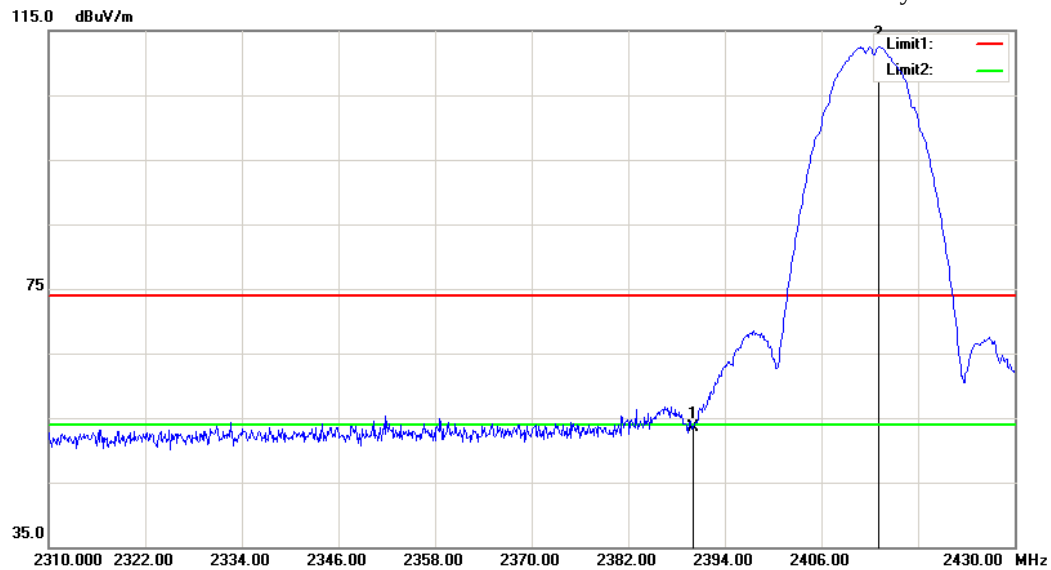

Detector mode: Average

Polarity: Horizontal

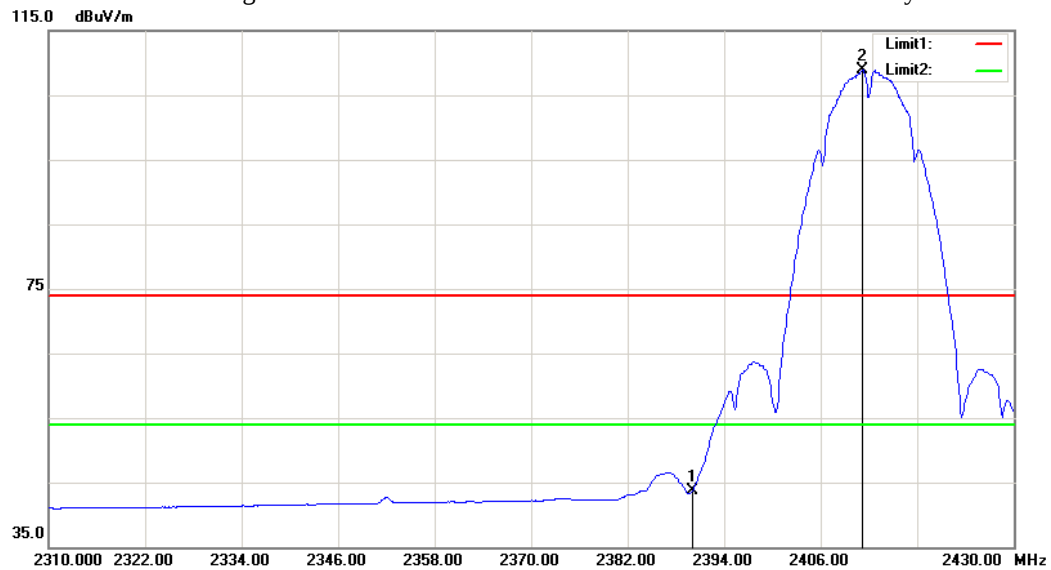


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2390.000	55.00	-1.48	53.52	74.00	-20.48	Peak	Horizontal
2	2413.080	113.92	-1.43	---	74.00	---	Peak	Horizontal
1	2390.000	45.10	-1.48	43.62	54.00	-10.38	Average	Horizontal
2	2411.160	110.40	-1.43	---	54.00	---	Average	Horizontal

802.11b mode (antenna 0)**Highest Channel**


Detector mode: Peak

Polarity: Vertical

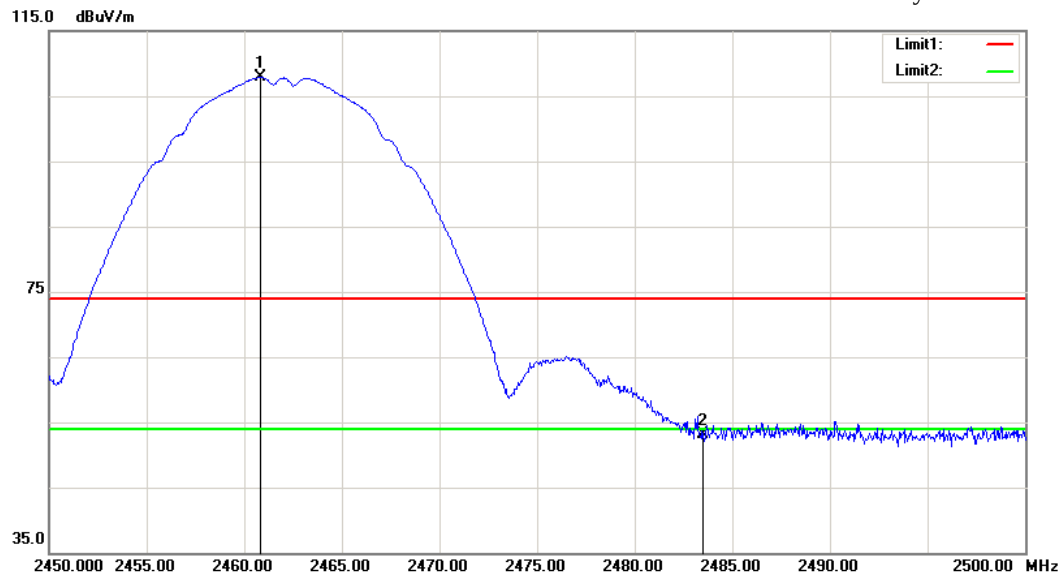

Detector mode: Average

Polarity: Vertical

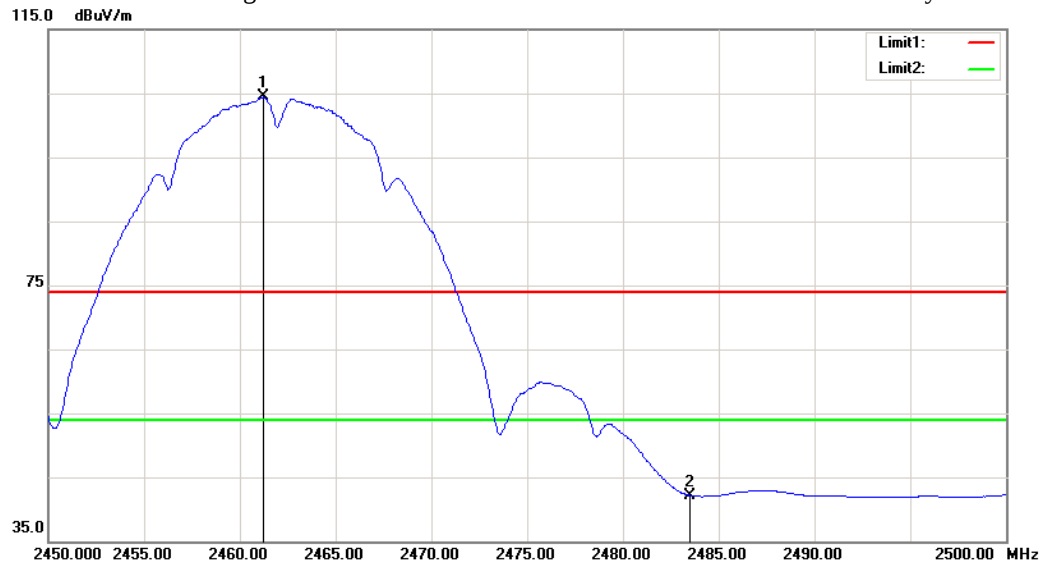


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2460.800	109.20	-1.32	---	74.00	---	Peak	Vertical
2	2483.500	54.42	-1.27	53.15	74.00	-20.85	Peak	Vertical
1	2461.250	105.73	-1.32	---	54.00	---	Average	Vertical
2	2483.500	43.43	-1.27	42.16	54.00	-11.84	Average	Vertical

802.11b mode (antenna 0)**Highest Channel**


Detector mode: Peak

Polarity: Horizontal

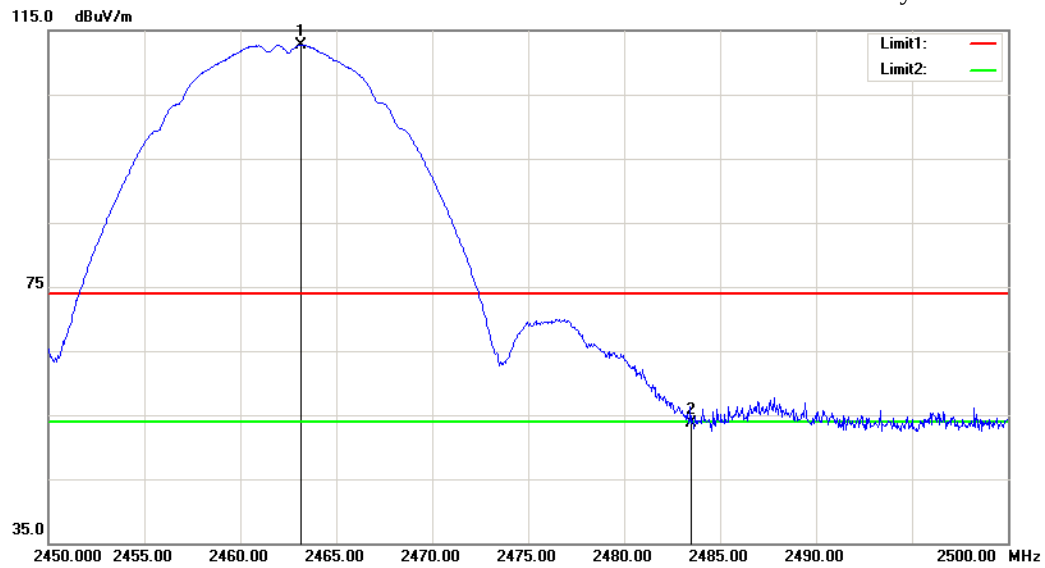

Detector mode: Average

Polarity: Horizontal

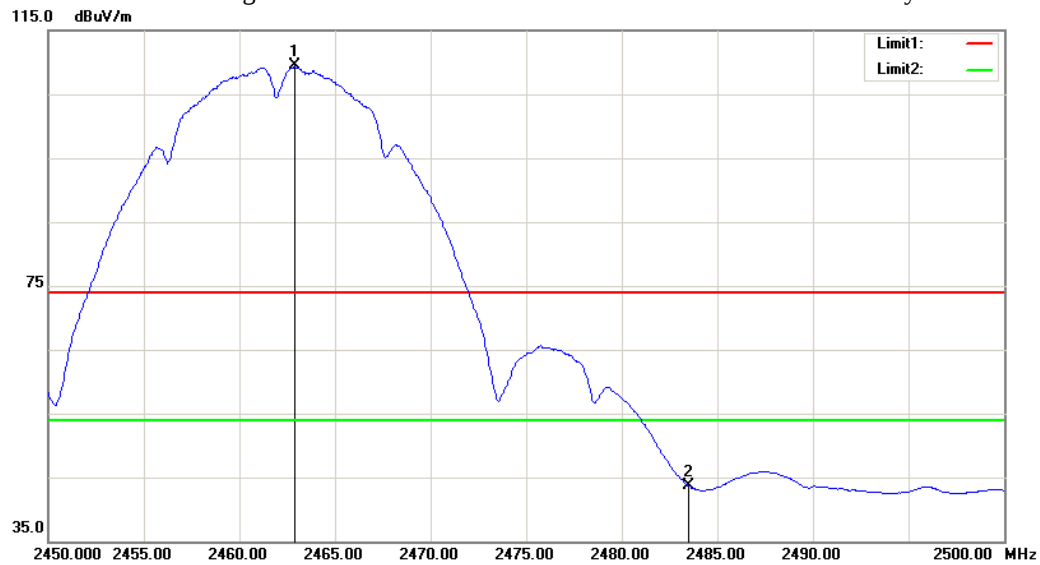


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2463.150	114.07	-1.32	---	74.00	---	Peak	Horizontal
2	2483.500	54.98	-1.27	53.71	74.00	-20.29	Peak	Horizontal
1	2462.900	110.87	-1.32	---	54.00	---	Average	Horizontal
2	2483.500	44.99	-1.27	43.72	54.00	-10.28	Average	Horizontal

802.11b mode (antenna 1)**Lowest Channel**


Detector mode: Peak

Polarity: Vertical

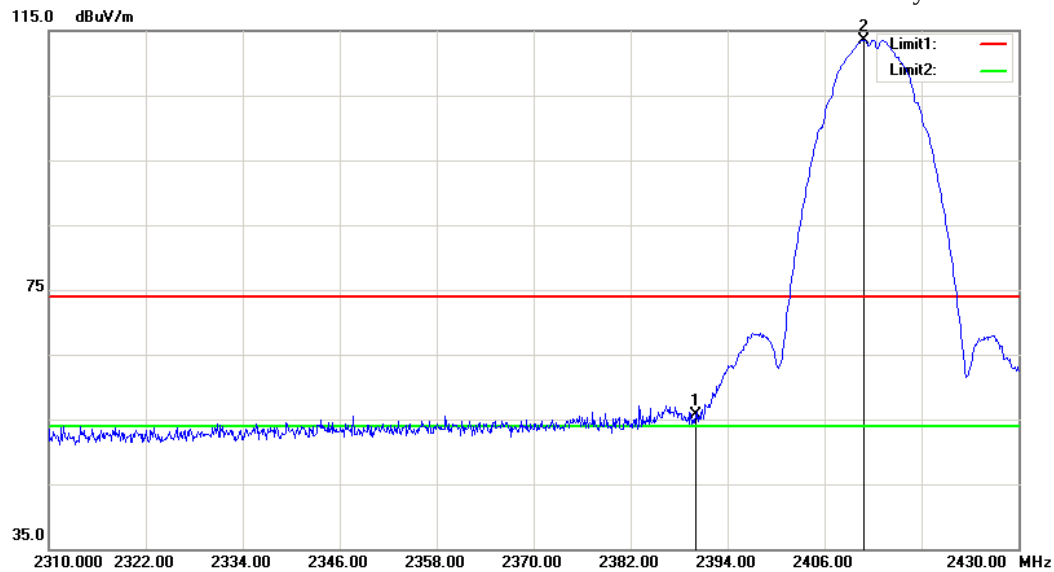

Detector mode: Average

Polarity: Vertical

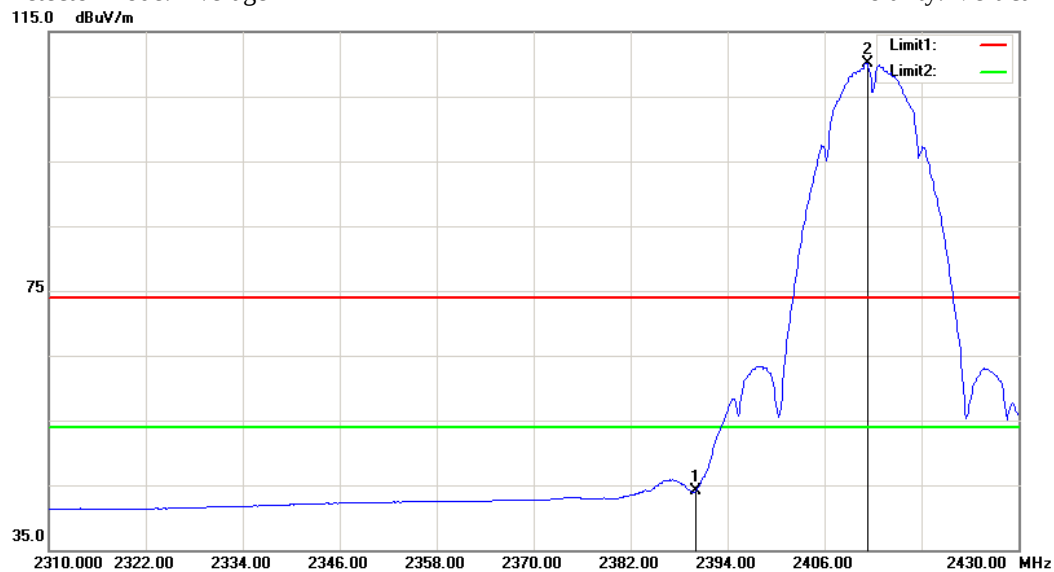


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2390.000	57.26	-1.48	55.78	74.00	-18.22	Peak	Vertical
2	2410.920	114.98	-1.43	---	74.00	---	Peak	Vertical
1	2390.000	45.62	-1.48	44.14	54.00	-9.86	Average	Vertical
2	2411.280	111.47	-1.43	---	54.00	---	Average	Vertical

802.11b mode (antenna 1)**Lowest Channel**


Detector mode: Peak

Polarity: Horizontal

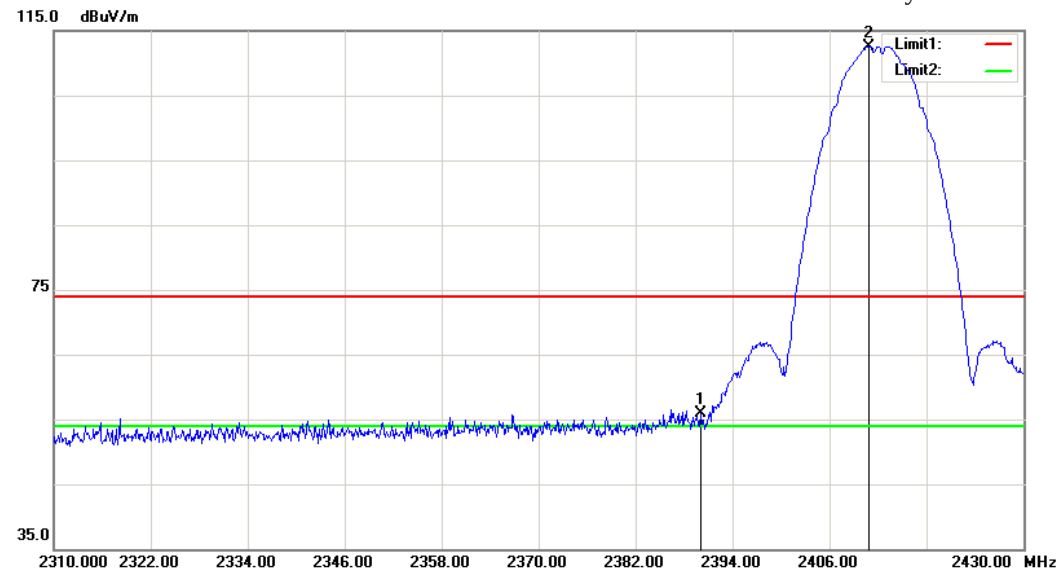

Detector mode: Average

Polarity: Horizontal

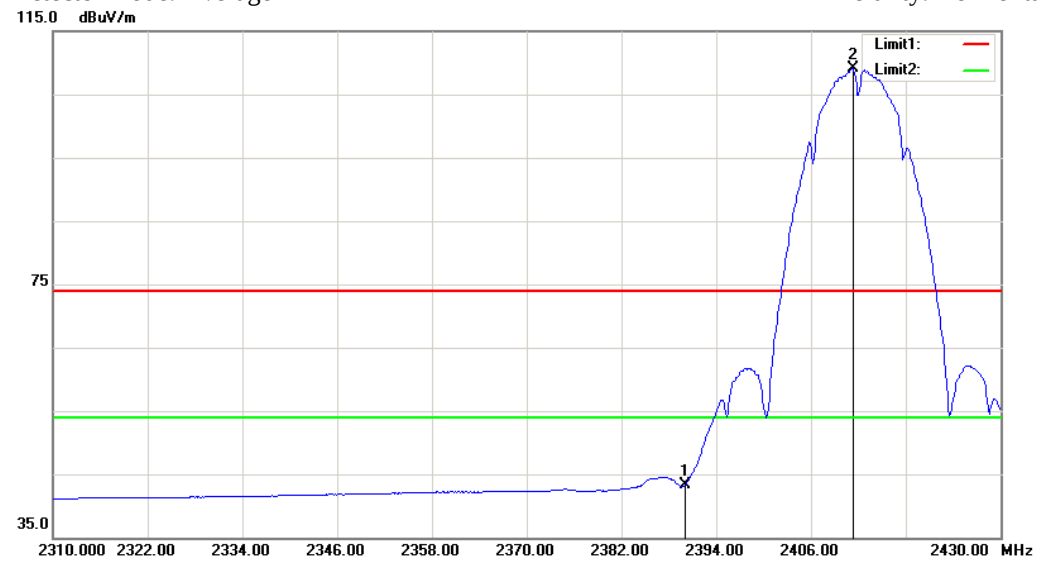


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2390.000	57.45	-1.48	55.97	74.00	-18.03	Peak	Horizontal
2	2410.920	114.01	-1.43	---	74.00	---	Peak	Horizontal
1	2390.000	44.81	-1.48	43.33	54.00	-10.67	Average	Horizontal
2	2411.280	110.54	-1.43	---	54.00	---	Average	Horizontal

802.11b mode (antenna 1)**Highest Channel**


Detector mode: Peak

Polarity: Vertical

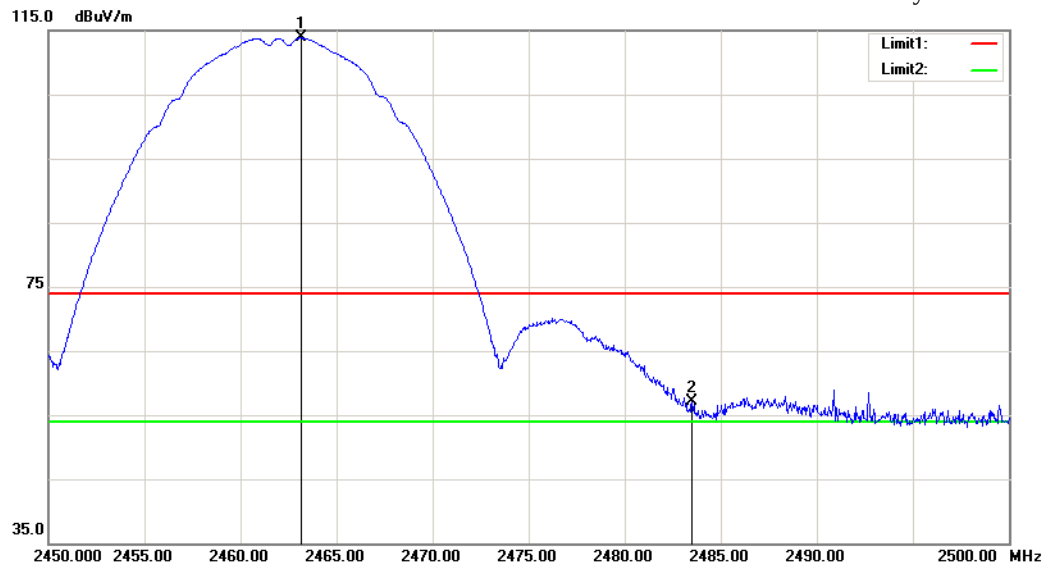

Detector mode: Average

Polarity: Vertical

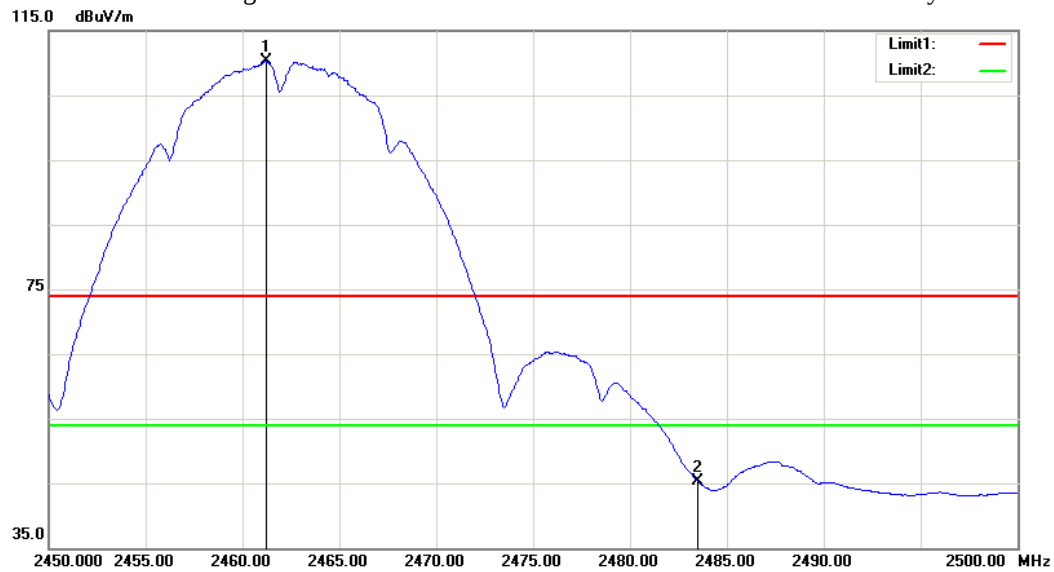


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2463.150	115.13	-1.32	---	74.00	---	Peak	Vertical
2	2483.500	58.38	-1.27	57.11	74.00	-16.89	Peak	Vertical
1	2461.200	111.61	-1.32	---	54.00	---	Average	Vertical
2	2483.500	46.56	-1.27	45.29	54.00	-8.71	Average	Vertical

802.11b mode (antenna 1)**Highest Channel**


Detector mode: Peak

Polarity: Horizontal

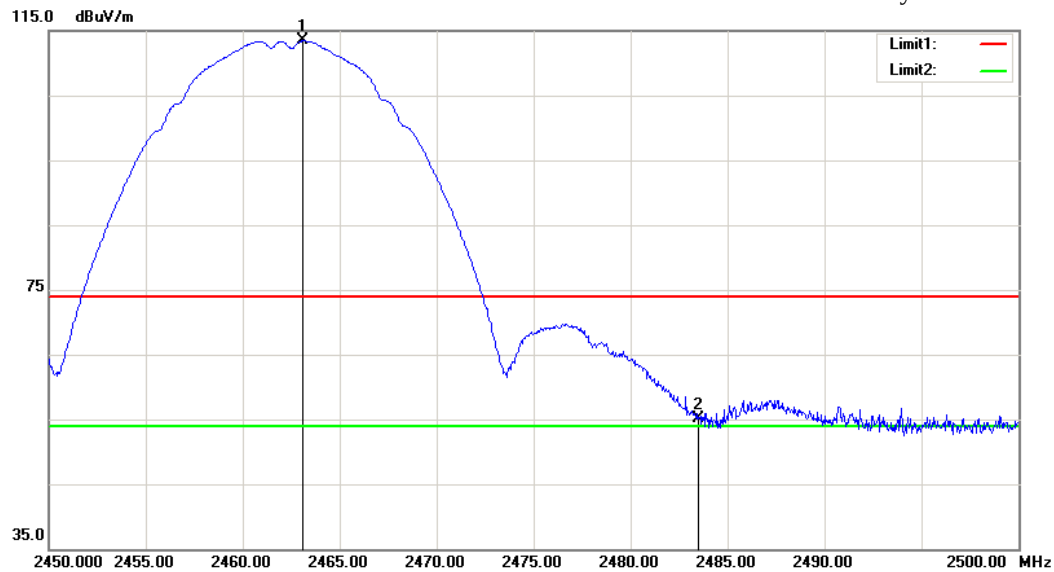

Detector mode: Average

Polarity: Horizontal

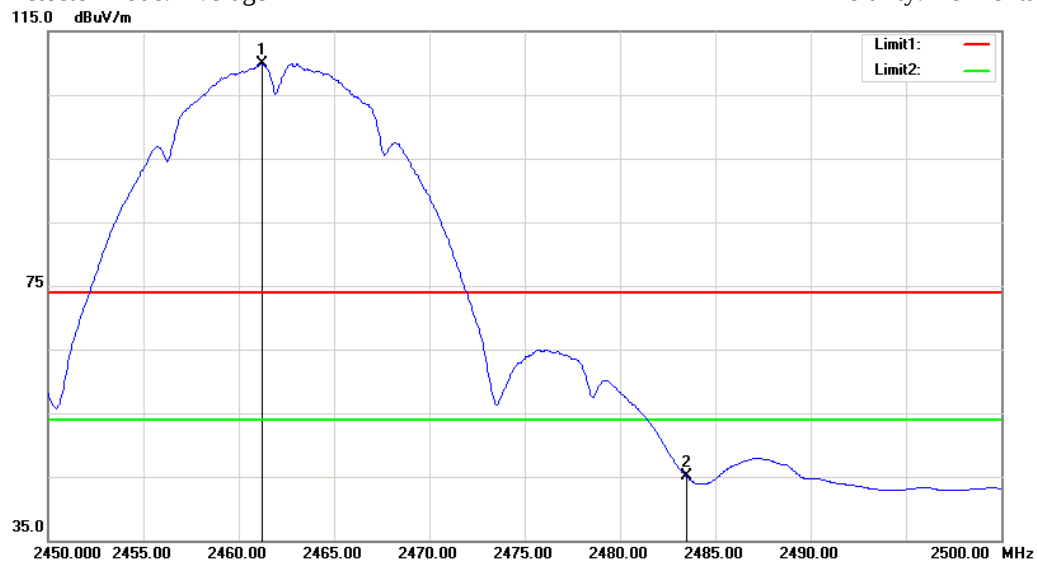


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2463.100	114.75	-1.32	---	74.00	---	Peak	Horizontal
2	2483.500	56.35	-1.27	55.08	74.00	-18.92	Peak	Horizontal
1	2461.200	111.19	-1.32	---	54.00	---	Average	Horizontal
2	2483.500	46.31	-1.27	45.04	54.00	-8.96	Average	Horizontal

802.11g mode (antenna 0)**Lowest Channel**


Detector mode: Peak

Polarity: Vertical

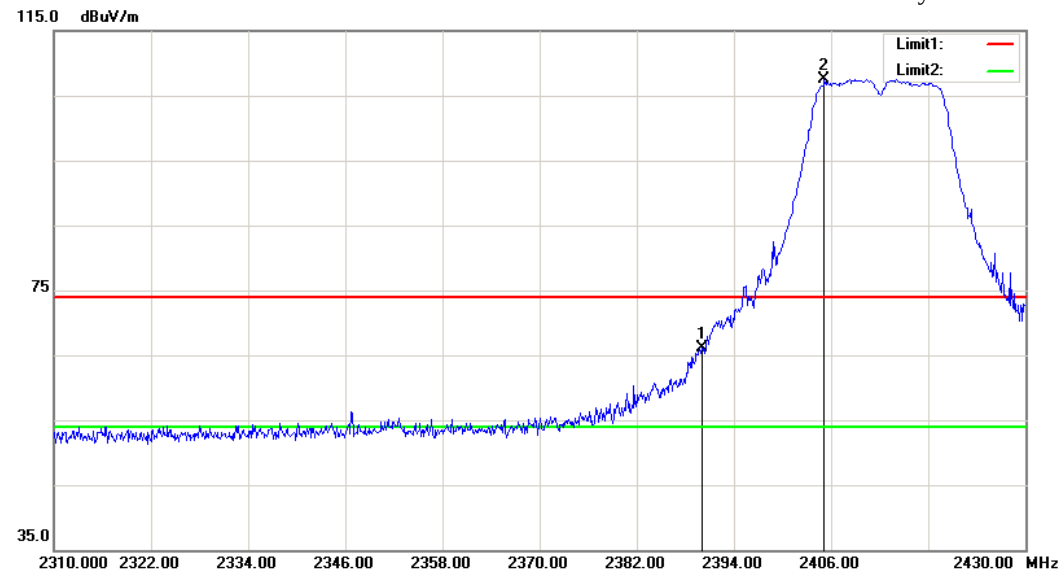

Detector mode: Average

Polarity: Vertical

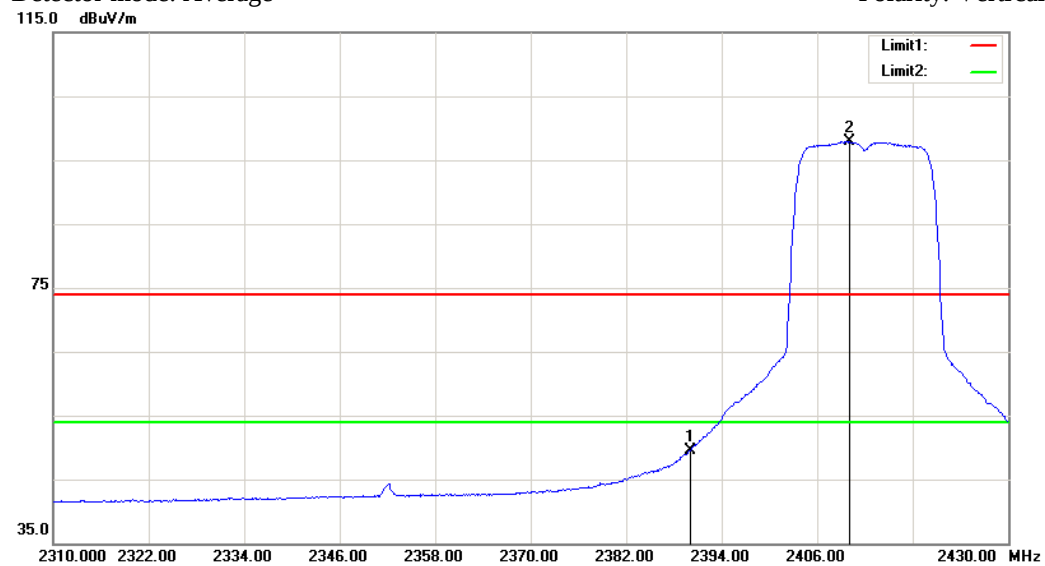


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2390.000	67.52	-1.48	66.04	74.00	-7.96	Peak	Vertical
2	2405.160	108.96	-1.45	---	74.00	---	Peak	Vertical
1	2390.000	51.00	-1.48	49.52	54.00	-4.48	Average	Vertical
2	2410.080	99.38	-1.44	---	54.00	---	Average	Vertical

802.11g mode (antenna 0)**Lowest Channel**


Detector mode: Peak

Polarity: Horizontal

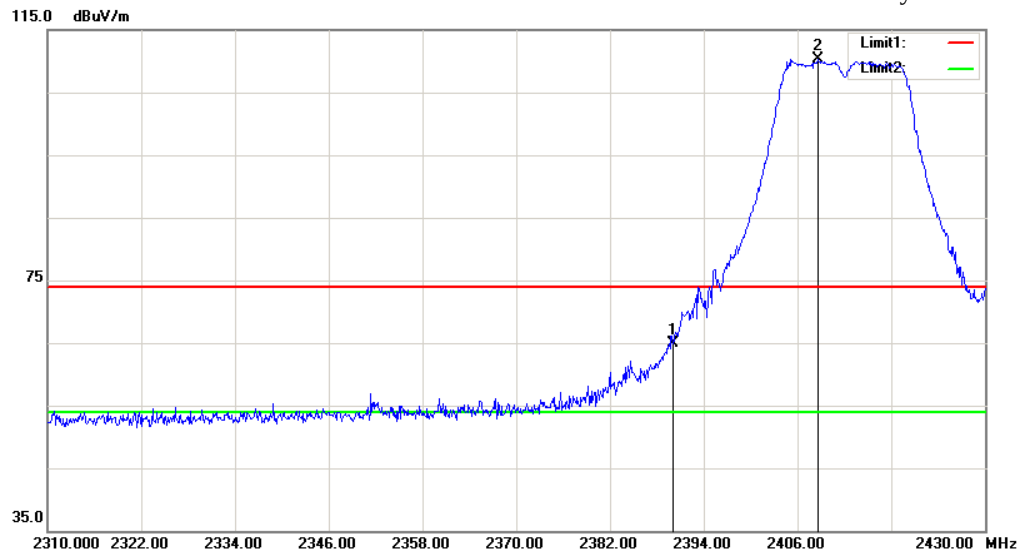

Detector mode: Average

Polarity: Horizontal

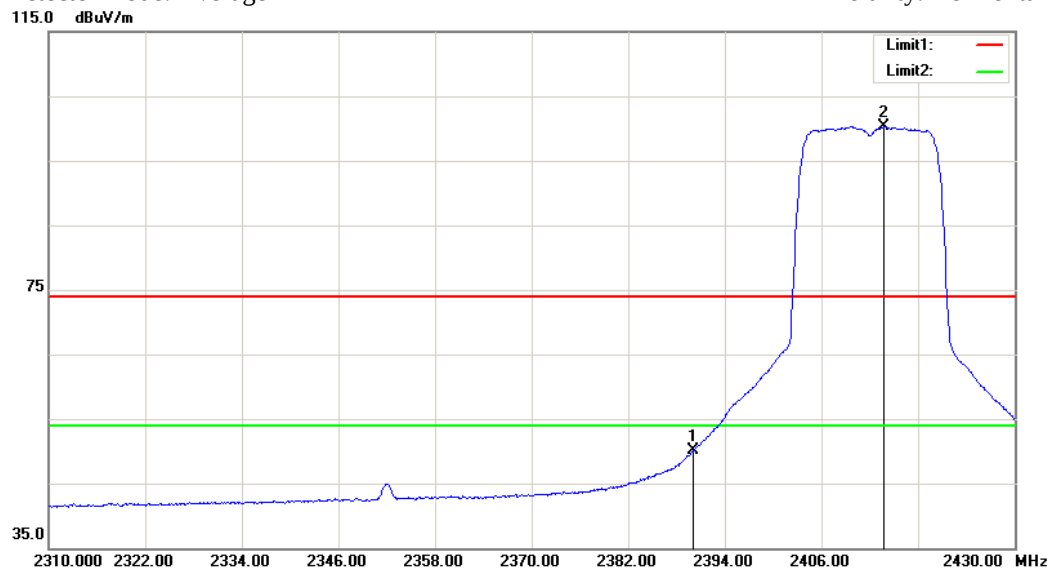


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2390.000	66.33	-1.48	64.85	74.00	-9.15	Peak	Horizontal
2	2408.640	111.75	-1.44	---	74.00	---	Peak	Horizontal
1	2390.000	51.51	-1.48	50.03	54.00	-3.97	Average	Horizontal
2	2413.680	101.72	-1.43	---	54.00	---	Average	Horizontal

802.11g mode (antenna 0)**Highest Channel**


Detector mode: Peak

Polarity: Vertical

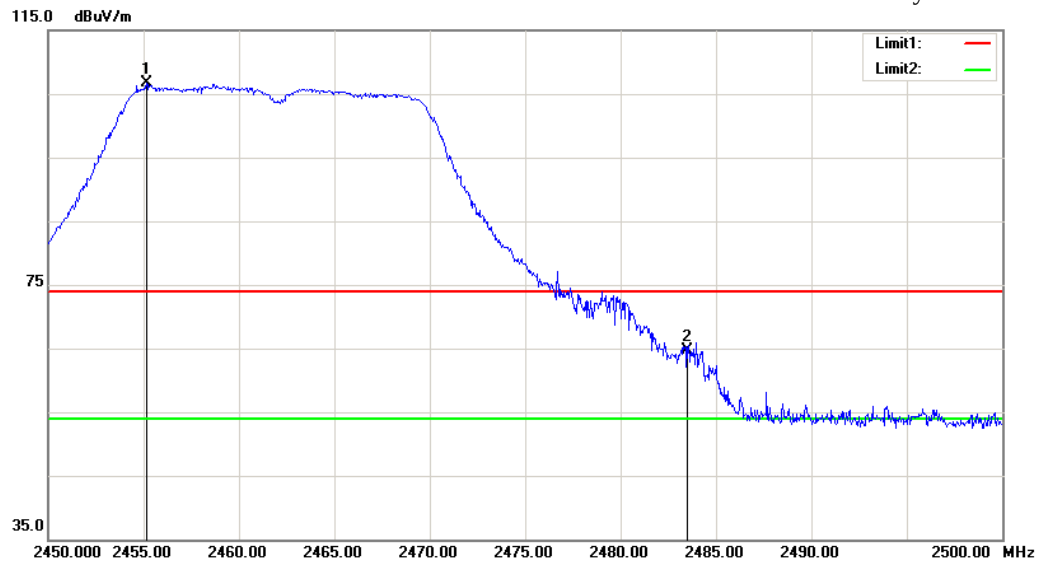

Detector mode: Average

Polarity: Vertical

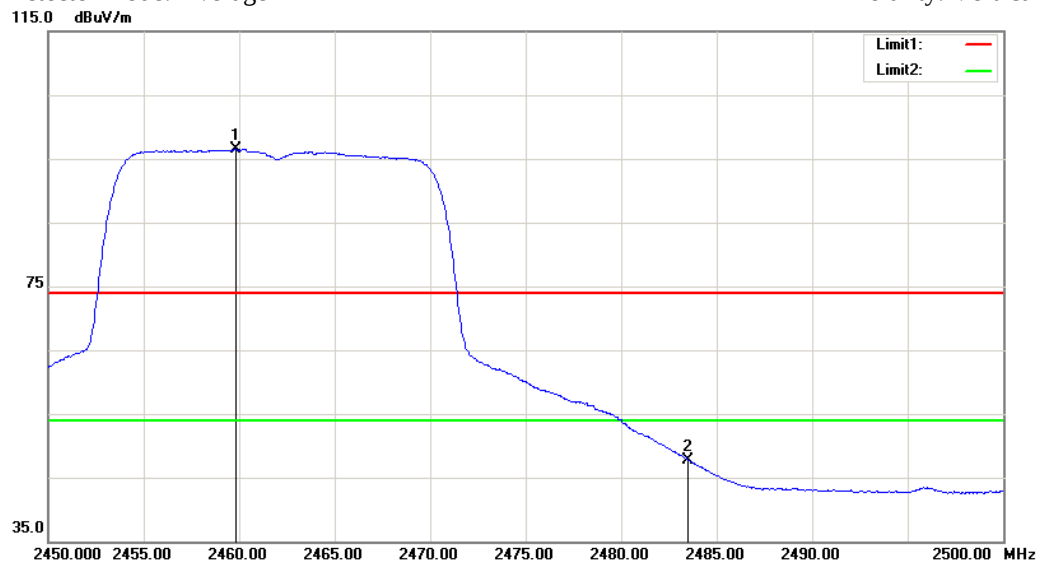


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2455.150	108.01	-1.34	---	74.00	---	Peak	Vertical
2	2483.500	65.89	-1.27	64.62	74.00	-9.38	Peak	Vertical
1	2459.800	97.84	-1.33	---	54.00	---	Average	Vertical
2	2483.500	49.06	-1.27	47.79	54.00	-6.21	Average	Vertical

802.11g mode (antenna 0)**Highest Channel**


Detector mode: Peak

Polarity: Horizontal

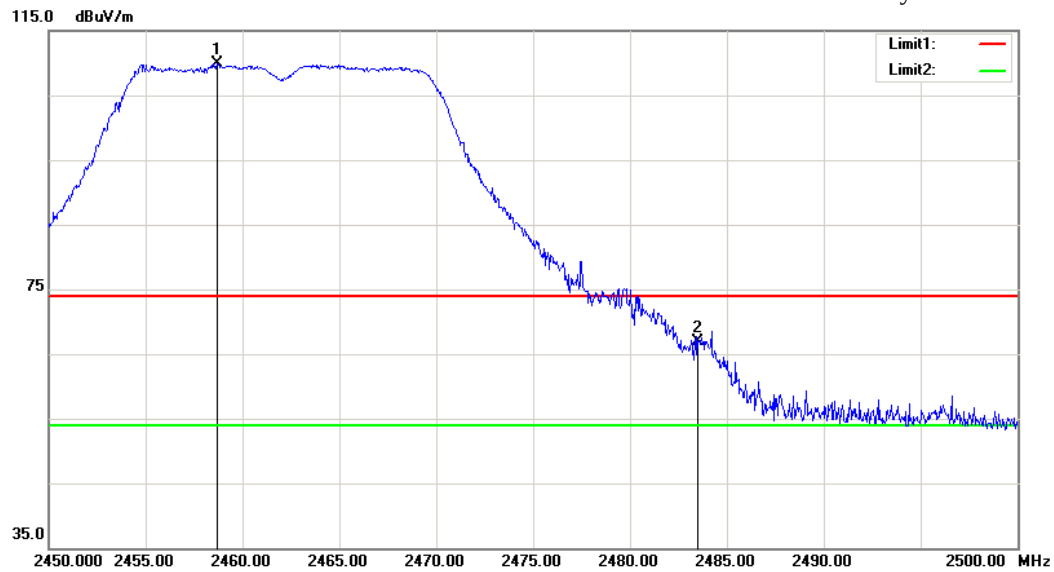

Detector mode: Average

Polarity: Horizontal

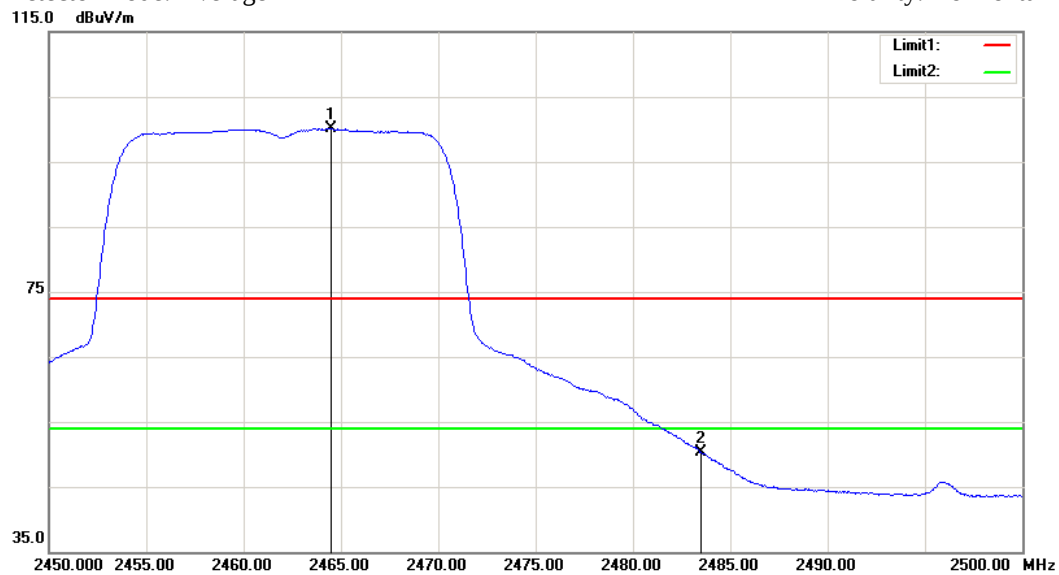


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2458.700	111.24	-1.33	---	74.00	---	Peak	Horizontal
2	2483.500	68.25	-1.27	66.98	74.00	-7.02	Peak	Horizontal
1	2464.500	101.50	-1.33	---	54.00	---	Average	Horizontal
2	2483.500	51.53	-1.27	50.26	54.00	-3.74	Average	Horizontal

802.11g mode (antenna 1)**Lowest Channel**


Detector mode: Peak

Polarity: Vertical

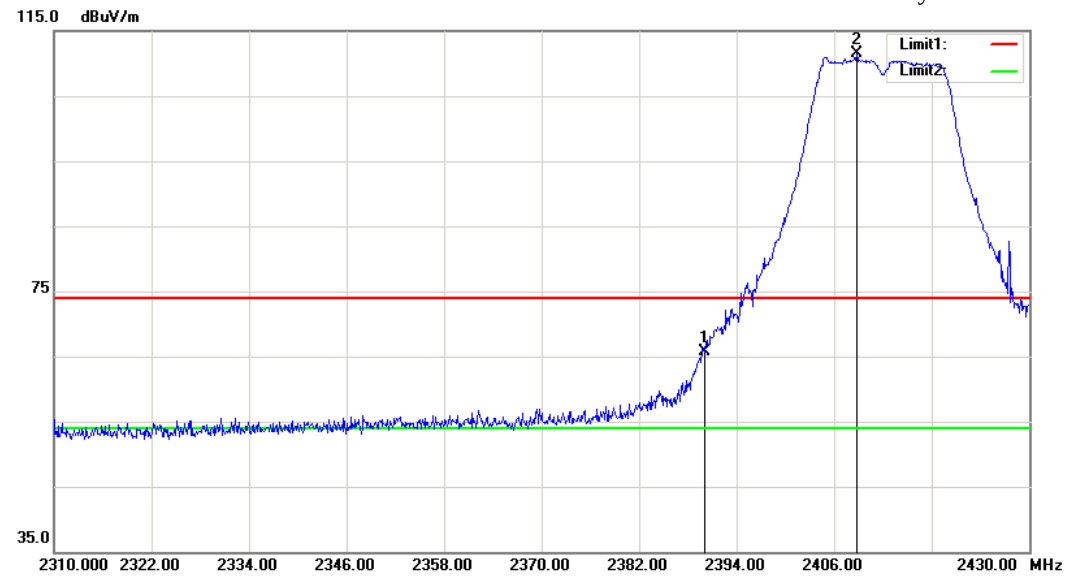

Detector mode: Average

Polarity: Vertical

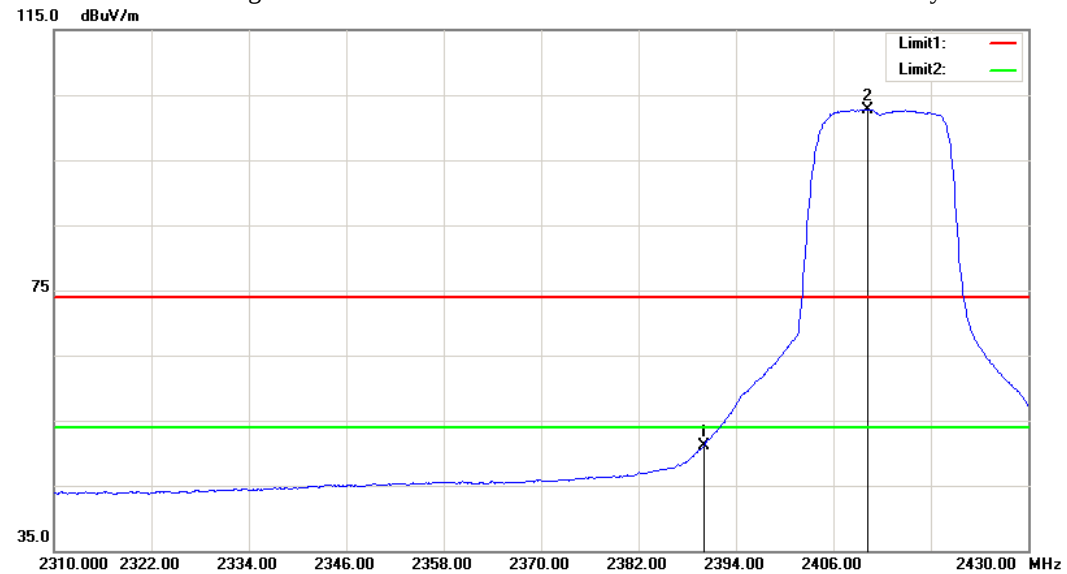


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2390.000	67.11	-1.48	65.63	74.00	-8.37	Peak	Vertical
2	2408.760	113.02	-1.44	---	74.00	---	Peak	Vertical
1	2390.000	52.63	-1.48	51.15	54.00	-2.85	Average	Vertical
2	2410.200	104.24	-1.44	---	54.00	---	Average	Vertical

802.11g mode (antenna 1)**Lowest Channel**


Detector mode: Peak

Polarity: Horizontal

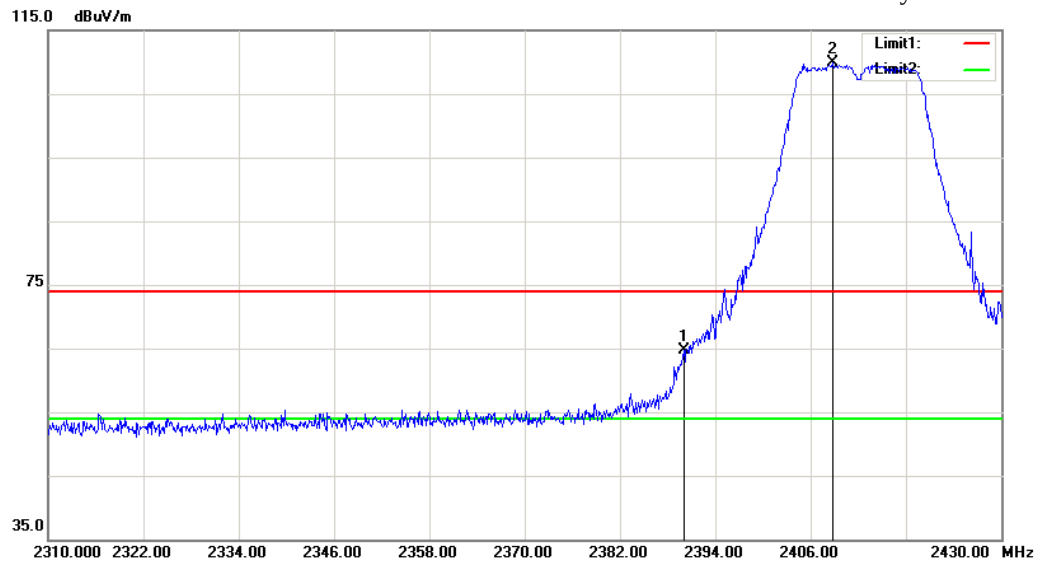

Detector mode: Average

Polarity: Horizontal

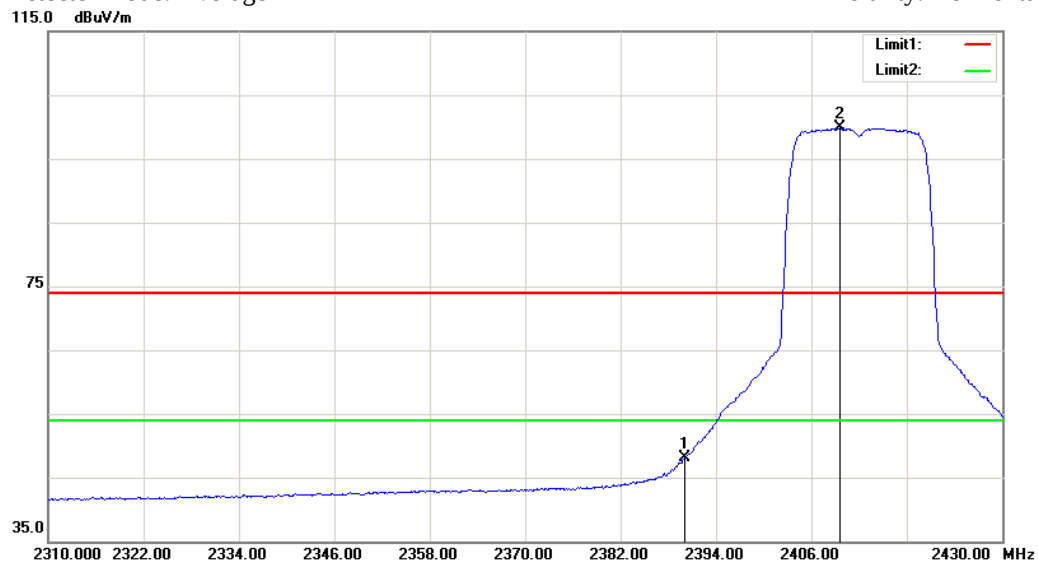


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2390.000	66.23	-1.48	64.75	74.00	-9.25	Peak	Horizontal
2	2408.760	111.35	-1.44	---	74.00	---	Peak	Horizontal
1	2390.000	49.58	-1.48	48.10	54.00	-5.90	Average	Horizontal
2	2409.600	101.31	-1.44	---	54.00	---	Average	Horizontal

802.11g mode (antenna 1)**Highest Channel**


Detector mode: Peak

Polarity: Vertical

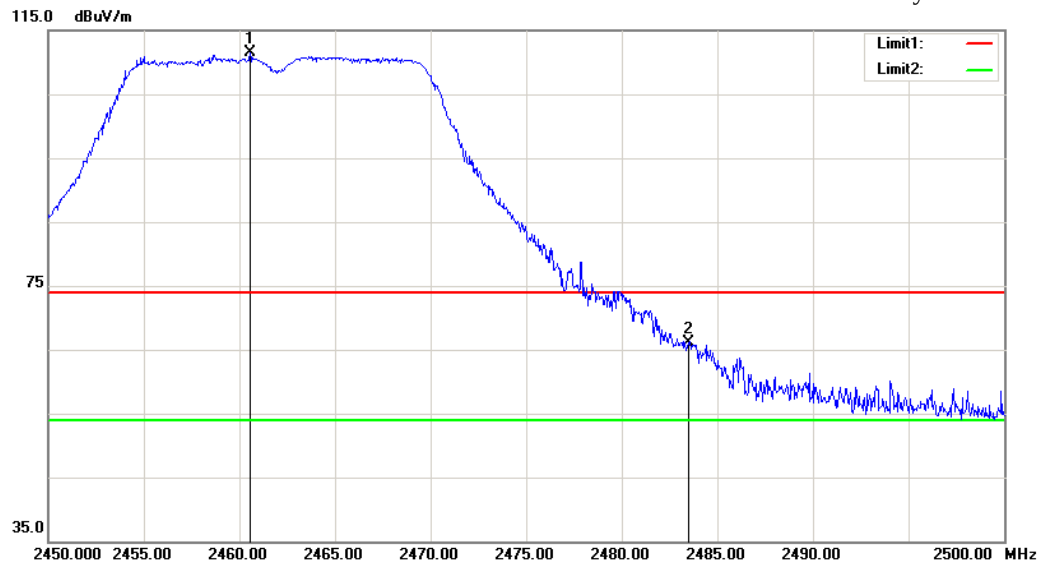

Detector mode: Average

Polarity: Vertical

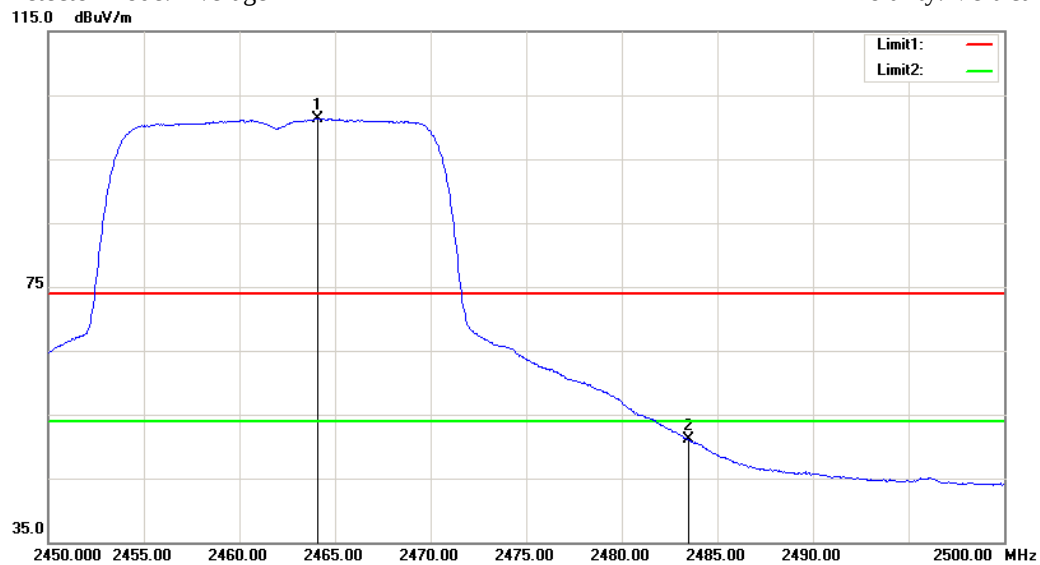


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2460.550	112.74	-1.32	---	74.00	---	Peak	Vertical
2	2483.500	67.46	-1.27	66.19	74.00	-7.81	Peak	Vertical
1	2464.100	102.64	-1.32	---	54.00	---	Average	Vertical
2	2483.500	52.34	-1.27	51.07	54.00	-2.93	Average	Vertical

802.11g mode (antenna 1)**Highest Channel**


Detector mode: Peak

Polarity: Horizontal

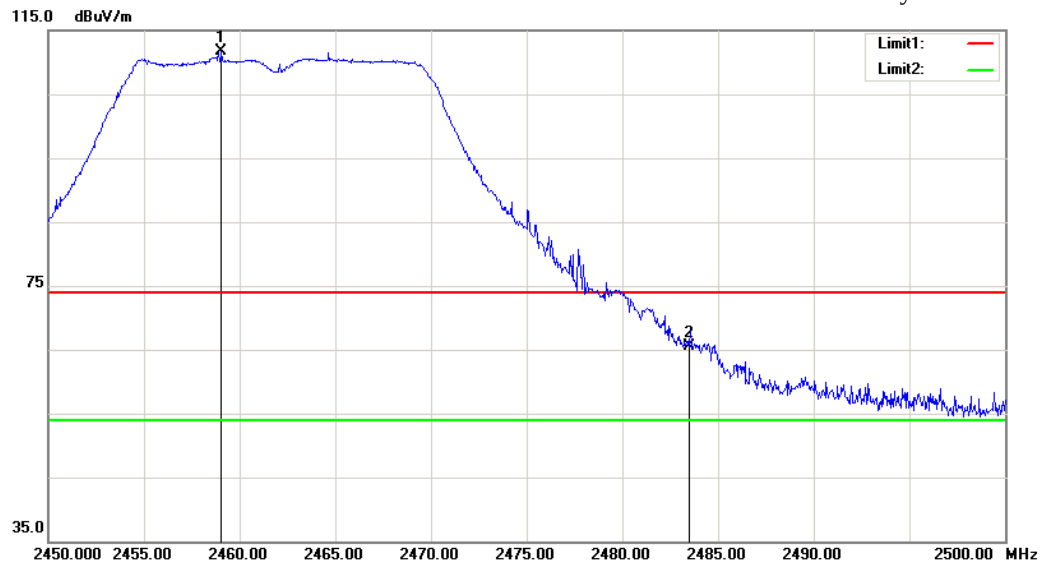

Detector mode: Average

Polarity: Horizontal

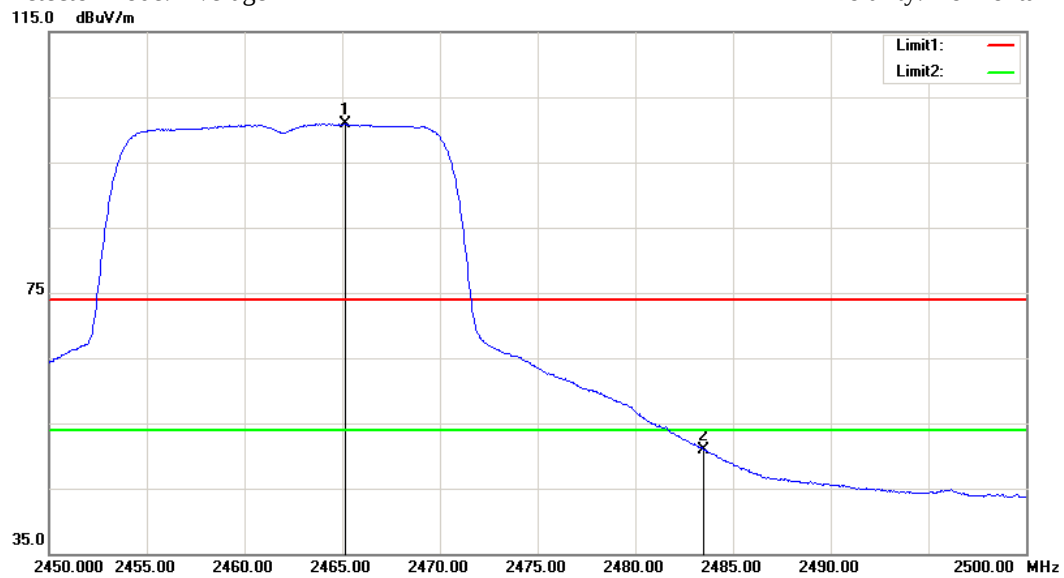


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2459.050	112.94	-1.33	---	74.00	---	Peak	Horizontal
2	2483.500	66.86	-1.27	65.59	74.00	-8.41	Peak	Horizontal
1	2465.150	102.21	-1.32	---	54.00	---	Average	Horizontal
2	2483.500	52.24	-1.27	50.97	54.00	-3.03	Average	Horizontal

802.11n HT20 mode (combine with antenna 0 and antenna 1)**Lowest Channel**


Detector mode: Peak

Polarity: Vertical

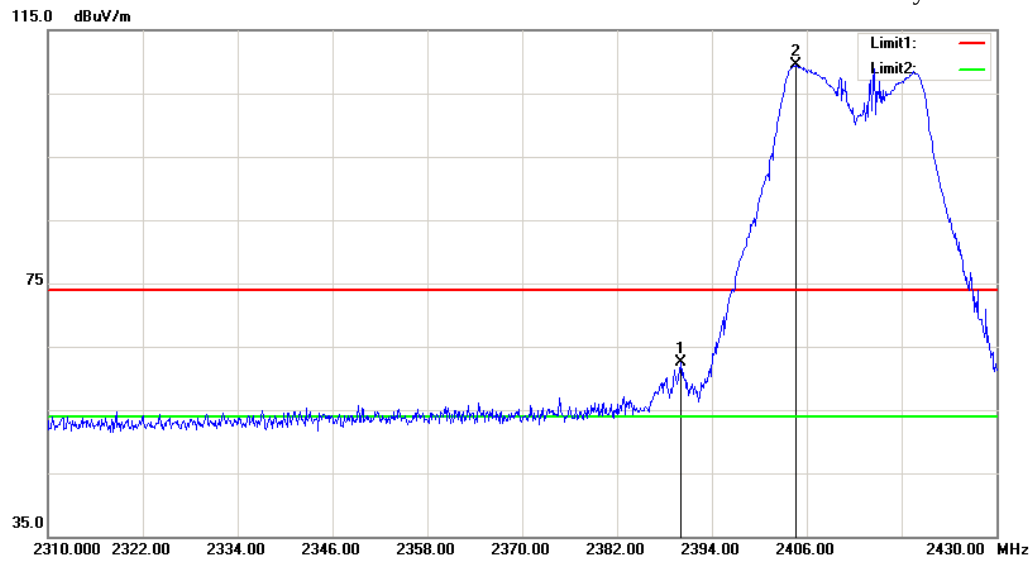

Detector mode: Average

Polarity: Vertical

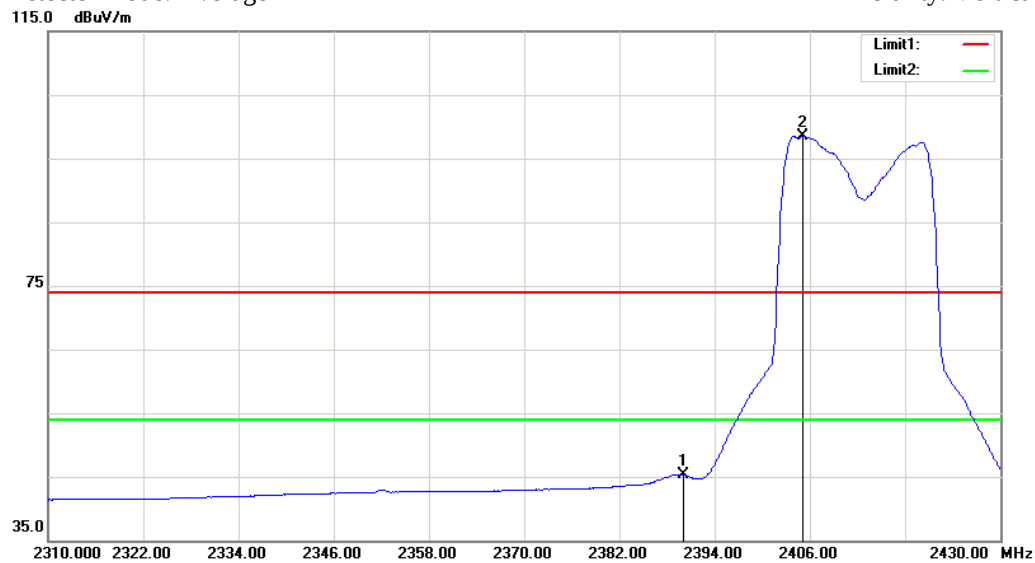


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2390.000	63.99	-1.48	62.51	74.00	-11.49	Peak	Vertical
2	2404.680	110.89	-1.45	---	74.00	---	Peak	Vertical
1	2390.000	46.71	-1.48	45.23	54.00	-8.77	Average	Vertical
2	2405.040	99.95	-1.45	---	54.00	---	Average	Vertical

802.11n HT20 mode (combine with antenna 0 and antenna 1)**Lowest Channel**


Detector mode: Peak

Polarity: Horizontal

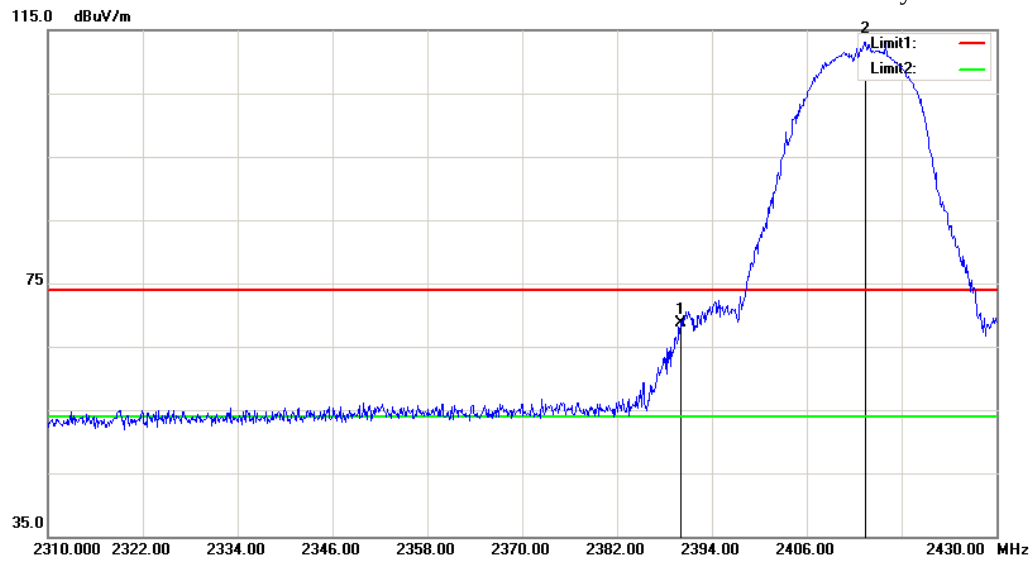

Detector mode: Average

Polarity: Horizontal

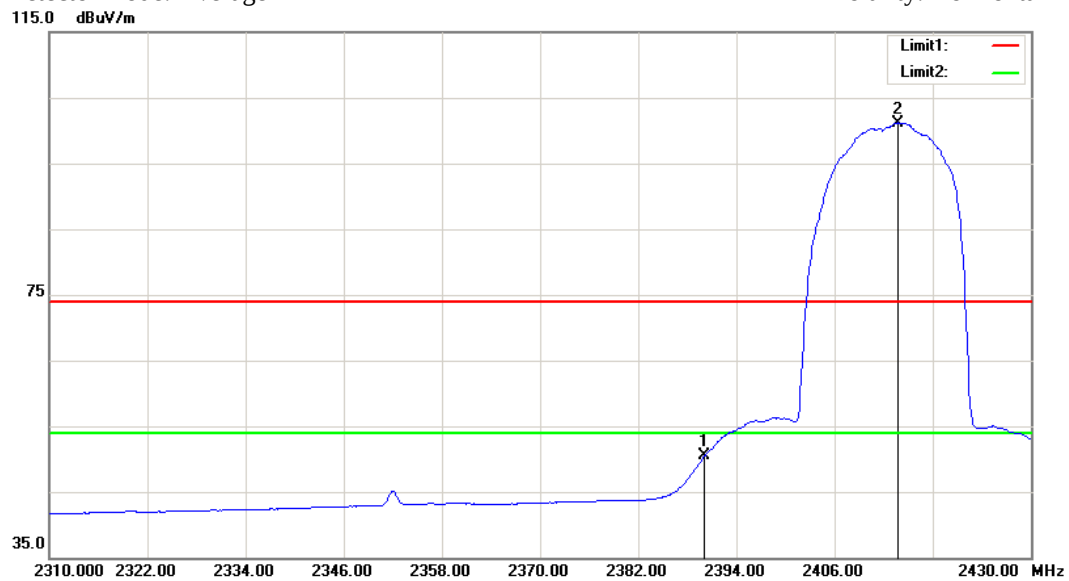


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2390.000	70.11	-1.48	68.63	74.00	-5.37	Peak	Horizontal
2	2413.440	114.57	-1.43	---	74.00	---	Peak	Horizontal
1	2390.000	51.89	-1.48	50.41	54.00	-3.59	Average	Horizontal
2	2413.680	102.63	-1.43	---	54.00	---	Average	Horizontal

802.11n HT20 mode (combine with antenna 0 and antenna 1)**Highest Channel**


Detector mode: Peak

Polarity: Vertical

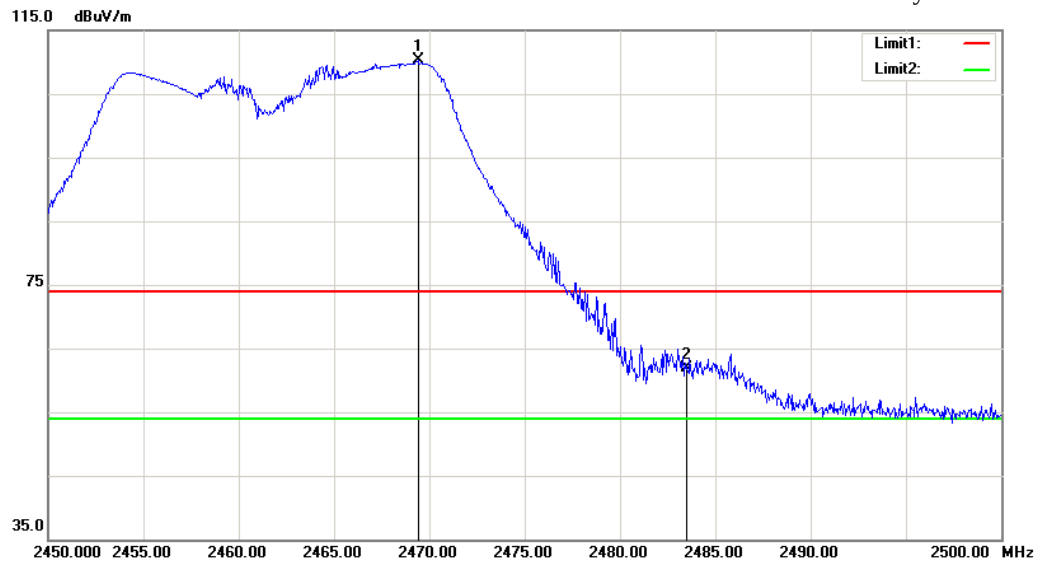

Detector mode: Average

Polarity: Vertical

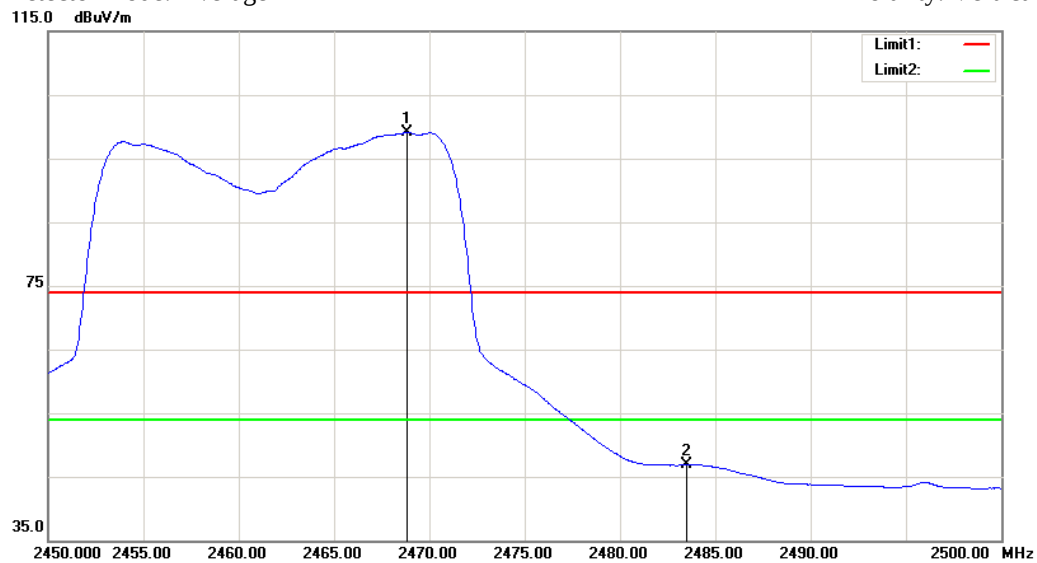


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2469.400	111.62	-1.31	---	74.00	---	Peak	Vertical
2	2483.500	63.14	-1.27	61.87	74.00	-12.13	Peak	Vertical
1	2468.800	100.39	-1.31	---	54.00	---	Average	Vertical
2	2483.500	48.14	-1.27	46.87	54.00	-7.13	Average	Vertical

802.11n HT20 mode (combine with antenna 0 and antenna 1)**Highest Channel**


Detector mode: Peak

Polarity: Horizontal

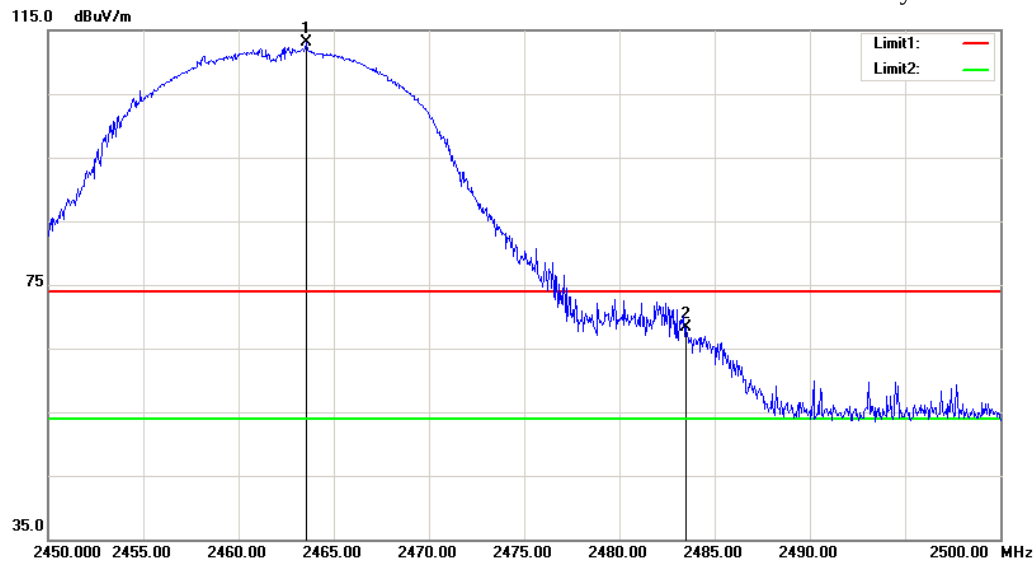

Detector mode: Average

Polarity: Horizontal

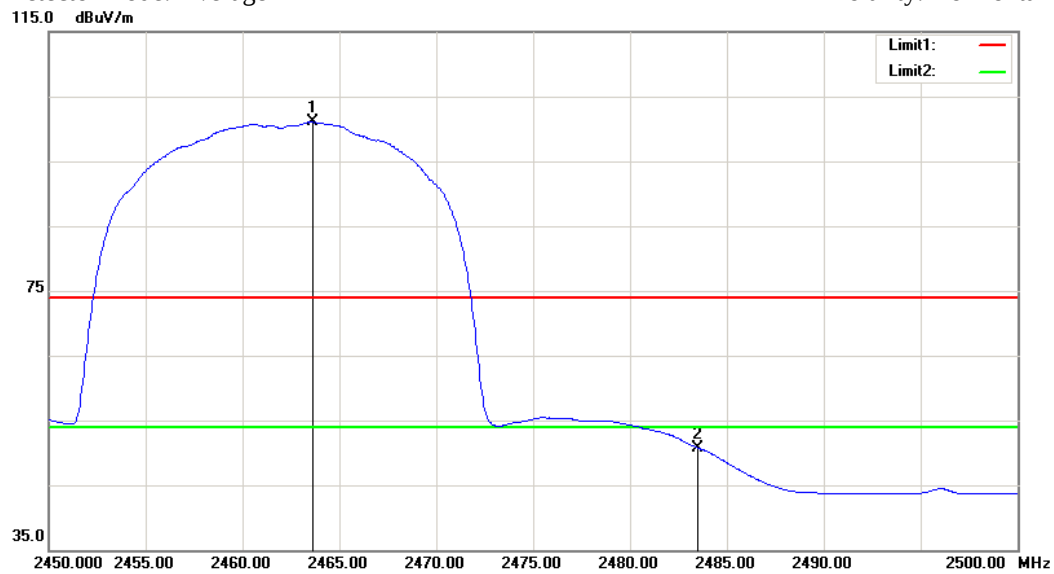


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2463.550	114.51	-1.32	---	74.00	---	Peak	Horizontal
2	2483.500	69.62	-1.27	68.35	74.00	-5.65	Peak	Horizontal
1	2463.600	102.37	-1.32	---	54.00	---	Average	Horizontal
2	2483.500	52.06	-1.27	50.79	54.00	-3.21	Average	Horizontal

802.11n HT40 mode (combine with antenna 0 and antenna 1)**Lowest Channel**


Detector mode: Peak

Polarity: Vertical

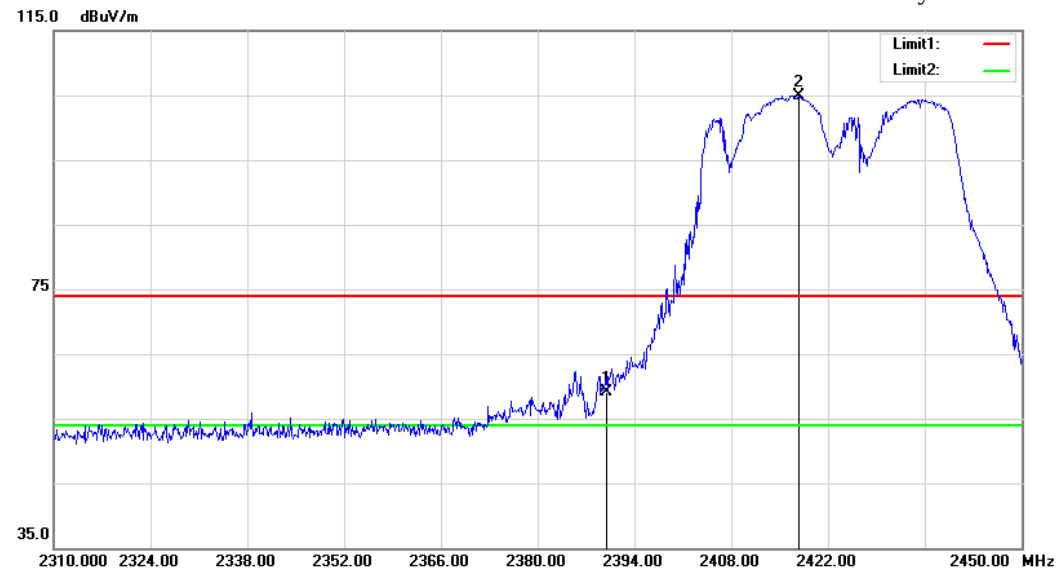

Detector mode: Average

Polarity: Vertical

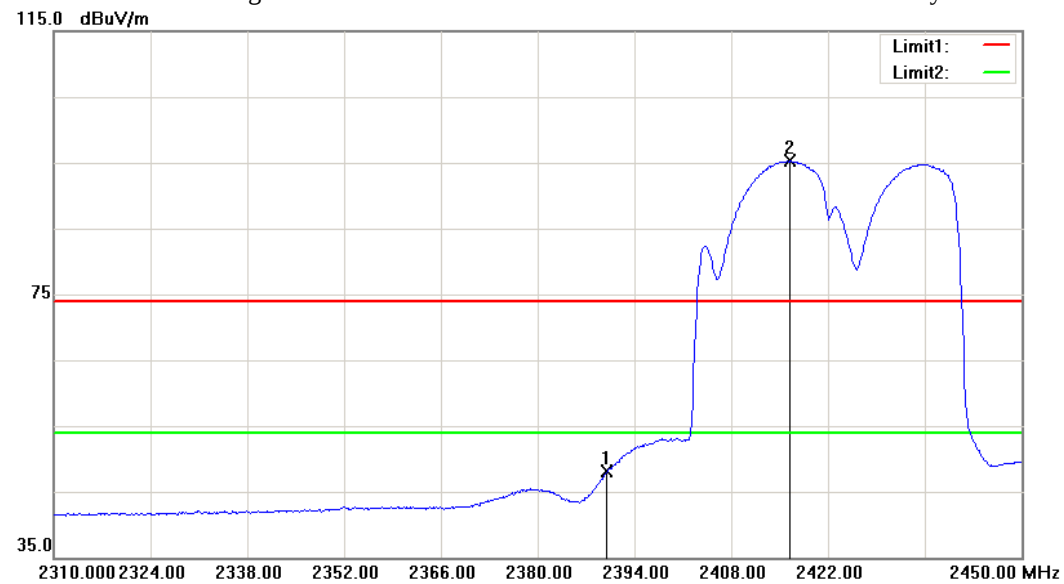


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2390.000	60.61	-1.48	59.13	74.00	-14.87	Peak	Vertical
2	2417.800	106.42	-1.43	---	74.00	---	Peak	Vertical
1	2390.000	49.51	-1.48	48.03	54.00	-5.97	Average	Vertical
2	2416.400	96.65	-1.42	---	54.00	---	Average	Vertical

802.11n HT40 mode (combine with antenna 0 and antenna 1)**Lowest Channel**


Detector mode: Peak

Polarity: Horizontal

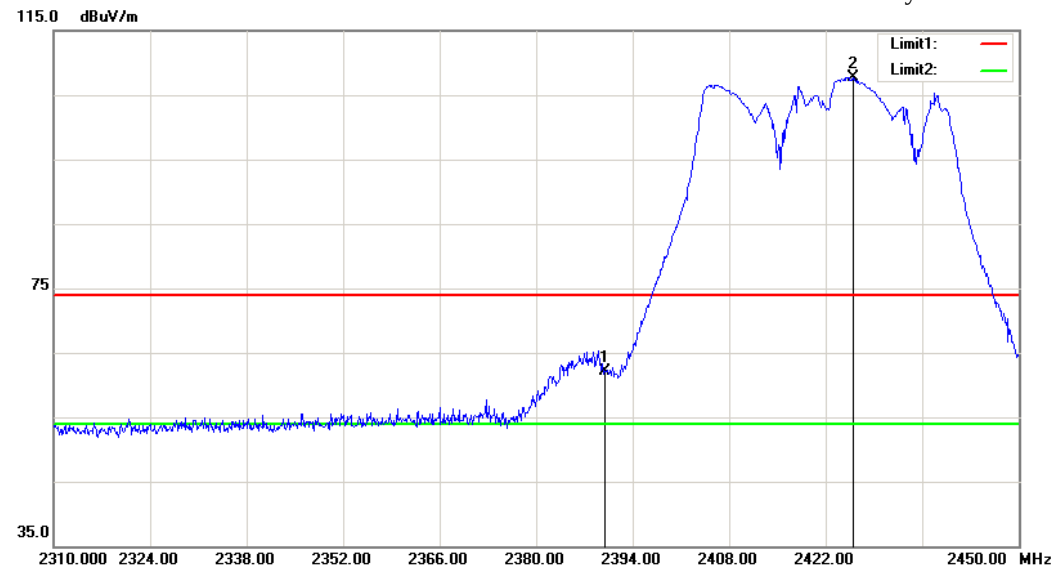

Detector mode: Average

Polarity: Horizontal

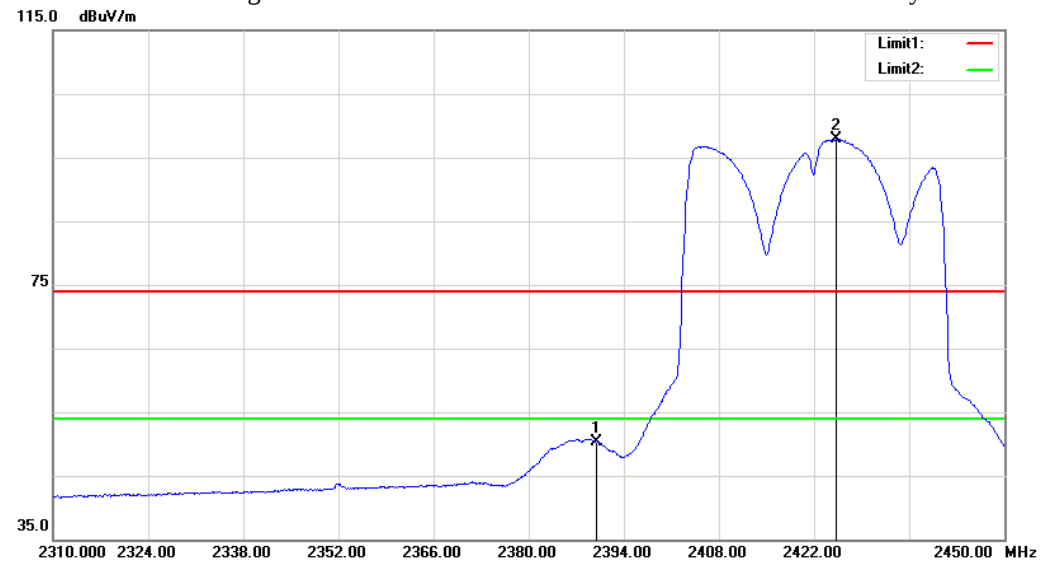


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2390.000	63.62	-1.48	62.14	74.00	-11.86	Peak	Horizontal
2	2425.920	109.12	-1.41	---	74.00	---	Peak	Horizontal
1	2390.000	51.85	-1.48	50.37	54.00	-3.63	Average	Horizontal
2	2425.220	99.23	-1.41	---	54.00	---	Average	Horizontal

802.11n HT40 mode (combine with antenna 0 and antenna 1)**Highest Channel**


Detector mode: Peak

Polarity: Vertical

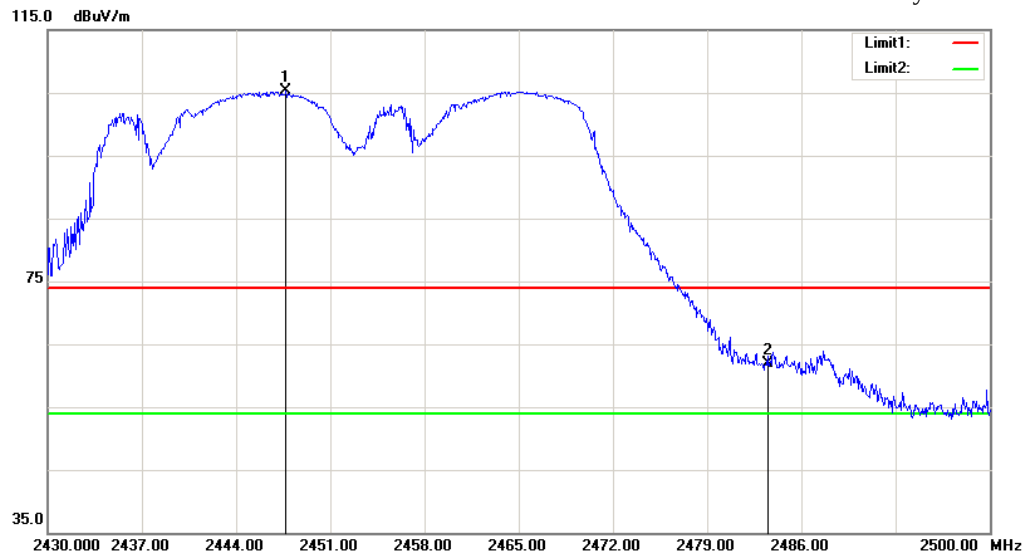

Detector mode: Average

Polarity: Vertical

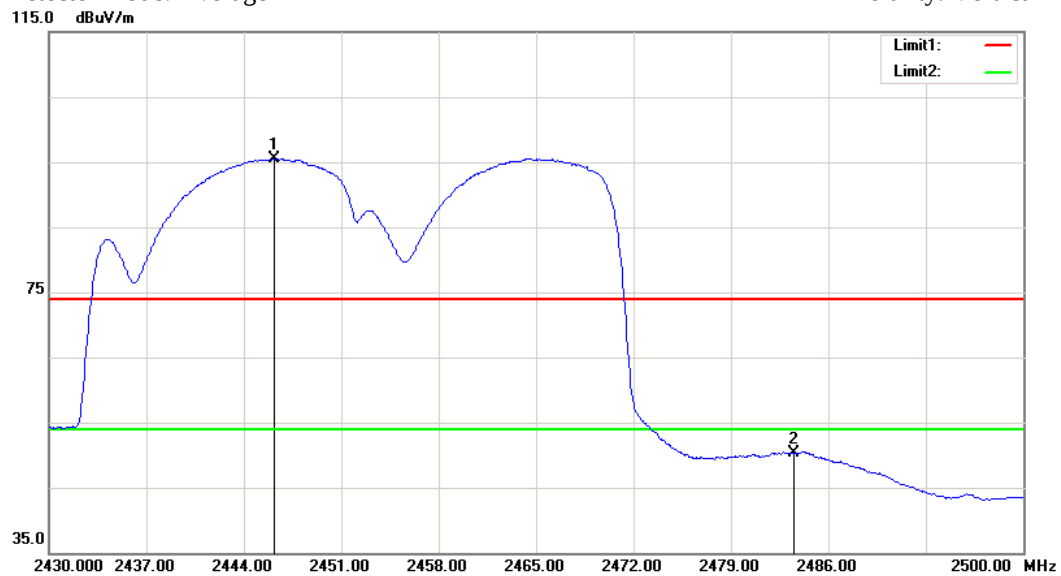


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2447.710	106.57	-1.36	---	74.00	---	Peak	Vertical
2	2483.500	63.10	-1.27	61.83	74.00	-12.17	Peak	Vertical
1	2446.170	96.82	-1.36	---	54.00	---	Average	Vertical
2	2483.500	51.52	-1.27	50.25	54.00	-3.75	Average	Vertical

802.11n HT40 mode (combine with antenna 0 and antenna 1)**Highest Channel**


Detector mode: Peak

Polarity: Horizontal

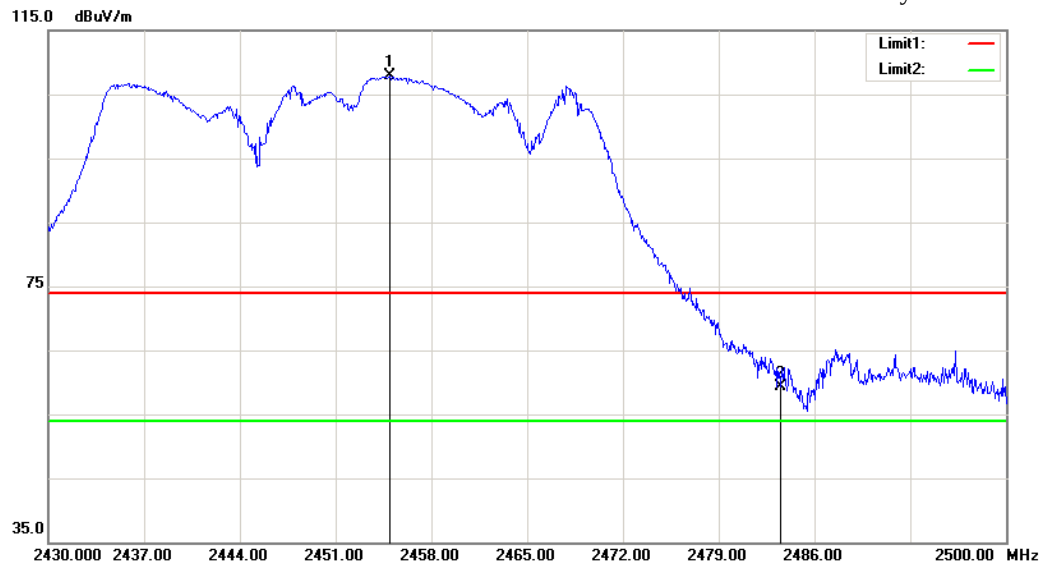

Detector mode: Average

Polarity: Horizontal

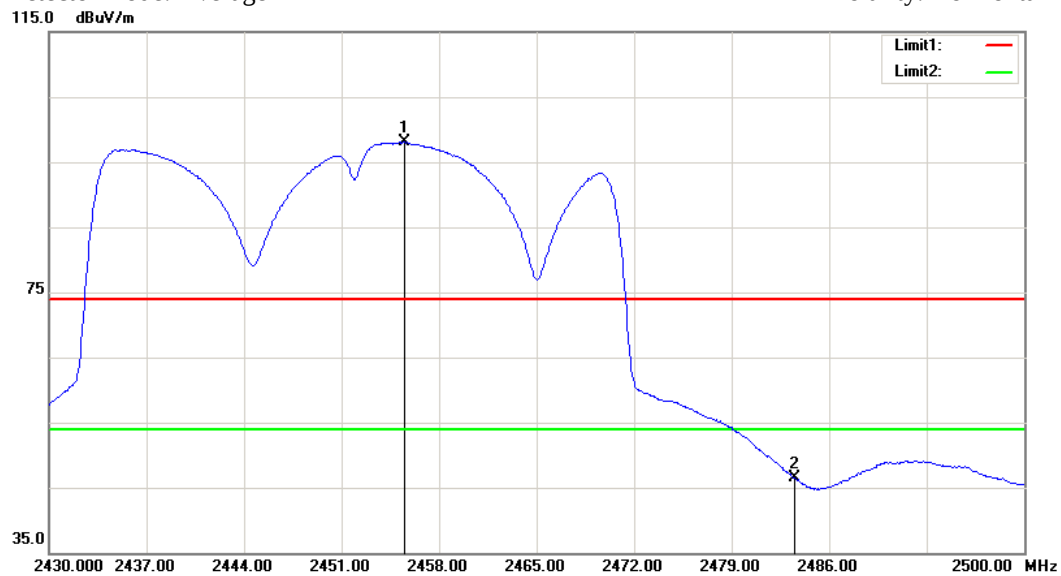

No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2454.990	109.15	-1.34	---	74.00	---	Peak	Horizontal
2	2483.500	60.54	-1.27	59.27	74.00	-14.73	Peak	Horizontal
1	2455.550	99.44	-1.34	---	54.00	---	Average	Horizontal
2	2483.500	47.76	-1.27	46.49	54.00	-7.51	Average	Horizontal